

Letter of acceptance

Customer name: Shenzhen Jiayu Chuang technology

Customer part number: 25.25149-1

Our model: RC- G25-8.1UH-3600GS-70MM

Sample delivery date: November 11, 2024

supplier: _____



Draw	Check	Approval
Lu Lin	Deng Xianggui	Lu Rusheng

Customer recognition:

Appositional	Incongruent case	Acknowledge
Reserve injection		

Customer name	Customer part number	Our model	Edition	Day period
Jiayuchuang	25.25149-1	RC- G25-8.1UH-3600GS-70MM	A0	2024.11.11

一、Plane structure: Unit :MM

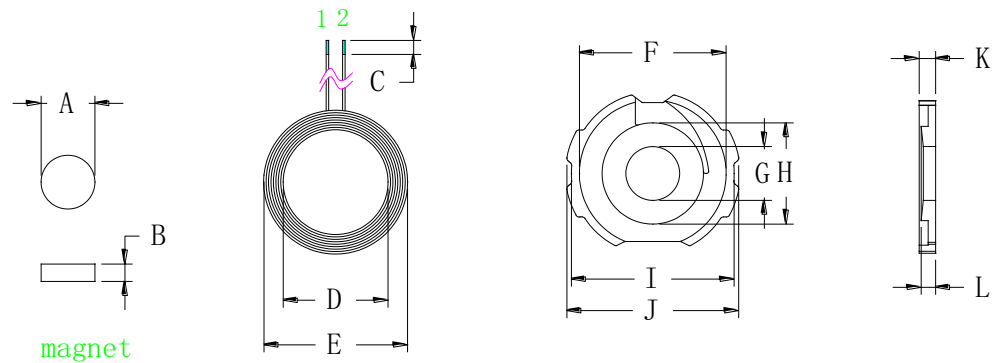

A	7.4 ± 0.1
B	2.5 ± 0.1
C	2 ± 1
D	14 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.5 ± 0.1
H	13.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.3
K	2.5 ± 0.15
L	2.4 ± 0.1 Height of center column
M	70 ± 2

二、Product parameter:

Foot position	Wire diameter	Number of turns	Remark
1 - 2	0.08*24	14	Hot air stranding wire

三、Technical requirement:

1. Secure the cable end to prevent loose cables
2. According to customer requirements, the excessive length of the thread is cut off, plated with tin, and the plating depth is 2 ± 1 MM
3. Point appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the product surface is clean and tidy during the process.
4. Additional process (according to customer requirements) : Install 7.4x2.5mm magnet in the middle round hole of the finished product and in the finished product

Back with 15*3mm-EVA foam, after packaging

四、Electrical parameter:

1. Inductance value, Q value:

$$\text{PIN } 1 - 2 = 8.1\mu\text{H} \pm 0.2\mu\text{H}$$

$$\text{Q value} \geq 25$$

The above inductance values are based on Quanhua 1062A instrument, 10KHZ/0.3Vrms as standard or equivalent instrument.

Q value is based on Quanhua 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent instrument

五、Bill of materials:

Serial number	Name	Material	Supplier	Remark
1	Hot air stranding wire	0.08X24	Weihan or equivalent	
2	Magnetic sheet	G25 Soft substrate	Tiantong or equivalent	
3	tin	High temperature environmental protection	Thousand Islands or equivalent	
4	White glue	BY882	Moon or equivalent	
5	Strong magnetic	7.4*2.5*3600GS $\pm$ 100GS	United win or equivalent	Additional processes, according to customer requirements
6	Double-sided adhesive	Φ 15*3MM-EVA Foam tape	Honghui or equivalent	
7	cannula	0.08*65MM	outsourcing	Simple root

Manufacturer: Shenzhen Jiayuchuang Technology Co., Ltd

Address: 2nd Floor, Building 1, Upper Row Runteng Fourth Industrial Zone, No. 5 Jintai Road, Longteng Community, Shiyao Street, Bao'an District, Shenzhen