

Radio Radio

Applicant:

Narda Safety Test Solutions GmbH
Sandwiesenstr. 7
72793 Pfullingen
Tel.: +49 7121 9732-0

Test report no.:

220041-AU03+W02

for:

Narda Safety Test Solutions GmbH
Broadband Field meter
NBP Fieldman

according to:

47 CFR Part 15, §15.247
RSS-247



Accreditation:

FCC test firm accreditation expiration date: 2023-04-06
MRA US-EU, FCC designation number: DE0010
Test firm registration number: 997268
FCC Registration Number (FRN): 0032245045
BnetzA-CAB-02/21-02/6 Valid until 2023-11-26



Recognized until 2023-03-16 by the
Department of Innovation, Science and Economic Development Canada (ISED)
as a recognized testing laboratory
CAB identifier: DE0011
Company number: 3472A

Location of Testing:

Element Materials Technology Straubing GmbH
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info.straubing@element.com
Gustav-Hertz-Straße 35
94315 Straubing, Germany

The technical accuracy is guaranteed through the quality management of
Element Materials Technology Straubing GmbH.

This document may be reproduced only in its entirety and without change.
The results contained in this document relate only to the item(s) tested

Table of contents

1	Summary of test results	7
2	Referenced publications	9
3	Equipment under test (EUT)	10
3.1	General information.....	10
3.2	Radio specifications	11
3.3	Photo documentation	11
4	Test configuration and mode of operation	12
4.1	Test configuration.....	12
4.2	Mode of operation	12
5	Test procedures	13
5.1	General specifications.....	13
5.2	Antenna-port conducted measurements.....	14
5.3	AC powerline conducted emissions	14
5.4	Radiated emissions below 30 MHz.....	16
5.5	Radiated emissions from 30 MHz to 1 GHz.....	18
5.6	Radiated emissions above 1 GHz.....	20
5.7	Bandwidth measurements	23
5.8	Duty cycle.....	24
5.9	Maximum peak conducted output power	24
5.10	Carrier frequency separation	25
5.11	Number of hopping frequencies.....	25
5.12	Time of occupancy	26
6	Test results	27
6.1	AC powerline conducted emissions	28
6.2	20 dB bandwidth	32
6.3	Occupied bandwidth.....	39
6.4	Conducted output power	46
6.5	Carrier frequency separation	53
6.6	Number of hopping frequencies.....	57
6.7	Time of occupancy	61
6.8	Band-edge measurements.....	68
6.9	Antenna-port conducted measurements.....	82
6.10	Radiated emissions below 30 MHz.....	93
6.11	Radiated emissions from 30 MHz to 1 GHz.....	96
6.12	Radiated emissions from 1 GHz to 25 GHz (10 th harmonic).	99
7	Equipment calibration status.....	105
8	Measurement uncertainties	106
9	Revision history.....	107

List of figures

Figure 1: Setup for antenna-port conducted measurements.....	14
Figure 2: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz	15
Figure 3: Setup for radiated emissions test below 30 MHz.....	17

Figure 4: Setup for radiated emissions test from 30 MHz to 1 GHz.....	19
Figure 5: Setup for radiated emissions test above 1 GHz.....	22
Figure 6: Chart of AC powerline conducted emissions on L1	30
Figure 7: Chart of AC powerline conducted emissions on N.....	31
Figure 8: Chart of 20 dB bandwidth test on lowest channel (data rate ACL-B DH1)	33
Figure 9: Chart of 20 dB bandwidth test on middle channel (data rate ACL-B DH1)	33
Figure 10: Chart of 20 dB bandwidth test on highest channel (data rate ACL-B DH1).....	34
Figure 11: Chart of 20 dB bandwidth test on lowest channel (data rate ACL-E 2-DH3)	35
Figure 12: Chart of 20 dB bandwidth test on middle channel (data rate ACL-E 2-DH3)	35
Figure 13: Chart of 20 dB bandwidth test on highest channel (data rate ACL-E 2-DH3)	36
Figure 14: Chart of 20 dB bandwidth test on lowest channel (data rate ACL-E 3-DH3).....	37
Figure 15: Chart of 20 dB bandwidth test on middle channel (data rate ACL-E 3-DH3)	37
Figure 16: Chart of 20 dB bandwidth test on highest channel (data rate ACL-E 3-DH3)	38
Figure 17: Chart of occupied bandwidth test on lowest channel (data rate ACL-B DH1)	40
Figure 18: Chart of occupied bandwidth test on middle channel (data rate ACL-B DH1).....	40
Figure 19: Chart of occupied bandwidth test on highest channel (data rate ACL-B DH1).....	41
Figure 20: Chart of occupied bandwidth test on lowest channel (data rate ACL-E 2-DH3)	42
Figure 21: Chart of occupied bandwidth test on middle channel (data rate ACL-E 2-DH3)	42
Figure 22: Chart of occupied bandwidth test on highest channel (data rate ACL-E 2-DH3)	43
Figure 23: Chart of occupied bandwidth test on lowest channel (data rate ACL-E 3-DH3).....	44
Figure 24: Chart of occupied bandwidth test on middle channel (data rate ACL-E 3-DH3)	44
Figure 25: Chart of occupied bandwidth test on highest channel (data rate ACL-E 3-DH3)	45
Figure 26: Chart of conducted output power on lowest channel (data rate ACL-B DH1)	47
Figure 27: Chart of conducted output power on middle channel (data rate ACL-B DH1).....	47
Figure 28: Chart of conducted output power on highest channel (data rate ACL-B DH1).....	48
Figure 29: Chart of conducted output power on lowest channel (data rate ACL-E 2-DH3)	49
Figure 30: Chart of conducted output power on middle channel (data rate ACL-E 2-DH3).....	49
Figure 31: Chart of conducted output power on highest channel (data rate ACL-E 2-DH3).....	50
Figure 32: Chart of conducted output power on lowest channel (data rate ACL-E 3-DH1)	51
Figure 33: Chart of conducted output power on middle channel (data rate ACL-E 3-DH1).....	51
Figure 34: Chart of conducted output power on highest channel (data rate ACL-E 3-DH1)	52
Figure 35: Chart of carrier frequency separation (data rate ACL-B DH3)	54
Figure 36: Chart of carrier frequency separation (data rate ACL-E 2-DH3).....	55
Figure 37: Chart of carrier frequency separation (data rate ACL-E 3-DH3).....	56
Figure 38: Chart of number of frequencies (data rate ACL-B DH1).....	58
Figure 39: Chart of number of frequencies (data rate ACL-E 2-DH1).....	59
Figure 40: Chart of number of frequencies (data rate ACL-E 3-DH1).....	60
Figure 41: Number of hops in 31.6 s (Trigger offset 1 s) (data rate ACL-B DH5).....	62
Figure 42: Number of hops in 15.8 s (Trigger offset 1 s) (data rate ACL-B DH5).....	62
Figure 43: Burstlength (data rate ACL-B DH5).....	63
Figure 44: Number of hops in 31.6 s (Trigger offset 1 s) (data rate ACL-E 2-DH5).....	64
Figure 45: Number of hops in 15.8 s (Trigger offset 1 s) (data rate ACL-E 2-DH5).....	64
Figure 46: Burstlength (data rate ACL-E 2-DH5)	65
Figure 47: Number of hops in 31.6 s (Trigger offset 1 s) (data rate ACL-E 3-DH5).....	66
Figure 48: Number of hops in 15.8 s (Trigger offset 1 s) (data rate ACL-E 3-DH5).....	66
Figure 49: Burstlength (data rate ACL-E 3-DH5)	67
Figure 50: Chart of band-edge measurement on lowest channel (data rate ACL-B DH1) – single mode	70
Figure 51: Chart of band-edge measurement on highest channel (PK) (data rate ACL-B DH5) – single mode	71
Figure 52: Chart of band-edge measurement on lowest channel (data rate ACL-E 2-DH3) – single mode....	72
Figure 53: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 2-DH5) – single mode.....	73
Figure 54: Chart of band-edge measurement on lowest channel (data rate ACL-E 3-DH3) – single mode....	74
Figure 55: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 3-DH3) – single mode.....	75
Figure 56: Chart of band-edge measurement on lowest channel (data rate ACL-B DH1) – hopping mode ..	76
Figure 57: Chart of band-edge measurement on highest channel (PK) (data rate ACL-B DH5) – hopping mode.....	77
Figure 58: Chart of band-edge measurement on lowest channel (data rate ACL-E 2-DH1) – hopping mode	78
Figure 59: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 2-DH3) – hopping mode.....	79
Figure 60: Chart of band-edge measurement on lowest channel (data rate ACL-E 3-DH1) – hopping mode	80

Figure 61: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 3-DH3) – hopping mode.....	81
Figure 62: Chart of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-B DH5), PK-detector.....	84
Figure 63: Chart of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-B DH5), PK-detector.....	85
Figure 64: Chart of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-B DH5), PK-detector.....	86
Figure 65: Chart of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1), PK-detector.....	87
Figure 66: Chart of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 2-DH1), PK-detector.....	88
Figure 67: Chart of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 2-DH1), PK-detector.....	89
Figure 68: Chart of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 3-DH1), PK-detector.....	90
Figure 69: Chart of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 3-DH1), PK-detector.....	91
Figure 70: Chart of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 3-DH1), PK-detector.....	92
Figure 71: Chart of emissions test below 30 MHz on lowest channel (data rate ACL-E 2-DH1), EUT position X, antenna in line to the EUT	95
Figure 72: Chart of emissions test from 30 MHz to 1 GHz on middle channel (data rate ACL-E 2-DH1), EUT position Y, antenna polarization vertical.....	98
Figure 73: Chart of emissions test from 1 GHz to 17 GHz on lowest channel (data rate ACL-E 2-DH1), EUT position X, antenna polarization vertical.....	102
Figure 74: Chart of exploratory emission test from 17 GHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1) at 0.5 m	102
Figure 75: Chart of emissions test from 1 GHz to 17 GHz on middle channel (data rate ACL-E 2-DH1), EUT position X, antenna polarization vertical.....	103
Figure 76: Chart of exploratory emission test from 17 GHz to 25 GHz on middle channel (data rate ACL-E 2-DH1) at 0.5 m	103
Figure 77: Chart of emissions test from 1 GHz to 17 GHz on highest channel (data rate ACL-E 2-DH1), EUT position X, antenna polarization vertical.....	104
Figure 78: Chart of exploratory emission test from 17 GHz to 25 GHz on highest channel (data rate ACL-E 2-DH1) at 0.5 m	104

List of tables

Table 1: Tested channel(s).....	11
Table 2: EUT used for testing.....	12
Table 3: Support equipment used for testing	12
Table 4: Ports of EUT and appropriate cables	12
Table 5: Bandwidth and detector type for AC power-line conducted emissions test	14
Table 6: Sample calculation	15
Table 7: Recalculation factors for extrapolation	16
Table 8: Bandwidth and detector type for radiated emissions test below 30 MHz.....	16
Table 9: Sample calculation	17
Table 10: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz	18
Table 11: Sample calculation	18
Table 12: Sample calculation	20
Table 13: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz.....	20
Table 14: Bandwidth and detector type for final radiated emissions test above 1 GHz.....	21
Table 15: Limits for AC powerline conducted emissions according to § 15.207(a) and RSS-Gen, section 8.8	29
Table 16: Results of 6 dB bandwidth test (data rate ACL-B DH1)	34
Table 17: Results of 6 dB bandwidth test (data rate ACL-E 2-DH3)	36
Table 18: Results of 6 dB bandwidth test (data rate ACL-E 3-DH3)	38
Table 19: Results of occupied bandwidth test (data rate ACL-B DH1)	41
Table 20: Results of occupied bandwidth test (data rate ACL-E 2-DH3)	43

Table 21: Results of occupied bandwidth test (data rate ACL-E 3-DH3).....	45
Table 22: Results of conducted output power (data rate ACL-B DH1)	48
Table 23: Results of conducted output power (data rate ACL-E 2-DH3)	50
Table 24: Results of conducted output power (data rate ACL-E 3-DH1)	52
Table 25: Results of carrier frequency separation (data rate ACL-B DH3)	54
Table 26: Results of carrier frequency separation (data rate ACL-E 2-DH3).....	55
Table 27: Results of carrier frequency separation (data rate ACL-E 3-DH3).....	56
Table 28: Results of number of frequencies (data rate ACL-B DH1)	58
Table 29: Results of number of frequencies (data rate ACL-E 2-DH1).....	59
Table 30: Results of number of frequencies (data rate ACL-E 3-DH1).....	60
Table 31: Results of time of occupancy (data rate ACL-B DH5).....	63
Table 32: Results of time of occupancy (data rate ACL-E 2-DH5).....	65
Table 33: Results of time of occupancy (data rate ACL-E 3-DH5).....	67
Table 34: Restricted bands of operation according to §15.205 and RSS-Gen section 8.10	69
Table 35: Result of band-edge measurement on lowest channel (data rate ACL-B DH1) – single mode.....	70
Table 36: Test results of band-edge measurements on highest channel (data rate ACL-B DH5) – single mode.....	71
Table 37: Result of band-edge measurement on lowest channel (data rate ACL-E 2-DH3) – single mode	72
Table 38: Test results of band-edge measurements on highest channel (data rate ACL-E 2-DH5) – single mode.....	73
Table 39: Result of band-edge measurement on lowest channel (data rate ACL-E 3-DH3) – single mode	74
Table 40: Test results of band-edge measurements on highest channel (data rate ACL-E 3-DH3) – single mode.....	75
Table 41: Result of band-edge measurement on lowest channel (data rate ACL-B DH1) – hopping mode	76
Table 42: Test results of band-edge measurements on highest channel (data rate ACL-B DH5) – hopping mode	77
Table 43: Result of band-edge measurement on lowest channel (data rate ACL-E 2-DH1) – hopping mode	78
Table 44: Test results of band-edge measurements on highest channel (data rate ACL-E 2-DH3) – hopping mode	79
Table 45: Result of band-edge measurement on lowest channel (data rate ACL-E 3-DH1) – hopping mode	80
Table 46: Test results of band-edge measurements on highest channel (data rate ACL-E 3-DH3) – hopping mode	81
Table 47: General radiated emission limits from 9 kHz to 25 GHz according to §15.209	82
Table 48: General radiated emission limits from 9 kHz to 30 MHz according to RSS-Gen section 8.9	83
Table 49: General radiated emission limits from 30 MHz to 25 GHz according to RSS-Gen section 8.9	83
Table 50: Results of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-B DH5)	84
Table 51: Results of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-B DH5).....	85
Table 52: Results of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-B DH5).....	86
Table 53: Results of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1)	87
Table 54: Results of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 2-DH1).....	88
Table 55: Results of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 2-DH1).....	89
Table 56: Results of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 3-DH1)	90
Table 57: Results of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 3-DH1).....	91
Table 58: Results of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 3-DH1).....	92
Table 59: General radiated emission limits up to 30 MHz according to §15.209	94
Table 60: General radiated emission limits from 9 kHz to 30 MHz according to section 8.9 of RSS-Gen	94
Table 61: General radiated emission limits \geq 30 MHz according to §15.209 and RSS-Gen section 8.9	97
Table 62: Results of emissions test from 30 MHz to 1 GHz on middle channel (data rate ACL-E 2-DH1), EUT position Y, antenna polarization vertical	98
Table 63: General radiated emission limits above 960 MHz according to §15.209 and RSS-Gen	100
Table 64: Results of emissions test from 1 GHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1)....	102
Table 65: Results of emissions test from 1 GHz to 25 GHz on middle channel (data rate ACL-E 2-DH1) ...	103
Table 66: Results of emissions test from 1 GHz to 25 GHz on highest channel (data rate ACL-E 2-DH1) ..	104

1 Summary of test results


System type: Frequency hopping system (DSS)

<i>47 CFR part and section</i>	<i>Test</i>	<i>Equivalent to IC radio standard(s)</i>	<i>Page</i>	<i>Result</i>	<i>Note(s)</i>
15.207	AC power line conducted emissions 150 kHz to 30 MHz	RSS-Gen, section 8.8	28	Passed	2
15.247(a)(1)	20 dB bandwidth	RSS-247, section 5.1(a)	32	Passed	---
---	Occupied bandwidth	RSS-Gen, section 6.7	39	For reference only	---
15.247(b)(1)	Conducted output power	RSS-247, section 5.4	44	Passed	---
15.247(a)(1)	Carrier frequency separation	RSS-247, section 5.1	53	Passed	---
15.247(a)(1)	Number of hopping frequencies	RSS-247, section 5.1	57	Passed	---
15.247(a)(1)	Time of occupancy	RSS-247, section 5.1	61	Passed	---
15.247(d)	Band-edge measurements	RSS-247, section 5.5	68	Passed	---
15.247(d)	Antenna-port conducted measurements	RSS-247, section 5.5	82	Passed	3
15.247(d)	Radiated emissions below 30 MHz	RSS-247, section 5.5	93	Passed	---
15.247(d)	Radiated emissions from 30 MHz to 1 GHz	RSS-247, section 5.5	96	Passed	---
15.247(d)	Radiated emissions from 1 GHz to 25 GHz (10th harmonic)	RSS-247, section 5.5	99	Passed	---
15.247(i)	Radio frequency radiation exposure	RSS-Gen, Section 3.4	---	Not performed	4

Note(s):

- 1 For information about EUT see clause 3.
- 2 Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.
- 3 If antenna port conducted tests cannot be performed (e.g. for portable or handheld devices with integral antenna), then radiated tests are performed for demonstrating compliance to the conducted emission requirements (see "Spurious radiated emissions 9 kHz to 10th harmonic").
- 4 Radio frequency radiation exposure is in consideration in another test report.

Straubing, October 26, 2022

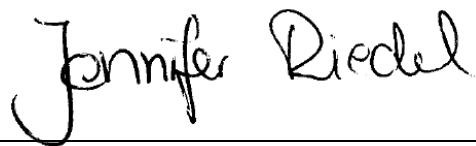

Tested by
Jennifer Riedel B. Eng.
Radio Test Engineer



Approved by
Konrad Graßl
Department Manager Radio

2 Referenced publications

Publication	Title
CFR 47 Part 2 October 2021	Code of Federal Regulations, Title 47 (Telecommunication), Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15 October 2021	Code of Federal Regulations, Title 47 (Telecommunication), Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
KDB Publication no. 412172 August 7, 2015	Guidelines for determining the Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP) of an RF transmitting system
KDB Publication no. 558074 April 02, 2019	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS), Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under §15.247 of the FCC Rules
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-Gen Issue 5 April 2018 Amendment 1 (March 2019) Amendment 2 (February 2021)	Spectrum Management and Telecommunications - Radio Standards Specification - General Requirements for Compliance of Radio Apparatus
RSS-247, Issue 2 February 2017	Spectrum Management and Telecommunications - Radio Standards Specification - Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3 Equipment under test (EUT)

All Information in this clause is declared by customer.

3.1 General information

Product type: Broadband Field meter
Model name: NBP Fieldman
Serial number(s): PT-0065
Manufacturer: Narda Safety Test Solutions GmbH
Version: Hardware: A-Serie
 Software: V0.9.0
Short description: EUT is a broadband field meter with a BT classic module operating in the 2.4 GHz band. The EUT also employs WLAN 2.4 GHz which is in consideration in another test report.
Additional modifications: None
FCC ID: 2A77Y-246001A
IC registration number: 28882-246001A
Designation of emissions: 966KF7D--
 1M22F7D--
Power supply: DC supply
 Nominal voltage: 5 V
Device type: Portable Mobile Fixed

3.2 Radio specifications

System type (Note 1): Frequency hopping system (DSS)

Application frequency band: 2400.0 MHz - 2483.5 MHz

Number of RF channels: 79

Nominal bandwidth: 1 MHz

Data rate(s): ACL-B: DH1, DH3, DH5
ACL-E: 2-DH1, 2-DH3, 2-DH5, 3-DH1, 3-DH3, 3-DH5

Antenna:

Type:	Chip antenna
Gain:	2.2 dBi (maximum)
Model:	W3006
Manufacturer:	PulseLarsen
Connector:	<input type="checkbox"/> external <input type="checkbox"/> internal <input type="checkbox"/> temporary <input checked="" type="checkbox"/> none (integral antenna)

Note(s):

1. “DTS” is the equipment class for digital transmission systems, “DSS” for all other Part 15 spread spectrum transmitters as used for equipment authorization system form 731.

Channel	Frequency (MHz)
Low	2402
Middle	2442
High	2480

Table 1: Tested channel(s)

3.3 Photo documentation

For external photos of the EUT see annex B, for internal ones see annex C. Photos taken during testing including EUT positions can be found in annex A.

4 Test configuration and mode of operation

4.1 Test configuration

Device	Type designation	Serial or inventory no.	Manufacturer
Broadband Field meter	NBP Fieldman	PT-0065	Narda Safety Test Solutions GmbH

Table 2: EUT used for testing

Device	Type designation	Serial or inventory no.	Manufacturer
E-field probe	Probe HFD-0191	---	Narda Safety Test Solutions GmbH
Laptop	Lifebook A531	E001053	FUJITSU
Power supply for laptop	AC adapter	E001053	FUJITSU
Power adapter	PN453I	---	Shenzhen Xinspower Technology Co., Ltd.

Table 3: Support equipment used for testing

Port	Classification
Ethernet	Signal/control
USB	DC power

Table 4: Ports of EUT and appropriate cables

4.2 Mode of operation

The EUT was connected to the laptop via Ethernet and the software “NappyBee EOL Tester” was used to set the appropriate parameters, e.g. channel and modulation type. When pressing the button “Set” the EUT was transmitting a modulated signal.

5 Test procedures**5.1 General specifications****5.1.1 Test setups**

Tabletop devices are placed on a non-conductive table with a height of 0.8 m. In case of AC power-line conducted emissions test, the rear of the EUT is located 40 cm to the vertical wall of the RF-shielded (screened) room which is used as vertical conducting plane. For radiated emission measurements above 1 GHz, tabletop devices are placed at a height of 1.5 m above the floor using a support made of styrene placed on top of the non-conductive table.

All other surfaces of tabletop or floor-standing EUTs are at least 80 cm from any other grounded conducting surface. This includes the case or cases of one or more LISNs when performing an AC power-line conducted emissions test.

Radiated emission measurements of equipment that can be used in multiple orientations (e.g. portable or handheld devices) are performed with the EUT in each of three orthogonal axis positions.

5.1.2 Conversion to conducted test results

If test procedures described herein are based on the use of an antenna-port conducted test configuration, but the EUT cannot provide such a configuration (e.g., portable or handheld devices with integral antenna), radiated tests are performed for demonstrating compliance to the conducted requirements.

If a radiated test configuration has to be used, then the measured power or field strength levels are converted to equivalent conducted power levels for comparison to the applicable limit. For this purpose, at first the radiated field strength or power levels are converted to EIRP as described in annex G of ANSI C63.10 and KDB Publication 412172, document D01. The equivalent conducted power is then determined by subtracting the EUT transmit antenna gain from the EIRP (assuming logarithmic representation).

For devices utilizing multiple antenna technologies, KDB Publication 662911 applies.

5.2 Antenna-port conducted measurements

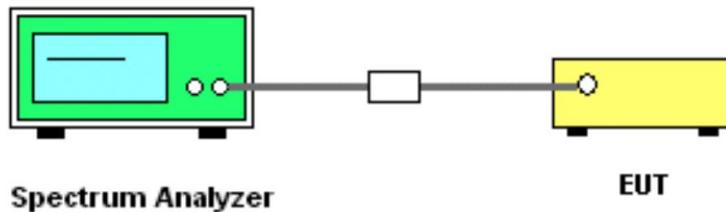


Figure 1: Setup for antenna-port conducted measurements

The RF signal of the EUT is measured conducted at the antenna port. In case of no permanent antenna connector available, a temporary antenna connector should be supplied by the manufacturer. The specific insertion loss of the signal path, which is matched to 50 Ohm, is determined. The test receiver is set to analyzer mode with pre-selector activated. The measurement readings on the test receiver are corrected by the signal path loss.

For frequency hopping systems (FHSS) and digital transmission systems (DTS) the settings as specified by KDB Publication 558074, document D01, are used.

If a radiated test configuration has to be used, conversion to conducted test results is performed according to clause 5.1.2.

5.3 AC powerline conducted emissions

AC power-line conducted emissions are measured according to clause 6.2 of ANSI C63.10 over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network. The tests are performed in a shielded room.

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements are made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required.

For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an “off-the-shelf” unmodified ac power adapter is used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
150 kHz ≤ f < 30 MHz	9 kHz	≤ 4.5 kHz	Peak, Average	Quasi-peak, Average	Quasi-peak, Average

Table 5: Bandwidth and detector type for AC power-line conducted emissions test

The AC power-line conducted emissions test is performed in the following steps:

- The EUT is arranged as tabletop or floor-standing equipment, as applicable, and connected to a line impedance stabilization network (LISN) with 50 μ H / 50 Ω . If required, a second LISN of the same type and terminated by 50 Ω is used for peripheral devices. The EUT is switched on.
- The measurement equipment is connected to the LISN for the EUT and set-up according to the specifications of the test (see table 5). At the LISN, the neutral line is selected to be tested.

- c) The prescan is performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescan, but not for final scan.
- d) When the prescan is completed, maximum levels with less margin than 10 dB or exceeding the limit are determined and collected in a list.
- e) With the first frequency of the list selected, a frequency zoom over a range of ten times of the measurement receiver bandwidth around this frequency is performed. If the EUT has no significant drift in frequency, the frequency zoom can be skipped.
- f) For final scan, the emission level is measured and the maximum is recorded.
- g) Steps e) to f) are repeated for all other frequencies in the list. At least the six highest EUT emissions relative to the limit have to be recorded.
- h) Steps c) to g) are repeated for all current-carrying conductors of all of the power cords of EUT, i.e. all phase and (if used) neutral line(s).

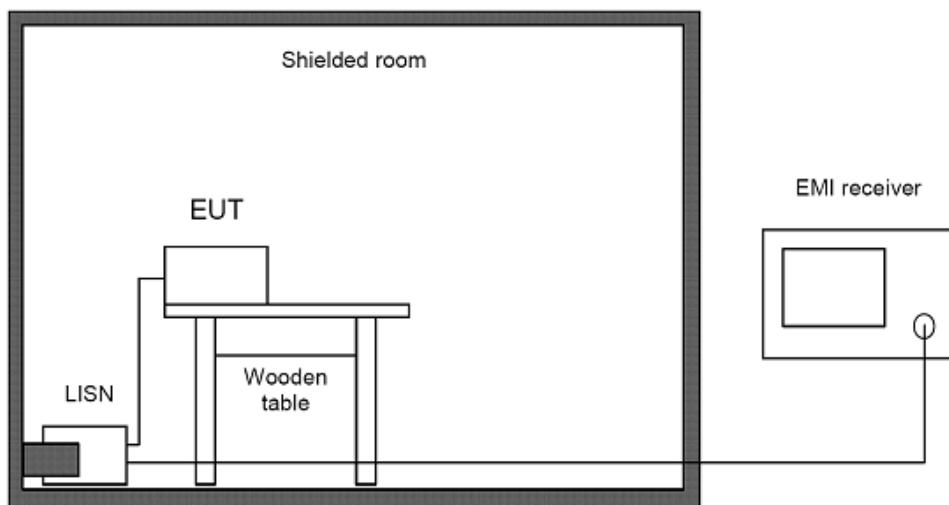


Figure 2: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz

Phase	Frequency (MHz)	Reading value (dB μ V)	AMN correction (dB)	Cable attenuation + 10 dB attenuator (dB)	Correction factor (Corr.) (dB)	Level (dB μ V)
L 1	10	10	0.6	10.9	11.5	21.5
N	10	10	1.0	10.9	11.9	21.9

Table 6: Sample calculation

Correction factor = Artificial mains network correction + Cable attenuation + 10 dB

Level = Reading value + Correction factor = 10 dB μ V + 11.5 dB = 21.5 dB μ V

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

5.4 Radiated emissions below 30 MHz

Radiated emissions below 30 MHz are measured according to clause 6.4 of ANSI C63.10 using an inductive shielded loop antenna. As this antenna measures the magnetic field only, its antenna factors are converted to electric field strength values assuming a free space impedance of 377Ω as described in clause 4.3.1 of ANSI C63.10. This results in an additional correction of 51.53 dB.

According to clause 6.4.3 of ANSI C63.10, at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements. In this case, the results are extrapolated to the specified distance by using a recalculation factor determined according to one of the methods described in clause 6.4.4 of ANSI C63.10, provided that the maximum dimension of the device is equal to or less than 0.625 times the wavelength at the frequency being measured. As the minimum wavelength is 10 meters corresponding to the maximum frequency of 30 MHz, this requirement is fulfilled if the maximum dimension of the device is equal to or less than 6.25 meters.

Unless otherwise stated, the recalculation factor is determined according to clause 6.4.4.2 "Extrapolation from the measurement of a single point" of ANSI C63.10:

$$\begin{aligned} d_{\text{near field}} &= 47.77 / f_{\text{MHz}}, \text{ or} \\ f_{\text{MHz}} &= 47.77 / d_{\text{near field}} \end{aligned}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula to determine the recalculation factor:

$$\begin{aligned} f_{\text{MHz}}(300 \text{ m}) &\approx 0.159 \text{ MHz} \\ f_{\text{MHz}}(30 \text{ m}) &\approx 1.592 \text{ MHz} \\ f_{\text{MHz}}(3 \text{ m}) &\approx 15.923 \text{ MHz} \end{aligned}$$

Based on the test distances for the general radiated emission limits as specified in §15.209 of 47 CFR Part 15 or RSS-Gen, the following formulas are used to determine the recalculation factor:

Frequency (f)	d_{limit}	d_{measure}	Formula for recalculation factor
9 kHz \leq f \leq 159 kHz 490 kHz $<$ f \leq 1.592 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{limit}} / d_{\text{measure}})$
159 kHz $<$ f \leq 490 kHz 1.592 MHz $<$ f \leq 15.923 MHz	300 m 30 m	3 m	$-40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$
f $>$ 15.923 MHz	30 m	3 m	$-20 \log(d_{\text{limit}} / d_{\text{measure}})$

Table 7: Recalculation factors for extrapolation

Prescans for radiated measurements below 30 MHz are performed in a fully anechoic room (called "CDC"). The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 8.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
9 kHz \leq f $<$ 150 kHz	200 Hz	$\leq 100 \text{ Hz}$	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average
150 kHz \leq f $<$ 30 MHz	9 kHz	$\leq 4.5 \text{ kHz}$	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average

Table 8: Bandwidth and detector type for radiated emissions test below 30 MHz

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB)	Level (dB μ V/m)
10	20.00	19.59	0.33	19.92	39.92

Table 9: Sample calculation

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 20 dB μ V + 19.92 dB = 39.92 dB μ V/m

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

The radiated emissions test below 30 MHz is performed in the following steps:

- a) The loop antenna is positioned with its plane perpendicular to the ground with the lowest height of the antenna 1 m above the ground.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the loop antenna and set-up according to the specifications of the test (see table 8).
- d) The EUT is turned to a position likely to get the maximum and the test antenna is rotated to detect the maximum of the fundamental in this EUT position.
- e) Then the EUT is rotated in a horizontal plane through 360° in steps of 45°. Starting at 0°, at each table position the spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the current table position is noted as the maximum position.
- f) After the last prescan, the significant maximum emissions and their table positions are determined and collected in a list.
- g) With the test receiver set to the first frequency of the list, the EUT is rotated by $\pm 45^\circ$ around the table position found during prescans while measuring the emission level continuously. For final scan, the worst-case table position is set and the maximum emission level is recorded.
- h) Step g) is repeated for all other frequencies in the list.
- i) Finally, for frequencies with critical emissions the loop antenna is rotated again to find the maximum of emission. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to i) are repeated in two other orthogonal positions. If the EUT may be used in one position only, steps a) to i) are repeated in one orthogonal position.

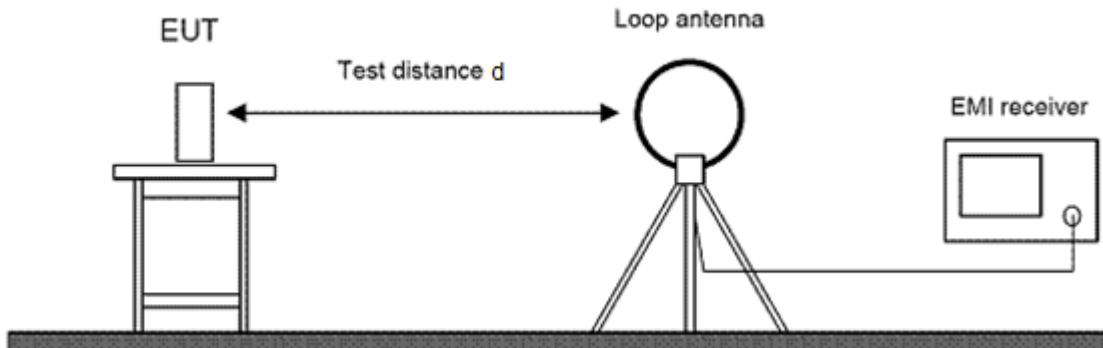


Figure 3: Setup for radiated emissions test below 30 MHz

5.5 Radiated emissions from 30 MHz to 1 GHz

Radiated emissions in the frequency range 30 MHz to 1 GHz are measured according to clause 6.5 of ANSI C63.10 using a semi-anechoic chamber (SAC) with a ground plane on the floor. The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 10.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
30 MHz ≤ f ≤ 1 GHz	120 kHz	≤ 60 kHz	Peak	Quasi-peak	Quasi-peak

Table 10: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz

Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB)	Level (dB μ V/m)
100	30.00	11.71	1.06	12.77	42.77

Table 11: Sample calculation

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 30 dB μ V + 12.77 dB = 42.77 dB μ V/m

The measurement antenna is a combination of a biconical antenna and a logarithmic-periodic dipole array antenna. It is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and in a height between 1 m and 4 m above the ground plane.

If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The radiated emissions test from 30 MHz to 1 GHz is performed in the following steps:

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 10).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
- g) The antenna height is increased to 4 m in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from 4 m to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° in steps of 60°. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- l) With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- m) The antenna is moved by ±50 cm around this height and the EUT is rotated by ±60° around this table position while measuring the emission level continuously.
- n) For final scan, the worst-case positions of antenna and table are set and the maximum emission level is recorded.
- o) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

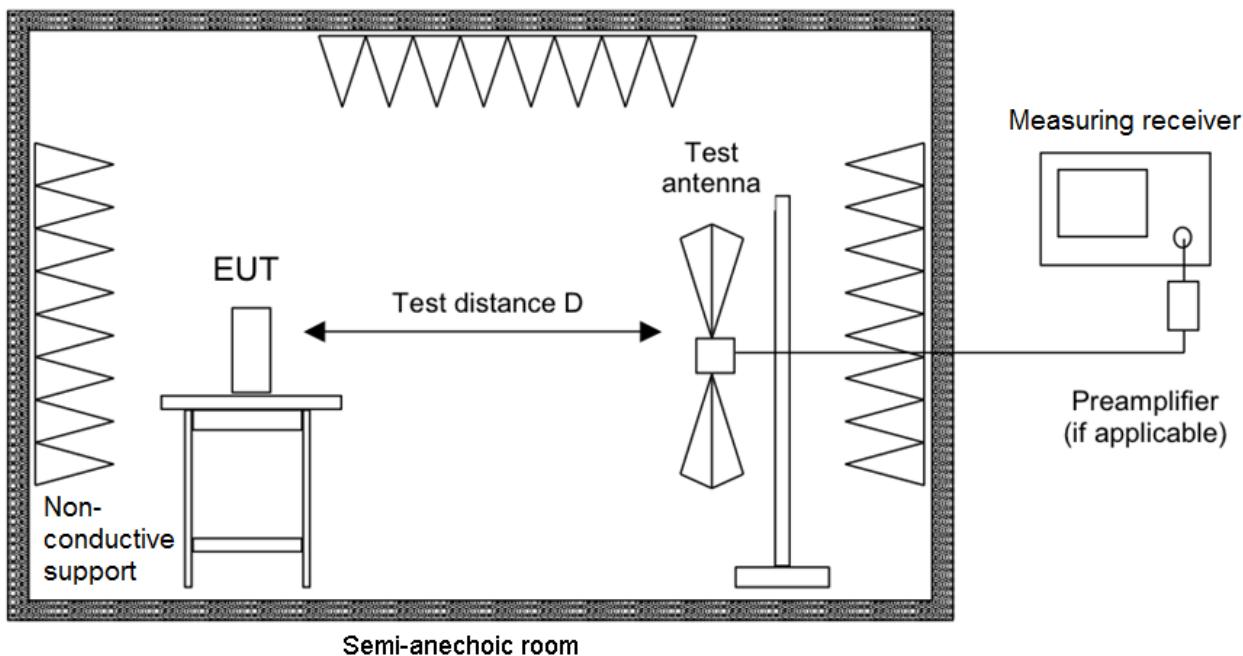


Figure 4: Setup for radiated emissions test from 30 MHz to 1 GHz

5.6 Radiated emissions above 1 GHz

Radiated emissions above 1 GHz are measured according to clause 6.6 of ANSI C63.10 by conducting exploratory and final radiated emission tests. According to clause 6.6.4.1 of ANSI C63.10, measurements may be performed at a distance closer than that specified in the requirements. However, an attempt shall be made to avoid making final measurements in the near field of both the measurement antenna and the EUT.

For measurement of radiated emissions above 1 GHz, horn antennas are used.

Test chamber	Frequency (MHz)	Reading value (dB μ V)	Antenna correction (dB/m)	Correction pre-amplifier (dB)	Cable attenuation (dB)	Correction factor (Corr.) (dB)	Level (dB μ V/m)
SAC3	2400	50.00	27.76	-47.91	5.24	-14.92	35.08
FS-SAC	2400	50.00	27.76	-34.57	3.51	-3.30	46.70

Table 12: Sample calculation

Correction factor = Antenna correction + Correction pre-amplifier + Cable attenuation

SAC3:

Level = Reading value + Correction factor = 50.00 dB μ V - 14.92 dB/m = 35.08 dB μ V/m

FS-SAC:

Level = Reading value + Correction factor = 50.00 dB μ V - 3.30 dB/m = 46.70 dB μ V/m

5.6.1 Exploratory radiated emissions measurements

Exploratory radiated emissions above 1 GHz are measured in a semi-anechoic chamber with RF absorbing material on the floor or a fully anechoic room. They are performed by moving the receiving antenna over all sides of the EUT at a closer distance (e.g. 0.5 or 1 m) while observing the display of the test receiver to find the emissions to be re-tested during final radiated emission measurements.

According to clause 5.3.3 of ANSI C63.10, when performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade of distance (inverse of linear distance for field-strength measurements). To simplify testing and documentation, the limits are increased accordingly instead of decreasing the results.

The emissions of the EUT are displayed and recorded with an EMI test receiver operating in the spectrum analyzer mode using the settings as described in table 13.

Frequency (f)	Resolution bandwidth	Video bandwidth	Sweep time	Trace detector(s)	Trace mode(s)	Test
f \geq 1 GHz	1 MHz	3 MHz	AUTO	Max Peak, Average	Clear Write	Searching
					Max Hold	Recording

Table 13: Bandwidth and trace settings for exploratory radiated emissions test above 1 GHz

If during exploratory radiated emissions measurements no levels to be re-tested are found, the final radiated emissions measurement may be omitted. In this case, the chart of the exploratory radiated emissions measurements has to be reported.

5.6.2 Final radiated emissions measurements

Final radiated emissions above 1 GHz are measured in the semi-anechoic chamber (SAC3) or Free space semi-anechoic chamber (FS-SAC) with RF absorbing material on the floor between measurement antenna and EUT. The measurement distance is 3 meters in the semi-anechoic chamber (SAC3) or 1.5 m in the Free space semi-anechoic chamber (FS-SAC). The emissions of the EUT are recorded with an EMI test receiver configured as described in table 14.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type	
			Prescan	Final scan
$f \geq 1 \text{ GHz}$	1 MHz	$\leq 500 \text{ kHz}$	Peak, Average	Peak, Average

Table 14: Bandwidth and detector type for final radiated emissions test above 1 GHz

Prescans are performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The horn antenna is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and to be moved in a scan height range between 1 m and the scan height upper range defined in clause 6.6.3.3 of ANSI C63.10. When the EUT is manipulated through three different orientations, the scan height upper range for the measurement antenna is limited to 2.5 m above the ground plane or 0.5 m above the top of the EUT, whichever is higher. Otherwise, the scan height upper range is 4 m above the ground plane.

To keep the emission signal within the illumination area of the 3 dB beamwidth of the measurement antenna, the automatic tilt function of the antenna support device is used to point the antenna at an angle toward the source of the emission.

The final radiated emissions test above 1 GHz is performed in the following steps:

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 14).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
 - g) The antenna height is increased to the scan height upper range in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from the scan height upper range to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° in steps of 30°. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- l) With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- m) The antenna is moved by ± 50 cm around this height and the EUT is rotated by ± 30 ° around this table position while measuring the emission level continuously.
- n) For final scan, the worst-case positions of antenna and table are set and the maximum emission level is recorded.
- o) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.

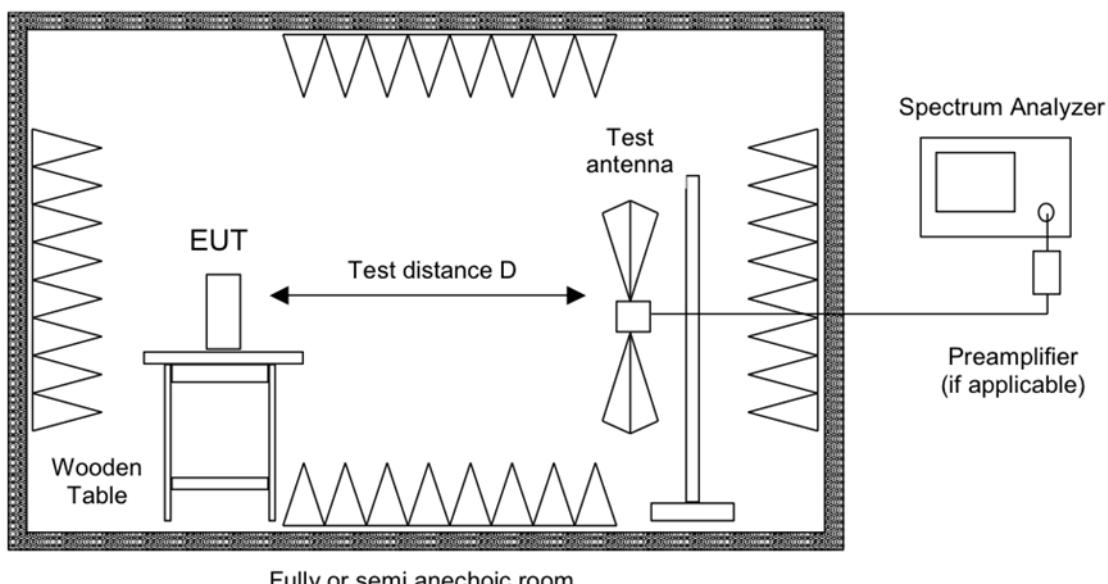


Figure 5: Setup for radiated emissions test above 1 GHz

5.7 Bandwidth measurements

In case of antenna-port conducted tests as described in clause 5.2 cannot be performed, according to section 3.0 of KDB 558074 D01, results of radiated tests are used for demonstrating compliance to the conducted emission requirements. For details about conversion see clause 5.1.2

5.7.1 20 dB bandwidth

The 20 dB bandwidth of the emission is measured according to clause 6.9.2 of ANSI C63.10 as the width of the spectral envelope of the modulated signal, at an amplitude level reduced by a ratio of 20 dB down from the reference value.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer is between two times and five times the 20 dB bandwidth. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 % to 5 % of the 20 dB bandwidth and the video bandwidth (VBW) shall be approximately three times RBW.

The reference level of the instrument is set as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (20 \text{ dB bandwidth}/\text{RBW})]$ below the reference level.

5.7.2 99 % occupied bandwidth

According to section 6.7 of RSS-Gen, the occupied bandwidth (OBW) is defined as the 99 % emission bandwidth.

The span of the spectrum analyzer is set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

The resolution bandwidth is in the range of 1 % to 5 % of the occupied bandwidth and the video bandwidth is not smaller than three times the resolution bandwidth. Video averaging is not permitted.

If possible, the detector of the spectrum analyzer is set to "Sample". However, if the device is not transmitting continuously, a peak, or peak hold is used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement).

To measure the 99 % emission bandwidth, the OBW function of the test receiver is used with the power bandwidth set to 99 %. This function indicates the lowest frequency (starting from the left side of the span) and the highest frequency (starting from the right side of the span) where 0.5% of the total sum is reached. The difference between the two frequencies is the 99 % occupied bandwidth.

5.8 Duty cycle

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

5.9 Maximum peak conducted output power

In case of antenna-port conducted tests as described in clause 5.2 cannot be performed, according to section 3.0 of KDB 558074 D01, results of radiated tests are used for demonstrating compliance to the conducted emission requirements. For details about conversion see clause 5.1.2

The maximum conducted output power test method refers to section 7.8.5 of ANSI C63.10-2013. Use a direct connection between the antenna port of the device and the spectrum analyzer. The hopping shall be disabled for this test.

The spectrum analyzer settings are as follows:

- a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel
- b) $RBW > 20$ dB bandwidth of the emission being measured
- c) $VBW \geq RBW$
- d) Sweep: Auto
- e) Detector function_ Peak
- f) Trace mode = max hold

After the trace is stabilized, the marker-to-peak function is used to set the marker to the peak of the emission. The indicated level is the maximum peak conducted output power.

5.10 Carrier frequency separation

The carrier frequency separation refers to section 7.8.2 of ANSI C63.10-2013. The EUT shall have its hopping function enabled.

The spectrum analyzer settings are as follows:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) $VBW \geq RBW$
- d) Sweep: Auto
- e) Detector function = peak
- f) Trace mode = max hold

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.11 Number of hopping frequencies

The number of frequencies refers to section 7.8.3 of ANSI C63.10-2013. The EUT shall have its hopping function enabled.

The spectrum analyzer settings are as follows:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) $VBW \geq RBW$
- d) Sweep: Auto
- e) Detector function = peak
- f) Trace mode = max hold
- g) Allow the trace to stabilize.

It might prove necessary to break to span up into subranges to show clearly of the hopping frequencies.

5.12 Time of occupancy

The time of occupancy refers to section 7.8.4 of ANSI C63.10-2013. The EUT shall have its hopping function enabled.

The spectrum analyzer settings are as follows:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function = peak
- e) Trace mode = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), the repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$(\text{Number of hops in the period specified in the requirements}) = (\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer sweep time})$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 7.

For information about measurement uncertainties see page 106.

The climatic conditions are recorded during the tests. It is ensured that the climatic conditions are within the following ranges:

<i>Ambient temperature</i>	<i>Ambient humidity</i>	<i>Ambient pressure</i>
15°C to 35°C	30 % to 75 %	86 kPa to 106 kPa

Note(s):

1. All tests were performed at 120 V and 60 Hz.

6.1 AC powerline conducted emissions

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s)	15.207(a) ANSI C63.10, clause 6.2
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-Gen, section 8.8 ANSI C63.10, clause 6.2

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 25, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.1.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Shielded room	P92007	Siemens Matsushita	E00107
EMI test receiver	ESR 7	Rohde & Schwarz	E01549
Artificial mains network	ESH2-Z5	Rohde & Schwarz	E00004
Attenuator (10 dB)	50FHB-010-10	JFW Industries	E00471
Cable set shielded room	RG 223/U RG 223/U	AME HF-Technik AME HF-Technik	E00741 E00804
Test software	EMC32-(M)EB, V10.60.20	Rohde & Schwarz	E00777, E00778 or E01073

6.1.2 Limits

According to §15.207(a):

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H / 50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

According to §15.207(c):

Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

According to RSS-Gen, section 8.8:

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in of the following table, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in the following table shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Table 15: Limits for AC powerline conducted emissions according to § 15.207(a) and RSS-Gen, section 8.8

*Decreases with the logarithm of the frequency

6.1.3 Test procedure

The AC powerline conducted emissions are measured using the test procedure as described in clause 5.3.

6.1.4 Test results

Note(s):

- 1 No assessable emissions were detected.
- 2 The EUT was in continuous frequency hopping mode.

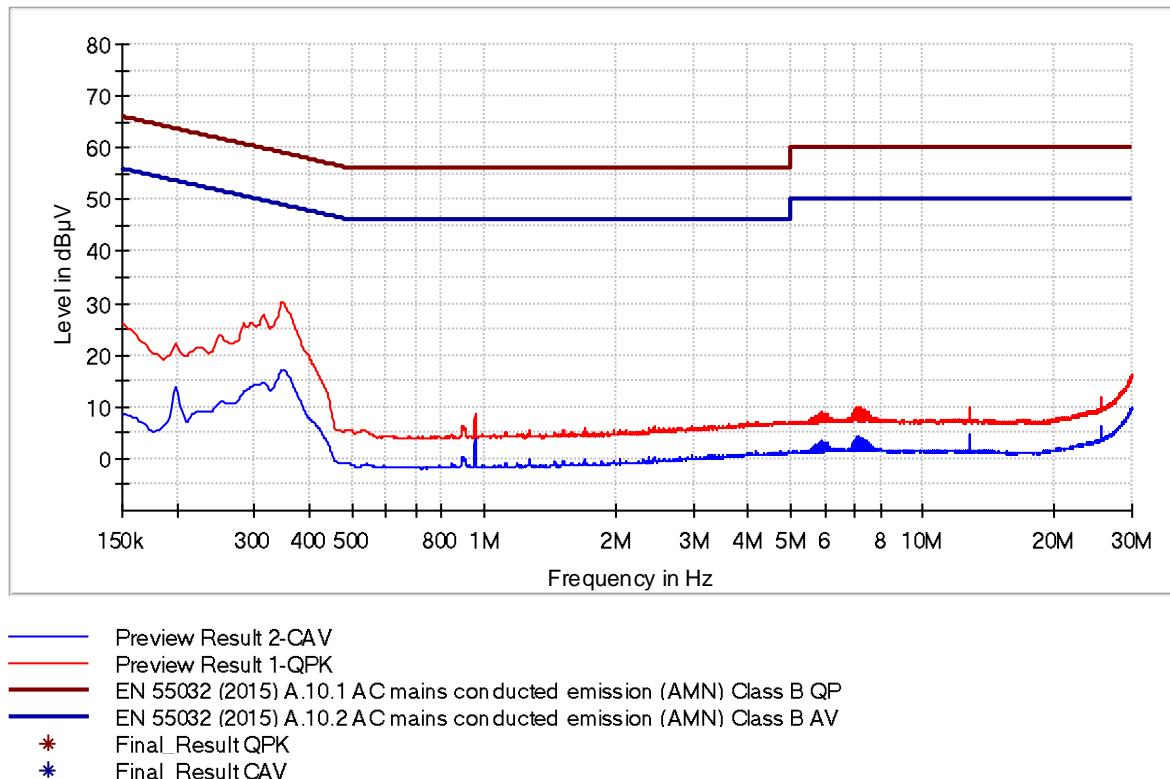


Figure 6: Chart of AC powerline conducted emissions on L1

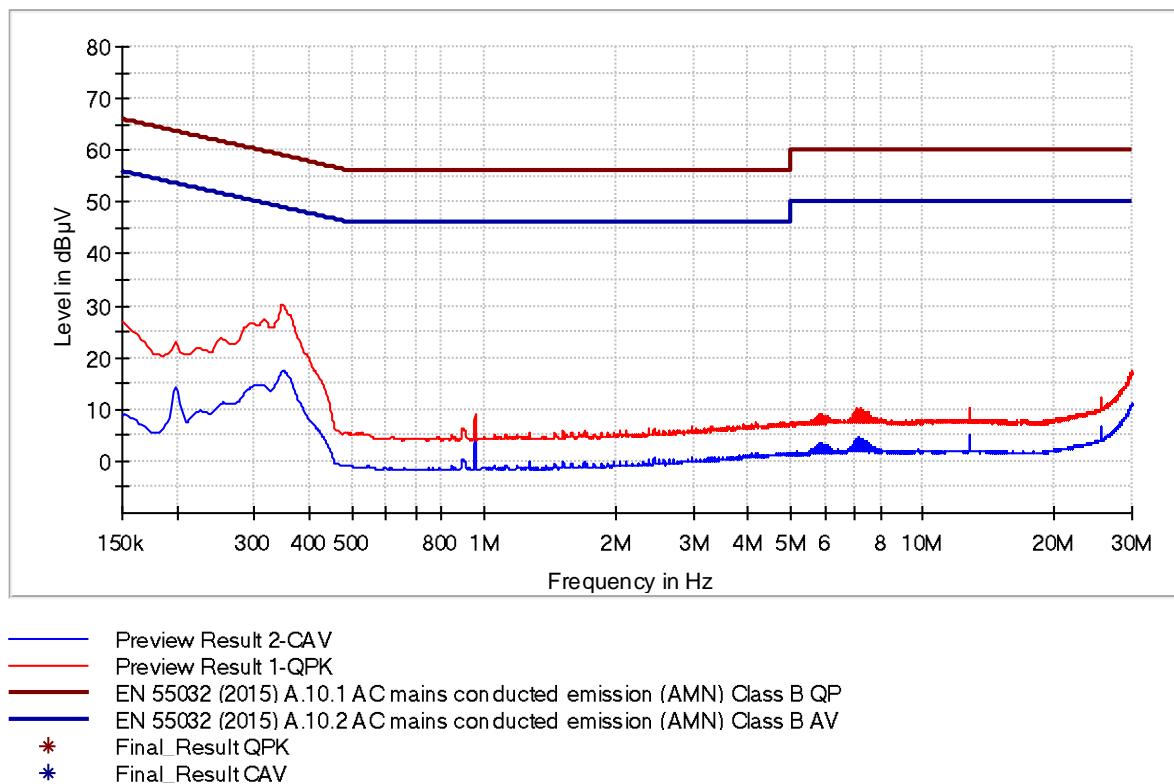


Figure 7: Chart of AC powerline conducted emissions on N

6.2 20 dB bandwidth

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.215(c) ANSI C63.10 , clause 6.9
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.1(a) ANSI C63.10, clause 6.9

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	October 11, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.2.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.2.2 Limits

According to §15.215(c):

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

According to RSS-247, section 5.1(a):

The bandwidth of a frequency hopping channel is the 20 dB emission bandwidth, measured with the hopping stopped.

6.2.3 Test procedure

The 20 dB bandwidth is measured using the test procedure as described in clause 5.7.1 and referring to the

- test method for conducted measurements as described in clause 5.2.
- test method for radiated measurements as described in clause 5.6.

6.2.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

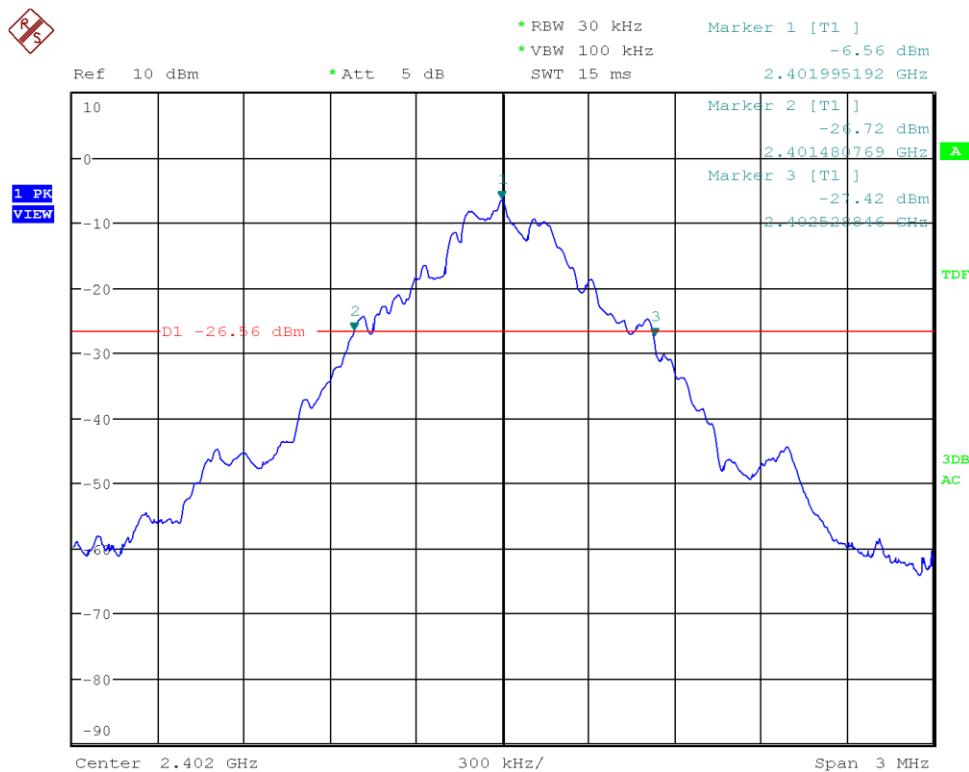


Figure 8: Chart of 20 dB bandwidth test on lowest channel (data rate ACL-B DH1)

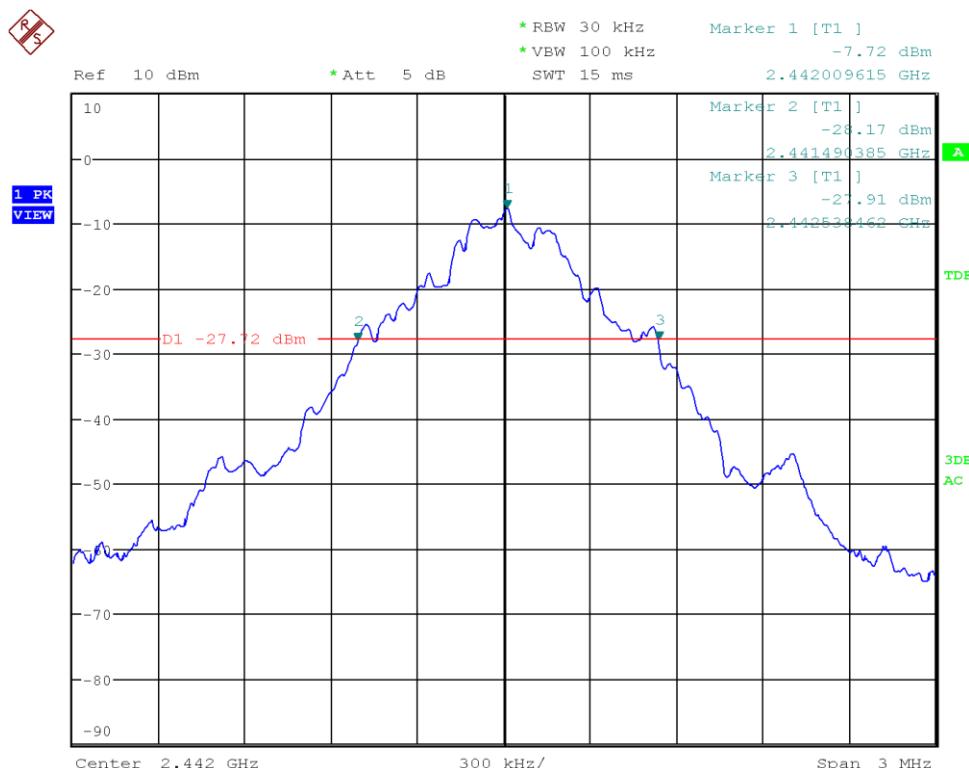


Figure 9: Chart of 20 dB bandwidth test on middle channel (data rate ACL-B DH1)

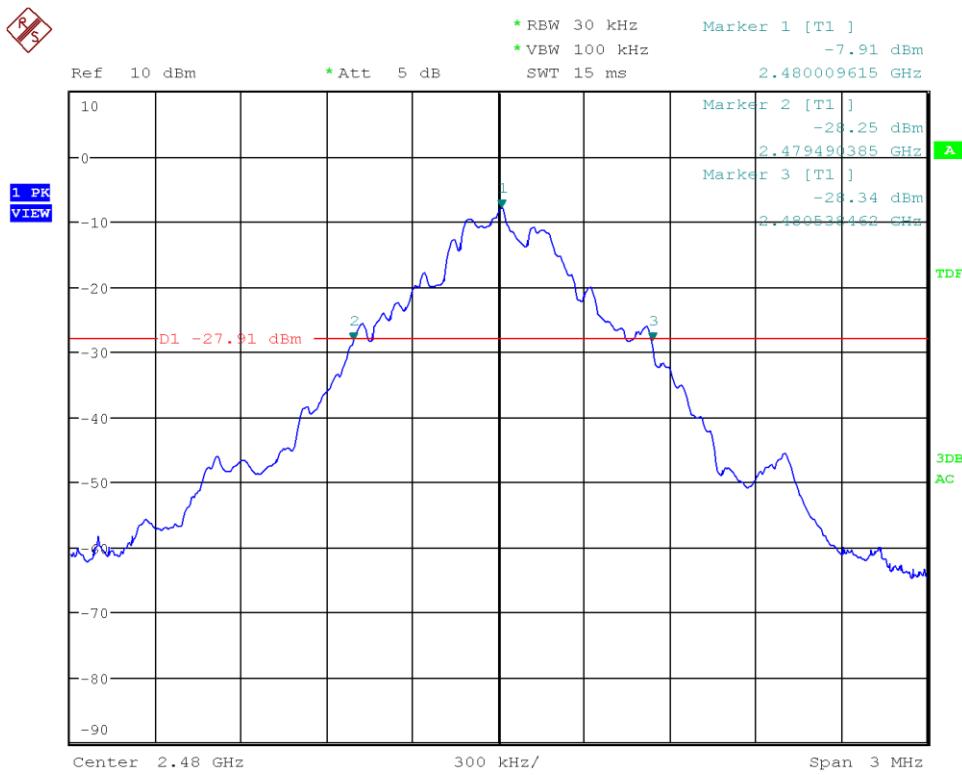


Figure 10: Chart of 20 dB bandwidth test on highest channel (data rate ACL-B DH1)

Channel	20 dB bandwidth (MHz)	Lower frequency of bandwidth (MHz)	Lower frequency of designated band (MHz)	Upper frequency of bandwidth (MHz)	Upper frequency of designated band (MHz)	Result
low	1.048	2401.481	2400.000	2402.529	2483.500	Passed
middle	1.048	2441.490	2400.000	2442.538	2483.500	Passed
high	1.048	2479.490	2400.000	2480.538	2483.500	Passed

Table 16: Results of 6 dB bandwidth test (data rate ACL-B DH1)

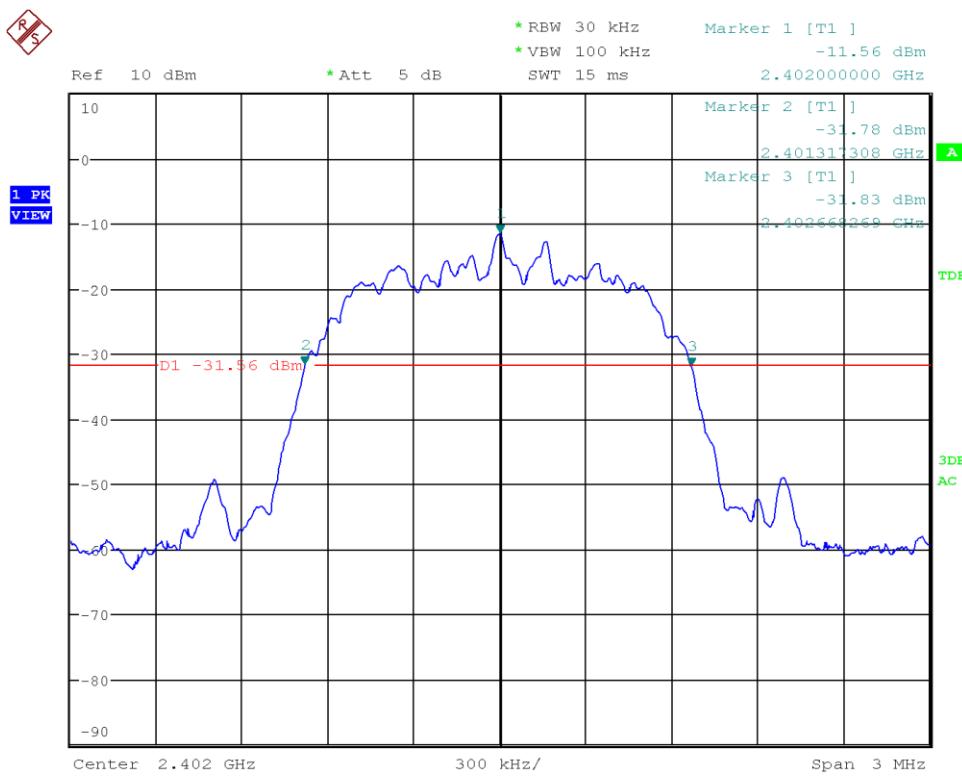


Figure 11: Chart of 20 dB bandwidth test on lowest channel (data rate ACL-E 2-DH3)

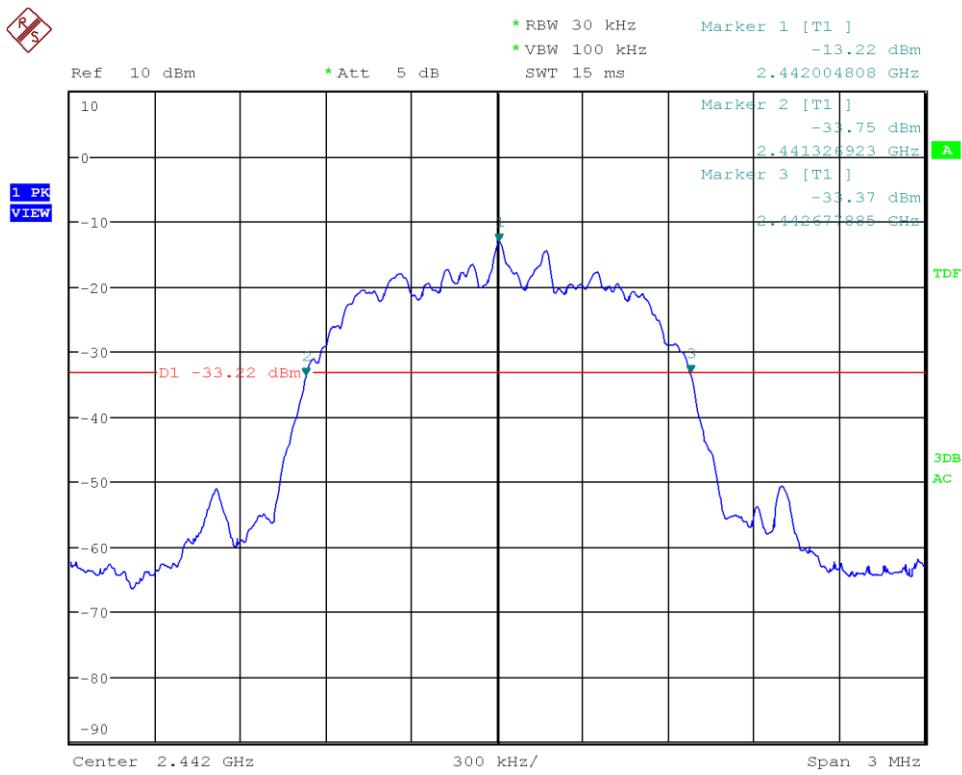


Figure 12: Chart of 20 dB bandwidth test on middle channel (data rate ACL-E 2-DH3)

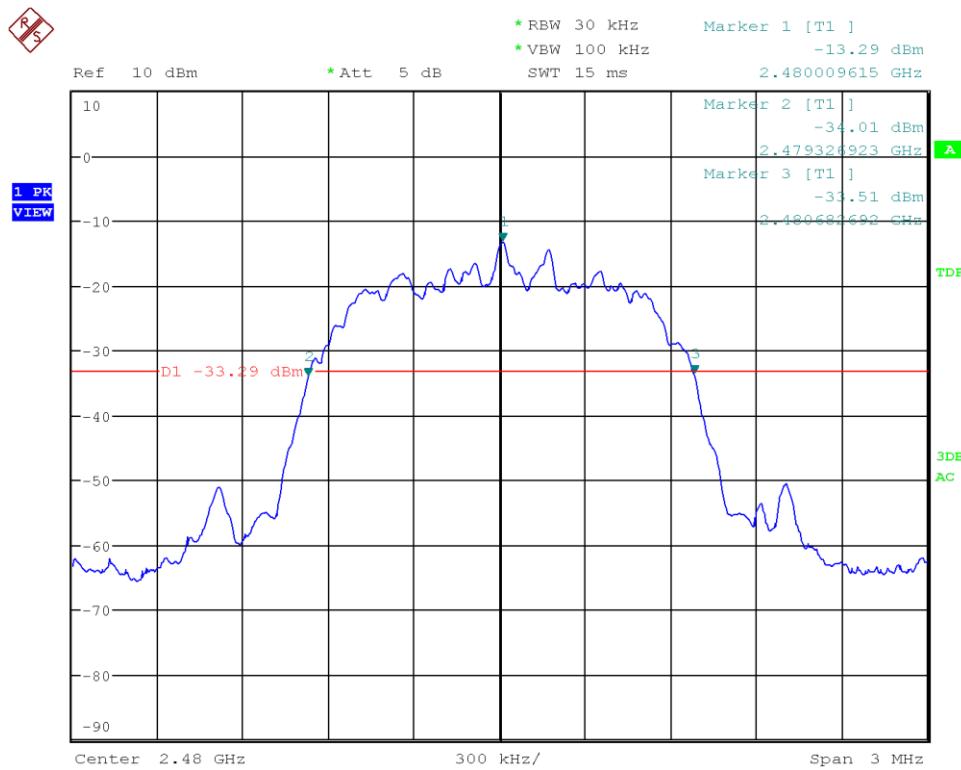


Figure 13: Chart of 20 dB bandwidth test on highest channel (data rate ACL-E 2-DH3)

Channel	20 dB bandwidth (MHz)	Lower frequency of bandwidth (MHz)	Lower frequency of designated band (MHz)	Upper frequency of bandwidth (MHz)	Upper frequency of designated band (MHz)	Result
low	1.351	2401.317	2400.000	2402.668	2483.500	Passed
middle	1.351	2441.327	2400.000	2442.678	2483.500	Passed
high	1.356	2479.327	2400.000	2480.683	2483.500	Passed

Table 17: Results of 6 dB bandwidth test (data rate ACL-E 2-DH3)

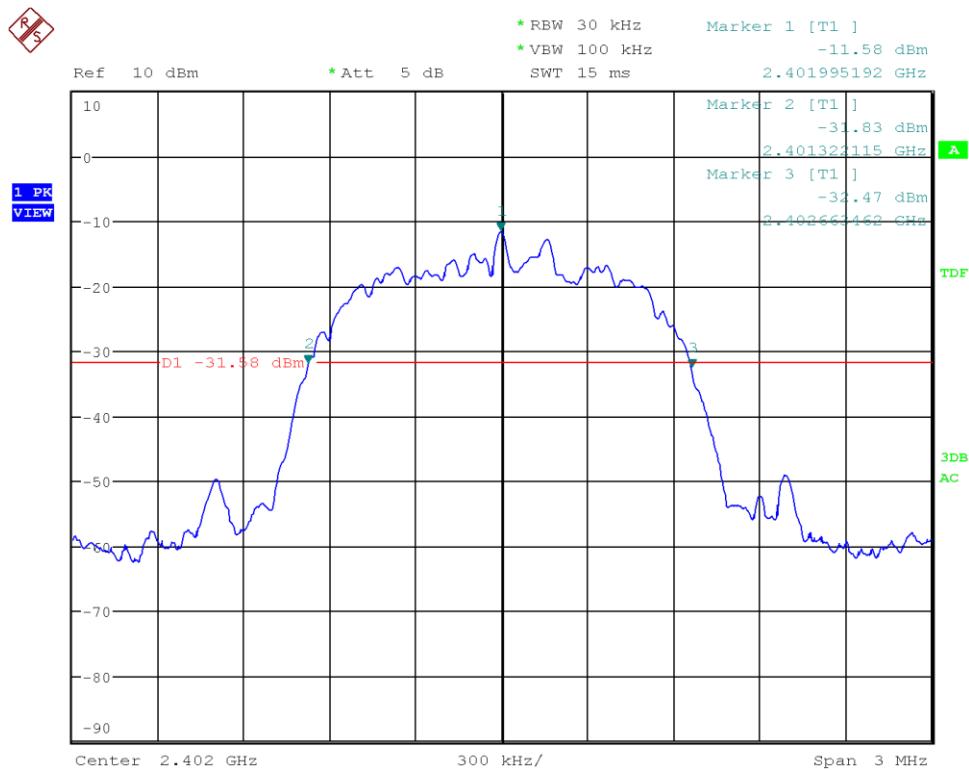


Figure 14: Chart of 20 dB bandwidth test on lowest channel (data rate ACL-E 3-DH3)

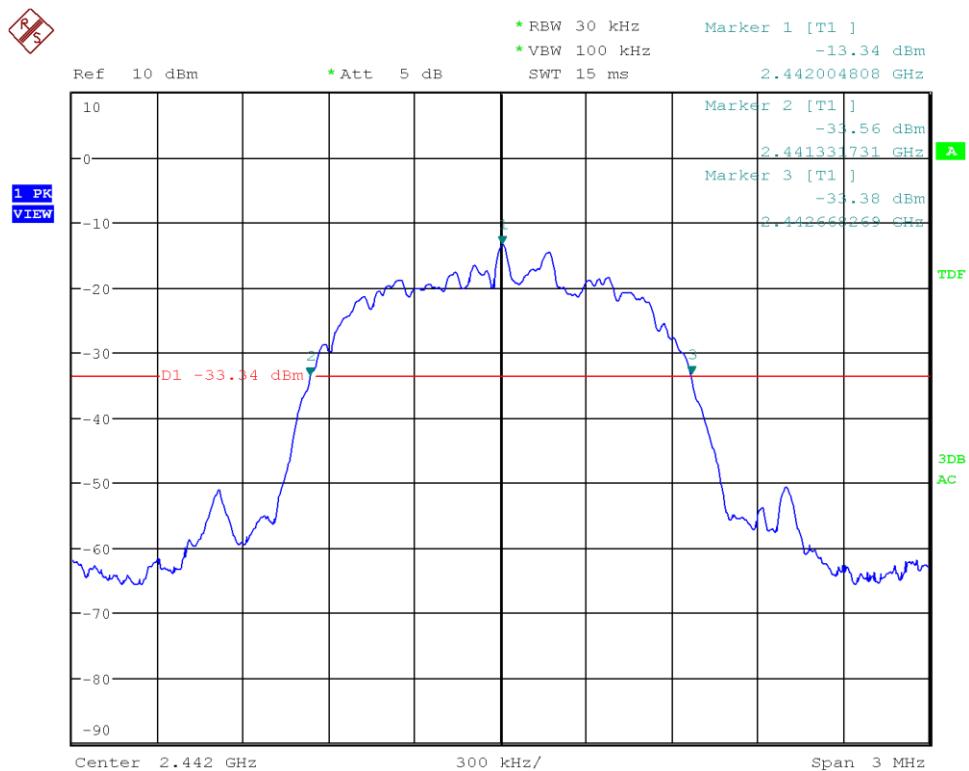


Figure 15: Chart of 20 dB bandwidth test on middle channel (data rate ACL-E 3-DH3)

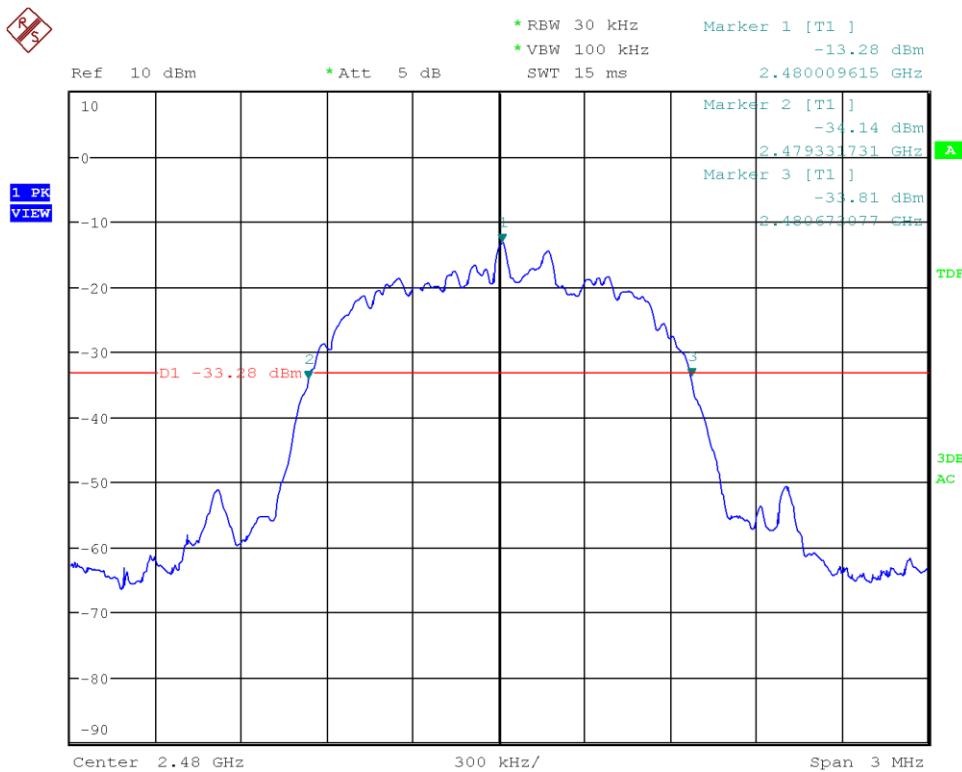


Figure 16: Chart of 20 dB bandwidth test on highest channel (data rate ACL-E 3-DH3)

Channel	20 dB bandwidth (MHz)	Lower frequency of bandwidth (MHz)	Lower frequency of designated band (MHz)	Upper frequency of bandwidth (MHz)	Upper frequency of designated band (MHz)	Result
low	1.341	2401.322	2400.000	2402.663	2483.500	Passed
middle	1.336	2441.332	2400.000	2442.668	2483.500	Passed
high	1.341	2479.332	2400.000	2480.673	2483.500	Passed

Table 18: Results of 6 dB bandwidth test (data rate ACL-E 3-DH3)

6.3 Occupied bandwidth

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	---	KDB 558074 D01, section 5.2 ANSI C63.10, clause 6.9
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-Gen, section 6.7 KDB 558074 D01, section 5.2 ANSI C63.10, clause 6.9	

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	October 11, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.3.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.3.2 Limits

According to section 5.2 of KDB Publication 558074, document D01:
The 99 % occupied bandwidth is necessary for setting the proper reference level and input attenuation.

According to RSS-Gen, section 6.7:
The occupied bandwidth or the “99% emission bandwidth” has to be reported for all equipment in addition to the specified bandwidth required in RSS-247.

6.3.3 Test procedure

The occupied bandwidth is measured using the test procedure as described in clause 5.7.2 and referring to the

- test method for conducted measurements as described in clause 5.2.
- test method for radiated measurements as described in clause 5.6.

6.3.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

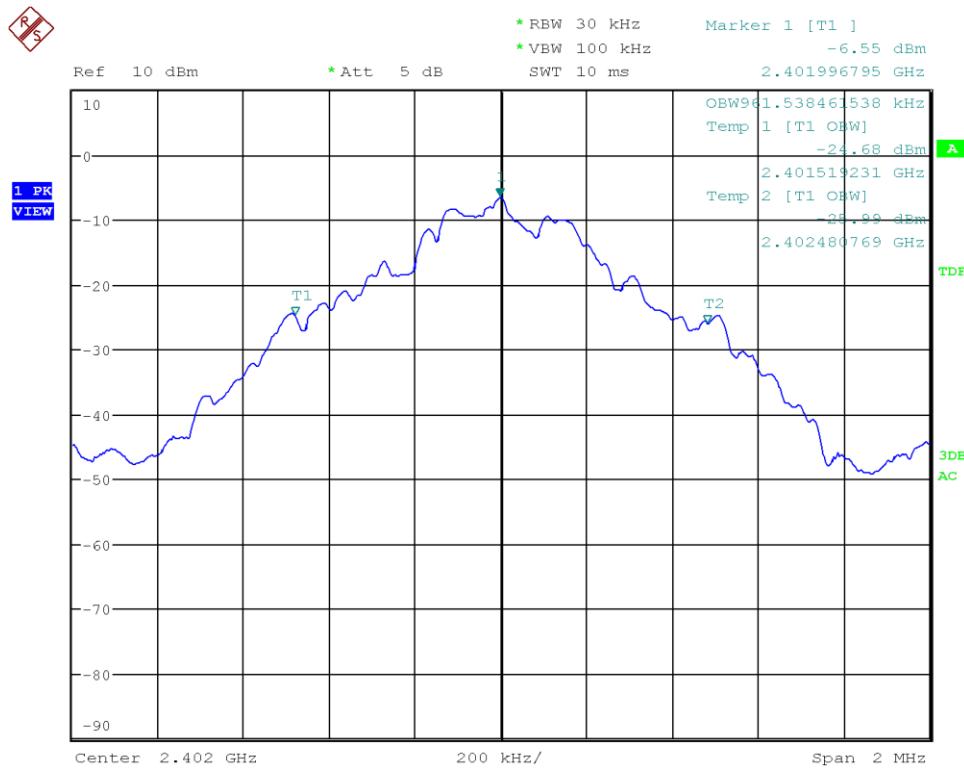


Figure 17: Chart of occupied bandwidth test on lowest channel (data rate ACL-B DH1)

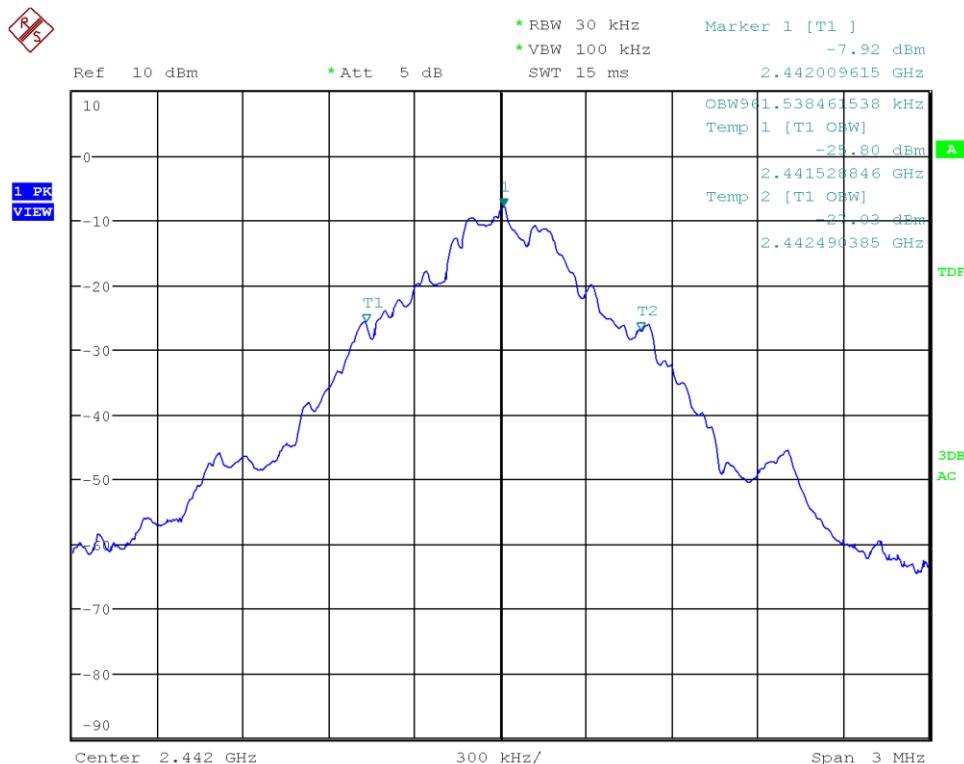


Figure 18: Chart of occupied bandwidth test on middle channel (data rate ACL-B DH1)

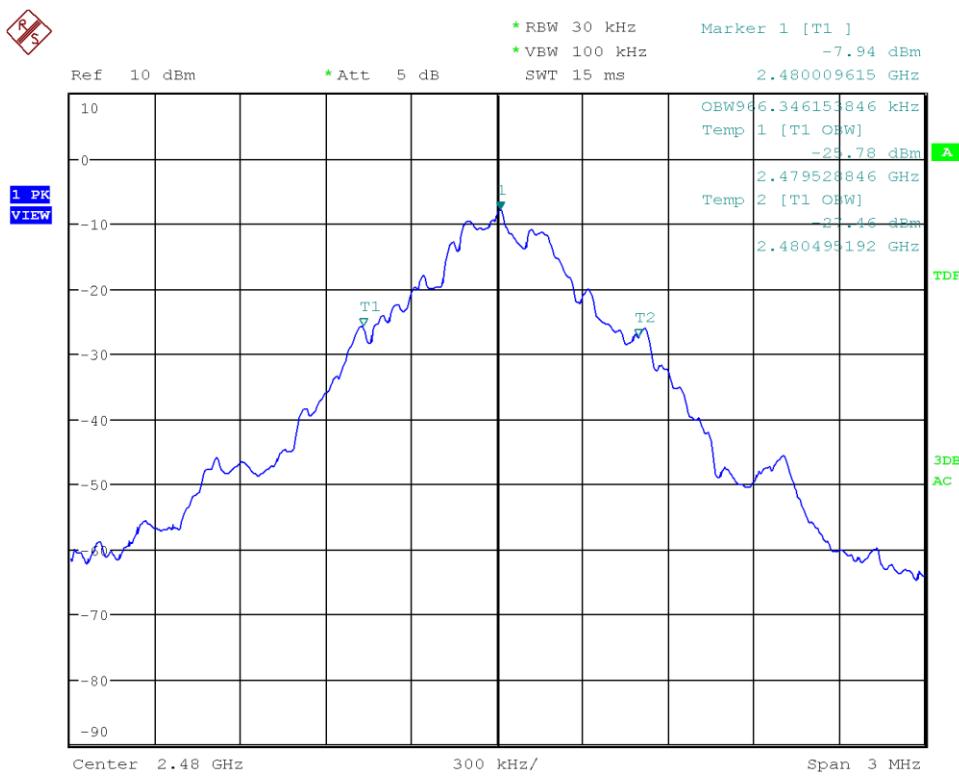


Figure 19: Chart of occupied bandwidth test on highest channel (data rate ACL-B DH1)

Channel	99 % occupied bandwidth (MHz)	Result
low	0.962	Recorded
middle	0.962	Recorded
high	0.966	Recorded

Table 19: Results of occupied bandwidth test (data rate ACL-B DH1)

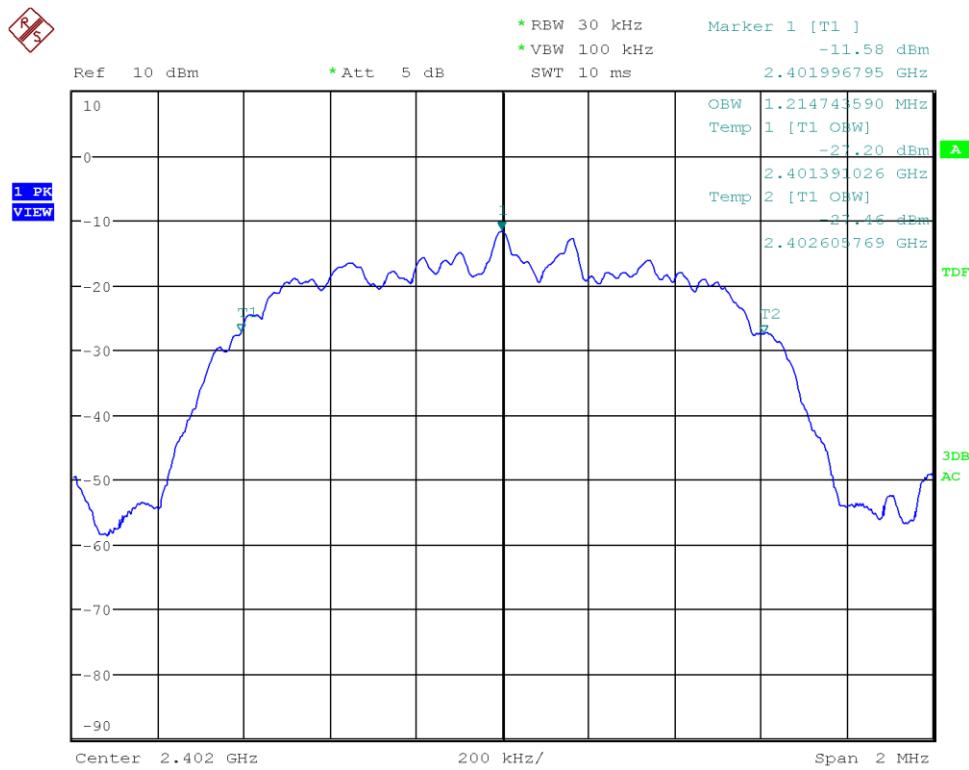


Figure 20: Chart of occupied bandwidth test on lowest channel (data rate ACL-E 2-DH3)

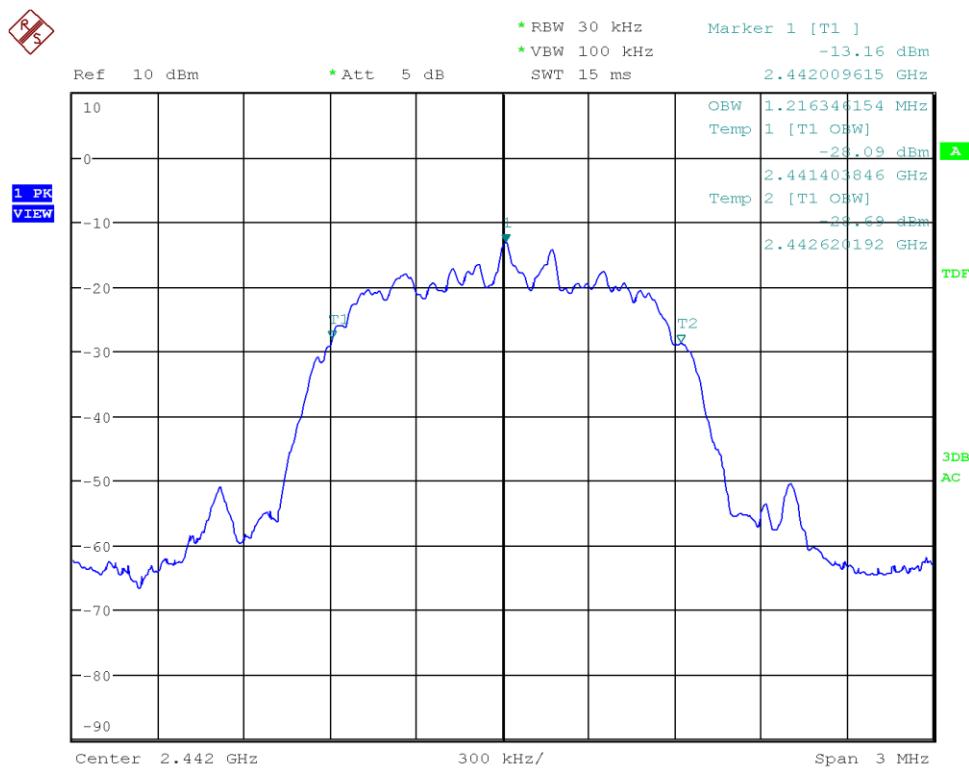


Figure 21: Chart of occupied bandwidth test on middle channel (data rate ACL-E 2-DH3)

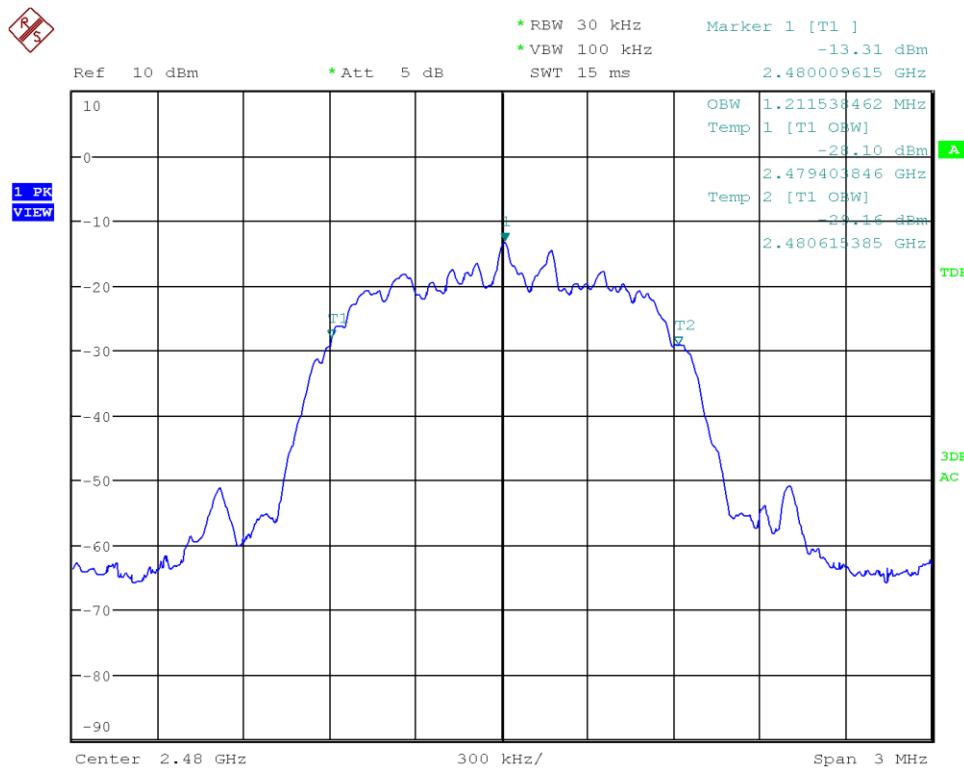


Figure 22: Chart of occupied bandwidth test on highest channel (data rate ACL-E 2-DH3)

Channel	99 % occupied bandwidth (MHz)	Result
low	1.215	Recorded
middle	1.216	Recorded
high	1.212	Recorded

Table 20: Results of occupied bandwidth test (data rate ACL-E 2-DH3)

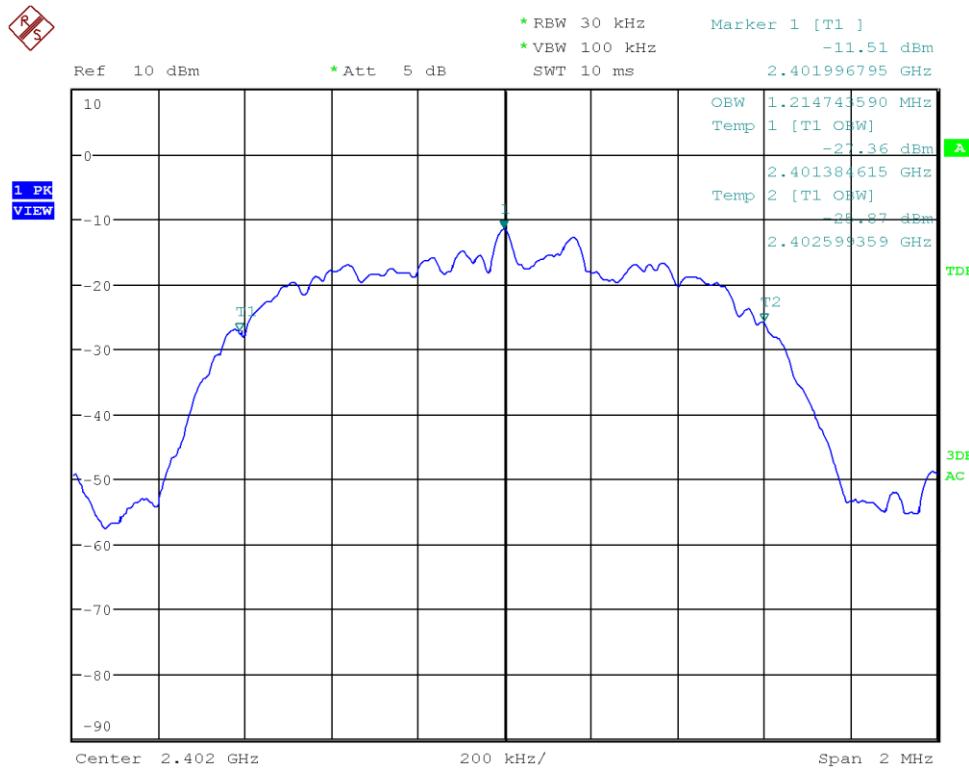


Figure 23: Chart of occupied bandwidth test on lowest channel (data rate ACL-E 3-DH3)

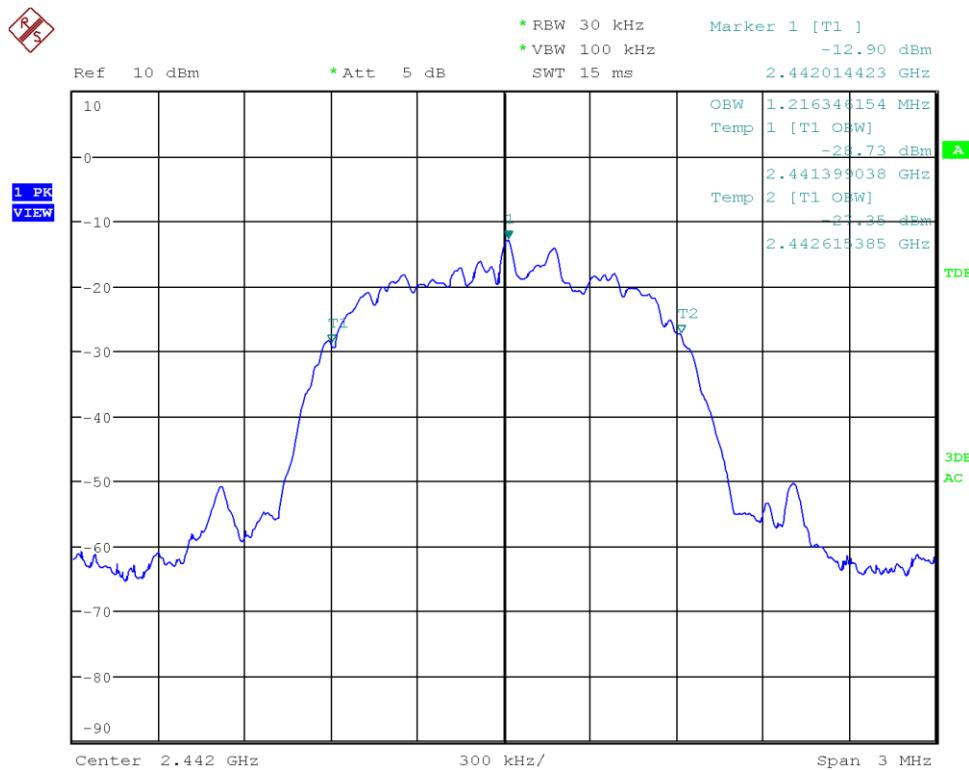


Figure 24: Chart of occupied bandwidth test on middle channel (data rate ACL-E 3-DH3)

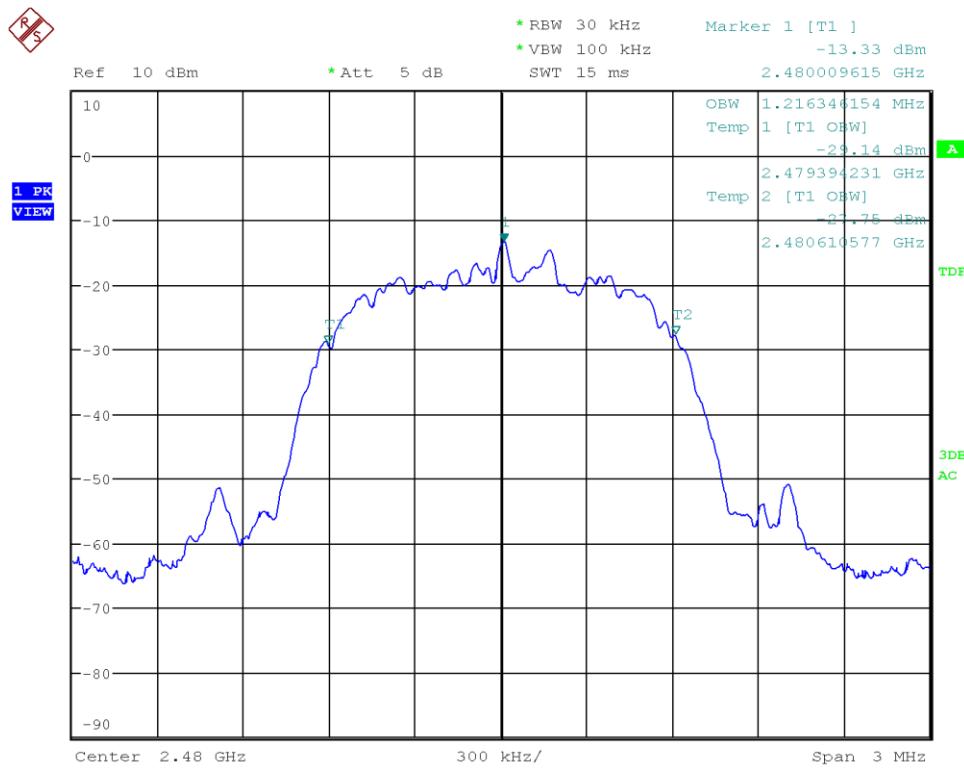


Figure 25: Chart of occupied bandwidth test on highest channel (data rate ACL-E 3-DH3)

Channel	99 % occupied bandwidth (MHz)	Result
low	1.215	Recorded
middle	1.216	Recorded
high	1.216	Recorded

Table 21: Results of occupied bandwidth test (data rate ACL-E 3-DH3)

6.4 Conducted output power

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(b)(1) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.5
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.4(b) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.5

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	October 11, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.4.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.4.2 Limits

According to §15.247(b)(1):

For frequency hopping systems operating in the 2400 – 2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725 – 5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4):

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-247, section 5.4(b):

b. For FHSSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

6.4.3 Test procedure

The maximum peak conducted output power is measured using the test procedure as described in clause 5.8 and referring to the

- test method for conducted measurements as described in clause 5.2.
- test method for radiated measurements as described in clause 5.6.

6.4.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. The gain of the antenna is below 6 dBi, therefore a reduction of the conducted limit was not applied.
3. For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

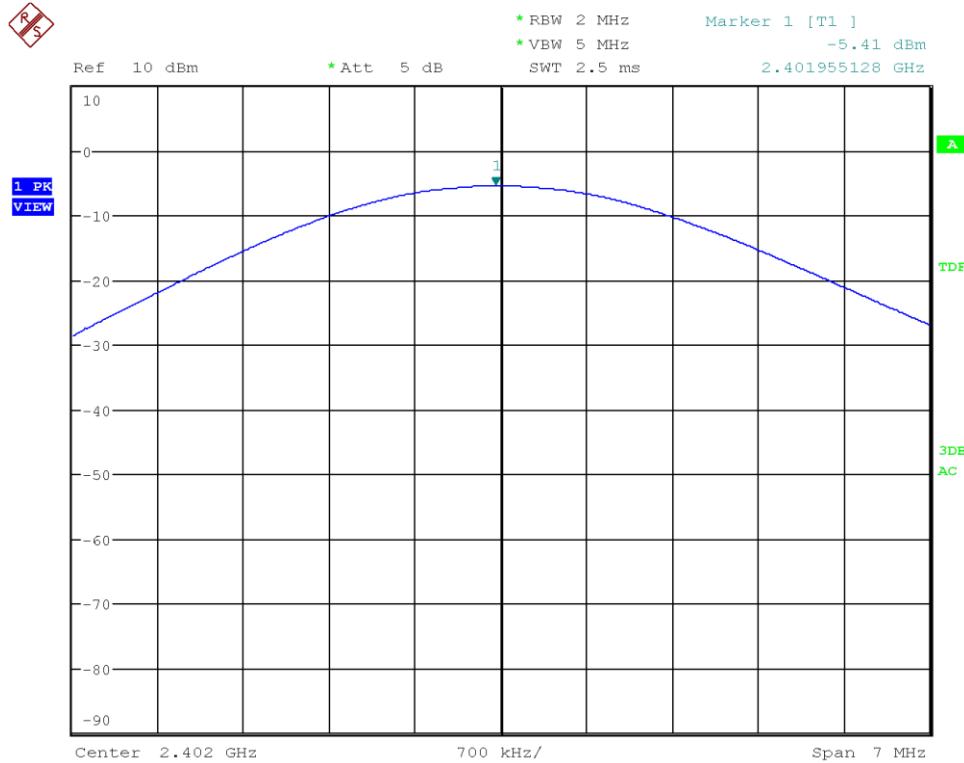


Figure 26: Chart of conducted output power on lowest channel (data rate ACL-B DH1)

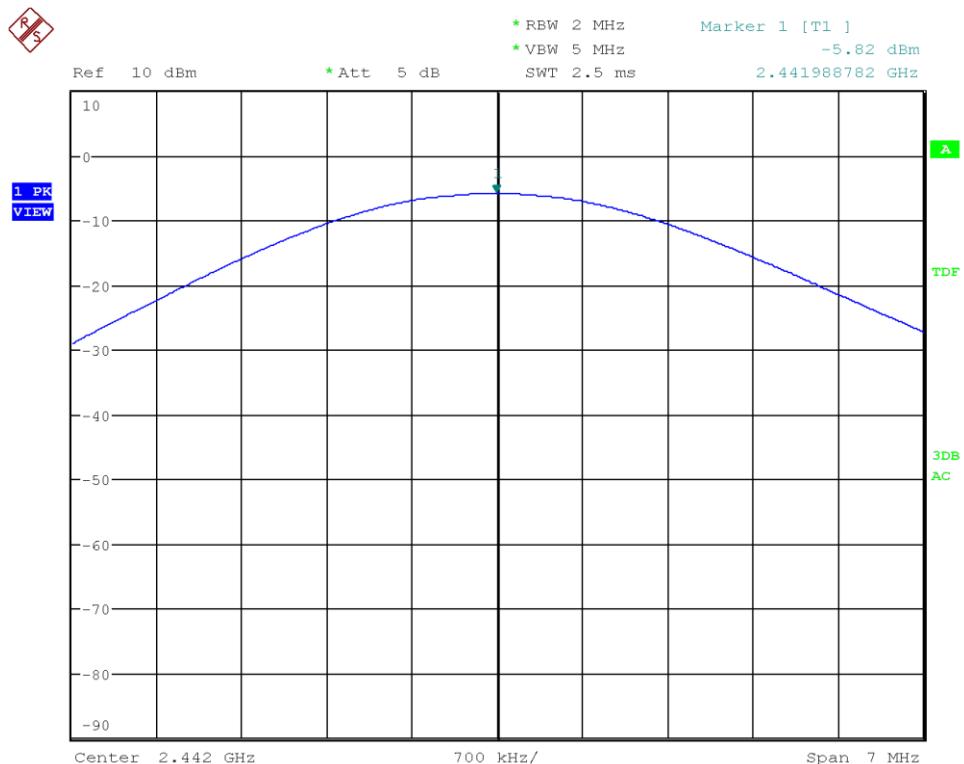


Figure 27: Chart of conducted output power on middle channel (data rate ACL-B DH1)

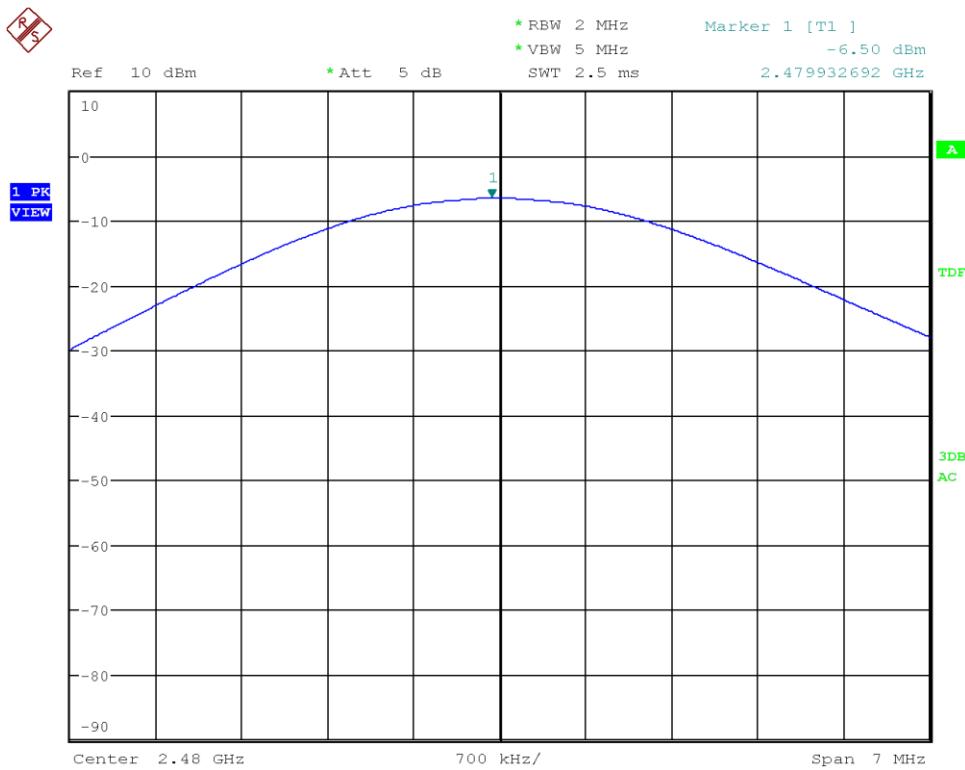


Figure 28: Chart of conducted output power on highest channel (data rate ACL-B DH1)

Channel	Conducted output power (dBm)	Limit (dBm)	Margin (dB)	Results
low	-5.41	30.00	35.41	Passed
middle	-5.82	30.00	35.82	Passed
high	-6.50	30.00	36.50	Passed

Table 22: Results of conducted output power (data rate ACL-B DH1)

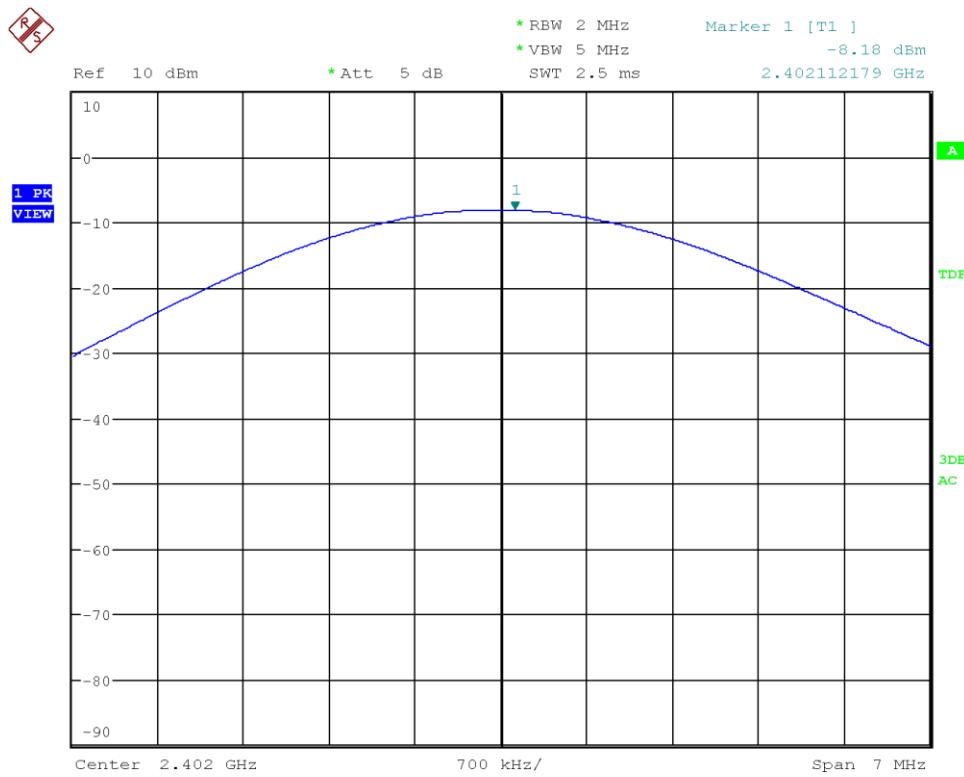


Figure 29: Chart of conducted output power on lowest channel (data rate ACL-E 2-DH3)

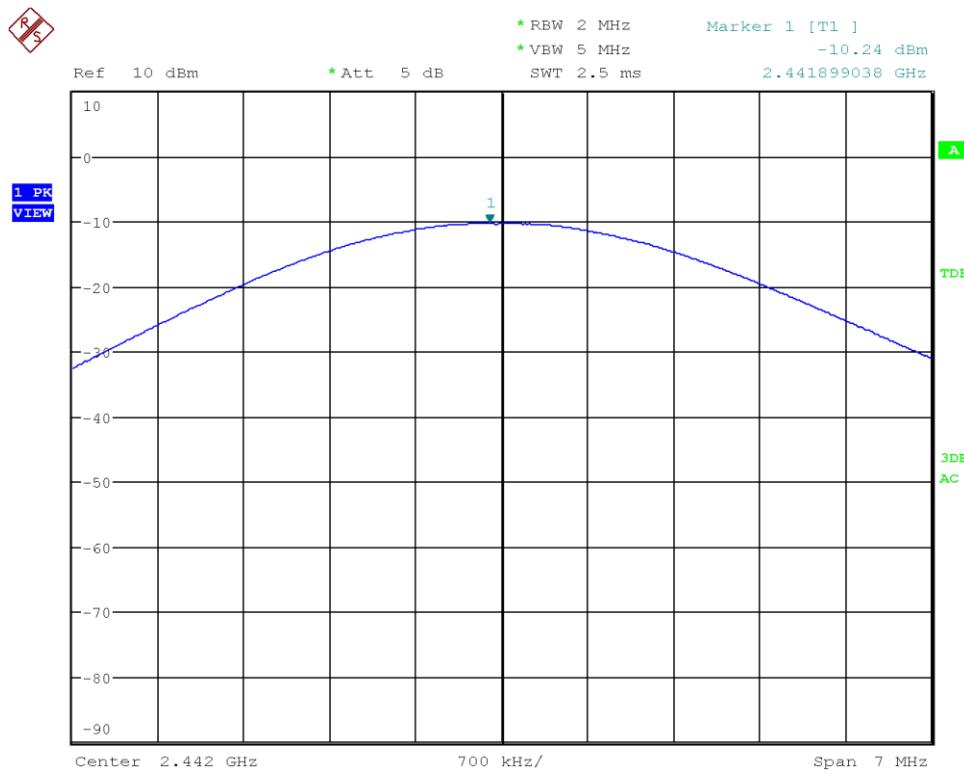


Figure 30: Chart of conducted output power on middle channel (data rate ACL-E 2-DH3)

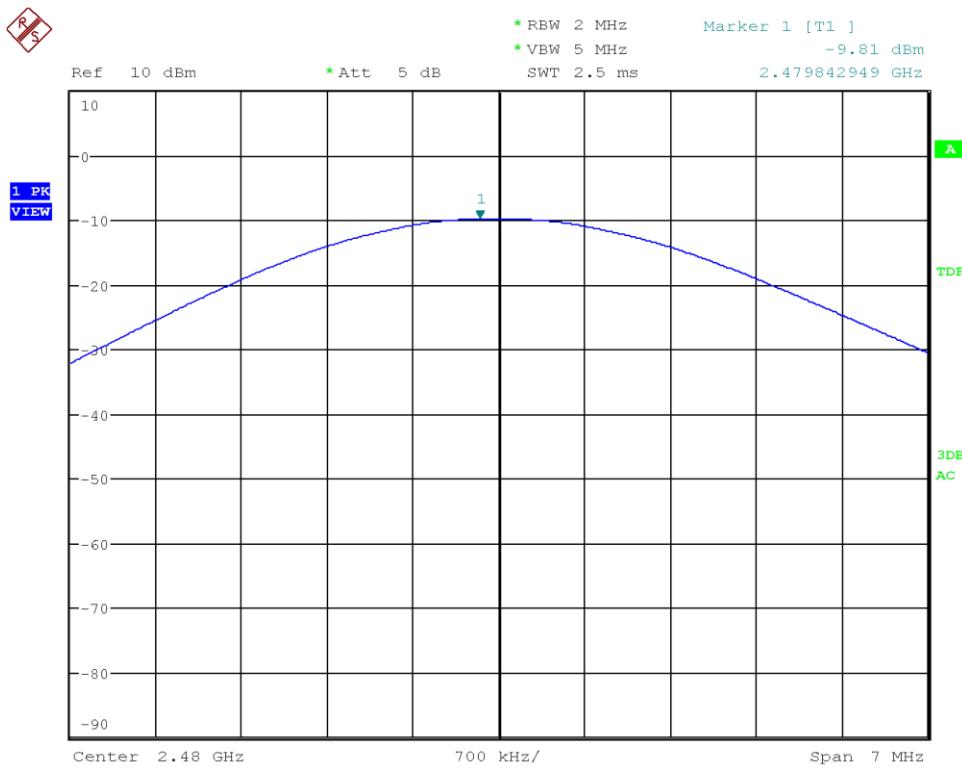


Figure 31: Chart of conducted output power on highest channel (data rate ACL-E 2-DH3)

Channel	Conducted output power (dBm)	Limit (dBm)	Margin (dB)	Results
low	-8.18	30.00	38.18	Passed
middle	-10.24	30.00	40.24	Passed
high	-9.81	30.00	39.81	Passed

Table 23: Results of conducted output power (data rate ACL-E 2-DH3)

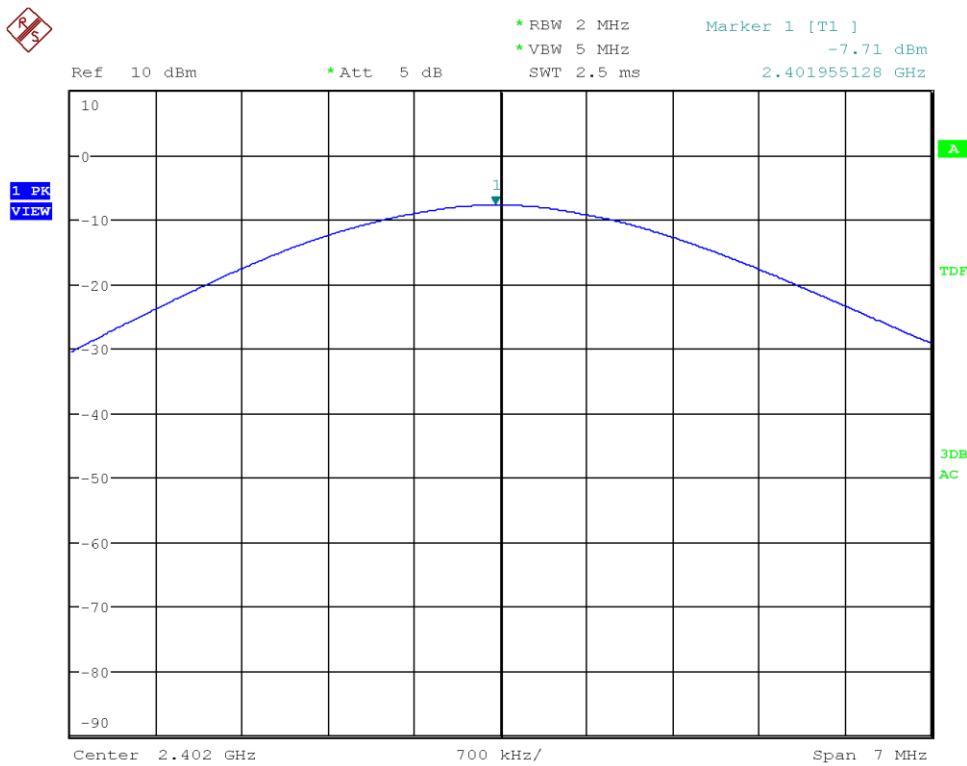


Figure 32: Chart of conducted output power on lowest channel (data rate ACL-E 3-DH1)

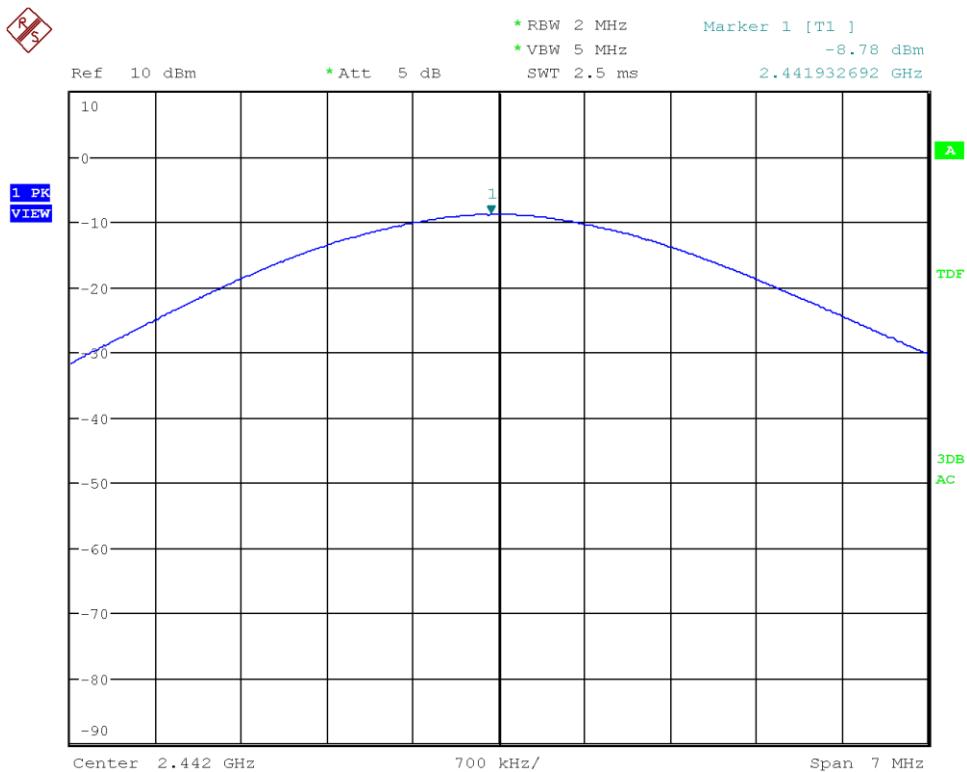


Figure 33: Chart of conducted output power on middle channel (data rate ACL-E 3-DH1)

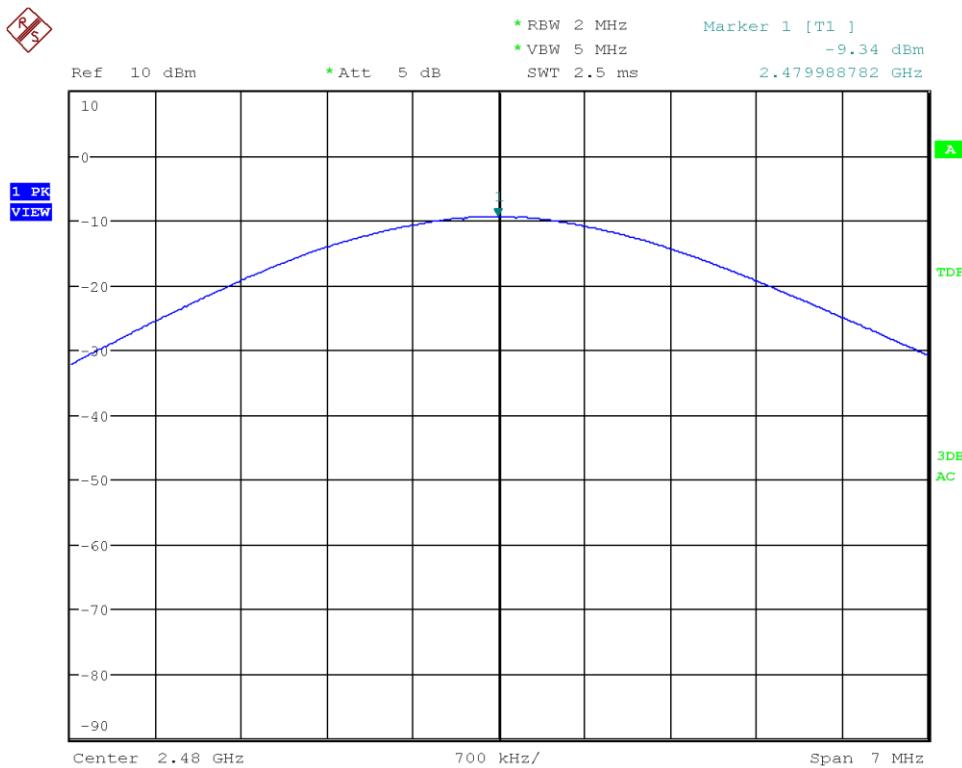


Figure 34: Chart of conducted output power on highest channel (data rate ACL-E 3-DH1)

Channel	Conducted output power (dBm)	Limit (dBm)	Margin (dB)	Results
low	-7.71	30.00	37.71	Passed
middle	-8.78	30.00	38.78	Passed
high	-9.34	30.00	39.34	Passed

Table 24: Results of conducted output power (data rate ACL-E 3-DH1)

6.5 Carrier frequency separation

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(a) KDB 558074 D01, clause 9 ANSI C63.10, clause 11.10
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.2(b) KDB 558074 D01, clause 9 ANSI C63.10, clause 11.10

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 12, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.5.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.5.2 Limits

According to §15.247(a)(1) and RSS-247 section 5.1(b):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.5.3 Test procedure

The carrier frequency separation is measured using the test procedure as described in clause 5.10 and referring to the

- test method for conducted measurements as described in clause 5.2.
- test method for radiated measurements as described in clause 5.6.

6.5.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

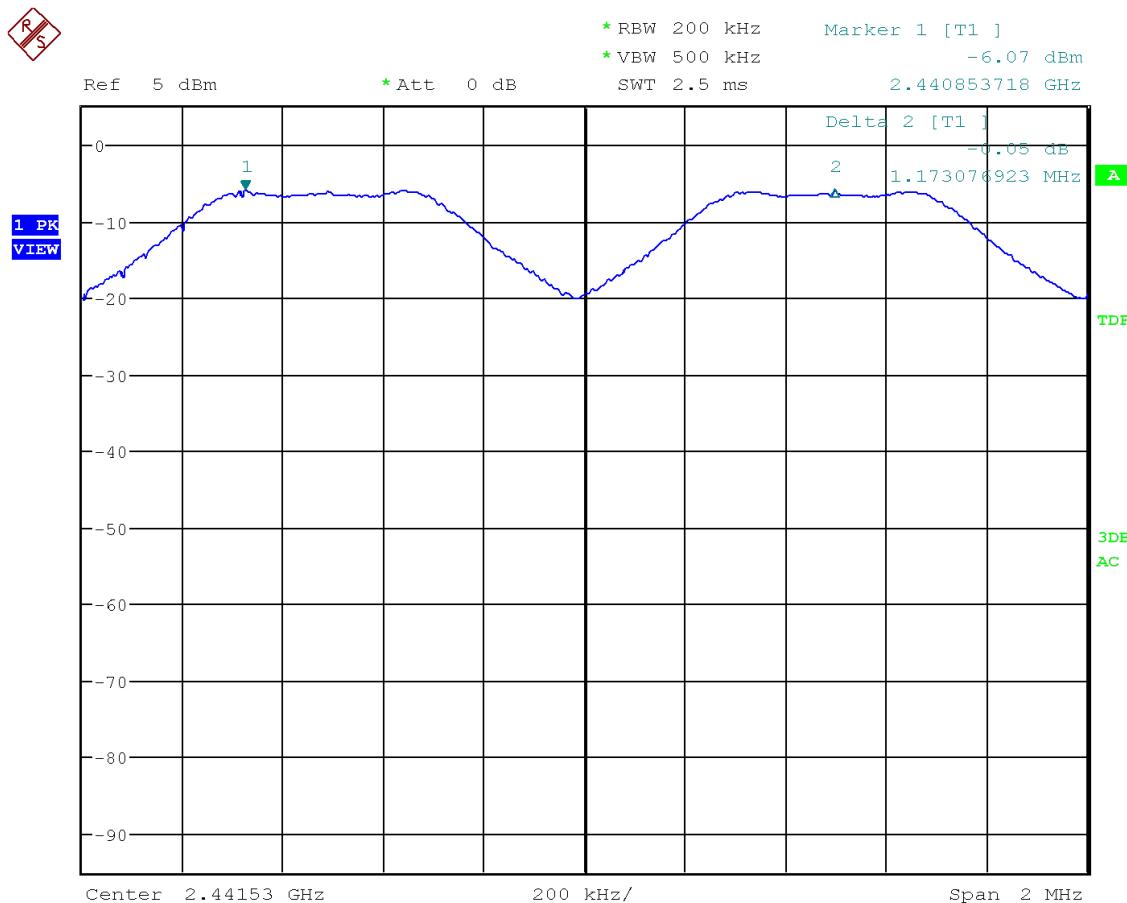


Figure 35: Chart of carrier frequency separation (data rate ACL-B DH3)

Carrier frequency separation (kHz)	Limit (kHz)	Results
1173.075	≥ 786	Passed

Table 25: Results of carrier frequency separation (data rate ACL-B DH3)

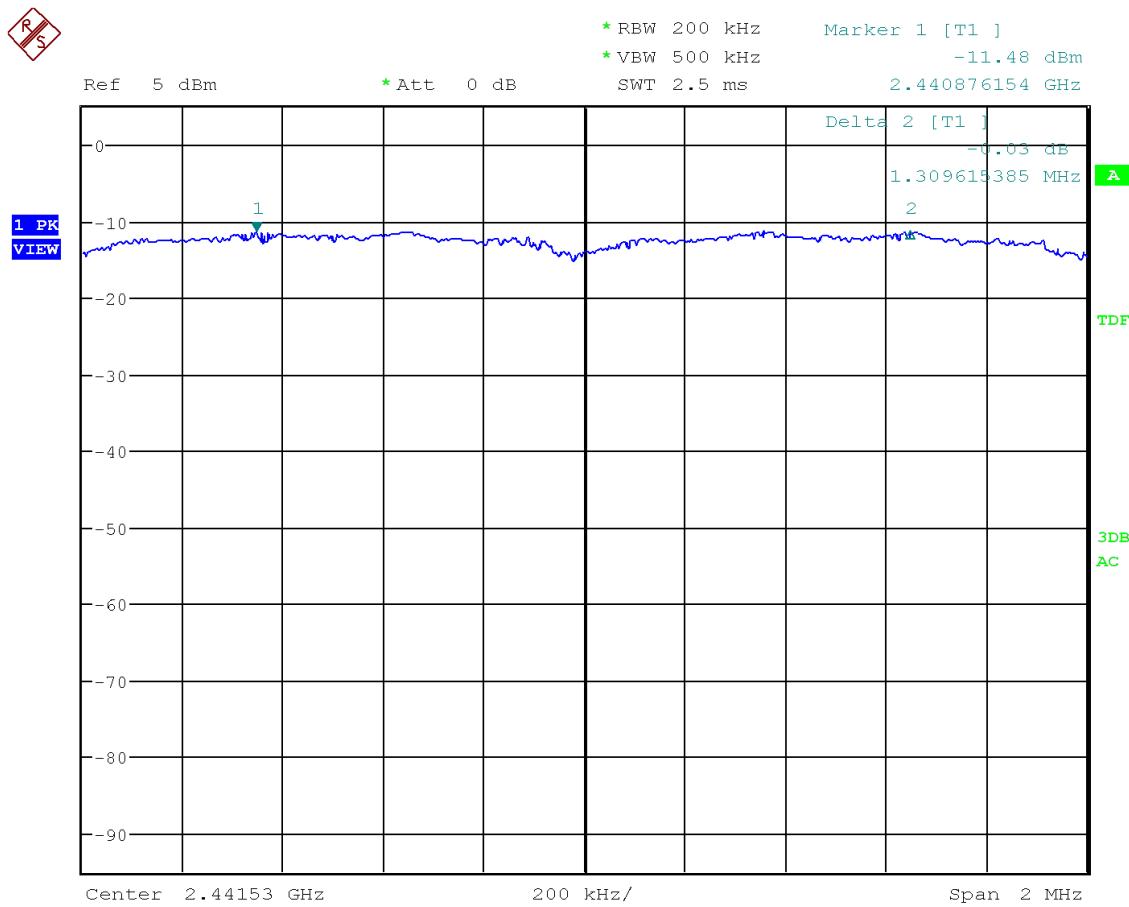


Figure 36: Chart of carrier frequency separation (data rate ACL-E 2-DH3)

Carrier frequency separation (kHz)	Limit (kHz)	Results
1309.615	≥ 1017	Passed

Table 26: Results of carrier frequency separation (data rate ACL-E 2-DH3)

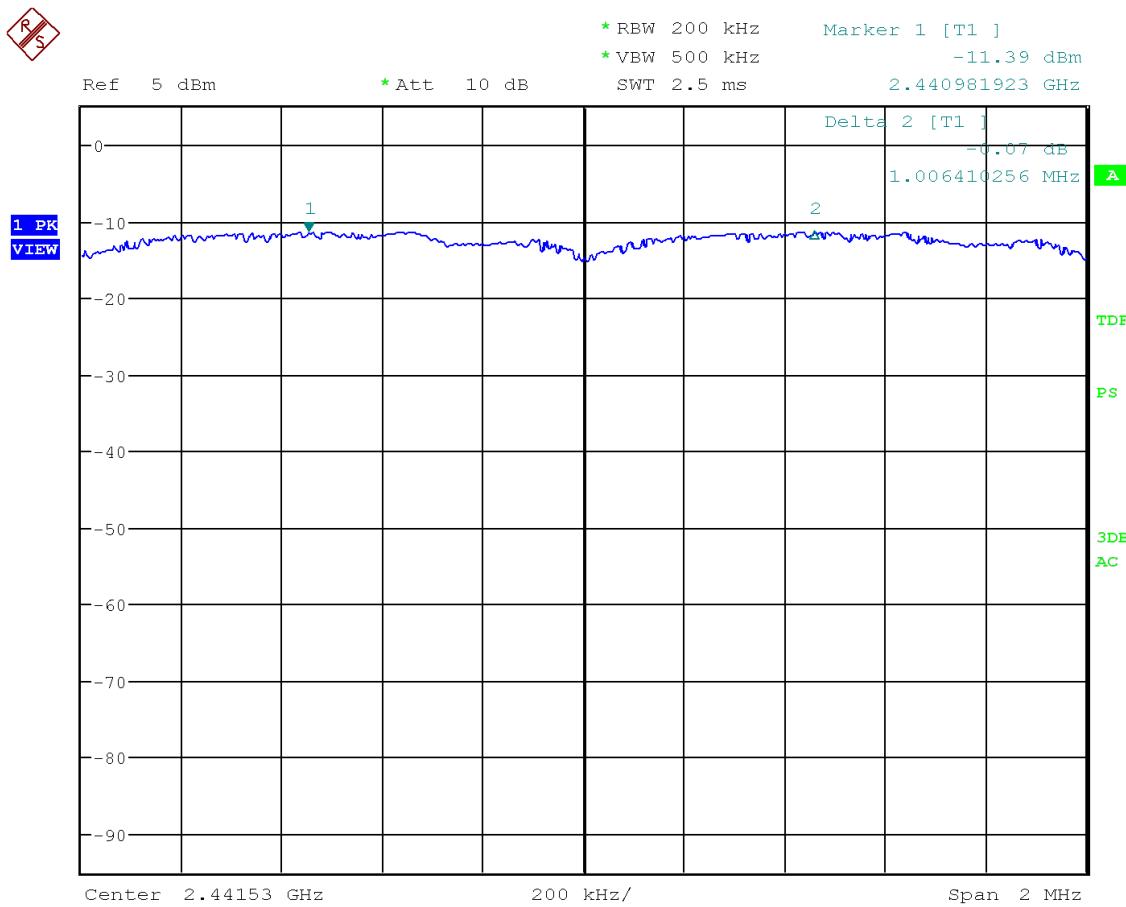


Figure 37: Chart of carrier frequency separation (data rate ACL-E 3-DH3)

Carrier frequency separation (kHz)	Limit (kHz)	Results
1006.410	≥ 1005.75	Passed

Table 27: Results of carrier frequency separation (data rate ACL-E 3-DH3)

6.6 Number of hopping frequencies

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(a)(1) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.3
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.1(d) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.3

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 12, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.6.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.6.2 Limits

According to §15.247(a)(1) and RSS-247 section 5.1(d):

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

6.6.3 Test procedure

The number of hopping frequencies is measured using the test procedure as described in clause 5.11 and referring to the

- test method for conducted measurements as described in clause 5.2.
- test method for radiated measurements as described in clause 5.6.

6.6.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

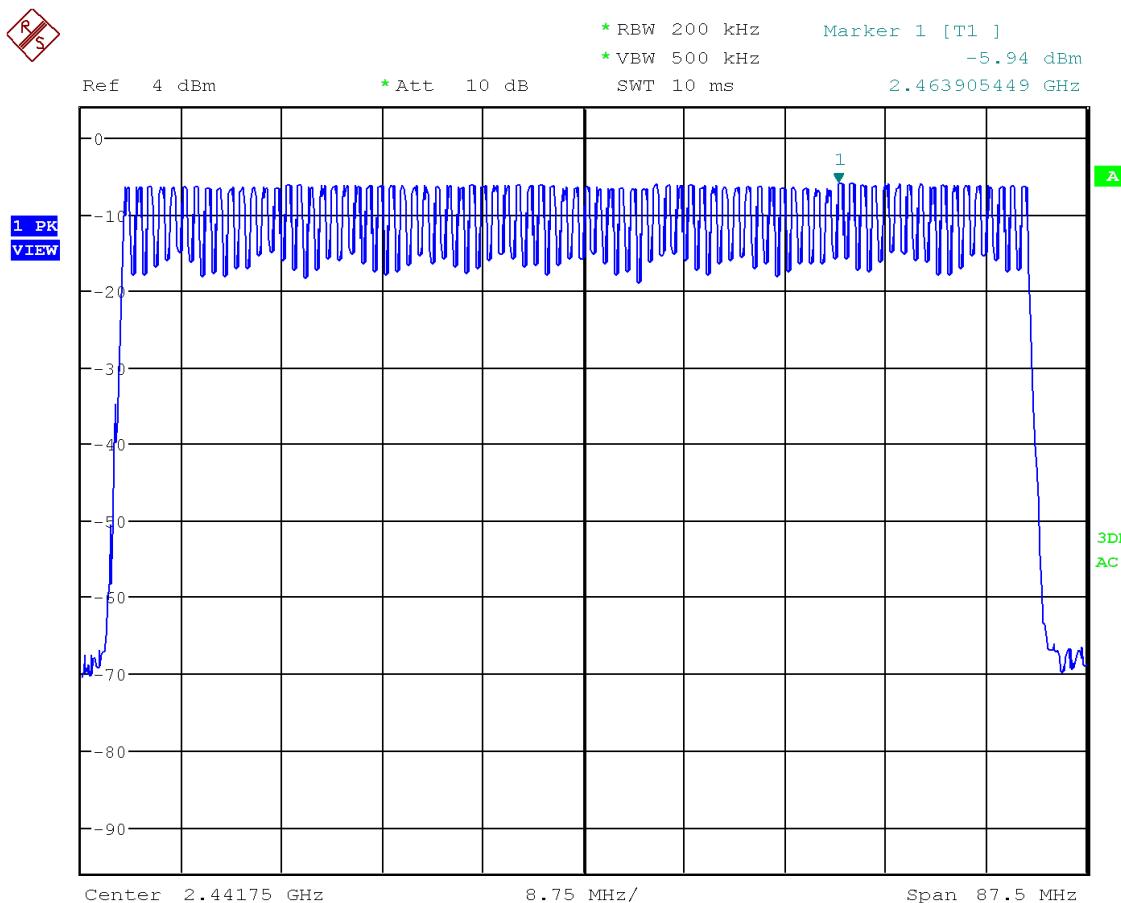


Figure 38: Chart of number of frequencies (data rate ACL-B DH1)

<i>Number of frequencies</i>	<i>Limit</i>	<i>Results</i>
79	≥ 15	Passed

Table 28: Results of number of frequencies (data rate ACL-B DH1)

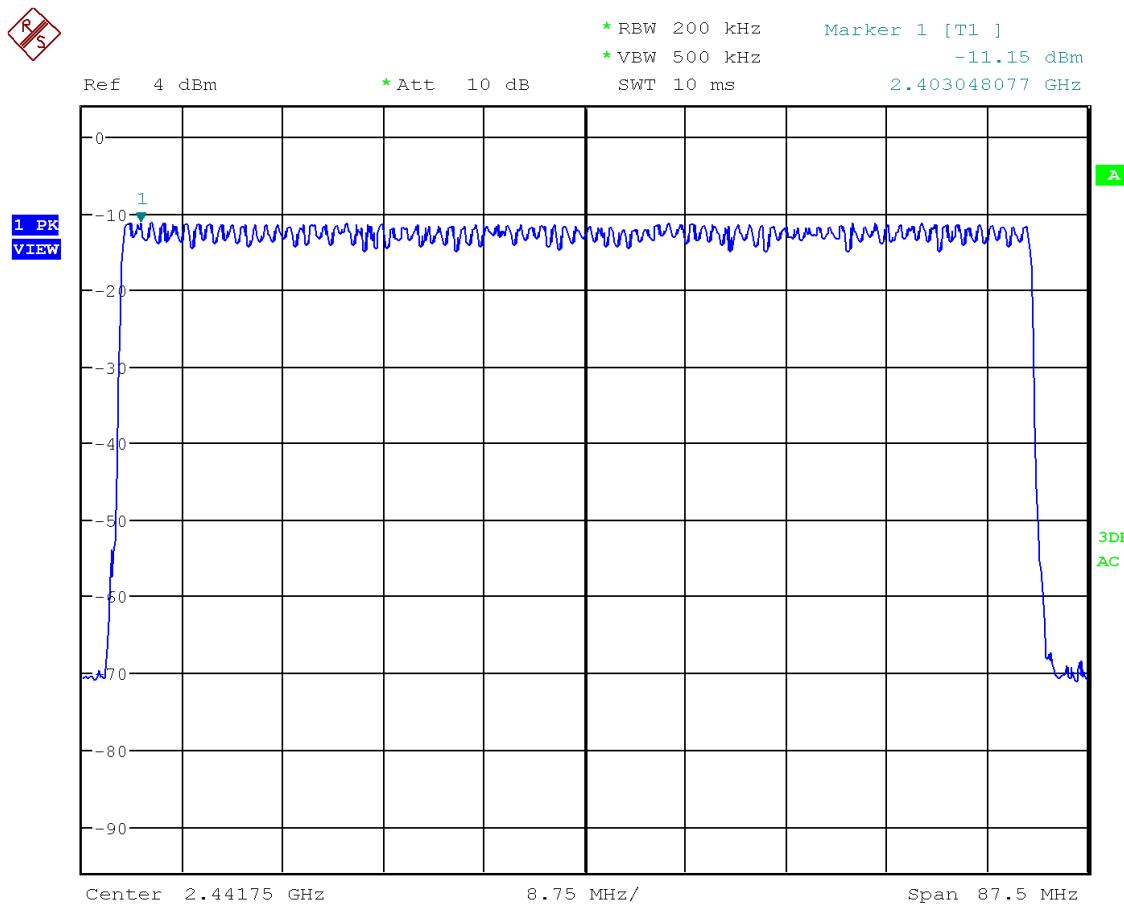


Figure 39: Chart of number of frequencies (data rate ACL-E 2-DH1)

Number of frequencies	Limit	Results
79	≥ 15	Passed

Table 29: Results of number of frequencies (data rate ACL-E 2-DH1)

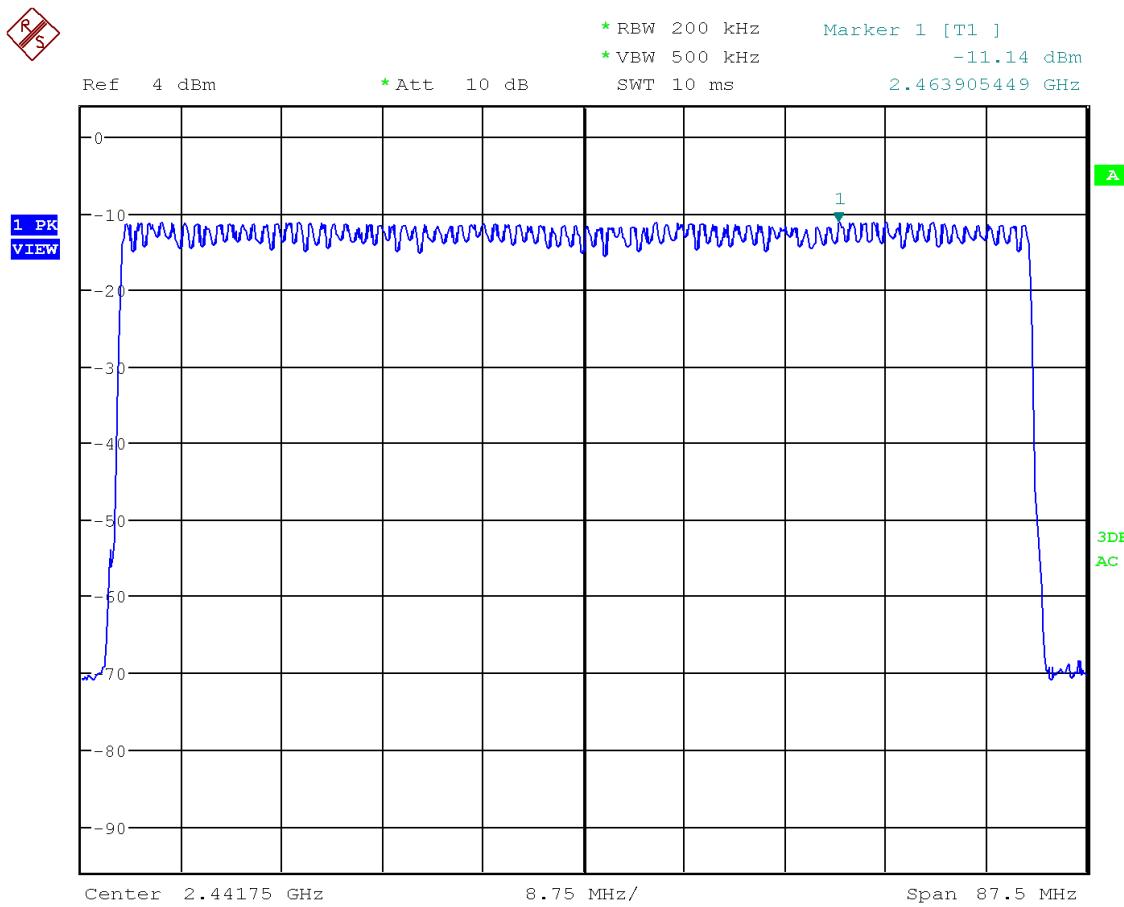


Figure 40: Chart of number of frequencies (data rate ACL-E 3-DH1)

Number of frequencies	Limit	Results
79	≥ 15	Passed

Table 30: Results of number of frequencies (data rate ACL-E 3-DH1)

6.7 Time of occupancy

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(a)(1) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.4
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.1(d) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.4

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 12, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.7.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.7.2 Limits

According to §15.247(a)(1) and RSS-247 section 5.1(d):

(iii) The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.7.3 Test procedure

The time of occupancy is measured using the test procedure as described in clause 5.12 and referring to the

- test method for conducted measurements as described in clause 5.2.
- test method for radiated measurements as described in clause 5.6.

According to clause 7.8.4 of ANSI C63.10-2013 the time of occupancy is calculated with the following formula:

$$(\text{Number of hops in the period specified in the requirements}) = (\text{number of hops on spectrum analyzer}) \times (\text{period specified in the requirements} / \text{analyzer sweep time})$$

6.7.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

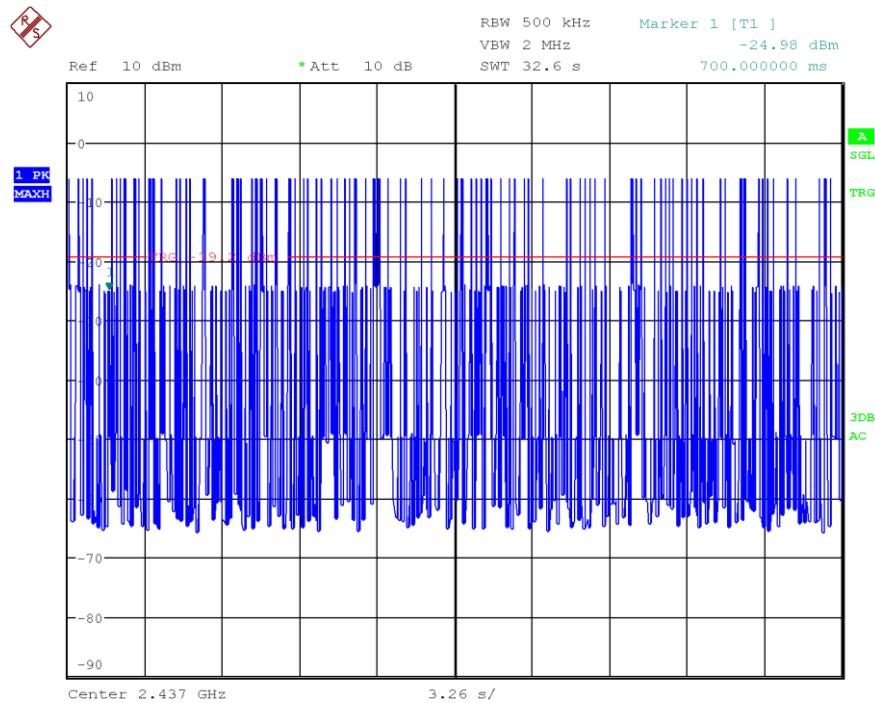


Figure 41: Number of hops in 31.6 s (Trigger offset 1 s) (data rate ACL-B DH5)

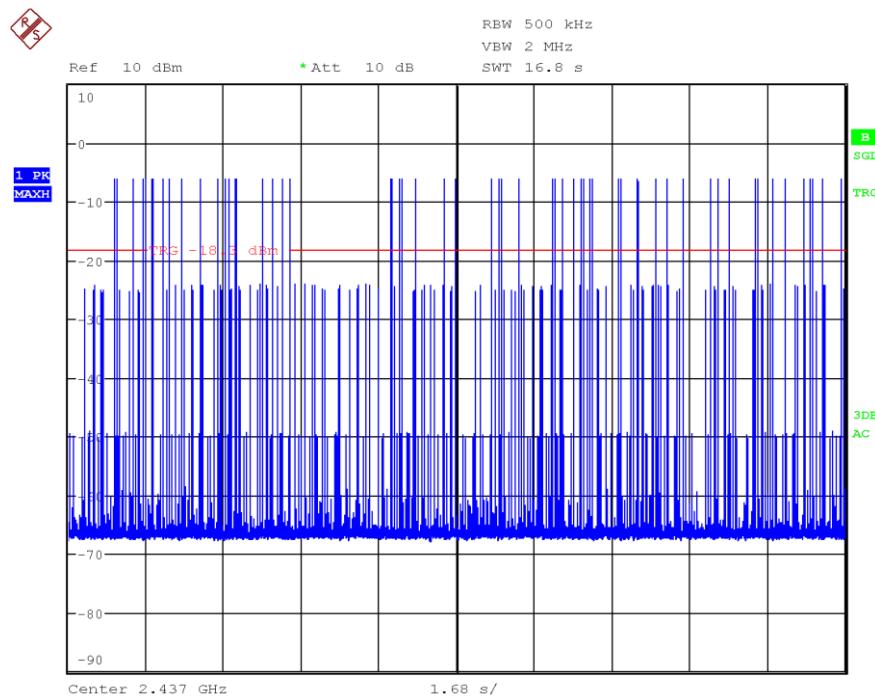


Figure 42: Number of hops in 15.8 s (Trigger offset 1 s) (data rate ACL-B DH5)

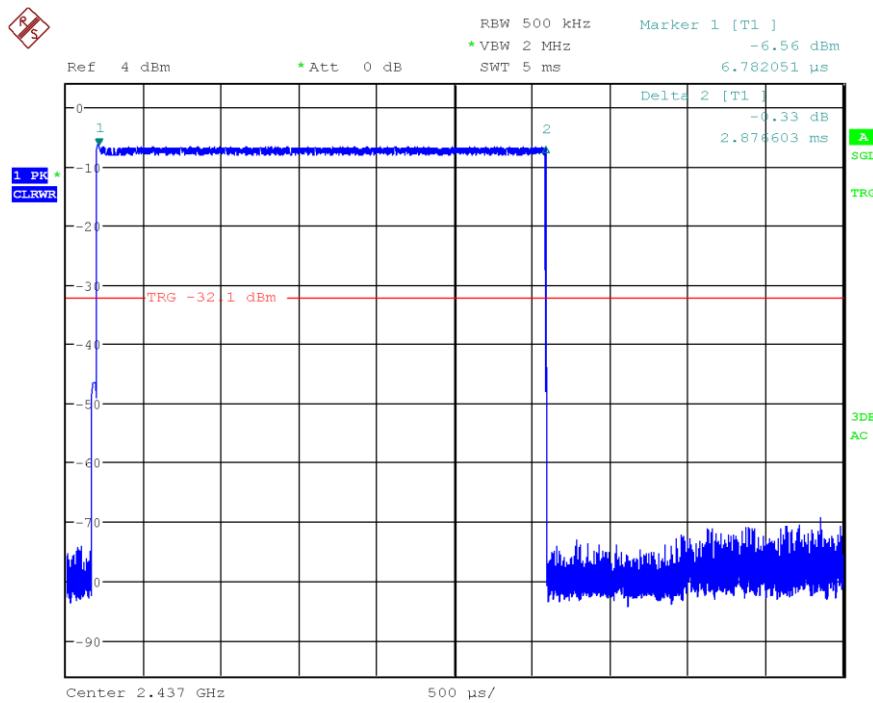


Figure 43: Burstlength (data rate ACL-B DH5)

Number of hops in 31.6 s	Burstlength (ms)	Time of occupancy (s)	Limit (s)	Margin (s)	Results
108	2.88	0.31	0.40	0.09	Passed

Table 31: Results of time of occupancy (data rate ACL-B DH5)

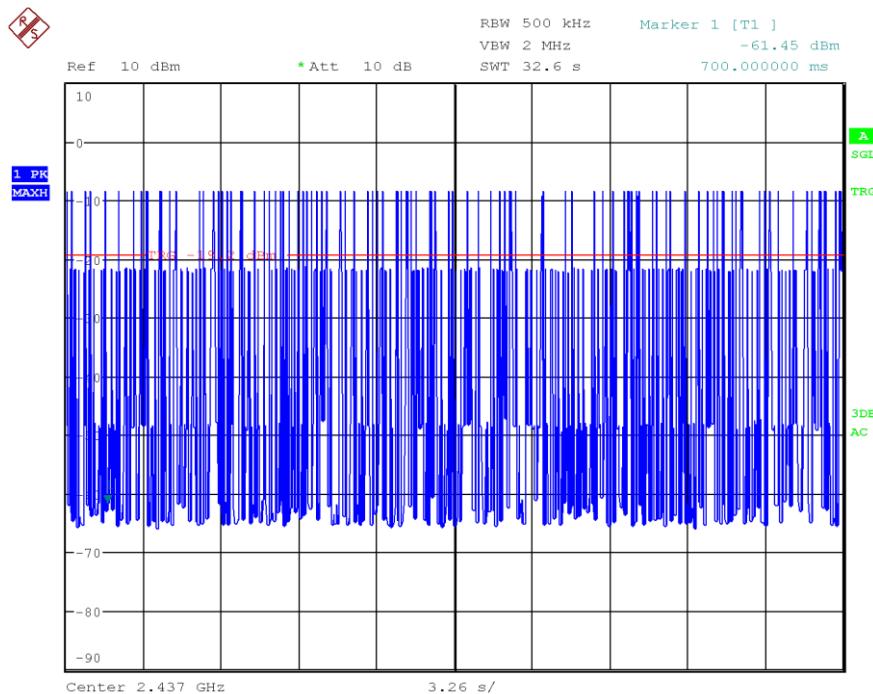


Figure 44: Number of hops in 31.6 s (Trigger offset 1 s) (data rate ACL-E 2-DH5)

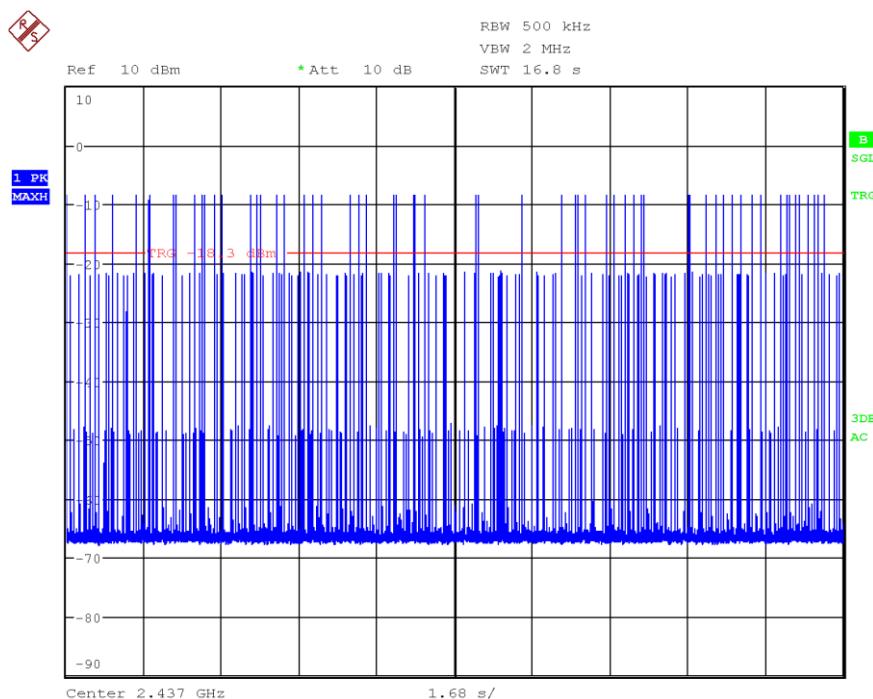


Figure 45: Number of hops in 15.8 s (Trigger offset 1 s) (data rate ACL-E 2-DH5)

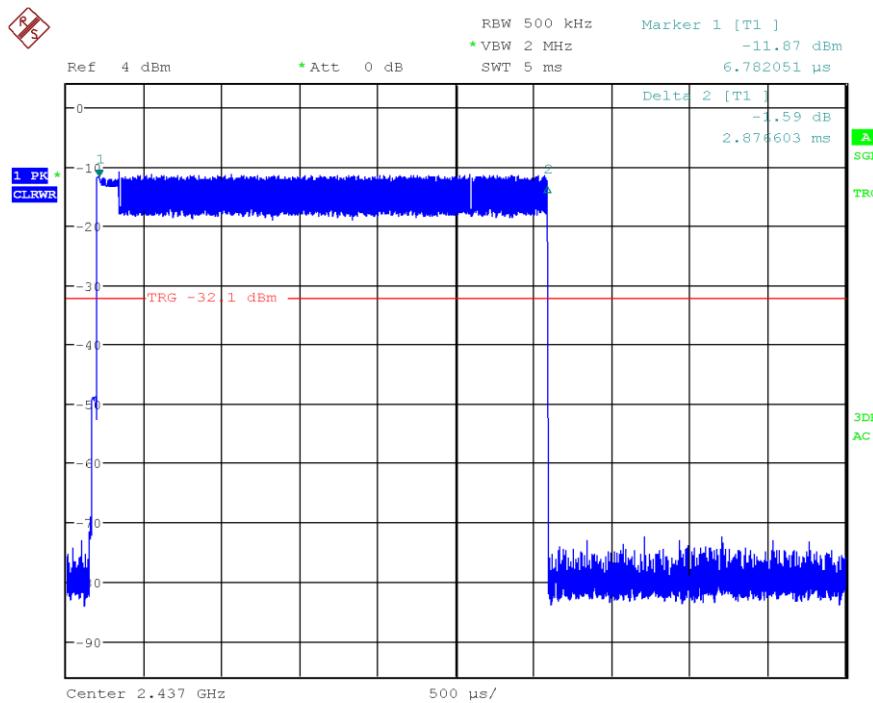


Figure 46: Burstlength (data rate ACL-E 2-DH5)

Number of hops in 31.6 s	Burstlength (ms)	Time of occupancy (s)	Limit (s)	Margin (s)	Results
116	2.88	0.33	0.40	0.07	Passed

Table 32: Results of time of occupancy (data rate ACL-E 2-DH5)

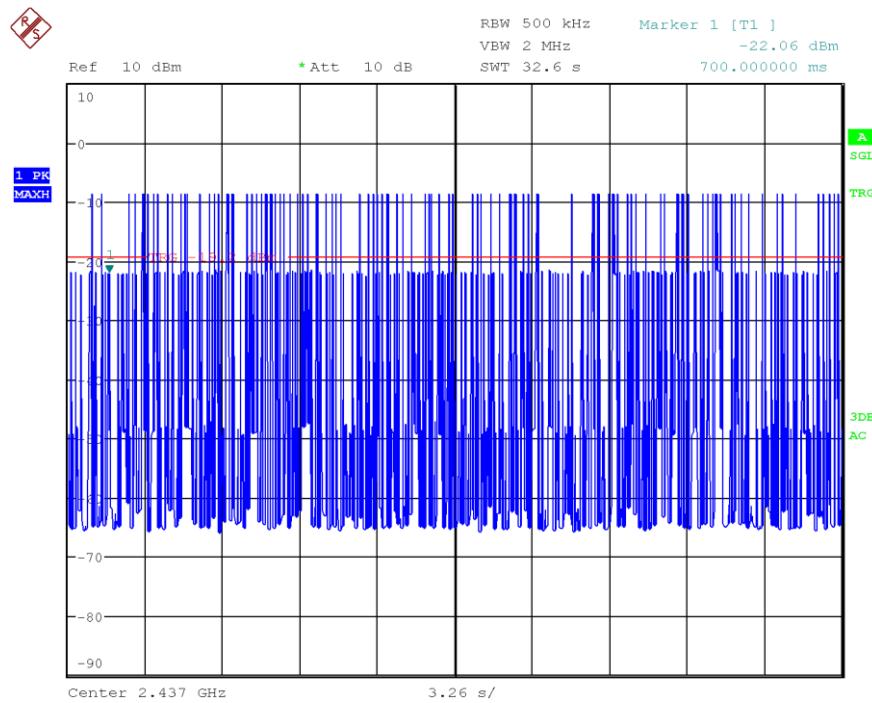


Figure 47: Number of hops in 31.6 s (Trigger offset 1 s) (data rate ACL-E 3-DH5)

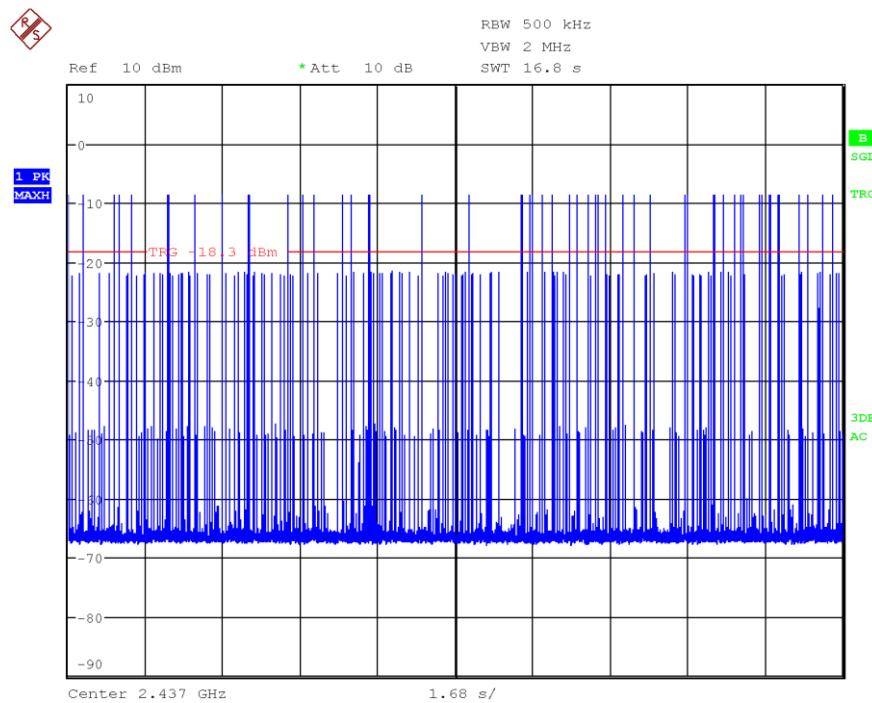


Figure 48: Number of hops in 15.8 s (Trigger offset 1 s) (data rate ACL-E 3-DH5)

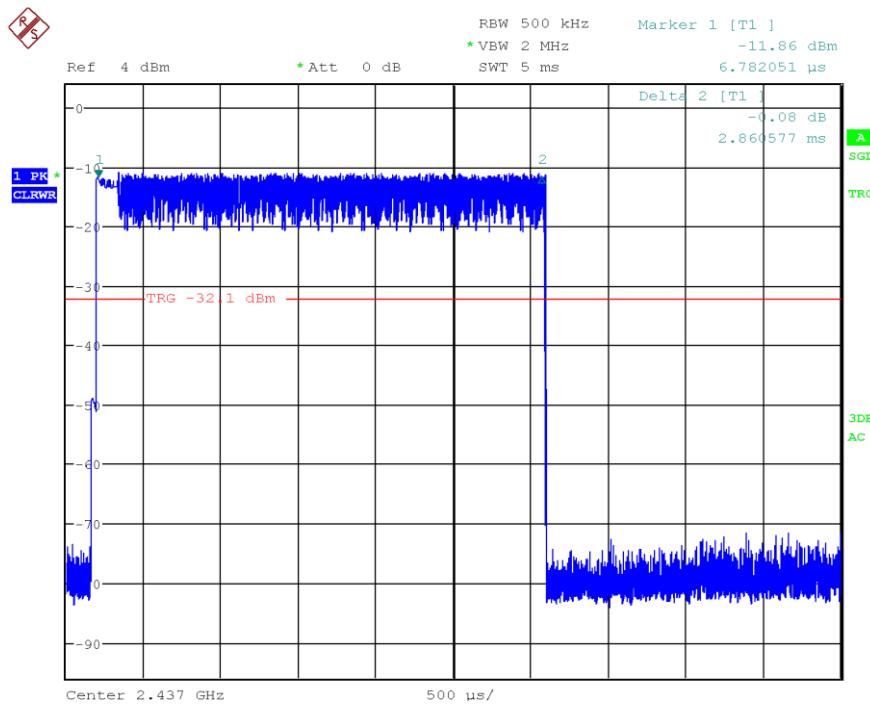


Figure 49: Burstlength (data rate ACL-E 3-DH5)

Number of hops in 31.6 s	Burstlength (ms)	Time of occupancy (s)	Limit (s)	Margin (s)	Results
90	2.86	0.26	0.40	0.14	Passed

Table 33: Results of time of occupancy (data rate ACL-E 3-DH5)

6.8 Band-edge measurements

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(d) KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.6
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.5 KDB 558074 D01, clause 9 ANSI C63.10, clause 7.8.6

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	October 14, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.8.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.8.2 Limits

According to §15.247(d) and RSS-247 section 5.5:

In any 100 kHz bandwidth outside of the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands (see table 34) must also comply with the radiated emission limits specified in §15.209(a) and RSS-Gen section 8.10.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	above 38.6
13.36-13.41			

Table 34: Restricted bands of operation according to §15.205 and RSS-Gen section 8.10

6.8.3 Test procedure

The band-edge measurements are performed using the

- test procedure for conducted measurements as described in clause 5.2.
- test procedure for radiated measurements as described in clause 5.6.

6.8.4 Test results

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B) only the worst case is shown in this test report.
3. The margin was corrected by the antenna gain of 2.2 dBi.

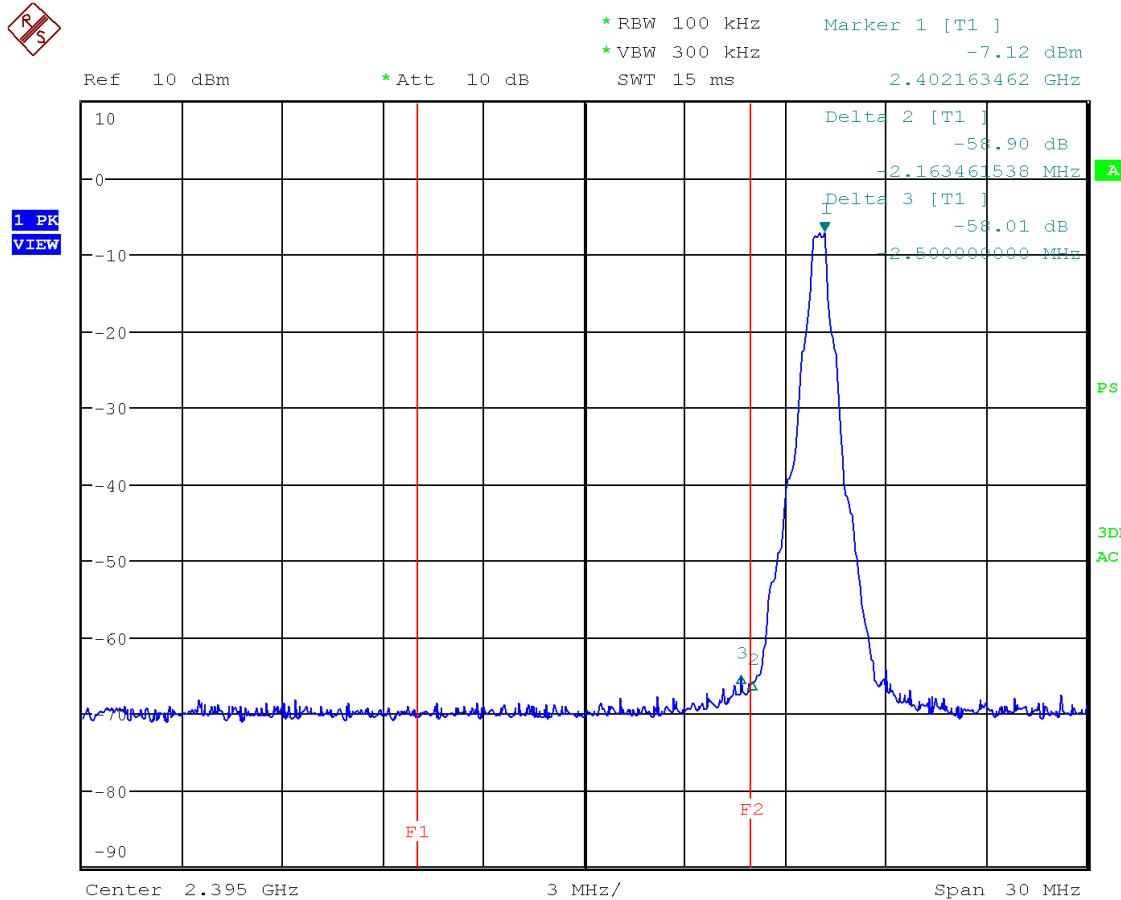


Figure 50: Chart of band-edge measurement on lowest channel (data rate ACL-B DH1) – single mode

Frequency (MHz)	Measured Margin (dB)	Limit of minimum margin	Result
2399.663	55.81	≥ 20	Passed
2400.000	56.70	≥ 20	Passed

Table 35: Result of band-edge measurement on lowest channel (data rate ACL-B DH1) – single mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. Conducted limit = Field strength limit at 3 m (radiated) – 95.2 – antenna gain (Minimum 2 dBi)
3. According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
4. For each data rate (ACL-B) only the worst case is shown in this test report.

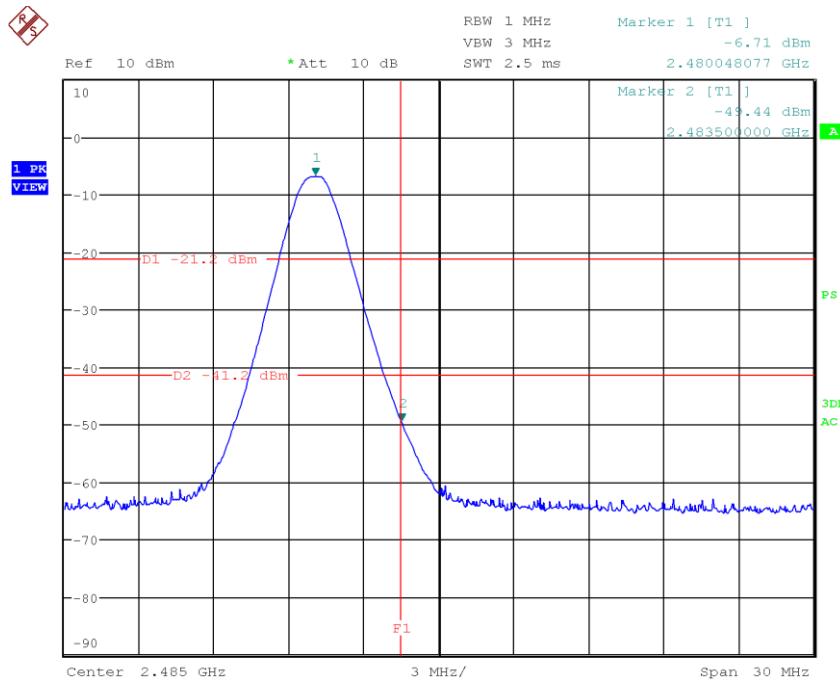


Figure 51: Chart of band-edge measurement on highest channel (PK) (data rate ACL-B DH5) – single mode

Frequency (MHz)	Max Peak (dBm)	Limit (dBm)	Margin (dB)	Result
2483.500	-49.44	-23.40	26.04	Passed

Table 36: Test results of band-edge measurements on highest channel (data rate ACL-B DH5) – single mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-E) only the worst case is shown in this test report.
3. The margin was corrected by the antenna gain of 2.2 dBi.

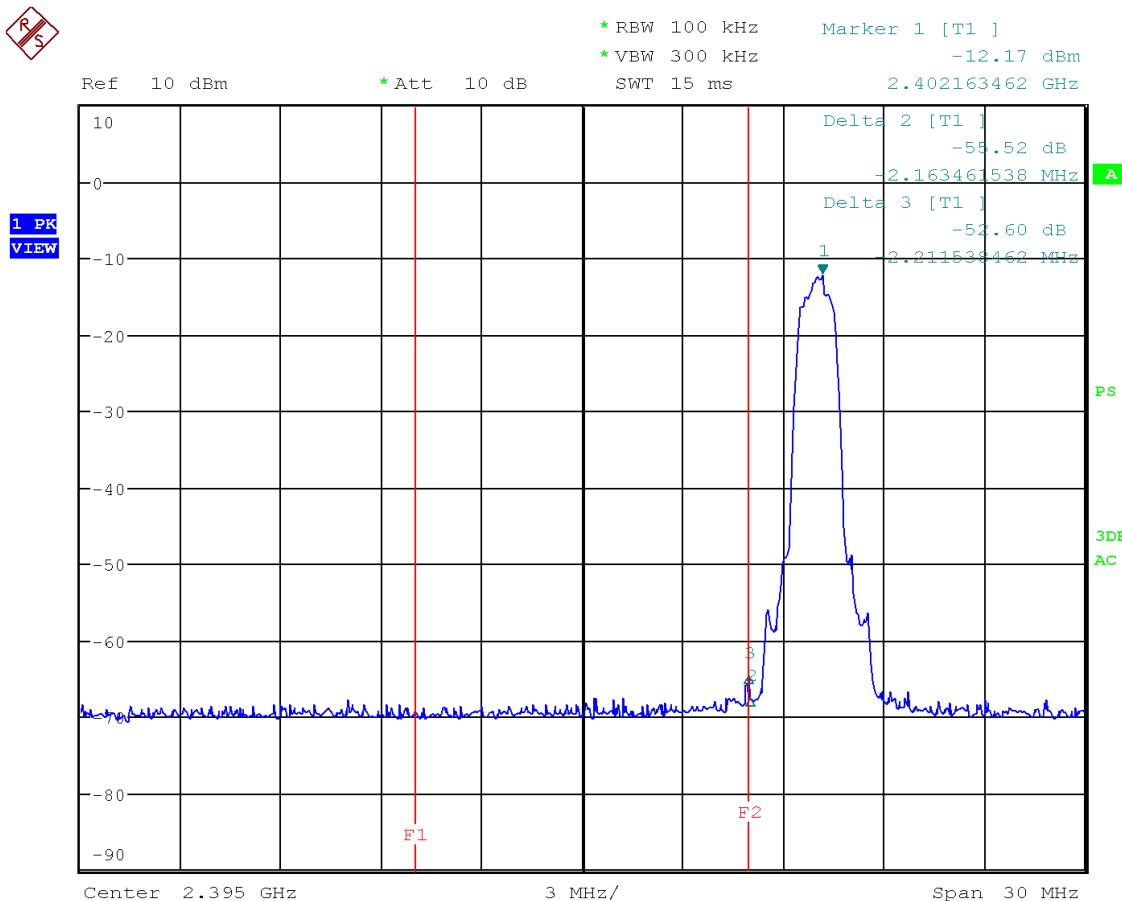


Figure 52: Chart of band-edge measurement on lowest channel (data rate ACL-E 2-DH3) – single mode

Frequency (MHz)	Measured Margin (dB)	Limit of minimum margin	Result
2399.952	50.40	≥ 20	Passed
2400.000	53.32	≥ 20	Passed

Table 37: Result of band-edge measurement on lowest channel (data rate ACL-E 2-DH3) – single mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. Conducted limit = Field strength limit at 3 m (radiated) – 95.2 – antenna gain (Minimum 2 dBi)
3. According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
4. For each data rate (ACL-E) only the worst case is shown in this test report.

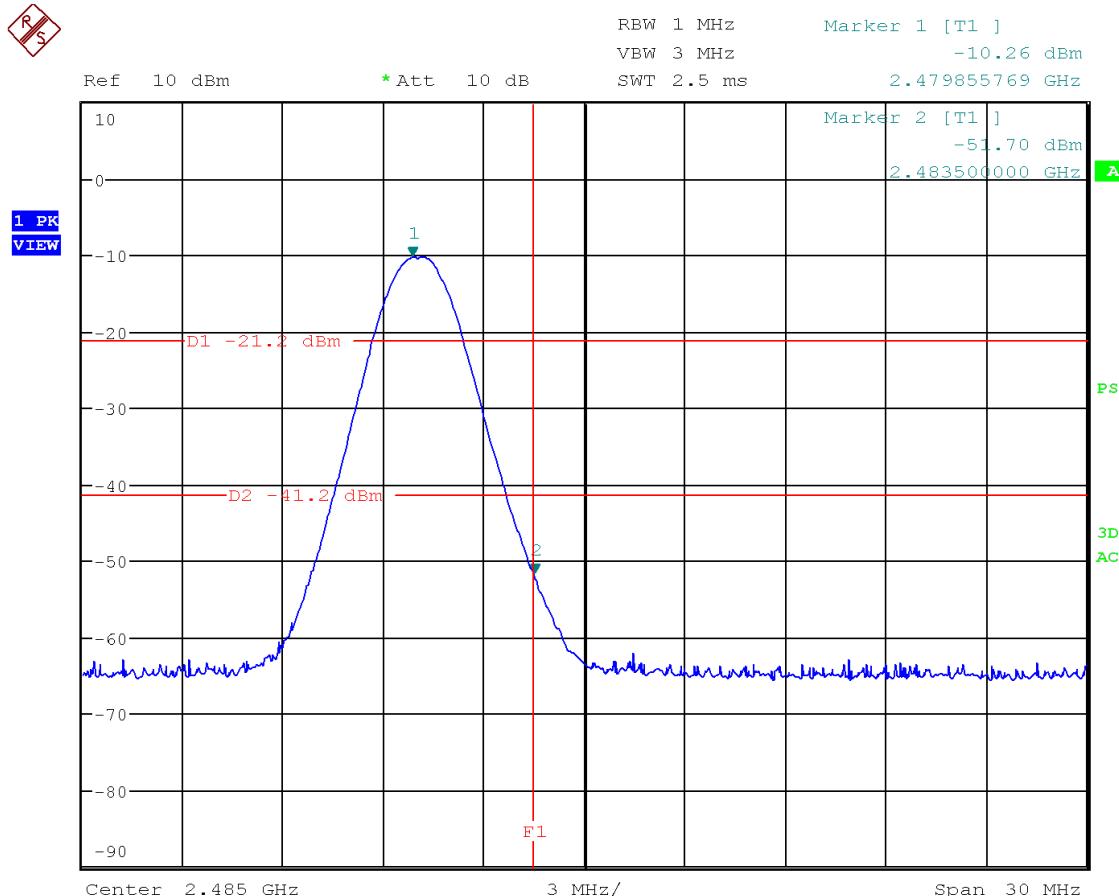


Figure 53: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 2-DH5) – single mode

Frequency (MHz)	Max Peak (dBm)	Limit (dBm)	Margin (dB)	Result
2483.500	-51.70	-23.40	28.30	Passed

Table 38: Test results of band-edge measurements on highest channel (data rate ACL-E 2-DH5) – single mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-E) only the worst case is shown in this test report.
3. The margin was corrected by the antenna gain of 2.2 dBi.

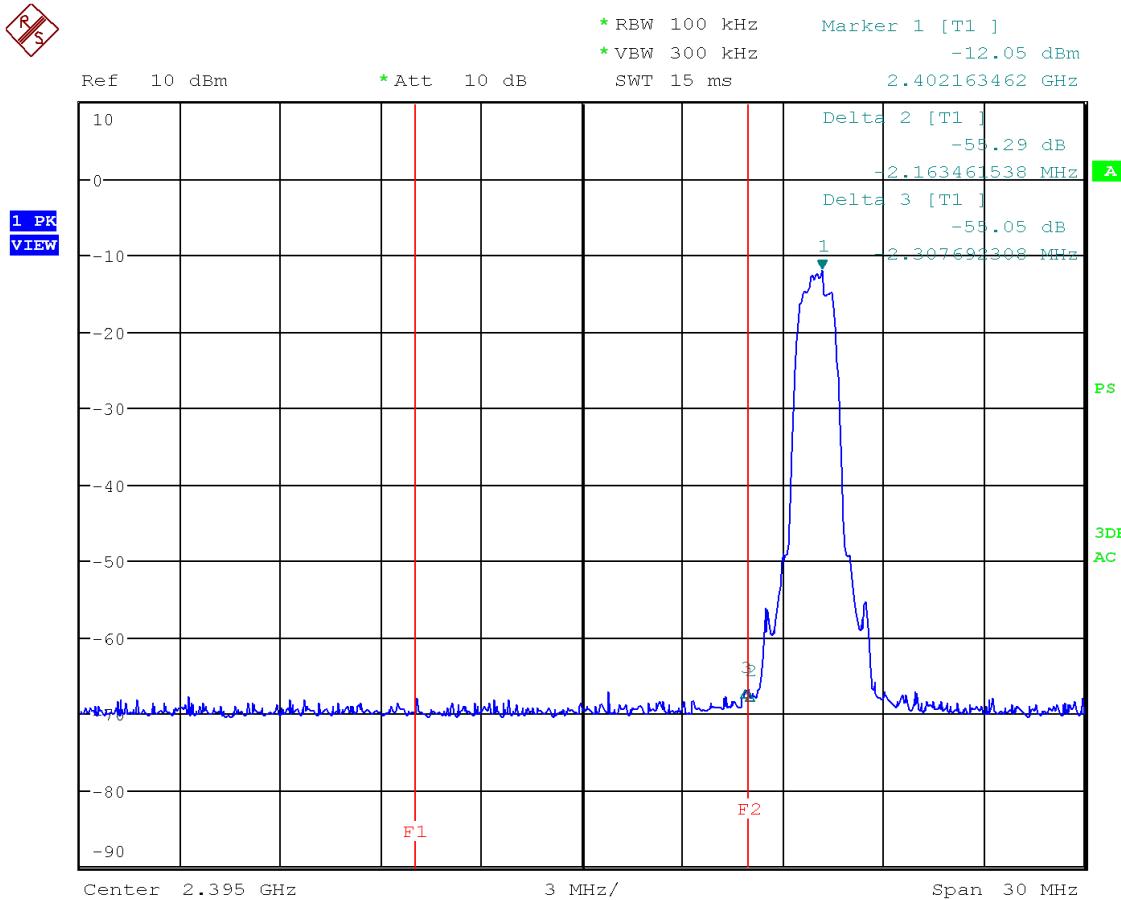


Figure 54: Chart of band-edge measurement on lowest channel (data rate ACL-E 3-DH3) – single mode

Frequency (MHz)	Measured Margin (dB)	Limit of minimum margin	Result
2399.856	52.85	≥ 20	Passed
2400.000	53.09	≥ 20	Passed

Table 39: Result of band-edge measurement on lowest channel (data rate ACL-E 3-DH3) – single mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. Conducted limit = Field strength limit at 3 m (radiated) – 95.2 – antenna gain (Minimum 2 dBi)
3. According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
4. For each data rate (ACL-E) only the worst case is shown in this test report.

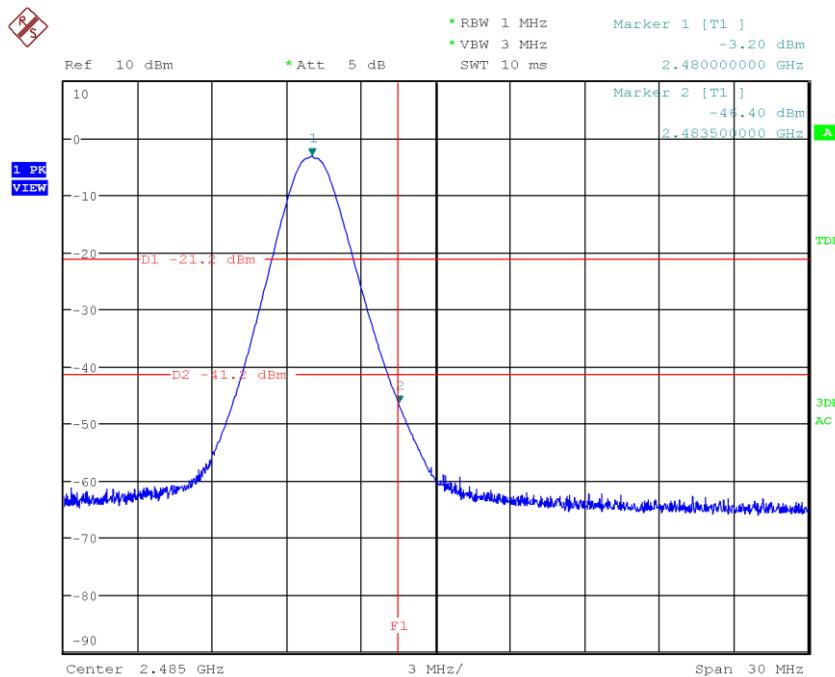


Figure 55: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 3-DH3) – single mode

Frequency (MHz)	Max Peak (dBm)	Limit (dBm)	Margin (dB)	Result
2483.500	-51.84	-23.40	28.44	Passed

Table 40: Test results of band-edge measurements on highest channel (data rate ACL-E 3-DH3) – single mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-B) only the worst case is shown in this test report.
3. The margin was corrected by the antenna gain of 2.2 dBi.

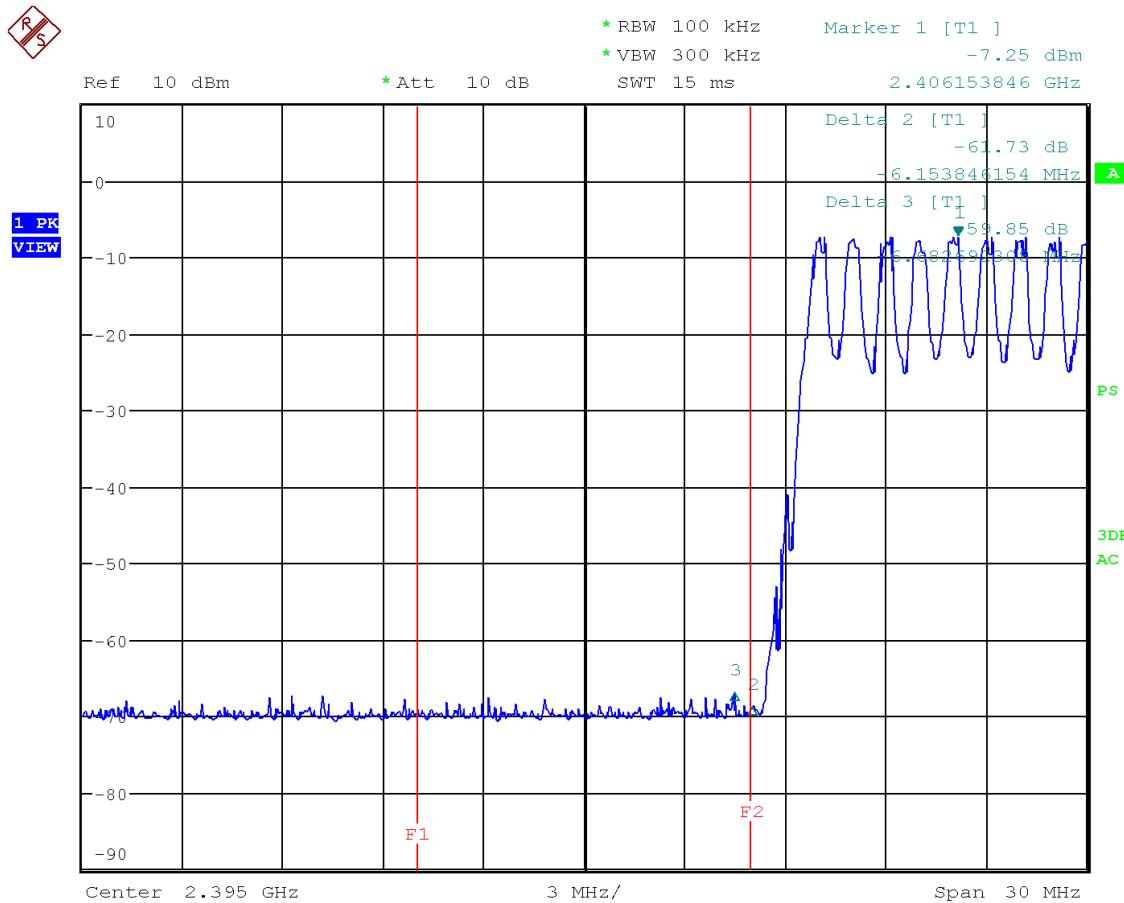


Figure 56: Chart of band-edge measurement on lowest channel (data rate ACL-B DH1) – hopping mode

Frequency (MHz)	Measured Margin (dB)	Limit of minimum margin	Result
2399.471	57.65	≥ 20	Passed
2400.000	59.53	≥ 20	Passed

Table 41: Result of band-edge measurement on lowest channel (data rate ACL-B DH1) – hopping mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. Conducted limit = Field strength limit at 3 m (radiated) – 95.2 – antenna gain (Minimum 2 dBi)
3. According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
4. For each data rate (ACL-B) only the worst case is shown in this test report.

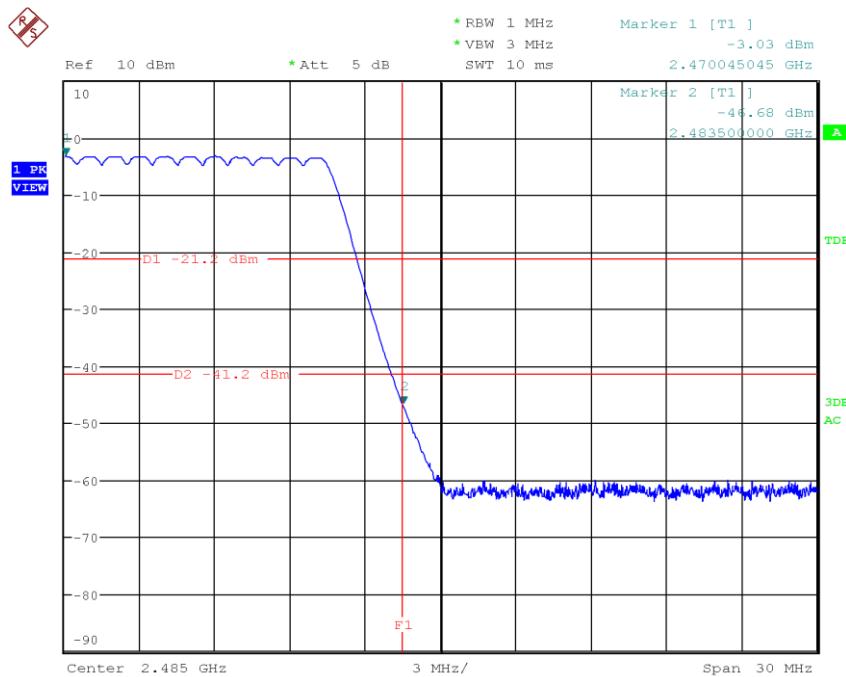


Figure 57: Chart of band-edge measurement on highest channel (PK) (data rate ACL-B DH5) – hopping mode

Frequency (MHz)	Max Peak (dBm)	Limit (dBm)	Margin (dB)	Result
2483.500	-49.77	-23.40	26.37	Passed

Table 42: Test results of band-edge measurements on highest channel (data rate ACL-B DH5) – hopping mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-E) only the worst case is shown in this test report.
3. The margin was corrected by the antenna gain of 2.2 dBi.

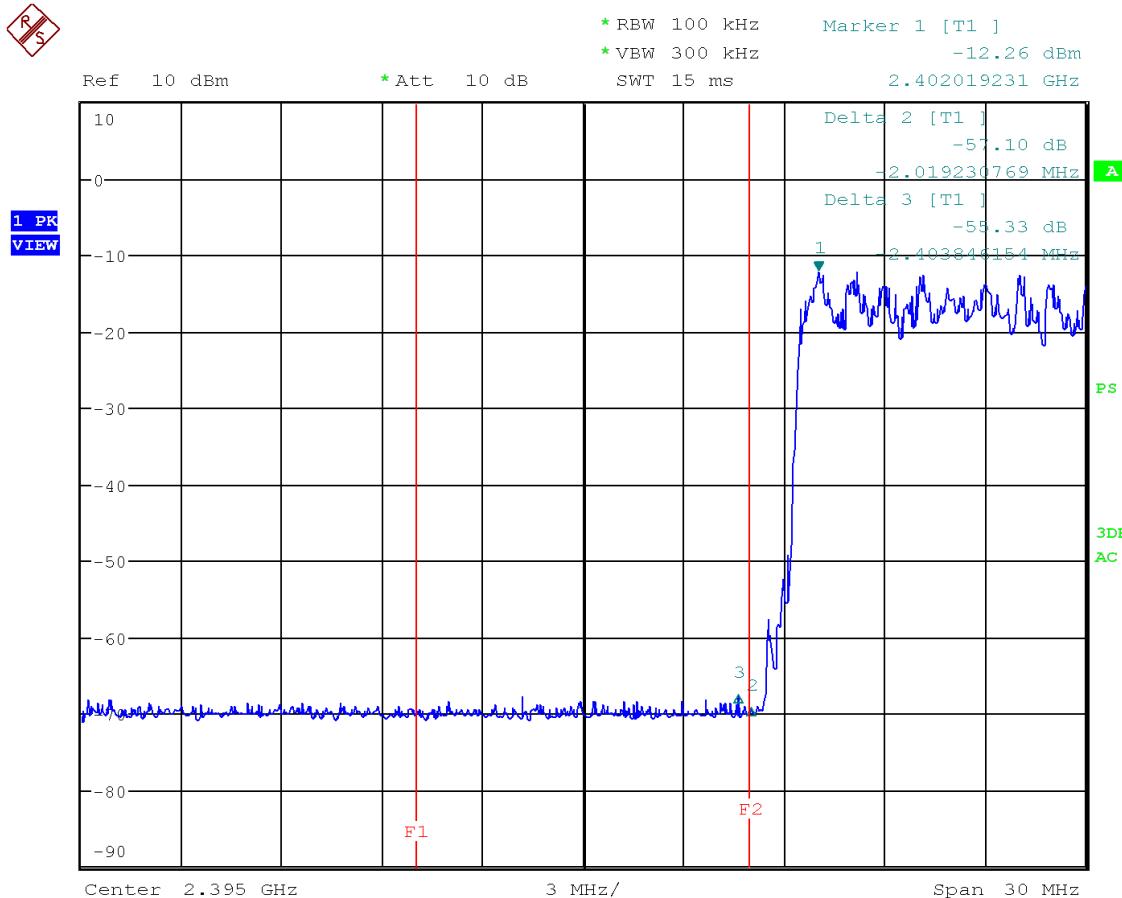


Figure 58: Chart of band-edge measurement on lowest channel (data rate ACL-E 2-DH1) – hopping mode

Frequency (MHz)	Measured Margin (dB)	Limit of minimum margin	Result
2399.615	53.13	≥ 20	Passed
2400.000	54.90	≥ 20	Passed

Table 43: Result of band-edge measurement on lowest channel (data rate ACL-E 2-DH1) – hopping mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. Conducted limit = Field strength limit at 3 m (radiated) – 95.2 – antenna gain (Minimum 2 dBi)
3. According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
4. For each data rate (ACL-E) only the worst case is shown in this test report.

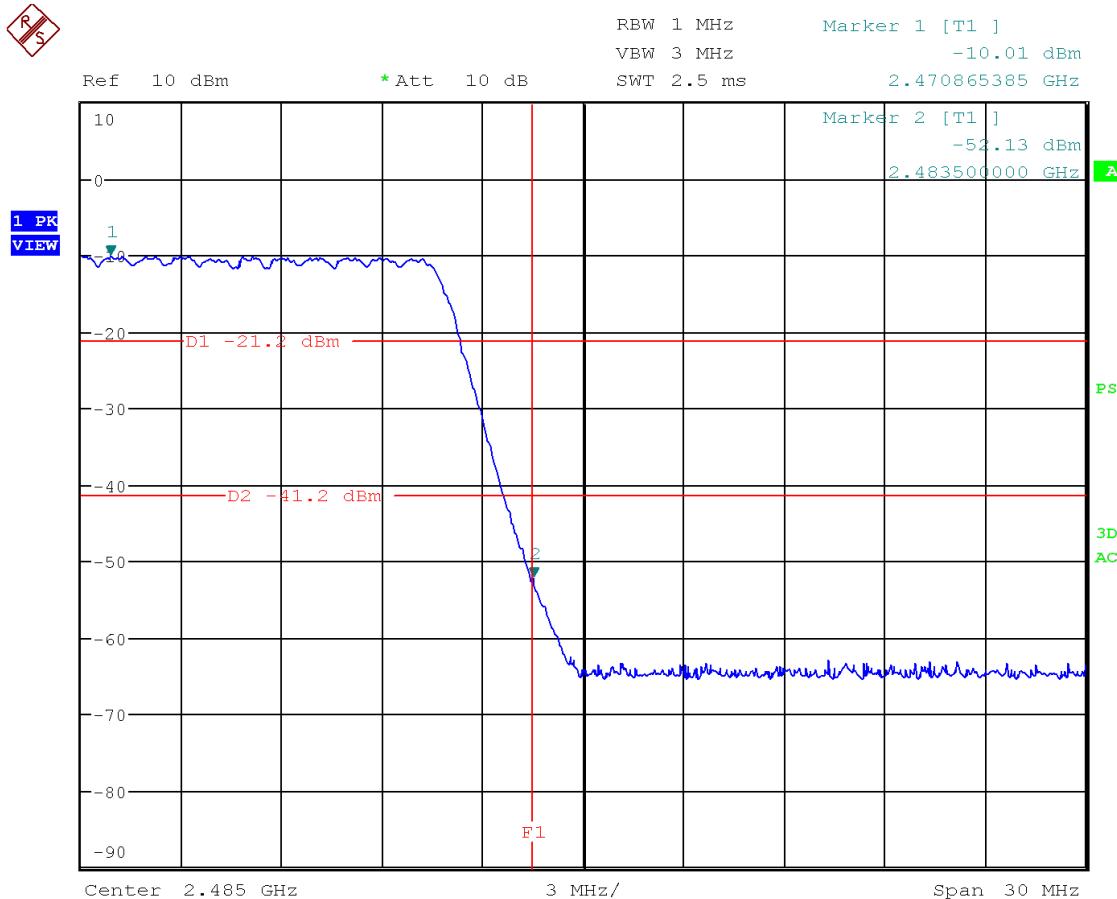


Figure 59: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 2-DH3) – hopping mode

Frequency (MHz)	Max Peak (dBm)	Limit (dBm)	Margin (dB)	Result
2483.500	-52.13	-23.40	28.73	Passed

Table 44: Test results of band-edge measurements on highest channel (data rate ACL-E 2-DH3) – hopping mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. For each data rate (ACL-E) only the worst case is shown in this test report.
3. The margin was corrected by the antenna gain of 2.2 dBi.

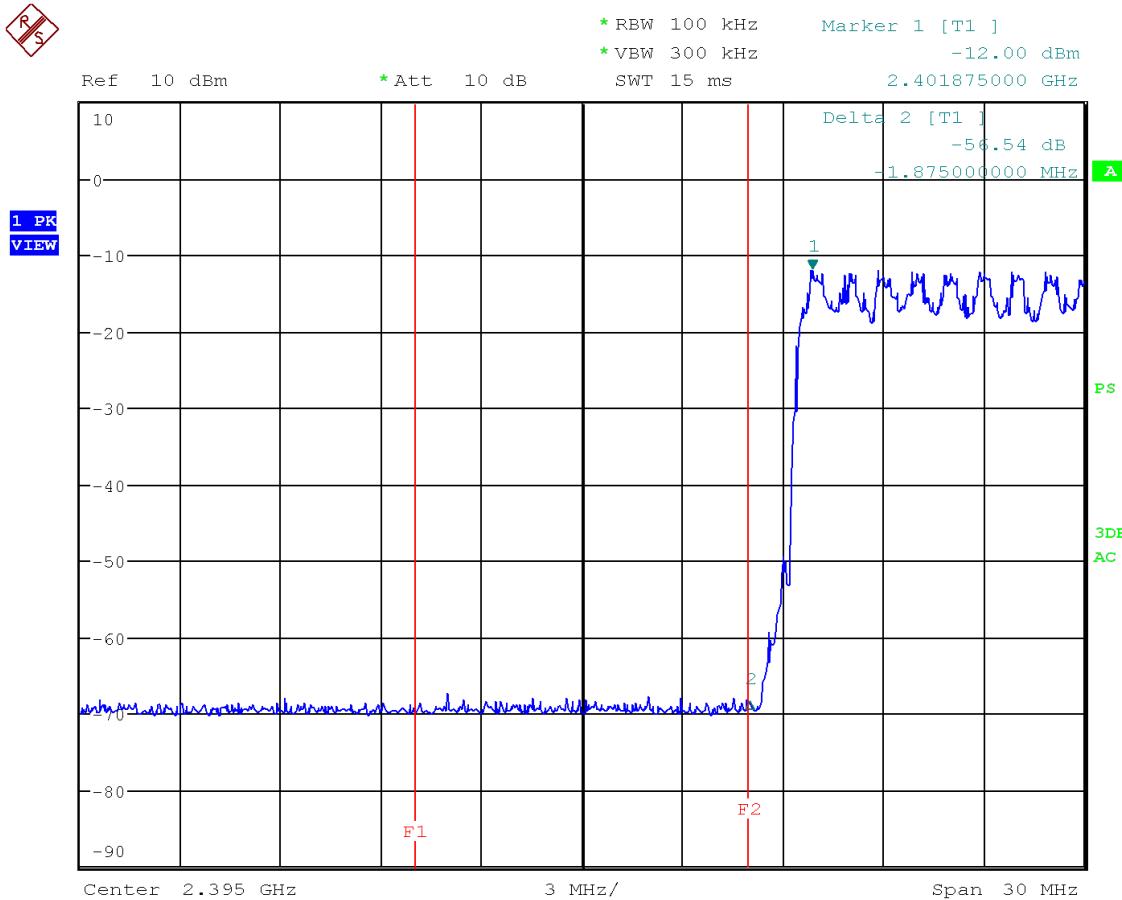


Figure 60: Chart of band-edge measurement on lowest channel (data rate ACL-E 3-DH1) – hopping mode

Frequency (MHz)	Measured Margin (dB)	Limit of minimum margin	Result
2400.000	54.34	≥ 20	Passed

Table 45: Result of band-edge measurement on lowest channel (data rate ACL-E 3-DH1) – hopping mode

Note(s):

1. Premeasurements were performed to declare the worst case which is documented below.
2. Conducted limit = Field strength limit at 3 m (radiated) – 95.2 – antenna gain (Minimum 2 dBi)
3. According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
4. For each data rate (ACL-E) only the worst case is shown in this test report.

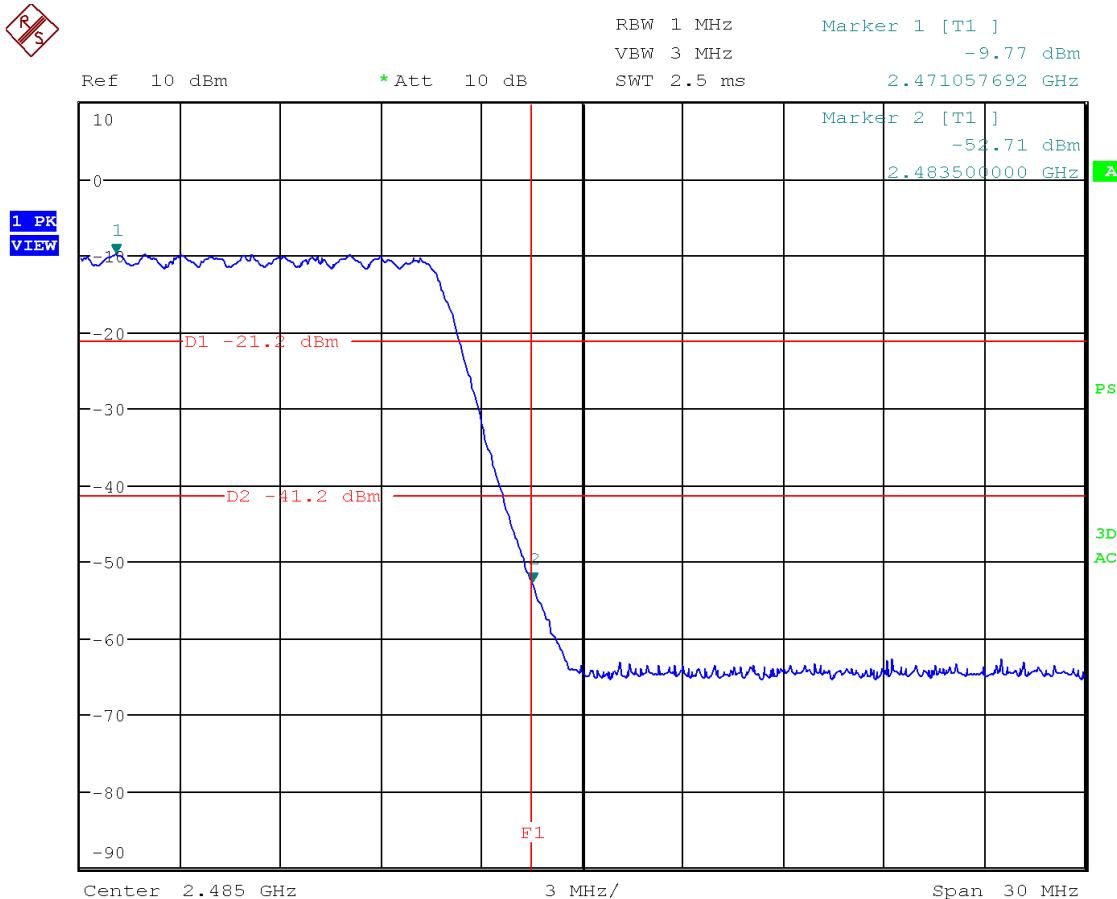


Figure 61: Chart of band-edge measurement on highest channel (PK) (data rate ACL-E 3-DH3) – hopping mode

Frequency (MHz)	Max Peak (dBm)	Limit (dBm)	Margin (dB)	Result
2483.500	-52.71	-23.40	26.42	Passed

Table 46: Test results of band-edge measurements on highest channel (data rate ACL-E 3-DH3) – hopping mode

6.9 Antenna-port conducted measurements

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(d) KDB 558074 D01, clauses 9 ANSI C63.10, clause 7.8.8
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.5 KDB 558074 D01, clauses 9 ANSI C63.10, clause 7.8.8

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 12, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.9.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
EMI test receiver	ESU 26	Rohde & Schwarz	W00002

6.9.2 Limits

According to §15.247(d) and RSS-247 section 5.5:

In any 100 kHz bandwidth outside of the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiated emissions which fall in the restricted bands (see table 34) must also comply with the radiated emission limits specified in §15.209(a) and RSS-Gen section 8.10.

Frequency (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz) (266.67 – 4.90)	48.52 – 13.80	300
0.490 – 1.705	24000/F(kHz) (48.98 – 14.08)	33.80 – 22.97	30
1.705 – 30	30	29.54	30
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3
Above 960	500	53.98	3

Table 47: General radiated emission limits from 9 kHz to 25 GHz according to §15.209

Frequency (MHz)	Magnetic field strength (μ A/m)	(dB μ A/m)	Measurement distance (m)
0.009 – 0.490	6.37/F(kHz)	-2.999 – -37.721	300
0.490 – 1.705	63.7/F(kHz)	-17.721 – -28.636	30
1.705 – 30	0.08	-21.94	30

Table 48: General radiated emission limits from 9 kHz to 30 MHz according to RSS-Gen section 8.9

Frequency (MHz)	Field strength (μ V/m)	(dB μ V/m)	Measurement distance (m)
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3
Above 960	500	53.98	3

Table 49: General radiated emission limits from 30 MHz to 25 GHz according to RSS-Gen section 8.9

In case of measurements are performed at other distances than that specified in the requirements, the limits in the charts and tables reported with the test results are derived from the general radiated emission limits as listed in table 59 using the recalculation factor as described in clause 5.3.

6.9.3 Test procedure

The emissions from 9 kHz to 25 GHz are measured using the

- test procedure for conducted measurements as described in clause 5.2.
- test procedure for radiated measurements as described in clause 5.3.

6.9.4 Test results

Note(s):

- 1 Premeasurements were performed to declare the worst case which is documented below.
- 2 The power limit lines in all charts are calculated from the field strength limits at 3 m measurement distance with an antenna gain of 0 dBi. The maximum antenna gain is 2.2 dBi. According to ANSI C63.10 clause 11.12.2.6, the gain of the transmitting antenna must be added to the measured output power, either the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- 3 The operating frequency band from 2400 MHz to 2483.5 MHz is not shown in the charts because it is not in consideration in this clause.
- 4 According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
- 5 For each data rate (ACL-B and ACL-E) only the worst case is shown in this test report.

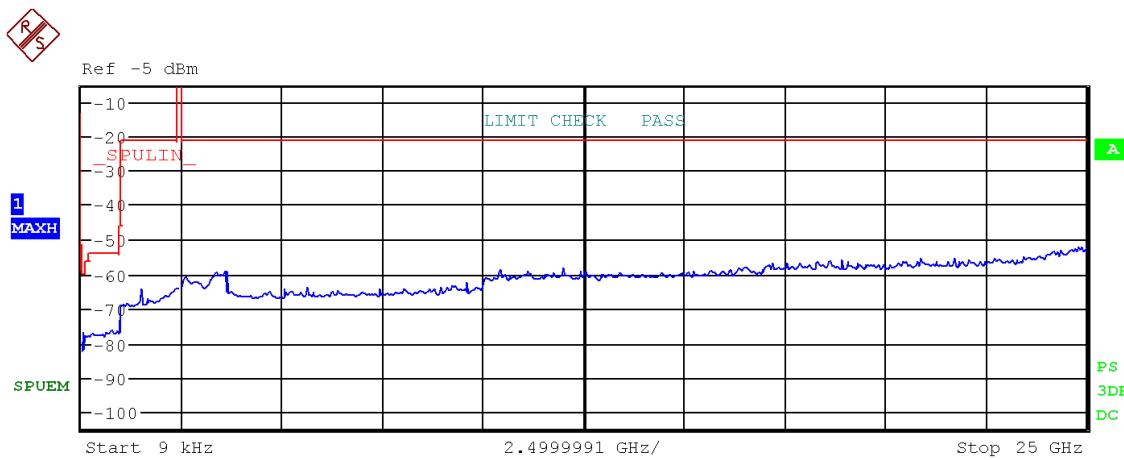


Figure 62: Chart of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-B DH5), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
986.753	-67.16	PK	-21.20	45.96
1487.890	-61.98	PK	-21.20	40.78
3575.286	-57.02	PK	-21.20	35.82
9607.500	-60.20	PK	-21.20	59.00

Table 50: Results of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-B DH5)

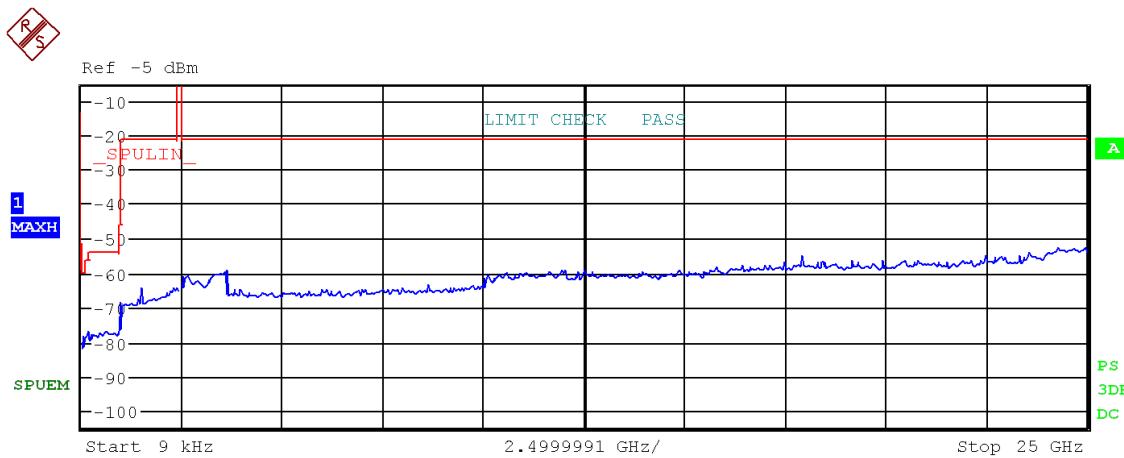


Figure 63: Chart of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-B DH5), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
584.528	-74.77	PK	-53.90	20.87
996.623	-66.52	PK	-21.20	45.32
2367.297	-62.05	PK	-21.20	40.85
3596.286	-56.90	PK	-21.20	35.70
9748.000	-61.36	PK	-21.20	40.16

Table 51: Results of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-B DH5)

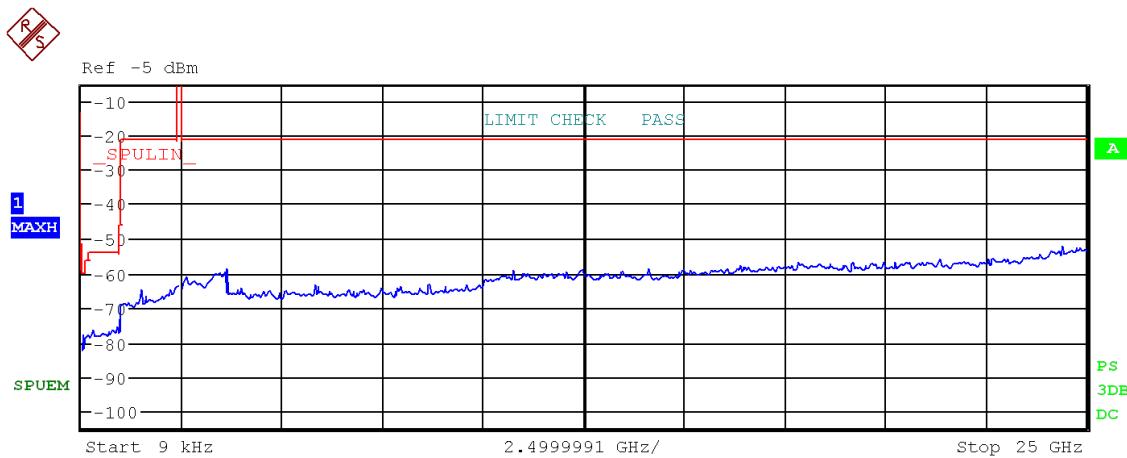


Figure 64: Chart of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-B DH5), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
156.949	-78.18	PK	-56.40	21.78
969.610	-67.30	PK	-21.20	46.10
2389.537	-61.81	PK	-21.20	40.61
3586.000	-56.74	PK	-21.20	35.54
9750.000	-61.04	PK	-21.20	39.84

Table 52: Results of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-B DH5)

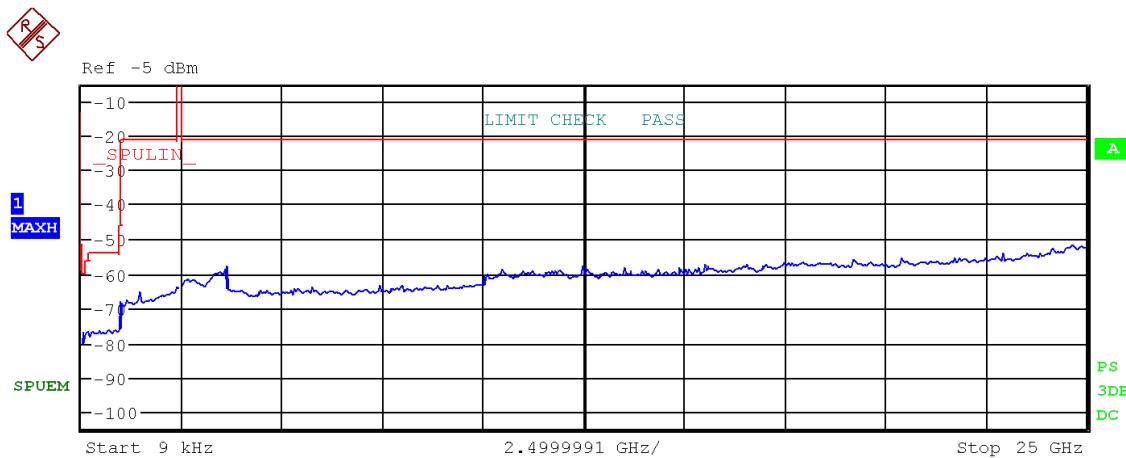


Figure 65: Chart of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
683.232	-74.29	PK	-53.90	20.39
974.545	-65.94	PK	-21.20	44.74
2383.050	-61.53	PK	-21.20	40.33
3591.571	-55.79	PK	-21.20	34.59
9607.500	-61.02	PK	-21.20	39.82

Table 53: Results of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1)

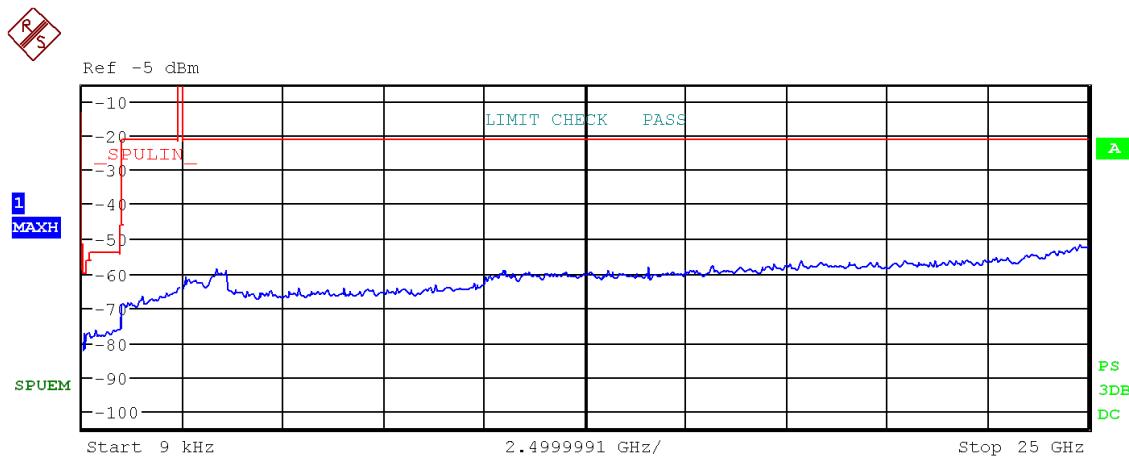


Figure 66: Chart of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 2-DH1), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
836.248	-74.22	PK	-53.90	20.32
986.234	-66.89	PK	-21.20	45.69
2387.220	-62.25	PK	-21.20	41.05
3325.857	-56.48	PK	-21.20	35.28
9745.330	-60.90	PK	-21.20	39.70

Table 54: Results of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 2-DH1)

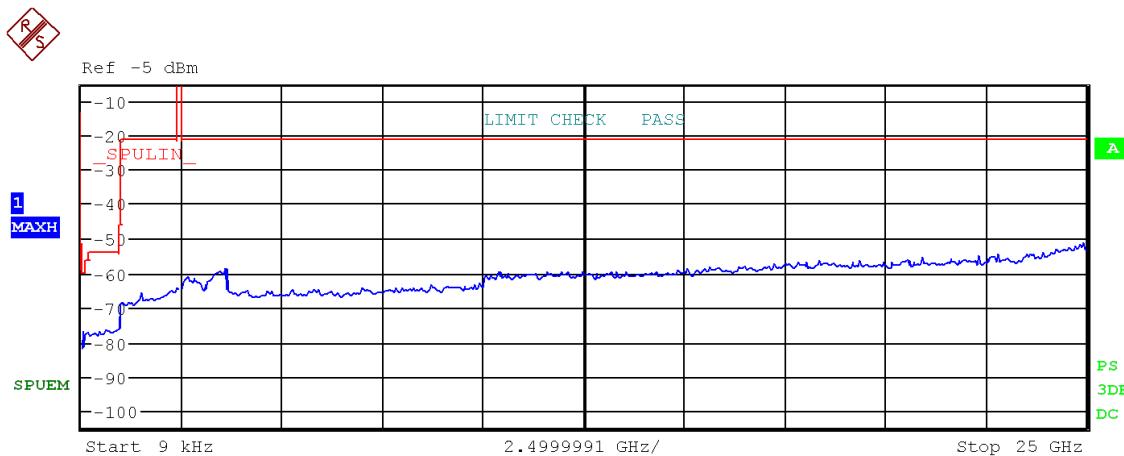


Figure 67: Chart of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 2-DH1), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
615.528	-74.19	PK	-53.90	20.29
989.351	-66.71	PK	-21.20	45.51
2371.930	-62.35	PK	-21.20	41.15
3584.714	-58.79	PK	-21.20	37.59
9910.312	-60.79	PK	-21.20	39.59

Table 55: Results of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 2-DH1)

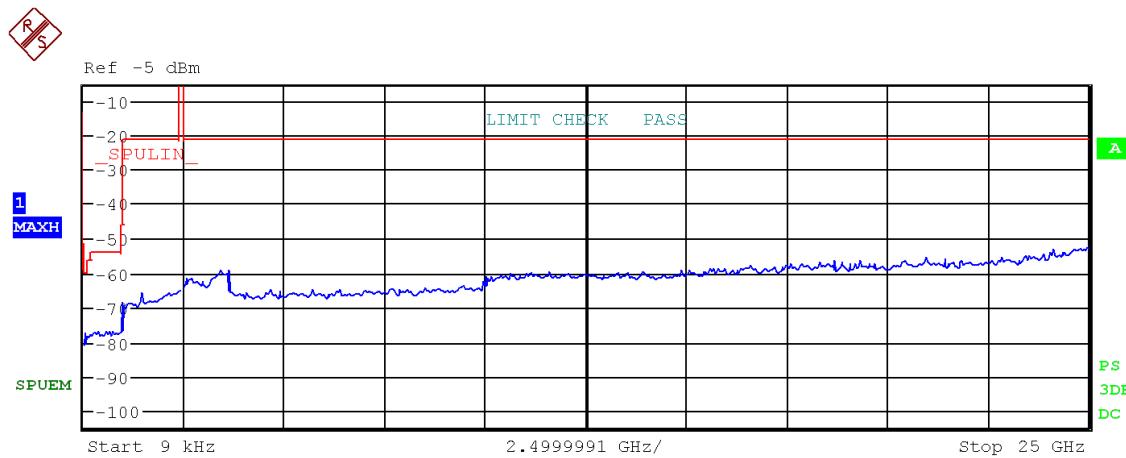


Figure 68: Chart of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 3-DH1), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
627.680	-78.20	PK	-56.40	21.80
974.286	-66.36	PK	-21.20	45.16
2389.073	-62.94	PK	-21.20	41.74
3588.571	-56.95	PK	-21.20	35.75
9606.985	-60.33	PK	-21.20	39.13

Table 56: Results of emissions test from 9 kHz to 25 GHz on lowest channel (data rate ACL-E 3-DH1)

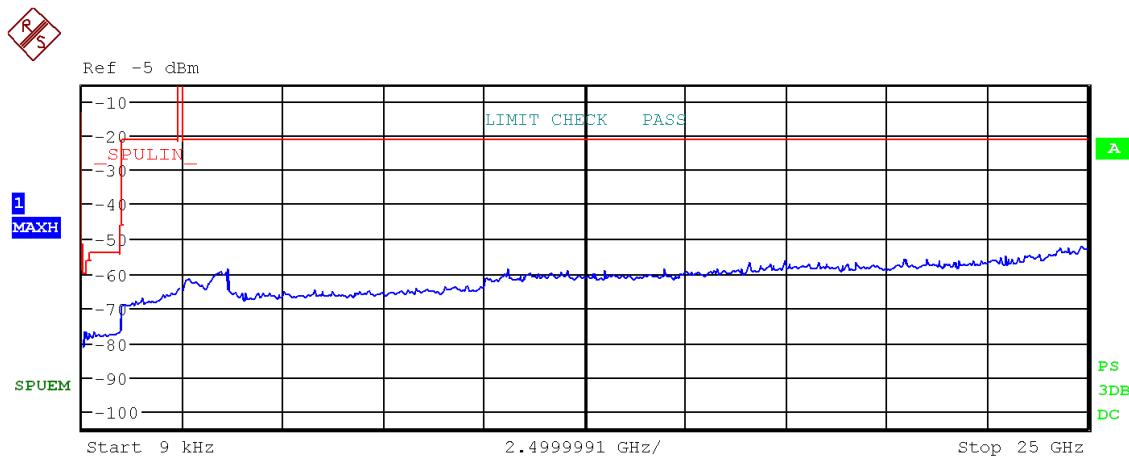


Figure 69: Chart of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 3-DH1), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
957.520	-74.70	PK	-53.90	20.80
993.506	-67.24	PK	-21.20	46.04
2389.537	-62.42	PK	-21.20	41.22
3586.000	-56.47	PK	-21.20	35.27
9745.981	-61.51	PK	-21.20	40.31

Table 57: Results of emissions test from 9 kHz to 25 GHz on middle channel (data rate ACL-E 3-DH1)

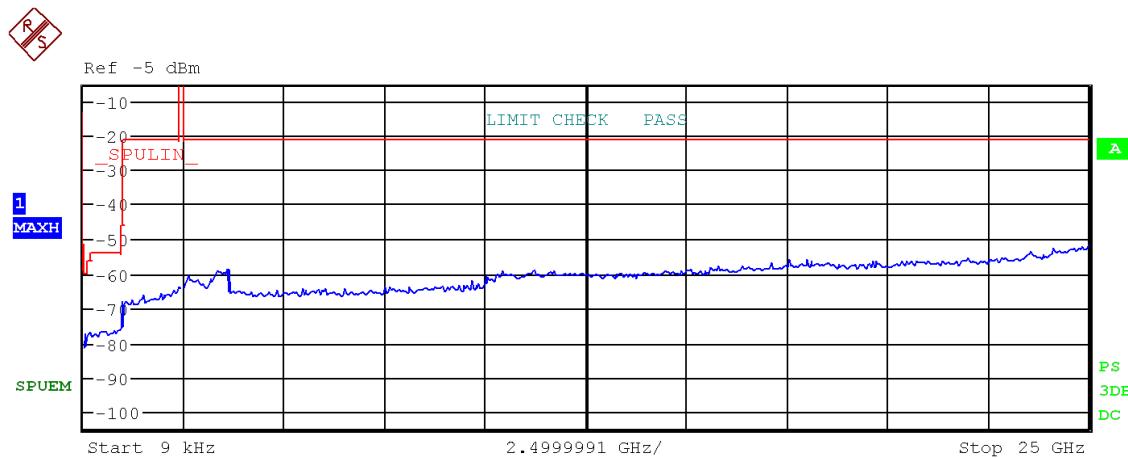


Figure 70: Chart of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 3-DH1), PK-detector

Frequency (MHz)	Level (dBm)	Detector	Limit (dBm)	Margin (dB)
921.808	-73.91	PK	-53.90	20.01
961.039	-65.90	PK	-21.20	44.70
2383.050	-61.55	PK	-21.20	40.35
3571.857	-56.66	PK	-21.20	35.46
9918.655	-59.52	PK	-21.20	38.72

Table 58: Results of emissions test from 9 kHz to 25 GHz on highest channel (data rate ACL-E 3-DH1)

6.10 Radiated emissions below 30 MHz

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(d) KDB 558074 D01, clause 9 ANSI C63.10, clause 6.4
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.5 KDB 558074 D01, clause 9 ANSI C63.10, clause 6.4

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 14, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.10.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
EMI test receiver	ESW 44	Rohde & Schwarz	E00895
Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
Cable set CDC	RF cable(s)	Huber + Suhner AME HF-Technik AME HF-Technik Stabo	E00446 E00920 E00921 E01215
Test software	EMC32-(M)EB, V10.60.20	Rohde & Schwarz	E00777, E00778 or E01073

6.10.2 Limits

According to §15.247(d) and RSS-247 section 5.5:

In any 100 kHz bandwidth outside of the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiated emissions which fall in the restricted bands (see table 34) must also comply with the radiated emission limits specified in §15.209(a) and RSS-Gen section 8.10.

For the frequency range 9 kHz to 30 MHz, these limits are shown in table 59 and Table 60.

Frequency (MHz)	Field strength		Measurement distance (m)
	(μ V/m)	(dB μ V/m)	
0.009 – 0.490	2400/F(kHz) (266.67 – 4.90)	48.52 – 13.80	300
0.490 – 1.705	24000/F(kHz) (48.98 – 14.08)	33.80 – 22.97	30
1.705 – 30	30	29.54	30

Table 59: General radiated emission limits up to 30 MHz according to §15.209

Frequency (MHz)	Magnetic field strength		Measurement distance (m)
	(μ A/m)	(dB μ A//m)	
0.009 – 0.490	6.37/F(kHz)	-2.999 – -37.721	300
0.490 – 1.705	63.7/F(kHz)	-17.721 – -28.636	30
1.705 – 30	0.08	-21.94	30

Table 60: General radiated emission limits from 9 kHz to 30 MHz according to section 8.9 of RSS-Gen

In case of measurements are performed at other distances than that specified in the requirements, the limits in the charts and tables reported with the test results are derived from the general radiated emission limits as listed in table 59 using the recalculation factor as described in clause 5.3.

6.10.3 Test procedure

The emissions below 30 MHz are measured using the

- test procedure for conducted measurements as described in clause 5.2.
- test procedure for radiated measurements as described in clause 5.3.

The following parameters are set:

Frequency range	IF Bandwidth	Preamplifier
9 kHz – 150 kHz	200 Hz	Off
150 kHz – 30 MHz	9 kHz	Off

6.10.4 Test results

Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
Antenna alignment:	<input checked="" type="checkbox"/> in parallel	<input checked="" type="checkbox"/> in line	<input type="checkbox"/> angle °
EUT position:	<input checked="" type="checkbox"/> Position X	<input checked="" type="checkbox"/> Position Y	<input checked="" type="checkbox"/> Position Z

Note(s):

- 1 Premeasurements were performed to declare the worst case which is documented below.
- 2 No assessable emissions could be detected.
- 3 According to clause 6.9 the data rate ACL-E 2-DH1 was tested as worst case for all channels.
- 4 Premeasurements have shown that there are no differences between the tested channels below 30 MHz, so the final measurement was only performed on lowest channel.
- 5 The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency X kHz resulted in a level of Y dB_{UV}/m, which is equivalent to $Y - 51.5 = Z$ dB_{UA}/m, which has the same margin, W dB, to the corresponding RSS-210 limit as it has to 15.209(a) limit.

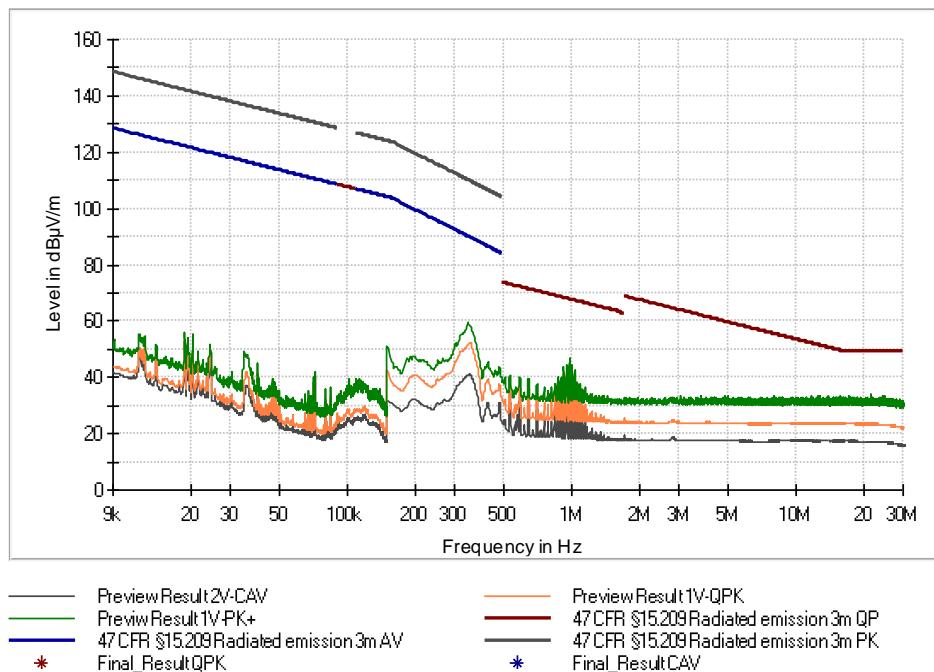


Figure 71: Chart of emissions test below 30 MHz on lowest channel (data rate ACL-E 2-DH1), EUT position X, antenna in line to the EUT

6.11 Radiated emissions from 30 MHz to 1 GHz

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(d) KDB 558074 D01, clause 9 ANSI C63.10, clause 6.5
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.5 KDB 558074 D01, clause 9 ANSI C63.10, clause 6.5

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 27, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.11.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
EMI test receiver	ESR 7	Rohde & Schwarz	E00739
TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
Test software	EMC32-(M)EB, V10.60.20	Rohde & Schwarz	E00777, E00778 or E01073

6.11.2 Limits

According to §15.247(d) and RSS-247 section 5.5:

In any 100 kHz bandwidth outside of the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiated emissions which fall in the restricted bands (see table 34) must also comply with the radiated emission limits specified in §15.209(a) and RSS-Gen section 8.10.

For frequencies equal to and above 30 MHz, these limits are shown in table 61.

<i>Frequency (MHz)</i>	<i>Field strength ($\mu V/m$)</i>	<i>Field strength ($dB\mu V/m$)</i>	<i>Measurement distance (m)</i>
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3
Above 960	500	53.98	3

Table 61: General radiated emission limits ≥ 30 MHz according to §15.209 and RSS-Gen section 8.9

6.11.3 Test procedure

The emissions from 30 MHz to 1 GHz are measured using the

- test procedure for conducted measurements as described in clause 5.2.
- test procedure for radiated measurements as described in clause 5.5.

The following parameters are set:

<i>Frequency range</i>	<i>IF Bandwidth</i>	<i>Preamplifier</i>
30 MHz – 1 GHz	120 kHz	20 dB

6.11.4 Test results

Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
Polarization:	<input checked="" type="checkbox"/> horizontal	<input checked="" type="checkbox"/> vertical	
EUT position:	<input checked="" type="checkbox"/> Position X	<input checked="" type="checkbox"/> Position Y	<input checked="" type="checkbox"/> Position Z

Note(s)

- 1 Premeasurements were performed to declare the worst case which is documented below.
- 2 According to clause 6.9 the data rate ACL-E 2-DH1 was tested as worst case for all channels.
- 3 Premeasurements have shown that there are no differences between the tested channels in the range of 30 MHz to 1 GHz, so the final measurement was only performed on middle channel.

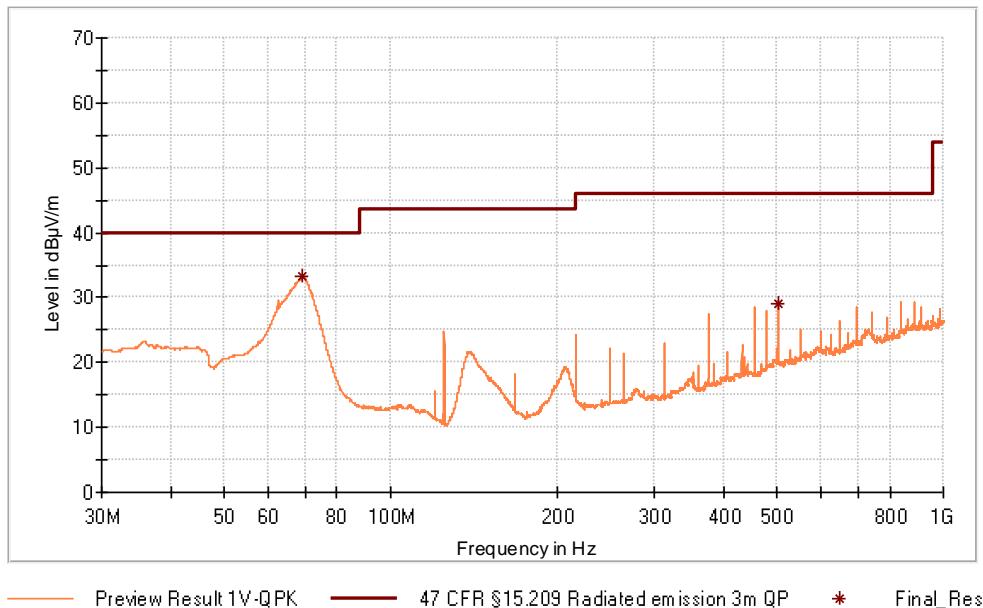


Figure 72: Chart of emissions test from 30 MHz to 1 GHz on middle channel (data rate ACL-E 2-DH1), EUT position Y, antenna polarization vertical

Frequency (MHz)	QuasiPK (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)	Corr. (dB/m)
69.300000	33.16	40.00	6.84	100.0	V	146.0	10.8
504.000000	29.01	46.00	16.99	100.0	V	1.0	19.6

Table 62: Results of emissions test from 30 MHz to 1 GHz on middle channel (data rate ACL-E 2-DH1), EUT position Y, antenna polarization vertical

6.12 Radiated emissions from 1 GHz to 25 GHz (10th harmonic)

Section(s) in 47 CFR Part 15:	Requirement(s): Reference(s):	15.247(d) KDB 558074 D01, clause 9 ANSI C63.10, clause 6.6
Section(s) in RSS:	Requirement(s): Reference(s):	RSS-247, section 5.5 KDB 558074 D01, clause 9 ANSI C63.10, clause 6.6

Performed by:	Jennifer Riedel B. Eng.	Date(s) of test:	July 13, 2022; July 20, 2022
Result:	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.12.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
Free space semi-anechoic chamber (FS-SAC)	FS-SAC	ELEMENT STRAUBING	E00100
EMI test receiver	ESW 44	Rohde & Schwarz	E00895
Preamplifier (0.5 GHz - 18 GHz)	BBV 9718 B	Schwarzbeck	W01325
Preamplifier (18 GHz – 40 GHz)	BBV 9721	Schwarzbeck	W01350
Highpass filter	WHK10-2700-3000-10000-40SS	Wainwright Instruments	W00774
Highpass filter	WHKX10-5850-6500-18000-40SS	Wainwright Instruments	W00699
Horn antenna	BBHA 9120D	Schwarzbeck	W00053
Horn antenna	BBHA 9170	Schwarzbeck	W00055
Cable set FS-SAC	RF cable(s)	Teledyne Reynolds Huber + Suhner Teledyne Reynolds	E00435 E00307 E00433

6.12.2 Limits

According to §15.247(d) and RSS-247 section 5.5:

In any 100 kHz bandwidth outside of the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In addition, radiated emissions which fall in the restricted bands (see table 34) must also comply with the radiated emission limits specified in §15.209(a) and RSS-Gen section 8.10.

For frequencies above 960 MHz, these limits are shown in table 63.

<i>Frequency (MHz)</i>	<i>Field strength (μV/m)</i>	<i>Field strength (dBμV/m)</i>	<i>Measurement distance (m)</i>
Above 960	500	54	3

Table 63: General radiated emission limits above 960 MHz according to §15.209 and RSS-Gen

6.12.3 Test procedure

The emissions from 1 GHz to 25 GHz are measured using the

- test procedure for conducted measurements as described in clause 5.2.
- test procedure for radiated measurements as described in clause 5.6.

6.12.4 Test results

Test distance:	Exploratory tests:	<input type="checkbox"/> 1 m	<input checked="" type="checkbox"/> 0.5 m
	Final tests:	<input type="checkbox"/> 3 m	<input checked="" type="checkbox"/> 1.5 m
EUT position:	<input checked="" type="checkbox"/> Position X	<input checked="" type="checkbox"/> Position Y	<input checked="" type="checkbox"/> Position Z

Note(s):

- 1 The measurements from 1 GHz to 17 GHz are made at a measurement distance of 1.5 m. However, the limit lines for these tests are referenced to the limit lines at a measurement distance of 3 m (Offset – 6 dB).
- 2 The exploratory measurements from 17 GHz to 25 GHz are made at a measurement distance of 0.5 m. However, the limit lines for these tests are referenced to the limit lines at a measurement distance of 3 m (Offset – 15.6 dB).
- 3 Premeasurements were performed to declare the worst case which is documented below. The table results are the final measurements of the emissions detected in the premeasurements which are shown in this test report.
- 4 According to clause 6.6.4.3, note 1 of ANSI C63.10, if the maximized peak measured value complies with the average limit, than it is unnecessary to perform an average measurement.
- 5 According to clause 6.9 the data rate ACL-E 2-DH1 was tested as worst case for all channels.

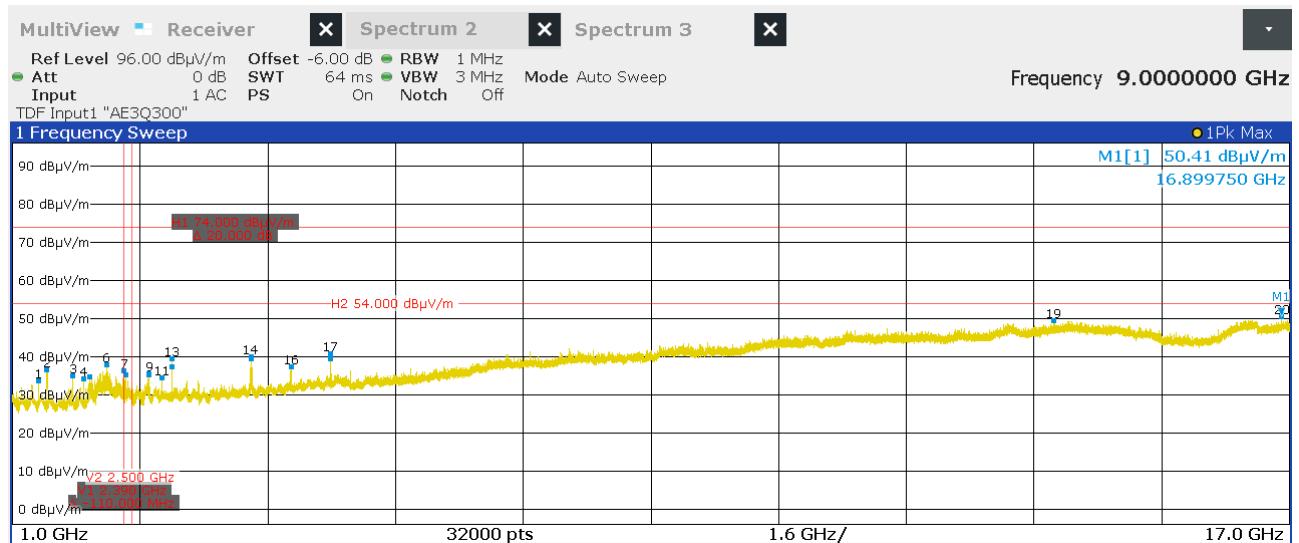


Figure 73: Chart of emissions test from 1 GHz to 17 GHz on lowest channel (data rate ACL-E 2-DH1), EUT position X, antenna polarization vertical

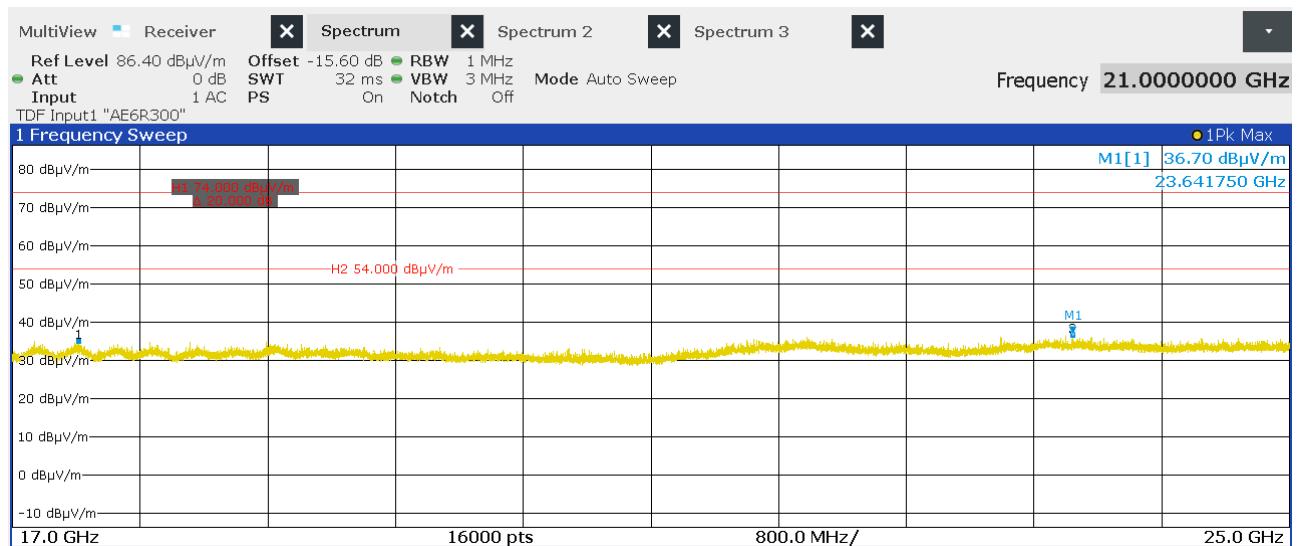


Figure 74: Chart of exploratory emission test from 17 GHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1) at 0.5 m

Frequency (MHz)	EUT Pos.	Level (dB μ V/m)	Detector	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)
4804.580	X	44.87	PK	74.00	29.13	250.0	V	240.0
14022.520	X	48.97	PK	74.00	25.03	250.0	V	160.0
16530.250	X	49.17	PK	74.00	24.83	100.0	V	0

Table 64: Results of emissions test from 1 GHz to 25 GHz on lowest channel (data rate ACL-E 2-DH1)

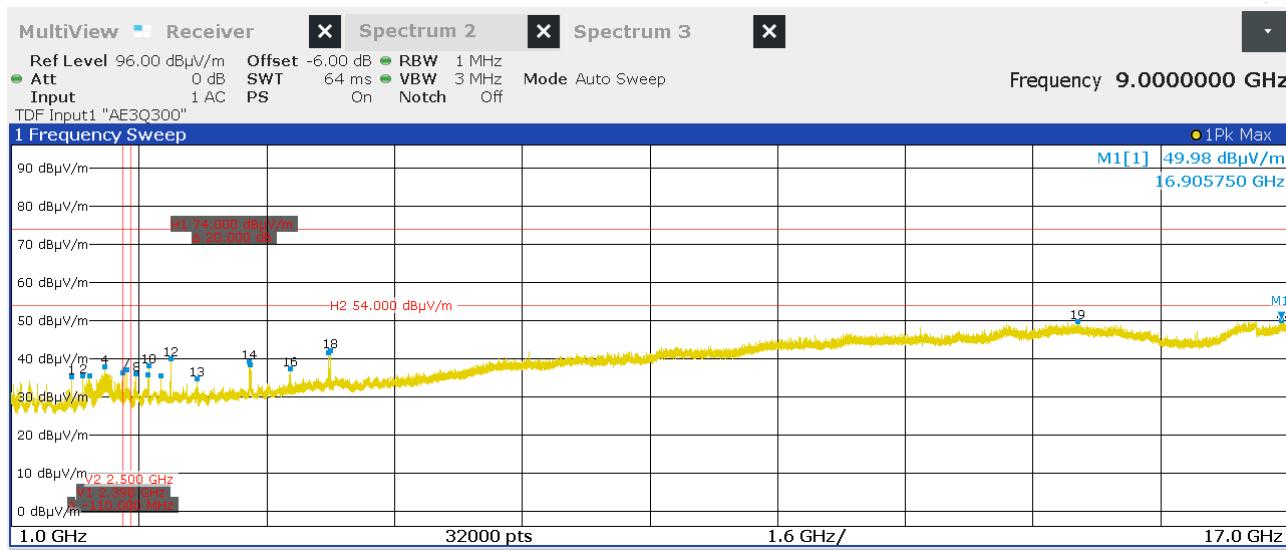


Figure 75: Chart of emissions test from 1 GHz to 17 GHz on middle channel (data rate ACL-E 2-DH1), EUT position X, antenna polarization vertical

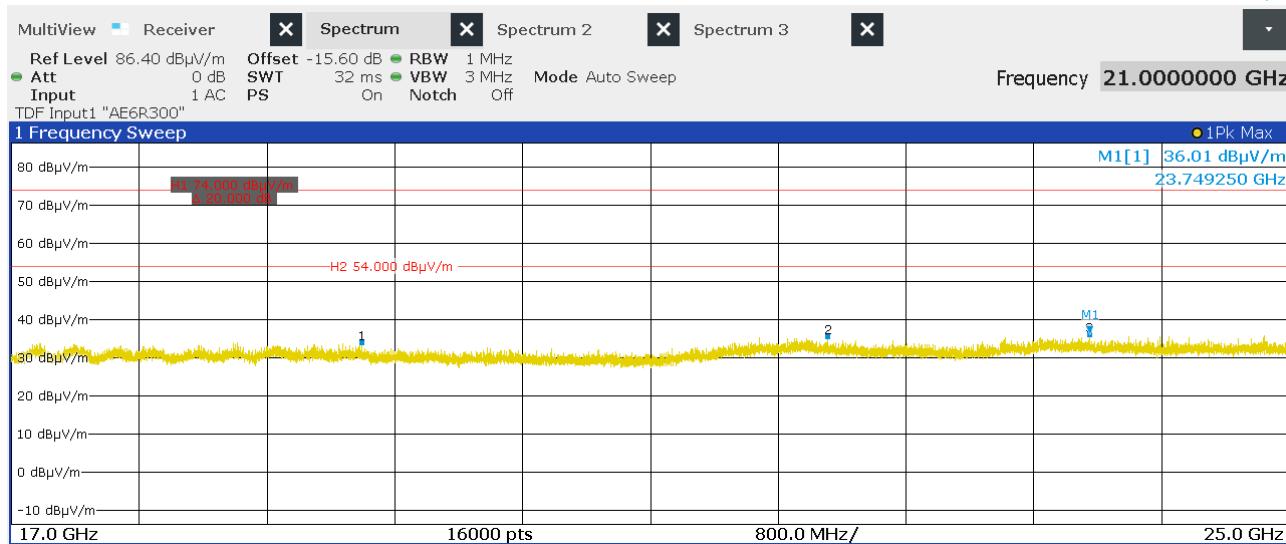


Figure 76: Chart of exploratory emission test from 17 GHz to 25 GHz on middle channel (data rate ACL-E 2-DH1) at 0.5 m

Frequency (MHz)	EUT Pos.	Level (dBμV/m)	Detector	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)
4880.839	X	44.04	PK	74.00	29.96	250.0	V	300.0
14350.410	X	49.21	PK	74.00	24.79	250.0	V	160.0
16545.250	X	49.35	PK	74.00	24.65	200.0	V	90.0

Table 65: Results of emissions test from 1 GHz to 25 GHz on middle channel (data rate ACL-E 2-DH1)

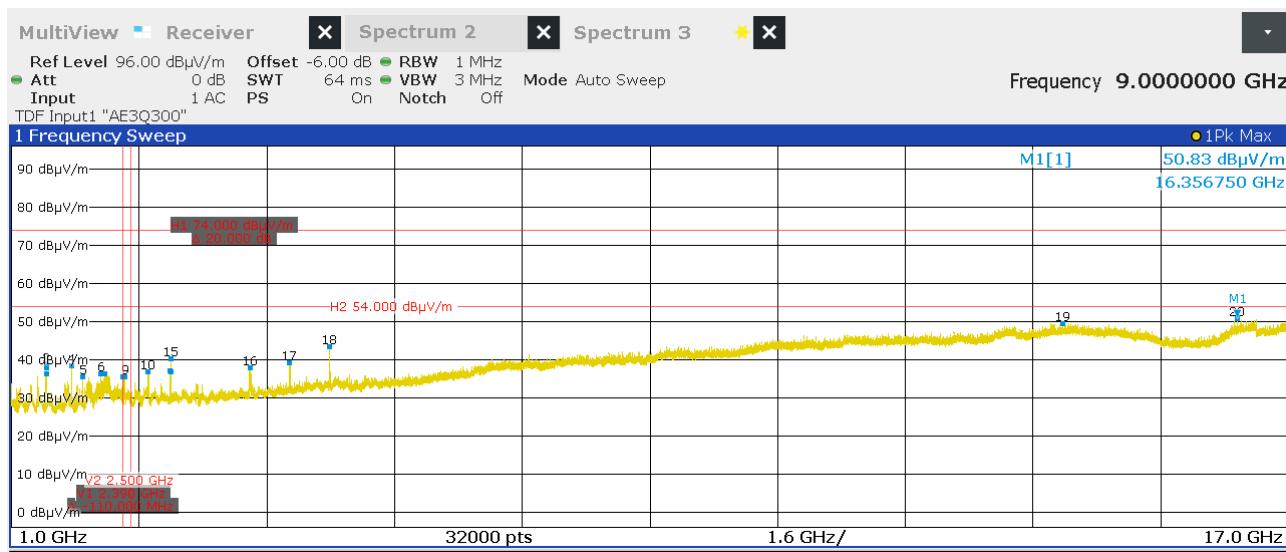


Figure 77: Chart of emissions test from 1 GHz to 17 GHz on highest channel (data rate ACL-E 2-DH1), EUT position X, antenna polarization vertical

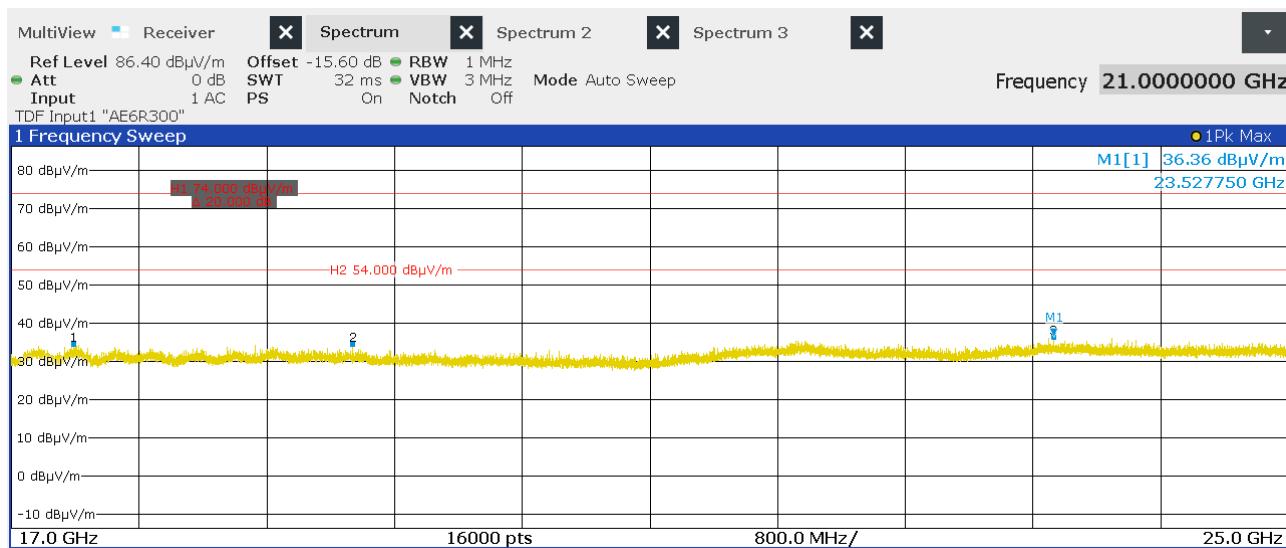


Figure 78: Chart of exploratory emission test from 17 GHz to 25 GHz on highest channel (data rate ACL-E 2-DH1) at 0.5 m

Frequency (MHz)	EUT Pos.	Level (dBμV/m)	Detector	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol.	Azimuth (deg)
4960.580	X	45.52	PK	74.00	28.48	200.0	V	280.0
14174.745	X	49.41	PK	74.00	24.59	200.0	V	130.0
16347.759	X	48.05	PK	74.00	25.95	200.0	V	190.0

Table 66: Results of emissions test from 1 GHz to 25 GHz on highest channel (data rate ACL-E 2-DH1)

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
EMI test receiver	ESW44	101538	E00895	2020-08	2022-08
EMI test receiver	ESU26	100026	W00002	2022-06	2024-06
EMI test receiver	ESR7	101059	E00739	2020-08	2022-08
EMI test receiver	ESCI3	100328	E00552	2020-10	2022-10
EMI test receiver	ESCI3	100013	E00001	2022-05	2024-05
Preamplifier (1 GHz – 18 GHz)	BBV 9718 B	00032	W01325	2021-09	2022-10
Preamplifier (18 GHz – 40 GHz)	BBV 9721	43	W01350	2021-11	2022-11
Preamplifier (1 GHz - 18 GHz)	ALS05749	001	W01007	2022-01	2023-01
Loop antenna	HFH2-Z2	871398/0050	E00060	2021-10	2023-10
LISN	ESH2-Z5	881362/037	E00004	Note 1	
LISN	ESH2-Z5	893406/009	E00005	2021-10	2023-10
Field probe	RF-R 400-1	02-2030	E00270	Note 2	
TRILOG broadband antenna (SAC3)	VULB 9162	9162-041	E00643	2021-03	2024-03
Horn antenna	BBHA 9120D	9120D-592	W00053	2020-04	2023-04
Horn antenna	BBHA 9170	9170-332	W00055	2020-04	2023-04
Shielded room	P92007	B 83117 C 1109 T 211	E00107	N/A	
Compact diagnostic chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Semi-anechoic chamber (SAC) with floor absorbers	FS-SAC	---	E00100	2021-03	2024-03
Semi-anechoic chamber (SAC)	SAC3	C62128-A520-A643-x-0006	E00716	2021-03	2024-03
Cable set CDC	RG214/U	---	E00446	2022-04	2023-04
	LCF12-50J	---	E01215	2022-04	2023-04
	LMR400	1718020006	E00920	2022-01	2023-01
	RG214 Hiflex	171802007	E00921	2022-01	2023-01
Cable set anechoic chamber	262-0942-1500	005	E00435	2021-10	2022-10
	SF104EA/2x11PC 35-42/5m	11144/4EA	E00307	2021-12	2022-12
	262-0942-1500	003	E00433	2021-10	2022-10
Cable set of semi-anechoic chamber SAC3	SF104EA/11PC35/11PC35/10000MM	501347/4EA	E00755	2021-12	2022-12
	SF104E/11PC35/11PC35/2000MM	507410/4E	E01035	2021-12	2022-12
	SF104E/11PC35/11PC35/2000MM	507411/4E	E01034	2021-09	2022-09

Note(s)

- Only used for decoupling of support equipment.
- Only used for relative measurements.

8 Measurement uncertainties

Description	Uncertainty	U_{Limit}	Note(s)	$k=$
AC power line conducted emission	± 3.0 dB	± 3.4 dB	2b), 3b)	2
Carrier frequency separation	± 1.5 %	± 5 %	2a), 3a)	2
Number of hopping frequencies	± 1.5 %	± 5 %	2a), 3a)	2
Time of occupancy (dwell time)	± 1.5 %	± 5 %	2a), 3a)	2
Bandwidth tests	± 2.0 %	± 5 %	2a), 3a)	2
Maximum conducted output power (conducted)	± 2.9 dB	± 3.0 dB	2a), 3a)	2
Power spectral density (conducted)	± 2.9 dB	± 3.0 dB	2a), 3a)	2
Conducted spurious emissions	± 2.9 dB	± 3.0 dB	2a), 3a)	2
Radiated emissions				
from 9 kHz to 30 MHz	± 3.8 dB	± 4.0 dB	2b), 3b)	2
from 30 MHz to 1 GHz	± 6.1 dB	± 6.3 dB	2b), 3b)	2
from 1 GHz to 6 GHz	± 4.6 dB	± 5.2 dB	2b), 3b)	2
from 6 GHz to 18 GHz	± 5.0 dB	± 5.5 dB	2b), 3b)	2
from 18 GHz to 26.5 GHz	± 5.4 dB	± 6.0 dB	2b), 3c)	2
from 26.5 GHz to 40 GHz	± 6.2 dB	± 6.5 dB	2b), 3c)	2

Note(s):

- 1 The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.
- 2 The values of the measurement uncertainty as listed above are calculated according to
 - a) ETSI TR 100 028-1 V1.4.1 and ETSI TR 100 028-2 V1.4.1
 - b) CISPR 16-4-2:2011-06 + A1:2014-02 + A2:2018-08
- 3 The limits for the measurement uncertainty as listed above are
 - a) derived from ETSI EN 300 328 V2.1.1
 - b) equal to U_{CISPR} taken from CISPR 16-4-2:2011-06 + A1:2014-02 + A2:2018-08
 - c) defined by the test laboratory
- 4 Simple acceptance is applied as the decision rule while keeping the specified limits (U_{Limit}) for the expanded measurement uncertainty (i.e. Test Uncertainty Ratio TUR $\geq 1:1$). That means, compliance is based on the recorded level by the lab irrespective of the expanded measurement uncertainty value but with a limitation to it.
- 5 All used test instruments as well as the test accessories are calibrated at regular intervals.

9 Revision history

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2022-10-26	Jennifer Riedel B. Eng.	First edition

Template: RF_15.247_RSS-247_V1.7