



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Shenzhen Jinghua phase control Co.,LTD

Address: 912 5A Building,ECO-Technology Park,Yuehai street,Nanshan district,Shenzhen city,Guandong province,China

FCC ID: 2A784IBABYI

Product Name: Baby Monitor

Model Number: i Baby I

Standard(s): 47 CFR Part 15 Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22080008-00

Date Of Issue: 2022-09-01

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 DESCRIPTION OF TEST CONFIGURATION	5
1.2.1 EUT Operation Condition:.....	5
1.2.2 Support Equipment List and Details	5
1.2.3 Support Cable List and Details	5
1.2.4 Block Diagram of Test Setup.....	6
1.3 MEASUREMENT UNCERTAINTY	7
2. SUMMARY OF TEST RESULTS	8
3. REQUIREMENTS AND TEST PROCEDURES	9
3.1 AC LINE CONDUCTED EMISSIONS.....	9
3.1.1 EUT Setup.....	9
3.1.2 EMI Test Receiver Setup	9
3.1.3 Test Procedure	10
3.1.4 Corrected Amplitude & Margin Calculation.....	10
3.2 RADIATION SPURIOUS EMISSIONS	11
3.2.1 EUT Setup.....	11
3.2.2 EMI Test Receiver Setup	12
3.2.3 Test Procedure	13
3.2.4 Corrected Amplitude & Margin Calculation.....	13
4. TEST DATA AND RESULTS	14
4.1 AC LINE CONDUCTED EMISSIONS.....	14
4.2 RADIATION SPURIOUS EMISSIONS	17

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Baby Monitor
EUT Model:	i Baby I
Rated Input Voltage:	DC 5V From USB
The Highest Operation Frequency:	63960 MHz
Serial Number:	CR22080008-EM -S1
EUT Received Date:	2022.08.09
EUT Received Status:	Good

Accessory Information:

No.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Normal Work
Equipment Modifications:	No
EUT Exercise Software:	JHXX-hotel V1.0.0

1.2.2 Support Equipment List and Details

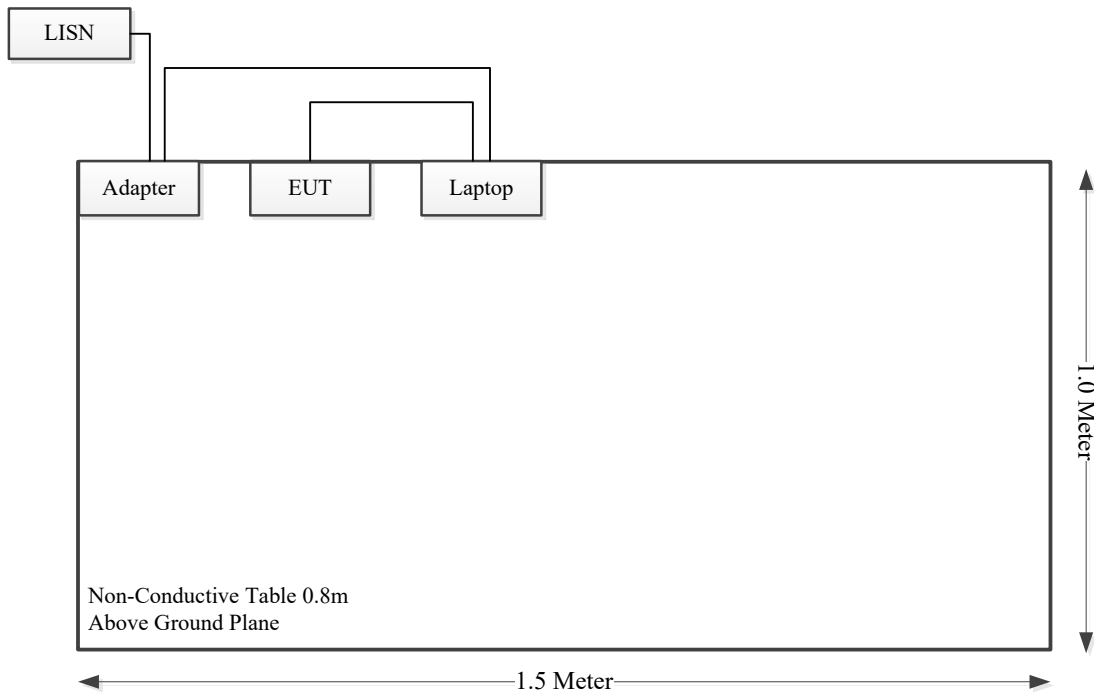
Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	E450	PF-OMRADG
Lenovo	Adapter	ADLX65NDC3A	45N0253

1.2.3 Support Cable List and Details

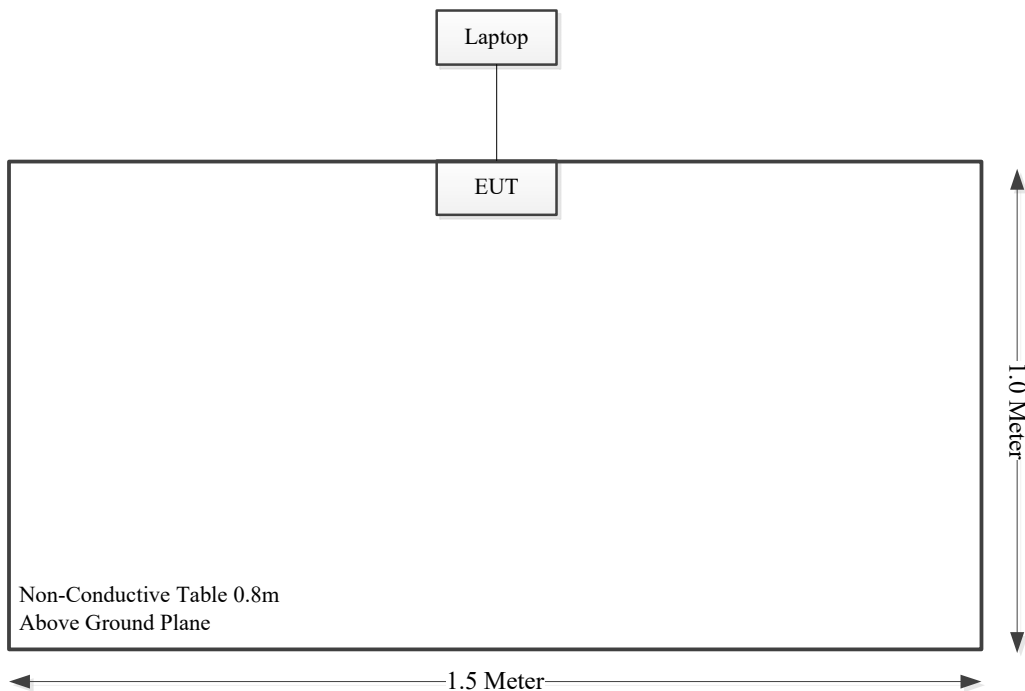
Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	1.2	Laptop	EUT
Power Cable	No	No	1.2	Adapter	LISN
Power Cable	No	Yes	1.5	Adapter	Laptop

1.2.4 Block Diagram of Test Setup

Conducted emissions:



Radiated emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

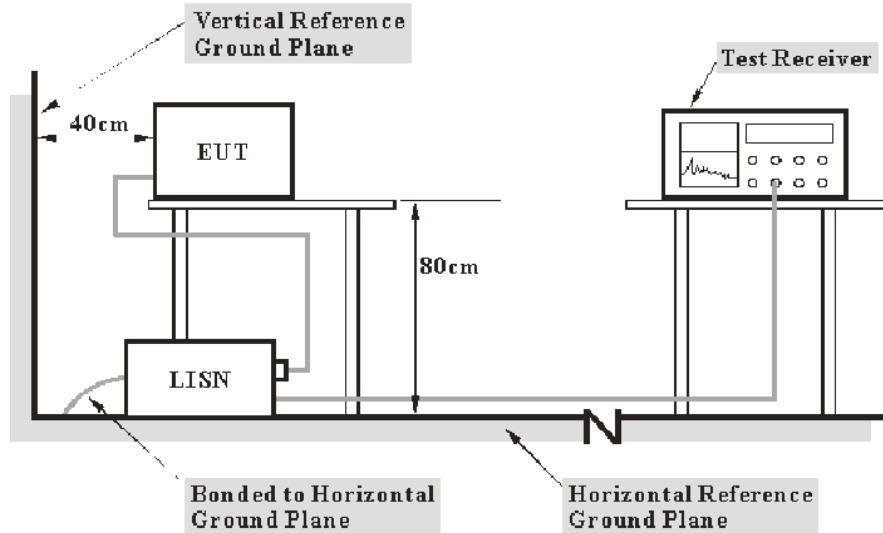
2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliant
§15.109	Radiated emissions	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

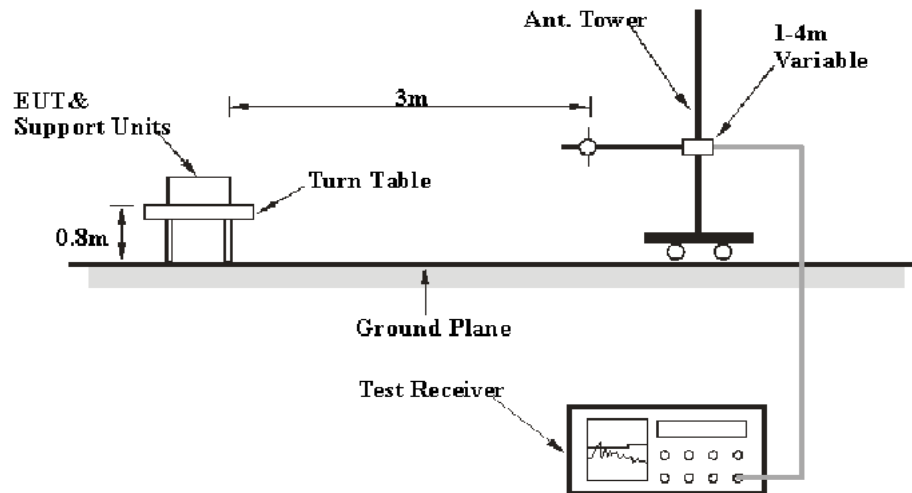
The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

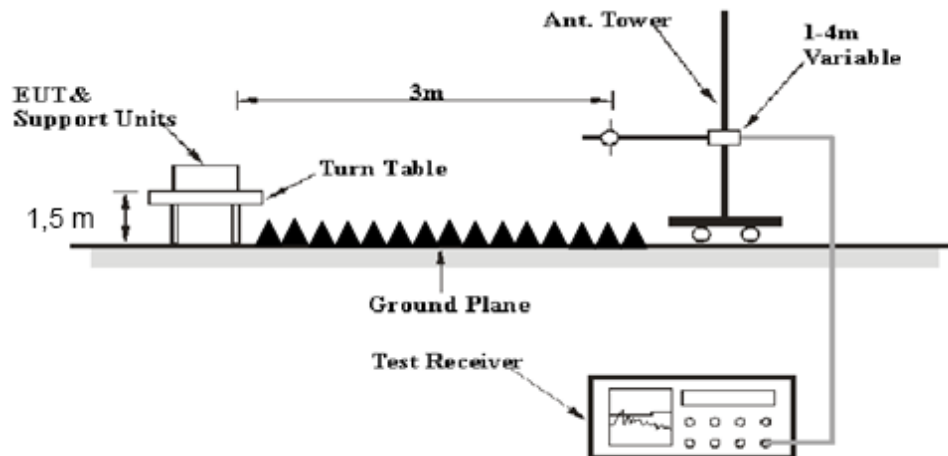
3.2 Radiation Spurious Emissions

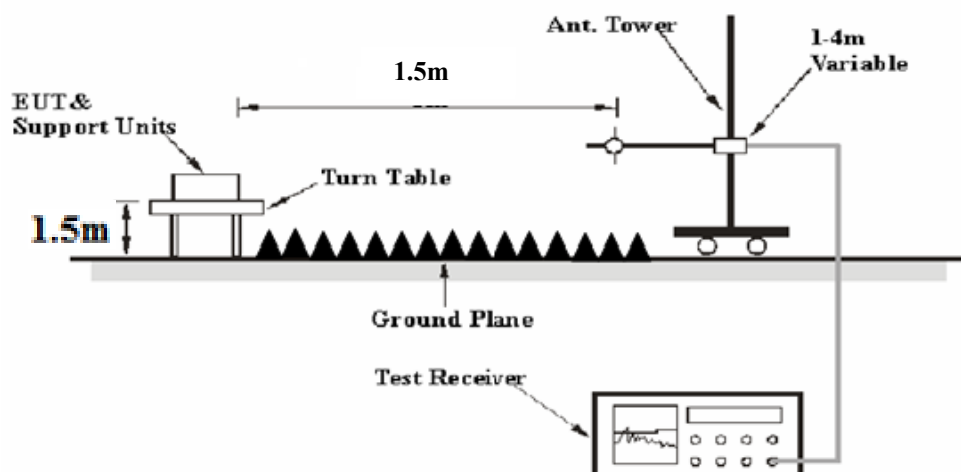
3.2.1 EUT Setup

Below 1GHz:



1-26.5 GHz:



26.5-40 GHz:

The radiated emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

For 26.5-40GHz

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB=6.02dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

For 30MHz-26.5GHz:

Result = Reading + Factor

For 26.5GHz-100GHz

Result = Reading + Factor-Distance extrapolation Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR22080008-EM-S1	Test Date:	2022-08-12
Test Site:	CE	Test Mode:	Normal Work
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

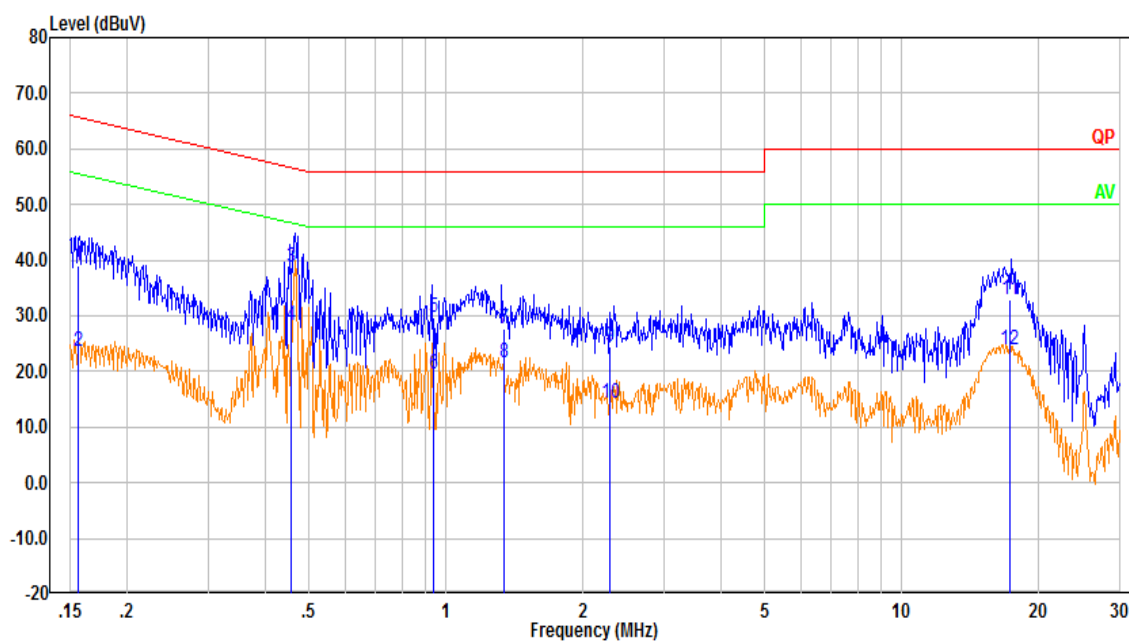
Temperature: (°C)	27.1	Relative Humidity: (%)	70	ATM Pressure: (kPa)	100.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022-04-01	2023-03-31
R&S	EMI Test Receiver	ESR3	102726	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022-08-07	2023-08-06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

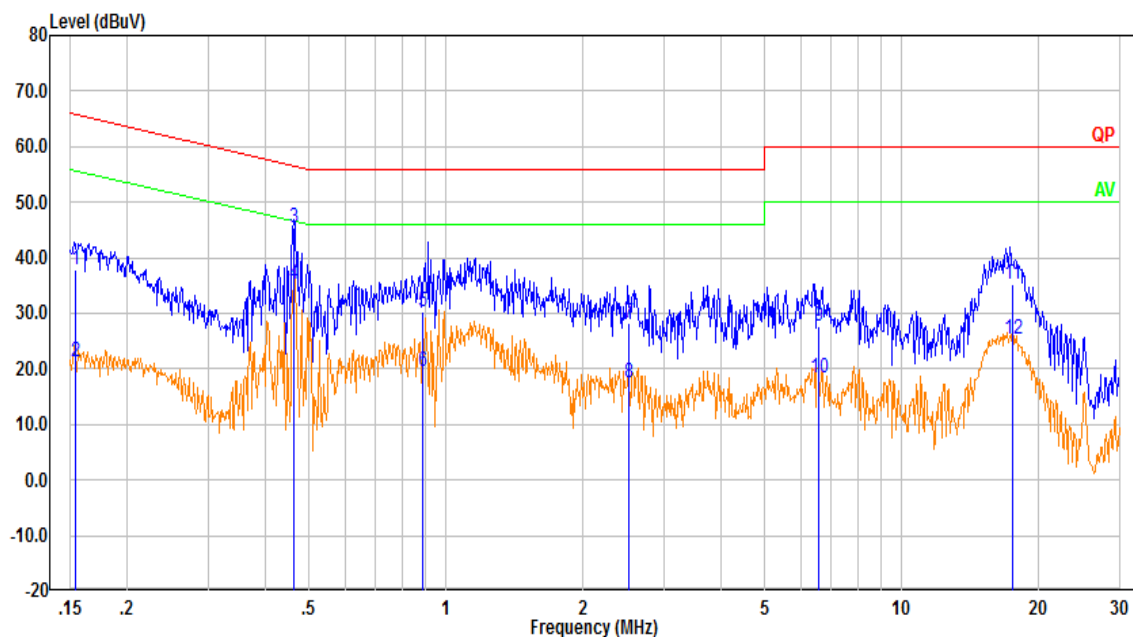
* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.155	29.42	9.61	39.03	65.70	26.67	QP
2	0.155	14.05	9.61	23.66	55.70	32.04	Average
3	0.458	29.03	9.61	38.64	56.73	18.09	QP
4	0.458	18.66	9.61	28.27	46.73	18.46	Average
5	0.939	20.16	9.62	29.78	56.00	26.22	QP
6	0.939	9.85	9.62	19.47	46.00	26.53	Average
7	1.338	18.02	9.62	27.65	56.00	28.35	QP
8	1.338	11.94	9.62	21.56	46.00	24.44	Average
9	2.282	14.79	9.64	24.43	56.00	31.57	QP
10	2.282	4.79	9.64	14.43	46.00	31.57	Average
11	17.224	23.30	9.73	33.04	60.00	26.96	QP
12	17.224	14.05	9.73	23.78	50.00	26.22	Average

Neutral:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	28.20	9.61	37.81	65.79	27.98	QP
2	0.154	11.75	9.61	21.36	55.79	34.43	Average
3	0.464	35.70	9.61	45.31	56.61	11.30	QP
4	0.464	25.53	9.61	35.14	46.61	11.47	Average
5	0.890	20.81	9.62	30.43	56.00	25.57	QP
6	0.890	10.06	9.62	19.68	46.00	26.32	Average
7	2.520	18.61	9.64	28.25	56.00	27.75	QP
8	2.520	7.79	9.64	17.43	46.00	28.57	Average
9	6.566	17.94	9.66	27.60	60.00	32.40	QP
10	6.566	8.63	9.66	18.29	50.00	31.71	Average
11	17.483	25.68	9.69	35.37	60.00	24.63	QP
12	17.483	15.62	9.69	25.31	50.00	24.69	Average

4.2 Radiation Spurious Emissions

Serial Number:	CR22080008-EM-S1	Test Date:	2022-08-26
Test Site:	966-1, 966-2	Test Mode:	Normal Work
Tester:	Carl Xue, Mack Huang	Test Result:	Pass

Environmental Conditions:

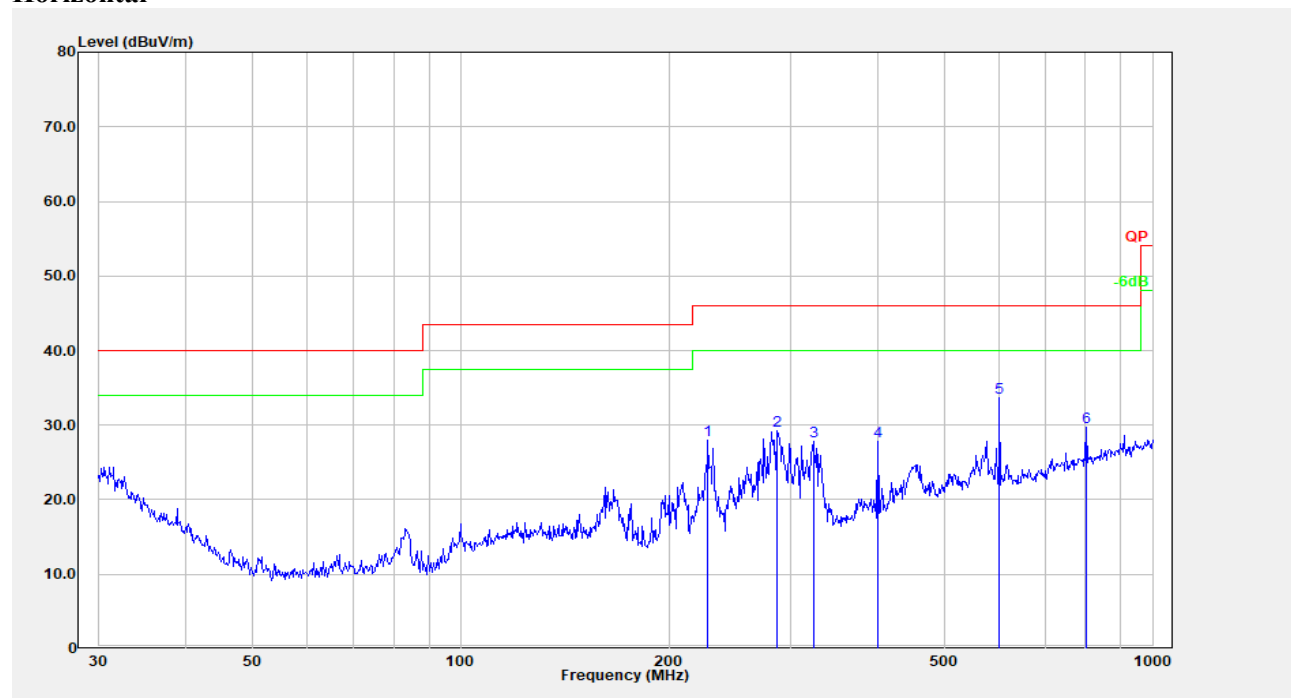
Temperature: (°C)	27.2	Relative Humidity: (%)	61	ATM Pressure: (kPa)	100.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

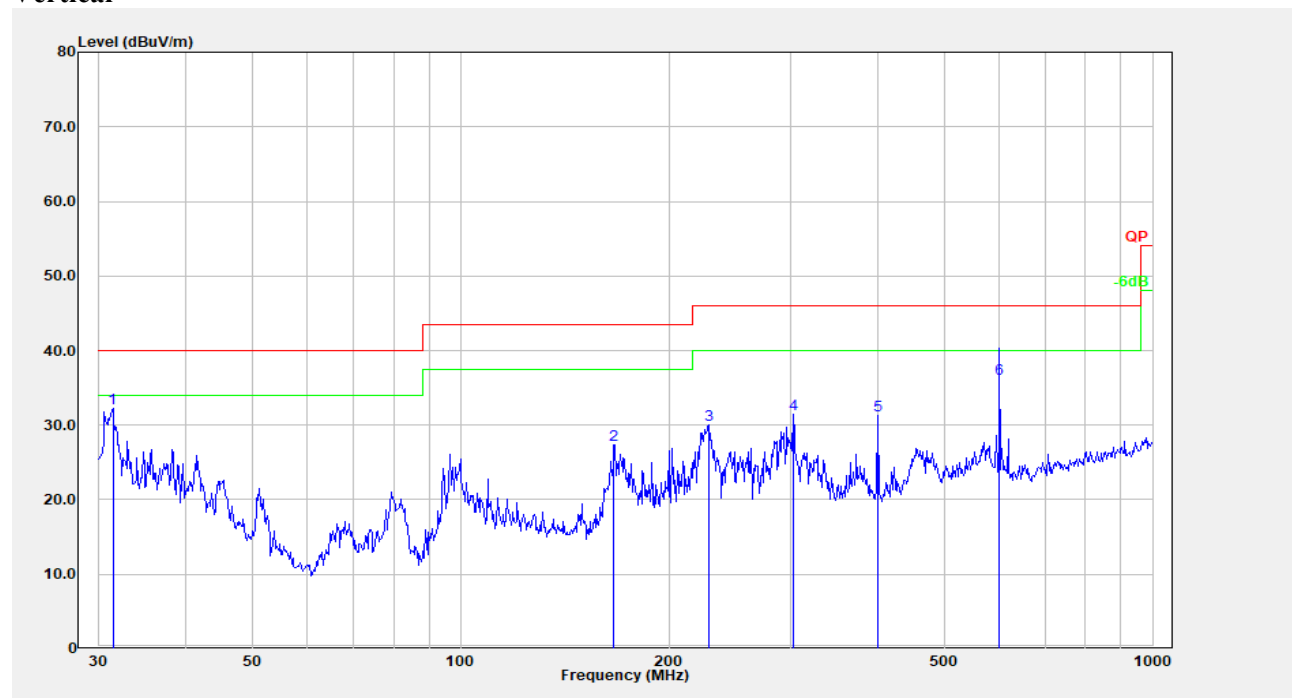
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2022-07-15	2023-07-14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022-07-17	2023-07-16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022-07-17	2023-07-16
Sonoma	Amplifier	310N	186165	2022-07-17	2023-07-16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2024-02-04
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2024-02-04
R&S	Spectrum Analyzer	FSV40	101591	2022-07-15	2023-07-14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022-08-07	2023-08-06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022-08-07	2023-08-06
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022-08-07	2023-08-06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

1) 30MHz-1GHz:

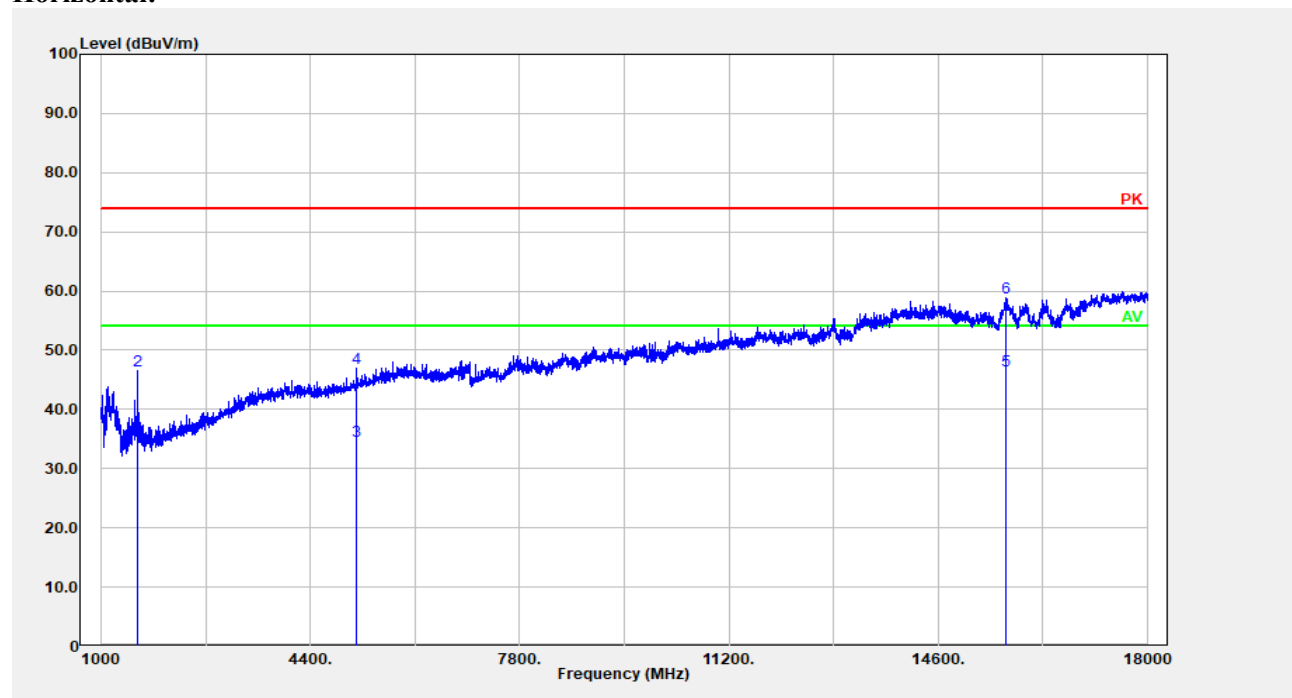
Horizontal

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	227.691	41.12	-13.10	28.02	46.00	17.98	Peak
2	286.982	40.61	-11.41	29.20	46.00	16.80	Peak
3	323.320	38.54	-10.66	27.88	46.00	18.12	Peak
4	400.432	36.87	-9.00	27.87	46.00	18.13	Peak
5	601.427	38.91	-5.27	33.63	46.00	12.37	Peak
6	801.786	32.14	-2.45	29.69	46.00	16.31	Peak

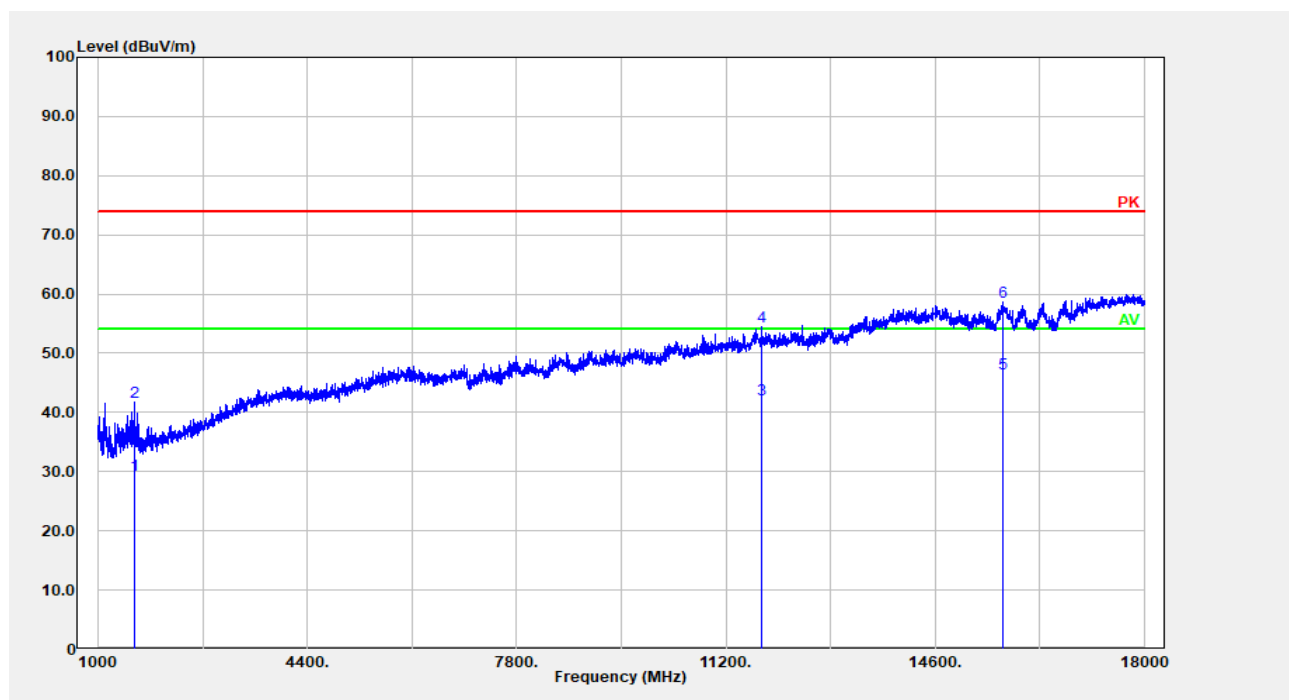
Vertical

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.399	37.13	-4.86	32.27	40.00	7.73	Peak
2	166.651	40.24	-12.88	27.36	43.50	16.14	Peak
3	228.490	43.14	-13.12	30.02	46.00	15.98	Peak
4	302.481	42.24	-10.80	31.44	46.00	14.56	Peak
5	400.432	40.36	-9.00	31.36	46.00	14.64	Peak
6	599.961	41.51	-5.34	36.17	46.00	9.83	QP

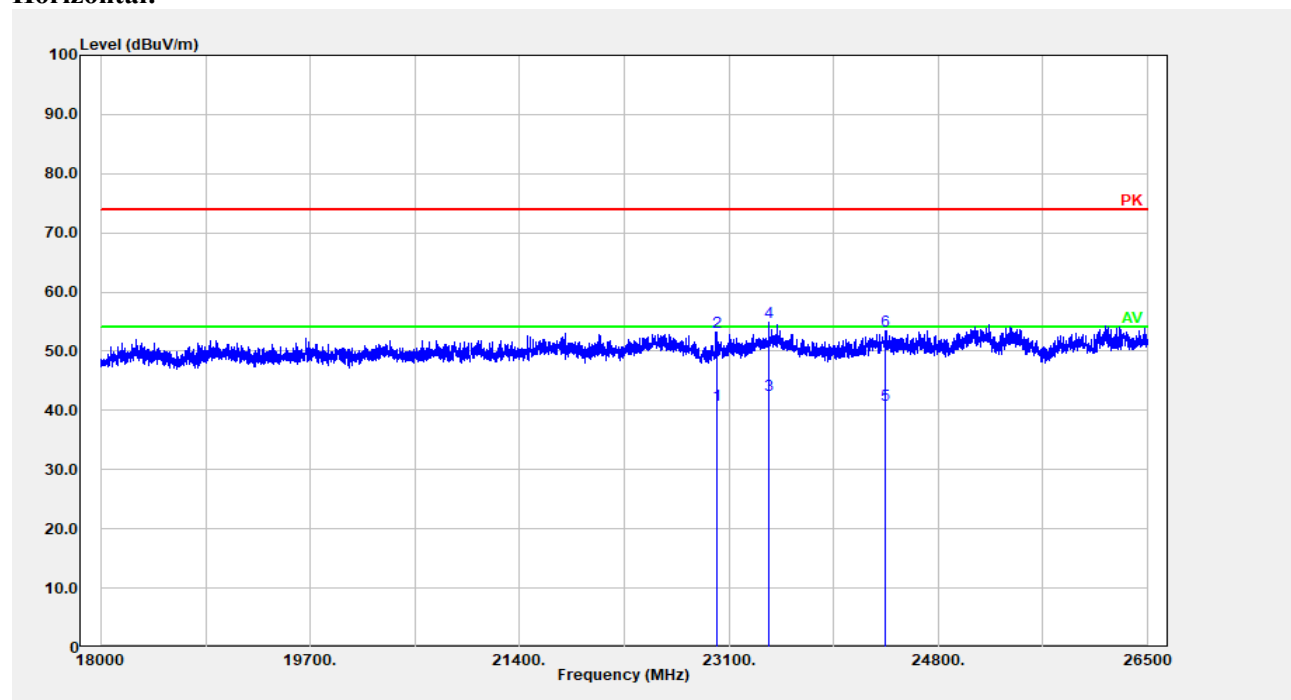
3) Above 1GHz

Horizontal:

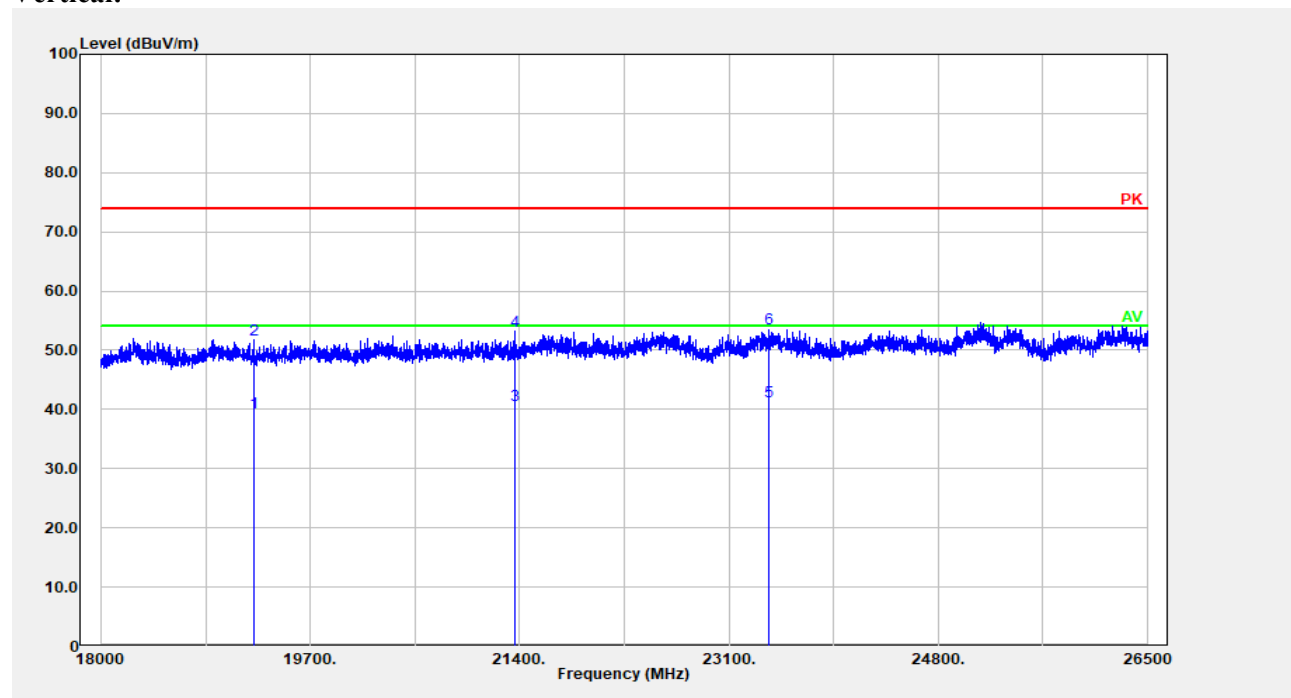
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1591.718	34.16	0.25	34.41	54.00	19.59	Average
2	1591.718	46.37	0.25	46.62	74.00	27.38	Peak
3	5142.028	23.25	11.49	34.74	54.00	19.26	Average
4	5142.028	35.51	11.49	47.00	74.00	27.00	Peak
5	15694.340	25.36	21.23	46.59	54.00	7.41	Average
6	15694.340	37.72	21.23	58.95	74.00	15.05	Peak

Vertical:

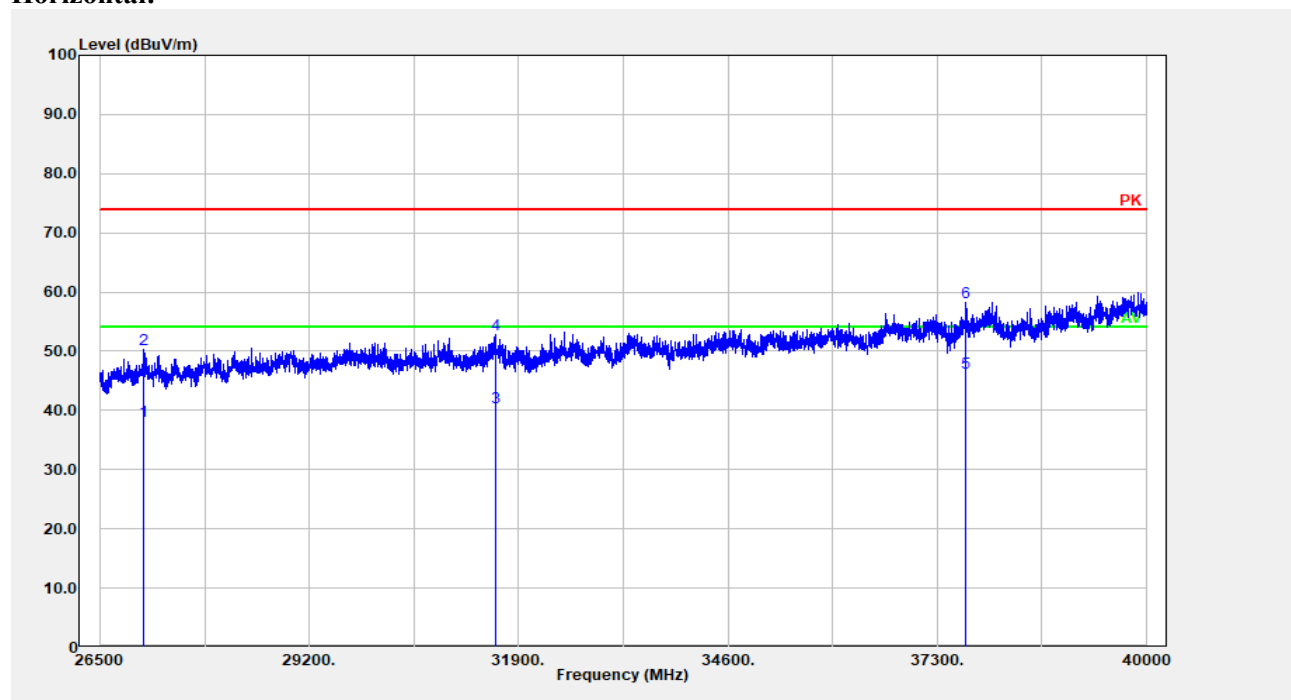
No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	1598.520	29.18	0.32	29.50	54.00	24.50	Average
2	1598.520	41.37	0.32	41.69	74.00	32.31	Peak
3	11780.160	22.21	20.02	42.23	54.00	11.77	Average
4	11780.160	34.42	20.02	54.44	74.00	19.56	Peak
5	15704.540	25.24	21.24	46.48	54.00	7.52	Average
6	15704.540	37.48	21.24	58.72	74.00	15.28	Peak

Horizontal:

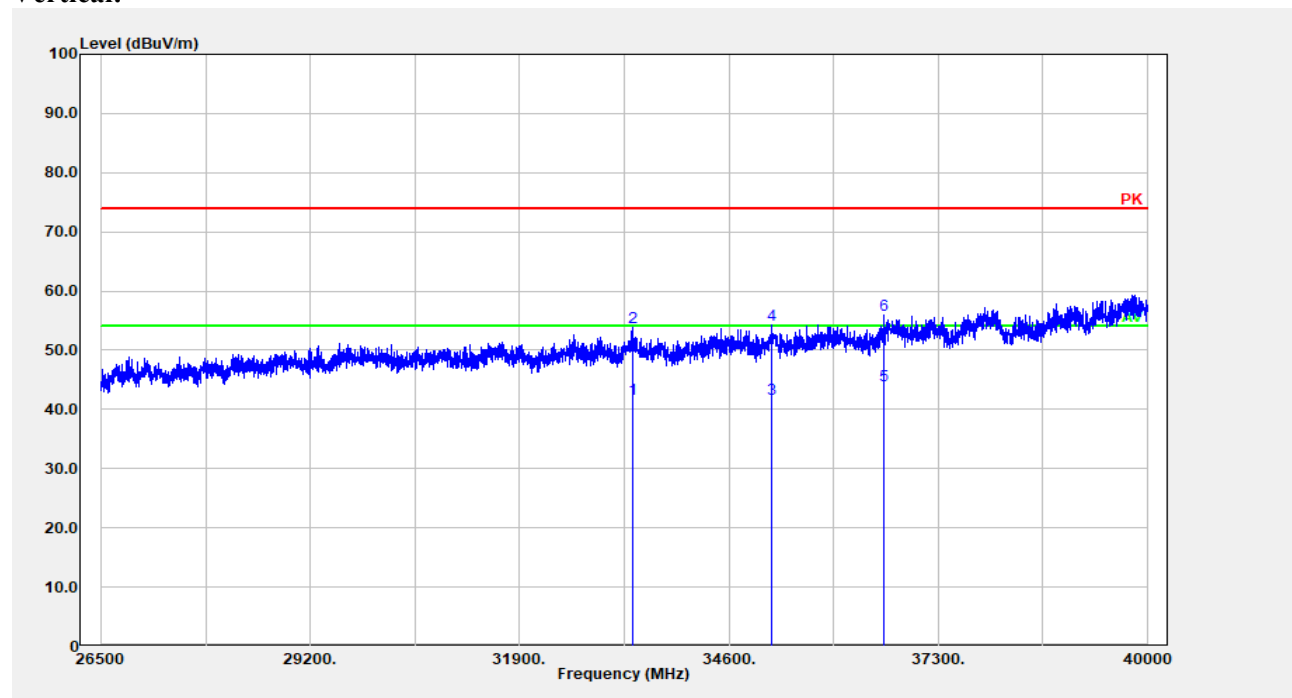
No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	23007.500	31.25	9.75	41.00	54.00	13.00	Average
2	23007.500	43.51	9.75	53.26	74.00	20.74	Peak
3	23422.380	31.37	11.17	42.54	54.00	11.46	Average
4	23422.380	43.74	11.17	54.91	74.00	19.09	Peak
5	24369.470	29.45	11.57	41.02	54.00	12.98	Average
6	24369.470	41.91	11.57	53.48	74.00	20.52	Peak

Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	19244.650	34.31	5.21	39.52	54.00	14.48	Average
2	19244.650	46.63	5.21	51.84	74.00	22.16	Peak
3	21364.970	32.38	8.39	40.77	54.00	13.23	Average
4	21364.970	44.77	8.39	53.16	74.00	20.84	Peak
5	23427.490	30.18	11.18	41.36	54.00	12.64	Average
6	23427.490	42.37	11.18	53.55	74.00	20.45	Peak

Horizontal:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	27061.710	18.10	20.12	38.22	54.00	15.78	Average
2	27061.710	30.21	20.12	50.33	74.00	23.67	Peak
3	31598.620	20.31	20.09	40.40	54.00	13.60	Average
4	31598.620	32.63	20.09	52.72	74.00	21.28	Peak
5	37661.330	21.06	25.19	46.25	54.00	7.75	Average
6	37661.330	33.14	25.19	58.33	74.00	15.67	Peak

Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	33353.970	21.14	20.52	41.66	54.00	12.34	Average
2	33353.970	33.28	20.52	53.80	74.00	20.20	Peak
3	35144.430	20.47	21.34	41.81	54.00	12.19	Average
4	35144.430	32.94	21.34	54.28	74.00	19.72	Peak
5	36602.720	20.04	23.94	43.98	54.00	10.02	Average
6	36602.720	32.09	23.94	56.03	74.00	17.97	Peak

*****END OF REPORT*****