



TEST REPORT

Reference No...... : WTF23F09194487W
FCC ID : 2A78BHU25-02H
Applicant..... : GUANGDONG KEGAO ELECTRONICS CO.,LTD.
Address..... : No.39 East Science & Technology Ave. Zone A Shishan Science
&Technology Industrial Park, Nanhai District, Foshan, Guangdong,
P.R.China.
Manufacturer : The same as above
Address..... : The same as above
Product Name..... : Humidifier
Model No...... : HU25-02H, HU25-03E, HU35-02G, HU35-03C
Test specification..... : FCC CFR47 Part 15 Subpart C (Section 15.247):2021
Date of Receipt sample : 2023-09-06
Date of Test : 2023-09-07 to 2023-09-19
Date of Issue..... : 2023-10-30
Test Report Form No. : WEW-15247A-01A
Test Result..... **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Foshan) Co., Ltd.

Address: No.13-19, 2/F., 2nd Building, Sunlink International Machinery City,
Chencun, Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398

Fax:+86-757-23811381

E-mail:info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Danny Zhou



1 Revision History

Test Report No.	Date of Issue	Description	Status
WTF23F09194487W	2023-10-30	Original	Valid

WALTEK



2 Contents

	Page
1 REVISION HISTORY.....	2
2 CONTENTS	3
3 GENERAL INFORMATION.....	4
3.1 GENERAL DESCRIPTION OF E.U.T	4
3.2 TECHNICAL CHARACTERISTICS OF EUT	4
3.3 STANDARDS APPLICABLE FOR TESTING.....	4
3.4 TEST FACILITY	5
3.5 SUBCONTRACTED	5
3.6 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4 EUT SETUP AND TEST MODE.....	6
5 EQUIPMENT USED DURING TEST.....	7
5.1 EQUIPMENT LIST	7
5.2 TEST SOFTWARE	8
5.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
5.4 MEASUREMENT UNCERTAINTY	8
6 SUMMARY OF TEST RESULT	9
6.1 ANTENNA REQUIREMENT	10
6.2 RADIATED SPURIOUS EMISSIONS	11
6.3 POWER SPECTRAL DENSITY	21
6.4 DTS BANDWIDTH.....	25
6.5 RF OUTPUT POWER.....	29
6.6 OUT OF BAND EMISSIONS.....	34
6.7 CONDUCTED EMISSIONS.....	45
7 PHOTOGRAPHS TEST SETUP	49
7.1 PHOTOGRAPHS - RADIATED EMISSION TEST SETUP	49
7.2 PHOTOGRAPHS – CONDUCTED EMISSION TEST SETUP	50
8 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	51
8.1 EUT - EXTERNAL PHOTOS.....	51
8.2 EUT - INTERNAL PHOTOS.....	58



3 General Information

3.1 General Description of E.U.T

Product Name	: Humidifier
Model No.	: HU25-02H, HU25-03E, HU35-02G, HU35-03C
Model Description	: All models are identical except for the appearance and color. Therefore the full tests were performed on model HU25-02H.
Rating	: DC 24V, 1A
Battery Capacity	: ---
Power Adapter	: ES088L-US-2400100 Input: 100-240V~, 50-60Hz, 0.9A; Output: DC 24V, 1A

3.2 Technical Characteristics of EUT

Support Standards	: 802.11b, 802.11g, 802.11n
Frequency Range	: 2412-2462MHz for 802.11b/g/n(HT20)
RF Output Power	: 16.29dBm (Conducted)
Modulation	: 802.11b: DSSS(DBPSK/DQPSK/CCK) 802.11g/n: OFDM (BPSK/QPSK/16QAM/64QAM)
Data Rate	: 1Mbps for 802.11b; 54Mbps for 802.11g; MCS7 for 802.11n
Quantity of Channels	: 11 for 802.11b/g/n(HT20)
Channel Separation	: 5MHz
Type of Antenna	: PCB Printed Antenna
Antenna Gain	: 1.20dBi

3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC Rules Part 15.247	Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules
662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices



3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895, March 12, 2019

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106, August 16, 2018

- **FCC – Designation No.: CN5034**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation No. CN5034.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

3.6 Abnormalities from Standard Conditions

None.



4 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List

Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz, High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz, High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz, High:2462MHz

Test Conditions

Temperature:	22~25°C
Relative Humidity:	50~55%
Atmospheric pressure:	101.8kPa

WALTEK



5 Equipment Used during Test

5.1 Equipment List

☐ Conducted Emissions 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101343	2023-01-05	2024-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2023-01-05	2024-01-04
4.	Switch	CD	RSU-A4 18G	RSUA4008	2023-01-05	2024-01-04
☒ Conducted Emissions 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101215	2023-01-05	2024-01-04
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	6102701	2023-01-05	2024-01-04
4.	Switch	ESE	RSU/M2	---	2023-01-05	2024-01-04
☐ Conducted Emissions 3#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal Date	Cal Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2023-01-05	2024-01-04
2.	LISN	R&S	ENV216	101542	2023-01-05	2024-01-04
3.	Cable	YIHENG	LMR195UF-NMNM-2.5	---	2023-01-05	2024-01-04
4.	Manual RF Switch	YIHENG	SW-2	RSU0402	2023-01-05	2024-01-04
☒ Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2021-01-11	2024-01-10
2.	EMI Test Receiver	RS	ESR7	101566	2023-01-05	2024-01-04
3.	EMC Analyzer	Agilent	N9020A	MY48011796	2023-05-15	2024-05-14
4.	Active Loop Antenna	SCHWARZBECK	FMZB1519B	00004	2023-01-05	2024-01-04
5.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2023-03-10	2024-03-09
6.	Coaxial Cable (below 1GHz)	H+S	CBL3-NN-12+3 m	214NN320	2023-01-06	2024-01-05
7.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2023-01-06	2024-01-05
8.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	01119	2023-01-06	2024-01-05
9.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2023-01-05	2024-01-04
10.	Amplifier	Lunar E M	LNA1G18-40	20160501002	2023-01-05	2024-01-04



☒ RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY48011796	2023-05-15	2024-05-14
2.	Analog Signal Generator	Agilent	N5181A	MY48180720	2023-01-05	2024-01-04
3.	RF Control Unit	CHANGCHUANG	JS0806-2	-	2023-01-06	2024-01-05

☐: Not Used

☒: Used

5.2 Test Software

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-EMC	CON-03A1
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	COM 3A1.1
EMI Test Software (Radiated Emission)	FARATRONIC	EZ-EMC	RA-03A1-1
RF Conducted Test Software	TONSCEND	JS1120-2	V2.6

5.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.
1.	/	/	/	/

5.4 Measurement Uncertainty

Parameter	Uncertainty
RF Output Power	±2.2dB
Occupied Bandwidth	±1.5%
Conducted Emission	±2.6dB
Transmitter Spurious Emission	±3.8dB (for 25MHz-1GHz)
	±5.0dB (for 1GHz-18GHz)



6 Summary of Test Result

Test Items	FCC Rules	Result
Antenna Requirement	§15.203; §15.247(b)(4)(i)	Compliant
Restricted Band of Operation	§15.205	Compliant
Conducted Emissions	§15.207(a)	Compliant
Radiated Spurious Emissions	§15.209(a)	Compliant
Power Spectral Density	§15.247(e)	Compliant
DTS Bandwidth	§ 15.247(a)(2)	Compliant
RF Output Power	§15.247(b)(3)	Compliant
Band edge (Out of Band Emissions)	§15.247(d)	Compliant

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

WALTEK



6.1 Antenna Requirement

6.1.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Evaluation Information

The EUT has an PCB Printed Antenna, the gain is 1.20dBi, fulfil the requirement of this section.





6.2 Radiated Spurious Emissions

6.2.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

6.2.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz.

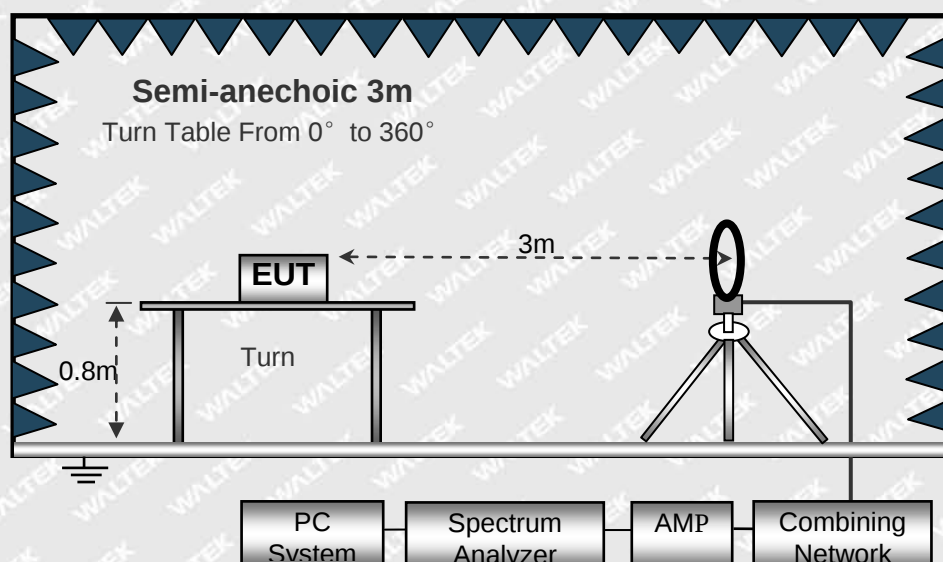




The test setup for emission measurement from 30 MHz to 1 GHz.

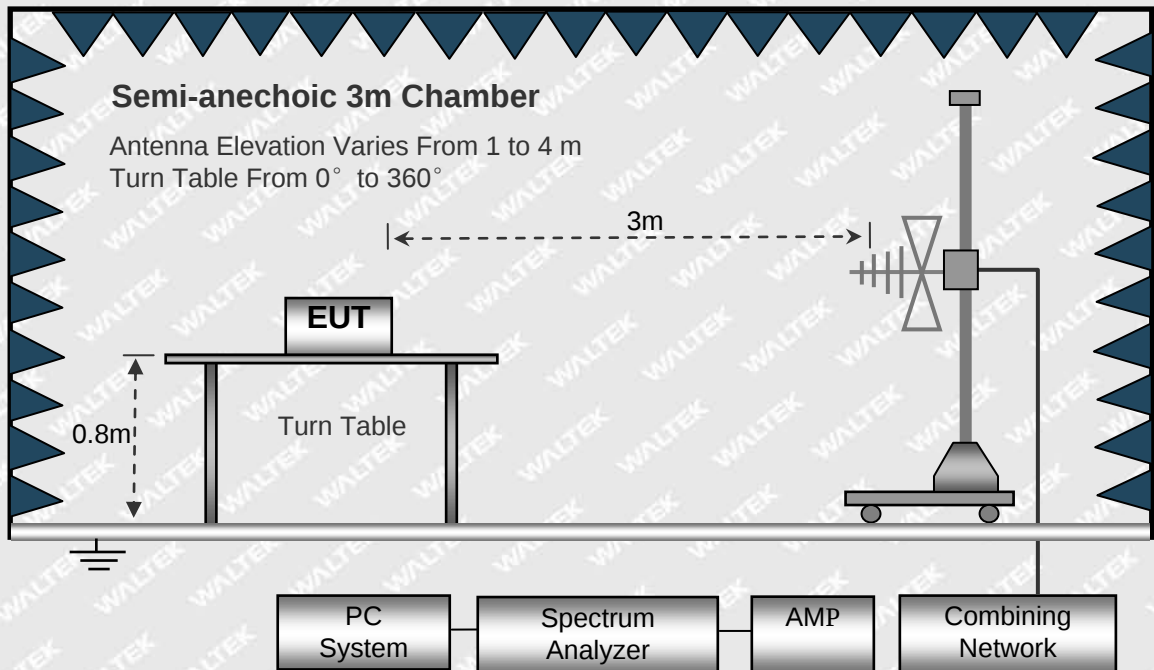

The test setup for emission measurement above 1 GHz.

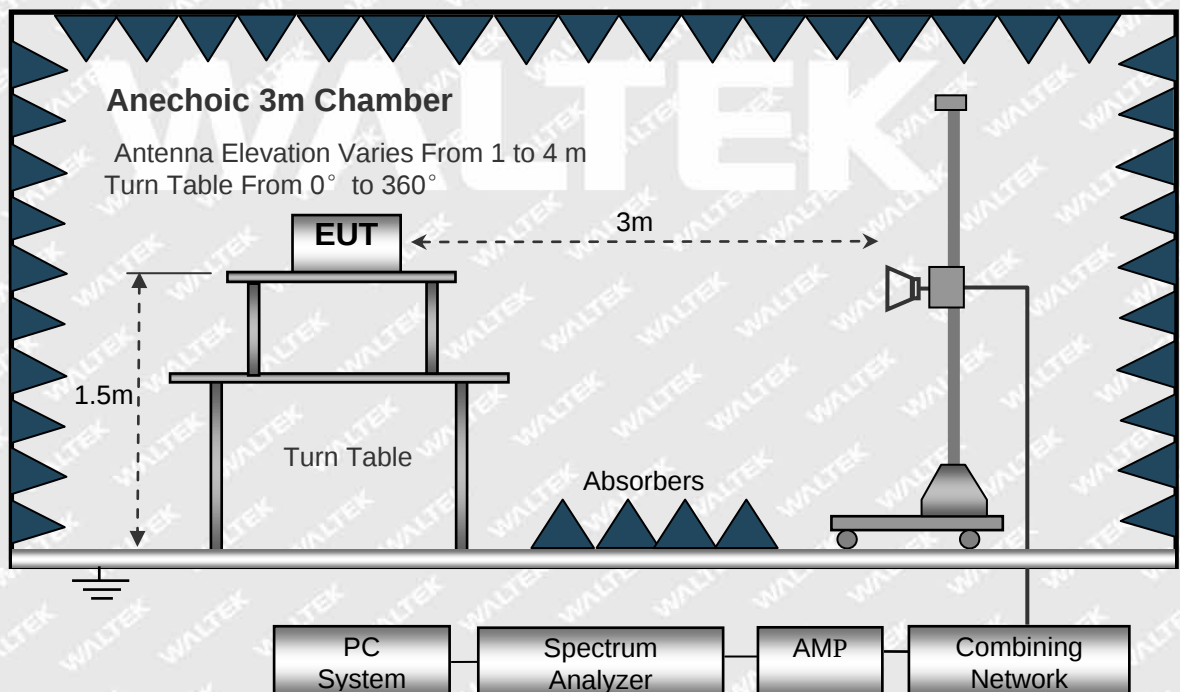



6.2.3 Spectrum Analyzer Setup

9KHz-30MHz

RBW=10kHz

VBW=30kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak

30MHz-1GHz

RBW=120kHz

VBW=300kHz

Sweep time=Auto

Trace=Max hold

Detector function=peak, QP

Above 1GHz

RBW=1MHz

VBW=3MHz(Peak), 10MHz(AV)

Sweep time=Auto

Trace=Max hold

Detector function=peak, AV

6.2.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$




6.2.5 Test Results

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Frequency: Below 1GHz

Test Mode: 802.11b (worst case)


Test Channel Low Channel Polarization Vertical

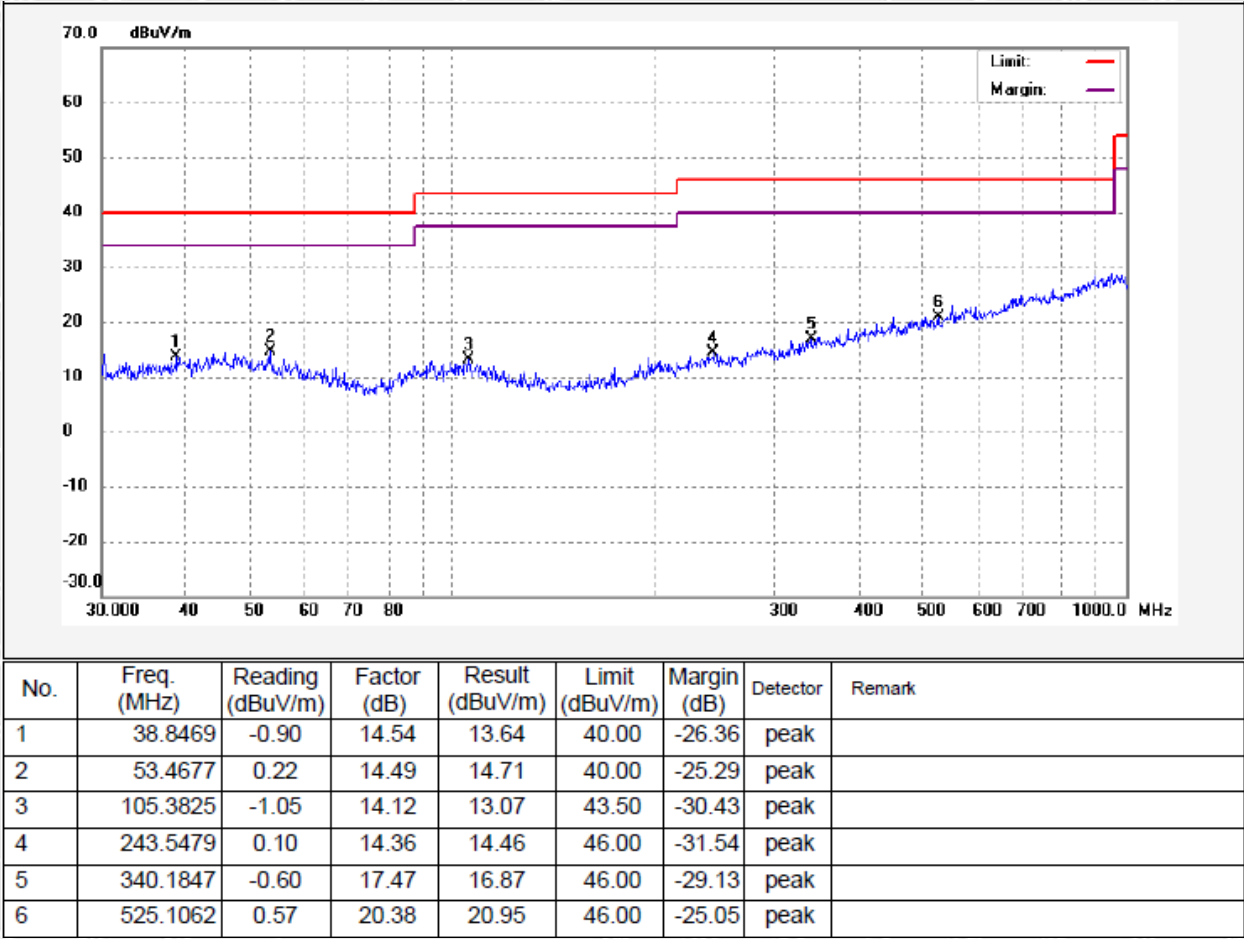



Test Channel Low Channel


Polarization Horizontal

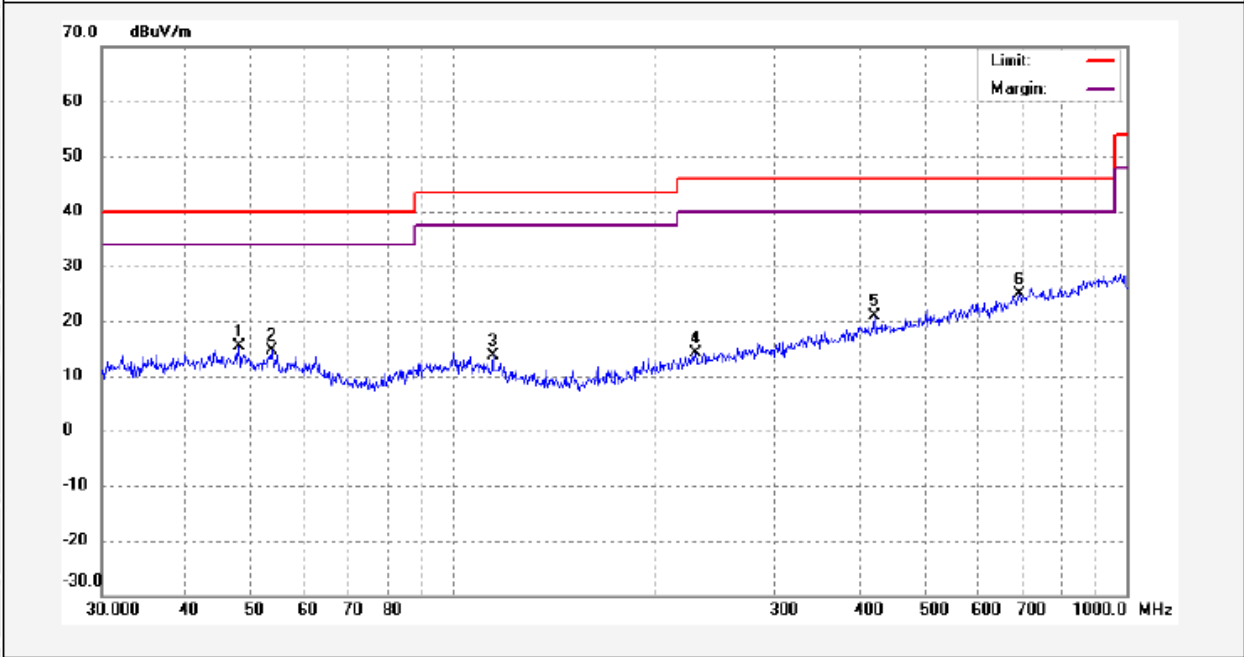

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	48.0950	0.11	15.15	15.26	40.00	-24.74	peak	
2	53.7685	0.16	14.44	14.60	40.00	-25.40	peak	
3	114.5949	1.02	12.69	13.71	43.50	-29.79	peak	
4	228.7309	0.44	13.77	14.21	46.00	-31.79	peak	
5	423.3917	1.90	18.96	20.86	46.00	-25.14	peak	
6	693.4441	1.36	23.57	24.93	46.00	-21.07	peak	




Test Channel Middle Channel Polarization Vertical

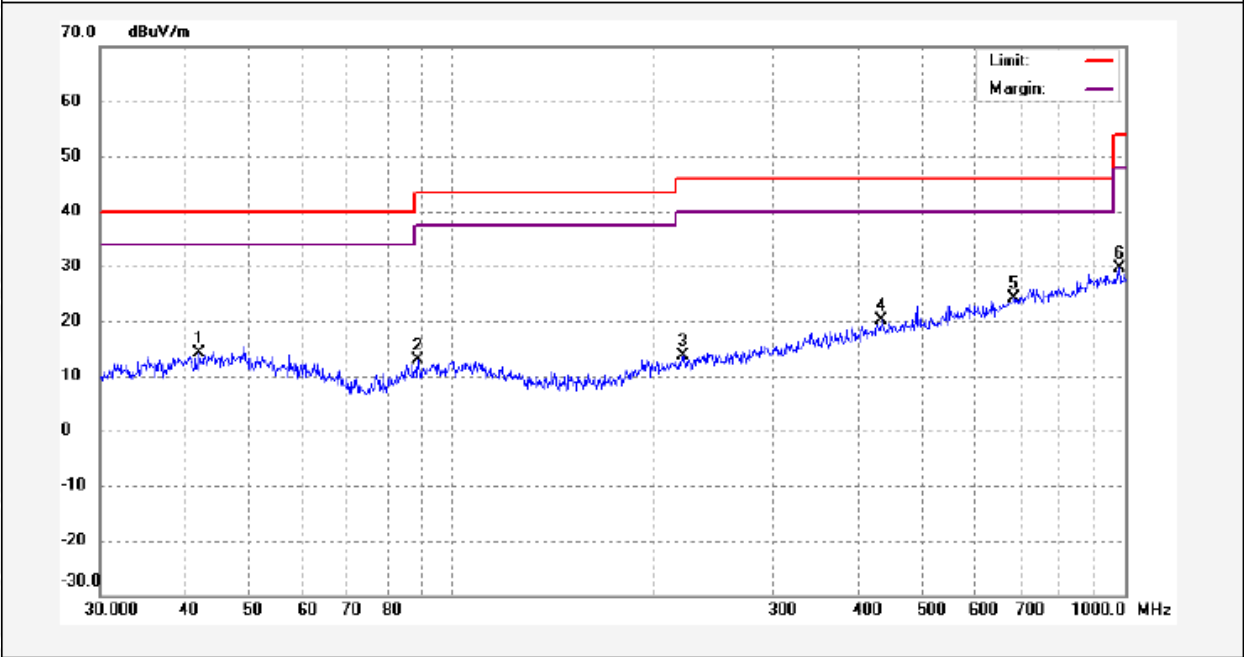

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	42.2874	-0.97	15.15	14.18	40.00	-25.82	peak	
2	88.9950	0.18	12.59	12.77	43.50	-30.73	peak	
3	219.9219	0.12	13.49	13.61	46.00	-32.39	peak	
4	434.8267	1.01	19.08	20.09	46.00	-25.91	peak	
5	683.0666	0.74	23.44	24.18	46.00	-21.82	peak	
6	981.2427	2.60	27.11	29.71	54.00	-24.29	peak	



Test Channel Middle Channel Polarization Horizontal

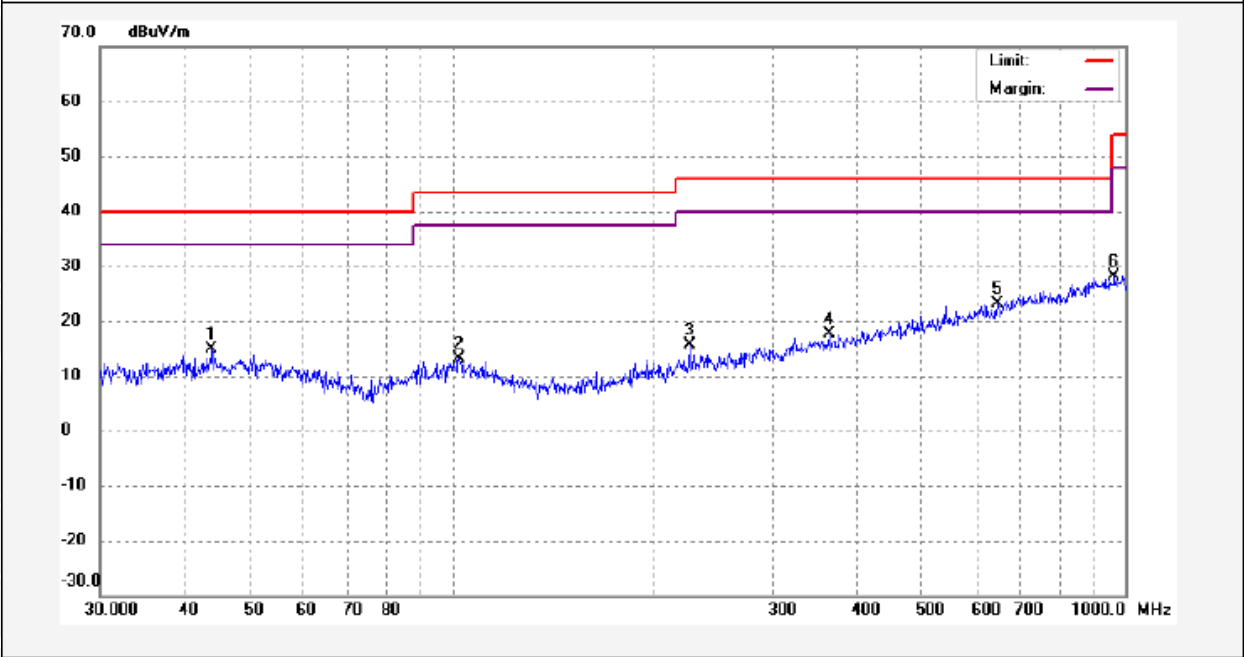


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	44.0429	-0.58	15.42	14.84	40.00	-25.16	peak	
2	102.3955	-0.93	14.00	13.07	43.50	-30.43	peak	
3	225.4660	1.93	13.63	15.56	46.00	-30.44	peak	
4	363.2391	0.33	17.30	17.63	46.00	-28.37	peak	
5	647.1586	0.72	22.45	23.17	46.00	-22.83	peak	
6	964.8651	1.42	26.82	28.24	54.00	-25.76	peak	



Test Channel High Channel

Polarization Vertical

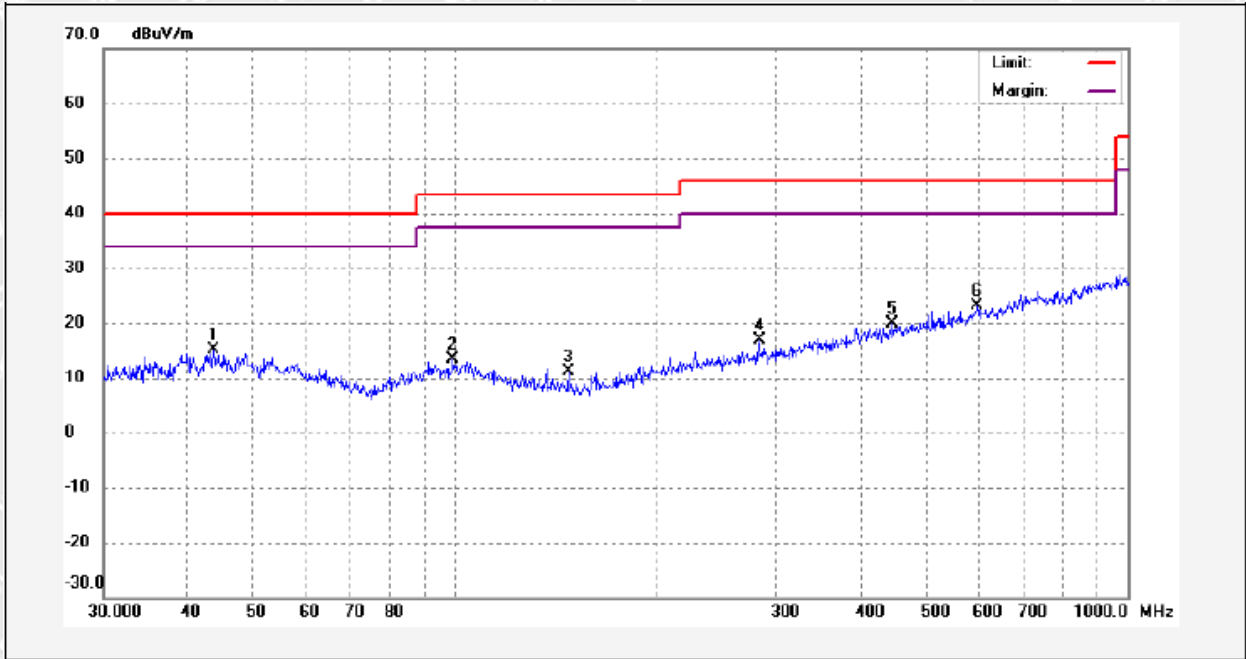


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	43.6738	-0.33	15.37	15.04	40.00	-24.96	peak	
2	99.3189	-0.44	13.78	13.34	43.50	-30.16	peak	
3	147.5070	0.93	10.31	11.24	43.50	-32.26	peak	
4	283.0844	1.57	15.32	16.89	46.00	-29.11	peak	
5	447.6681	0.85	19.15	20.00	46.00	-26.00	peak	
6	598.6911	1.17	21.84	23.01	46.00	-22.99	peak	



Test Channel High Channel

Polarization Horizontal

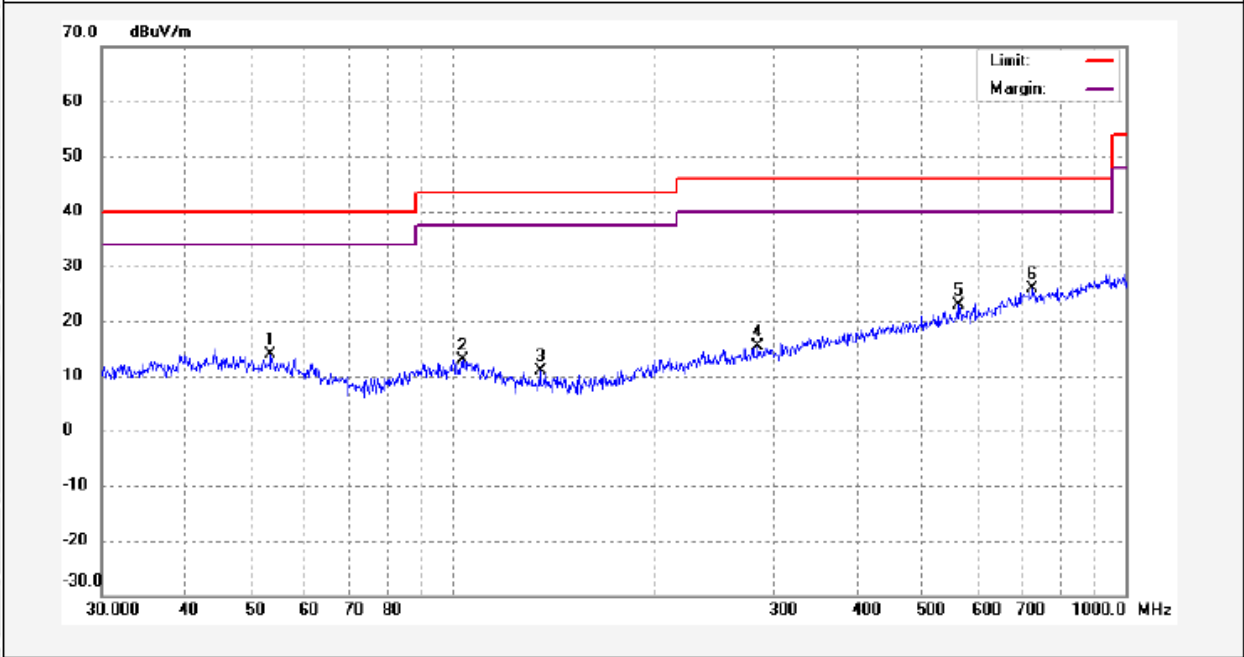

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	53.5428	-0.71	14.48	13.77	40.00	-26.23	peak	
2	103.3334	-1.20	14.07	12.87	43.50	-30.63	peak	
3	134.8899	0.22	10.55	10.77	43.50	-32.73	peak	
4	284.9767	0.03	15.37	15.40	46.00	-30.60	peak	
5	563.4521	1.89	20.88	22.77	46.00	-23.23	peak	
6	727.8254	1.57	24.40	25.97	46.00	-20.03	peak	

**Test Frequency: Above 1GHz****Test Mode: 802.11b (worst case)**

Frequency (MHz)	Reading (dBμV/m)	Detector	Polar (H/V)	Corrected Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel							
4824	42.18	Peak	H	-3.59	38.59	74	-35.41
4824	32.54	AVG	H	-3.59	28.95	54	-25.05
7236	45.92	Peak	H	3.07	48.99	74	-25.01
7236	36.23	AVG	H	3.07	39.3	54	-14.7
4824	40.53	Peak	V	-3.46	37.07	74	-36.93
4824	31.95	AVG	V	-3.46	28.49	54	-25.51
7236	45.33	Peak	V	2.97	48.3	74	-25.7
7236	36.34	AVG	V	2.97	39.31	54	-14.69
Middle Channel							
4874	42.09	Peak	H	-3.41	38.68	74	-35.32
4874	33.19	AVG	H	-3.41	29.78	54	-24.22
7311	45.05	Peak	H	3.23	48.28	74	-25.72
7311	35.76	AVG	H	3.23	38.99	54	-15.01
4874	40.74	Peak	V	-3.26	37.48	74	-36.52
4874	32.01	AVG	V	-3.26	28.75	54	-25.25
7311	45.82	Peak	V	3.13	48.95	74	-25.05
7311	35.51	AVG	V	3.13	38.64	54	-15.36
High Channel							
4924	42.64	Peak	H	-3.24	39.4	74	-34.6
4924	32.31	AVG	H	-3.24	29.07	54	-24.93
7386	45.46	Peak	H	3.38	48.84	74	-25.16
7386	36.67	AVG	H	3.38	40.05	54	-13.95
4924	41.35	Peak	V	-3.06	38.29	74	-35.71
4924	32.34	AVG	V	-3.06	29.28	54	-24.72
7386	46.52	Peak	V	3.28	49.8	74	-24.2
7386	36.91	AVG	V	3.28	40.19	54	-13.81

Note: Testing is carried out with frequency range 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



6.3 Power Spectral Density

6.3.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).


6.3.3 Test Result

Test Mode	Test Channel(MHz)	Test Result (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-18.66	8
	2437	-13.89	8
	2462	-13.45	8
802.11g	2412	-18.43	8
	2437	-18	8
	2462	-20.67	8
802.11n (HT20)	2412	-21.14	8
	2437	-20.92	8
	2462	-19.78	8




Test plots:


802.11b_Low Channel

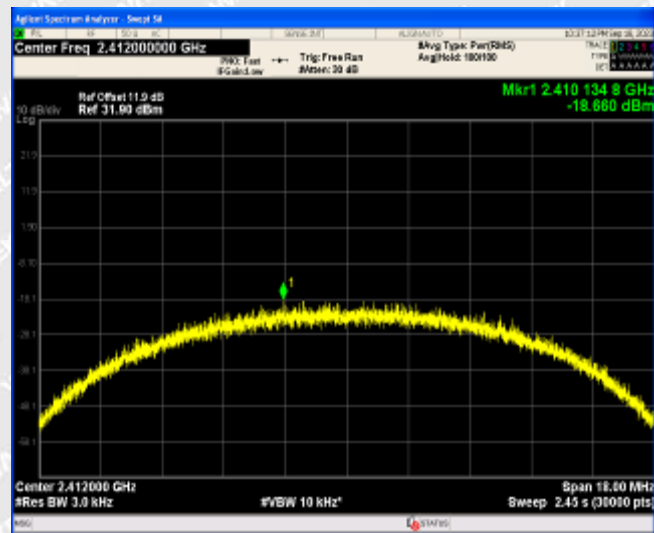

802.11b_Middle Channel

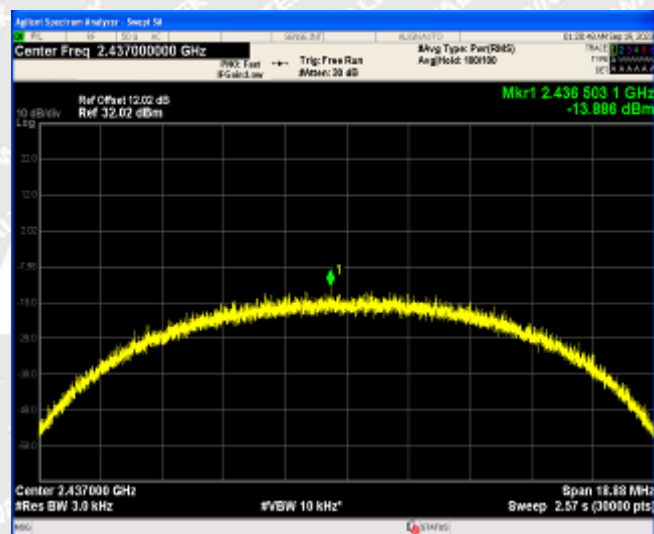


802.11b_High Channel

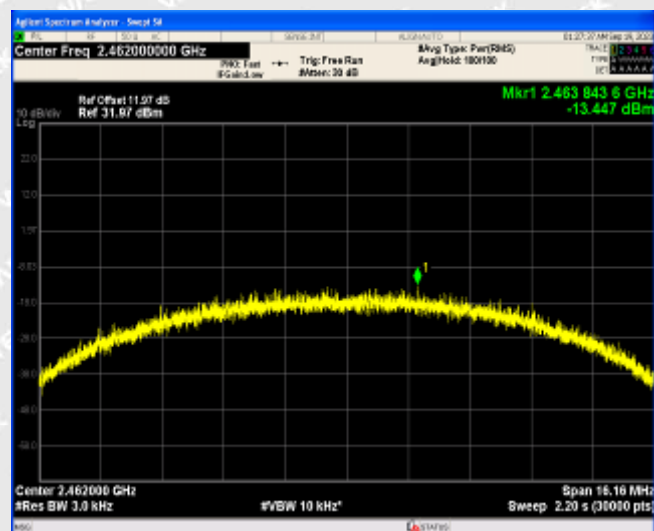





802.11g_Low Channel



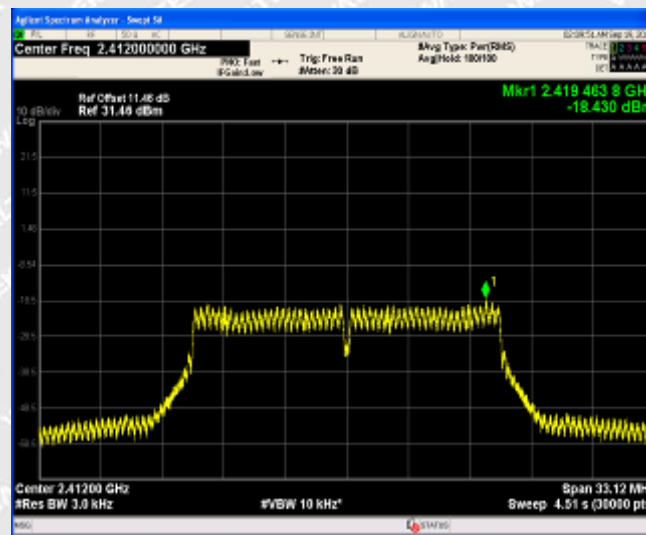


802.11g_Middle Channel

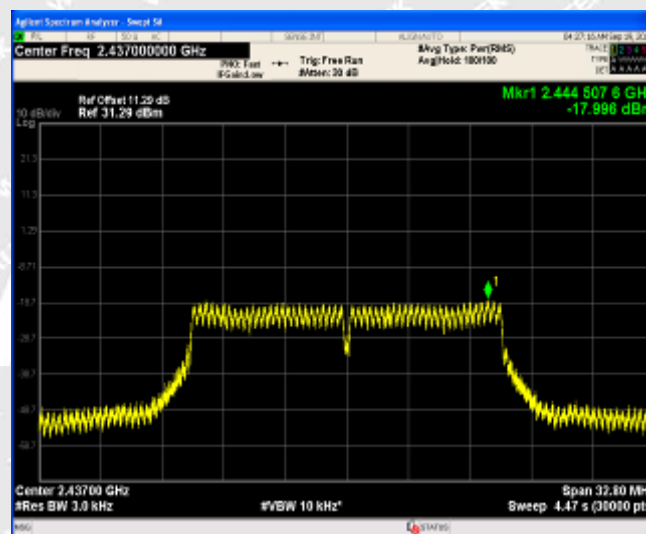

802.11g_High Channel

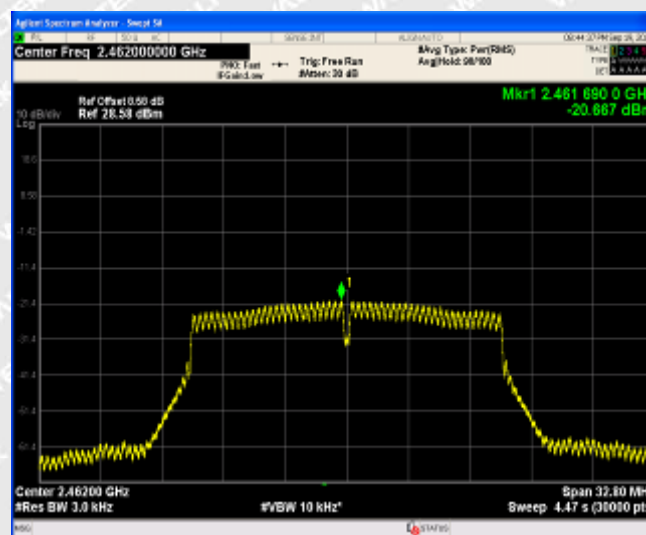

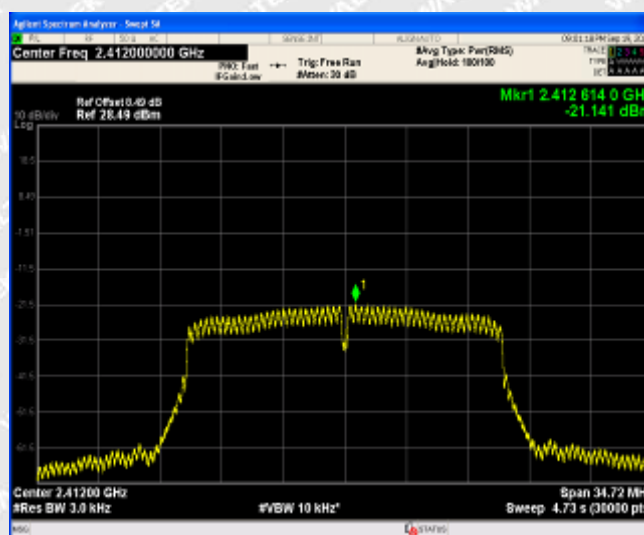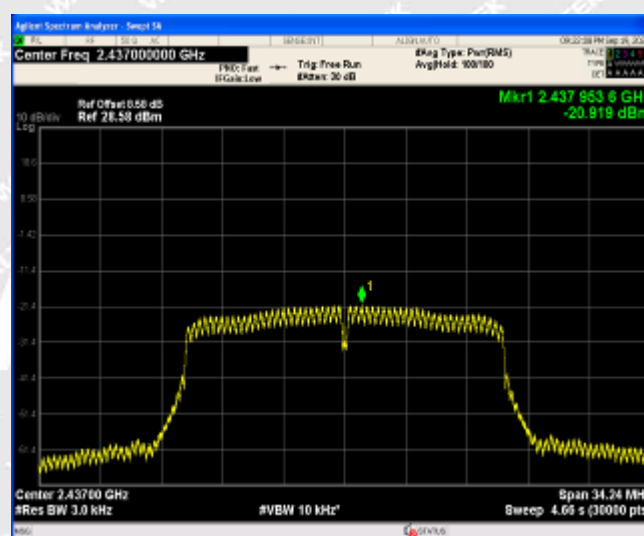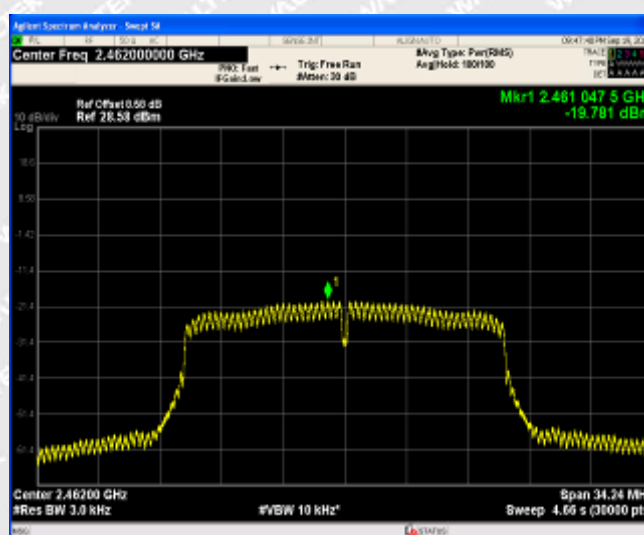**802.11n(HT20)_Low Channel****802.11n(HT20)_Middle Channel****802.11n(HT20)_High Channel**



6.4 DTS Bandwidth

6.4.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


6.4.3 Test Result

Test Mode	Test Channel (MHz)	Test Result (MHz)	Limit (kHz)
802.11b	2412	9.000	≥ 500
	2437	9.440	≥ 500
	2462	8.080	≥ 500
802.11g	2412	16.560	≥ 500
	2437	16.400	≥ 500
	2462	16.400	≥ 500
802.11n (HT20)	2412	17.360	≥ 500
	2437	17.120	≥ 500
	2462	17.120	≥ 500




Test plots:


802.11b_Low Channel

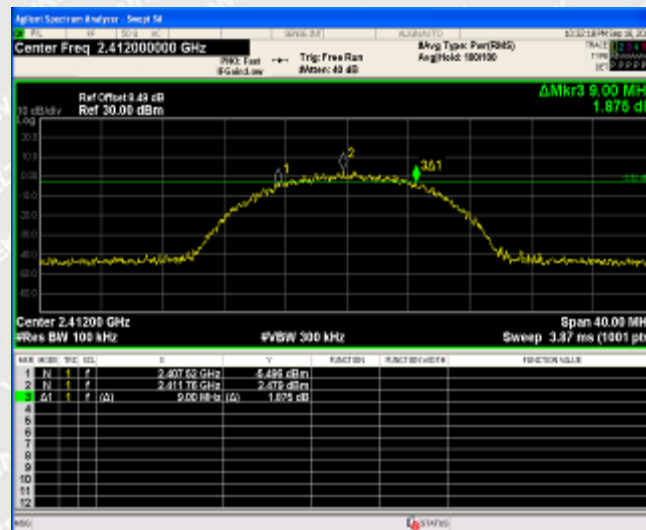

802.11b_Middle Channel

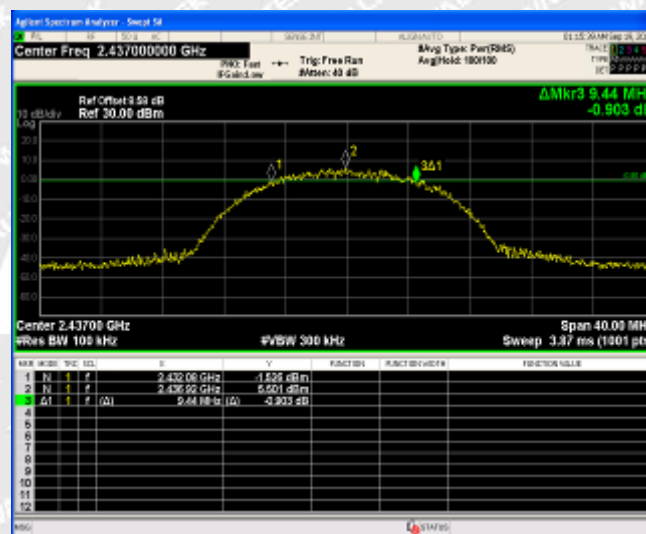


802.11b_High Channel

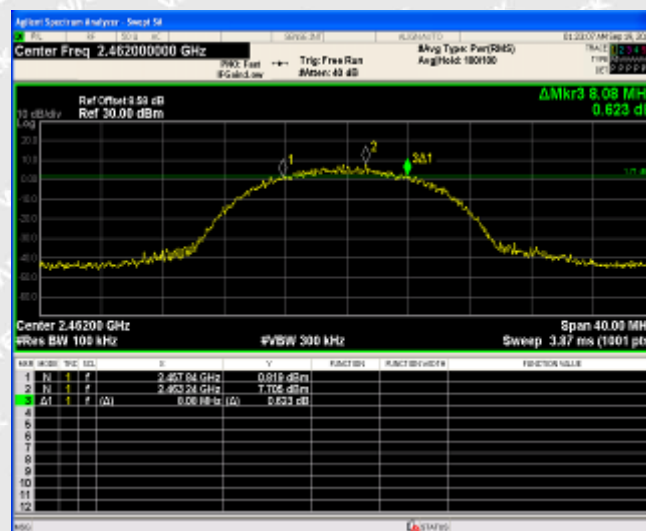





802.11g_Low Channel

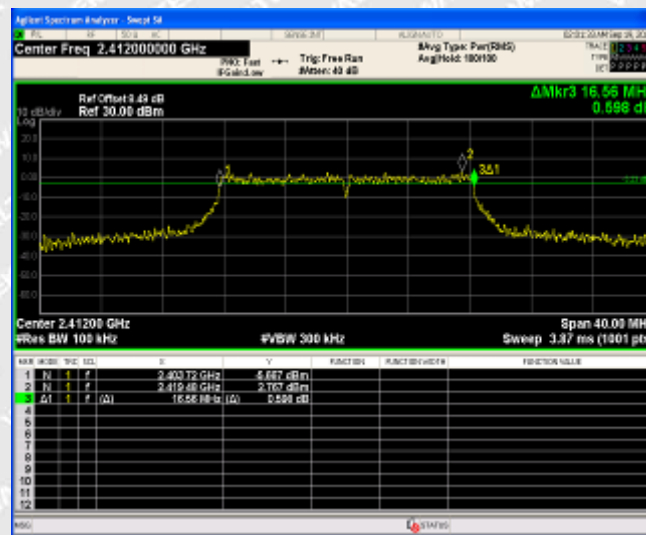

802.11g_Middle Channel

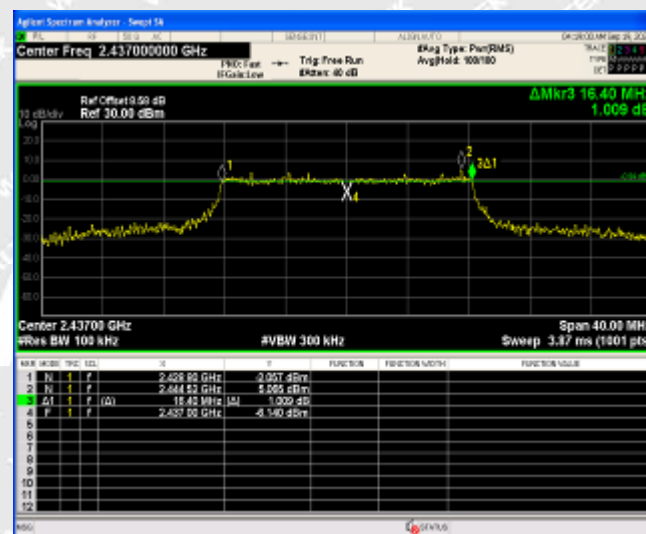


802.11g_High Channel

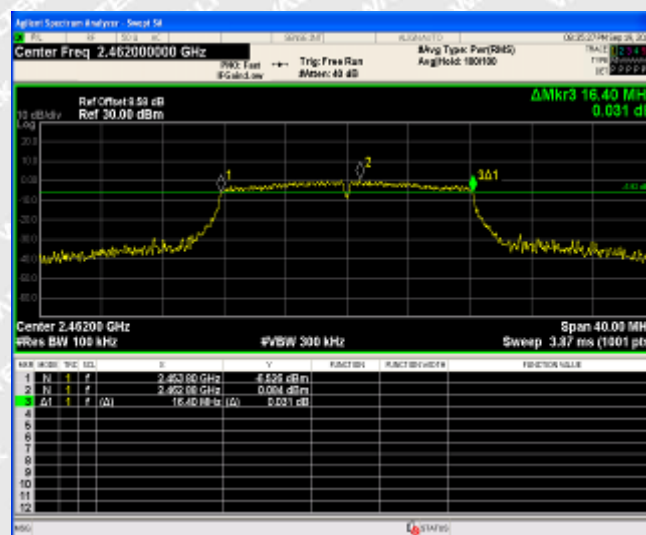





802.11n(HT20)_Low Channel

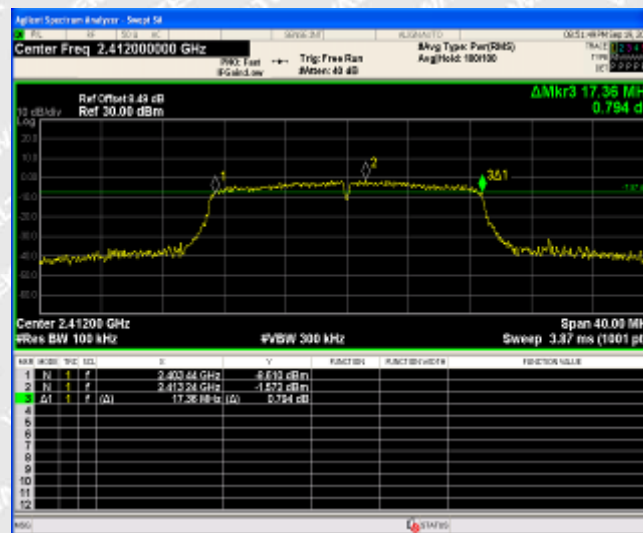

802.11n(HT20)_Middle Channel

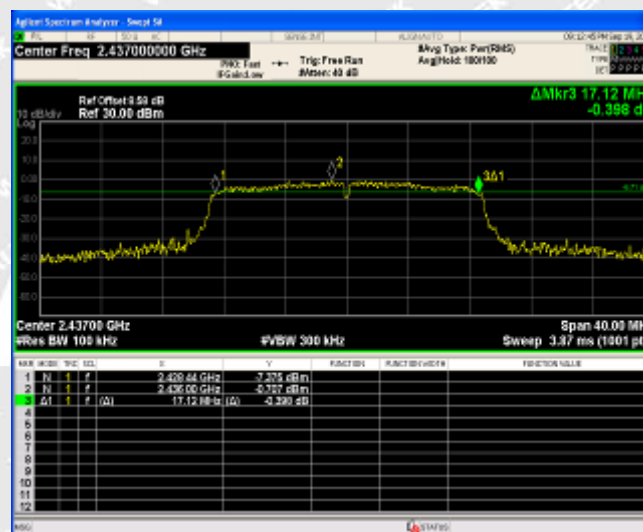

802.11n(HT20)_High Channel

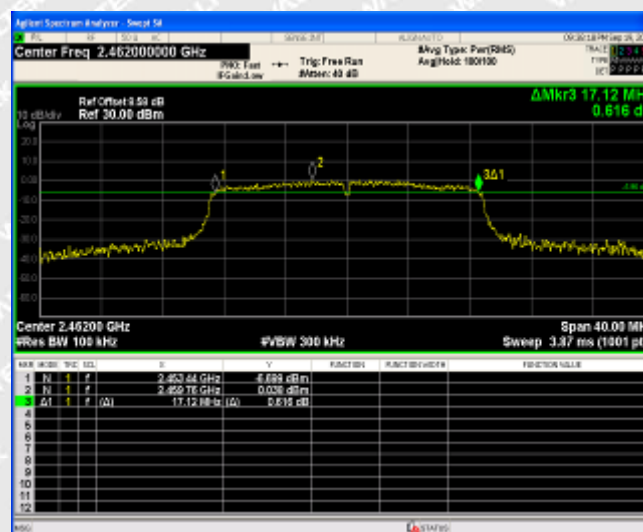



6.5 RF Output Power

6.5.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

6.5.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\geq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.



6.5.3 Test Result


Modulation	Test Channel (MHz)	Reading (dBm)	Output Power (mW)	Limit (mW)
802.11b	2412	10.29	10.69	1000
	2437	15.28	33.73	1000
	2462	16.29	42.56	1000
802.11g	2412	14.26	26.67	1000
	2437	15.24	33.42	1000
	2462	12.91	19.54	1000
802.11n (HT20)	2412	11.90	15.49	1000
	2437	12.56	18.03	1000
	2462	13.58	22.80	1000

WALTEK




Test plots:


802.11b_Low Channel



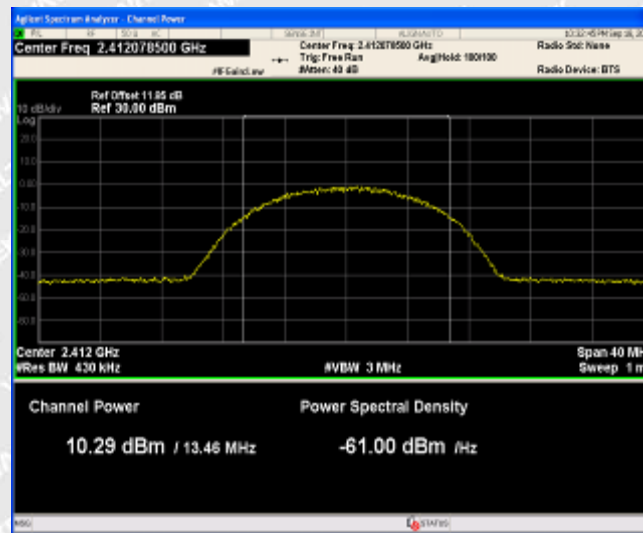





802.11b_Middle Channel

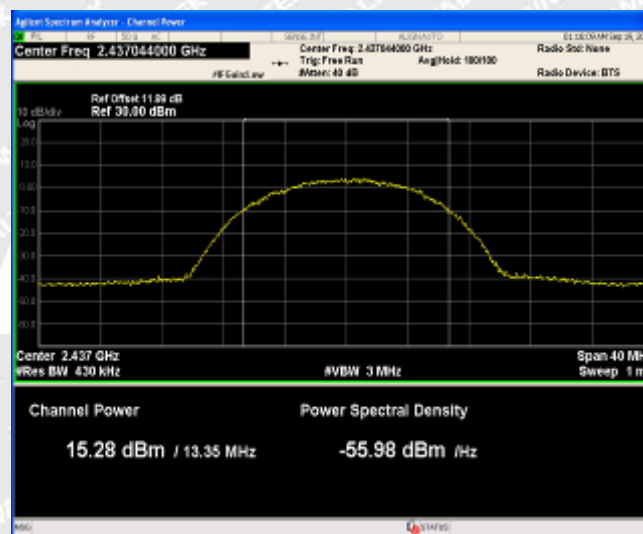

802.11b_High Channel

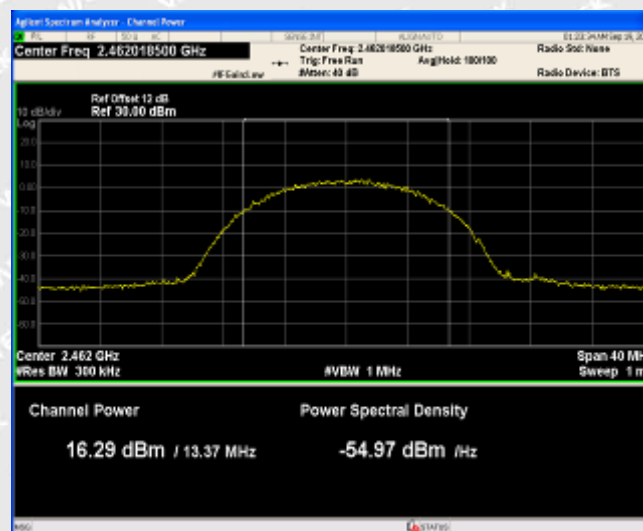

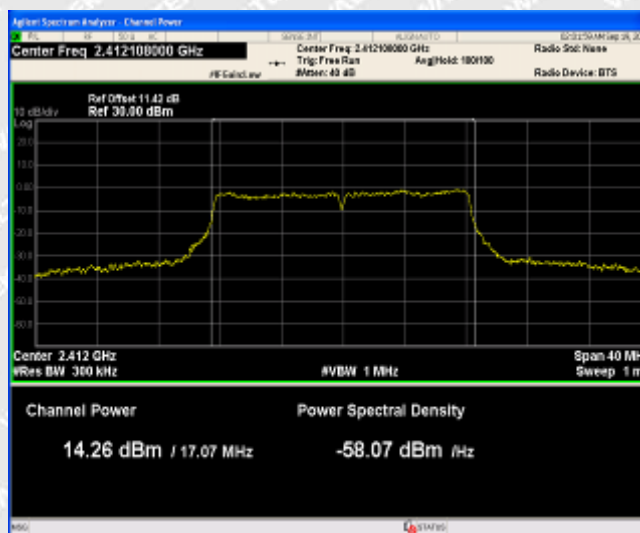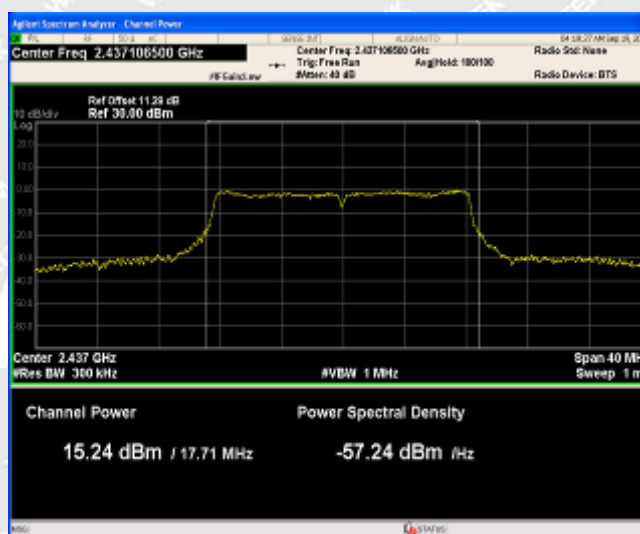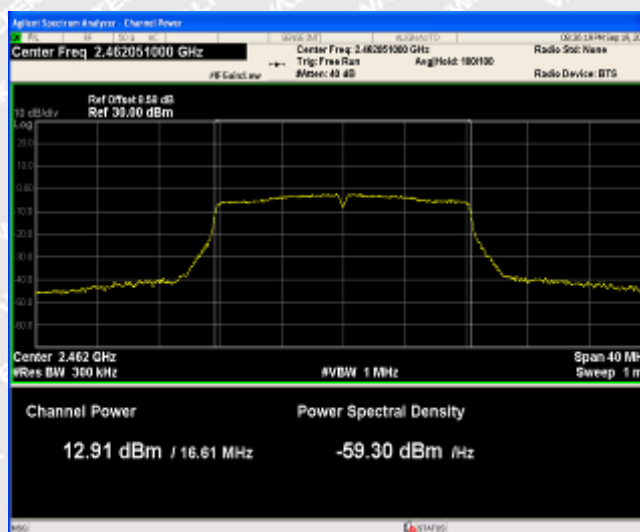**802.11g_Low Channel****802.11g_Middle Channel****802.11g_High Channel**

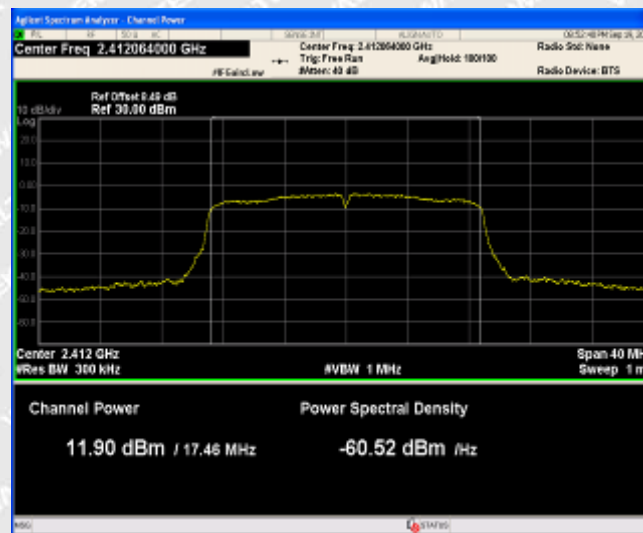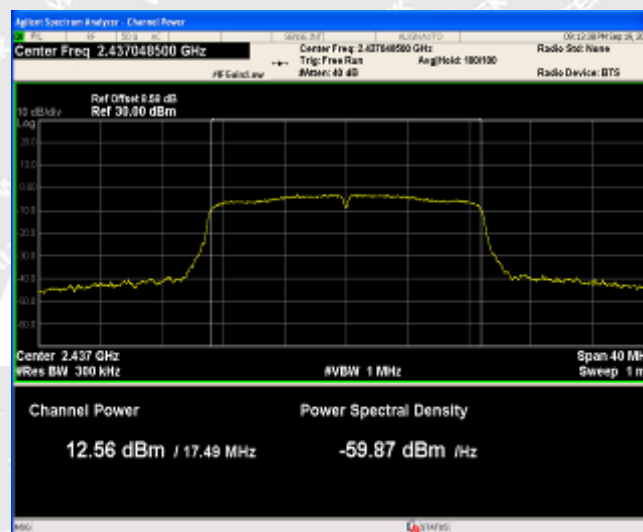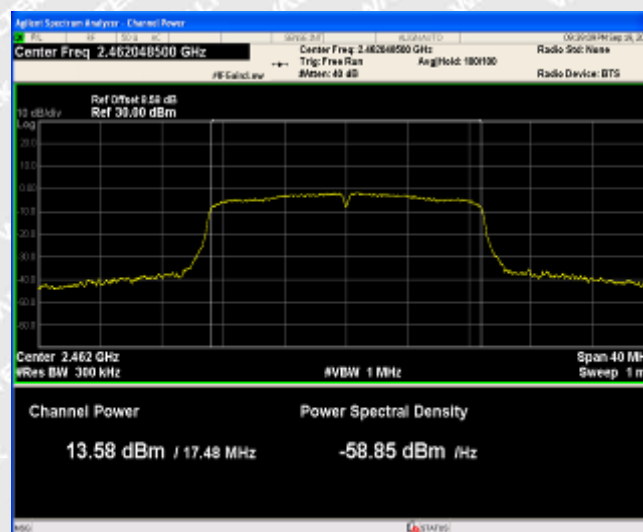**802.11n(HT20)_Low Channel****802.11n(HT20)_Middle Channel****802.11n(HT20)_High Channel**



6.6 Out of Band Emissions

6.6.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

6.6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge,

as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz

for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emissions must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.



Note that the method of measurement KDB publication number: 913591 may be used for the radiated band edge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1.




6.6.3 Test Result

Radiated Test

802.11b

Test Channel Low Channel


Polarization Horizontal (worst case)

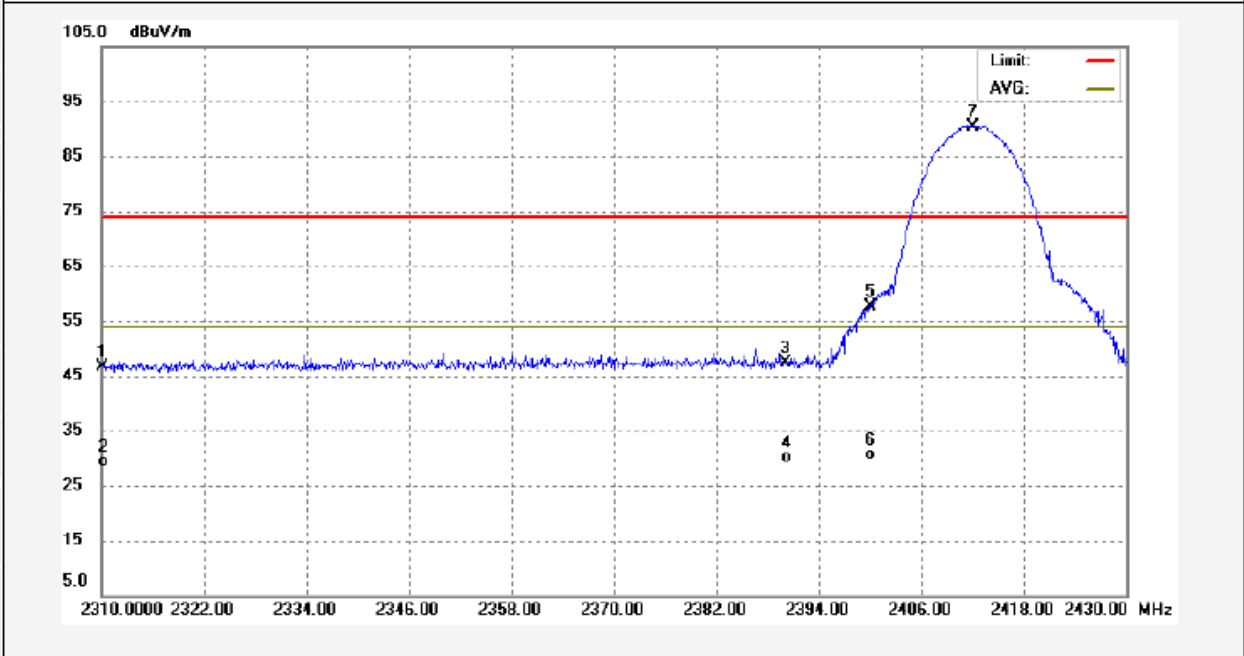

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	14.72	31.85	46.57	74.00	-27.43	peak	
2	2310.000	-2.35	31.85	29.50	54.00	-24.50	AVG	
3	2390.000	15.23	32.25	47.48	74.00	-26.52	peak	
4	2390.000	-2.14	32.25	30.11	54.00	-23.89	AVG	
5	2400.000	25.39	32.30	57.69	74.00	-16.31	peak	
6	2400.000	-1.78	32.30	30.52	54.00	-23.48	AVG	
7	2412.000	57.93	32.36	90.29	74.00	16.29	peak	




Test Channel High Channel Polarization Horizontal (worst case)

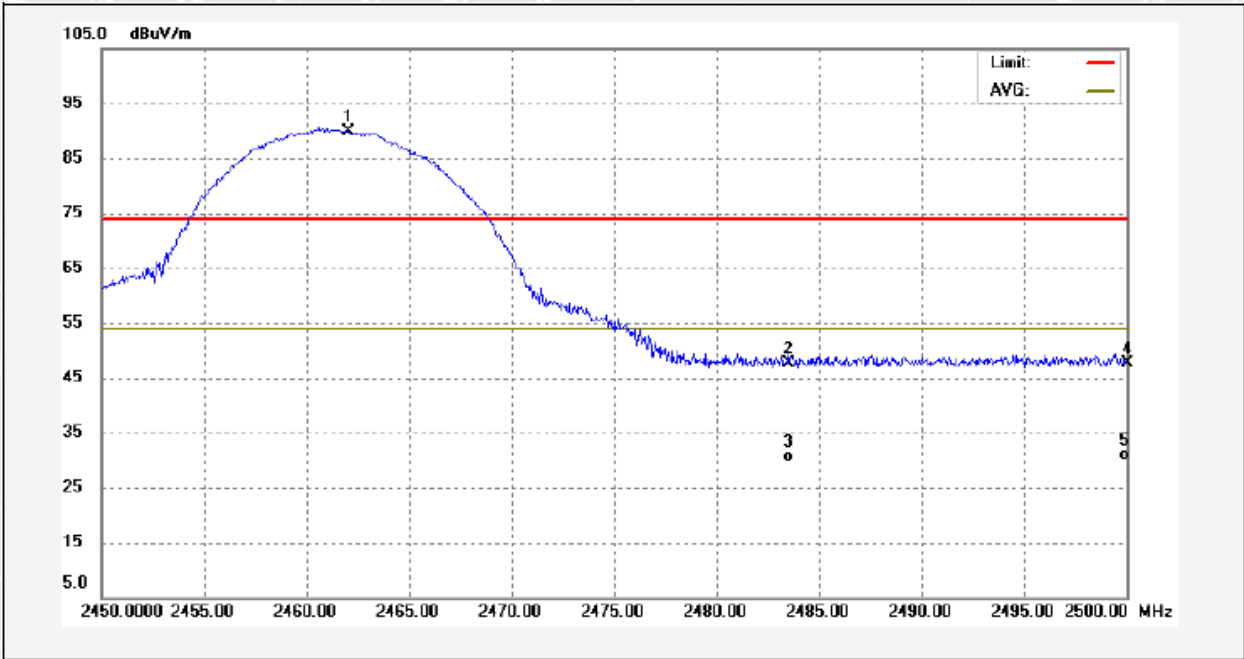

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2462.000	57.32	32.61	89.93	74.00	15.93	peak	
2	2483.500	15.03	32.72	47.75	74.00	-26.25	peak	
3	2483.500	-2.05	32.72	30.67	54.00	-23.33	AVG	
4	2500.000	14.92	32.80	47.72	74.00	-26.28	peak	
5	2500.000	-1.94	32.80	30.86	54.00	-23.14	AVG	

**802.11g****Test Channel** Low Channel**Polarization**

Horizontal (worst case)

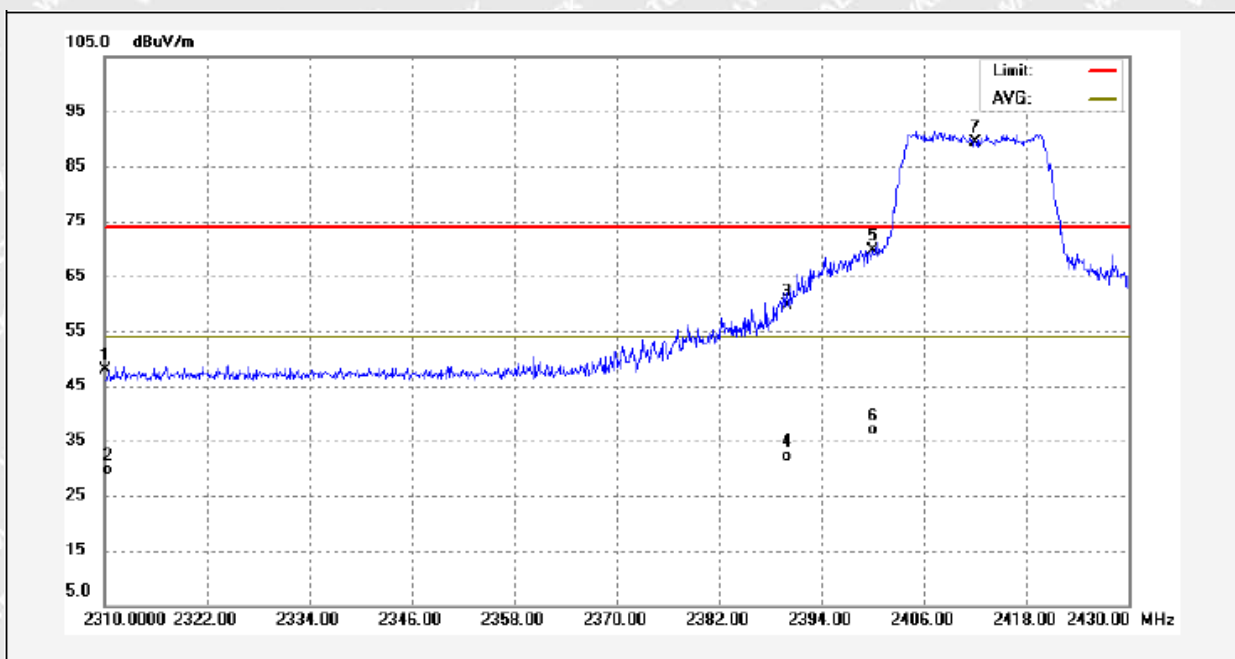


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	16.06	31.85	47.91	74.00	-26.09	peak	
2	2310.000	-2.32	31.85	29.53	54.00	-24.47	AVG	
3	2390.000	27.26	32.25	59.51	74.00	-14.49	peak	
4	2390.000	-0.23	32.25	32.02	54.00	-21.98	AVG	
5	2400.000	37.37	32.30	69.67	74.00	-4.33	peak	
6	2400.000	4.62	32.30	36.92	54.00	-17.08	AVG	
7	2412.000	56.96	32.36	89.32	74.00	15.32	peak	



Test Channel High Channel

Polarization Horizontal (worst case)

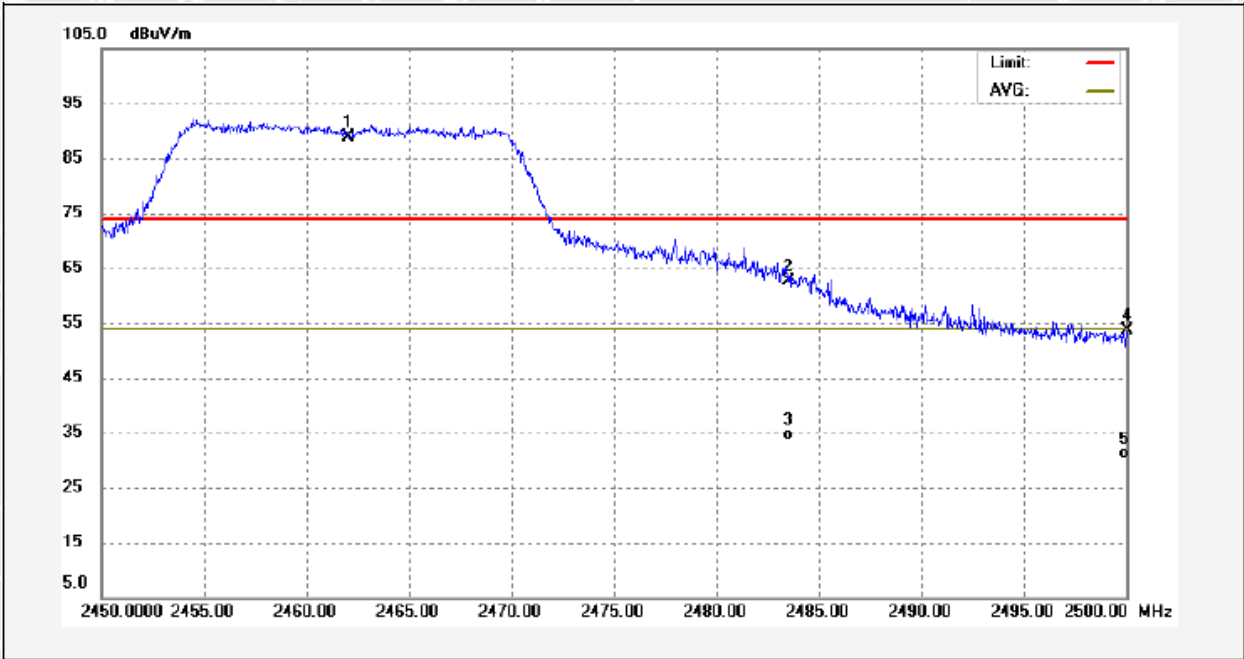


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2462.000	56.34	32.61	88.95	74.00	14.95	peak	
2	2483.500	29.95	32.72	62.67	74.00	-11.33	peak	
3	2483.500	1.96	32.72	34.68	54.00	-19.32	AVG	
4	2500.000	20.77	32.80	53.57	74.00	-20.43	peak	
5	2500.000	-1.70	32.80	31.10	54.00	-22.90	AVG	



802.11n(HT20)

Test Channel Low Channel

Polarization Horizontal (worst case)

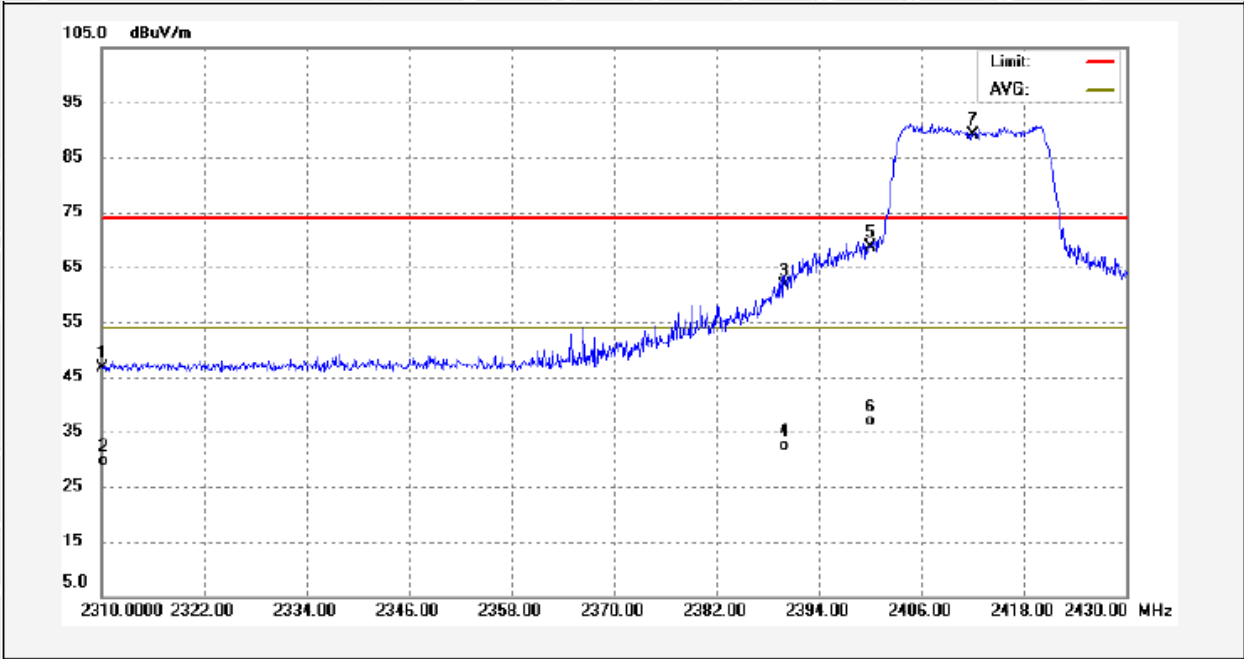


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2310.000	14.86	31.85	46.71	74.00	-27.29	peak	
2	2310.000	-2.32	31.85	29.53	54.00	-24.47	AVG	
3	2390.000	29.44	32.25	61.69	74.00	-12.31	peak	
4	2390.000	0.11	32.25	32.36	54.00	-21.64	AVG	
5	2400.000	36.33	32.30	68.63	74.00	-5.37	peak	
6	2400.000	4.59	32.30	36.89	54.00	-17.11	AVG	
7	2412.000	56.88	32.36	89.24	74.00	15.24	peak	



Test Channel High Channel

Polarization Horizontal (worst case)

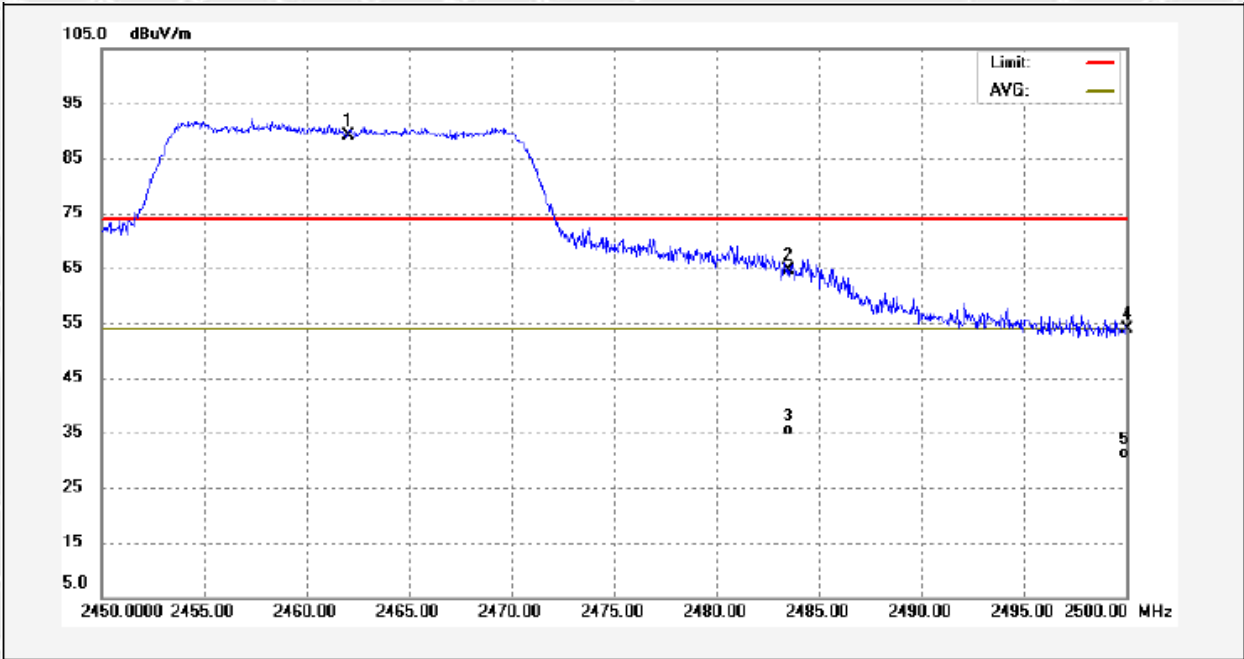

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2462.000	56.60	32.61	89.21	74.00	15.21	peak	
2	2483.500	31.84	32.72	64.56	74.00	-9.44	peak	
3	2483.500	2.73	32.72	35.45	54.00	-18.55	AVG	
4	2500.000	21.04	32.80	53.84	74.00	-20.16	peak	
5	2500.000	-1.60	32.80	31.20	54.00	-22.80	AVG	




Conducted Test


Test Mode	Channel (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
802.11b	2412	5.46	-38.34	<=-24.54	Pass
	2462	7.93	-49.31	<=-22.07	Pass
802.11g	2412	1.78	-33.54	<=-28.22	Pass
	2462	-0.06	-38.06	<=-30.06	Pass
802.11n (HT20)	2412	-1.39	-32.11	<=-31.39	Pass
	2462	0.43	-35.28	<=-29.57	Pass

Test Plots:

802.11b_Low Channel

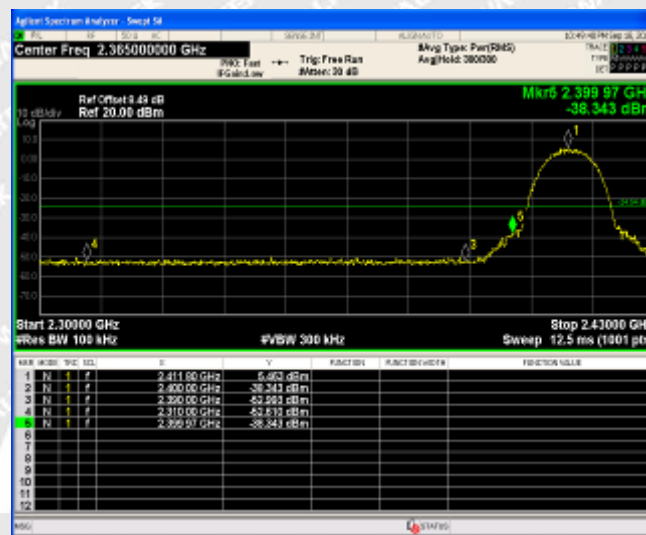

802.11b_High Channel

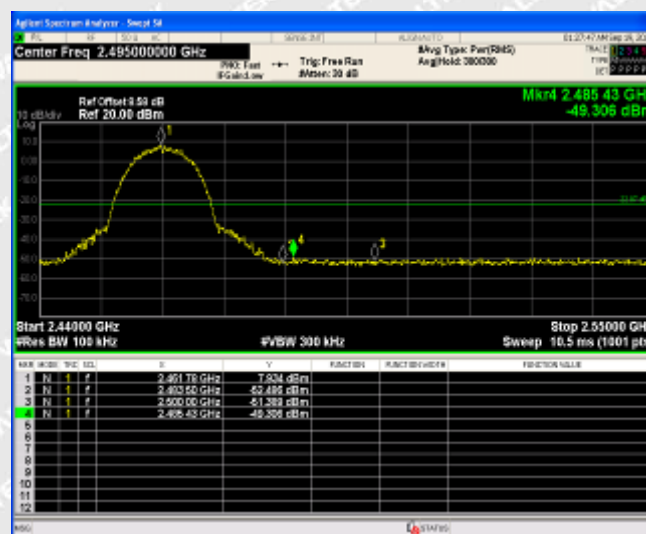




802.11g_Low Channel



802.11g_High Channel

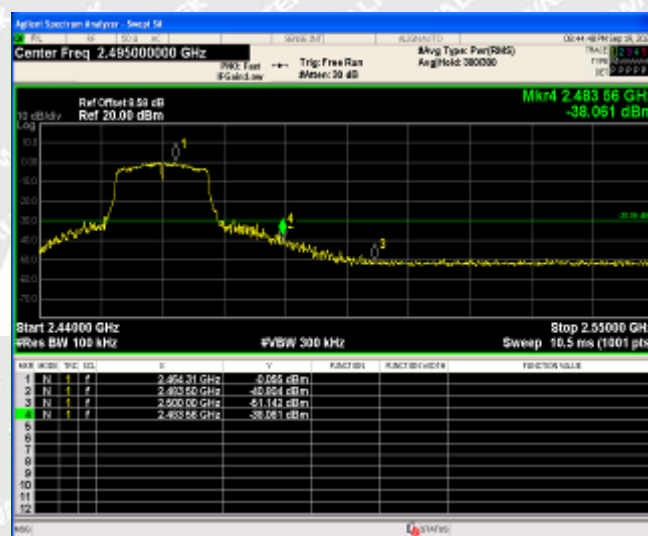



Agilent Spectrum Analyzer - Sweep 34

Center Freq 2.365000000 GHz

Ref Offset 0.44 dB
Ref 20.00 dBm

Mkr5 2.36789 GHz
-32.111 dBm

Start 2.30000 GHz
#BW 100 kHz
#VSW 300 kHz

Stop 2.43000 GHz
Sweep 12.5 ms (1001 pts)

Row	Marker	Freq (GHz)	Amplitude (dBm)	Offset (dB)	Offset (dBm)	Marker Value
1	N	2.41284	-3.267	0.00	-3.267	
2	N	2.40000	-34.573	0.00	-34.573	
3	N	2.35000	-45.222	0.00	-45.222	
4	N	2.31000	-53.554	0.00	-53.554	
5	N	2.36789	-32.111	0.00	-32.111	

Agilent Spectrum Analyzer - Sweep 56

Center Freq 2.49500000 GHz

Ref Offset 3.55 dB
Ref 20.06 dBm

Mkr4 2.483 86 GHz
-35.277 dBm

Start 2.44000 GHz
#Res BW 100 kHz

Stop 2.55000 GHz
Sweep 10.5 ms (1901 pts)

#VBW 300 kHz

MARK	MODE	TYPE	SQL	F	P	FUNCTION	FUNCTION VALUE
1	N	F	F	2.483 86 GHz	0.434 dBm		
2	N	F	F	2.493 55 GHz	-37.675 dBm		
3	N	F	F	2.500 00 GHz	-49.883 dBm		
4	N	F	F	2.483 86 GHz	-35.277 dBm		



6.7 Conducted Emissions


6.7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

6.7.2 Basic Test Setup Block Diagram

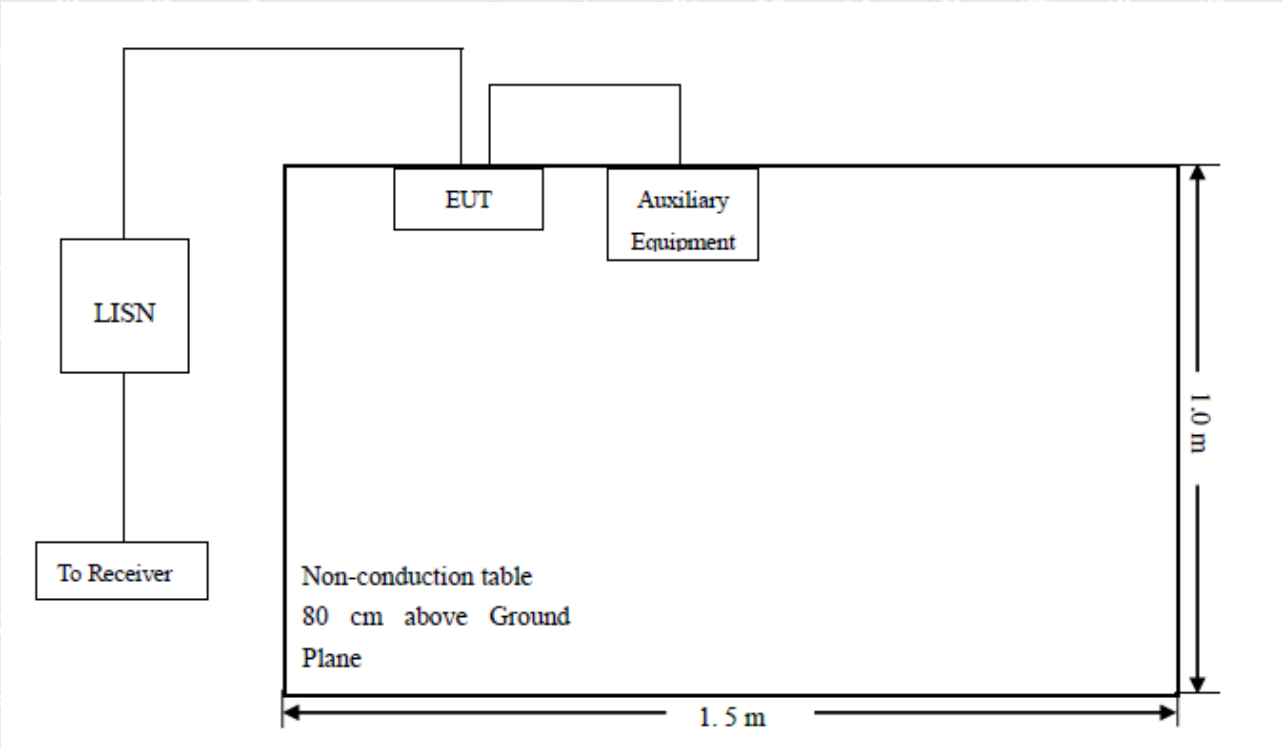

6.7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal



6.7.4 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7.5 Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Facotr), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$

$$\text{Correct Facotor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Measurement} - \text{Limit}$$

WALTEK




6.7.6 Test Result

Test Mode

Communication mode(AC 120V/60Hz)

Polarity

Line

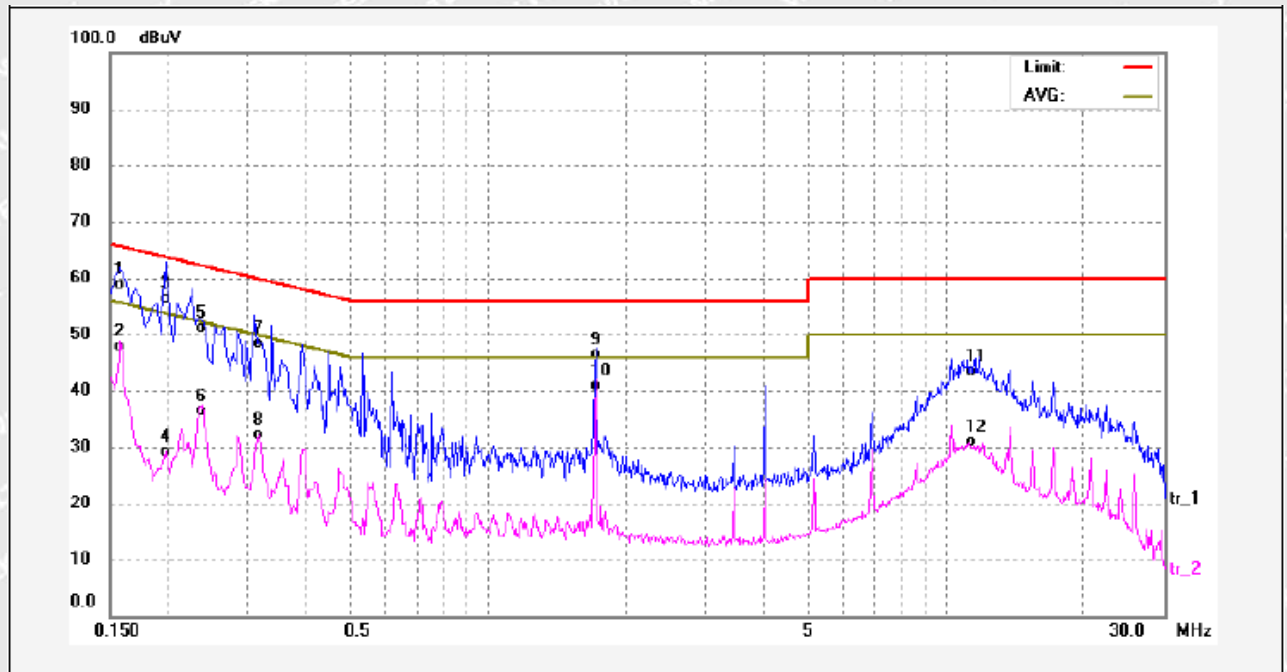


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	48.26	9.74	58.00	65.56	-7.56	QP	
2	0.1580	37.26	9.74	47.00	55.56	-8.56	AVG	
3	0.1980	45.50	9.76	55.26	63.69	-8.43	QP	
4	0.1980	18.26	9.76	28.02	53.69	-25.67	AVG	
5	0.2366	40.55	9.69	50.24	62.21	-11.97	QP	
6	0.2366	25.63	9.69	35.32	52.21	-16.89	AVG	
7	0.3183	37.83	9.62	47.45	59.75	-12.30	QP	
8	0.3183	21.63	9.62	31.25	49.75	-18.50	AVG	
9	1.7220	35.54	9.82	45.36	56.00	-10.64	QP	
10	1.7220	30.18	9.82	40.00	46.00	-6.00	AVG	
11	11.3820	31.80	10.55	42.35	60.00	-17.65	QP	
12	11.3820	19.45	10.55	30.00	50.00	-20.00	AVG	

**Test Mode**

Communication mode(AC 120V/60Hz)

Polarity

Neutral

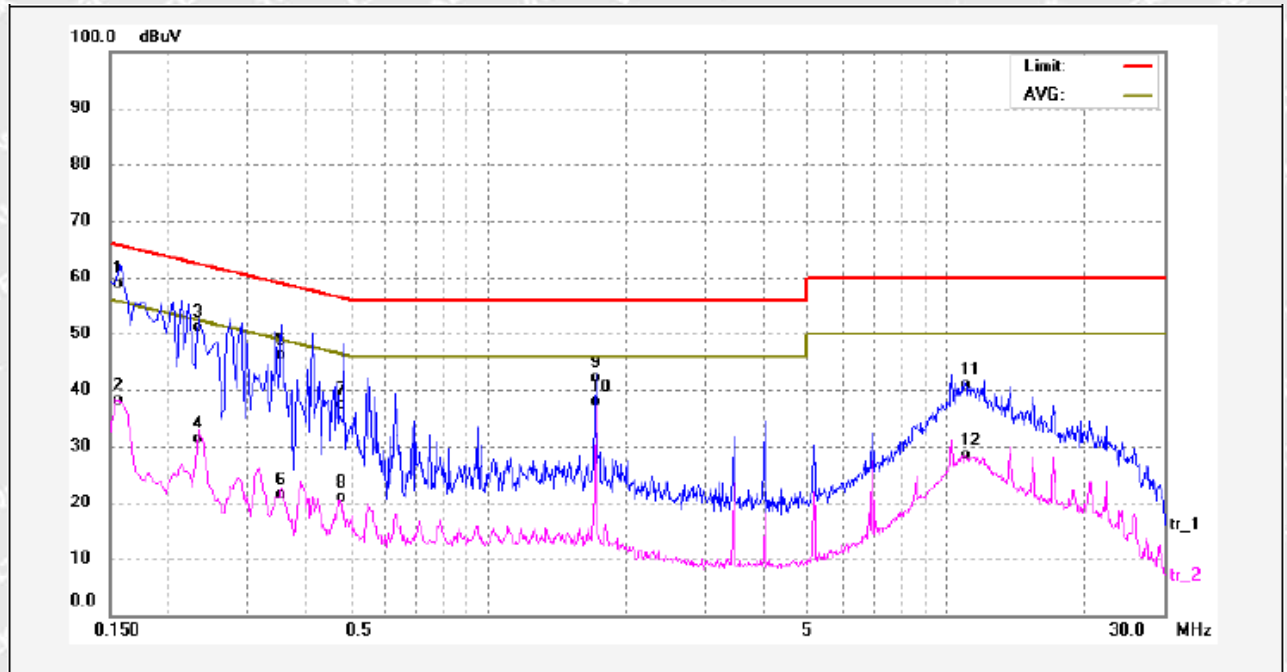

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1580	48.43	9.57	58.00	65.56	-7.56	QP	
2	0.1580	27.56	9.57	37.13	55.56	-18.43	AVG	
3	0.2340	40.43	9.59	50.02	62.30	-12.28	QP	
4	0.2340	20.68	9.59	30.27	52.30	-22.03	AVG	
5	0.3540	35.53	9.62	45.15	58.87	-13.72	QP	
6	0.3540	10.82	9.62	20.44	48.87	-28.43	AVG	
7	0.4860	26.70	9.62	36.32	56.24	-19.92	QP	
8	0.4860	10.38	9.62	20.00	46.24	-26.24	AVG	
9	1.7220	31.44	9.66	41.10	56.00	-14.90	QP	
10	1.7220	27.18	9.66	36.84	46.00	-9.16	AVG	
11	11.0500	29.96	10.04	40.00	60.00	-20.00	QP	
12	11.0500	17.36	10.04	27.40	50.00	-22.60	AVG	



7 Photographs Test Setup

7.1 Photographs - Radiated Emission Test Setup

30MHz-1GHz



Above 1GHz





7.2 Photographs – Conducted Emission Test Setup



WALTEK





8 Photographs - Constructional Details

8.1 EUT - External Photos

Model HU25-02H





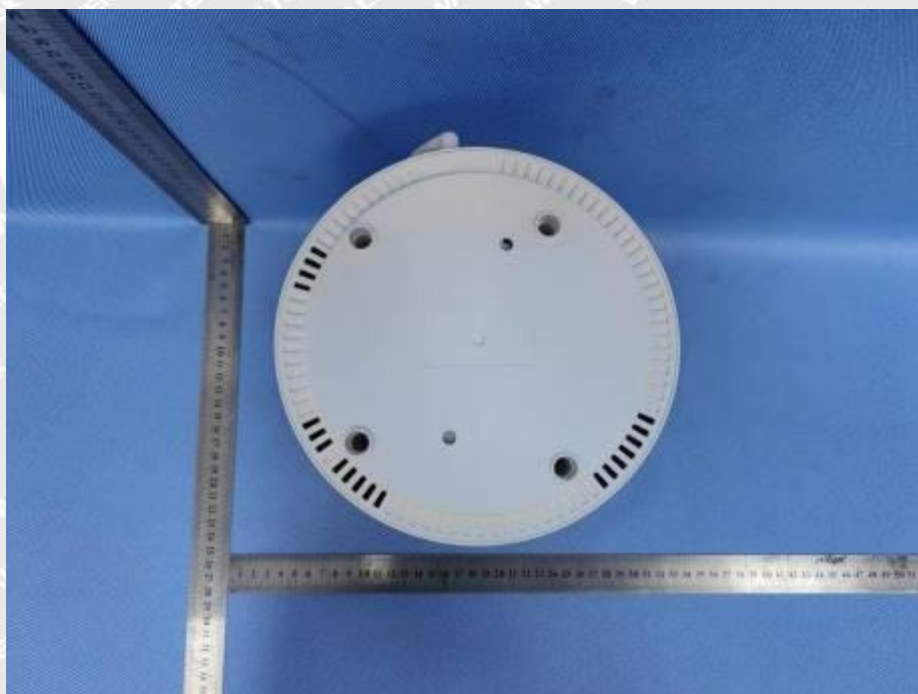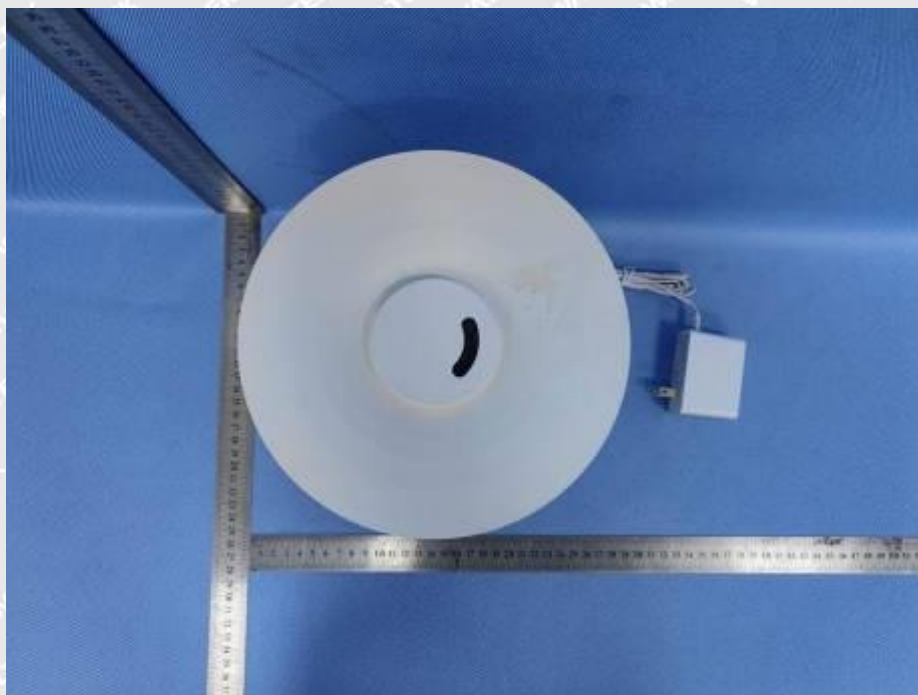



Model HU25-02G





Model HU25-03E





Model HU25-03C




**Adapter Label**


WALTEK



8.2 EUT - Internal Photos

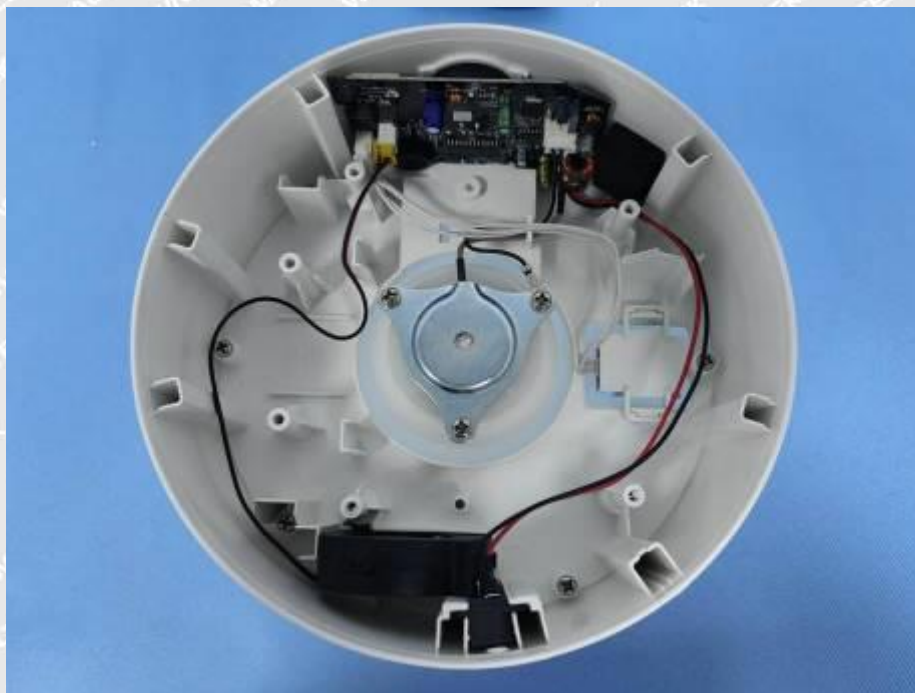



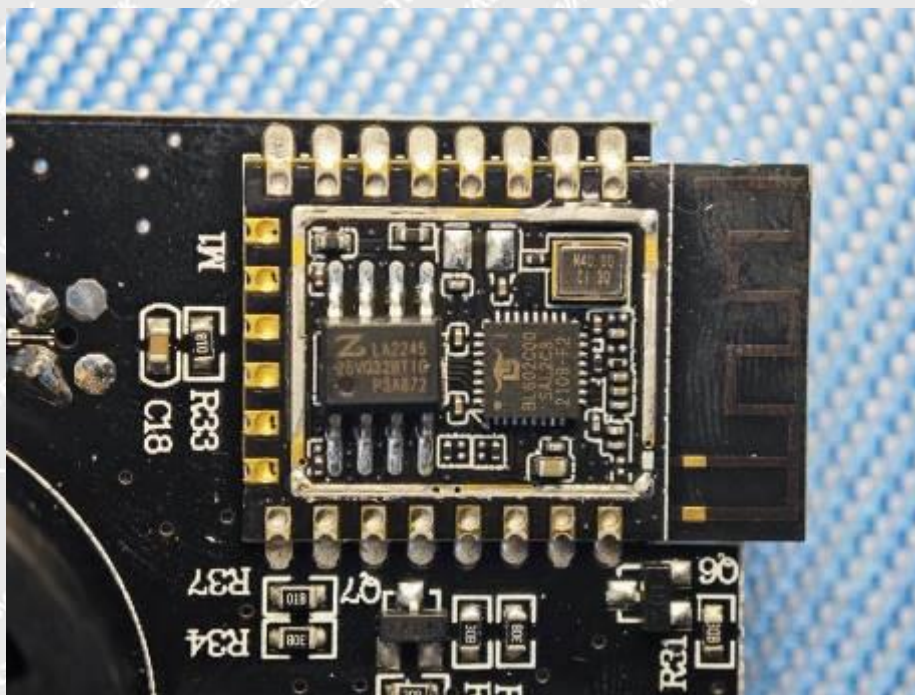



=====End of Report=====

WALTEK