

Test Report

Report No.: MTi220719003-01E1

Date of issue: 2022-08-25

Applicant: Jiamaxin E-Commerce Center, Jiangbei New District

Product: Double coil Auto sensing car fast wireless charger

Model(s): F4, F5, F6, F7

FCC ID: 2A78X-F4F5F6F7

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1. General Description	5
1.1 Description of the EUT	5
1.2 Description of test modes	5
1.3 Description of support units	6
1.4 Environmental conditions	6
1.5 Measurement uncertainty	6
2. Summary of Test Result.....	7
3. Test Facilities and accreditations.....	8
3.1 Test laboratory	8
4. List of test equipment	9
5. Test Results	10
5.1 Antenna requirements	10
5.2 Description of the EUT antenna	10
5.3 AC power line conducted emissions.....	11
5.4 Radiated emissions.....	16
5.5 Occupied bandwidth test	27
Photographs of the test setup.....	28
Photographs of the EUT.....	28


Test Result Certification	
Applicant:	Jiamaixin E-Commerce Center, Jiangbei New District
Address:	Room 901, Unit 1, Building 03, District 1, Xuri Shangcheng, No. 301, Nanpu Road, Jiangbei New District, Nanjing City, Jiangsu Province (residential)
Manufacturer:	Shenzhen Feichi Wireless Technology Co., Ltd.
Address:	4th Floor, Building 11, Tianfu'an Industrial Park, Bao'an District, Shenzhen City, Guangdong Province
Factory:	Shenzhen Feichi Wireless Technology Co., Ltd.
Address:	4th Floor, Building 11, Tianfu'an Industrial Park, Bao'an District, Shenzhen City, Guangdong Province
Product description	
Product name:	Double coil Auto sensing car fast wireless charger
Trademark:	DEMCERT
Model name:	F4
Serial Model:	F5, F6, F7
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013
Date of Test	
Date of test:	2022-07-28 ~ 2022-08-24
Test result:	Pass

Test Engineer :



(Yanice Xie)

Reviewed By :



(Leon Chen)

Approved By :



(Tom Xue)

1. General Description

1.1 Description of the EUT

Product name:	Double coil Auto sensing car fast wireless charger
Model name:	F4
Series Model:	F5, F6, F7
Model difference:	All the models are the same circuit and module, except the model name.
Electrical rating:	Input: DC 5V/2A, 9V/1.67A, 12V/1.5A Wireless Output: 5W/7.5W/10W/15W
Accessories:	1. cable USB-A to USB-C 1.5m
Hardware version:	TC7650_V21
Software version:	7650_V2.0
Test sample number:	MTi220719003-01-S0001
RF specification:	
Operation frequency:	115 kHz – 205 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode 1	Wireless charger (5W)
Mode 2	Wireless charger (7.5W)
Mode 3	Wireless charger (10W)
Mode 4	Wireless charger (15W)
Mode 5	Stand-by

The worst test mode of conducted emissions: Mode 4

The worst test mode of radiated emissions(9kHz-30MHz): Mode 4

The worst test mode of radiated emissions(30MHz-1GHz): Mode 4

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Load 1	YBZ1.1	/	YBZ
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.4 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Humidity:	20 % RH ~ 75 % RH
Atmospheric pressure:	98 kPa~101 kPa

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emission (9 kHz~30 MHz)	± 2.5 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB
Occupied bandwidth	± 3 %
Temperature	±1 degree
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. Summary of Test Result

No.	FCC reference	Description of test	Result
Emission			
1	FCC Part 15.203	Antenna requirement	Pass
2	FCC Part 15.207	AC power line Conducted emissions	Pass
3	FCC Part 15.209	Radiated emissions	Pass
4	FCC Part 15.215	Occupied bandwidth	Pass

Note: N/A means not applicable.

3. Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4. List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E043	EMI test receiver	R&S	ESCI7	101166	2022/05/05	2023/05/04
MTI-E044	Broadband antenna	Schwarzbeck	VULB9163	9163-1338	2021/05/30	2023/05/29
MTI-E045	Horn antenna	Schwarzbeck	BBHA9120D	9120D-2278	2021/05/30	2023/05/29
MTi-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2021/05/30	2023/05/29
MTI-E047	Pre-amplifier	Hewlett-Packard	8447F	3113A06184	2022/05/05	2023/05/04
MTI-E048	Pre-amplifier	Agilent	8449B	3008A01120	2022/05/05	2023/05/04
MTi-E120	Broadband antenna	Schwarzbeck	VULB9163	9163-1419	2021/05/30	2023/05/29
MTi-E121	Pre-amplifier	Hewlett-Packard	8447D	2944A09365	2022/04/15	2023/04/14
MTi-E123	Pre-amplifier	Agilent	8449B	3008A04723	2022/05/05	2023/05/04
MTi-E122	MXA signal analyzer	Agilent	N9020A	MY5444085 9	2022/05/05	2023/05/04
MTi-E001	Artificial Mains Network	R&S	ESH2-Z5	100263	2022/05/05	2023/05/04
MTi-E002	EMI Test Receiver	R&S	ESCI3	101368	2022/05/05	2023/05/04
MTi-E023	Artificial power network	Schwarzbeck	NSLK8127	NSLK8127# 841	2022/05/05	2023/05/04
MTi-E025	Artificial power network	Schwarzbeck	NSLK8127	8127183	2022/05/05	2023/05/04
MTi-E026	8-wire Impedance Stabilization Network	Schwarzbeck	NTFM 8158	NTFM 8158 #199	2022/05/05	2023/05/04
MTi-E021	EMI Test Receiver	R&S	ESCS30	100210	2022/05/05	2023/05/04
MTi-E024	Artificial power network	Schwarzbeck	NSLK8127	01001	2022/05/05	2023/05/04

5. Test Results

5.1 Antenna requirements

15.203 requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2 Description of the EUT antenna

The antenna of EUT is coil antenna, which is integrated on the main PCB of the EUT and no consideration of replacement.

5.3 AC power line conducted emissions

5.3.1 Limits


Frequency (MHz)	Detector type / Bandwidth	Limit-Quasi-peak dB μ V	Limit-Average dB μ V
0.15 -0.5	Average / 9 kHz	66 to 56	56 to 46
0.5 -5		56	46
5 -30		60	50

Note 1: the limit decreases with the logarithm of the frequency in the range of 0.15 MHz to 0.5 MHz.

5.3.2 Test Procedures

- The test setup is refer to the standard ANSI C63.10-2013.
- The EUT is connected to the main power through a line impedance stabilization network (LISN). All support equipment is powered from additional LISN(s).
- Emissions were measured on each current carrying line of the EUT using an EMI test receiver connected to the LISN powering the EUT.
- The test receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes described in Item 1.2.
- The test data of the worst-case condition(s) was recorded.

5.3.3 Test setup

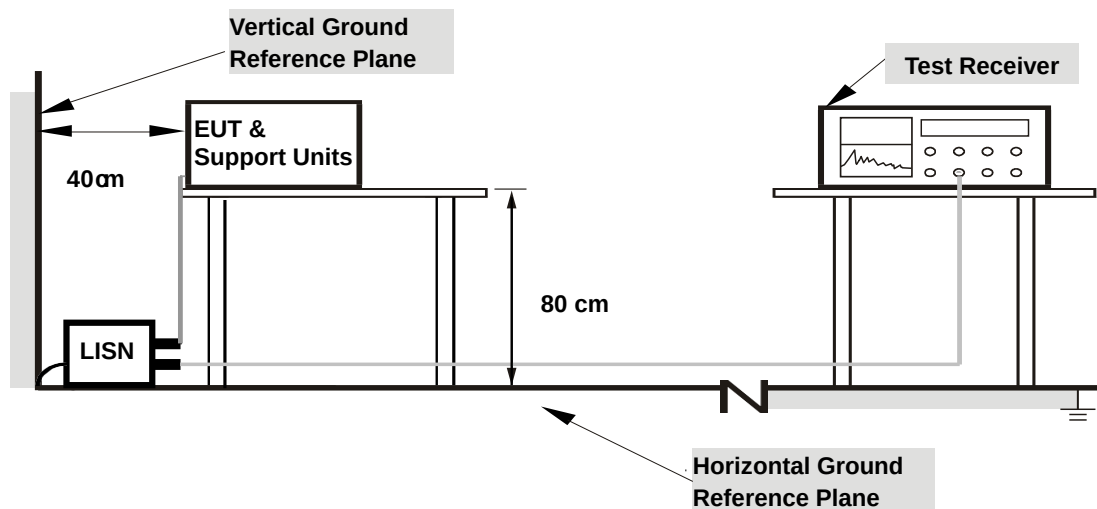

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.3.4 Test Result


Calculation formula:

Measurement (dB μ V) = Reading Level (dB μ V) + Correct Factor (dB)

Over (dB) = Measurement (dB μ V) – Limit (dB μ V)


Coil 1:

Test mode:	Mode 4	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

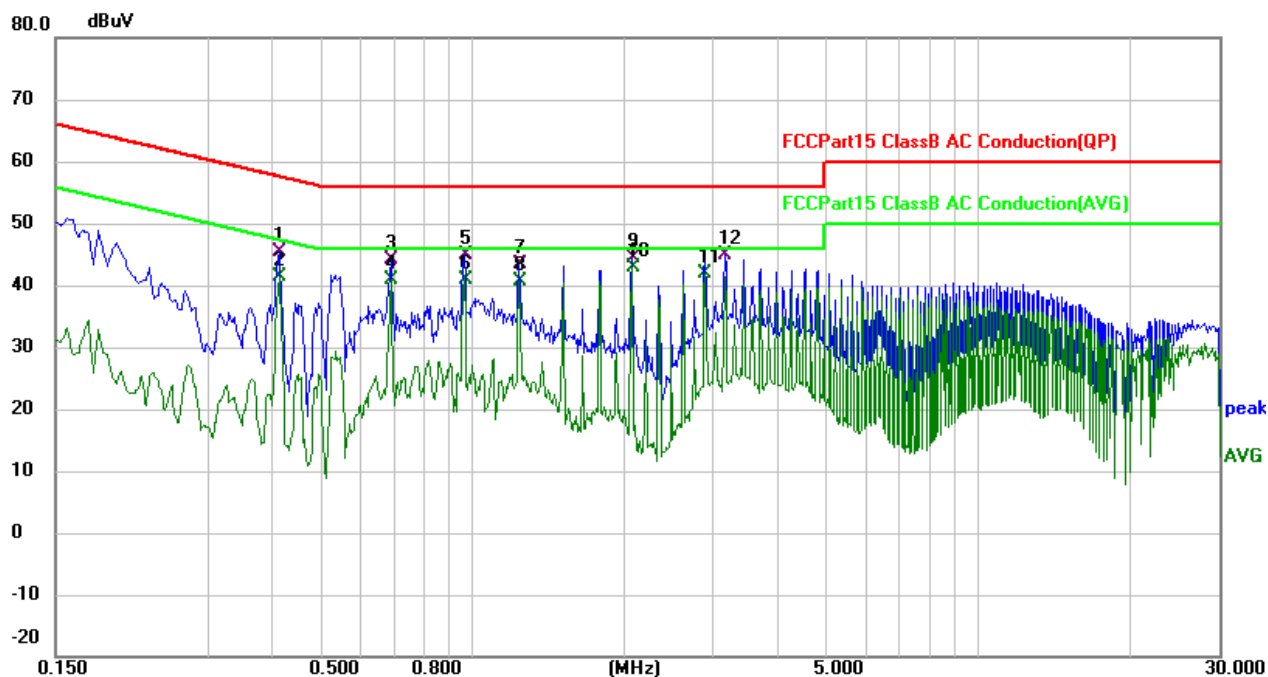

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4140	34.15	11.12	45.27	57.57	-12.30	QP
2		0.4140	30.14	11.12	41.26	47.57	-6.31	AVG
3		0.6900	32.39	11.75	44.14	56.00	-11.86	QP
4		0.6900	29.16	11.75	40.91	46.00	-5.09	AVG
5		0.9680	32.43	12.35	44.78	56.00	-11.22	QP
6		0.9680	28.48	12.35	40.83	46.00	-5.17	AVG
7		1.2420	30.57	12.79	43.36	56.00	-12.64	QP
8		1.2420	27.93	12.79	40.72	46.00	-5.28	AVG
9		2.0680	34.34	10.02	44.36	56.00	-11.64	QP
10	*	2.0680	32.81	10.02	42.83	46.00	-3.17	AVG
11		2.8880	31.72	10.25	41.97	46.00	-4.03	AVG
12		3.1700	34.58	10.27	44.85	56.00	-11.15	QP


Test mode:	Mode 4	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

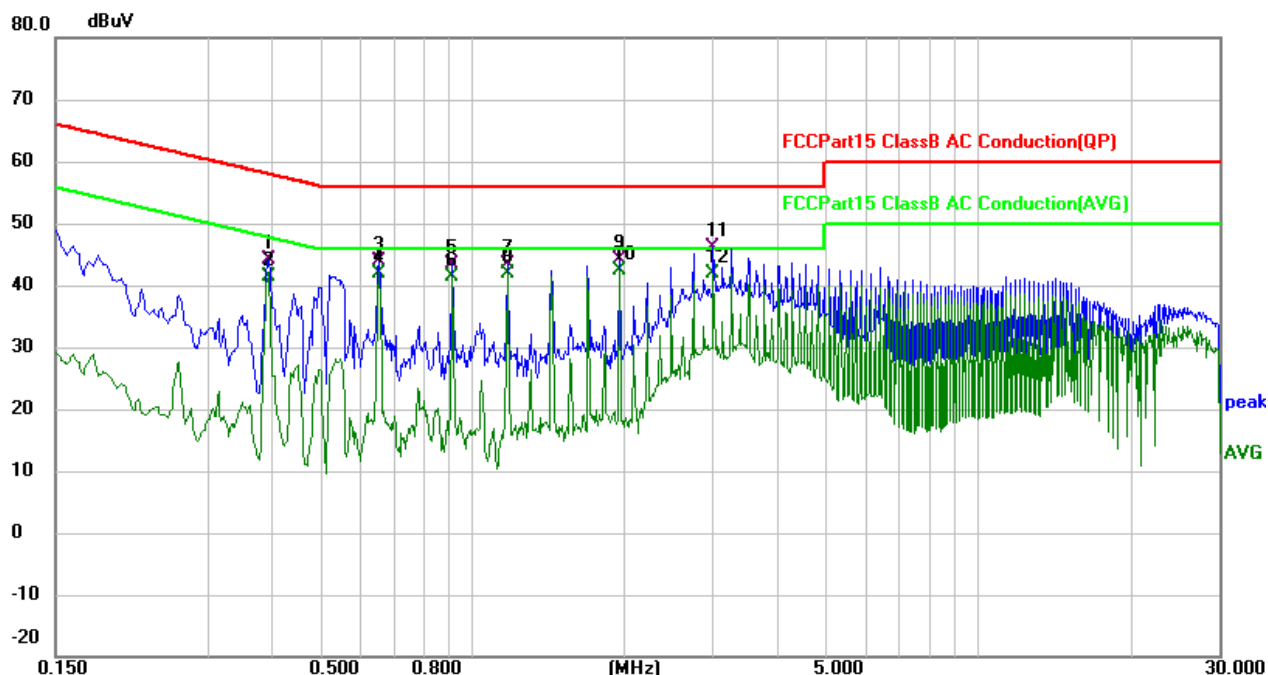

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3940	33.03	11.02	44.05	57.98	-13.93	QP
2		0.3940	30.26	11.02	41.28	47.98	-6.70	AVG
3		0.6540	32.30	11.67	43.97	56.00	-12.03	QP
4		0.6540	30.13	11.67	41.80	46.00	-4.20	AVG
5		0.9140	31.15	12.16	43.31	56.00	-12.69	QP
6		0.9140	29.16	12.16	41.32	46.00	-4.68	AVG
7		1.1780	30.71	12.71	43.42	56.00	-12.58	QP
8		1.1780	29.21	12.71	41.92	46.00	-4.08	AVG
9		1.9580	33.68	10.46	44.14	56.00	-11.86	QP
10	*	1.9580	31.90	10.46	42.36	46.00	-3.64	AVG
11		3.0059	35.72	10.29	46.01	56.00	-9.99	QP
12		3.0059	31.70	10.29	41.99	46.00	-4.01	AVG


Coil 2:

Test mode:	Mode 4	Phase:	L
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

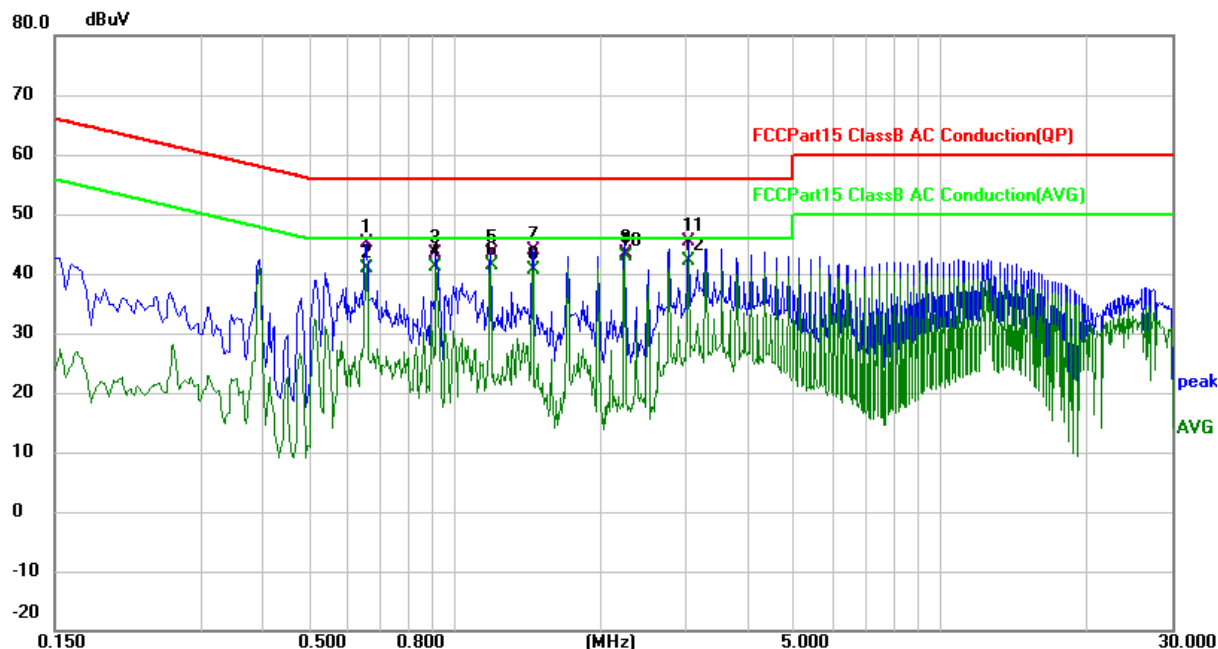

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.6580	33.48	11.67	45.15	56.00	-10.85	QP
2		0.6580	29.23	11.67	40.90	46.00	-5.10	AVG
3		0.9180	31.11	12.23	43.34	56.00	-12.66	QP
4		0.9180	28.79	12.23	41.02	46.00	-4.98	AVG
5		1.1860	30.55	12.71	43.26	56.00	-12.74	QP
6		1.1860	28.74	12.71	41.45	46.00	-4.55	AVG
7		1.4460	30.83	13.12	43.95	56.00	-12.05	QP
8		1.4500	27.56	13.12	40.68	46.00	-5.32	AVG
9		2.2380	33.43	10.07	43.50	56.00	-12.50	QP
10	*	2.2380	32.93	10.07	43.00	46.00	-3.00	AVG
11		3.0300	34.99	10.27	45.26	56.00	-10.74	QP
12		3.0300	31.89	10.27	42.16	46.00	-3.84	AVG

Test mode:	Mode 4	Phase:	N
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	CE chamber 1

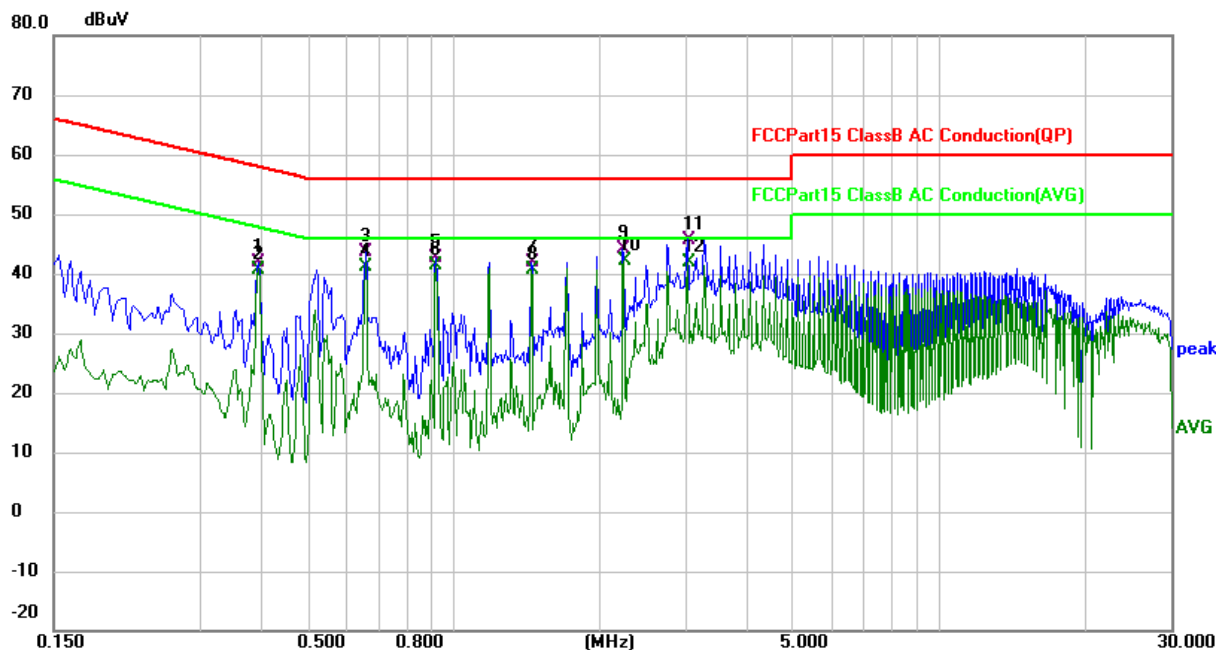

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3940	30.90	11.02	41.92	57.98	-16.06	QP
2		0.3940	29.68	11.02	40.70	47.98	-7.28	AVG
3		0.6580	31.91	11.69	43.60	56.00	-12.40	QP
4		0.6580	29.37	11.69	41.06	46.00	-4.94	AVG
5		0.9220	30.48	12.18	42.66	56.00	-13.34	QP
6		0.9220	29.08	12.18	41.26	46.00	-4.74	AVG
7		1.4460	28.58	13.29	41.87	56.00	-14.13	QP
8		1.4460	27.31	13.29	40.60	46.00	-5.40	AVG
9		2.2340	33.67	10.43	44.10	56.00	-11.90	QP
10	*	2.2380	31.78	10.43	42.21	46.00	-3.79	AVG
11		3.0260	35.46	10.29	45.75	56.00	-10.25	QP
12		3.0260	31.71	10.29	42.00	46.00	-4.00	AVG

5.4 Radiated emissions

5.4.1 Limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note 1: the tighter limit applies at the band edges.

Note 2: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10, the tests shall be performed in the frequency range shown in the following table:

Frequency range of measurements for unlicensed wireless device

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Frequency range of measurements for unlicensed wireless device with digital device

Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / 120 kHz

5.4.2 Test Procedures

The EUT is placed on a non-conducting table 80cm above the ground plane for measurement blew 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10-2013.

For measurement blew 1 GHz, the resolution bandwidth is set as item 5.4.2.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned form 1 to 4m meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and horizontal positions.

Special requirements for 9 kHz to 30 MHz:


The lowest height of the magnetic antenna shall be 1 m above the ground

When the EUT contains a loop antenna that can only be placed in a vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, and then orthogonal to the axis. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable.


When the EUT contains a loop antenna that can be placed in a horizontal or vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, orthogonal to the axis, and then with the measurement antenna horizontal. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable.

5.4.3 Test Setup

Blew 30 MHz:

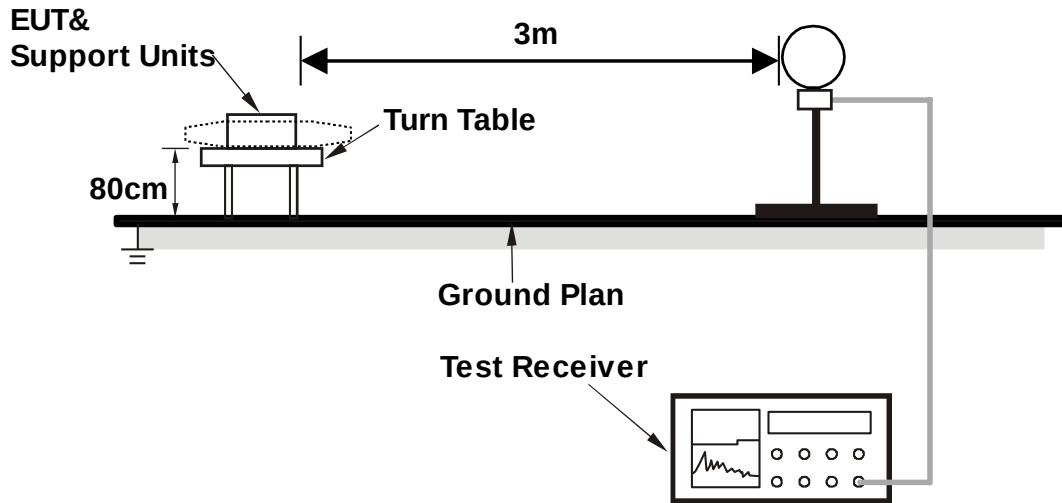

Blew 1 GHz:

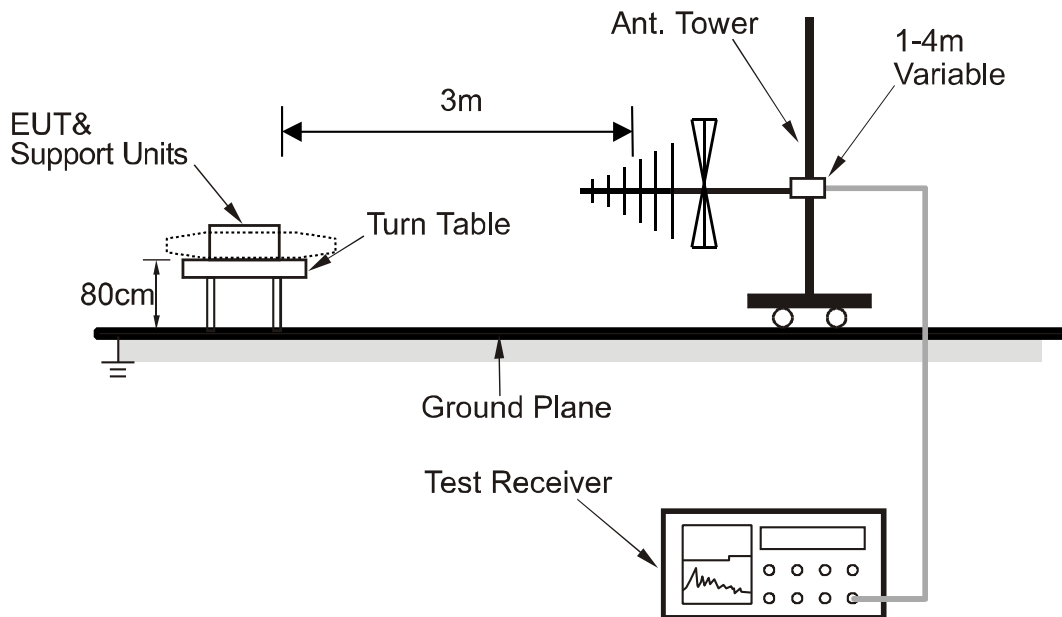

For the actual test configuration, please refer to the related item – Photographs of the test setup.

5.4.4 Test result

Calculation formula:


Measurement (dB μ V/m) = Reading Level (dB μ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB μ V/m) – Limit (dB μ V/m)

Note: For 9 kHz - 30 MHz testing, all the required orthogonal orientations of the measurement loop antenna were performed for pre-scan, the maximum radiated transmissions (Site axis) were recorded.

Coil 1:
Frequency 9 kHz ~ 150 kHz


Test mode:	Mode 4	Polarization:	Site axis
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

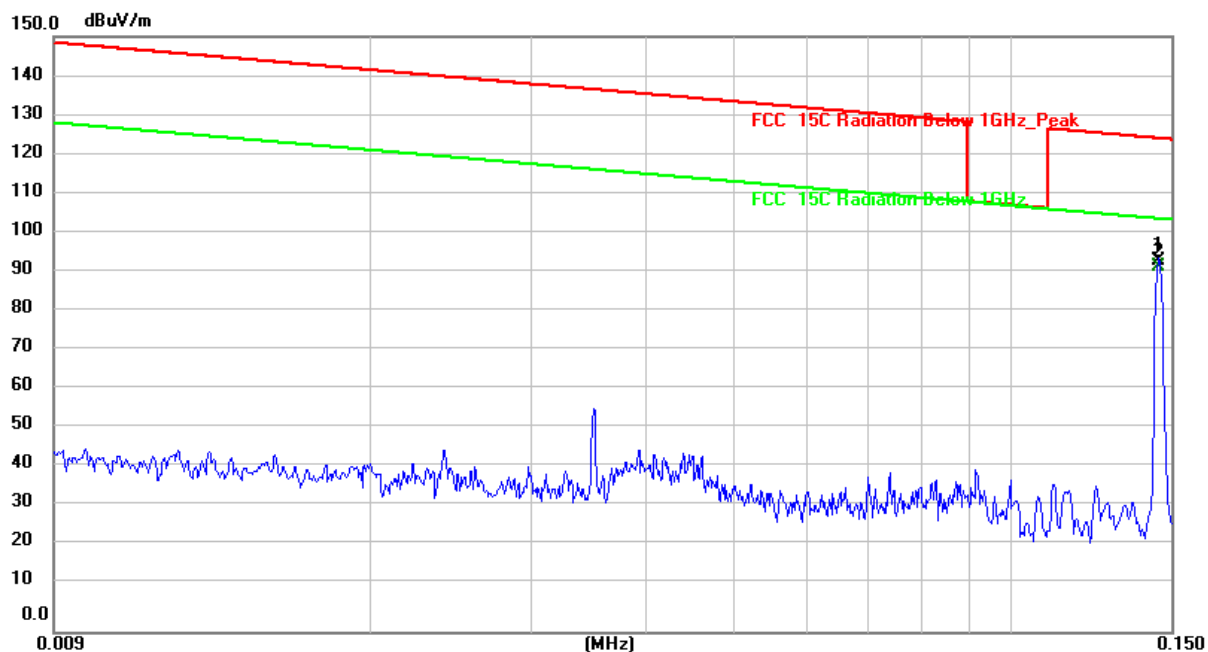

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.1454	72.28	21.28	93.56	124.37	-30.81	peak
2	*	0.1454	70.84	21.28	92.12	104.37	-12.25	AVG

Frequency 150 kHz ~ 30 MHz


Test mode:	Mode 4	Polarization:	Site axis
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

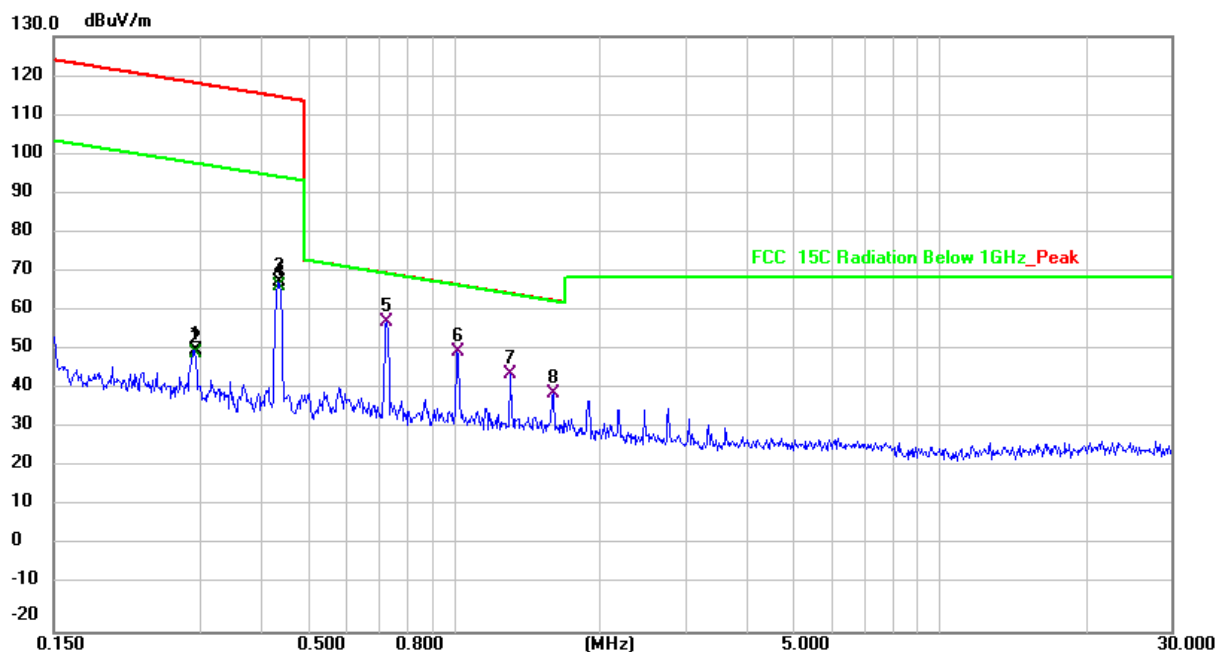

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.2924	29.77	21.33	51.10	118.29	-67.19	peak
2		0.2924	28.90	21.33	50.23	98.29	-48.06	AVG
3		0.4351	47.04	21.32	68.36	114.83	-46.47	peak
4		0.4351	45.89	21.32	67.21	94.83	-27.62	AVG
5	*	0.7273	36.57	21.57	58.14	70.38	-12.24	QP
6		1.0157	28.69	21.87	50.56	67.49	-16.93	QP
7		1.3029	20.41	24.48	44.89	65.33	-20.44	QP
8		1.6019	15.27	25.07	40.34	63.54	-23.20	QP

Coil 2:
Frequency 9 kHz ~ 150 kHz


Test mode:	Mode 4	Polarization:	Site axis
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

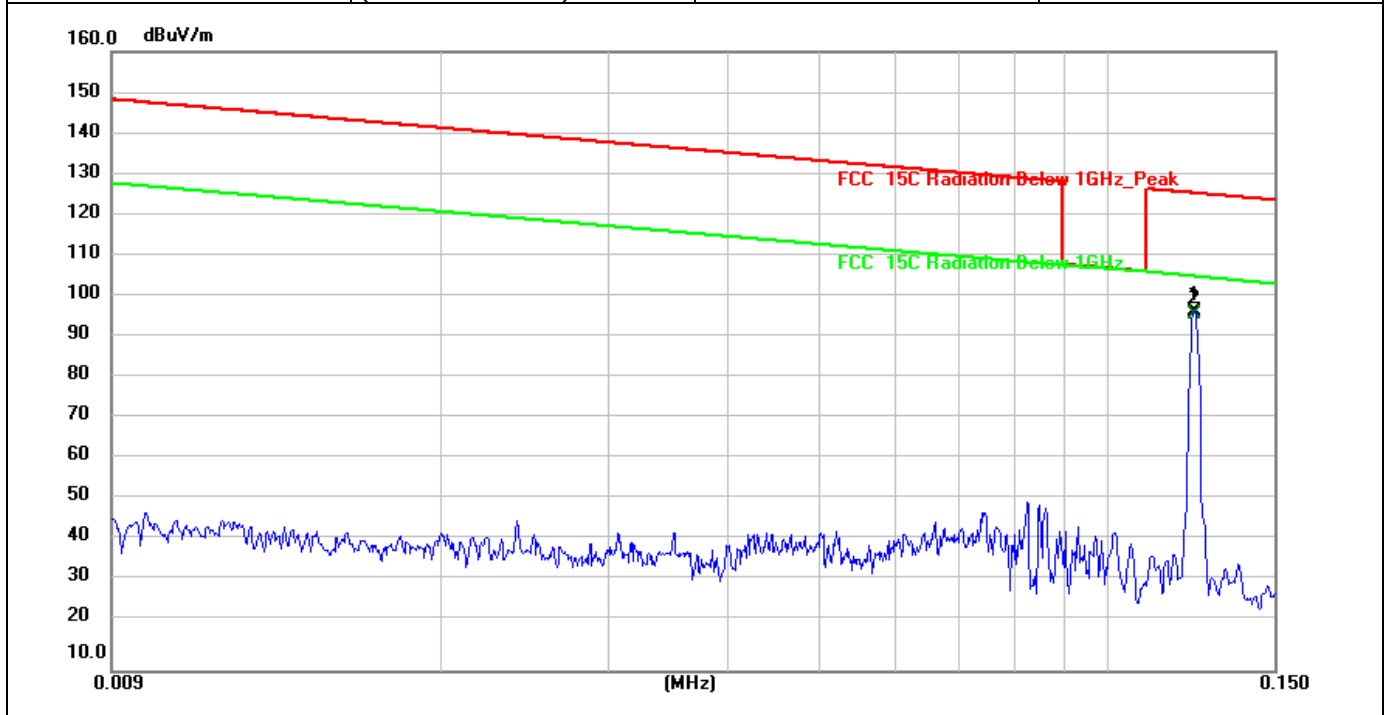

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		0.1235	75.85	21.22	97.07	125.79	-28.72	peak
2	*	0.1235	75.34	21.22	96.56	105.79	-9.23	AVG

Frequency 150 kHz ~ 30 MHz

Test mode:	Mode 4	Polarization:	Site axis
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

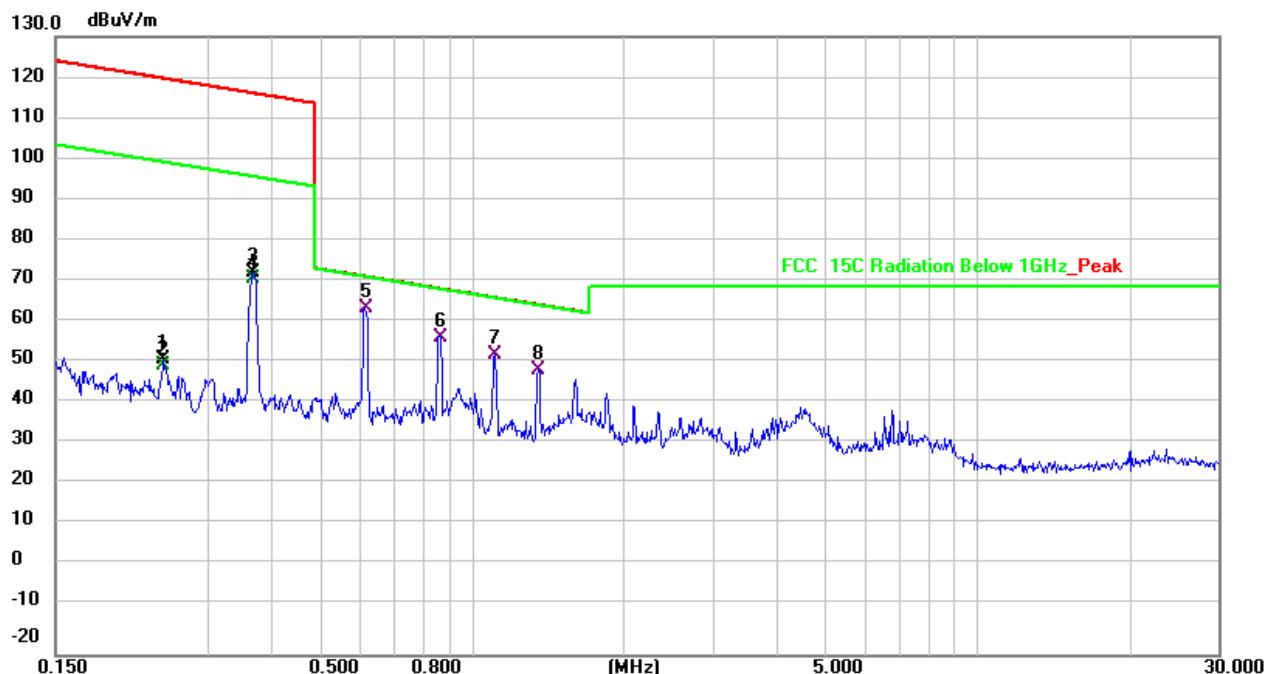


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.2455	30.55	21.33	51.88	119.81	-67.93	peak
2		0.2455	28.87	21.33	50.20	99.81	-49.61	AVG
3		0.3692	51.54	21.32	72.86	116.26	-43.40	peak
4		0.3692	50.18	21.32	71.50	96.26	-24.76	AVG
5	*	0.8140	42.88	21.45	64.33	71.85	-7.72	QP
6		0.8664	35.34	21.73	57.07	68.86	-11.79	QP
7		1.1114	29.02	24.10	53.12	66.71	-13.59	QP
8		1.3521	24.67	24.58	49.25	65.01	-15.76	QP

W

Coil 1:
Frequency 30 MHz ~ 1 GHz


Test mode:	Mode 4	Polarization:	Horizontal
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

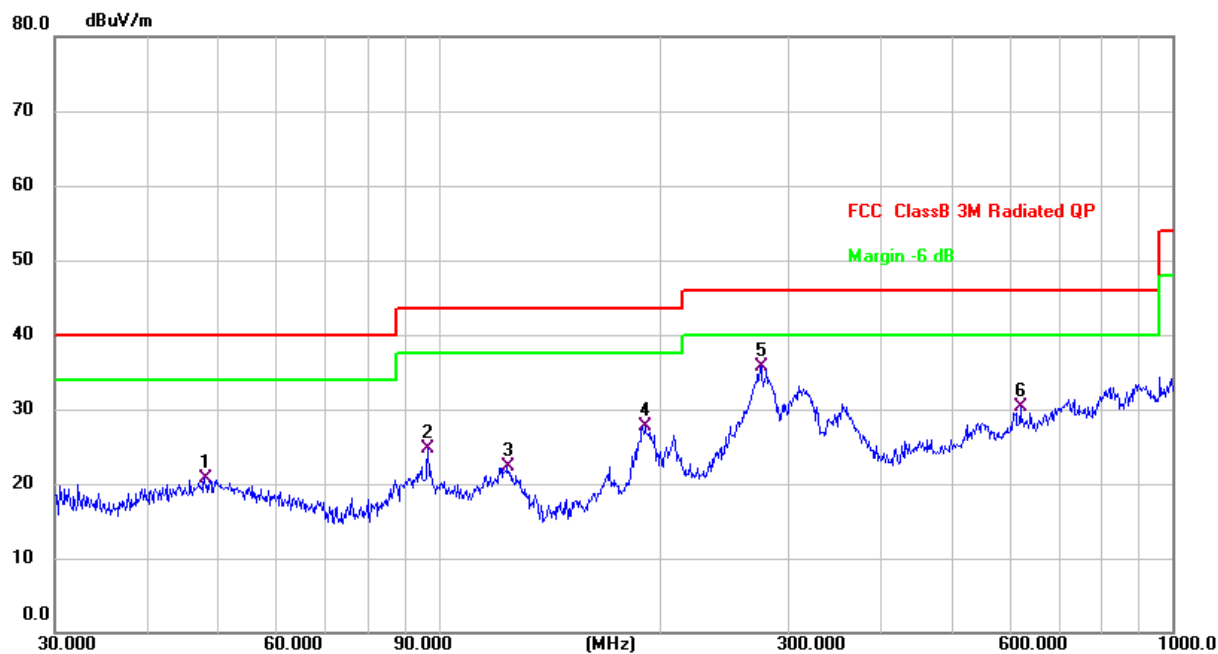

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		47.9940	26.91	-6.14	20.77	40.00	-19.23	QP
2		96.7749	32.32	-7.56	24.76	43.50	-18.74	QP
3		124.1330	31.49	-9.25	22.24	43.50	-21.26	QP
4		191.0738	35.27	-7.47	27.80	43.50	-15.70	QP
5	*	274.1939	40.50	-4.78	35.72	46.00	-10.28	QP
6		620.7096	27.06	3.28	30.34	46.00	-15.66	QP

Frequency 30 MHz ~ 1 GHz


Test mode:	Mode 4	Polarization:	Vertical
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

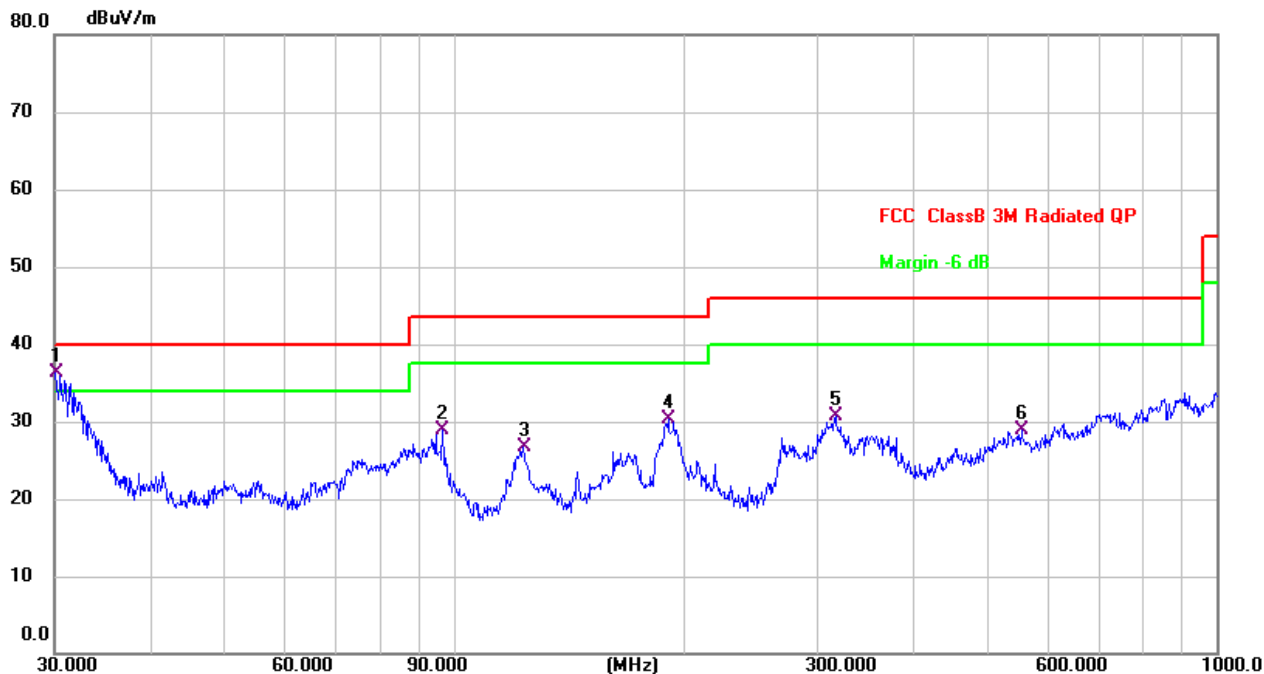

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	30.1054	46.14	-9.78	36.36	40.00	-3.64	QP
2		96.7749	36.55	-7.56	28.99	43.50	-14.51	QP
3		123.2655	35.49	-8.86	26.63	43.50	-16.87	QP
4		191.0738	37.77	-7.43	30.34	43.50	-13.16	QP
5		316.5890	34.74	-4.09	30.65	46.00	-15.35	QP
6		554.8254	27.14	1.70	28.84	46.00	-17.16	QP

Coil 2:
Frequency 30 MHz ~ 1 GHz


Test mode:	Mode 4	Polarization:	Horizontal
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

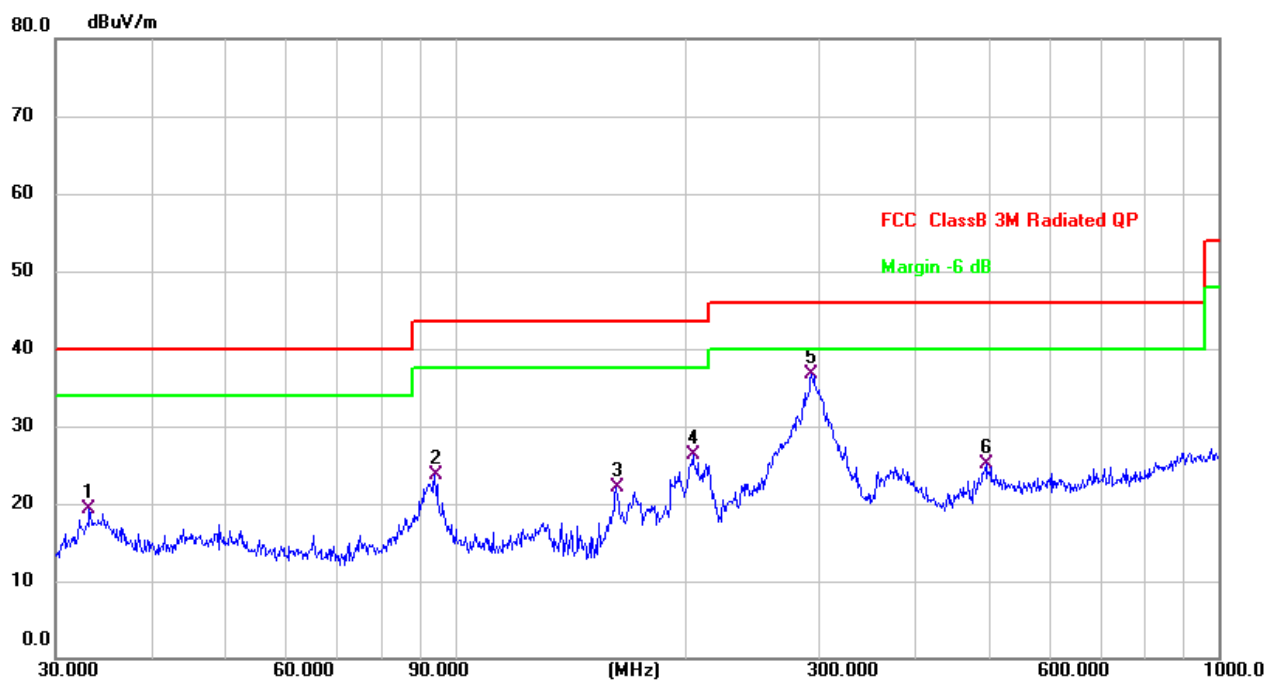

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		33.2112	29.59	-10.24	19.35	40.00	-20.65	QP
2		94.0979	34.18	-10.52	23.66	43.50	-19.84	QP
3		162.6106	33.95	-11.82	22.13	43.50	-21.37	QP
4		204.9551	35.94	-9.66	26.28	43.50	-17.22	QP
5	*	293.0842	44.77	-8.14	36.63	46.00	-9.37	QP
6		495.9344	30.16	-5.11	25.05	46.00	-20.95	QP

Frequency 30 MHz ~ 1 GHz

Test mode:	Mode 4	Polarization:	Vertical
Power supply:	Power by AC/DC adapter (AC 120V/60Hz)	Test site:	RE chamber 2

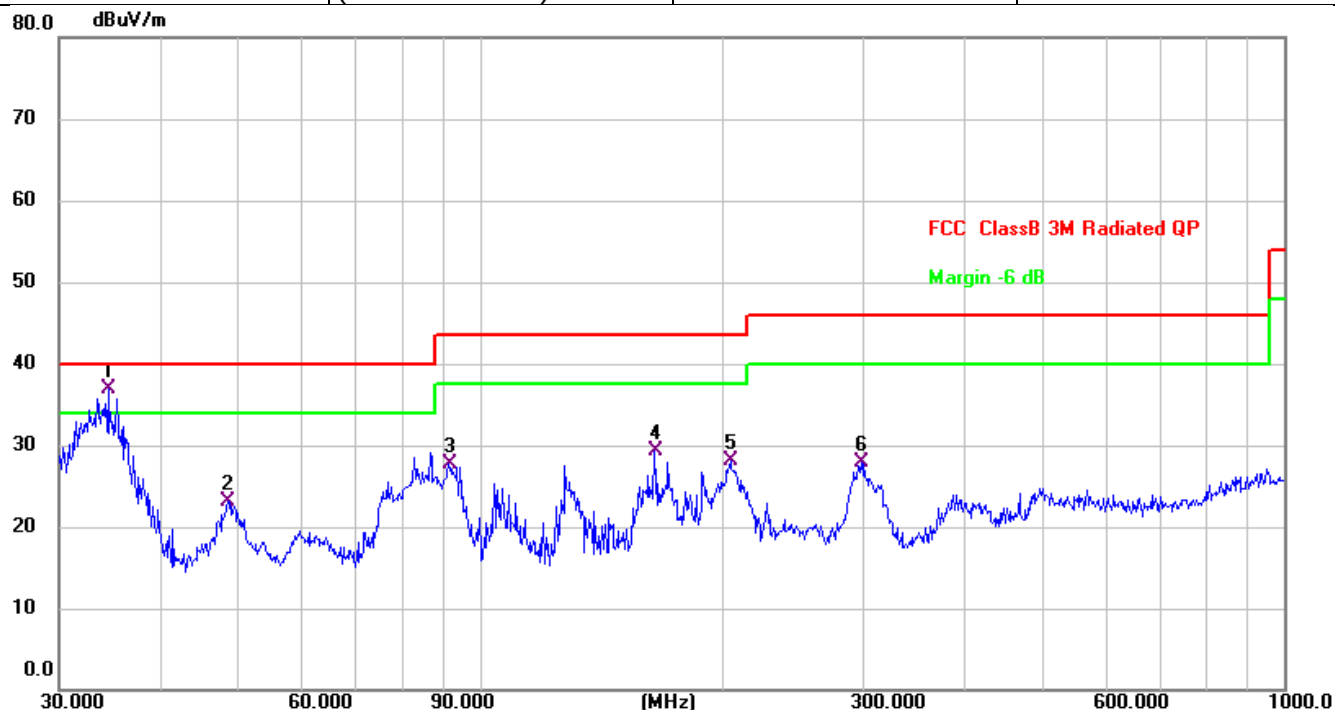

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1	*	34.5173	46.97	-10.03	36.94	40.00	-3.06	QP
2		48.6719	32.38	-9.27	23.11	40.00	-16.89	QP
3		91.4949	38.28	-10.58	27.70	43.50	-15.80	QP
4		164.9075	41.01	-11.78	29.23	43.50	-14.27	QP
5		204.9551	37.78	-9.66	28.12	43.50	-15.38	QP
6		298.2681	36.15	-8.21	27.94	46.00	-18.06	QP


5.5 Occupied bandwidth test

5.5.1 Test Procedures

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation.
- The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement
- Set detection mode to peak and trace mode to max hold.
- Determine the “-xx dB down amplitude” using [(reference value) – xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument.

5.5.2 Test Result

Note: Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measurement bandwidth will always follow the RBW. The RBW is set to 300 Hz to perform the occupied bandwidth test.

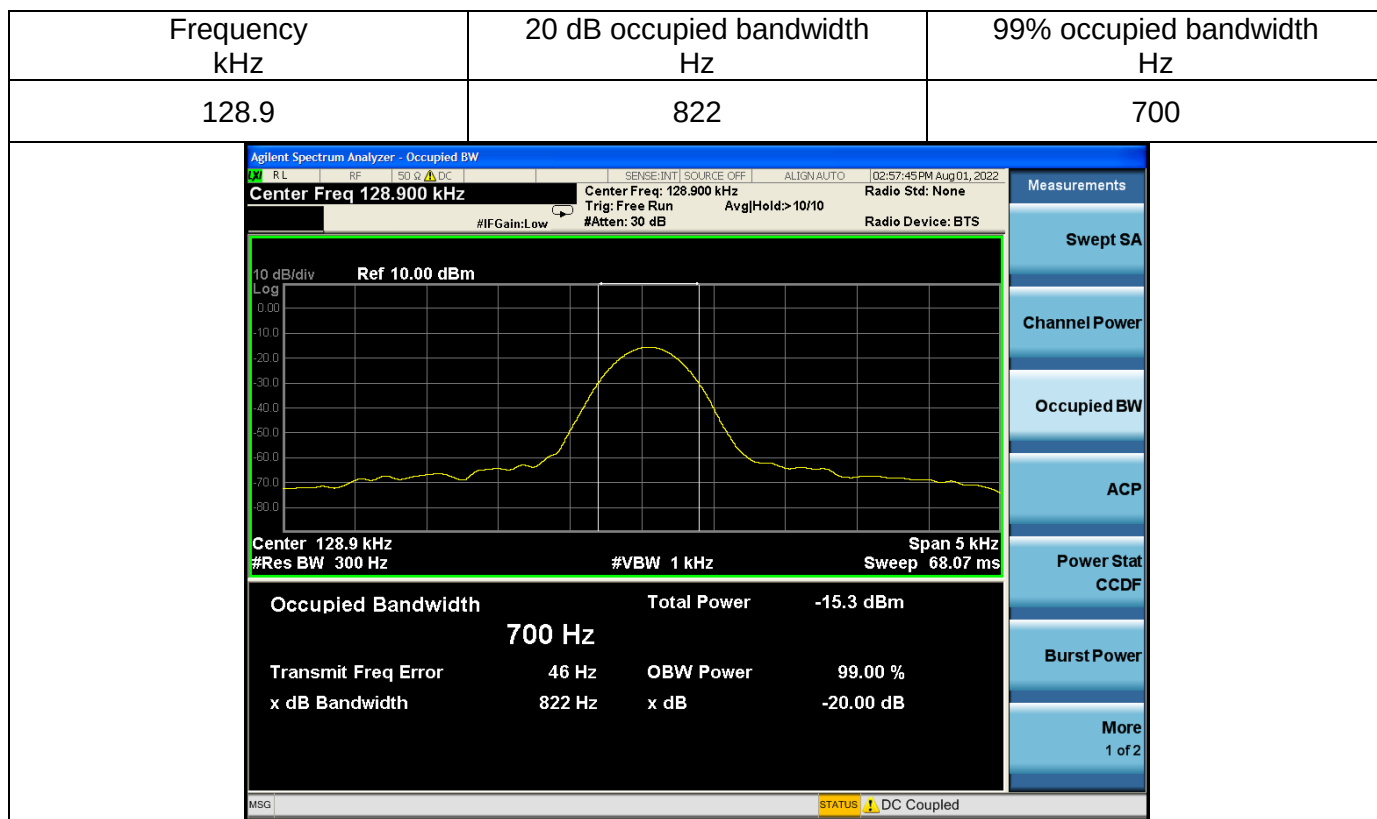

Photographs of the test setup

See the Appendix – Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----