



## RF exposure evaluation

### 1. Introduction

Model	: <u>4-LD6142</u>
Product Type	: <u>ALARM CLOCK WITH QI CHARGING PAD</u>
Applicant	: <u>Guangzhou Hai Na Bai Chuan Electronics Industrial Co., LTD</u>
Address	: <u>601-605 6/F, Doctor YI Building 2, No.96 BanHe Road, Huangpu District, Guangzhou, China</u>
Manufacturer	: <u>PUTIAN CITY HAI WEI Electronics CO., LTD</u>
Address	: <u>No. 3111, Hangang new Road, Chigang, JiangKou town, Hanjiang District, Putian city, Fujian province, China</u>

This document is prepared to show compliance with the RF Exposure requirements as required in §1.1310 and KDB 680106 D01 v03r01 of the FCC Rules and Regulations.



## 2. Product information

Product:	ALARM CLOCK WITH QI CHARGING PAD
Model no.:	4-LD6142
FCC ID:	2A7B84-LD6142
Options and accessories:	Adapter
Rated Input:	9.0VDC, 2.0A
Adapter information:	Model: HH0024B-090200-AU Input: 100-240V~50/60Hz, 0.8A Max Output: 9.0VDC 2.0A 18.0W
RF Transmission Frequency:	110-148.5 kHz
Antenna Type:	Integrated coil antenna
Description of the EUT:	The Equipment Under Test (EUT) is an ALARM CLOCK WITH QI CHARGING PAD which operated at 110-148.5 kHz for Wireless charging function (with data transmitting function).



### 3. Limit and Guidelines on RF Exposure

(1) According to KDB 680106 D01 v03r01 3(c) For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. Below 100 kHz, applicable reference levels for maximum instantaneous exposure field strengths are defined in clause 3.a).

(2) According to §1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.



TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	≤6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	<30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz \* = Plane-wave equivalent power density

Per the guidance of KDB 680106, the E-field and H-field limits shown in the table above are extended down to 100kHz.

#### 4. Test setup

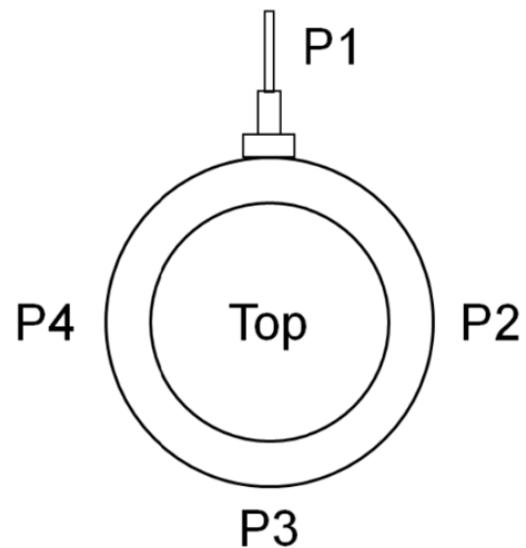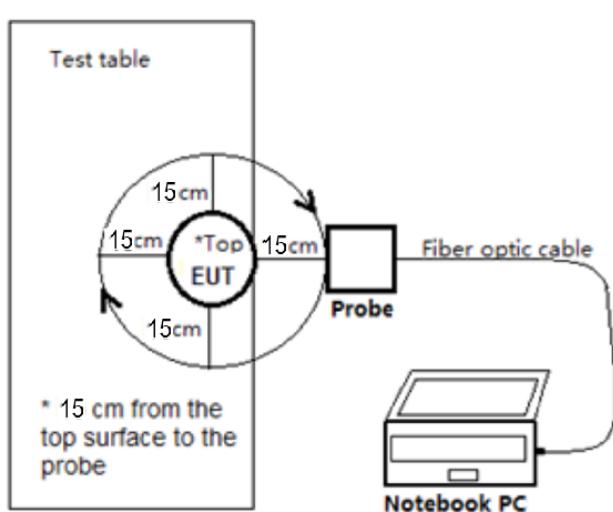



## 5. Measurement procedure

- a) The RF exposure test was performed on the table in anechoic chamber.
- b) The measurement was investigated between the edge of the charger and center of the field probe in the closest state.
- c) Maximum E-field and H-field measurements were made on each of five sides of the EUT that could come in contact with a user. Five sides are defined as follows: Right (P2), Top, Left (P4), Rear (P1) and Front (P3). Refer to the test position diagram above.
- d) According to the guidance of KDB 680106 D01 v03r01 test distance was 15 cm on the surrounding sides from the EUT.
- e) Equipment approval considerations item 5.b) of KDB 680106 D01 v03r01
  - (1) Power transfer frequency is less than 1 MHz
    - Yes, The device operates at a frequency of 110 KHz to 148.5 KHz.
  - (2) Output power from each primary coil is less than or equal to 15 watts.
    - Yes; the maximum output power of the primary coil is 10 W.
  - (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.
    - Yes, only one primary coil.
  - (4) Client device is placed directly in contact with the transmitter.
    - Yes
  - (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
    - Yes, Mobile exposure conditions only
  - (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.
    - Refer to following worst test result (For more detail, please refer to section 7)

- 1) The worst E-Field Strength levels at 15 cm < 50 % of the MPE E-Field Strength limit 614 V/m  
Charging mode: 1.4205V/m < 307 V/m
- 2) The worst H-Field Strength levels at 15 cm < 50 % of the MPE H-Field Strength limit 1.63 A/m  
Charging mode: 0.2382A/m < 0.815 A/m
- 3) The top surface E-Field Strength levels at 20 cm < 50 % of the MPE E-Field Strength limit 614 V/m  
Charging mode: 0.8168 V/m < 307 V/m
- 4) The top surface H-Field Strength levels at 20 cm < 50 % of the MPE H-Field Strength limit 1.63 A/m  
Charging mode: 0.0964 A/m < 0.815 A/m



## 6. Test Laboratory and test Equipment List

### Details about the Test Laboratory:

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch

Building 12&13, Zhiheng Wisdomland Business Park,  
Guankou Erlu, Nantou, Nanshan District,  
Shenzhen, 518052 China

FCC Registration No.: 514049

Telephone: 86 755 8828 6998  
Fax: 86 755 828 5299

### Equipment list

Description	Manufacturer	Model no.	Serial no.	Cal. due date
Electric and magnetic field probe Analyzer	Narda	EHP-200A	180ZX10218	2023-4-19

### Measurement Uncertainty

Test Item	Uncertainty
Electric and magnetic field	7.8%



## 7. Test Result

15cm

Electric Field Emissions					
Test Position	Test Distance (cm)	Measure Value (V/m)	Limit (V/m)	50% Limit (V/m)	Result
P1	15	0.8968	614	307	Pass
P2	15	0.5404	614	307	Pass
P3	15	0.9870	614	307	Pass
P4	15	0.8588	614	307	Pass
Top	15	<b>1.4205</b>	614	307	Pass
Magnetic Field Emissions					
Test Position	Test Distance (cm)	Measure Value (A/m)	Limit (A/m)	50% Limit (A/m)	Result
P1	15	0.0833	1.63	0.815	Pass
P2	15	0.0570	1.63	0.815	Pass
P3	15	0.1085	1.63	0.815	Pass
P4	15	0.0717	1.63	0.815	Pass
Top	15	<b>0.2382</b>	1.63	0.815	Pass

20cm

Electric Field Emissions					
Test Position	Test Distance (cm)	Measure Value (V/m)	Limit (V/m)	50% Limit (V/m)	Result
Top	20	<b>0.8168</b>	614	307	Pass
Magnetic Field Emissions					
Test Position	Test Distance (cm)	Measure Value (A/m)	Limit (A/m)	50% Limit (A/m)	Result
Top	20	<b>0.0964</b>	1.63	0.815	Pass

**The test result compliance with §1.1310 requirement.**

Reviewed by:

Jessie He  
Project Manager

Prepared by:

Myron Yu  
Project Engineer

Tested by:

Carry Cai  
Test Engineer