

# RF Exposure Evaluation Report

## 1. Product Information

FCC ID	2A7C6-N1002
Product Name	Shock Absorbing Magnetic Wireless Car Charger
Model Number	N1002
Series Models	N/A
Power Supply	DC 5V/2A or DC 9V/2A from adapter
Maximum Rated Power of WPT	15W Max.
Modulation Type	ASK
Operation Frequency	From 110KHz~205KHz
Antenna Type	Coil Antenna
Hardware version	TL10A763 CWT1004 V2.0
Software version	V1.0
Exposure category	General population/uncontrolled environment
Test Sample ID:	CTA220615001-1#
EUT Type	Production Unit
Device Type	Mobile Device

## 2. Evaluation Limit

### 2.1 Refer Evaluation Method

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

According KDB 680106 D01 RF Exposure Wireless Charging App v03

### 2.2 Limit

#### Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

#### Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

\*=Plane-wave equivalent power density

### 3. Test Facility and Accreditation

Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

FCC-Registration No.: 517856 Designation Number: CN1318.


A2LA-Lab Cert. No.: 6534.01

### 4. Equipment Approval Considerations

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110KHz~205KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power for each primary coil is 15W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes only one primary coils.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.


## 5. TEST CONDITIONS AND RESULTS

### 5.1 Test Setup

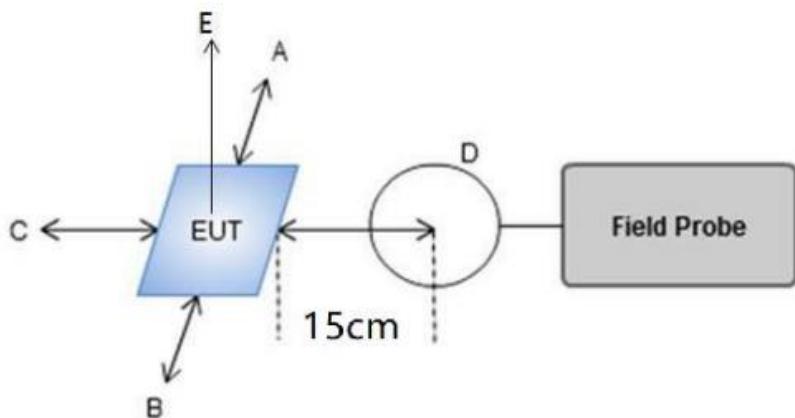

Note: A, B, C, D, E, F for six surfaces of the product.

The surfaces of the EUT is defined as figure below:

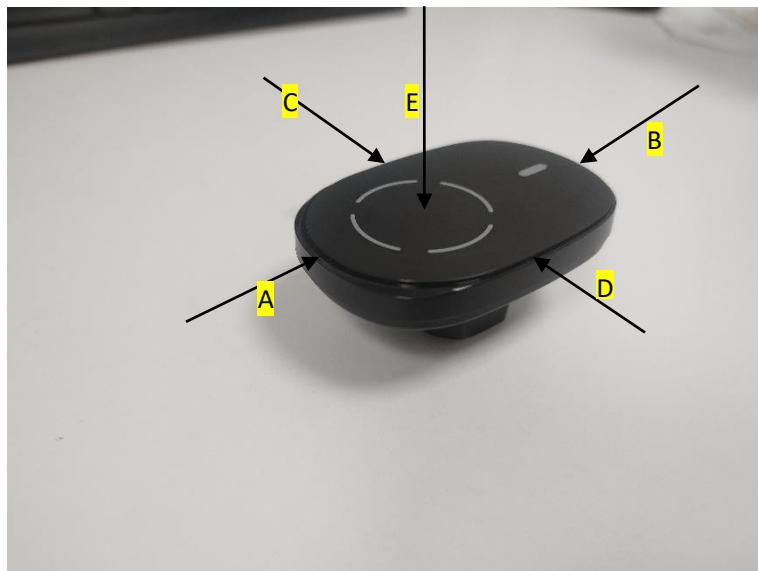

### 5.2 Measurement Procedure

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (10cm) which is between the edge of the charger and the geometric centre of probe.
- c) The turn table was rotated 360d degree to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v03.

### 5.3 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

Test Conditions	Description					
TM1	AC/DC Adapter (9V/2A) + EUT + Wireless Charger tester (Load 15W)					Recorded
TM2	AC/DC Adapter (9V/2A) + EUT + Wireless Charger tester (Load 10W)					Recorded
TM3	AC/DC Adapter (9V/2A) + EUT + Wireless Charger tester (Load 5W)					Recorded
TM4	AC/DC Adapter (5V/2A) + EUT + Wireless Charger tester (Load 15W)					Pre-tested
TM5	AC/DC Adapter (5V/2A) + EUT + Wireless Charger tester (Load 10W)					Pre-tested
TM6	AC/DC Adapter (5V/2A) + EUT + Wireless Charger tester (Load 5W)					Pre-tested

### 5.4 Test Result of E and H field Strength

E-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Power Load	Unit	Frequency Range (MHz)	Measured E-Field Strength Values (V/m)					FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
15W	v/m	0.113	52.40	44.49	49.39	51.65	108.20	307.0	614.0
10W	v/m	0.113	45.62	36.57	41.85	45.62	97.27	307.0	614.0
5W	v/m	0.113	35.06	27.14	35.44	38.83	86.71	307.0	614.0

Note: V/m= A/m \*377

H-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Power Load	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)					FCC H-Field Strength 50% Limits (A/m)	H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
15W	uT	0.113	0.174	0.148	0.164	0.171	0.359	--	--
15W	A/m	0.113	0.139	0.118	0.131	0.137	0.287	0.815	1.63
10W	uT	0.113	0.151	0.121	0.139	0.151	0.323	--	--
10W	A/m	0.113	0.121	0.097	0.111	0.121	0.258	0.815	1.63
5W	uT	0.113	0.116	0.090	0.118	0.129	0.288	--	--
5W	A/m	0.113	0.093	0.072	0.094	0.103	0.230	0.815	1.63

Note: A/m=uT/1.25

**H-Field Strength at 20cm from the top surface of the EUT**

Power Load	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
15W	uT	0.113	0.323	--	--
15W	A/m	0.113	0.258	0.815	1.63
10W	uT	0.113	0.304	--	--
10W	A/m	0.113	0.243	0.815	1.63
5W	uT	0.113	0.259	--	--
5W	A/m	0.113	0.207	0.815	1.63

Note: A/m = uT/1.25

## **6. Conclusion**

A minimum safety distance of at 15 cm surrounding the device and 20 cm above the top surface of the device is required when the device is charging a smart phone. The detected emissions with a distance of 15 cm surrounding the device and 20 cm above the top surface of the device are below the limitations according to FCC KDB 680106 D01 Section 3. RF Exposure Requirement Clause 3.

## 7. Test Setup Photos of the EUT



.....END.....