


TEST REPORT

Product Name: Deligo food delivery robot
FCC ID: 2A7DE-FBOT12D
Trademark: 
Model Number: FBOT12D
Prepared For: Shenzhen Reeman Intelligent Equipment Co.,Ltd
Address: NO.401, Building NO.15, Incubator,Robot Zhizao Industries Park, COFCO (Fu'an), Dayang Road, Fuyong Sub-district, Bao'an District, Shenzhen, China
Manufacturer: Shenzhen Reeman Intelligent Equipment Co.,Ltd
Address: NO.401, Building NO.15, Incubator,Robot Zhizao Industries Park, COFCO (Fu'an), Dayang Road, Fuyong Sub-district, Bao'an District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: Apr. 16, 2022
Sample tested Date: Apr. 16, 2022 to May.17, 2022
Issue Date: May.17, 2022
Report No.: CTB220517008RFX
Test Standards: 47 CFR Part 15 Subpart E
KDB 662911 D01 v02r01
Test Results: PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	10
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. AC POWER LINE CONDUCTED EMISSION	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 Test Result	16
7. RADIATED SPURIOUS EMISSIONS	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	19
7.3 Test procedure	20
7.4 Test Result	21
8. BAND EDGE	29
8.1 Block Diagram Of Test Setup	29
8.2 Limit	29
8.3 Test procedure	29
8.4 Test Result	30
9. CONDUCTED PEAK OUTPUT POWER	42
9.1 Block Diagram Of Test Setup	42
9.2 Limit	42

9.3	Test procedure	43
10.	EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	60
10.1	Block Diagram Of Test Setup	60
10.2	Limits.....	60
10.3	Test Procedure	60
10.4	Test Results	62
11.	POWER SPECTRAL DENSITY	79
11.1	Block Diagram Of Test Setup	79
11.2	Limit.....	79
11.3	Test procedure	79
11.4	Test Result	81
12.	FREQUENCY STABILITY	98
12.1	Block Diagram Of Test Setup	98
12.2	Limit.....	98
12.3	Test procedure	98
12.4	Test Result	98
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT	117
13.1	Requirement.....	117
13.2	Test Results	117
14.	ANTENNA REQUIREMENT	118
15.	EUT PHOTOGRAPHS.....	119
16.	EUT TEST SETUP PHOTOGRAPHS	120

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220517008RFX	May.17, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (b)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U = \pm 54.3\text{Hz}$
Adjacent channel power	$U = \pm 1.3\text{dB}$
Conducted Adjacent channel power	$U = \pm 1.38\text{dB}$
Conducted output power Above 1G	$U = \pm 1.0\text{dB}$
Conducted output power below 1G	$U = \pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U = \pm 1.0\text{dB}$
Conduction spurious emissions	$U = \pm 2.8\text{dB}$
Out of band emission	$U = \pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U = \pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U = \pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U = \pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U = \pm 3.4\text{dB}$
humidity uncertainty	$U = \pm 5.3\%$
Temperature uncertainty	$U = \pm 0.59^{\circ}\text{C}$
Supply voltages	$U = \pm 3\%$
Time	$U = \pm 5\%$
Conducted emission(150K-30MHz)	3.2dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	FBOT12D
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	RK3128_Main_A1.5
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850 MHz/ 4 channel IEEE802.11n/ac(40M): 5725MHz ~5850 MHz / 2 channel IEEE802.11ac(80M): 5725MHz ~5850 MHz / 1 channel
Max. RF output power:	WiFi (5G): 10.73dBm
Type of Modulation:	WiFi: DSSS, CCK and OFDM
Antenna installation:	Internal Antenna
Antenna Gain:	Antenna 1: 1.76dBi Antenna 2: 1.76dBi Antenna 3: 1.76dBi
Ratings:	Input: AC 100-240V 50/60Hz Output: 29.4V $\Rightarrow$ 4.0A 25.9V $\Rightarrow$ 538.72Wh(Built-in battery)

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	Foshan Shunde Guan Yuda Power Supply Co.,LTD	GM130-2940400-F	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
52	5260MHz	60	5300MHz
56	5280MHz	64	5320MHz

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz

For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	NA	NA
155	5775MHz	NA	NA

NOTE: Dutycycle>98%.

Test mode	rate
802.11a	54M
802.11n	500M
802.11/ac	500M

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)	5250MHz ~5350 MHz	Channel 52	Channel 56	Channel 64
		5260MHz	5280MHz	5320MHz
802.11n/ac(40M)	5250MHz ~5350 MHz	Channel54	N/A	Channel62
		5270MHz	N/A	5310MHz
802.11ac(80M)	5250MHz ~5350 MHz	N/A	Channel 58	N/A
		N/A	5290MHz	N/A

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):NV	120
Normal Temperature(°C):NT	25
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.11.01	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

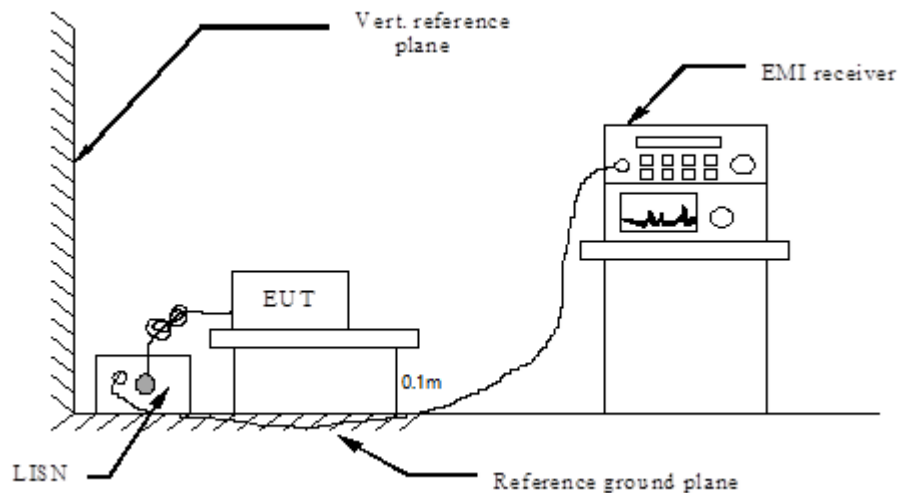

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

L:

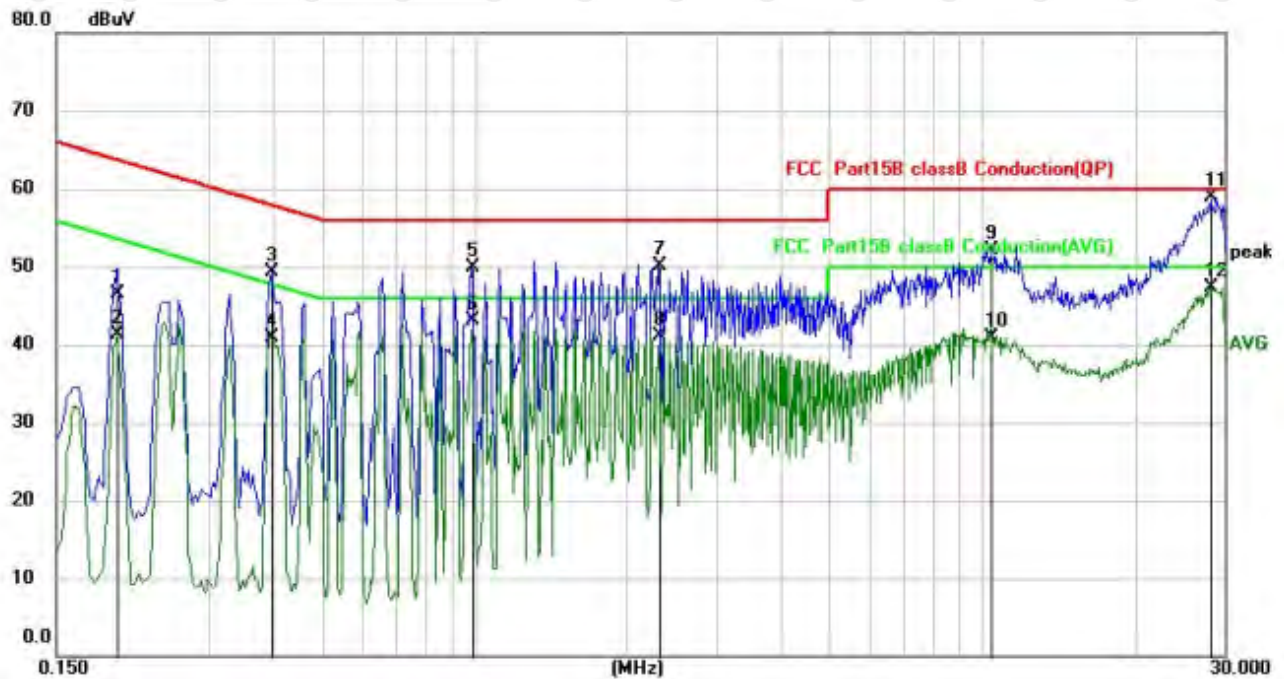


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1980	35.72	10.69	46.41	63.69	-17.28	QP
2		0.1980	30.54	10.69	41.23	53.69	-12.46	AVG
3		0.3980	38.81	10.58	49.39	57.90	-8.51	QP
4		0.3980	30.37	10.58	40.95	47.90	-6.95	AVG
5		0.9860	39.21	10.62	49.83	56.00	-6.17	QP
6		0.9860	32.46	10.62	43.08	46.00	-2.92	AVG
7		2.3020	39.42	10.63	50.05	56.00	-5.95	QP
8		2.3020	30.42	10.63	41.05	46.00	-4.95	AVG
9		10.4460	41.27	10.83	52.10	60.00	-7.90	QP
10		10.4460	30.09	10.83	40.92	50.00	-9.08	AVG
11	*	28.1860	47.90	11.02	58.92	60.00	-1.08	QP
12		28.1860	36.35	11.02	47.37	50.00	-2.63	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

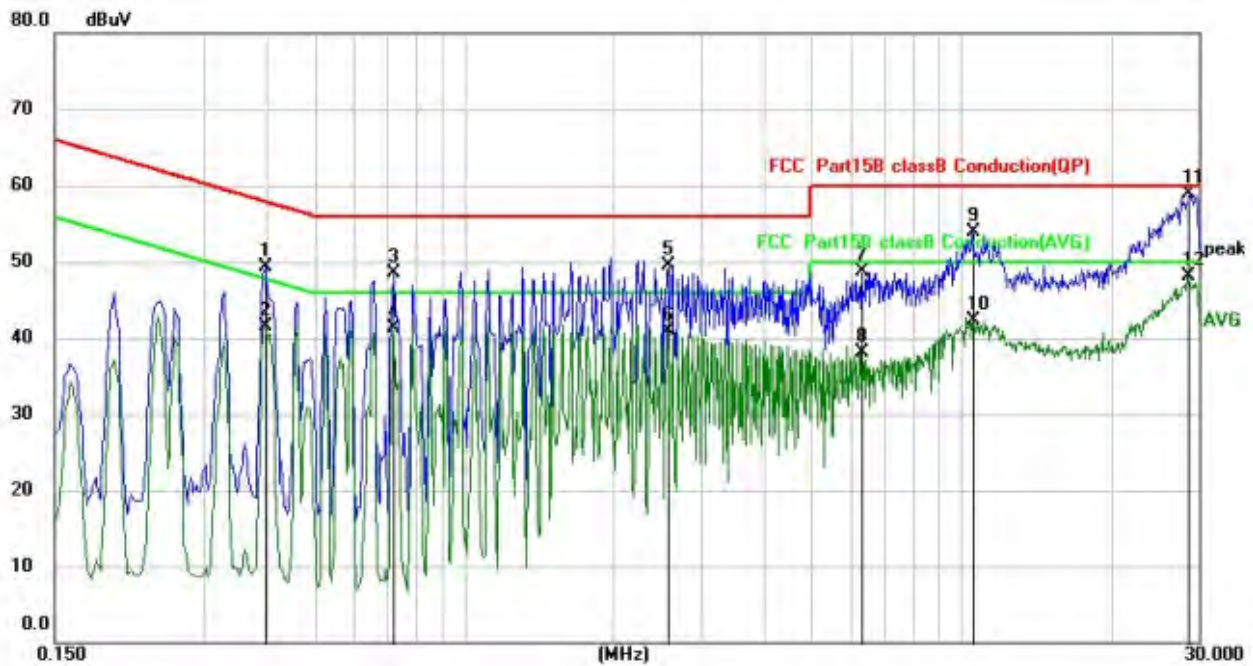

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	dBuV	Factor	ment	dBuV	dB	Detector
1		0.3980	38.78	10.58	49.36	57.90	-8.54	QP
2		0.3980	30.90	10.58	41.48	47.90	-6.42	AVG
3		0.7220	37.96	10.56	48.52	56.00	-7.48	QP
4		0.7220	30.66	10.56	41.22	46.00	-4.78	AVG
5		2.5620	38.89	10.63	49.52	56.00	-6.48	QP
6		2.5620	30.34	10.63	40.97	46.00	-5.03	AVG
7		6.3100	37.98	10.69	48.67	60.00	-11.33	QP
8		6.3100	27.38	10.69	38.07	50.00	-11.93	AVG
9		10.5140	43.04	10.83	53.87	60.00	-6.13	QP
10		10.5140	31.49	10.83	42.32	50.00	-7.68	AVG
11	*	28.5860	47.86	11.02	58.88	60.00	-1.12	QP
12		28.5860	37.09	11.02	48.11	50.00	-1.89	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Remark:

1. Factor = Cable loss + LISN factor, Margin = Limit – Level
2. All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
3. All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

Figure 1. Below 30MHz

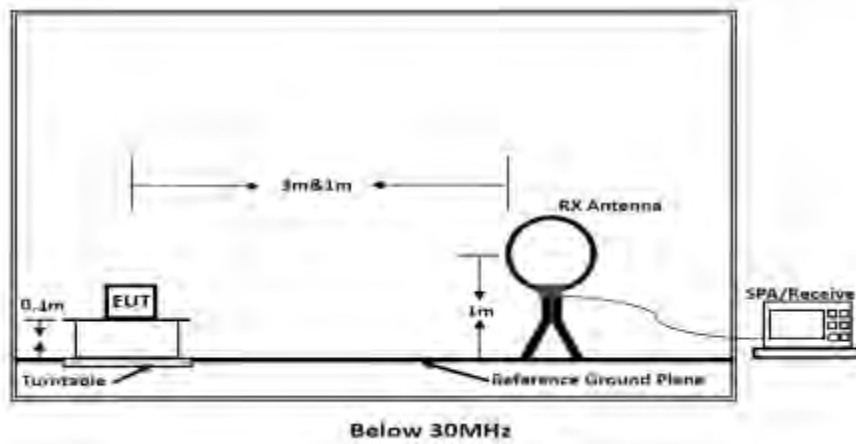


Figure 2. 30MHz to 1GHz


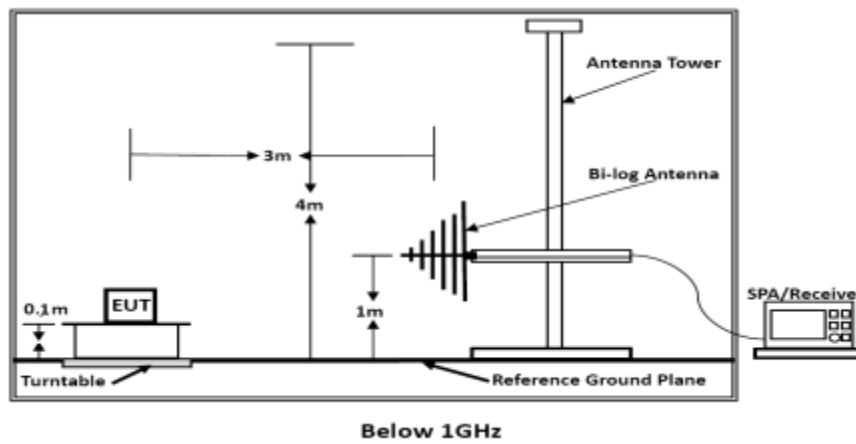


Figure 3. Above 1GHz

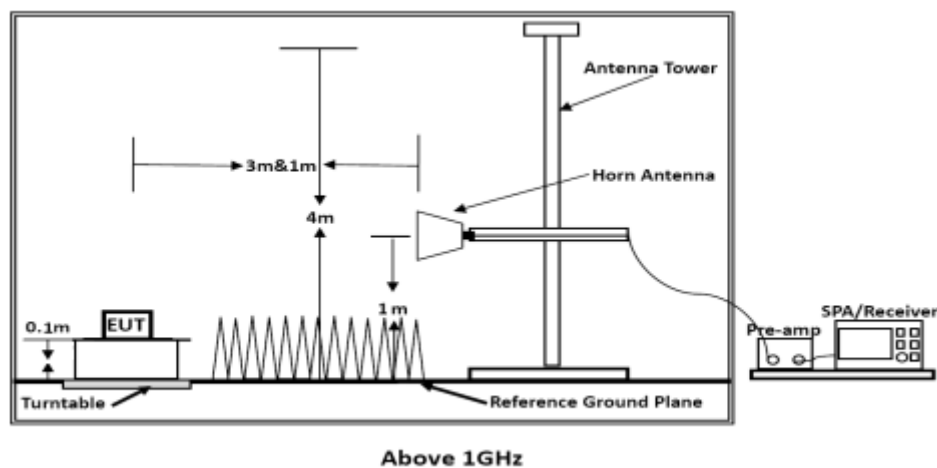

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F$ (kHz) + 80	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F$ (kHz) + 40	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = (E \cdot d)^2 / 30$

where:

- E is the field strength in V/m;
 - d is the measurement distance in meters;
 - EIRP is the equivalent isotropically radiated power in watts.
- (ii) Working in dB units, the above equation is equivalent to:
- $$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

30MHz-1GHz Test Results:

Modulation : 802.11a (the worst data)


Test Channel : 5780MHz

Antenna polarity: H

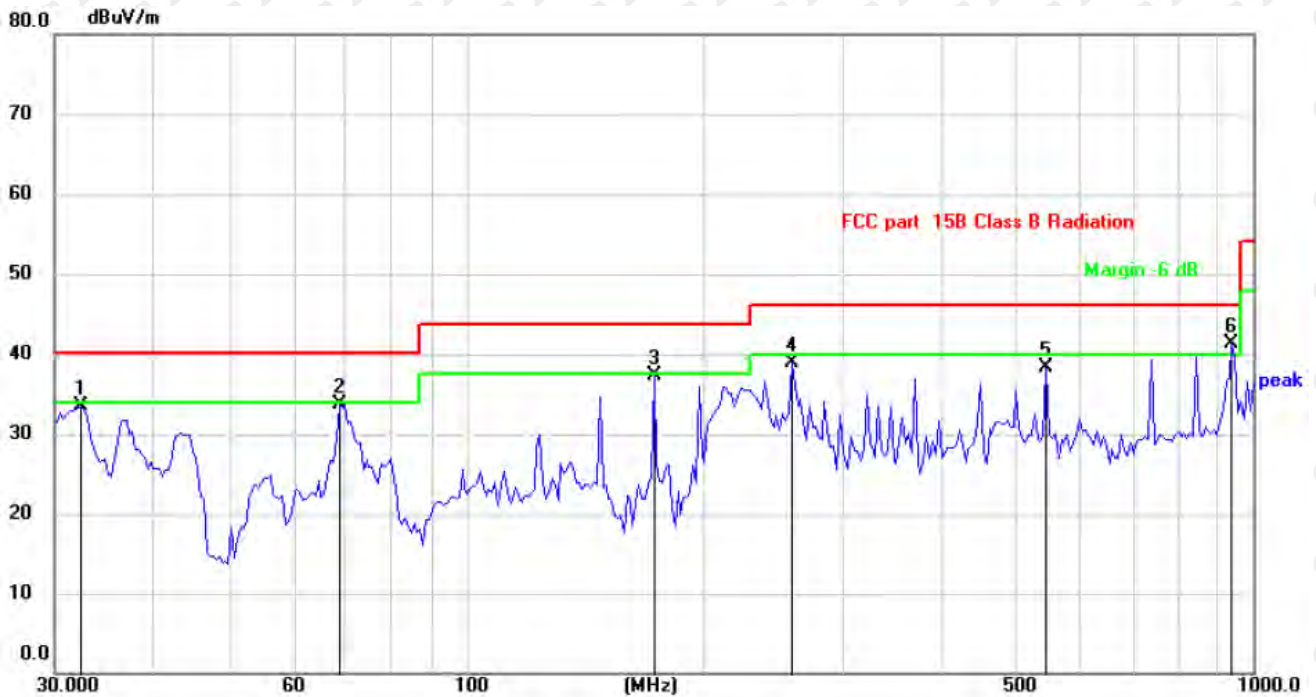

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		32.4628	40.55	-7.02	33.53	40.00	-6.47	QP
2		68.9929	41.39	-7.75	33.64	40.00	-6.36	QP
3		173.2050	44.06	-6.68	37.38	43.50	-6.12	QP
4		259.2336	44.59	-5.61	38.98	46.00	-7.02	QP
5		546.1390	36.74	1.57	38.31	46.00	-7.69	QP
6	*	940.4800	35.36	5.96	41.32	46.00	-4.68	QP

Antenna polarity: V

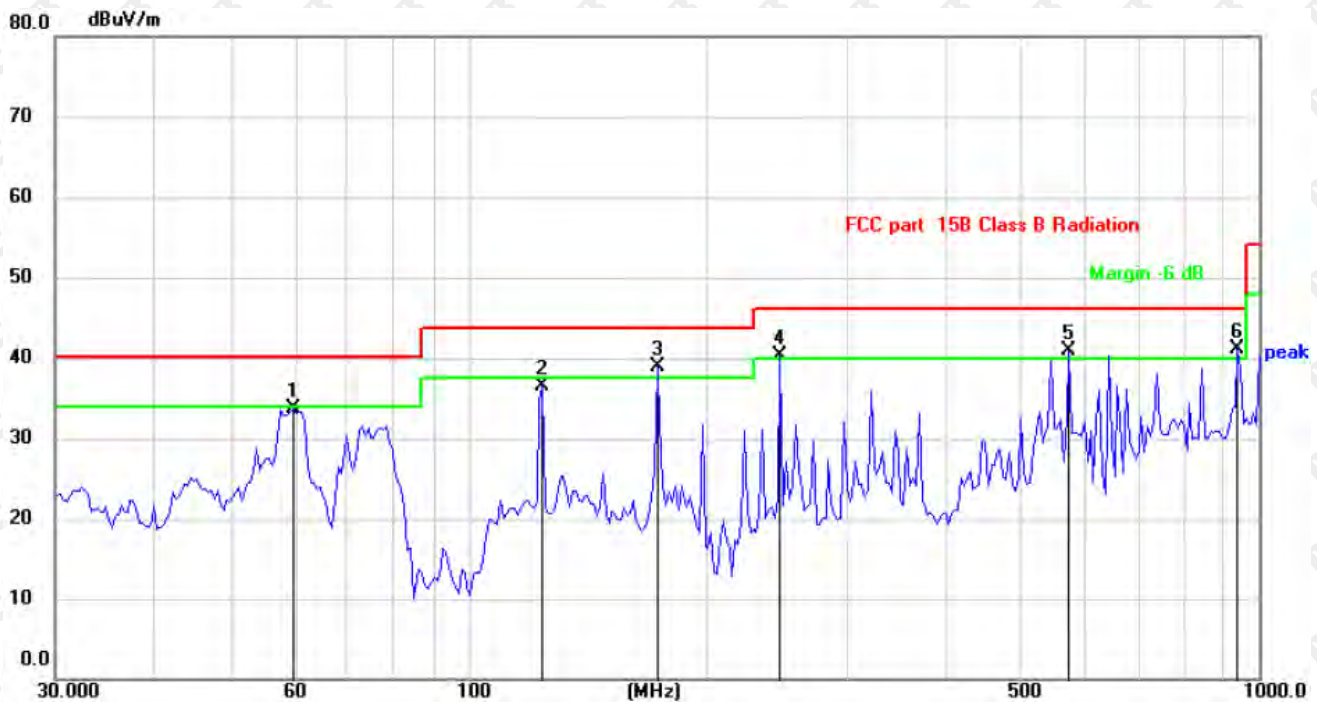

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		59.9637	39.89	-6.17	33.72	40.00	-6.28	QP
2		124.1329	43.02	-6.58	36.44	43.50	-7.06	QP
3	*	173.2050	45.59	-6.68	38.91	43.50	-4.59	QP
4	!	248.1165	45.94	-5.72	40.22	46.00	-5.78	QP
5	!	575.6340	38.81	2.12	40.93	46.00	-5.07	QP
6	!	940.4800	35.20	5.96	41.16	46.00	-4.84	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Radiated Spurious Emission (Above 1GHz):

ANT 1

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	42.87	16.15	59.02	74	-14.98	PK	1.90	143	H
10360	25.50	16.15	41.65	54	-12.35	AV	1.76	107	H
10360	41.30	16.15	57.45	74	-16.55	PK	1.38	358	V
10360	28.42	16.15	44.57	54	-9.43	AV	1.56	227	V
Channel:5240MHz									
10480	42.18	16.15	58.33	74	-15.67	PK	1.62	195	H
10480	25.03	16.15	41.18	54	-12.82	AV	1.54	138	H
10480	40.41	16.15	56.56	74	-17.44	PK	1.51	207	V
10480	26.74	16.15	42.89	54	-11.11	AV	1.05	324	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	41.90	16.15	58.05	74	-15.95	PK	1.35	112	H
10380	24.16	16.15	40.31	54	-13.69	AV	1.56	137	H
10380	42.27	16.15	58.42	74	-15.58	PK	1.31	223	V
10380	28.39	16.15	44.54	54	-9.46	AV	1.53	144	V
Channel:5230MHz									
10460	40.86	16.15	57.01	74	-16.99	PK	1.50	206	H
10460	26.72	16.15	42.87	54	-11.13	AV	1.33	164	H
10460	43.66	16.15	59.81	74	-14.19	PK	1.21	70	V
10460	25.24	16.15	41.39	54	-12.61	AV	1.12	69	V

Modulation : 802.11(VH80) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	43.73	16.15	59.88	74	-14.12	PK	1.38	282	H
10420	24.47	16.15	40.62	54	-13.38	AV	1.31	126	H
10420	43.95	16.15	60.10	74	-13.90	PK	1.35	142	V
10420	28.02	16.15	44.17	54	-9.83	AV	1.29	256	V
Channel:5775MHz									
11550	39.60	16.15	55.75	74	-18.25	PK	1.36	144	H
11550	27.92	16.15	44.07	54	-9.93	AV	1.83	332	H
11550	39.74	16.15	55.89	74	-18.11	PK	1.49	206	V
11550	25.78	16.15	41.93	54	-12.07	AV	1.11	126	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Radiated Spurious Emission (Above 1GHz):

ANT 2+ANT 3

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	40.54	16.15	56.69	74	-17.31	PK	1.34	287	H
10360	24.49	16.15	40.64	54	-13.36	AV	1.28	109	H
10360	43.99	16.15	60.14	74	-13.86	PK	1.42	297	V
10360	28.94	16.15	45.09	54	-8.91	AV	1.02	112	V
Channel:5240MHz									
10480	43.22	16.34	59.56	74	-14.44	PK	1.83	110	H
10480	26.34	16.34	42.68	54	-11.32	AV	1.76	189	H
10480	41.28	16.34	57.62	74	-16.38	PK	1.35	196	V
10480	26.64	16.34	42.98	54	-11.02	AV	1.73	106	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	42.08	16.34	58.42	74	-15.58	PK	1.19	47	H
10380	27.28	16.34	43.62	54	-10.38	AV	1.82	352	H
10380	42.37	16.34	58.71	74	-15.29	PK	1.40	54	V
10380	27.24	16.34	43.58	54	-10.42	AV	1.43	198	V
Channel:5230MHz									
10460	40.22	16.34	56.56	74	-17.44	PK	1.71	101	H
10460	27.39	16.34	43.73	54	-10.27	AV	1.52	124	H
10460	41.30	16.34	57.64	74	-16.36	PK	1.77	249	V
10460	26.74	16.34	43.08	54	-10.92	AV	1.02	149	V

Modulation : 802.11(VH80) (the worst data)


Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	41.49	16.34	57.83	74	-16.17	PK	1.18	199	H
10420	26.64	16.34	42.98	54	-11.02	AV	1.03	201	H
10420	40.68	16.34	57.02	74	-16.98	PK	1.06	327	V
10420	28.36	16.34	44.70	54	-9.30	AV	1.45	177	V

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
2. The EUT was tested in the low, high channel and the worst case position data was reported.
3. Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

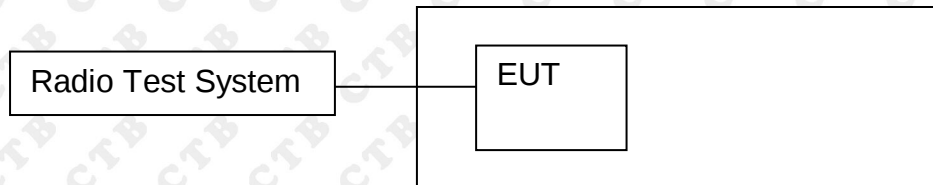

8.2 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


8.4 Test Result

Test Graph


ANT 1

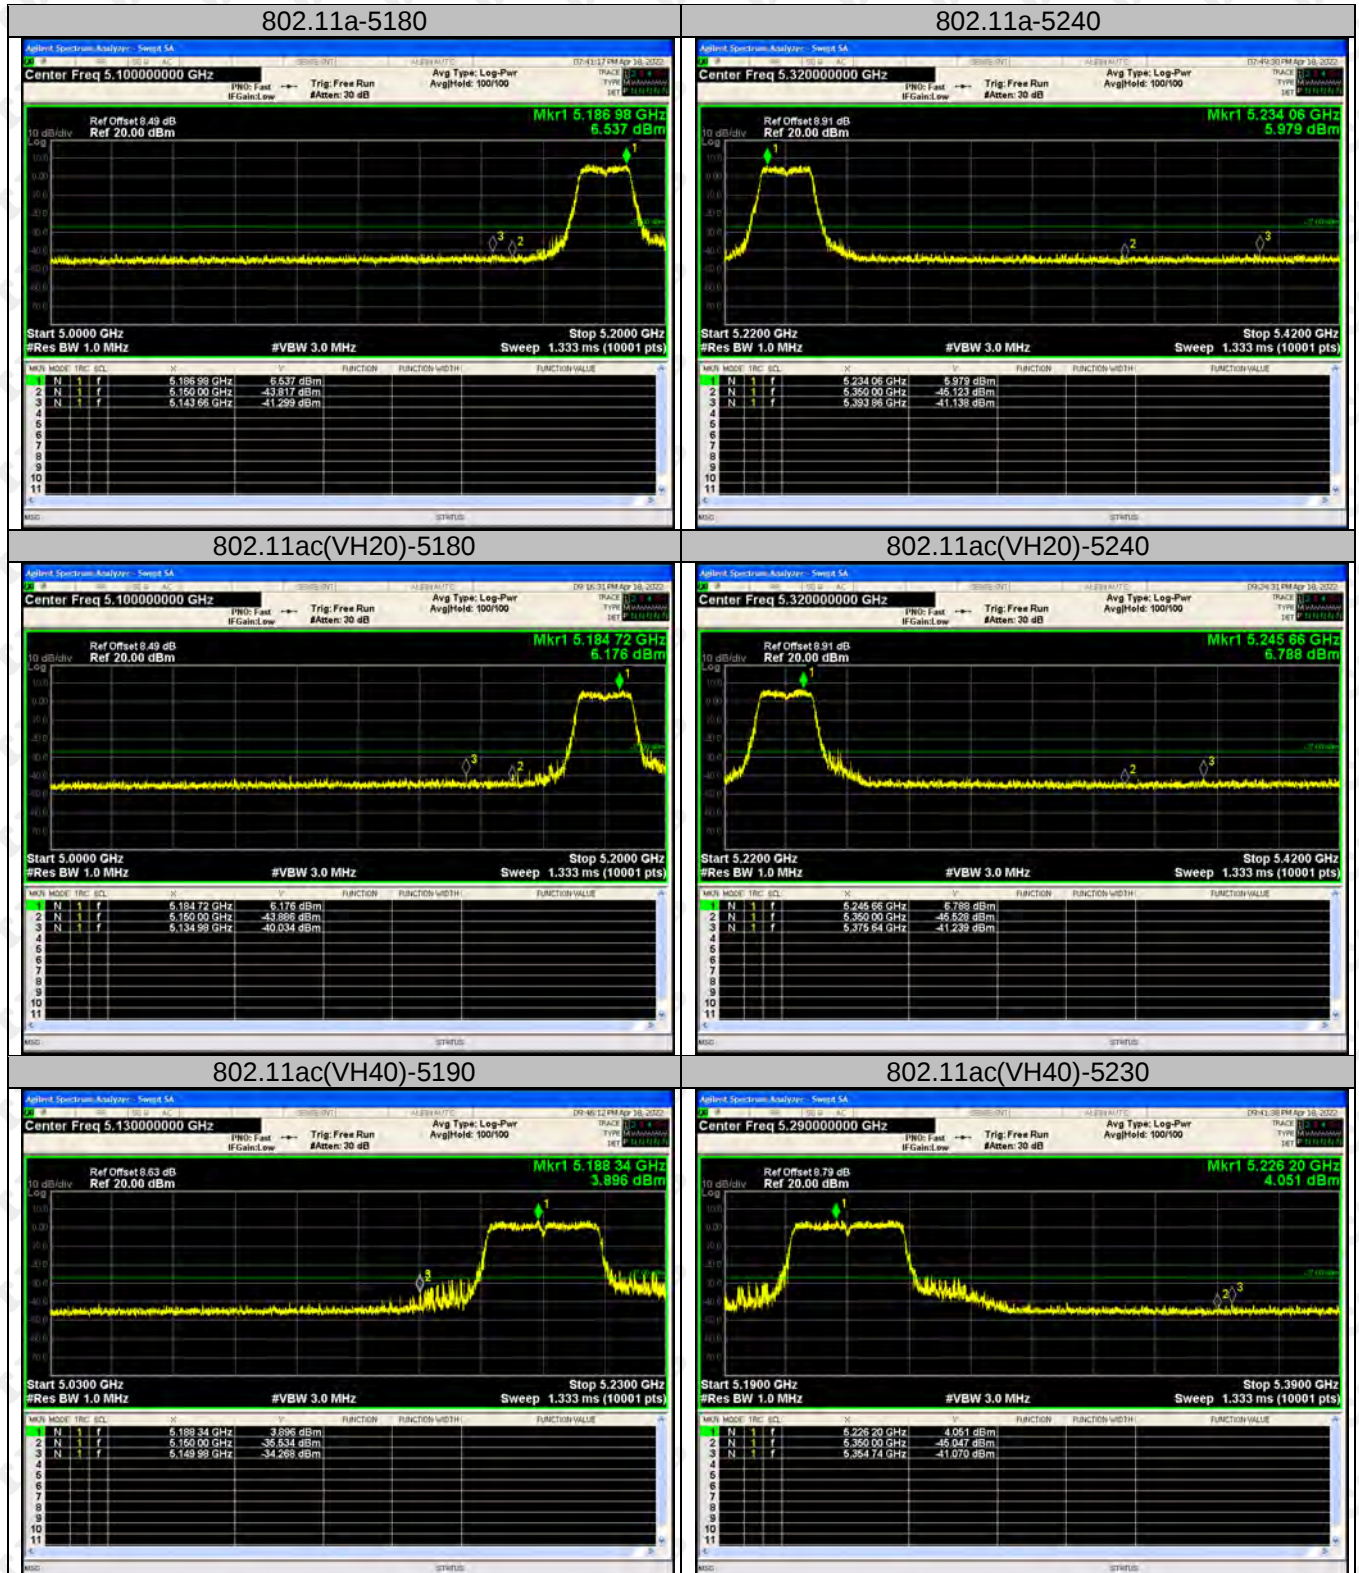


802.11n(HT20)-5180

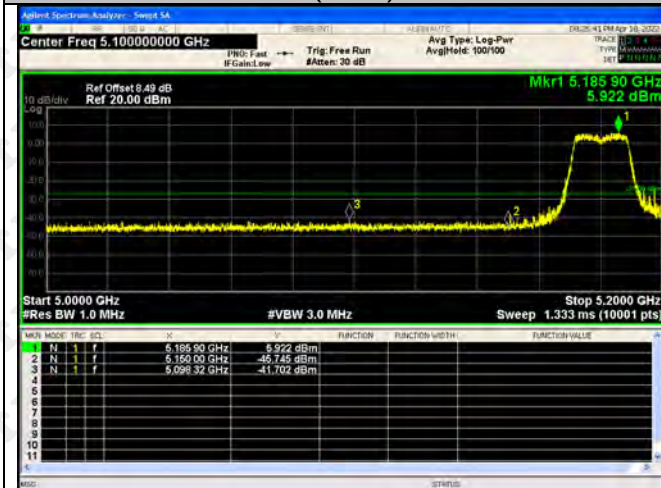


802.11n(HT20)-5240

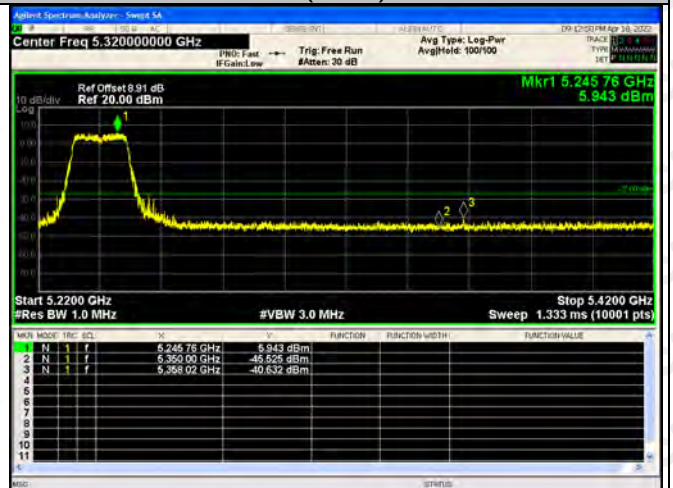


802.11n(HT40)-5190

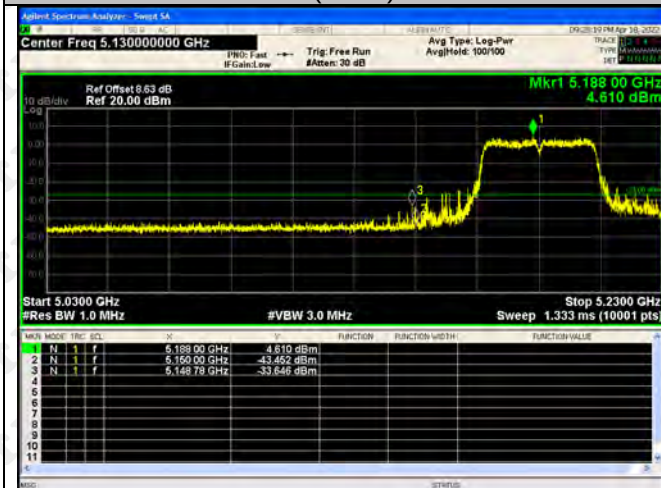



802.11n(HT40)-5230

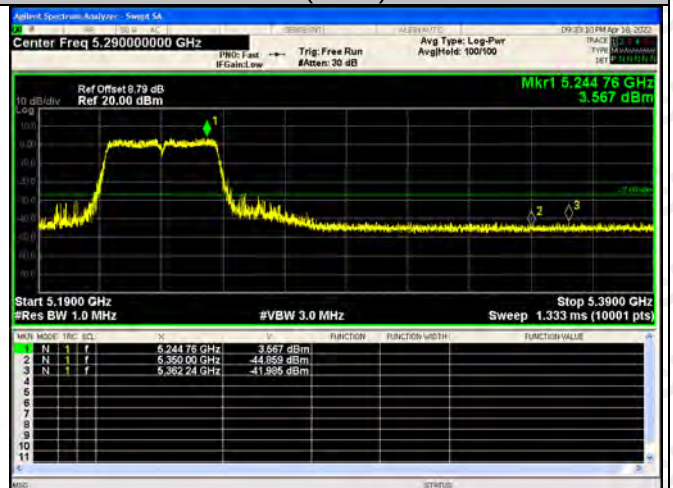


802.11ac(VH80)-5210

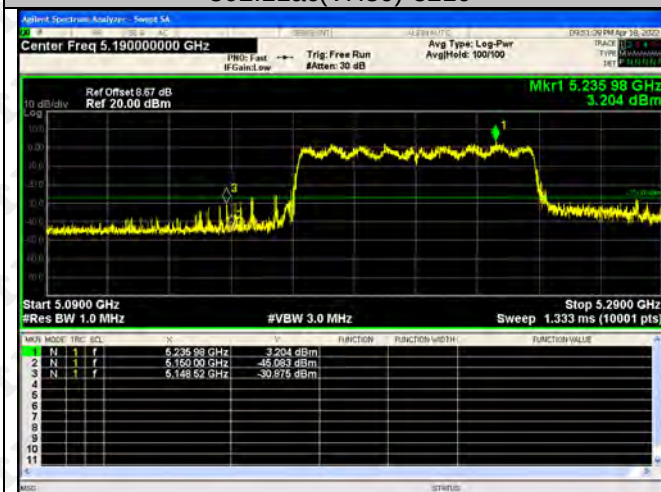

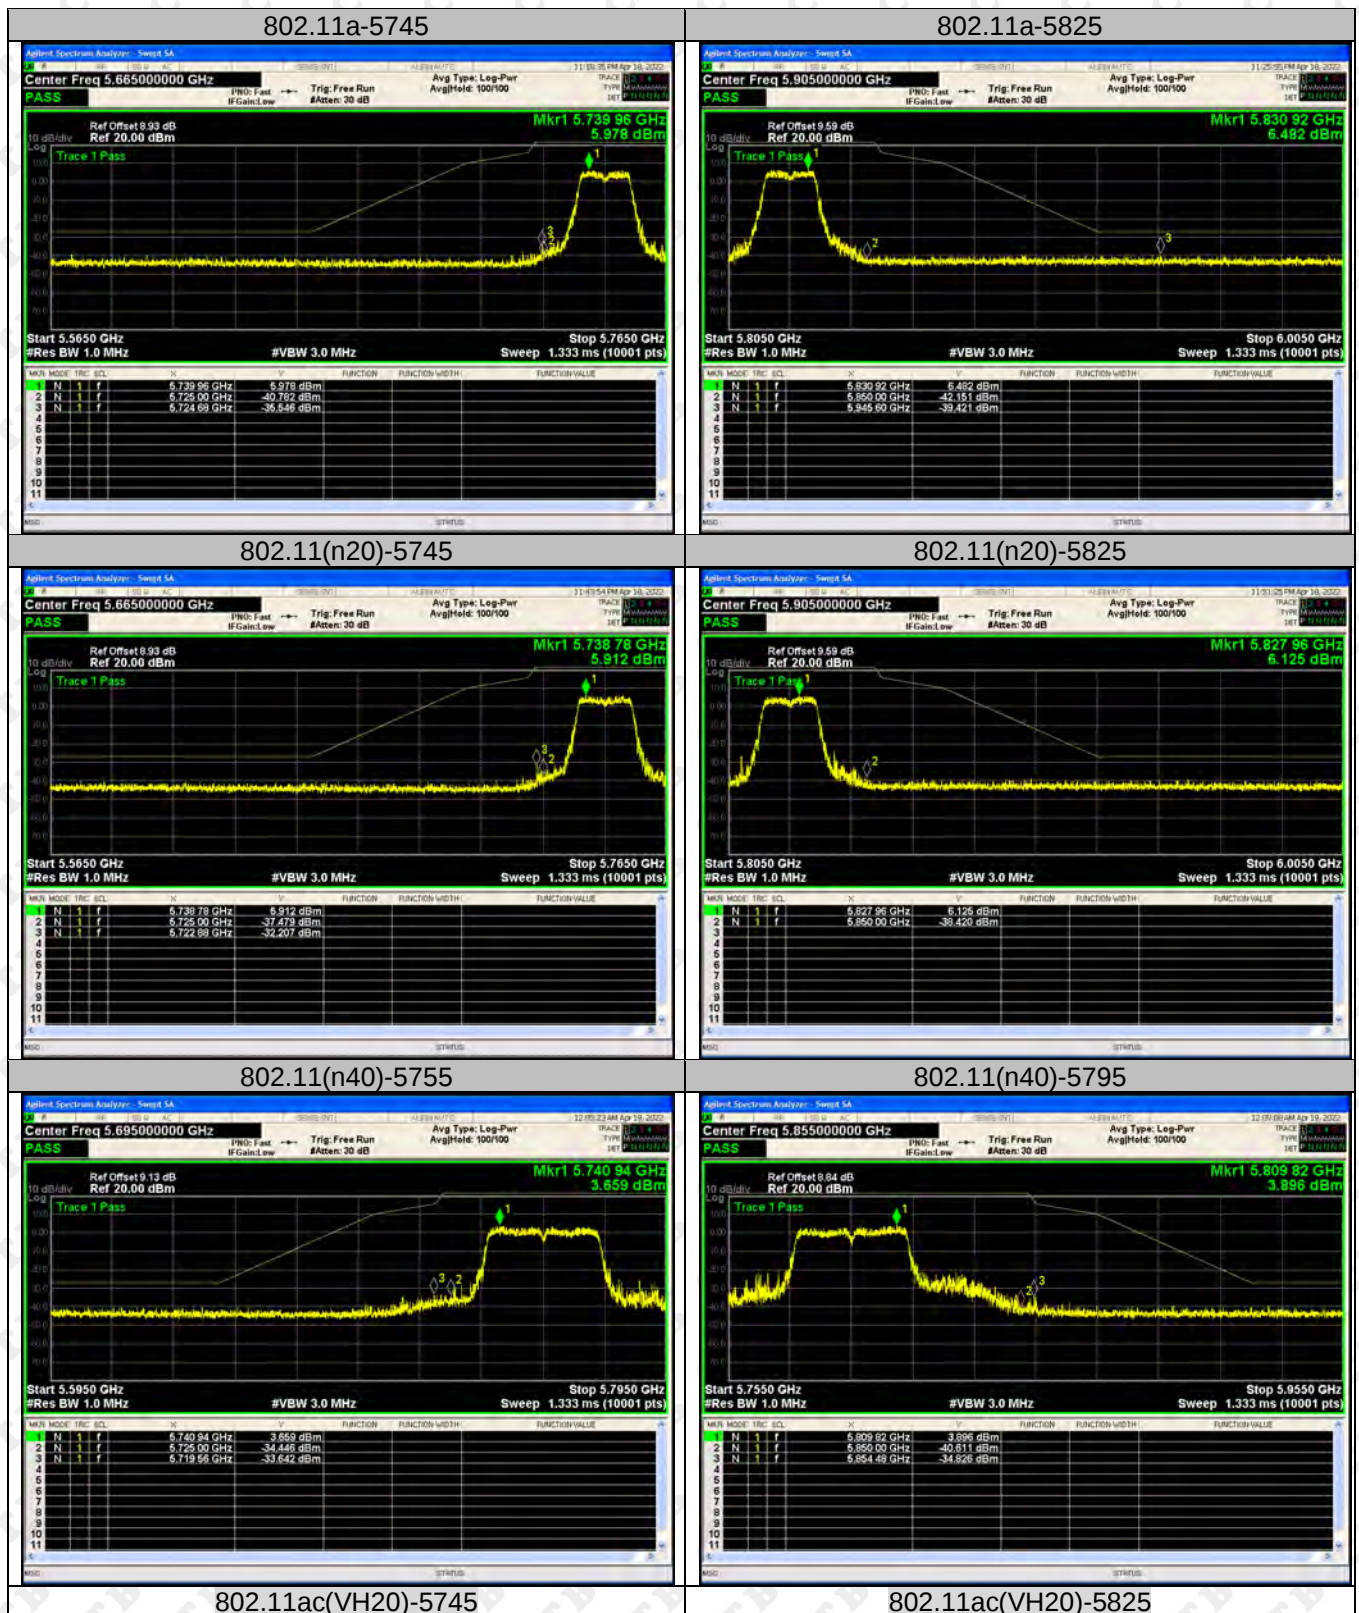


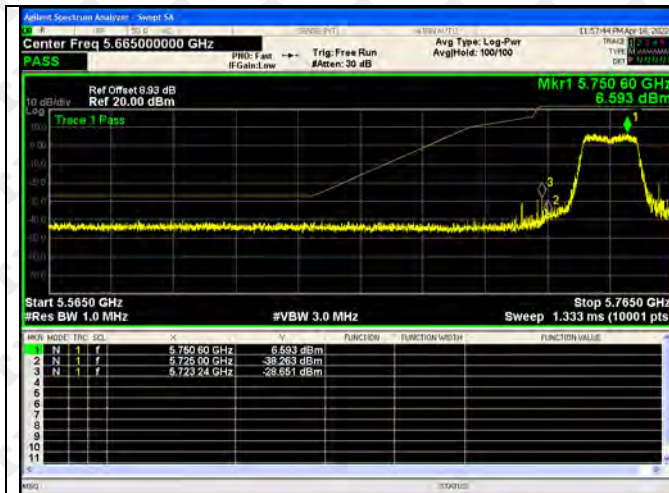

802.11ac(VH40)-5755

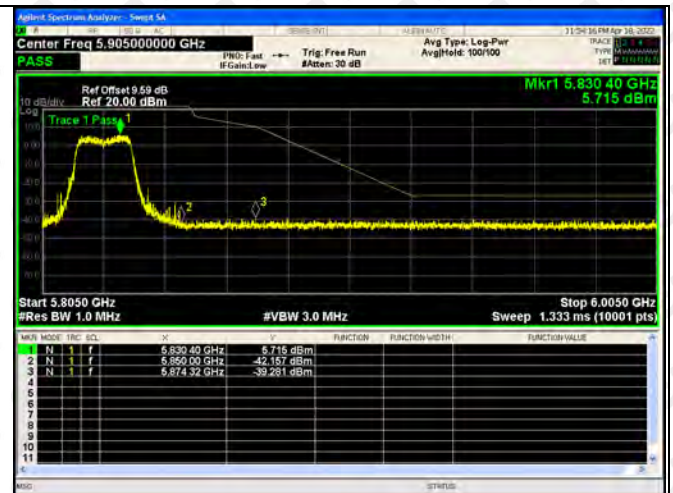


802.11ac(VH40)-5795

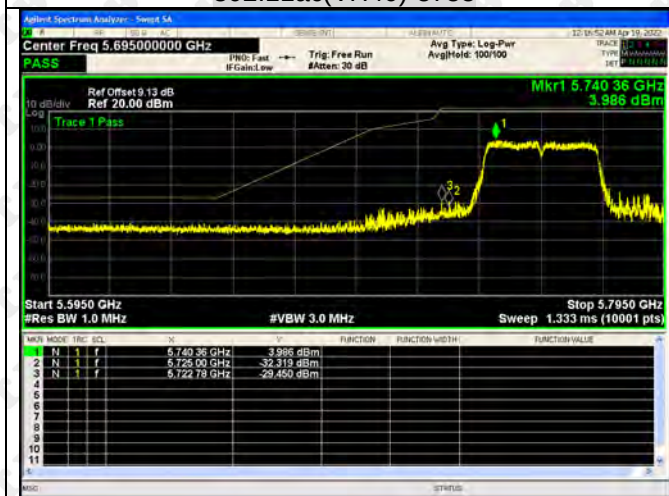


802.11ac(VH80)-5775




ANT 2

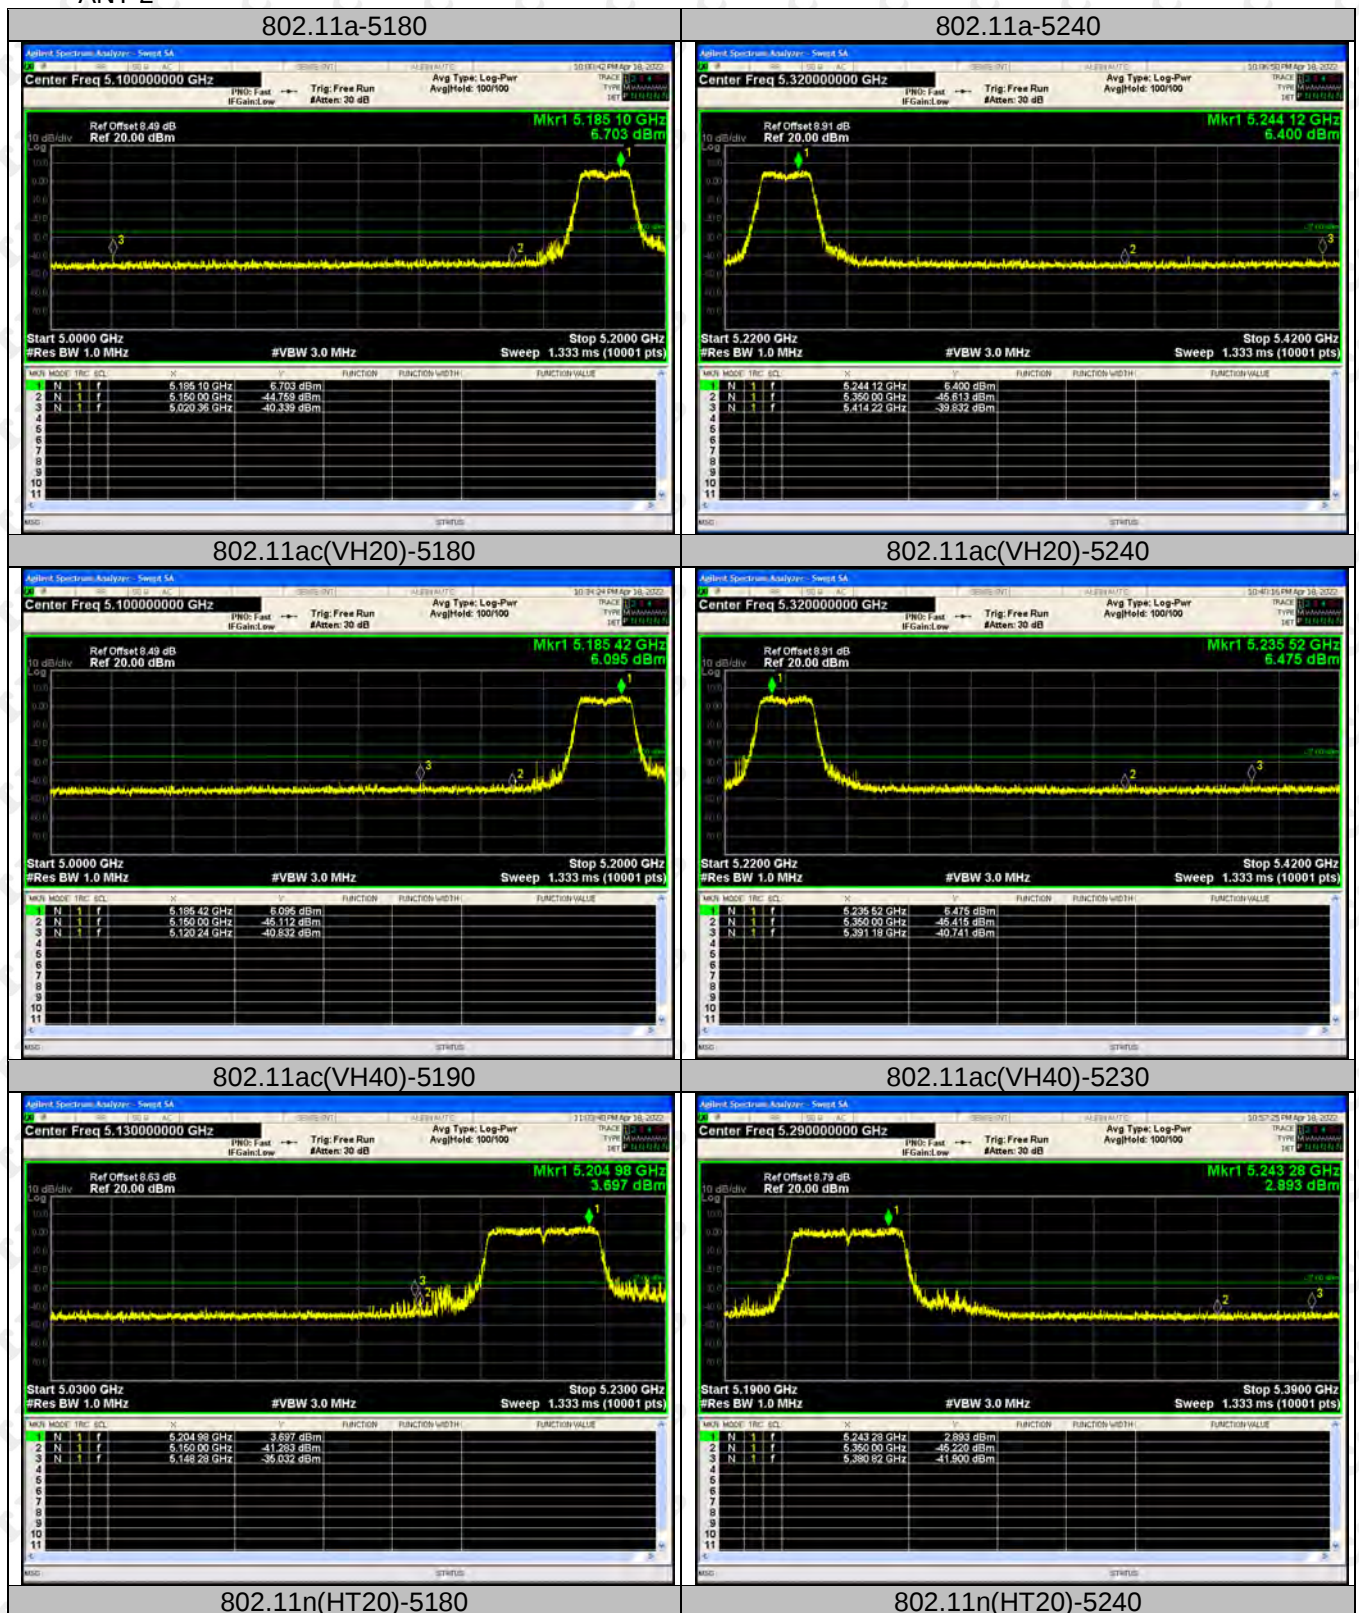


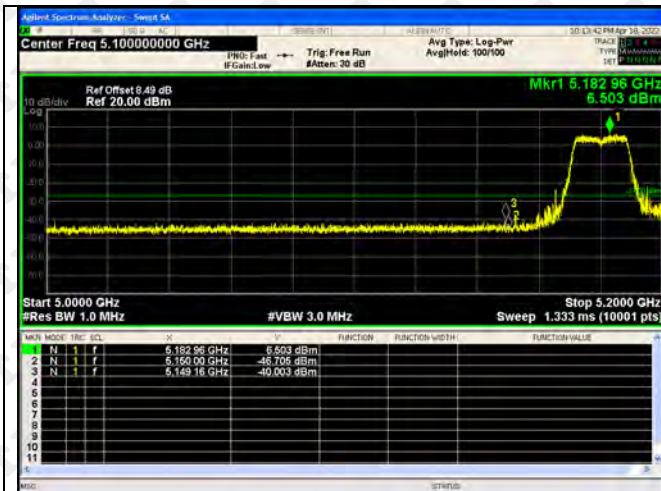



802.11n(HT40)-5190

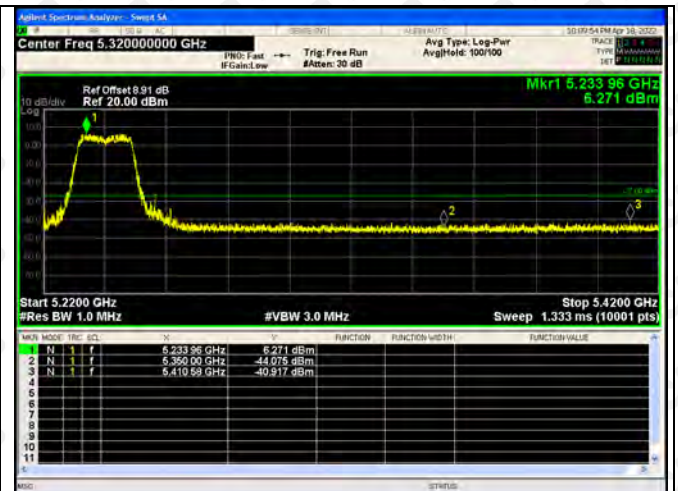


802.11n(HT40)-5230

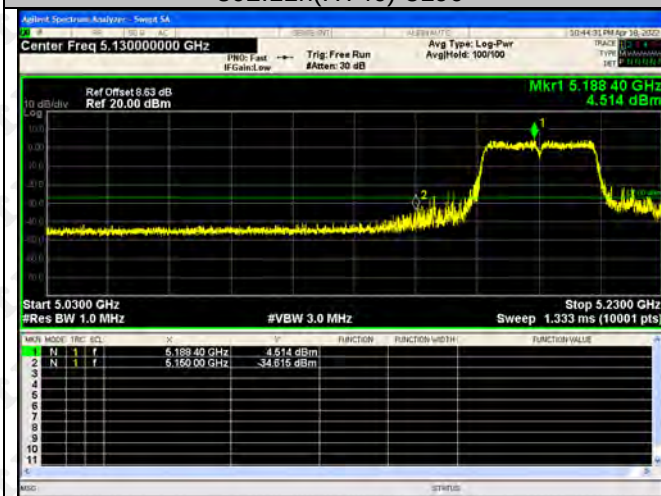

802.11ac(VH80)-5210

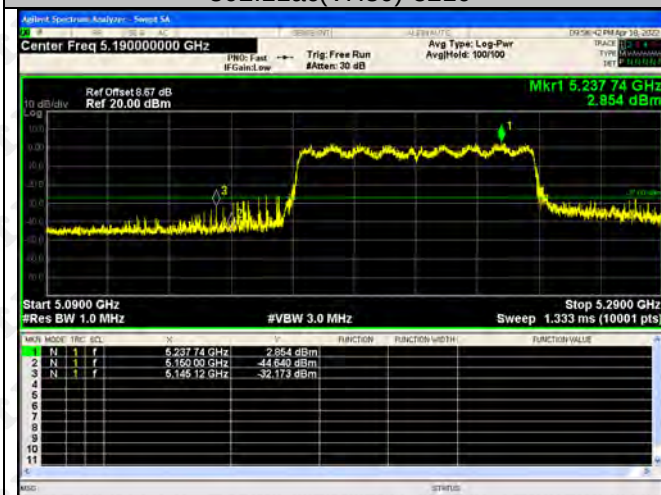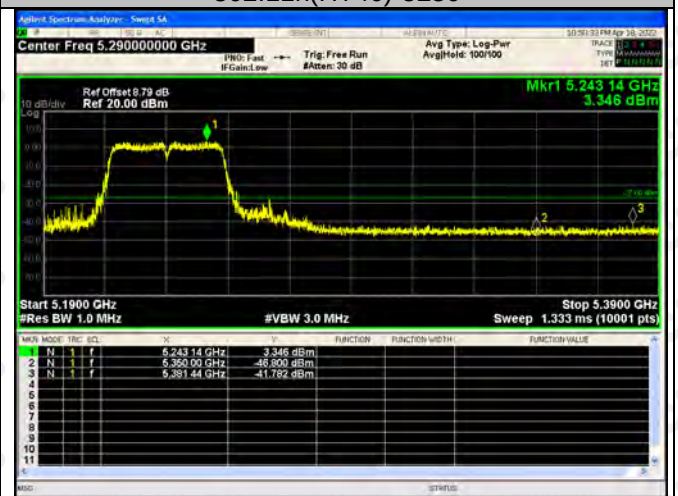

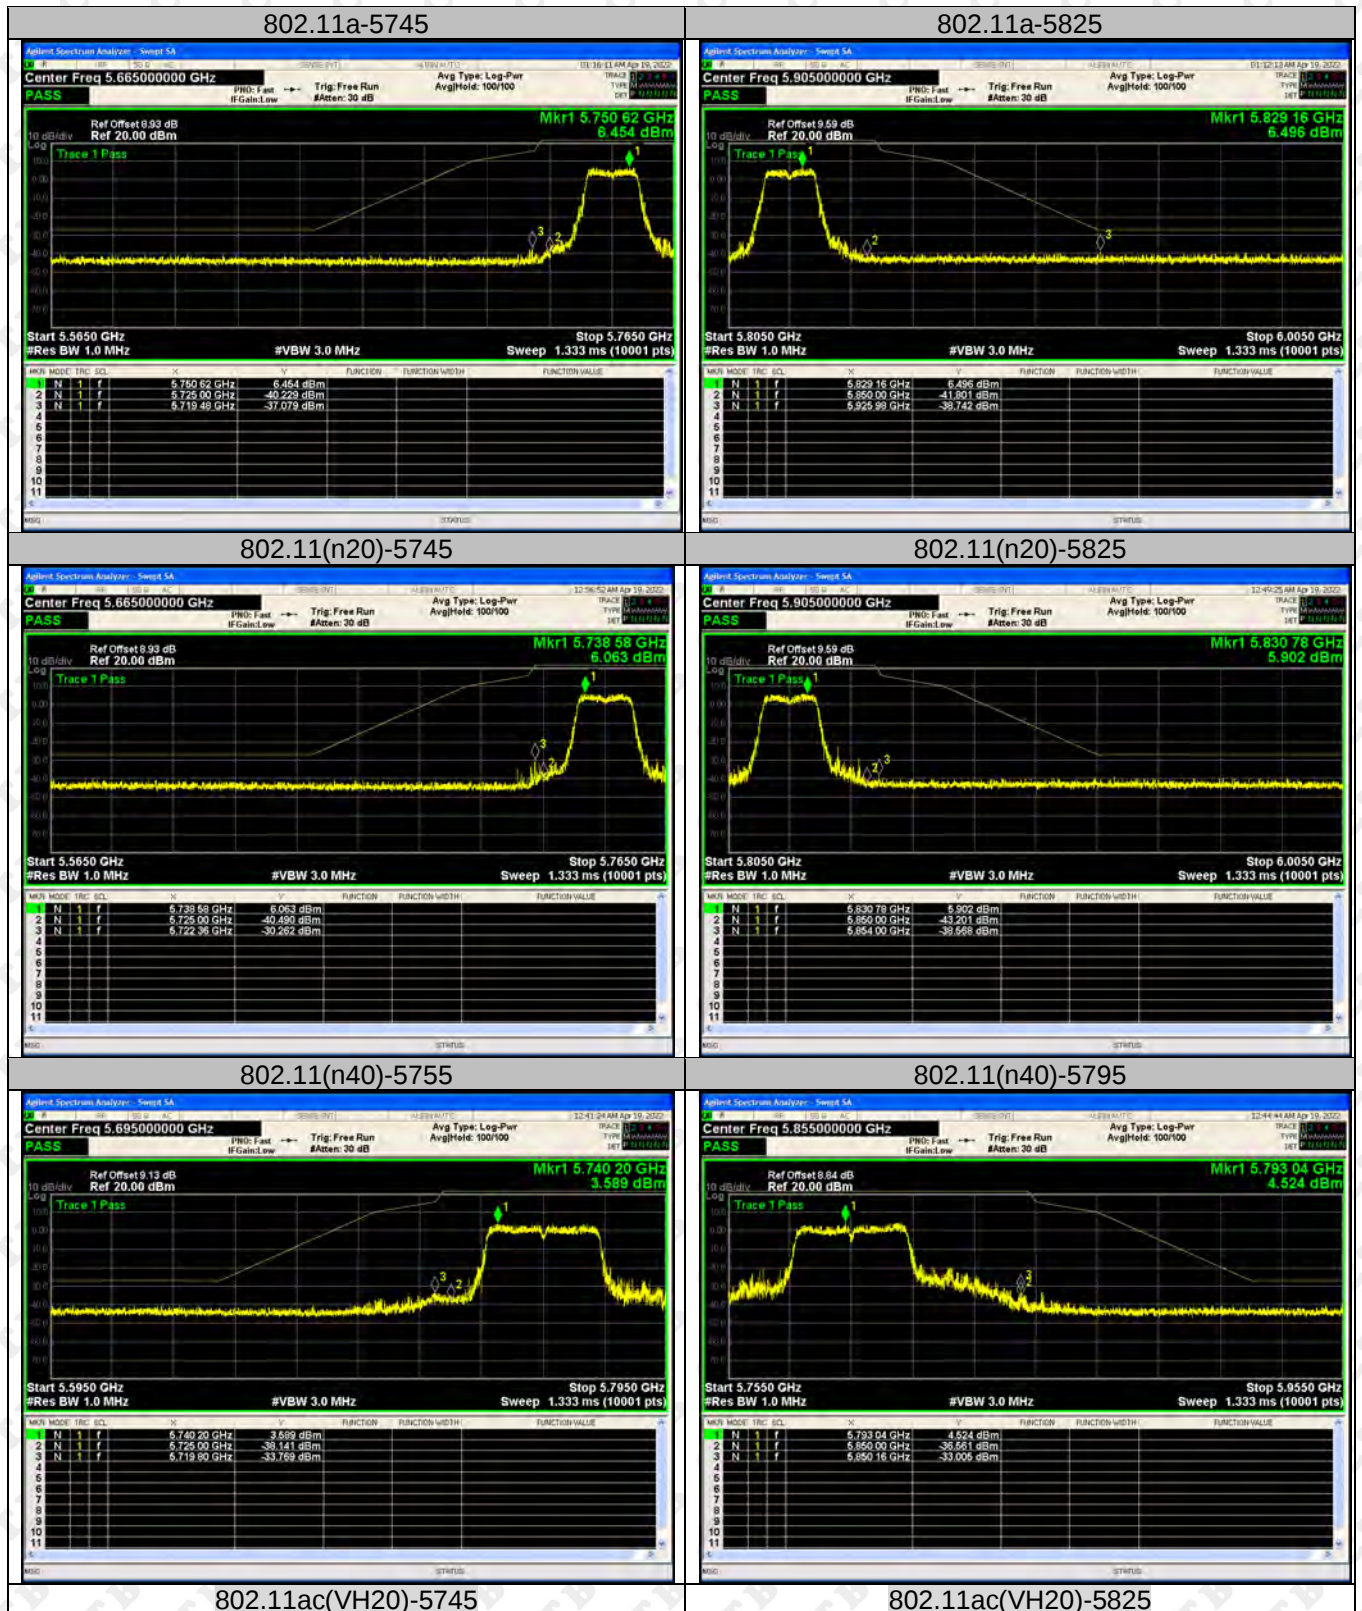




802.11ac(VH40)-5755




802.11ac(VH40)-5795

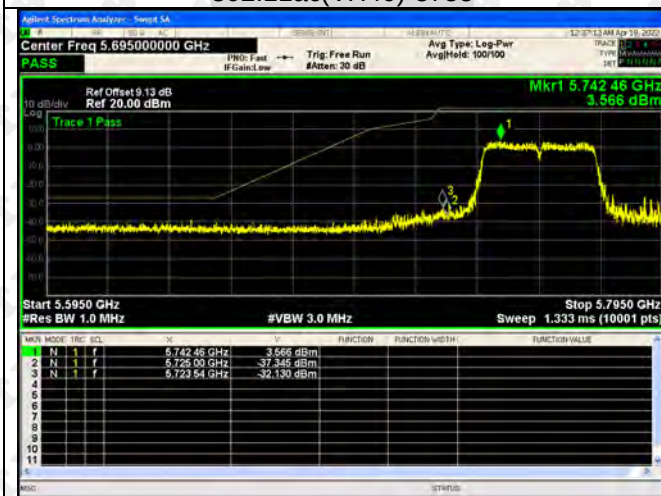


802.11ac(VH80)-5775




ANT 3

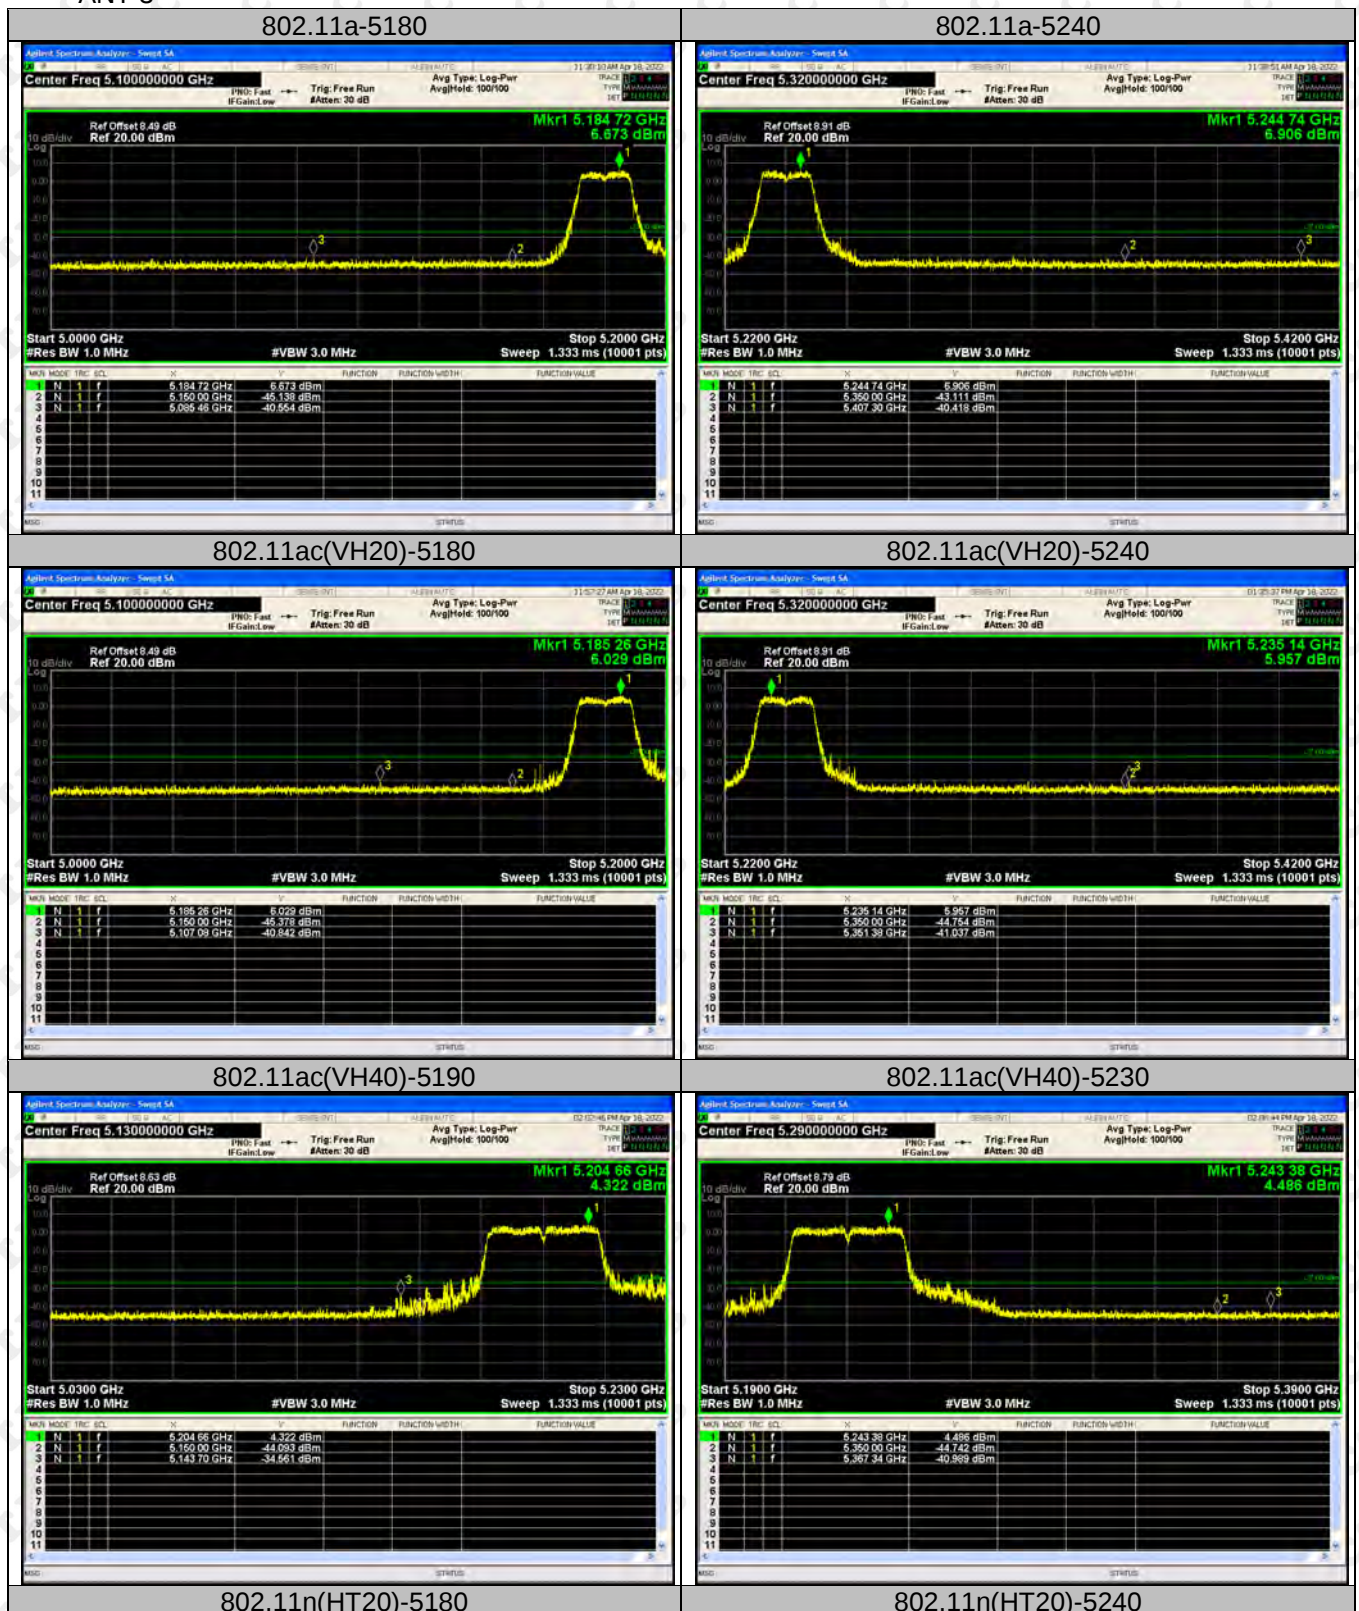


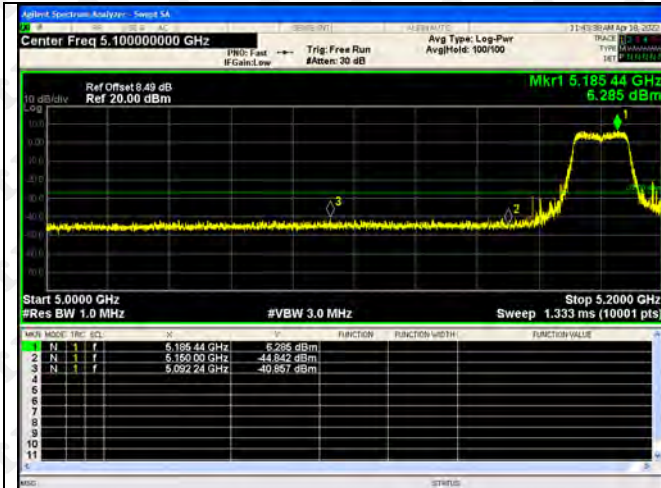



802.11n(HT40)-5190

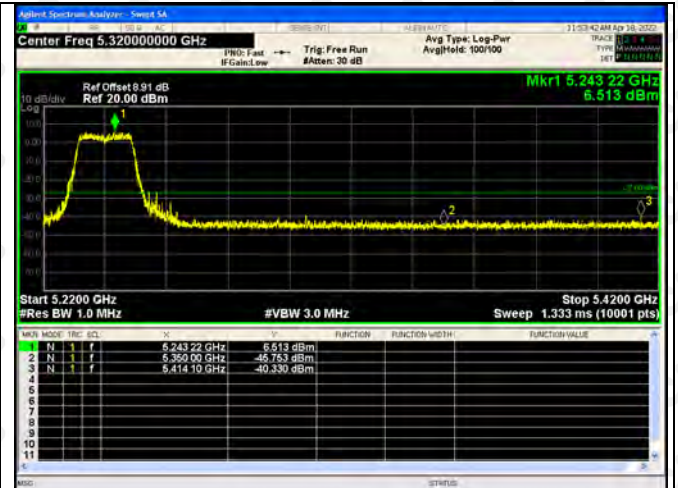



802.11n(HT40)-5230

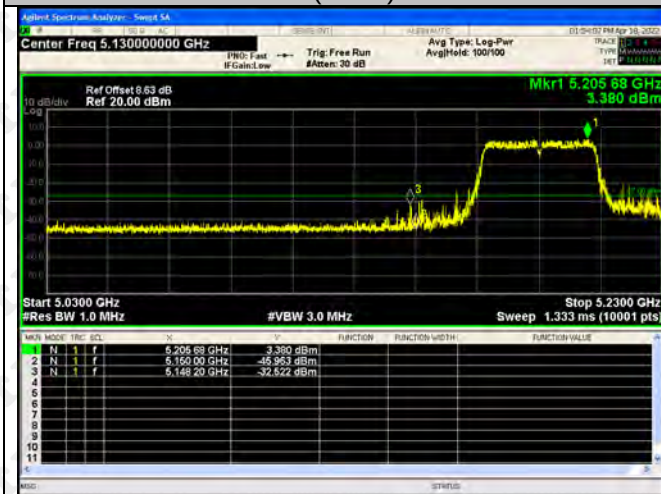


802.11ac(VH80)-5210

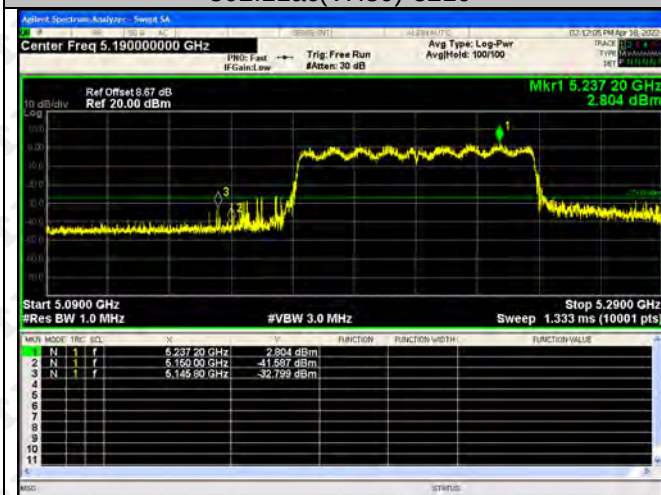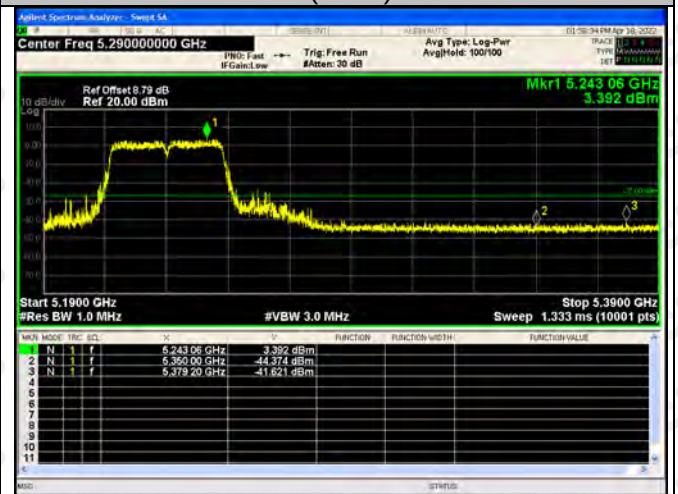

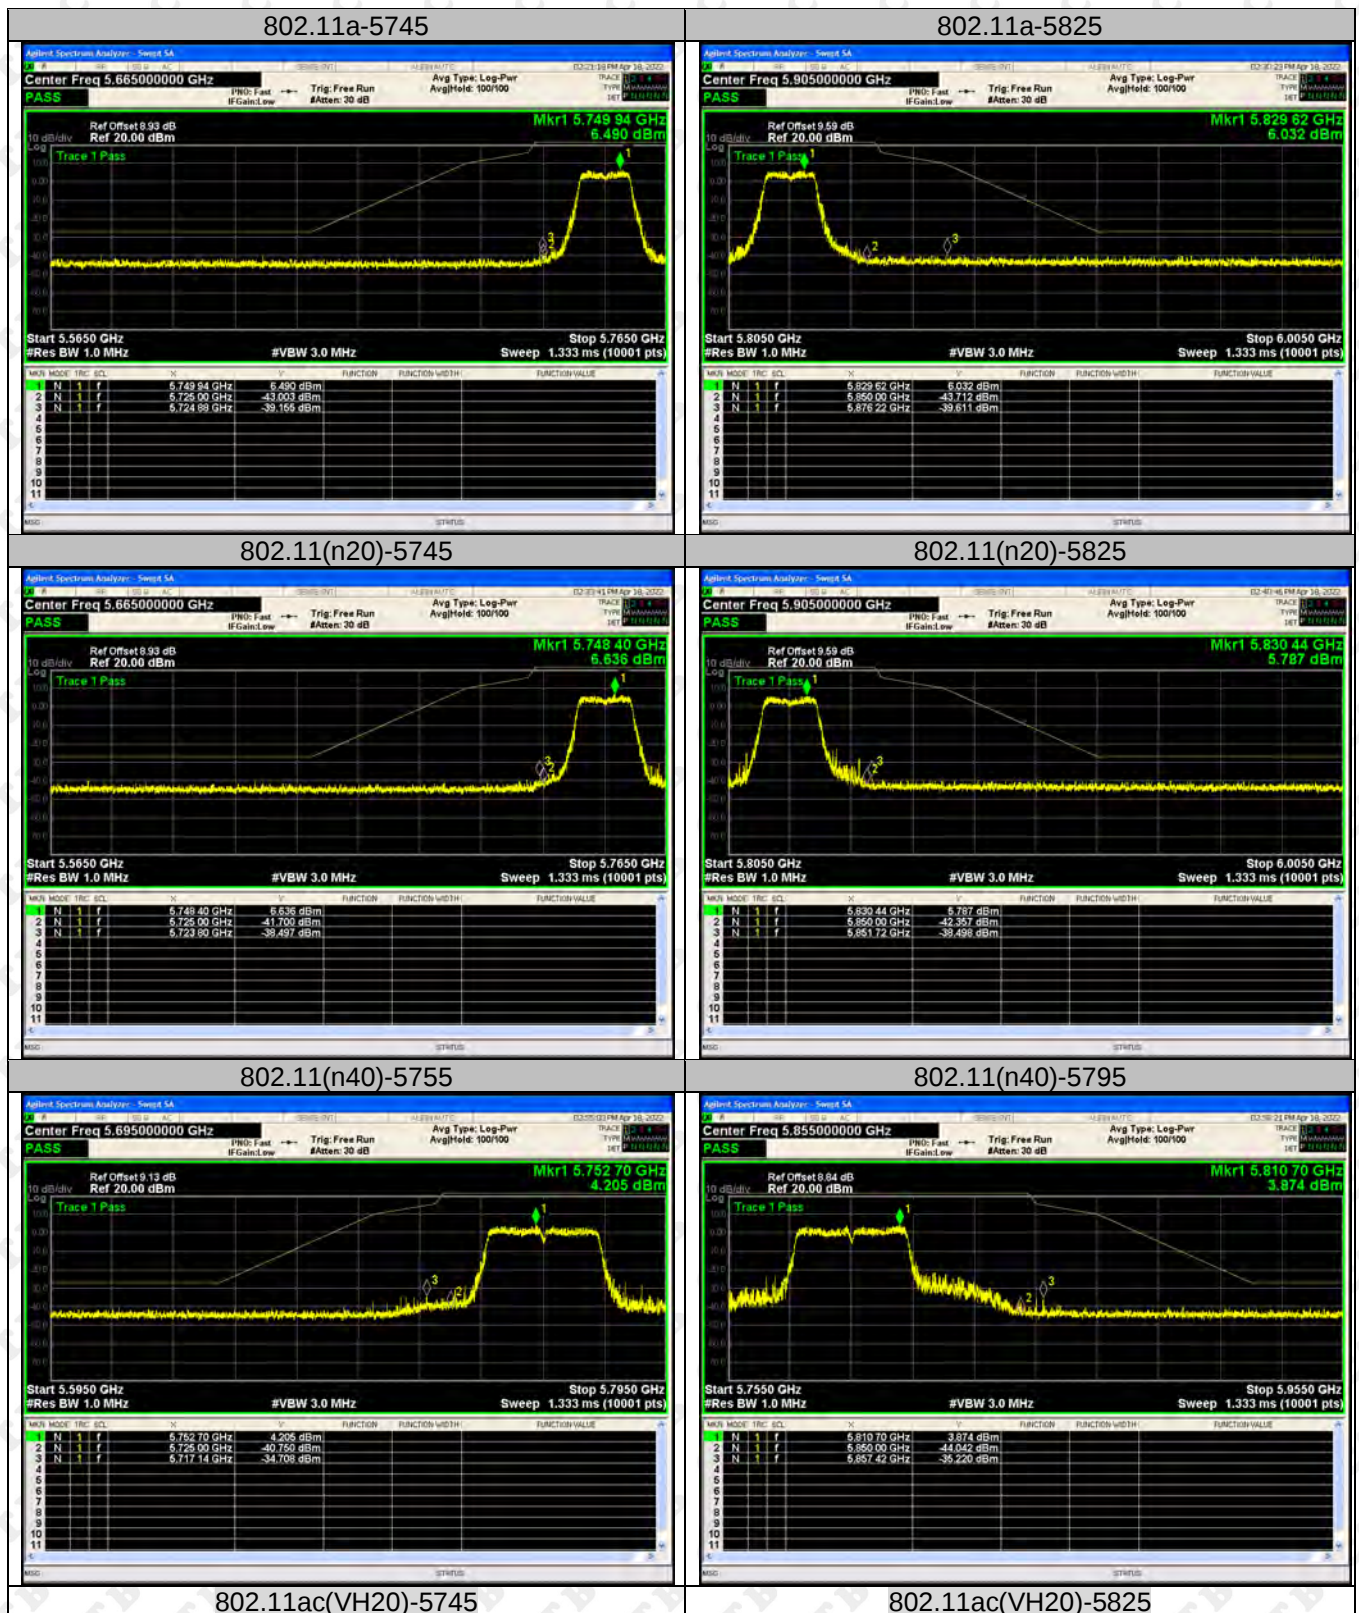


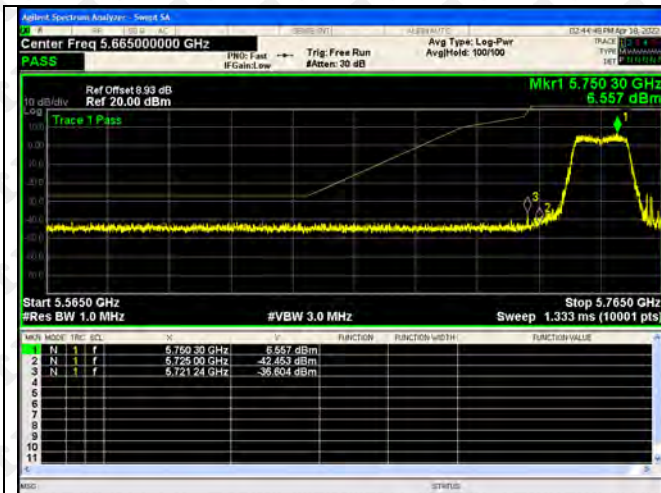

802.11ac(VH40)-5755

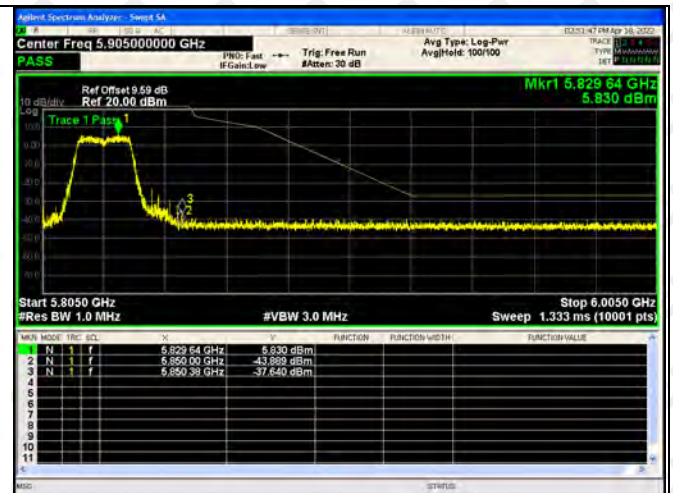

802.11ac(VH40)-5795

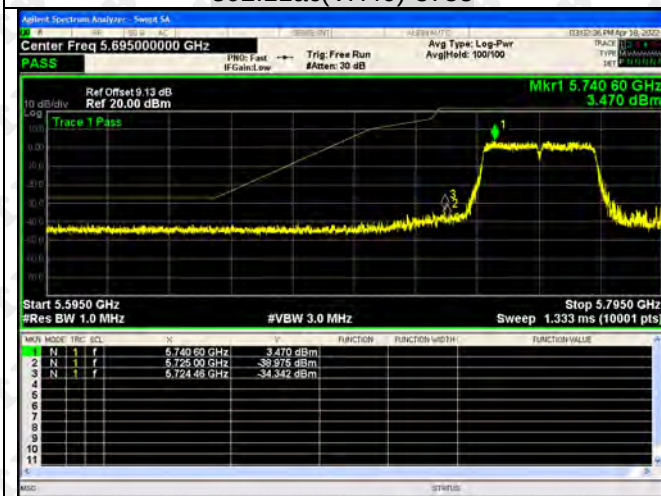


802.11ac(VH80)-5775



9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

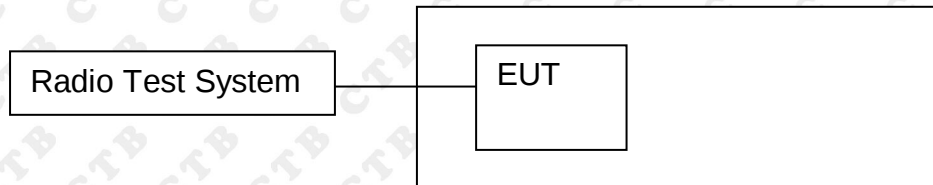

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.

Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

9.4 Test Result

ANT 1

Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5180	7.547	24
	5200	7.157	24
	5240	7.313	24
802.11ac20	5180	7.129	24
	5200	7.525	24
	5240	7.512	24
802.11ac40	5190	6.039	24
	5230	6.198	24
802.11ac80	5210	5.308	24
802.11n(HT20)	5180	7.421	24
	5200	7.45	24
	5240	7.111	24
802.11n(HT40)	5190	6.207	24
	5230	6.079	24

ANT 2+ANT 3

Test mode1	Test Channel (MHz)	Output Power dBm ANT2	Output Power dBm ANT3	Output Power dBm Total	Limit dBm
802.11a	5180	7.532	7.544	/	30
	5200	7.384	7.442	/	30
	5240	7.281	7.551	/	30
802.11ac20	5180	7.218	7.134	10.19	30
	5200	7.796	7.182	10.51	30
	5240	7.785	7.405	10.61	30
802.11ac40	5190	6.316	6.599	9.47	30
	5230	6.013	6.712	9.39	30
802.11ac80	5210	5.247	5.399	8.33	30
802.11n(HT20)	5180	7.093	7.616	10.37	30
	5200	7.561	7.211	10.40	30
	5240	7.397	7.689	10.56	30
802.11n(HT40)	5190	6.42	6.331	9.39	30
	5230	6.281	6.641	9.48	30

ANT 1


5725-5850MHz


Test mode	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a	5745	7.445	30
	5785	7.786	30
	5825	7.573	30
802.11ac20	5745	7.797	30
	5785	7.852	30
	5825	7.251	30
802.11ac40	5755	6.613	30
	5795	6.284	30
802.11ac80	5775	5.007	30
802.11n(HT20)	5745	7.136	30
	5785	7.303	30
	5825	7.494	30
802.11n(HT40)	5755	6.518	30
	5795	6.301	30

ANT 2+ANT 3


Test mode1	Test Channel (MHz)	Output Power dBm ANT2	Output Power dBm ANT3	Output Power dBm Total	Limit dBm
802.11a	5745	7.254	7.328	/	30
	5785	7.682	7.61	/	30
	5825	7.507	7.791	/	30
802.11ac20	5745	7.489	7.456	10.48	30
	5785	7.017	7.65	10.36	30
	5825	7.706	7.73	10.73	30
802.11ac40	5755	6.64	6.11	9.39	30
	5795	6.516	6.129	9.34	30
802.11ac80	5775	5.014	5.117	8.08	30
802.11n(HT20)	5745	7.364	7.475	10.43	30
	5785	7.315	7.681	10.51	30
	5825	7.253	7.738	10.51	30
802.11n(HT40)	5755	6.725	6.363	9.56	30
	5795	6.407	6.721	9.58	30

ANT 1

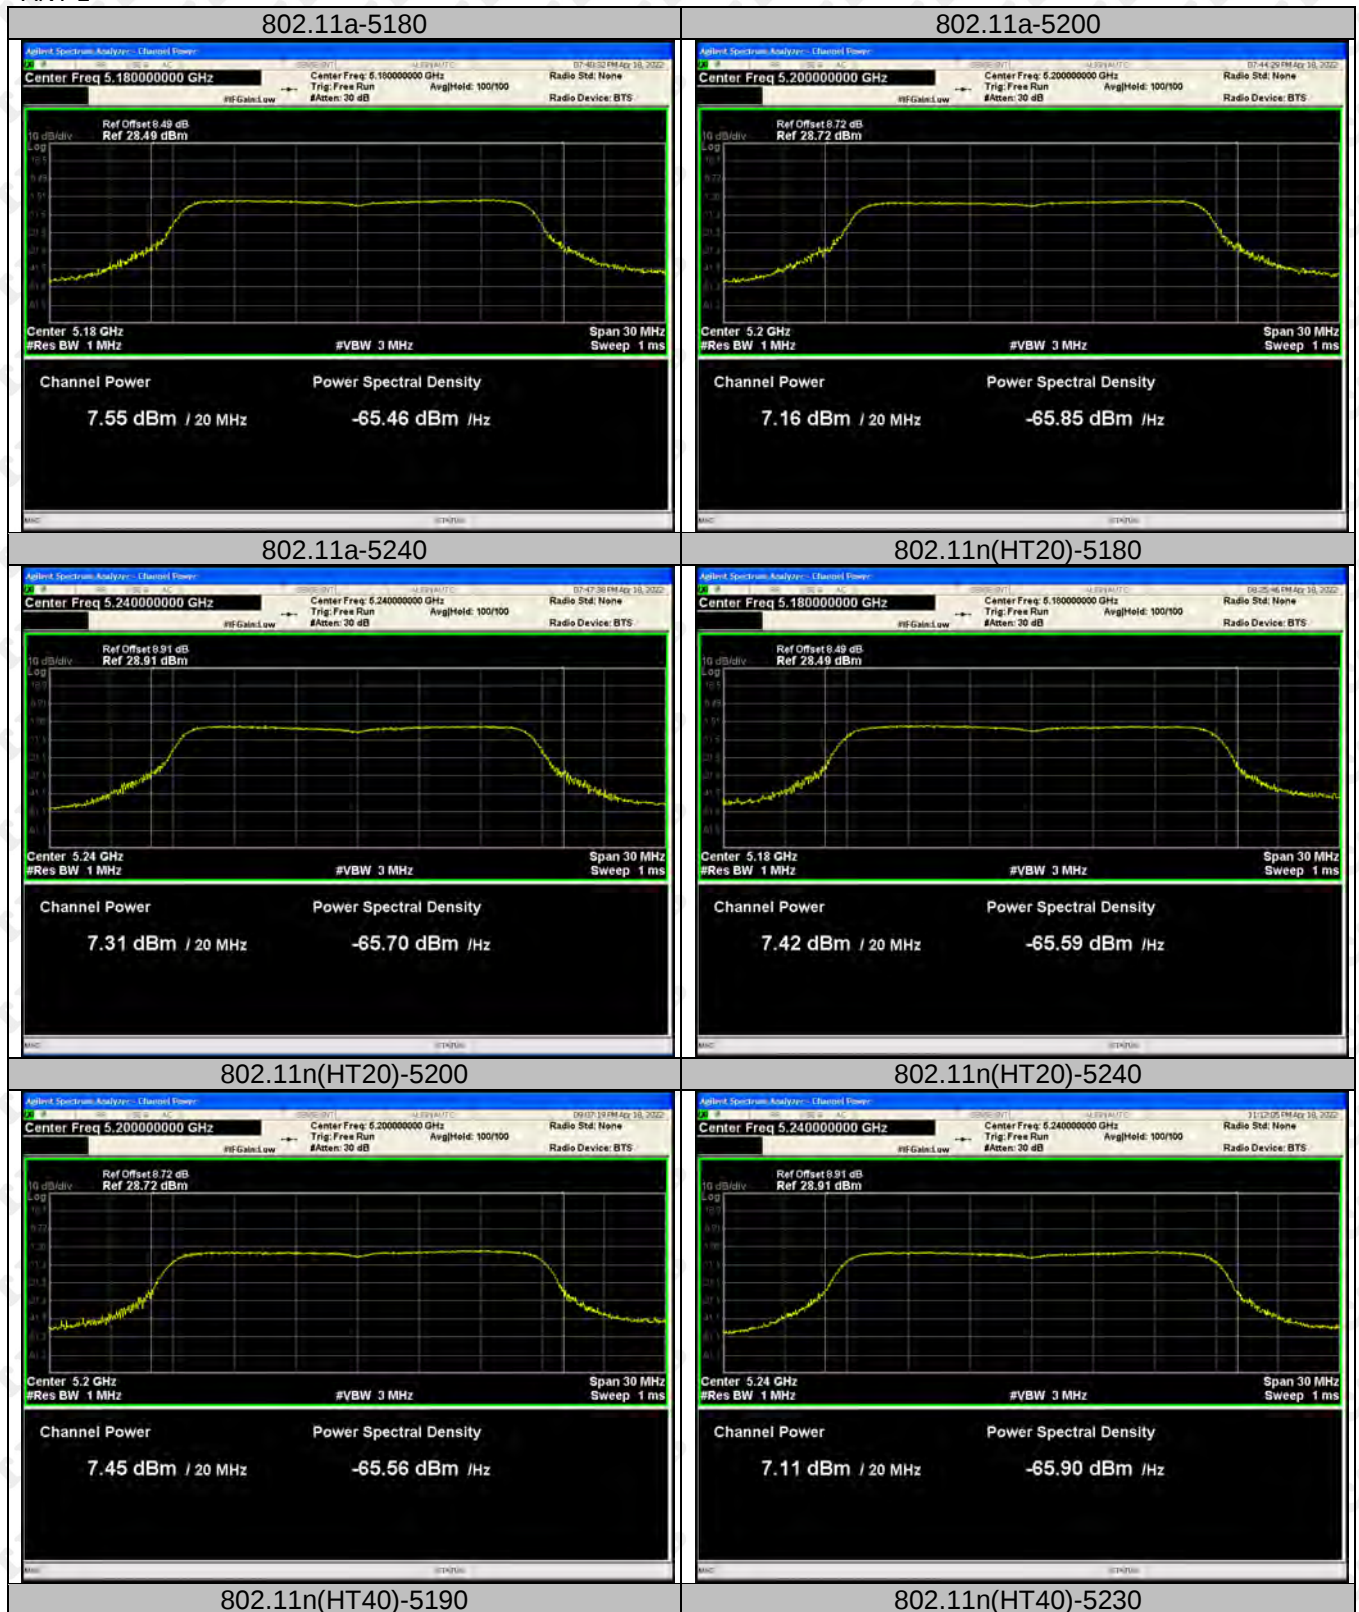


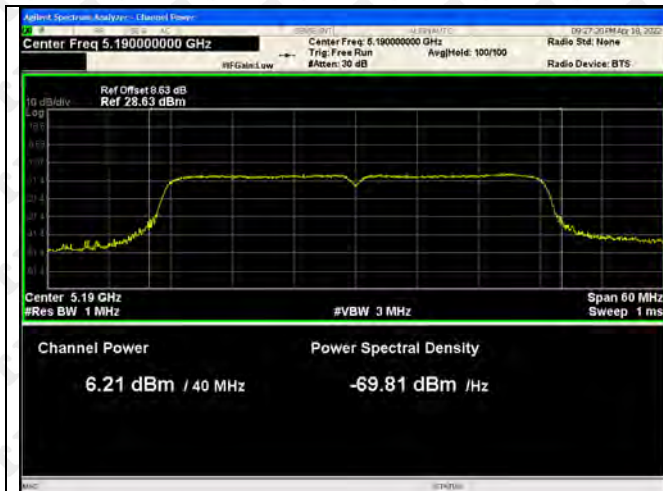


802.11ac(VH20)-5180

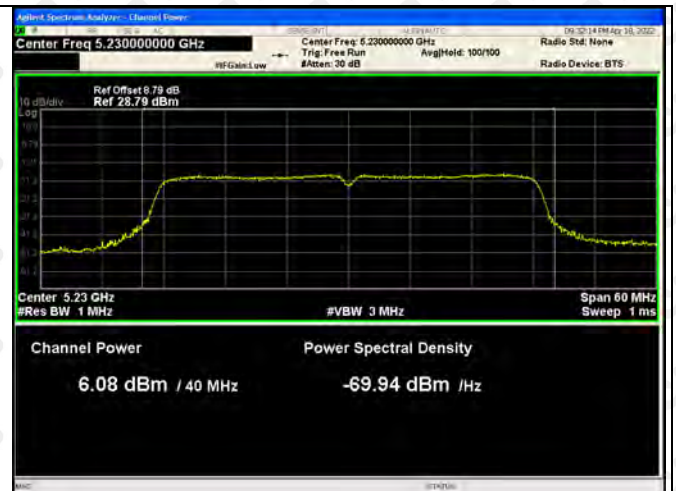


802.11ac(VH20)-5200

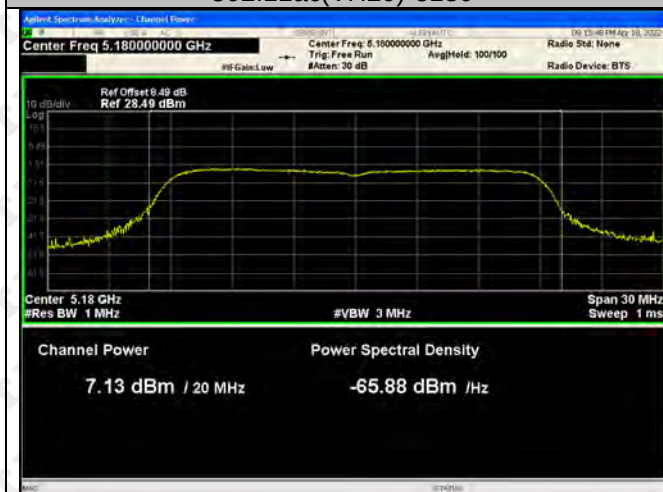


802.11ac(VH20)-5240

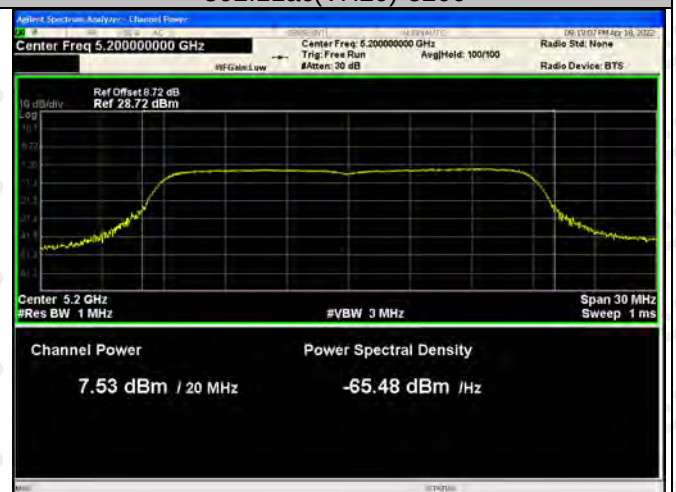




802.11ac(VH40)-5190

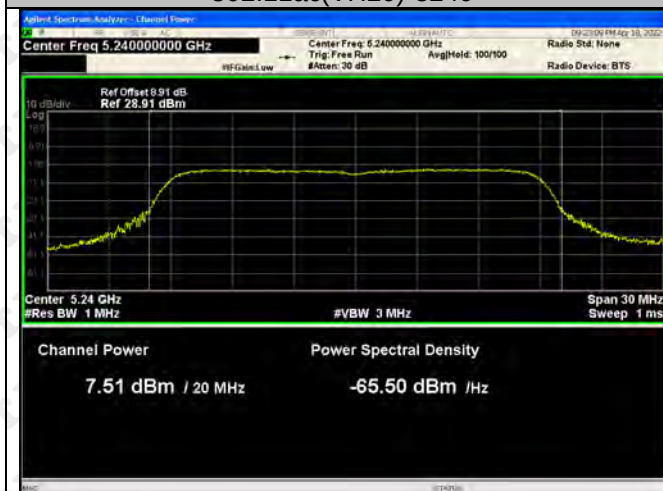

802.11ac(VH40)-5230

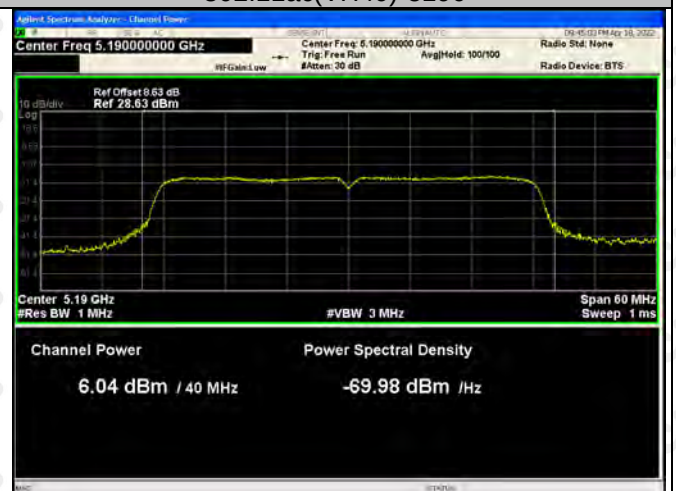

802.11ac(VH80)-5210

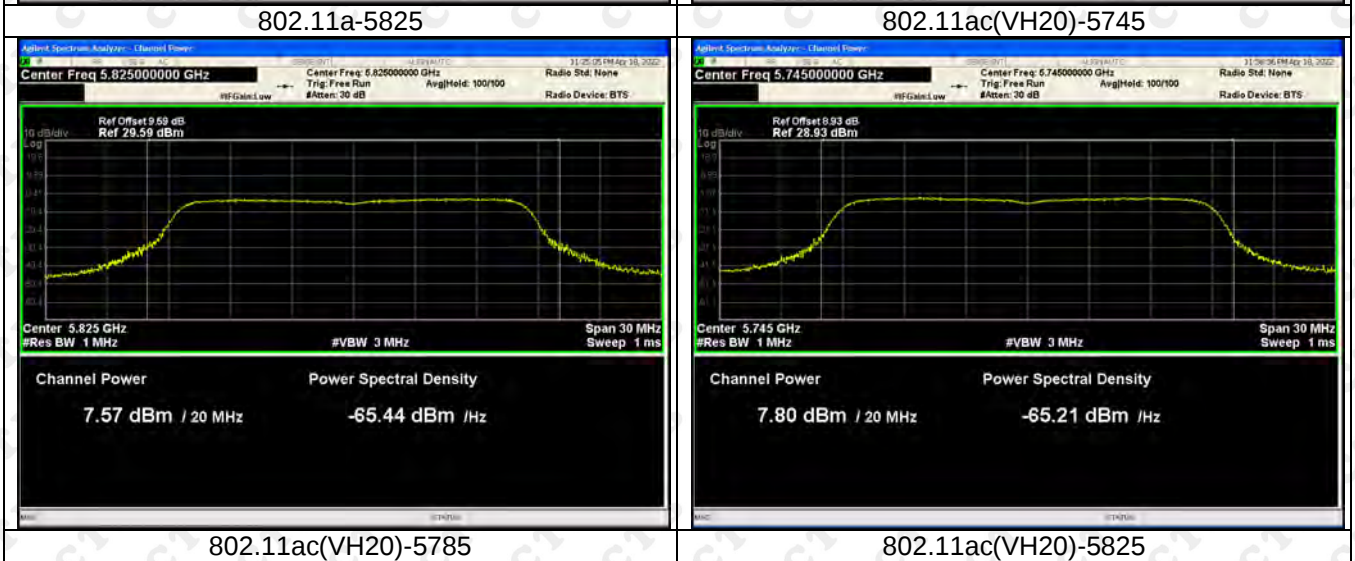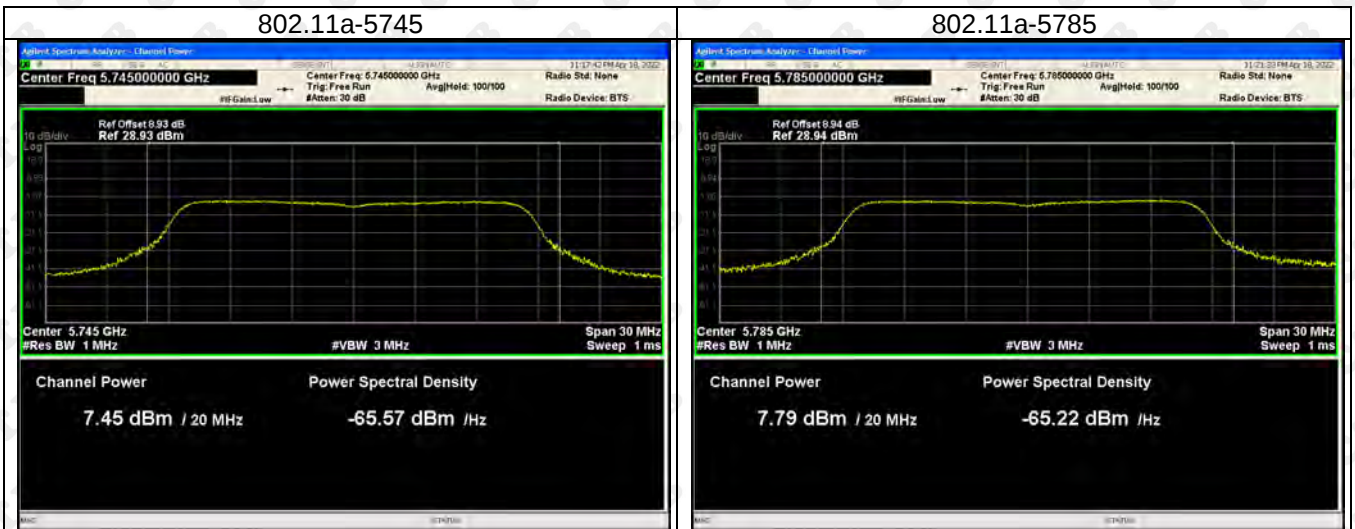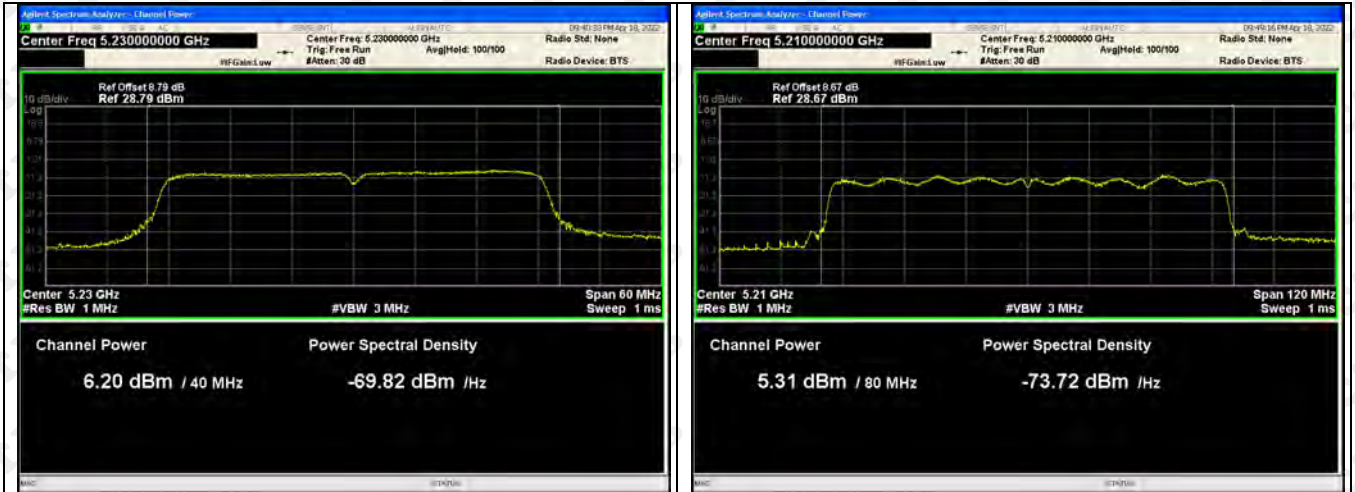





802.11ac(VH40)-5755




802.11ac(VH40)-5795

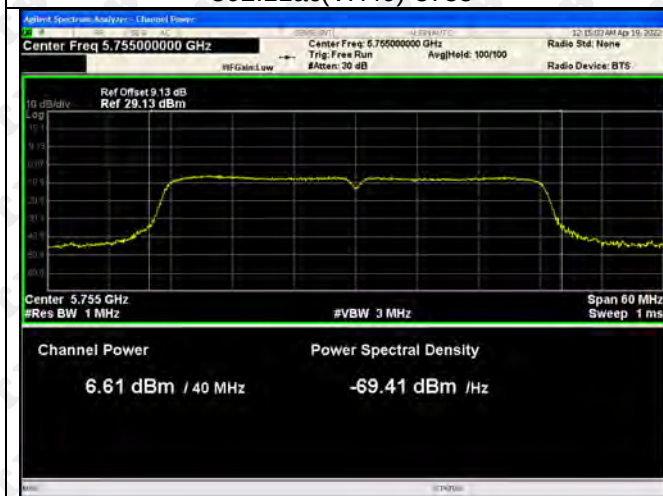


802.11n(HT20)-5745

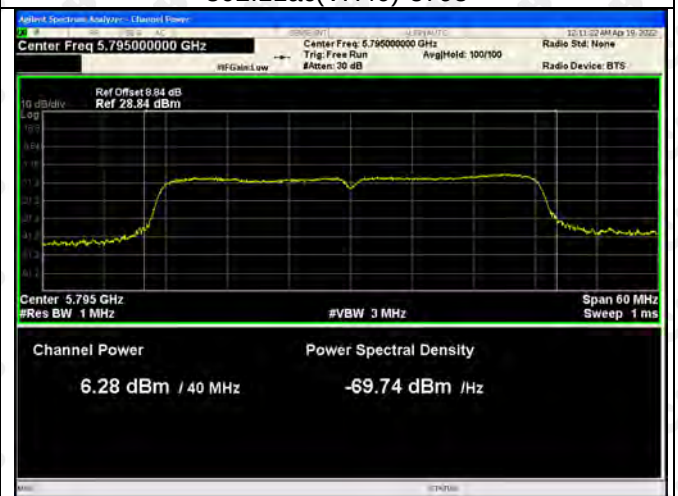


802.11n(HT20)-5795

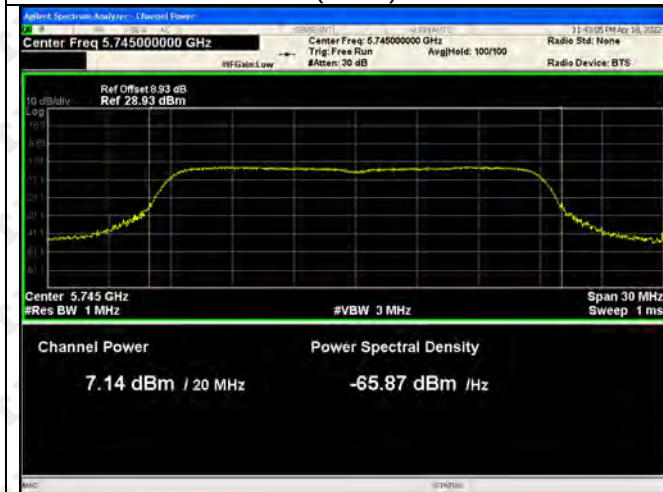

802.11n(HT20)-5825

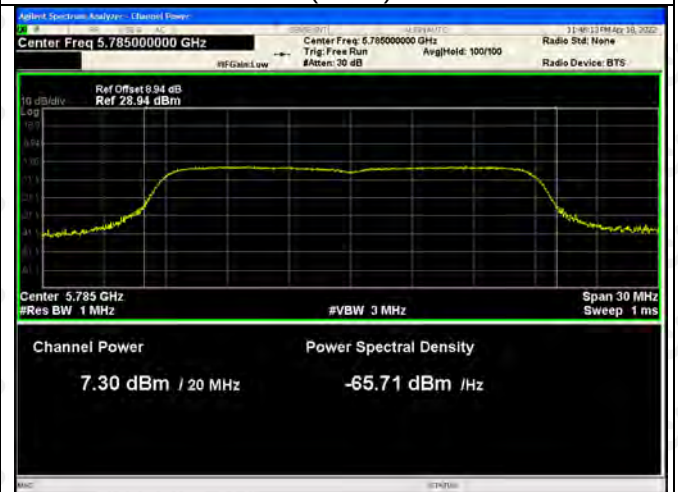



802.11n(HT40)-5755

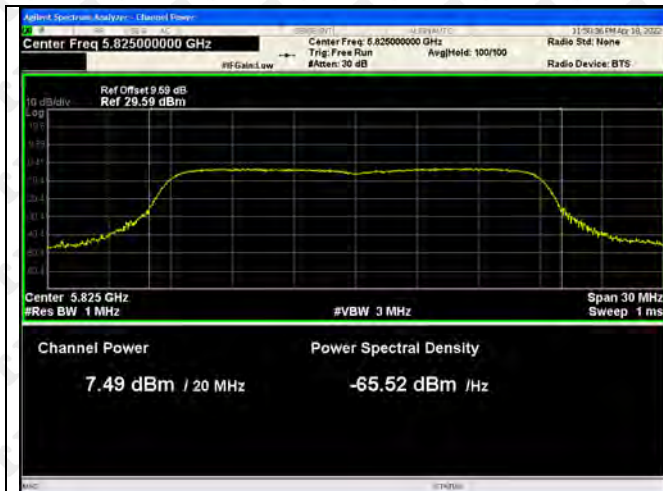


802.11n(HT40)-5795




802.11ac(HT80)-5775

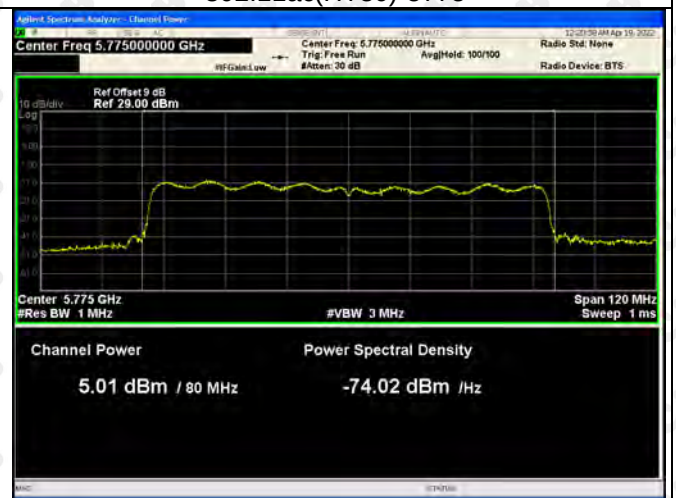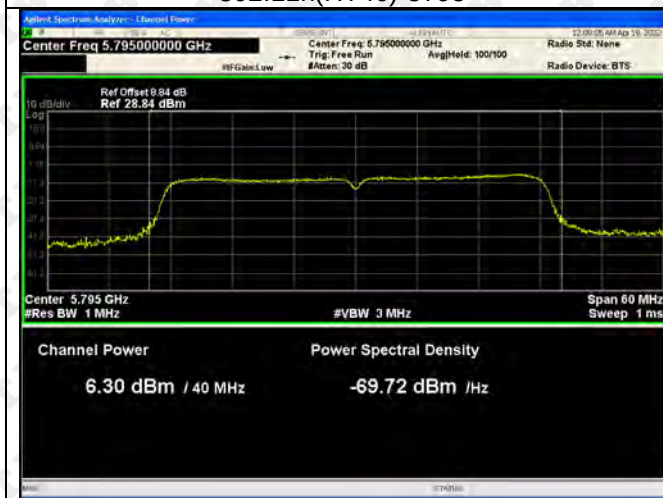

ANT 2

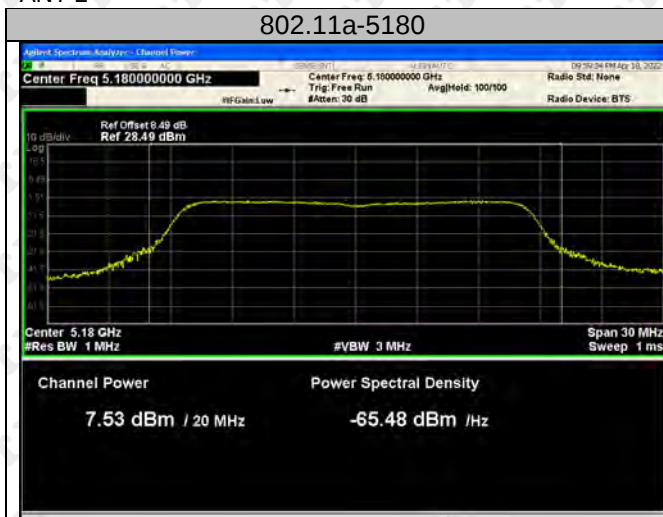

802.11a-5240

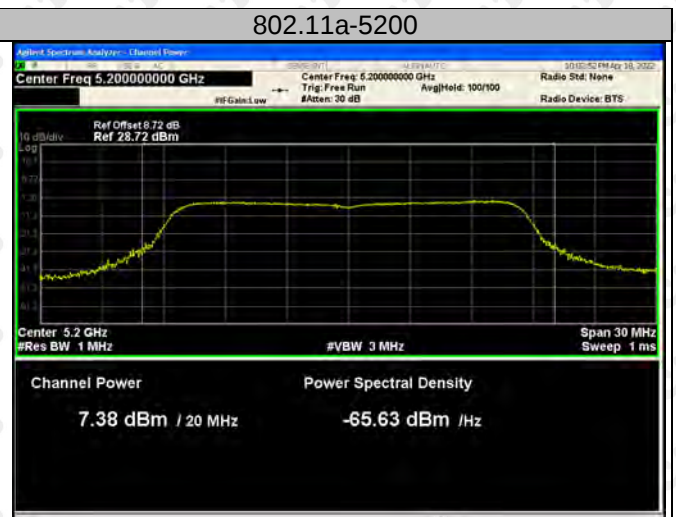


802.11n(HT20)-5180




802.11n(HT20)-5200




802.11n(HT20)-5240

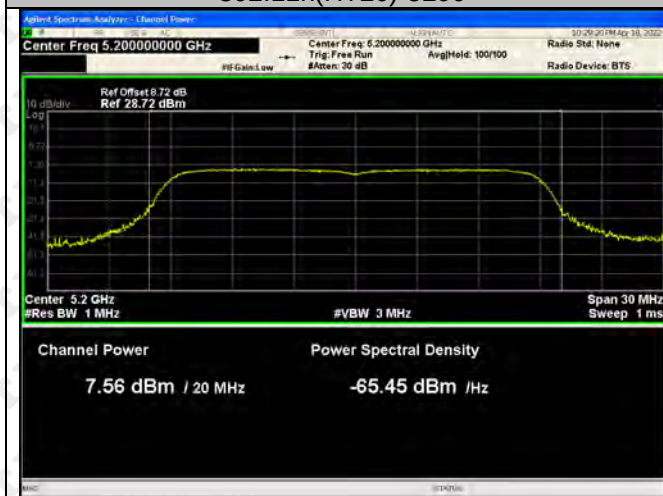


802.11n(HT40)-5190

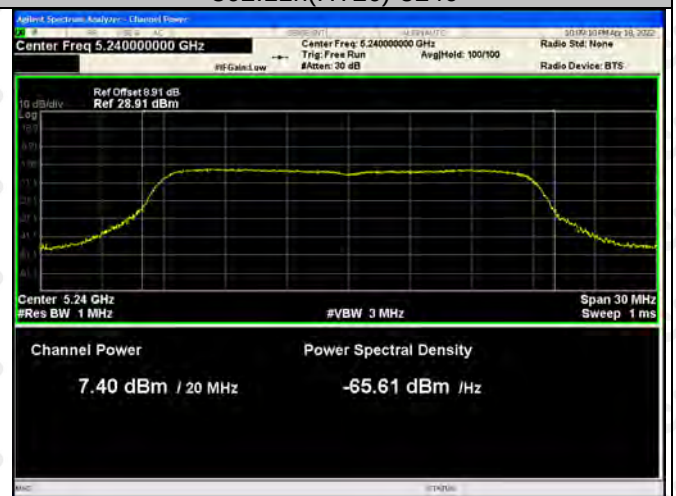


802.11n(HT40)-5230

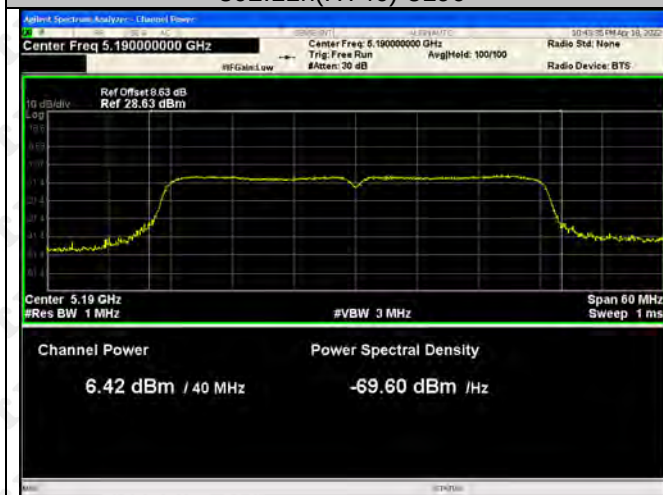

802.11ac(VH20)-5180

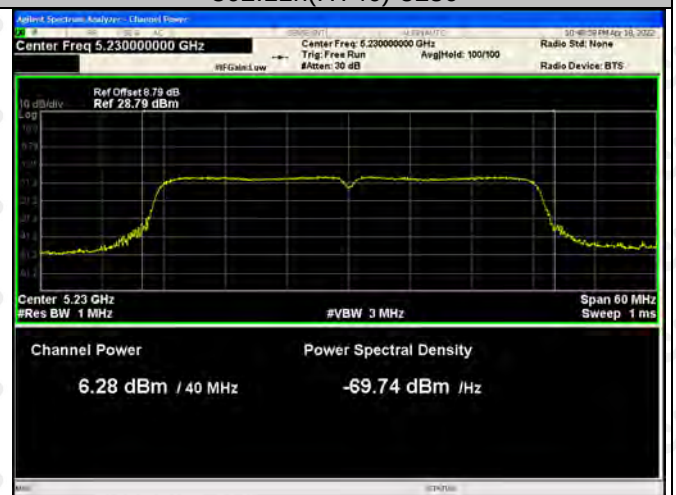


802.11ac(VH20)-5200

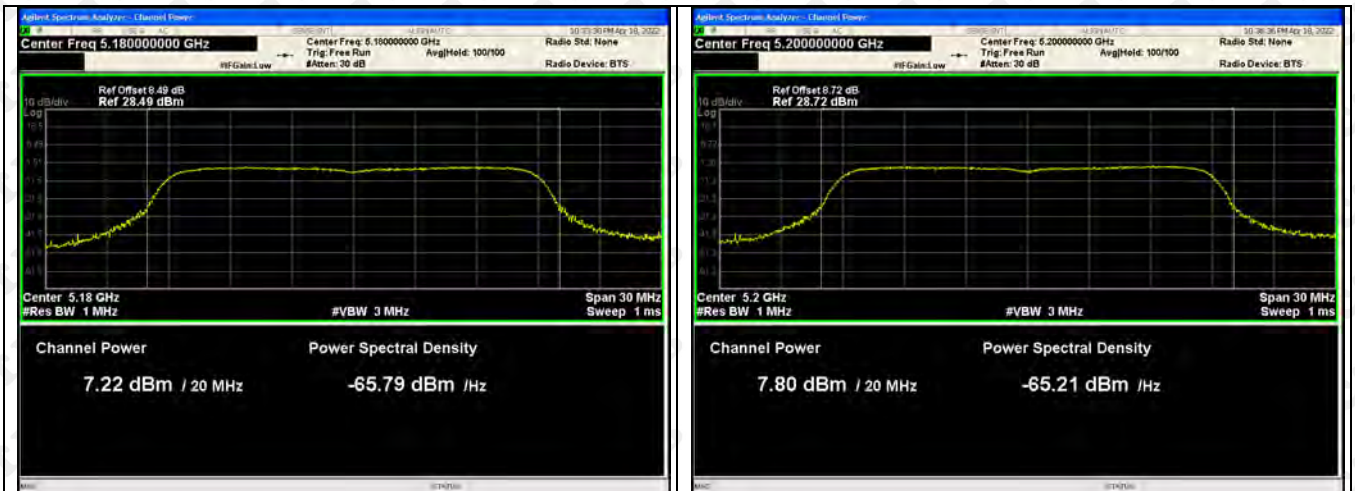


802.11ac(VH20)-5240

802.11ac(VH40)-5190

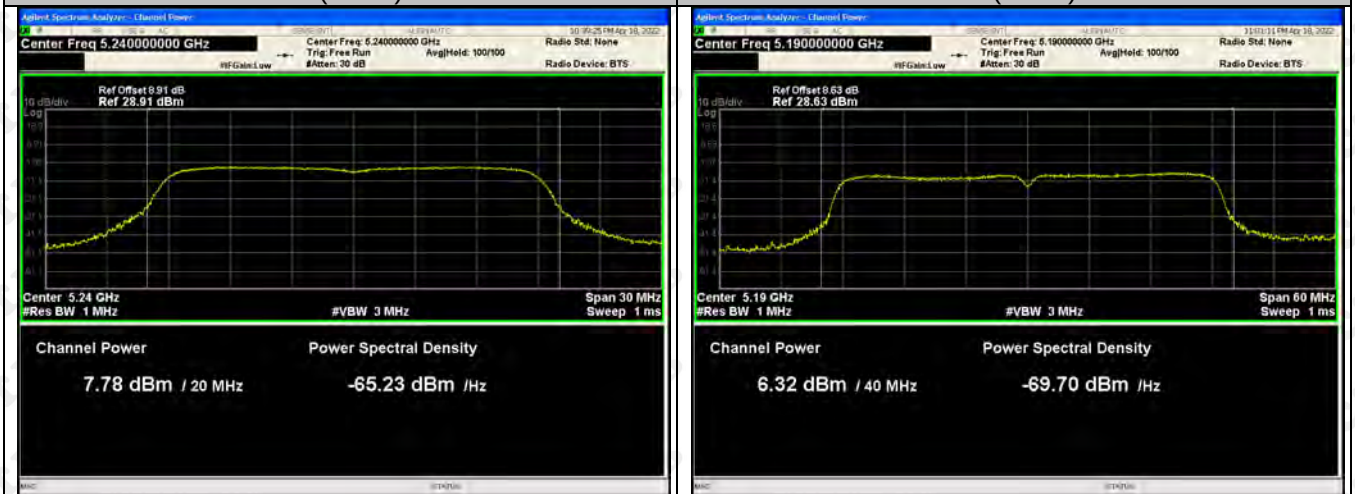


802.11ac(VH40)-5230

802.11ac(VH80)-5210

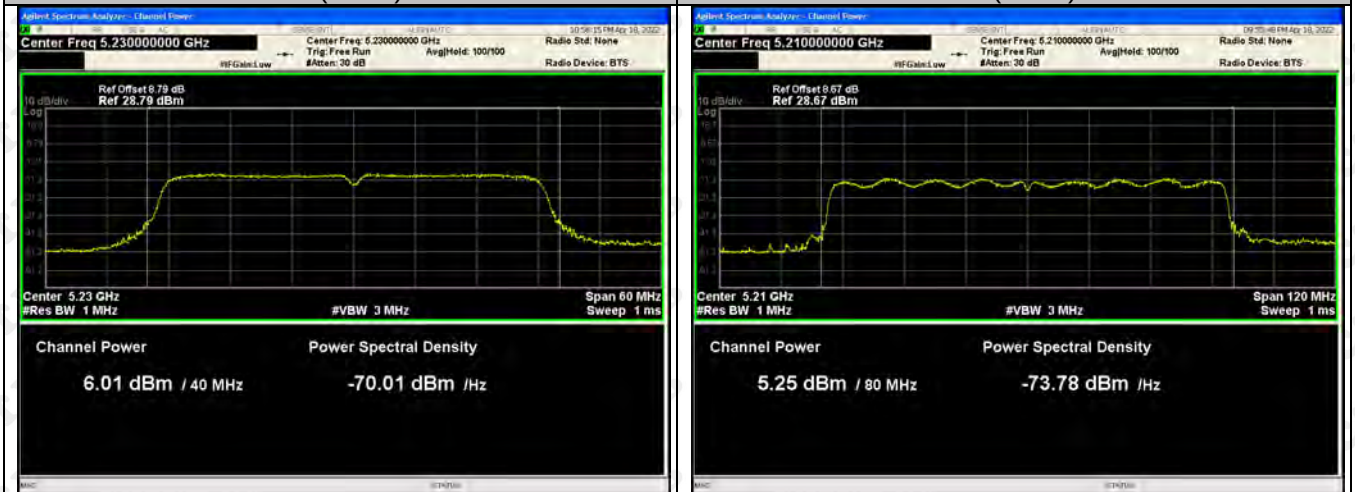

802.11a-5745

802.11a-5785

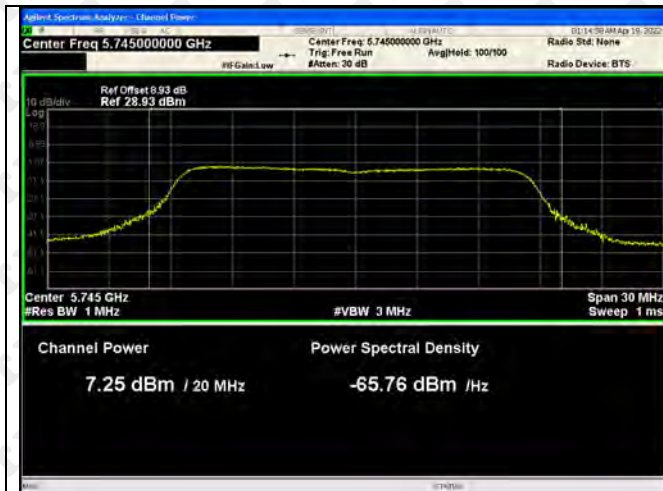


802.11a-5825




802.11ac(VH20)-5745




802.11ac(VH20)-5785

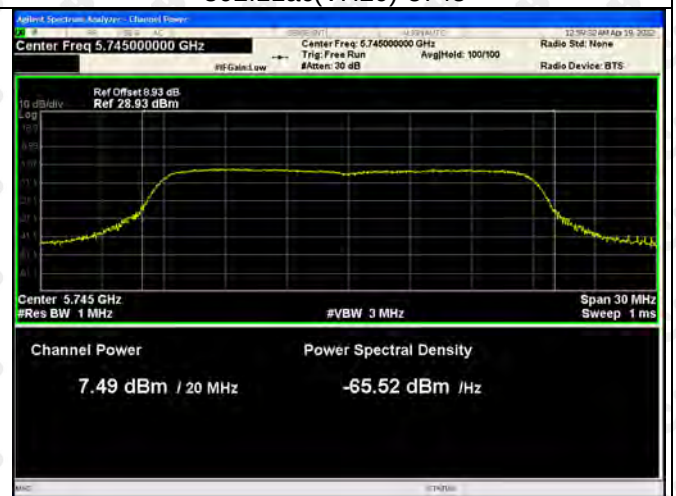


802.11ac(VH20)-5745

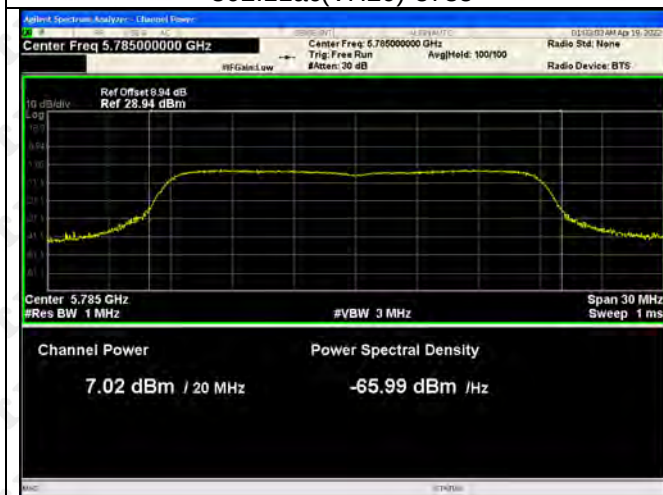


802.11ac(VH40)-5755

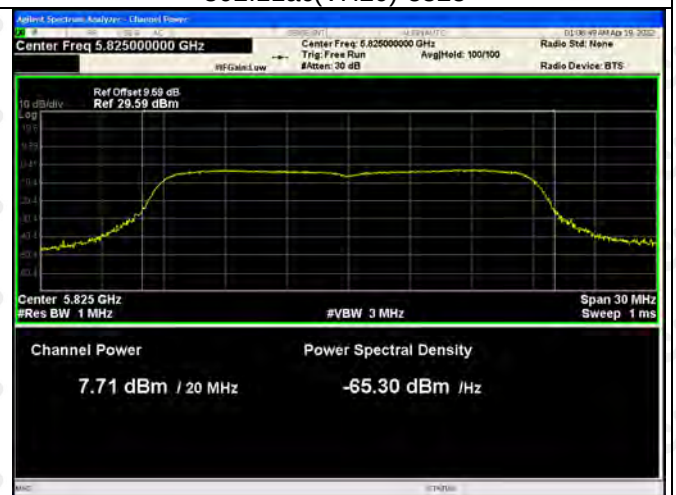


802.11ac(VH40)-5795

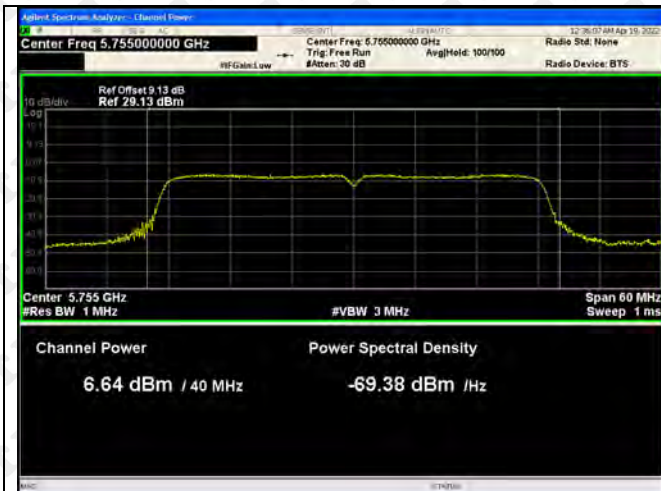

802.11n(HT20)-5745

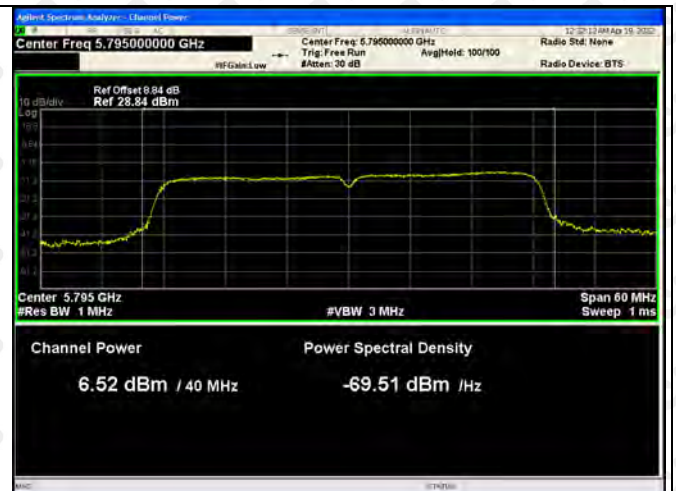


802.11n(HT20)-5785

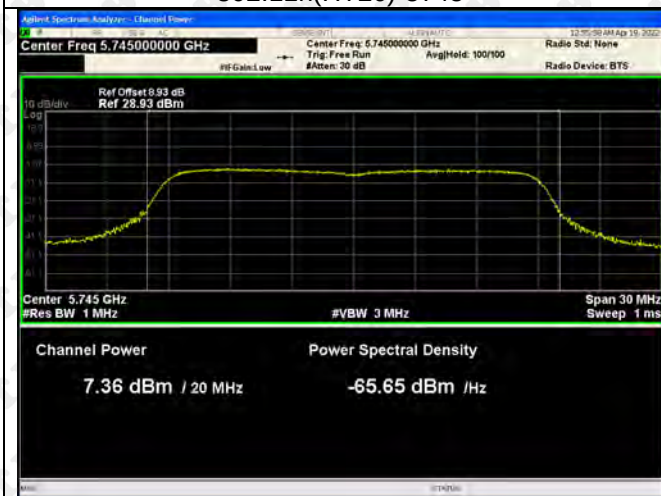


802.11n(HT20)-5825




802.11n(HT40)-5755

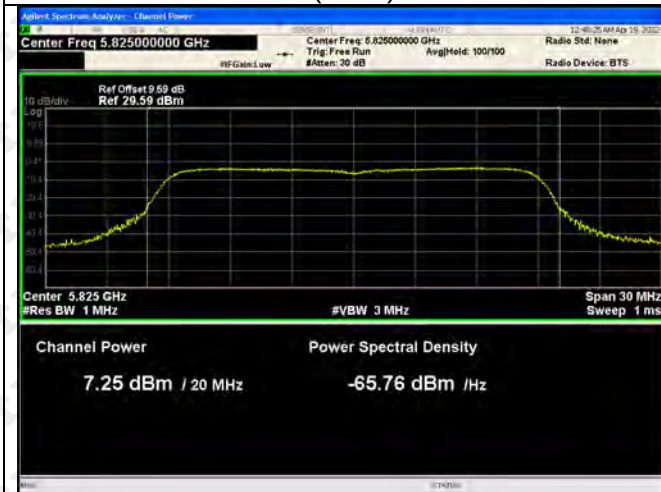


802.11n(HT40)-5795

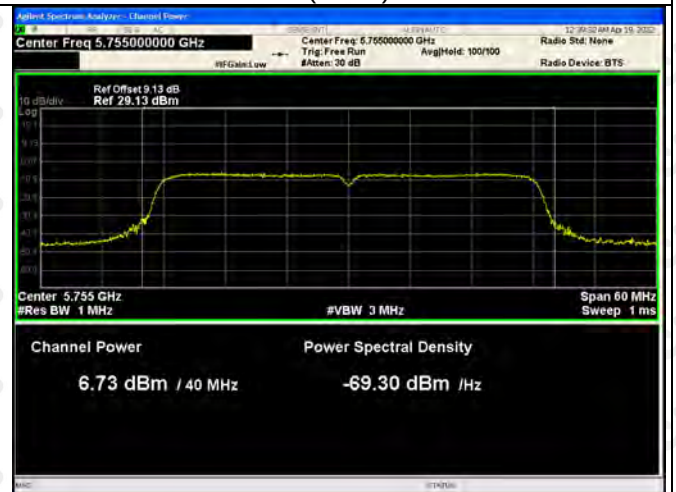


802.11ac(HT80)-5775

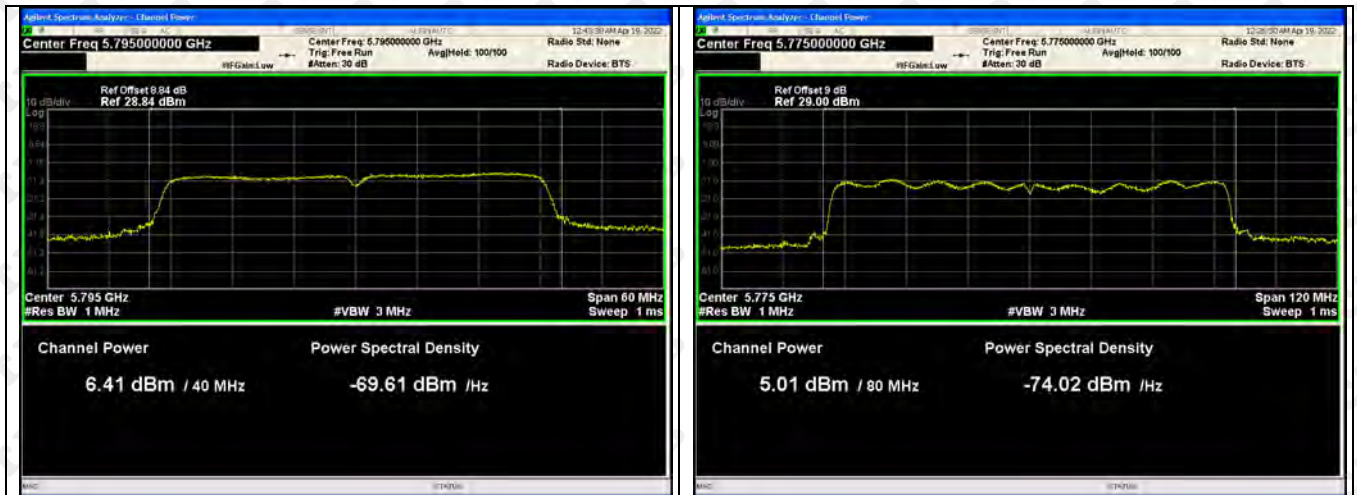

ANT 3

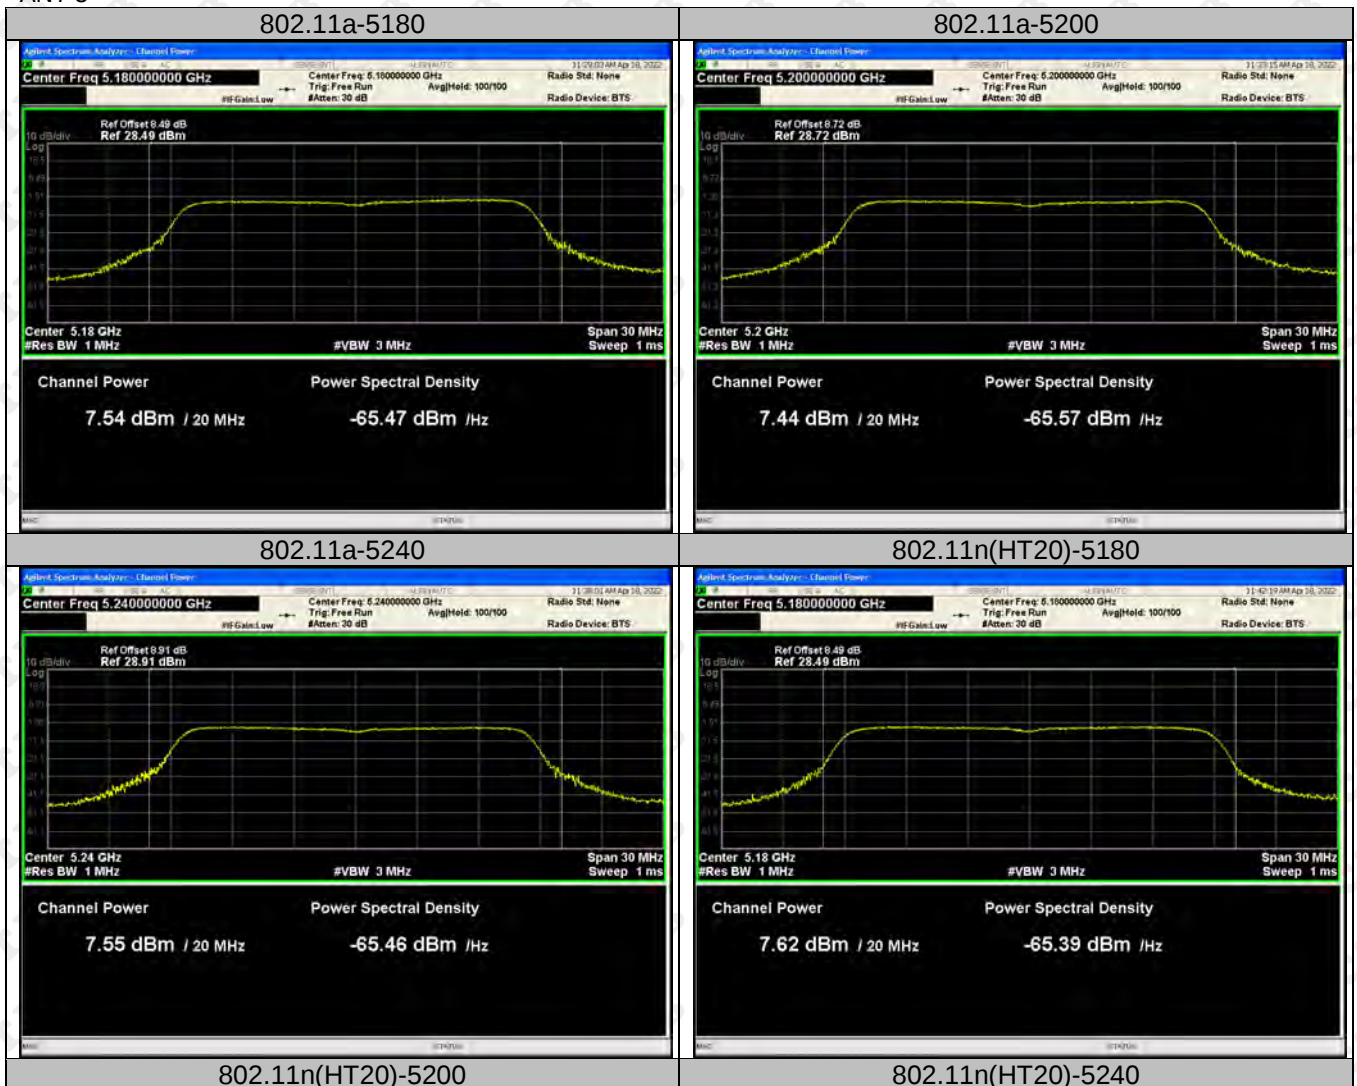


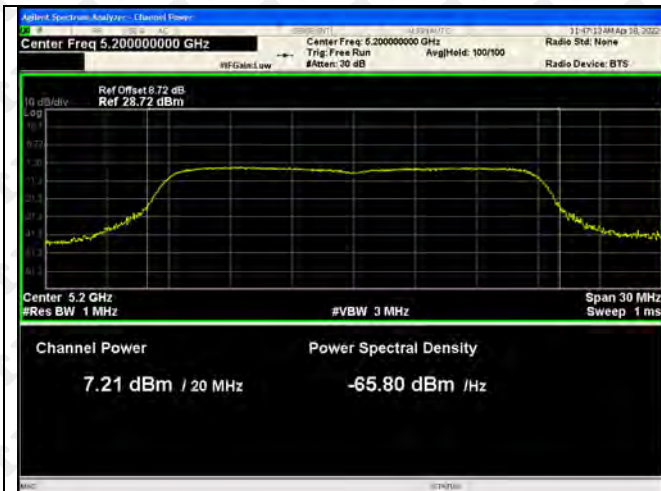


802.11n(HT40)-5190




802.11n(HT40)-5230

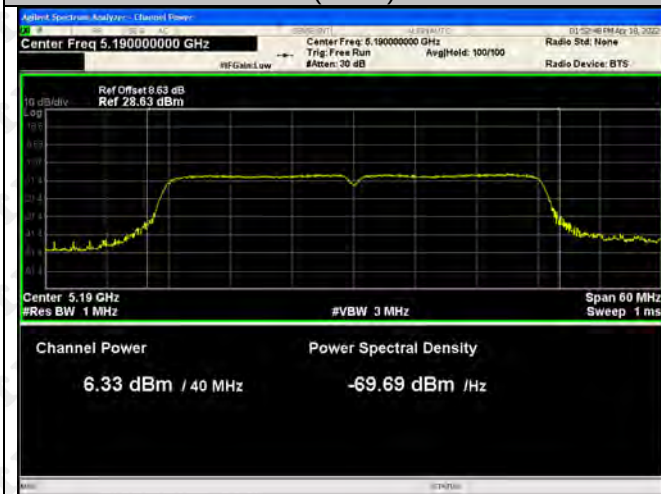


802.11ac(VH20)-5180

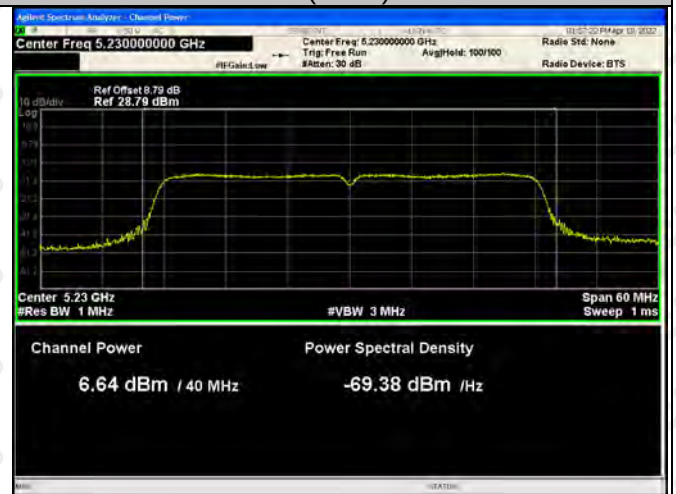


802.11ac(VH20)-5200

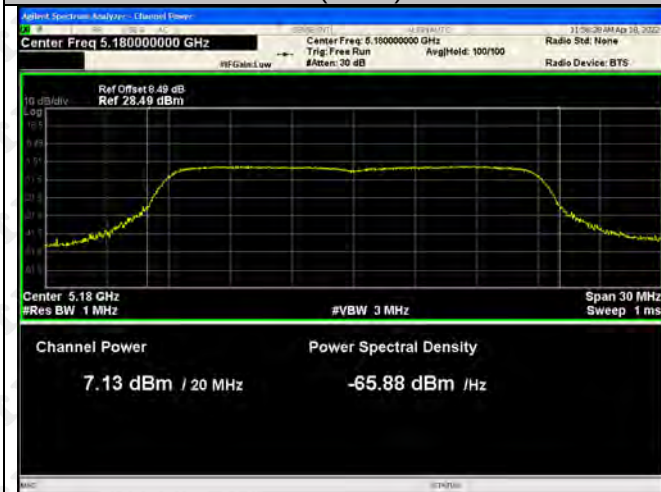


802.11ac(VH20)-5240

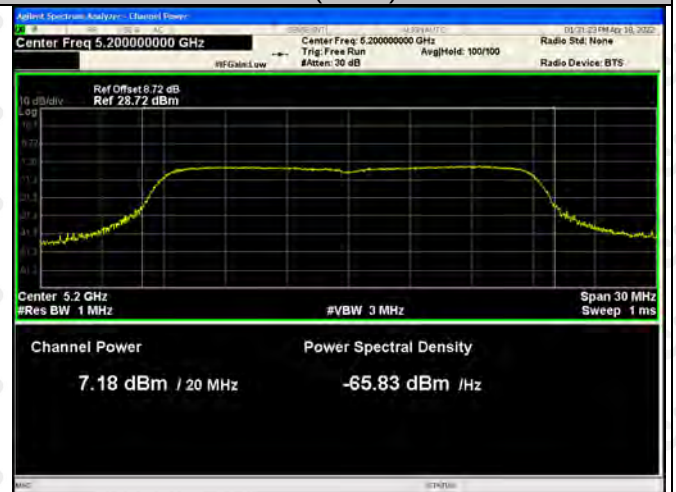


802.11ac(VH40)-5190

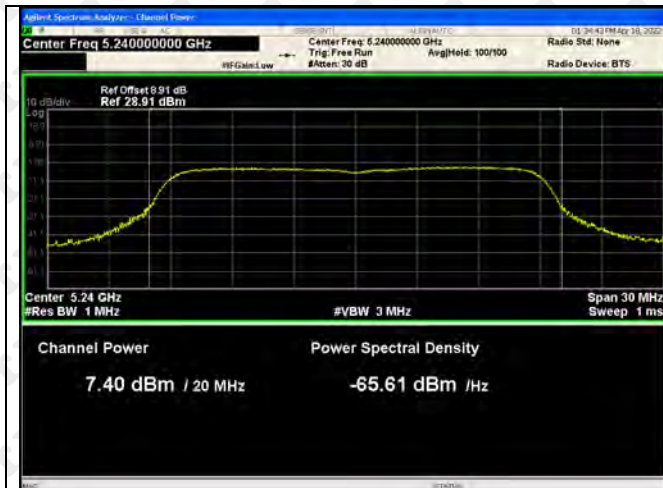


802.11ac(VH40)-5230

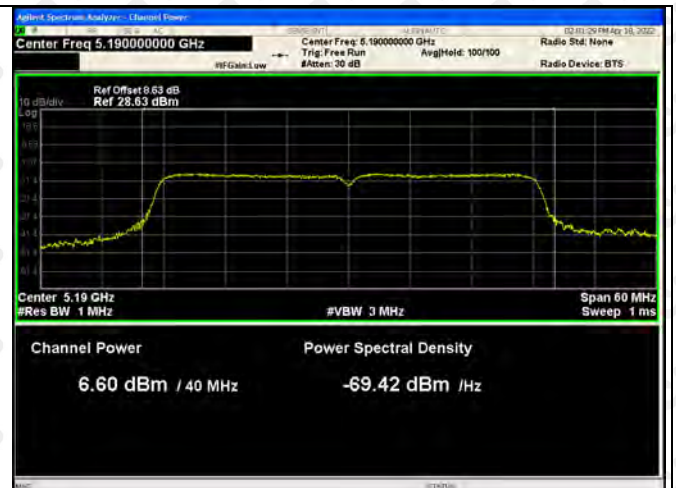


802.11ac(VH80)-5210

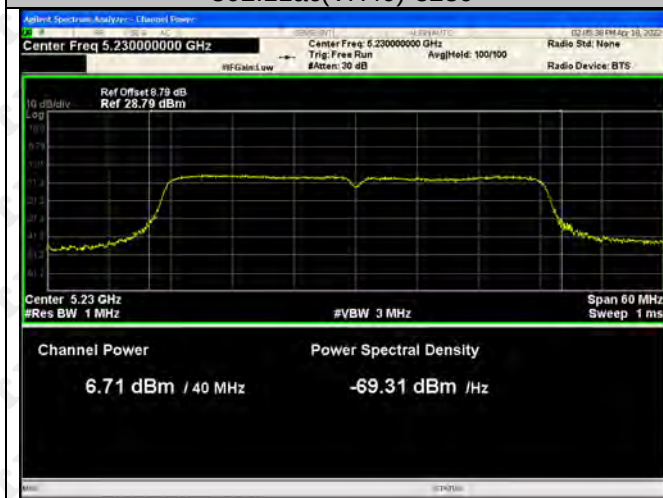


802.11a-5745

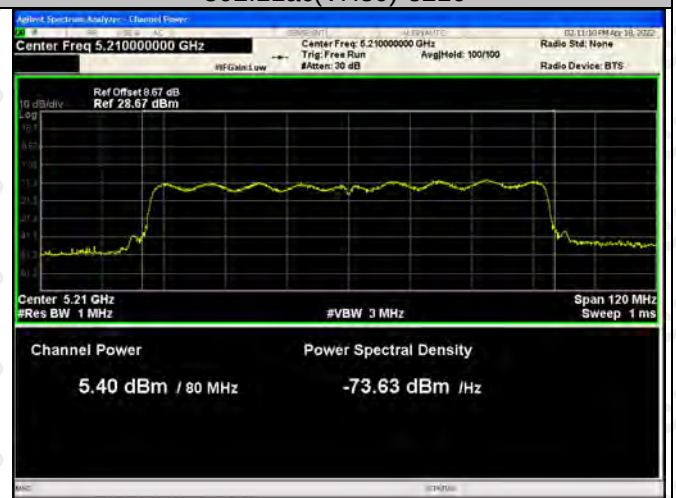

802.11a-5785

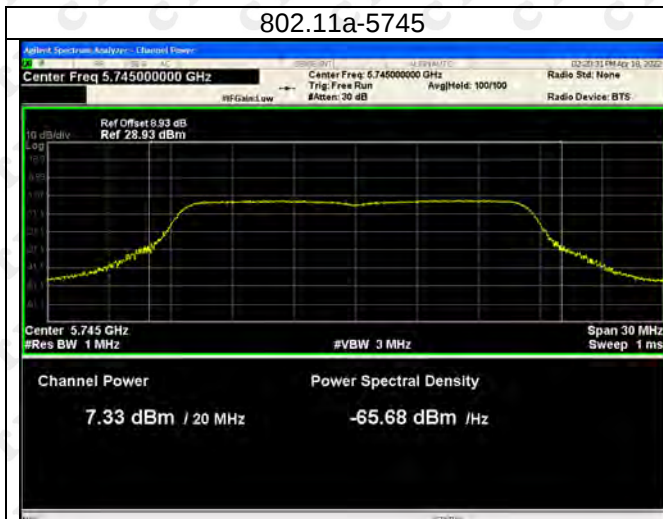

802.11a-5825

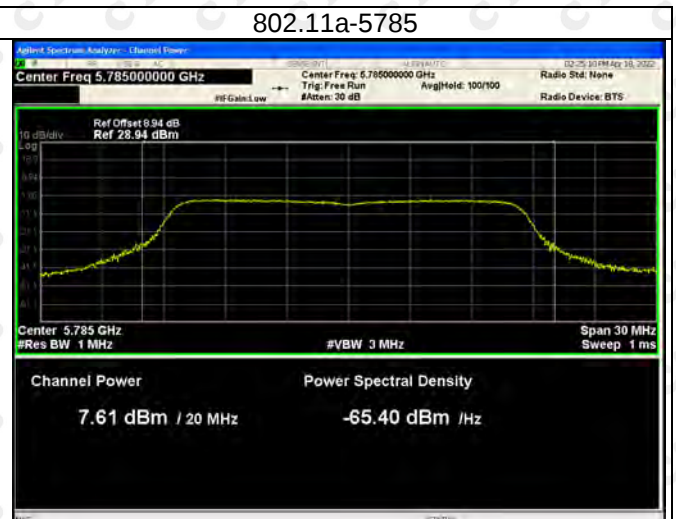

802.11ac(VH20)-5745




802.11ac(VH20)-5785




802.11ac(VH20)-5825




802.11ac(VH40)-5755

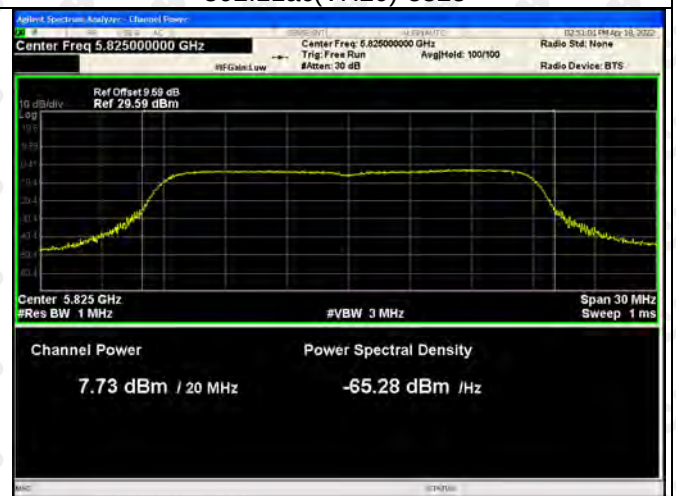


802.11ac(VH40)-5795

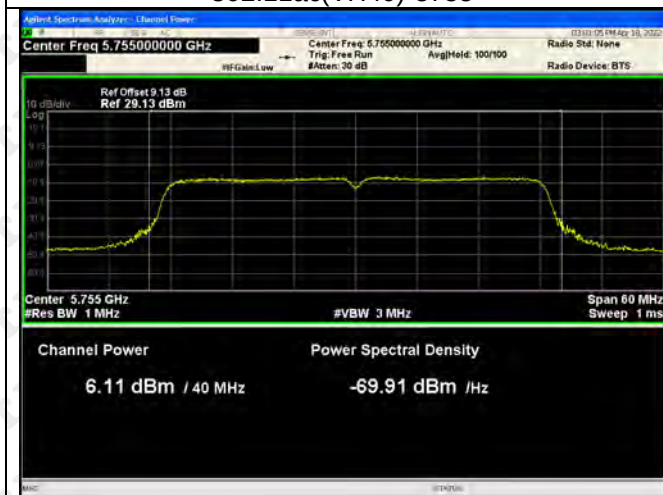


802.11n(HT20)-5745

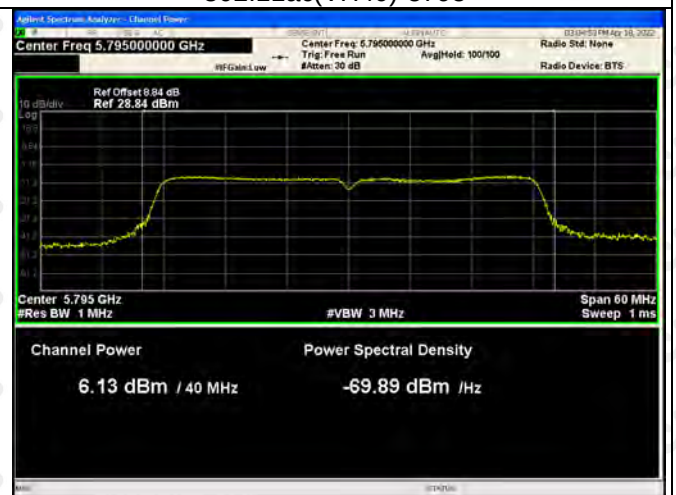


802.11n(HT20)-5785

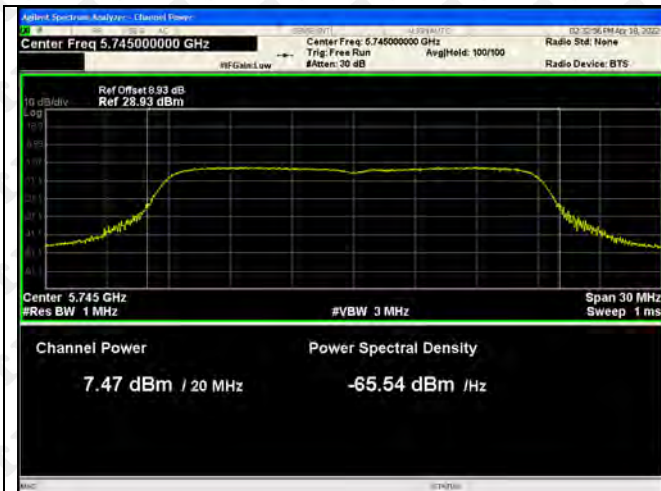


802.11n(HT20)-5825

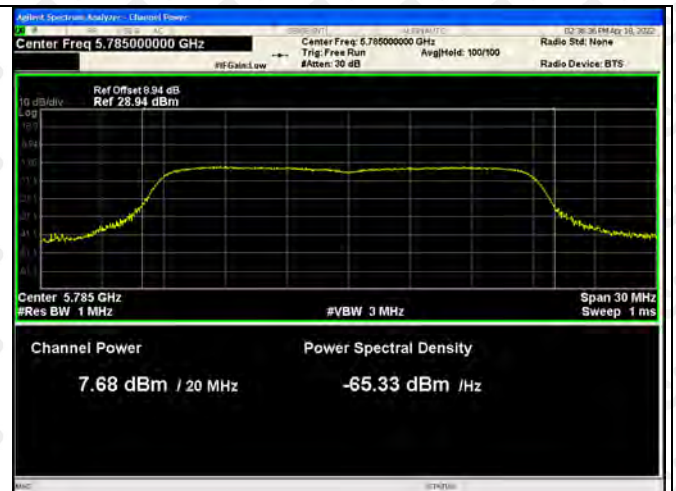



802.11n(HT40)-5755

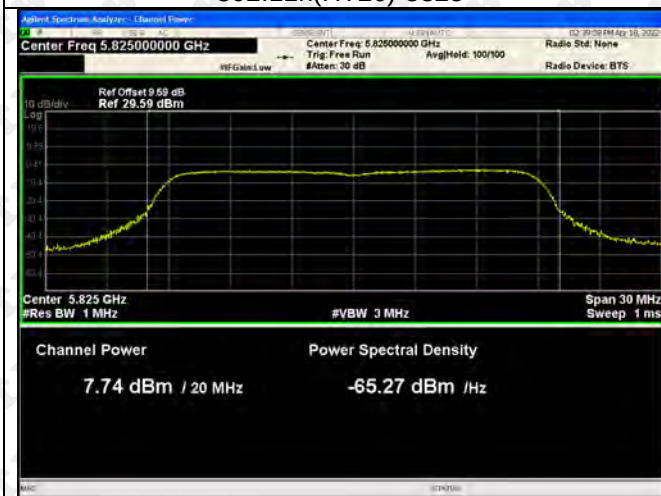

802.11n(HT40)-5795

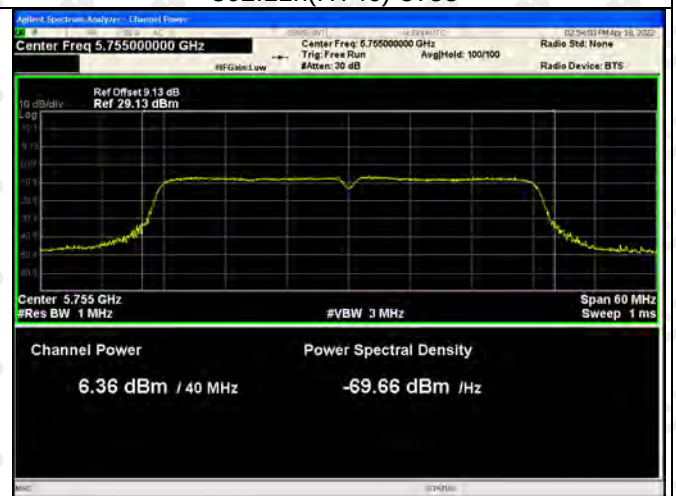


802.11ac(HT80)-5775

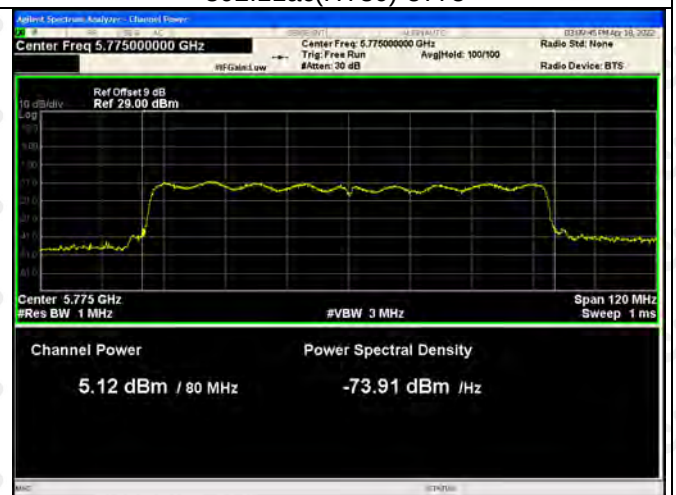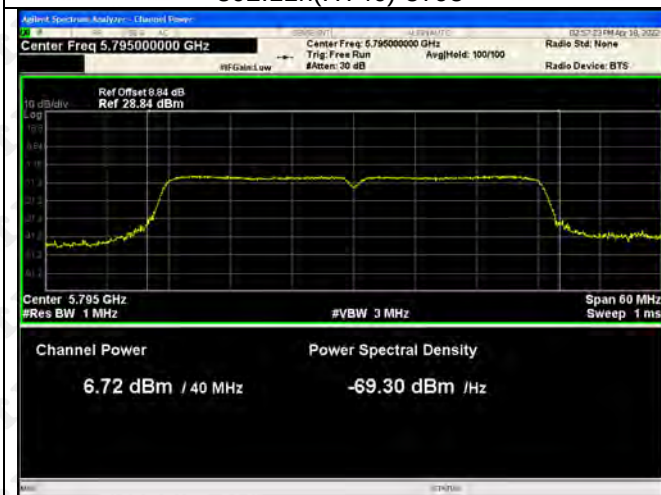

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

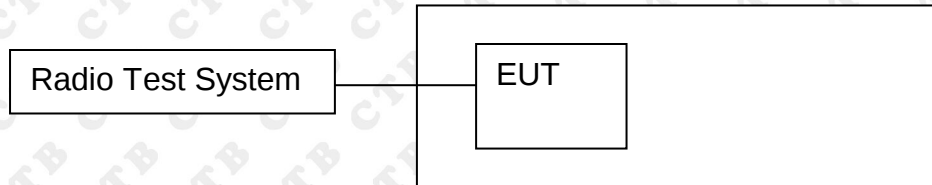

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) $\geq 3 * RBW$.

c) Detector = Peak.

d) Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results

Test mode ANT 1	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	21.037
	5200	21.372
	5240	21.035
802.11ac20	5180	21.27
	5200	21.225
	5240	20.966
802.11ac40	5190	40.416
	5230	40.628
802.11ac80	5210	80.339
802.11n(HT20)	5180	20.998
	5200	21.412
	5240	21.133
802.11n(HT40)	5190	40.907
	5230	40.981

Test mode ANT 2	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	21.345
	5200	20.523
	5240	20.858
802.11ac20	5180	21.07
	5200	21.066
	5240	21.043
802.11ac40	5190	40.75
	5230	41.154
802.11ac80	5210	81.561
802.11n(HT20)	5180	21.207
	5200	21.037
	5240	20.986
802.11n(HT40)	5190	40.277
	5230	41.077

Test mode ANT 3	Test Channel (MHz)	26dB Bandwidth (MHz)
802.11a	5180	21.227
	5200	21.17
	5240	21.456
802.11ac20	5180	21.737
	5200	21.403
	5240	21.649
802.11ac40	5190	46.321
	5230	40.905
802.11ac80	5210	80.773
802.11n(HT20)	5180	21.701
	5200	21.753
	5240	21.134
802.11n(HT40)	5190	41.081
	5230	41.819

5725-5850 MHz


Test mode Ant 1	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.343	Pass
	5785	16.351	Pass
	5825	16.352	Pass
802.11ac(VH20)	5745	17.259	Pass
	5785	17.292	Pass
	5825	17.111	Pass
802.11ac(VH40)	5755	35.351	Pass
	5795	35.299	Pass
802.11ac(VH80)	5775	75.303	Pass
802.11n(VH20)	5745	16.958	Pass
	5785	17.327	Pass
	5825	17.024	Pass
802.11n(VH40)	5755	35.448	Pass
	5795	35.288	Pass

Test mode Ant 2	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.356	Pass
	5785	16.341	Pass
	5825	16.139	Pass
802.11ac(VH20)	5745	17.548	Pass
	5785	17.576	Pass
	5825	16.993	Pass
802.11ac(VH40)	5755	35.127	Pass
	5795	34.537	Pass
802.11ac(VH80)	5775	75.145	Pass
802.11n(VH20)	5745	17.061	Pass
	5785	17.257	Pass
	5825	16.338	Pass
802.11n(VH40)	5755	35.332	Pass
	5795	35.459	Pass

Test mode Ant 3	Test Channel (MHz)	6dB Bandwidth (MHz)	Result
802.11a	5745	16.108	Pass
	5785	16.344	Pass
	5825	16.086	Pass
802.11ac(VH20)	5745	16.748	Pass
	5785	17.007	Pass
	5825	16.451	Pass
802.11ac(VH40)	5755	35.211	Pass
	5795	35.807	Pass
802.11ac(VH80)	5775	75.274	Pass
802.11n(VH20)	5745	17.322	Pass
	5785	16.935	Pass
	5825	16.182	Pass
802.11n(VH40)	5755	35.249	Pass
	5795	35.537	Pass

Test Graph ANT 1



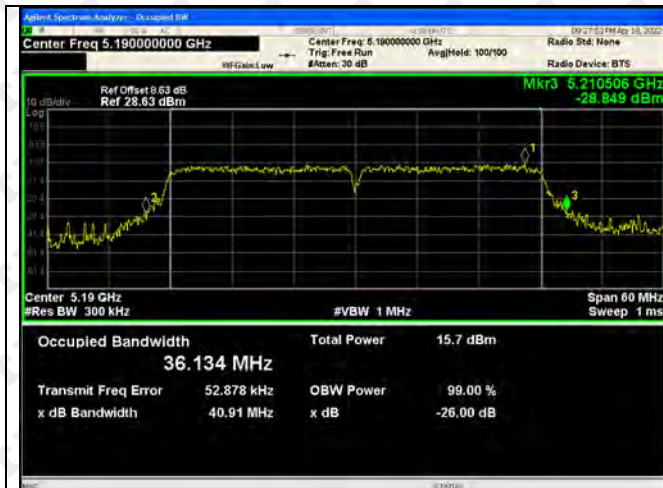

802.11ac(VH20)-5180



802.11ac(VH20)-5200



802.11ac(VH20)-5240




802.11ac(VH40)-5190




802.11ac(VH40)-5230



802.11ac(VH80)-5210

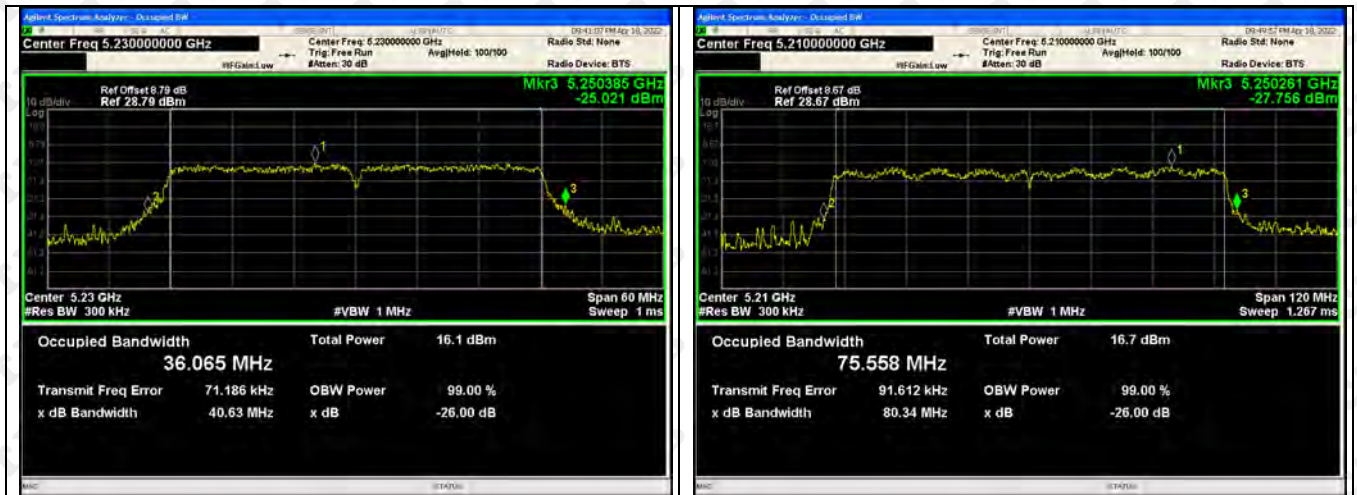

5725-5850MHz

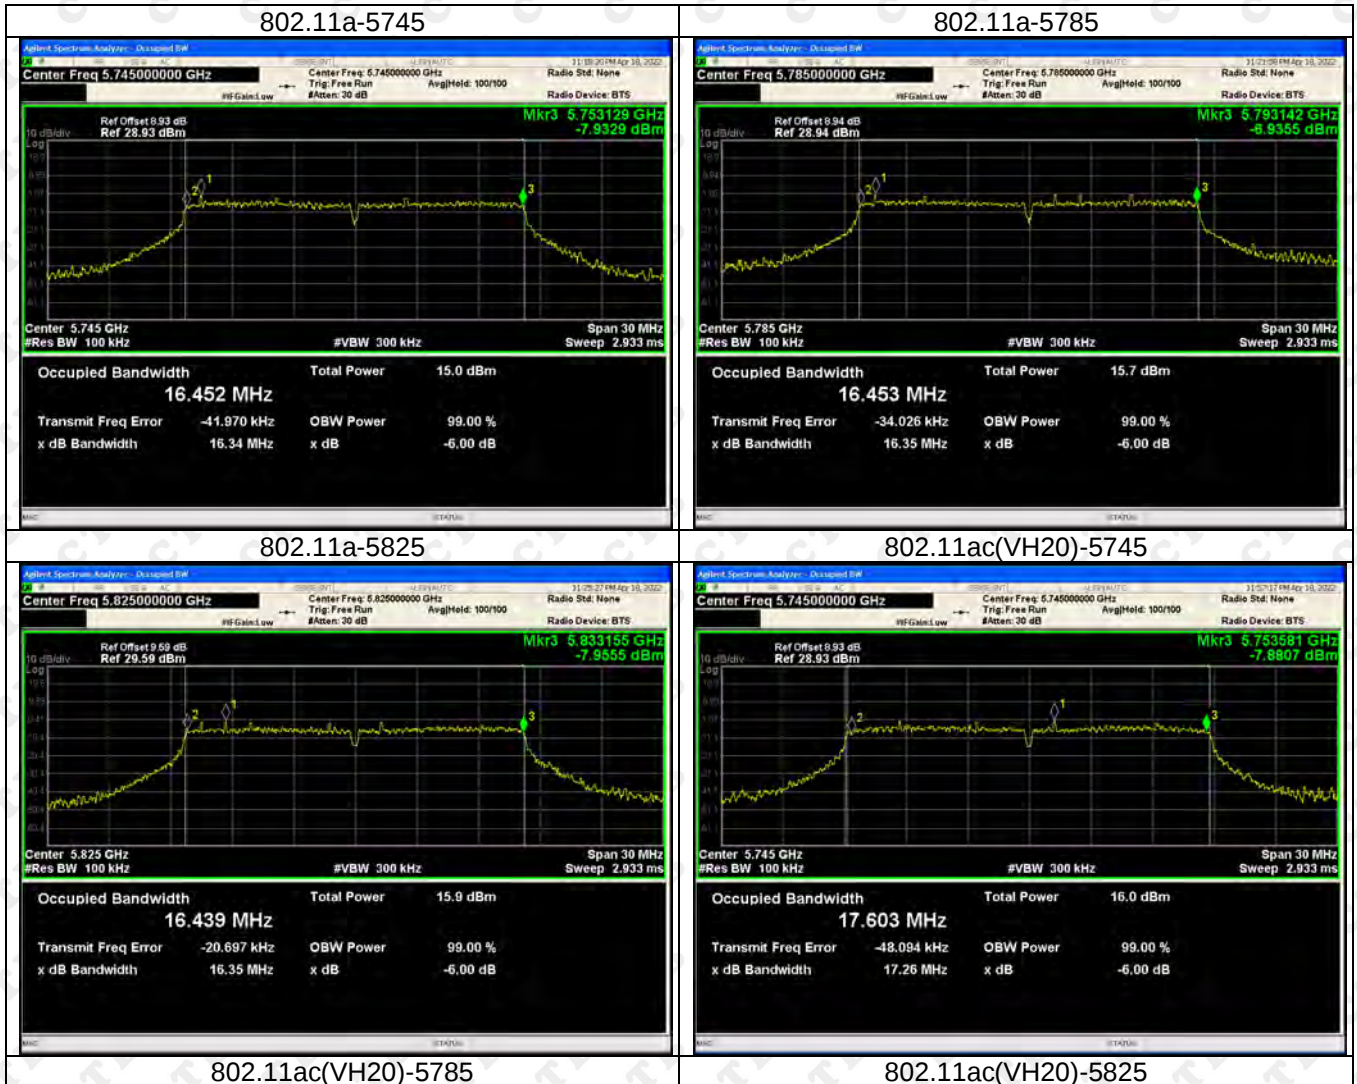



802.11ac(VH40)-5755



802.11ac(VH40)-5795



802.11ac(VH40)-5755



802.11ac(VH40)-5795




802.11n(HT20)-5745




802.11n(HT20)-5785



802.11n(HT40)-5795

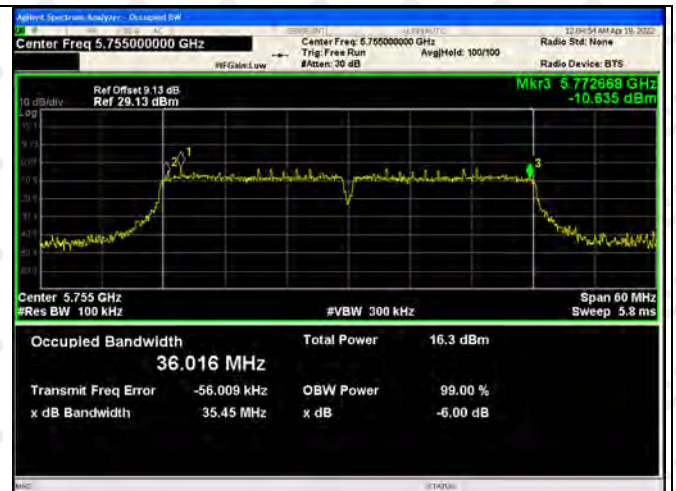


802.11ac(HT80)-5775

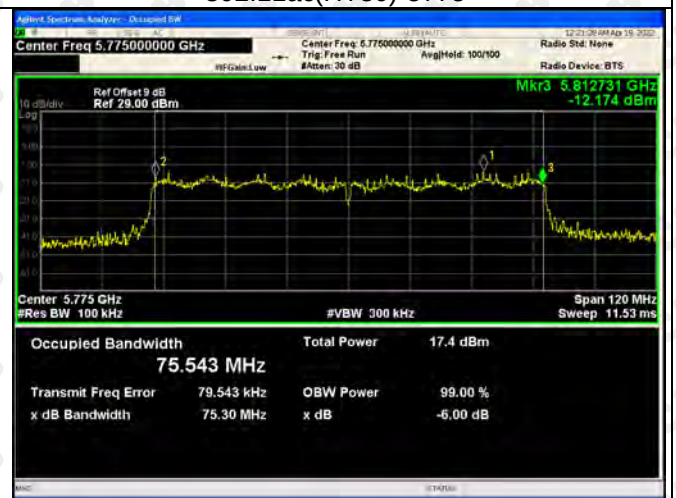

Test Graph ANT 2



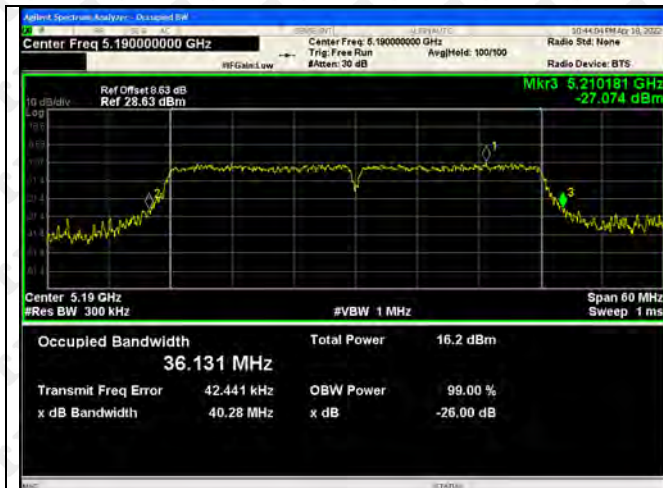

802.11ac(VH20)-5180




802.11ac(VH20)-5200



802.11ac(VH20)-5240



802.11ac(VH40)-5190

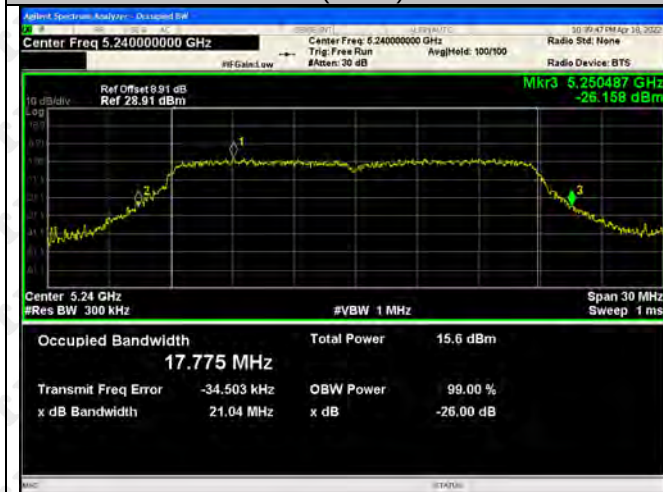

802.11ac(VH40)-5230



802.11ac(VH80)-5210