





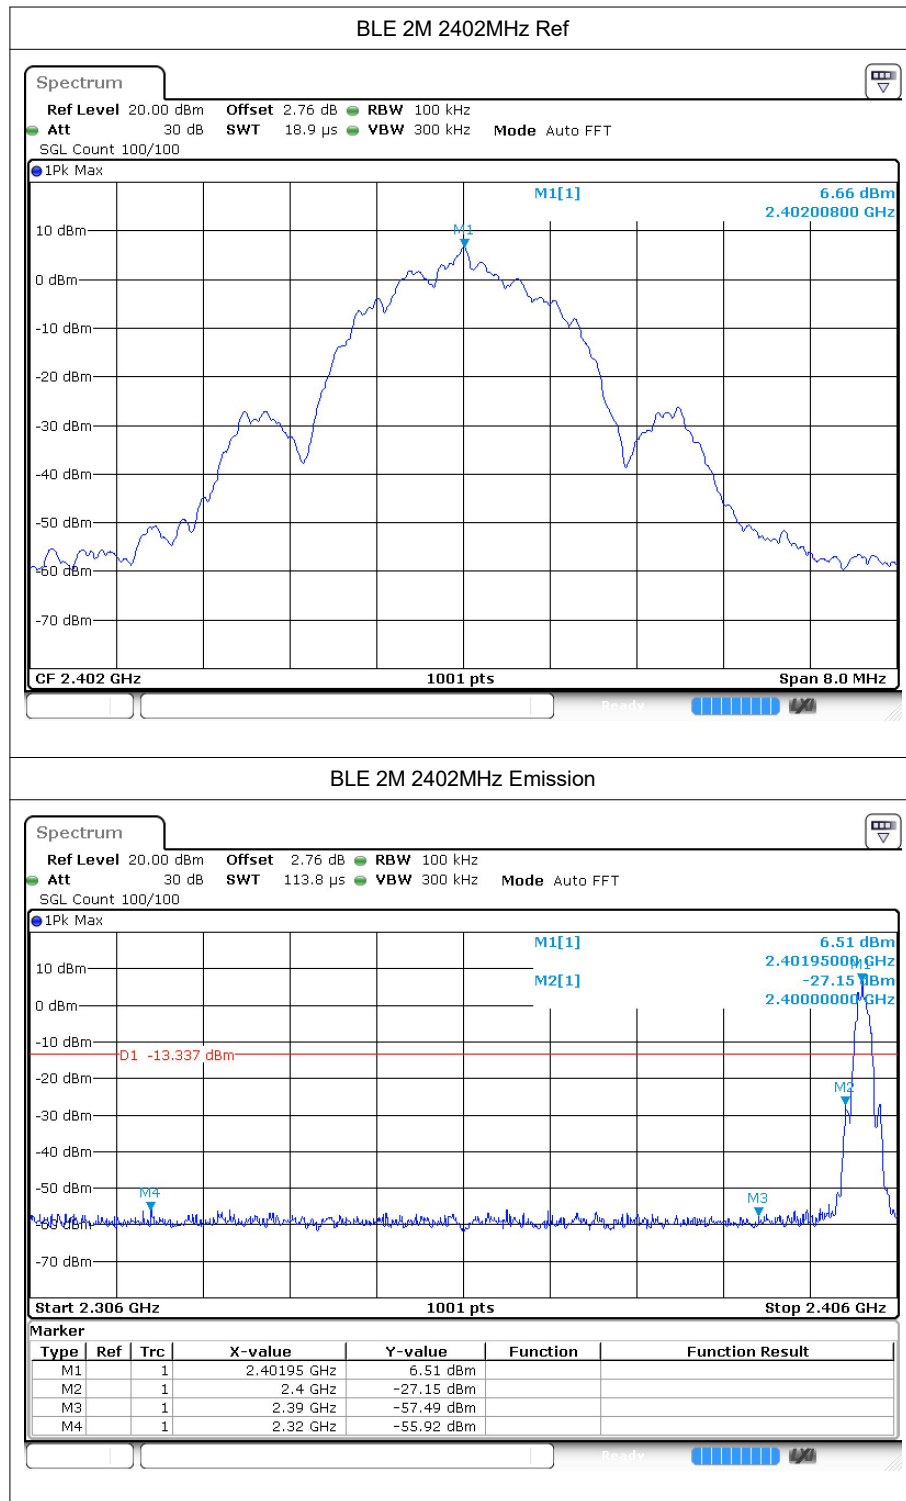

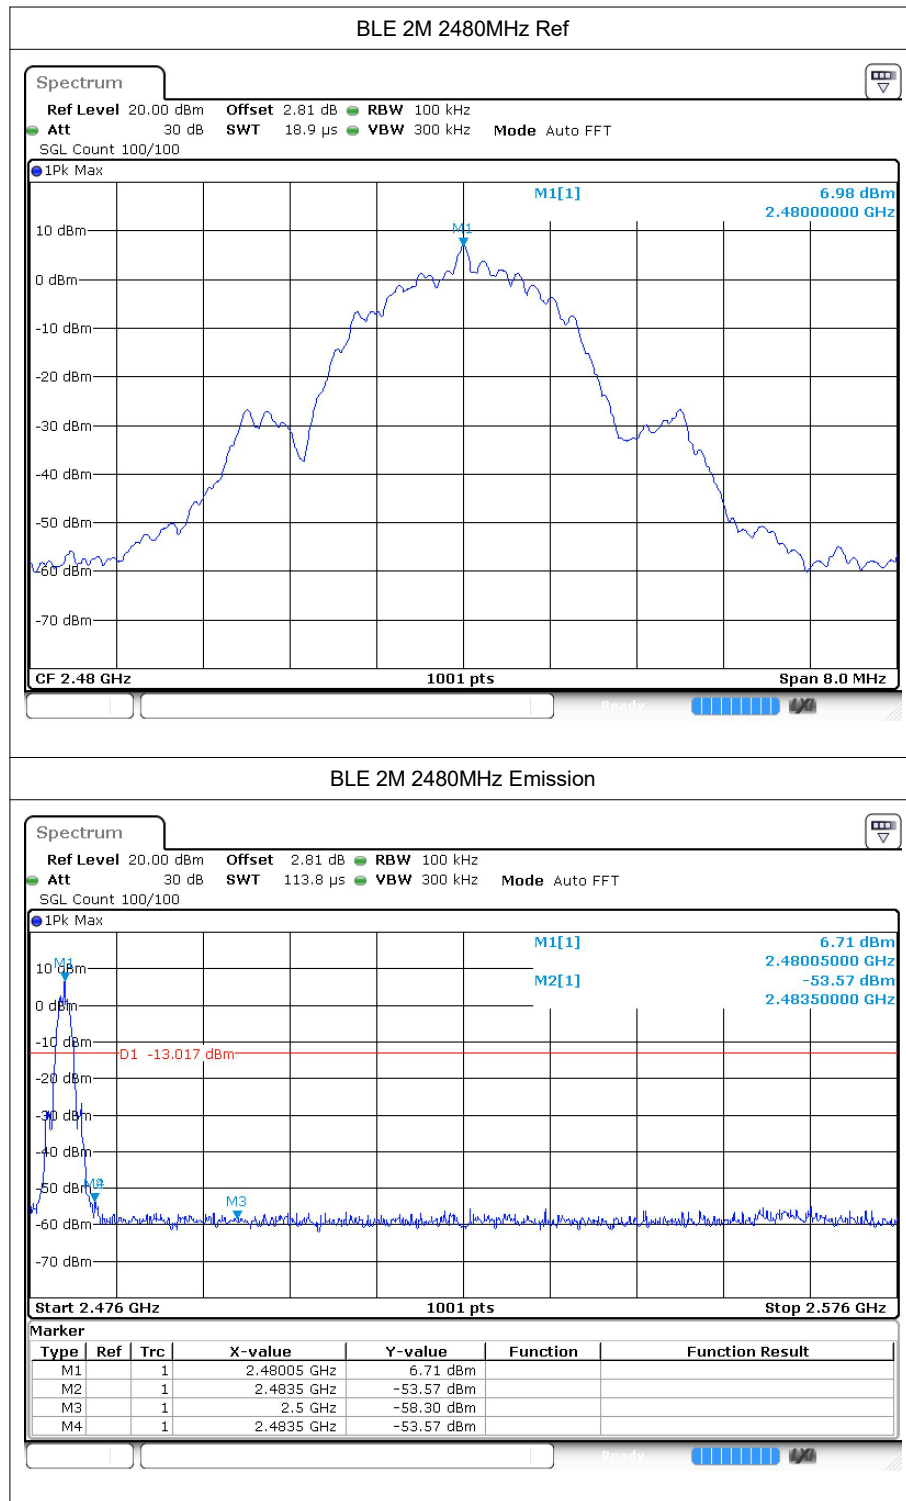



6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-49.41	-20	Pass
BLE 1M	2440	-50.03	-20	Pass
BLE 1M	2480	-49.99	-20	Pass
BLE 2M	2402	-50.4	-20	Pass
BLE 2M	2440	-50.06	-20	Pass
BLE 2M	2480	-46.84	-20	Pass


6.2 Test Graphs

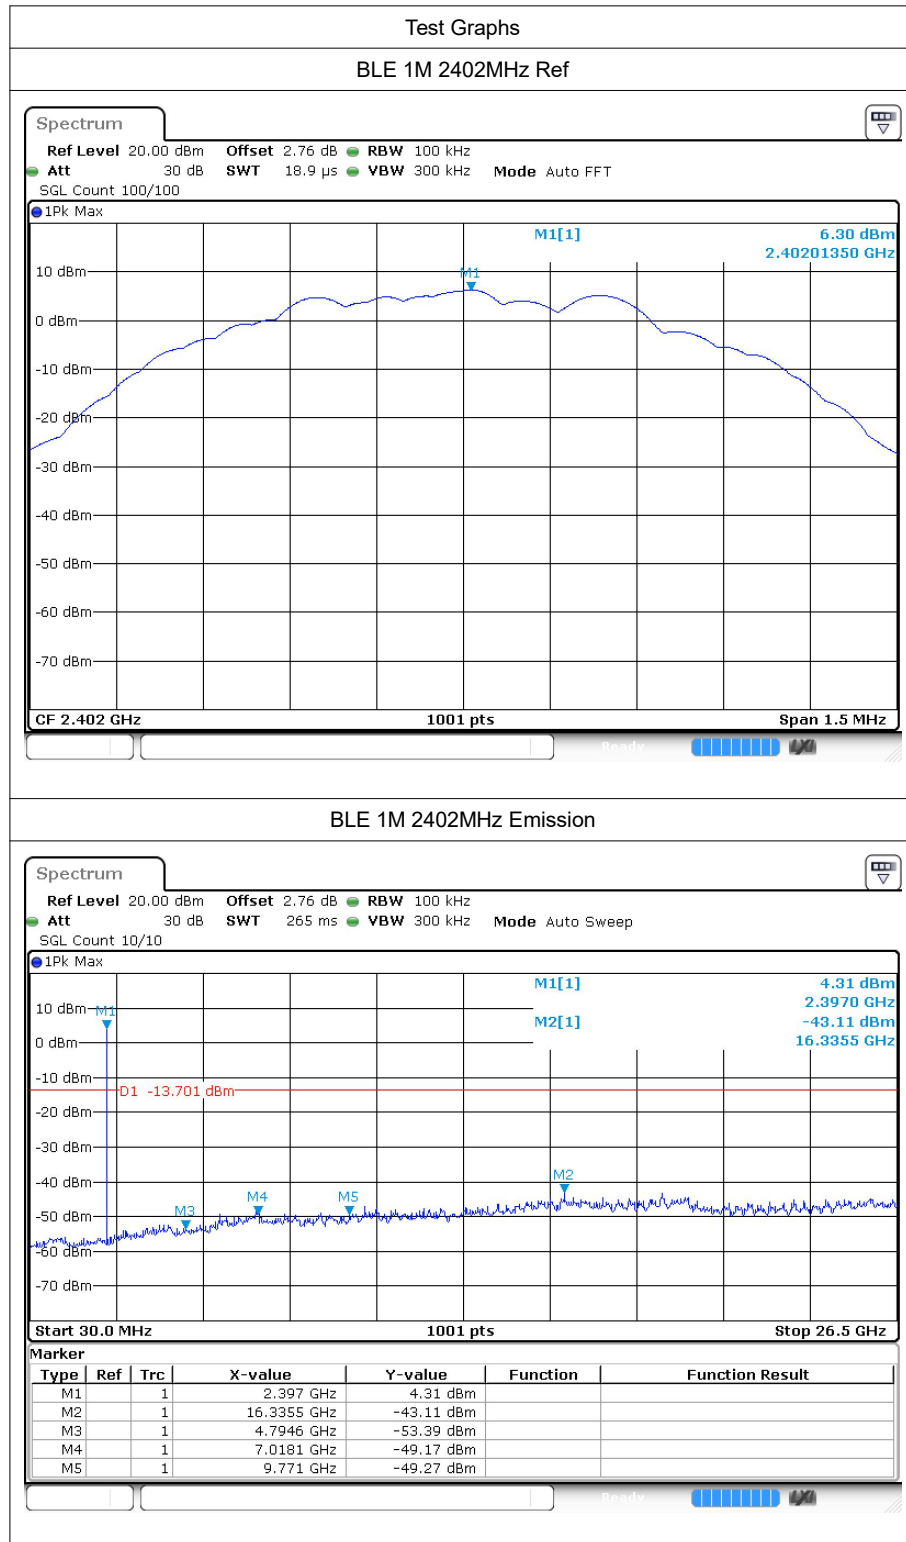


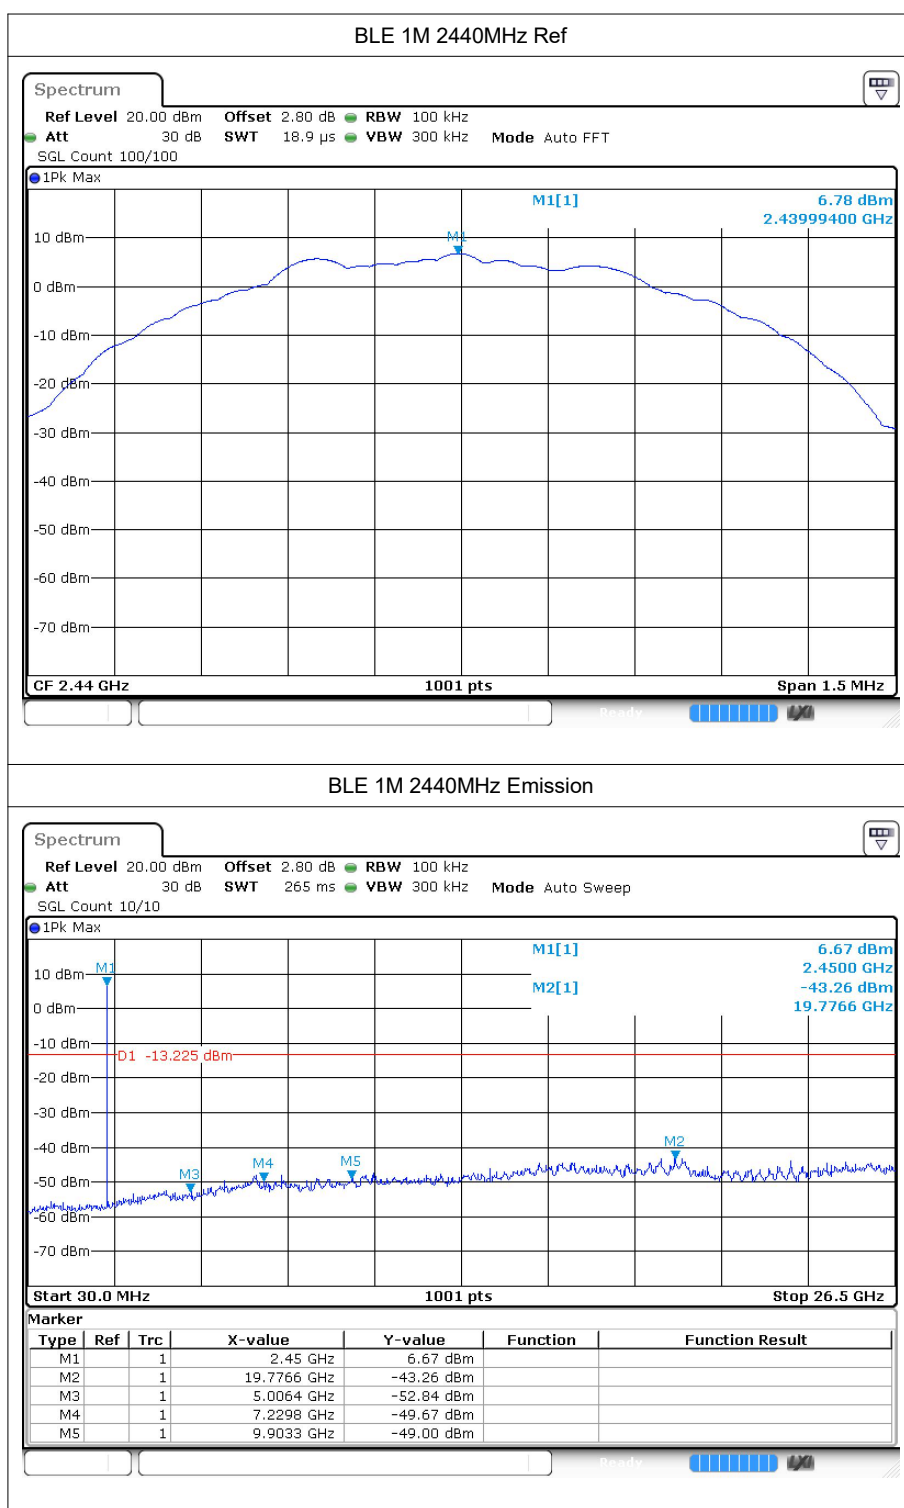

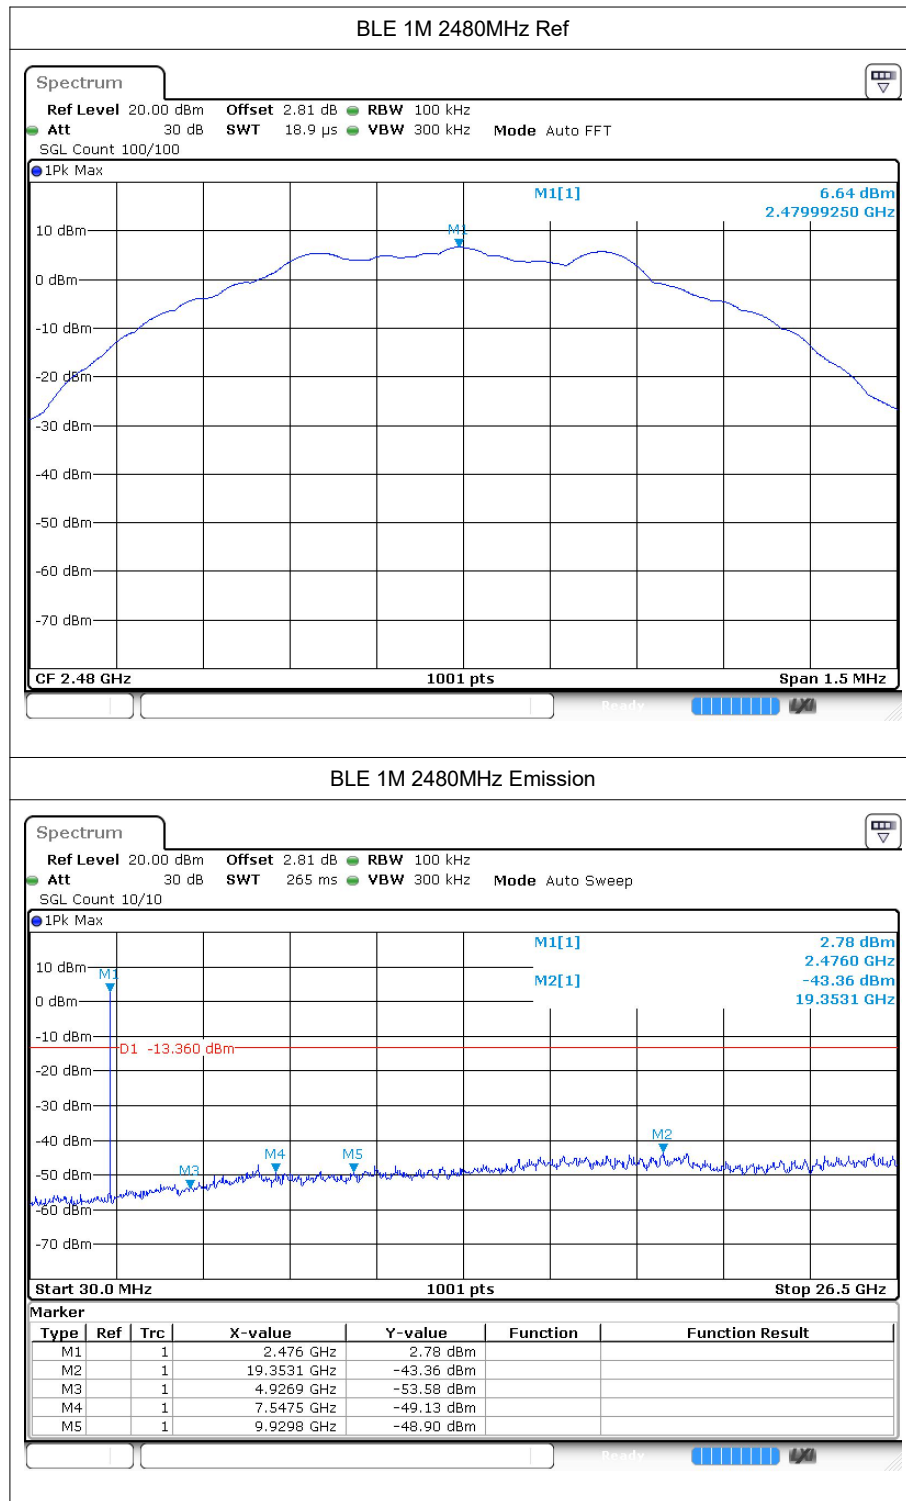

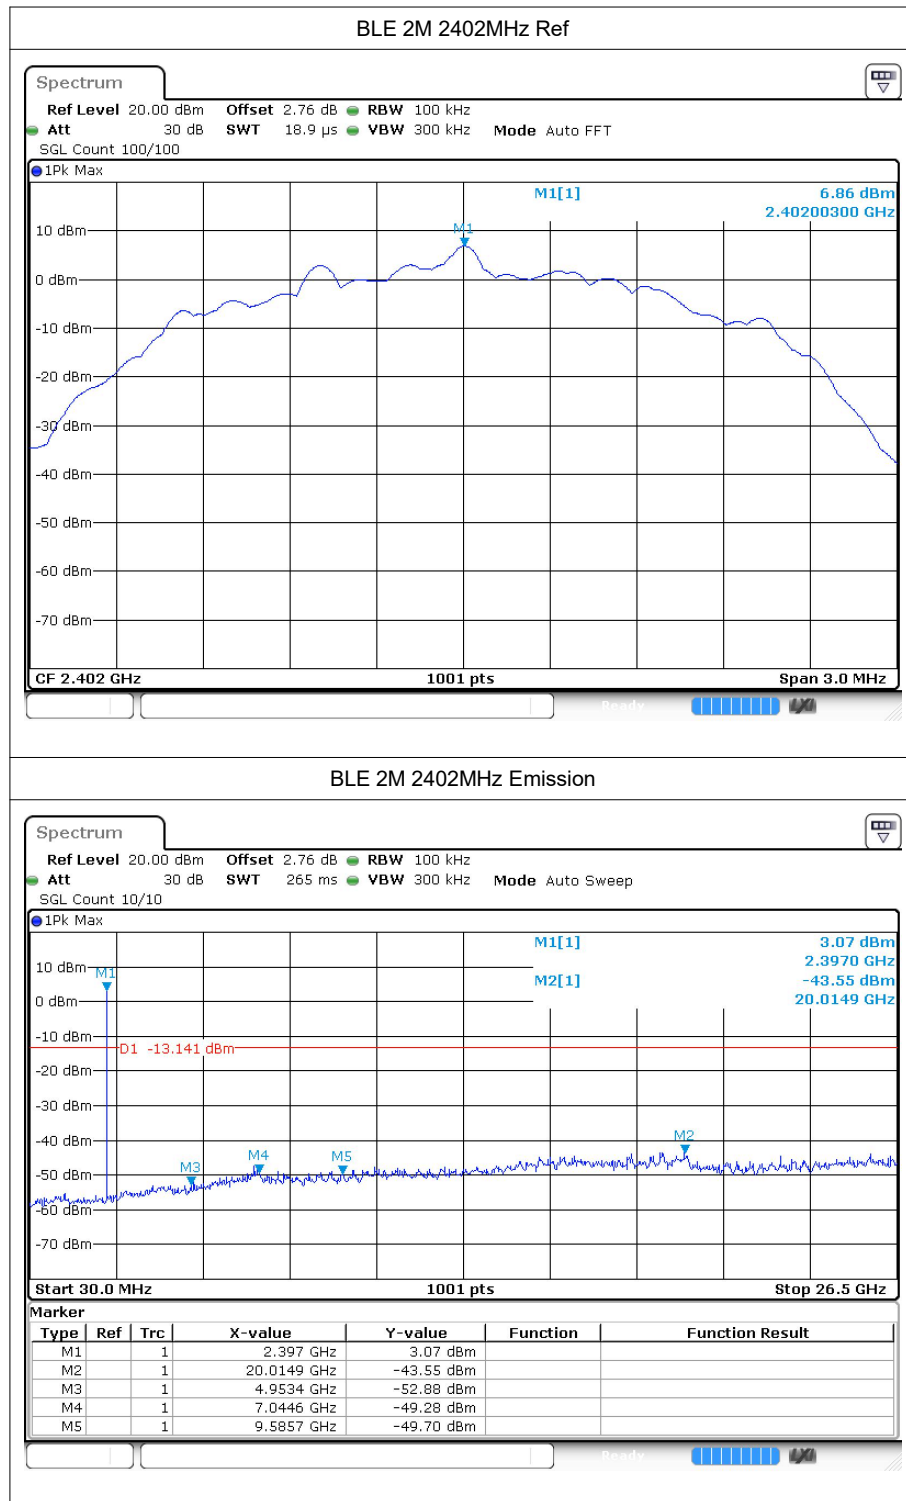

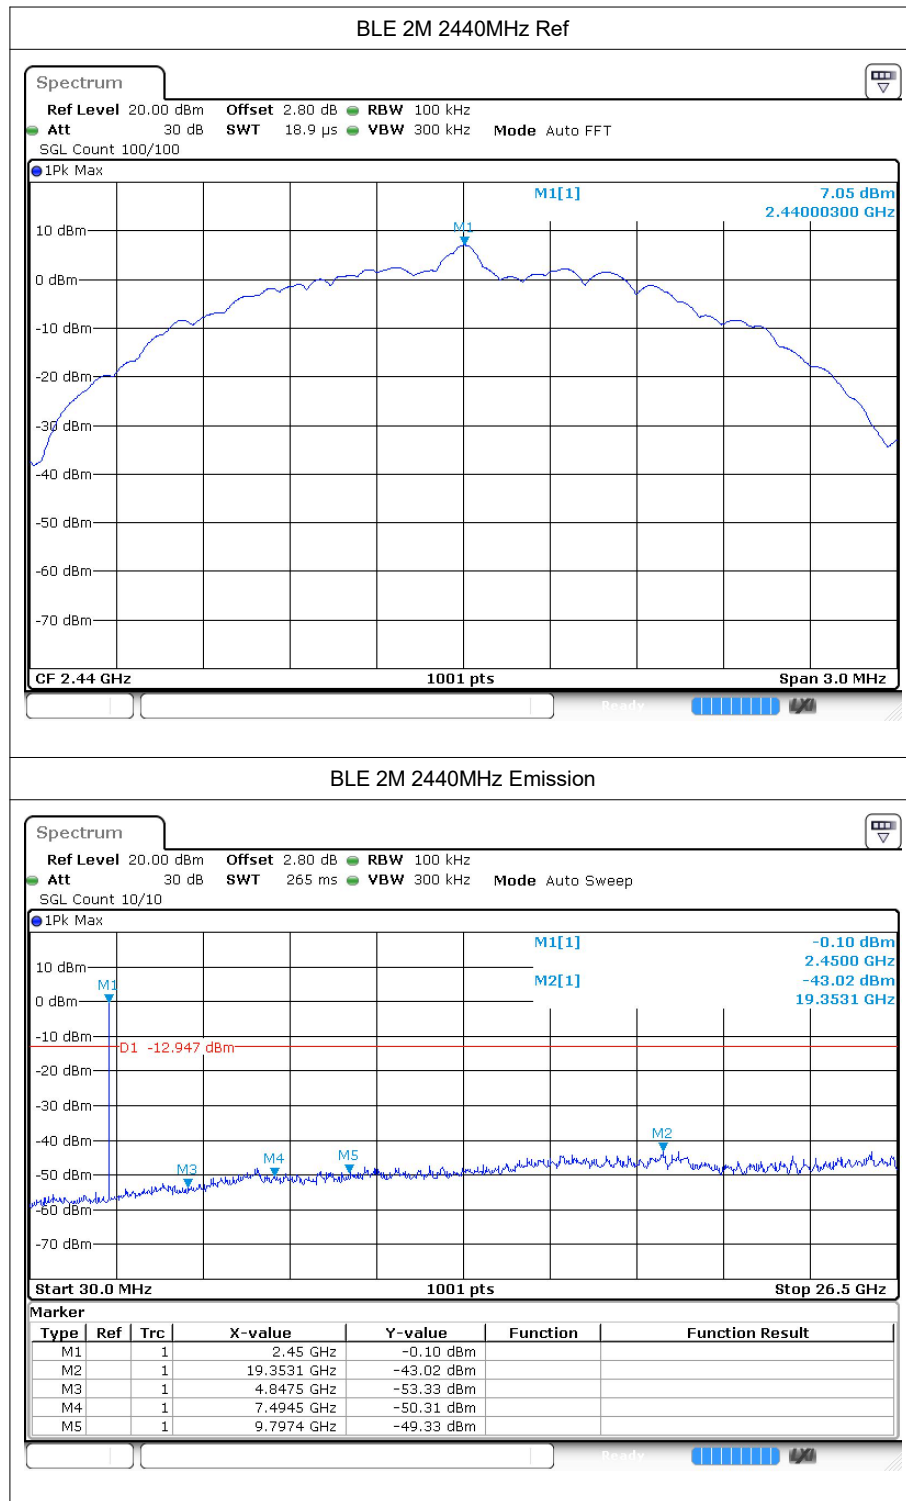

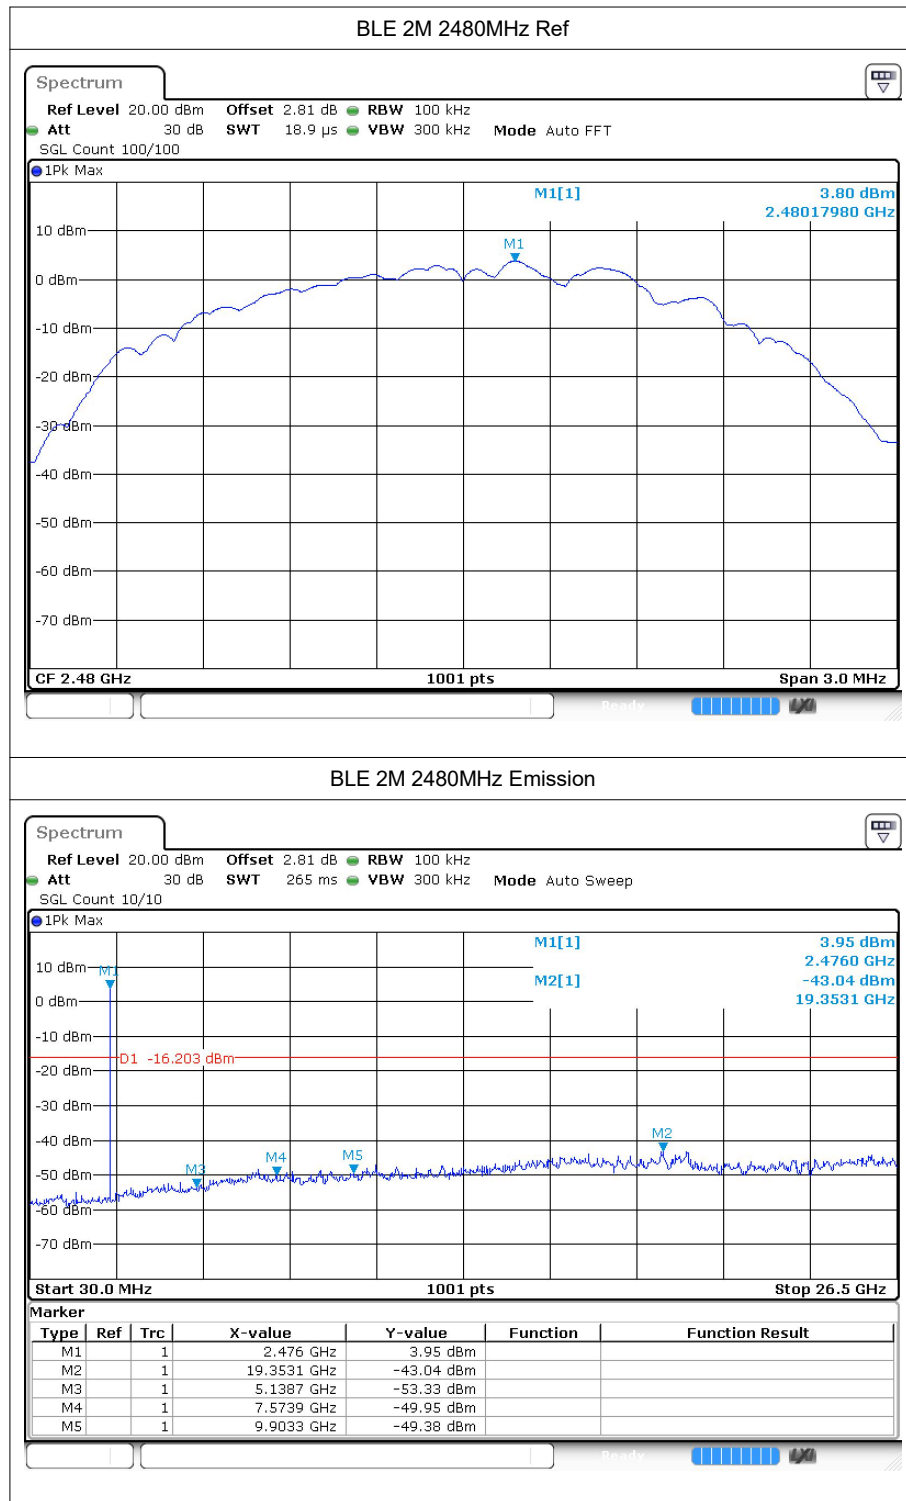





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-48.73	3.28	-	49.78	Peak	74	Pass
BLE 1M	2402	2310	-56.29	3.28	1.88	44.1	Average	54	Pass
BLE 1M	2402	2344.752	-46.07	3.28	-	52.44	Peak	74	Pass
BLE 1M	2402	2338.608	-54.22	3.28	1.88	46.17	Average	54	Pass
BLE 1M	2402	2390	-50.14	3.28	-	48.37	Peak	74	Pass
BLE 1M	2402	2390	-56.6	3.28	1.88	43.79	Average	54	Pass
BLE 1M	2480	2483.5	-47.31	3.28	-	51.2	Peak	74	Pass
BLE 1M	2480	2483.5	-55.54	3.28	1.88	44.85	Average	54	Pass
BLE 1M	2480	2484.64	-47.08	3.28	-	51.43	Peak	74	Pass
BLE 1M	2480	2483.92	-55.04	3.28	1.88	45.35	Average	54	Pass
BLE 1M	2480	2500	-49.82	3.28	-	48.69	Peak	74	Pass
BLE 1M	2480	2500	-56.8	3.28	1.88	43.59	Average	54	Pass
BLE 2M	2402	2310	-47.41	3.28	-	51.1	Peak	74	Pass
BLE 2M	2402	2310	-56.95	3.28	4.53	46.09	Average	54	Pass
BLE 2M	2402	2345.136	-46.15	3.28	-	52.36	Peak	74	Pass
BLE 2M	2402	2339.28	-54.03	3.28	4.53	49.01	Average	54	Pass
BLE 2M	2402	2390	-49.46	3.28	-	49.05	Peak	74	Pass
BLE 2M	2402	2390	-57.53	3.28	4.53	45.51	Average	54	Pass
BLE 2M	2480	2483.5	-45.9	3.28	-	52.61	Peak	74	Pass
BLE 2M	2480	2483.5	-55.04	3.28	4.57	48.04	Average	54	Pass
BLE 2M	2480	2485.528	-45.79	3.28	-	52.72	Peak	74	Pass
BLE 2M	2480	2483.512	-55.23	3.28	4.57	47.85	Average	54	Pass
BLE 2M	2480	2500	-49.55	3.28	-	48.96	Peak	74	Pass
BLE 2M	2480	2500	-56.47	3.28	4.57	46.61	Average	54	Pass

7.2 Test Graphs

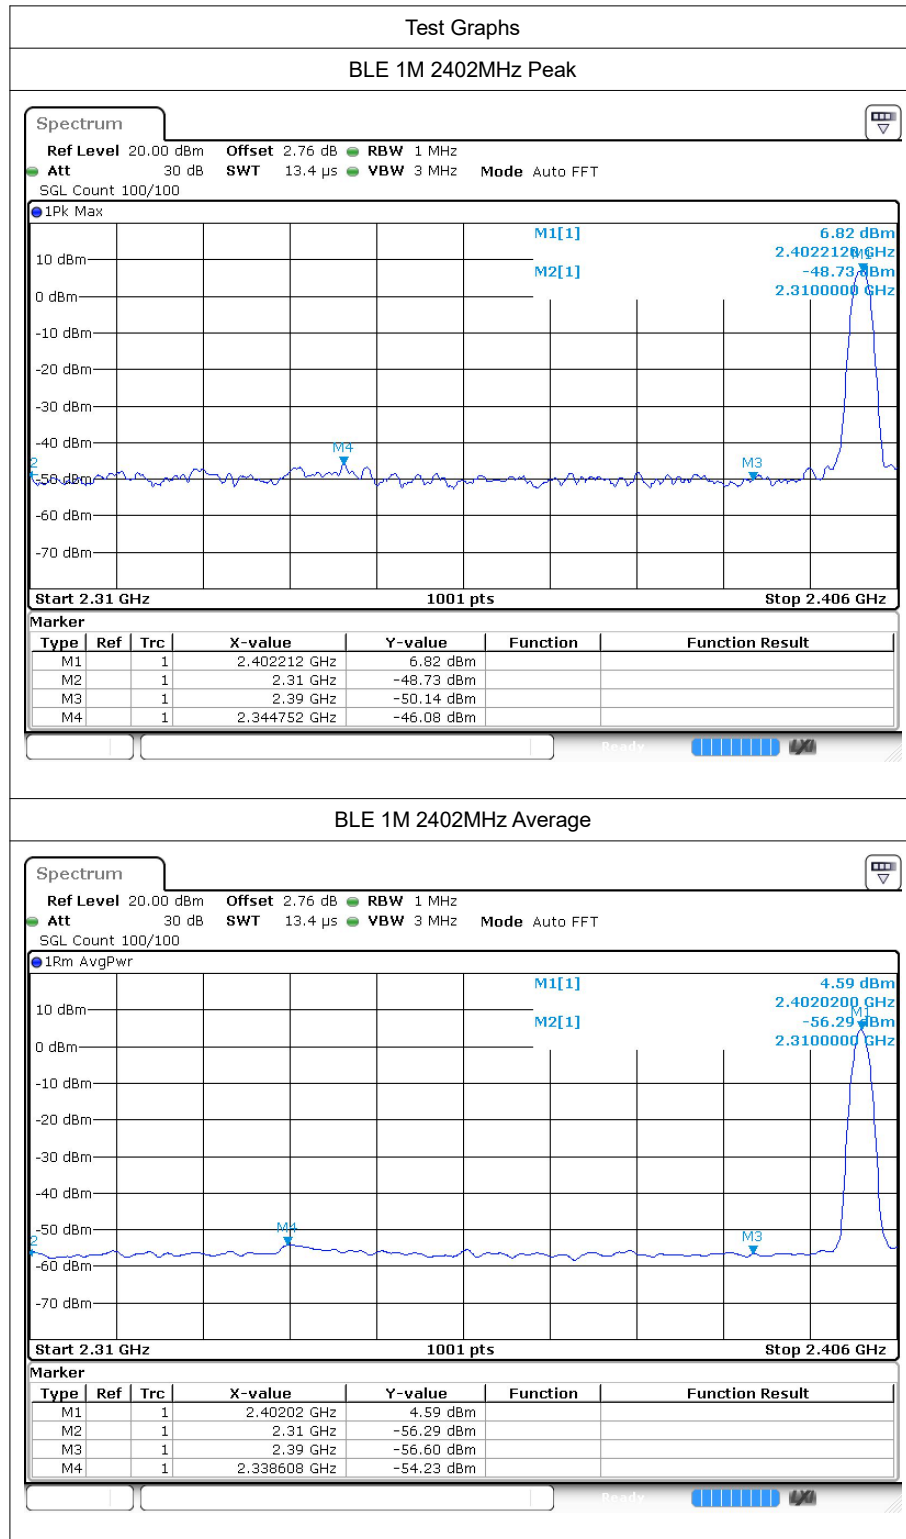

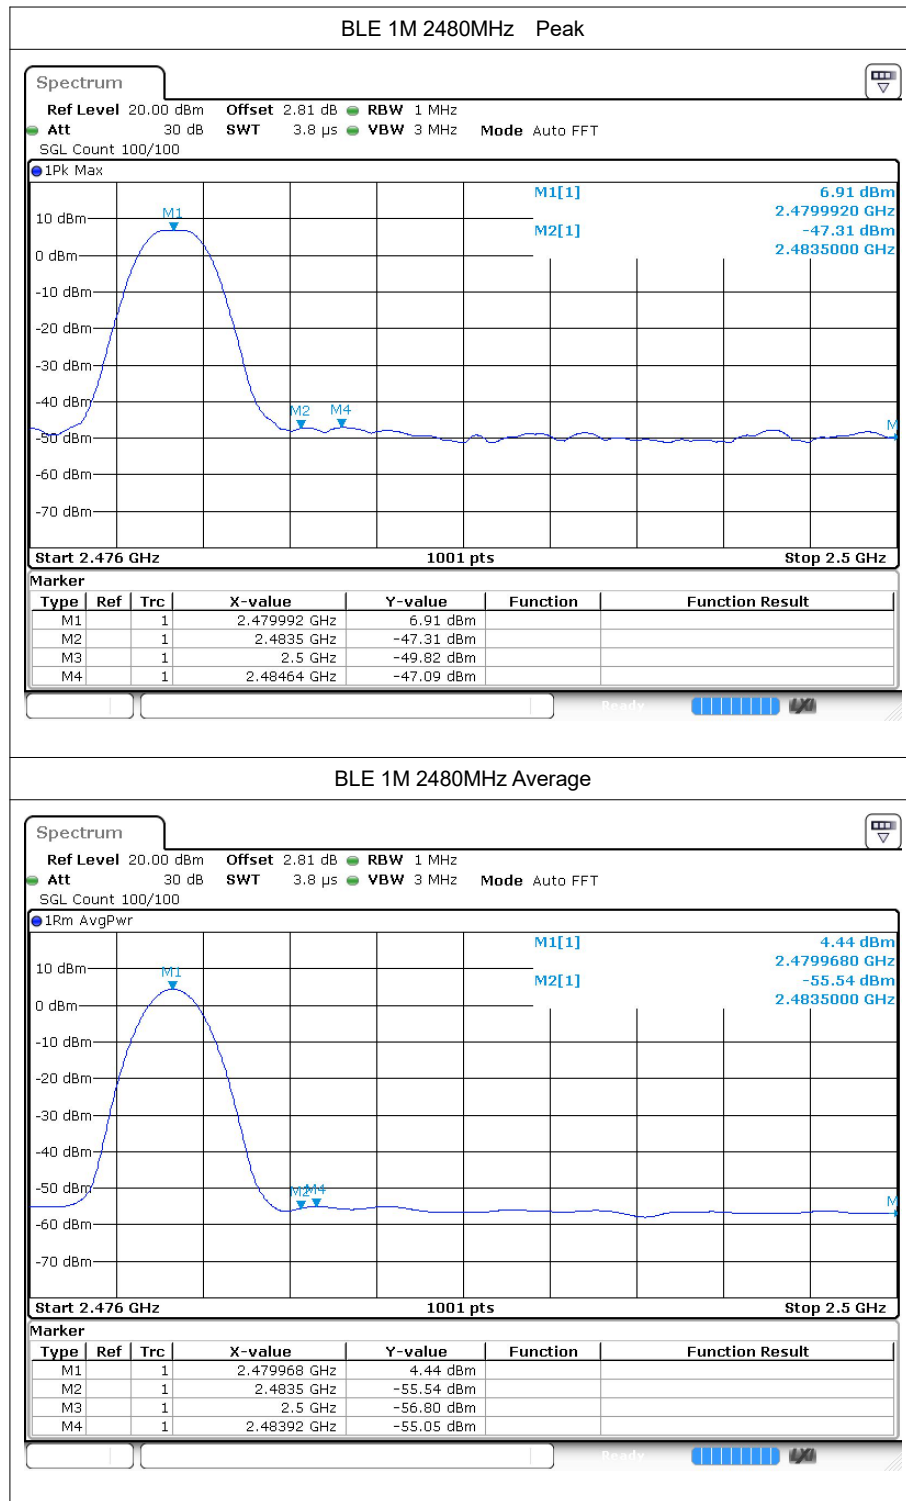

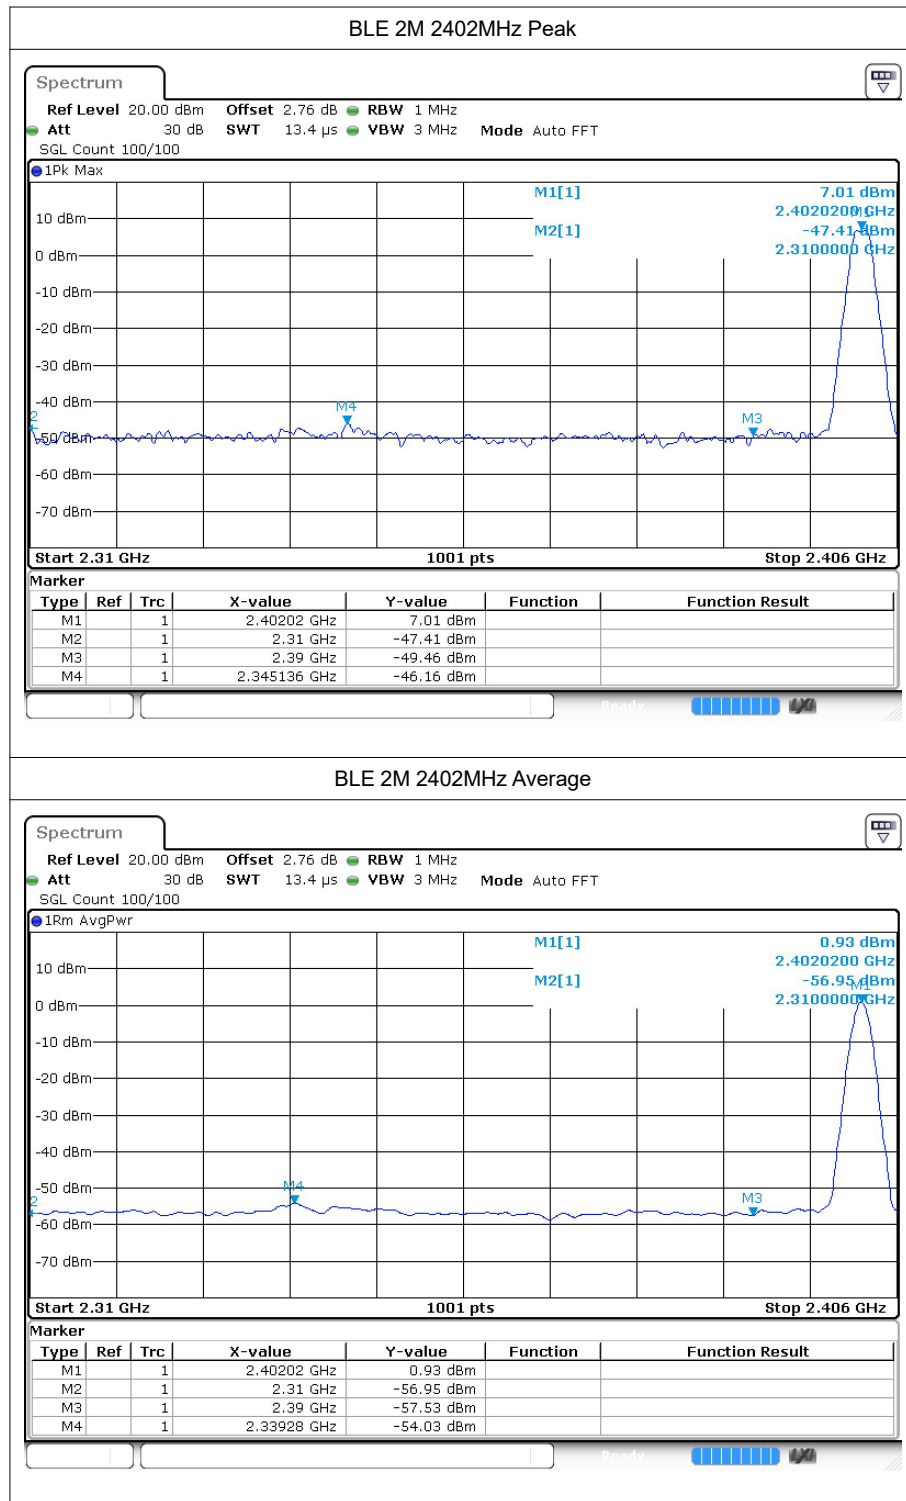

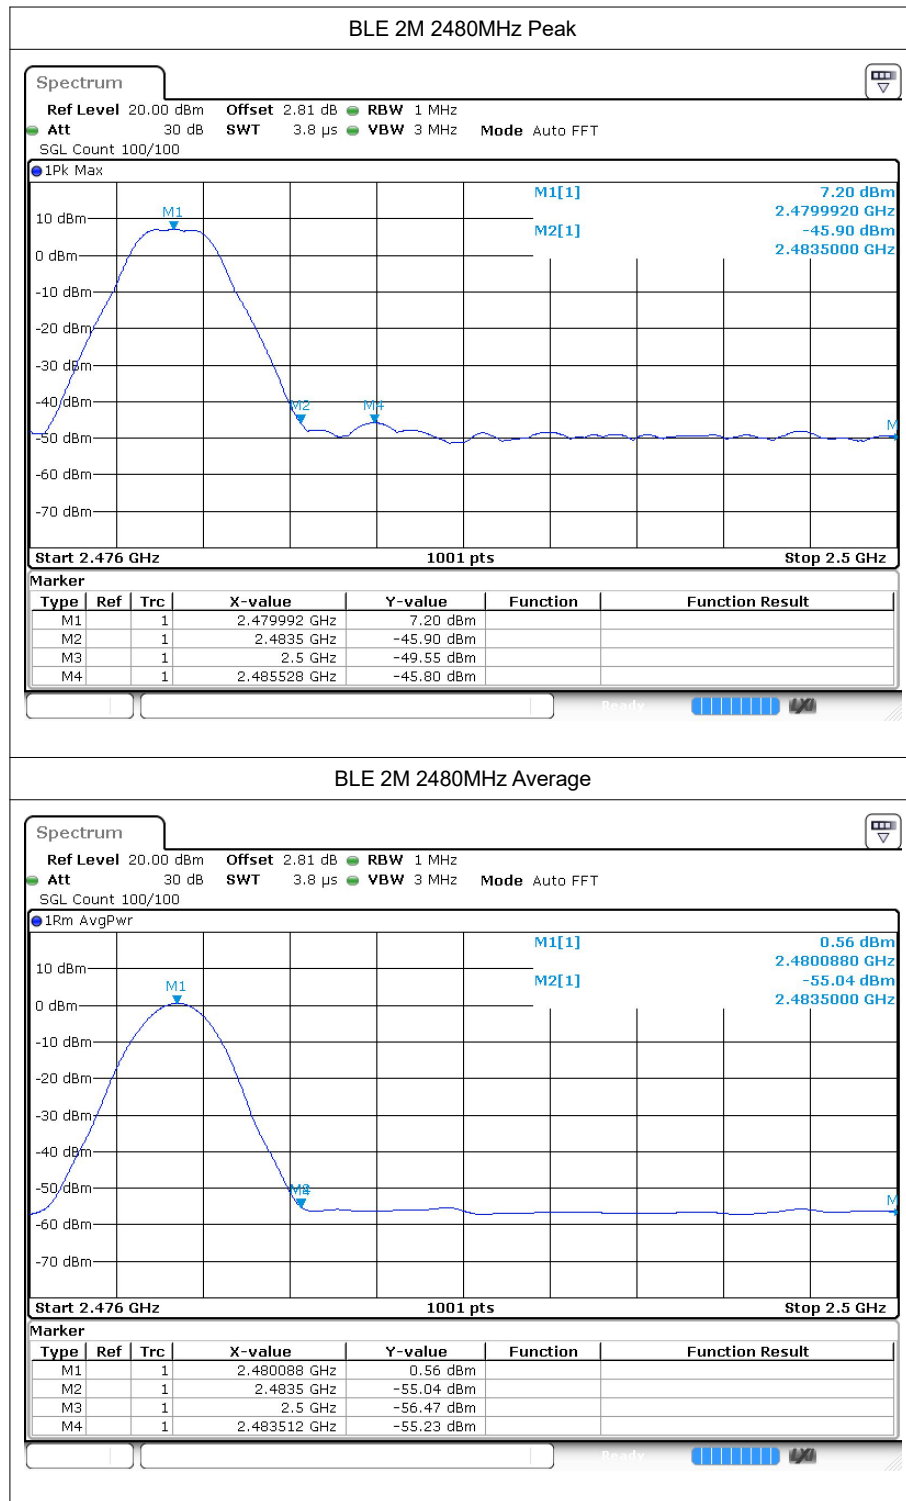

---The End---