



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.038	0.649	0.351	0.203	0.114	0.064	0.036

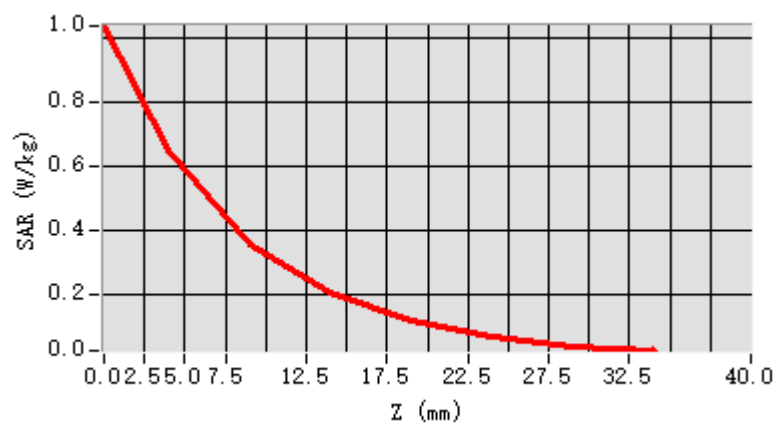


F. 3D Image

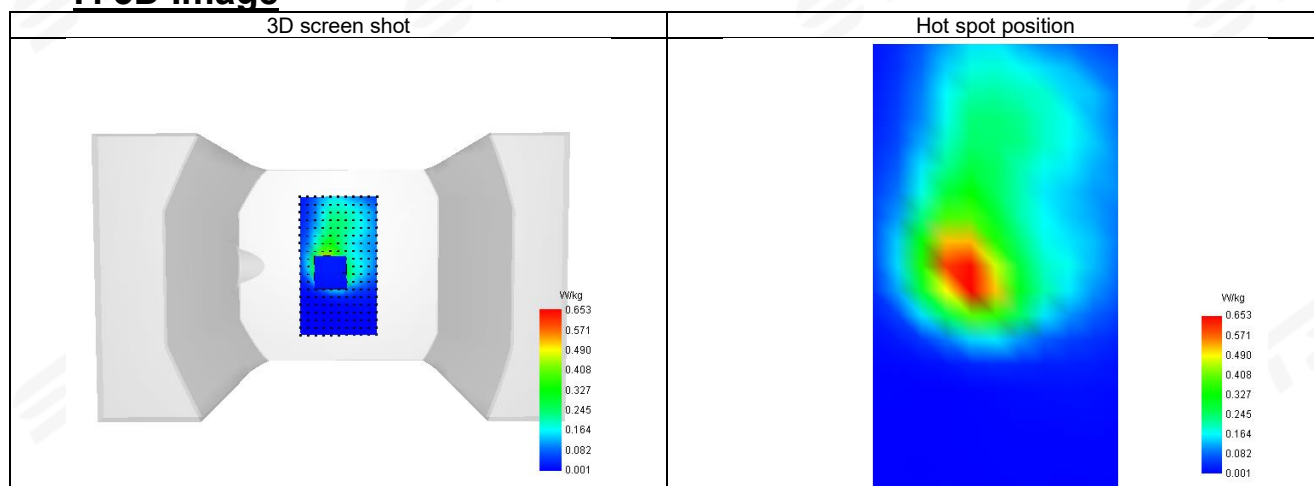

Plot 5: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-07
ConvF	1.72
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.37
Conductivity (S/m)	1.45

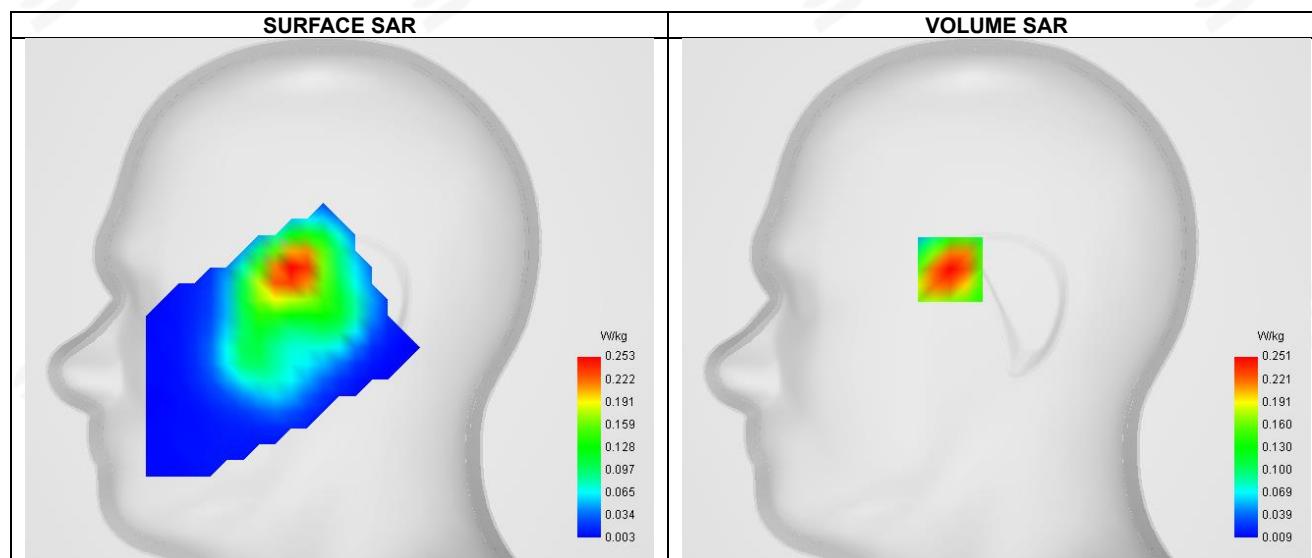


Maximum location: X=-23.00, Y=15.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.238
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	64.471283

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.355	0.251	0.162	0.103	0.067	0.044	0.028

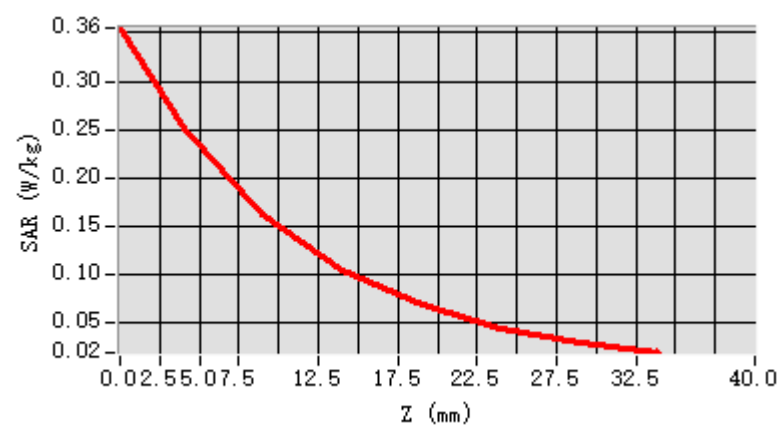


F. 3D Image

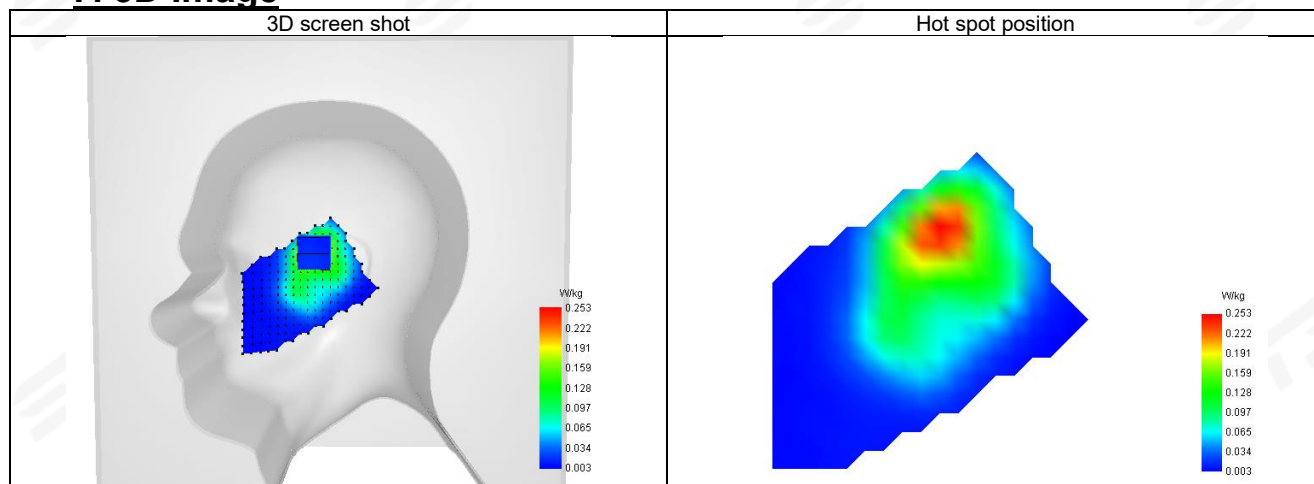



Plot 6: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-07
ConvF	1.72
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.37
Conductivity (S/m)	1.45

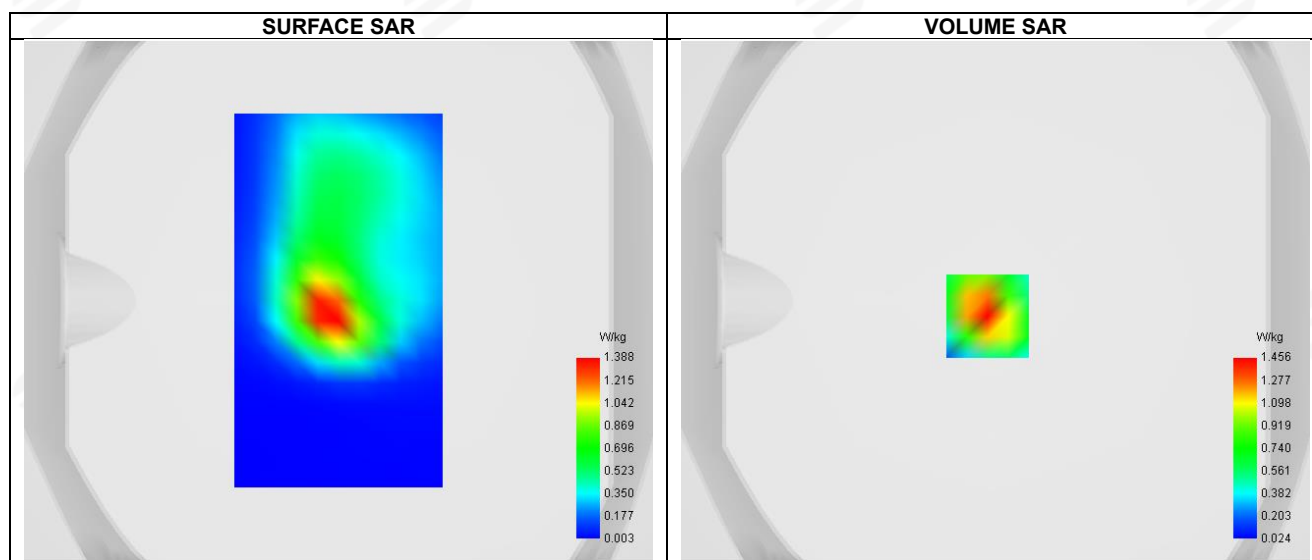



Maximum location: X=-3.00, Y=-6.00 ; SAR Peak: 2.32 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.699
SAR 1g (W/Kg)	1.366
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.061675


**E. Z Axis Scan**

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.338	1.456	0.787	0.460	0.260	0.147	0.083

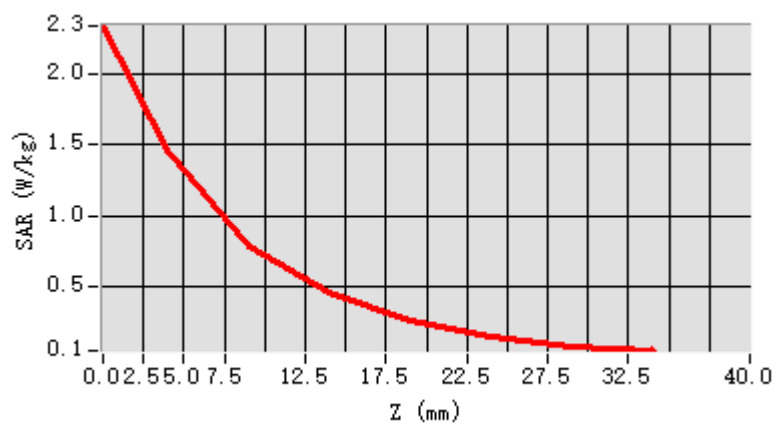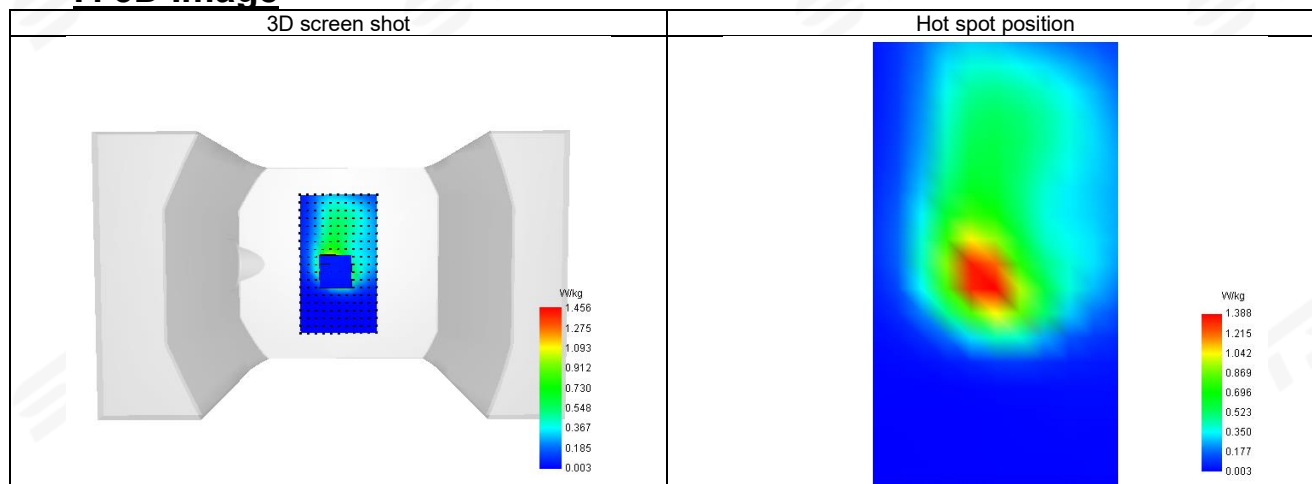**F. 3D Image**

Plot 7: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-06
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA IV
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1740
Relative permittivity (real part)	41.23
Conductivity (S/m)	1.37

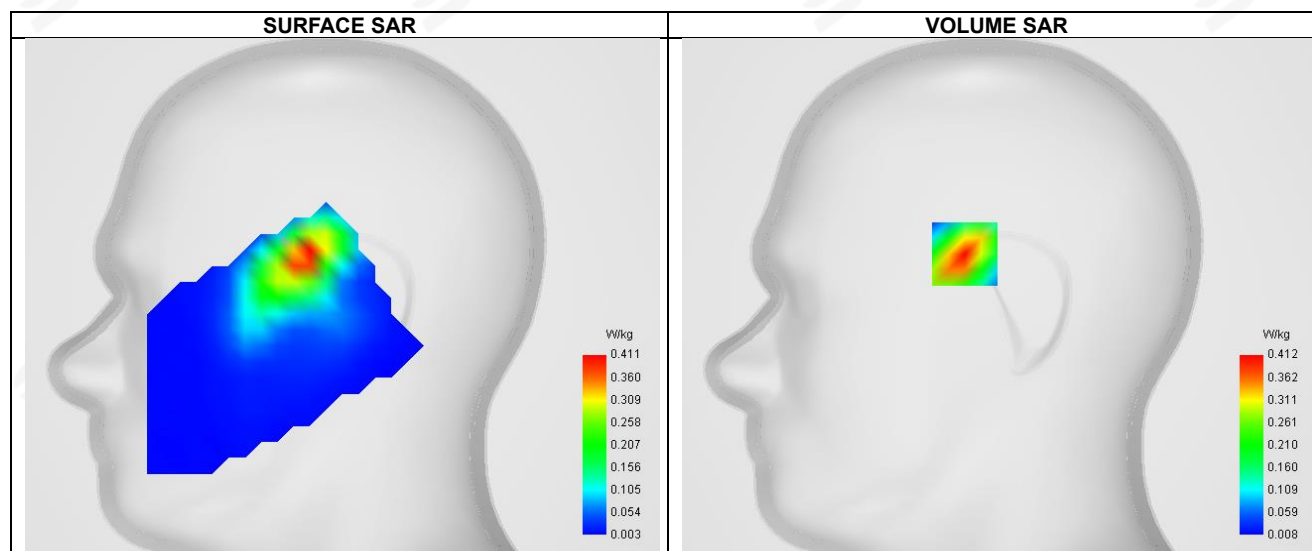


Maximum location: X=-17.00, Y=22.00 ; SAR Peak: 0.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.193
SAR 1g (W/Kg)	0.385
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	52.709941

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.672	0.412	0.217	0.124	0.068	0.038	0.021

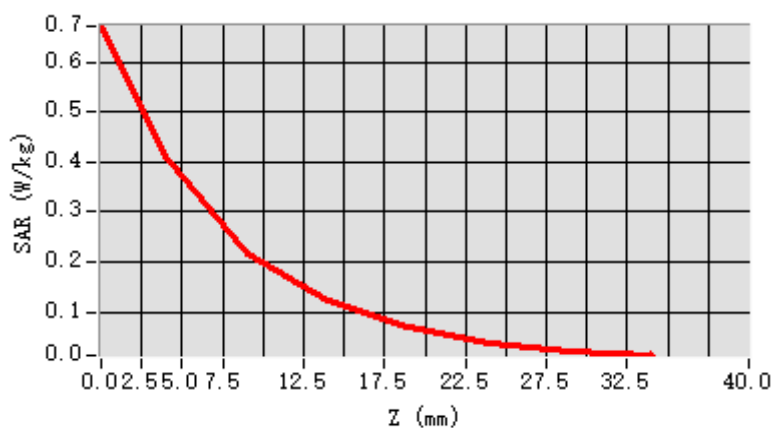


F. 3D Image

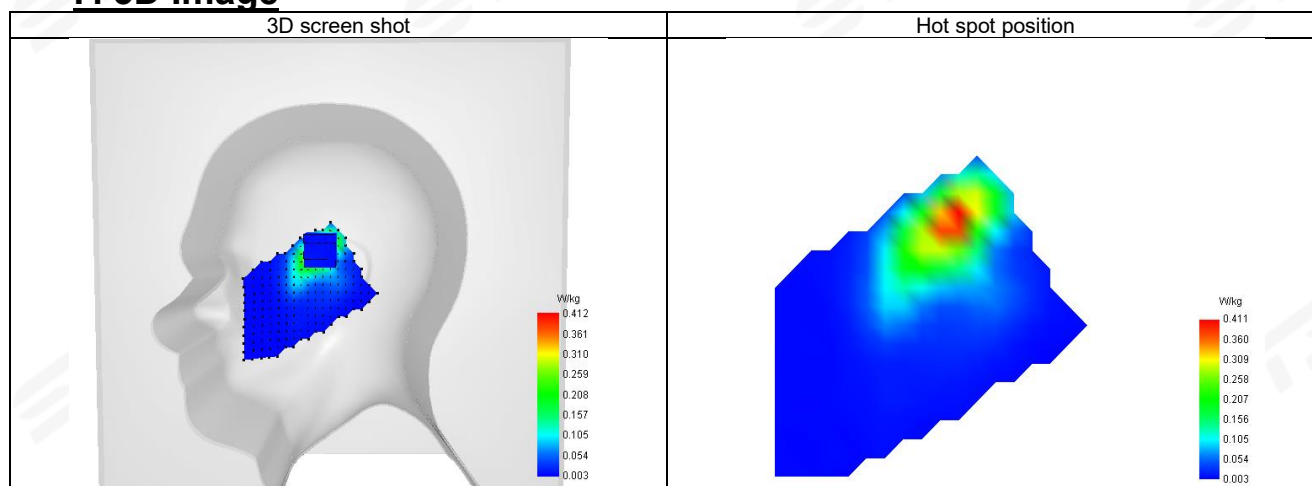



Plot 8: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-06
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA IV
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1740
Relative permittivity (real part)	41.23
Conductivity (S/m)	1.37

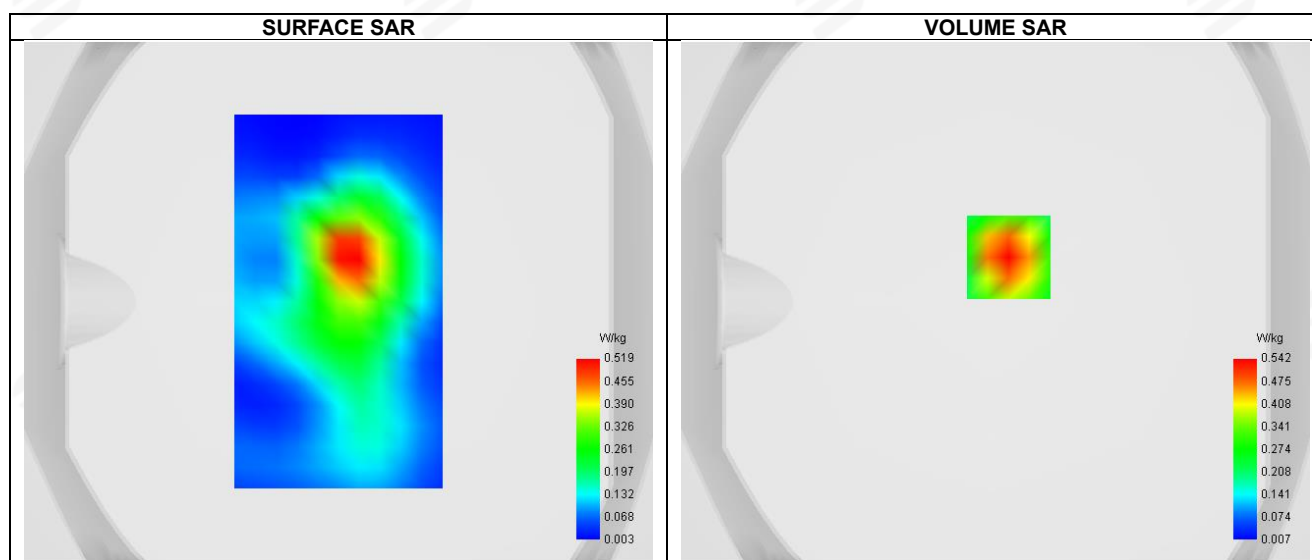


Maximum location: X=5.00, Y=17.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.267
SAR 1g (W/Kg)	0.514
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	53.593345

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.865	0.542	0.291	0.155	0.083	0.044	0.024

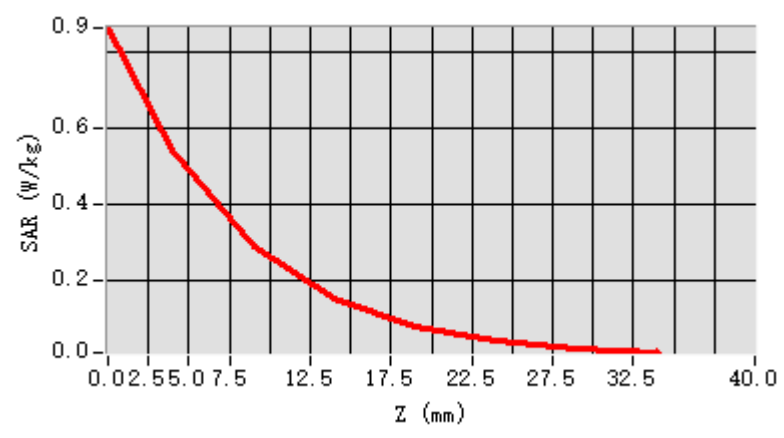


F. 3D Image

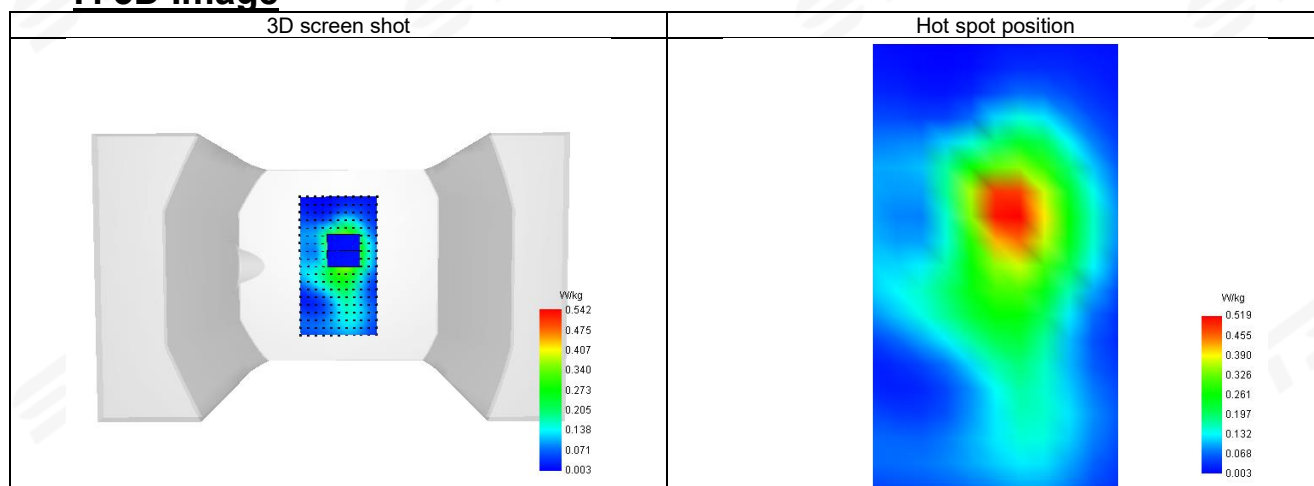

Plot 9: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-05
ConvF	1.44
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA V
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	41.53
Conductivity (S/m)	0.94

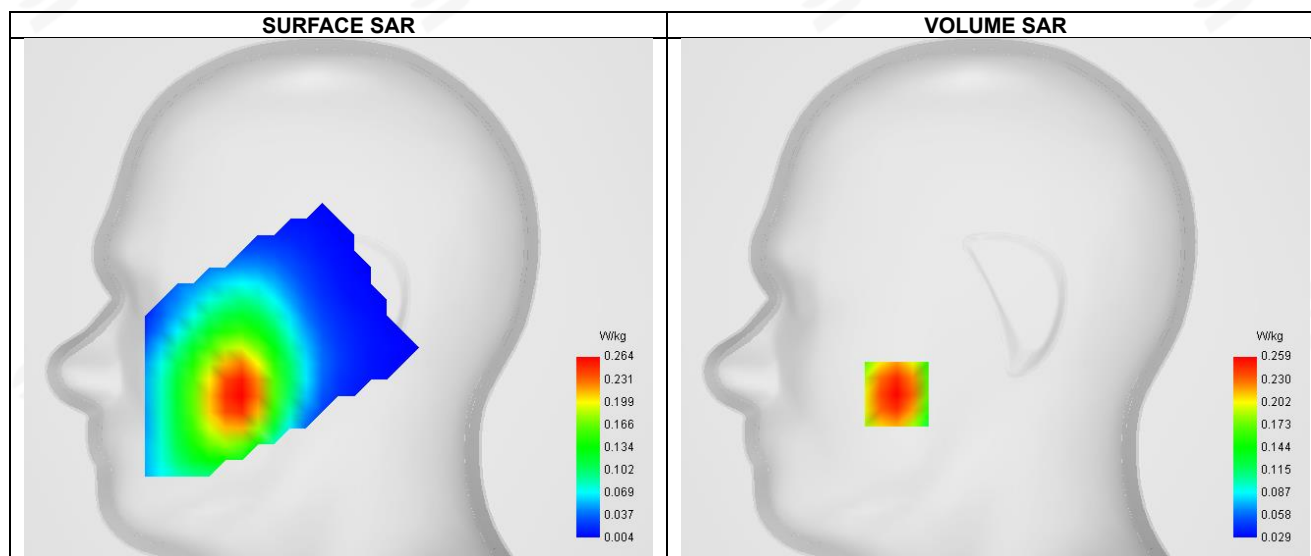


Maximum location: X=-49.00, Y=-47.00 ; SAR Peak: 0.33 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.252
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	76.915925

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.328	0.259	0.199	0.154	0.121	0.090	0.068

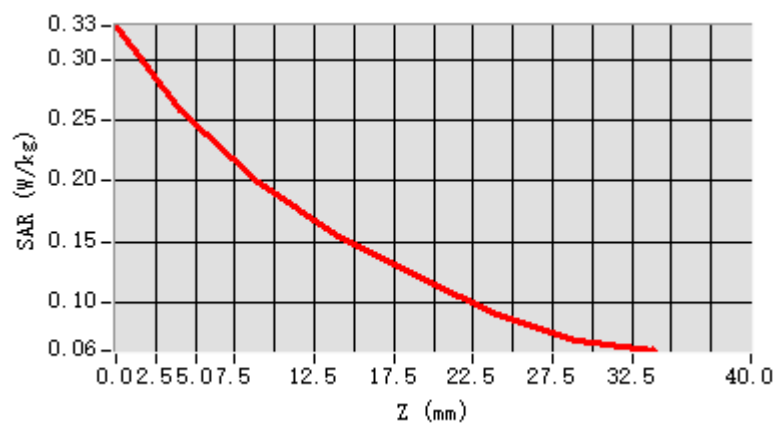


F. 3D Image

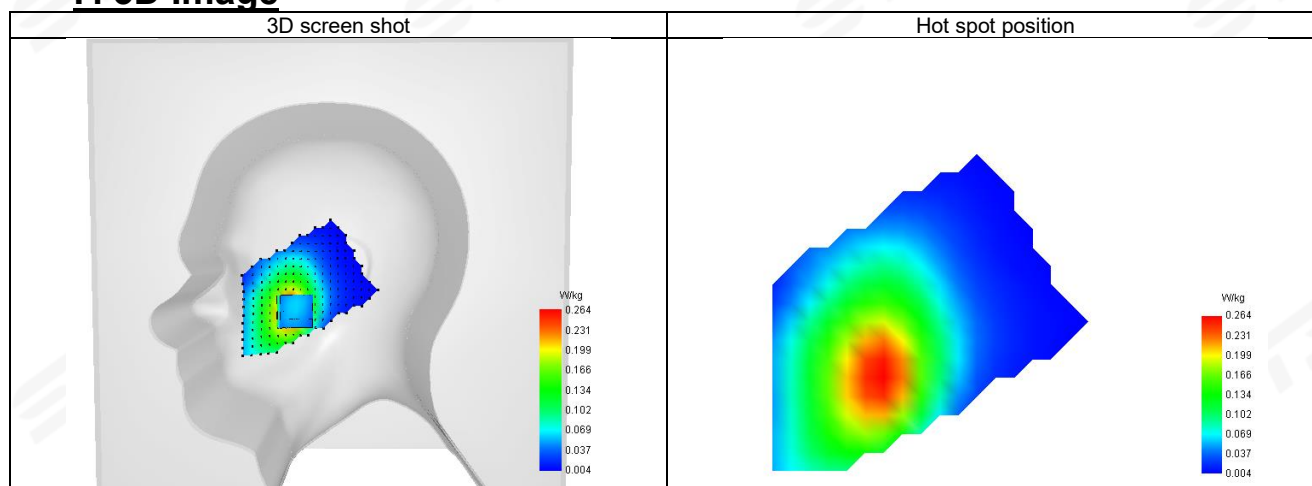

**Plot 10: DUT: Smart phone; EUT Model: WAVE 9C**


Test Date	2025-07-05
ConvF	1.44
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA V
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	41.53
Conductivity (S/m)	0.94

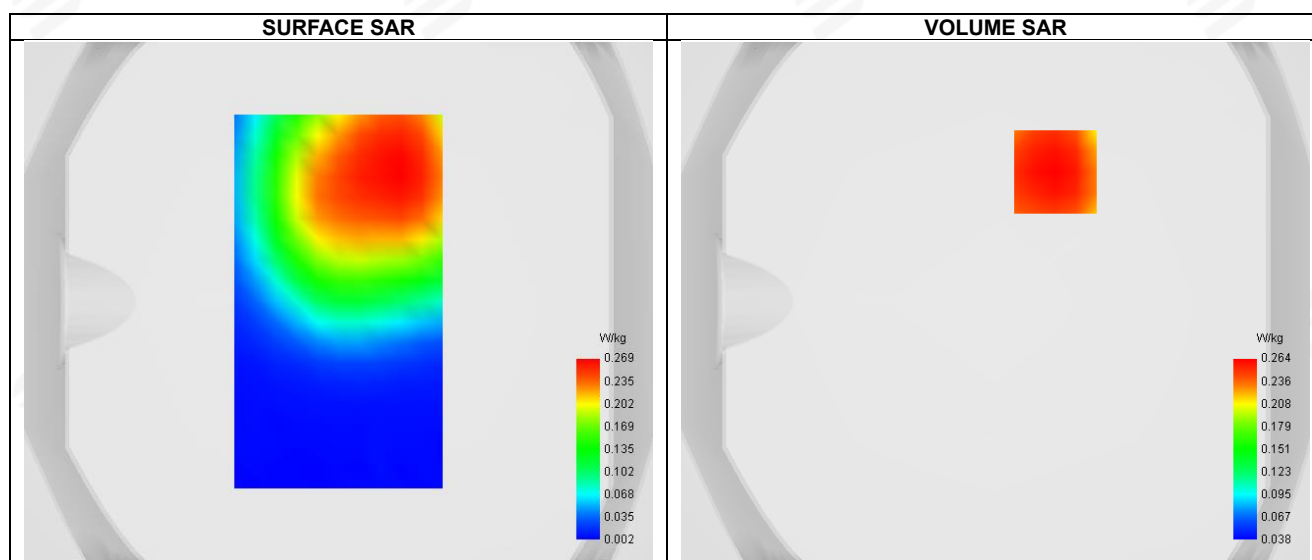**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.191
Horizontal validation criteria: minimum distance (mm)	8.445144
Vertical validation criteria: SAR ratio M2/M1 (%)	75.624145

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.339	0.264	0.202	0.156	0.123	0.090	0.065

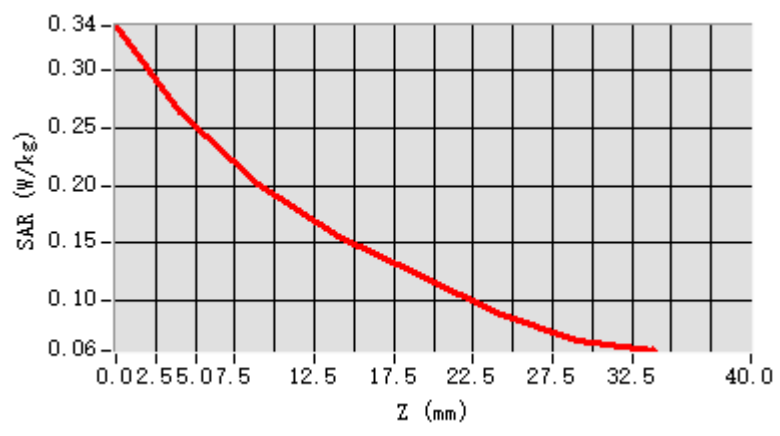


F. 3D Image

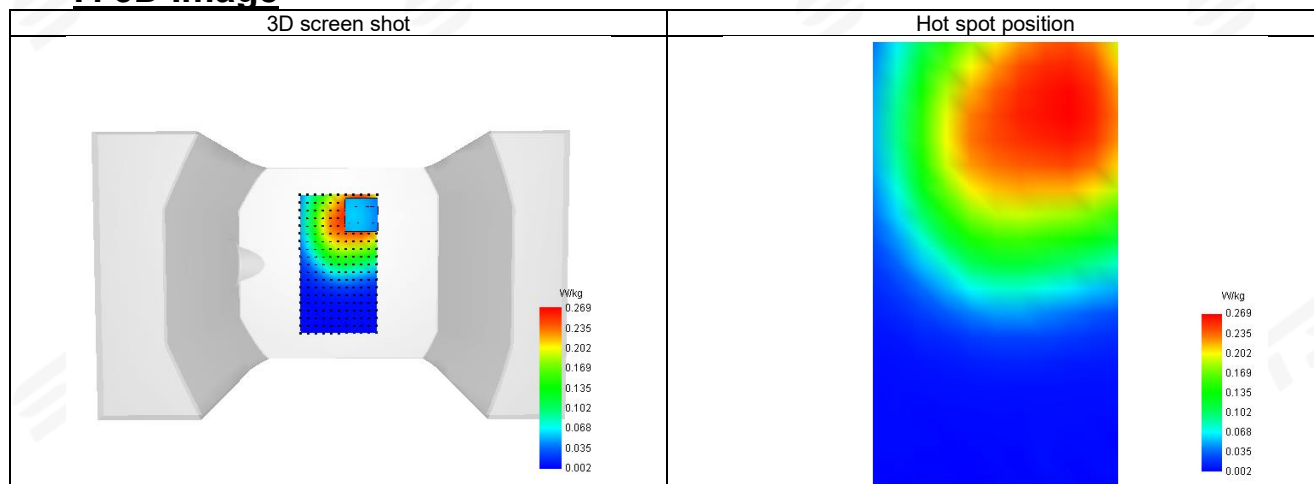

Plot 11: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-08
	1.80
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	39.34
Conductivity (S/m)	1.85

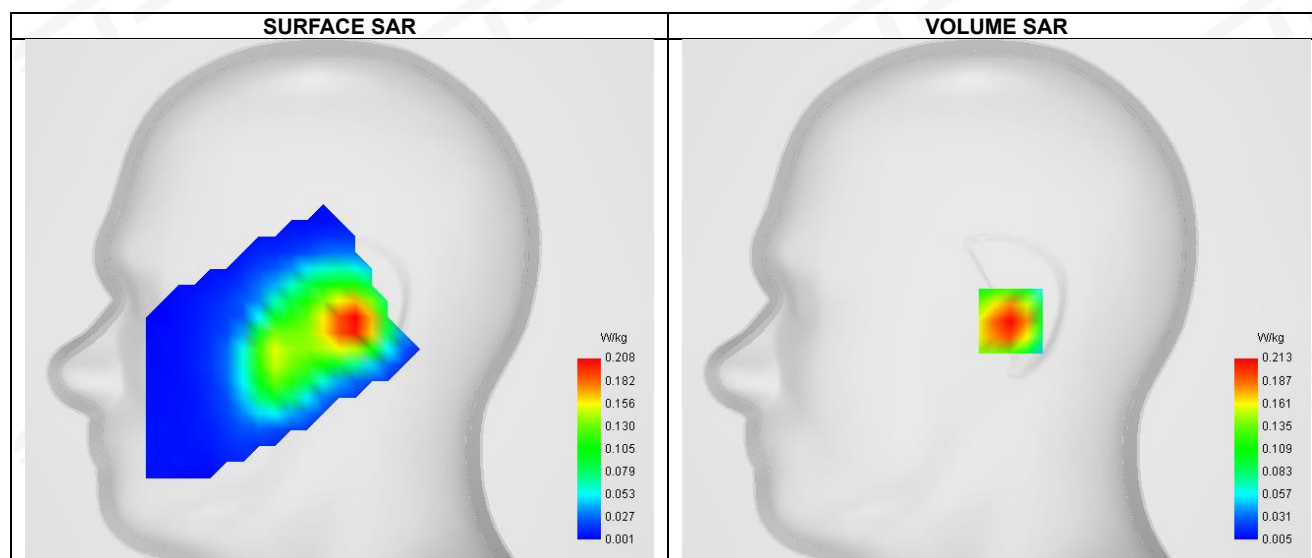


Maximum location: X=7.00, Y=-10.00 ; SAR Peak: 0.34 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.111
SAR 1g (W/Kg)	0.205
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.611025

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.340	0.213	0.118	0.064	0.041	0.024	0.014

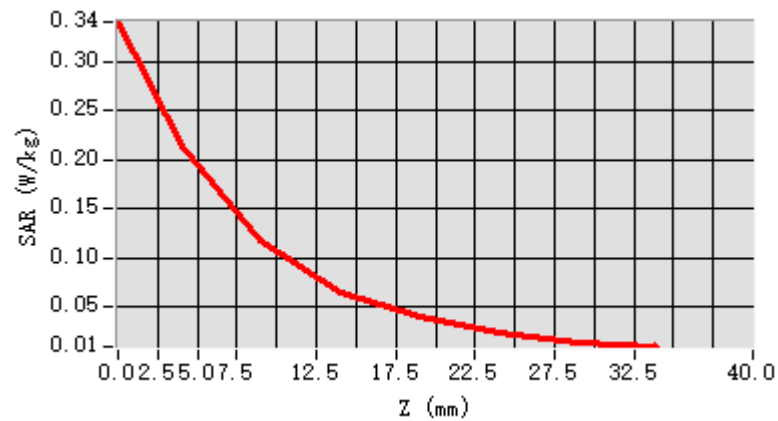


F. 3D Image

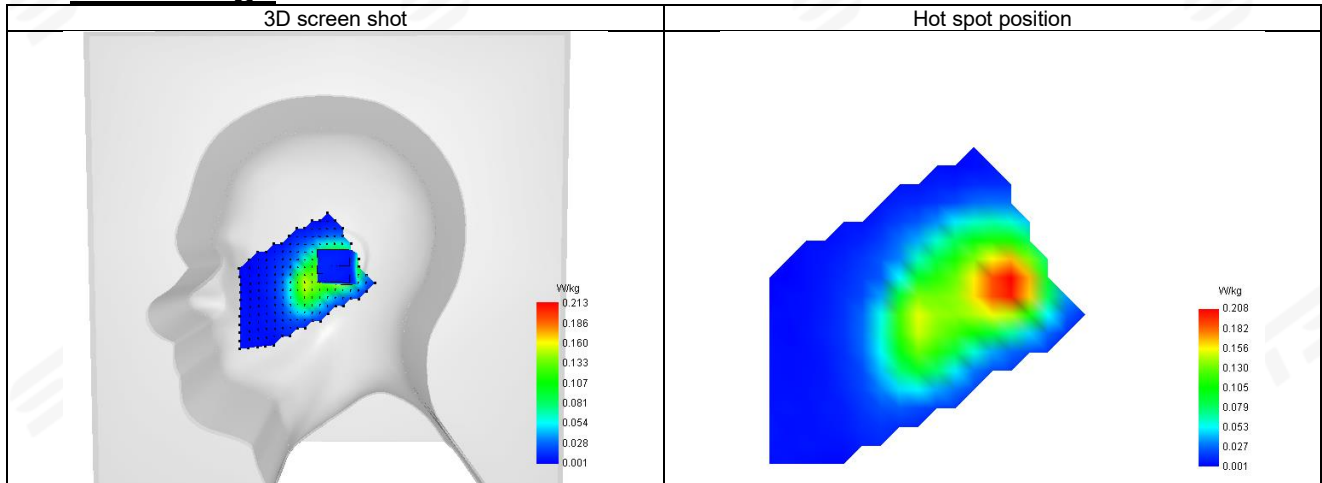



Plot 12: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-08
ConvF	1.80
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	39.34
Conductivity (S/m)	1.85

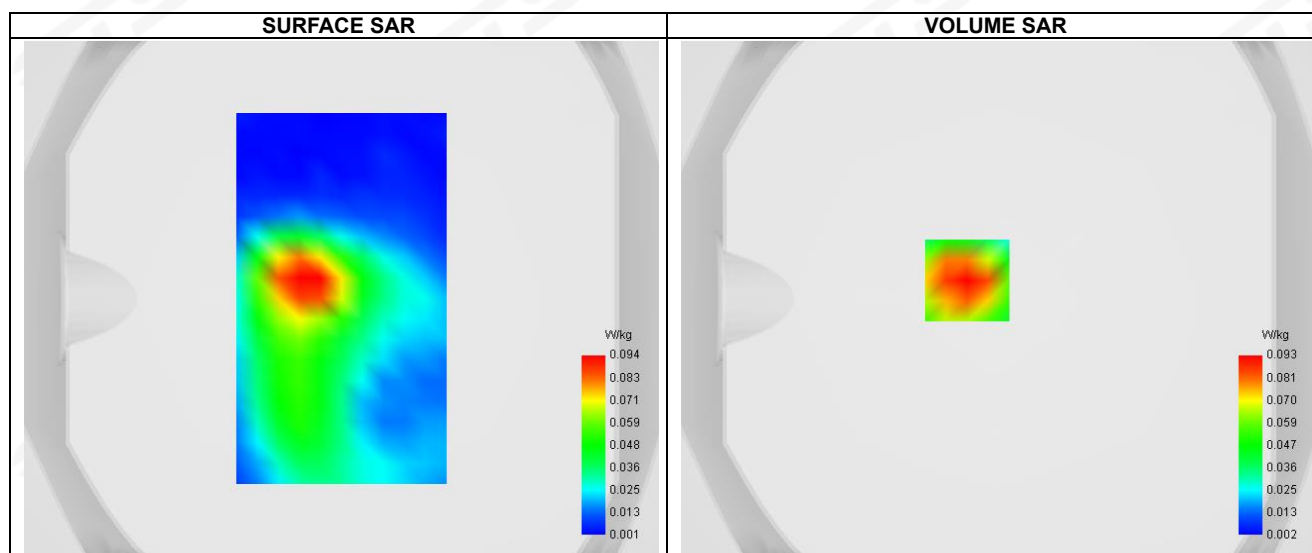


Maximum location: X=-12.00, Y=7.00 ; SAR Peak: 0.15 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.049
SAR 1g (W/Kg)	0.090
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	52.438243

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.153	0.093	0.049	0.030	0.017	0.010	0.006

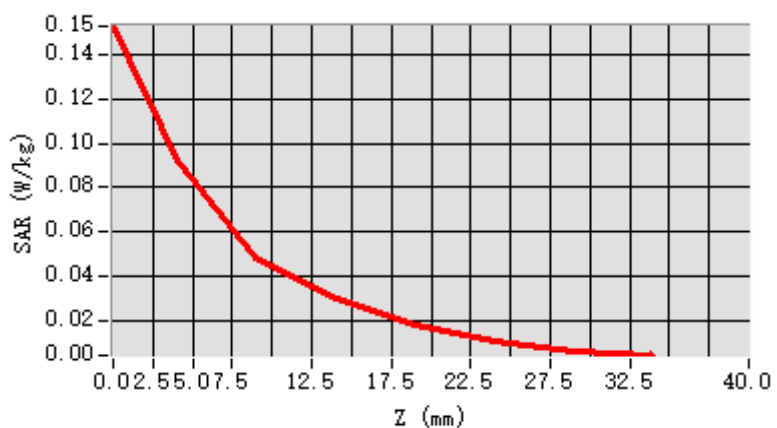


F. 3D Image

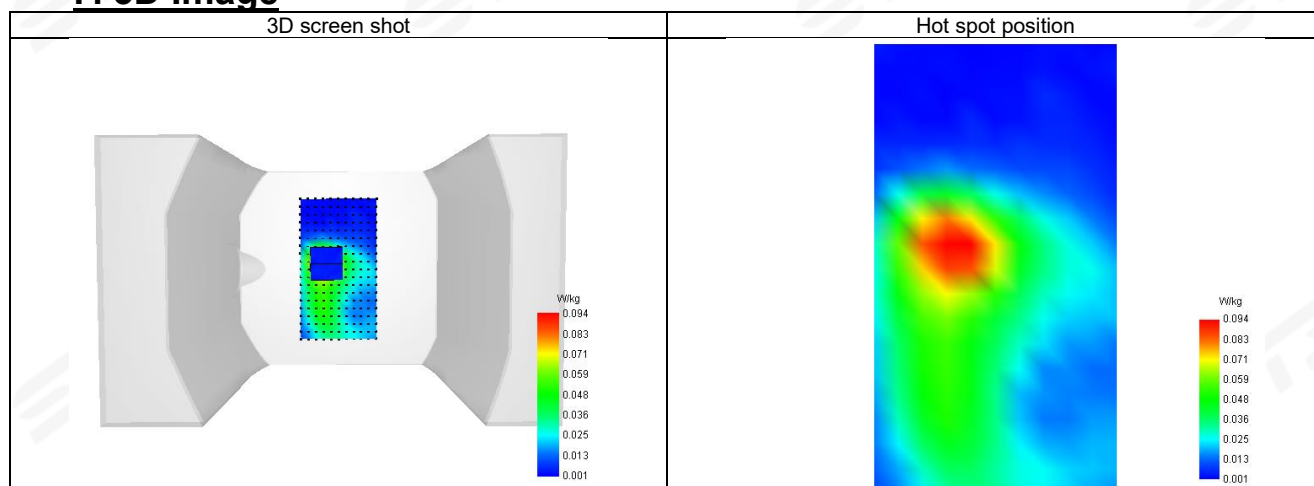

Plot 13: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-08
ConvF	1.80
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	BT
Signal	GFSK (Crest factor: 1.0)
Frequency (MHz)	2441
Relative permittivity (real part)	40.05
Conductivity (S/m)	1.83

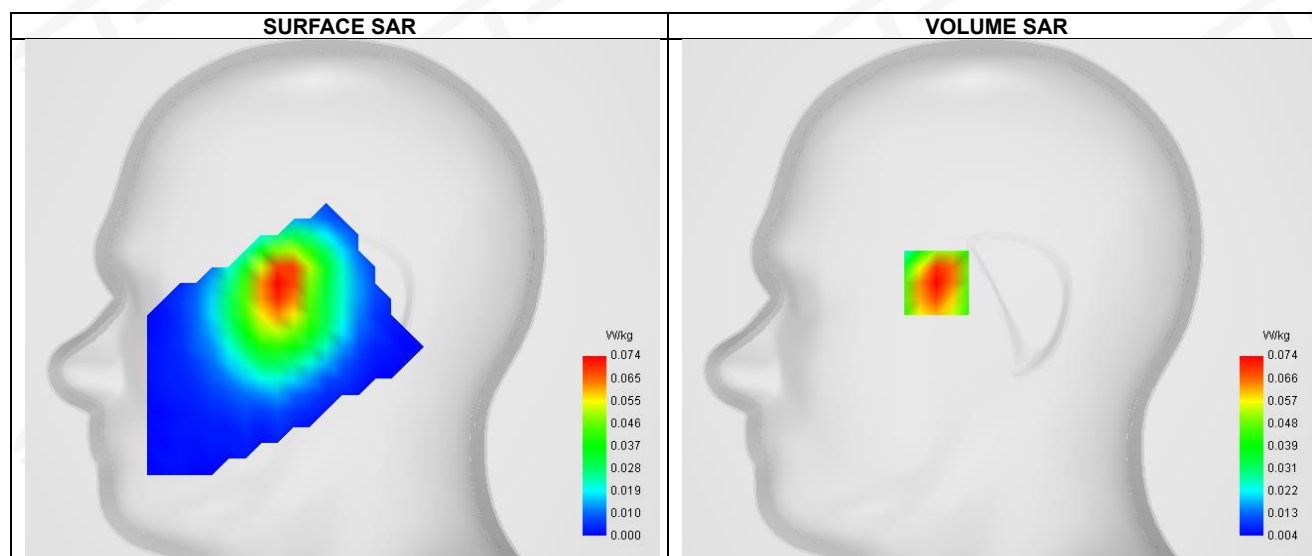


Maximum location: X=-31.00, Y=8.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.032
SAR 1g (W/Kg)	0.058
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	61.835036

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.112	0.074	0.046	0.033	0.022	0.015	0.010

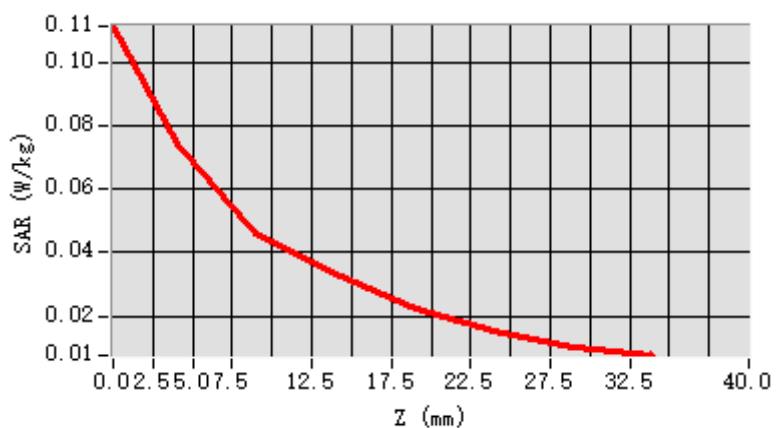


F. 3D Image

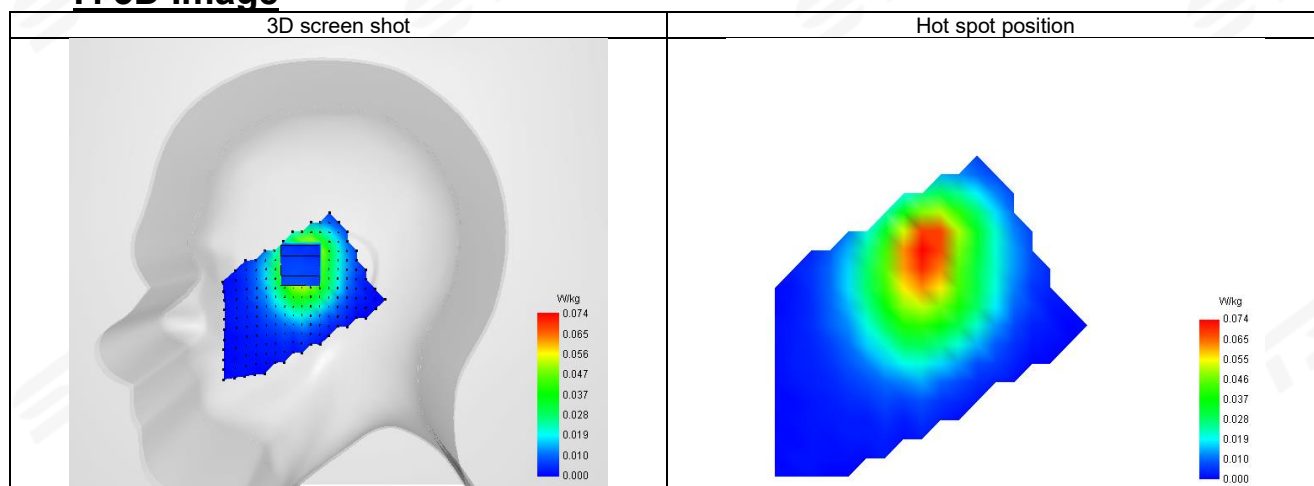

**Plot 14: DUT: Smart phone; EUT Model: WAVE 9C**

Test Date	2025-07-08
ConvF	1.80
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	BT
Signal	GFSK (Crest factor: 1.0)
Frequency (MHz)	2441
Relative permittivity (real part)	40.05
Conductivity (S/m)	1.83

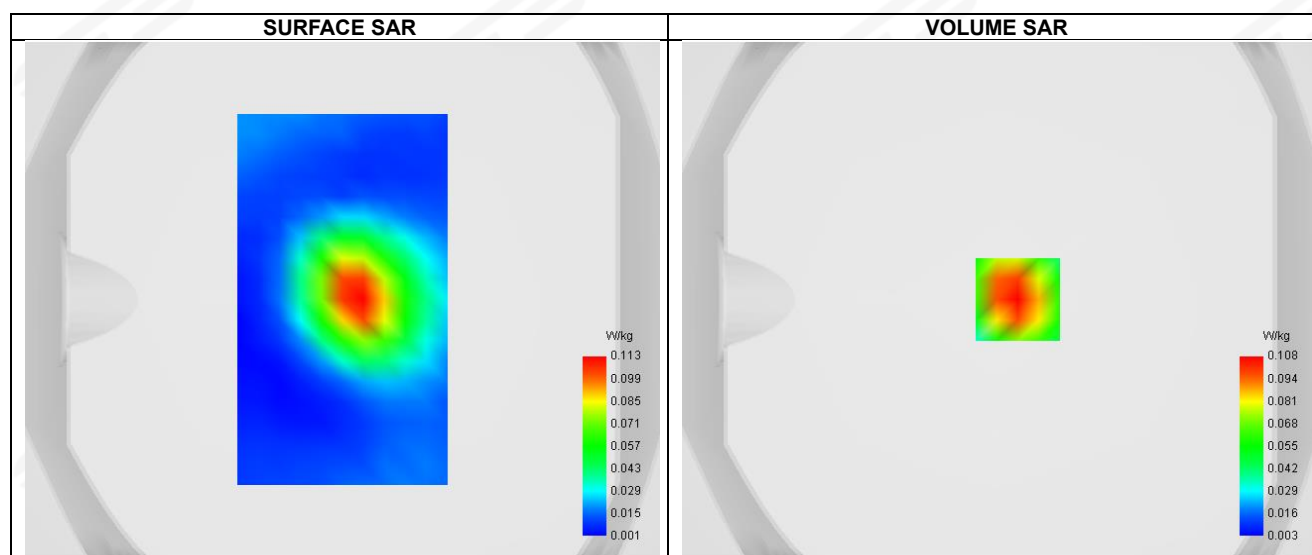


Maximum location: X=7.00, Y=0.00 ; SAR Peak: 0.16 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.026
SAR 1g (W/Kg)	0.038
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	61.562330

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.159	0.108	0.066	0.043	0.028	0.018	0.011

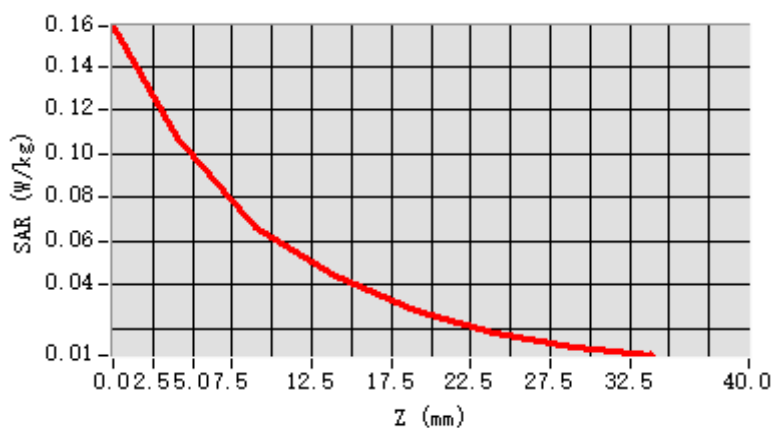


F. 3D Image

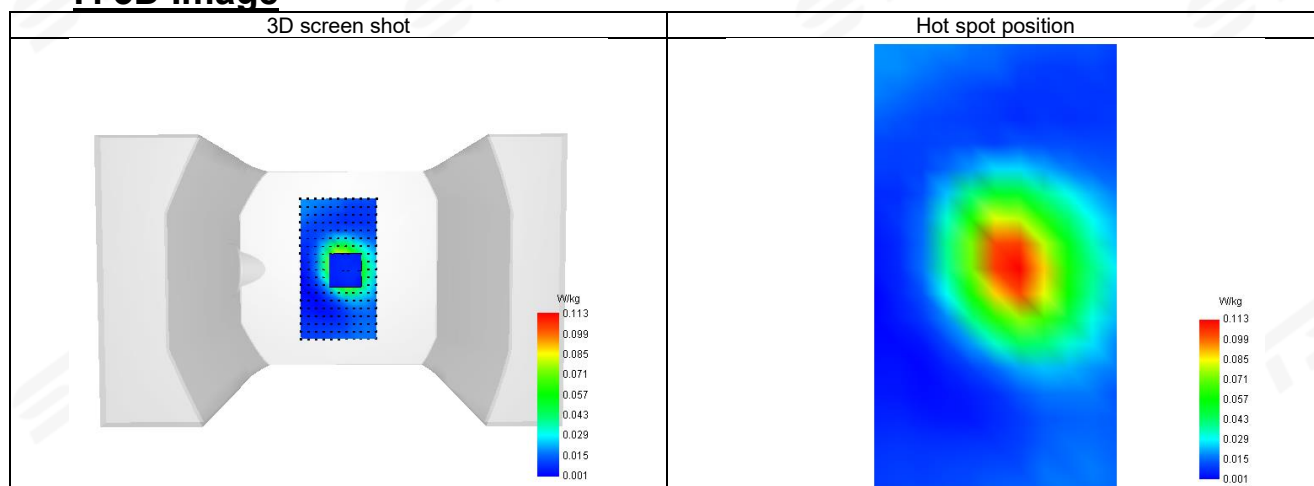

Plot 15: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-07
ConvF	1.72
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	41.37
Conductivity (S/m)	1.39

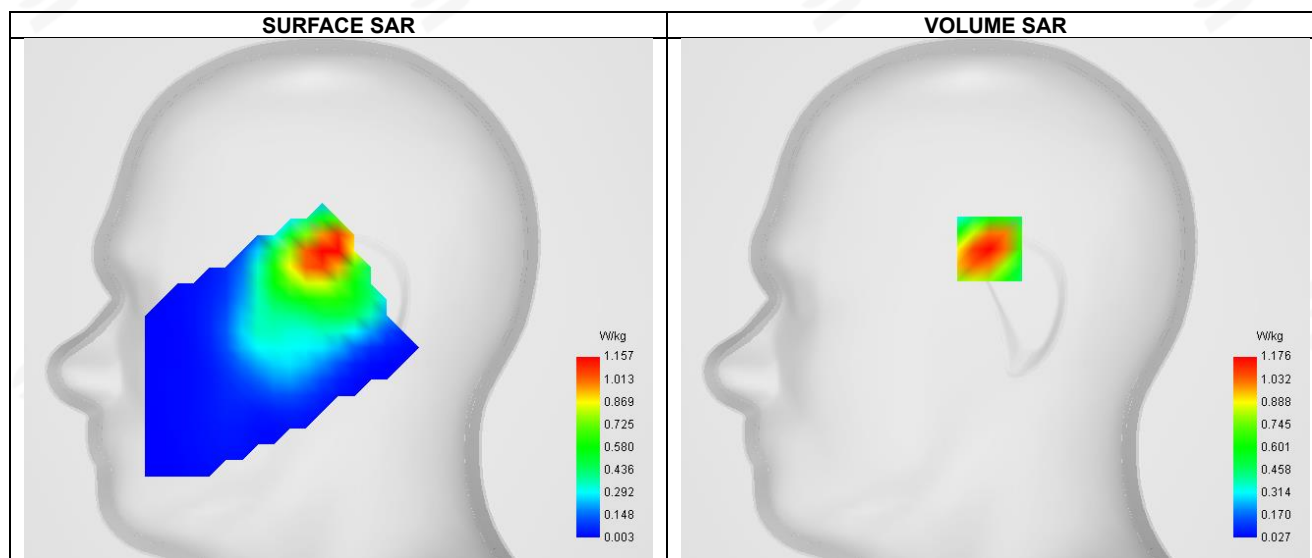


Maximum location: X=-3.00, Y=25.00 ; SAR Peak: 1.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.628
SAR 1g (W/Kg)	1.112
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	60.516722

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.729	1.176	0.711	0.426	0.257	0.155	0.093

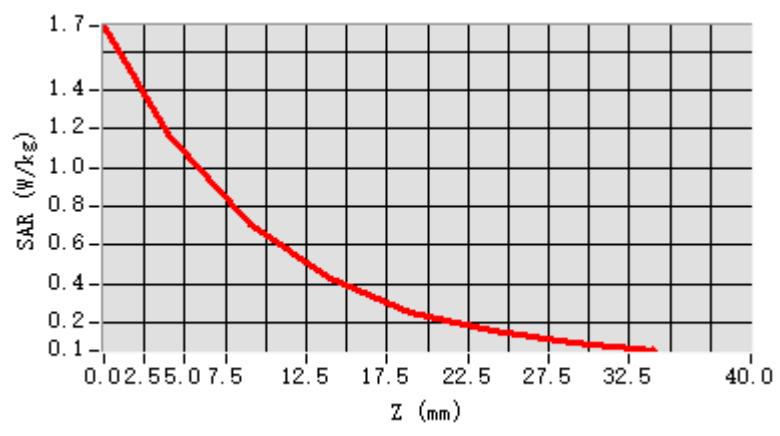


F. 3D Image

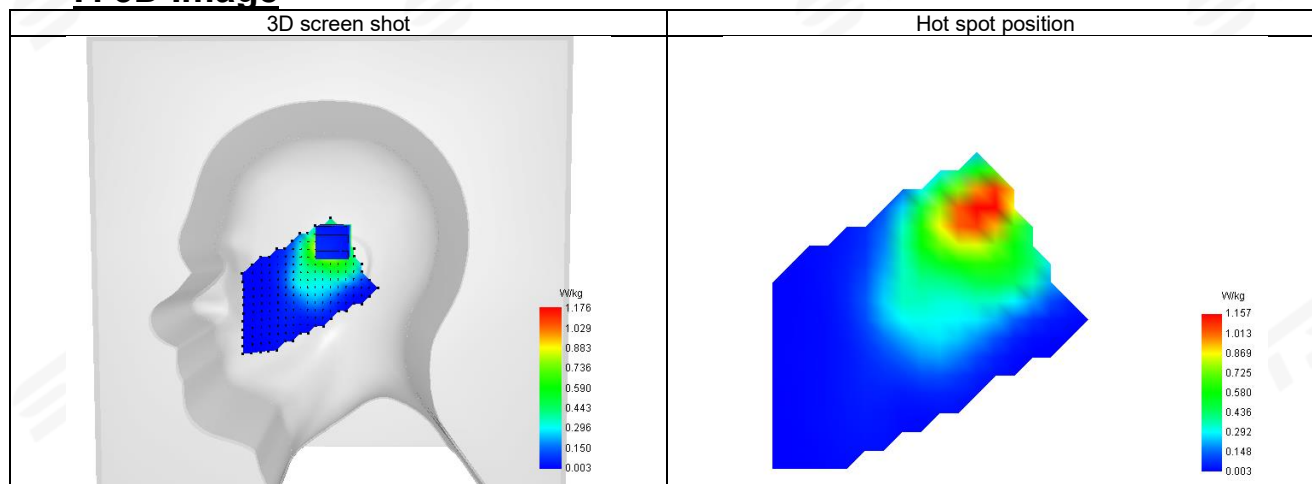

**Plot 16: DUT: Smart phone; EUT Model: WAVE 9C**


Test Date	2025-07-07
ConvF	1.72
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 2(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	41.37
Conductivity (S/m)	1.39

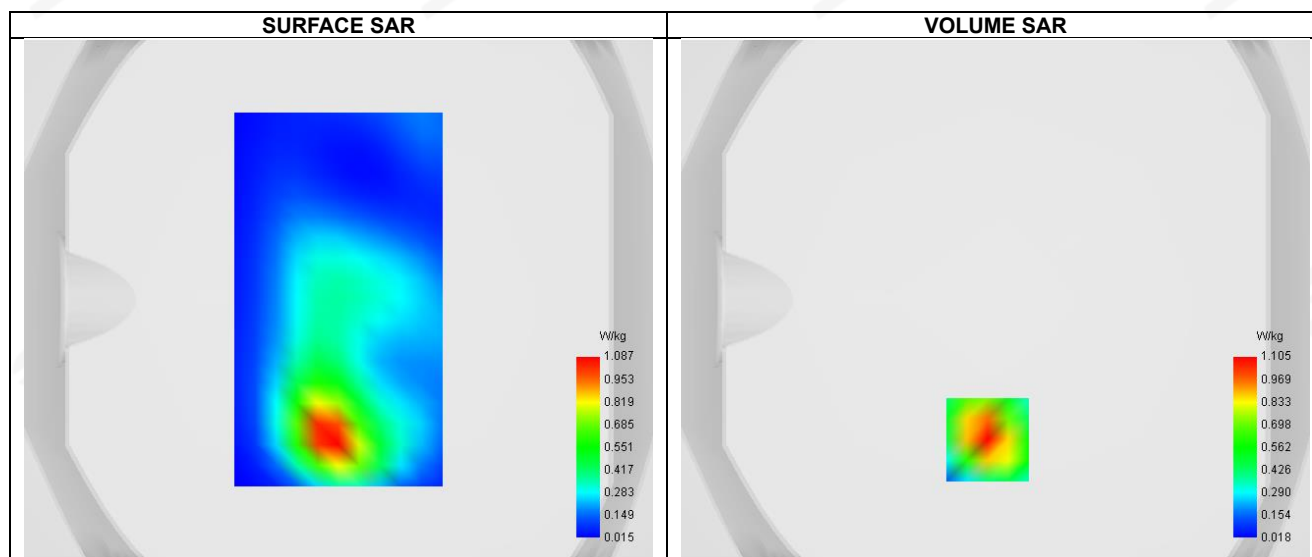**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.536
SAR 1g (W/Kg)	1.032
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.611974

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.733	1.105	0.615	0.354	0.201	0.114	0.065

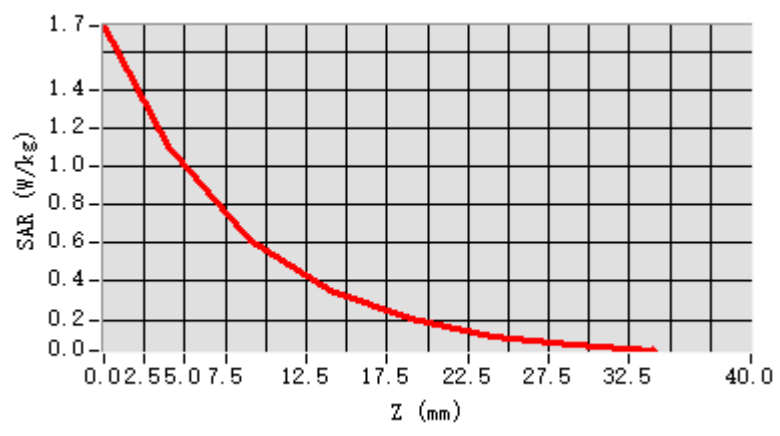


F. 3D Image

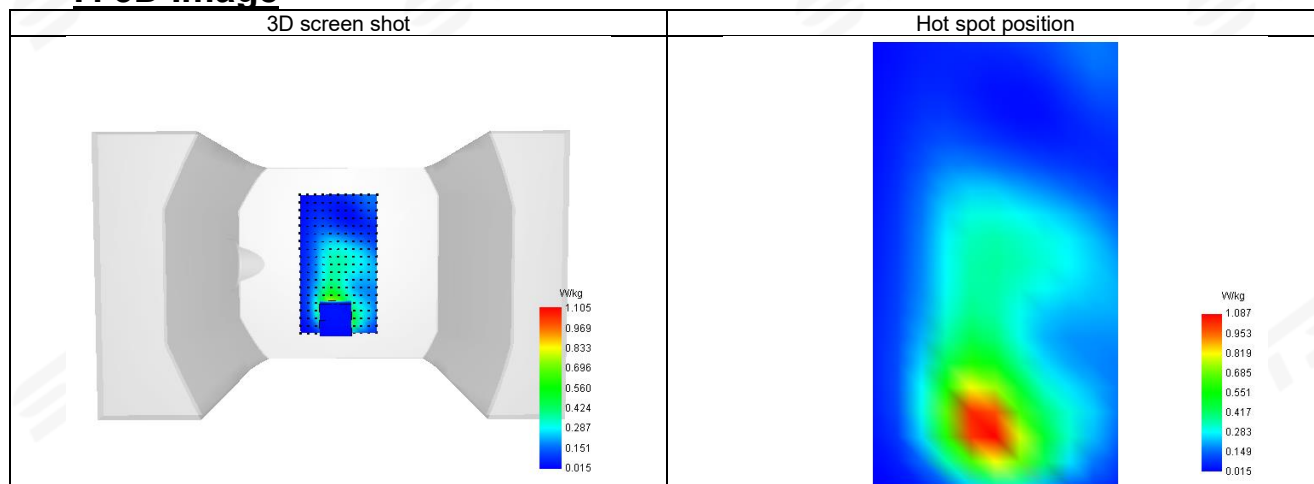

Plot 17: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-06
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	40.46
Conductivity (S/m)	1.39

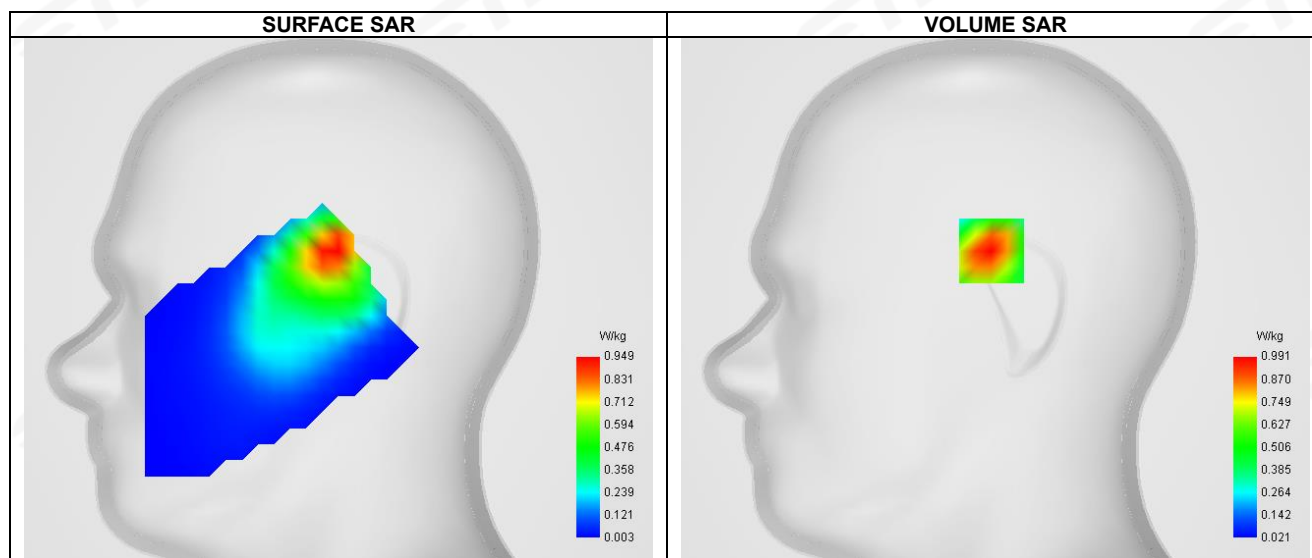


Maximum location: X=-2.00, Y=24.00 ; SAR Peak: 1.45 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.541
SAR 1g (W/Kg)	0.935
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	62.654967

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.414	0.991	0.621	0.381	0.233	0.143	0.088

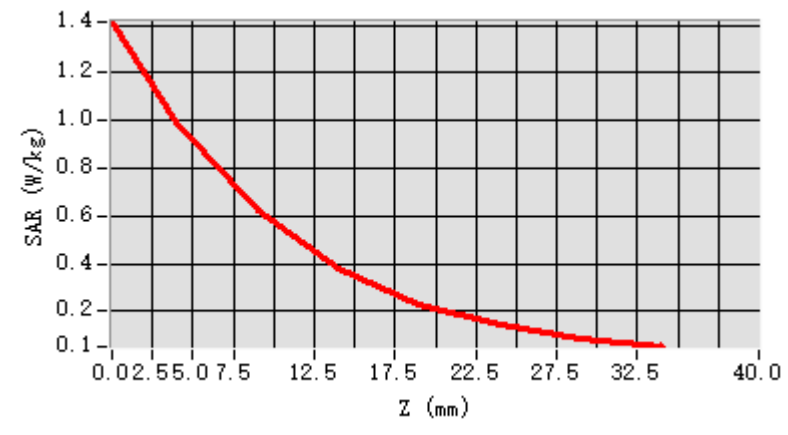


F. 3D Image

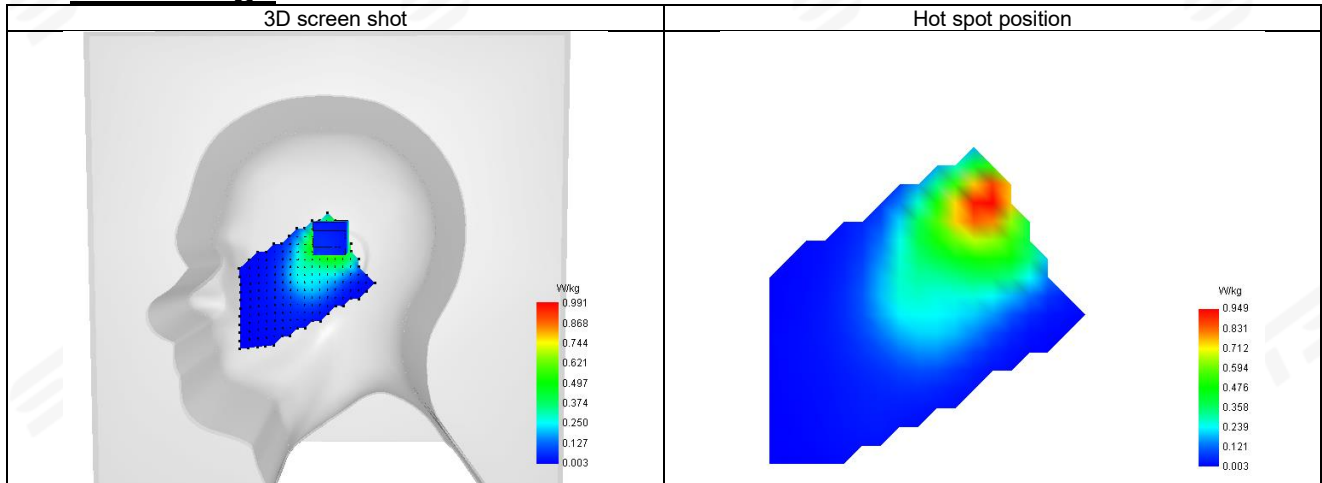

**Plot 18: DUT: Smart phone; EUT Model: WAVE 9C**

Test Date	2025-07-06
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	40.46
Conductivity (S/m)	1.39

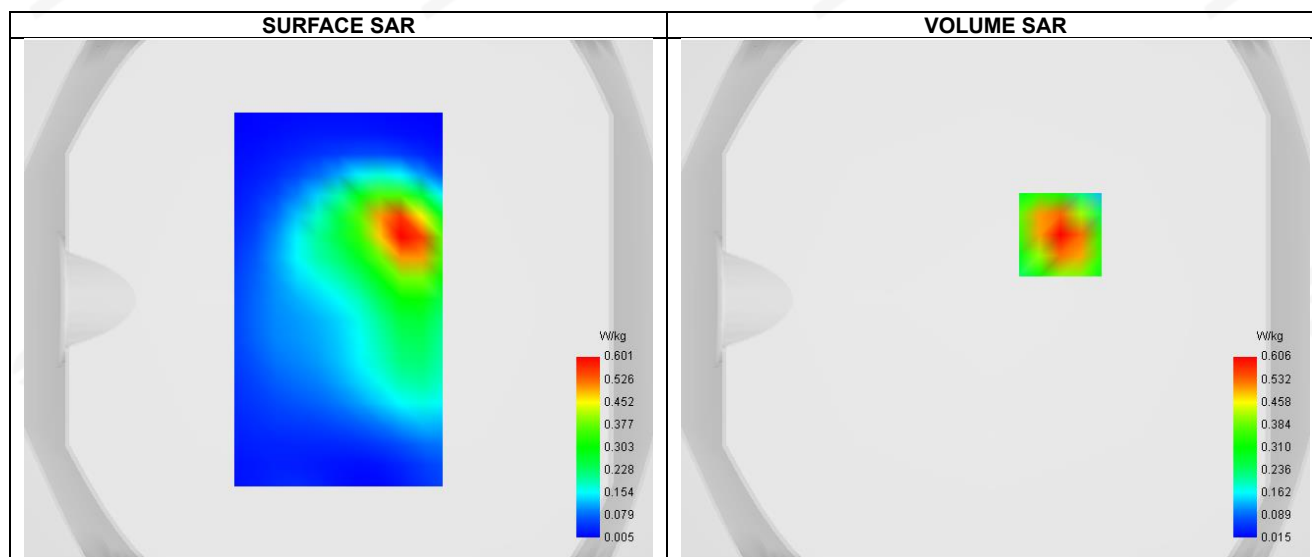


Maximum location: X=25.00, Y=25.00 ; SAR Peak: 0.92 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.316
SAR 1g (W/Kg)	0.572
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	58.454767

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.923	0.606	0.354	0.212	0.129	0.078	0.047

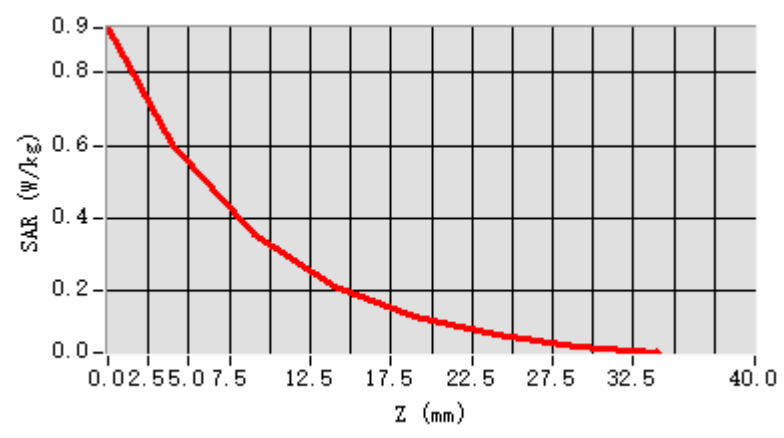


F. 3D Image

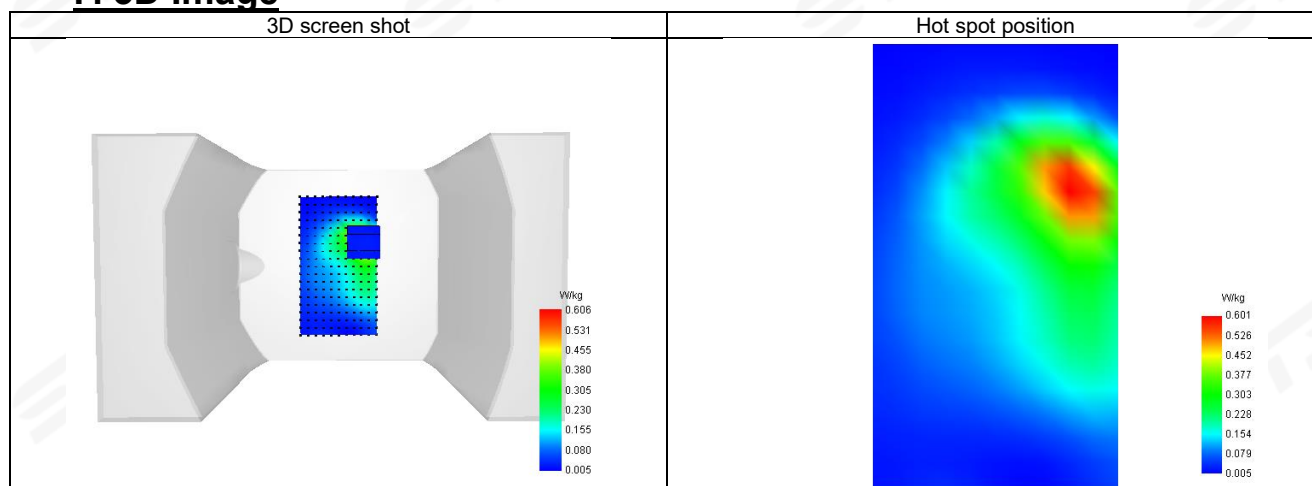

Plot 19: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-05
ConvF	1.44
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829
Relative permittivity (real part)	41.36
Conductivity (S/m)	0.87

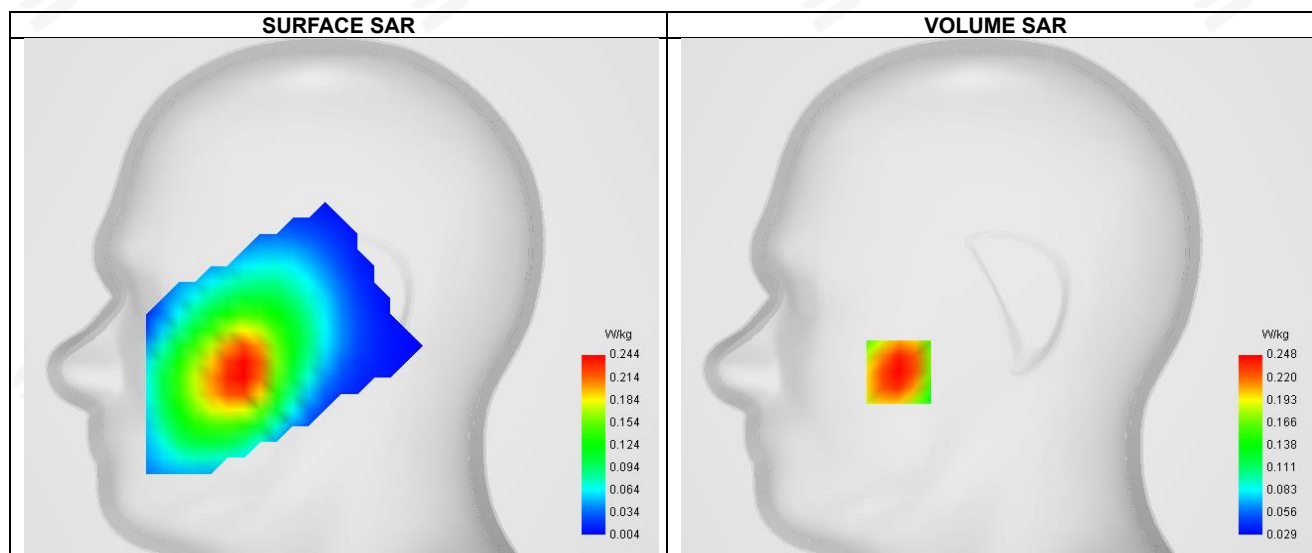


Maximum location: X=-49.00, Y=-37.00 ; SAR Peak: 0.32 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.133
SAR 1g (W/Kg)	0.172
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	76.606215

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.314	0.248	0.190	0.147	0.114	0.083	0.062

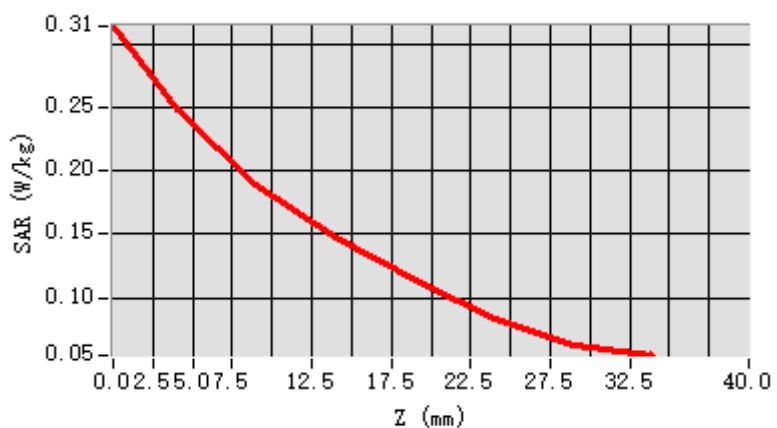


F. 3D Image

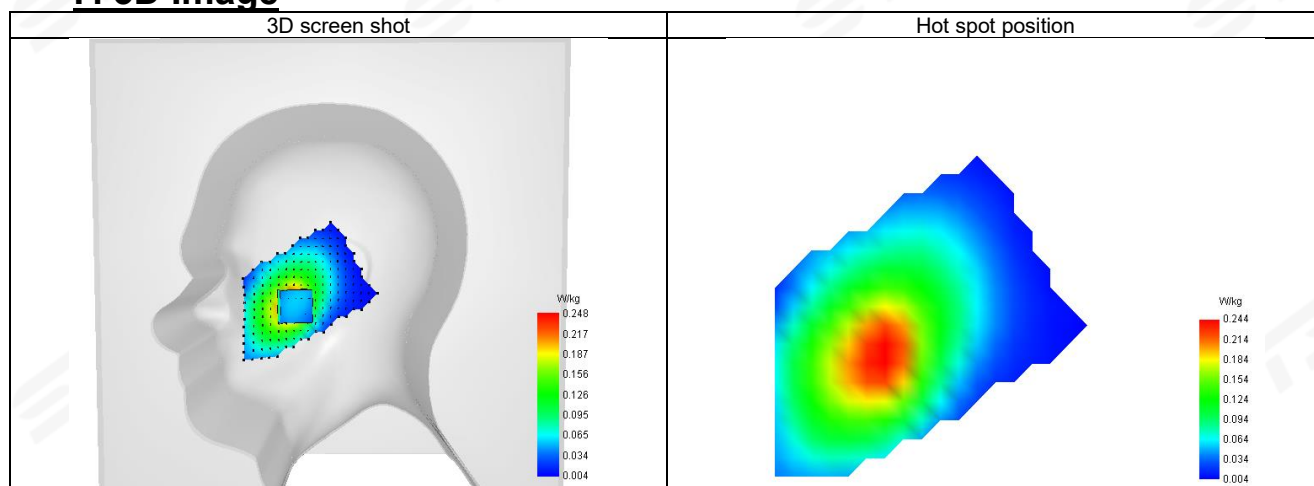

**Plot 20: DUT: Smart phone; EUT Model: WAVE 9C**


Test Date	2025-07-05
ConvF	1.44
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829
Relative permittivity (real part)	41.36
Conductivity (S/m)	0.87

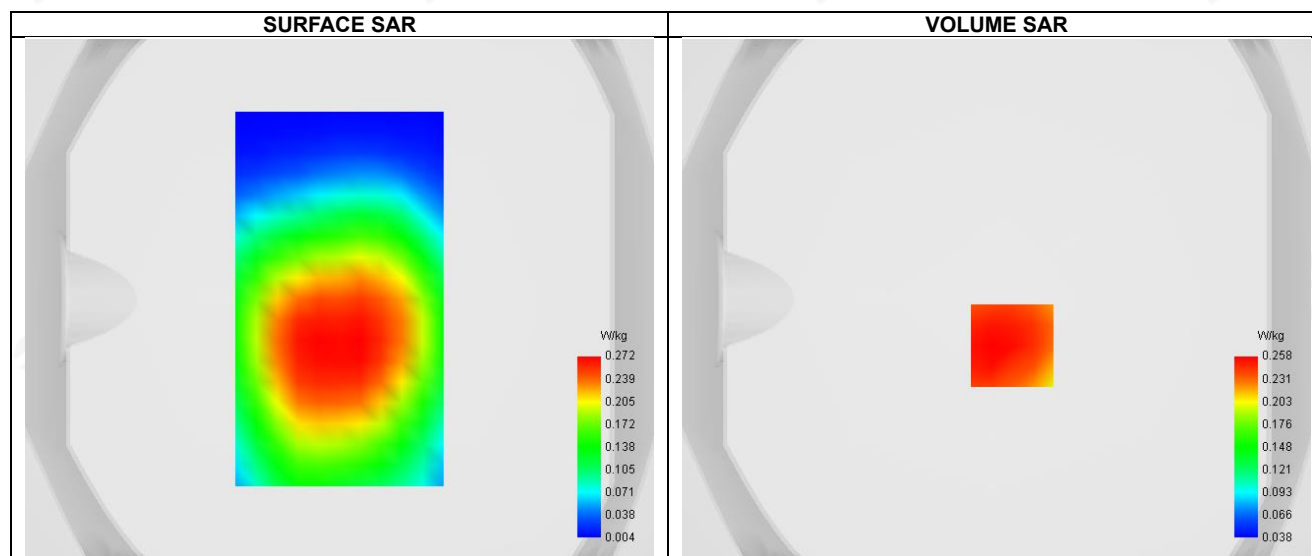**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.186
SAR 1g (W/Kg)	0.252
Horizontal validation criteria: minimum distance (mm)	8.444512
Vertical validation criteria: SAR ratio M2/M1 (%)	56.55148

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.336	0.258	0.188	0.158	0.110	0.085	0.065

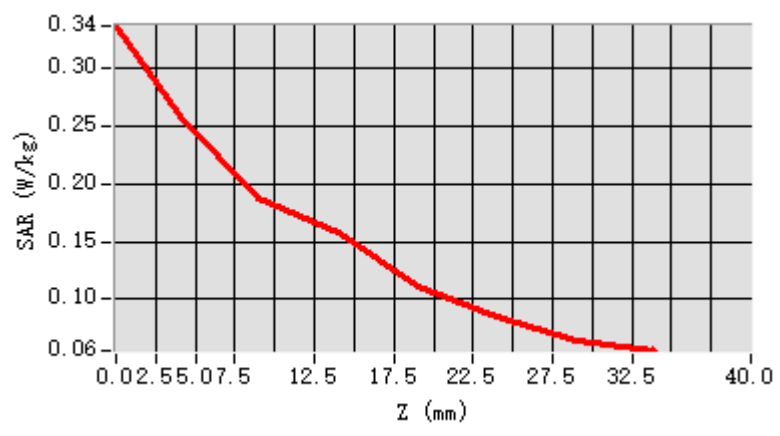


F. 3D Image

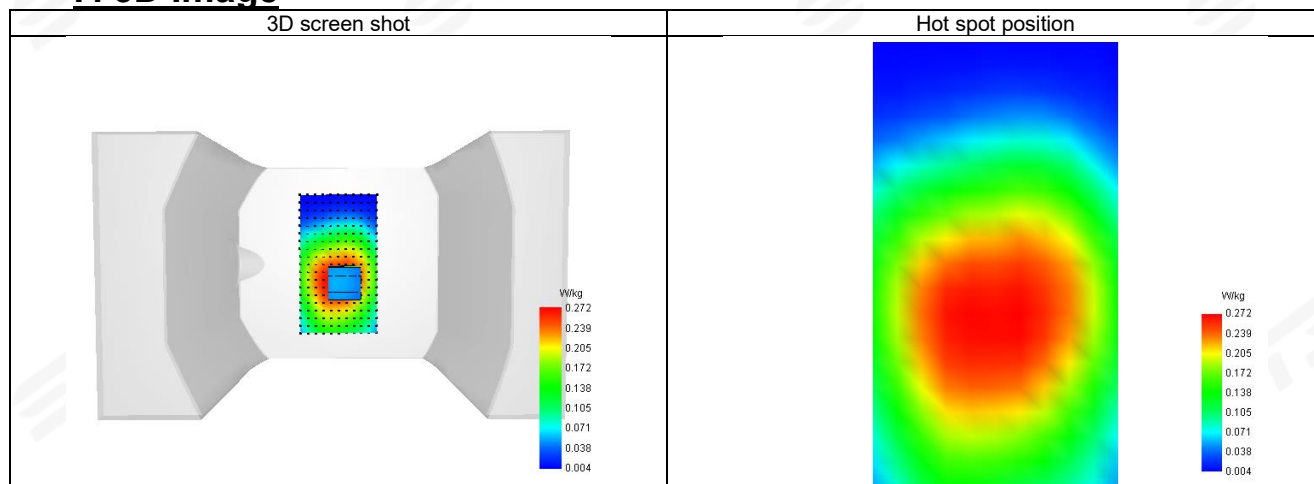

Plot 21: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-08
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2680
Relative permittivity (real part)	40.02
Conductivity (S/m)	2.01

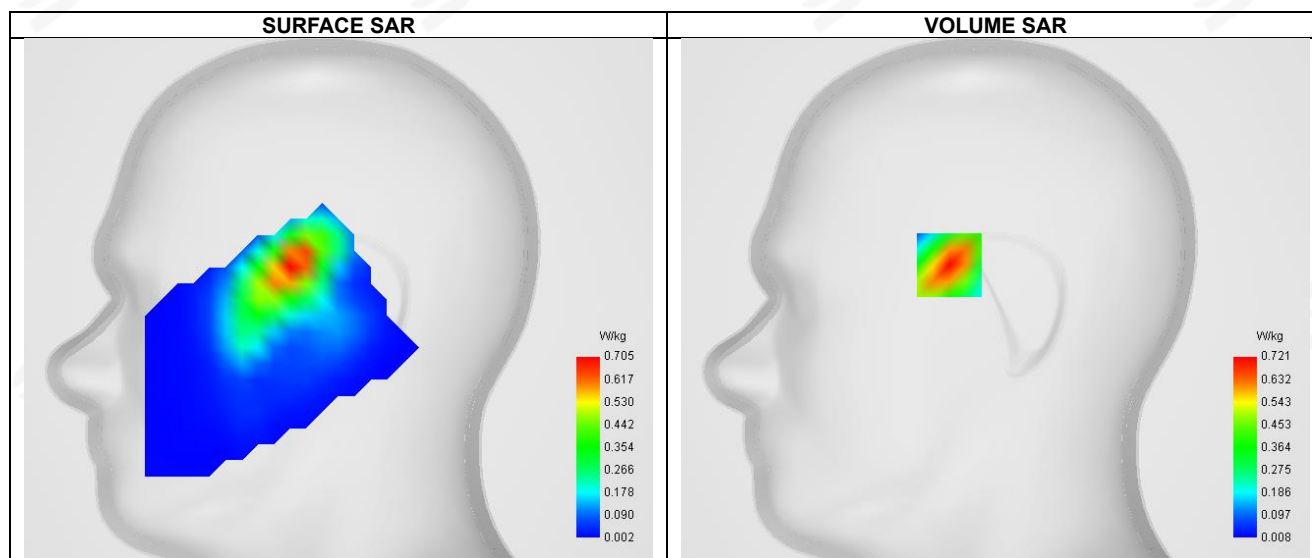


Maximum location: X=-23.00, Y=17.00 ; SAR Peak: 1.16 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.341
SAR 1g (W/Kg)	0.674
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.668567

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.120	0.721	0.401	0.216	0.119	0.065	0.036

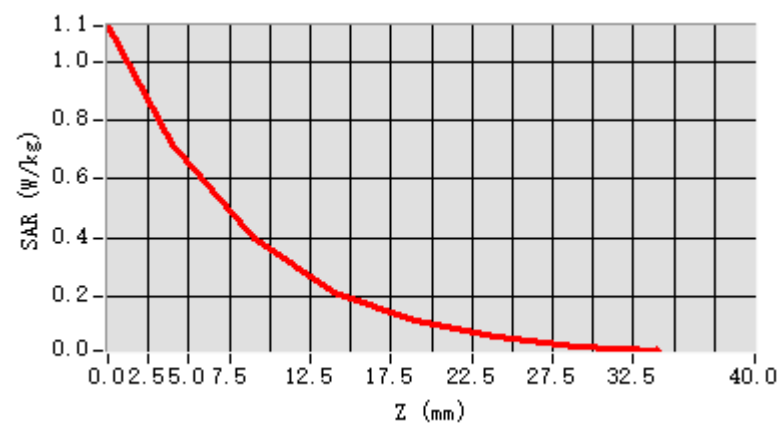


F. 3D Image

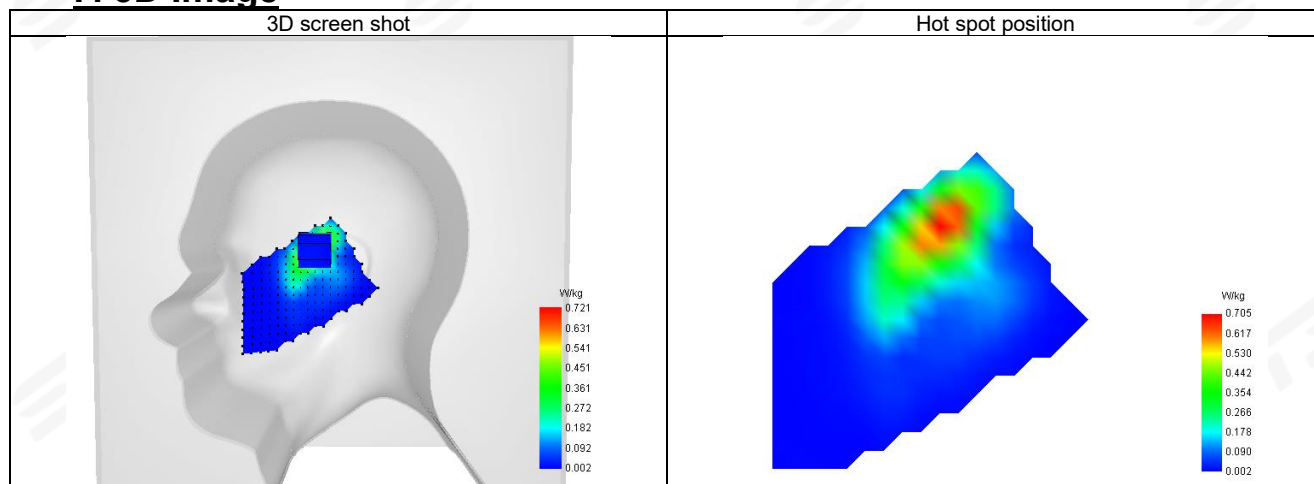

**Plot 22: DUT: Smart phone; EUT Model: WAVE 9C**

Test Date	2025-07-08
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2680
Relative permittivity (real part)	40.02
Conductivity (S/m)	2.01

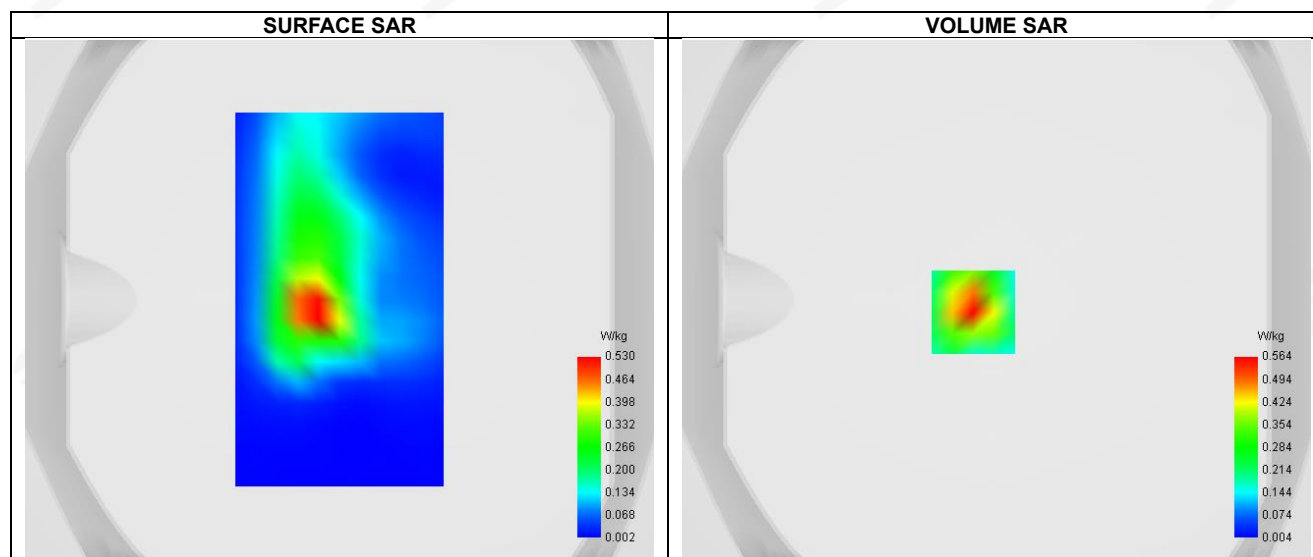


Maximum location: X=-9.00, Y=-5.00 ; SAR Peak: 0.94 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.250
SAR 1g (W/Kg)	0.525
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	48.956288

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.955	0.564	0.276	0.141	0.071	0.036	0.018

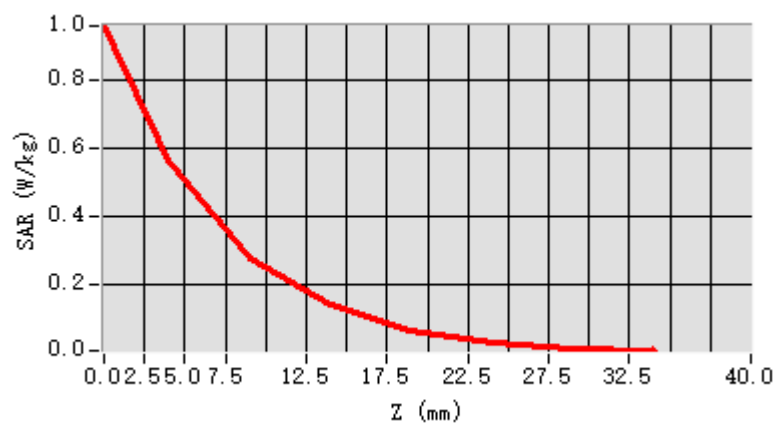


F. 3D Image

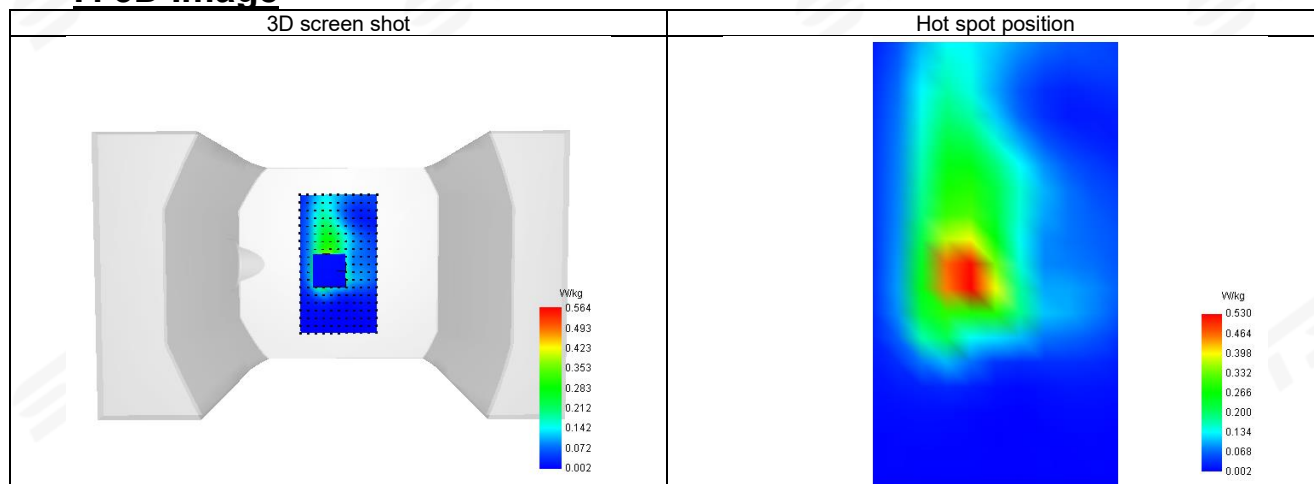

Plot 23: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-04
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.84
Conductivity (S/m)	0.89

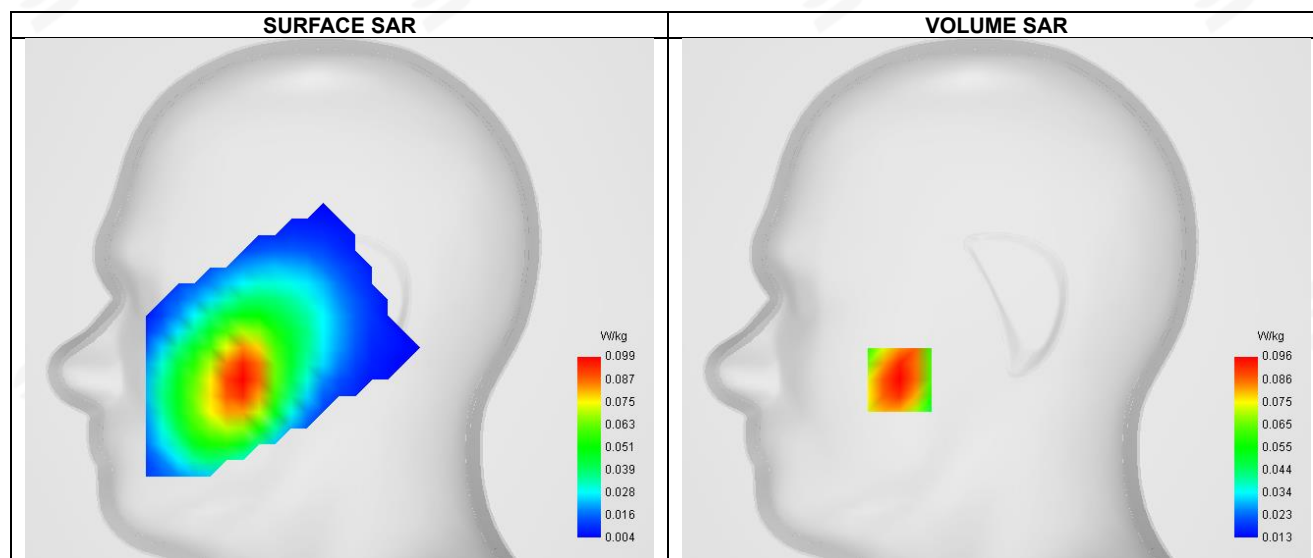


Maximum location: X=-48.00, Y=-40.00 ; SAR Peak: 0.13 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.092
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	77.739959

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.122	0.096	0.075	0.057	0.046	0.035	0.026

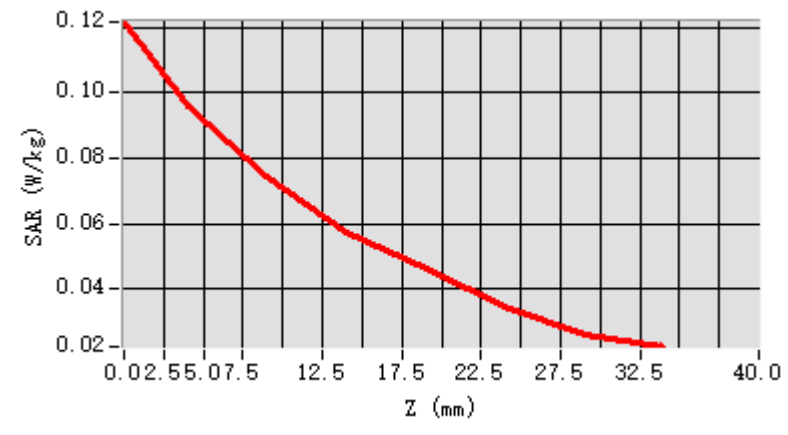


F. 3D Image

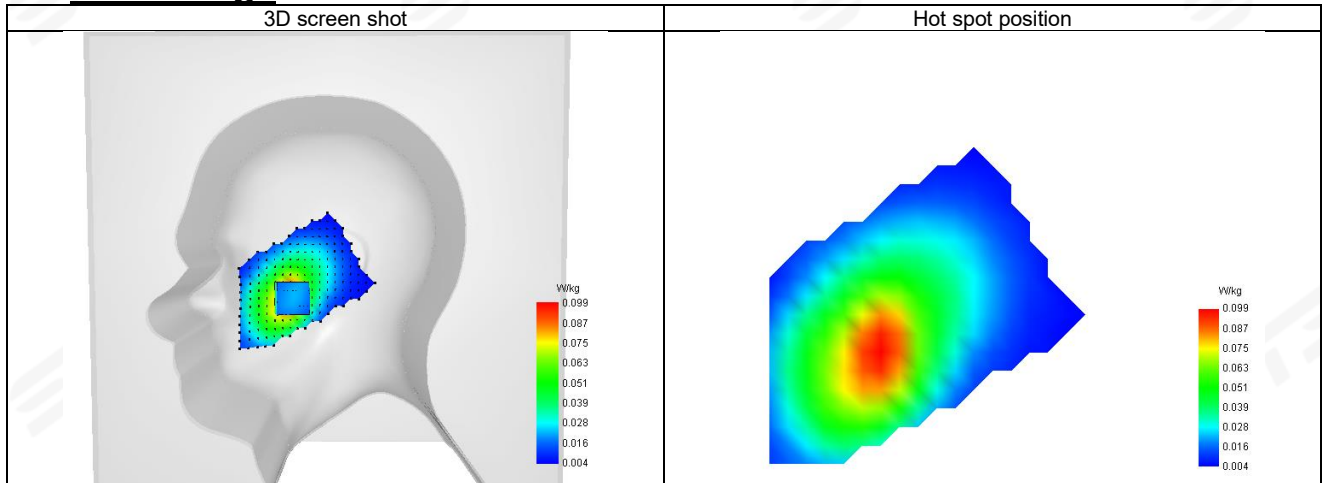

Plot 24: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-04
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.84
Conductivity (S/m)	0.89

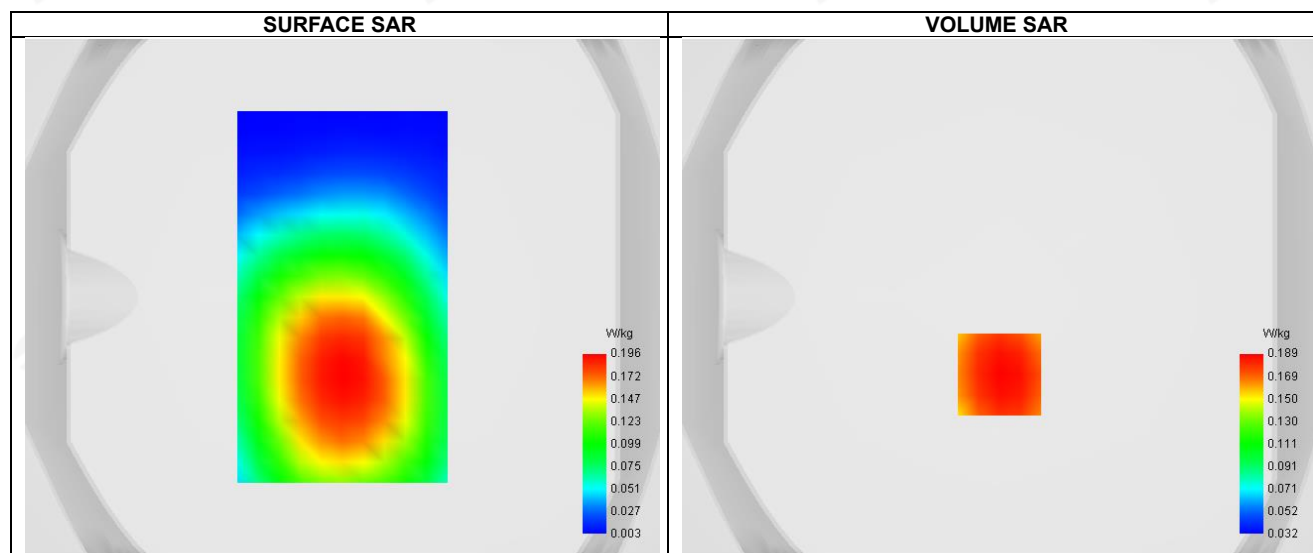


Maximum location: X=0.00, Y=-30.00 ; SAR Peak: 0.24 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.138
SAR 1g (W/Kg)	0.186
Horizontal validation criteria: minimum distance (mm)	16.485166
Vertical validation criteria: SAR ratio M2/M1 (%)	65.471519

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.237	0.189	0.147	0.116	0.090	0.066	0.049

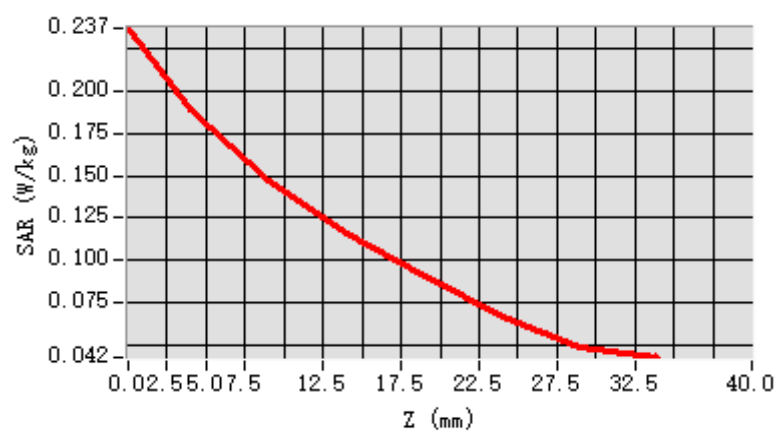


F. 3D Image

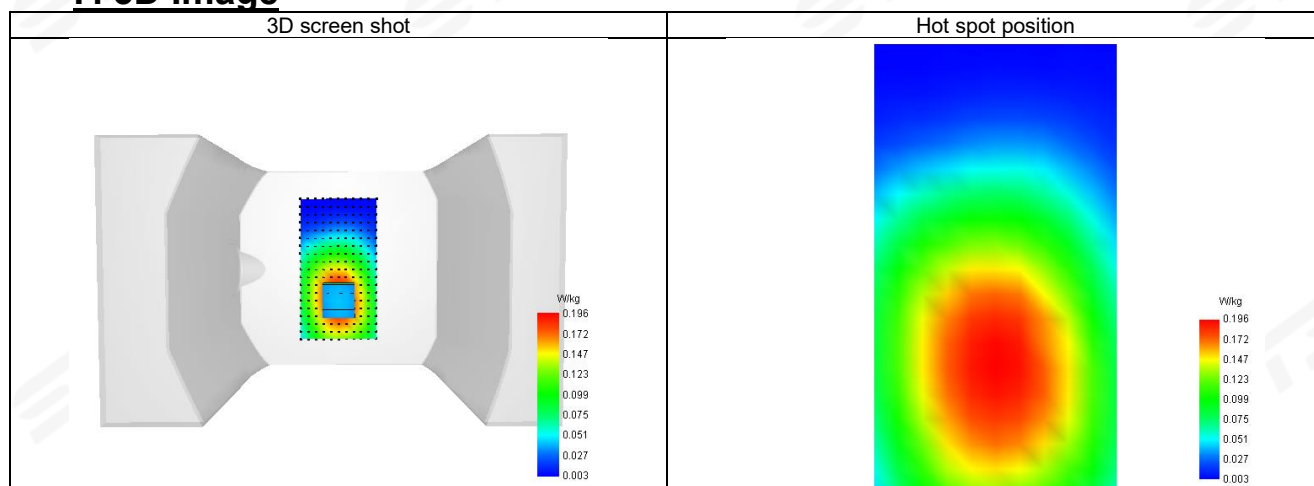

Plot 25: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-04
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	709
Relative permittivity (real part)	42.84
Conductivity (S/m)	0.92

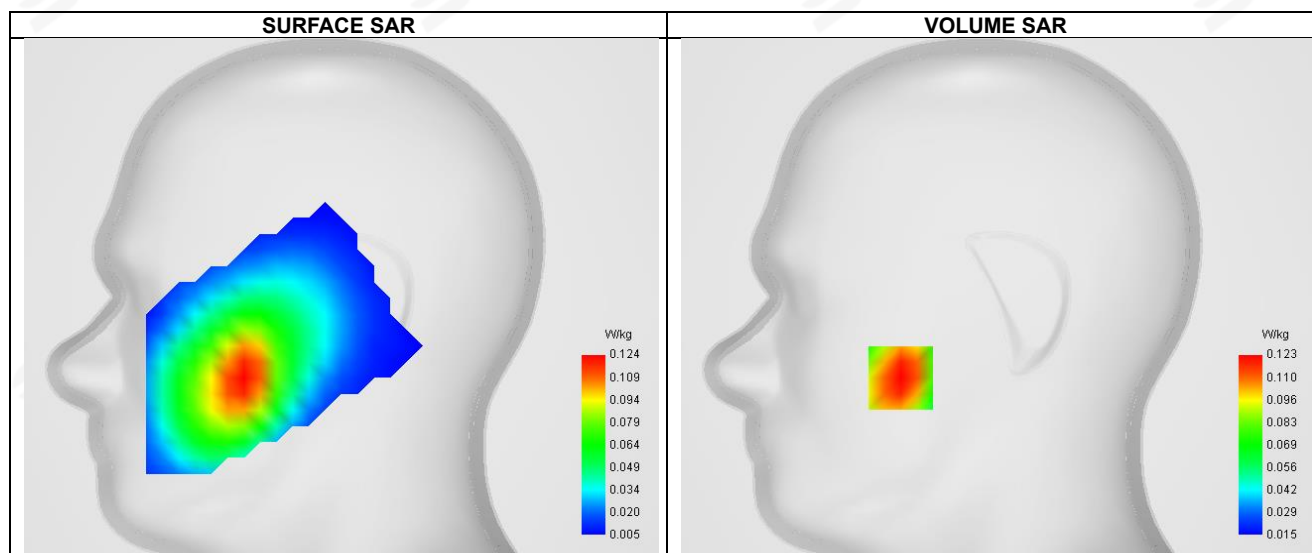


Maximum location: X=-48.00, Y=-40.00 ; SAR Peak: 0.16 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.085
SAR 1g (W/Kg)	0.119
Horizontal validation criteria: minimum distance (mm)	22.627417
Vertical validation criteria: SAR ratio M2/M1 (%)	77.571749

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.154	0.123	0.095	0.073	0.057	0.042	0.031

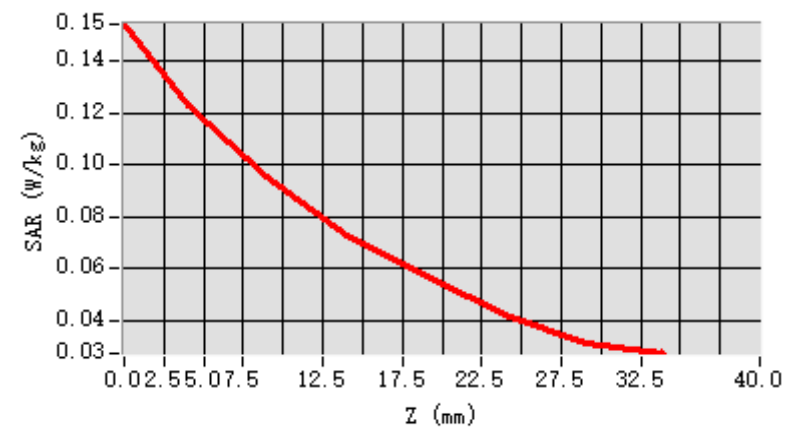


F. 3D Image

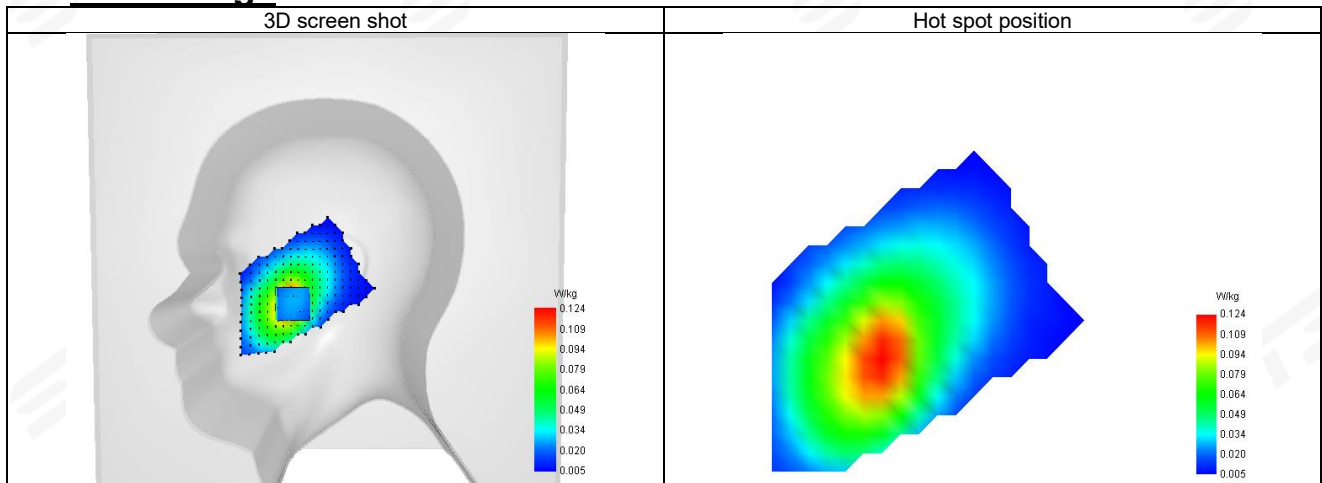

Plot 26: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-04
ConvF	1.56
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	709
Relative permittivity (real part)	42.84
Conductivity (S/m)	0.92

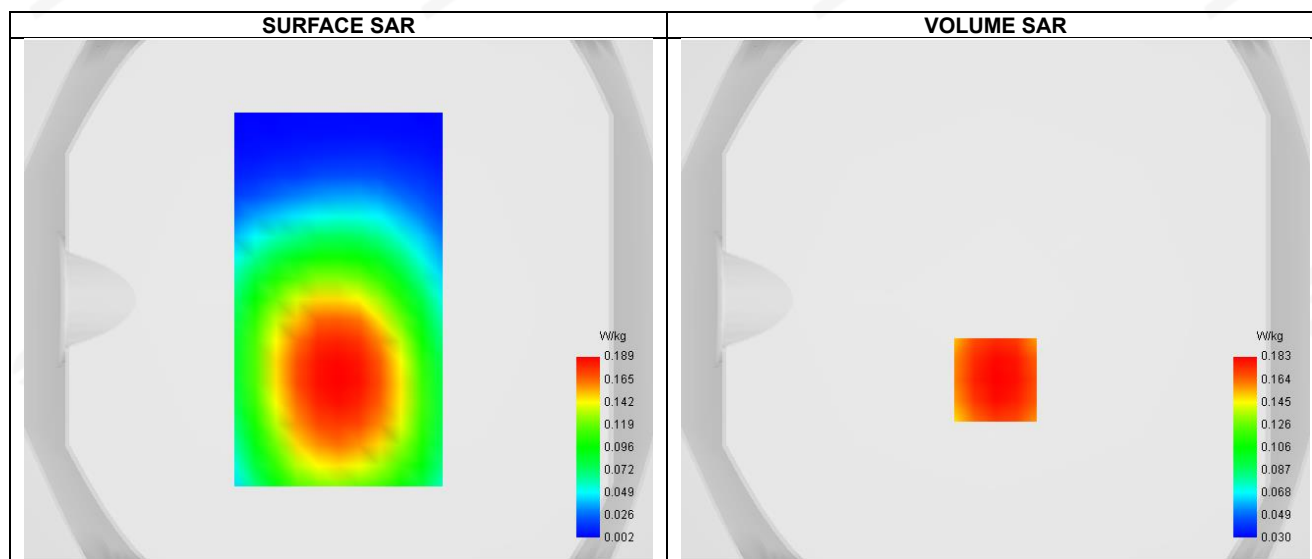


Maximum location: X=0.00, Y=-31.00 ; SAR Peak: 0.22 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.134
SAR 1g (W/Kg)	0.180
Horizontal validation criteria: minimum distance (mm)	16.478515
Vertical validation criteria: SAR ratio M2/M1 (%)	77.851556

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.222	0.183	0.144	0.116	0.087	0.062	0.046

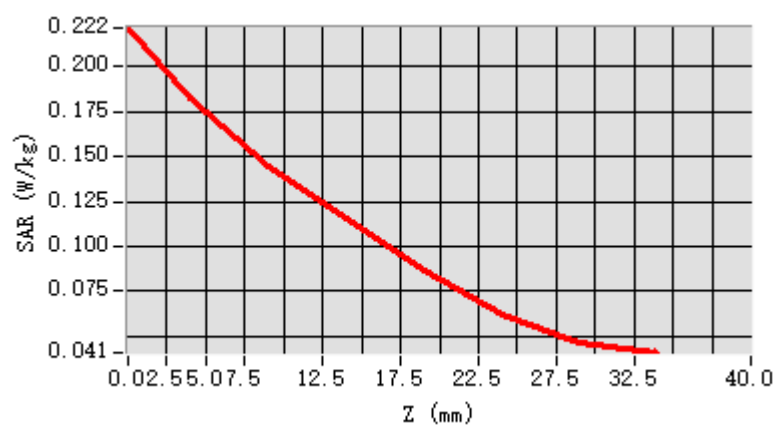


F. 3D Image

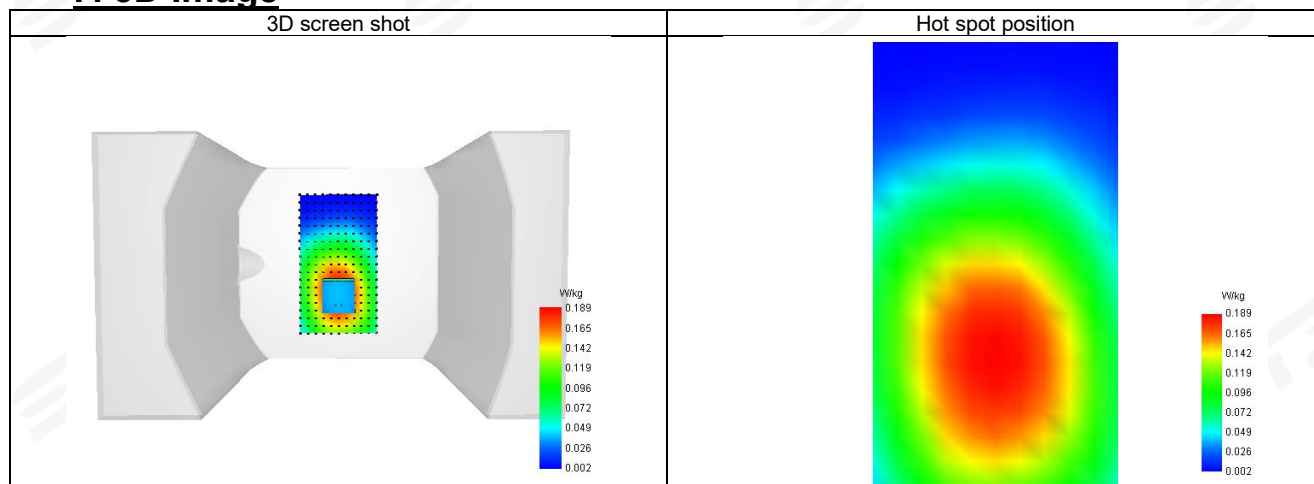

Plot 27: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-08
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2506
Relative permittivity (real part)	39.78
Conductivity (S/m)	1.85

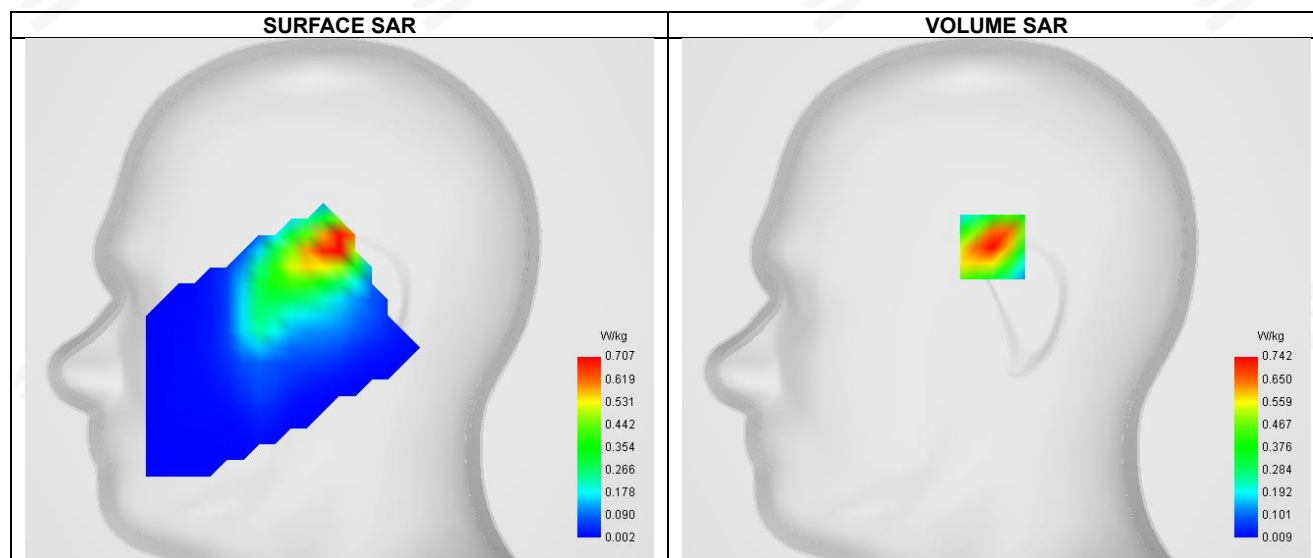


Maximum location: X=-2.00, Y=26.00 ; SAR Peak: 1.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.358
SAR 1g (W/Kg)	0.698
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.596275

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.170	0.742	0.405	0.220	0.120	0.065	0.036

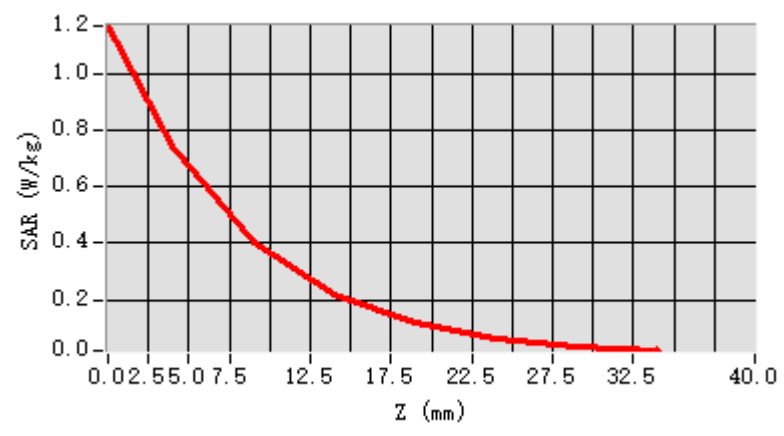


F. 3D Image

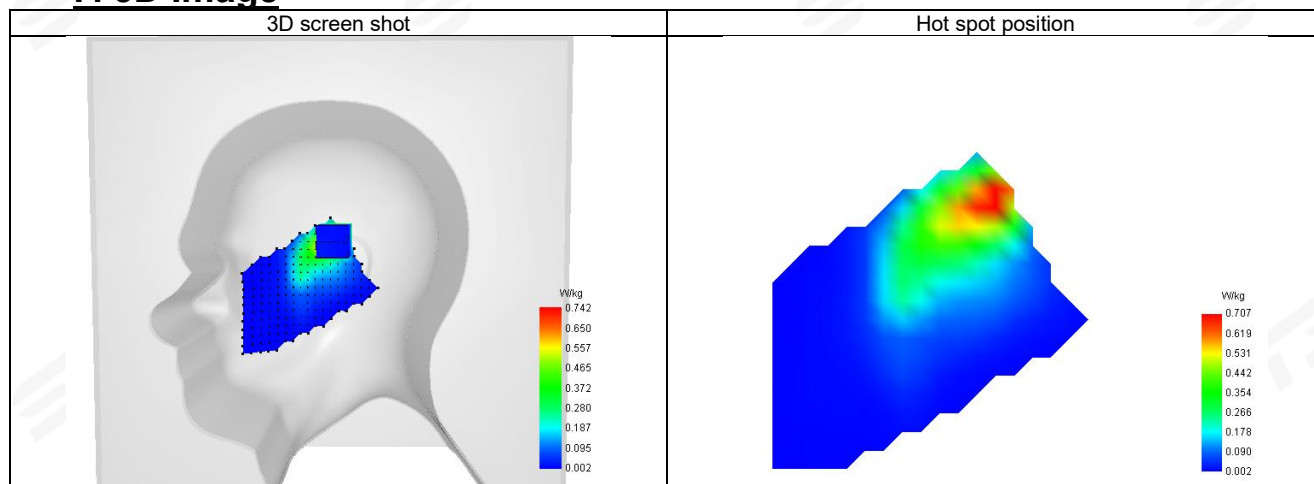

**Plot 28: DUT: Smart phone; EUT Model: WAVE 9C**

Test Date	2025-07-08
ConvF	1.74
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 41 (RB 1)
Signal	LTE (Cr est factor: 1.0)
Frequency (MHz)	2506
Relative permittivity (real part)	39.78
Conductivity (S/m)	1.85

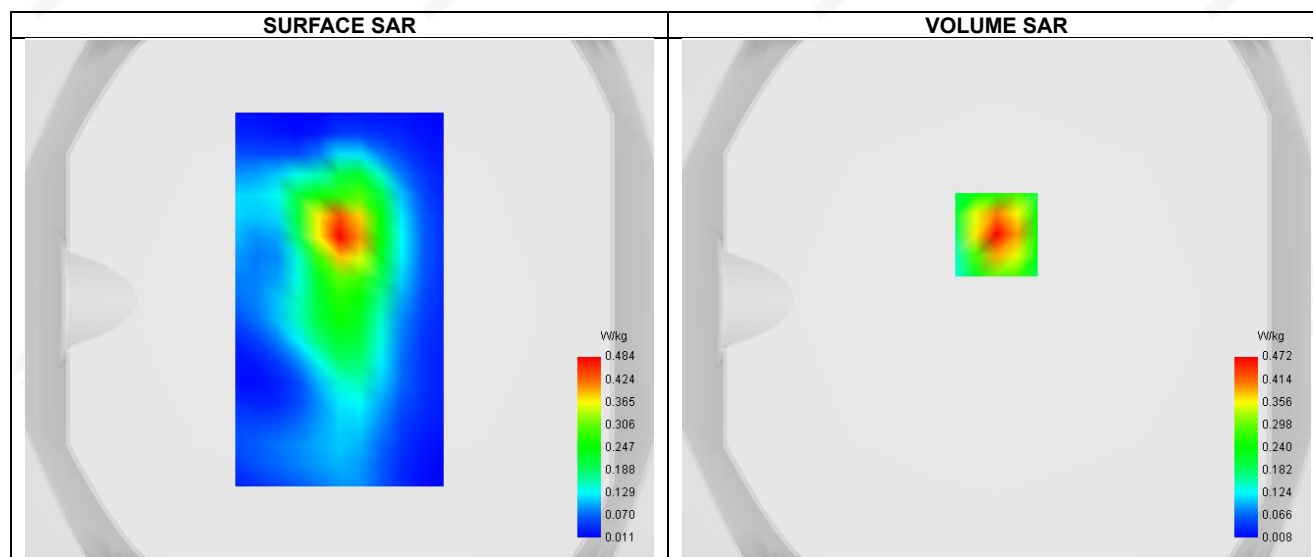


Maximum location: X=0.00, Y=25.00 ; SAR Peak: 0.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.227
SAR 1g (W/Kg)	0.447
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	51.911635

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.777	0.472	0.245	0.139	0.076	0.041	0.023

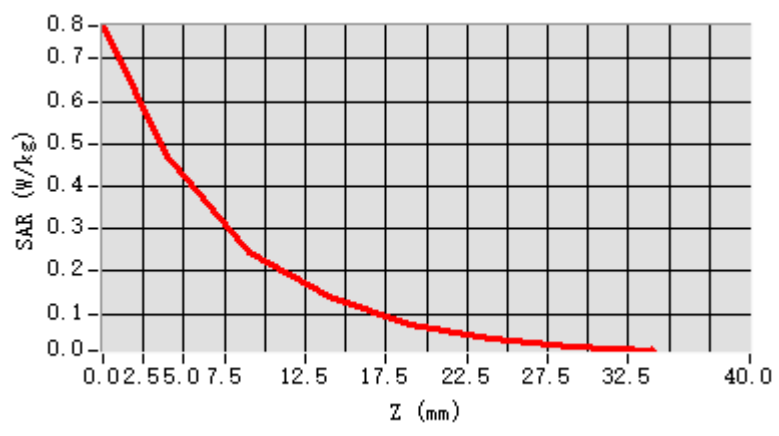


F. 3D Image

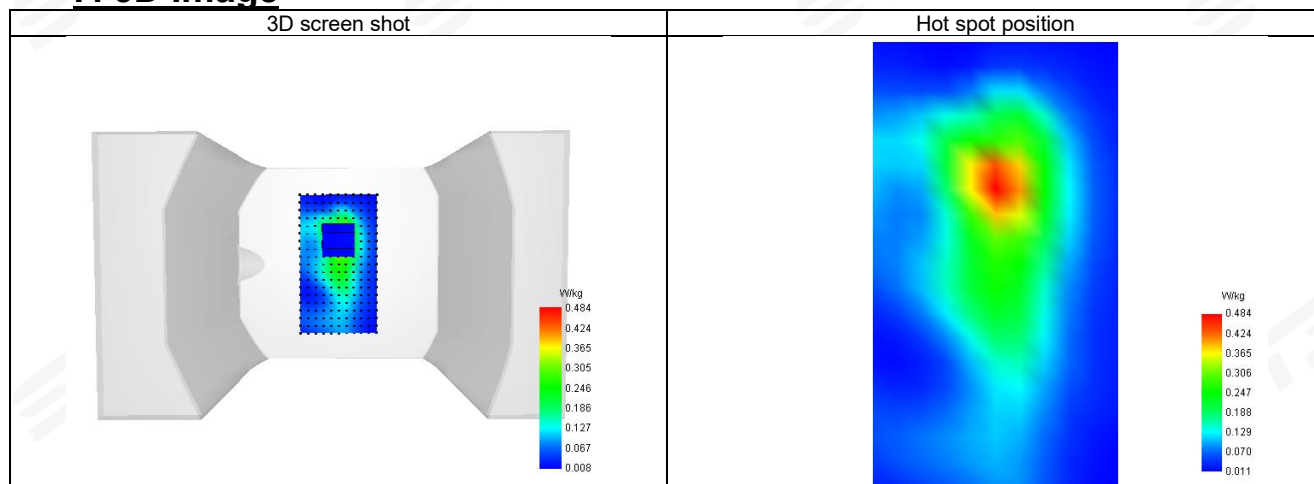

Plot 29: DUT: Smart phone; EUT Model: WAVE 9C

Test Date	2025-07-06
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 66 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	40.85
Conductivity (S/m)	1.41

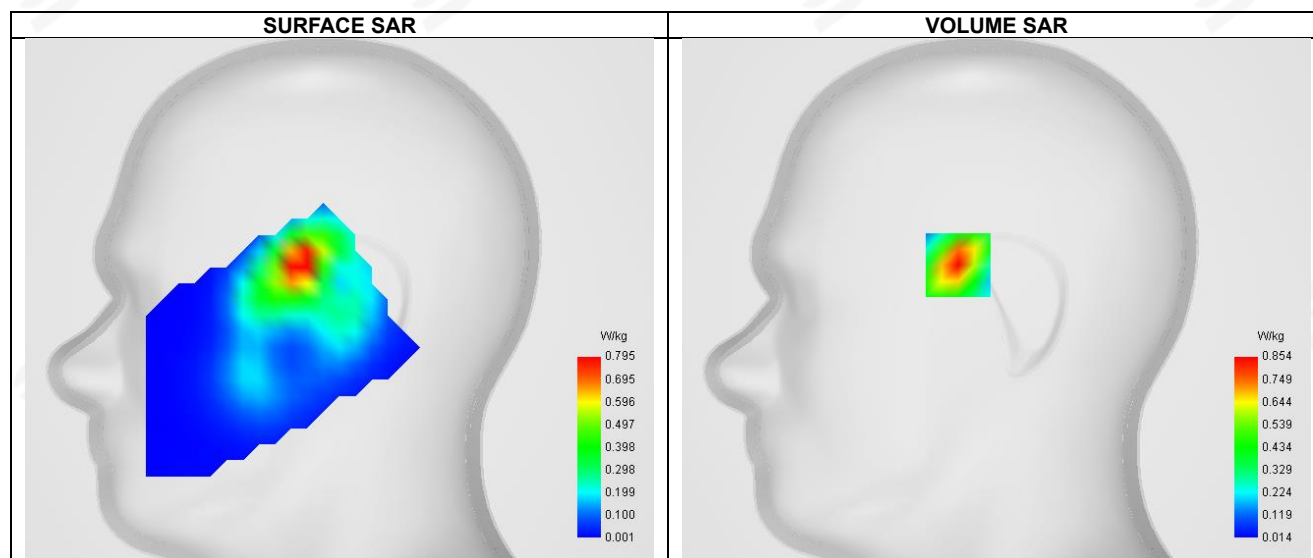


Maximum location: X=-19.00, Y=17.00 ; SAR Peak: 1.32 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.407
SAR 1g (W/Kg)	0.650
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.348926

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.307	0.854	0.490	0.284	0.164	0.095	0.055

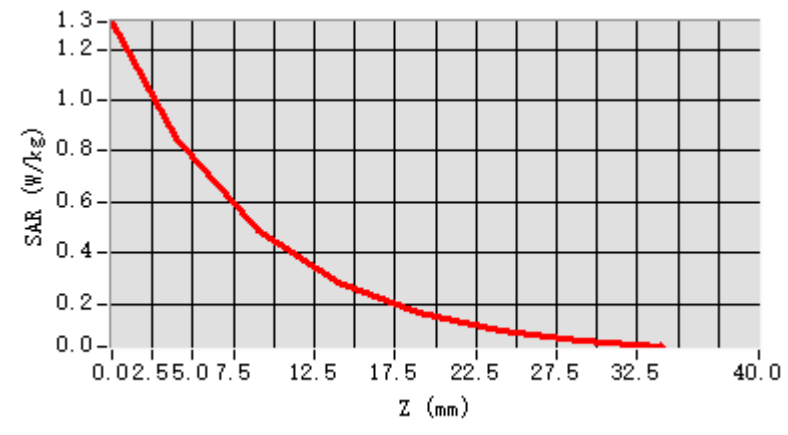


F. 3D Image

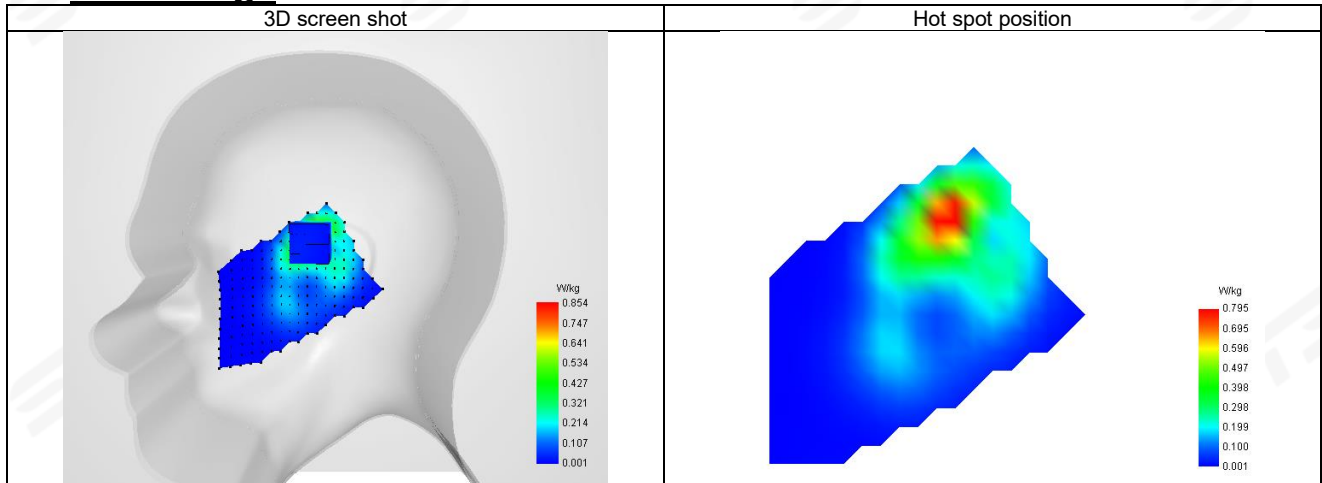

**Plot 30: DUT: Smart phone; EUT Model: WAVE 9C**

Test Date	2025-07-06
ConvF	1.58
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	40.85
Conductivity (S/m)	1.41

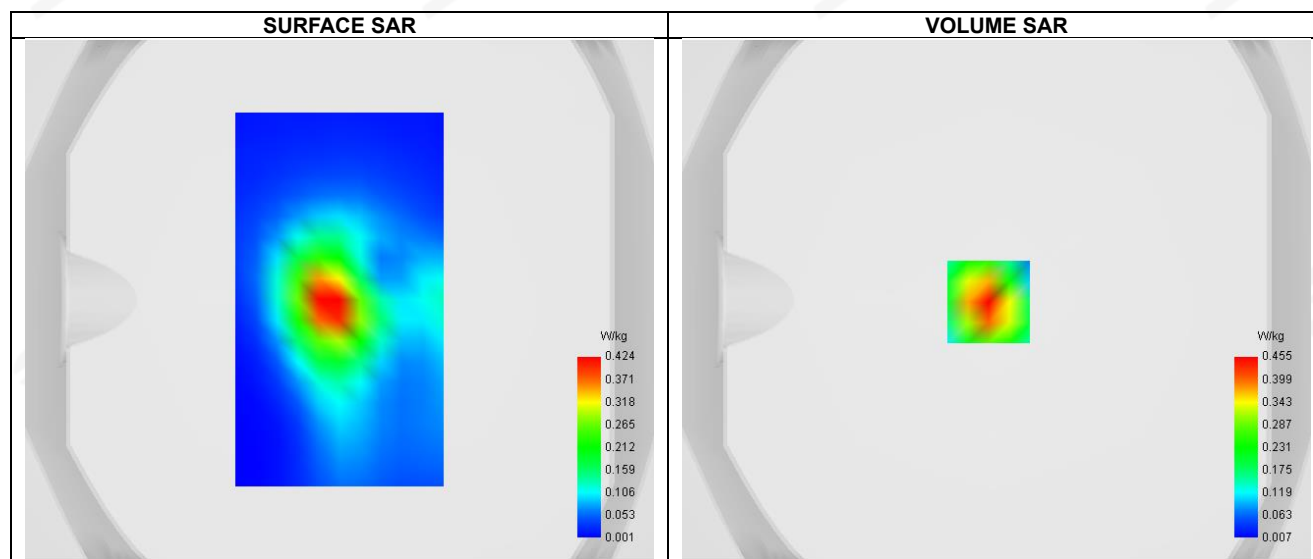


Maximum location: X=-3.00, Y=-1.00 ; SAR Peak: 0.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.228
SAR 1g (W/Kg)	0.431
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	61.451952

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.661	0.455	0.280	0.169	0.102	0.062	0.038

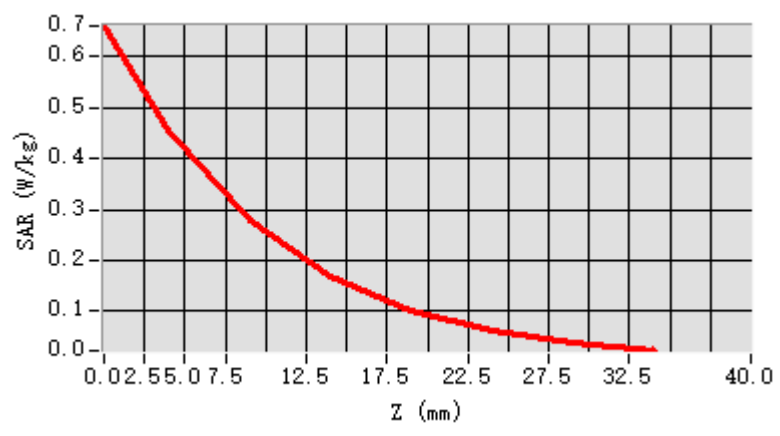

F. 3D Image

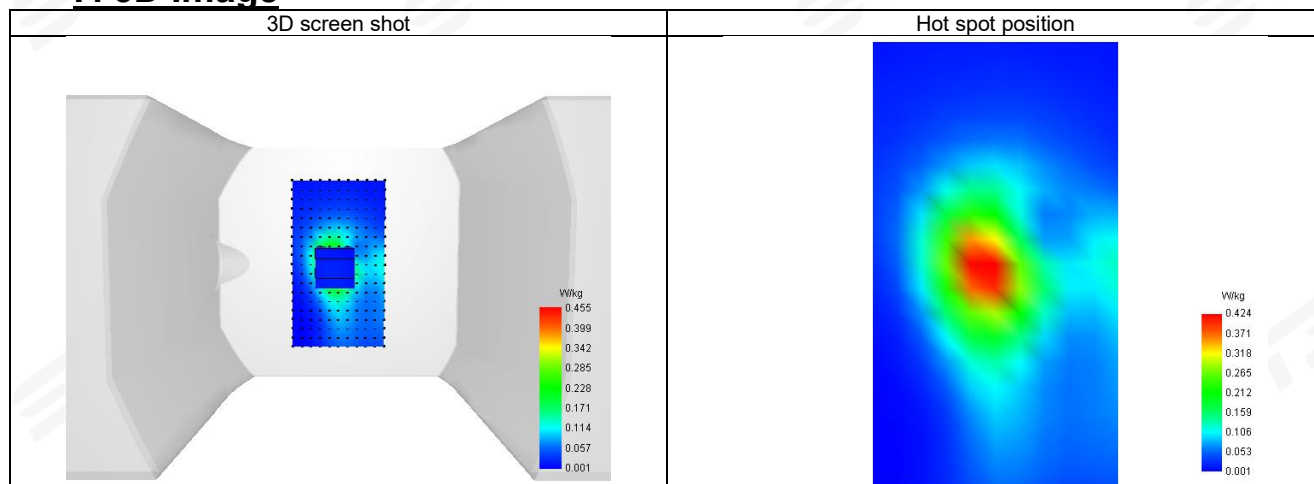



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※