


Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Vertical

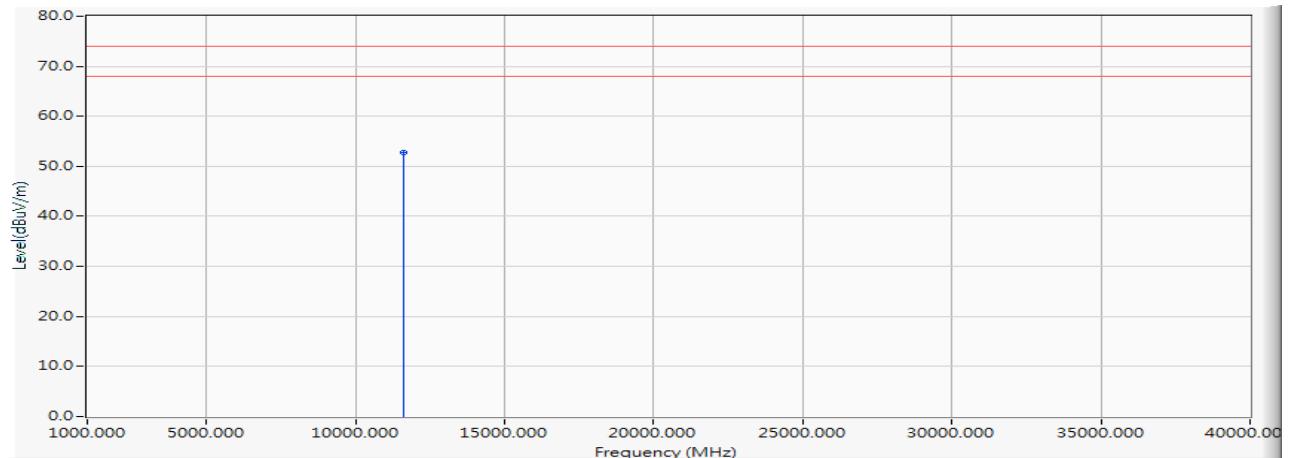


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11590.000	14.578	38.256	52.834	-21.166	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5210MHz)

Horizontal

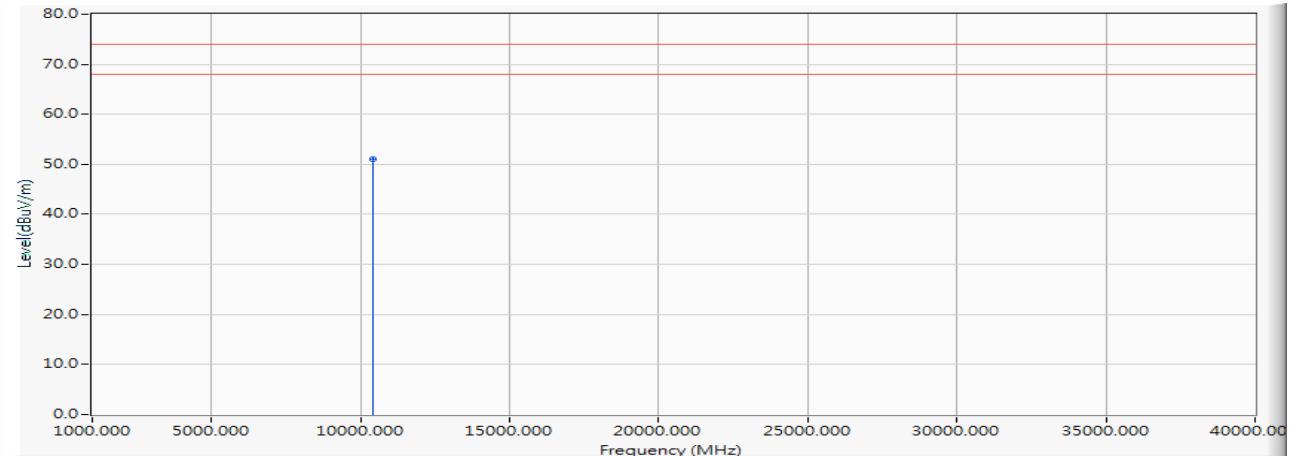


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10420.000	13.273	37.695	50.967	-23.033	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5210MHz)

Vertical

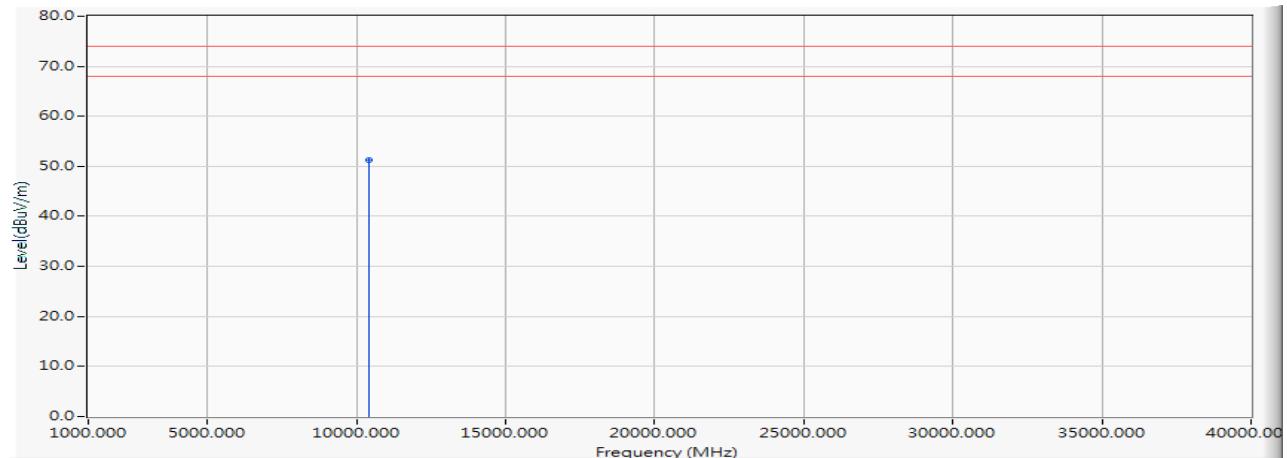


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10420.000	13.273	38.077	51.349	-22.651	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5290MHz)

Horizontal

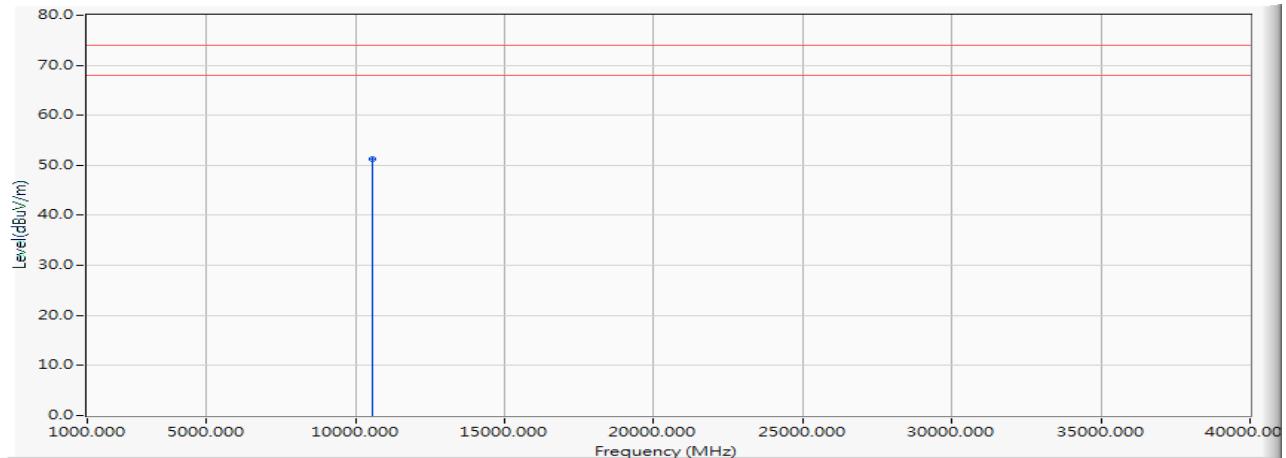


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10580.000	13.118	38.103	51.221	-22.779	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5290MHz)

Vertical

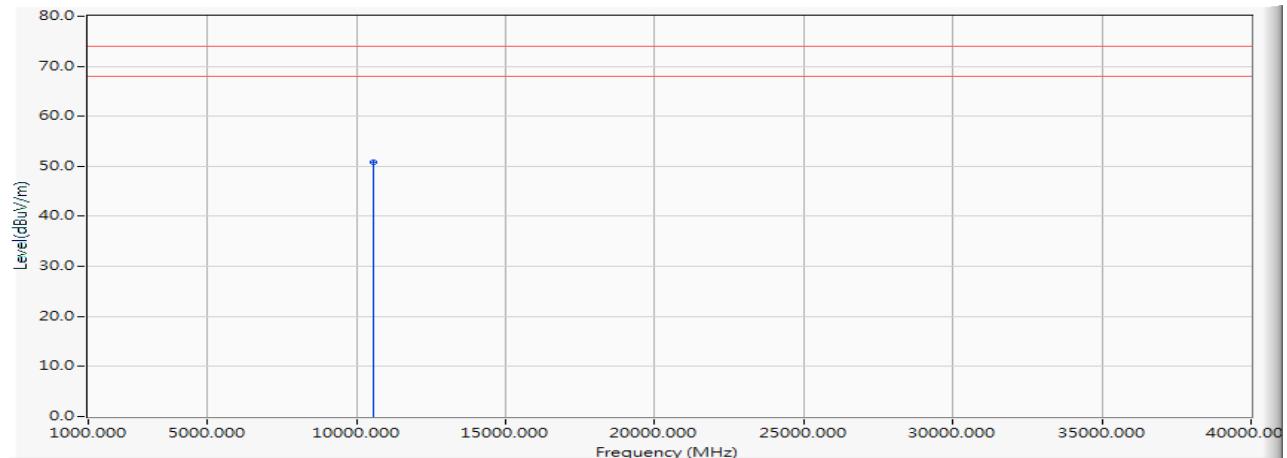


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10580.000	13.118	37.696	50.814	-23.186	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5530MHz)

Horizontal

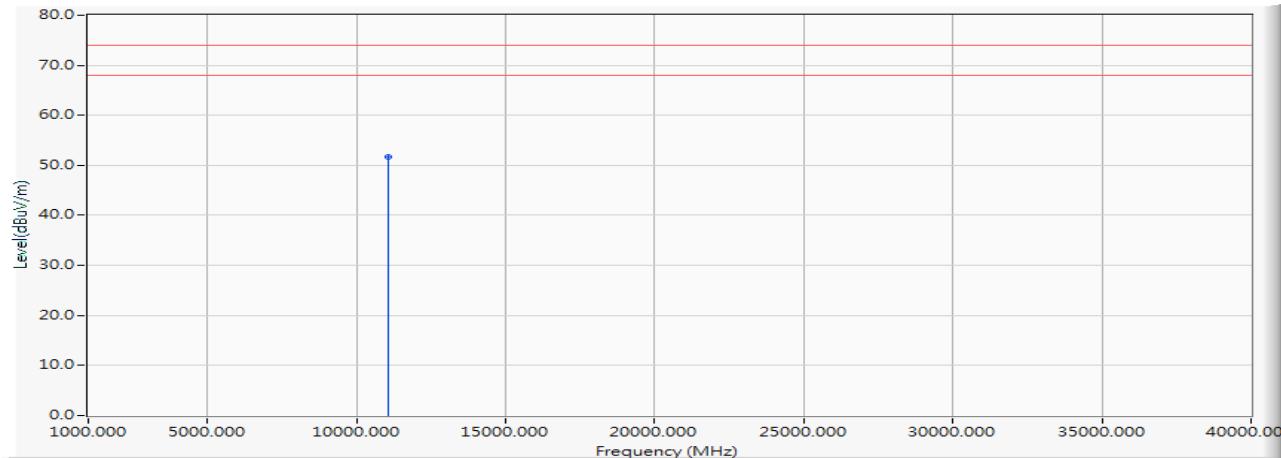


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11060.000	13.957	37.740	51.697	-22.303	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5530MHz)

Vertical

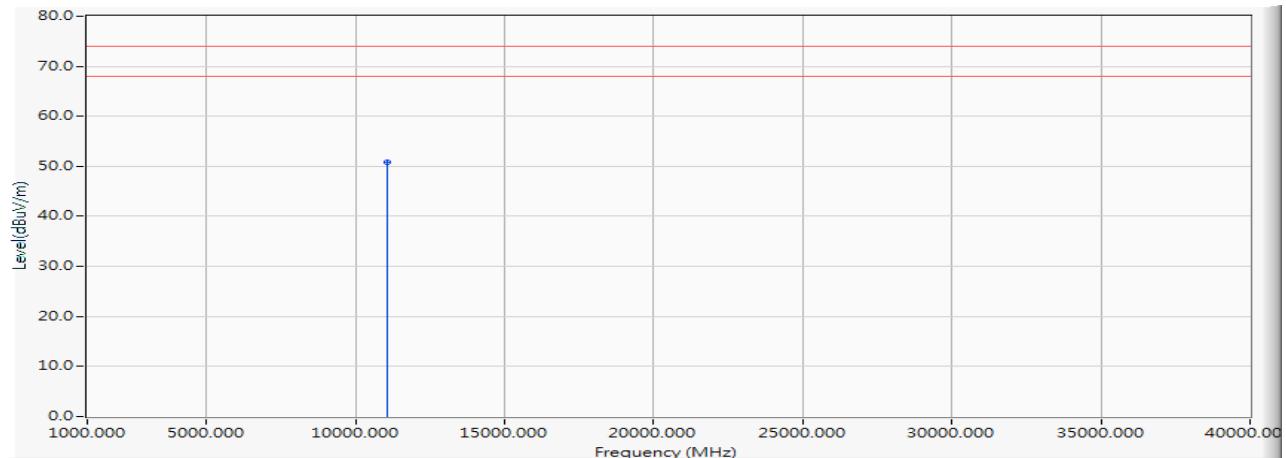


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11060.000	13.957	36.829	50.786	-23.214	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Horizontal

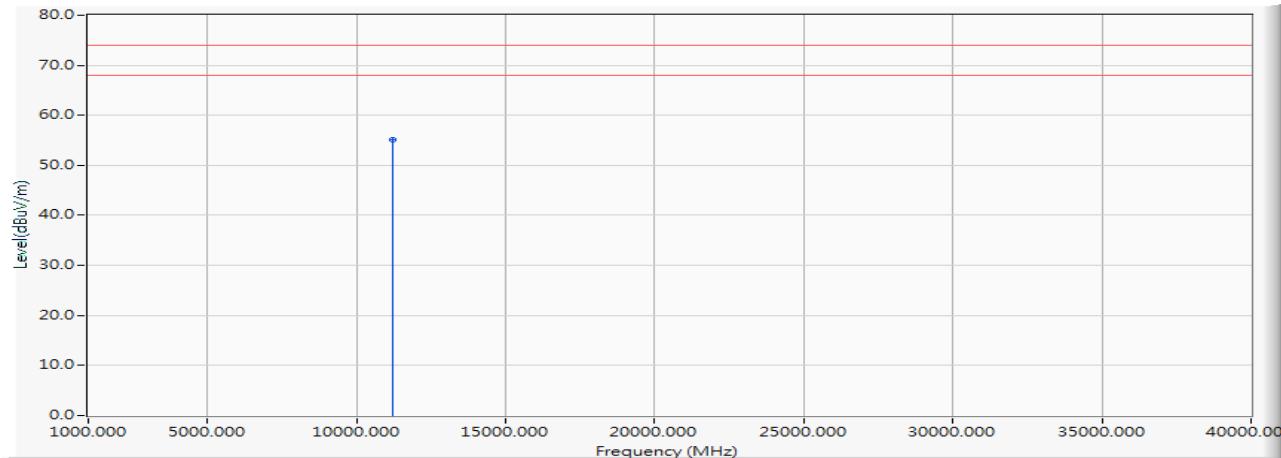


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	40.493	55.196	-18.804	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Horizontal

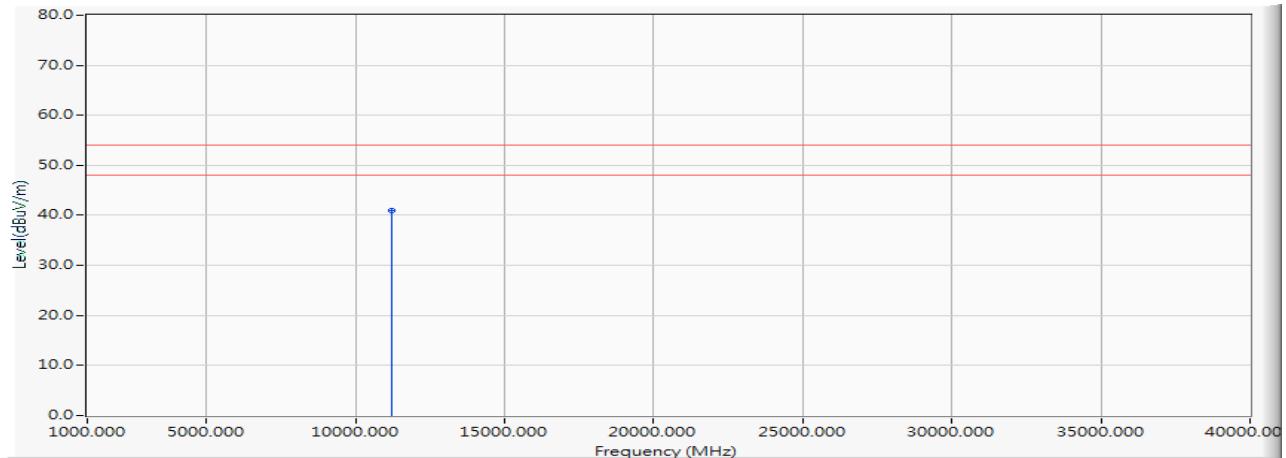


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	26.178	40.881	-13.119	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Vertical

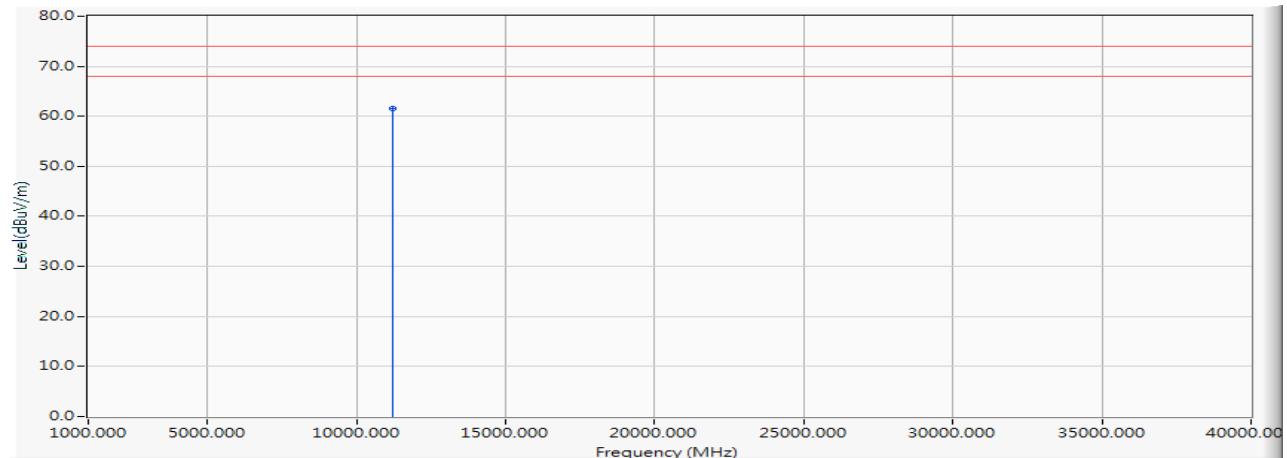


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	46.922	61.625	-12.375	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Vertical

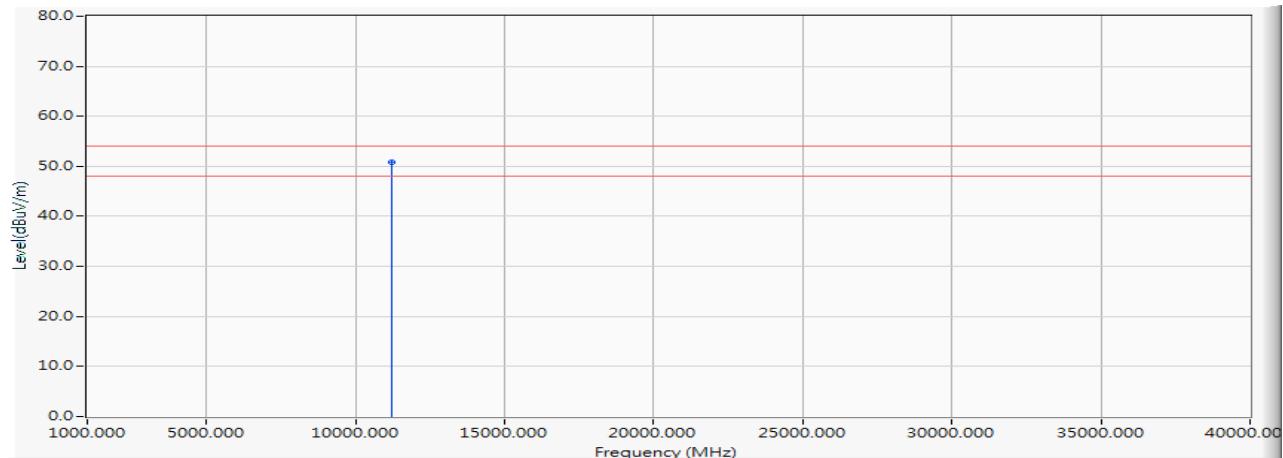


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	36.057	50.760	-3.240	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5690MHz)

Horizontal

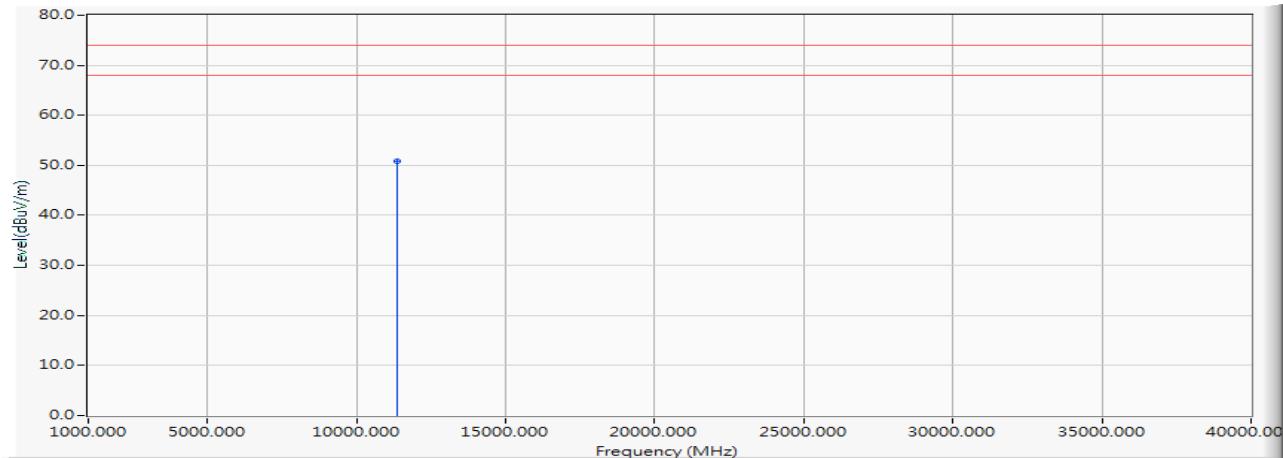


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11380.000	15.050	35.685	50.735	-23.265	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5690MHz)

Vertical

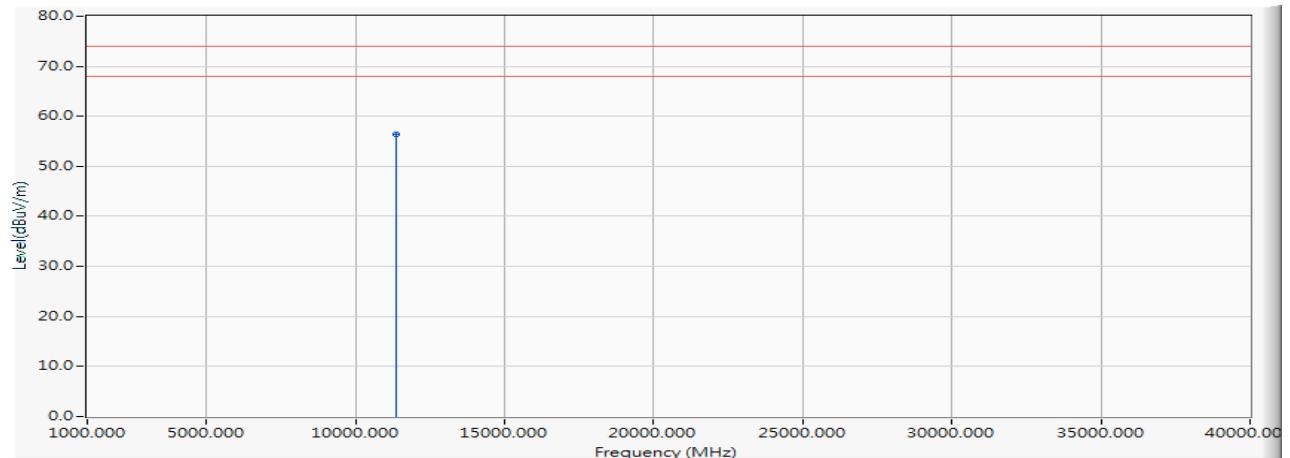


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11380.000	15.050	41.447	56.497	-17.503	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5690MHz)

Vertical

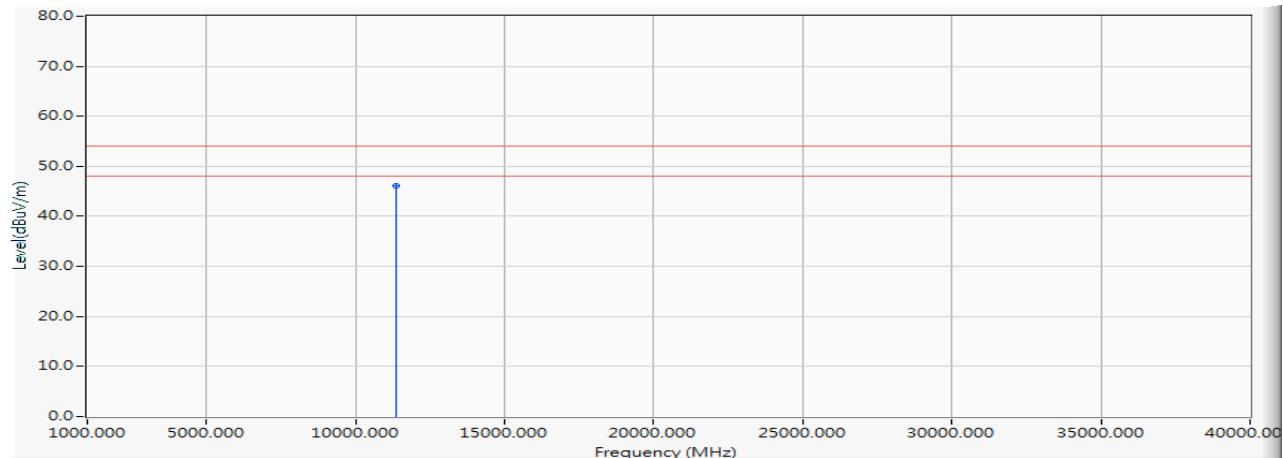


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11380.000	15.050	30.987	46.037	-7.963	54.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5775MHz)

Horizontal

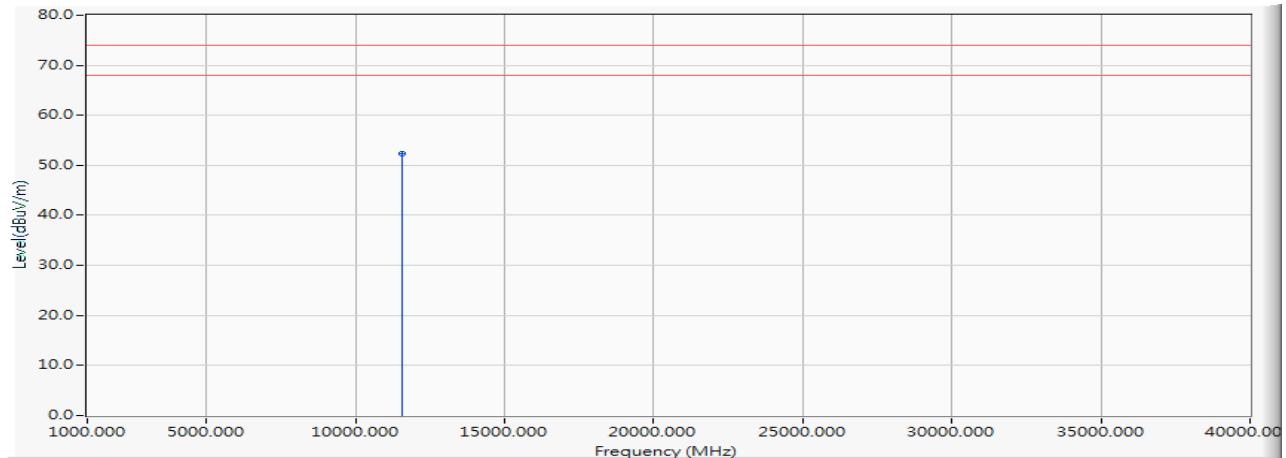


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11550.000	14.901	37.417	52.317	-21.683	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 1 SISO A: Transmit (802.11ac-80BW_32.5Mbps)(5775MHz)

Vertical

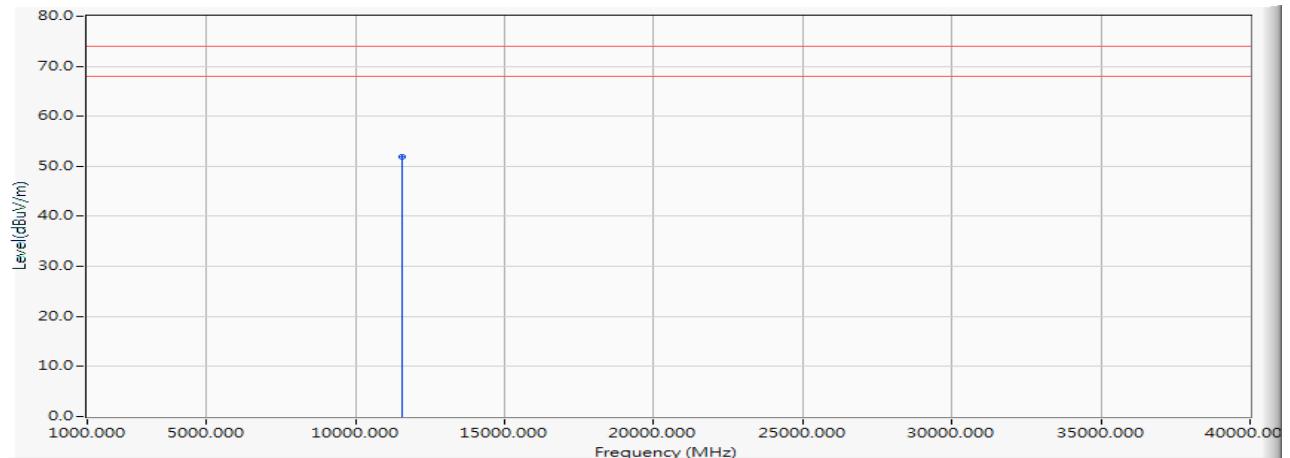


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11550.000	14.901	36.955	51.855	-22.145	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5180MHz)

Horizontal

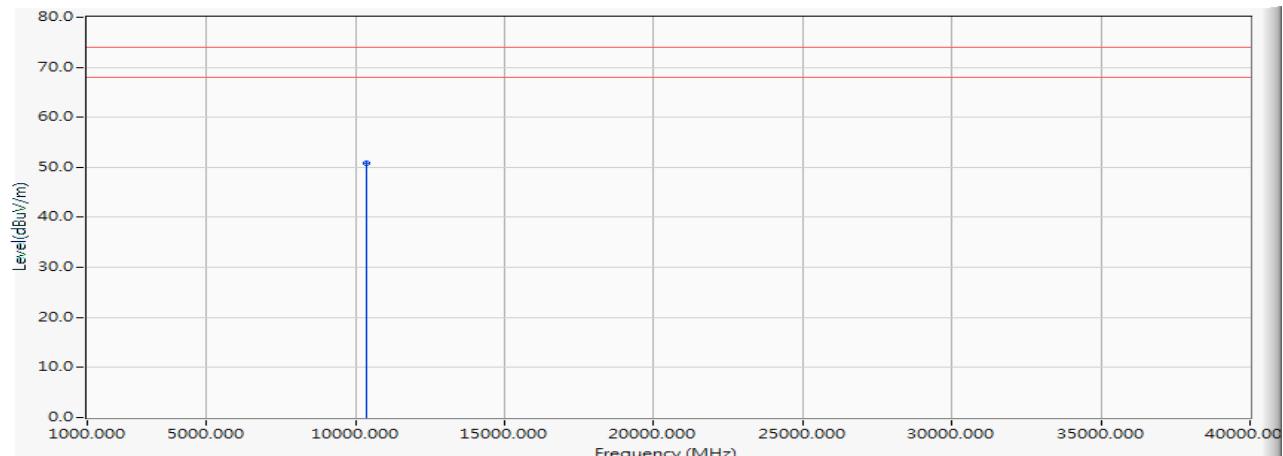


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	37.416	50.809	-23.191	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5180MHz)

Vertical

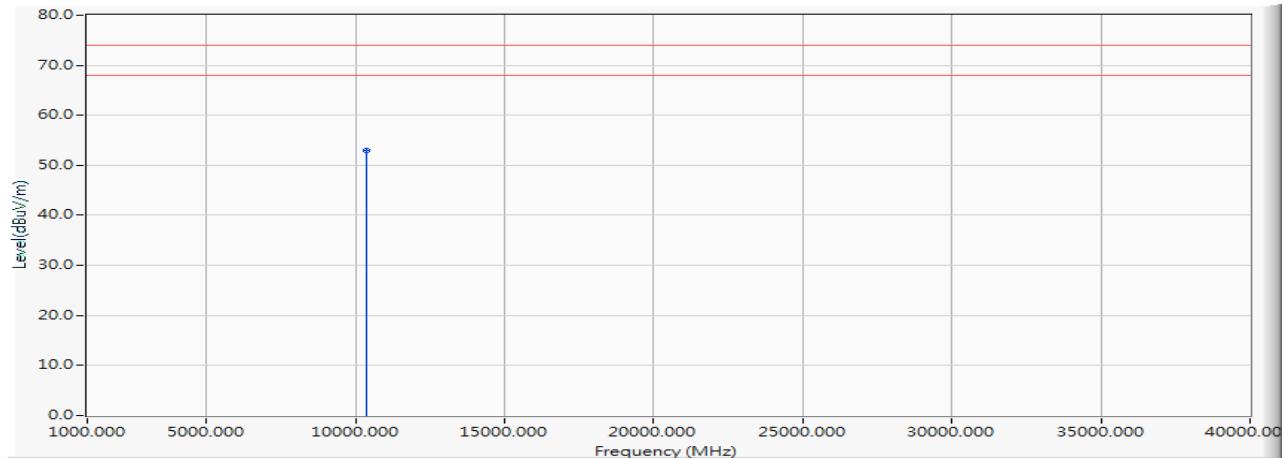


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	39.485	52.878	-21.122	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5200MHz)

Horizontal

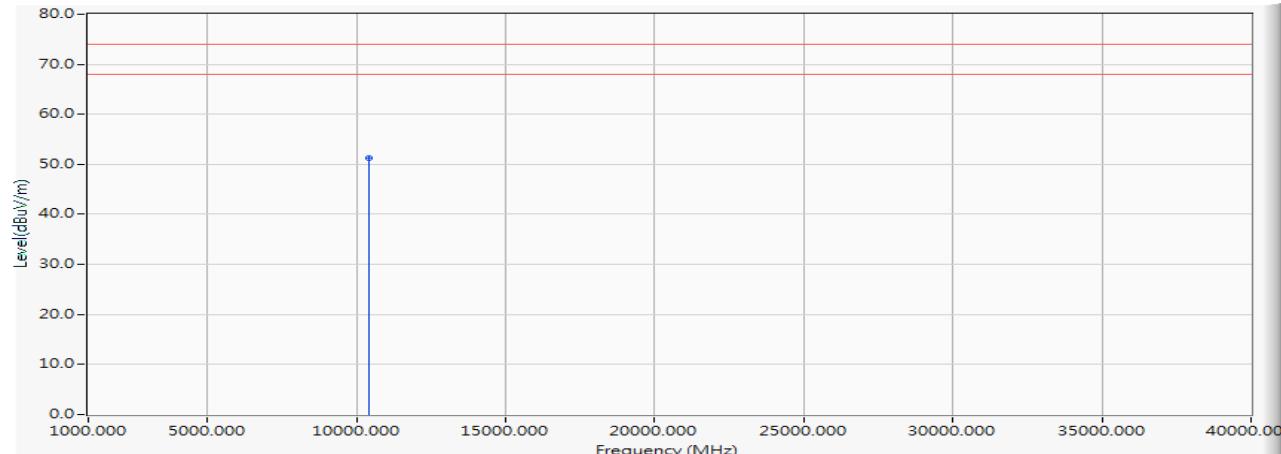


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10400.000	13.313	37.984	51.297	-22.703	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5200MHz)

Vertical

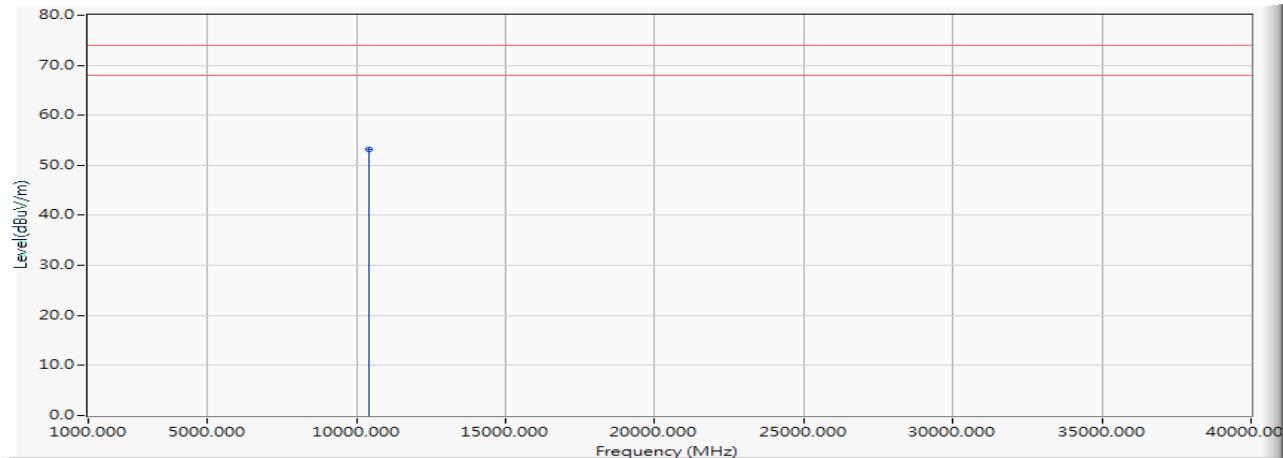


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10400.000	13.313	39.873	53.186	-20.814	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5240MHz)

Horizontal

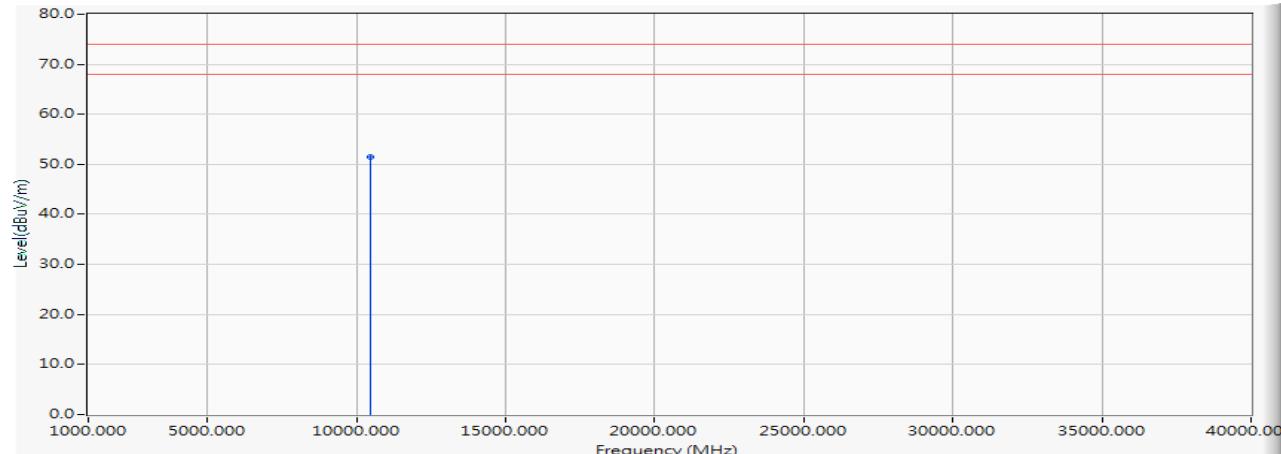


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10480.000	13.152	38.419	51.570	-22.430	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5240MHz)

Vertical

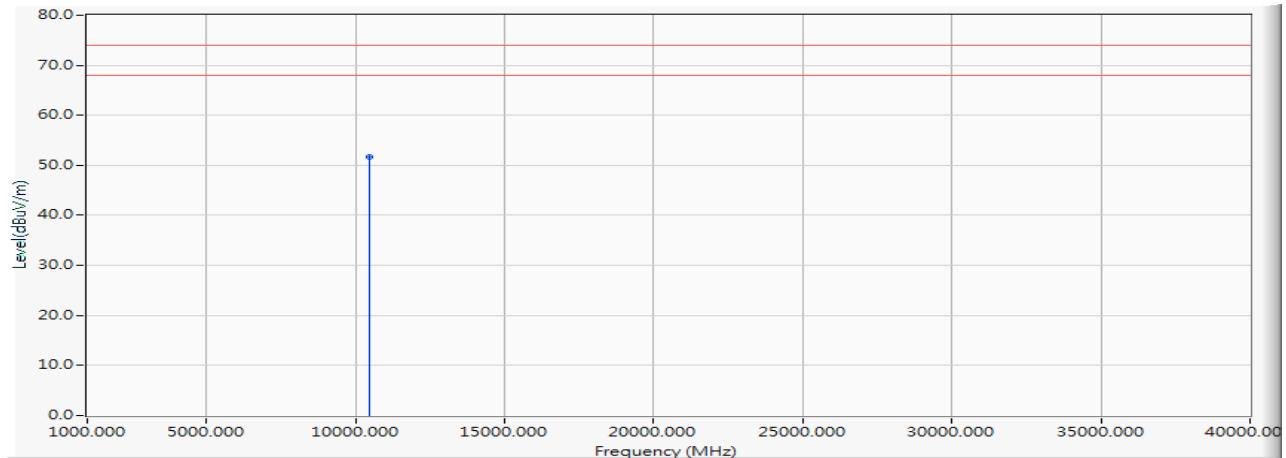


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10480.000	13.152	38.493	51.644	-22.356	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5260MHz)

Horizontal

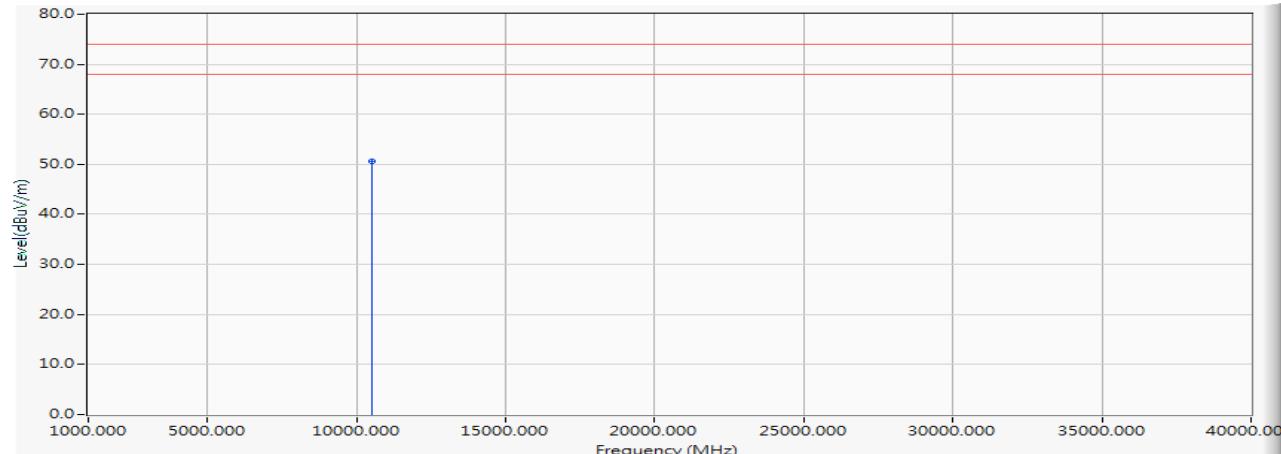


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10520.000	13.107	37.493	50.600	-23.400	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5260MHz)

Vertical

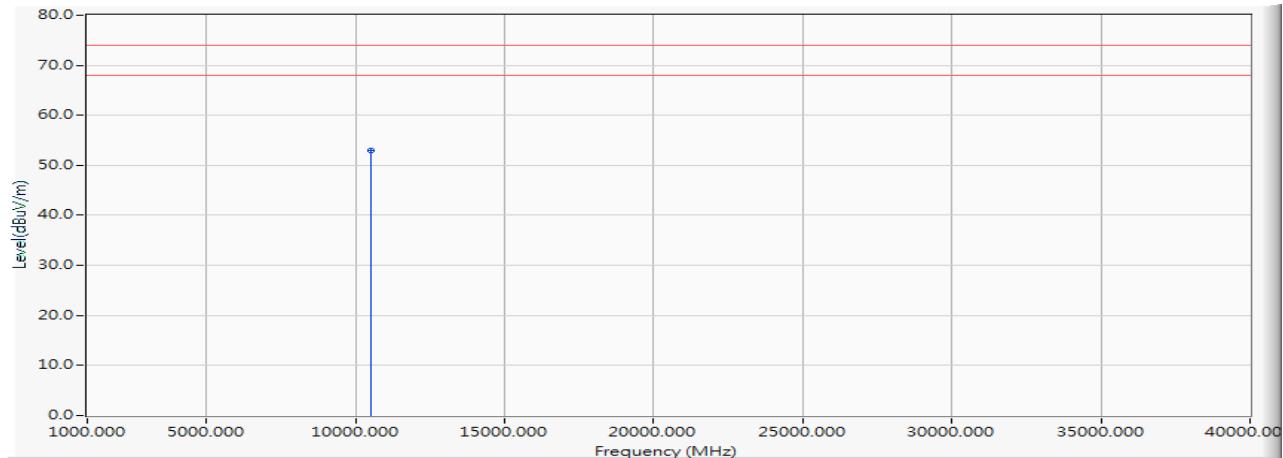


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10520.000	13.107	39.816	52.923	-21.077	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5280MHz)

Horizontal

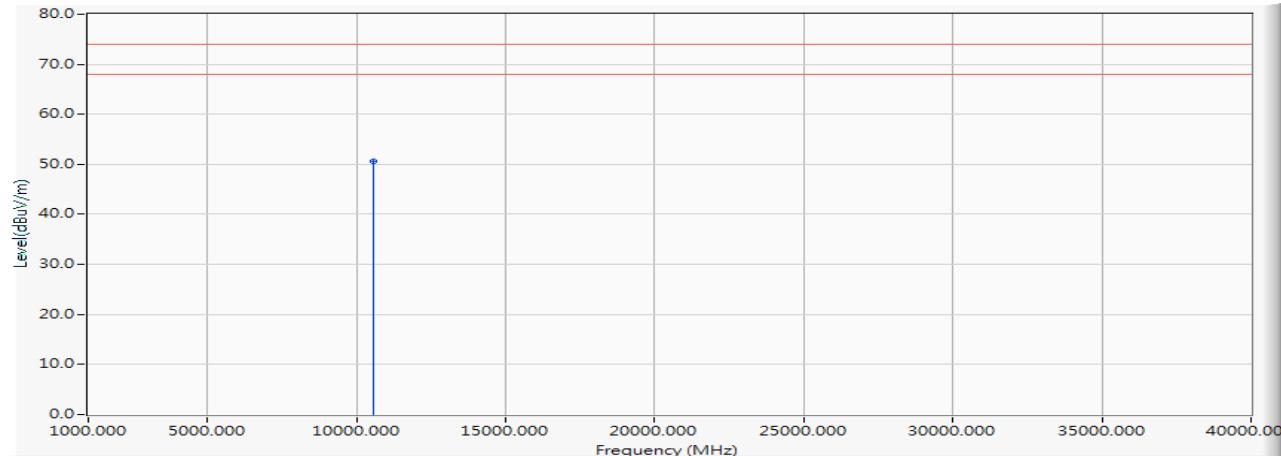


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10560.000	13.115	37.513	50.628	-23.372	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5280MHz)

Vertical

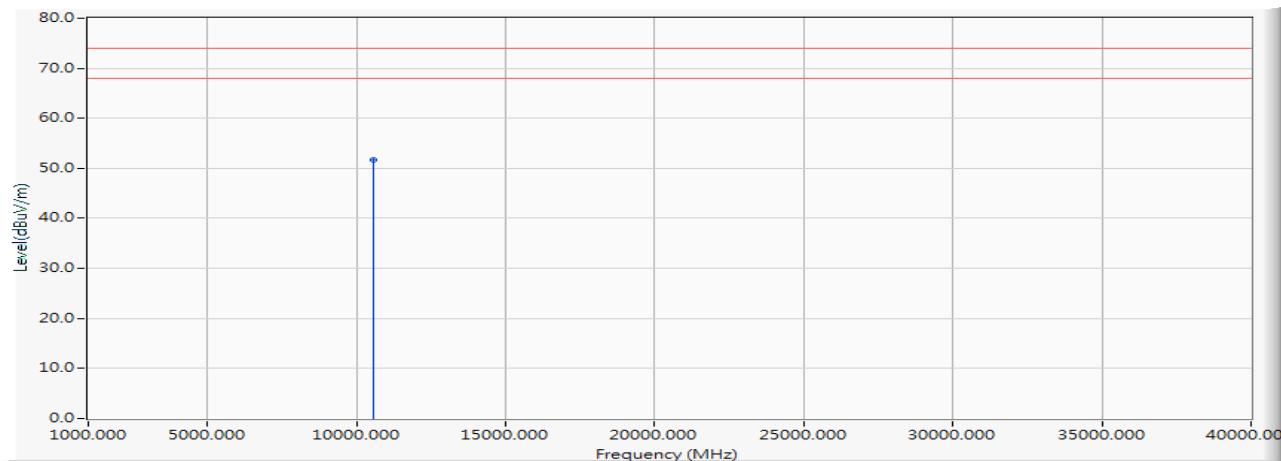


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10560.000	13.115	38.493	51.608	-22.392	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5320MHz)

Horizontal

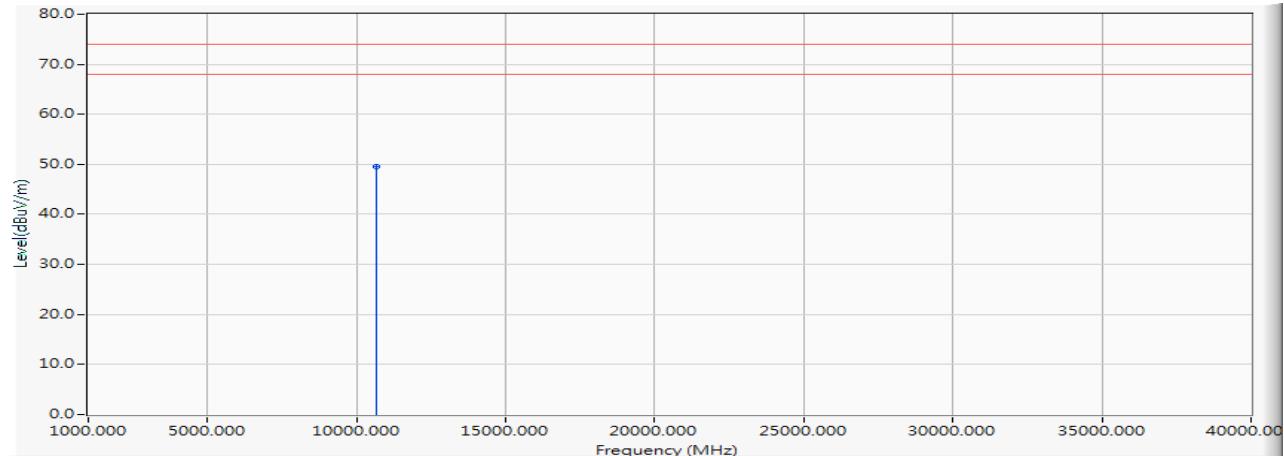


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10640.000	13.129	36.419	49.549	-24.451	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5320MHz)

Vertical

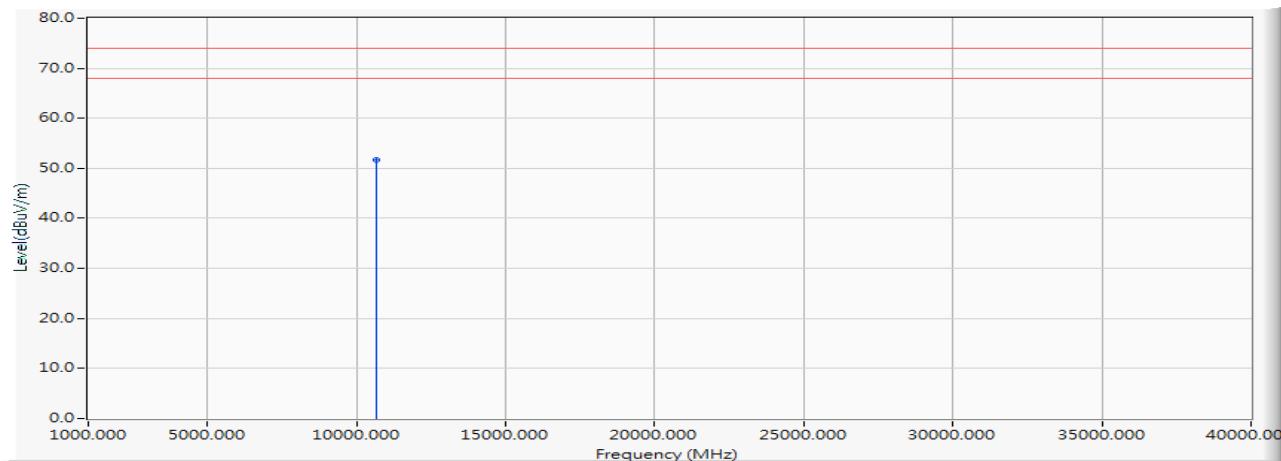


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10640.000	13.129	38.490	51.620	-22.380	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5500MHz)

Horizontal

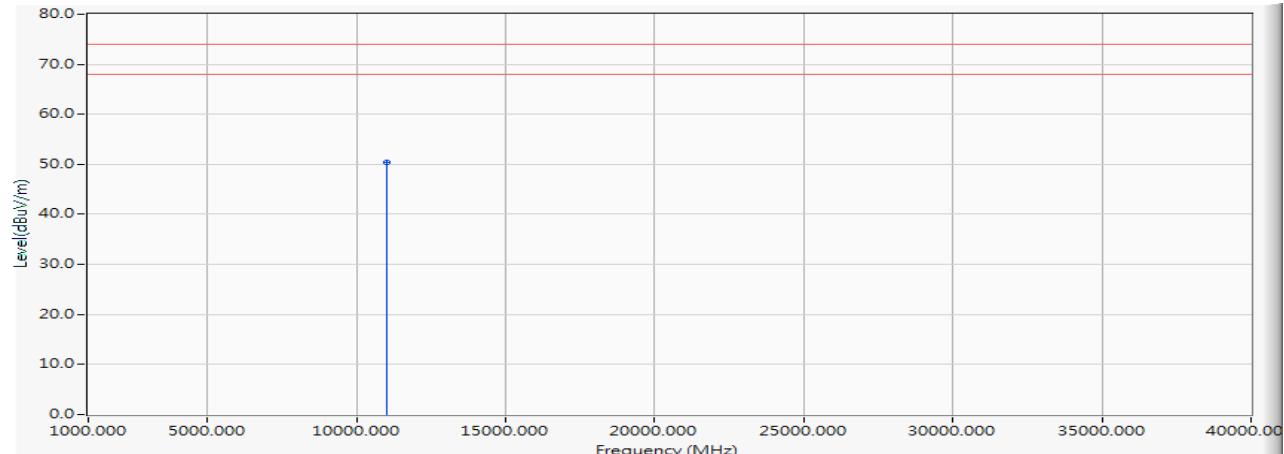


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11000.000	13.649	36.732	50.380	-23.620	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5500MHz)

Vertical

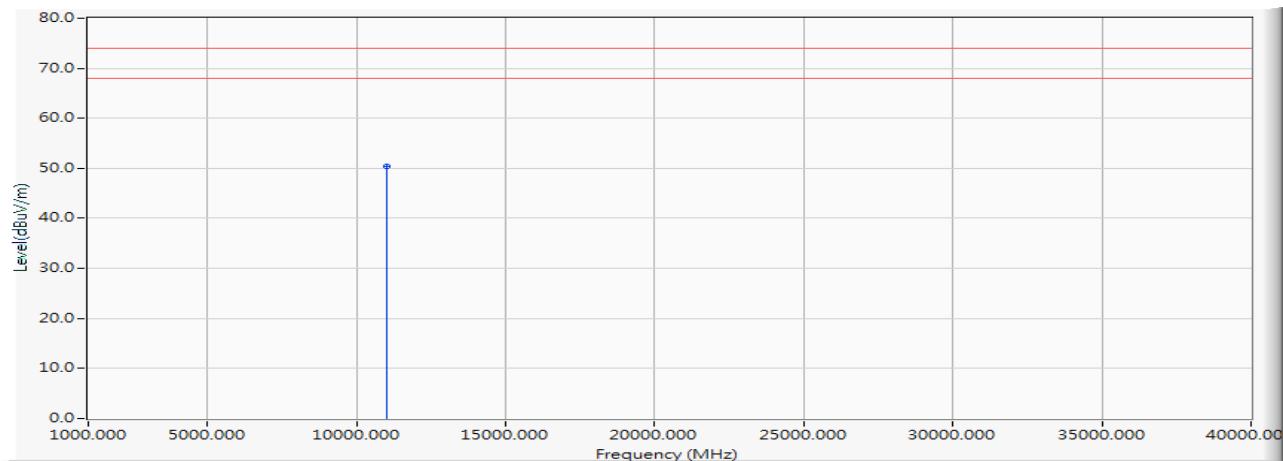


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11000.000	13.649	36.814	50.462	-23.538	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5600MHz)

Horizontal

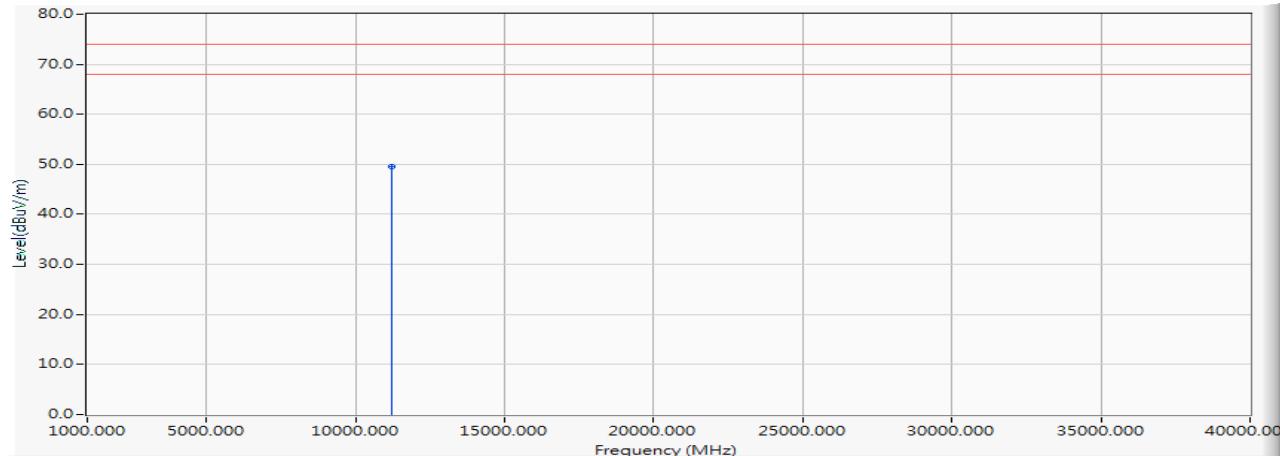


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	14.613	34.846	49.459	-24.541	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5600MHz)

Vertical

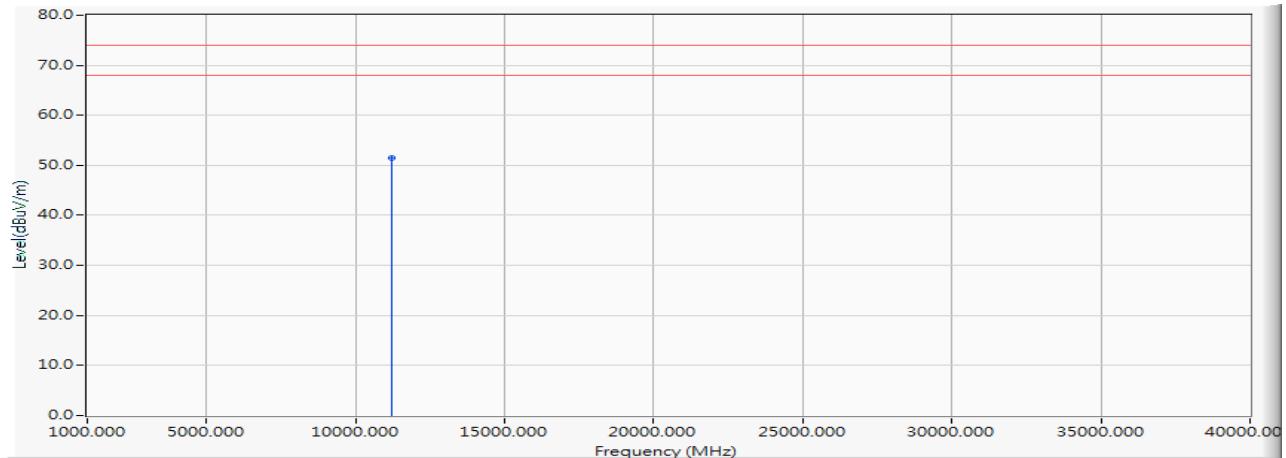


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	14.613	36.915	51.528	-22.472	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5700MHz)

Horizontal

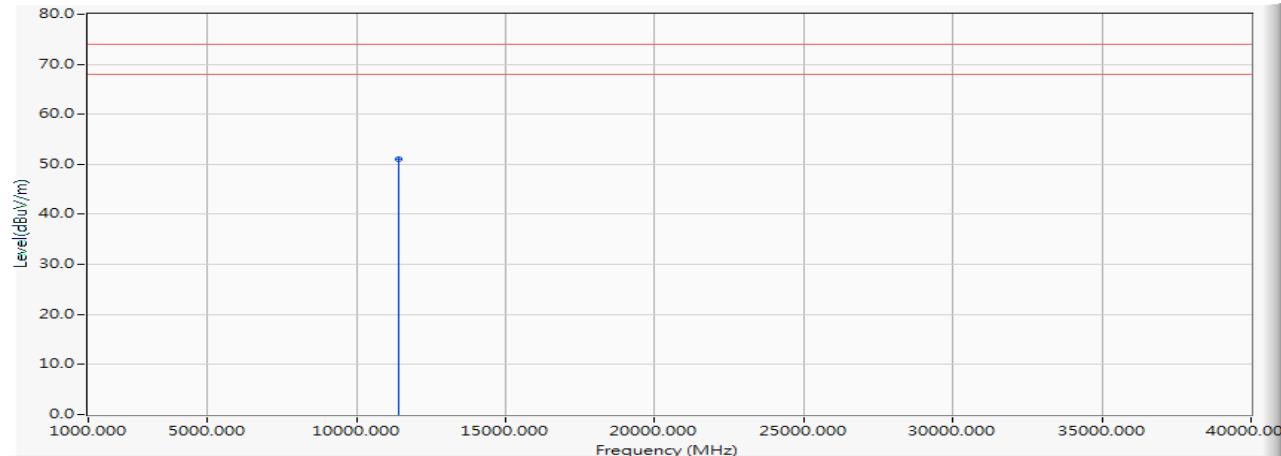


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	35.916	51.004	-22.996	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5700MHz)

Vertical

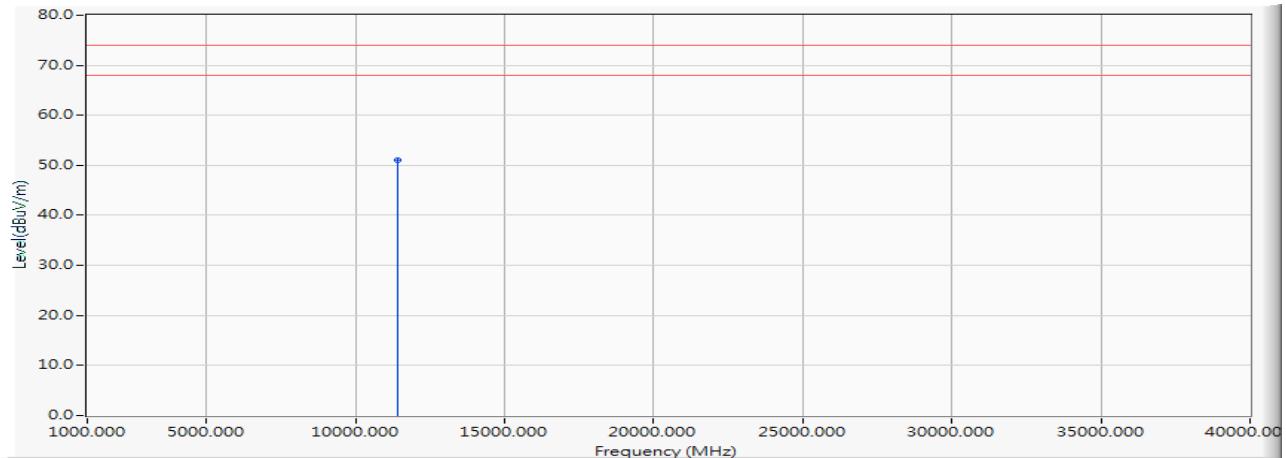


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	35.984	51.072	-22.928	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5745MHz)

Horizontal

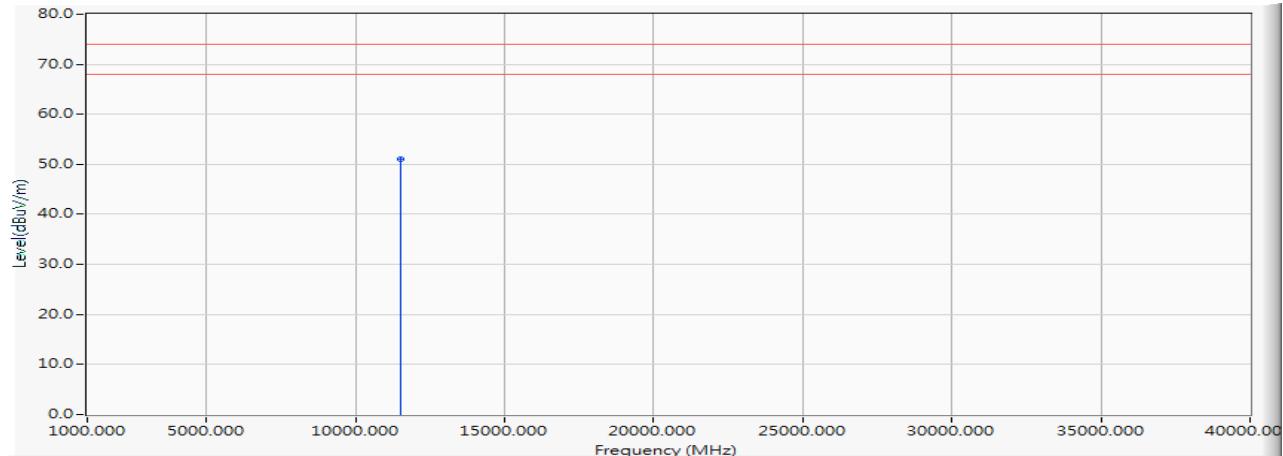


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	35.812	51.054	-22.946	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5745MHz)

Vertical

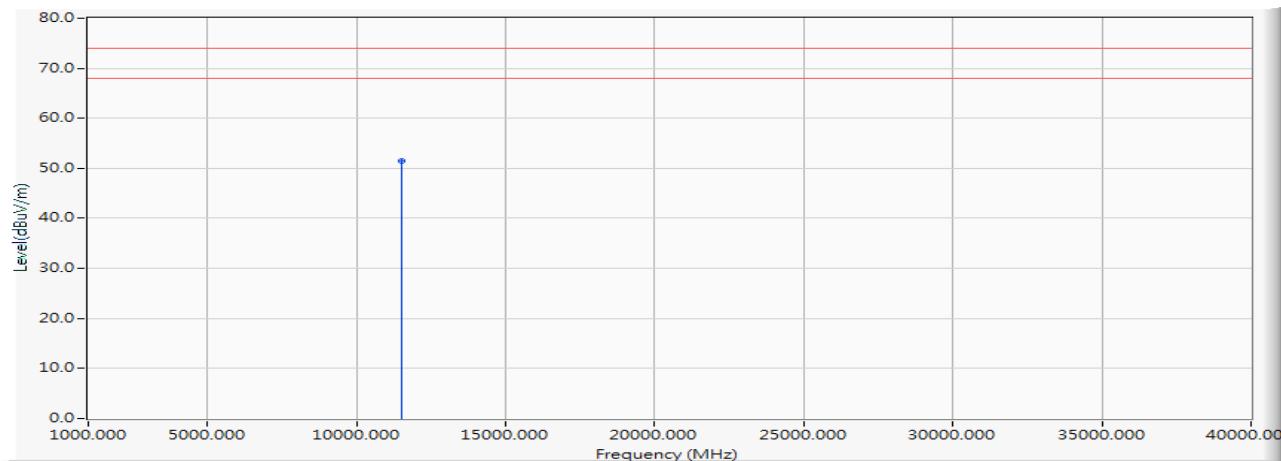


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	36.145	51.387	-22.613	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5785MHz)

Horizontal

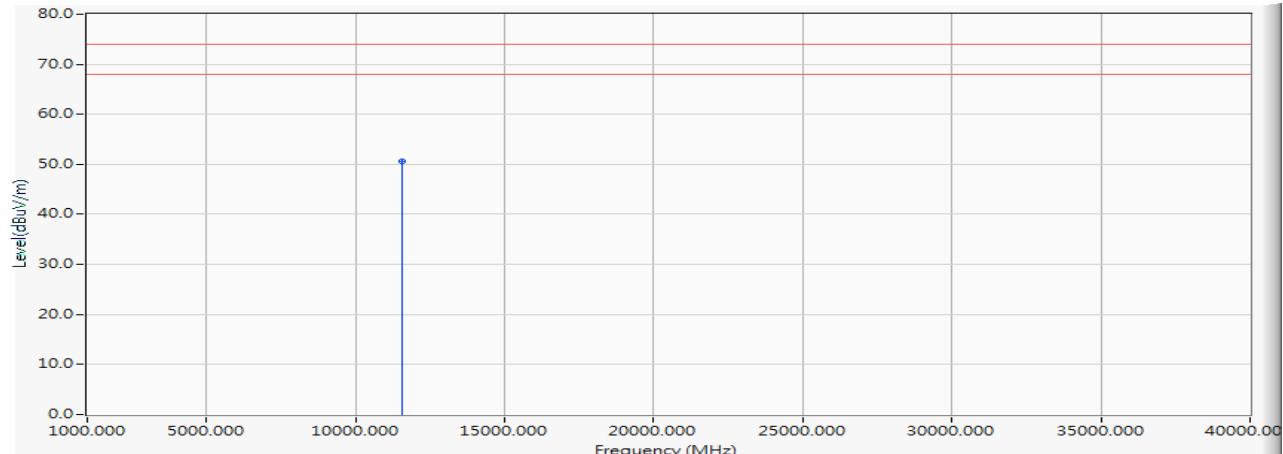


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	35.815	50.555	-23.445	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5785MHz)

Vertical

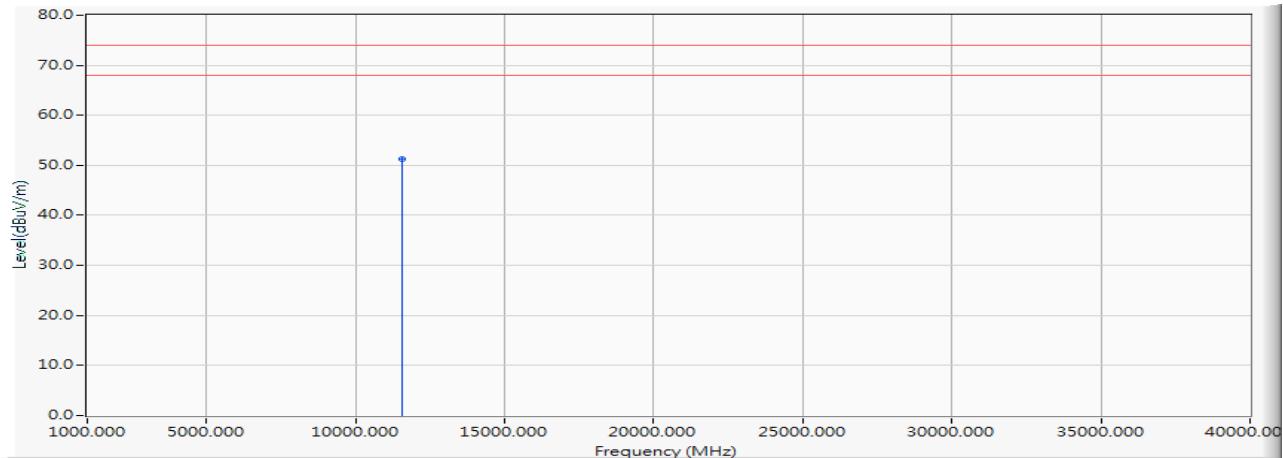


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	36.491	51.231	-22.769	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5825MHz)

Horizontal

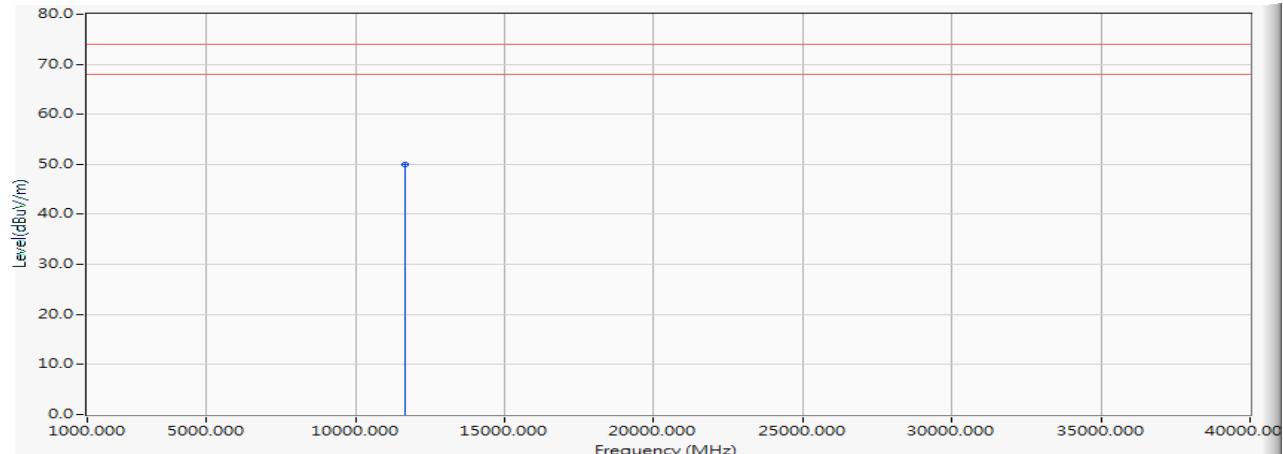


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	35.813	49.909	-24.091	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11a_6Mbps)(5825MHz)

Vertical

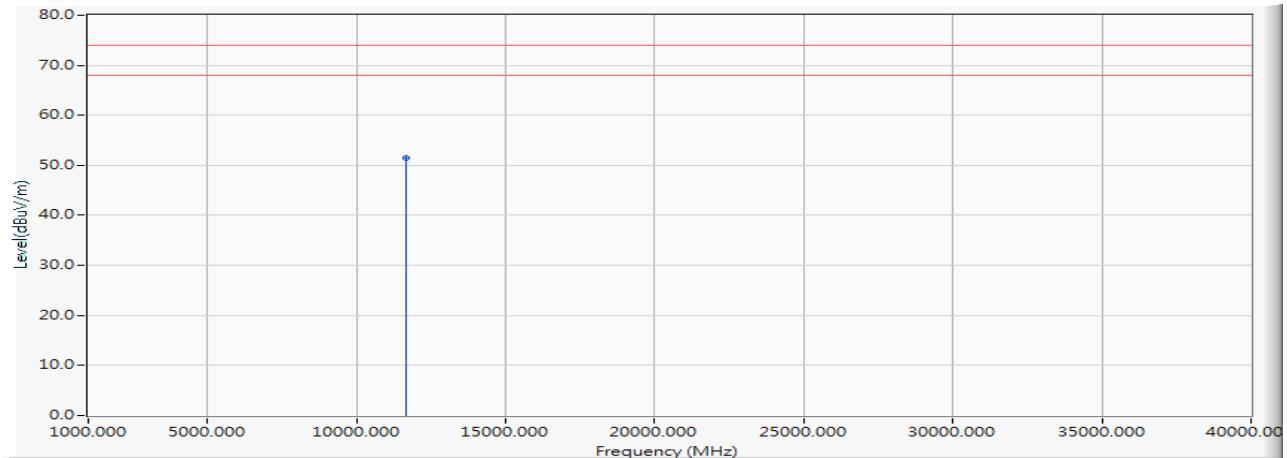


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	37.432	51.528	-22.472	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Horizontal

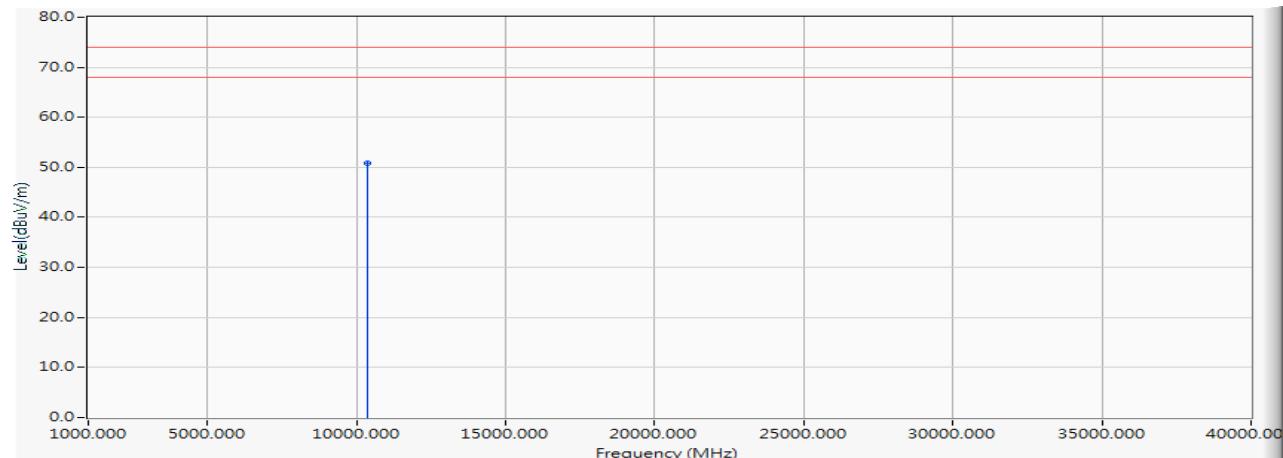


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	37.512	50.905	-23.095	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Vertical

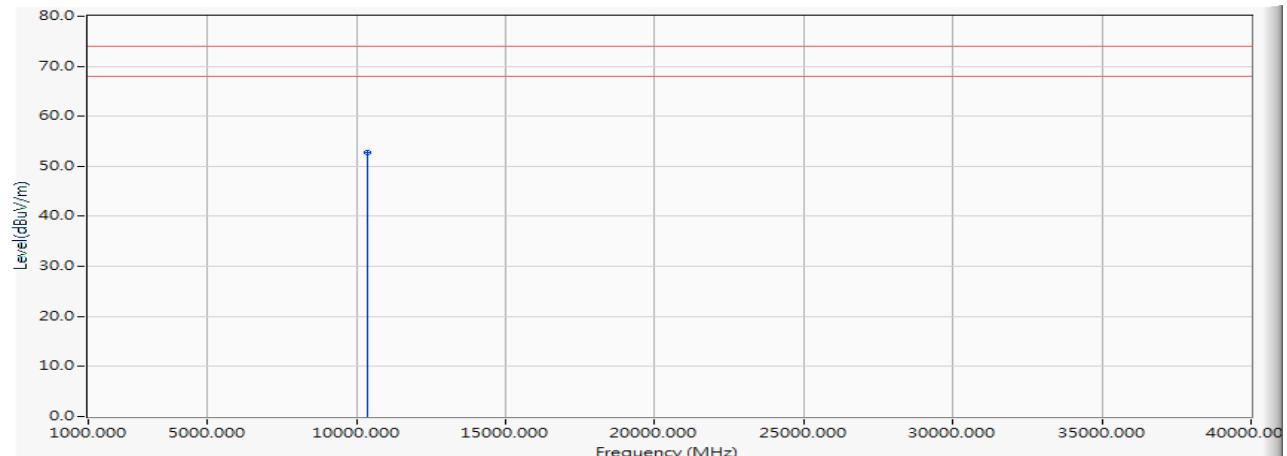


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	39.418	52.811	-21.189	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5200MHz)

Horizontal

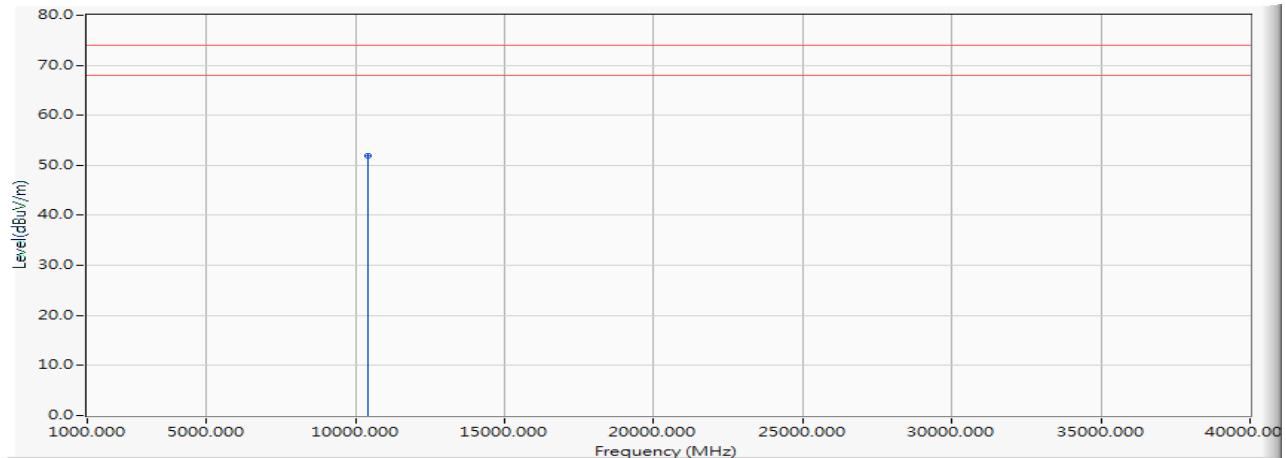


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10400.000	13.313	38.496	51.809	-22.191	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5200MHz)

Vertical

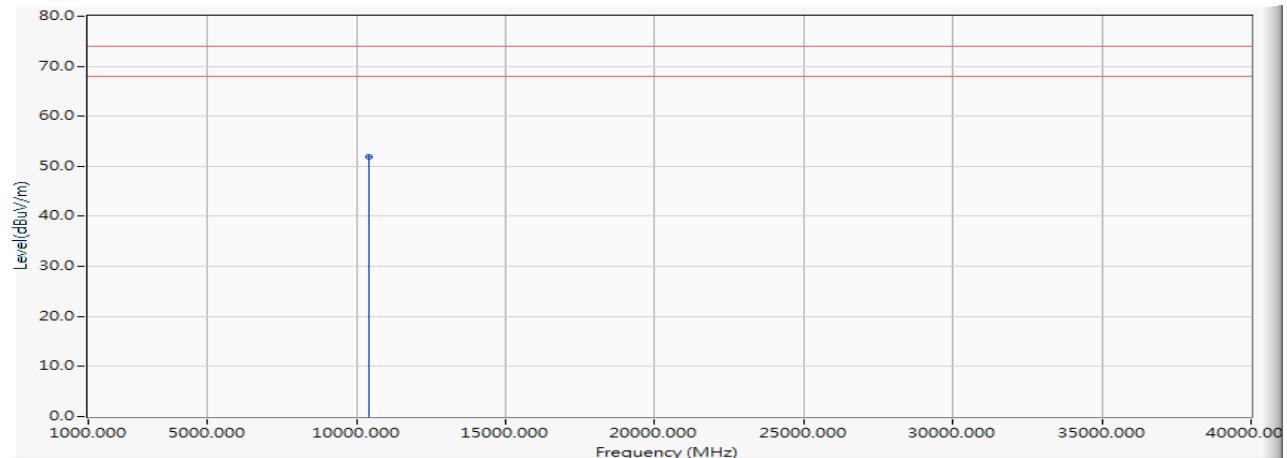


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10400.000	13.313	38.491	51.804	-22.196	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Horizontal

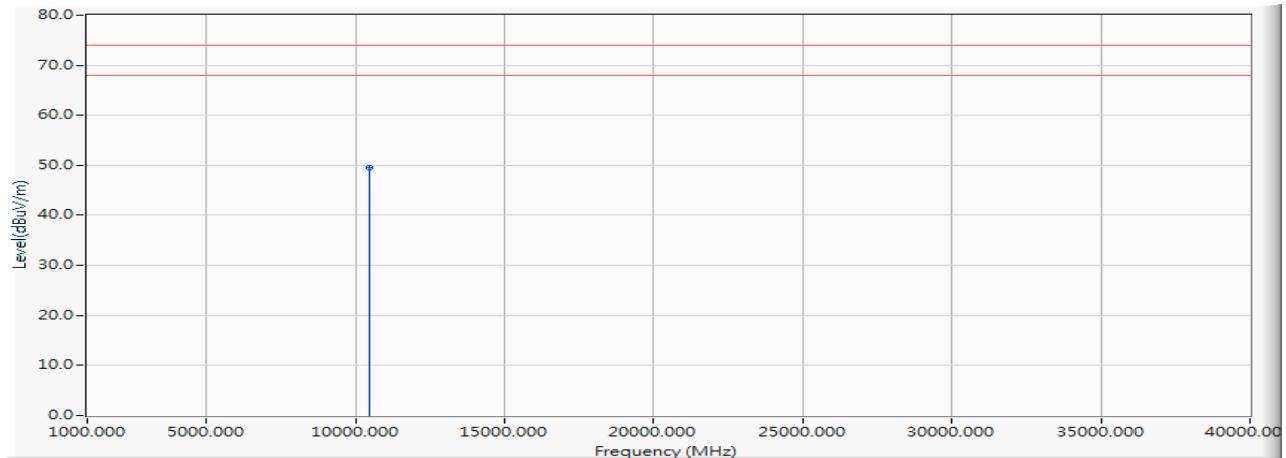


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10480.000	13.152	36.491	49.642	-24.358	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Vertical

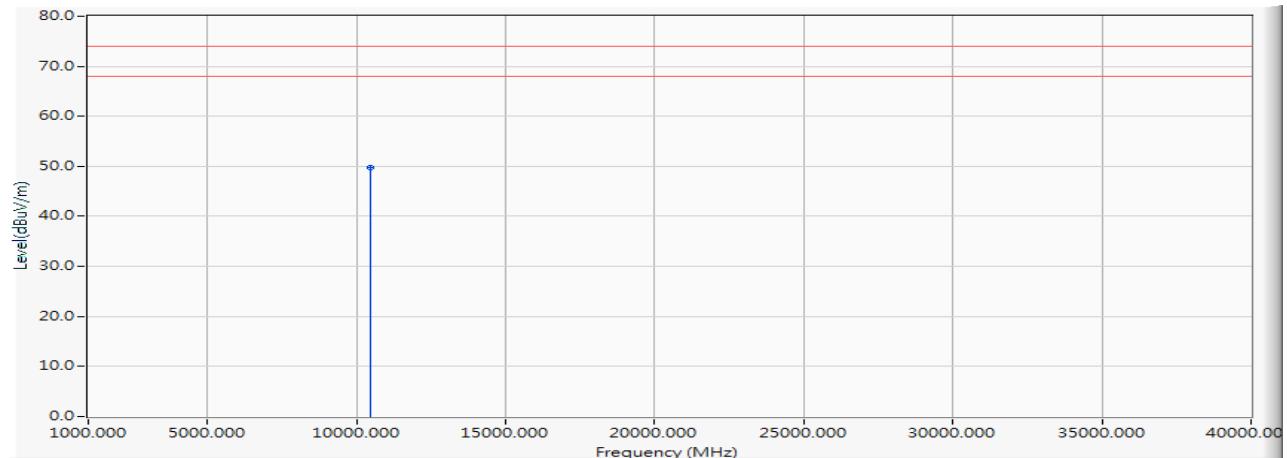


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10480.000	13.152	36.586	49.737	-24.263	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Horizontal

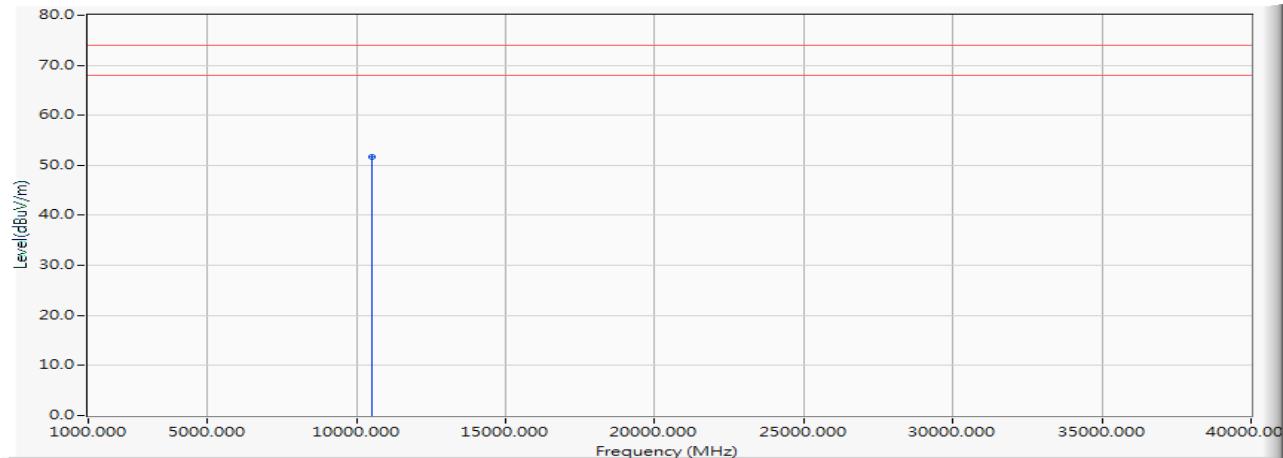


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10520.000	13.107	38.649	51.756	-22.244	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Vertical

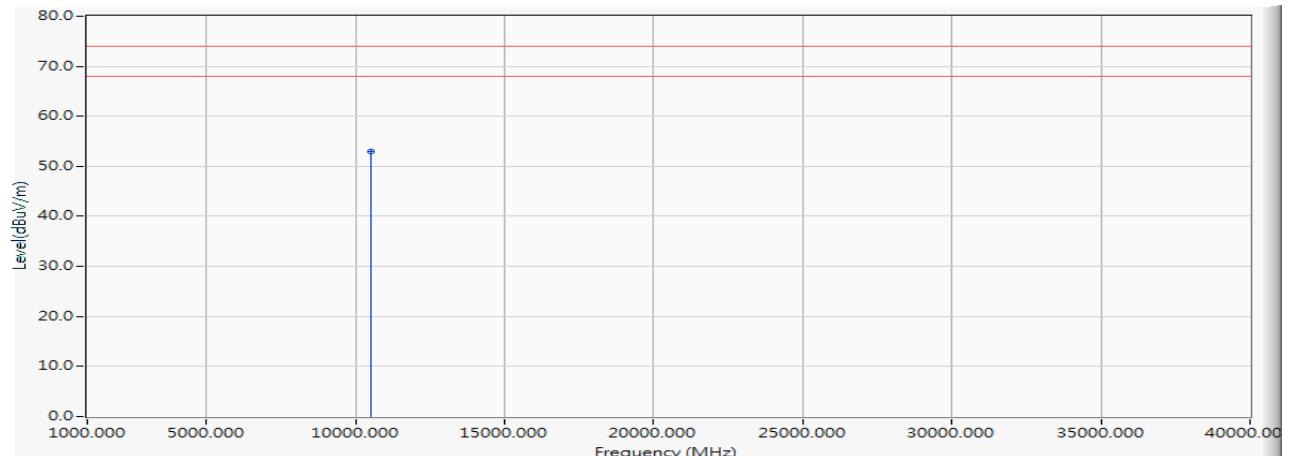


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10520.000	13.107	39.846	52.953	-21.047	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5280MHz)

Horizontal

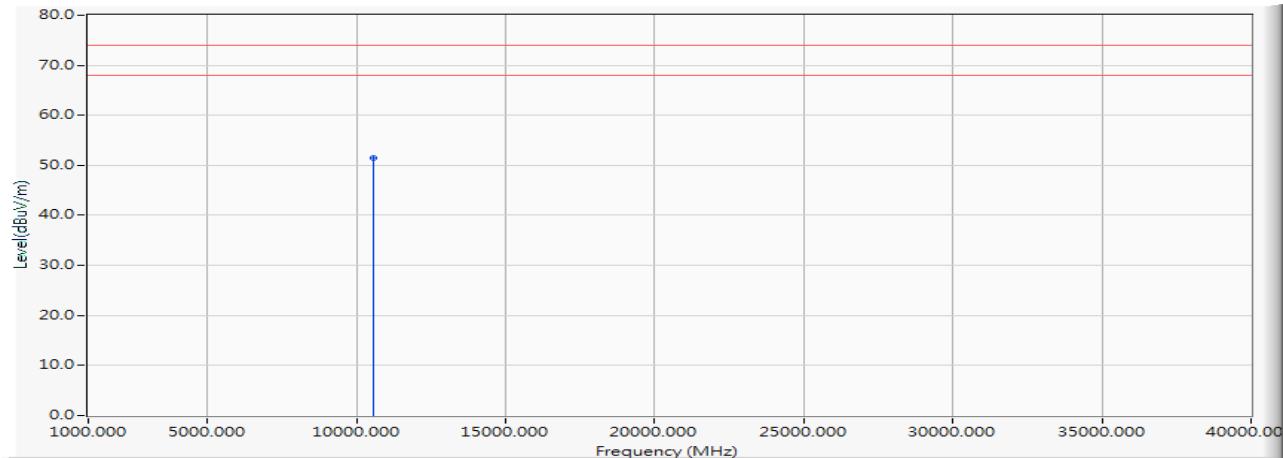


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10560.000	13.115	38.416	51.531	-22.469	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5280MHz)

Vertical

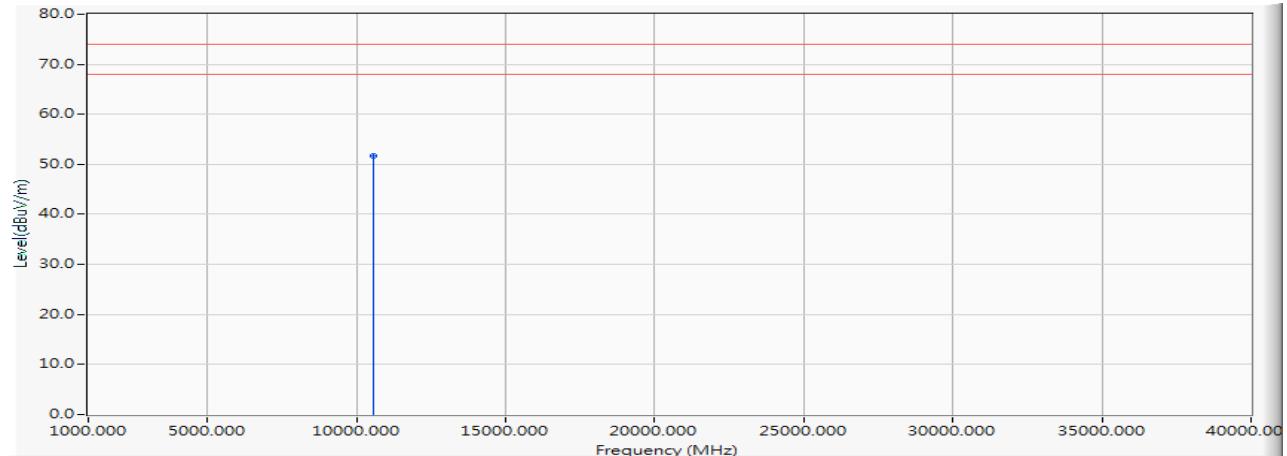


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10560.000	13.115	38.493	51.608	-22.392	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5320MHz)

Horizontal

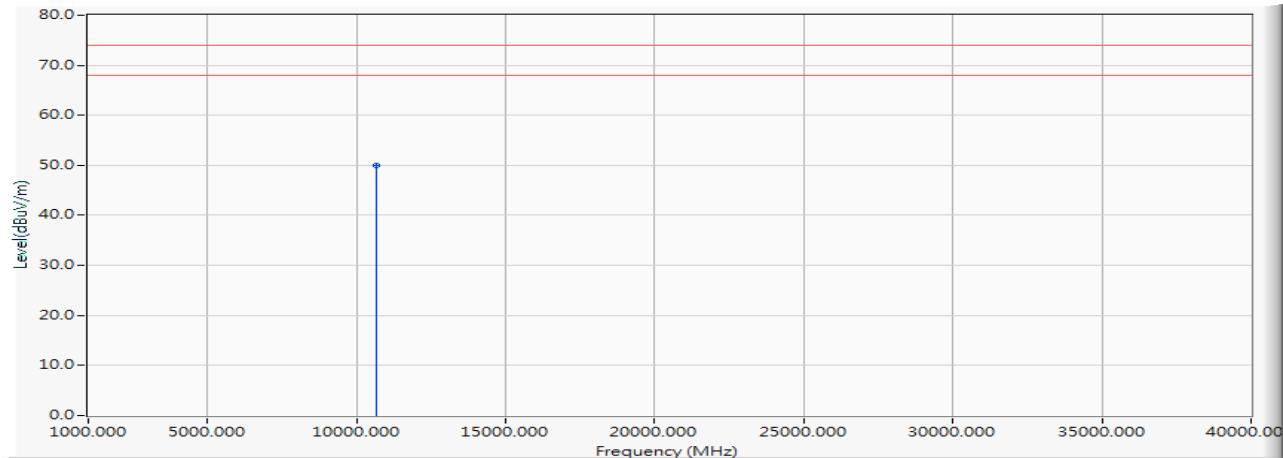


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10640.000	13.129	36.916	50.046	-23.954	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5320MHz)

Vertical

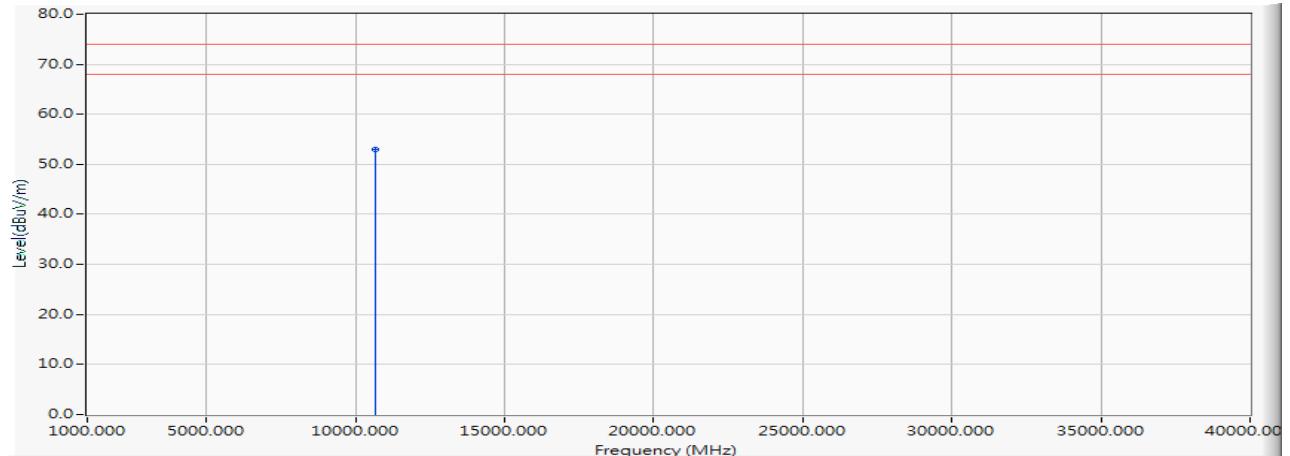


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10640.000	13.129	39.815	52.945	-21.055	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5500MHz)

Horizontal

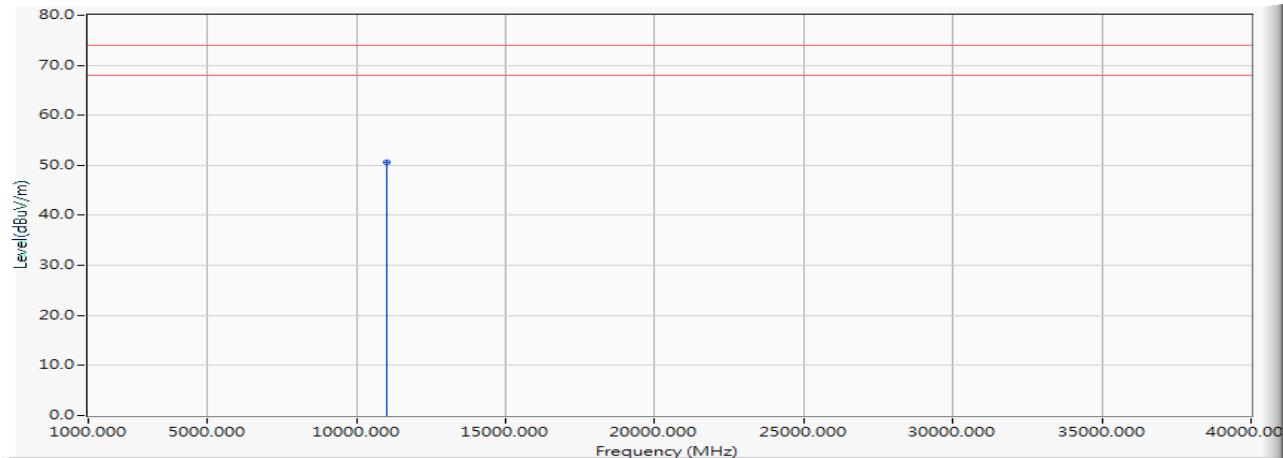


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11000.000	13.649	36.915	50.563	-23.437	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5500MHz)

Vertical

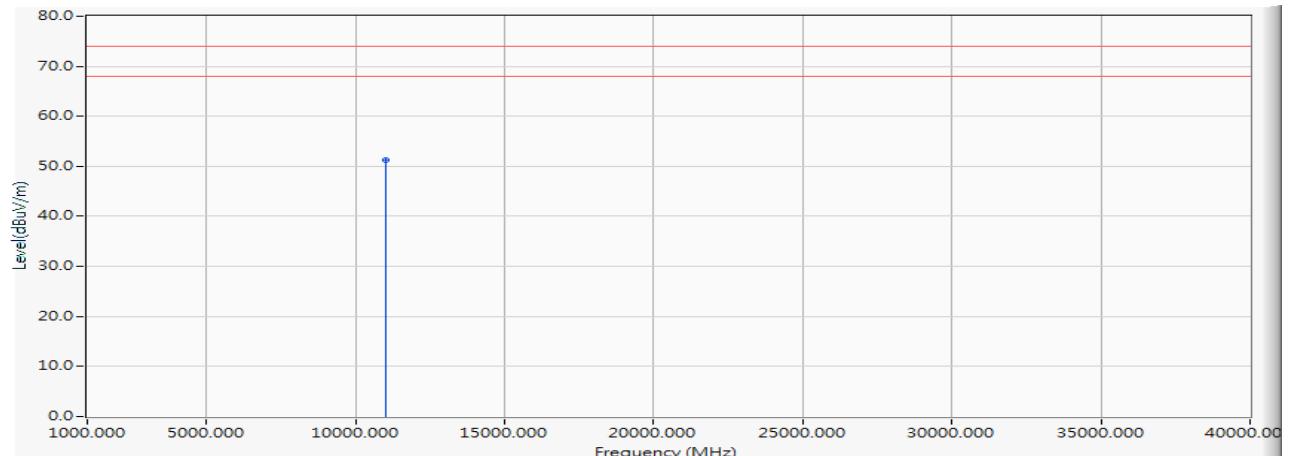


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11000.000	13.649	37.541	51.189	-22.811	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5600MHz)

Horizontal

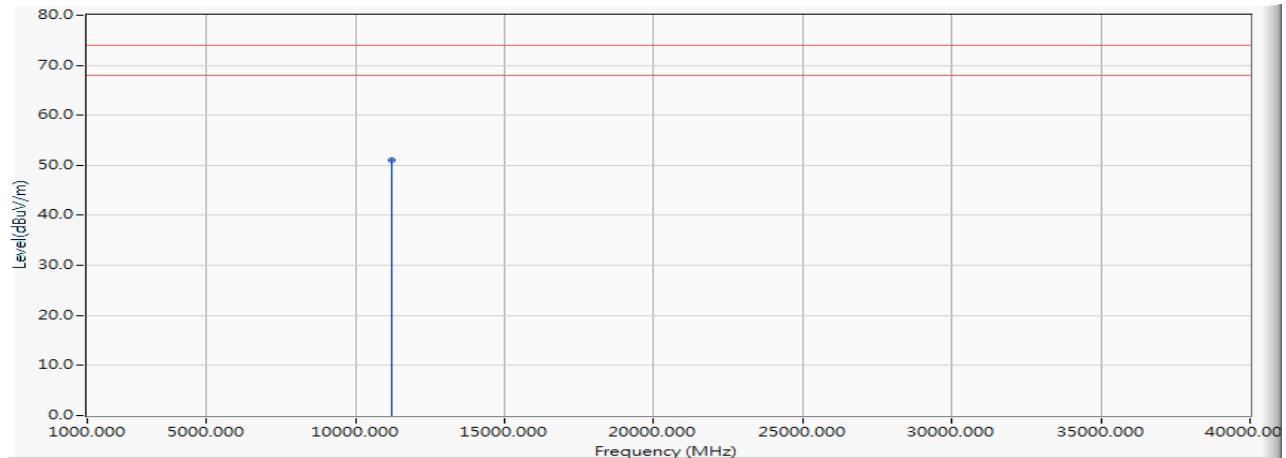


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	14.613	36.491	51.104	-22.896	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5600MHz)

Vertical

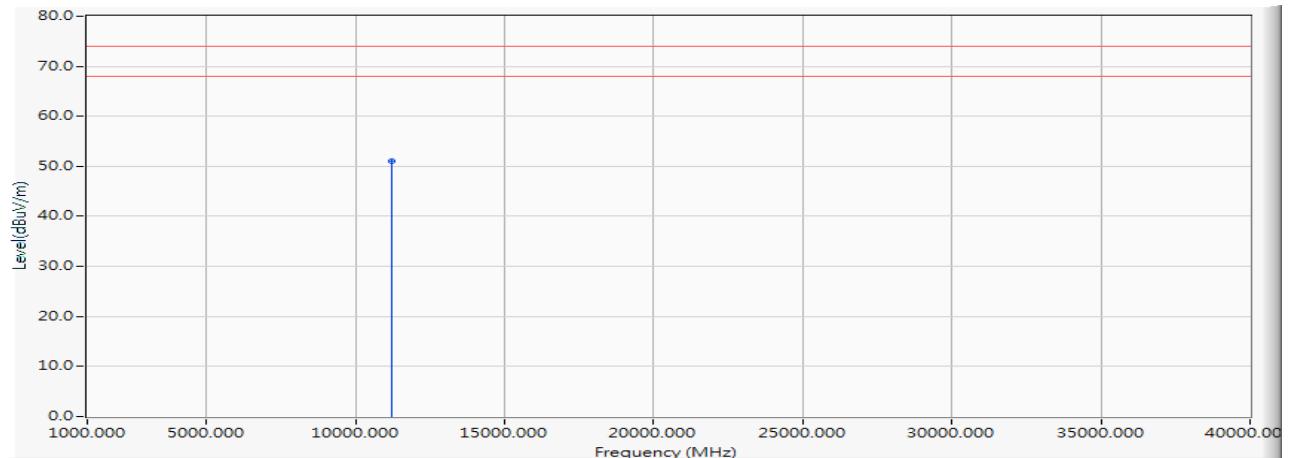


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	14.613	36.419	51.032	-22.968	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5700MHz)

Horizontal

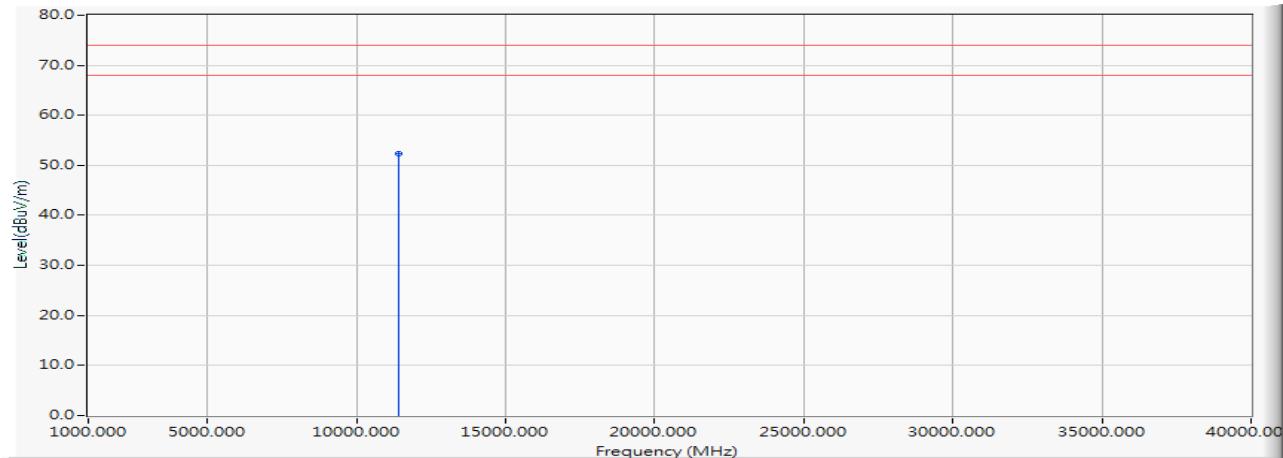


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	37.149	52.237	-21.763	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5700MHz)

Vertical

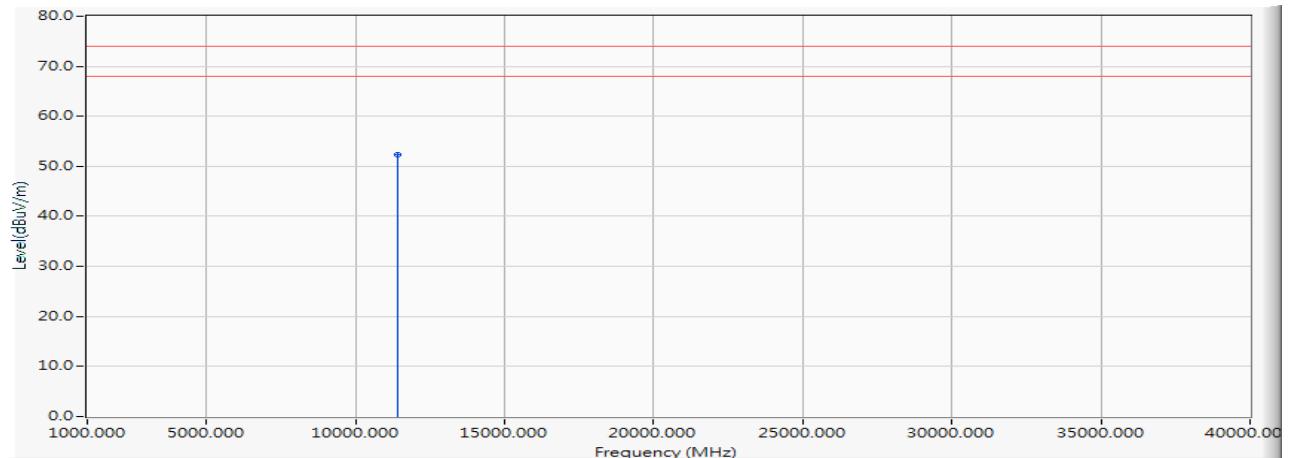


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	37.149	52.237	-21.763	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5720MHz)

Horizontal

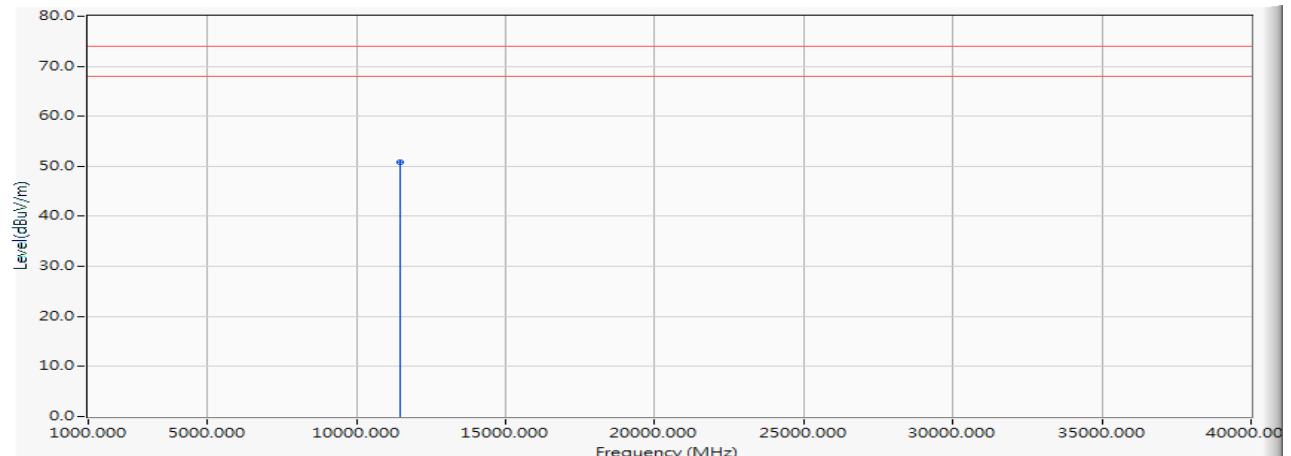


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11440.000	15.161	35.598	50.759	-23.241	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5720MHz)

Vertical

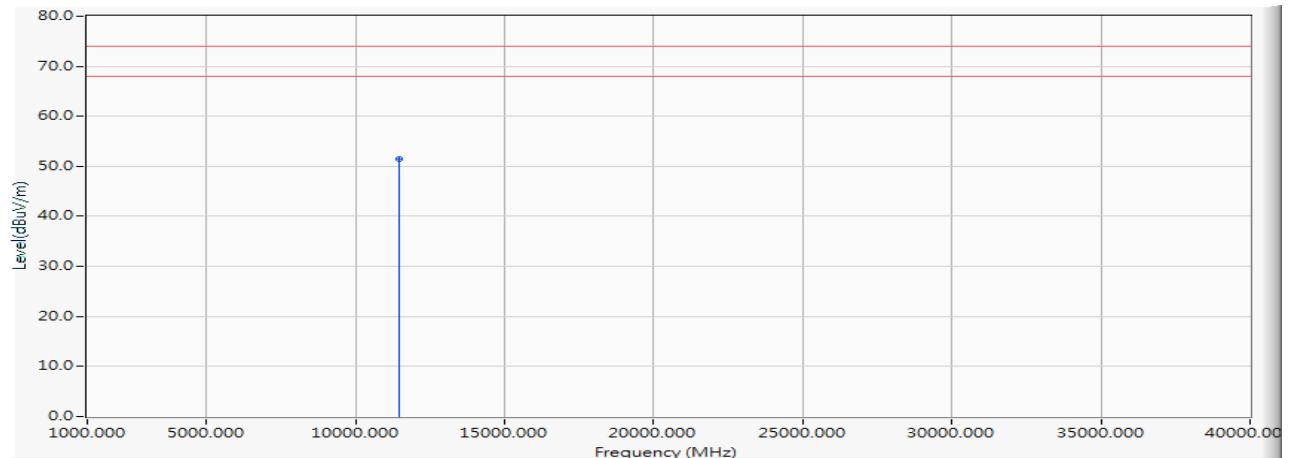


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11440.000	15.161	36.419	51.580	-22.420	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5745MHz)

Horizontal

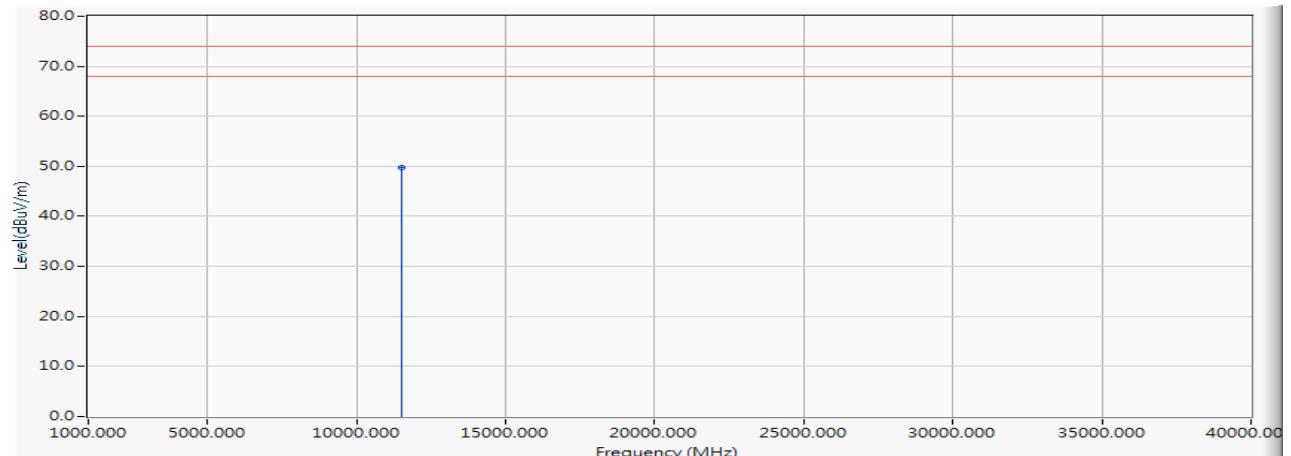


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	34.564	49.806	-24.194	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5745MHz)

Vertical

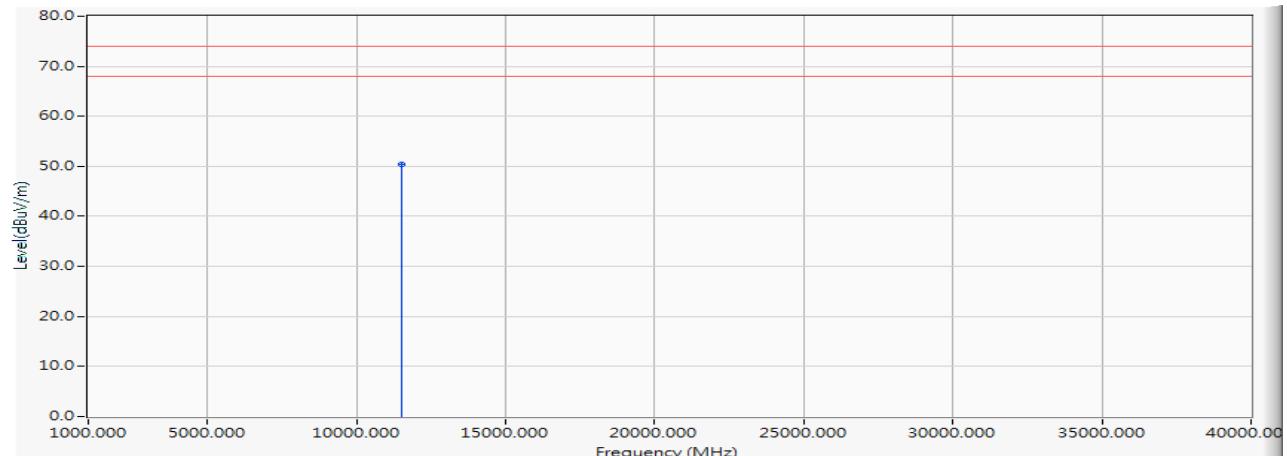


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	35.198	50.440	-23.560	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Horizontal

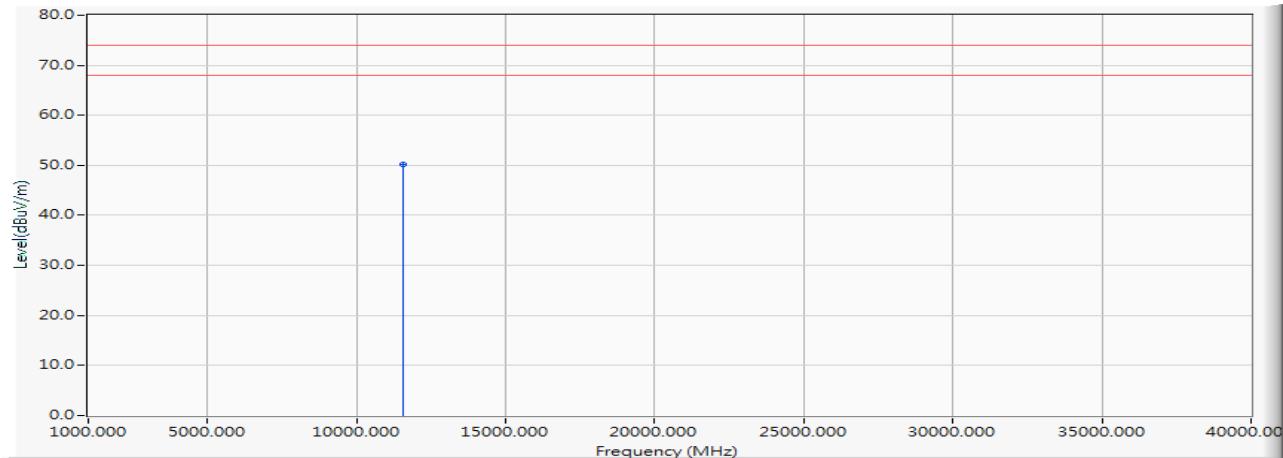


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	35.497	50.237	-23.763	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Vertical

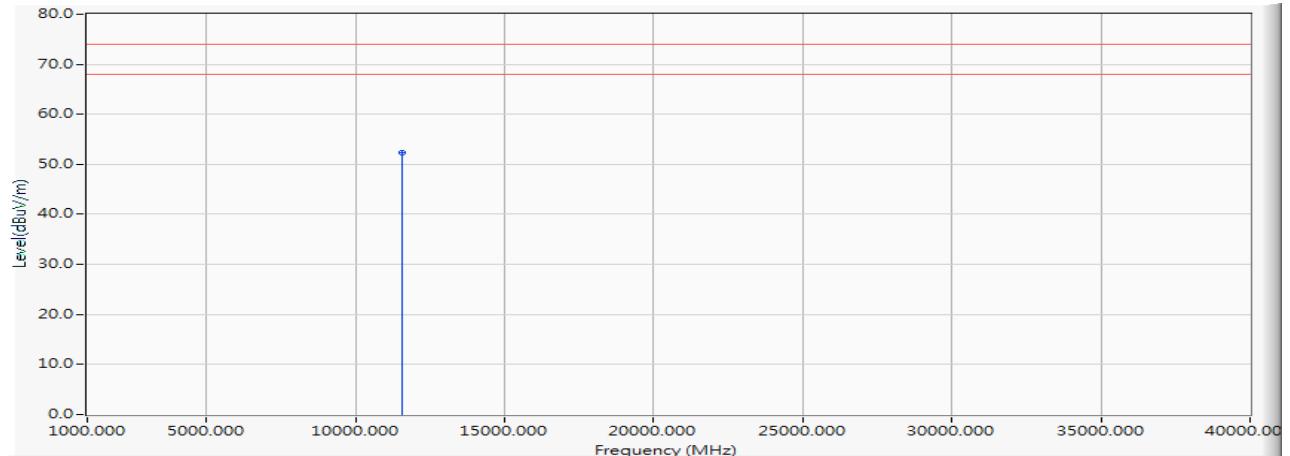


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	37.493	52.233	-21.767	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5825MHz)

Horizontal

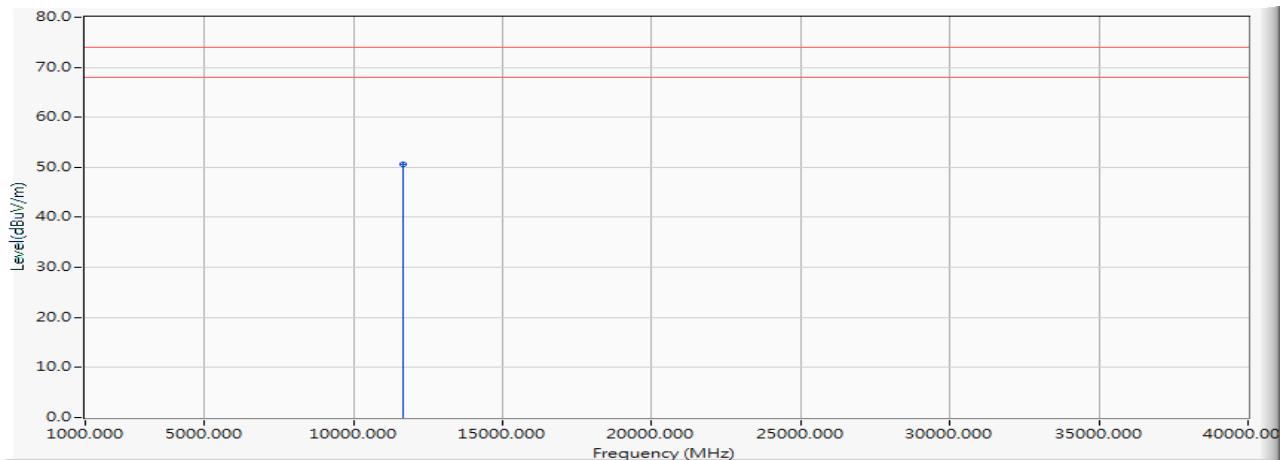


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	36.495	50.591	-23.409	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5825MHz)

Vertical

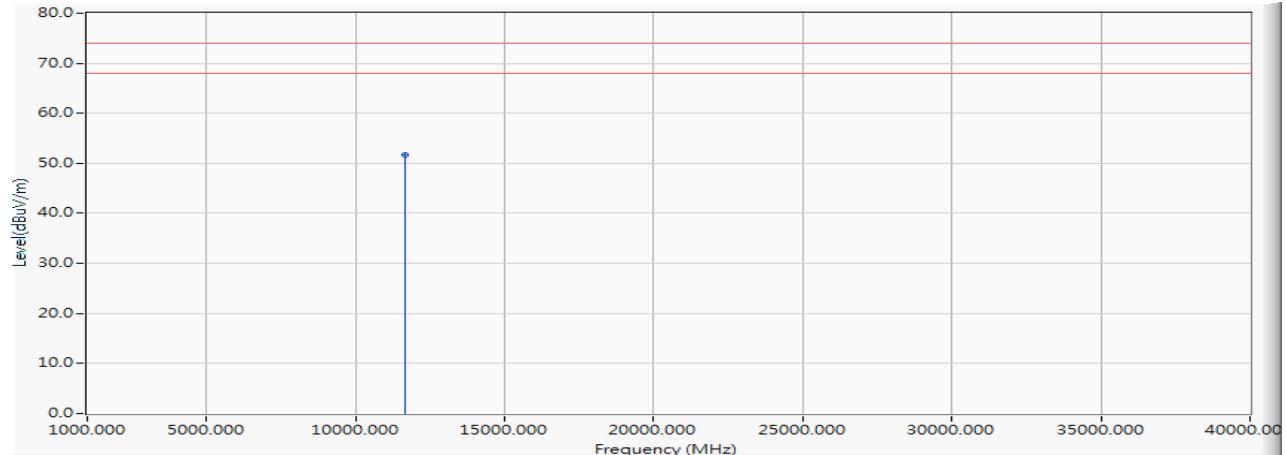


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	37.496	51.592	-22.408	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5190MHz)

Horizontal

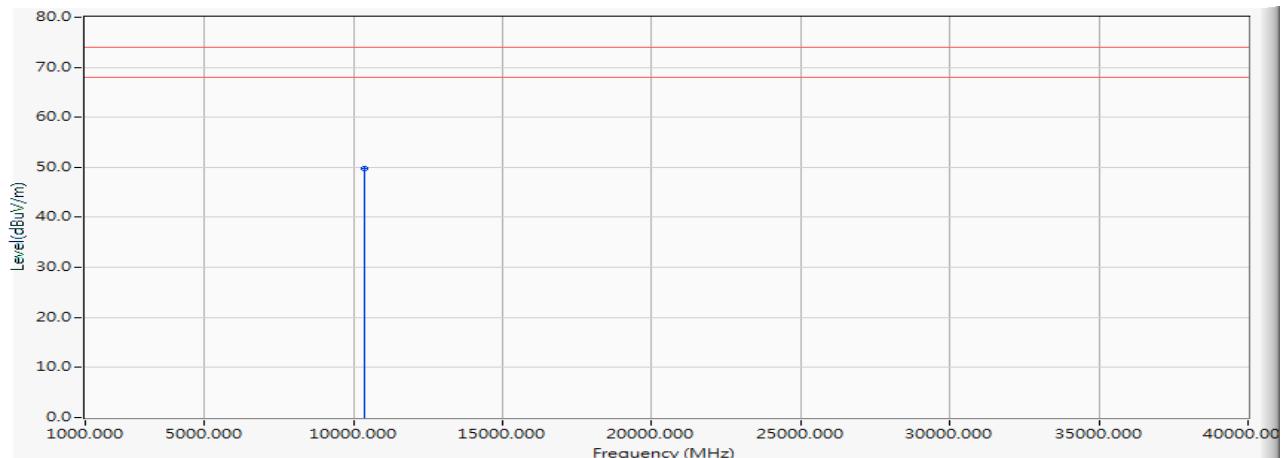


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10380.000	13.352	36.491	49.843	-24.157	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5190MHz)

Vertical

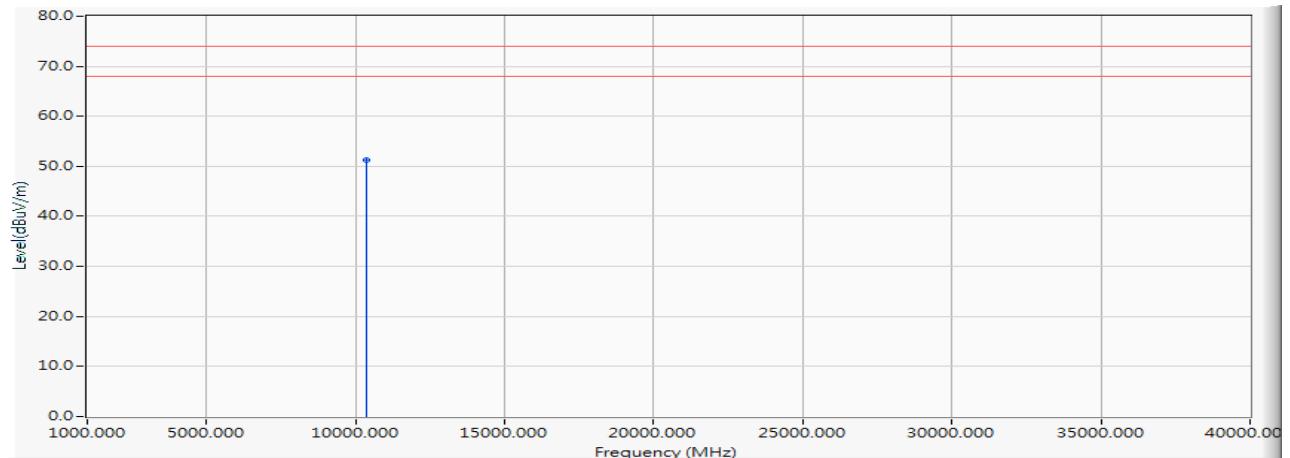


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10380.000	13.352	37.861	51.213	-22.787	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Horizontal

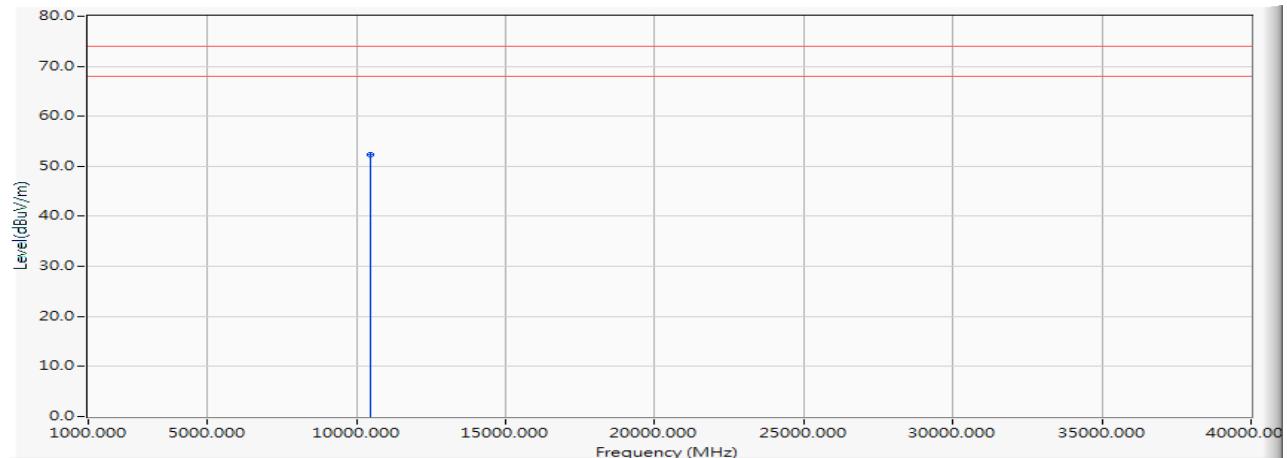


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10460.000	13.192	39.157	52.349	-21.651	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Vertical

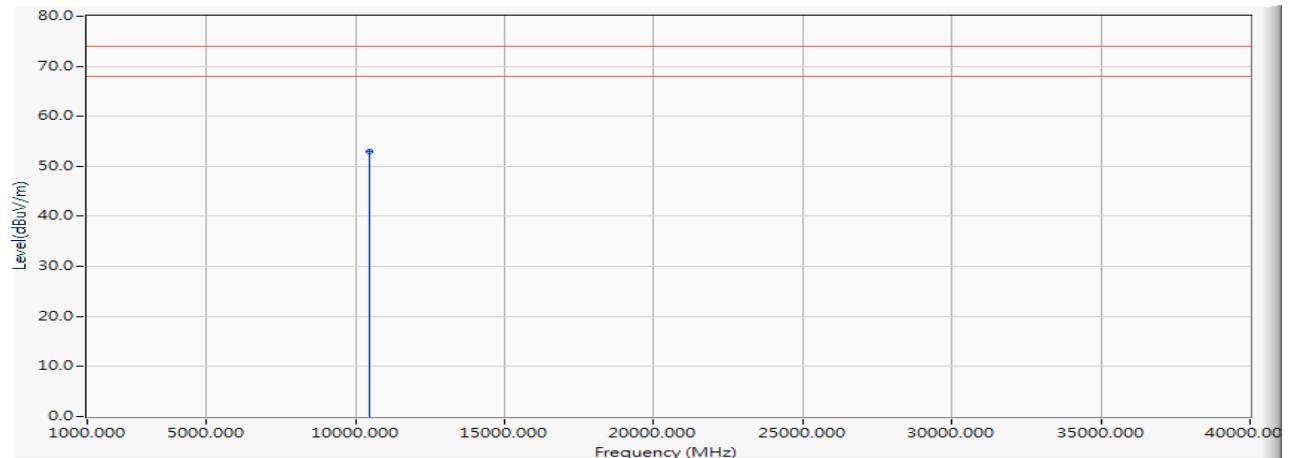


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10460.000	13.192	39.872	53.064	-20.936	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5270MHz)

Horizontal

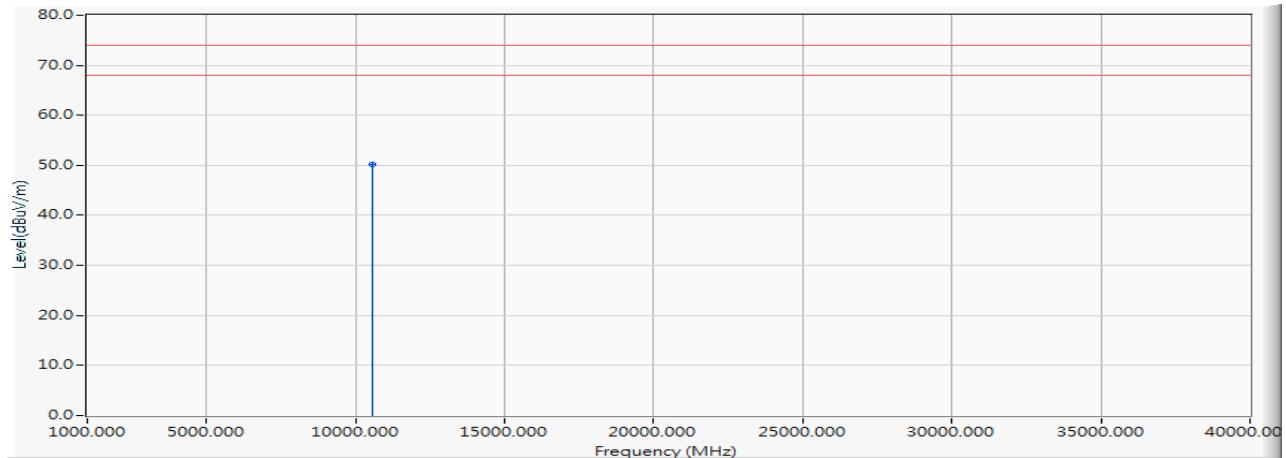


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10540.000	13.111	37.021	50.133	-23.867	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5270MHz)

Vertical

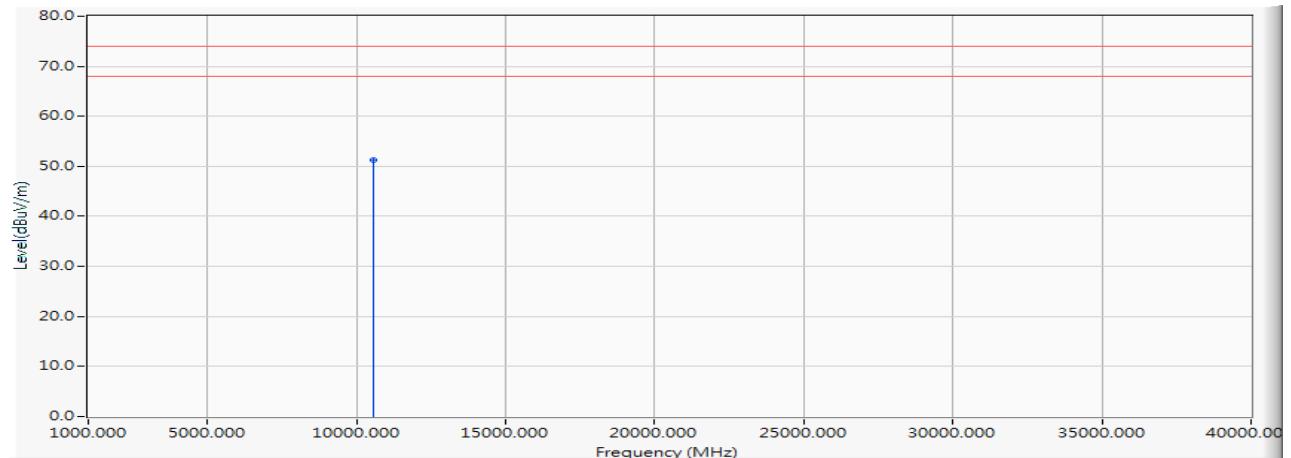


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10540.000	13.111	38.153	51.265	-22.735	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Horizontal

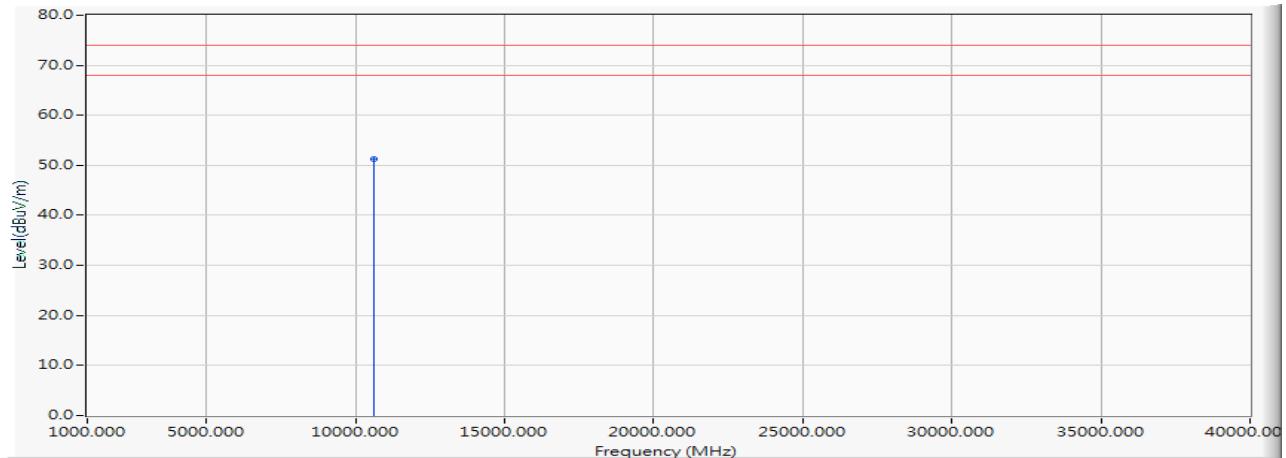


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10620.000	13.126	38.137	51.264	-22.736	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Vertical

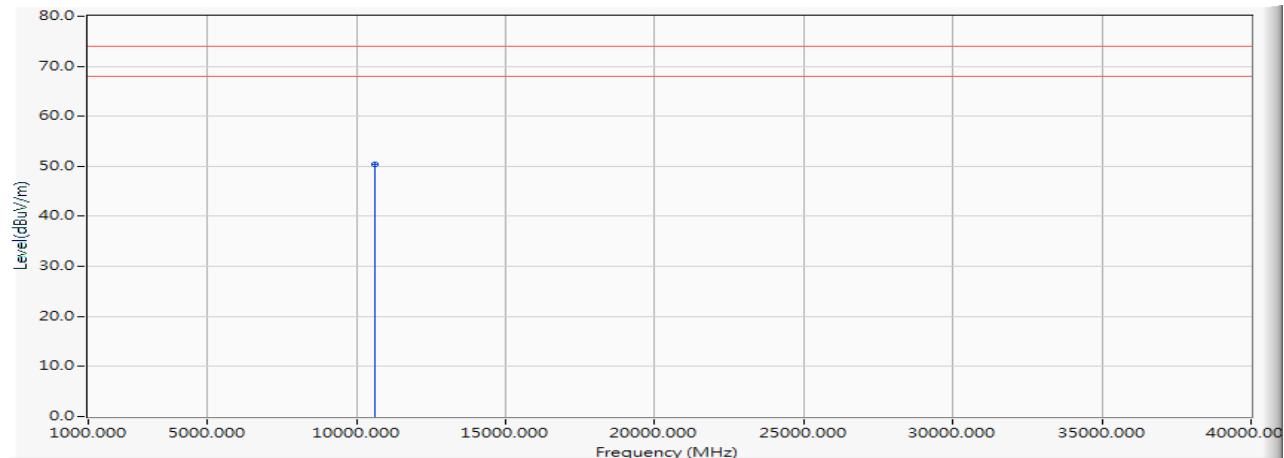


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10620.000	13.126	37.198	50.325	-23.675	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5510MHz)

Horizontal

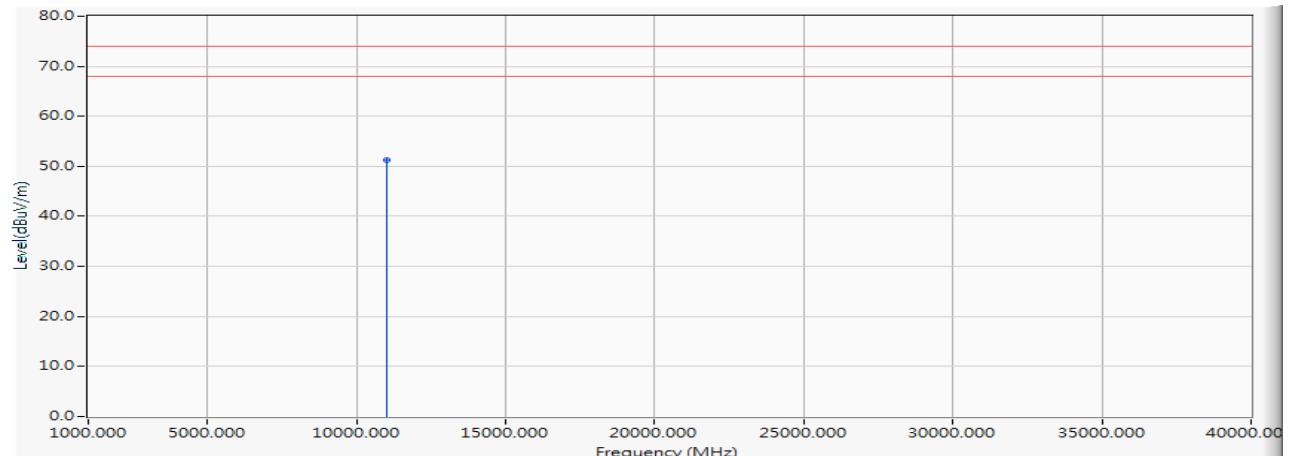


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11020.000	13.756	37.472	51.227	-22.773	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5510MHz)

Vertical

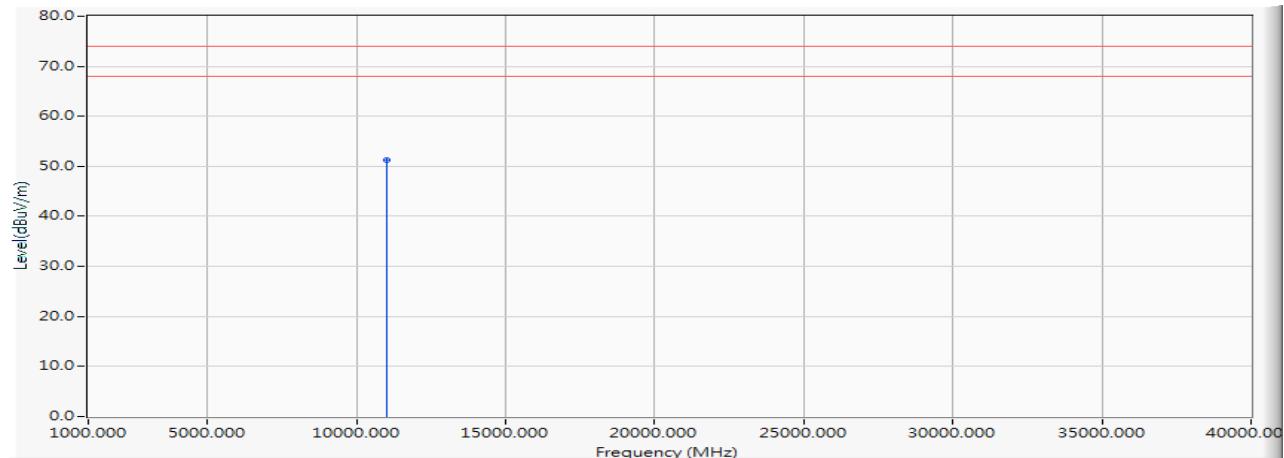


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11020.000	13.756	37.484	51.239	-22.761	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5590MHz)

Horizontal

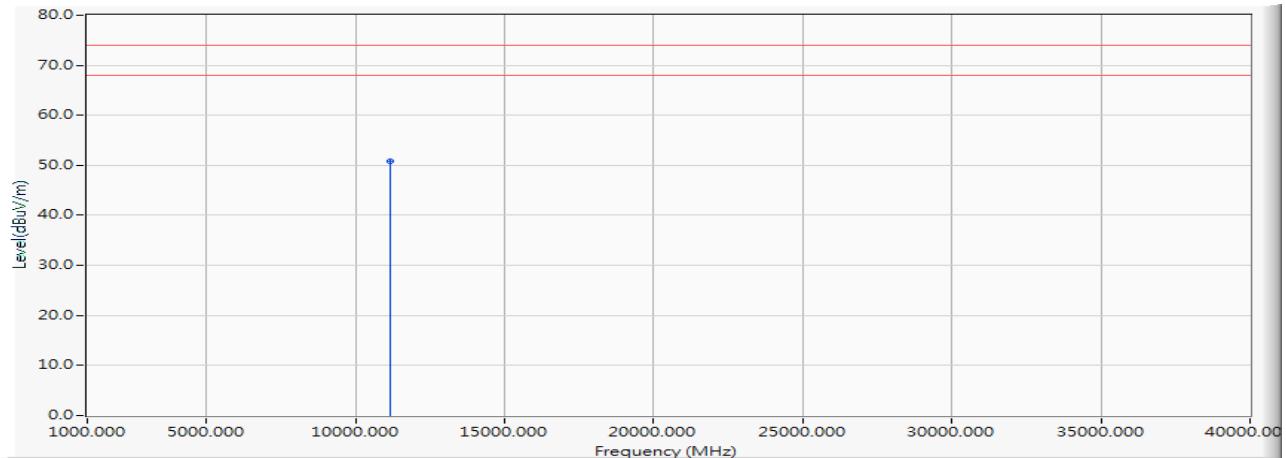


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11180.000	14.522	36.294	50.816	-23.184	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5590MHz)

Vertical

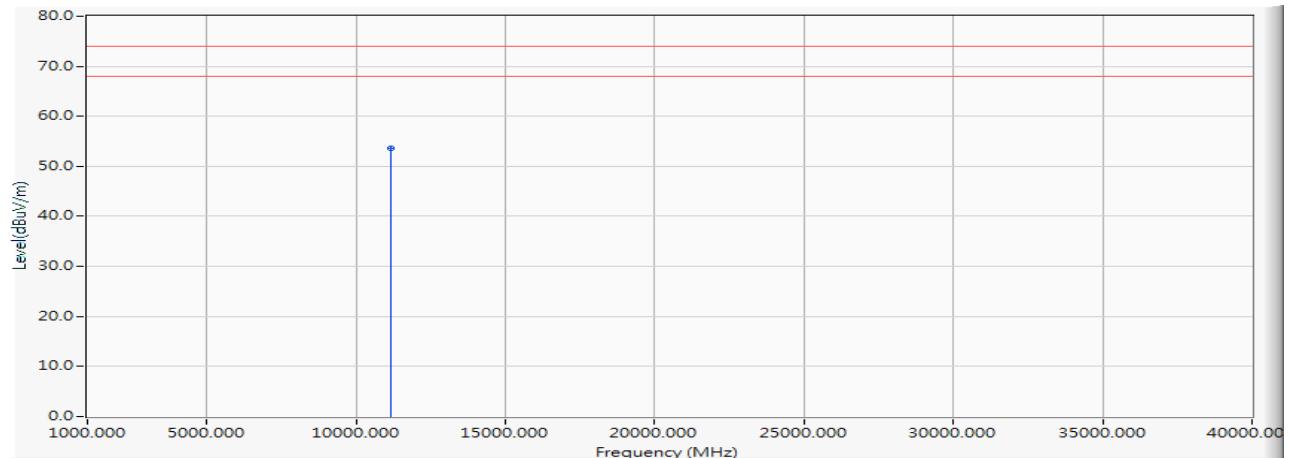


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11180.000	14.522	39.098	53.620	-20.380	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5670MHz)

Horizontal

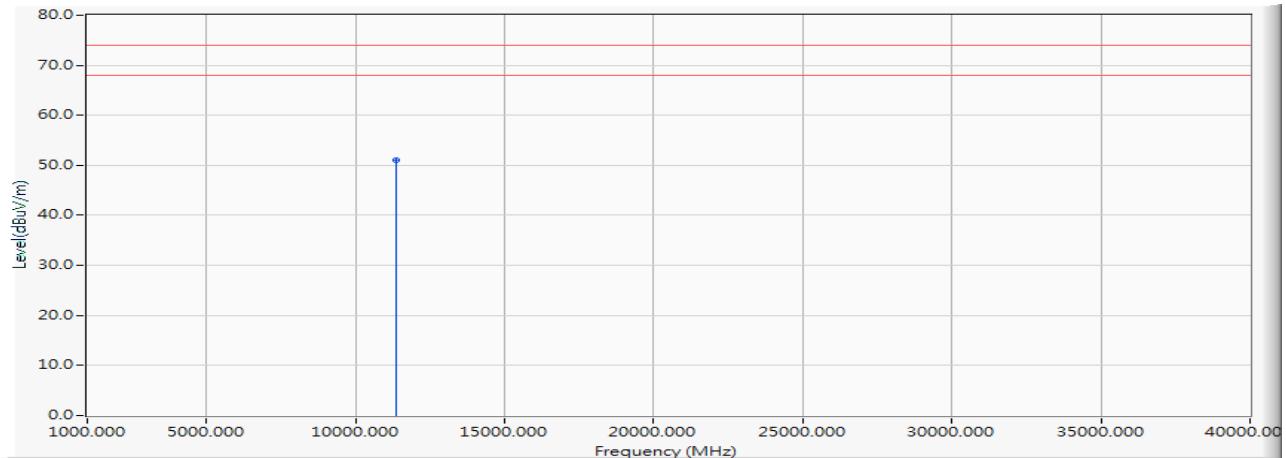


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11340.000	14.967	36.132	51.099	-22.901	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5670MHz)

Vertical

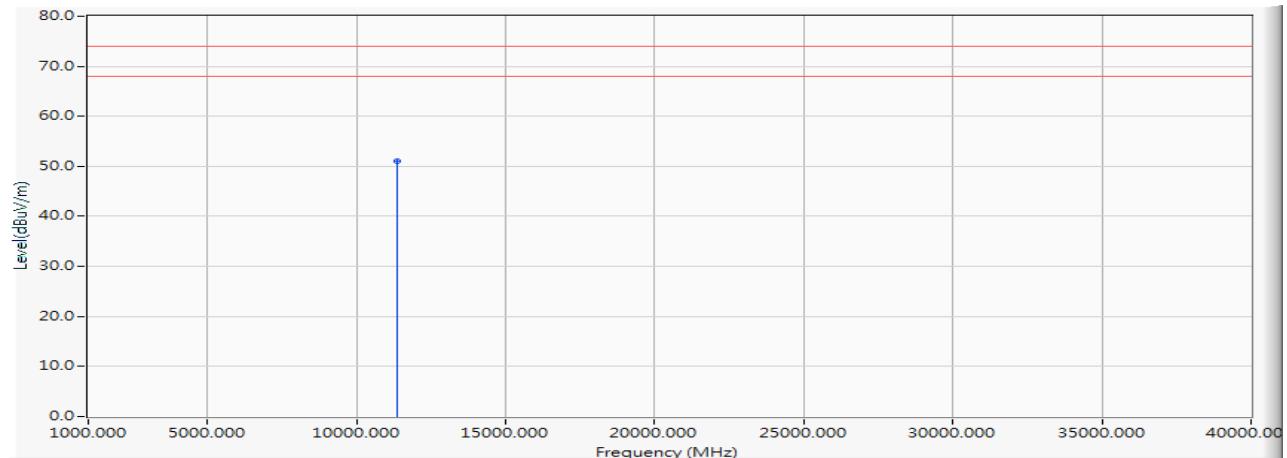


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11340.000	14.967	36.085	51.052	-22.948	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5710MHz)

Horizontal

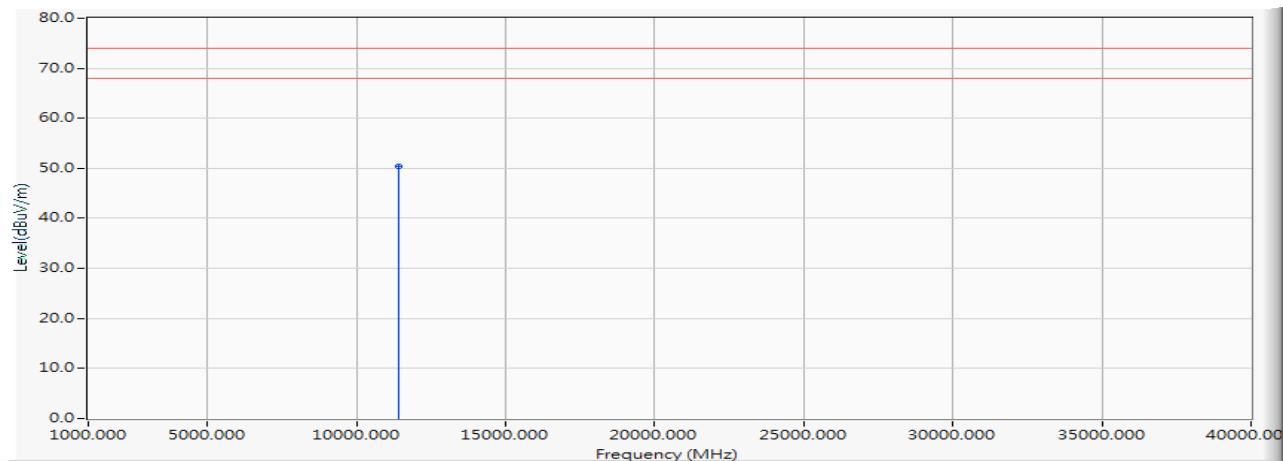


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11420.000	15.126	35.249	50.375	-23.625	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5710MHz)

Vertical

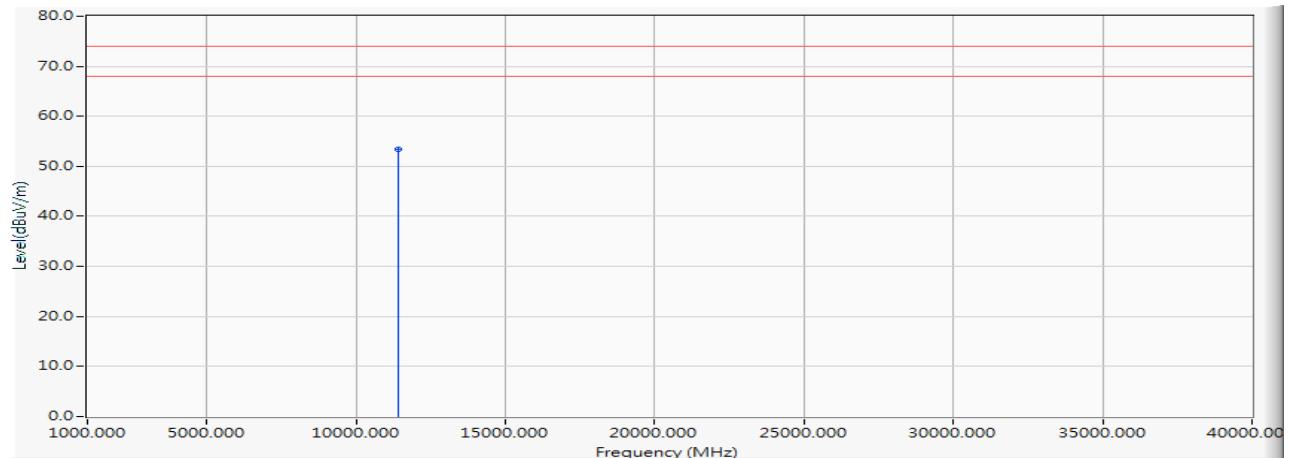


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11420.000	15.126	38.248	53.374	-20.626	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5755MHz)

Horizontal

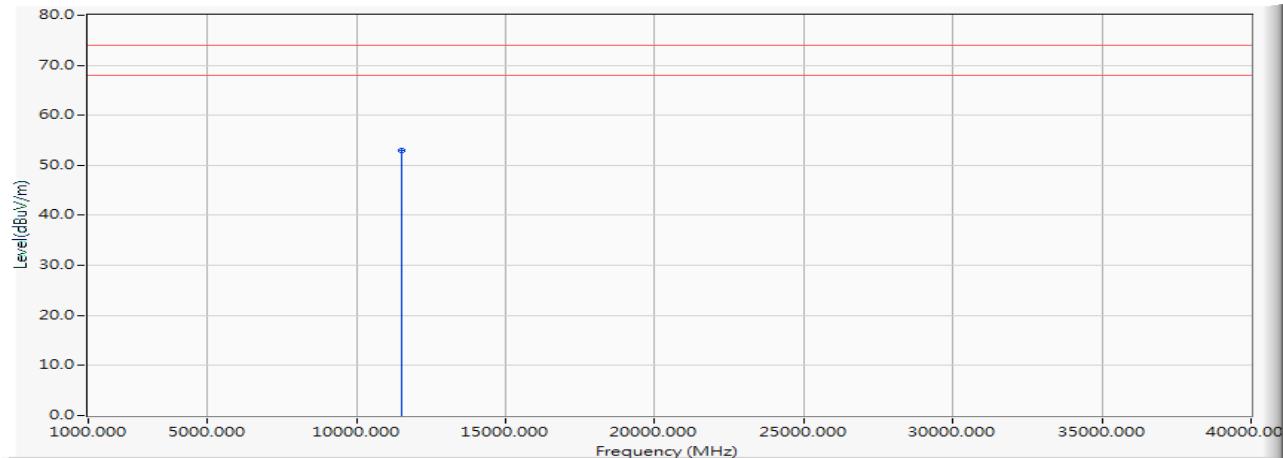


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11510.000	15.201	37.842	53.042	-20.958	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5755MHz)

Vertical

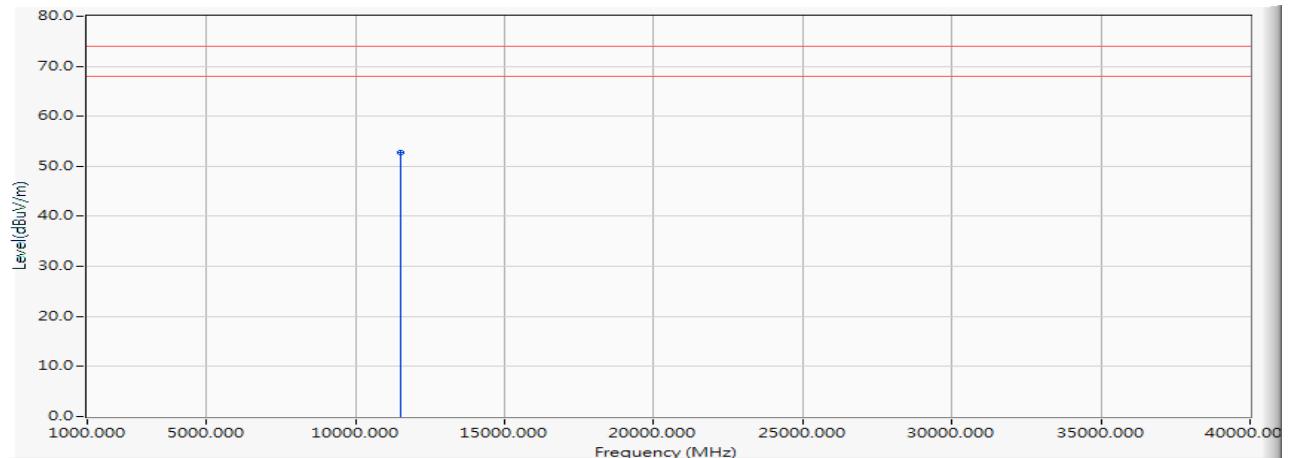


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11510.000	15.201	37.490	52.690	-21.310	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Horizontal

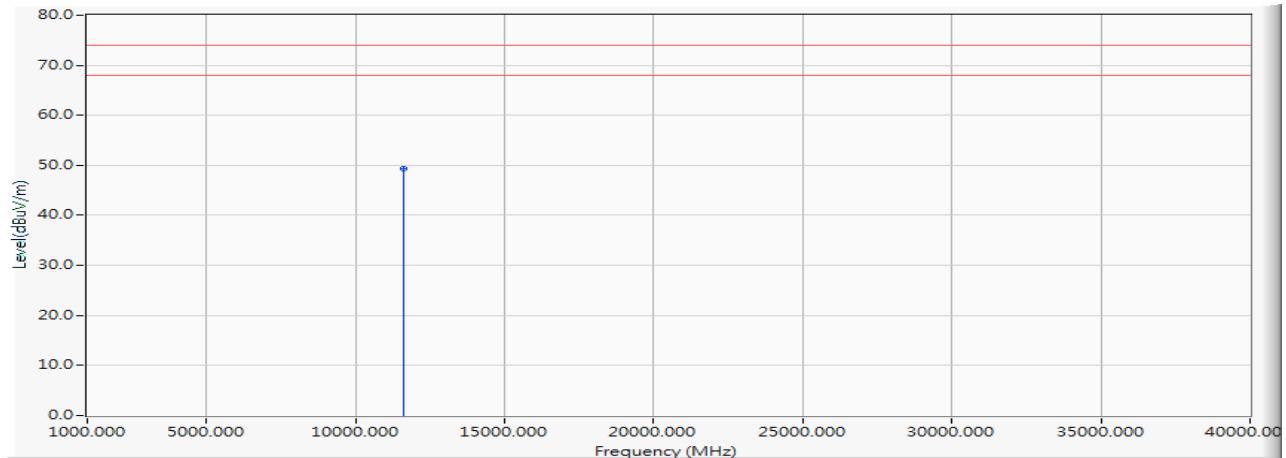


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11590.000	14.578	34.846	49.424	-24.576	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Vertical

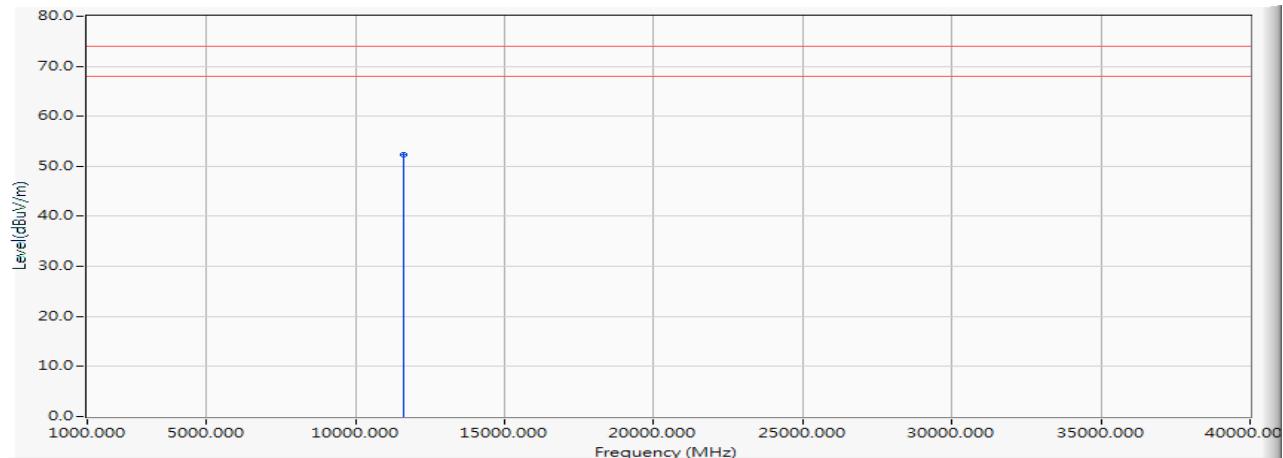


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11590.000	14.578	37.843	52.421	-21.579	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5210MHz)

Horizontal

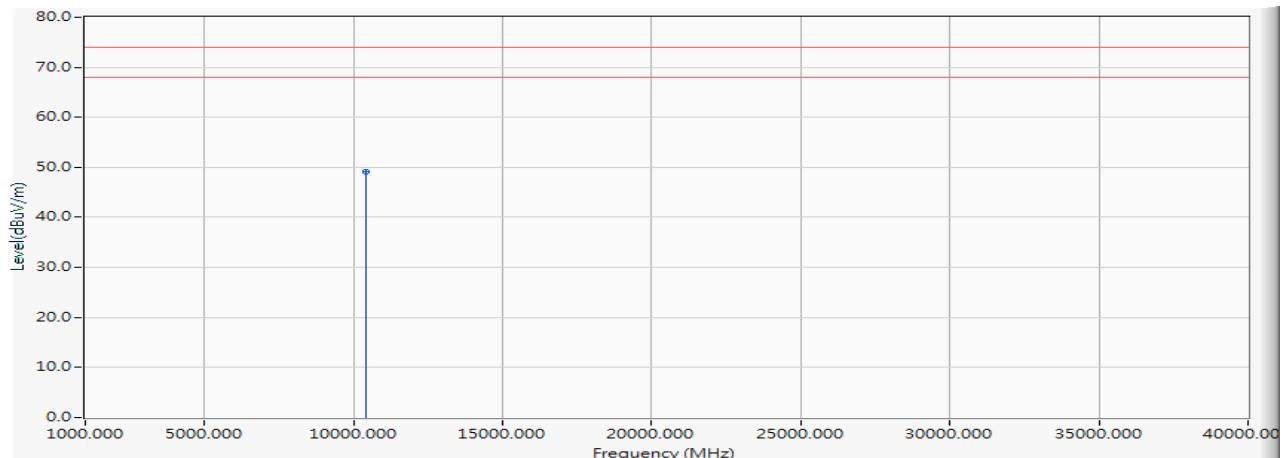


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10420.000	13.273	35.948	49.220	-24.780	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5210MHz)

Vertical

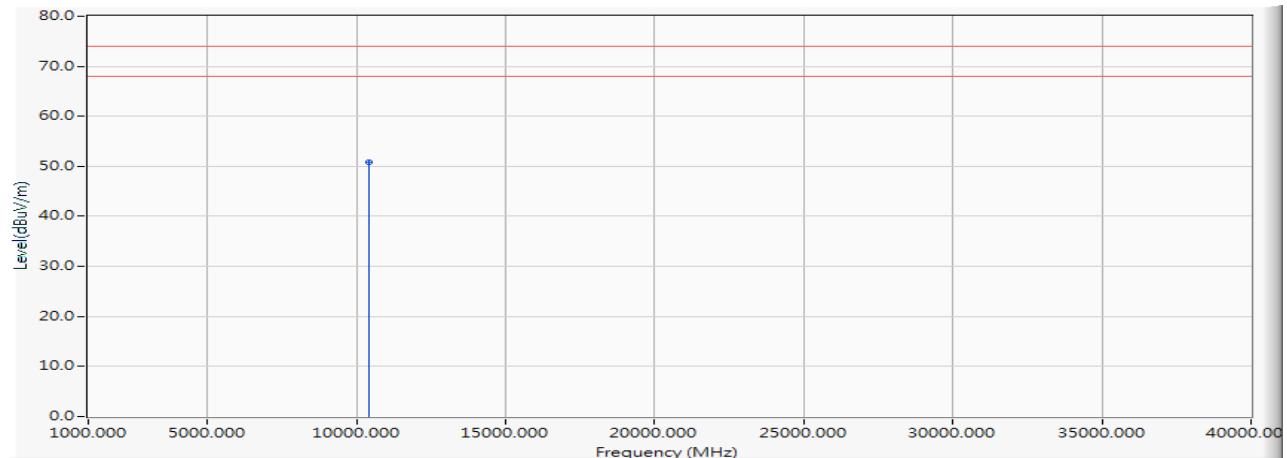


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10420.000	13.273	37.596	50.868	-23.132	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5290MHz)

Horizontal

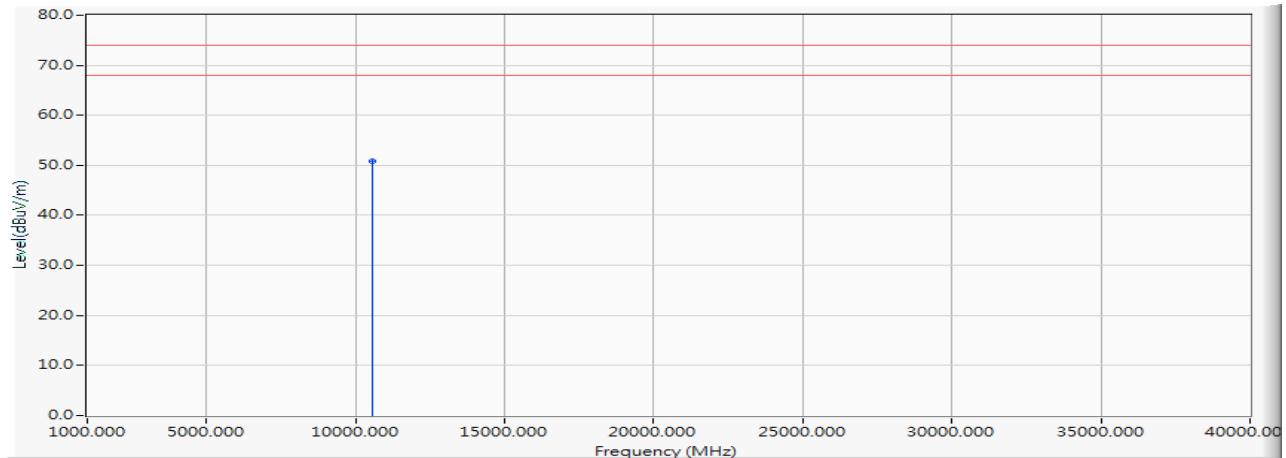


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10580.000	13.118	37.682	50.800	-23.200	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5290MHz)

Vertical

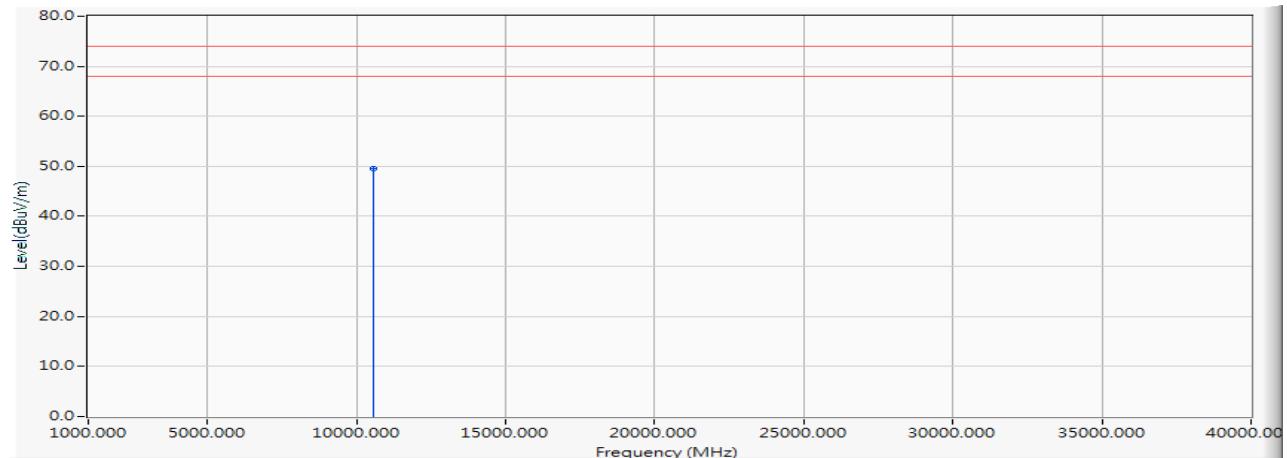


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10580.000	13.118	36.412	49.530	-24.470	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5530MHz)

Horizontal

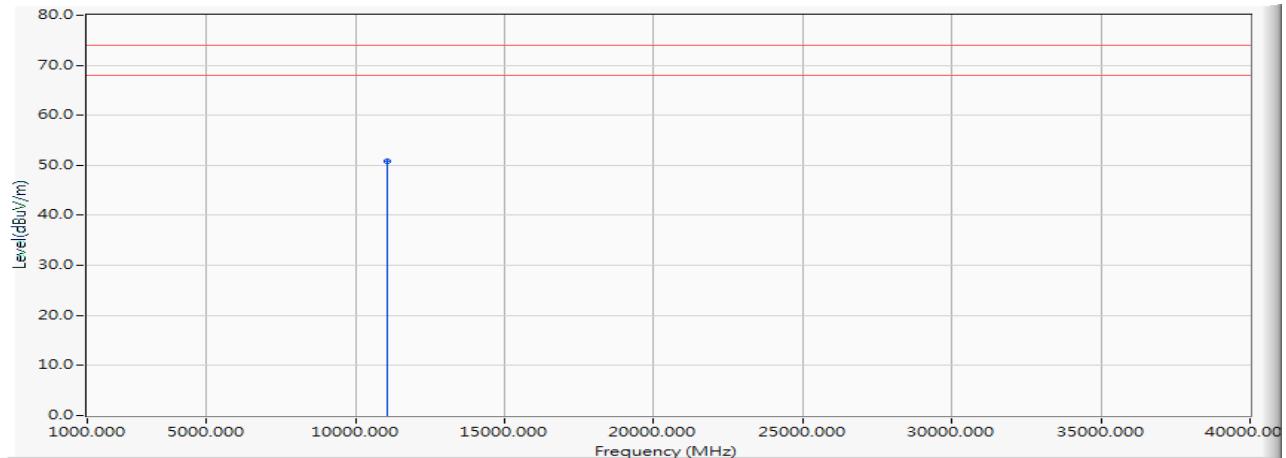


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11060.000	13.957	36.840	50.797	-23.203	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5530MHz)

Vertical

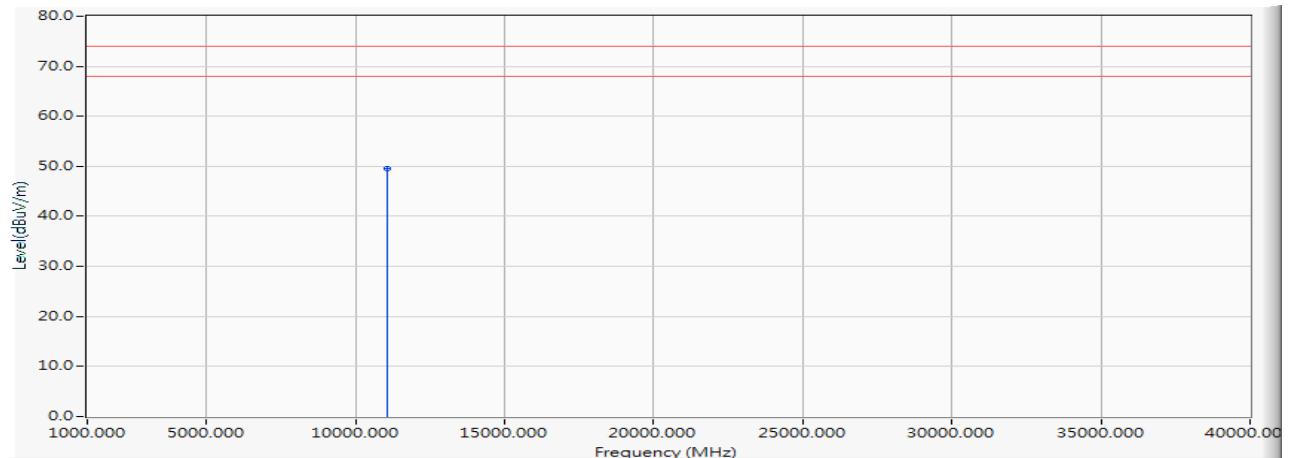


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11060.000	13.957	35.497	49.454	-24.546	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Horizontal

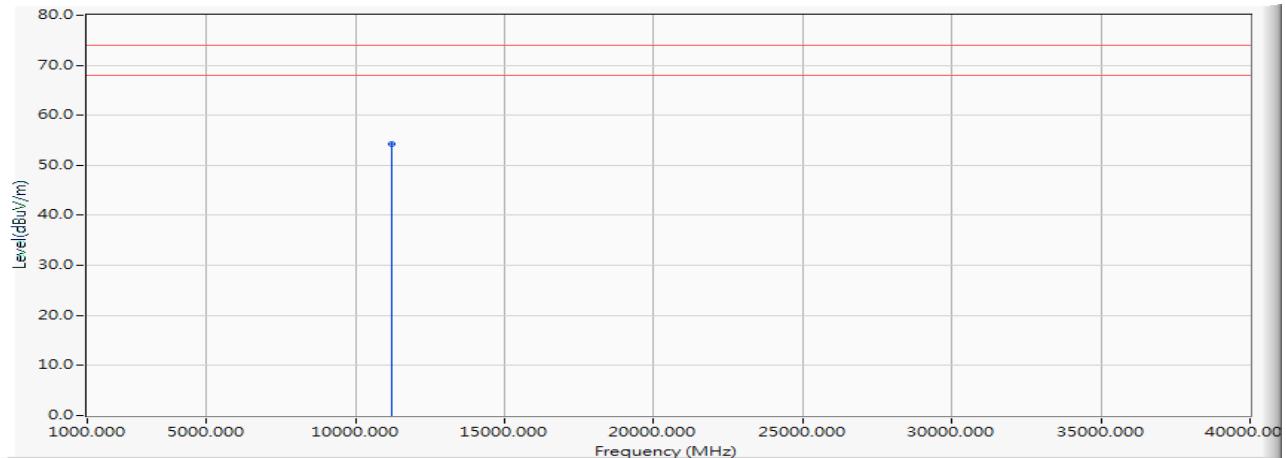


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	39.476	54.179	-19.821	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Horizontal

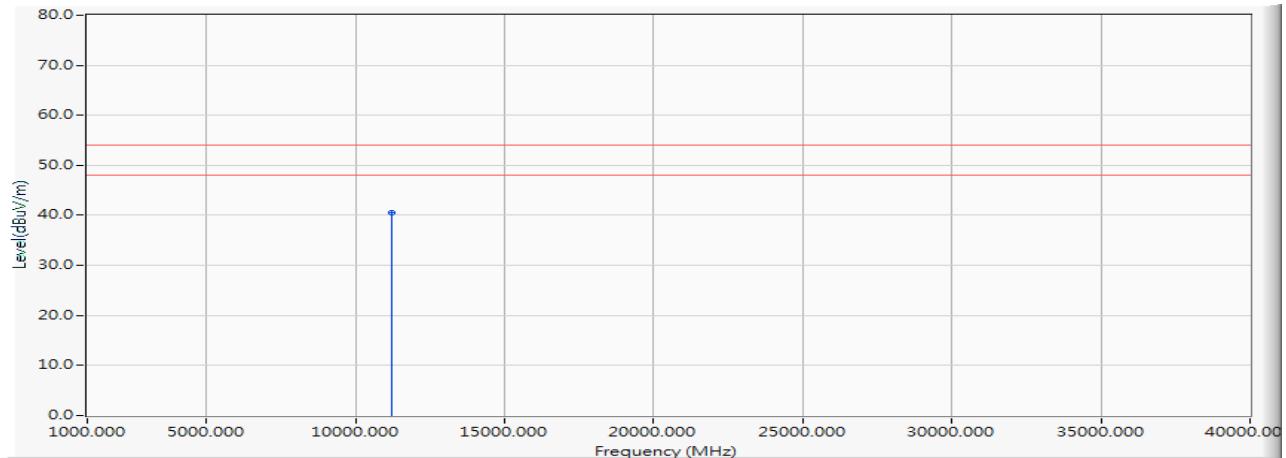


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	25.913	40.616	-13.384	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Vertical

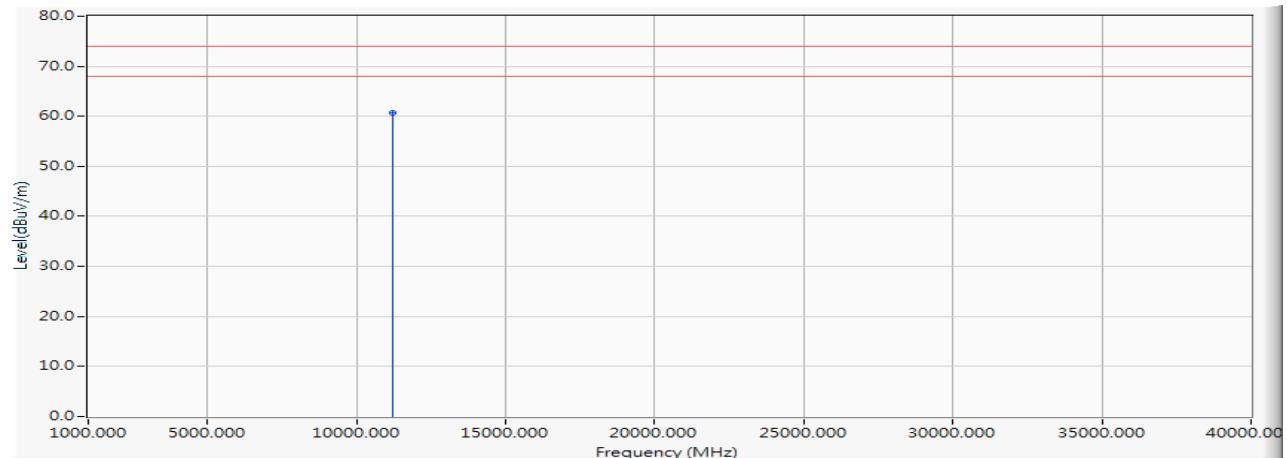


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	45.916	60.619	-13.381	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5610MHz)

Vertical

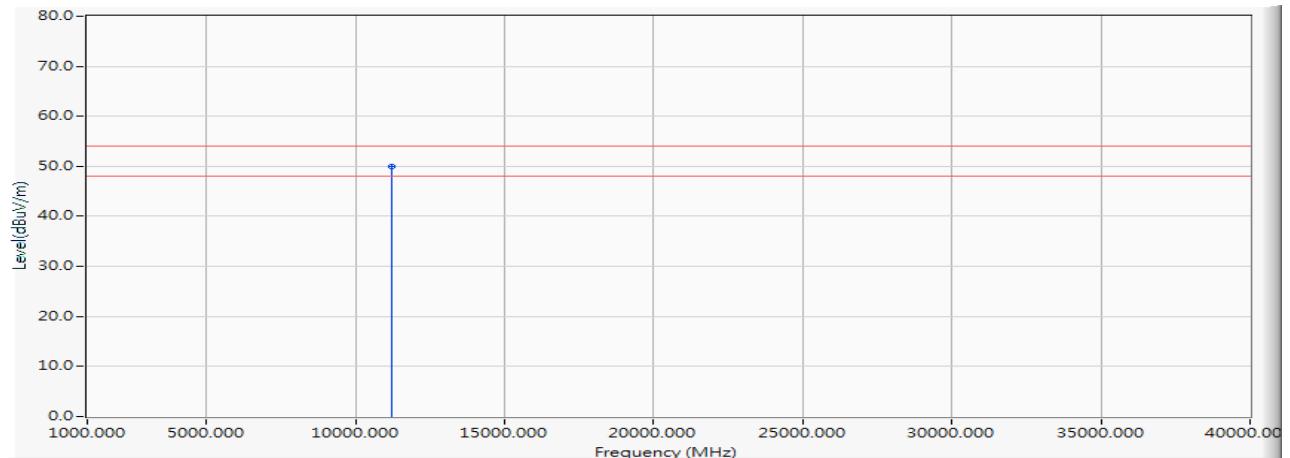


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	35.196	49.899	-4.101	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5690MHz)

Horizontal

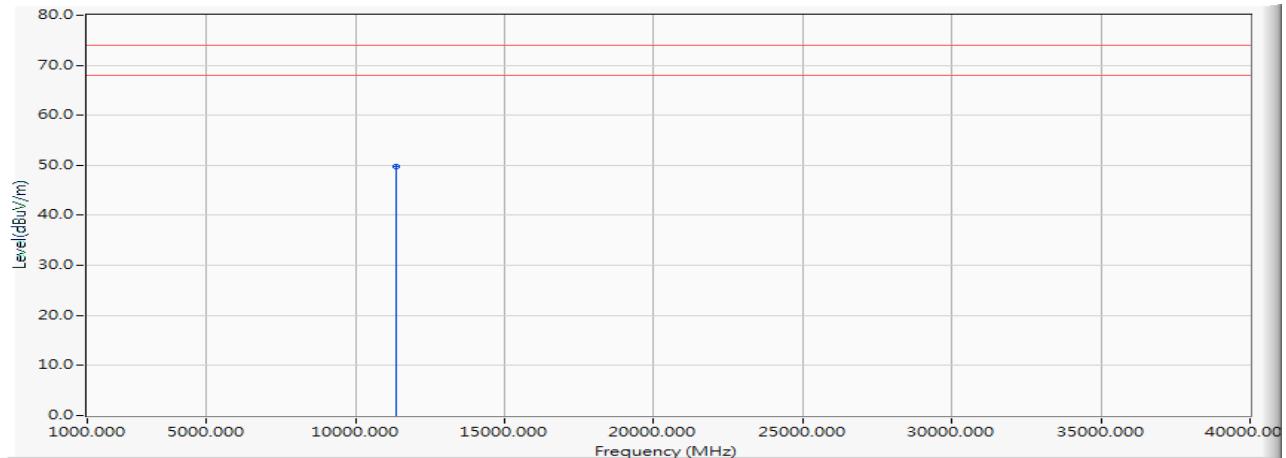


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11380.000	15.050	34.729	49.779	-24.221	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5690MHz)

Vertical

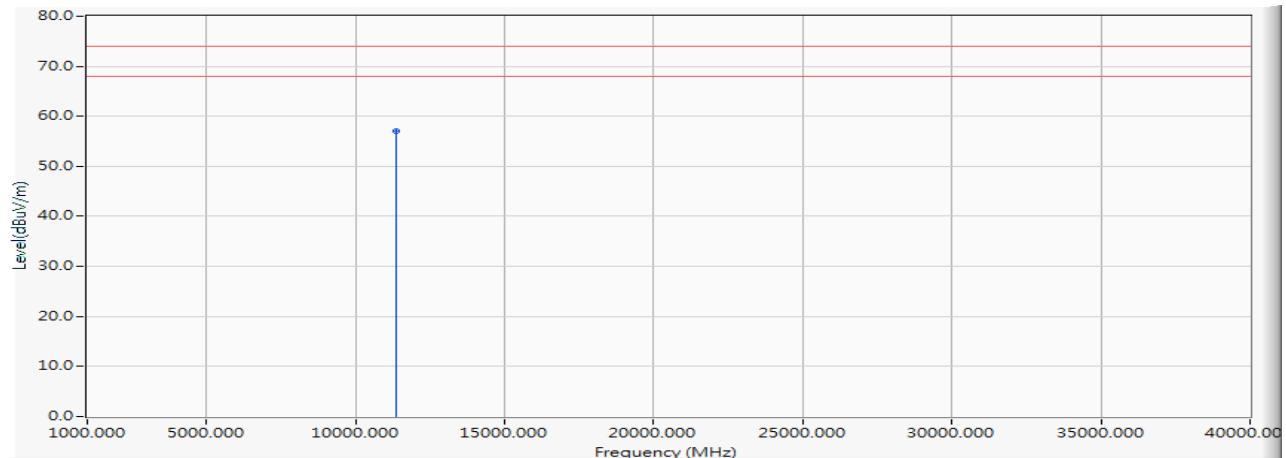


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11380.000	15.050	42.069	57.119	-16.881	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5690MHz)

Vertical

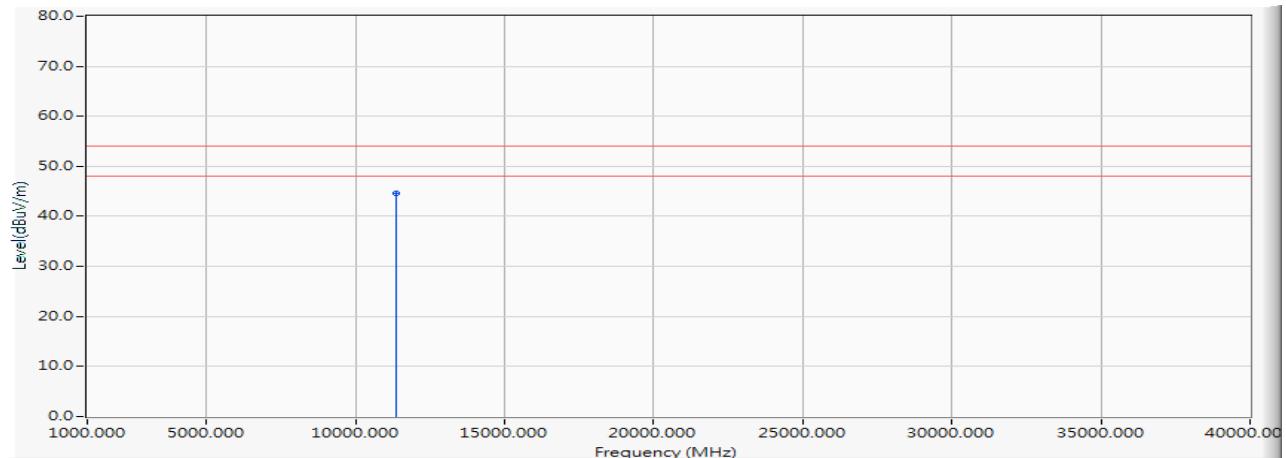


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11380.000	15.050	29.562	44.612	-9.388	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5775MHz)

Horizontal

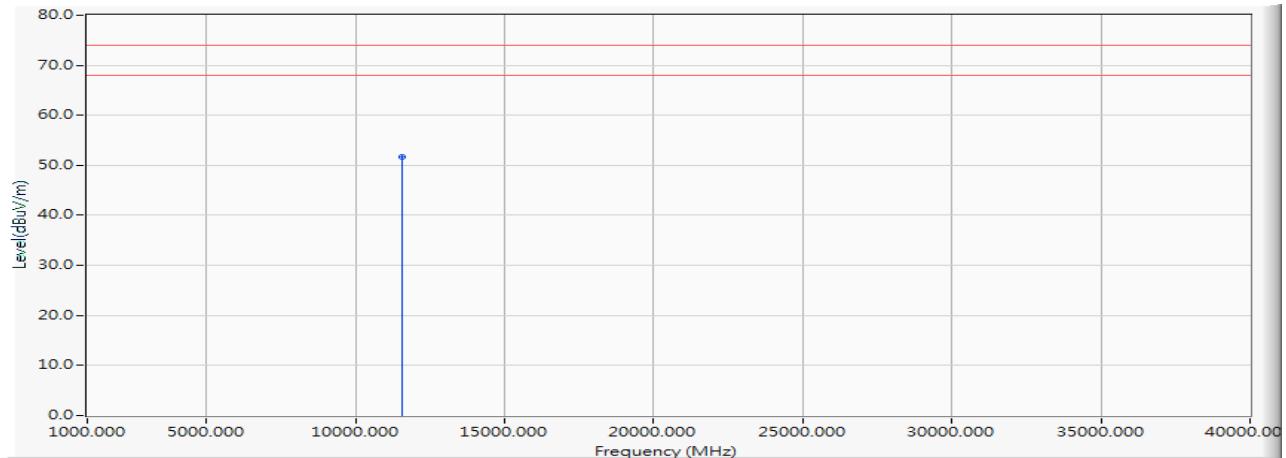


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11550.000	14.901	36.816	51.716	-22.284	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/03
 Test Mode : Mode 2 SISO B: Transmit (802.11ac-80BW_32.5Mbps)(5775MHz)

Vertical

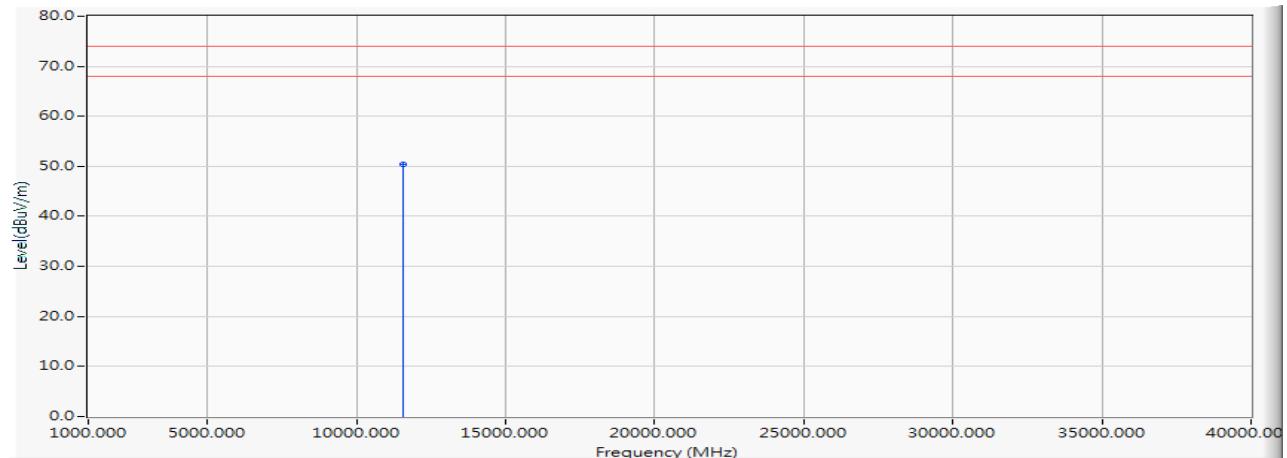


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11550.000	14.901	35.496	50.396	-23.604	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5180MHz)

Horizontal

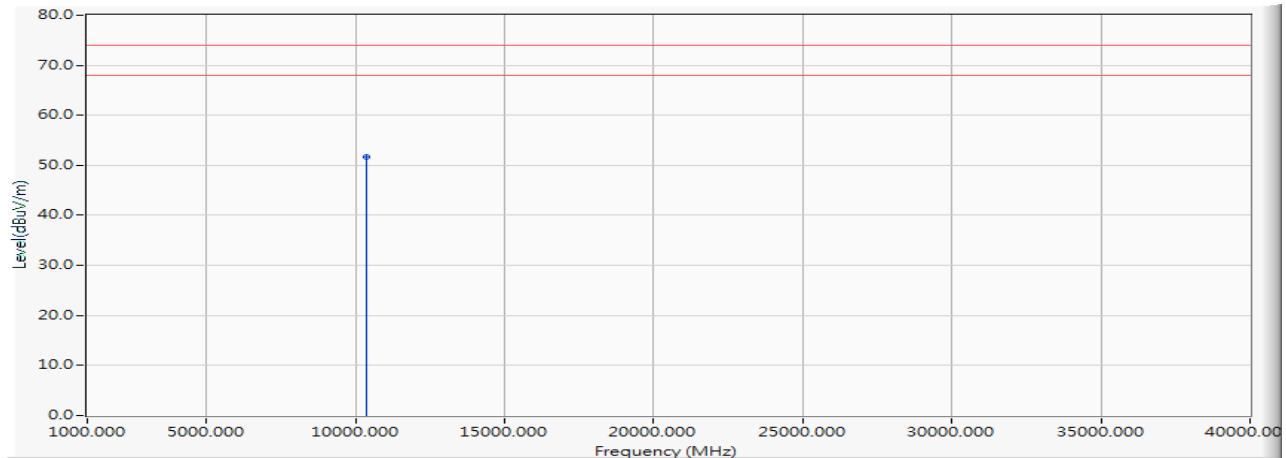


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	38.241	51.634	-22.366	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5180MHz)

Vertical

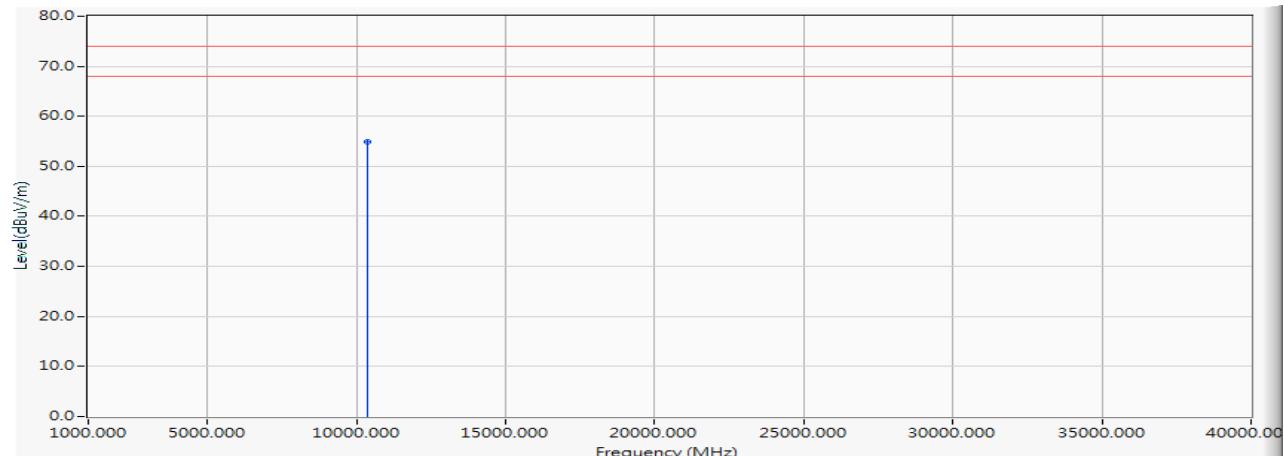


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	41.493	54.886	-19.114	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5180MHz)

Vertical

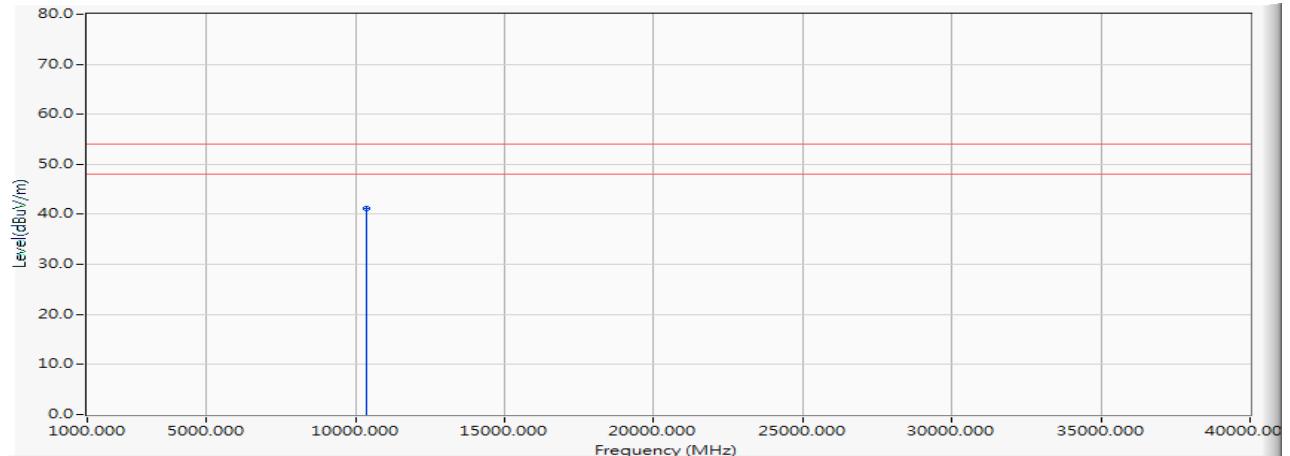


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10360.000	13.393	27.843	41.236	-12.764	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5200MHz)

Horizontal

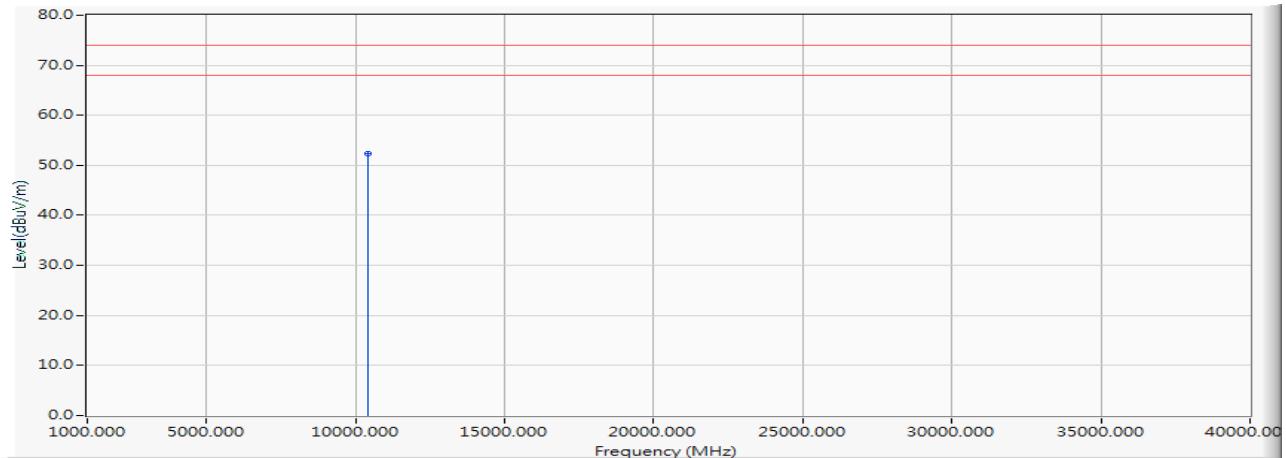


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10400.000	24.622	27.621	52.244	-21.756	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5200MHz)

Vertical

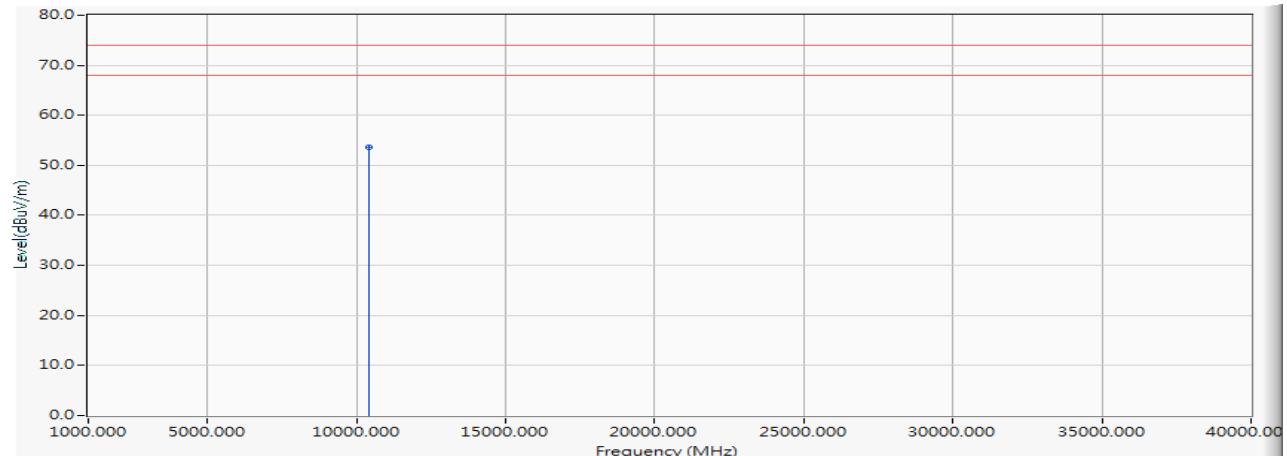


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10400.000	24.622	28.929	53.552	-20.448	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5240MHz)

Horizontal

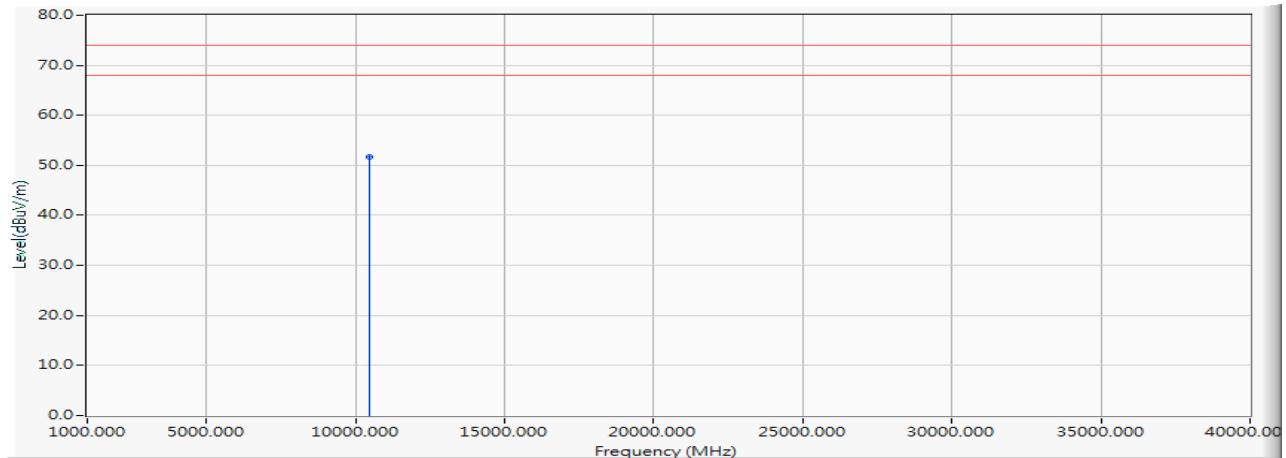


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10480.000	13.152	38.613	51.764	-22.236	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5240MHz)

Vertical

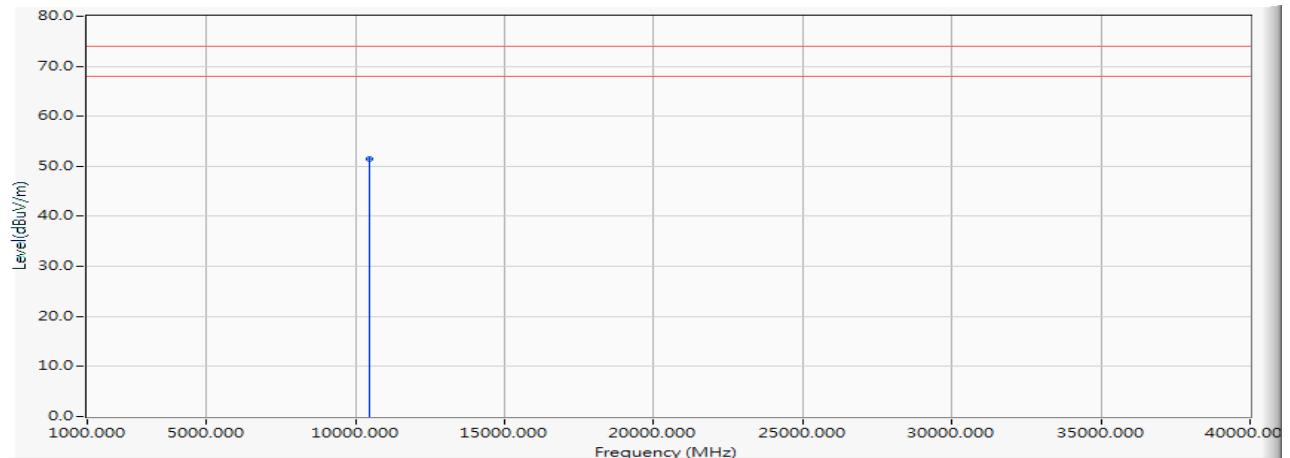


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10480.000	13.152	38.246	51.397	-22.603	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5260MHz)

Horizontal

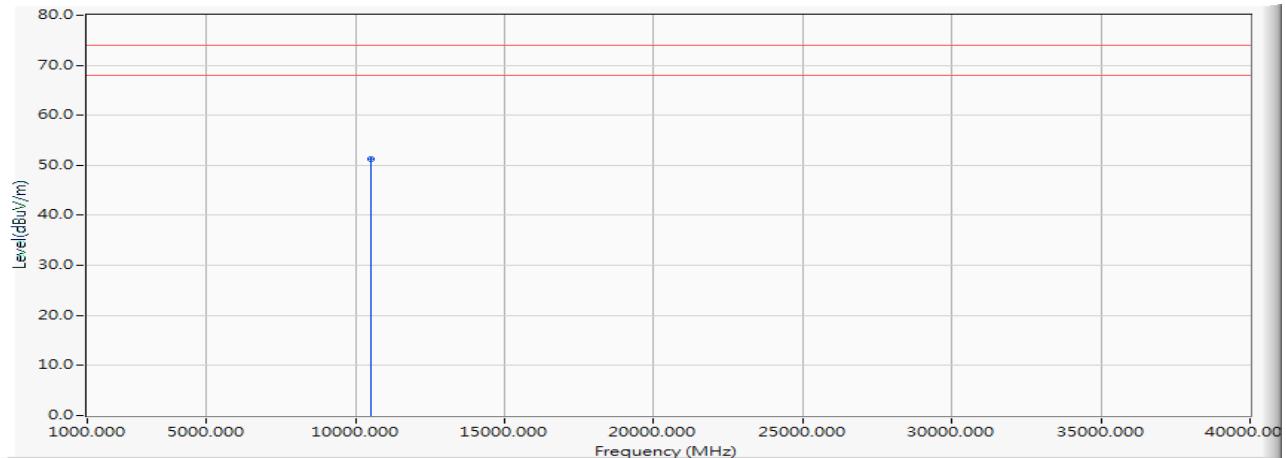


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10520.000	13.107	38.163	51.270	-22.730	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5260MHz)

Vertical

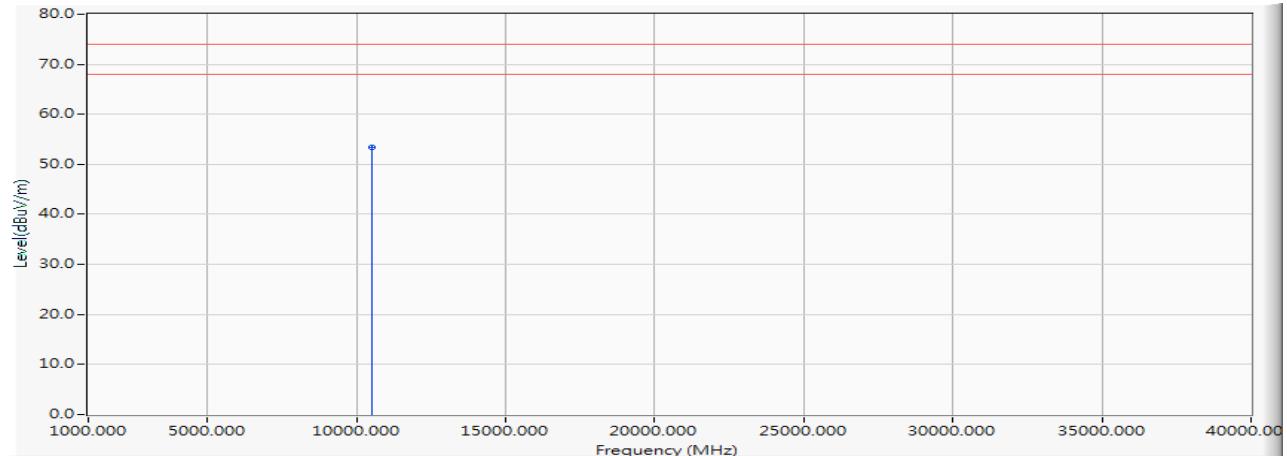


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10520.000	13.107	40.287	53.394	-20.606	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5280MHz)

Horizontal

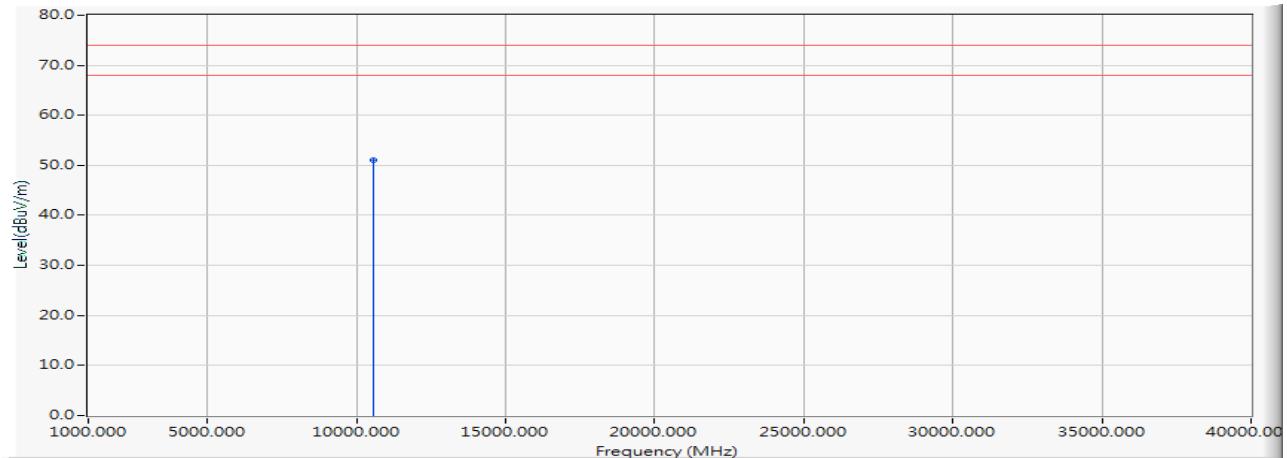


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10560.000	23.118	28.026	51.144	-22.856	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5280MHz)

Vertical

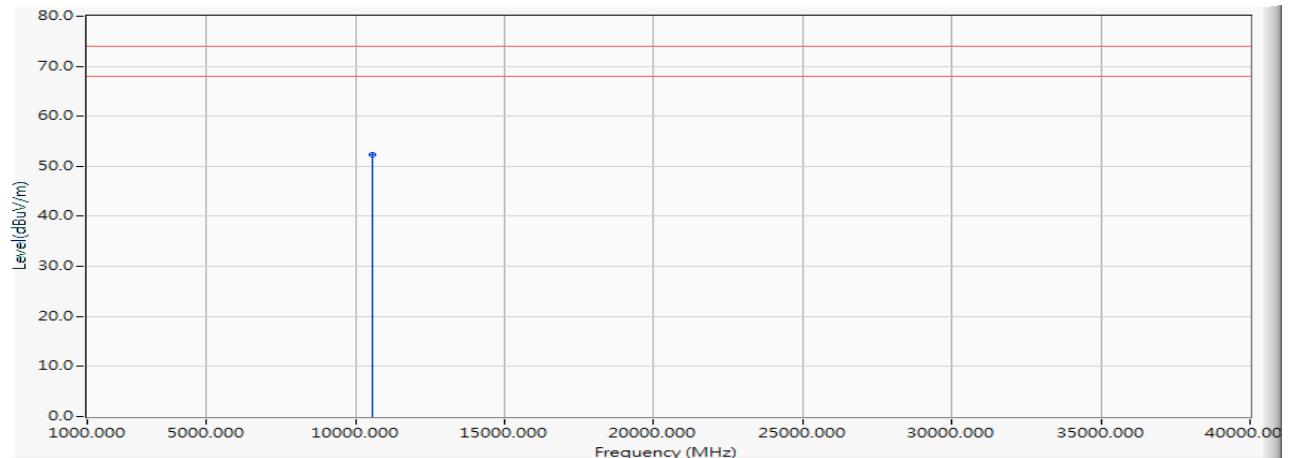


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10560.000	23.118	29.261	52.379	-21.621	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5320MHz)

Horizontal

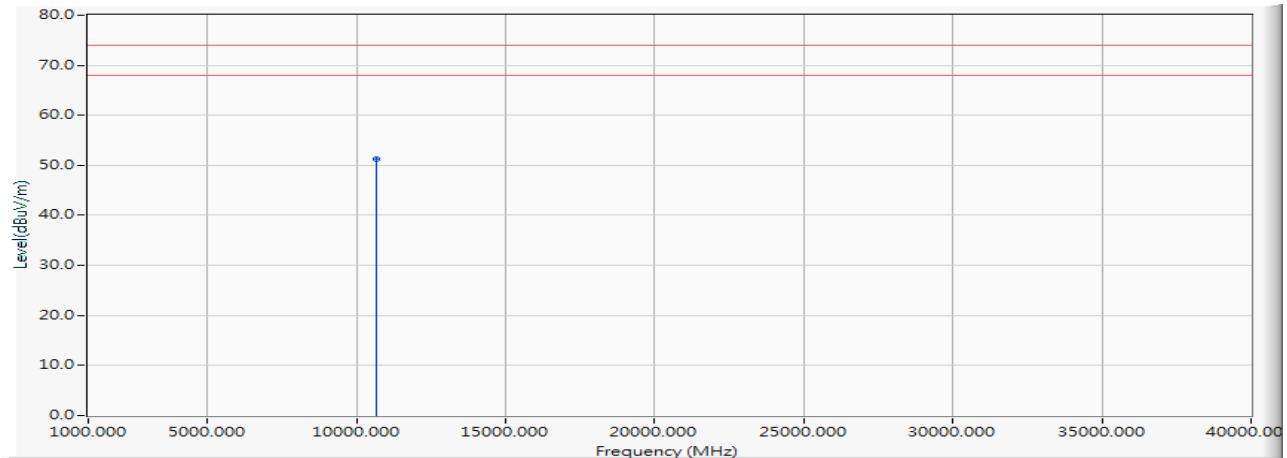


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10640.000	13.129	38.056	51.186	-22.814	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5320MHz)

Vertical

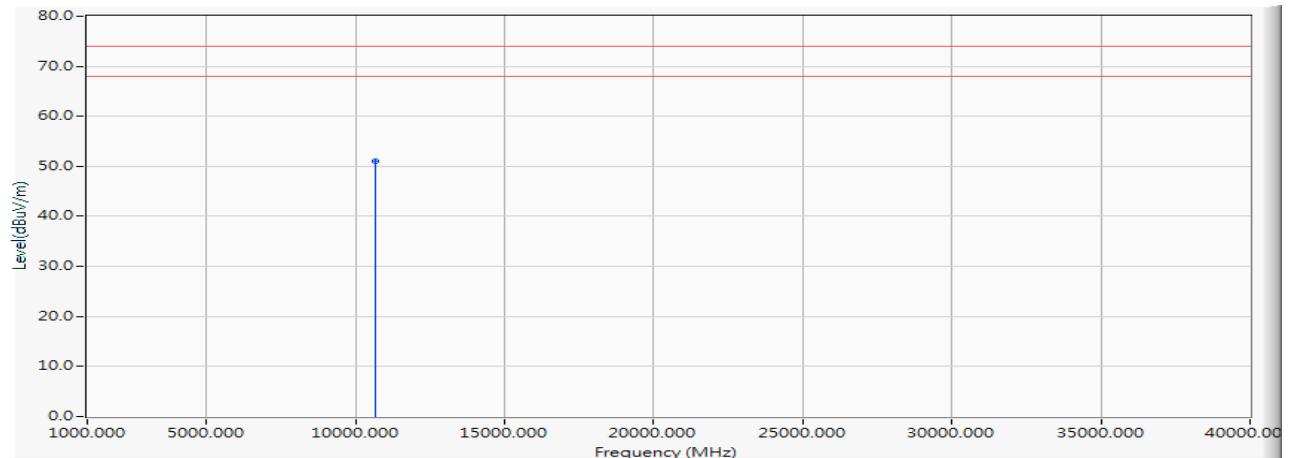


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10640.000	13.129	38.015	51.145	-22.855	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5500MHz)

Horizontal

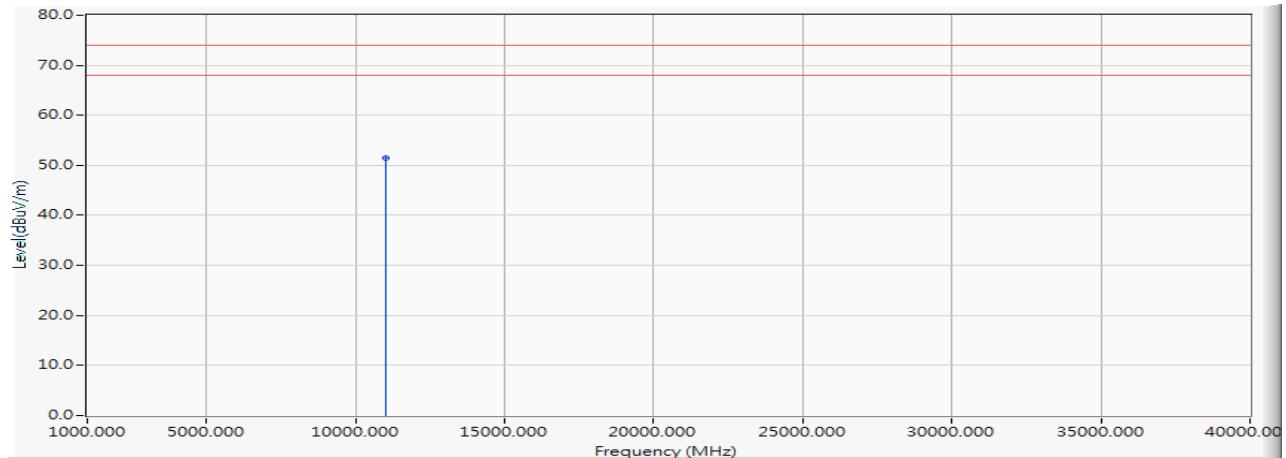


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11000.000	13.649	37.850	51.498	-22.502	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5500MHz)

Vertical

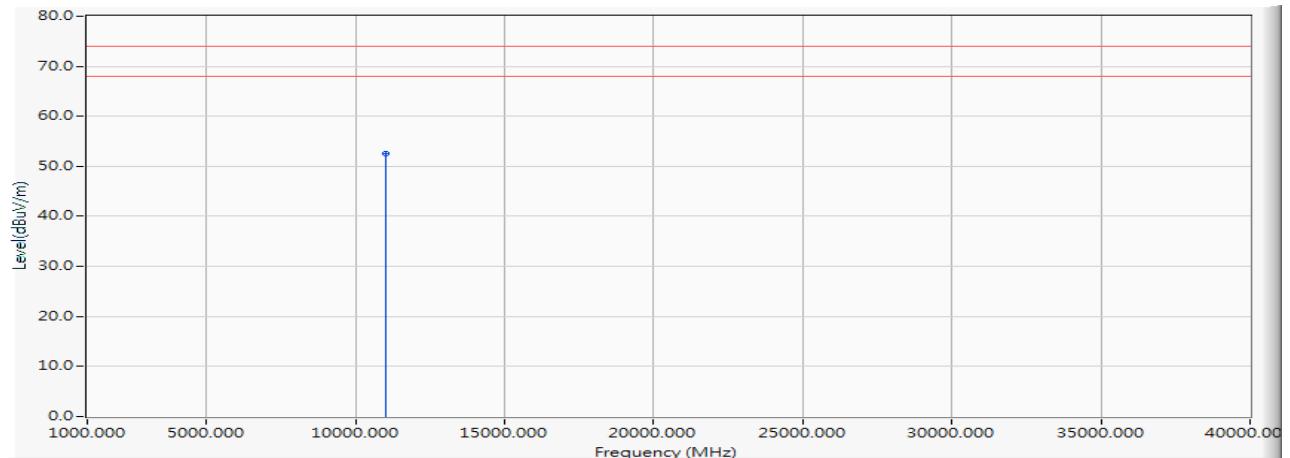


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11000.000	13.649	38.996	52.644	-21.356	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5600MHz)

Horizontal

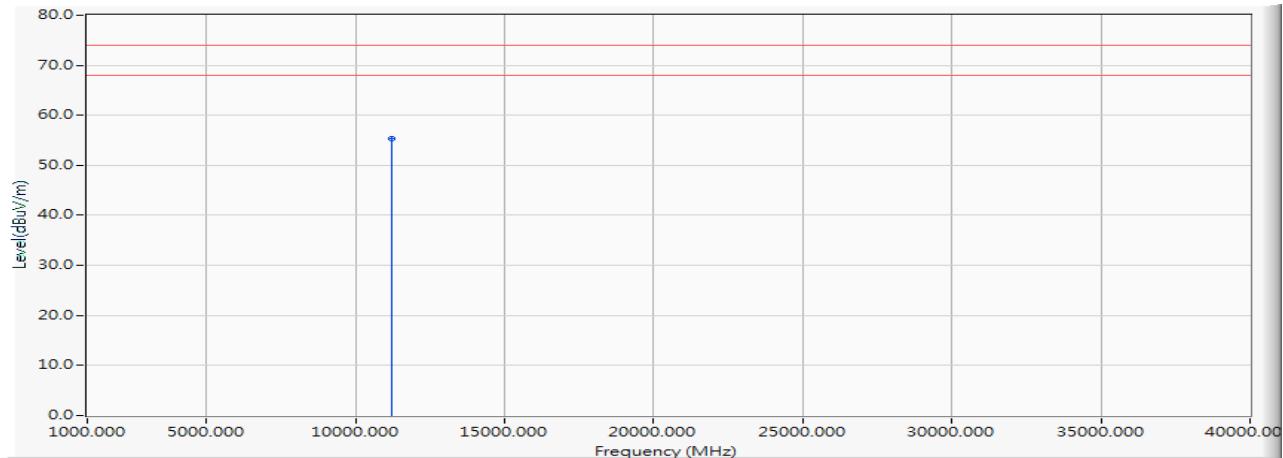


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	25.238	30.047	55.285	-18.715	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5600MHz)

Horizontal

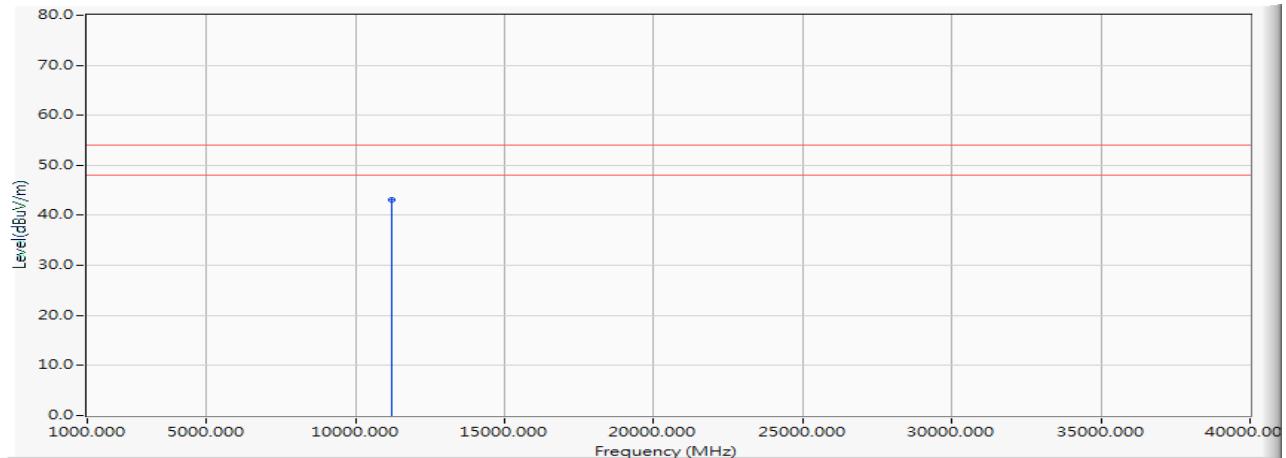


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	25.238	17.824	43.062	-10.938	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5600MHz)

Vertical

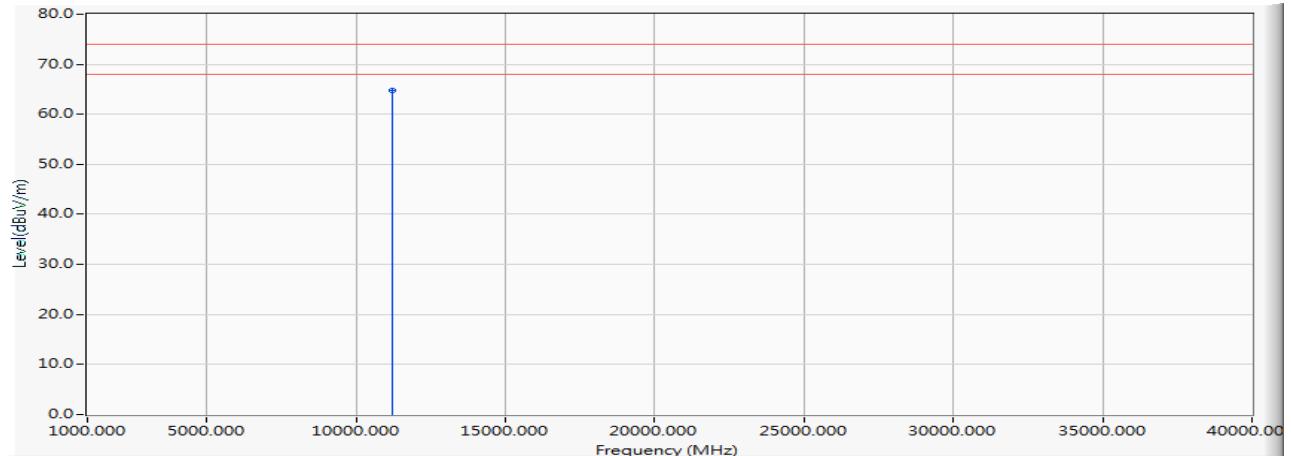


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	25.238	39.611	64.849	-9.151	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5600MHz)

Vertical

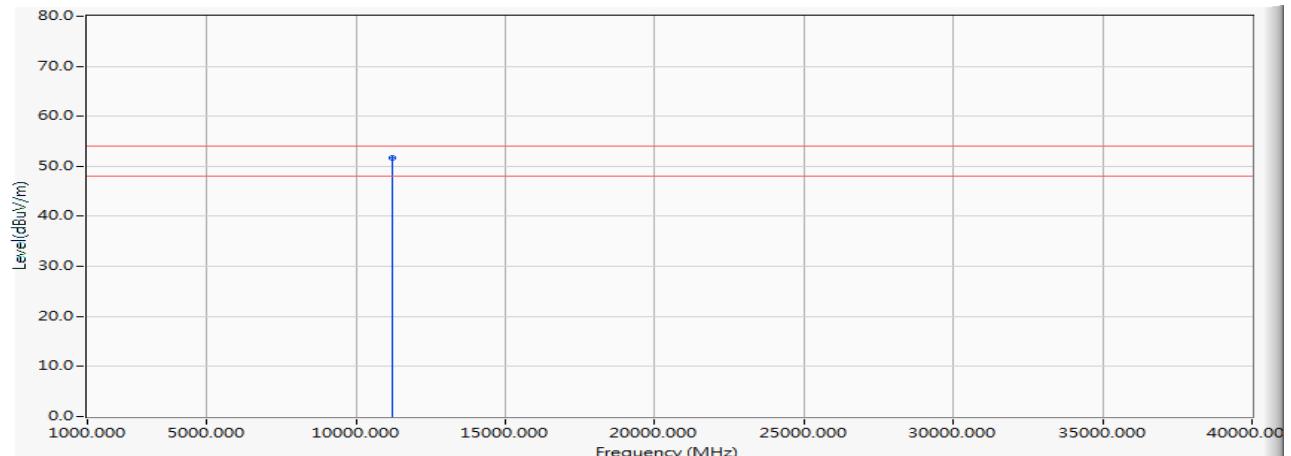


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11200.000	25.238	26.532	51.770	-2.230	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5700MHz)

Horizontal

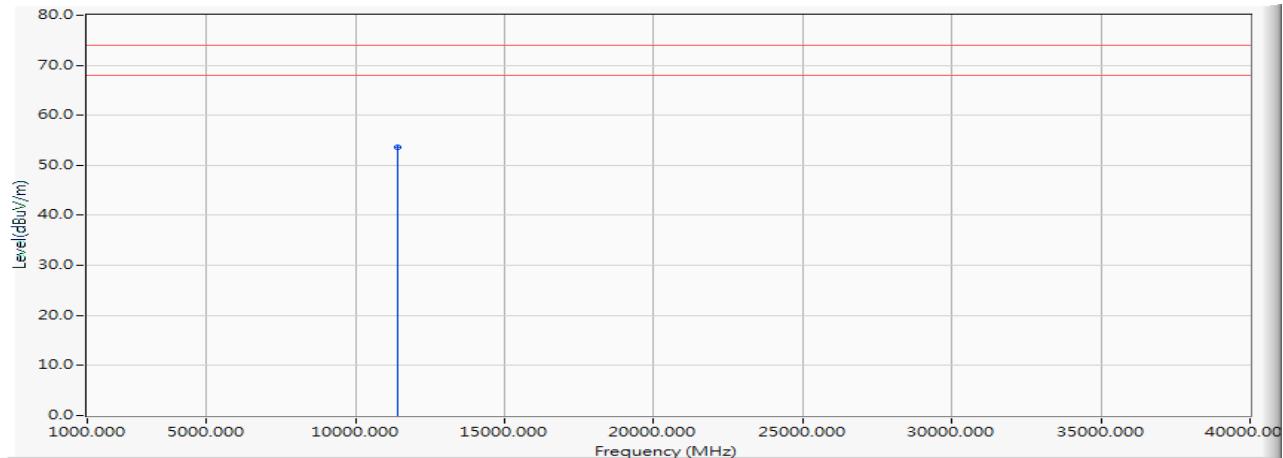


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	38.541	53.629	-20.371	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5700MHz)

Vertical

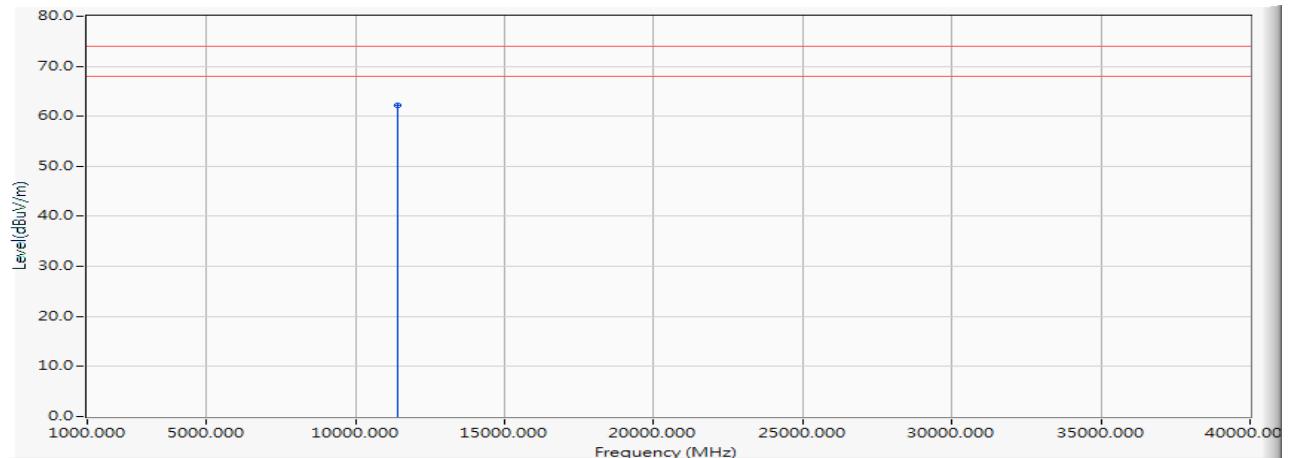


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	47.163	62.251	-11.749	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5700MHz)

Vertical

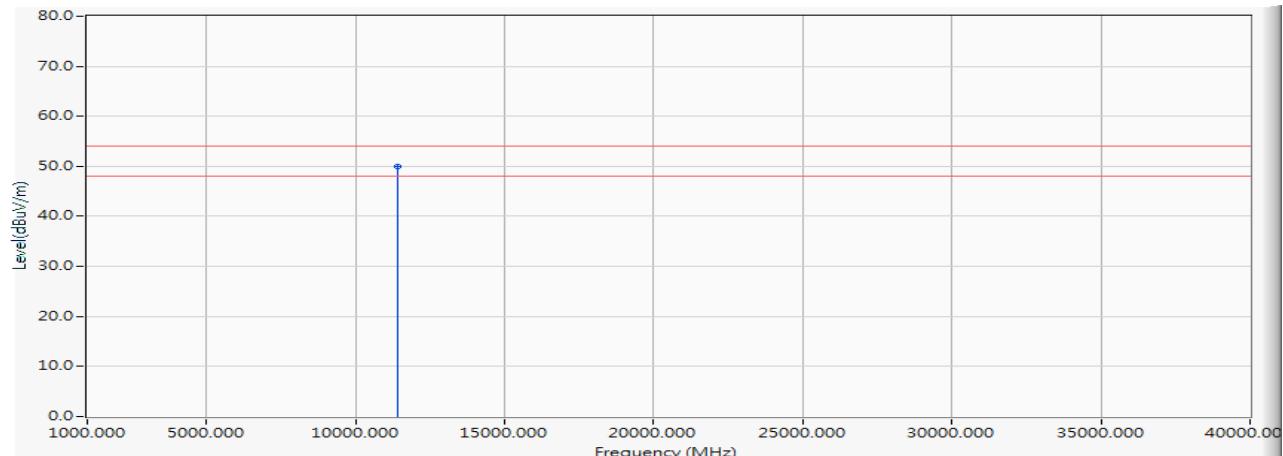


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11400.000	15.089	34.784	49.872	-4.128	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5720MHz)

Horizontal

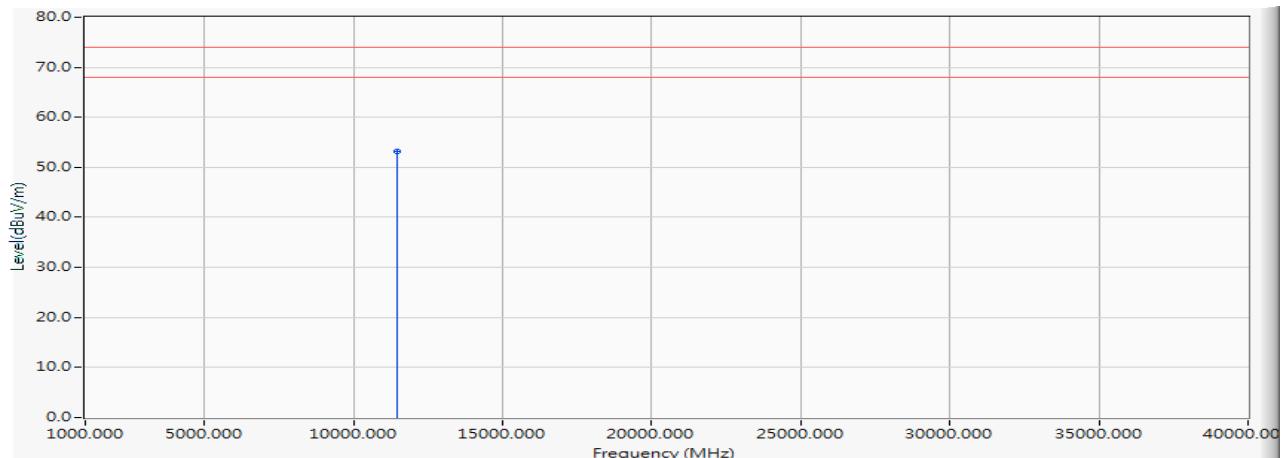


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11440.000	15.161	38.021	53.182	-20.818	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5720MHz)

Vertical

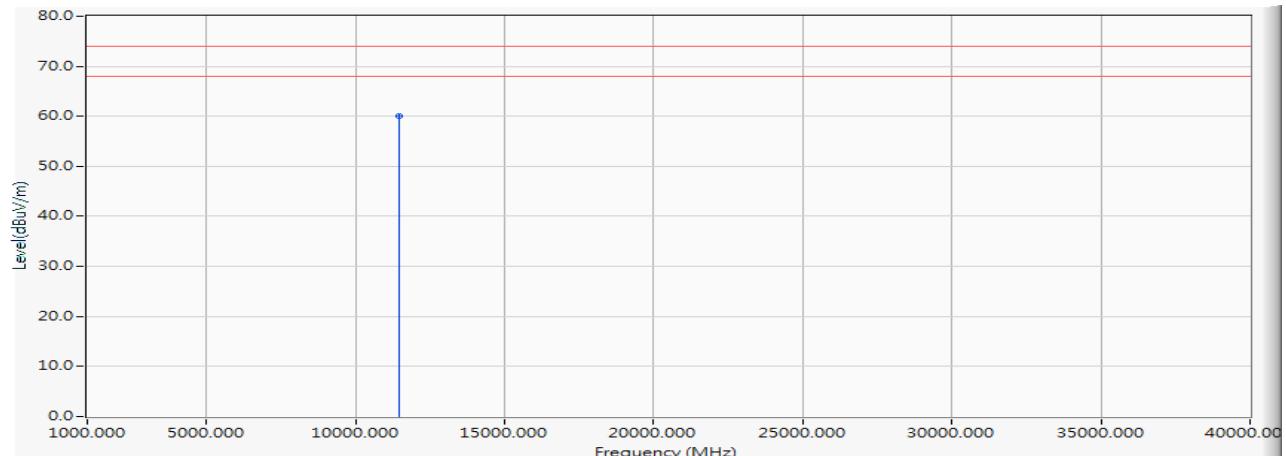


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11440.000	15.161	44.823	59.984	-14.016	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5720MHz)

Vertical

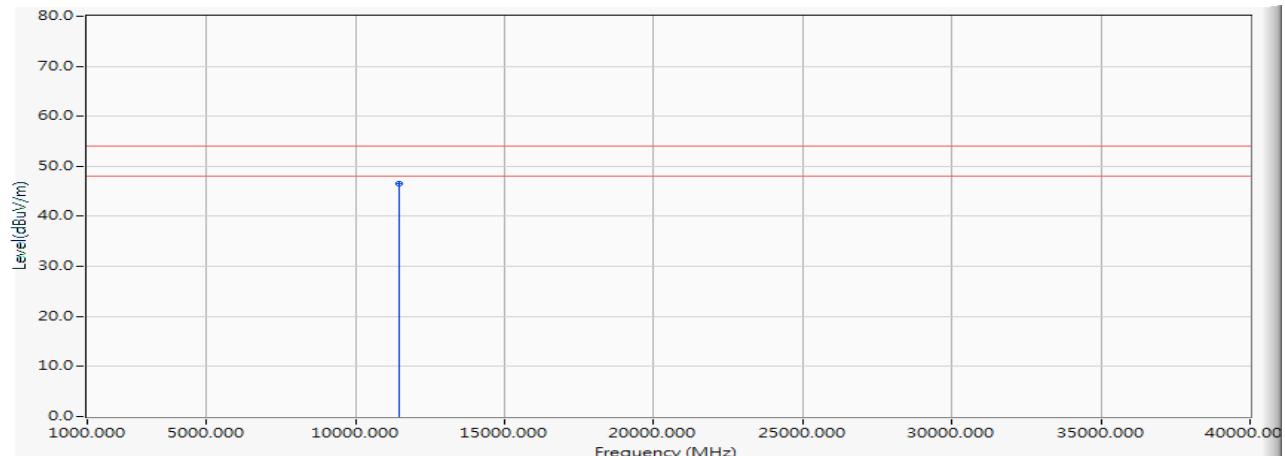


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11440.000	15.161	31.469	46.630	-7.370	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5745MHz)

Horizontal

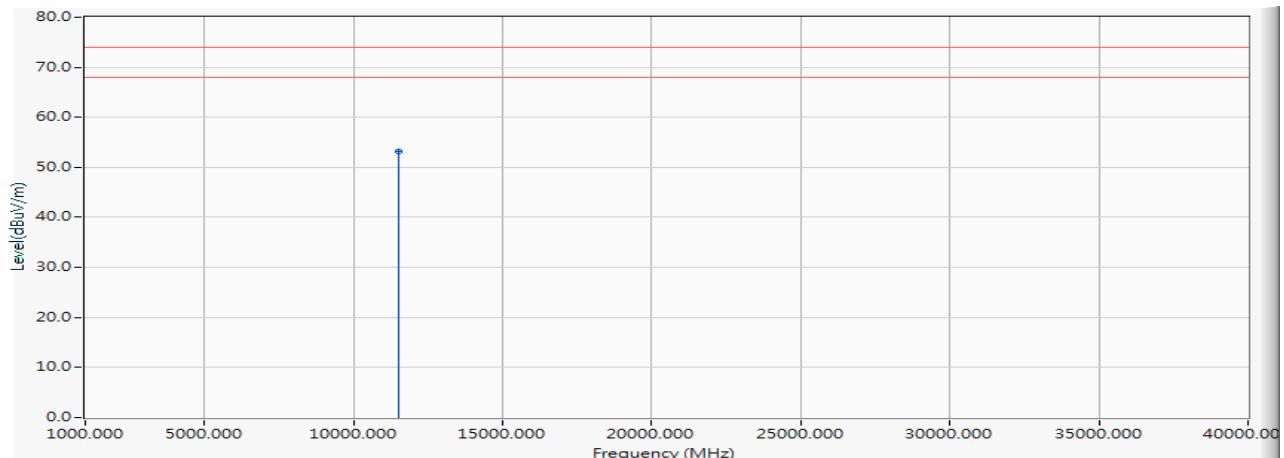


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	37.860	53.102	-20.898	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5745MHz)

Vertical

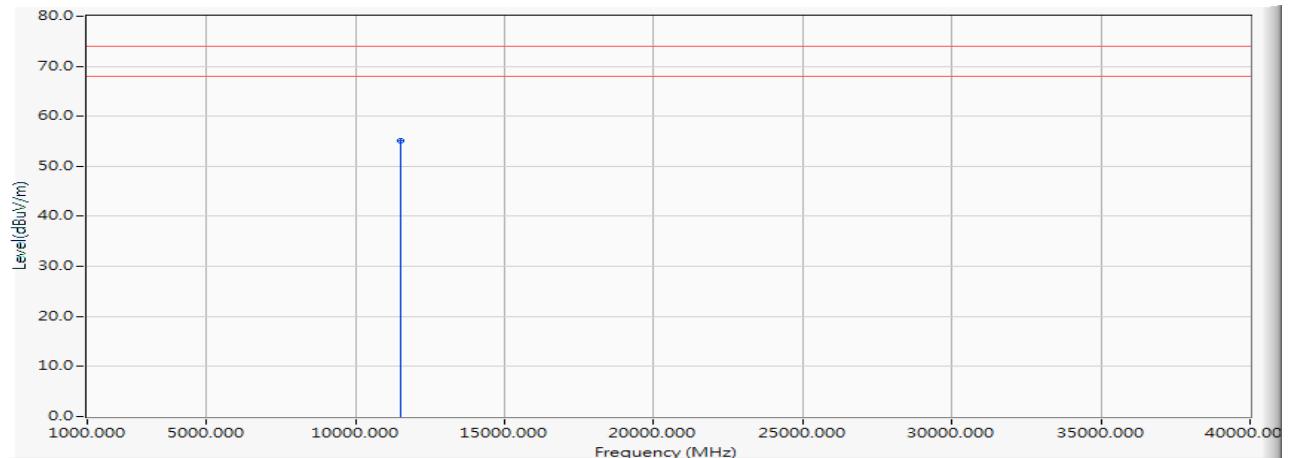


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	39.860	55.102	-18.898	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5745MHz)

Vertical

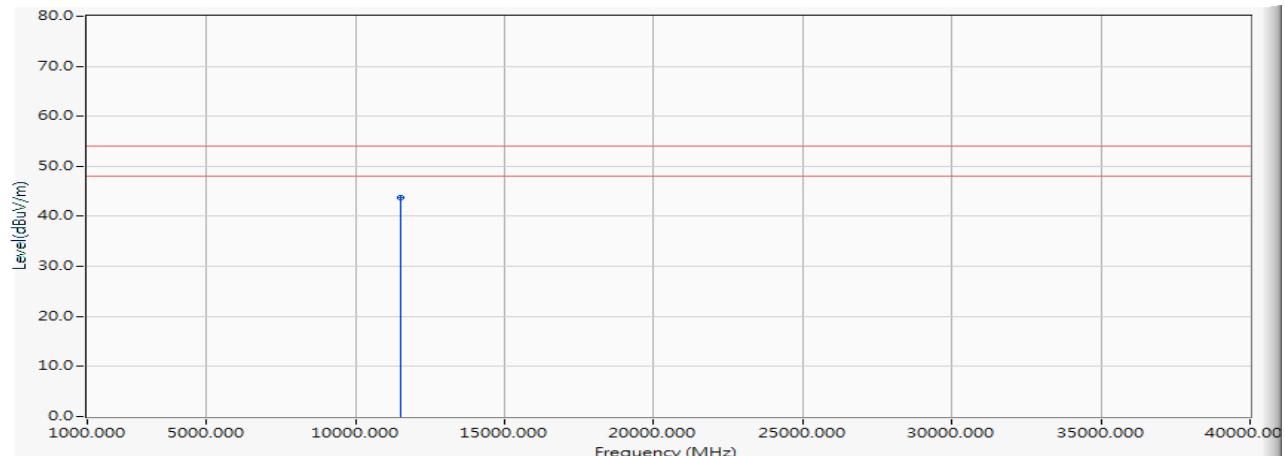


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11490.000	15.242	28.470	43.712	-10.288	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5785MHz)

Horizontal

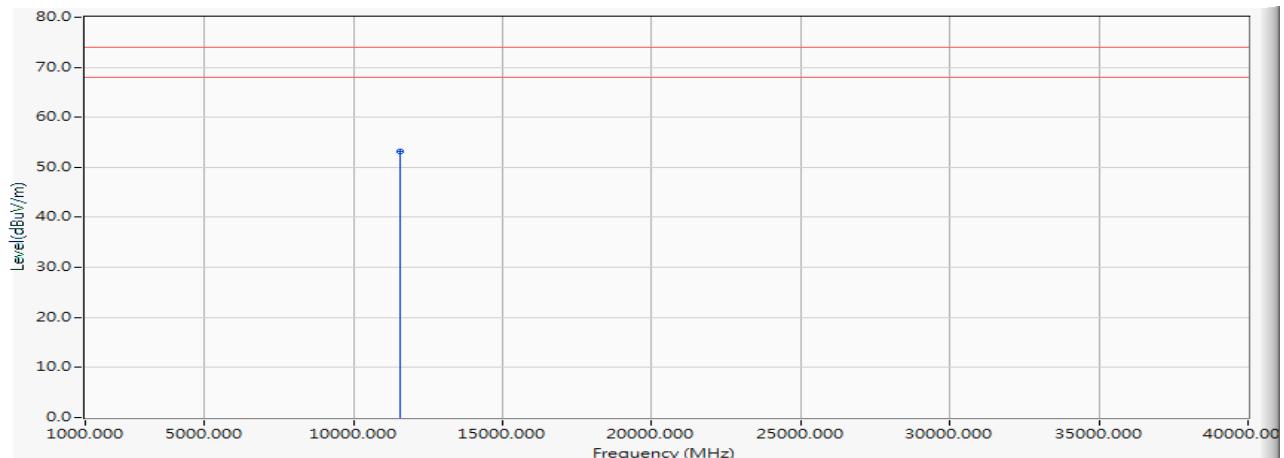


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	38.410	53.150	-20.850	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5785MHz)

Vertical

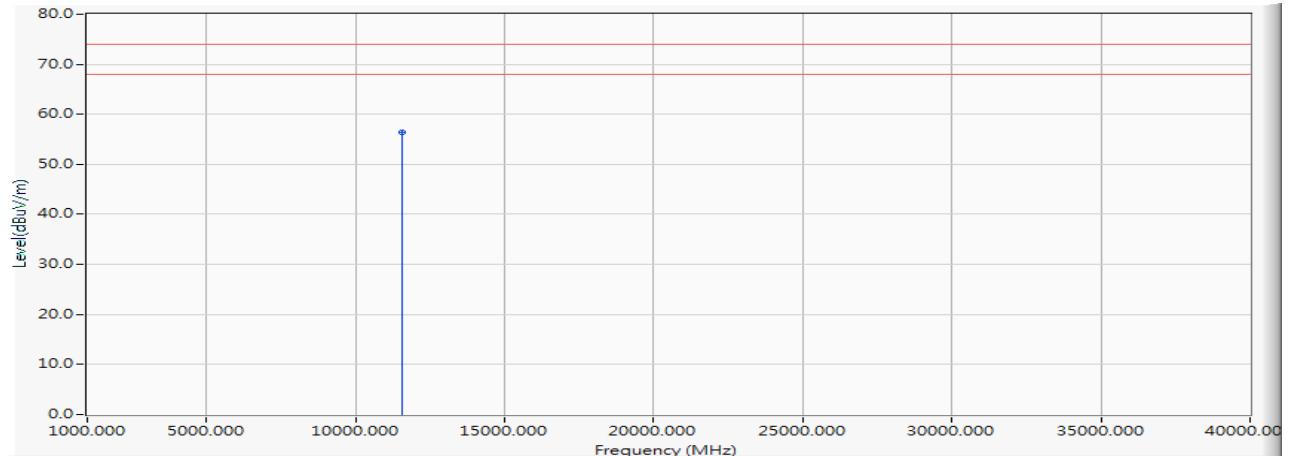


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	41.632	56.372	-17.628	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5785MHz)

Vertical

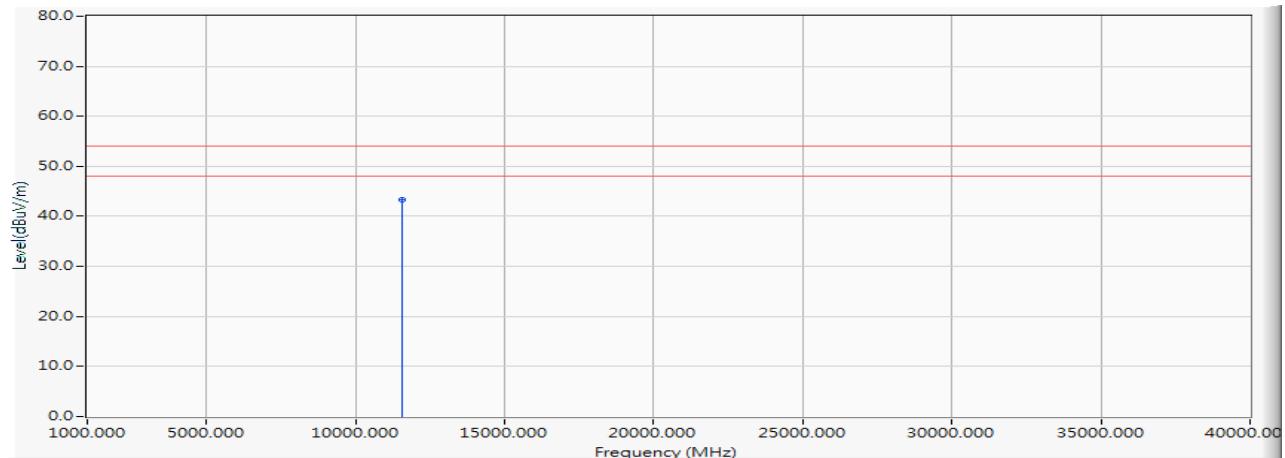


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11570.000	14.740	28.630	43.370	-10.630	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5825MHz)

Horizontal

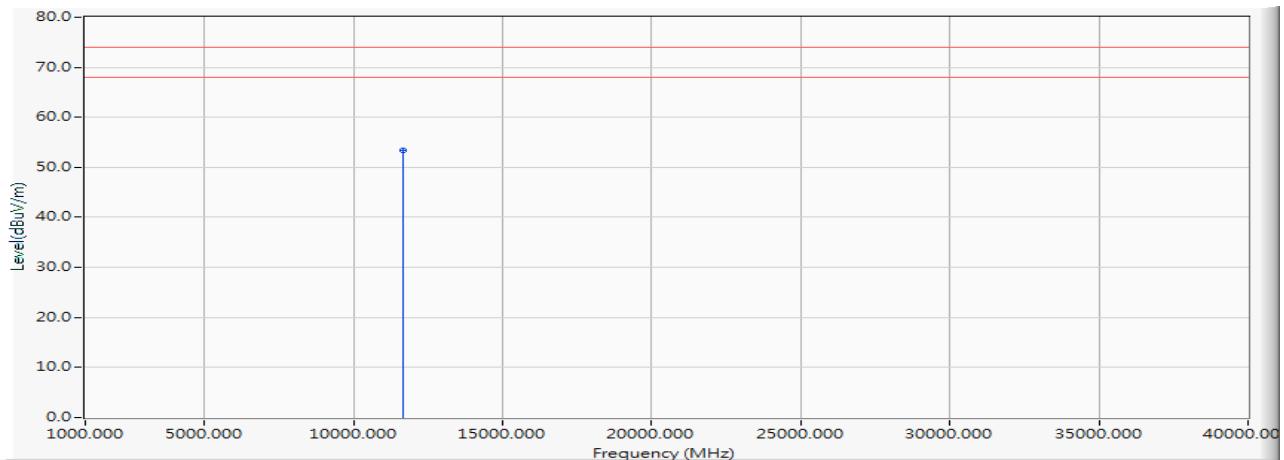


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	39.264	53.360	-20.640	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5825MHz)

Vertical

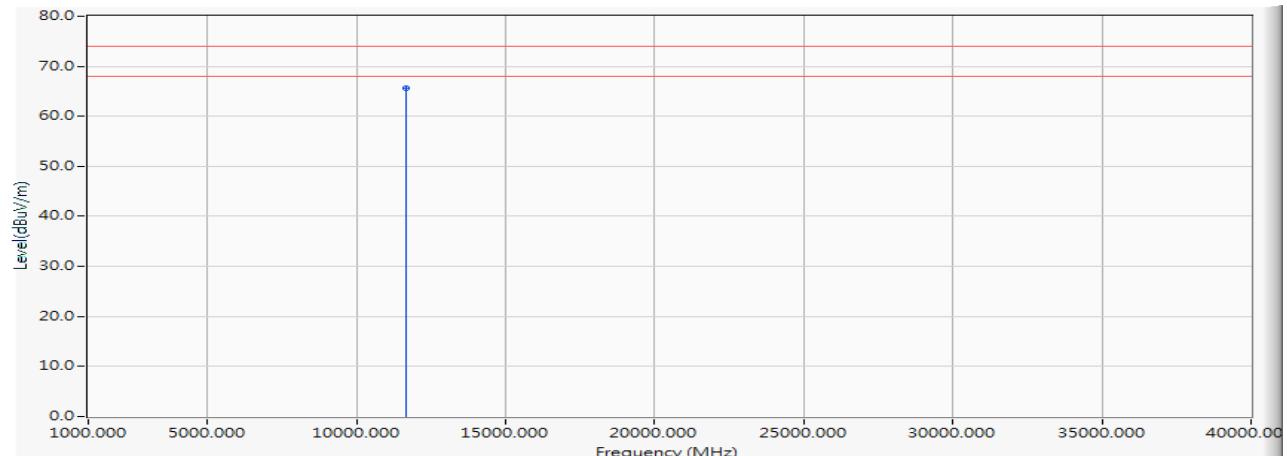


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	51.498	65.594	-8.406	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-20BW_14.4Mbps) (5825MHz)

Vertical

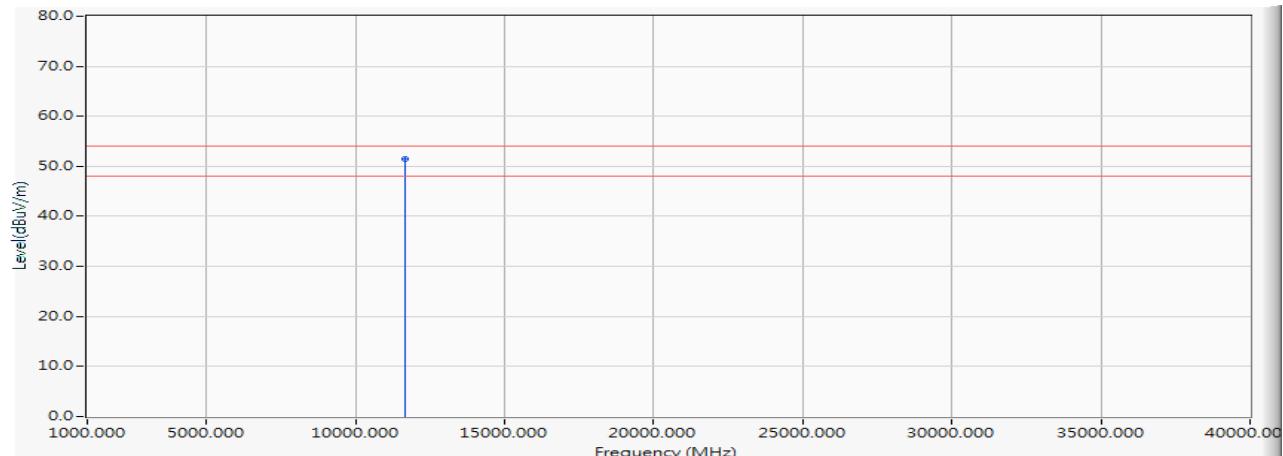


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11650.000	14.096	37.432	51.528	-2.472	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5190MHz)

Horizontal

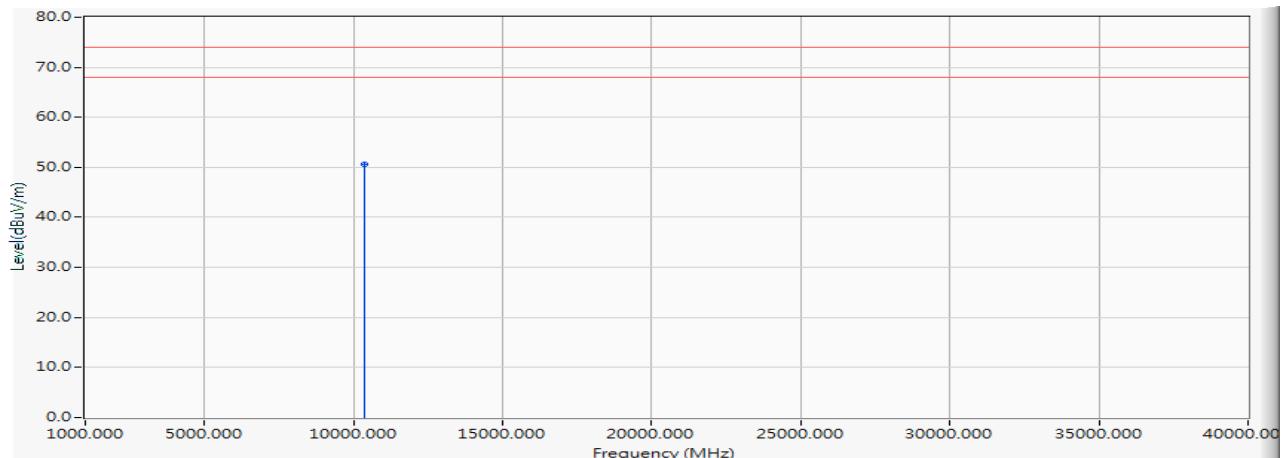


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10380.000	13.352	37.353	50.705	-23.295	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5190MHz)

Vertical

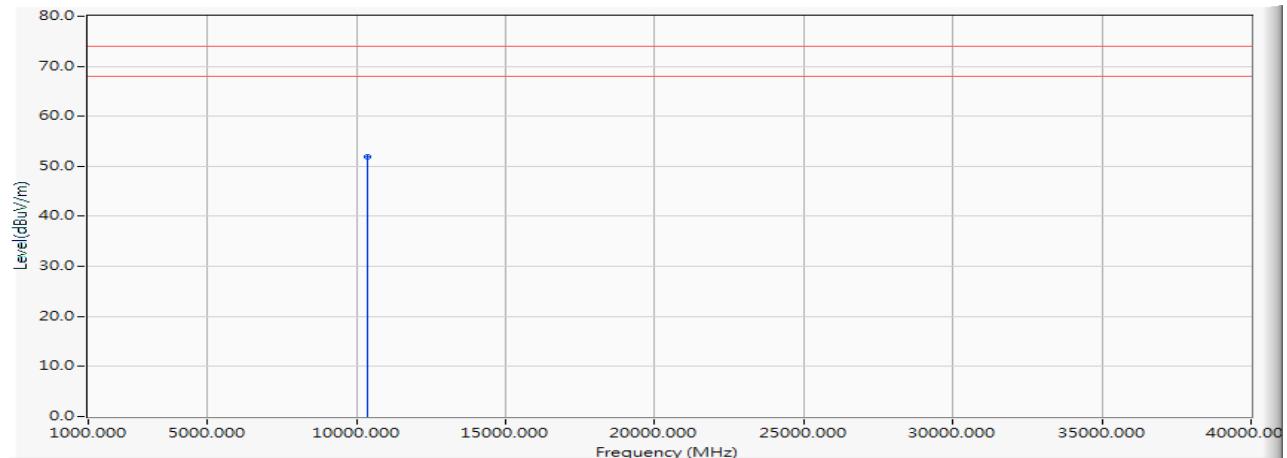


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10380.000	13.352	38.469	51.821	-22.179	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5230MHz)

Horizontal

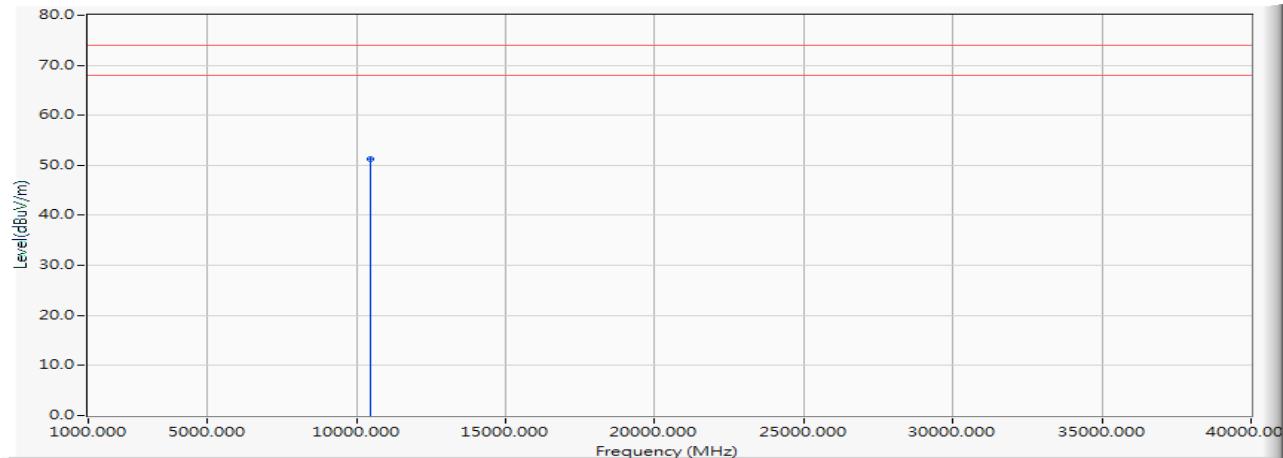


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10460.000	13.192	38.135	51.327	-22.673	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5230MHz)

Vertical

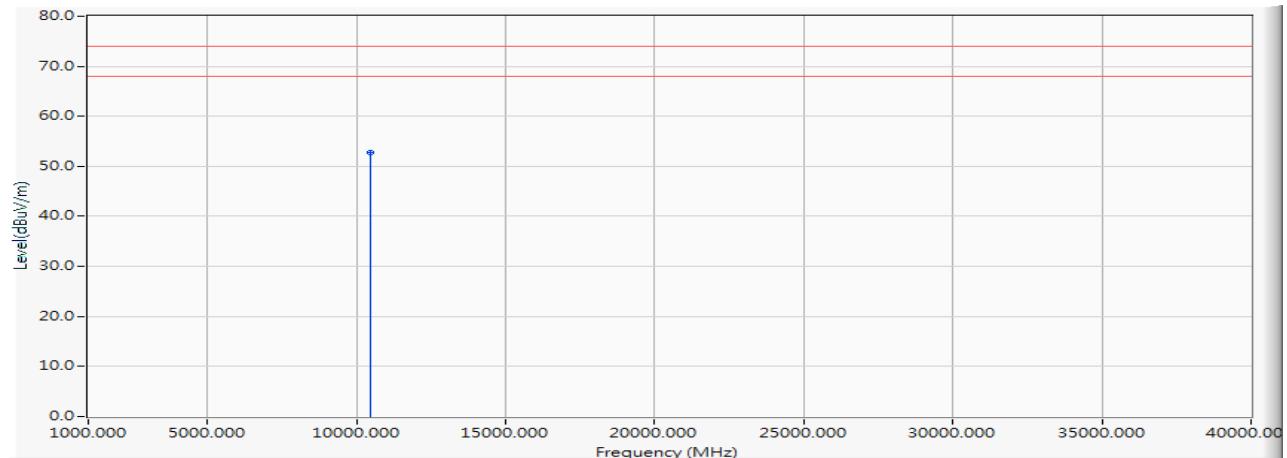


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10460.000	13.192	39.479	52.671	-21.329	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5270MHz)

Horizontal

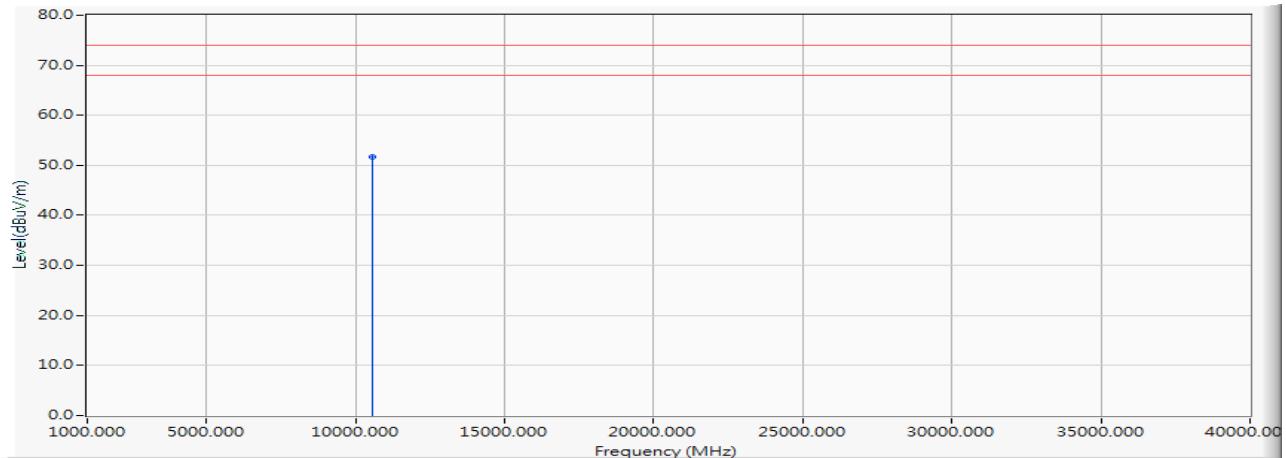


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10540.000	13.111	38.493	51.605	-22.395	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5270MHz)

Vertical

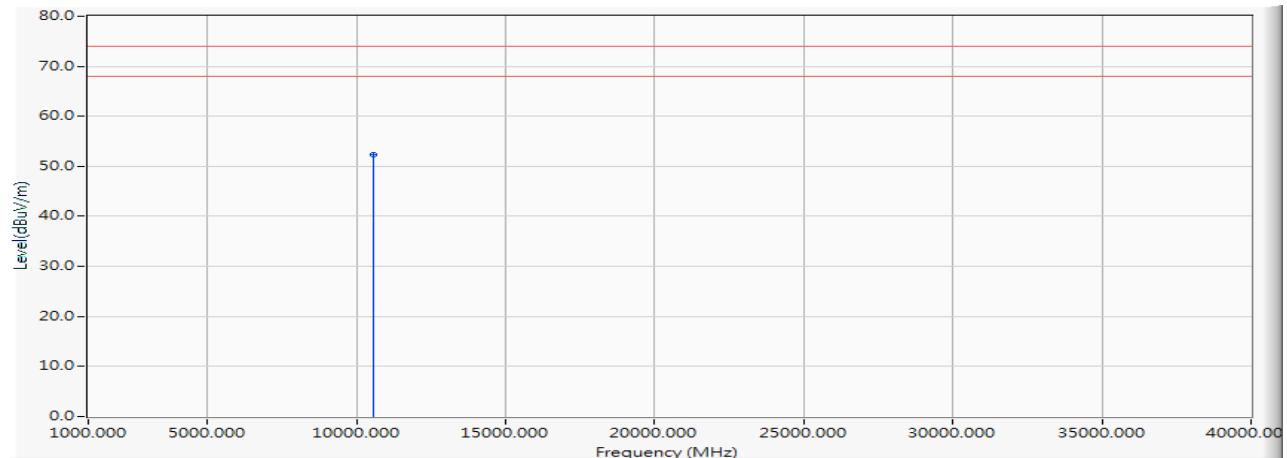


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10540.000	13.111	39.312	52.424	-21.576	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5310MHz)

Horizontal

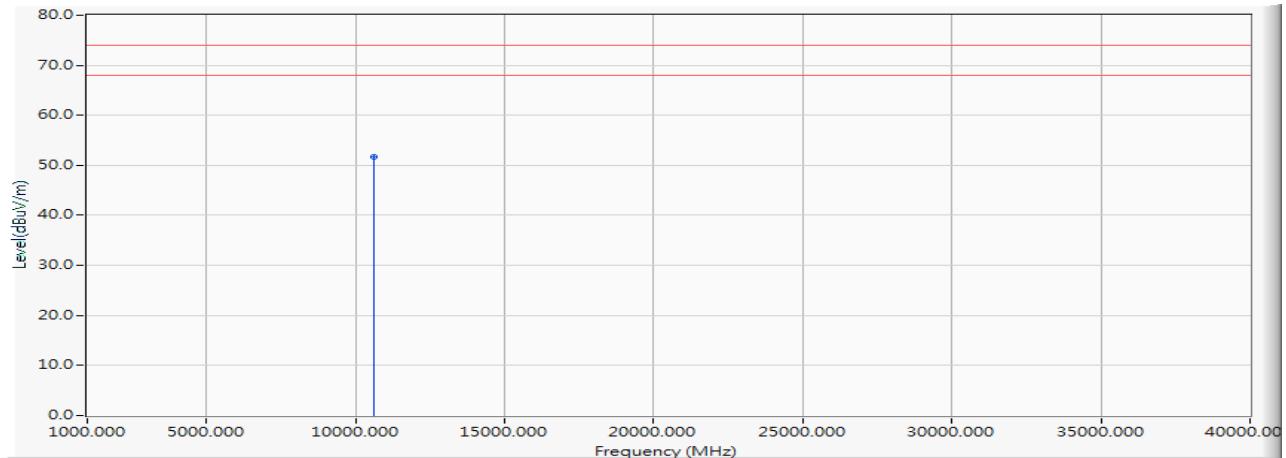


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10620.000	13.126	38.493	51.620	-22.380	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5310MHz)

Vertical

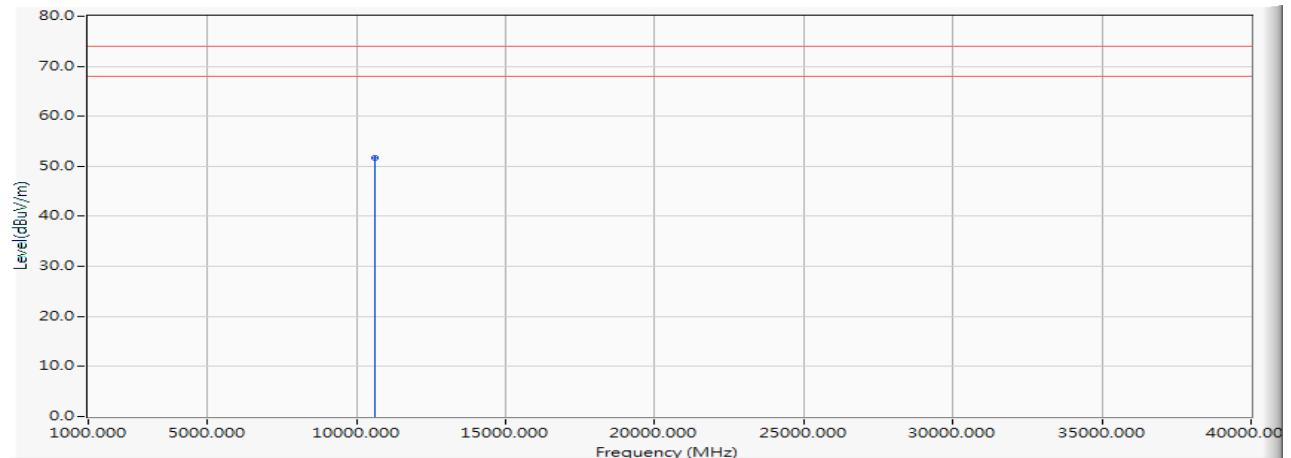


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10620.000	13.126	38.496	51.623	-22.377	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5510MHz)

Horizontal

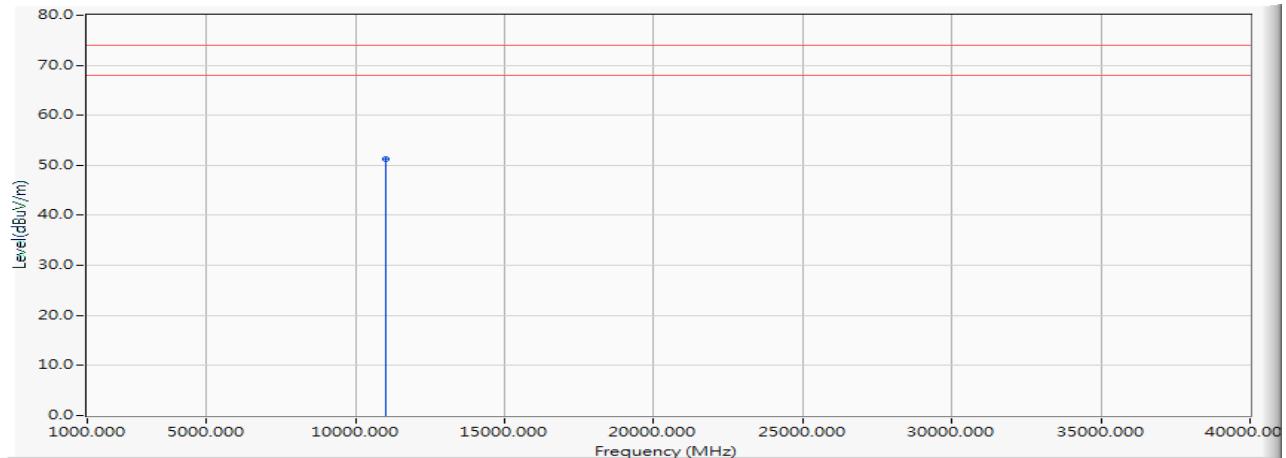


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11020.000	13.756	37.463	51.218	-22.782	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5510MHz)

Vertical

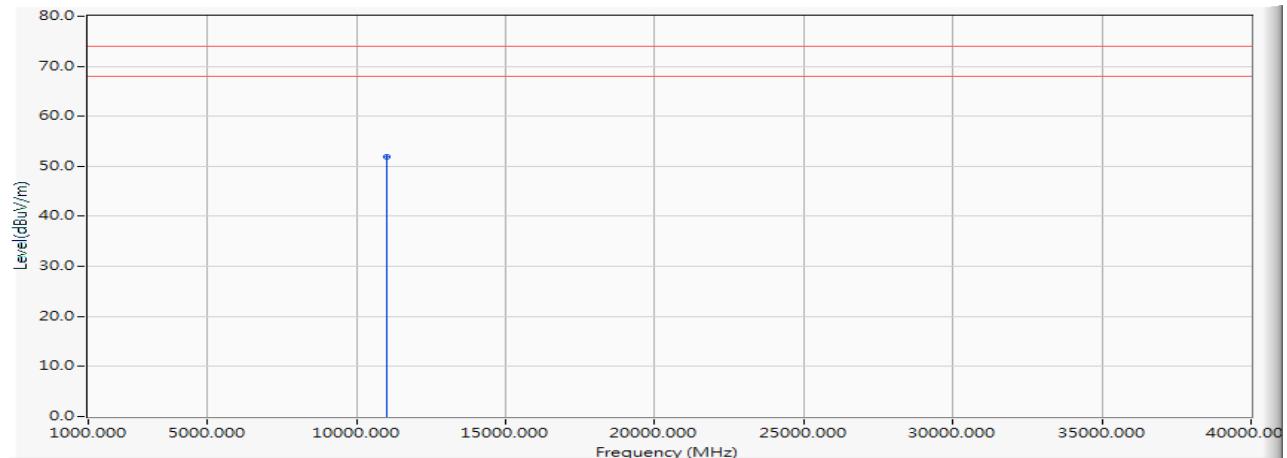


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11020.000	13.756	38.136	51.891	-22.109	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5590MHz)

Horizontal

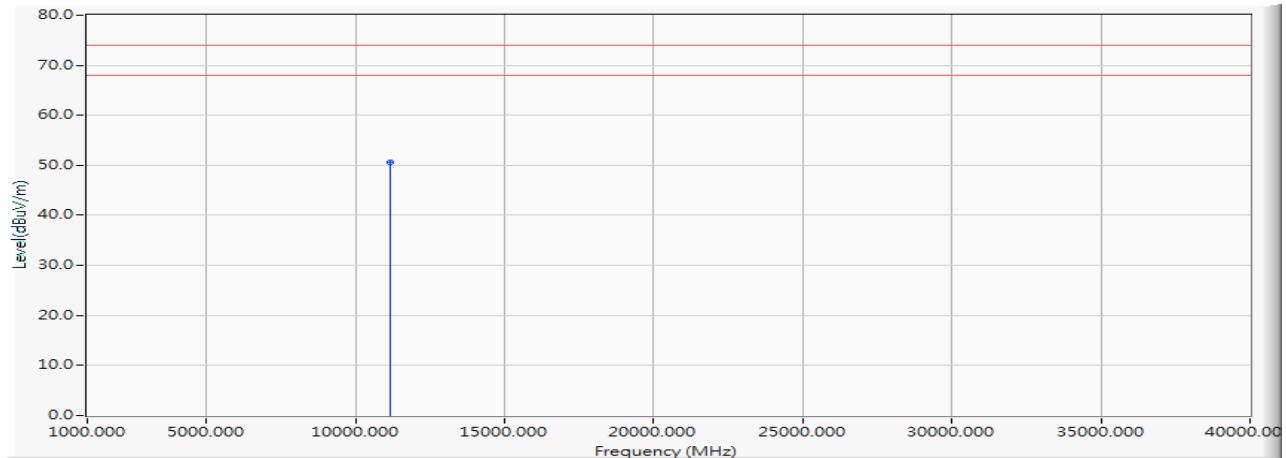


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11180.000	25.105	25.536	50.641	-23.359	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5590MHz)

Vertical

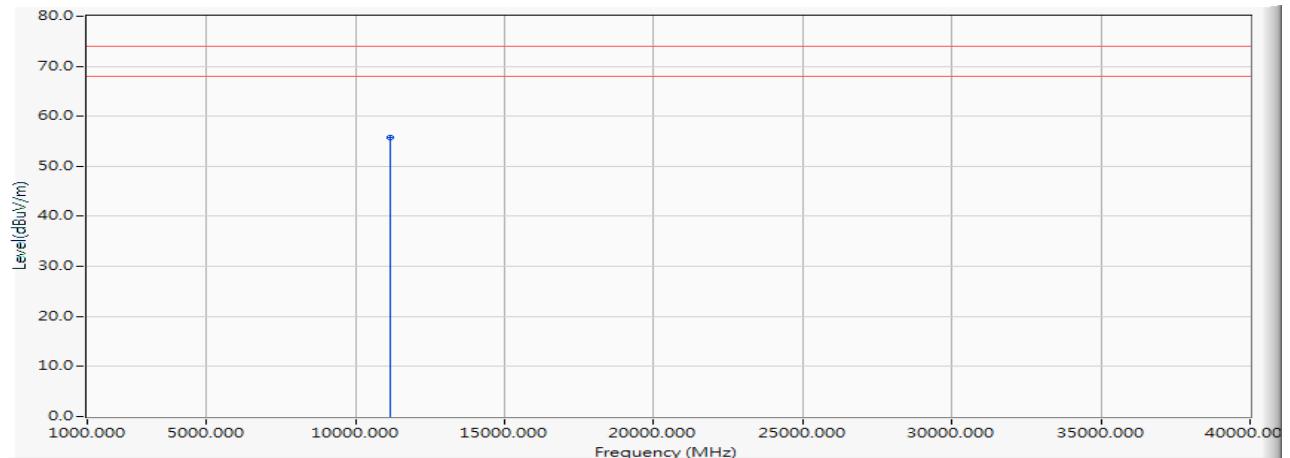


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11180.000	25.105	30.740	55.845	-18.155	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/10/04
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5590MHz)

Vertical

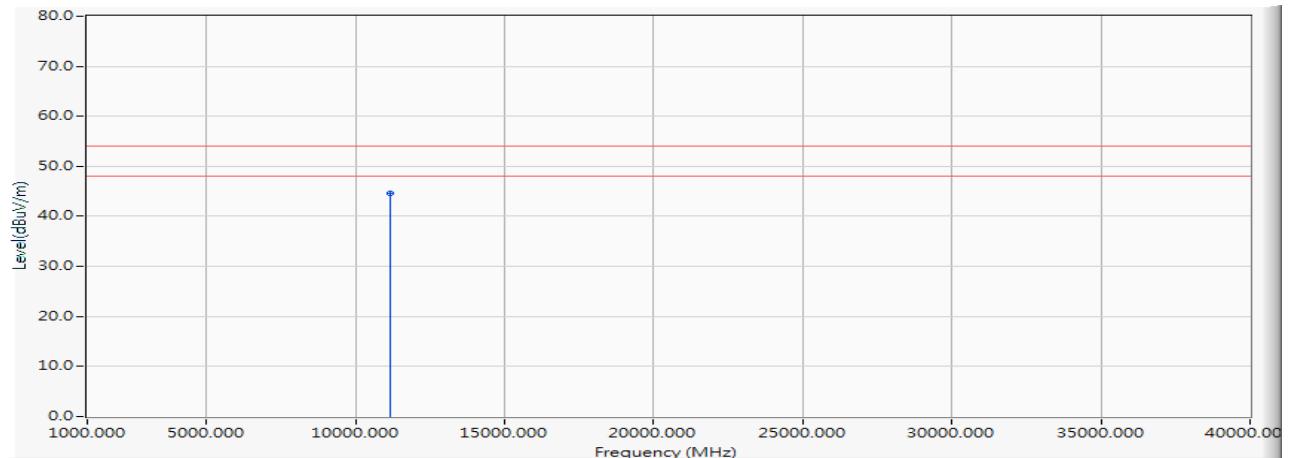


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11180.000	25.105	19.416	44.521	-9.479	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Horizontal

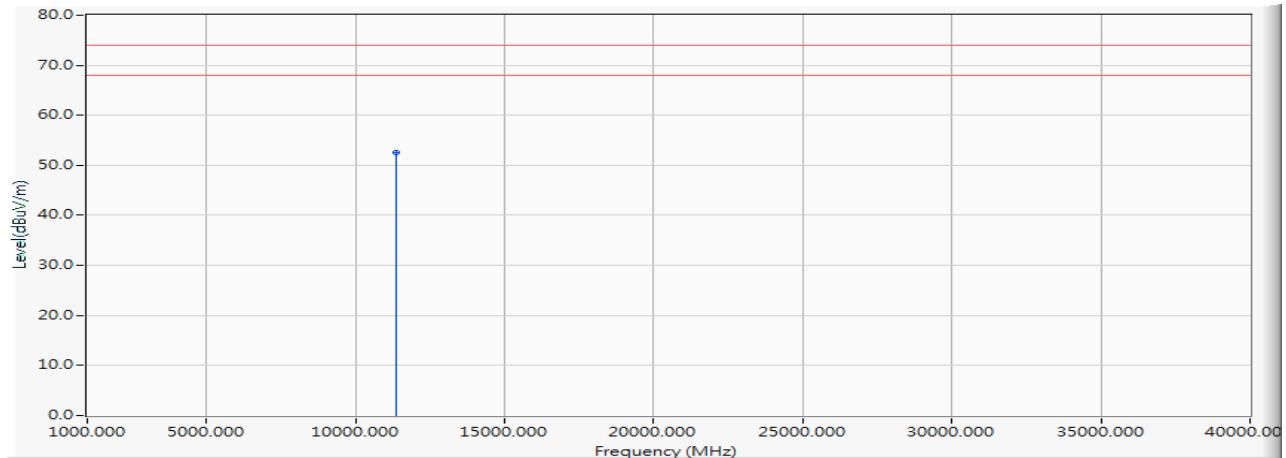


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11340.000	14.967	37.492	52.459	-21.541	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Vertical

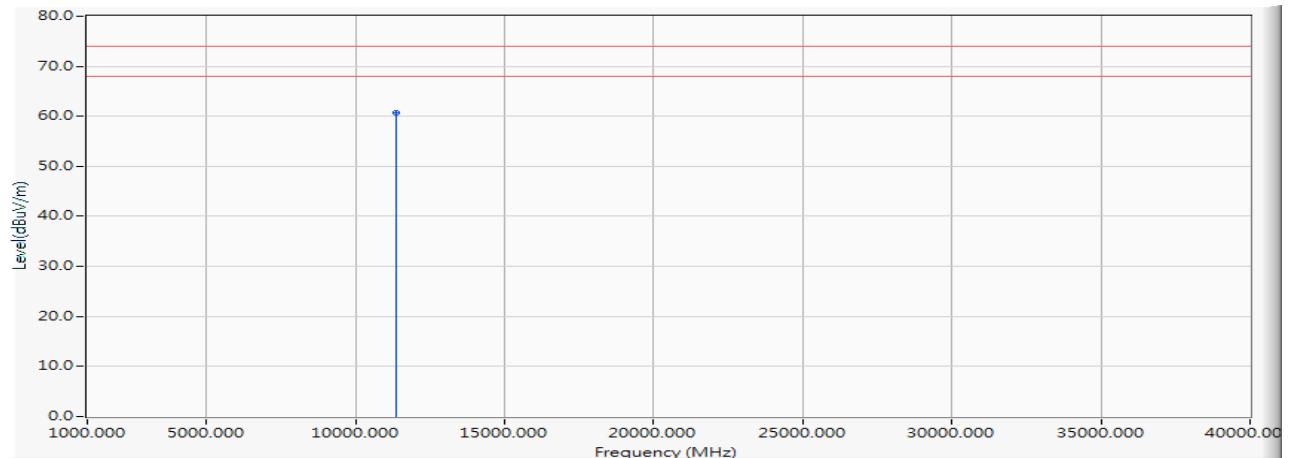


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11340.000	14.967	45.723	60.690	-13.310	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Vertical

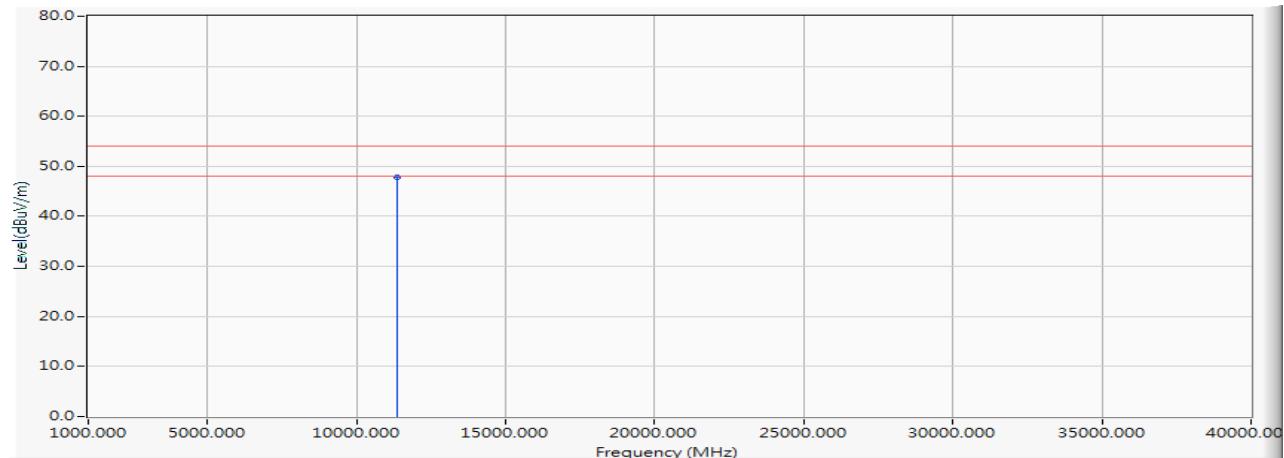


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11340.000	14.967	32.853	47.820	-6.180	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5710MHz)

Horizontal

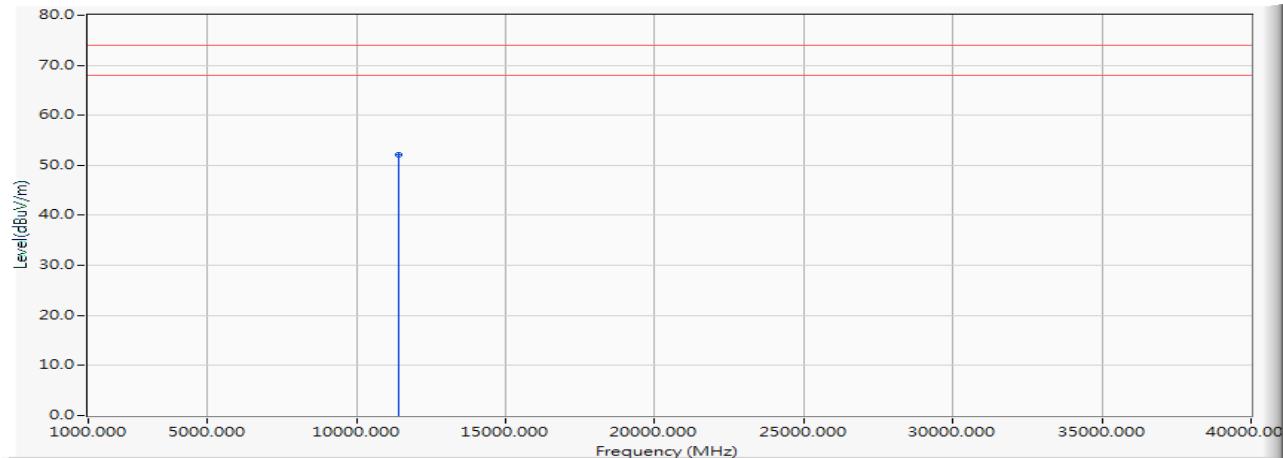


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11420.000	15.126	37.096	52.222	-21.778	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5710MHz)

Vertical

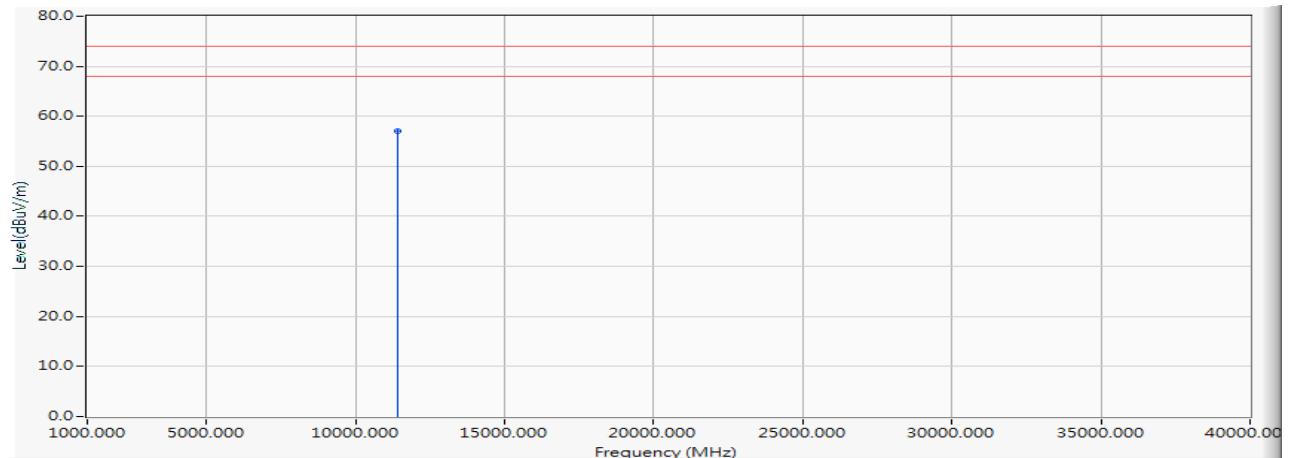


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11420.000	15.126	41.856	56.982	-17.018	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5710MHz)

Vertical

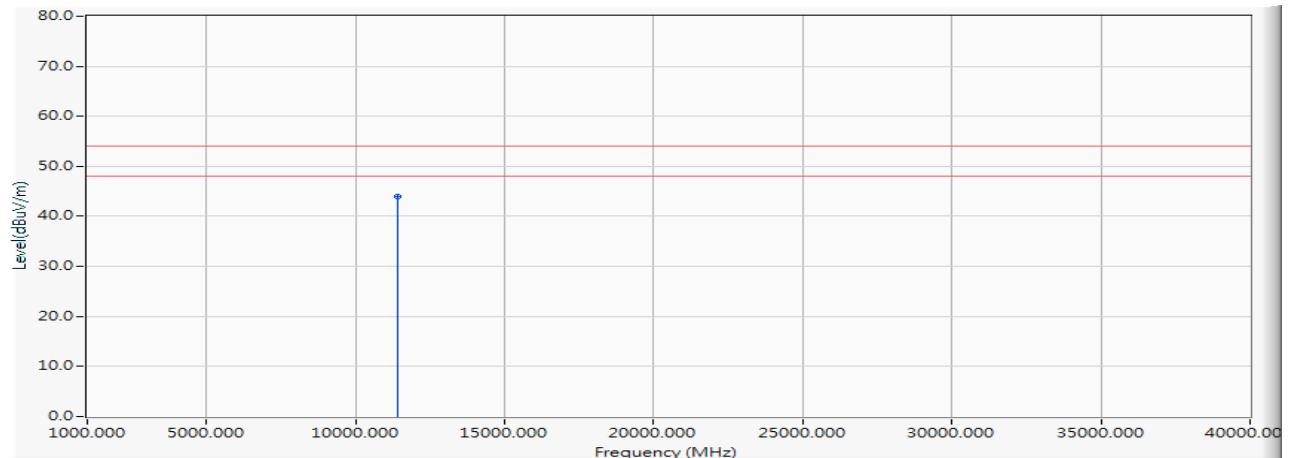


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11420.000	15.126	28.746	43.872	-10.128	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5755MHz)

Horizontal

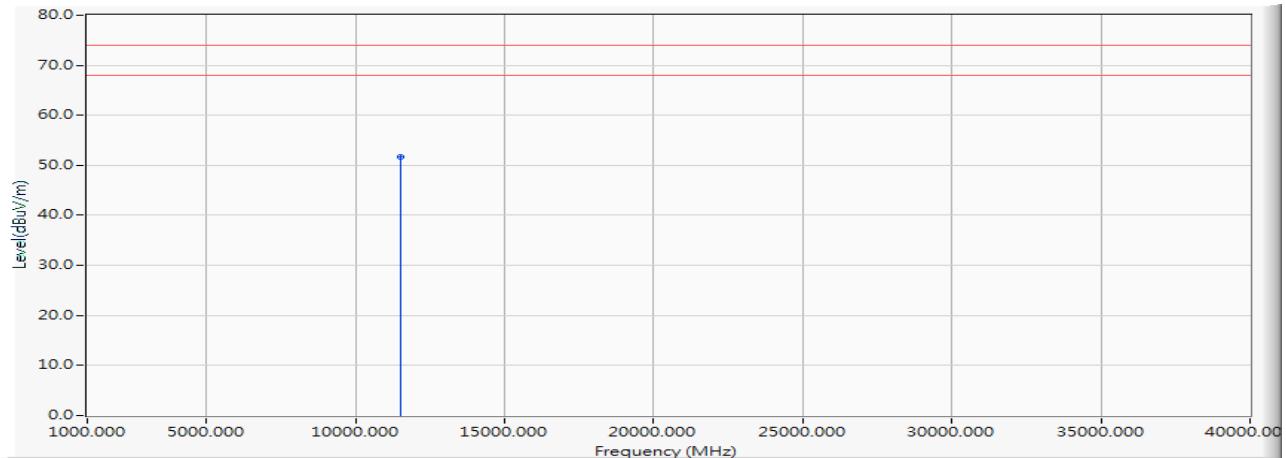


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11510.000	15.201	36.528	51.728	-22.272	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5755MHz)

Vertical

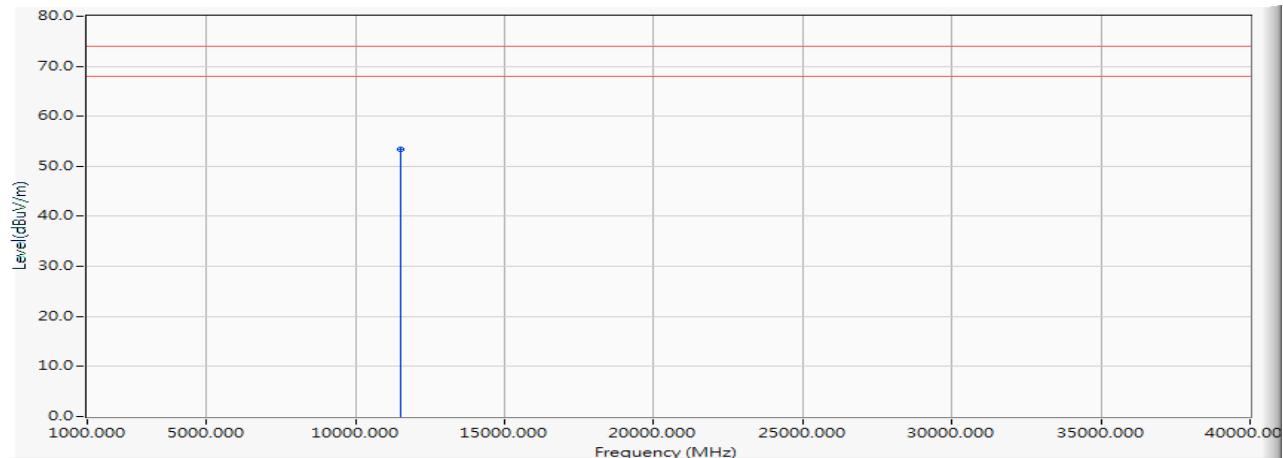


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11510.000	15.201	38.210	53.410	-20.590	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Horizontal

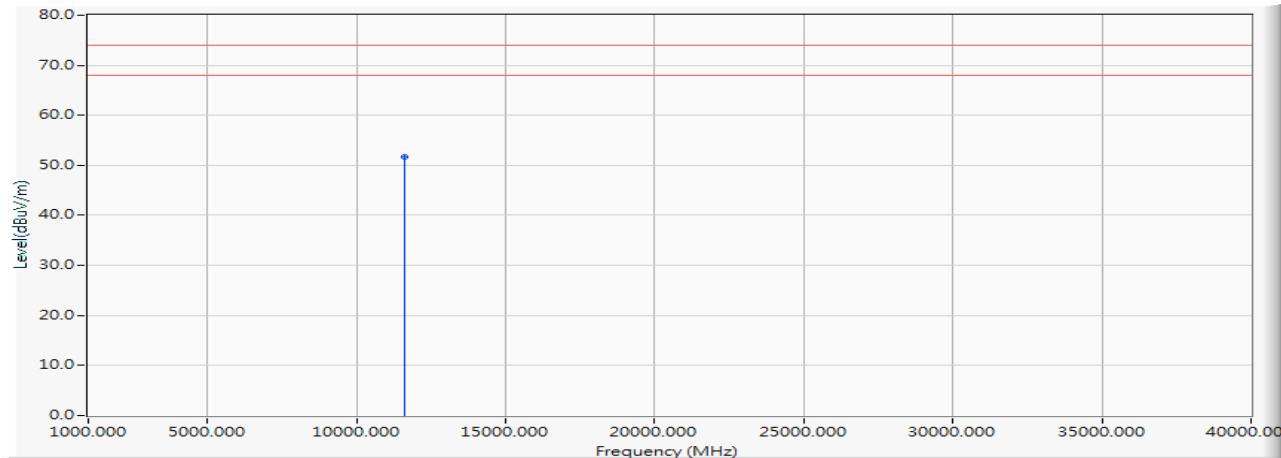


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11590.000	14.578	37.096	51.674	-22.326	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Vertical

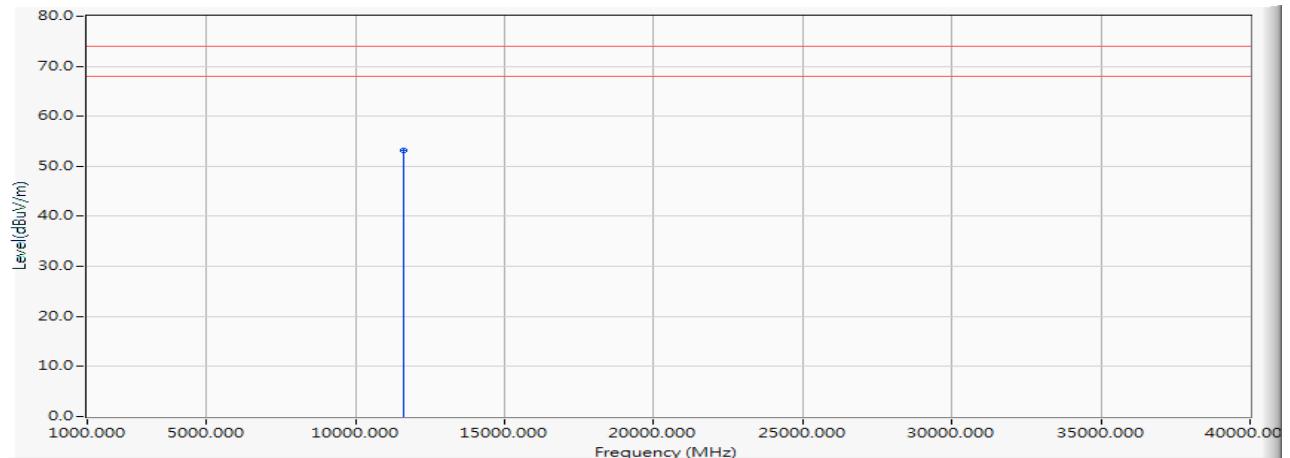


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11590.000	14.578	38.620	53.198	-20.802	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5210MHz)

Horizontal

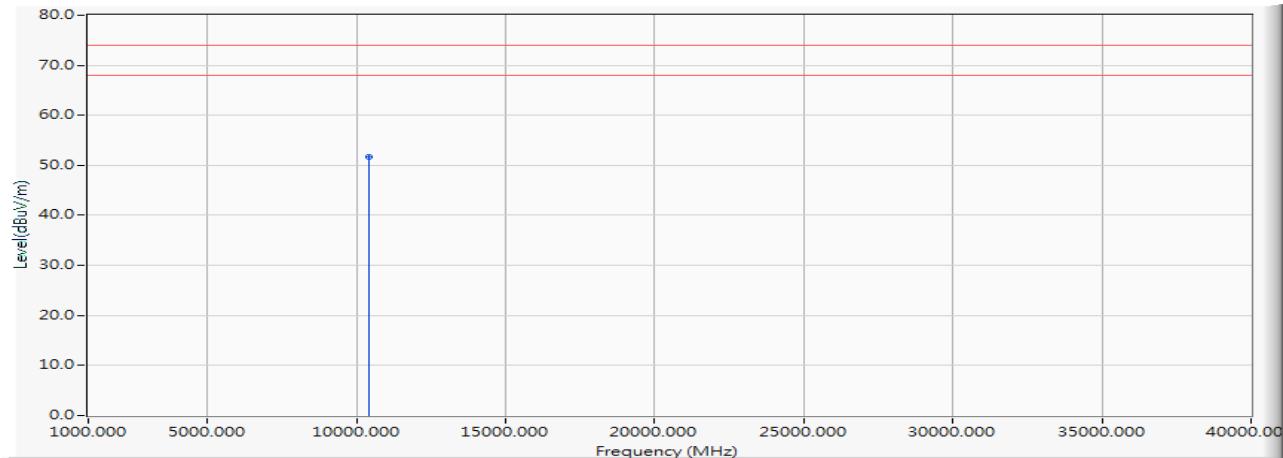


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10420.000	13.273	38.469	51.741	-22.259	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5210MHz)

Vertical

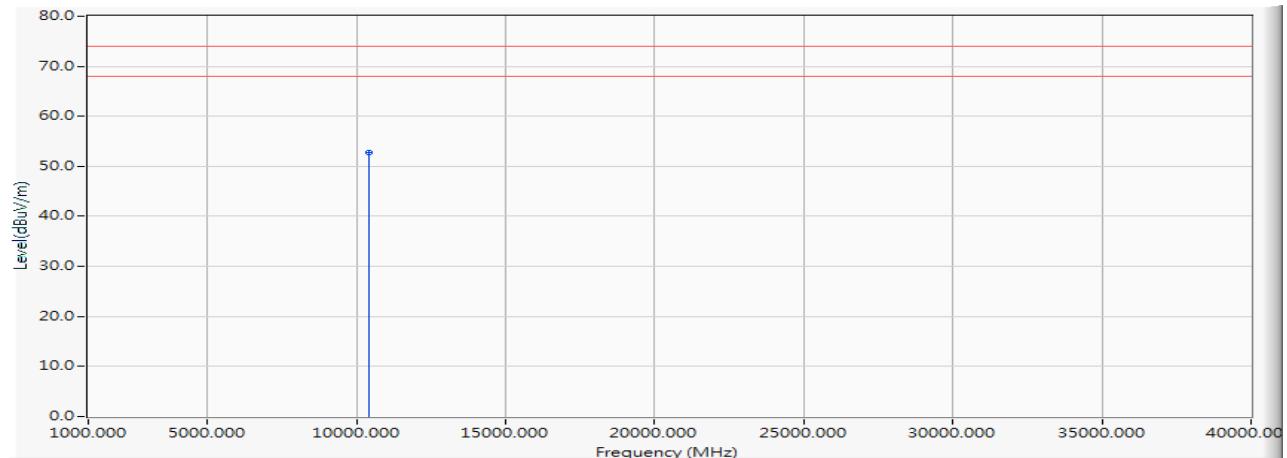


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10420.000	13.273	39.420	52.692	-21.308	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5290MHz)

Horizontal

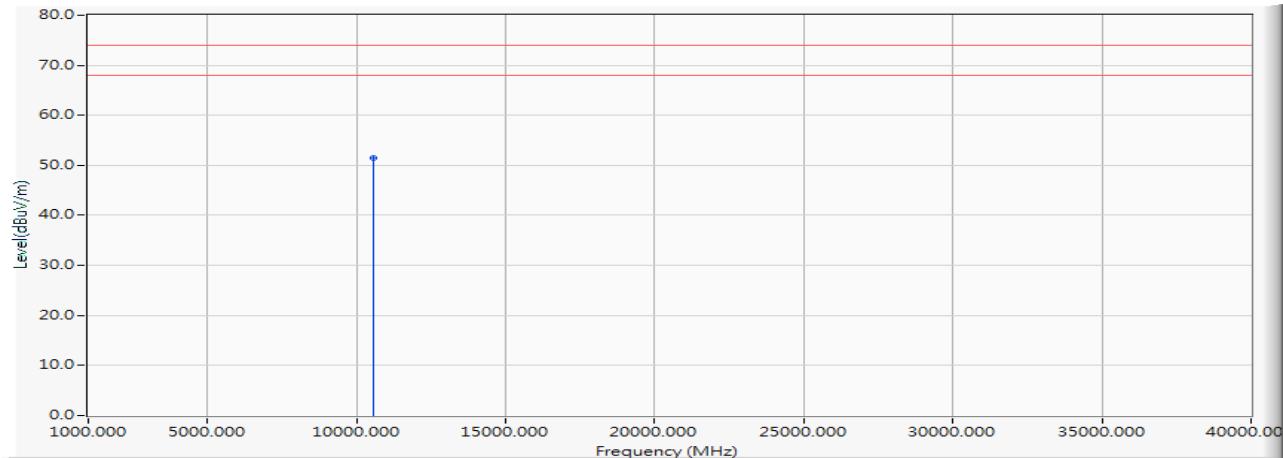


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10580.000	13.118	38.423	51.541	-22.459	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5290MHz)

Vertical

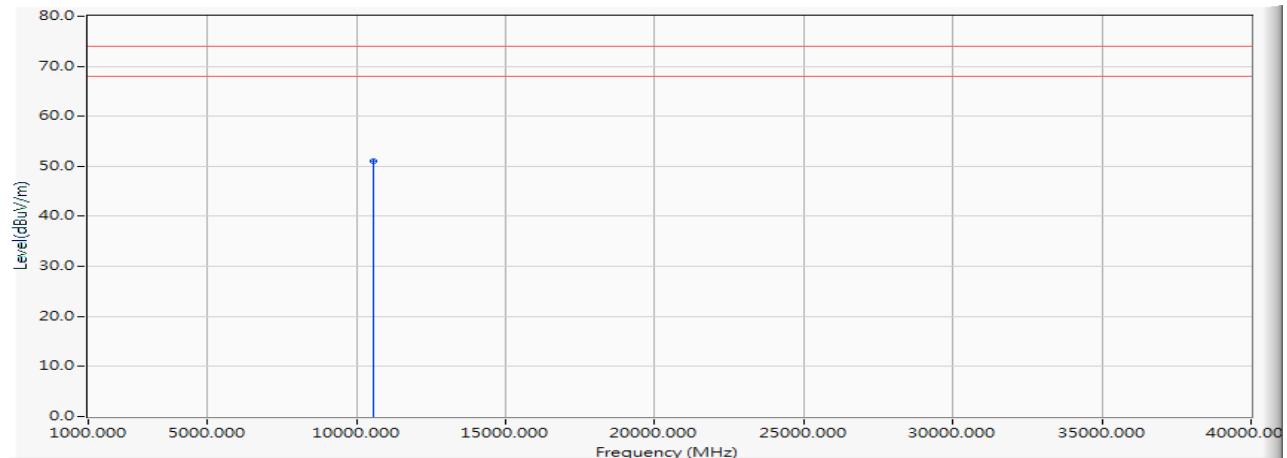


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	10580.000	13.118	38.003	51.121	-22.879	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5530MHz)

Horizontal

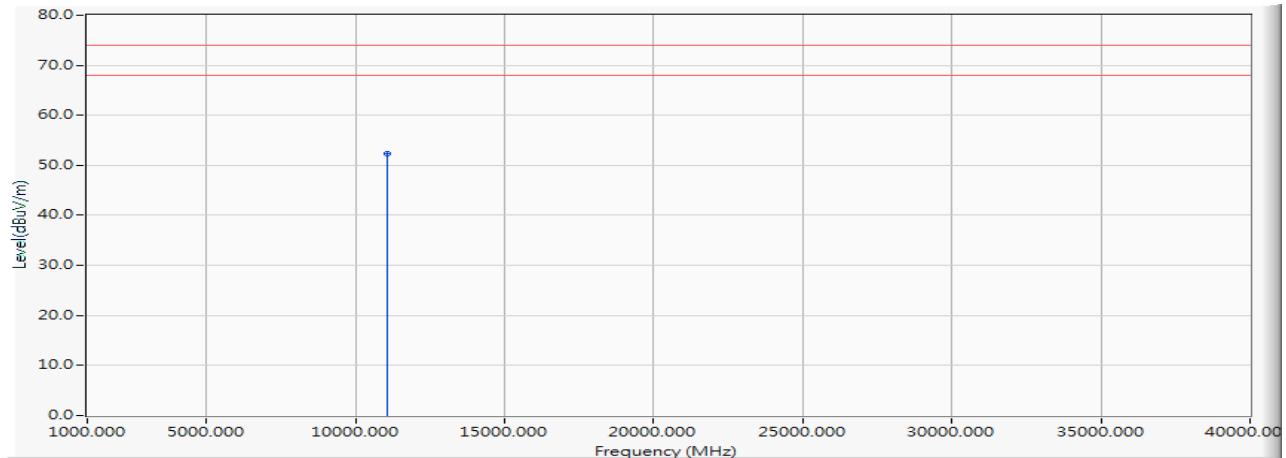


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11060.000	13.957	38.415	52.372	-21.628	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5530MHz)

Vertical

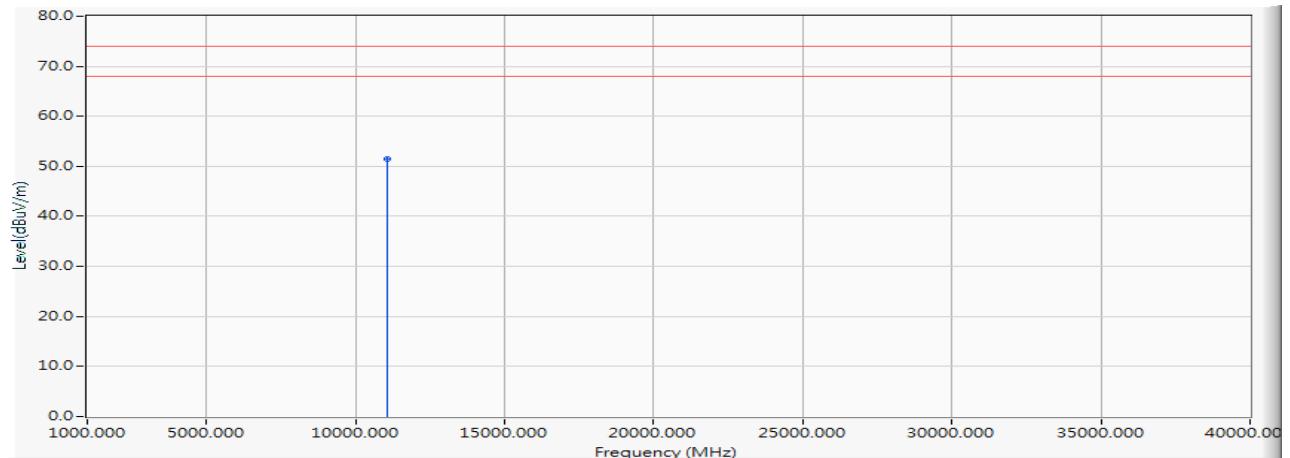


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11060.000	13.957	37.493	51.450	-22.550	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : PRORAD X-ray Flat Panel Detector
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2019/09/25
 Test Mode : Mode 3 MIMO: Transmit (802.11ac-80BW_65Mbps)(5610MHz)

Horizontal

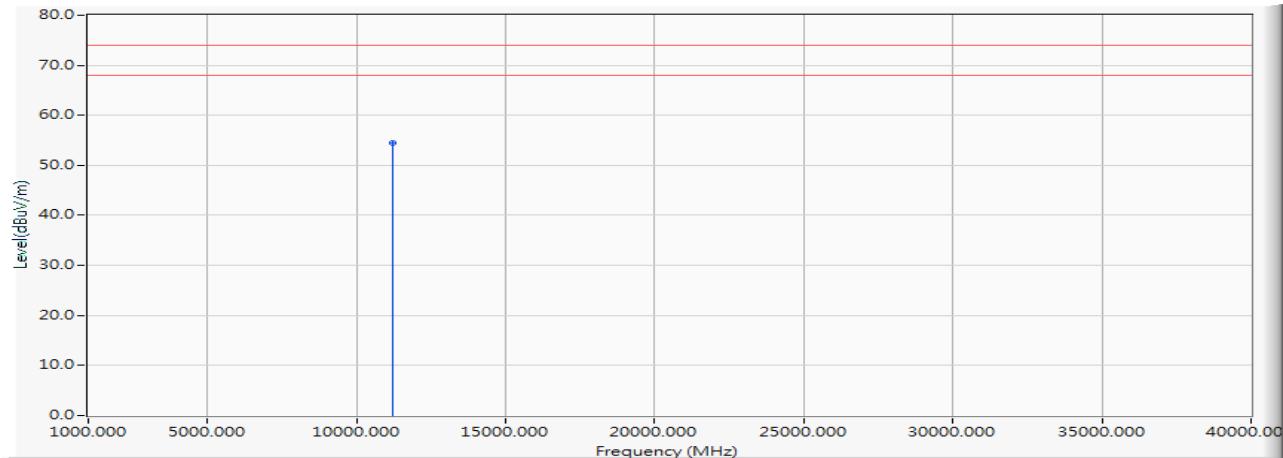

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	11220.000	14.703	39.784	54.487	-19.513	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.