

TEST REPORT

Reference No...... : WTH21X09102605W001
FCC ID : 2A7EI-EAX1805
Applicant : HUIZHOU MTN WEIYE TECHNOLOGY DEVELOPMENT CO.,LTD
Address : NO.2 Huitai Road,Huinan High-tech Industrial Park,Huihao Avenue,Huizhou
City,Guangdong Province,China
Manufacturer : HUIZHOU MTN WEIYE TECHNOLOGY DEVELOPMENT CO.,LTD.
Address : NO.2 Huitai Road,Huinan High-tech Industrial Park,Huihao Avenue,Huizhou
City,Guangdong Province,China
Product Name : WiFi 6 Range Extender
Model No...... : EAX1805
Standards : FCC Part 15.407
Date of Receipt sample : 2021-09-26
Date of Test..... : 2021-09-26 to 2022-05-25
Date of Issue : 2022-05-25
Test Report Form No. : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	8
1.6 TEST FACILITY	8
1.7 EUT SETUP AND TEST MODE.....	9
1.8 MEASUREMENT UNCERTAINTY	10
1.9 TEST EQUIPMENT LIST AND DETAILS	11
2. SUMMARY OF TEST RESULTS	14
3. ANTENNA REQUIREMENT	15
3.1 STANDARD APPLICABLE.....	15
3.2 EVALUATION INFORMATION	15
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	16
4.1 STANDARD APPLICABLE.....	16
4.2 SUMMARY OF TEST RESULTS	16
5. POWER SPECTRAL DENSITY	17
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 SUMMARY OF TEST RESULTS/PLOTS	18
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	19
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS	21
7. MAXIMUM CONDUCTED OUTPUT POWER.....	22
7.1 STANDARD APPLICABLE.....	22
7.2 TEST PROCEDURE.....	22
7.3 SUMMARY OF TEST RESULTS/PLOTS	23
8. RADIATED SPURIOUS EMISSIONS.....	24
8.1 STANDARD APPLICABLE.....	24
8.2 TEST PROCEDURE.....	24
8.3 TEST RECEIVER SETUP	26
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	26
8.5 SUMMARY OF TEST RESULTS/PLOTS	27
9. FREQUENCY STABILITY	53
9.1 STANDARD APPLICABLE.....	53
9.2 TEST PROCEDURE.....	53
9.3 SUMMARY OF TEST RESULTS/PLOTS	53
10 CONDUCTED EMISSIONS	54
10.1 TEST PROCEDURE.....	54
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	54
10.3 TEST RECEIVER SETUP	54
10.4 SUMMARY OF TEST RESULTS/PLOTS	54
APPENDIX SUMMARY	57
APPENDIX A.....	58
APPENDIX B.....	80
APPENDIX C.....	122
APPENDIX D.....	143

APPENDIX PHOTOGRAPHS.....145

Report version

Version No.	Date of issue	Description
Rev.00	2022-05-25	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	WiFi 6 Range Extender
Trade Name:	MTN
Model No.:	EAX1805
Adding Model(s):	/
Rated Voltage:	AC120V/60Hz
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ax-HE20, 802.11ax-HE40, 802.11ac-VHT80, 802.11ax-HE80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	5150-5250MHz: Antenna 1: 17.69dBm (Conducted) Antenna 2: 17.57dBm (Conducted) 5725-5850MHz: Antenna 1: 17.09dBm (Conducted) Antenna 2: 17.54dBm (Conducted)
Type of Modulation:	QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Type of Antenna:	External Antenna
Antenna Gain:	3dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

KDB662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “3646631+” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	520	524	526	5300	532	550	558	570	572	574	578	5825
802.11a 6Mbps	ANT 1	38	38	38	/	/	/	/	/	/	/	35	35	35
	ANT 2	38	38	38	/	/	/	/	/	/	/	35	35	35
802.11n-HT20 MCS0	ANT 1	35	35	35	/	/	/	/	/	/	/	30	30	30
	ANT 2	35	35	35	/	/	/	/	/	/	/	30	30	30
802.11ax-HE20 MCS0	ANT 1	35	35	35	/	/	/	/	/	/	/	30	30	30
	ANT 2	35	35	35	/	/	/	/	/	/	/	30	30	30
Mode	Ant.	NCB: 40MHz												
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	ANT 1	35	35	/	/	/	/	/	/	30	30			
	ANT 2	35	35	/	/	/	/	/	/	30	30			
802.11ax-HE40	ANT 1	35	35	/	/	/	/	/	/	30	30			

MCS0	ANT 2	35	35	/	/	/	/	/	/	30	30
Mode	Ant.	NCB: 80MHz									
		5210	5290	5530	5610	5690	5775				
802.11ac-VH80 MCS0	ANT 1	35	/	/	/	/	30				
	ANT 2	35	/	/	/	/	30				
802.11ax-VE80 MCS0	ANT 1	35	/	/	/	/	30				
	ANT 2	35	/	/	/	/	30				

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ax-HE20	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM5	802.11ax-HE40	5190MHz,5230MHz, 5755MHz,5795MHz
TM6	802.11ac-VH80	5210MHz, 5775 MHz
TM7	802.11ax-HE80	5210MHz, 5775 MHz
Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26

SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91705 82	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2021-03-27	2022-03-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27

	Antenna					
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two External antennas, fulfill the requirement of this section. And the signals at the antennas are completely uncorrelated. The product transmits signals through Spatial Multiplexing MIMO (SM-MIMO) mode.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1MHz RBW to satisfy directly the 1MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1MHz, or 500kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If

measurements are performed using a reduced resolution bandwidth (< 1 MHz, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz

Section 15.407(e) specifies the minimum 6dB emission bandwidth of at least 500KHz for the band 5.715-5.85GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 * \text{RBW}$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

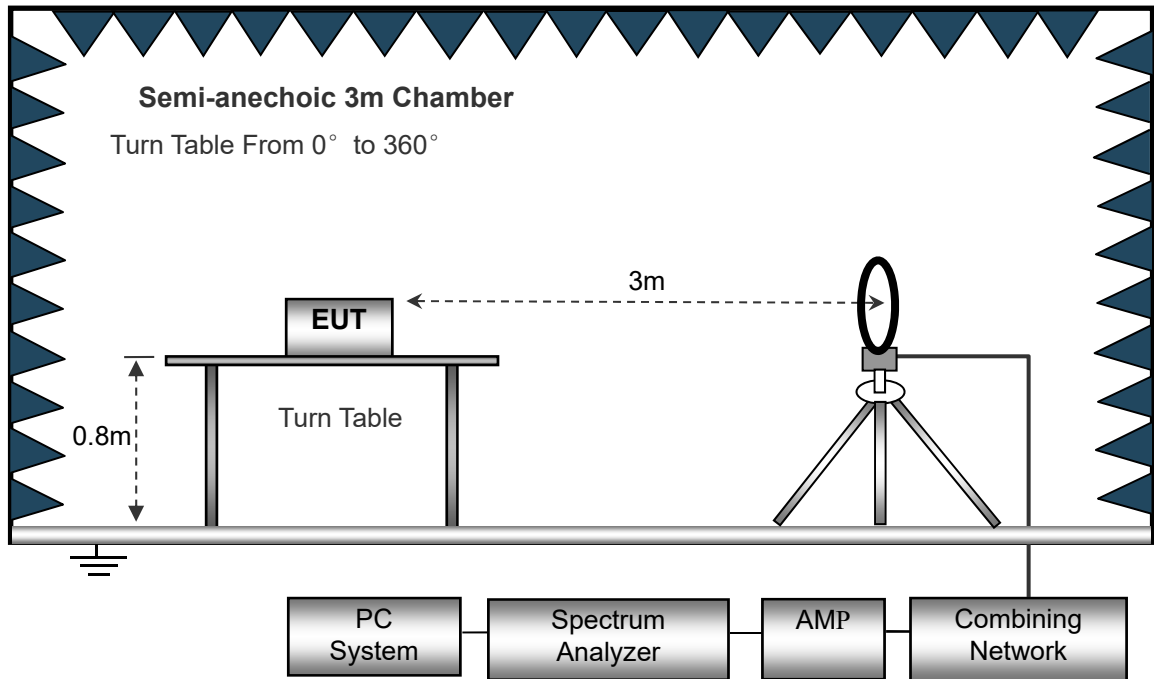
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

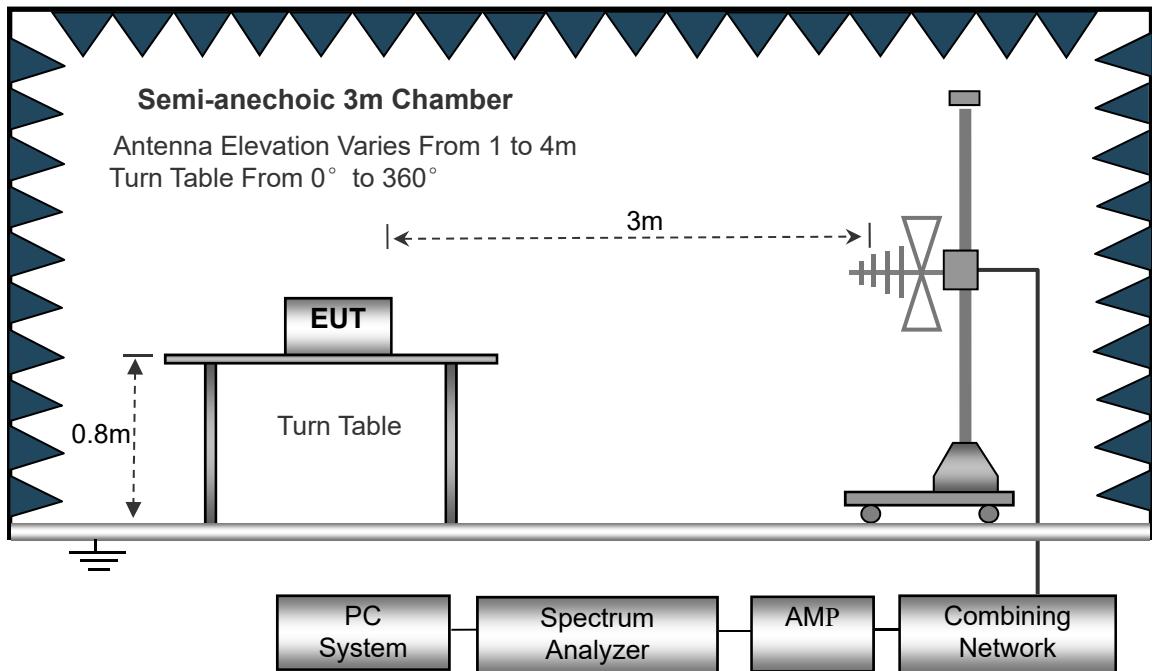
The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

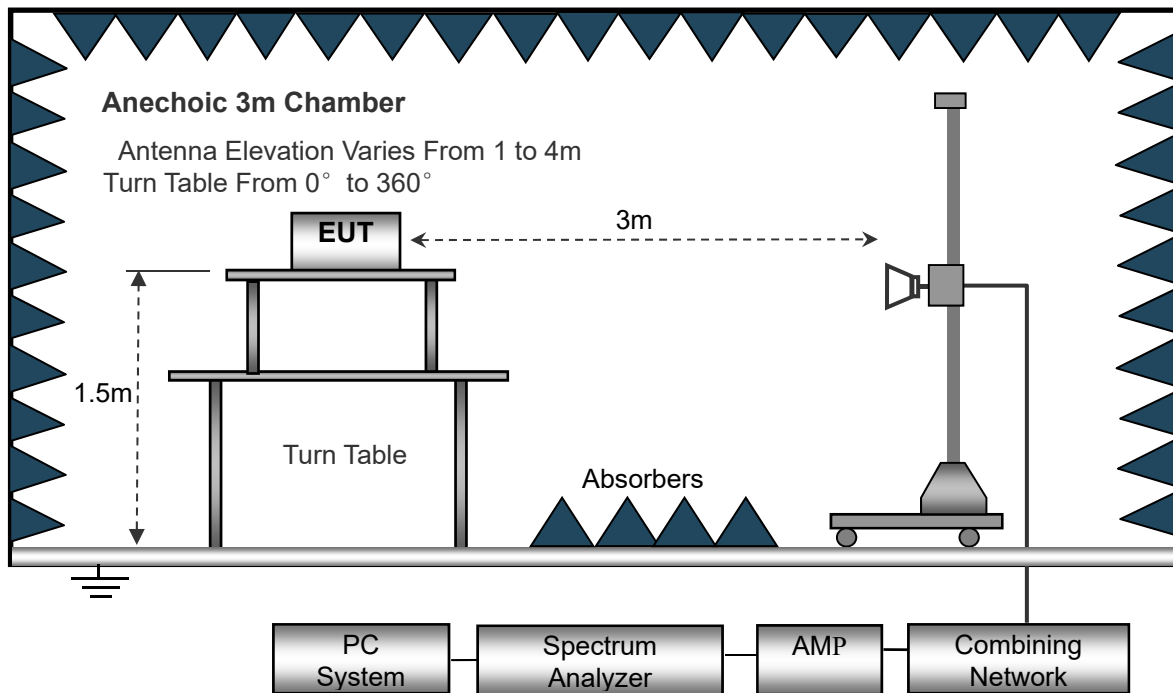
The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30 MHz to 1 GHz.



The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

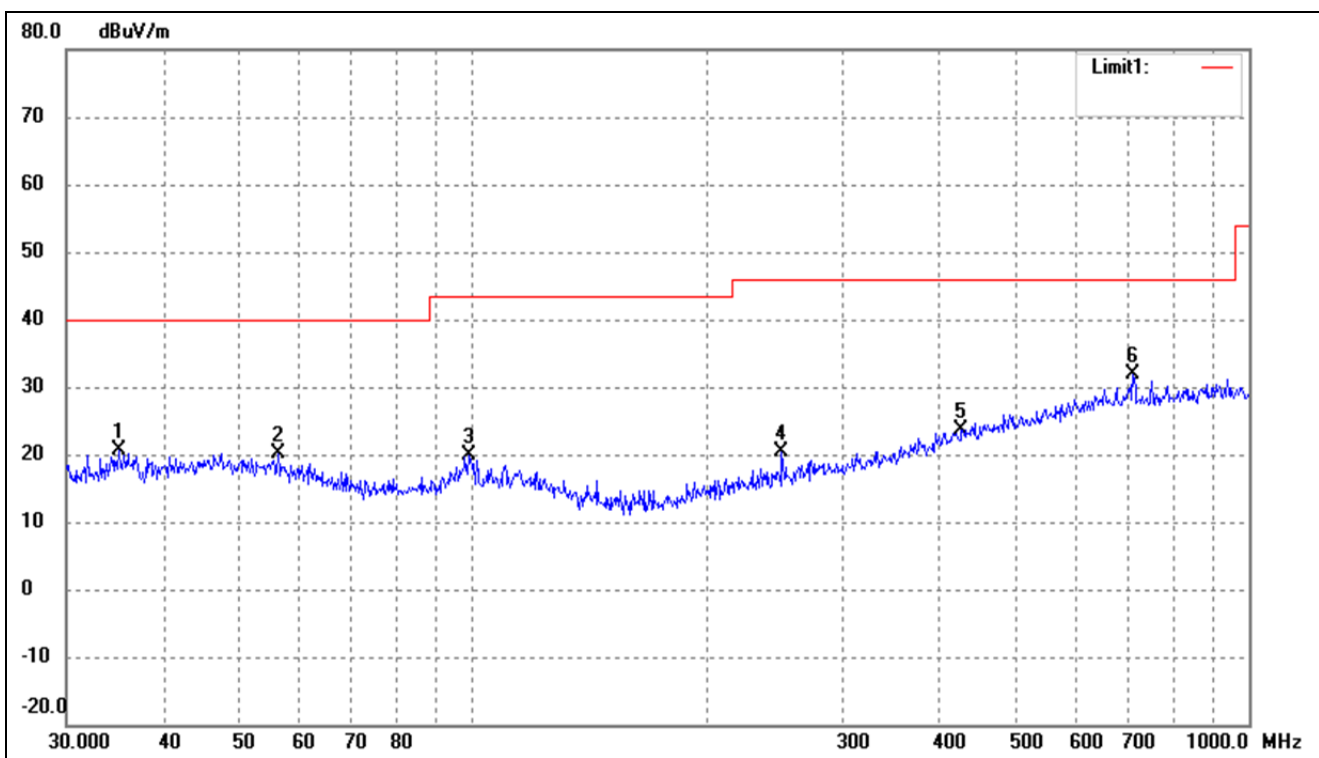
➤ Spurious Emission From 30MHz to 1GHz

➤ Antenna 1(Worst case)

➤ 5150-5250MHz

802.11a(Worst case)

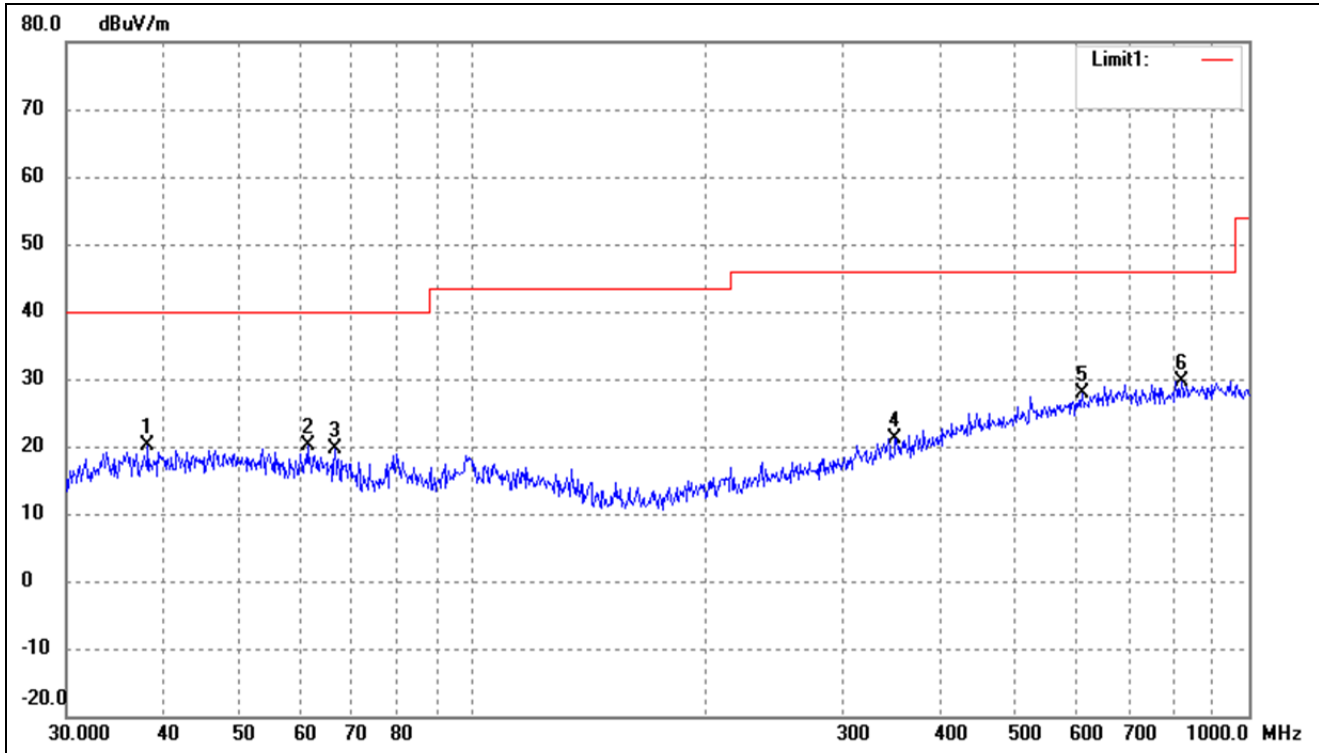
Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.1278	28.93	-8.19	20.74	40.00	-19.26	-	-	peak
2	56.1974	28.10	-7.88	20.22	40.00	-19.78	-	-	peak
3	98.8326	28.86	-8.94	19.92	43.50	-23.58	-	-	peak
4	250.3012	28.67	-8.31	20.36	46.00	-25.64	-	-	peak
5	426.5210	26.75	-3.18	23.57	46.00	-22.43	-	-	peak
6	709.1823	30.29	1.48	31.77	46.00	-14.23	-	-	peak

802.11a(Worst case)

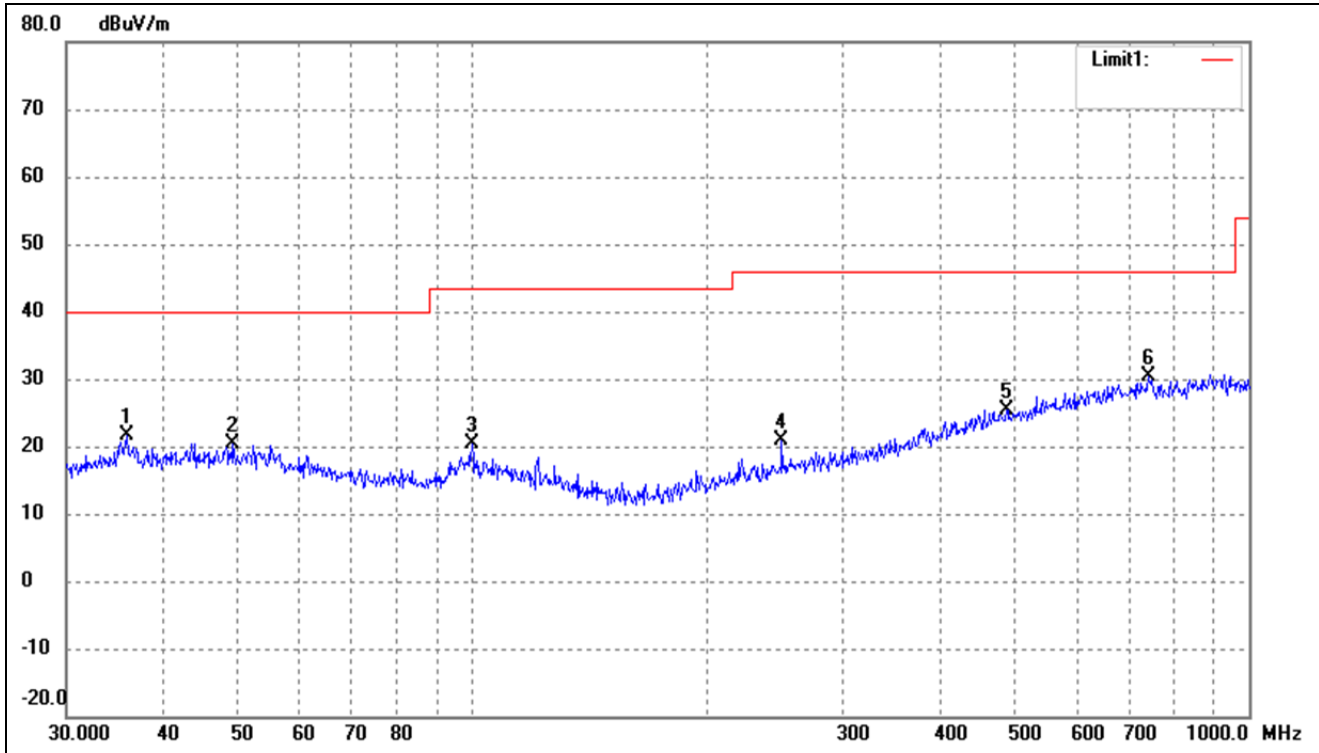
Test Channel	5180MHz	Polarity:	Vertical
--------------	---------	-----------	----------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.2120	27.59	-7.45	20.14	40.00	-19.86	-	-	peak
2	61.3463	28.80	-8.66	20.14	40.00	-19.86	-	-	peak
3	66.4989	29.16	-9.56	19.60	40.00	-20.40	-	-	peak
4	350.4768	26.46	-5.39	21.07	46.00	-24.93	-	-	peak
5	609.9217	27.31	0.48	27.79	46.00	-18.21	-	-	peak
6	818.8341	27.50	2.20	29.70	46.00	-16.30	-	-	peak

802.11a(Worst case)

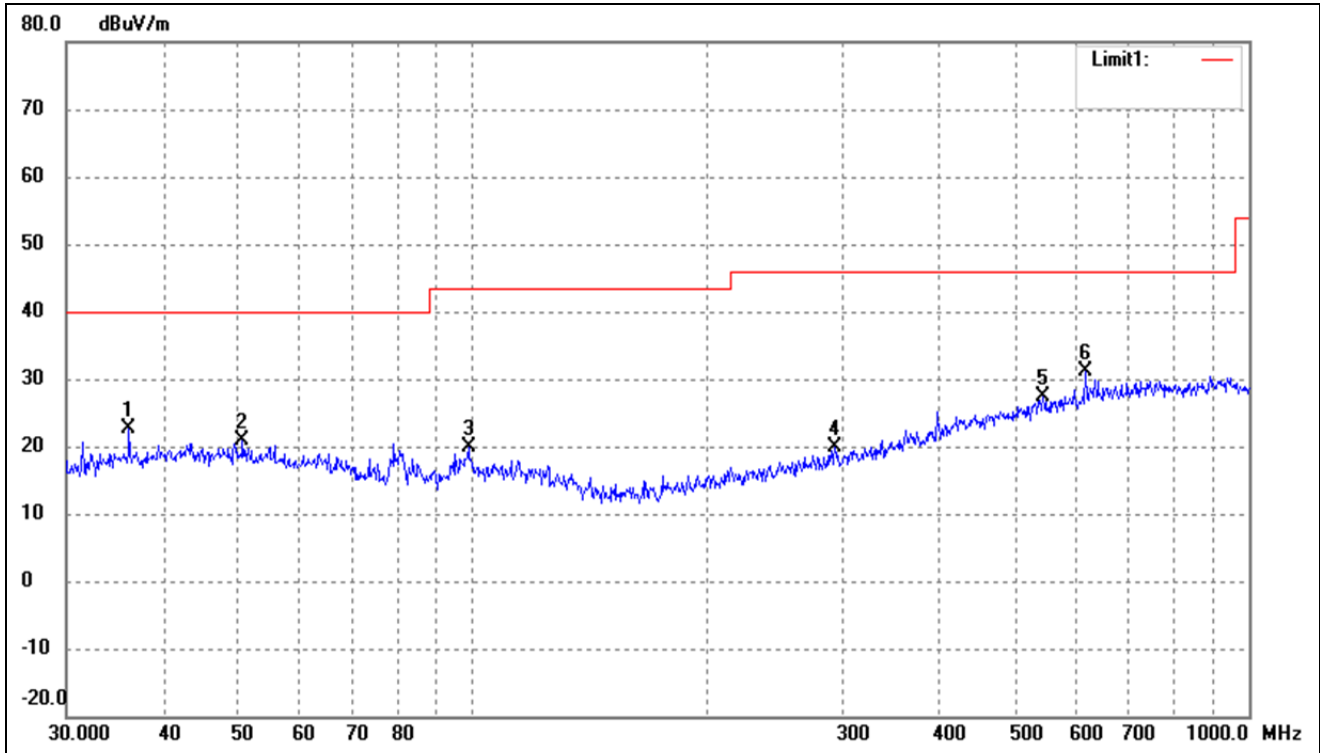
Test Channel	5200MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	35.8747	29.67	-8.01	21.66	40.00	-18.34	-	-	peak
2	49.1866	27.23	-6.97	20.26	40.00	-19.74	-	-	peak
3	99.8777	29.01	-8.75	20.26	43.50	-23.24	-	-	peak
4	250.3012	29.23	-8.31	20.92	46.00	-25.08	-	-	peak
5	487.3151	27.07	-1.62	25.45	46.00	-20.55	-	-	peak
6	742.2587	28.58	1.71	30.29	46.00	-15.71	-	-	peak

802.11a(Worst case)

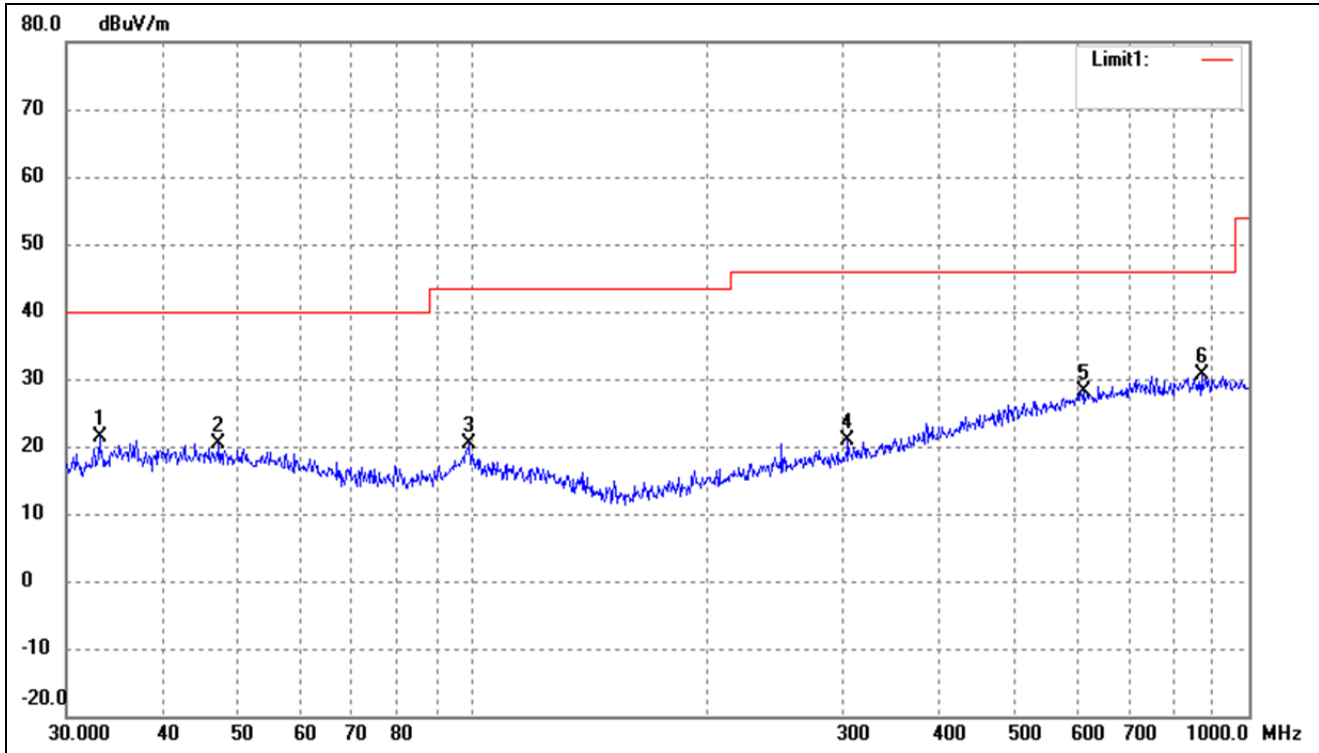
Test Channel	5200MHz	Polarity:	Vertical
--------------	---------	-----------	----------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.1272	30.68	-7.95	22.73	40.00	-17.27	-	-	peak
2	50.5860	28.01	-7.05	20.96	40.00	-19.04	-	-	peak
3	98.8326	28.83	-8.94	19.89	43.50	-23.61	-	-	peak
4	293.0842	27.03	-7.14	19.89	46.00	-26.11	-	-	peak
5	543.2742	27.95	-0.57	27.38	46.00	-18.62	-	-	peak
6	616.3718	30.62	0.55	31.17	46.00	-14.83	-	-	peak

802.11a(Worst case)

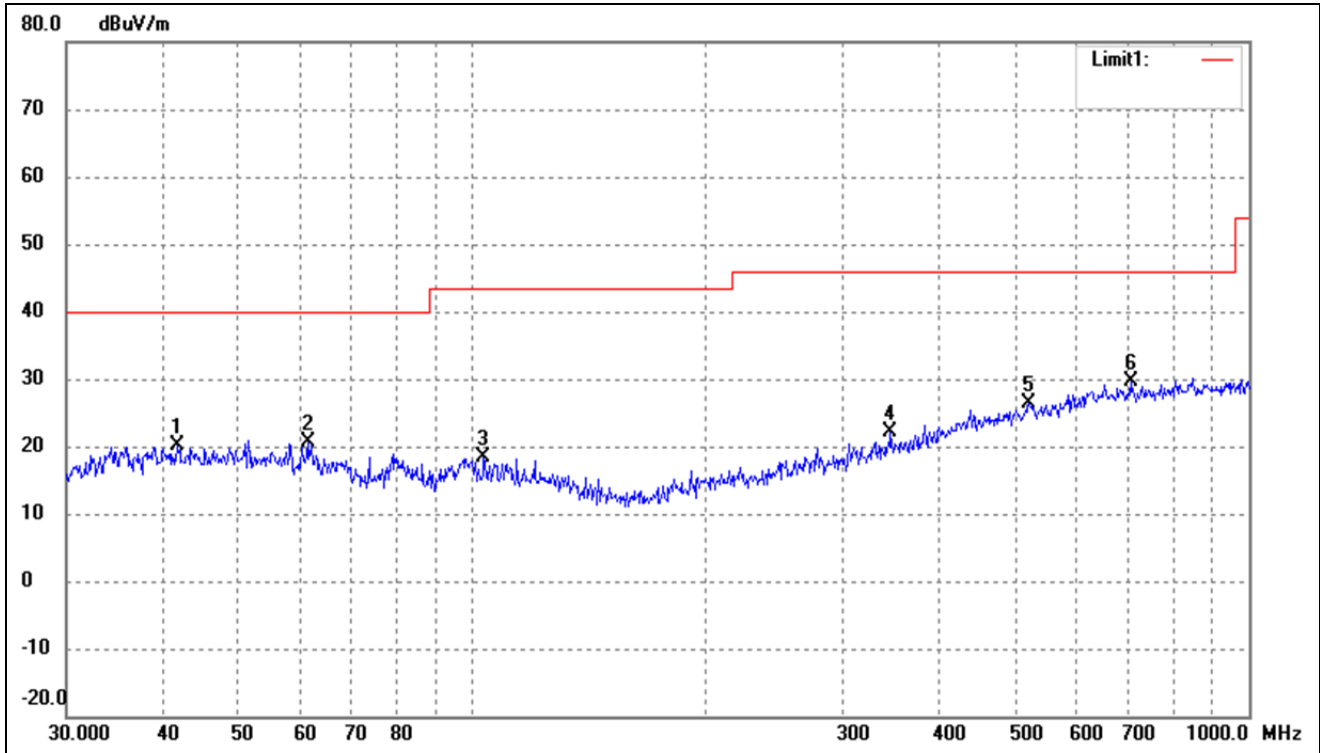
Test Channel	5240MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.0950	29.96	-8.69	21.27	40.00	-18.73	-	-	peak
2	47.1599	27.47	-6.97	20.50	40.00	-19.50	-	-	peak
3	99.1797	29.34	-8.88	20.46	43.50	-23.04	-	-	peak
4	304.6100	27.59	-6.82	20.77	46.00	-25.23	-	-	peak
5	612.0642	27.62	0.50	28.12	46.00	-17.88	-	-	peak
6	869.1302	28.17	2.52	30.69	46.00	-15.31	-	-	peak

802.11a(Worst case)

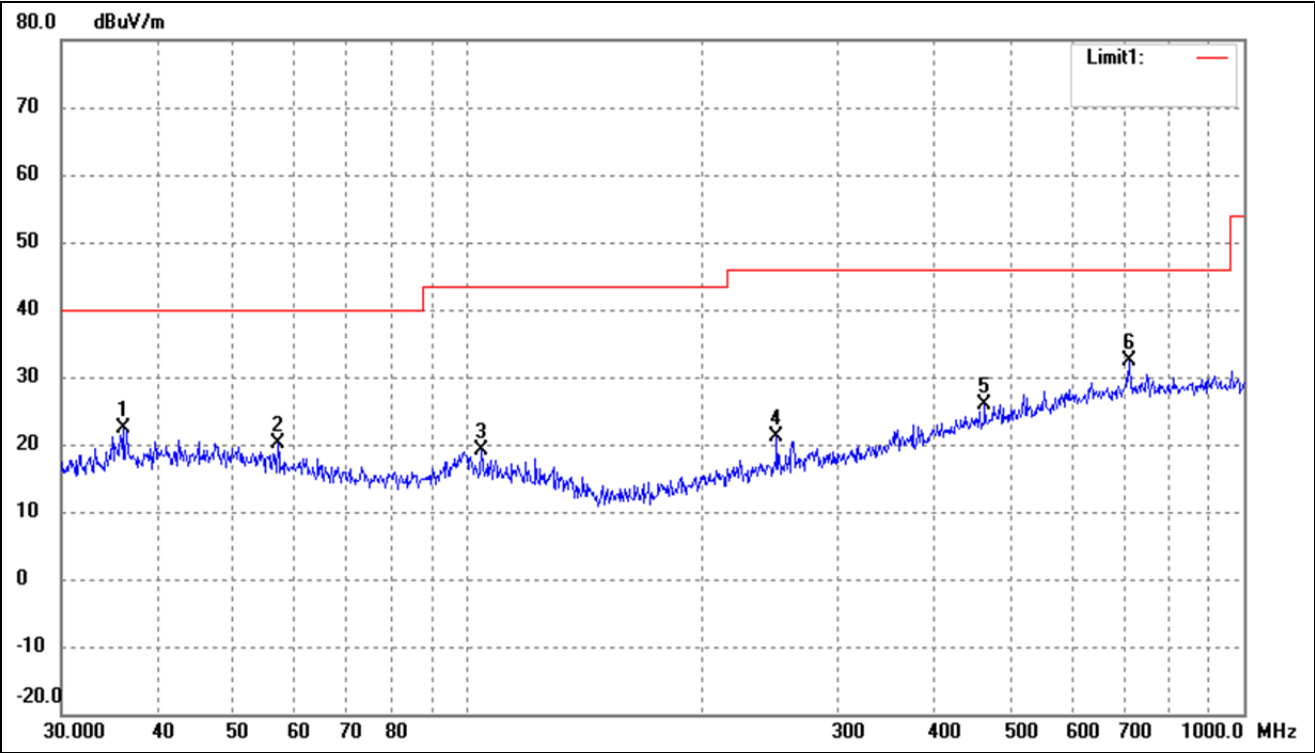
Test Channel	5240MHz	Polarity:	Vertical
--------------	---------	-----------	----------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7130	27.17	-7.00	20.17	40.00	-19.83	-	-	peak
2	61.3463	29.27	-8.66	20.61	40.00	-19.39	-	-	peak
3	103.4421	27.06	-8.78	18.28	43.50	-25.22	-	-	peak
4	345.5952	27.58	-5.54	22.04	46.00	-23.96	-	-	peak
5	520.8882	27.32	-0.94	26.38	46.00	-19.62	-	-	peak
6	704.2261	28.06	1.46	29.52	46.00	-16.48	-	-	peak

➤ 5725-5850MHz

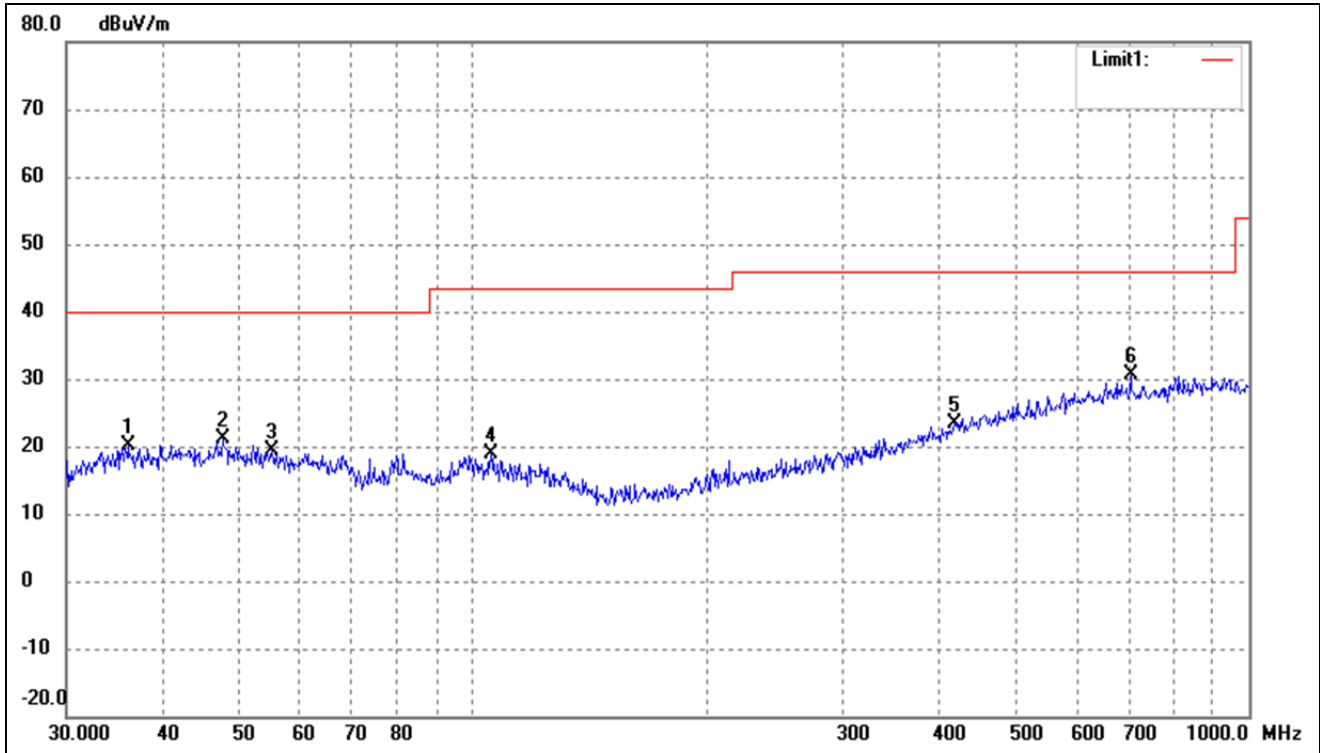
802.11a(Worst case)			
Test Channel	5745MHz	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.0007	30.27	-7.98	22.29	40.00	-17.71	-	-	peak
2	56.9912	28.22	-7.99	20.23	40.00	-19.77	-	-	peak
3	104.1701	27.99	-8.78	19.21	43.50	-24.29	-	-	peak
4	250.3012	29.43	-8.31	21.12	46.00	-24.88	-	-	peak
5	463.9696	28.10	-2.21	25.89	46.00	-20.11	-	-	peak
6	711.6734	30.95	1.50	32.45	46.00	-13.55	-	-	peak

802.11a(Worst case)

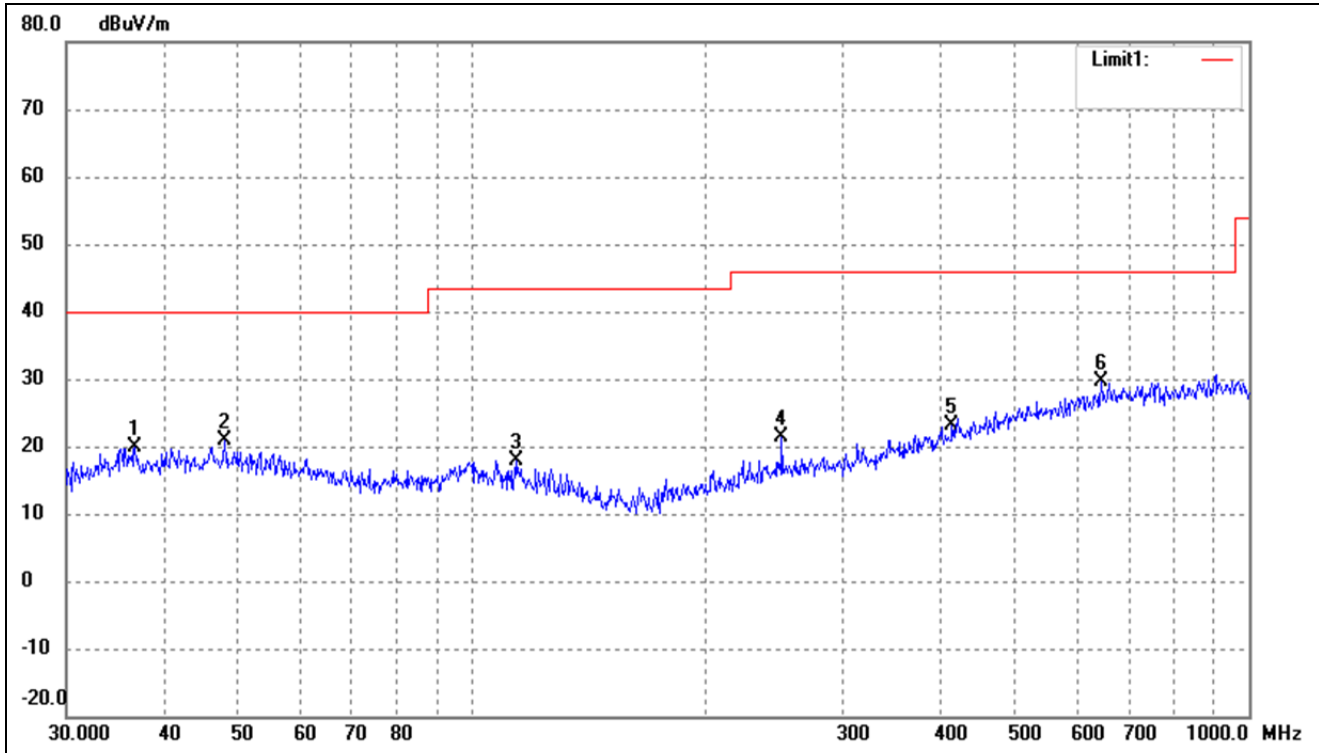
Test Channel	5745MHz	Polarity:	Vertical
--------------	---------	-----------	----------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.0007	28.14	-7.98	20.16	40.00	-19.84	-	-	peak
2	47.6586	27.98	-6.97	21.01	40.00	-18.99	-	-	peak
3	55.2207	27.18	-7.73	19.45	40.00	-20.55	-	-	peak
4	105.6415	27.69	-8.80	18.89	43.50	-24.61	-	-	peak
5	417.6411	26.78	-3.42	23.36	46.00	-22.64	-	-	peak
6	704.2261	29.19	1.46	30.65	46.00	-15.35	-	-	peak

802.11a(Worst case)

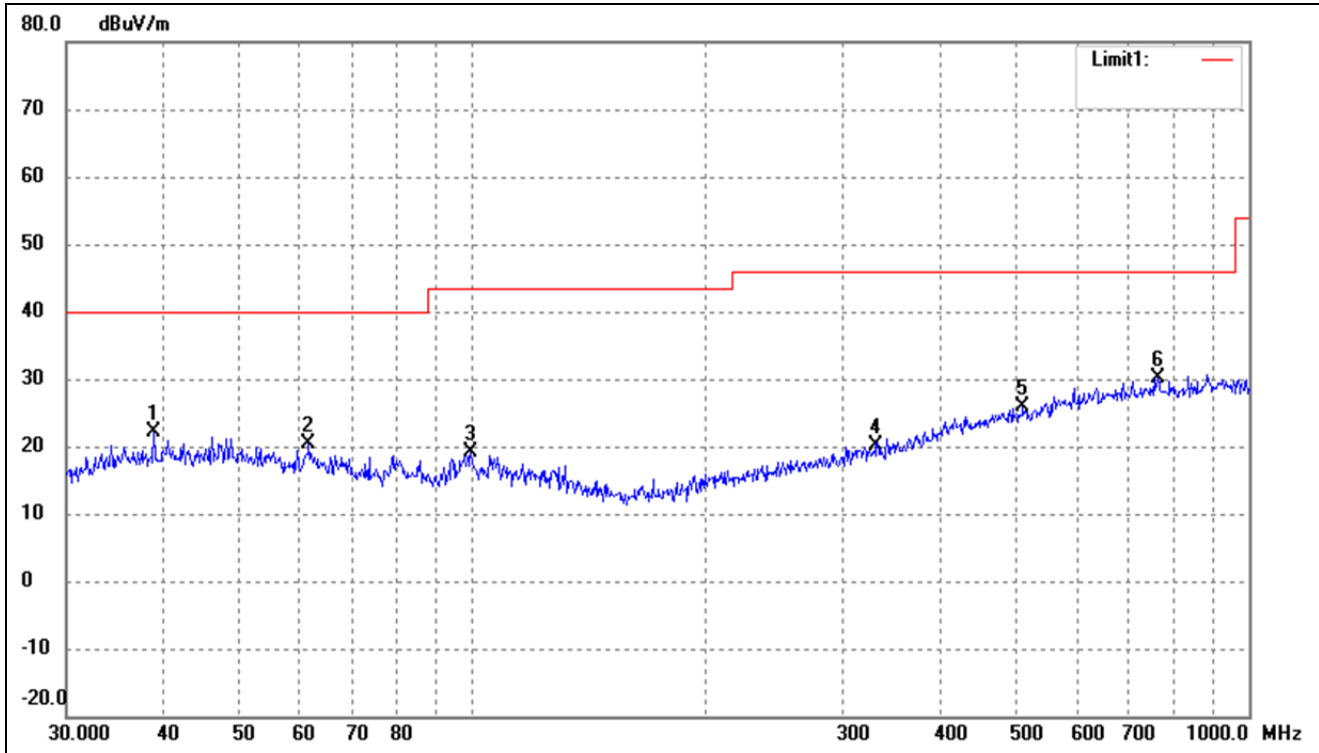
Test Channel	5785MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7662	27.61	-7.79	19.82	40.00	-20.18	-	-	peak
2	47.9940	27.82	-6.97	20.85	40.00	-19.15	-	-	peak
3	114.1138	27.08	-9.17	17.91	43.50	-25.59	-	-	peak
4	250.3012	29.70	-8.31	21.39	46.00	-24.61	-	-	peak
5	414.7223	26.57	-3.50	23.07	46.00	-22.93	-	-	peak
6	645.1195	28.66	0.87	29.53	46.00	-16.47	-	-	peak

802.11a(Worst case)

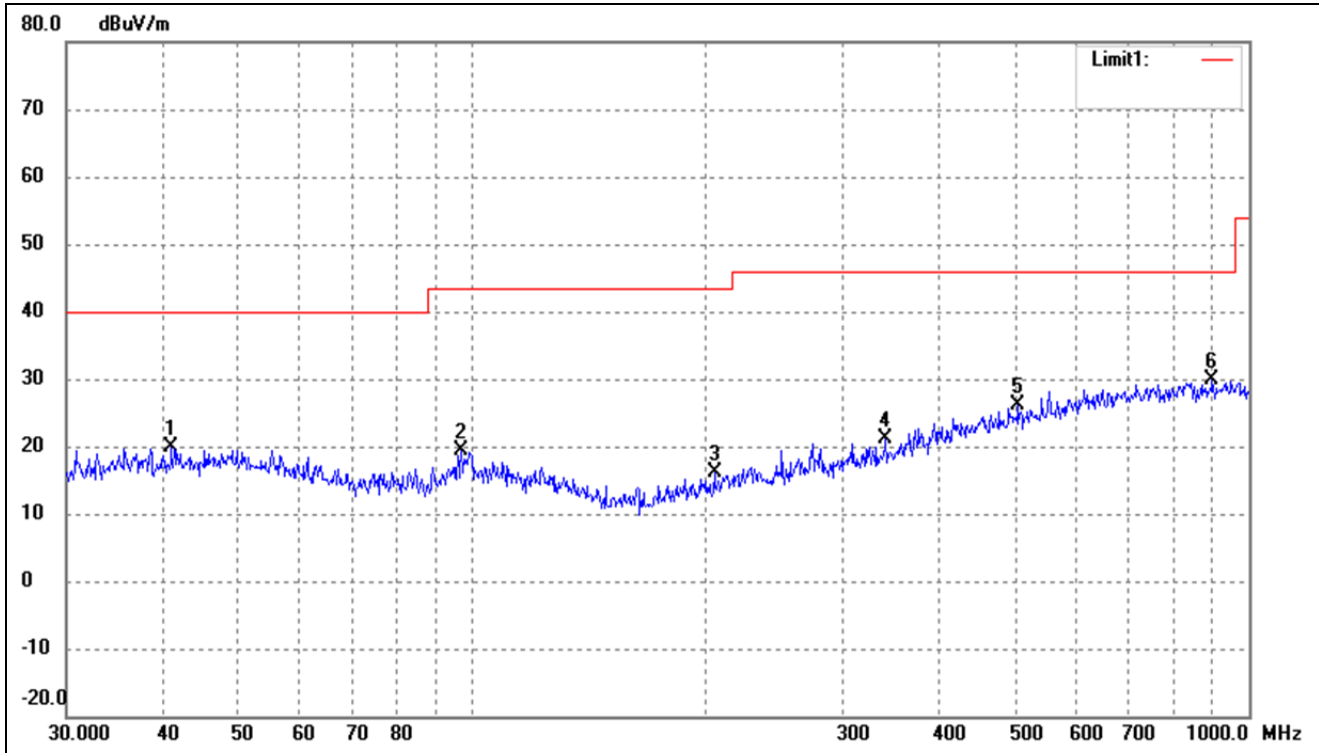
Test Channel	5785MHz	Polarity:	Vertical
--------------	---------	-----------	----------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.8879	29.43	-7.27	22.16	40.00	-17.84	-	-	peak
2	61.5618	29.19	-8.70	20.49	40.00	-19.51	-	-	peak
3	99.5281	28.06	-8.81	19.25	43.50	-24.25	-	-	peak
4	331.3547	26.19	-5.98	20.21	46.00	-25.79	-	-	peak
5	511.8352	27.01	-1.11	25.90	46.00	-20.10	-	-	peak
6	763.3757	28.34	1.85	30.19	46.00	-15.81	-	-	peak

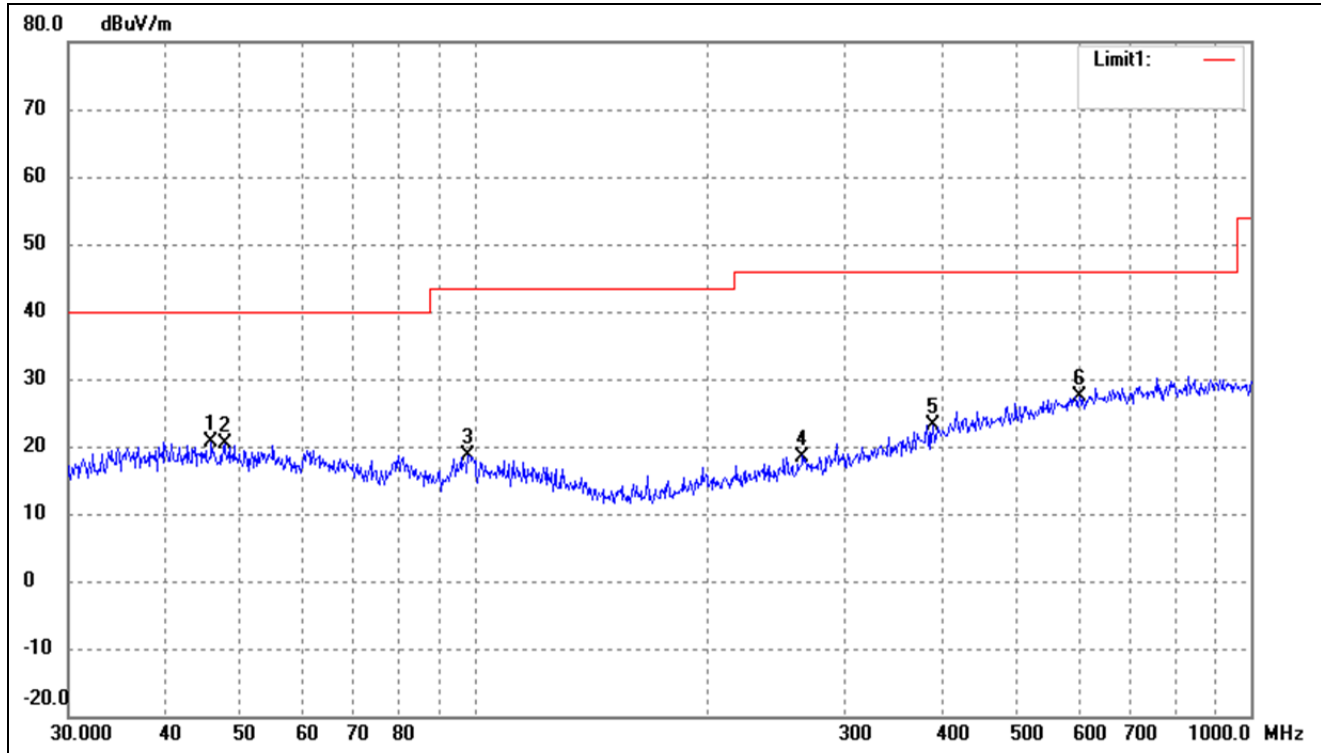
802.11a(Worst case)

Test Channel	5825MHz	Polarity:	Horizontal
--------------	---------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.9881	26.92	-7.00	19.92	40.00	-20.08	-	-	peak
2	96.7749	28.74	-9.33	19.41	43.50	-24.09	-	-	peak
3	204.9551	25.73	-9.56	16.17	43.50	-27.33	-	-	peak
4	340.7817	26.73	-5.69	21.04	46.00	-24.96	-	-	peak
5	504.7062	27.41	-1.22	26.19	46.00	-19.81	-	-	peak
6	896.9965	27.10	2.73	29.83	46.00	-16.17	-	-	peak

802.11a(Worst case)			
Test Channel	5825MHz	Polarity:	Vertical



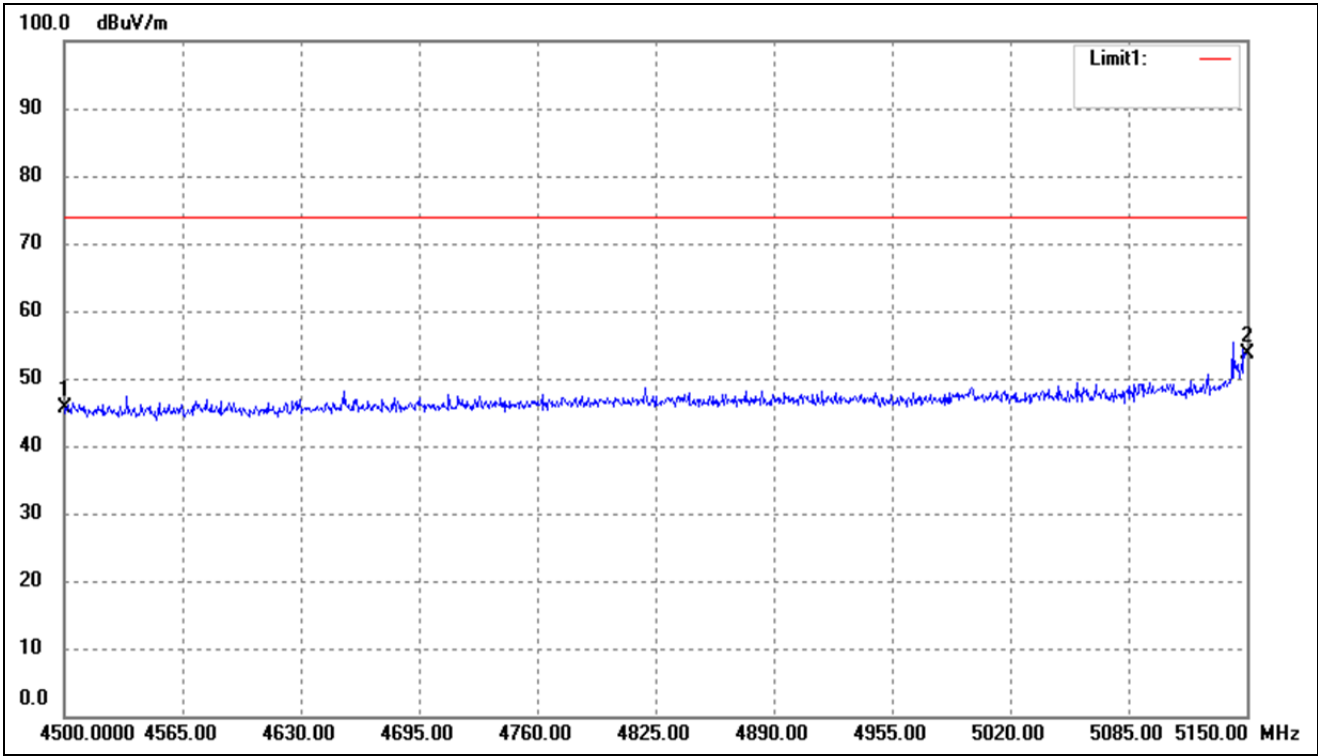
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.8553	27.70	-6.98	20.72	40.00	-19.28	-	-	peak
2	47.6586	27.25	-6.97	20.28	40.00	-19.72	-	-	peak
3	98.1419	27.82	-9.07	18.75	43.50	-24.75	-	-	peak
4	264.7457	26.41	-7.91	18.50	46.00	-27.50	-	-	peak
5	389.3549	27.45	-4.20	23.25	46.00	-22.75	-	-	peak
6	601.4265	27.08	0.39	27.47	46.00	-18.53	-	-	peak

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emission above 1GHz

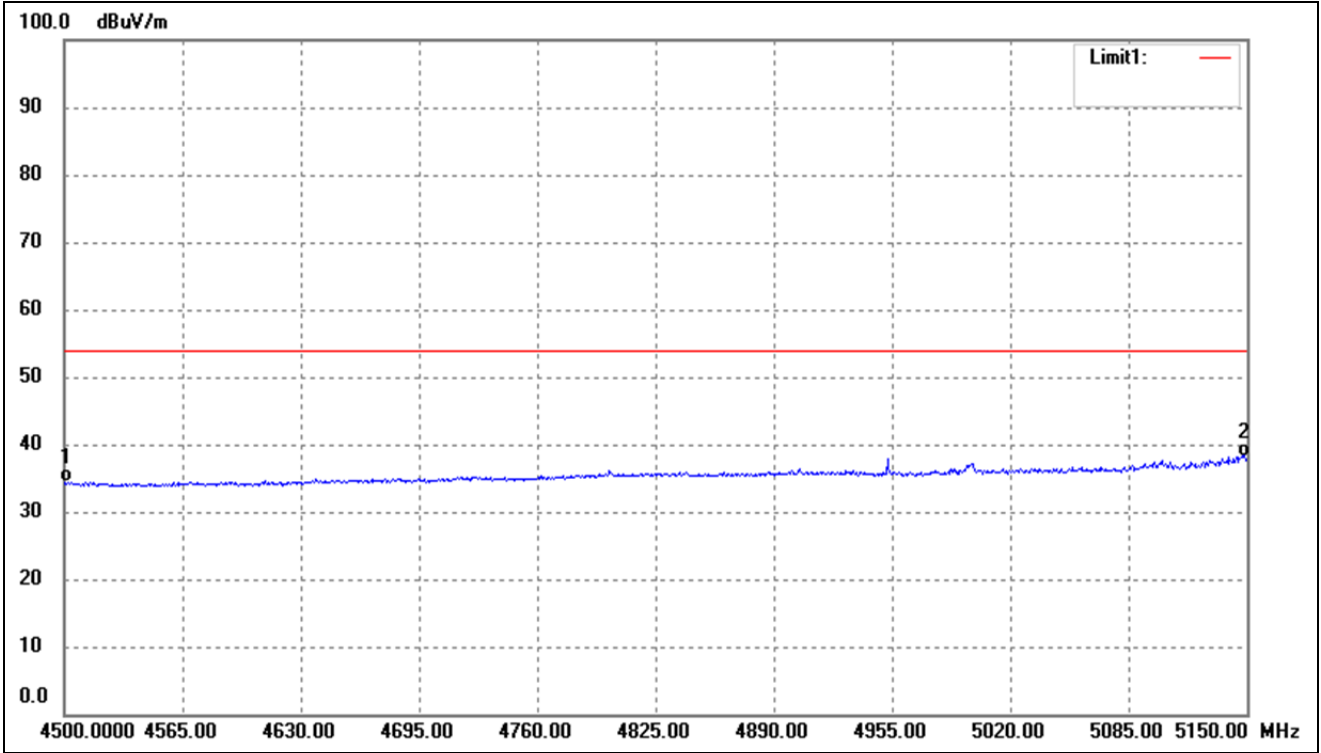
Antenna 1(worst case)

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	52.63	-6.92	45.71	74.00	-28.29	-	-	peak
2	5150.000	58.97	-5.33	53.64	74.00	-20.36	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	41.20	-6.92	34.28	54.00	-19.72	-	-	AVG
2	5150.000	43.53	-5.33	38.20	54.00	-15.80	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Antenna 1(worst case)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	56.13	7.11	63.24	74	-10.76	H	PK
15540	35.02	8.22	43.24	54	-10.76	H	AV
10360	57.23	7.11	64.34	74	-9.66	V	PK
15540	39.95	8.22	48.17	54	-5.83	V	AV
Middle Channel (5200MHz)							
10400	56.46	7.22	63.68	74	-10.32	H	PK
15600	35.44	8.67	44.11	54	-9.89	H	AV
10400	56.09	7.22	63.31	74	-10.69	V	PK
15600	37.98	8.67	46.65	54	-7.35	V	AV
High Channel (5240MHz)							
10480	56.43	7.69	64.12	74	-9.88	H	PK
15720	39.66	8.93	48.59	54	-5.41	H	AV
10480	58.18	7.69	65.87	74	-8.13	V	PK
15720	37.19	8.93	46.12	54	-7.88	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.91	9.45	65.36	74	-8.64	H	PK
17235	33.12	10.36	43.48	54	-10.52	H	AV
11490	55.36	9.45	64.81	74	-9.19	V	PK
17235	35.77	10.36	46.13	54	-7.87	V	AV
Middle Channel (5785MHz)							
11570	57.47	9.62	67.09	74	-6.91	H	PK
17355	34.89	10.67	45.56	54	-8.44	H	AV
11570	56.45	9.62	66.07	74	-7.93	V	PK
17355	35.49	10.67	46.16	54	-7.84	V	AV
High Channel (5825MHz)							
11650	56.76	9.84	66.60	74	-7.40	H	PK
17475	34.83	10.95	45.78	54	-8.22	H	AV
11650	54.13	9.84	63.97	74	-10.03	V	PK
17475	35.94	10.95	46.89	54	-7.11	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.15	-27
Highest	Above 5350	-43.82	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.59	-27
	5715 to 5725	-43.06	-17
Highest	5850 to 5860	-40.91	-17
	Above 5860	-42.99	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	57.00	7.11	64.11	74	-9.89	H	PK
15540	38.50	8.22	46.72	54	-7.28	H	AV
10360	58.86	7.11	65.97	74	-8.03	H	PK
15540	37.85	8.22	46.07	54	-7.93	H	AV
Middle Channel (5200MHz)							
10400	56.45	7.22	63.67	74	-10.33	H	PK
15600	38.79	8.67	47.46	54	-6.54	H	AV
10400	56.43	7.22	63.65	74	-10.35	V	PK
15600	35.47	8.67	44.14	54	-9.86	V	AV
High Channel (5240MHz)							
10480	56.67	7.69	64.36	74	-9.64	H	PK
15720	34.70	8.93	43.63	54	-10.37	H	AV
10480	60.48	7.69	68.17	74	-5.83	V	PK
15720	37.49	8.93	46.42	54	-7.58	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.02	9.45	66.47	74	-7.53	H	PK
17235	36.09	10.36	46.45	54	-7.55	H	AV
11490	55.35	9.45	64.80	74	-9.20	V	PK
17235	34.37	10.36	44.73	54	-9.27	V	AV
Middle Channel (5785MHz)							
11570	58.88	9.62	68.50	74	-5.50	H	PK
17355	37.75	10.67	48.42	54	-5.58	H	AV
11570	56.19	9.62	65.81	74	-8.19	V	PK
17355	38.30	10.67	48.97	54	-5.03	V	AV
High Channel (5825MHz)							
11650	54.92	9.84	64.76	74	-9.24	H	PK
17475	34.24	10.95	45.19	54	-8.81	H	AV
11650	58.06	9.84	67.90	74	-6.10	V	PK
17475	37.20	10.95	48.15	54	-5.85	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-30.55	-27
Highest	Above 5350	-39.38	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-46.11	-27
	5715 to 5725	-35.73	-17
Highest	5850 to 5860	-37.90	-17
	Above 5860	-40.42	-27
Note: the data just list the worst cases.			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.64	7.11	62.75	74	-11.25	H	PK
15540	36.27	8.22	44.49	54	-9.51	H	AV
10360	57.82	7.11	64.93	74	-9.07	V	PK
15540	39.21	8.22	47.43	54	-6.57	V	AV
Middle Channel (5200MHz)							
10400	56.84	7.22	64.06	74	-9.94	H	PK
15600	35.67	8.67	44.34	54	-9.66	H	AV
10400	58.51	7.22	65.73	74	-8.27	V	PK
15600	36.26	8.67	44.93	54	-9.07	V	AV
High Channel (5240MHz)							
10480	55.58	7.69	63.27	74	-10.73	H	PK
15720	35.82	8.93	44.75	54	-9.25	H	AV
10480	57.73	7.69	65.42	74	-8.58	V	PK
15720	36.55	8.93	45.48	54	-8.52	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.45	9.45	66.90	74	-7.10	H	PK
17235	37.65	10.36	48.01	54	-5.99	H	AV
11490	56.35	9.45	65.80	74	-8.20	V	PK
17235	33.68	10.36	44.04	54	-9.96	V	AV
Middle Channel (5785MHz)							
11570	55.00	9.62	64.62	74	-9.38	H	PK
17355	36.59	10.67	47.26	54	-6.74	H	AV
11570	56.51	9.62	66.13	74	-7.87	V	PK
17355	34.79	10.67	45.46	54	-8.54	V	AV
High Channel (5825MHz)							
11650	55.19	9.84	65.03	74	-8.97	H	PK
17475	34.54	10.95	45.49	54	-8.51	H	AV
11650	58.68	9.84	68.52	74	-5.48	V	PK
17475	36.19	10.95	47.14	54	-6.86	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-34.15	-27
Highest	Above 5350	-40.29	-27
Note: the data just list the worst cases.			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-47.59	-27
	5715 to 5725	-34.44	-17
Highest	5850 to 5860	-34.79	-17
	Above 5860	-42.84	-27
Note: the data just list the worst cases.			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.77	7.25	64.02	74	-9.98	H	PK
10380	37.54	8.33	45.87	54	-8.13	H	AV
10380	58.92	7.25	66.17	74	-7.83	V	PK
10380	37.54	8.33	45.87	54	-8.13	V	AV
High Channel (5230MHz)							
10460	56.74	7.54	64.28	74	-9.72	H	PK
10460	38.54	8.86	47.40	54	-6.60	H	AV
10460	58.44	7.54	65.98	74	-8.02	V	PK
10460	39.95	8.86	48.81	54	-5.19	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	56.41	9.65	66.06	74	-7.94	H	PK
11510	35.84	10.87	46.71	54	-7.29	H	AV
11510	56.73	9.65	66.38	74	-7.62	V	PK
11510	36.59	10.87	47.46	54	-6.54	V	AV
High Channel (5795MHz)							
11590	56.04	9.81	65.85	74	-8.15	H	PK
11590	34.98	10.89	45.87	54	-8.13	H	AV
11590	55.99	9.81	65.80	74	-8.20	V	PK
11590	37.62	10.89	48.51	54	-5.49	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.54	-27
Highest	Above 5350	-40.56	-27
Note: the data just list the worst cases.			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.59	-27
	5715 to 5725	-38.67	-17
Highest	5850 to 5860	-41.27	-17
	Above 5860	-42.31	-27
Note: the data just list the worst cases.			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.33	7.25	63.58	74	-10.42	H	PK
10380	37.37	8.33	45.70	54	-8.30	H	AV
10380	59.83	7.25	67.08	74	-6.92	V	PK
10380	38.58	8.33	46.91	54	-7.09	V	AV
High Channel (5230MHz)							
10460	56.59	7.54	64.13	74	-9.87	H	PK
10460	38.72	8.86	47.58	54	-6.42	H	AV
10460	60.64	7.54	68.18	74	-5.82	V	PK
10460	37.63	8.86	46.49	54	-7.51	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	55.41	9.65	65.06	74	-8.94	H	PK
11510	35.45	10.87	46.32	54	-7.68	H	AV
11510	55.04	9.65	64.69	74	-9.31	V	PK
11510	35.35	10.87	46.22	54	-7.78	V	AV
High Channel (5795MHz)							
11590	54.79	9.81	64.60	74	-9.40	H	PK
11590	33.58	10.89	44.47	54	-9.53	H	AV
11590	55.56	9.81	65.37	74	-8.63	V	PK
11590	35.49	10.89	46.38	54	-7.62	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.77	-27
Highest	Above 5350	-40.42	-27
Note: the data just list the worst cases.			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.35	-27
	5715 to 5725	-37.21	-17
Highest	5850 to 5860	-41.99	-17
	Above 5860	-44.53	-27
Note: the data just list the worst cases.			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VH80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	58.73	7.33	66.06	74	-7.94	H	PK
15630	35.95	8.75	44.70	54	-9.30	H	AV
10420	55.92	7.33	63.25	74	-10.75	H	PK
15630	36.11	8.75	44.86	54	-9.14	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	54.73	9.54	64.27	74	-9.73	H	PK
17325	37.26	10.59	47.85	54	-6.15	H	AV
11550	57.29	9.54	66.83	74	-7.17	H	PK
17325	32.57	10.59	43.16	54	-10.84	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.08	-27
Highest	Above 5350	-32.76	-27
Note: the data just list the worst cases.			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-46.82	-27
	5715 to 5725	-31.42	-17
Highest	5850 to 5860	-30.10	-17
	Above 5860	-39.35	-27
Note: the data just list the worst cases.			

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ax HE80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	59.24	7.33	66.57	74	-7.43	H	PK
15630	37.09	8.75	45.84	54	-8.16	H	AV
10420	56.87	7.33	64.20	74	-9.80	H	PK
15630	37.11	8.75	45.86	54	-8.14	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	54.41	9.54	63.95	74	-10.05	H	PK
17325	36.42	10.59	47.01	54	-6.99	H	AV
11550	56.61	9.54	66.15	74	-7.85	H	PK
17325	33.17	10.59	43.76	54	-10.24	H	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-33.85	-27
Highest	Above 5350	-29.57	-27
Note: the data just list the worst cases.			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.92	-27
	5715 to 5725	-28.53	-17
Highest	5850 to 5860	-32.13	-17
	Above 5860	-40.04	-27
Note: the data just list the worst cases.			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

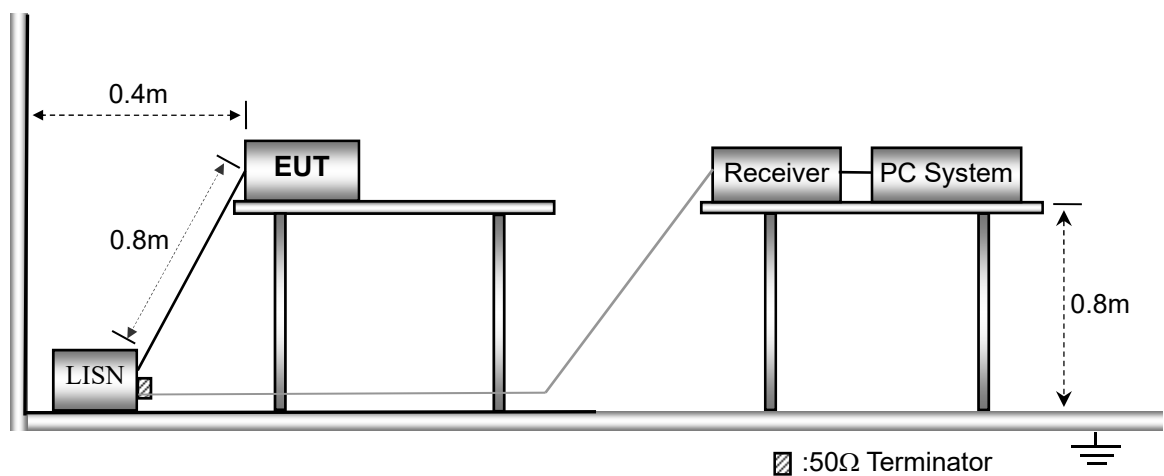
10 Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram



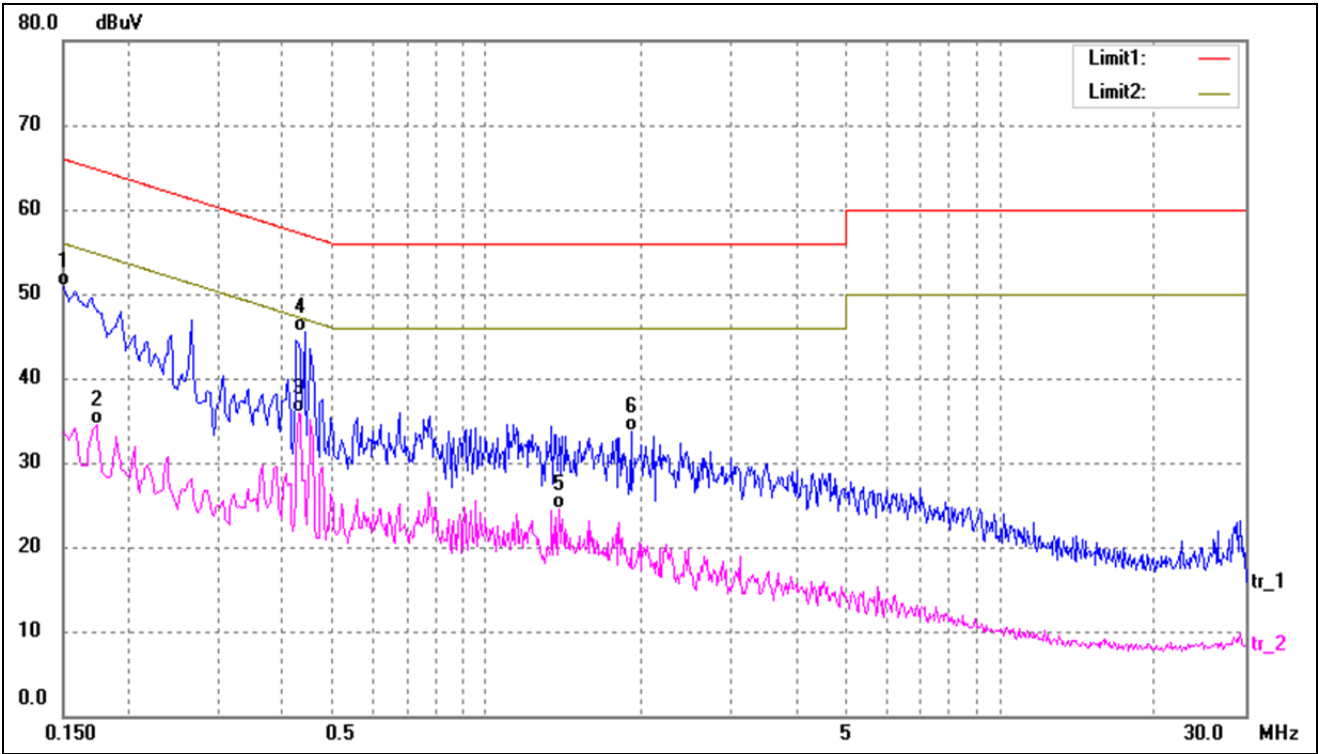
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

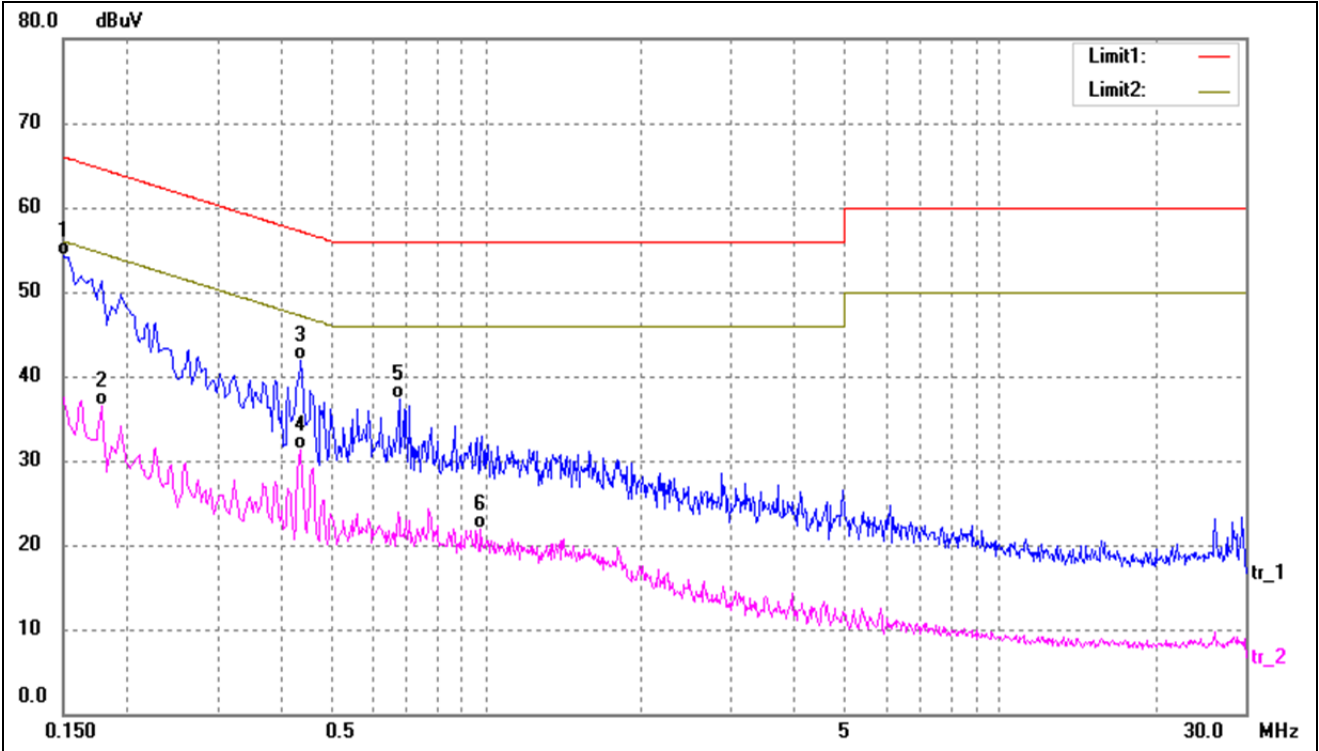
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	40.60	10.38	50.98	66.00	-15.02	QP
2	0.1740	24.09	10.37	34.46	54.77	-20.31	AVG
3*	0.4300	25.61	10.28	35.89	47.25	-11.36	AVG
4	0.4420	35.19	10.28	45.47	57.02	-11.55	QP
5	1.3860	14.03	10.40	24.43	46.00	-21.57	AVG
6	1.9140	23.46	10.16	33.62	56.00	-22.38	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	43.85	10.38	54.23	66.00	-11.77	QP
2	0.1780	26.07	10.37	36.44	54.58	-18.14	AVG
3	0.4340	31.55	10.28	41.83	57.18	-15.35	QP
4	0.4340	21.11	10.28	31.39	47.18	-15.79	AVG
5	0.6780	26.84	10.37	37.21	56.00	-18.79	QP
6	0.9740	11.46	10.54	22.00	46.00	-24.00	AVG

APPENDIX SUMMARY

Project No.	WTH21X09102605W	Test Engineer	Gala
Start date	2022/5/19	Finish date	2022/5/23
Temperature	23℃	Humidity	45%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

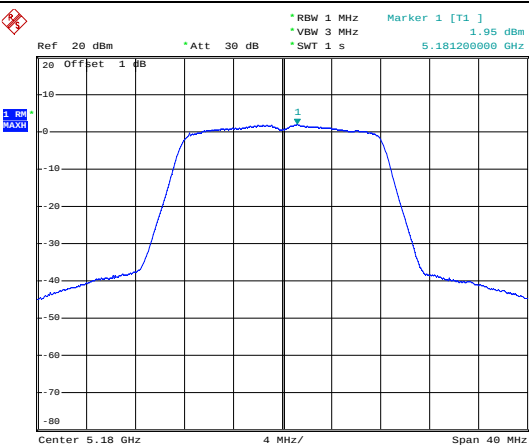
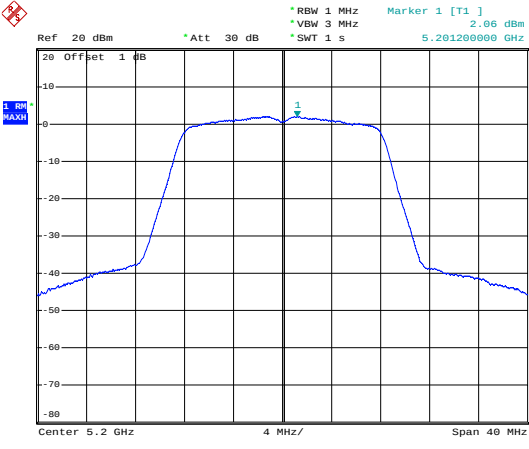
Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ATN 1 dBm/MHz	ATN 2 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	1.95	2.15	/	11
	5200	2.06	1.66	/	11
	5240	2.38	1.25	/	11
802.11n-HT20	5180	5.80	-1.07	6.61	11
	5200	5.90	-1.11	6.69	11
	5240	6.19	-1.77	6.83	11
802.11n-HT40	5190	-4.05	-4.94	-1.46	11
	5230	-3.87	-5.91	-1.76	11
802.11ac-VHT80	5210	-11.77	-12.89	-9.28	11
802.11ax-AX20	5180	-4.02	-1.20	0.63	11
	5200	-4.01	-1.62	0.36	11
	5240	-3.57	-2.34	0.10	11
802.11ax-AX40	5190	-8.57	-6.91	-4.65	11
	5230	-8.18	-7.76	-4.95	11
802.11ax-AX80	5210	-11.75	-12.83	-9.25	11

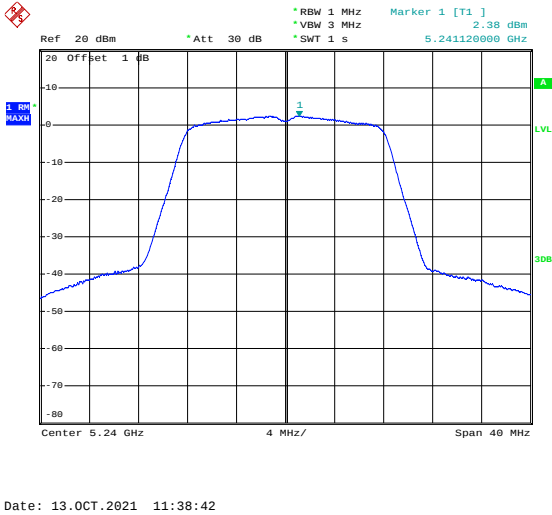
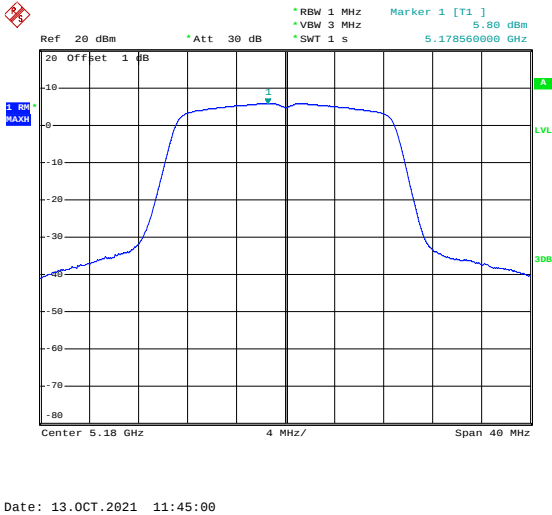
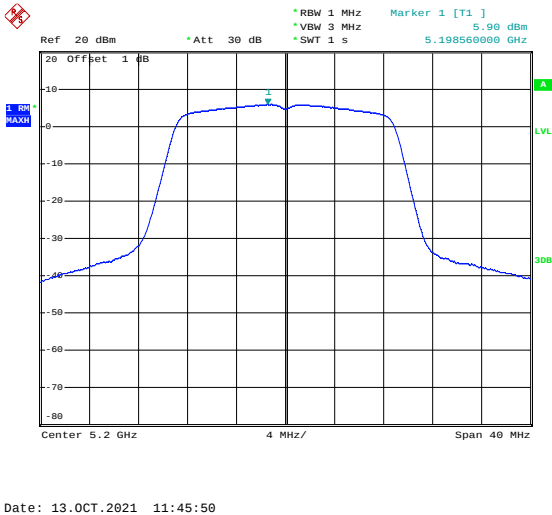
Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ATN 1 dBm/300kHz	ATN 2 dBm/300kHz	Factor	ATN 1 dBm/500kHz*	ATN 2 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	-4.61	-8.14	2.22	-2.39	-5.92	30
	5785	-3.97	-8.28	2.22	-1.75	-6.06	30
	5825	-3.08	-7.64	2.22	-0.86	-5.42	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22							

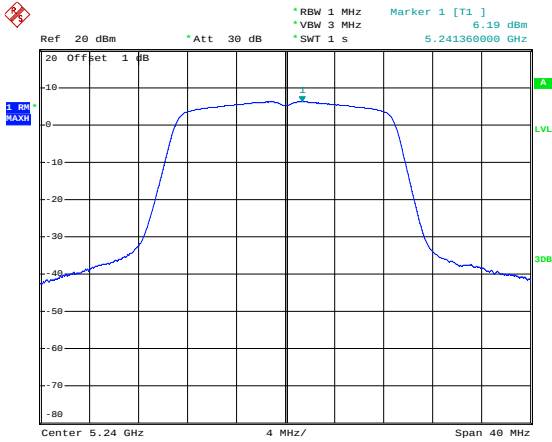
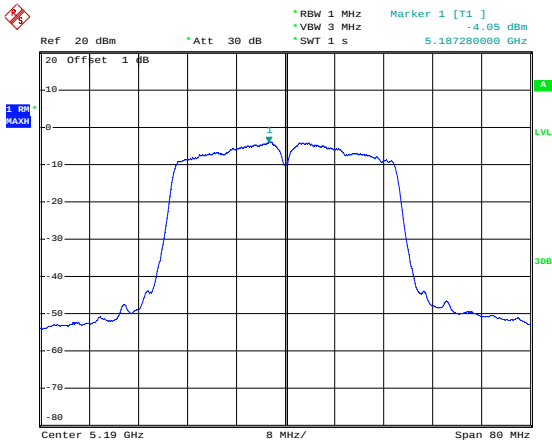
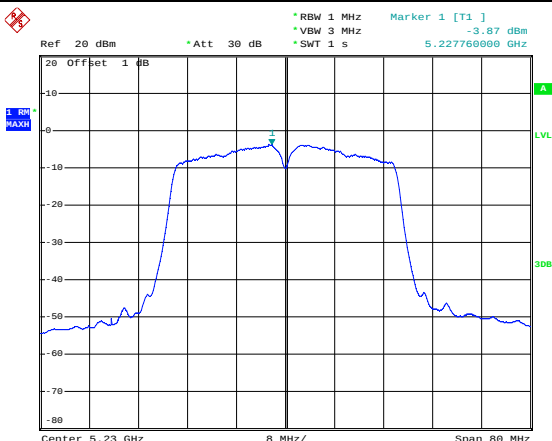
Power Spectral Density						
U-NII-3: 5725-5850MHz						
Operating mode	Test Channel	ATN 1 dBm/300kHz	ATN 2 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz
802.11n-HT20	5745	-7.36	-10.99	2.22	-3.58	30
	5785	-6.72	-11.29	2.22	-3.20	30
	5825	-5.95	-11.48	2.22	-2.66	30
802.11n-HT40	5755	-10.56	-10.36	2.22	-5.23	30

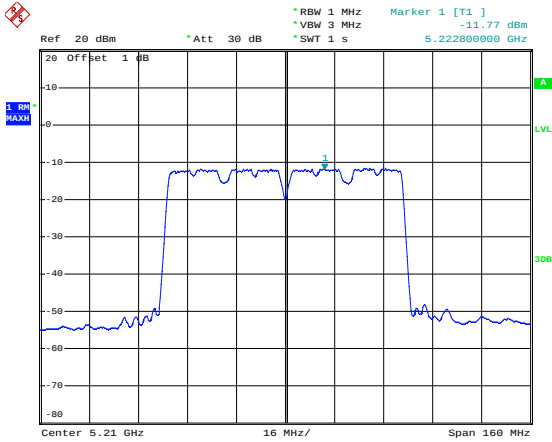
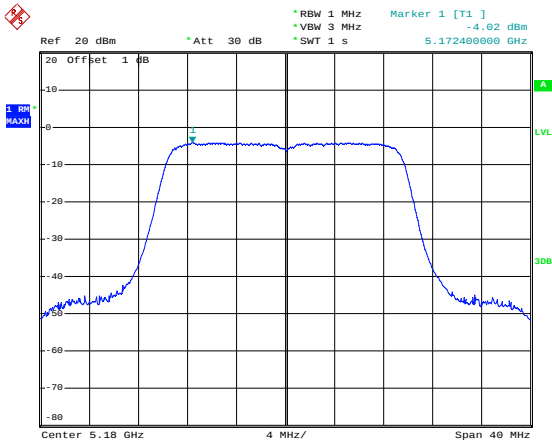
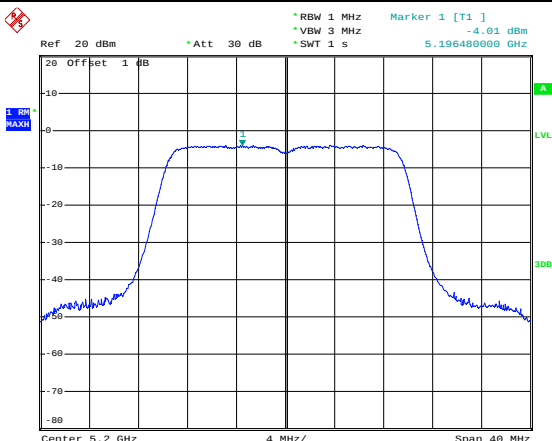
	5795	-10.12	-9.84	2.22	-4.75	30
802.11ac-VHT80	5775	-17.75	-22.48	2.22	-14.27	30
802.11ac-AX20	5745	-6.84	-9.45	2.22	-2.72	30
	5785	-6.63	-6.66	2.22	-1.41	30
	5825	-5.39	-5.50	2.22	-0.21	30
802.11ac-AX40	5755	-12.62	-12.58	2.22	-7.37	30
	5795	-12.29	-12.36	2.22	-7.09	30
802.11ac-AX80	5775	-17.74	-22.41	2.22	-14.25	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						

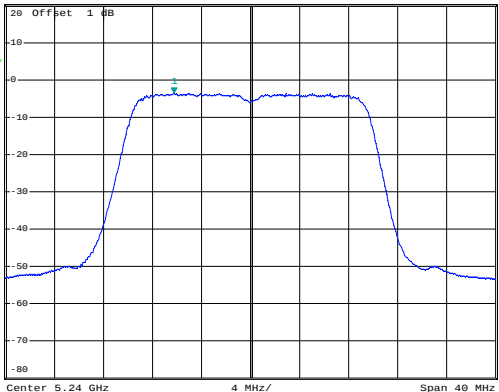
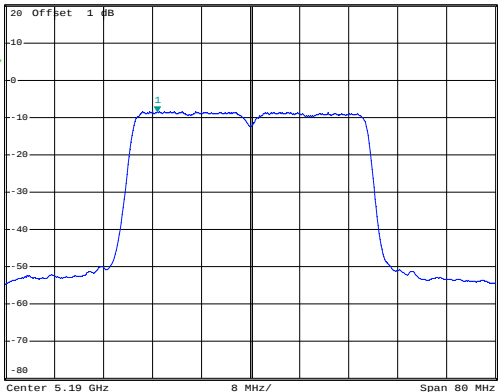
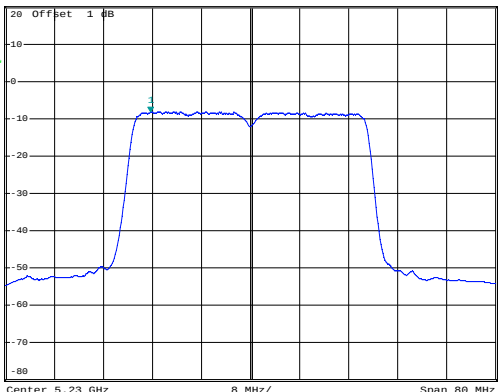
ATN 1
5150-5250MHz

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 1.95 dBm VBW 3 MHz SWT 1 s 5.181200000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 13.OCT.2021 11:37:23
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 2.06 dBm VBW 3 MHz SWT 1 s 5.201200000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 13.OCT.2021 11:38:07

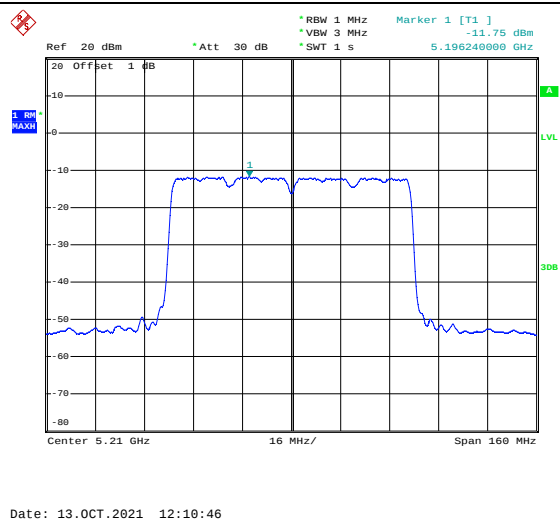
802.11a-High	 Date: 13.OCT.2021 11:38:42
802.11n-HT20-Low	 Date: 13.OCT.2021 11:45:00
802.11n-HT20-Middle	 Date: 13.OCT.2021 11:45:50

802.11n-HT20-High	 Date: 13.OCT.2021 11:46:22
802.11n-HT40-Low	 Date: 13.OCT.2021 11:48:37
802.11n-HT40-High	 Date: 13.OCT.2021 11:49:58

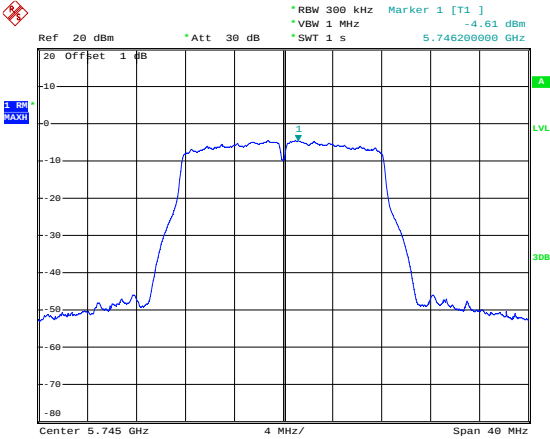
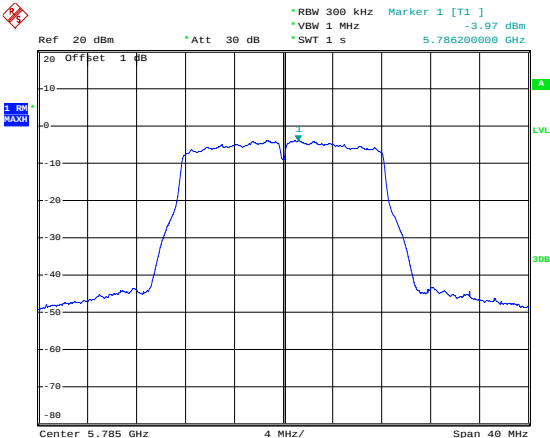
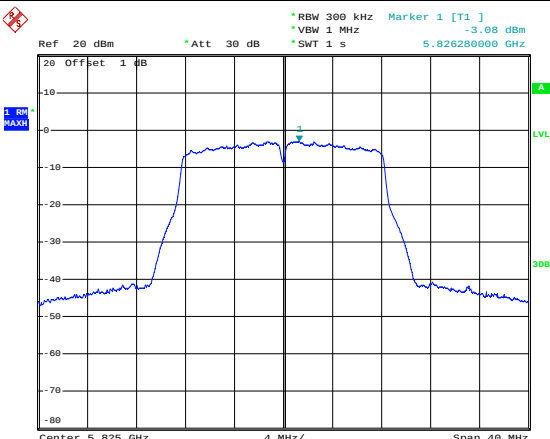
802.11ac-VHT80	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -11.77 dBm 5.222800000 GHz 20 Offset 1 dB Center 5.21 GHz 16 MHz/ Span 160 MHz Date: 13.OCT.2021 11:54:39
802.11ac-HE20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -4.02 dBm 5.172400000 GHz 20 Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 13.OCT.2021 11:57:06
802.11ac-HE20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -4.01 dBm 5.196480000 GHz 20 Offset 1 dB Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 13.OCT.2021 11:58:01

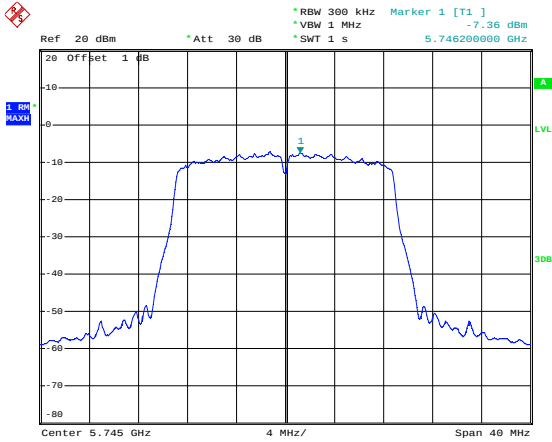
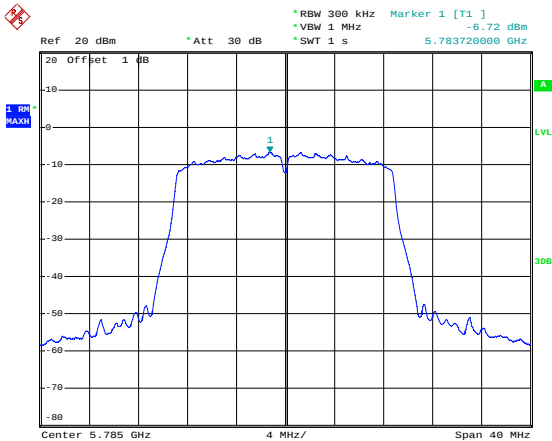
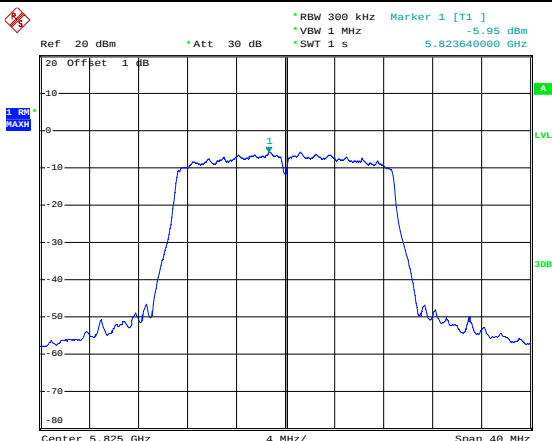
802.11ac-HE20-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -3.57 dBm 5.233760000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 13.OCT.2021 11:58:41
802.11ac-HE40-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -8.57 dBm 5.174800000 GHz Center 5.19 GHz 8 MHz/ Span 80 MHz Date: 13.OCT.2021 12:05:33
802.11ac-HE40-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -8.18 dBm 5.213680000 GHz Center 5.23 GHz 8 MHz/ Span 80 MHz Date: 13.OCT.2021 12:09:06

802.11ac-HE80

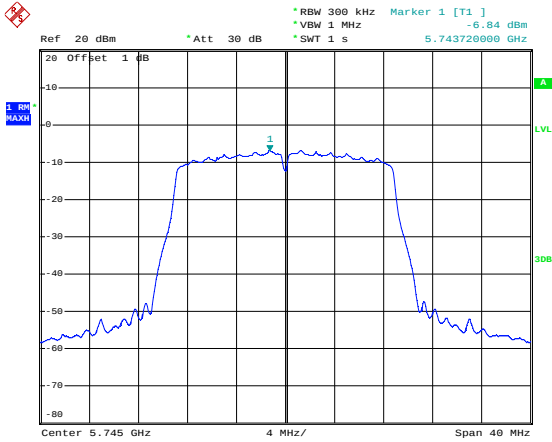
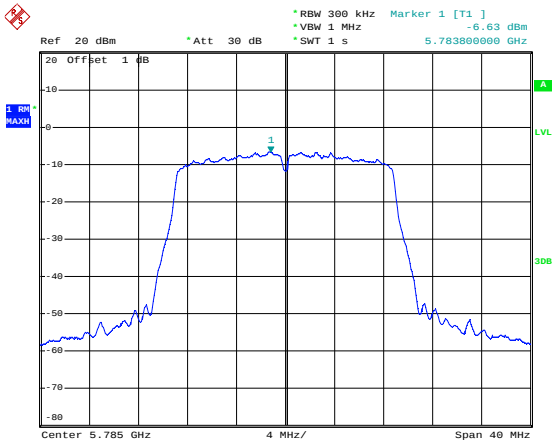
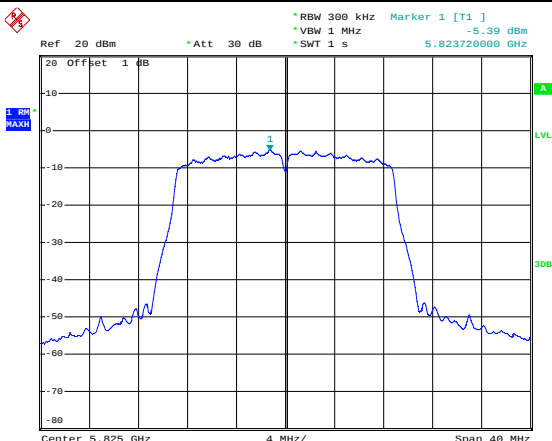


5725-5850MHz

802.11a-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -4.61 dBm *VBW 1 MHz 5.746200000 GHz *SWT 1 s Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:47:47
802.11a-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.97 dBm *VBW 1 MHz 5.786200000 GHz *SWT 1 s Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:48:50
802.11a-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -3.08 dBm *VBW 1 MHz 5.826200000 GHz *SWT 1 s Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:49:20

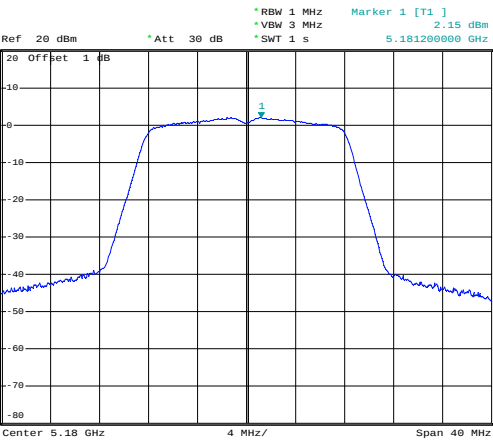
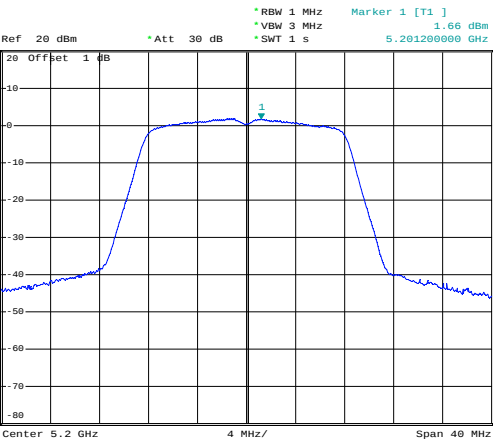
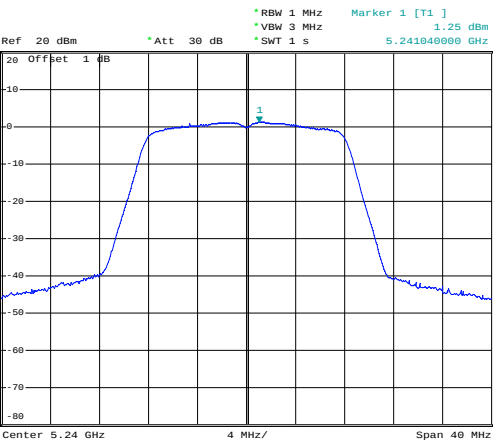
802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz *VBW 1 MHz *SWT 1 s Marker 1 [T1] -7.36 dBm 5.74520000 GHz 20 Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:49:56
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz *VBW 1 MHz *SWT 1 s Marker 1 [T1] -6.72 dBm 5.783720000 GHz 20 Offset 1 dB Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:51:15
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz *VBW 1 MHz *SWT 1 s Marker 1 [T1] -5.95 dBm 5.823640000 GHz 20 Offset 1 dB Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:51:41

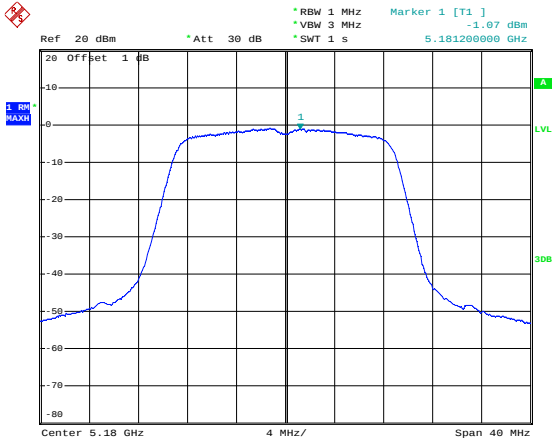
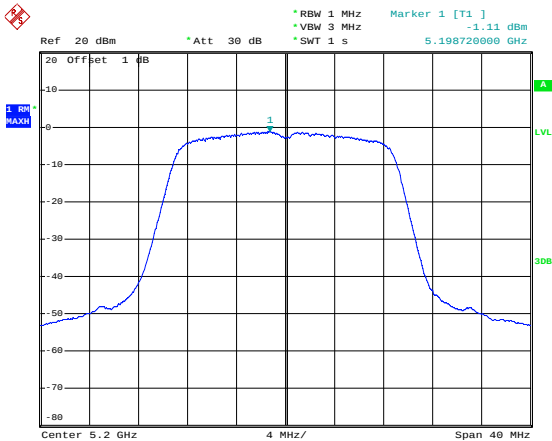
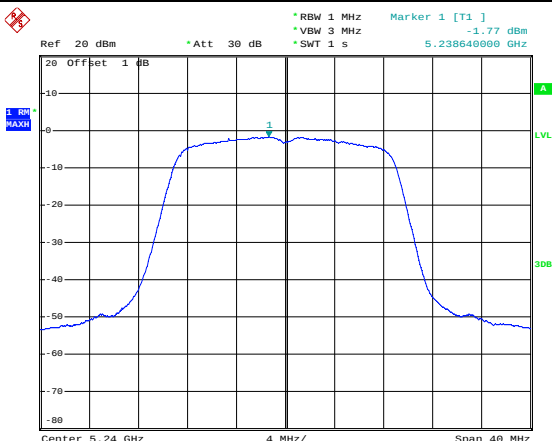
Device	Frequency (GHz)	Power (dBm)	Bandwidth (MHz)	Span (MHz)	Resolution (kHz)	Marker 1 [T1]
802.11n-HT40-Low	5.755	-10.56	1	80	300	5.752448000
802.11n-HT40-High	5.795	-10.12	1	80	300	5.792448000
802.11ac-VHT80	5.775	-17.75	16	160	300	5.787480000

802.11ac-HE20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -6.84 dBm *VBW 1 MHz *SWT 1 s 5.743720000 GHz 20 Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:54:06
802.11ac-HE20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -6.63 dBm *VBW 1 MHz *SWT 1 s 5.783800000 GHz 20 Offset 1 dB Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:54:33
802.11ac-HE20-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -5.39 dBm *VBW 1 MHz *SWT 1 s 5.823720000 GHz 20 Offset 1 dB Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 17:55:20

Configuration	Measurement Type	Frequency (GHz)	Power (dBm)	Bandwidth (kHz)	Span (MHz)	Resolution (MHz)	Marker 1 [T1]
802.11ac-HE40-Low	Power Spectral Density	5.755	-12.62	300	80	8	5.759960000
802.11ac-HE40-High	Power Spectral Density	5.795	-12.29	300	80	8	5.798580000
802.11ac-HE80	Power Spectral Density	5.775	-17.74	300	160	16	5.759960000

ATN 2
5150-5250MHz

802.11a-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 2.15 dBm *VBW 3 MHz *SWT 1 s 5.181200000 GHz 20 Offset 1 dB 1 dB MAX Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:44:33
802.11a-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.66 dBm *VBW 3 MHz *SWT 1 s 5.201200000 GHz 20 Offset 1 dB 1 dB MAX Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:45:02
802.11a-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 1.25 dBm *VBW 3 MHz *SWT 1 s 5.241840000 GHz 20 Offset 1 dB 1 dB MAX Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:45:52

802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -1.07 dBm 5.18120000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:46:56
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -1.11 dBm 5.19872000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:47:21
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -1.77 dBm 5.23864000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:47:46

Device	Frequency (GHz)	Power (dBm)	Bandwidth (MHz)	Span (MHz)	Resolution (MHz)	Marker 1 [T1]
802.11n-HT40-Low	5.19	-4.94	30	80	1	5.187688000
802.11n-HT40-High	5.23	-5.91	30	80	1	5.232728000
802.11ac-VHT80	5.21	-12.89	30	160	1	5.184888000

Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -4.94 dBm 5.187688000 GHz

Center 5.19 GHz 8 MHz/ Span 80 MHz

Date: 17.MAY.2022 20:50:05

Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -5.91 dBm 5.232728000 GHz

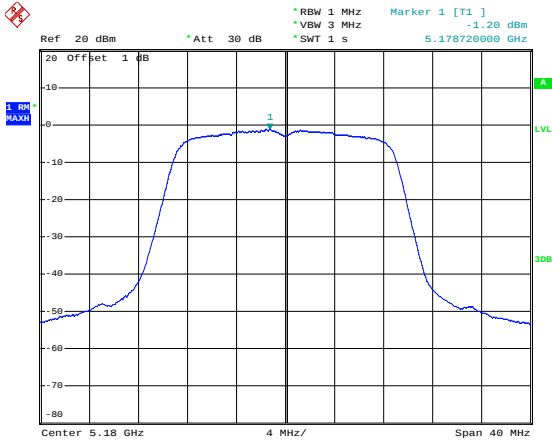
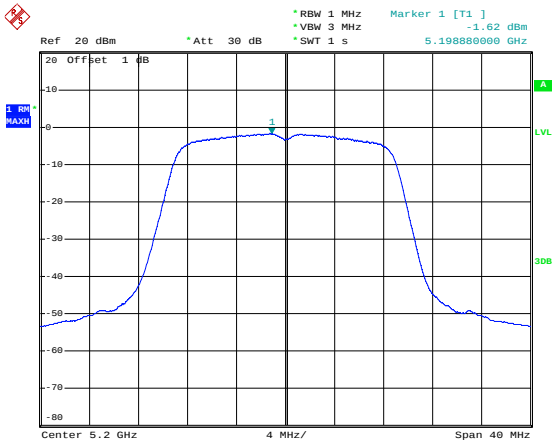
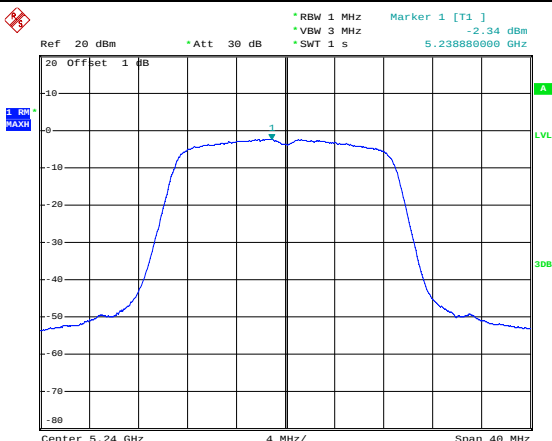
Center 5.23 GHz 8 MHz/ Span 80 MHz

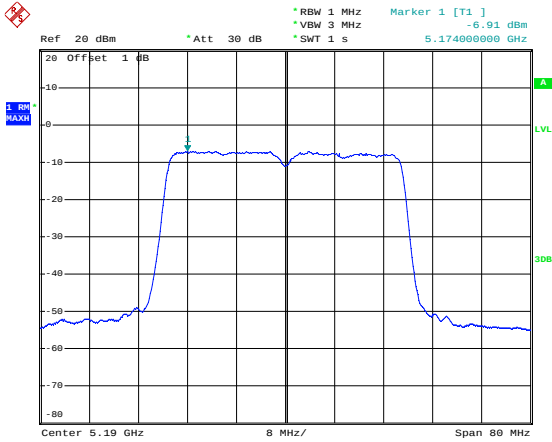
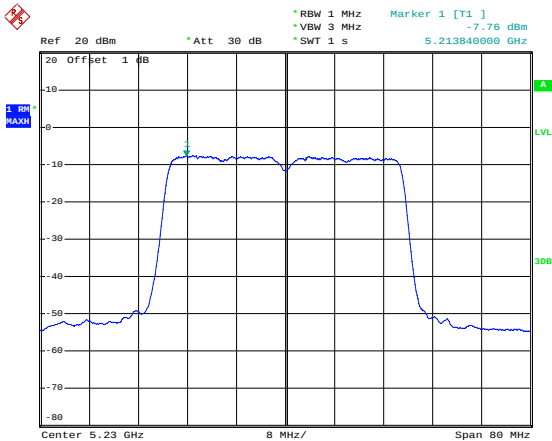
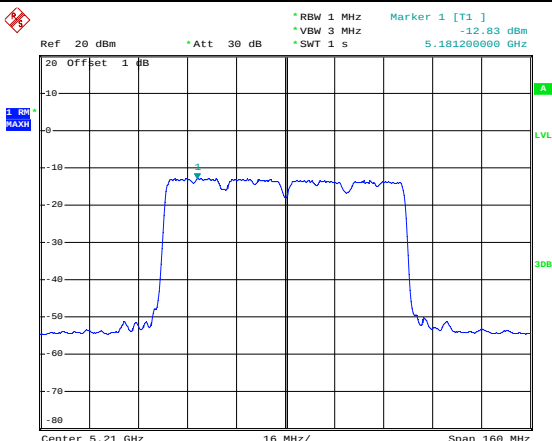
Date: 17.MAY.2022 20:50:32

Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -12.89 dBm 5.184888000 GHz

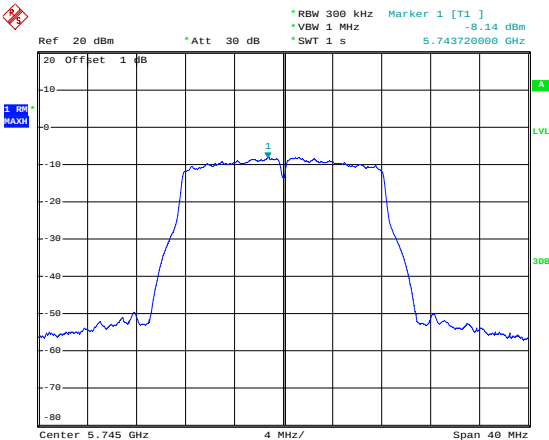
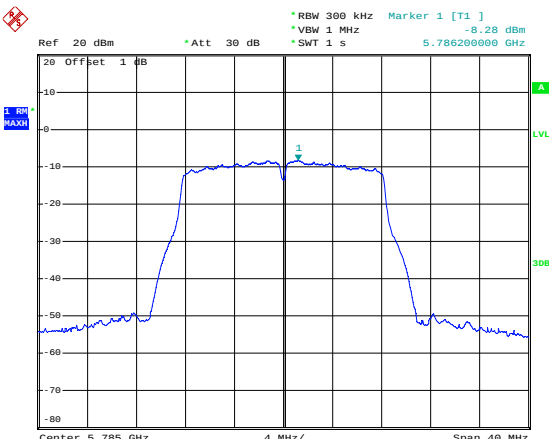
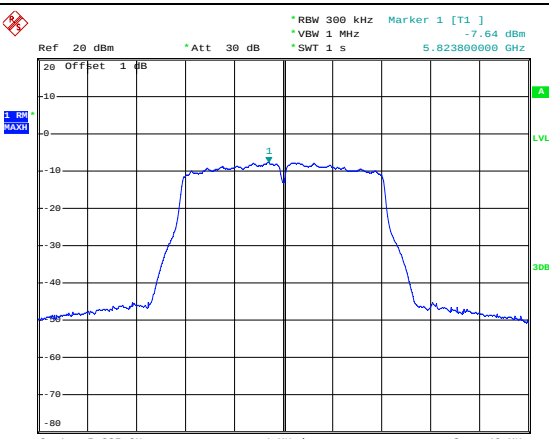
Center 5.21 GHz 16 MHz/ Span 160 MHz

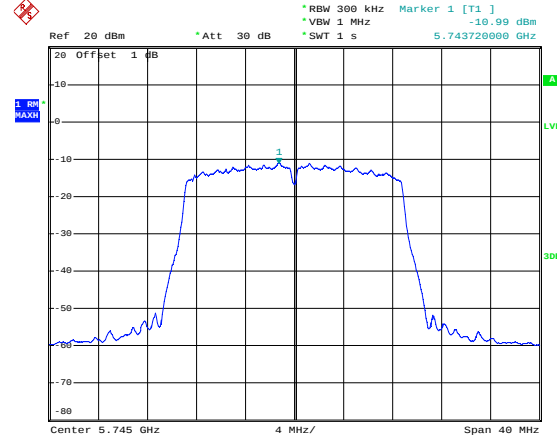
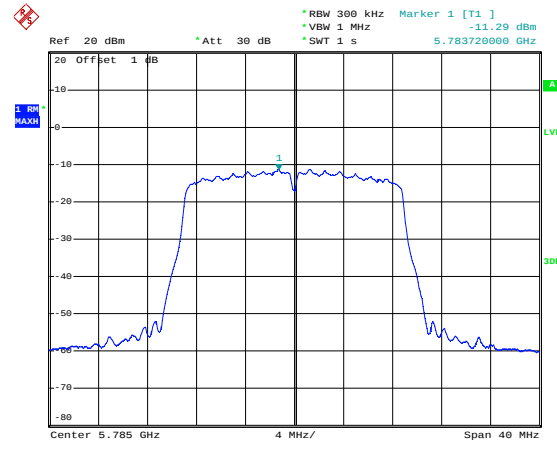
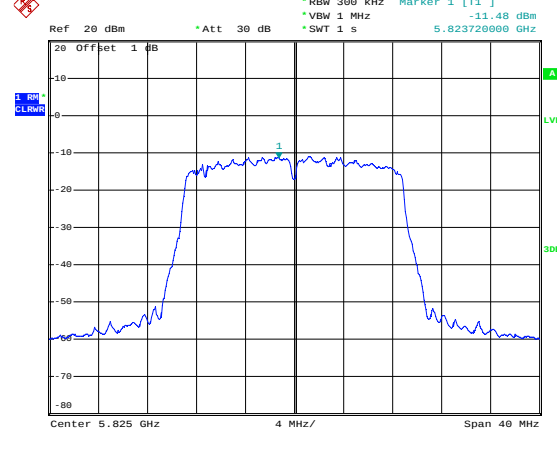
Date: 17.MAY.2022 20:43:40

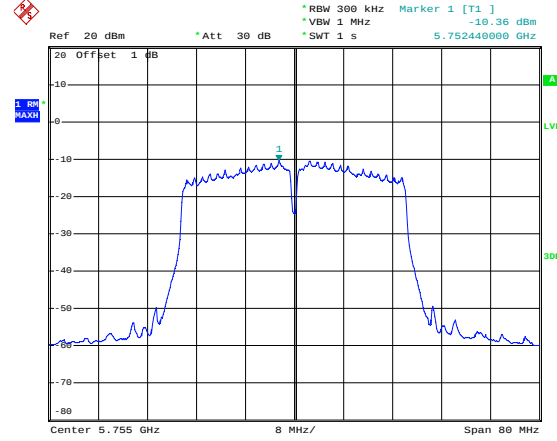
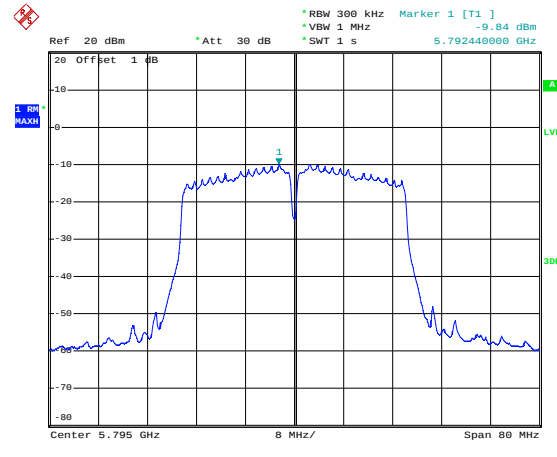
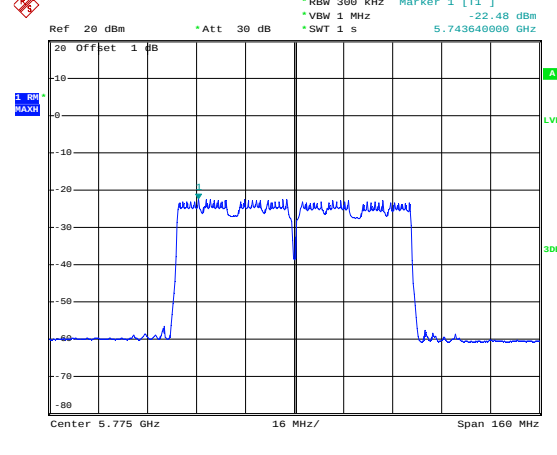
802.11ac-HE20-Low	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -1.20 dBm 5.178720000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:48:29
802.11ac-HE20-Middle	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -1.62 dBm 5.198880000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:48:57
802.11ac-HE20-High	 Ref 20 dBm *Att 30 dB *RBW 1 MHz *VBW 3 MHz *SWT 1 s Marker 1 [T1] -2.34 dBm 5.238880000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:49:24

802.11ac-HE40-Low	 Date: 17.MAY.2022 20:51:09
802.11ac-HE40-High	 Date: 17.MAY.2022 20:51:39
802.11ac-HE80	 Date: 17.MAY.2022 20:44:07

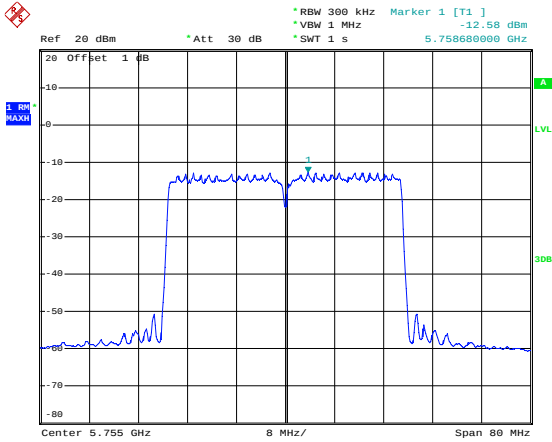
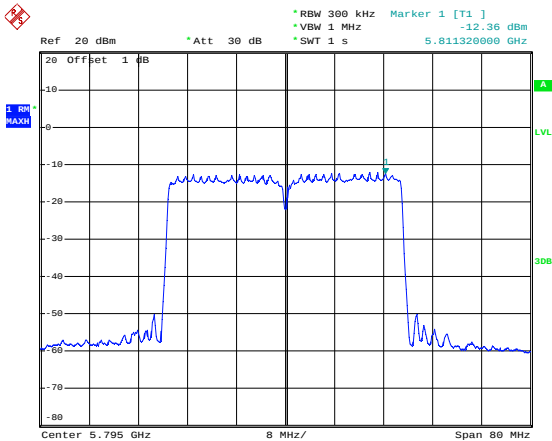
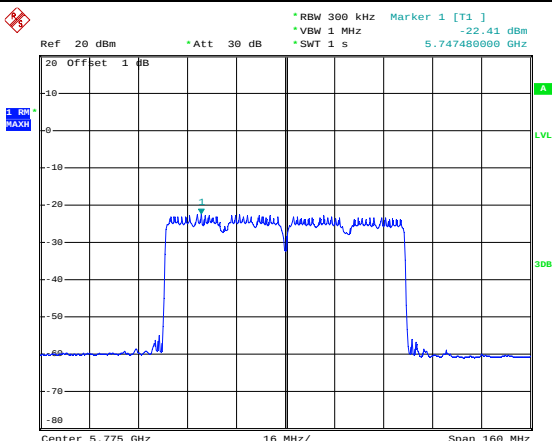
5725-5850MHz

802.11a-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -8.14 dBm *VBW 1 MHz *SWT 1 s 5.743720000 GHz 20 Offset 1 dB 1 RB MAX Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:15:55
802.11a-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -8.28 dBm *VBW 1 MHz *SWT 1 s 5.786200000 GHz 20 Offset 1 dB 1 RB MAX Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:16:26
802.11a-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] -7.64 dBm *VBW 1 MHz *SWT 1 s 5.823800000 GHz 20 Offset 1 dB 1 RB MAX Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:16:58

Channel	Plot	Center Frequency (GHz)	Span (MHz)	Marker 1 [T1] (dBm)	Date
802.11n-HT20-Low		5.745	40	-10.99	17.MAY.2022 18:17:46
802.11n-HT20-Middle		5.785	40	-11.29	17.MAY.2022 18:18:14
802.11n-HT20-High		5.825	40	-11.48	17.MAY.2022 18:19:02

Configuration	Plot Description	Date
802.11n-HT40-Low		17.MAY.2022 18:26:22
802.11n-HT40-High		17.MAY.2022 18:26:58
802.11ac-VHT80		17.MAY.2022 17:04:30

Channel	Center Frequency (GHz)	Span (MHz)	Ref (dBm)	Att (dB)	RBW (kHz)	VBW (MHz)	SWT (s)	Marker 1 [T1] (dBm)	Date
802.11ac-HE20-Low	5.745	40	20	30	300	1	1	-9.45	17.MAY.2022 18:22:53
802.11ac-HE20-Middle	5.785	40	20	30	300	1	1	-6.66	17.MAY.2022 18:23:36
802.11ac-HE20-High	5.825	40	20	30	300	1	1	-5.50	17.MAY.2022 18:24:34

802.11ac-HE40-Low	 Date: 17.MAY.2022 18:27:57
802.11ac-HE40-High	 Date: 17.MAY.2022 18:28:28
802.11ac-HE80	 Date: 17.MAY.2022 17:05:30

APPENDIX B

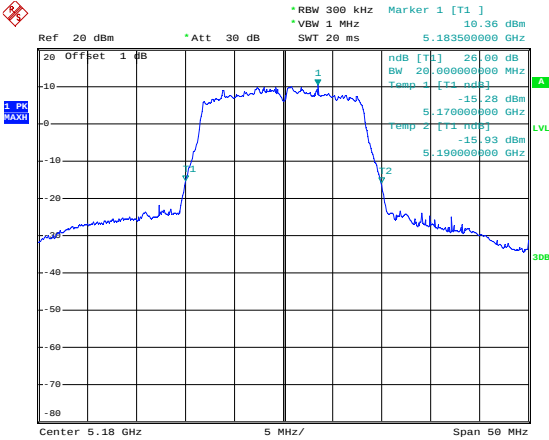
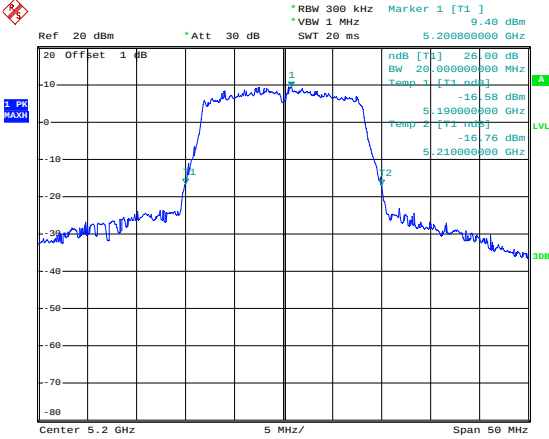
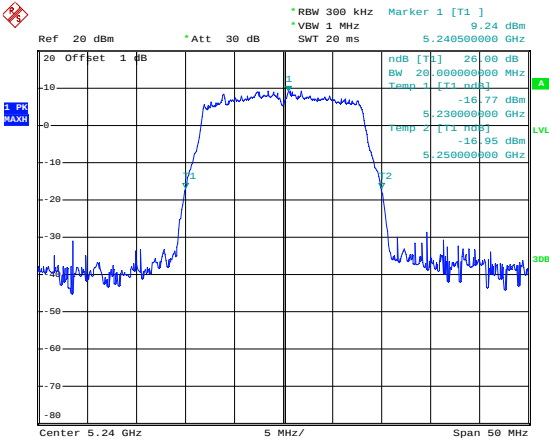
Emission Bandwidth and Occupied Bandwidth

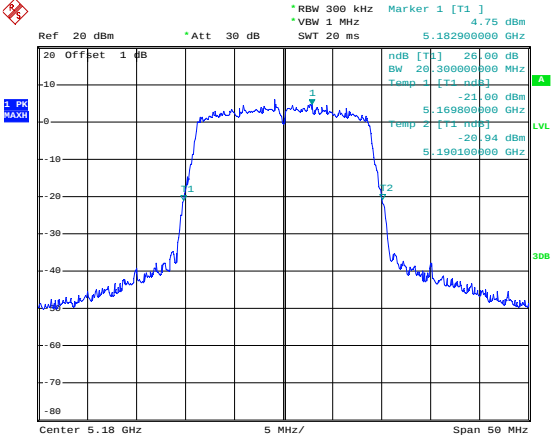
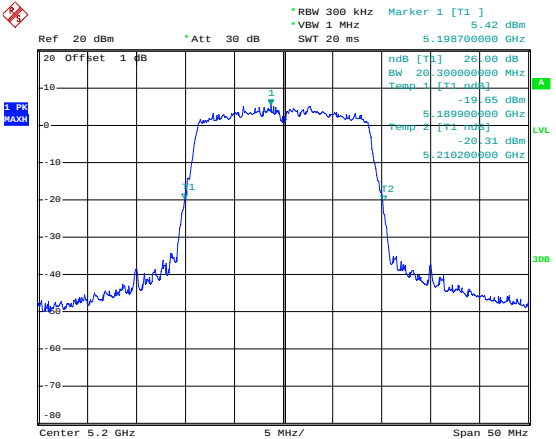
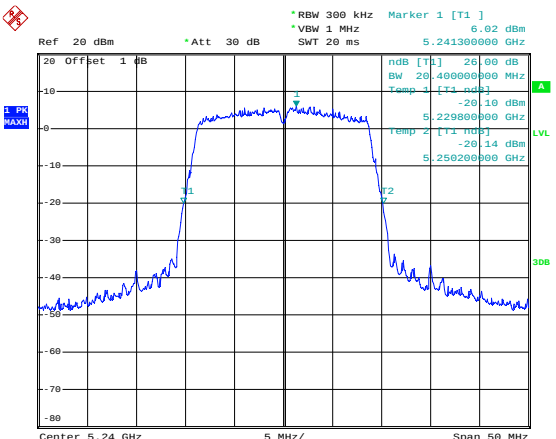
U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ATN 1		ATN 2		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	20.0	16.72	20.0	16.72	Pass
	5200	20.0	16.72	20.0	16.72	Pass
	5240	20.0	16.72	20.0	16.64	Pass
802.11n-HT20	5180	20.3	17.76	20.4	17.76	Pass
	5200	20.3	17.76	20.3	17.76	Pass
	5240	20.4	17.76	20.3	17.76	Pass
802.11n-HT40	5190	39.8	35.84	39.8	35.84	Pass
	5230	39.2	35.84	39.4	35.84	Pass
802.11ac-VHT80	5210	81.2	76.16	81.2	77.76	Pass
802.11ac-HE20	5180	20.5	17.84	20.3	17.84	Pass
	5200	20.5	17.84	20.5	17.84	Pass
	5240	20.4	17.84	20.4	17.76	Pass
802.11ax-HE40	5190	39.6	37.92	39.6	35.84	Pass
	5230	39.8	37.92	39.8	35.84	Pass
802.11ax-HE80	5210	81.6	77.76	81.6	76.16	Pass

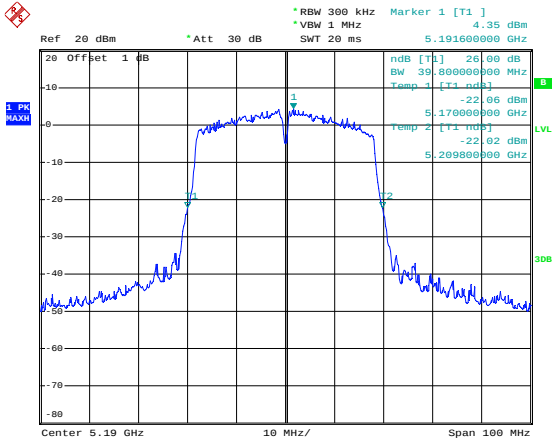
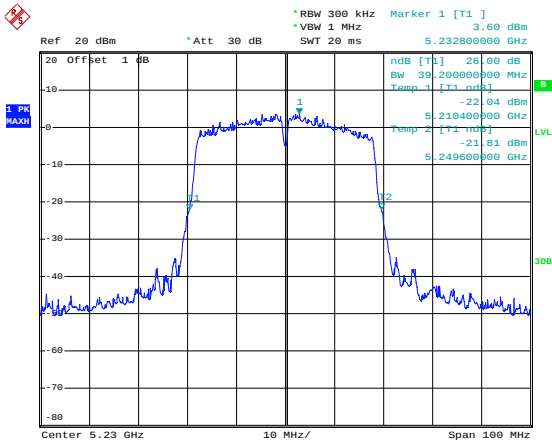
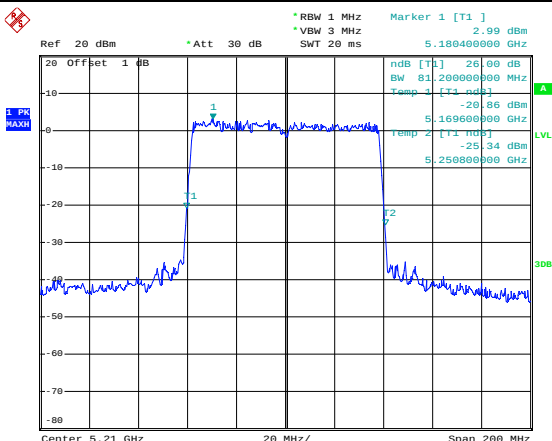
U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ATN 1		ATN 2		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	16.48	16.68	16.48	16.72	≥500
	5785	16.40	16.72	16.40	16.72	≥500
	5825	16.40	16.72	16.48	16.72	≥500
802.11n-HT20	5745	17.76	17.76	17.68	17.76	≥500
	5785	17.68	17.72	17.68	17.76	≥500
	5825	17.68	17.72	17.68	17.76	≥500
802.11n-HT40	5755	35.20	35.84	32.20	35.84	≥500
	5795	35.20	35.76	35.20	35.84	≥500

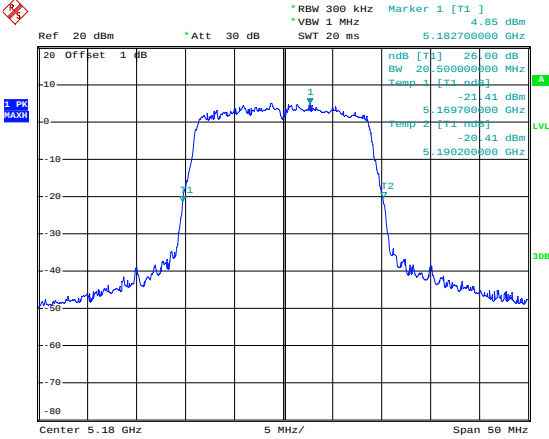
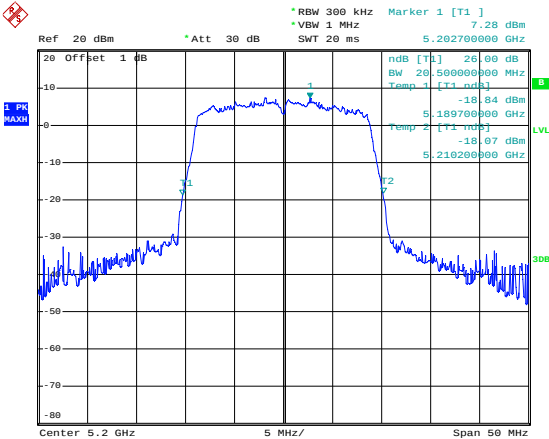
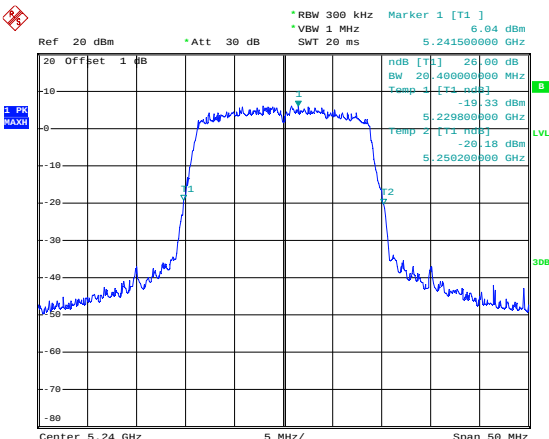
802.11ac-VHT80	5775	76.8	76.16	76.80	76.16	≥ 500
802.11ax-HE20	5745	17.68	17.80	17.68	17.80	≥ 500
	5785	17.68	17.84	17.68	17.84	≥ 500
	5825	17.68	17.80	17.68	17.80	≥ 500
802.11ax-HE40	5755	38.24	37.92	38.40	37.92	≥ 500
	5795	38.40	37.92	38.40	37.92	≥ 500
802.11ax-HE80	5775	78.40	77.60	78.16	77.60	≥ 500

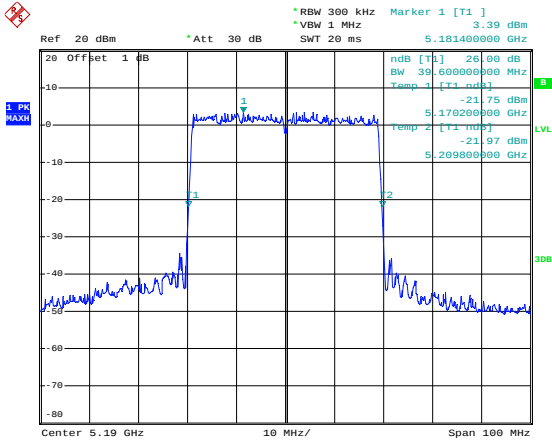
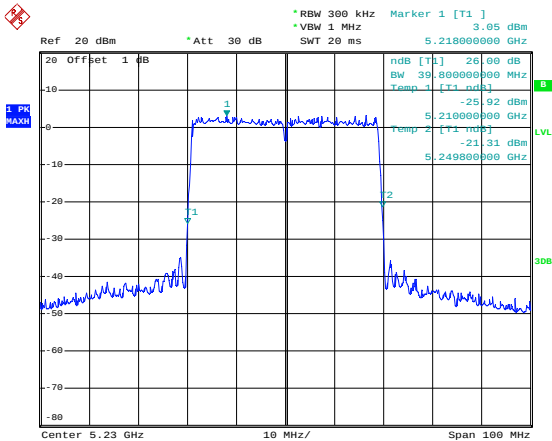
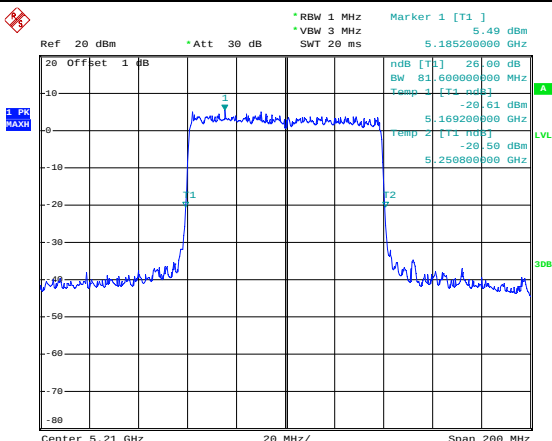
ATN 1
5150-5250MHz
-26dB

802.11a-Low	 The spectrum plot for 802.11a-Low shows a signal centered at 5.18 GHz. The plot includes a peak marker at 1 with a value of 10.36 dBm. The signal is measured with a resolution bandwidth (RBW) of 300 kHz, video bandwidth (VBW) of 1 MHz, and a sweep time (SWT) of 20 ms. The plot also shows noise floor levels (LVL) at -15.28 dBm and -15.93 dBm. The signal is measured at 5.183500000 GHz. Date: 17.MAY.2022 21:15:06
802.11a-Middle	 The spectrum plot for 802.11a-Middle shows a signal centered at 5.2 GHz. The plot includes a peak marker at 1 with a value of 9.40 dBm. The signal is measured with a resolution bandwidth (RBW) of 300 kHz, video bandwidth (VBW) of 1 MHz, and a sweep time (SWT) of 20 ms. The plot also shows noise floor levels (LVL) at -16.58 dBm and -16.76 dBm. The signal is measured at 5.200000000 GHz. Date: 17.MAY.2022 21:16:02
802.11a-High	 The spectrum plot for 802.11a-High shows a signal centered at 5.24 GHz. The plot includes a peak marker at 1 with a value of 9.24 dBm. The signal is measured with a resolution bandwidth (RBW) of 300 kHz, video bandwidth (VBW) of 1 MHz, and a sweep time (SWT) of 20 ms. The plot also shows noise floor levels (LVL) at -16.77 dBm and -16.95 dBm. The signal is measured at 5.240500000 GHz. Date: 17.MAY.2022 21:16:34

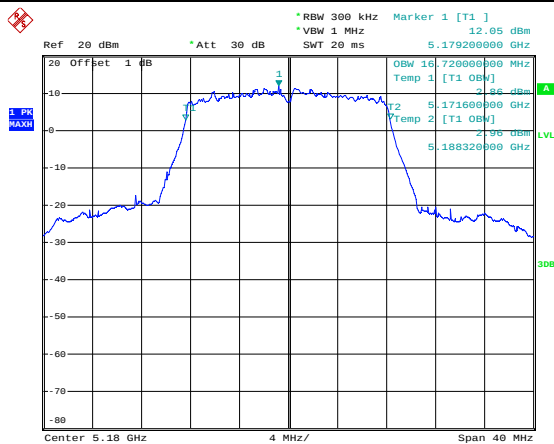

802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 4.75 dBm *VBW 1 MHz SWT 20 ms 5.182900000 GHz ndB [T1] 26.00 dB BW 20.300000000 MHz Temp 1 [T1 ndB] -21.00 dBm 5.169000000 GHz Temp 2 [T1 ndB] -20.94 dBm 5.190100000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 17.MAY.2022 21:17:16
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 5.42 dBm *VBW 1 MHz SWT 20 ms 5.198700000 GHz ndB [T1] 26.00 dB BW 20.300000000 MHz Temp 1 [T1 ndB] -19.65 dBm 5.189000000 GHz Temp 2 [T1 ndB] -20.31 dBm 5.210200000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 17.MAY.2022 21:18:06
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 6.02 dBm *VBW 1 MHz SWT 20 ms 5.241300000 GHz ndB [T1] 26.00 dB BW 20.400000000 MHz Temp 1 [T1 ndB] -20.10 dBm 5.229000000 GHz Temp 2 [T1 ndB] -20.14 dBm 5.250200000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 17.MAY.2022 21:18:49

802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 4.35 dBm *VBW 1 MHz SWT 20 ms 5.191600000 GHz ndB [T1] 26.00 dB BW 39.80000000 MHz Temp 1 [T1 ndB] -22.06 dBm 5.170000000 GHz Temp 2 [T1 ndB] -22.02 dBm 5.209000000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 17.MAY.2022 21:24:15
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 3.60 dBm *VBW 1 MHz SWT 20 ms 5.232800000 GHz ndB [T1] 26.00 dB BW 39.20000000 MHz Temp 1 [T1 ndB] -22.04 dBm 5.210400000 GHz Temp 2 [T1 ndB] -21.81 dBm 5.249600000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 17.MAY.2022 21:26:52
802.11ac-VHT80	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 2.99 dBm *VBW 3 MHz SWT 20 ms 5.180400000 GHz ndB [T1] 26.00 dB BW 81.20000000 MHz Temp 1 [T1 ndB] -20.86 dBm 5.169600000 GHz Temp 2 [T1 ndB] -25.34 dBm 5.250800000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 17.MAY.2022 21:14:01

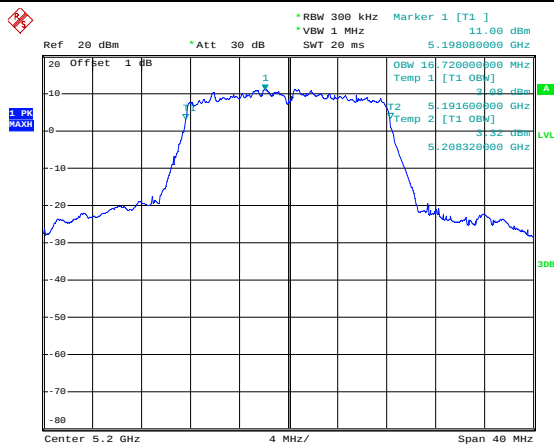

802.11ax-HE20-Low	 Date: 17.MAY.2022 21:19:52
802.11ax-HE20-Middle	 Date: 17.MAY.2022 21:21:41
802.11ax-HE20-High	 Date: 17.MAY.2022 21:22:42

802.11ax-HE40-Low	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 3.39 dBm *VBW 1 MHz SWT 20 ms 5.181400000 GHz ndB [T1] 26.00 dB BW 30.00000000 MHz Temp 1 [T1 ndB] -21.75 dBm 5.170200000 GHz Temp 2 [T1 ndB] -21.97 dBm 5.209800000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 17.MAY.2022 21:28:28
802.11ax-HE40-High	 Ref 20 dBm *Att 30 dB *RBW 300 kHz Marker 1 [T1] 3.05 dBm *VBW 1 MHz SWT 20 ms 5.218000000 GHz ndB [T1] 26.00 dB BW 30.00000000 MHz Temp 1 [T1 ndB] -25.92 dBm 5.210000000 GHz Temp 2 [T1 ndB] -21.31 dBm 5.249800000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 17.MAY.2022 21:29:54
802.11ax-HE80	 Ref 20 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 5.49 dBm *VBW 3 MHz SWT 20 ms 5.185200000 GHz ndB [T1] 26.00 dB BW 81.60000000 MHz Temp 1 [T1 ndB] -20.61 dBm 5.169200000 GHz Temp 2 [T1 ndB] -20.50 dBm 5.250800000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 17.MAY.2022 21:13:17

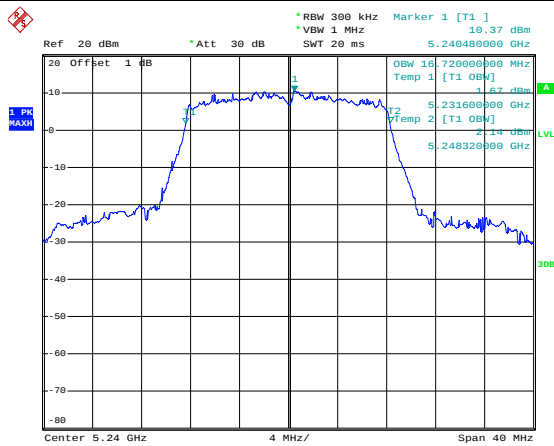

99%OBW



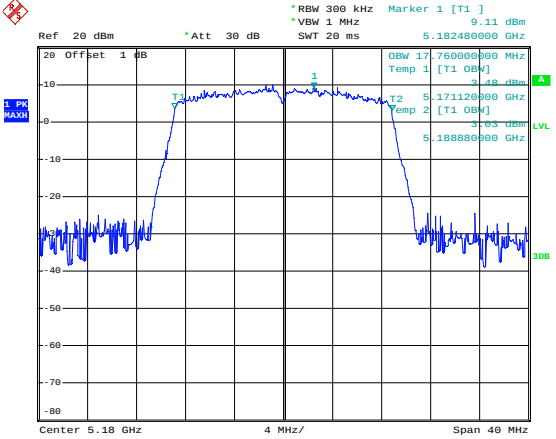
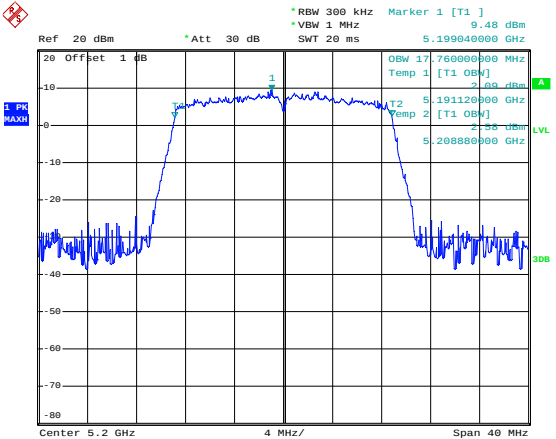
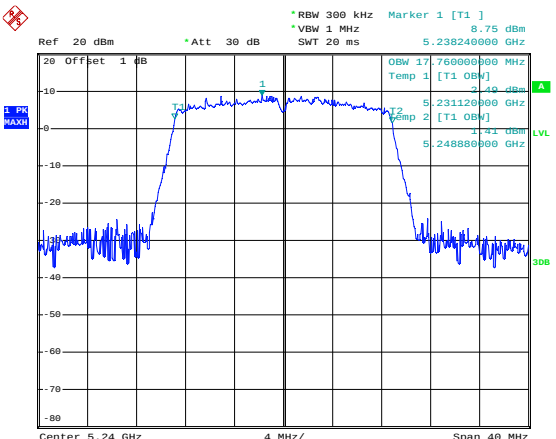
Date: 16.MAY.2022 17:00:39

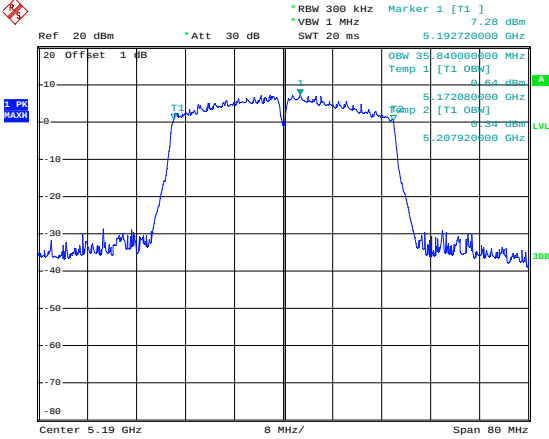
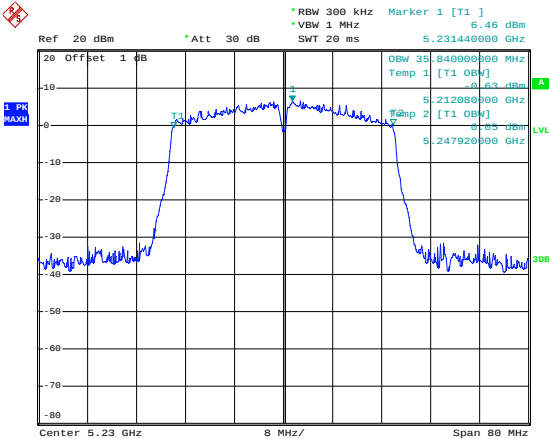
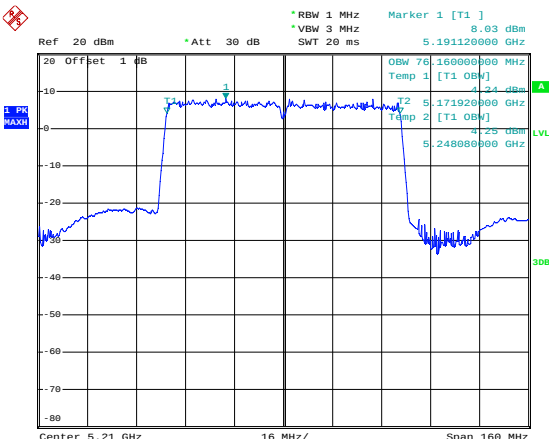


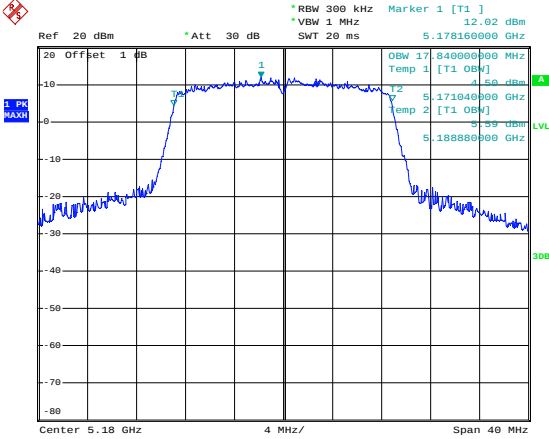
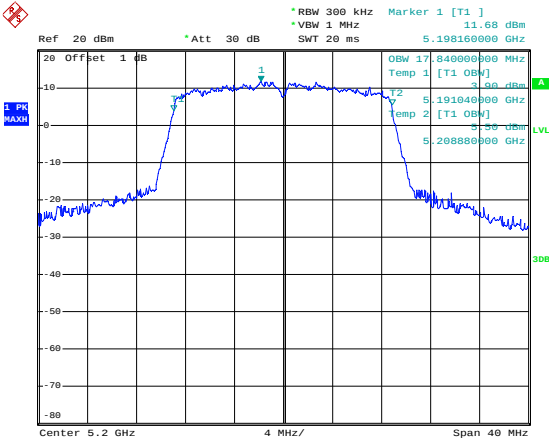
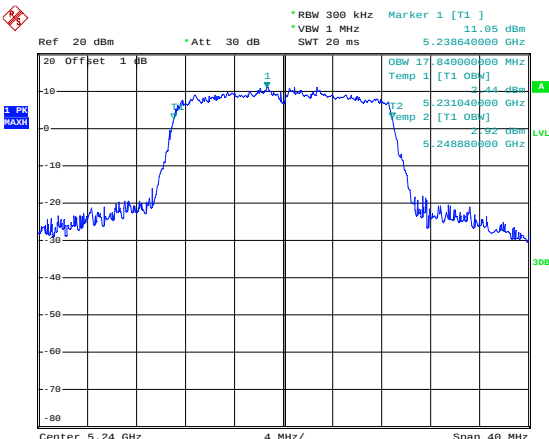
Date: 16.MAY.2022 17:01:18





Date: 16.MAY.2022 17:02:09

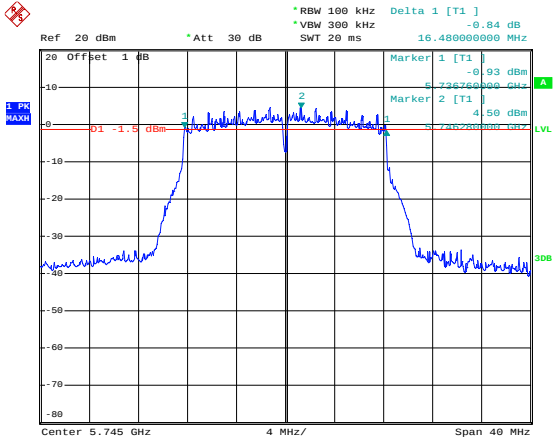
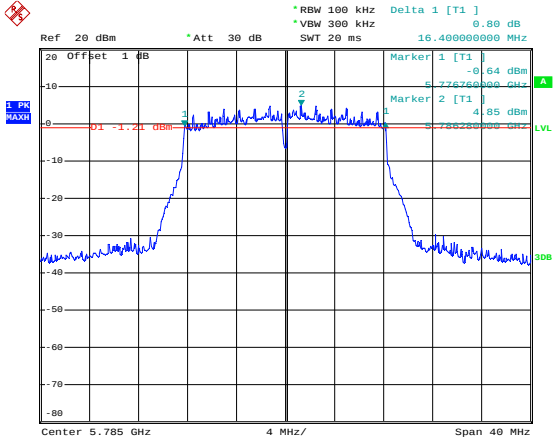
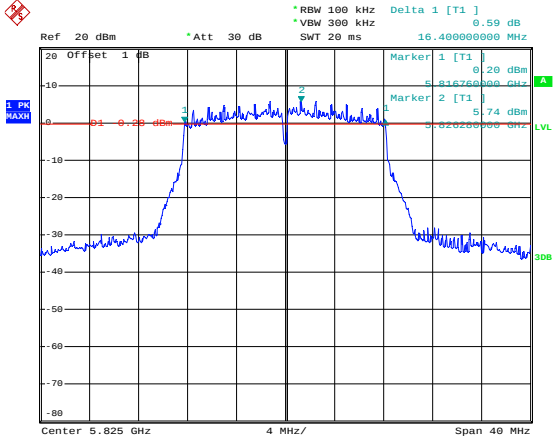
802.11n-HT20-Low	 Date: 16.MAY.2022 17:03:16
802.11n-HT20-Middle	 Date: 16.MAY.2022 17:03:44
802.11n-HT20-High	 Date: 16.MAY.2022 17:04:28

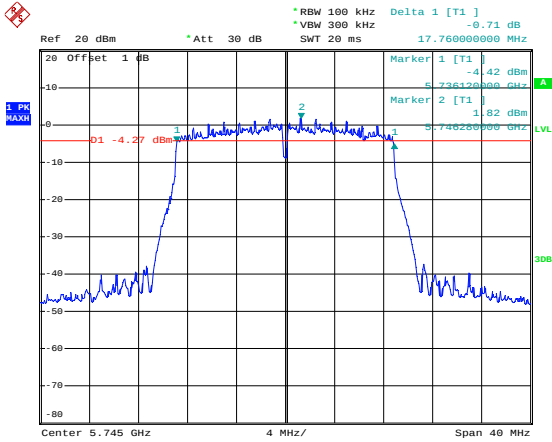
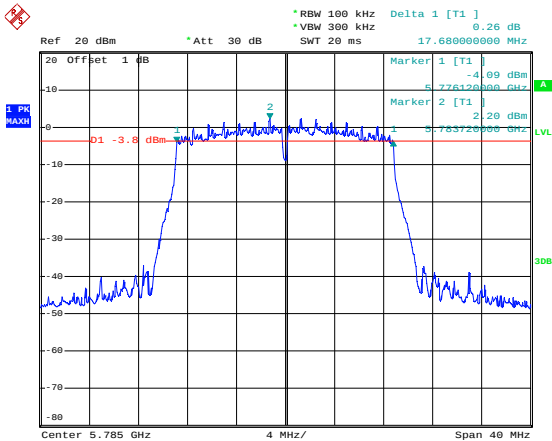
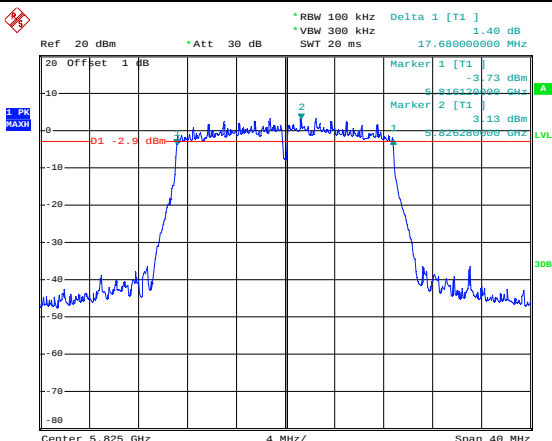
802.11n-HT40-Low	 Date: 16.MAY.2022 17:13:33
802.11n-HT40-High	 Date: 16.MAY.2022 17:14:24
802.11ac-VHT80	 Date: 16.MAY.2022 16:59:15

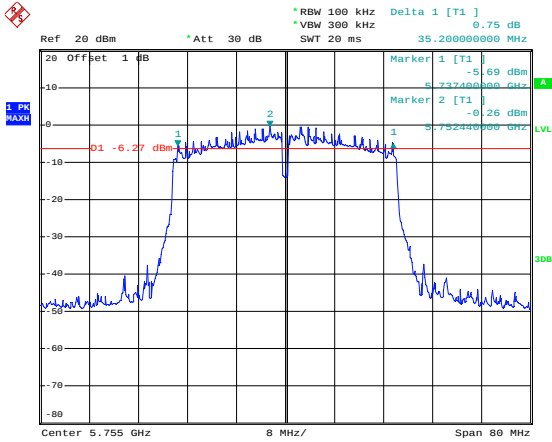
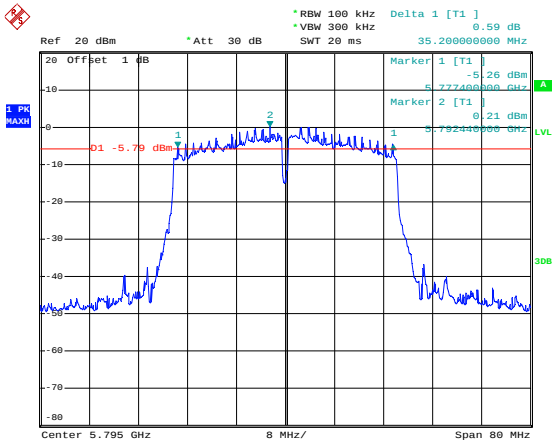
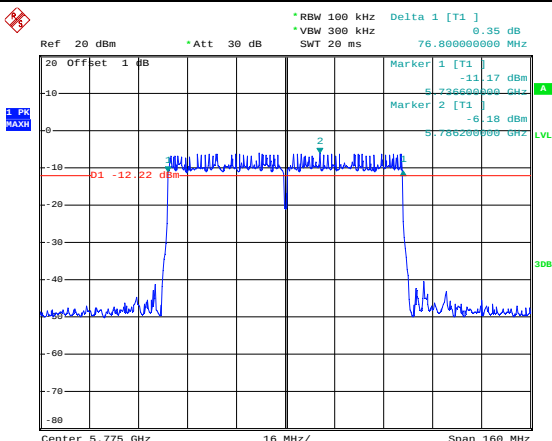
802.11ax-HE20-Low	 Date: 16.MAY.2022 17:10:19
802.11ax-HE20-Middle	 Date: 16.MAY.2022 17:11:24
802.11ax-HE20-High	 Date: 16.MAY.2022 17:11:56

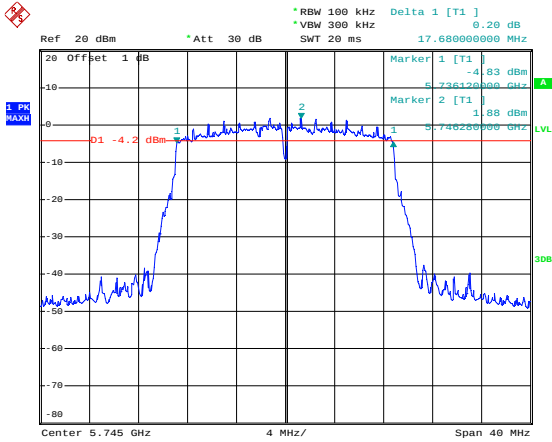
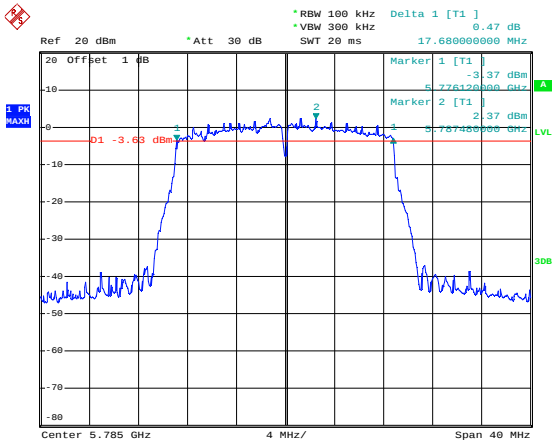
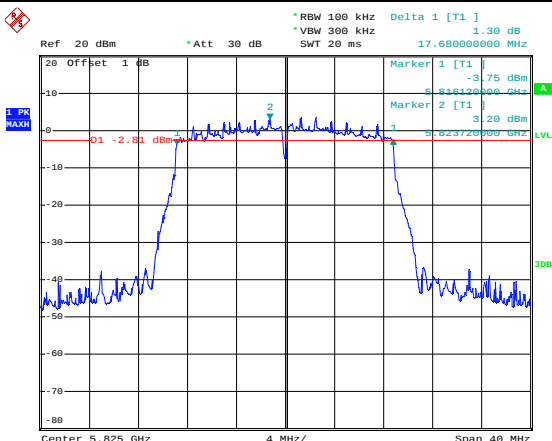


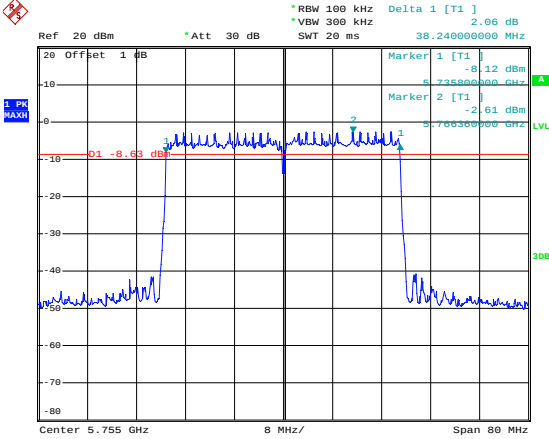
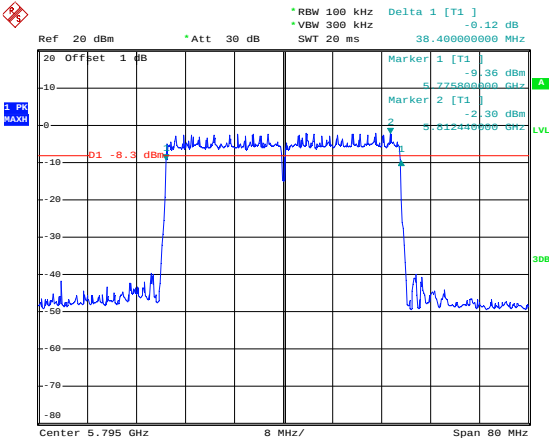
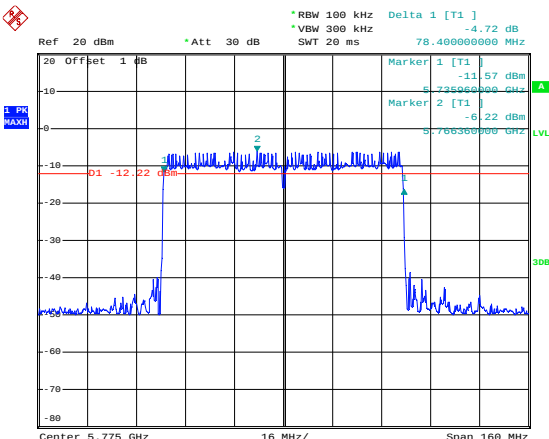
5725-5850MHz
-6dB

802.11a-Low	 Date: 16.MAY.2022 18:13:14
802.11a-Middle	 Date: 16.MAY.2022 18:14:32
802.11a-High	 Date: 16.MAY.2022 18:15:24

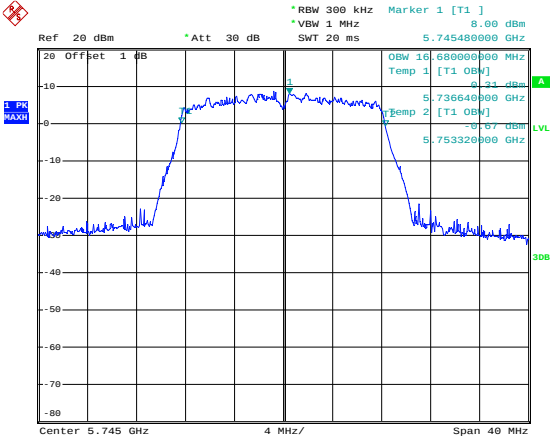
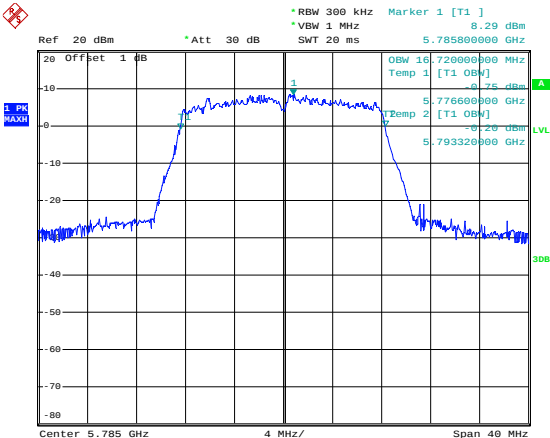
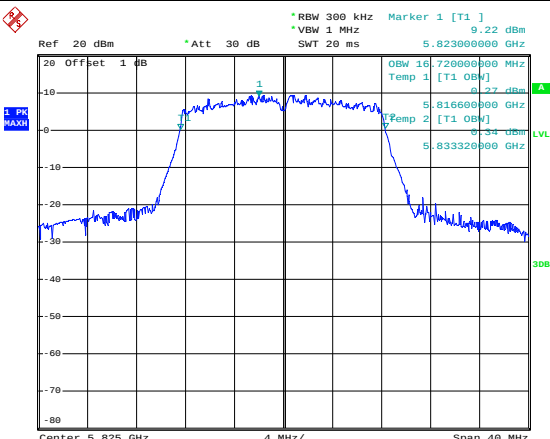
802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.71 dB RBW 100 kHz VBW 300 kHz SWT 20 ms 17.76000000 MHz Marker 1 [T1] -4.42 dBm Marker 2 [T1] 1.82 dBm D1 -4.27 dBm LVL 300 Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:20:56
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.26 dB RBW 100 kHz VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -4.09 dBm Marker 2 [T1] 2.20 dBm D1 -3.8 dBm LVL 300 Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:24:00
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 1.40 dB RBW 100 kHz VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.73 dBm Marker 2 [T1] 3.13 dBm D1 -2.9 dBm LVL 300 Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:25:48

802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.75 dB *RBW 100 kHz *VBW 300 kHz SWT 20 ms 35.20000000 MHz Marker 1 [T1] -5.19 dBm Marker 2 [T1] -10.26 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 16.MAY.2022 18:40:23
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.59 dB *RBW 100 kHz *VBW 300 kHz SWT 20 ms 35.20000000 MHz Marker 1 [T1] -5.26 dBm Marker 2 [T1] -10.21 dBm Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 16.MAY.2022 18:41:53
802.11ac-HT80	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.35 dB *RBW 100 kHz *VBW 300 kHz SWT 20 ms 76.80000000 MHz Marker 1 [T1] -11.17 dBm Marker 2 [T1] -12.22 dBm Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 16.MAY.2022 18:10:36

802.11ax-HE20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.20 dB *VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -4.83 dBm Marker 2 [T1] 1.88 dBm D1 -4.2 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:27:07
802.11ax-HE20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.47 dB *VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.37 dBm Marker 2 [T1] 2.37 dBm D1 -3.63 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:37:22
802.11ax-HE20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.30 dB *VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.75 dBm Marker 2 [T1] 3.20 dBm D1 -2.81 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:38:22

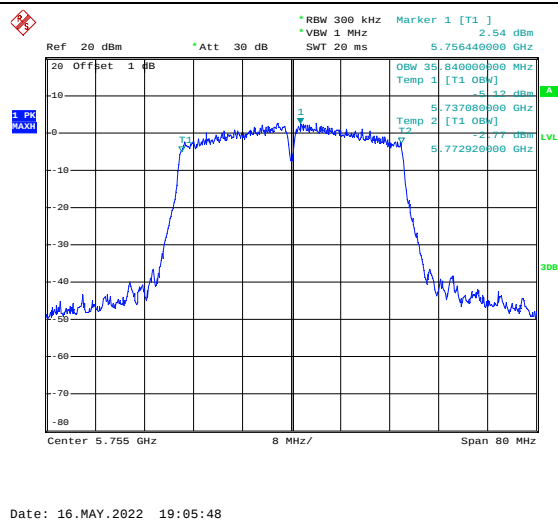
802.11ax-HE40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 2.06 dB *VBW 300 kHz SWT 20 ms 38.24000000 MHz Marker 1 [T1] -8.12 dBm Marker 2 [T1] -2.61 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 16.MAY.2022 18:43:08
802.11ax-HE40-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] -0.12 dB *VBW 300 kHz SWT 20 ms 38.40000000 MHz Marker 1 [T1] -9.36 dBm Marker 2 [T1] -2.30 dBm Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 16.MAY.2022 18:44:51
802.11ax-HE80	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] -4.72 dB *VBW 300 kHz SWT 20 ms 78.40000000 MHz Marker 1 [T1] -11.57 dBm Marker 2 [T1] -6.22 dBm Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 16.MAY.2022 18:11:41

99%OBW

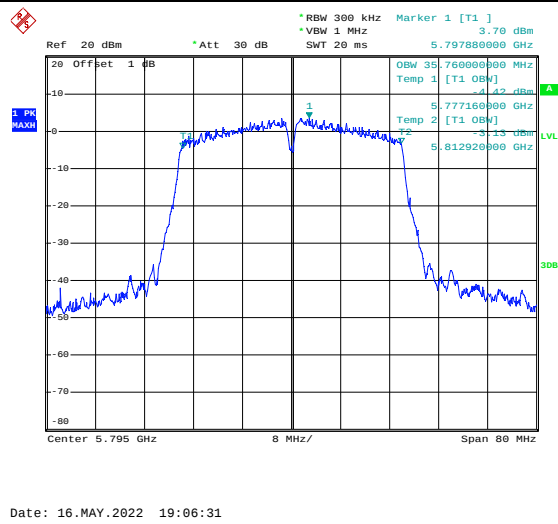
802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 8.00 dBm VBW 1 MHz 5.745480000 GHz SWT 20 ms OBW 16.68000000 MHz Temp 1 [T1 OBW] 5.736640000 GHz Temp 2 [T1 OBW] 5.753320000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:57:07
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 8.29 dBm VBW 1 MHz 5.785800000 GHz SWT 20 ms OBW 16.72000000 MHz Temp 1 [T1 OBW] 5.776600000 GHz Temp 2 [T1 OBW] 5.793320000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:57:40
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 9.22 dBm VBW 1 MHz 5.823000000 GHz SWT 20 ms OBW 16.72000000 MHz Temp 1 [T1 OBW] 5.816600000 GHz Temp 2 [T1 OBW] 5.833320000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 16.MAY.2022 18:58:15

802.11n-HT20-Low	Date: 16.MAY.2022 18:59:43
802.11n-HT20-Middle	Date: 16.MAY.2022 19:00:19
802.11n-HT20-High	Date: 16.MAY.2022 19:00:54

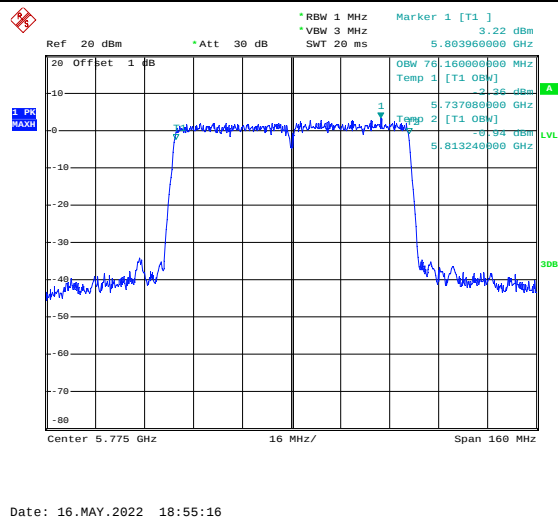
802.11n-HT40-Low

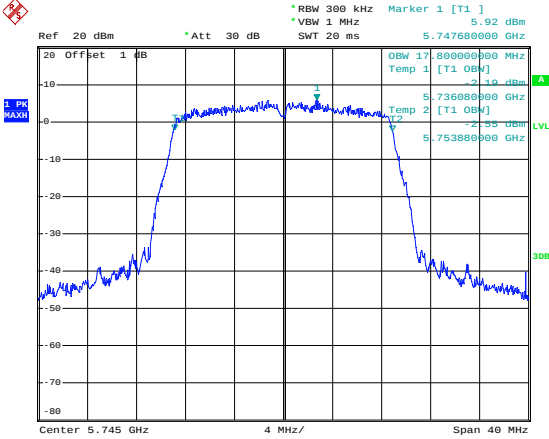
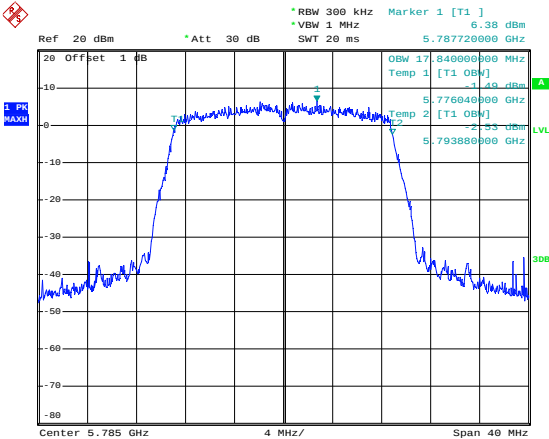
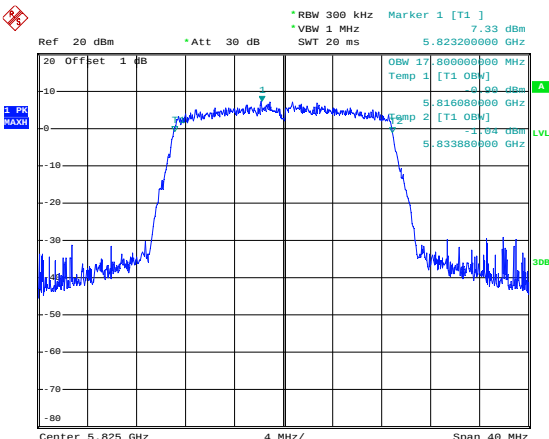


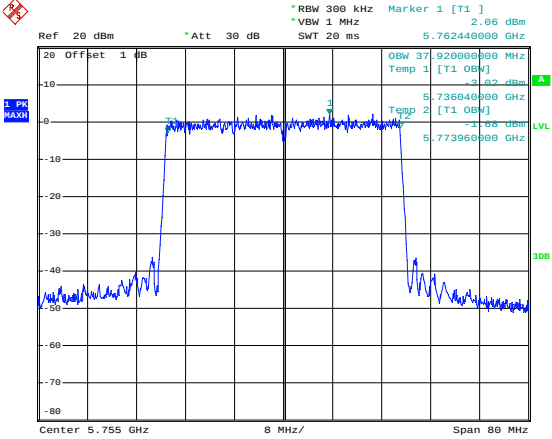
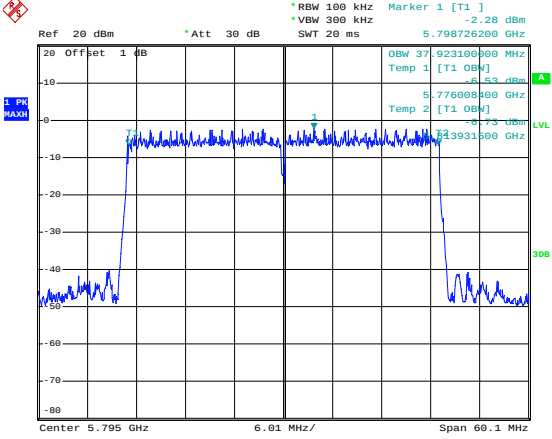
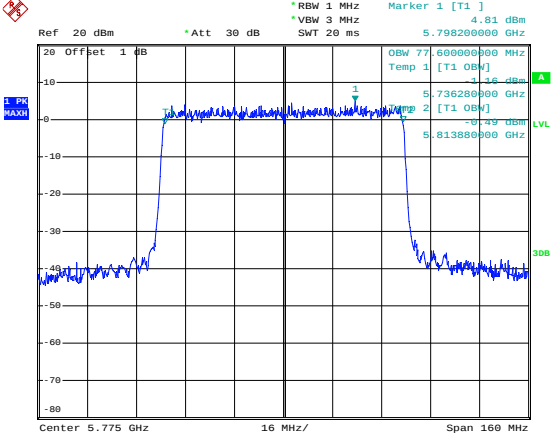
802.11n-HT40-High



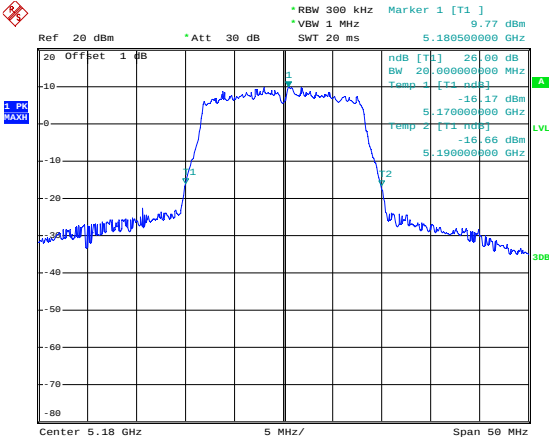
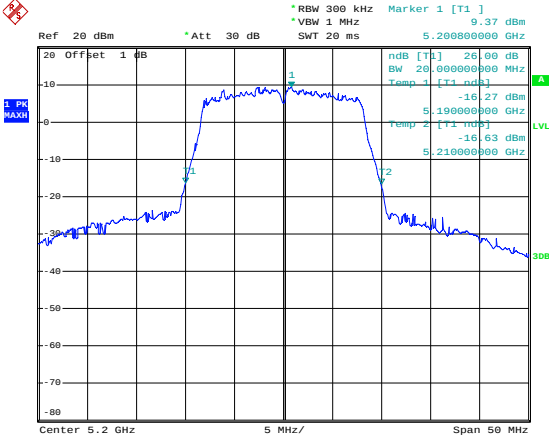
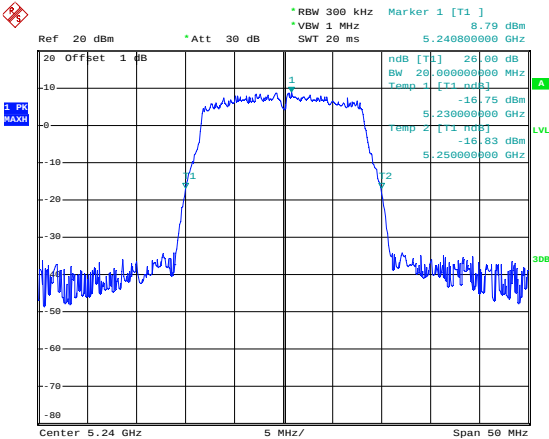
802.11ac-VHT80



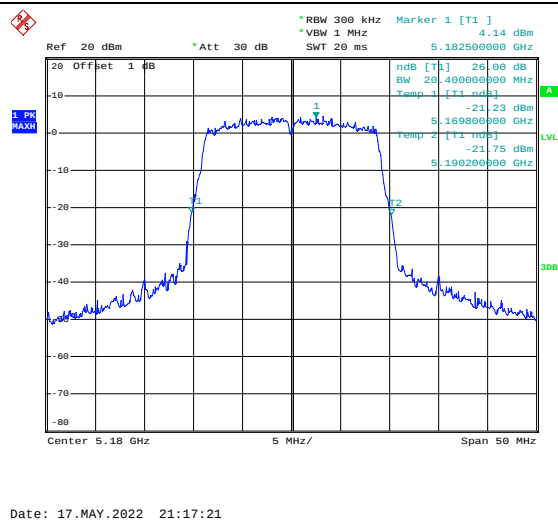
802.11ax-HE20-Low	 Date: 16.MAY.2022 19:01:53
802.11ax-HE20-Middle	 Date: 16.MAY.2022 19:03:28
802.11ax-HE20-High	 Date: 16.MAY.2022 19:03:59

802.11ax-HE40-Low	 Date: 16.MAY.2022 19:07:11
802.11ax-HE40-High	 Date: 16.MAY.2022 20:26:04
802.11ax-HE80	 Date: 16.MAY.2022 18:55:56

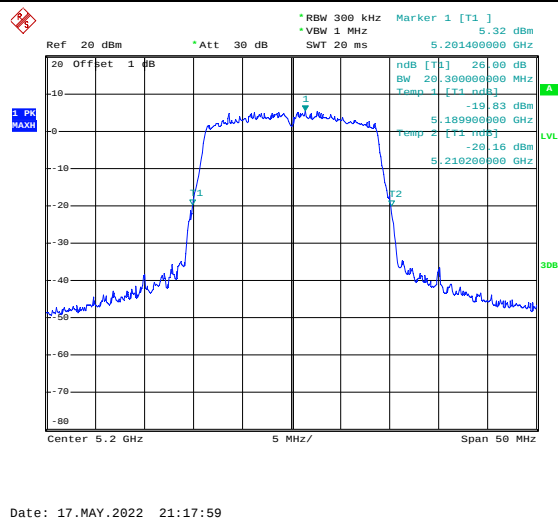
ATN 2
5150-5250MHz
-26dB

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 9.77 dBm VBW 1 MHz SWT 20 ms 5.18050000 GHz ndB [T1] 26.00 dB BW 20.00000000 MHz Temp 1 [T1 ndB] -16.17 dBm Temp 2 [T1 ndB] -16.66 dBm Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 17.MAY.2022 21:15:12
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 9.37 dBm VBW 1 MHz SWT 20 ms 5.20000000 GHz ndB [T1] 26.00 dB BW 20.00000000 MHz Temp 1 [T1 ndB] -16.27 dBm Temp 2 [T1 ndB] -16.63 dBm Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 17.MAY.2022 21:15:55
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 8.79 dBm VBW 1 MHz SWT 20 ms 5.24000000 GHz ndB [T1] 26.00 dB BW 20.00000000 MHz Temp 1 [T1 ndB] -16.75 dBm Temp 2 [T1 ndB] -16.83 dBm Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 17.MAY.2022 21:16:39

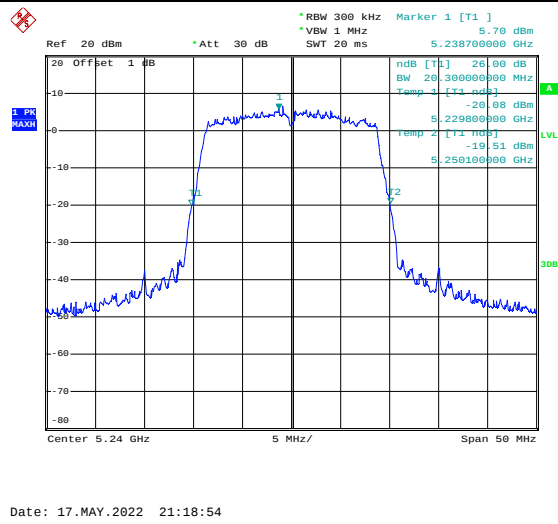
802.11n-HT20-Low

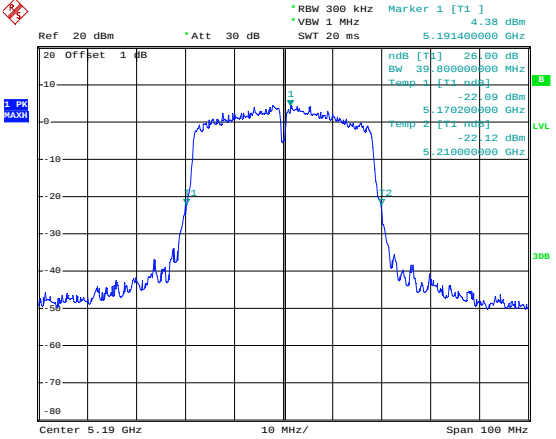
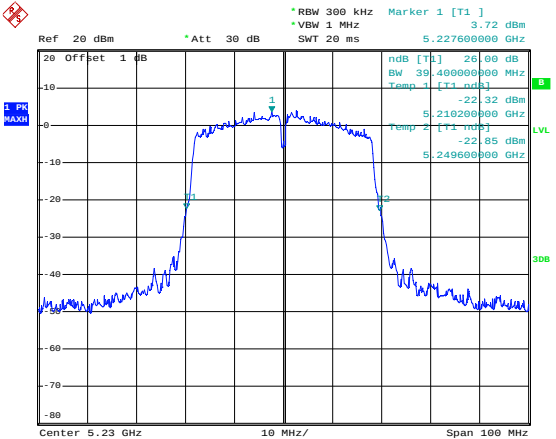
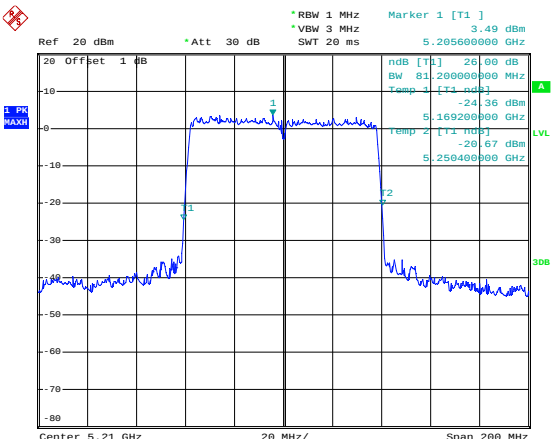


802.11n-HT20-Middle

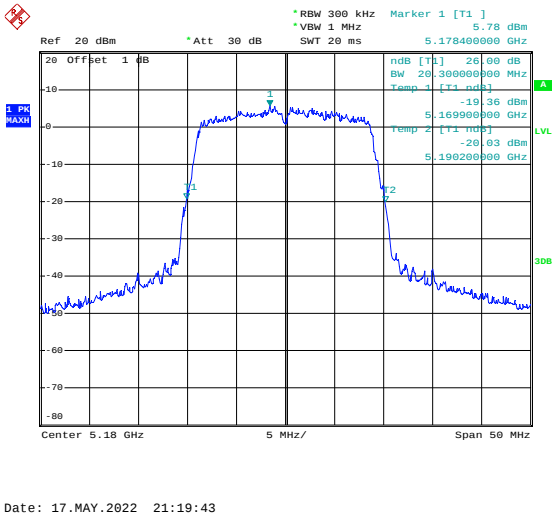


802.11n-HT20-High

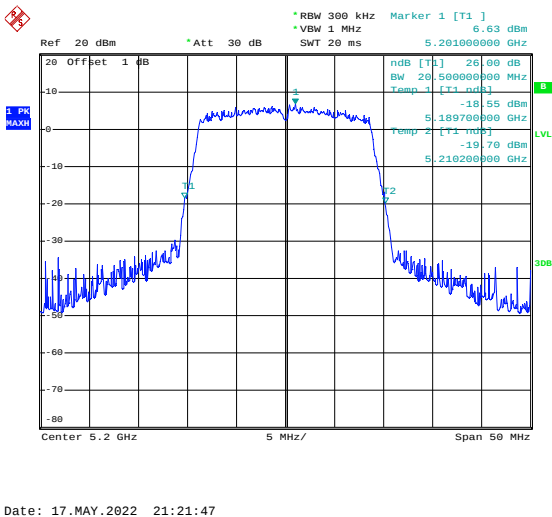


802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 4.38 dBm *VBW 1 MHz SWT 20 ms 5.191400000 GHz <table><tr><td>ndB [T1]</td><td>26.00 dB</td></tr><tr><td>BW</td><td>39.80000000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-22.09 dBm</td></tr><tr><td>Temp 2 [T1 ndB]</td><td>-22.12 dBm</td></tr></table> Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 17.MAY.2022 21:26:04	ndB [T1]	26.00 dB	BW	39.80000000 MHz	Temp 1 [T1 ndB]	-22.09 dBm	Temp 2 [T1 ndB]	-22.12 dBm
ndB [T1]	26.00 dB								
BW	39.80000000 MHz								
Temp 1 [T1 ndB]	-22.09 dBm								
Temp 2 [T1 ndB]	-22.12 dBm								
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 3.72 dBm *VBW 1 MHz SWT 20 ms 5.227600000 GHz <table><tr><td>ndB [T1]</td><td>26.00 dB</td></tr><tr><td>BW</td><td>39.40000000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-22.32 dBm</td></tr><tr><td>Temp 2 [T1 ndB]</td><td>-22.85 dBm</td></tr></table> Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 17.MAY.2022 21:27:01	ndB [T1]	26.00 dB	BW	39.40000000 MHz	Temp 1 [T1 ndB]	-22.32 dBm	Temp 2 [T1 ndB]	-22.85 dBm
ndB [T1]	26.00 dB								
BW	39.40000000 MHz								
Temp 1 [T1 ndB]	-22.32 dBm								
Temp 2 [T1 ndB]	-22.85 dBm								
802.11ac-VHT80	 Ref 20 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 3.49 dBm *VBW 3 MHz SWT 20 ms 5.205600000 GHz <table><tr><td>ndB [T1]</td><td>26.00 dB</td></tr><tr><td>BW</td><td>81.20000000 MHz</td></tr><tr><td>Temp 1 [T1 ndB]</td><td>-24.36 dBm</td></tr><tr><td>Temp 2 [T1 ndB]</td><td>-20.67 dBm</td></tr></table> Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 17.MAY.2022 21:13:56	ndB [T1]	26.00 dB	BW	81.20000000 MHz	Temp 1 [T1 ndB]	-24.36 dBm	Temp 2 [T1 ndB]	-20.67 dBm
ndB [T1]	26.00 dB								
BW	81.20000000 MHz								
Temp 1 [T1 ndB]	-24.36 dBm								
Temp 2 [T1 ndB]	-20.67 dBm								

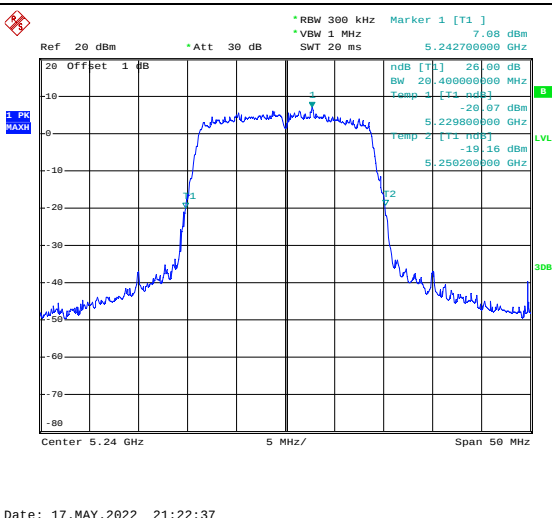
802.11ax-HE20-Low

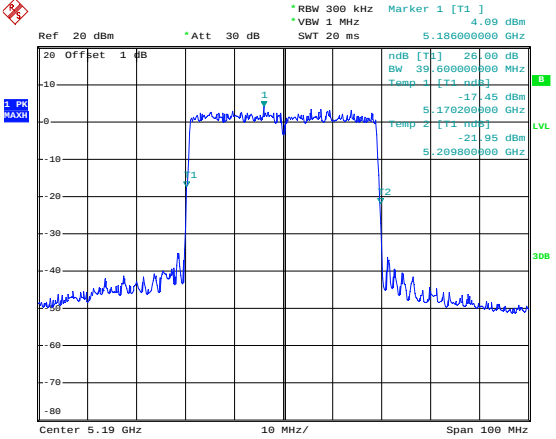
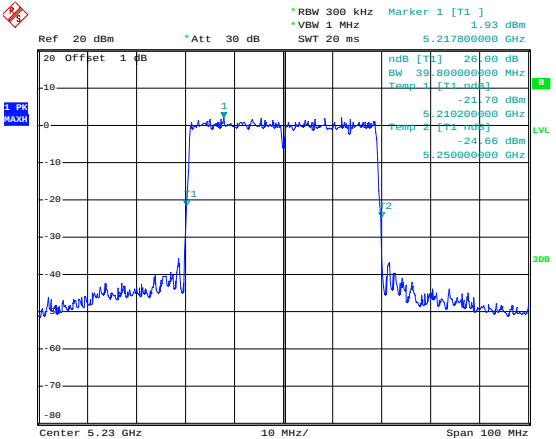
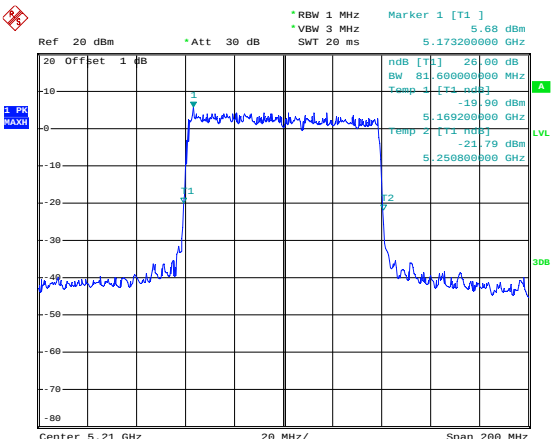


802.11ax-HE20-Middle

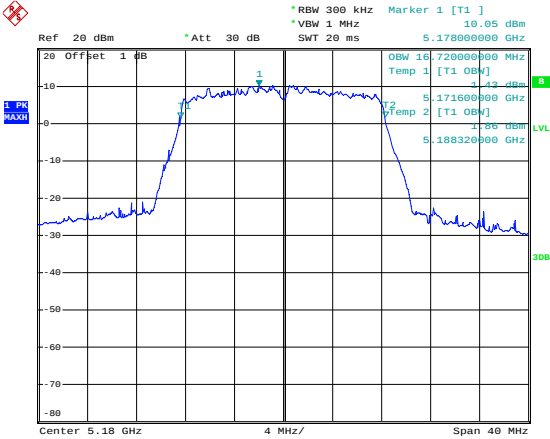
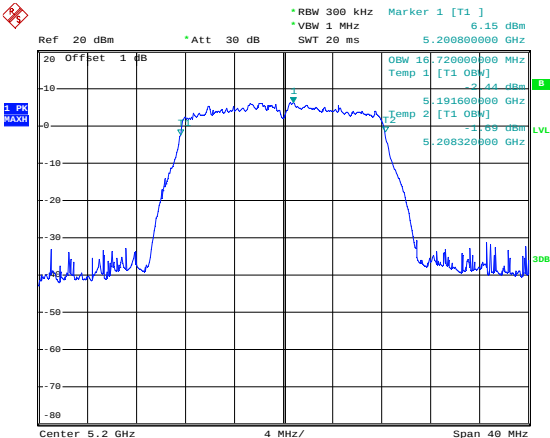
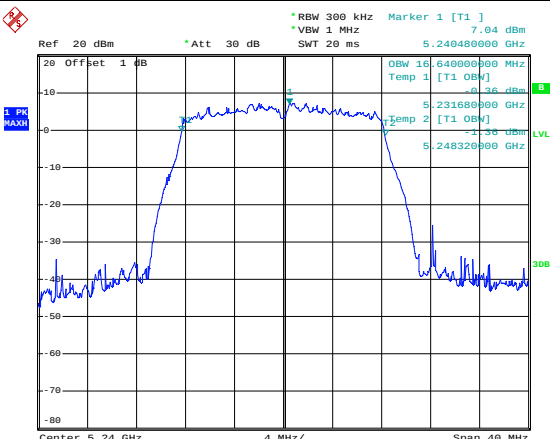


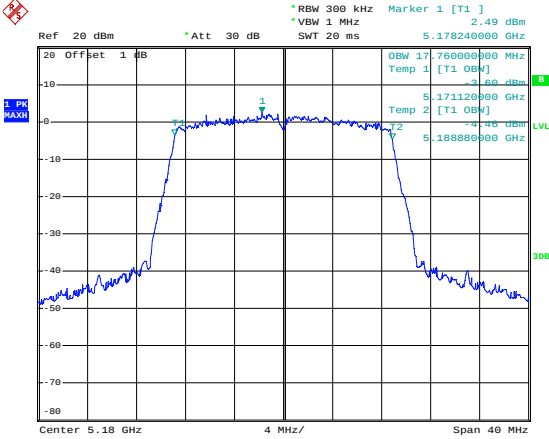
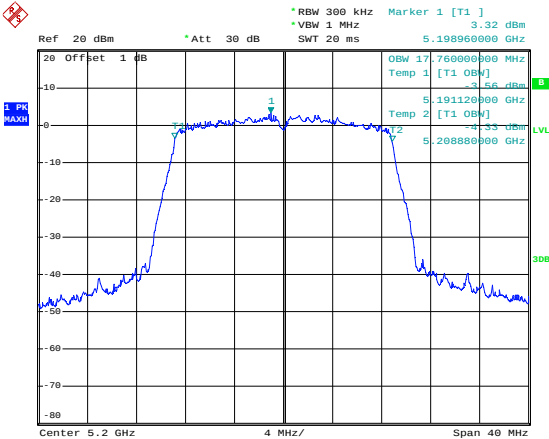
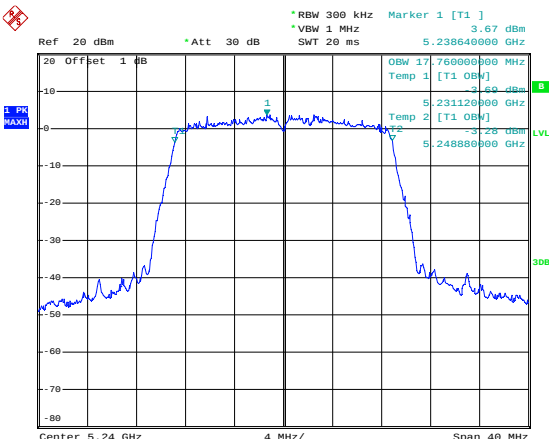
802.11ax-HE20-High

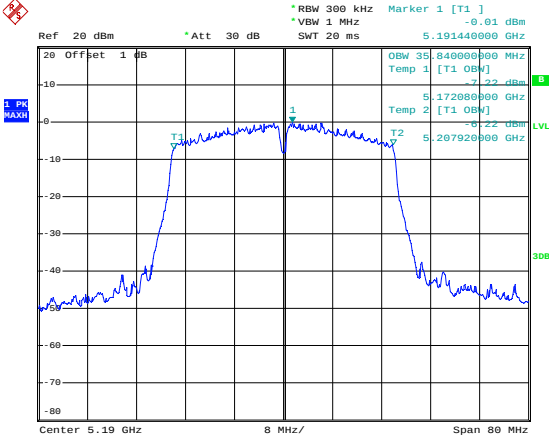
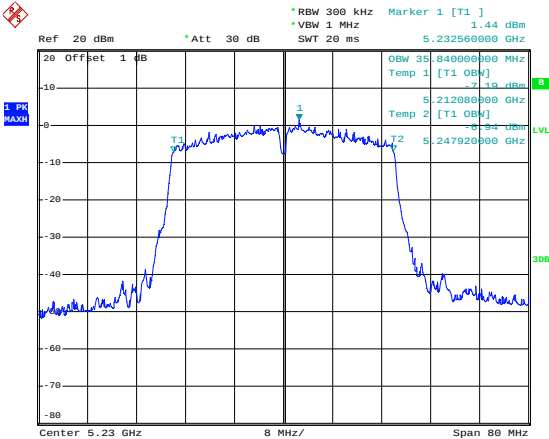
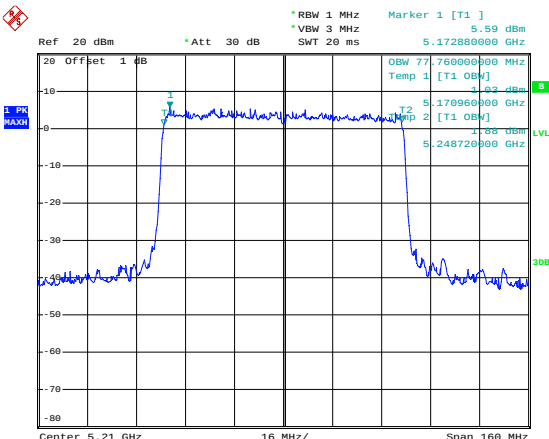


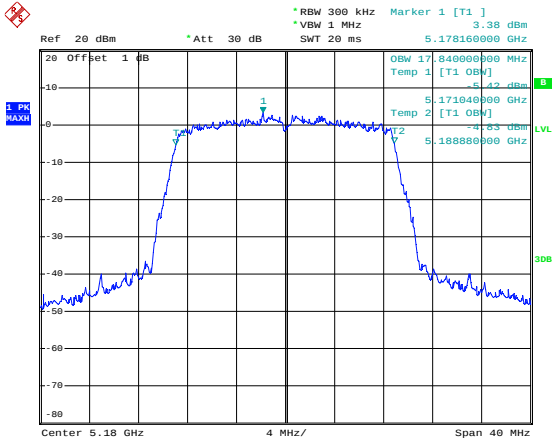
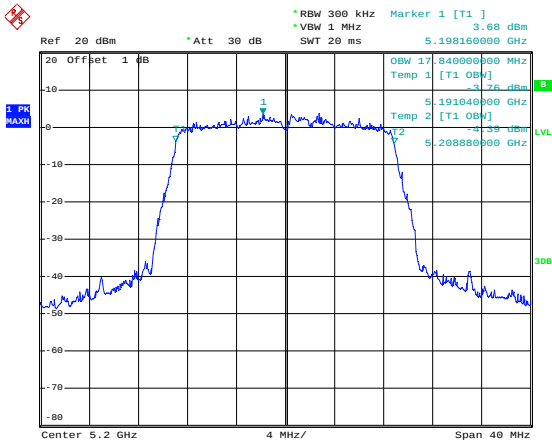
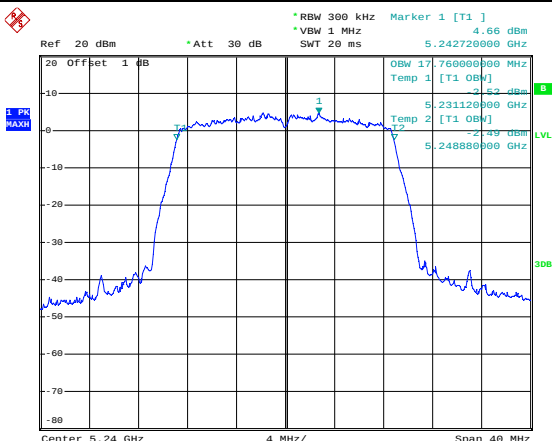
802.11ax-HE40-Low	 Date: 17.MAY.2022 21:28:16
802.11ax-HE40-High	 Date: 17.MAY.2022 21:30:01
802.11ax-HE80	 Date: 17.MAY.2022 21:13:26




99%OBW

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] VBW 1 MHz 10.05 dBm SWT 20 ms 5.178000000 GHz OBW 16.720000000 MHz Temp 1 [T1 OBW] 5.171600000 GHz Temp 2 [T1 OBW] 5.180000000 GHz 5.188320000 GHz Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 21:34:46
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] VBW 1 MHz 6.15 dBm SWT 20 ms 5.200000000 GHz OBW 16.720000000 MHz Temp 1 [T1 OBW] 5.191600000 GHz Temp 2 [T1 OBW] 5.200000000 GHz 5.208320000 GHz Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 21:35:35
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] VBW 1 MHz 7.04 dBm SWT 20 ms 5.240400000 GHz OBW 16.640000000 MHz Temp 1 [T1 OBW] 5.231600000 GHz Temp 2 [T1 OBW] 5.240000000 GHz 5.248320000 GHz Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 21:35:59

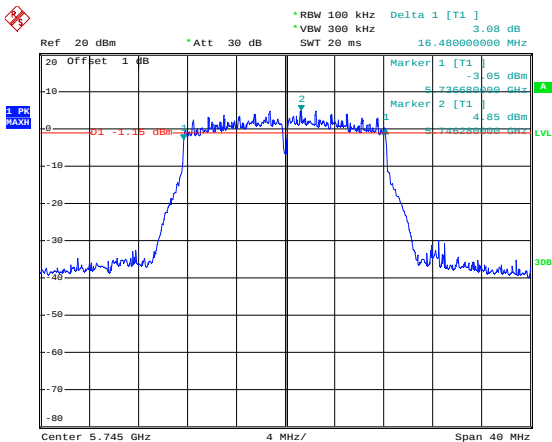
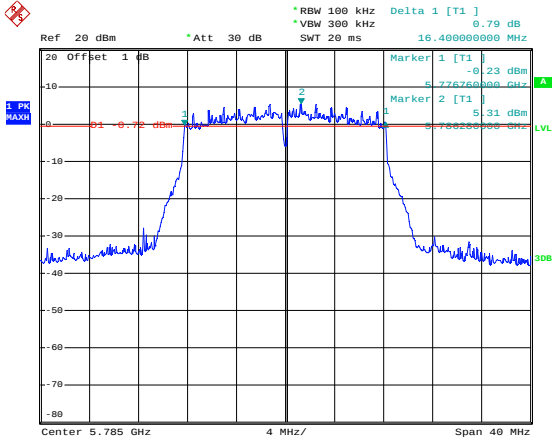
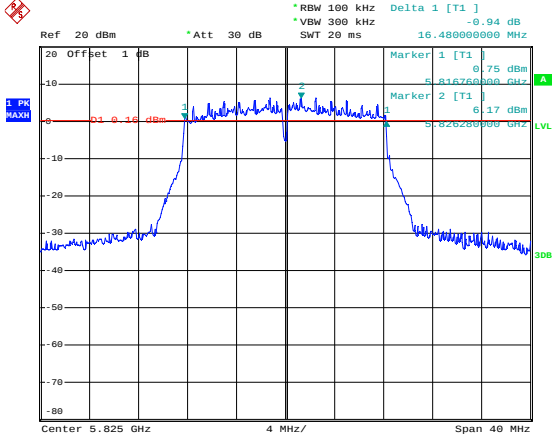
802.11n-HT20-Low	 Date: 17.MAY.2022 21:36:32
802.11n-HT20-Middle	 Date: 17.MAY.2022 21:37:05
802.11n-HT20-High	 Date: 17.MAY.2022 21:37:47

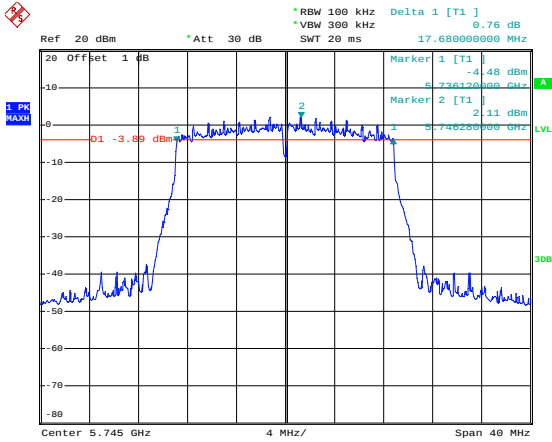
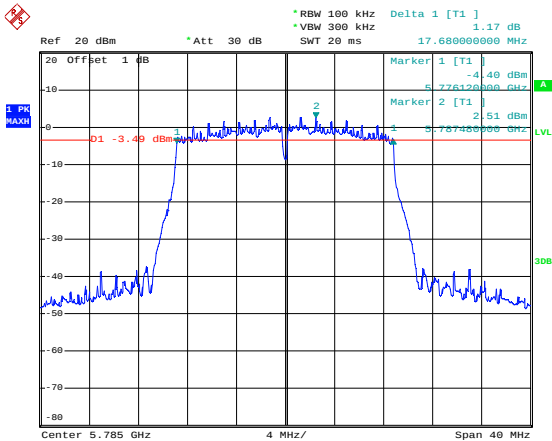
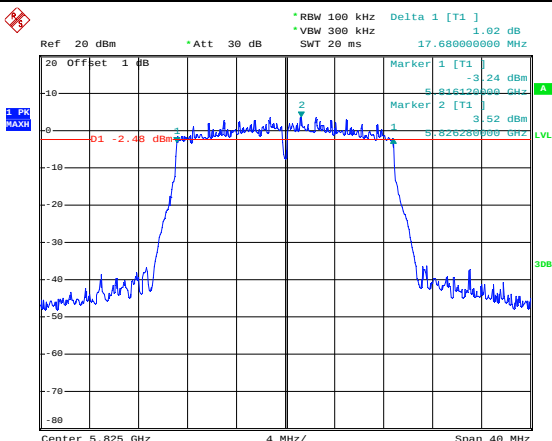
802.11n-HT40-Low	 Date: 17.MAY.2022 21:41:48
802.11n-HT40-High	 Date: 17.MAY.2022 21:42:12
802.11ac-VHT80	 Date: 17.MAY.2022 21:33:56

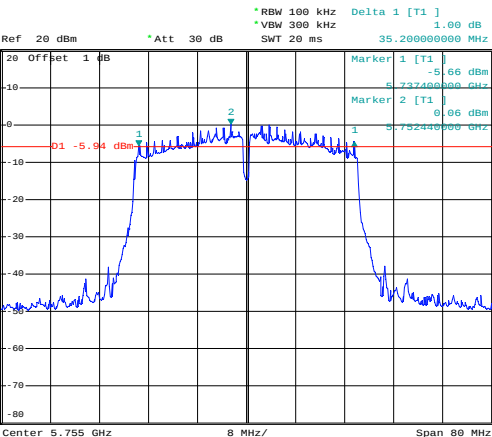
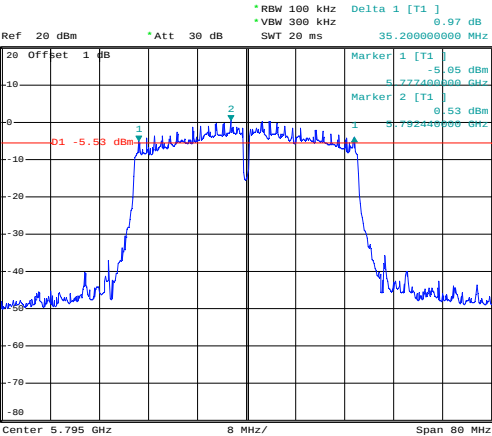
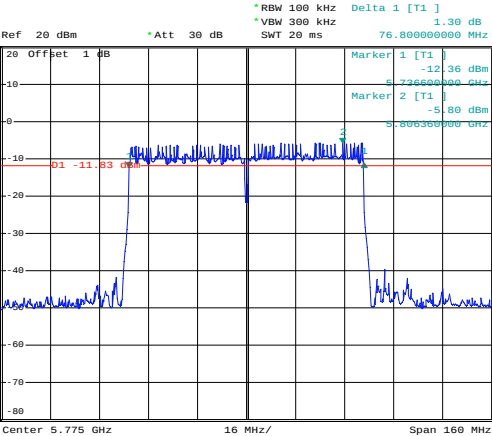
802.11ax-HE20-Low	 Date: 17.MAY.2022 21:38:34
802.11ax-HE20-Middle	 Date: 17.MAY.2022 21:39:00
802.11ax-HE20-High	 Date: 17.MAY.2022 21:40:31

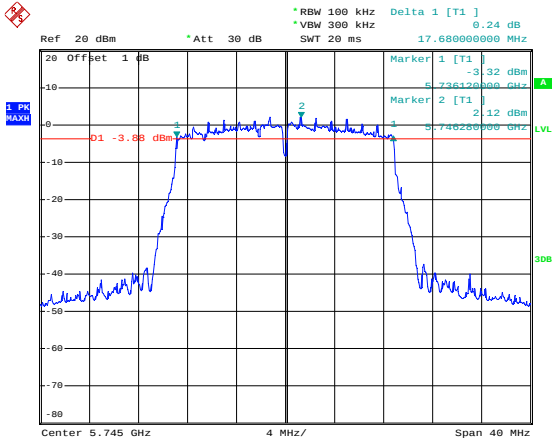
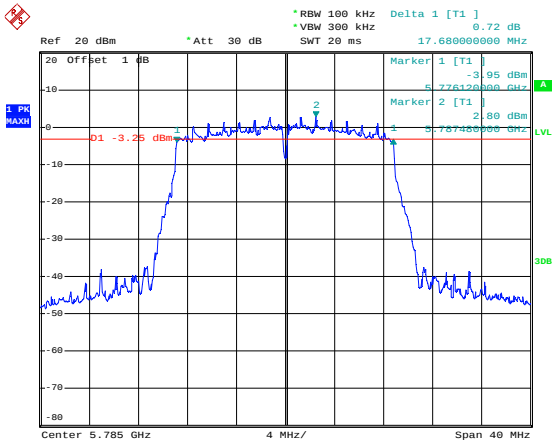
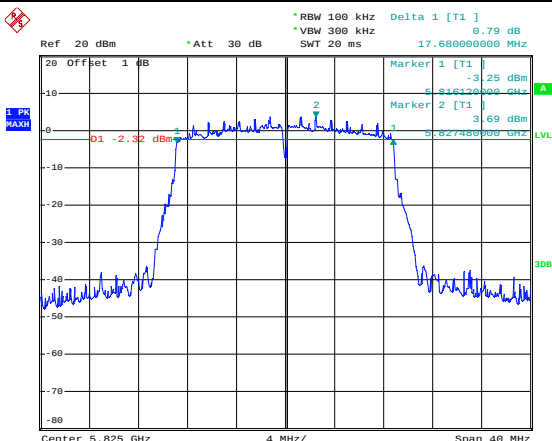


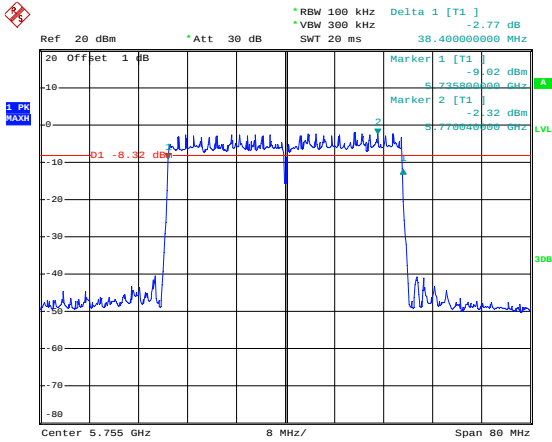
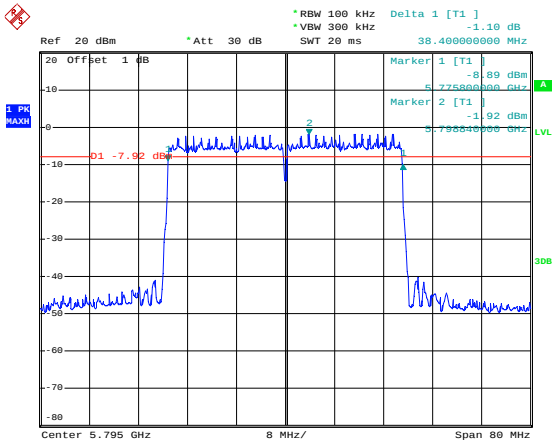
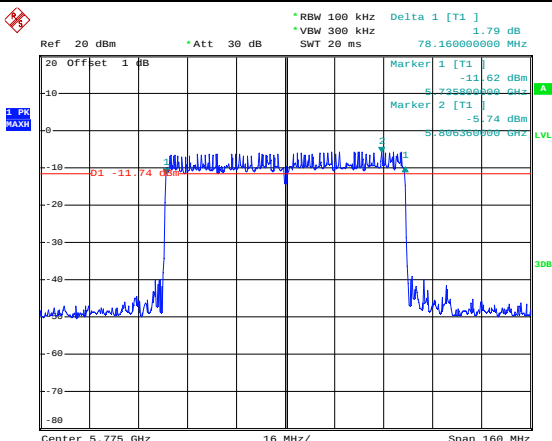
5725-5850MHz
-6dB

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 3.08 dB VBW 300 kHz SWT 20 ms 16.480000000 MHz Marker 1 [T1] -3.05 dBm Marker 2 [T1] 4.85 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:35:53
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.79 dB VBW 300 kHz SWT 20 ms 16.480000000 MHz Marker 1 [T1] -0.23 dBm Marker 2 [T1] 5.31 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:37:24
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] -0.94 dB VBW 300 kHz SWT 20 ms 16.480000000 MHz Marker 1 [T1] -0.75 dBm Marker 2 [T1] 6.17 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:38:42

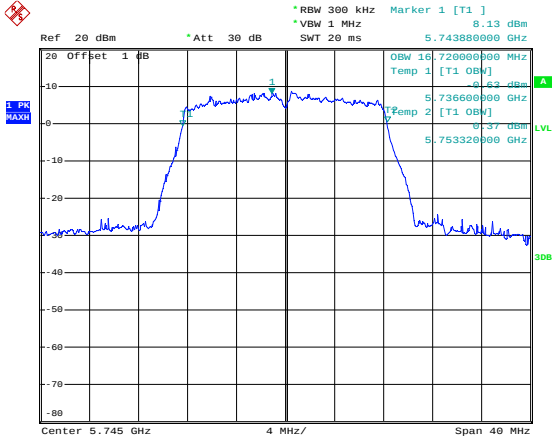
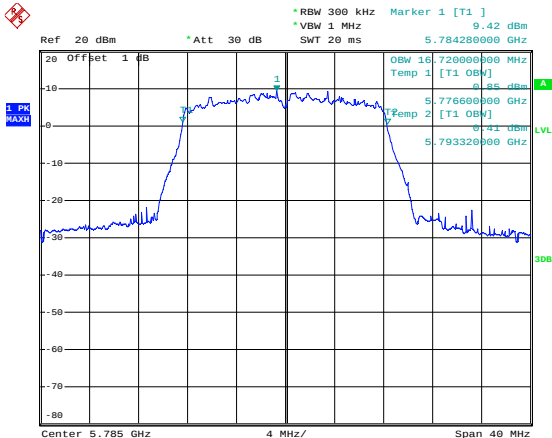
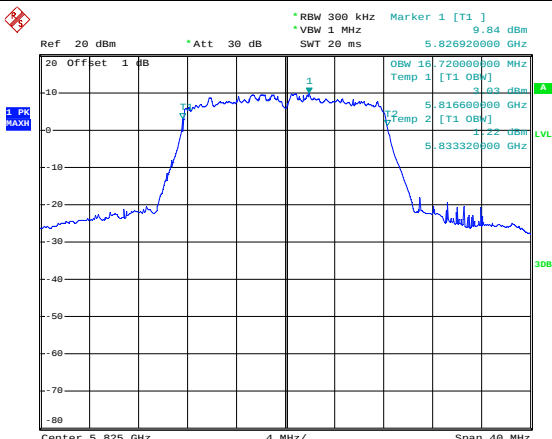
802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.76 dB VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -4.48 dBm 5.736120000 GHz Marker 2 [T1] 2.11 dBm 5.746200000 GHz D1 -3.89 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:40:18
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.17 dB VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -4.40 dBm 5.776120000 GHz Marker 2 [T1] 2.51 dBm 5.787400000 GHz D1 -3.49 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:42:33
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.02 dB VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.24 dBm 5.816120000 GHz Marker 2 [T1] 3.52 dBm 5.826200000 GHz D1 -2.49 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:43:33

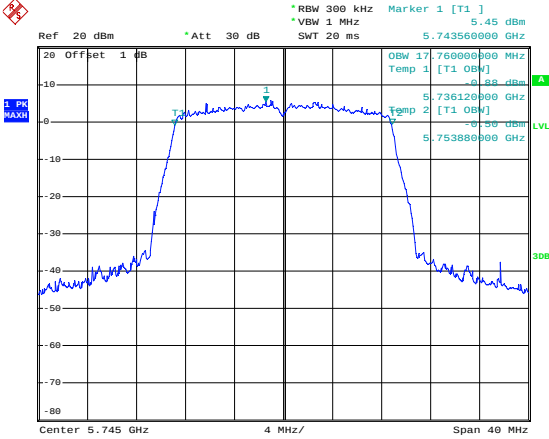
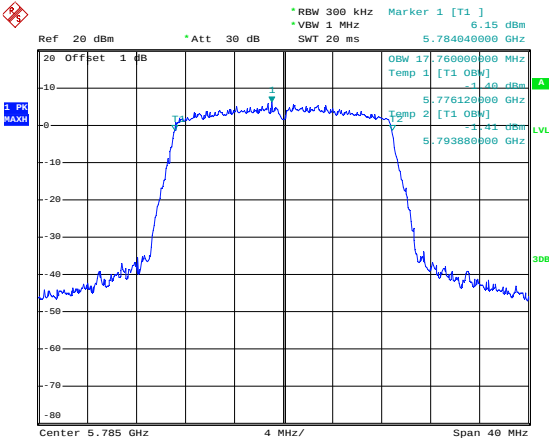
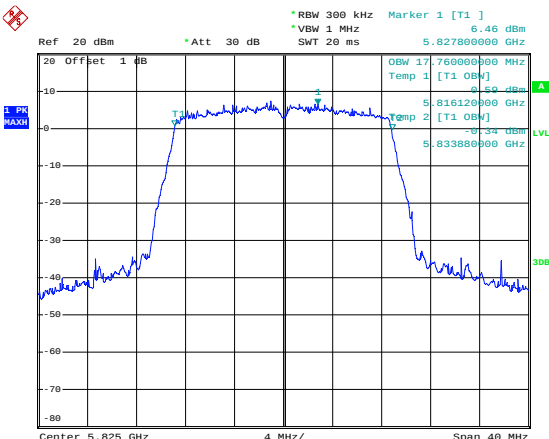
802.11n-HT40-Low	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 1.00 dB *RBW 100 kHz *VBW 300 kHz SWT 20 ms 35.200000000 MHz Marker 1 [T1] -5.66 dBm Marker 2 [T1] 0.06 dBm D1 -5.94 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 17.MAY.2022 18:48:20
802.11n-HT40-High	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 0.97 dB *RBW 100 kHz *VBW 300 kHz SWT 20 ms 35.200000000 MHz Marker 1 [T1] -5.05 dBm Marker 2 [T1] 0.53 dBm D1 -5.53 dBm Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 17.MAY.2022 18:49:14
802.11ac-VHT80	 Ref 20 dBm *Att 30 dB Delta 1 [T1] 1.30 dB *RBW 100 kHz *VBW 300 kHz SWT 20 ms 76.800000000 MHz Marker 1 [T1] -12.36 dBm Marker 2 [T1] -5.80 dBm D1 -11.83 dBm Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 17.MAY.2022 18:32:18

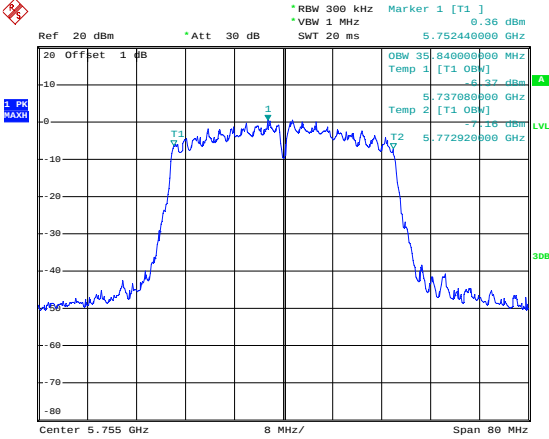
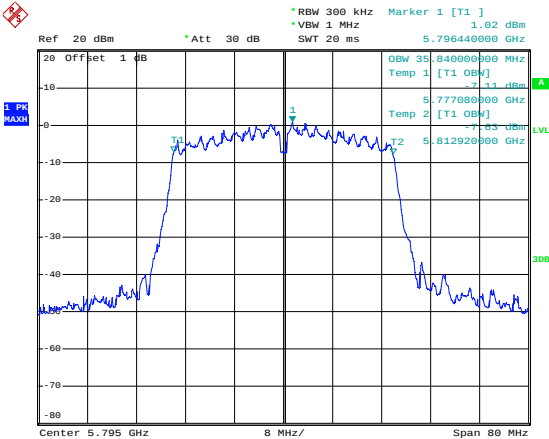
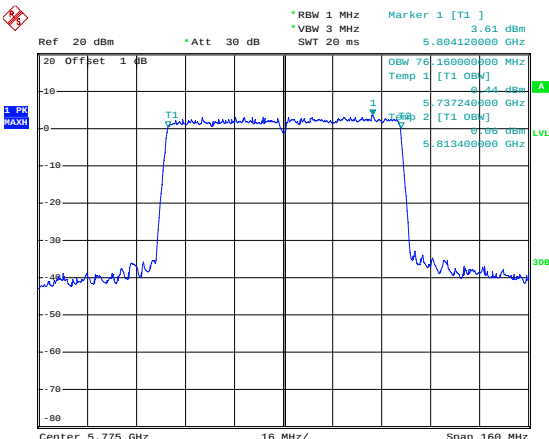
802.11ax-HE20-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.24 dB *VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.32 dBm Marker 2 [T1] -2.12 dBm D1 -3.69 dBm Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:45:16
802.11ax-HE20-Middle	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.72 dB *VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.95 dBm Marker 2 [T1] -2.80 dBm D1 -3.25 dBm Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:46:17
802.11ax-HE20-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 0.79 dB *VBW 300 kHz SWT 20 ms 17.68000000 MHz Marker 1 [T1] -3.25 dBm Marker 2 [T1] -3.69 dBm D1 -2.32 dBm Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 18:47:16

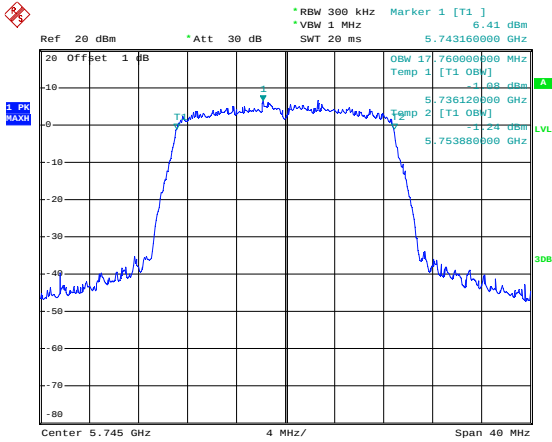
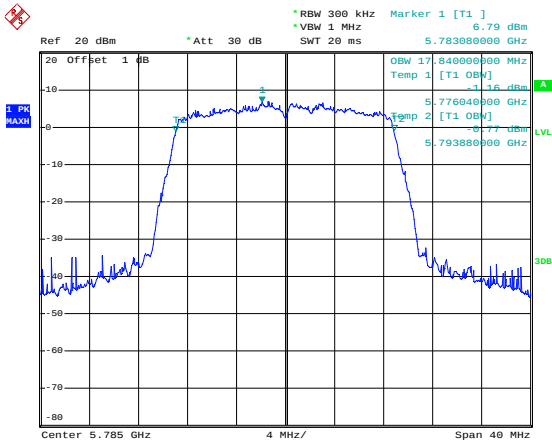
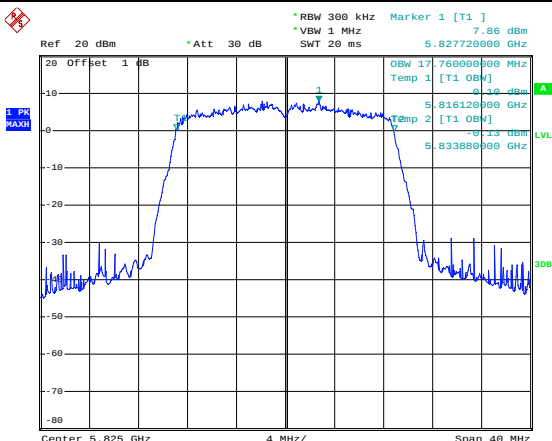
802.11ax-HE40-Low	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 2.77 dB *VBW 300 kHz SWT 20 ms 38.40000000 MHz Marker 1 [T1] -9.92 dBm Marker 2 [T1] -2.32 dBm Center 5.755 GHz 8 MHz/ Span 80 MHz Date: 17.MAY.2022 18:50:04
802.11ax-HE40-High	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] -1.10 dB *VBW 300 kHz SWT 20 ms 38.40000000 MHz Marker 1 [T1] -8.89 dBm Marker 2 [T1] -1.92 dBm Center 5.795 GHz 8 MHz/ Span 80 MHz Date: 17.MAY.2022 18:51:04
802.11ax-HE80	 Ref 20 dBm *Att 30 dB RBW 100 kHz Delta 1 [T1] 1.79 dB *VBW 300 kHz SWT 20 ms 78.16000000 MHz Marker 1 [T1] -11.62 dBm Marker 2 [T1] -5.74 dBm Center 5.775 GHz 16 MHz/ Span 160 MHz Date: 17.MAY.2022 18:34:32

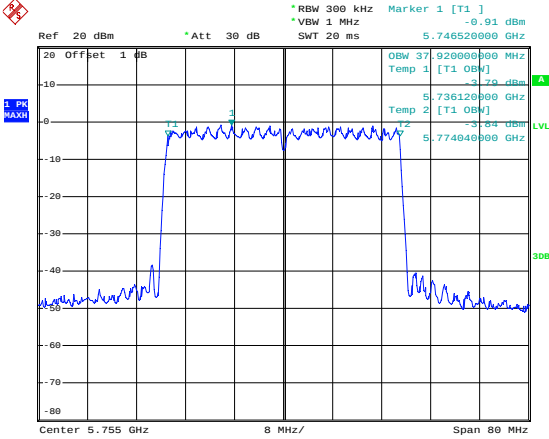
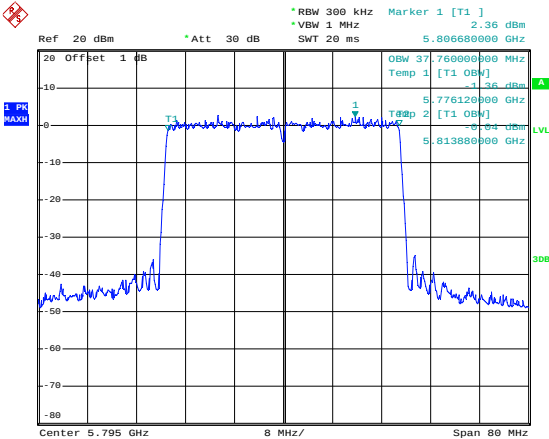
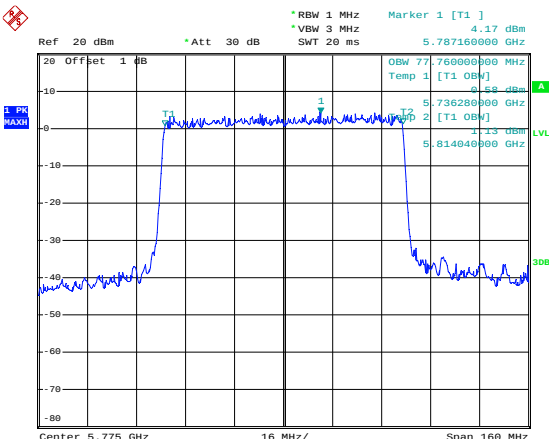
99%OBW

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 8.13 dBm VBW 1 MHz 5.743880000 GHz SWT 20 ms OBW 16.720000000 MHz Temp 1 [T1 OBW] 5.736600000 GHz Temp 2 [T1 OBW] 5.753320000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:13:47
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 9.42 dBm VBW 1 MHz 5.784280000 GHz SWT 20 ms OBW 16.720000000 MHz Temp 1 [T1 OBW] 5.776600000 GHz Temp 2 [T1 OBW] 5.793320000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:14:20
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 9.84 dBm VBW 1 MHz 5.826920000 GHz SWT 20 ms OBW 16.720000000 MHz Temp 1 [T1 OBW] 5.816600000 GHz Temp 2 [T1 OBW] 5.833320000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:14:59

802.11n-HT20-Low	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 5.45 dBm *VBW 1 MHz SWT 20 ms 5.743560000 GHz OBW 17.760000000 MHz Temp 1 [T1 OBW] -0.88 dBm 5.736120000 GHz Temp 2 [T1 OBW] -0.50 dBm 5.753880000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:15:51
802.11n-HT20-Middle	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 6.15 dBm *VBW 1 MHz SWT 20 ms 5.784040000 GHz OBW 17.760000000 MHz Temp 1 [T1 OBW] -1.40 dBm 5.776120000 GHz Temp 2 [T1 OBW] -1.41 dBm 5.793880000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:16:16
802.11n-HT20-High	 Ref 20 dBm *Att 30 dB RBW 300 kHz Marker 1 [T1] 6.46 dBm *VBW 1 MHz SWT 20 ms 5.827800000 GHz OBW 17.760000000 MHz Temp 1 [T1 OBW] -0.60 dBm 5.816120000 GHz Temp 2 [T1 OBW] -0.34 dBm 5.833880000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 17.MAY.2022 20:16:49

802.11n-HT40-Low	 Date: 17.MAY.2022 20:27:39
802.11n-HT40-High	 Date: 17.MAY.2022 20:28:13
802.11ac-VHT80	 Date: 17.MAY.2022 20:12:04

802.11ax-HE20-Low	 Date: 17.MAY.2022 20:25:32
802.11ax-HE20-Middle	 Date: 17.MAY.2022 20:26:19
802.11ax-HE20-High	 Date: 17.MAY.2022 20:26:52

802.11ax-HE40-Low	 Date: 17.MAY.2022 20:28:59
802.11ax-HE40-High	 Date: 17.MAY.2022 20:29:21
802.11ax-HE80	 Date: 17.MAY.2022 20:12:33

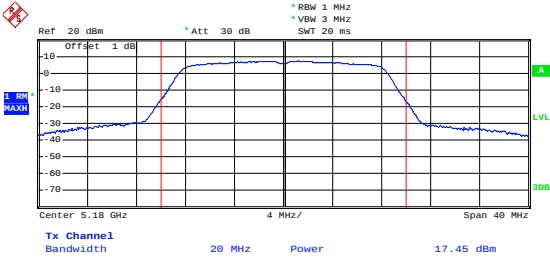
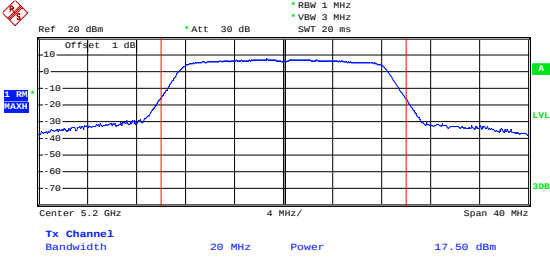
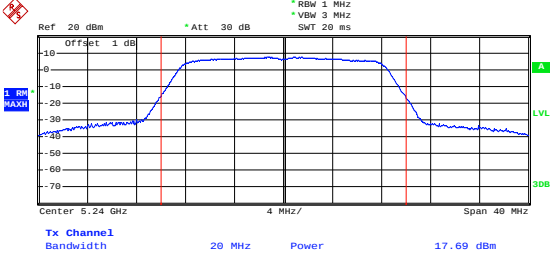
APPENDIX C

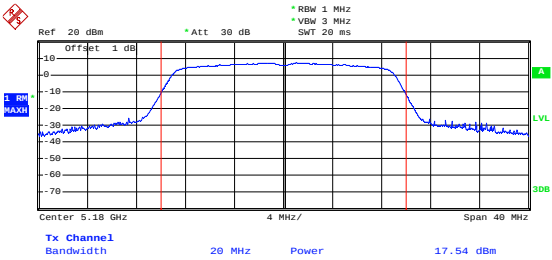
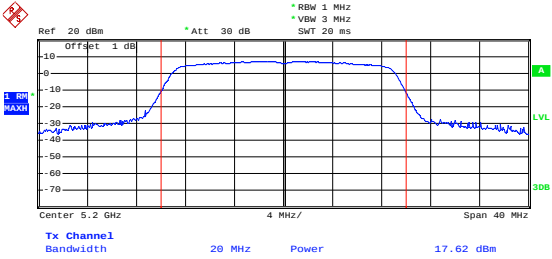
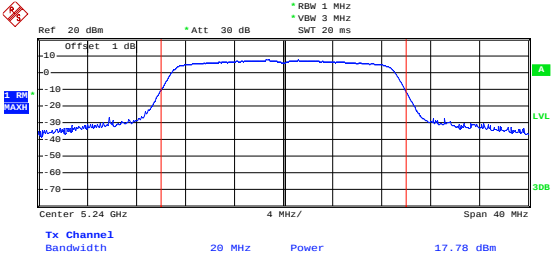
Maximum Conducted Output Power

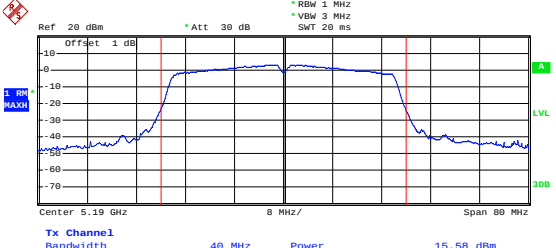
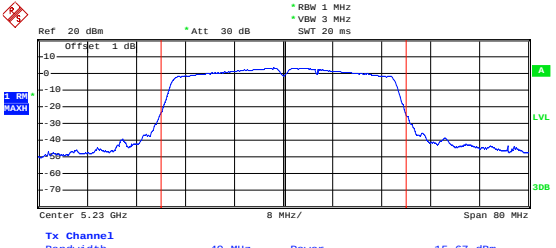
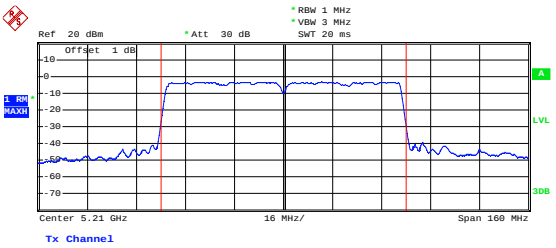
U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ATN 1	ATN 2		
802.11a	5180	17.45	17.57	/	23.98
	5200	17.50	17.09	/	23.98
	5240	17.69	16.60	/	23.98
802.11n-HT20	5180	17.54	14.63	19.33	23.98
	5200	17.62	14.41	19.32	23.98
	5240	17.78	13.62	19.19	23.98
802.11n-HT40	5190	15.58	14.16	17.94	23.98
	5230	15.67	13.34	17.67	23.98
802.11ac-VHT80	5210	13.98	12.34	16.25	23.98
802.11ax-HE20	5180	13.22	14.56	16.95	23.98
	5200	13.38	14.09	16.76	23.98
	5240	13.69	13.54	16.63	23.98
802.11ax-HE40	5190	12.77	12.97	15.88	23.98
	5230	13.06	12.66	15.87	23.98
802.11ax-HE80	5210	13.17	12.60	15.90	23.98

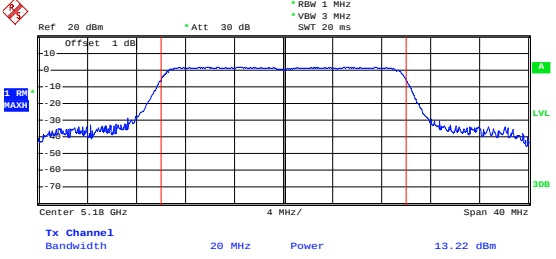
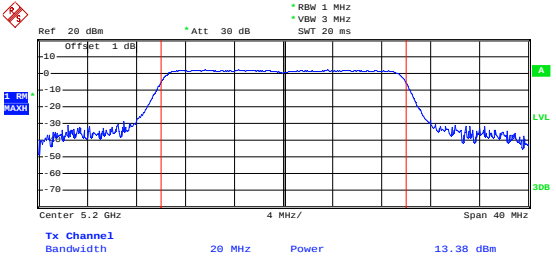
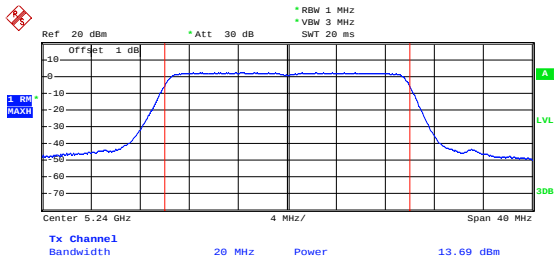
U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ATN 1	ATN 2		
802.11a	5745	15.67	16.08	/	30
	5785	16.21	16.40	/	30
	5825	17.09	17.54	/	30
802.11n-HT20	5745	12.98	13.26	16.13	30
	5785	13.47	13.67	16.58	30
	5825	14.33	14.77	17.57	30
802.11n-HT40	5755	12.85	13.37	16.13	30
	5795	13.26	13.47	16.38	30
802.11ac-VHT80	5775	11.53	12.58	15.10	30
802.11ax-HE20	5745	12.85	13.72	16.32	30
	5785	13.29	13.74	16.53	30
	5825	14.33	14.41	17.38	30
802.11ax-HE40	5755	12.22	12.52	15.38	30
	5795	12.46	12.81	15.65	30
802.11ax-HE80	5775	11.68	12.12	14.92	30

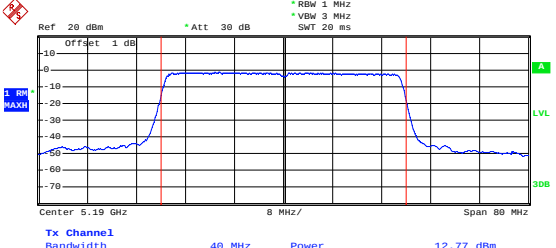
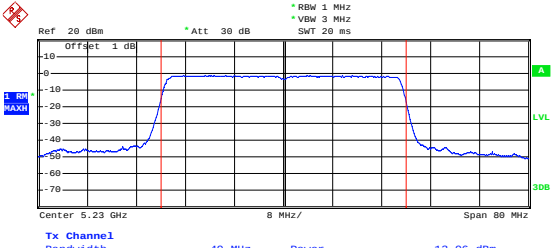
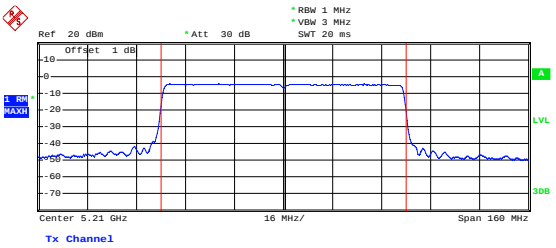
ATN 1
5150-5250MHz

802.11a-Low	 Date: 13.OCT.2021 12:21:20
802.11a-Middle	 Date: 13.OCT.2021 12:21:46
802.11a-High	 Date: 13.OCT.2021 12:22:15

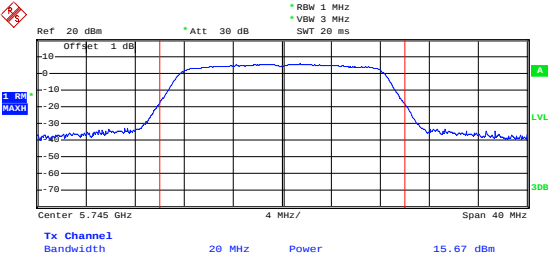
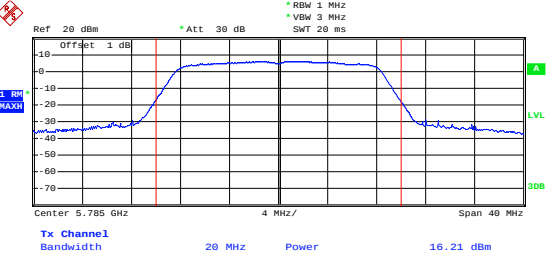
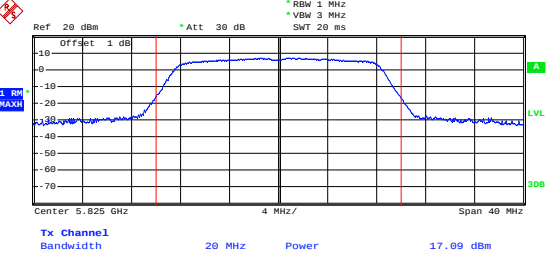
802.11n-HT20-Low	 Date: 13.OCT.2021 12:22:48
802.11n-HT20-Middle	 Date: 13.OCT.2021 12:23:18
802.11n-HT20-High	 Date: 13.OCT.2021 12:25:10

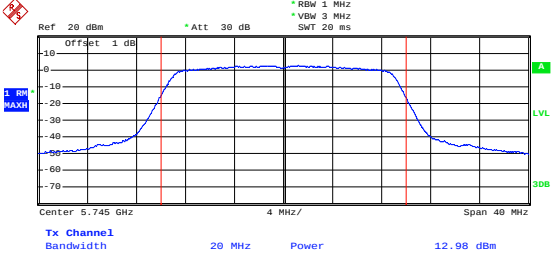
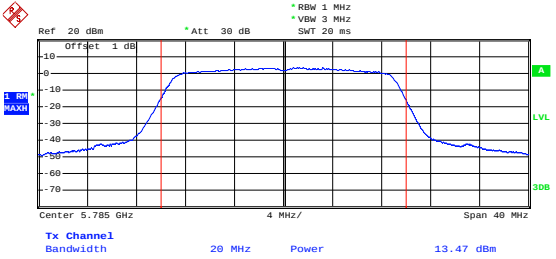
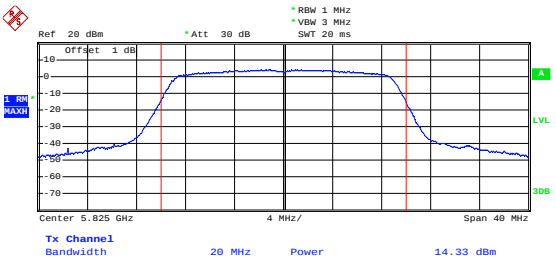
802.11n-HT40-Low	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.19 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 15.58 dBm Date: 13.OCT.2021 12:26:15
802.11n-HT40-High	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.23 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 15.67 dBm Date: 13.OCT.2021 12:26:53
802.11ac-VHT80	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.21 GHz 16 MHz/ Span 160 MHz Tx Channel Bandwidth 80 MHz Power 13.98 dBm Date: 13.OCT.2021 12:16:42

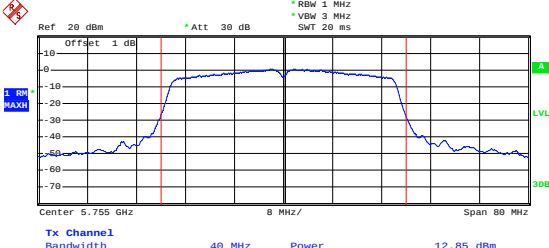
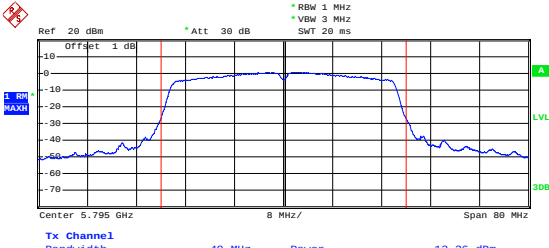
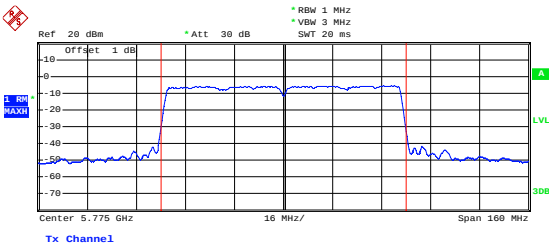
802.11ax-HE20-Low	 Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 13.22 dBm Date: 13.OCT.2021 12:29:05
802.11ax-HE20-Middle	 Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.2 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 13.38 dBm Date: 13.OCT.2021 12:29:32
802.11ax-HE20-High	 Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.24 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 13.69 dBm Date: 13.OCT.2021 12:30:27

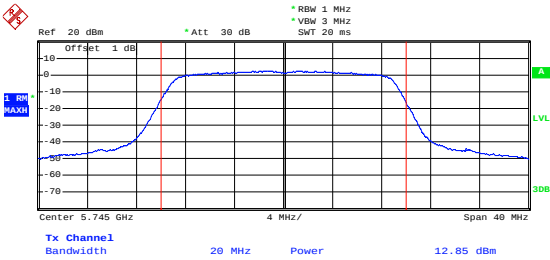
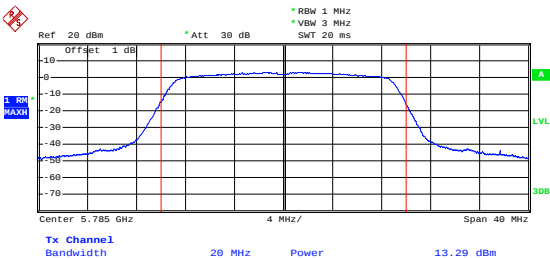
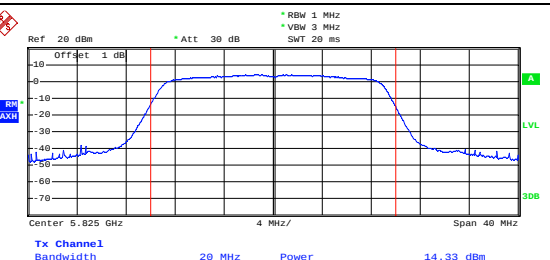
802.11ax-HE40-Low	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Center 5.19 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 12.77 dBm Date: 13.OCT.2021 12:31:15
802.11ax-HE40-High	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Center 5.23 GHz 8 MHz/ Span 80 MHz Tx Channel Bandwidth 40 MHz Power 13.06 dBm Date: 13.OCT.2021 12:31:52
802.11ax-HE80	 Ref 20 dBm Offset 1 dB Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Center 5.21 GHz 16 MHz/ Span 160 MHz Tx Channel Bandwidth 80 MHz Power 13.17 dBm Date: 13.OCT.2021 12:34:08

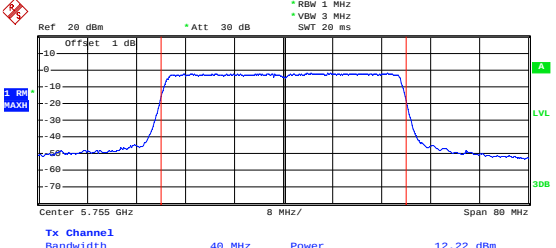
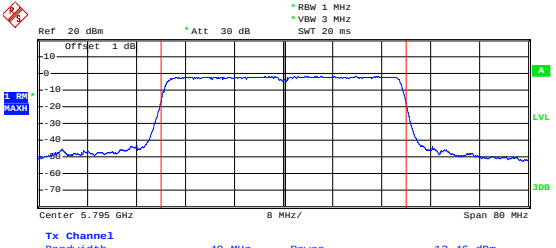
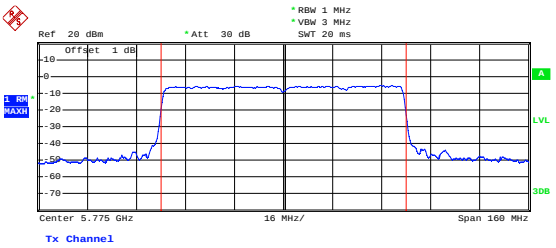
5725-5850MHz

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 15.67 dBm Date: 16.MAY.2022 17:24:37
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 16.21 dBm Date: 16.MAY.2022 17:25:33
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 17.09 dBm Date: 16.MAY.2022 17:26:03

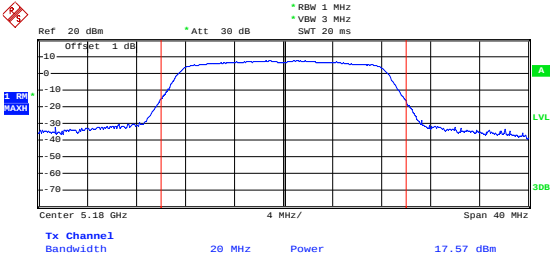
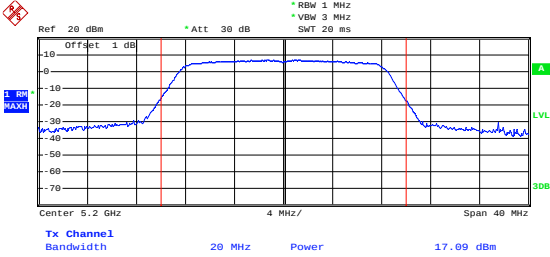
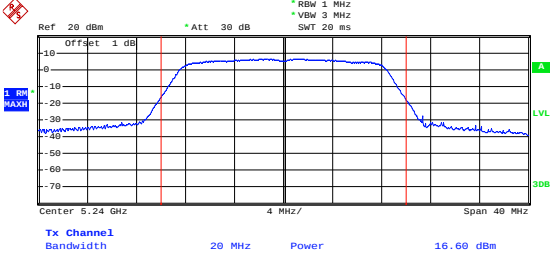
802.11n-HT20-Low	 Date: 16.MAY.2022 17:29:16
802.11n-HT20-Middle	 Date: 16.MAY.2022 17:30:08
802.11n-HT20-High	 Date: 16.MAY.2022 17:30:43

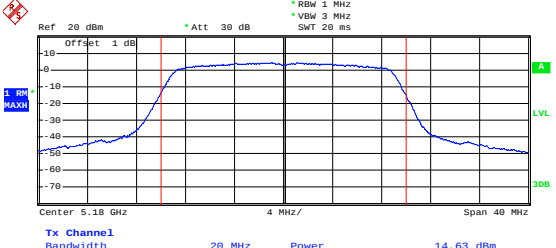
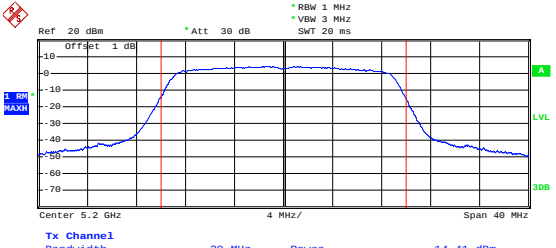
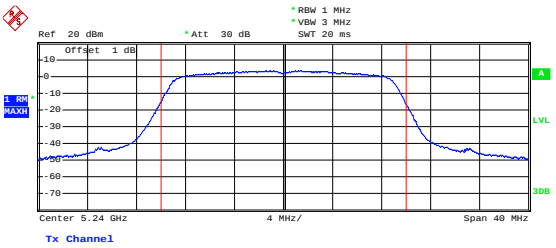
802.11n-HT40-Low	 Date: 16.MAY.2022 17:39:47
802.11n-HT40-High	 Date: 16.MAY.2022 17:40:13
802.11ac-VHT80	 Date: 16.MAY.2022 17:21:09

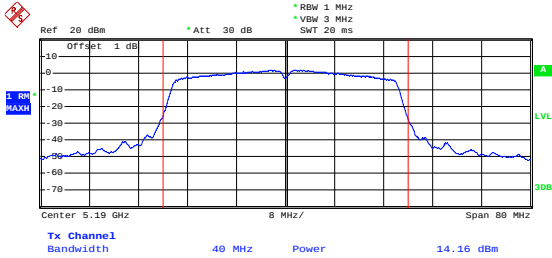
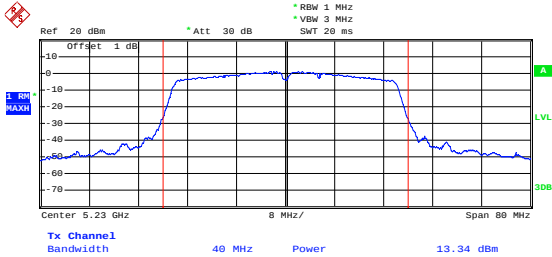
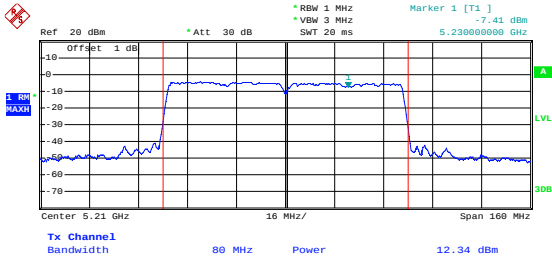
802.11ax-HE20-Low	 Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz SMT 20 ms Offset 1 dB 1 RBW MAX Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 12.85 dBm Date: 16.MAY.2022 17:33:39
802.11ax-HE20-Middle	 Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz SMT 20 ms Offset 1 dB 1 RBW MAX Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 13.29 dBm Date: 16.MAY.2022 17:36:25
802.11ax-HE20-High	 Ref 20 dBm * Att 30 dB * RBW 1 MHz * VBW 3 MHz SMT 20 ms Offset 1 dB 1 RBW MAX Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 14.33 dBm Date: 16.MAY.2022 17:37:24

802.11ax-HE40-Low	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.755 GHz 8 MHz/ Span 80 MHz Tx Channel1 Bandwidth 40 MHz Power 12.22 dBm Date: 16.MAY.2022 17:42:31
802.11ax-HE40-High	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.795 GHz 8 MHz/ Span 80 MHz Tx Channel1 Bandwidth 40 MHz Power 12.46 dBm Date: 16.MAY.2022 17:42:52
802.11ax-HE80	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.775 GHz 16 MHz/ Span 160 MHz Tx Channel1 Bandwidth 80 MHz Power 11.68 dBm Date: 16.MAY.2022 17:22:29

ATN 2
5150-5250MHz

802.11a-Low	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 17.57 dBm Date: 17.MAY.2022 20:35:40
802.11a-Middle	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.2 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 17.89 dBm Date: 17.MAY.2022 20:36:32
802.11a-High	 Ref 20 dBm *Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.24 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 16.68 dBm Date: 17.MAY.2022 20:36:59

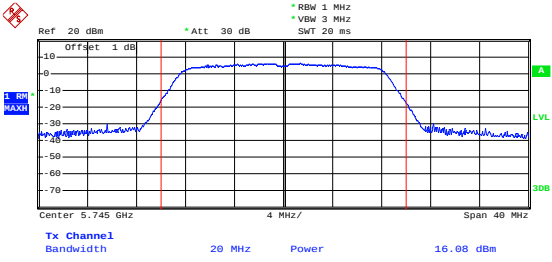
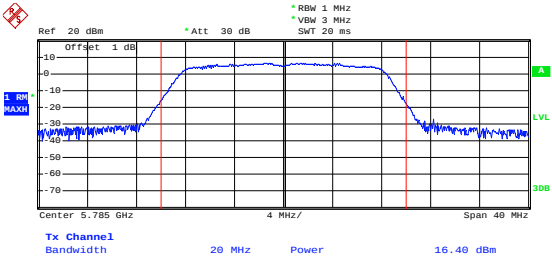
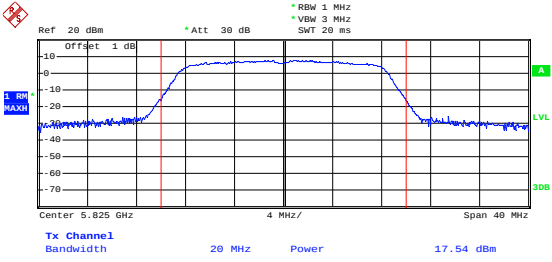
802.11n-HT20-Low	 Date: 17.MAY.2022 20:37:21
802.11n-HT20-Middle	 Date: 17.MAY.2022 20:37:50
802.11n-HT20-High	 Date: 17.MAY.2022 20:38:09

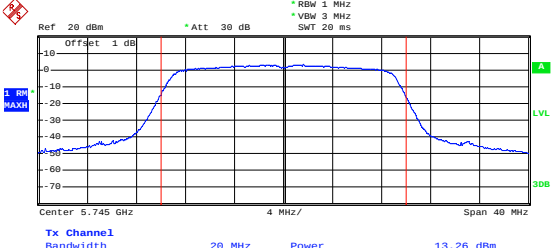
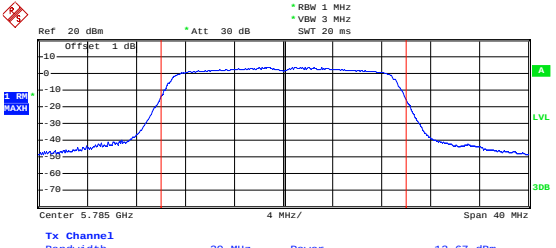
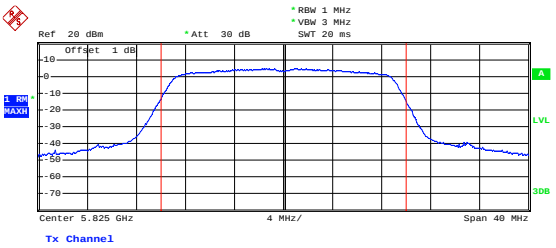
802.11n-HT40-Low	 Date: 17.MAY.2022 20:40:17
802.11n-HT40-High	 Date: 17.MAY.2022 20:40:36
802.11ac-VHT80	 Date: 17.MAY.2022 20:34:20

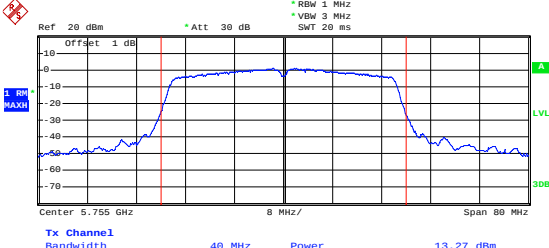
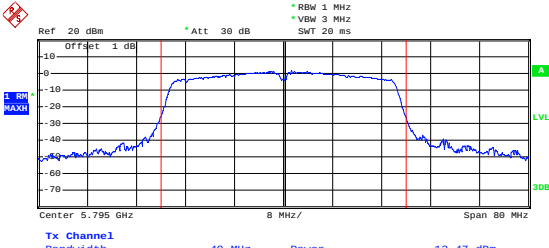
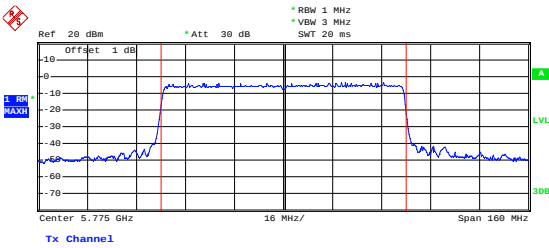
802.11ax-HE20-Low	Date: 17.MAY.2022 20:38:42
802.11ax-HE20-Middle	Date: 17.MAY.2022 20:39:07
802.11ax-HE20-High	Date: 17.MAY.2022 20:39:28

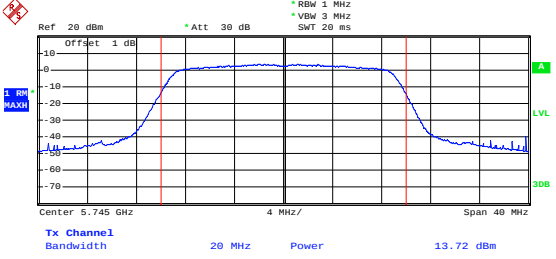
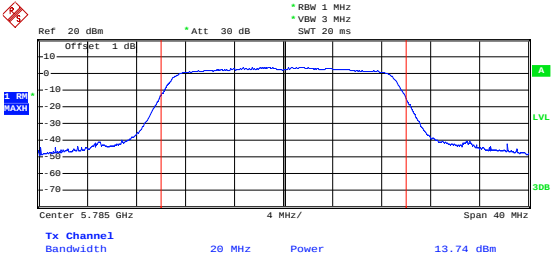
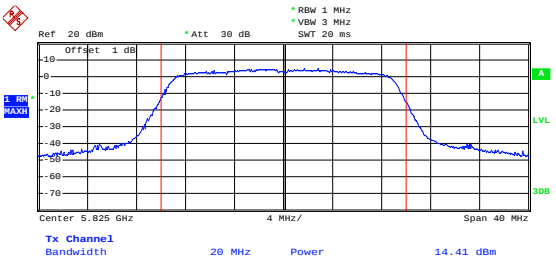
802.11ax-HE40-Low	Date: 17.MAY.2022 20:41:07
802.11ax-HE40-High	Date: 17.MAY.2022 20:41:28
802.11ax-HE80	Date: 17.MAY.2022 20:35:12

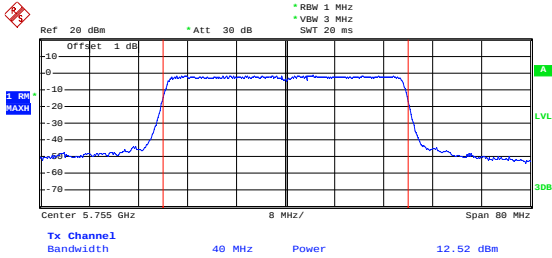
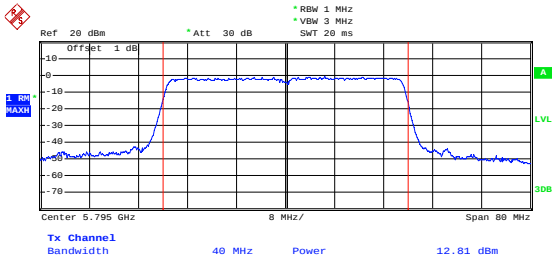
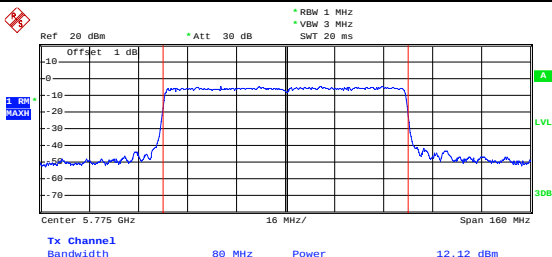
5725-5850MHz

802.11a-Low	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 16.68 dBm Date: 16.MAY.2022 20:34:53
802.11a-Middle	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 16.48 dBm Date: 16.MAY.2022 20:36:46
802.11a-High	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Offset 1 dB Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 17.54 dBm Date: 16.MAY.2022 20:42:59

802.11n-HT20-Low	 Date: 16.MAY.2022 20:43:43
802.11n-HT20-Middle	 Date: 16.MAY.2022 20:44:29
802.11n-HT20-High	 Date: 16.MAY.2022 20:45:00

802.11n-HT40-Low	 Date: 16.MAY.2022 20:52:01
802.11n-HT40-High	 Date: 16.MAY.2022 20:53:03
802.11ac-VHT80	 Date: 16.MAY.2022 20:33:14

802.11ax-HE20-Low	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 13.72 dBm Date: 16.MAY.2022 20:46:35
802.11ax-HE20-Middle	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 13.74 dBm Date: 16.MAY.2022 20:48:29
802.11ax-HE20-High	 Ref 20 dBm * Att 30 dB RBW 1 MHz VBW 3 MHz SMT 20 ms Offset 1 dB Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel1 Bandwidth 20 MHz Power 14.41 dBm Date: 16.MAY.2022 20:50:20

802.11ax-HE40-Low	 Date: 16.MAY.2022 20:54:21
802.11ax-HE40-High	 Date: 16.MAY.2022 20:54:41
802.11ax-HE80	 Date: 16.MAY.2022 20:41:57

APPENDIX D

Frequency Stability

ANT 1

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	3009	0.5787
100%		-20	3006	0.5781
100%		-10	3009	0.5786
100%		0	3008	0.5784
100%		+10	3006	0.5781
100%		+20	3003	0.5775
100%		+30	3007	0.5783
100%		+40	3005	0.5779
100%		+50	3001	0.5771
Low Battery power	132	+20	3008	0.5784
High Battery power	108	+20	3003	0.5775

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	3005	0.5195
100%		-20	3010	0.5203
100%		-10	3004	0.5192
100%		0	3002	0.5190
100%		+10	3008	0.5201
100%		+20	3009	0.5201
100%		+30	3005	0.5194
100%		+40	3010	0.5202
100%		+50	3008	0.5199
Low Battery power	132	+20	3006	0.5196
High Battery power	108	+20	3005	0.5195

ANT 2

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	3009	0.5787
100%		-20	3002	0.5773
100%		-10	3009	0.5786
100%		0	3010	0.5788
100%		+10	3009	0.5787
100%		+20	3001	0.5771
100%		+30	3009	0.5787
100%		+40	3002	0.5773
100%		+50	3008	0.5785
Low Battery power	132	+20	3008	0.5784
High Battery power	108	+20	3001	0.5771

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	120	-30	3000	0.5186
100%		-20	3009	0.5202
100%		-10	3002	0.5190
100%		0	3003	0.5192
100%		+10	3007	0.5198
100%		+20	3000	0.5186
100%		+30	3004	0.5192
100%		+40	3002	0.5189
100%		+50	3001	0.5188
Low Battery power	132	+20	3005	0.5194
High Battery power	108	+20	3006	0.5197

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****