

Product Specification

A. Electrical Characteristics

Frequency 2400MHz ~2500MHz

VSWR <3.0

Efficiency >30%

Impedance 50 Ohm

Polarization Line

Gain 0.17DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.4 white

Connector Type : NO

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 60 °C

Storage Temperature - 30 °C ~ + 60 °C

Test Equipment & Conditions




1. Network Analyzers :

Agilent 8753D 5071B

2. Communications Test Set:

Agilent E5515C





3. 3D Chamber Test System

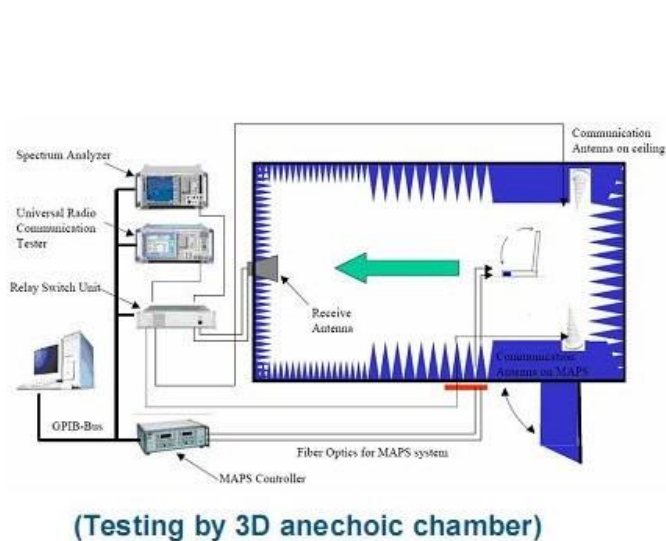


Effiency &Gain

2.40	-0.01
2.440	0.12
2.48	0.17

Radiation Pattern:

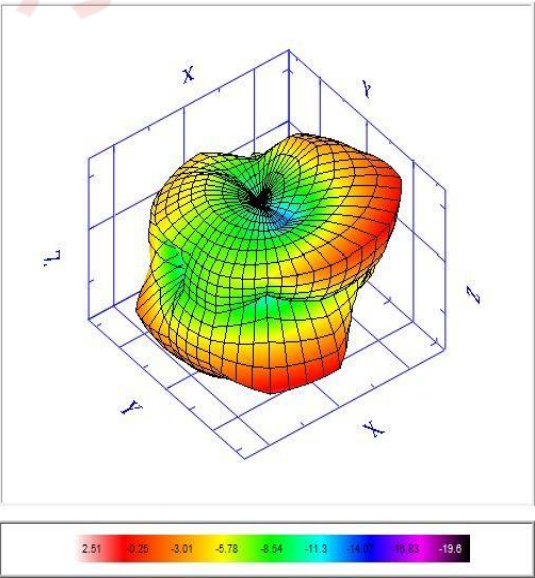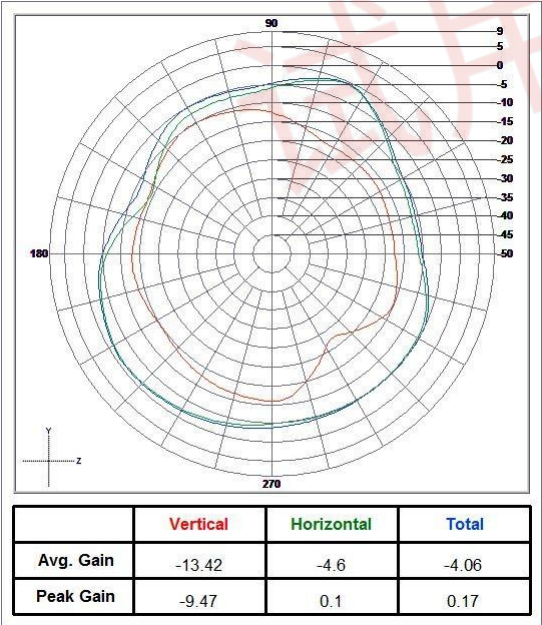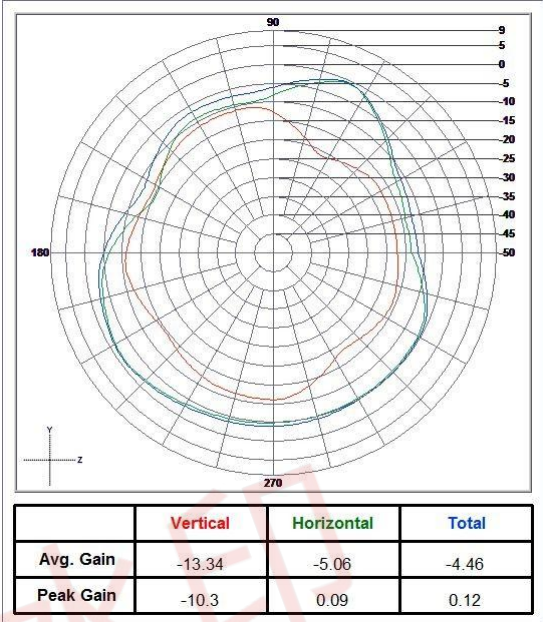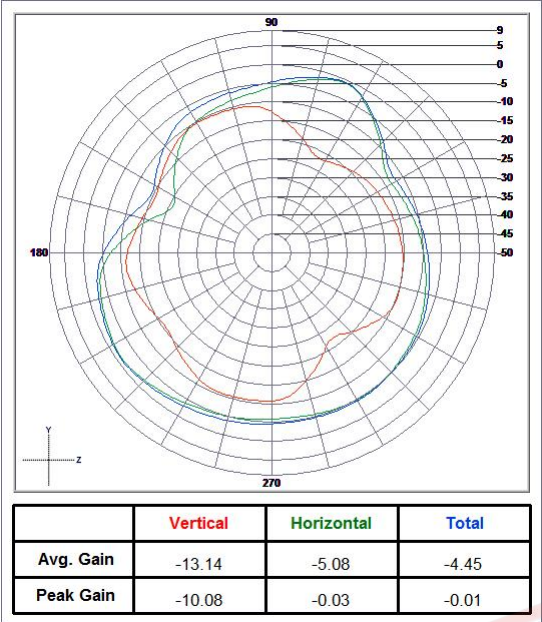

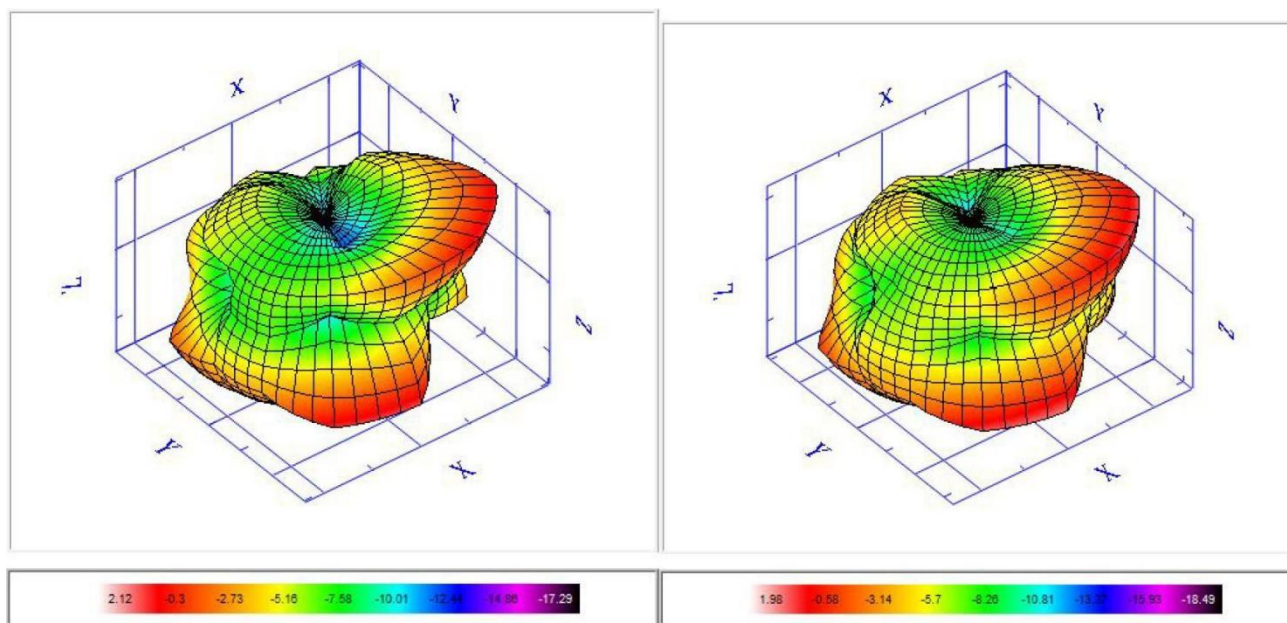

Length*diameter: 80mm*1.1mm



Picture of Antenna

