



FCC TEST REPORT

FCC ID: 2A7FF-ADAPT-PIXEL

Product	:	Temperature Data logger
Model Name	:	KARTO G200,PIXEL C100,PIXEL C300,PIXEL W100, PIXEL W300
Brand	:	N/A
Report No.	:	PTC2307170220201E-FC01
Sample ID	:	PTC2307170220201E-FC01#
Prepared for		
Adapt Ideations Private Limited		
SY No 8 9,1/89/G/36,Shilpi Valley,Gafoor Nagar,Madhavapur Village,Ranga Reddy		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



Report No.: PTC2307170220201E-FC01

1 TEST RESULT CERTIFICATION

Applicant's name : Adapt Ideations Private Limited

Address : SY No 8 9,1/89/G/36,Shilpi Valley,Gafoor Nagar,Madhavapur
Village,Ranga Reddy

Manufacture's name : Adapt Ideations Private Limited

Address : SY No 8 9,1/89/G/36,Shilpi Valley,Gafoor Nagar,Madhavapur
Village,Ranga Reddy

Product name : Temperature Data logger

Model name : KARTO G200,PIXEL C100,PIXEL C300,PIXEL W100,
PIXEL W300

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10:2013

Test Date : Sept. 27, 2023 to Oct. 19, 2023

Date of Issue : Oct. 20, 2023

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Ronnie Liu'.

Ronnie Liu / Manager



Contents

Page

1	TEST RESULT CERTIFICATION.....	2
2	TEST SUMMARY.....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF E.U.T.....	6
3.2	CHANNEL LIST	7
3.3	TEST SITE.....	14
4	EQUIPMENT DURING TEST.....	15
4.1	EQUIPMENTS LIST	15
4.2	MEASUREMENT UNCERTAINTY.....	17
4.3	DESCRIPTION OF SUPPORT UNITS.....	18
5	CONDUCTED EMISSION.....	19
5.1	E.U.T. OPERATION	19
5.2	EUT SETUP	19
5.3	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
5.4	MEASUREMENT PROCEDURE.....	20
5.5	CONDUCTED EMISSION LIMIT.....	20
5.6	MEASUREMENT DESCRIPTION	20
5.7	CONDUCTED EMISSION TEST RESULT.....	20
6	RADIATED SPURIOUS EMISSIONS.....	23
6.1	EUT OPERATION.....	23
6.2	TEST SETUP	24
6.3	SPECTRUM ANALYZER SETUP	25
6.4	TEST PROCEDURE.....	26
6.5	SUMMARY OF TEST RESULTS	27
7	CONDUCTED SPURIOUS EMISSION.....	34
7.1	TEST PROCEDURE.....	34
7.2	TEST RESULT	34
8	BAND EDGE MEASUREMENT	53



8.1	TEST PROCEDURE.....	53
8.2	TEST RESULT	53
9	6DB BANDWIDTH MEASUREMENT	58
9.1	TEST PROCEDURE.....	58
9.2	TEST RESULT	58
10	MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	71
10.1	TEST PROCEDURE.....	71
10.2	TEST RESULT	71
11	POWER SPECTRAL DENSITY	72
11.1	TEST PROCEDURE.....	72
11.2	TEST RESULT	72
12	ANTENNA APPLICATION	79
12.1	ANTENNA REQUIREMENT	79
12.2	RESULT	79
13	TEST SETUP	80
14	EUT PHOTOS.....	81



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Temperature Data logger
Model Name	:	KARTO G200,PIXEL C100,PIXEL C300,PIXEL W100, PIXEL W300
Specification	:	802.11b/g/n HT20/HT40
Operating frequency	:	2412-2462MHz for 802.11b/g/ n(HT20/HT40)
Numbers of Channel	:	11 channels for 802.11b/g 7 channels for 802.11n-HT2/HT40
Antenna Type	:	PCB Antenna
Antenna Gain	:	4.54 dBi
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Power supply	:	Lion battery DC3.7V 8700mAh
Hardware Version	:	Pixel_Gen_3
Software Version	:	Pixel V1.1.0



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n-HT40:13.5 Mbps) were used for all test

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		


Frequency and Channel list for 802.11 n (HT40)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
/	/	5	2432	9	2452
/	/	6	2437	/	/
3	2422	7	2442	/	/
4	2427	8	2447	/	/




The maximum duty cycle as following table:


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	27.00	27.00	100.00	0.00
11B	Ant1	2437	27.00	27.00	100.00	0.00
11B	Ant1	2462	27.00	27.00	100.00	0.00
11G	Ant1	2412	27.00	27.00	100.00	0.00
11G	Ant1	2437	27.00	27.00	100.00	0.00
11G	Ant1	2462	27.00	27.00	100.00	0.00
11N20SISO	Ant1	2412	27.00	27.00	100.00	0.00
11N20SISO	Ant1	2437	27.00	27.00	100.00	0.00
11N20SISO	Ant1	2462	27.00	27.00	100.00	0.00
11N40SISO	Ant1	2422	0.65	0.66	98.48	0.07
11N40SISO	Ant1	2437	0.65	0.66	98.48	0.07
11N40SISO	Ant1	2452	0.65	0.66	98.48	0.07

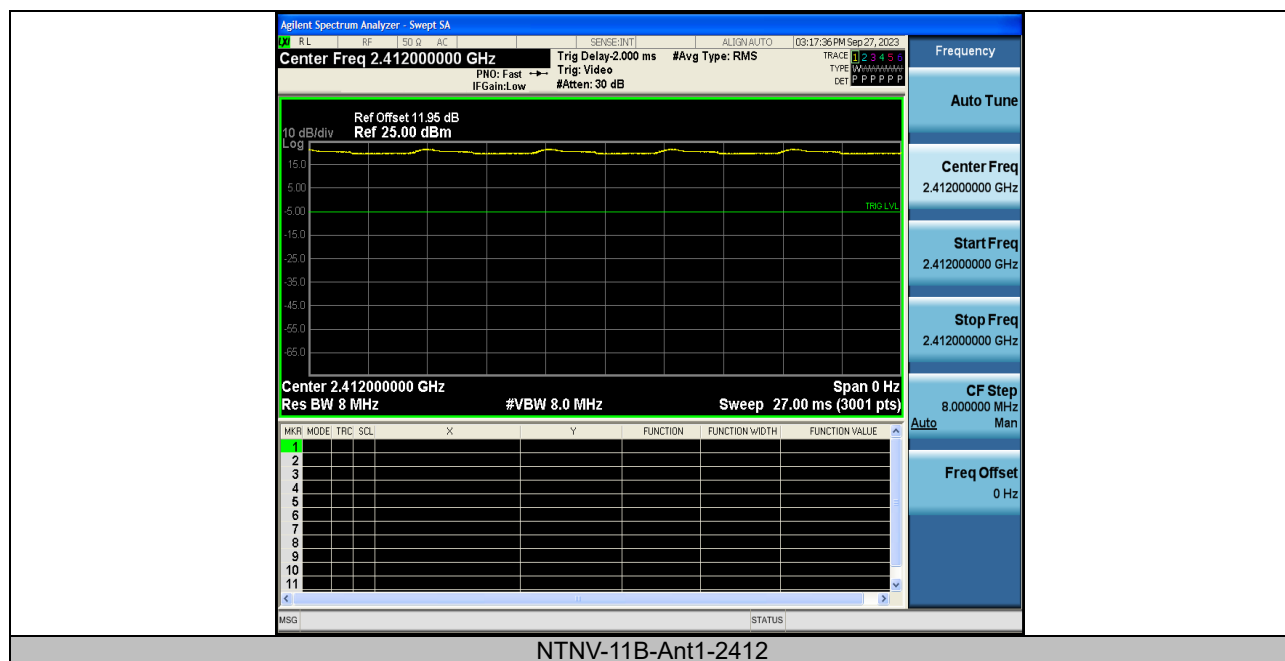


NTNV-11B-Ant1-2412

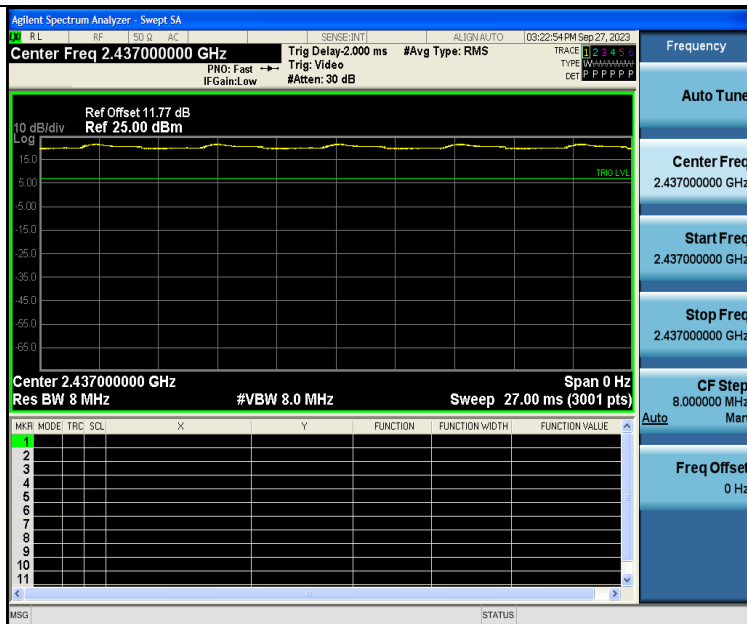


NTNV-11B-Ant1-2437

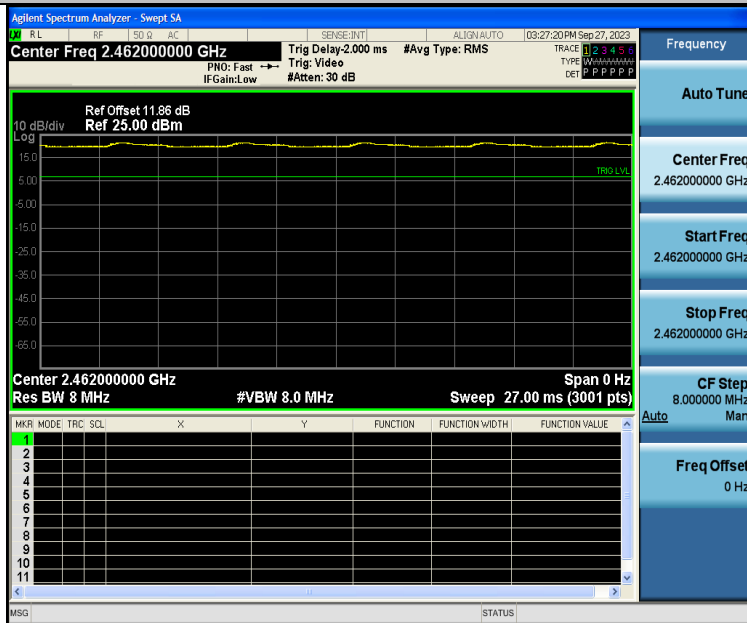


NTNV-11B-Ant1-2462

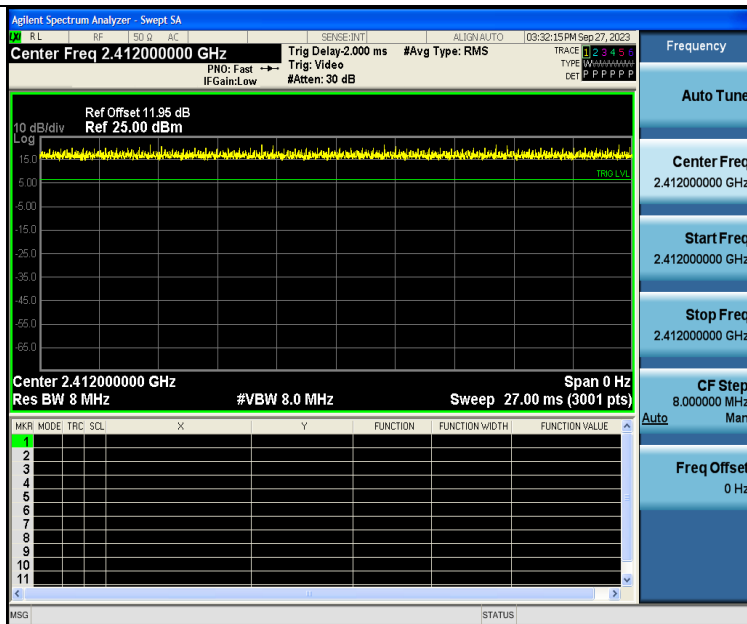


NTNV-11G-Ant1-2412

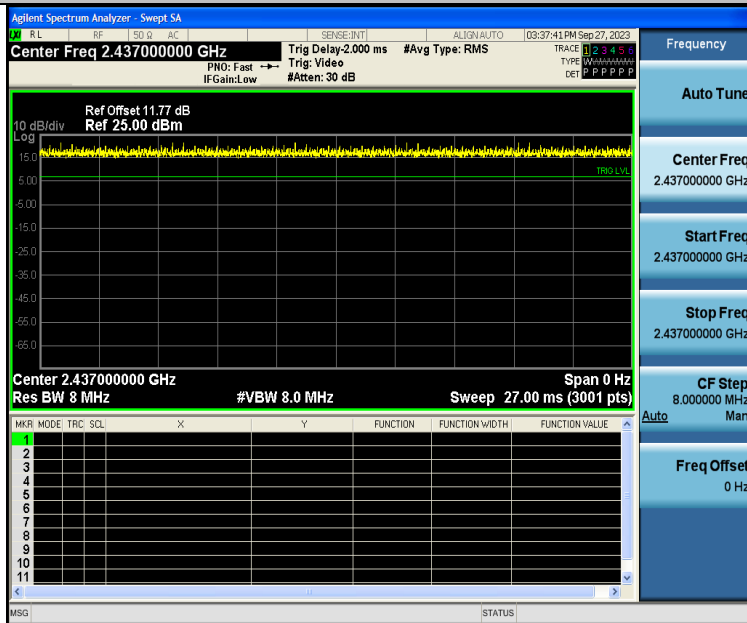

NTNV-11G-Ant1-2437

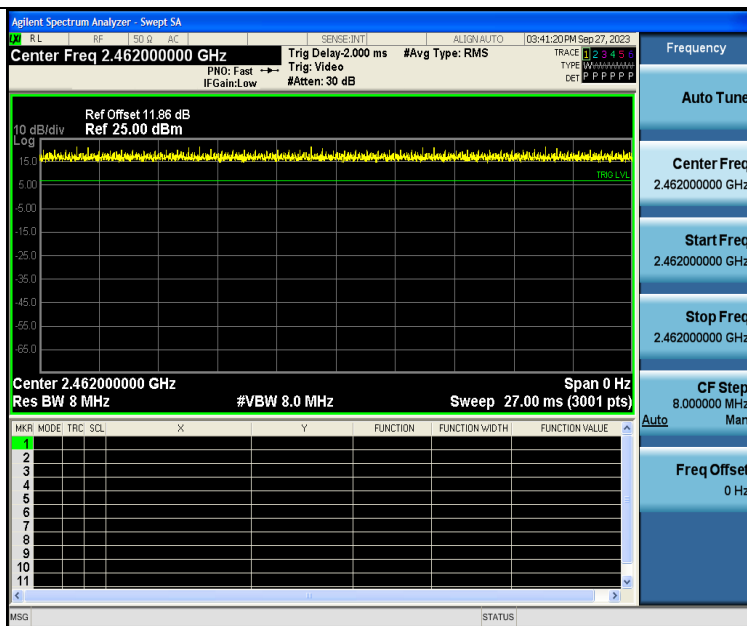


NTNV-11G-Ant1-2462

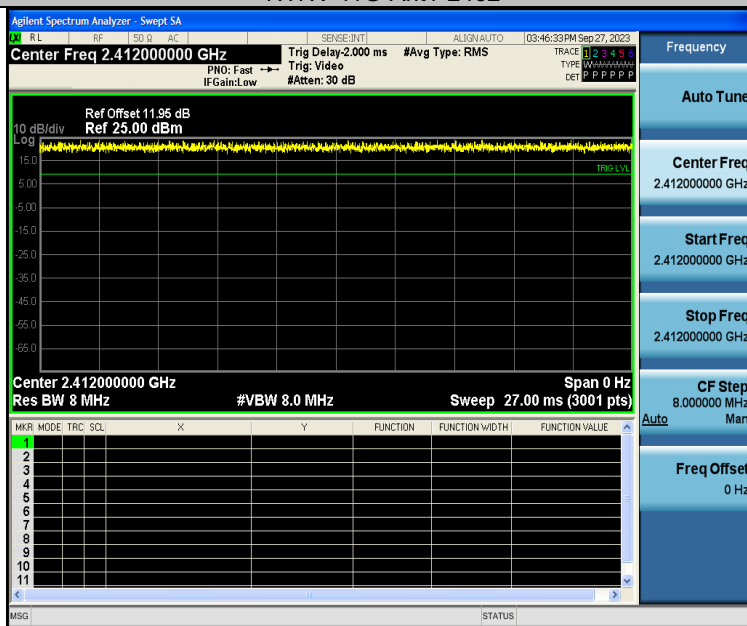


NTNV-11N20SISO-Ant1-2412




NTNV-11N20SISO-Ant1-2437

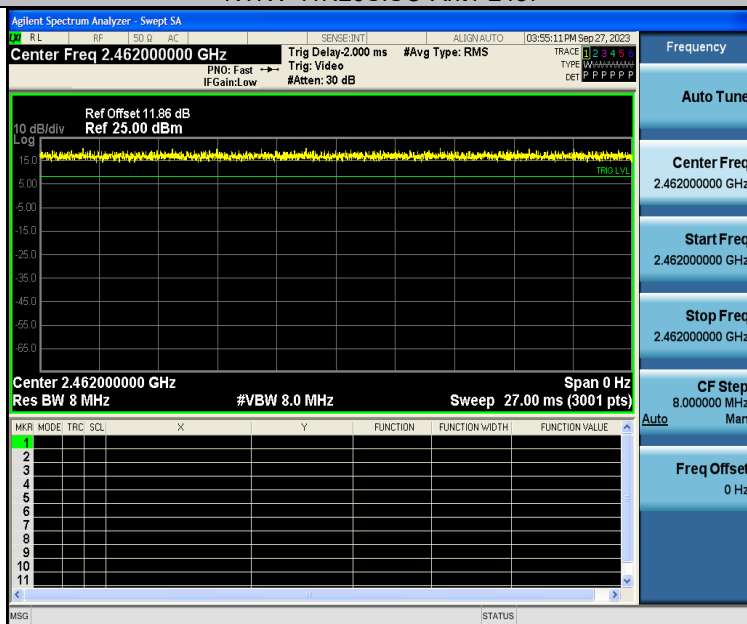



NTNV-11N20SISO-Ant1-2462

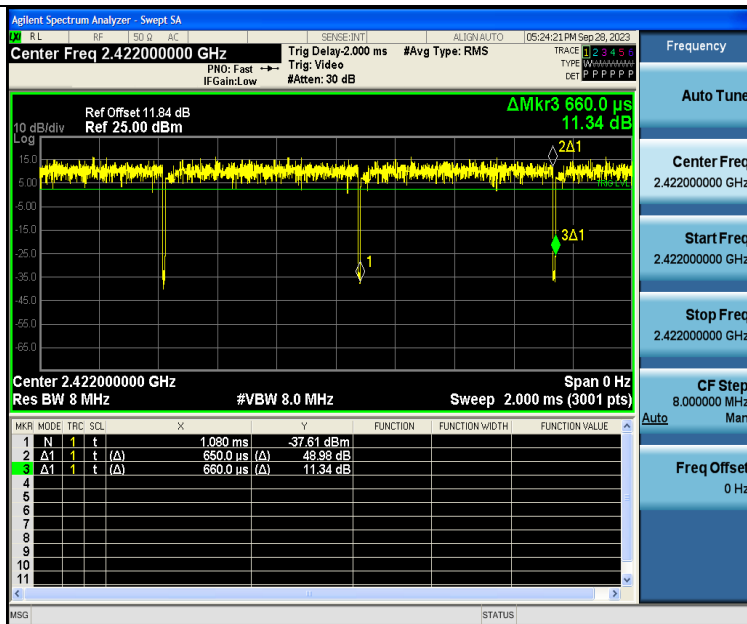

NTNV-11N40SISO-Ant1-2422

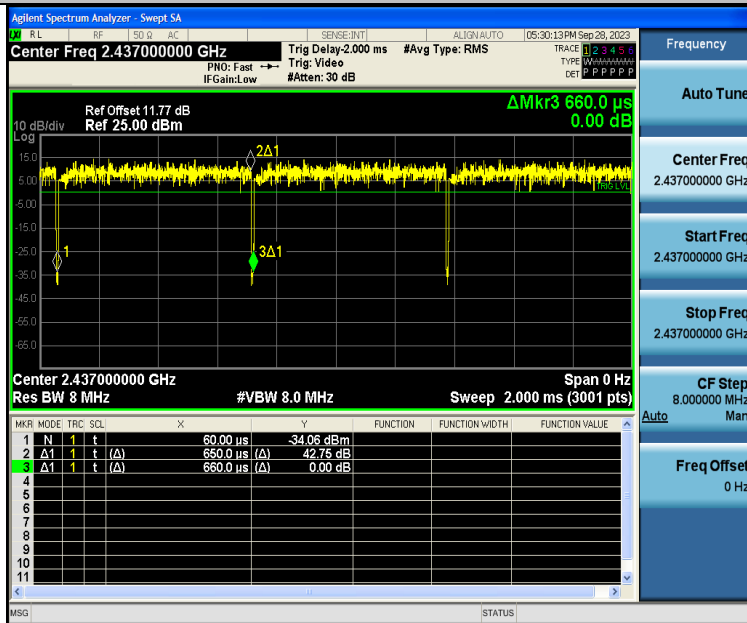

NTNV-11N40SISO-Ant1-2437

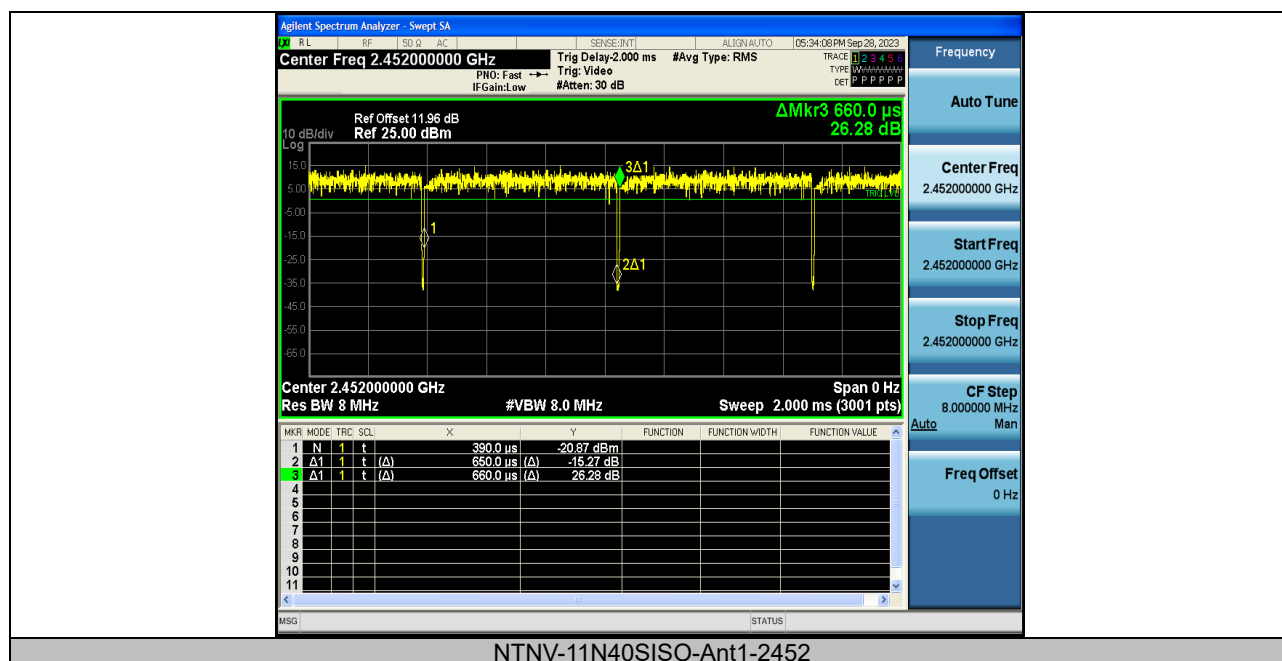

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

CAB identifier: CN0080



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration period
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 17, 2023	1 year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 17, 2023	1 year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 17, 2023	1 year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 17, 2023	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 17, 2023	1 year
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 17, 2023	1 year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 17, 2023	1 year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 17, 2023	1 year
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 17, 2023	1 year
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 17, 2023	1 year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 17, 2023	1 year
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 17, 2023	1 year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 17, 2023	1 year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 17, 2023	1 year



Report No.: PTC2307170220201E-FC01

Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 17, 2023	1 year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 17, 2023	1 year

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 17, 2023	1 year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 17, 2023	1 year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 17, 2023	1 year



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9kHz ~30MHz)	$\pm 3.15\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$



Report No.: PTC2307170220201E-FC01

4.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	XSC-0502000SU Input:100-240V~, 0.4A, 50-60Hz Output : DC 5V, 2A	N/A

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 23.9 °C
Humidity	: 51.4 % RH
Atmospheric Pressure	: 101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

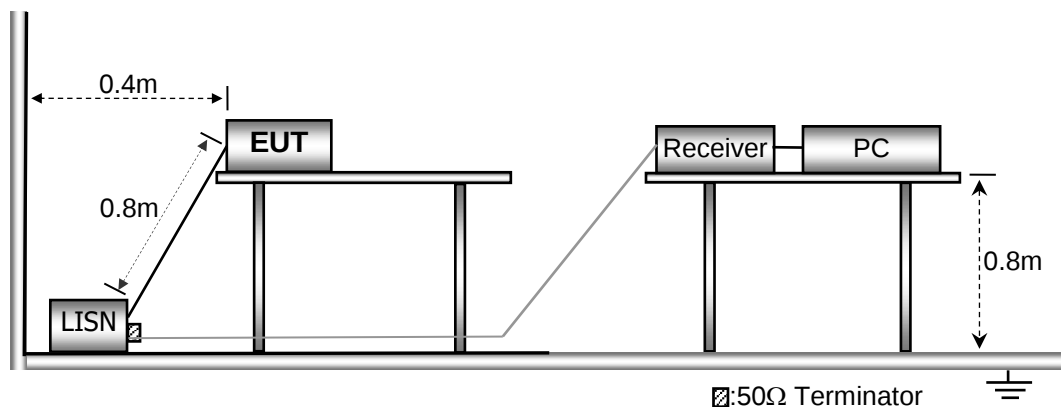

5.3 Test SET-UP (Block Diagram of Configuration)

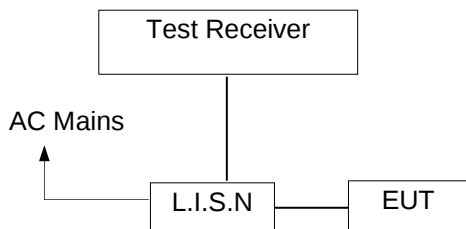

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result


Pass.

During the test, the 120Vac/60Hz and 240Vac/60Hz power supplies were scanned in advance, and it was found that (120Vac/60Hz, TX 802.11b Low Channel) was a poor mode, and the report only reflected the poor mode.

Please refer to the following pages.




Line- AC 120V/60Hz

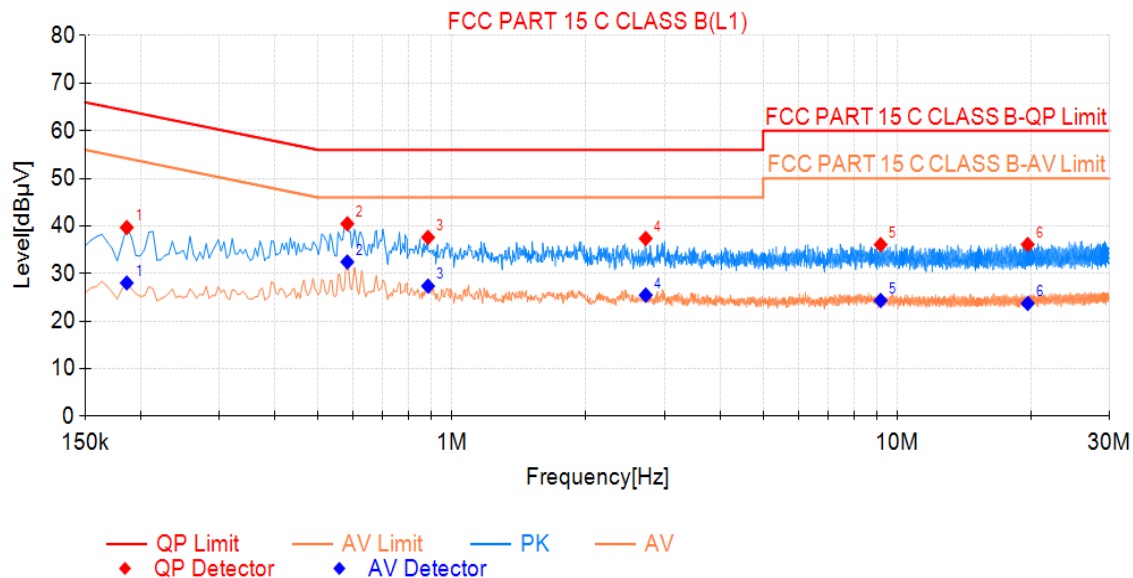

Final Data List								
NO.	Freq. [MHz]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Verdict
1	0.186	39.68	64.21	24.53	28.03	54.21	26.18	PASS
2	0.582	40.46	56.00	15.54	32.44	46.00	13.56	PASS
3	0.884	37.61	56.00	18.39	27.38	46.00	18.62	PASS
4	2.724	37.38	56.00	18.62	25.48	46.00	20.52	PASS
5	9.182	36.08	60.00	23.92	24.35	50.00	25.65	PASS
6	19.649	36.12	60.00	23.88	23.73	50.00	26.27	PASS

Note: Level= Reading + Cable Loss + Factor

Neutral-AC 120V/60Hz

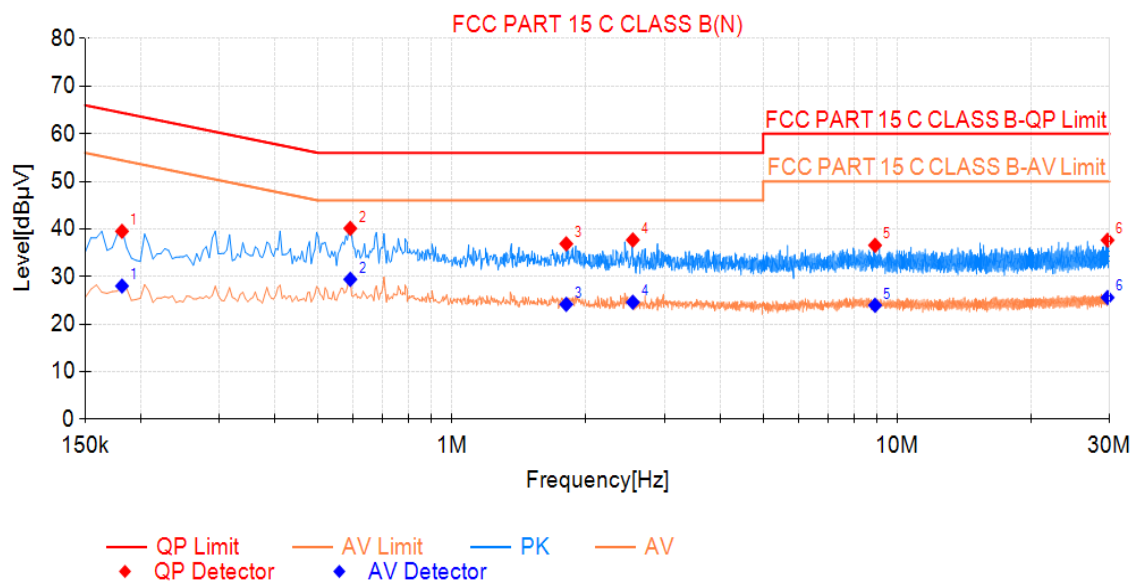

Final Data List								
NO.	Freq. [MHz]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Verdict
1	0.182	39.52	64.42	24.90	28.02	54.42	26.40	PASS
2	0.591	40.13	56.00	15.87	29.42	46.00	16.58	PASS
3	1.806	36.89	56.00	19.11	24.17	46.00	21.83	PASS
4	2.549	37.69	56.00	18.31	24.61	46.00	21.39	PASS
5	8.921	36.58	60.00	23.42	23.97	50.00	26.03	PASS
6	29.688	37.65	60.00	22.35	25.60	50.00	24.40	PASS

Note: Level= Reading + Cable Loss + Factor



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5 °C
 Humidity: : 52 % RH
 Atmospheric Pressure: : 101.3kPa
 Test Voltage : AC 120V 60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

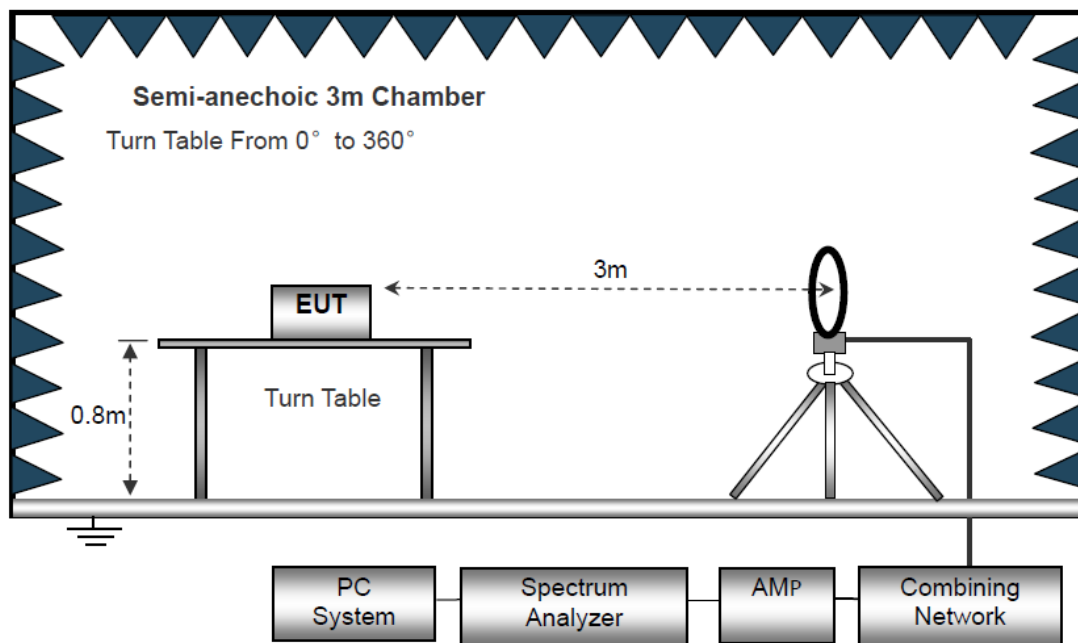

The test setup for emission measurement from 30 MHz to 1 GHz.

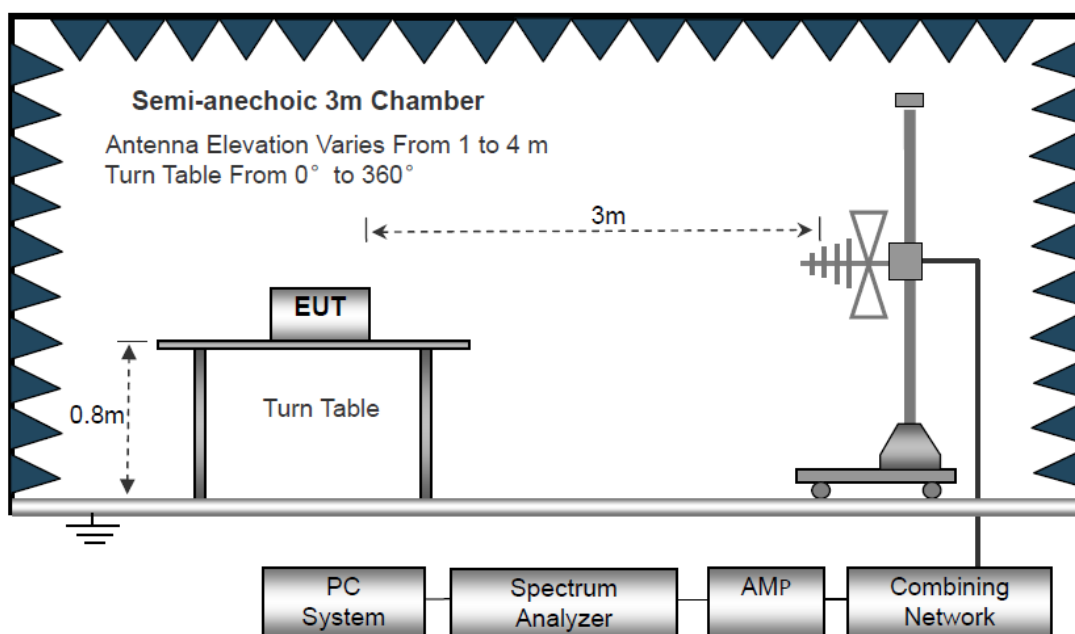

The test setup for emission measurement above 1 GHz

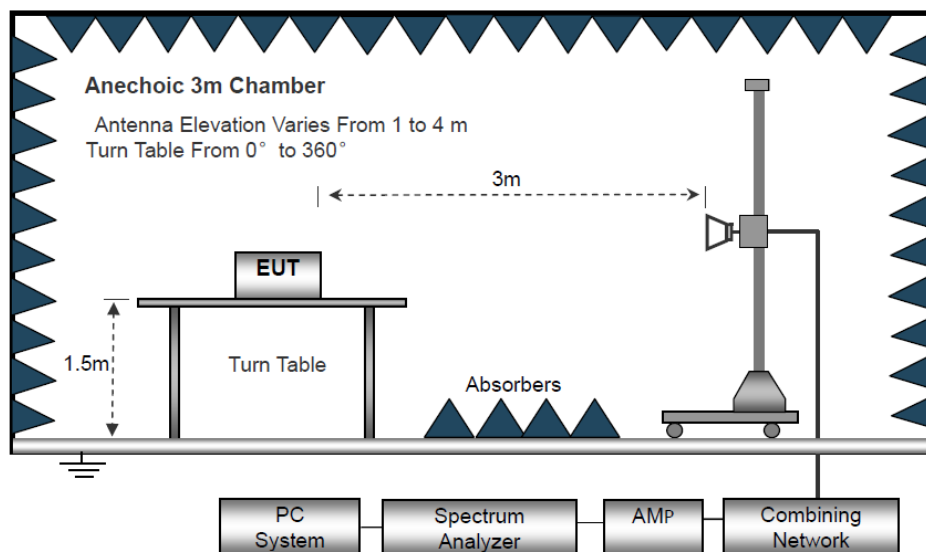

6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal

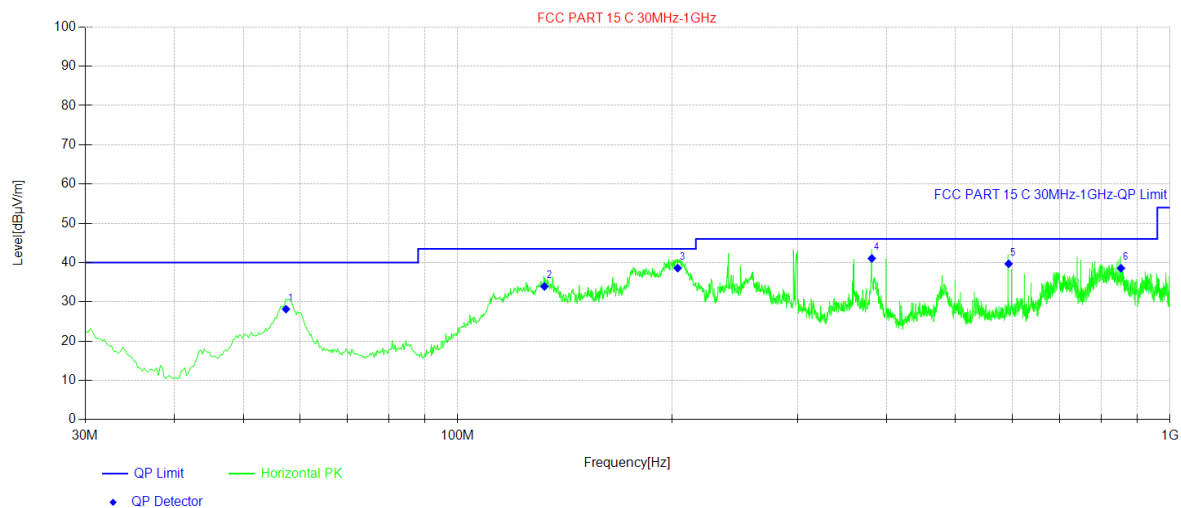


Final Data List[QP]							
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	57.40	46.07	-17.92	28.15	40.00	11.85	Horizontal
2	132.34	50.98	-17.06	33.92	43.50	9.58	Horizontal
3	203.63	57.36	-18.76	38.60	43.50	4.90	Horizontal
4	381.38	54.73	-13.67	41.06	46.00	4.94	Horizontal
5	593.57	48.2	-8.50	39.70	46.00	6.30	Horizontal
6	853.53	42.12	-3.56	38.56	46.00	7.44	Horizontal

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical

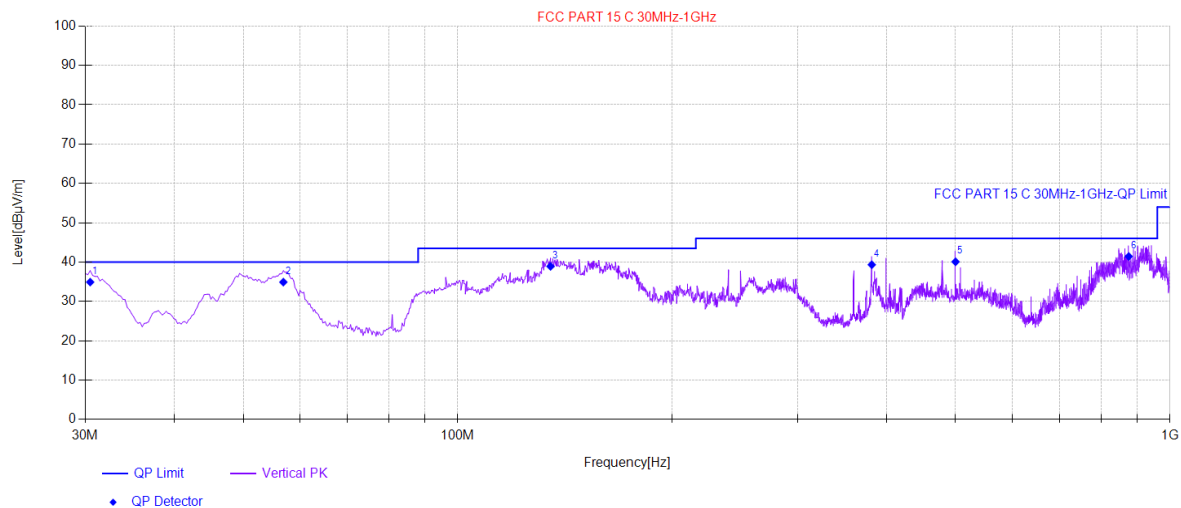

Final Data List[QP]							
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	30.49	53.24	-18.32	34.92	40.00	5.08	Vertical
2	56.92	52.83	-17.92	34.91	40.00	5.09	Vertical
3	135.00	55.8	-16.88	38.92	43.50	4.58	Vertical
4	381.38	53.01	-13.67	39.34	46.00	6.66	Vertical
5	499.97	50.68	-10.60	40.08	46.00	5.92	Vertical
6	875.11	44.72	-3.29	41.43	46.00	4.57	Vertical

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Test Frequency: From 1GHz to 18GHz

Worst case 802.11b

Test Mode: 2412					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	45.53	32.35	4.12	28.44	53.56	74	-20.44	V
7236	37.35	36.08	6.3	27.74	51.99	74	-22.01	V
9648	35.38	38.25	7.91	24.65	57.89	74	-17.11	V
4824	43.00	32.35	4.12	28.44	51.63	74	-22.67	H
7236	37.51	36.08	6.3	27.74	54.15	74	-20.95	H
9648	33.33	38.25	7.91	24.65	55.84	74	-18.76	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	30.40	32.35	4.12	28.44	38.43	54	-15.57	V
7236	23.56	36.08	6.3	27.74	38.20	54	-15.80	V
9648	20.24	38.25	7.91	24.65	41.75	54	-12.25	V
4824	31.31	32.35	4.12	28.44	39.34	54	-14.66	H
7236	24.95	36.08	6.3	27.74	39.57	54	-14.43	H
9648	18.74	38.25	7.91	24.65	40.25	54	-13.75	H



Worst case 802.11b

Test Mode: 2437					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	46.35	32.35	4.12	28.44	54.35	74	-19.65	V
7311	38.87	36.08	6.3	27.74	52.50	74	-21.50	V
9748	35.03	38.25	7.91	24.65	56.04	74	-17.96	V
4874	43.06	32.35	4.12	28.44	51.19	74	-22.81	H
7311	38.45	36.08	6.3	27.74	53.99	74	-20.01	H
9748	35.24	38.25	7.91	24.65	56.75	74	-17.25	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	31.40	32.35	4.12	28.44	39.43	54	-14.57	V
7311	24.58	36.08	6.3	27.74	39.22	54	-14.78	V
9748	20.67	38.25	7.91	24.65	42.18	54	-11.82	V
4874	30.08	32.35	4.12	28.44	38.11	54	-15.89	H
7311	25.08	36.08	6.3	27.74	39.72	54	-14.28	H
9748	21.60	38.25	7.91	24.65	41.91	54	-12.09	H



Worst case 802.11b

Test Mode: 2462					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	46.63	32.41	4.14	28.42	54.26	74	-19.74	V
7386	38.39	36.15	6.36	27.68	53.12	74	-20.88	V
9848	35.38	38.35	7.97	24.33	57.37	74	-16.63	V
4924	43.73	32.41	4.14	28.42	51.86	74	-22.14	H
7386	38.80	36.15	6.36	27.68	53.63	74	-20.37	H
9848	34.97	38.35	7.97	24.33	56.96	74	-17.04	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	31.28	32.41	4.14	28.42	39.41	54	-14.59	V
7386	23.43	36.15	6.36	27.68	38.26	54	-15.74	V
9848	20.57	38.35	7.97	24.33	42.56	54	-11.44	V
4924	30.29	32.41	4.14	28.42	38.42	54	-15.58	H
7386	24.37	36.15	6.36	27.68	39.20	54	-14.80	H
9848	21.56	38.35	7.97	24.33	43.55	54	-10.45	H

Note:

1. The testing has been conformed to $10 \times 2462 \text{ MHz} = 24620 \text{ MHz}$.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
2.4G WiFi (802.11b/g/n) mode have been tested, and the worst result(802.11g) was report as below
Test Mode: Worst case 802.11g Low Channel 2412MHz

Test Mode: 802.11g Low Channel 2412MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2390	48.54	27.39	2.77	34.01	44.69	74	-29.31	H	Peak
2400	58.04	27.42	2.78	34.01	57.03	74	-16.97	H	
2390	47.65	27.39	2.77	34.01	43.80	74	-30.20	V	
2400	54.52	27.42	2.78	34.01	50.71	74	-23.19	V	
2390	40.99	27.39	2.77	34.01	37.14	54	-16.86	H	Average
2400	44.19	27.42	2.78	34.01	40.38	54	-14.82	H	
2390	39.66	27.39	2.77	34.01	35.81	54	-19.19	V	
2400	44.62	27.42	2.78	34.01	40.81	54	-14.99	V	

Test Mode: Worst case 802.11g High Channel 2462MHz

Test Mode: 802.11g High Channel 2462MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2483.5	60.70	27.39	2.77	34.01	56.85	74	-17.25	H	Peak
2500	48.76	27.42	2.78	34.01	44.95	74	-29.35	H	
2483.5	60.55	27.39	2.77	34.01	56.20	74	-16.80	V	
2500	48.22	27.42	2.78	34.01	44.41	74	-29.49	V	
2483.5	41.13	27.39	2.77	34.01	37.28	54	-17.72	H	Average
2500	39.54	27.42	2.78	34.01	35.73	54	-18.87	H	
2483.5	43.12	27.39	2.77	34.01	39.27	54	-14.23	V	
2500	39.69	27.42	2.78	34.01	35.88	54	-19.12	V	

Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.



7 Conducted Spurious Emission

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	6.97	6.97	---	PASS
11B	Ant1	2412	30~1000	6.97	-57.41	≤-13.03	PASS
11B	Ant1	2412	1000~26500	6.97	-42.43	≤-13.03	PASS
11B	Ant1	2437	0~Reference	7.11	7.11	---	PASS
11B	Ant1	2437	30~1000	7.11	-58.35	≤-12.89	PASS
11B	Ant1	2437	1000~26500	7.11	-42.29	≤-12.89	PASS
11B	Ant1	2462	0~Reference	6.02	6.02	---	PASS
11B	Ant1	2462	30~1000	6.02	-57.23	≤-13.98	PASS
11B	Ant1	2462	1000~26500	6.02	-41.86	≤-13.98	PASS
11G	Ant1	2412	0~Reference	-1.14	-1.14	---	PASS
11G	Ant1	2412	30~1000	-1.14	-56.46	≤-21.14	PASS
11G	Ant1	2412	1000~26500	-1.14	-41.91	≤-21.14	PASS
11G	Ant1	2437	0~Reference	-1.04	-1.04	---	PASS
11G	Ant1	2437	30~1000	-1.04	-56.36	≤-21.04	PASS
11G	Ant1	2437	1000~26500	-1.04	-41.5	≤-21.04	PASS
11G	Ant1	2462	0~Reference	-1.16	-1.16	---	PASS
11G	Ant1	2462	30~1000	-1.16	-57.27	≤-21.16	PASS
11G	Ant1	2462	1000~26500	-1.16	-42.34	≤-21.16	PASS
11N20SISO	Ant1	2412	0~Reference	2.19	2.19	---	PASS
11N20SISO	Ant1	2412	30~1000	2.19	-57.31	≤-17.81	PASS
11N20SISO	Ant1	2412	1000~26500	2.19	-42.78	≤-17.81	PASS
11N20SISO	Ant1	2437	0~Reference	-1.13	-1.13	---	PASS
11N20SISO	Ant1	2437	30~1000	-1.13	-57	≤-21.13	PASS
11N20SISO	Ant1	2437	1000~26500	-1.13	-42.07	≤-21.13	PASS
11N20SISO	Ant1	2462	0~Reference	-1.74	-1.74	---	PASS
11N20SISO	Ant1	2462	30~1000	-1.74	-58.29	≤-21.74	PASS



11N20SISO	Ant1	2462	1000~26500	-1.74	-42.14	≤ -21.74	PASS
11N40SISO	Ant1	2422	0~Reference	-2.68	-2.68	---	PASS
11N40SISO	Ant1	2422	30~1000	-2.68	-57.53	≤ -22.68	PASS
11N40SISO	Ant1	2422	1000~26500	-2.68	-42.06	≤ -22.68	PASS
11N40SISO	Ant1	2437	0~Reference	-3.46	-3.46	---	PASS
11N40SISO	Ant1	2437	30~1000	-3.46	-56.89	≤ -23.46	PASS
11N40SISO	Ant1	2437	1000~26500	-3.46	-42.48	≤ -23.46	PASS
11N40SISO	Ant1	2452	0~Reference	-2.78	-2.78	---	PASS
11N40SISO	Ant1	2452	30~1000	-2.78	-57.4	≤ -22.78	PASS
11N40SISO	Ant1	2452	1000~26500	-2.78	-42.16	≤ -22.78	PASS




11B-Ant1-2412-0~Reference-PASS

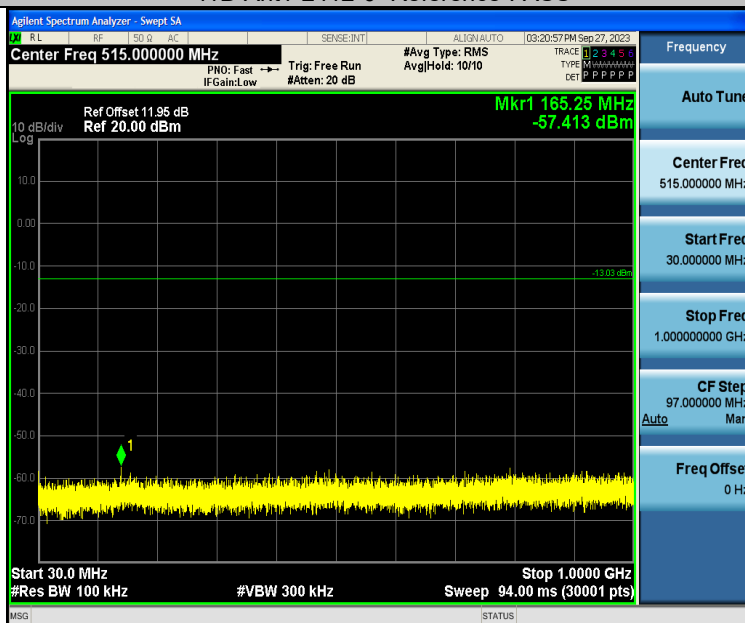




11B-Ant1-2412-30~1000-PASS

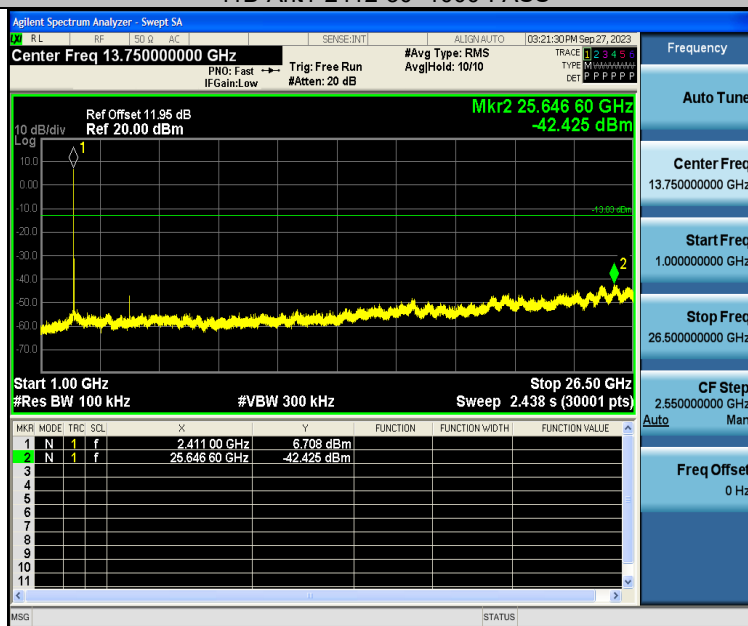


11B-Ant1-2412-1000~26500-PASS



11B-Ant1-2437-0~Reference-PASS

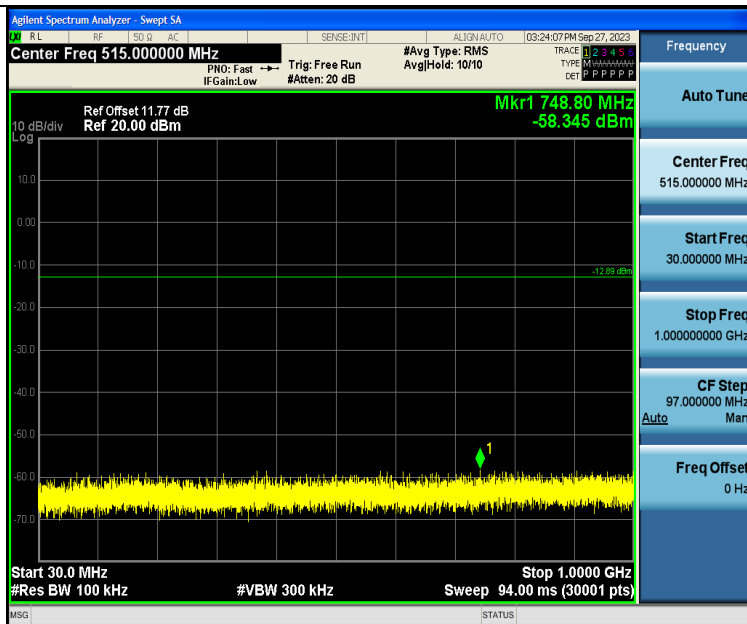


11B-Ant1-2437-30~1000-PASS

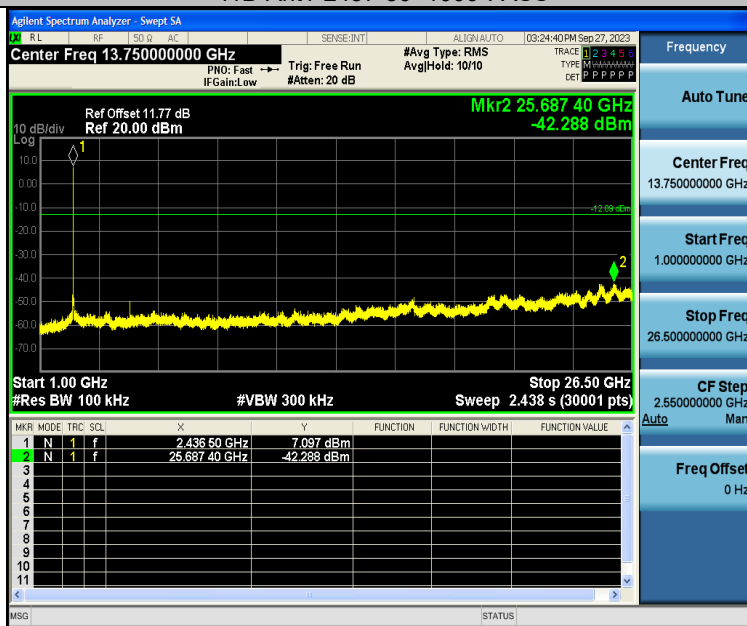


11B-Ant1-2437-1000~26500-PASS




11B-Ant1-2462-0~Reference-PASS

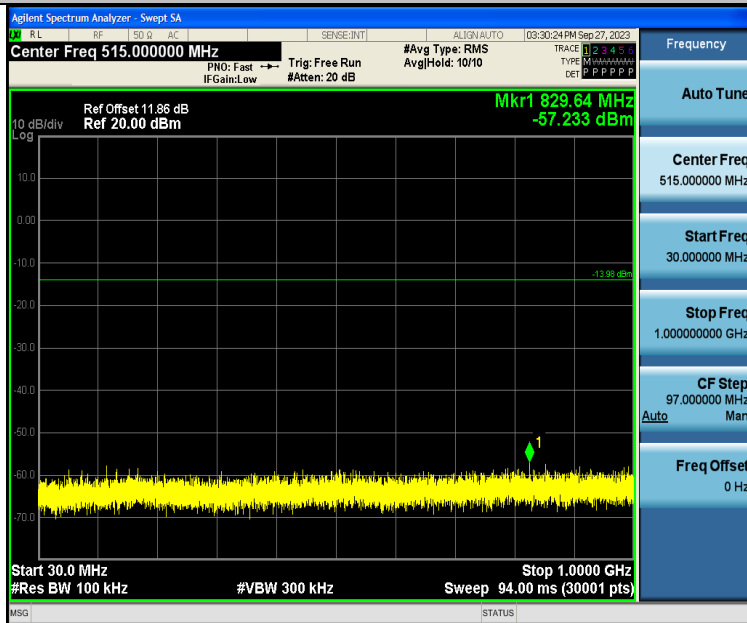


11B-Ant1-2462-30~1000-PASS

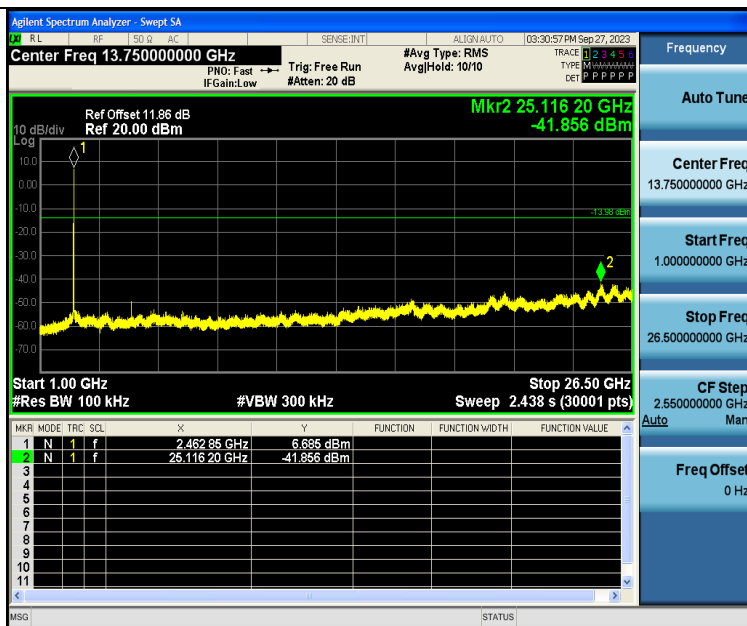

11B-Ant1-2462-1000~26500-PASS

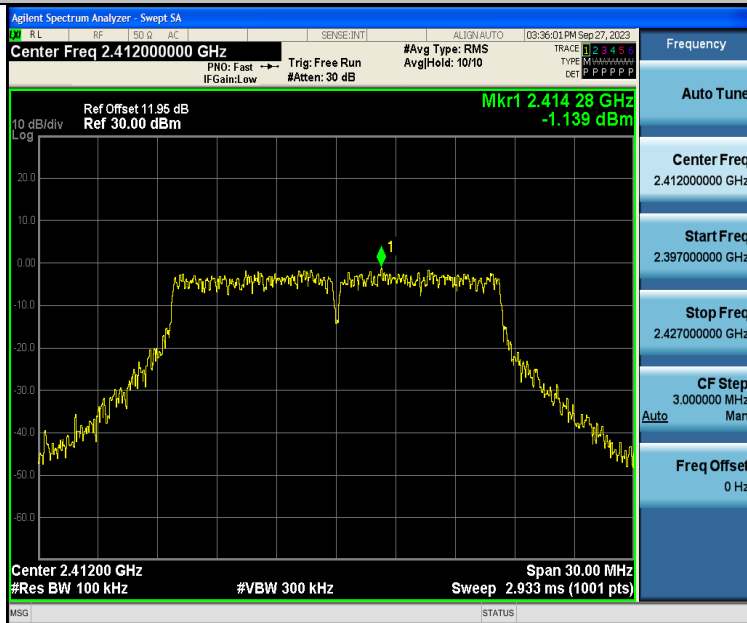


11G-Ant1-2412-0~Reference-PASS

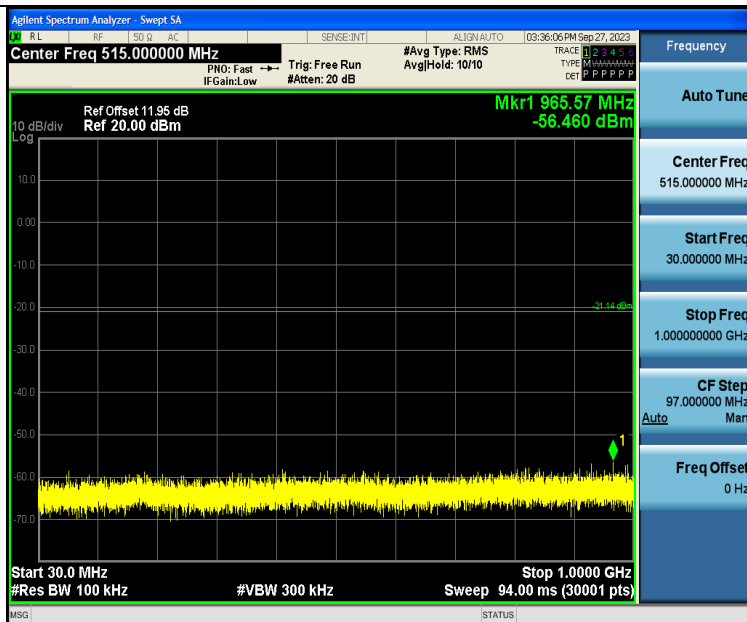


11G-Ant1-2412-30~1000-PASS




11G-Ant1-2412-1000~26500-PASS

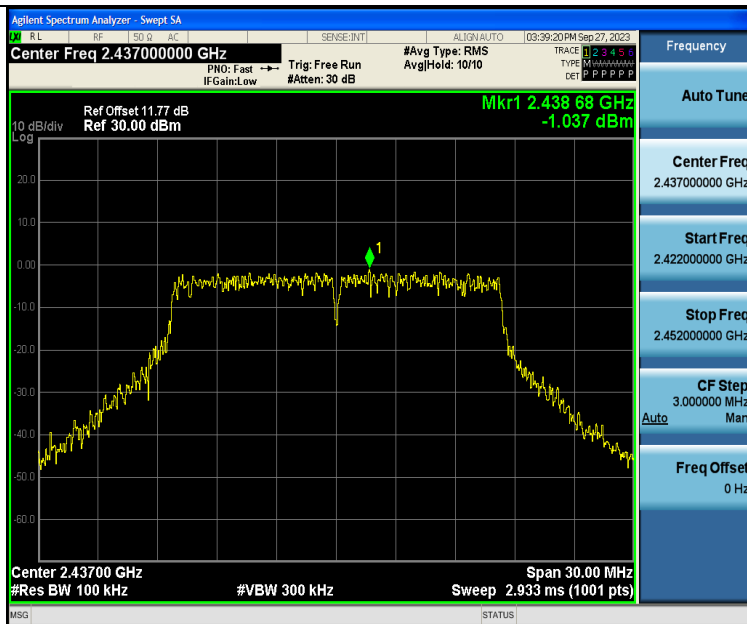


11G-Ant1-2437-0~Reference-PASS

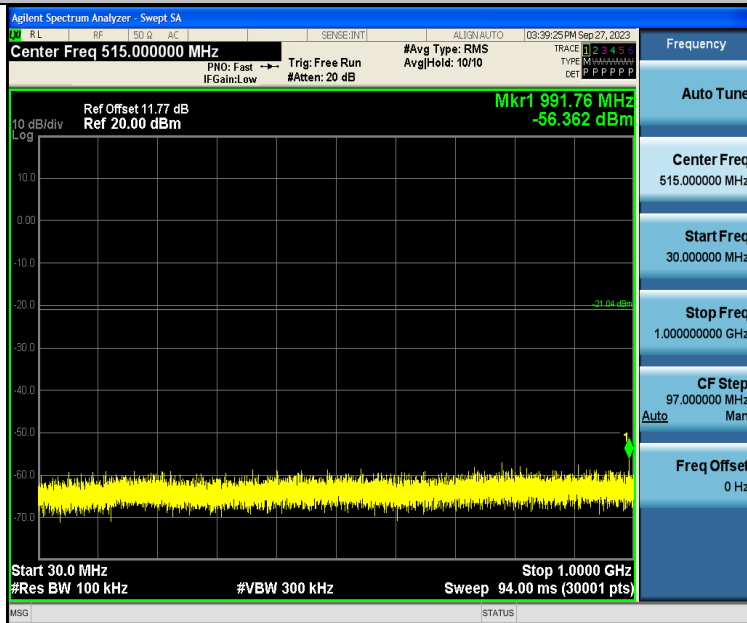


11G-Ant1-2437-30~1000-PASS

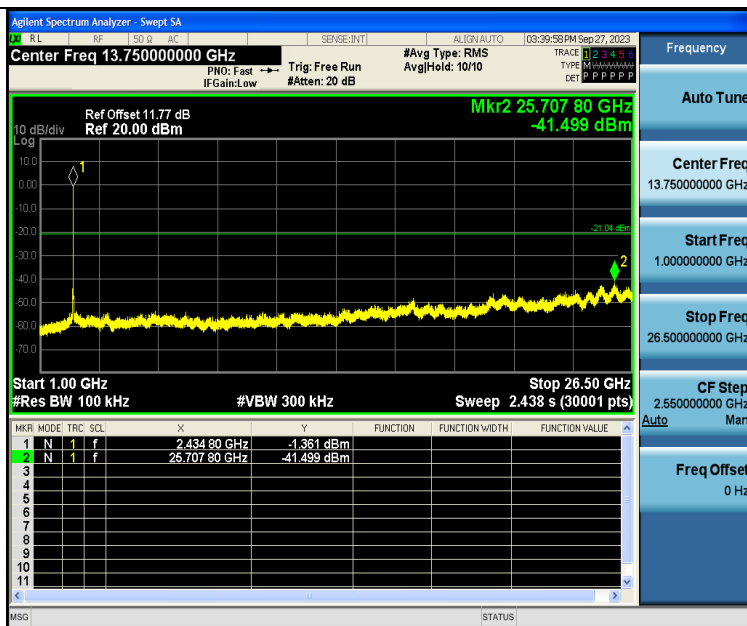


11G-Ant1-2437-1000~26500-PASS

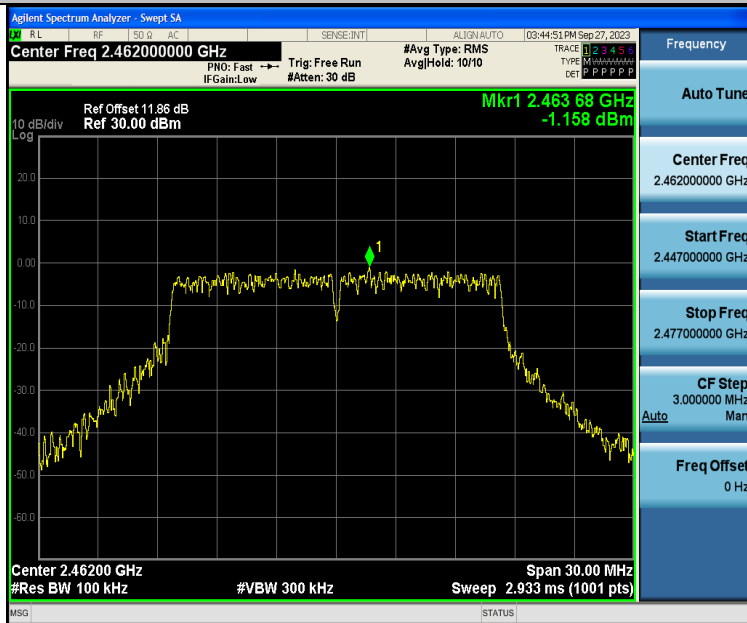


11G-Ant1-2462-0~Reference-PASS

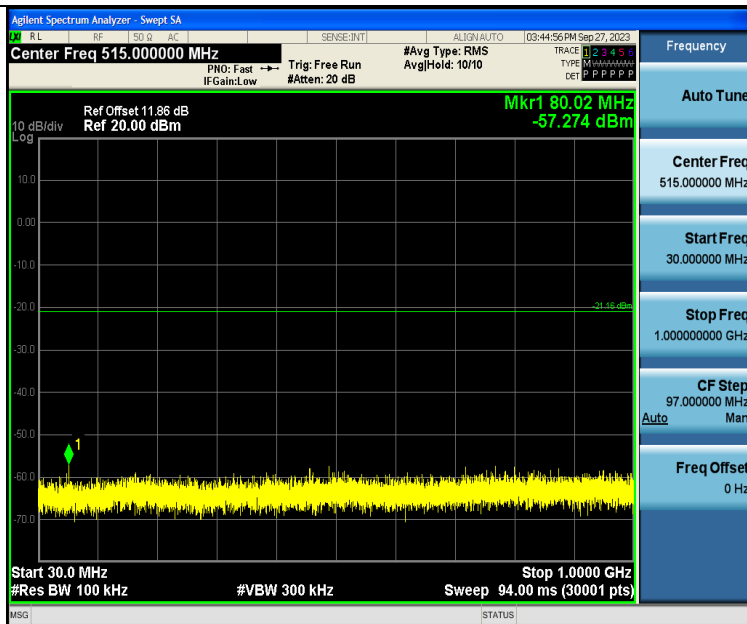


11G-Ant1-2462-30~1000-PASS

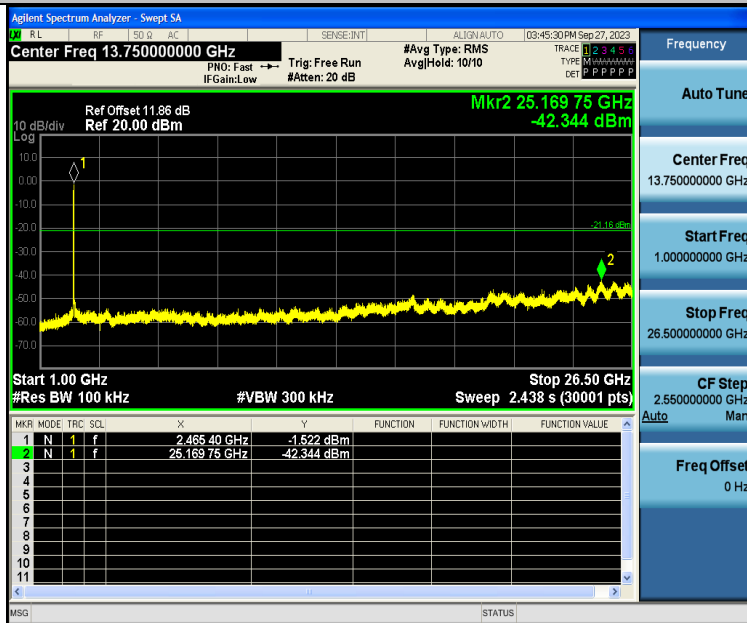


11G-Ant1-2462-1000~26500-PASS

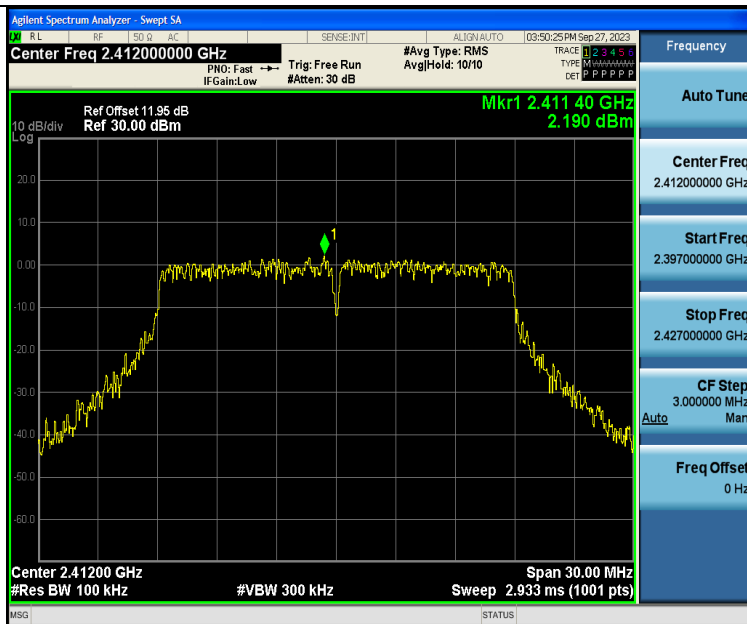


11N20SISO-Ant1-2412-0~Reference-PASS

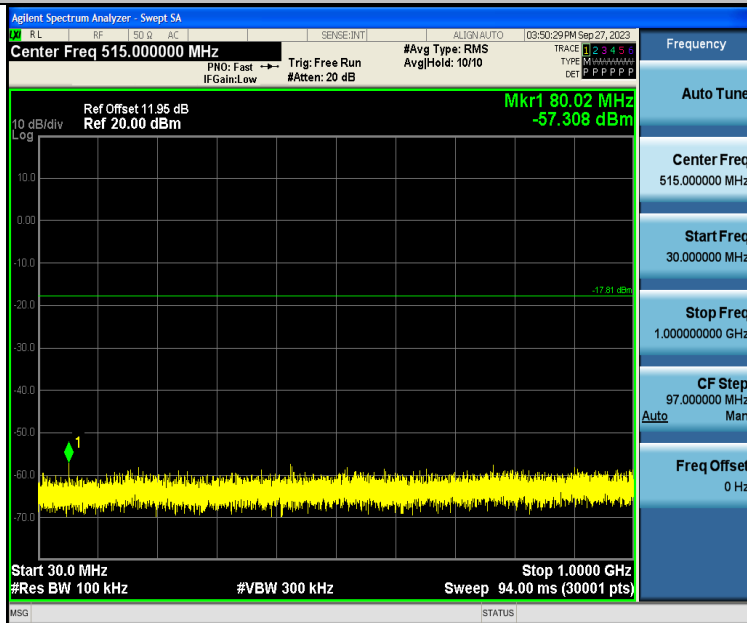

11N20SISO-Ant1-2412-30~1000-PASS

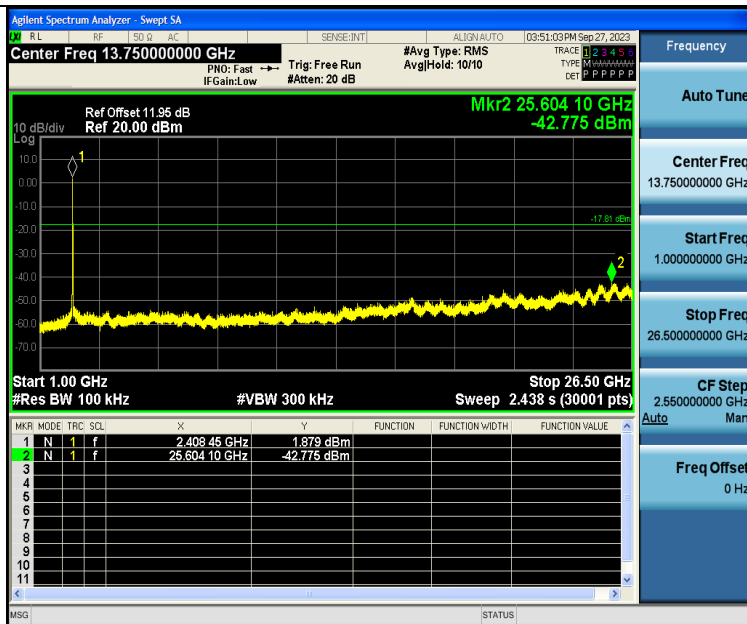


11N20SISO-Ant1-2412-1000~26500-PASS

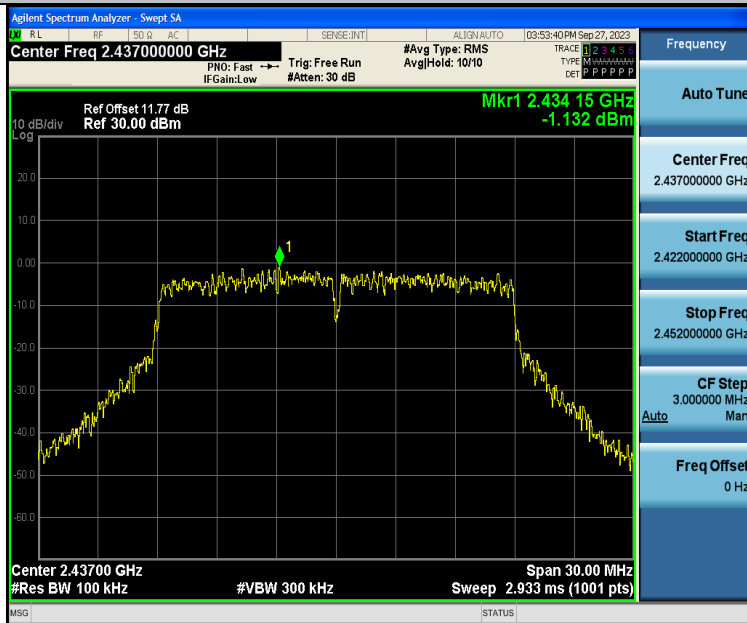


11N20SISO-Ant1-2437-0~Reference-PASS




11N20SISO-Ant1-2437-30~1000-PASS

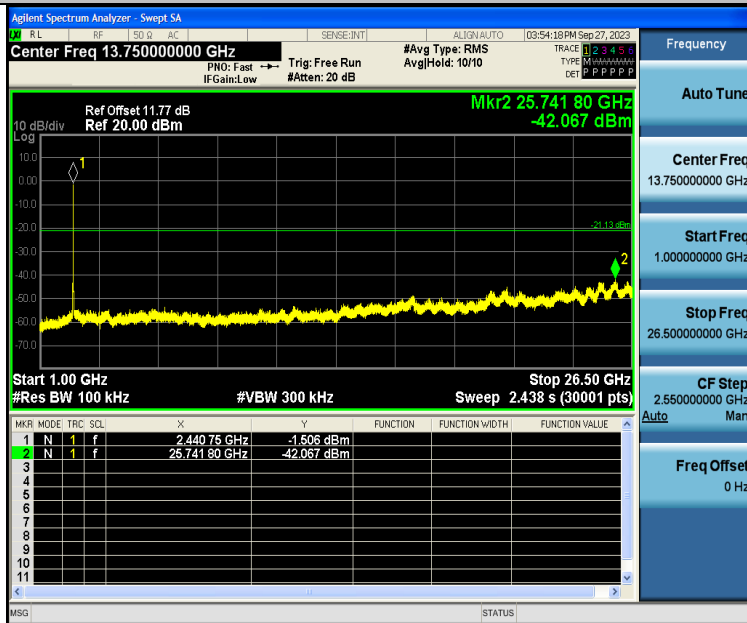

11N20SISO-Ant1-2437-1000~26500-PASS

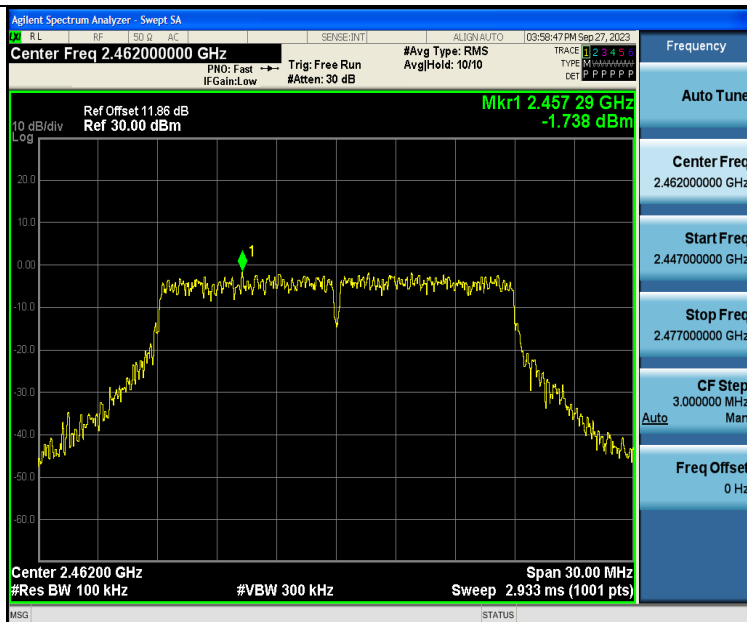

11N20SISO-Ant1-2462-0~Reference-PASS

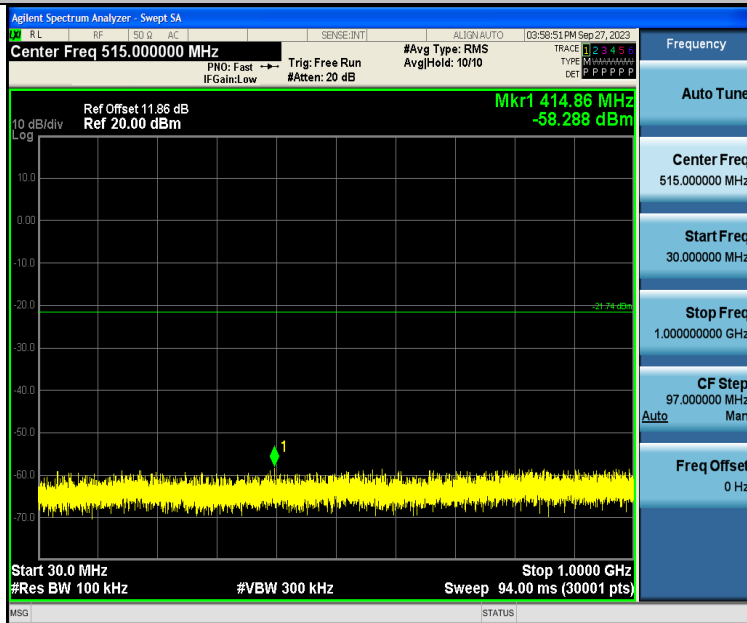


11N20SISO-Ant1-2462-30~1000-PASS




11N20SISO-Ant1-2462-1000~26500-PASS



11N40SISO-Ant1-2422-0~Reference-PASS

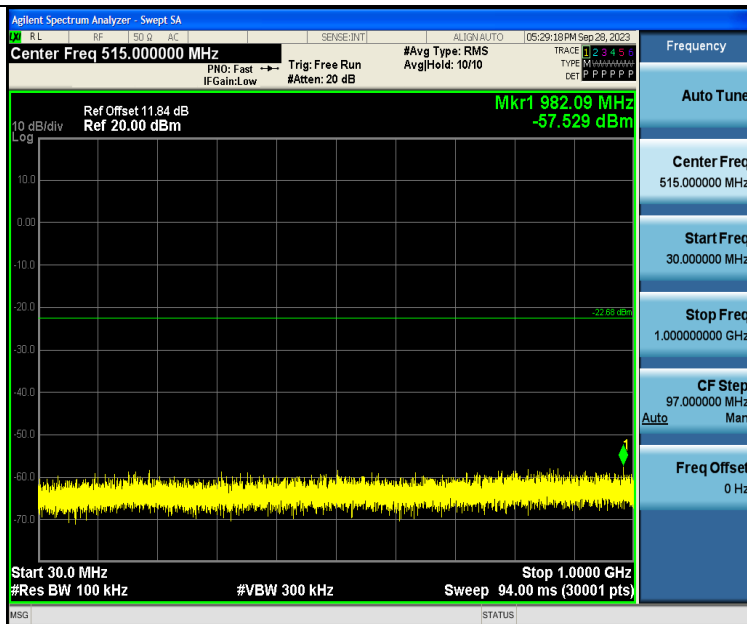


11N40SISO-Ant1-2422-30~1000-PASS

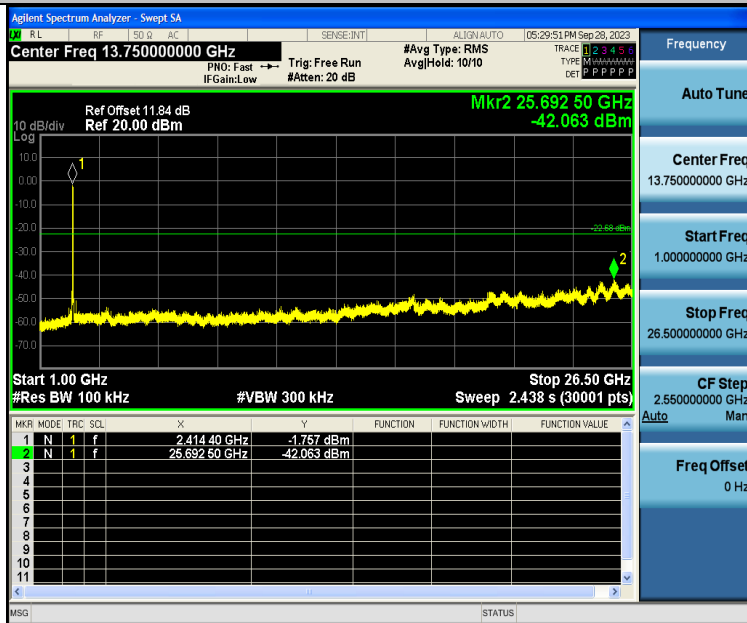


11N40SISO-Ant1-2422-1000~26500-PASS




11N40SISO-Ant1-2437-0~Reference-PASS

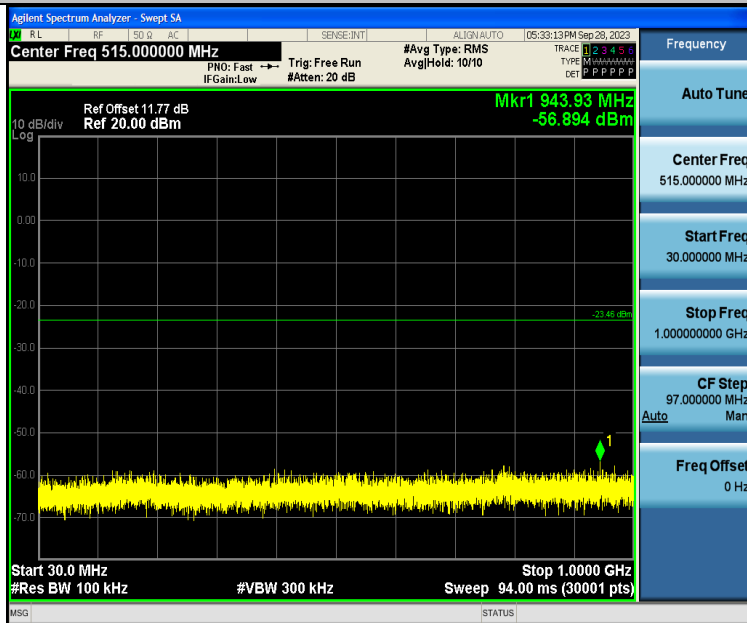


11N40SISO-Ant1-2437-30~1000-PASS

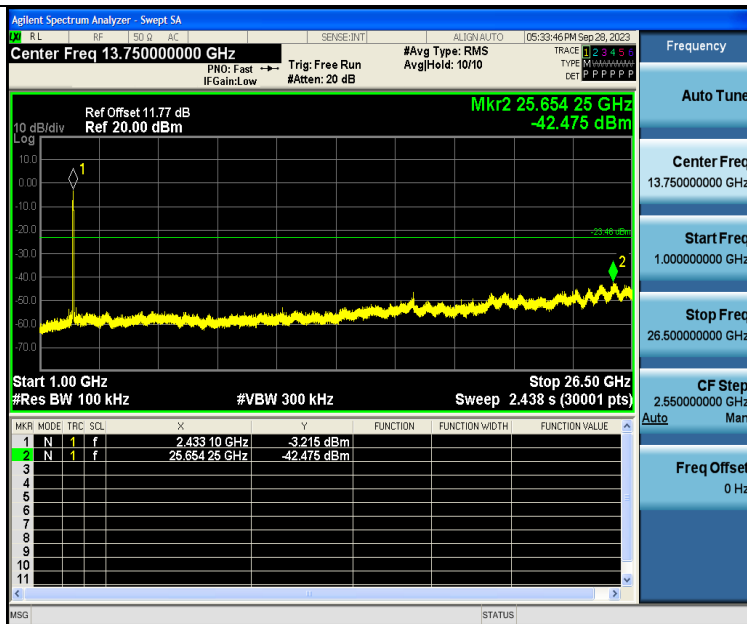


11N40SISO-Ant1-2437-1000~26500-PASS

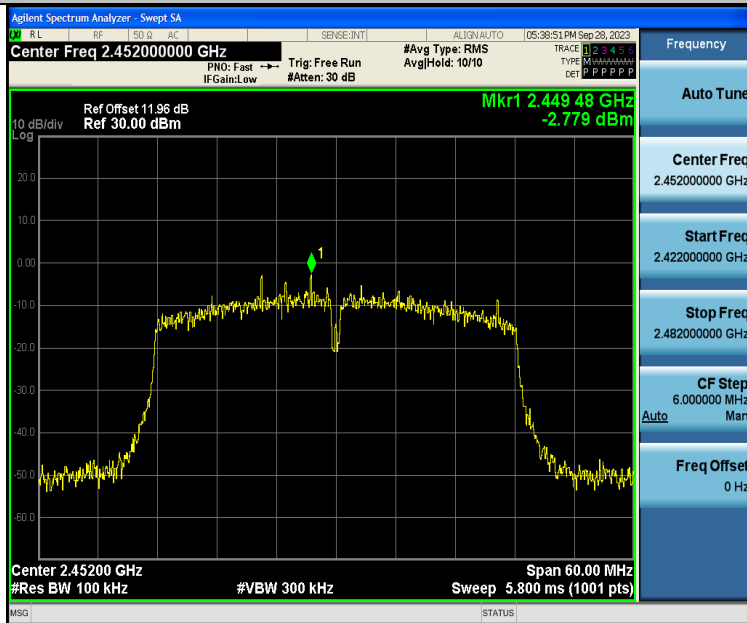

11N40SISO-Ant1-2452-0~Reference-PASS

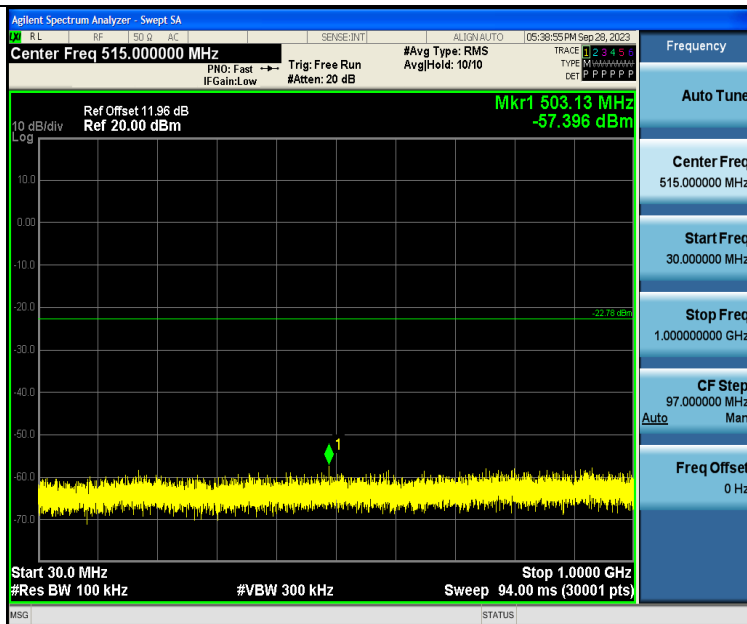

11N40SISO-Ant1-2452-30~1000-PASS

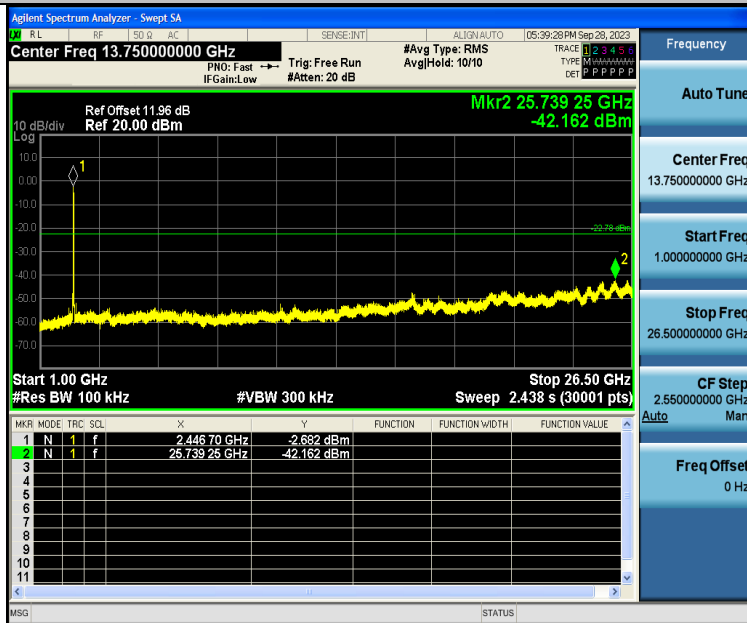

11N40SISO-Ant1-2452-1000~26500-PASS



8 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
- 3.Test set-up(block diagram of configuration):




8.2 Test Result


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	7.05	-42.74	≤-12.96	PASS
11B	Ant1	High	2462	6.81	-45.67	≤-13.19	PASS
11G	Ant1	Low	2412	-1.07	-32.87	≤-21.07	PASS
11G	Ant1	High	2462	-1.02	-45.26	≤-21.02	PASS
11N20SISO	Ant1	Low	2412	2.62	-27.98	≤-17.39	PASS
11N20SISO	Ant1	High	2462	-1.23	-45.59	≤-21.23	PASS
11N40SISO	Ant1	Low	2422	-1.88	-40.66	≤-21.88	PASS
11N40SISO	Ant1	High	2452	-2.67	-46.28	≤-22.67	PASS

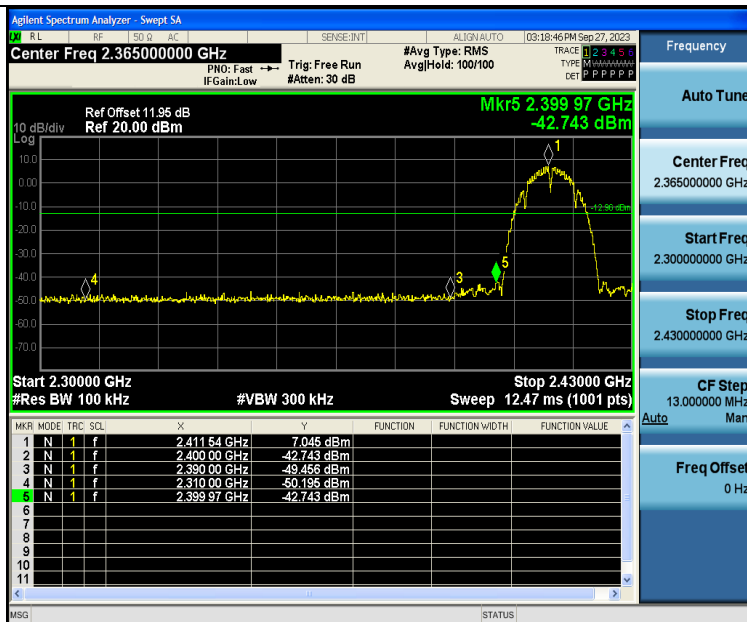


11B-Ant1-2412-PASS

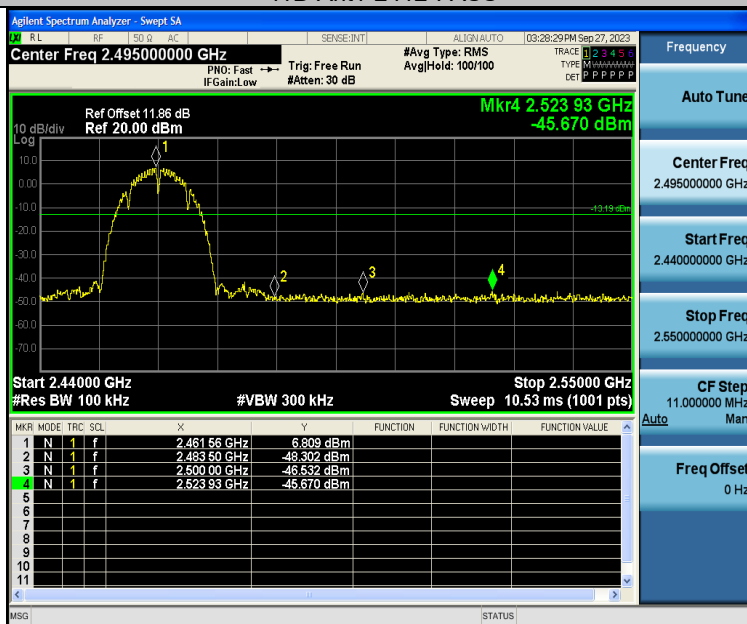


11B-Ant1-2462-PASS

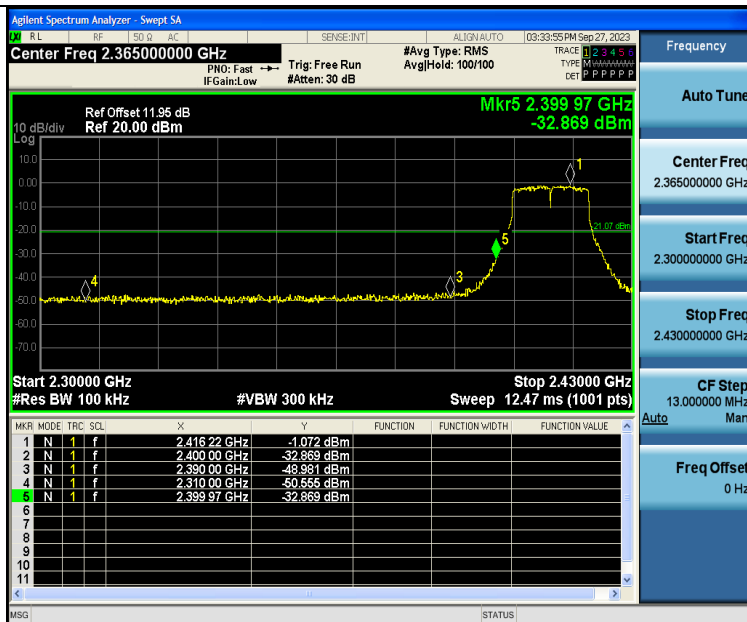


11G-Ant1-2412-PASS

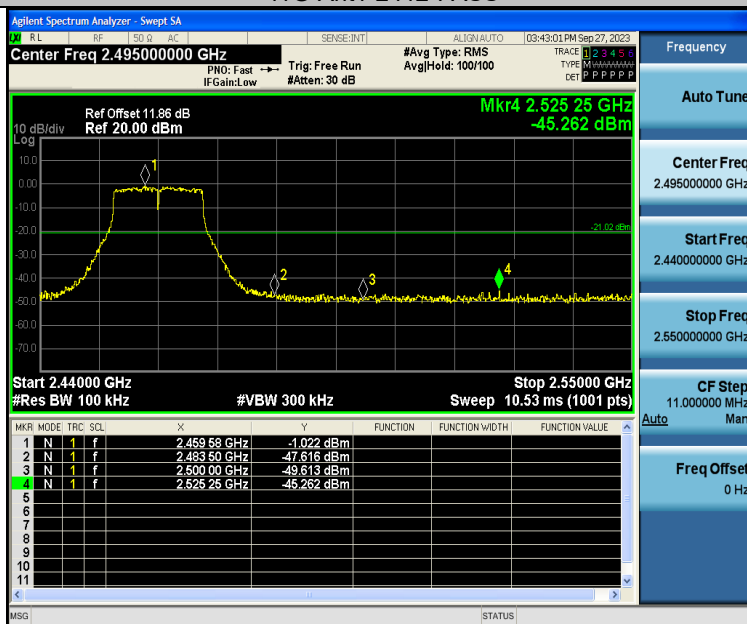

11G-Ant1-2462-PASS

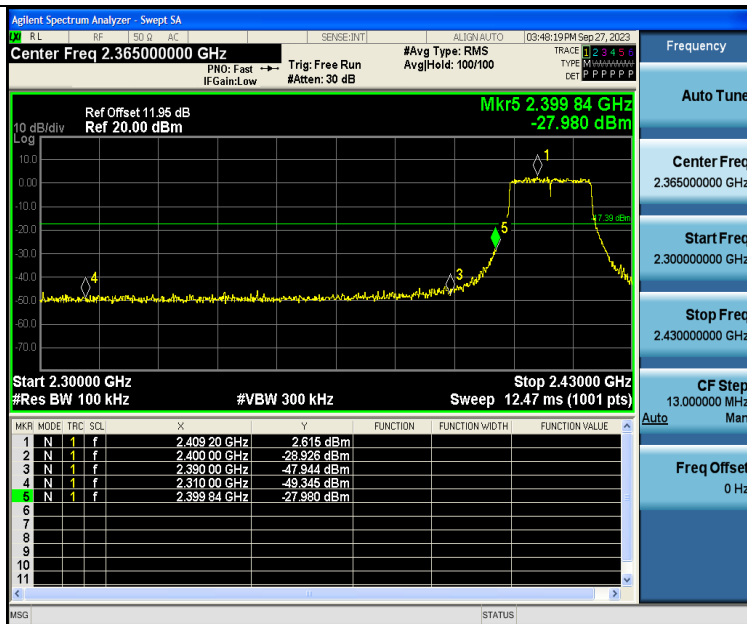


11N20SISO-Ant1-2412-PASS

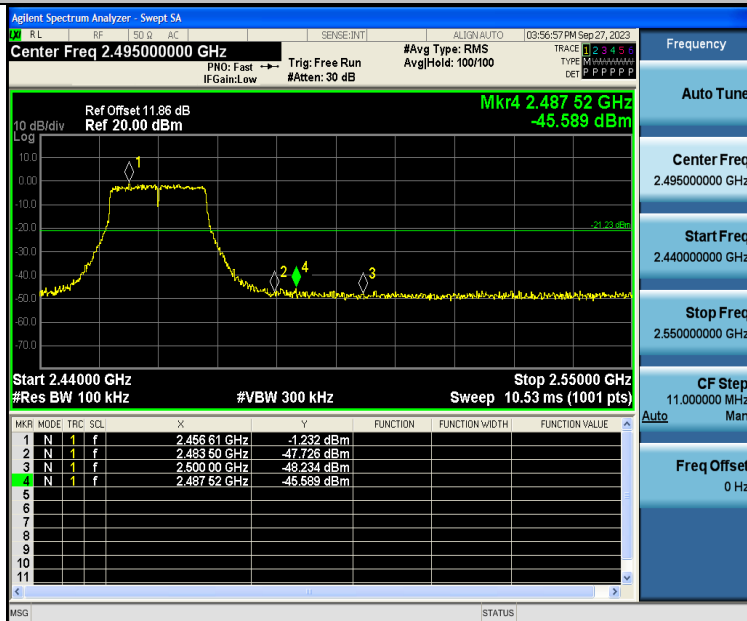

11N20SISO-Ant1-2462-PASS



11N40SISO-Ant1-2422-PASS

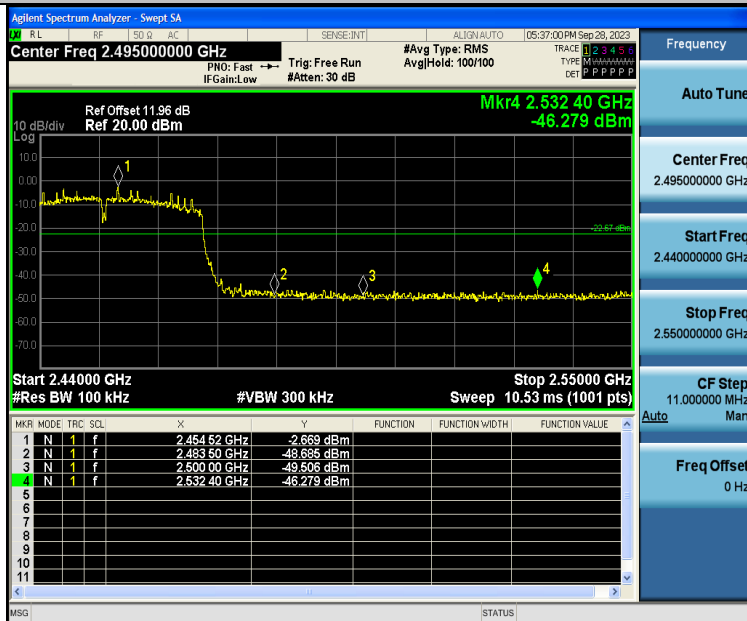

11N40SISO-Ant1-2452-PASS



9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz
3. Test set-up (block diagram of configuration):




9.2 Test Result


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.120	2407.480	2416.600	0.5	PASS
11B	Ant1	2437	9.040	2432.520	2441.560	0.5	PASS
11B	Ant1	2462	9.040	2457.520	2466.560	0.5	PASS
11G	Ant1	2412	16.560	2403.760	2420.320	0.5	PASS
11G	Ant1	2437	16.560	2428.760	2445.320	0.5	PASS
11G	Ant1	2462	16.560	2453.760	2470.320	0.5	PASS
11N20SISO	Ant1	2412	17.760	2403.160	2420.920	0.5	PASS
11N20SISO	Ant1	2437	17.760	2428.160	2445.920	0.5	PASS
11N20SISO	Ant1	2462	17.760	2453.160	2470.920	0.5	PASS
11N40SISO	Ant1	2422	31.280	2406.960	2438.240	0.5	PASS
11N40SISO	Ant1	2437	33.840	2419.480	2453.320	0.5	PASS
11N40SISO	Ant1	2452	31.280	2434.480	2465.760	0.5	PASS



11B-Ant1-2412-PASS

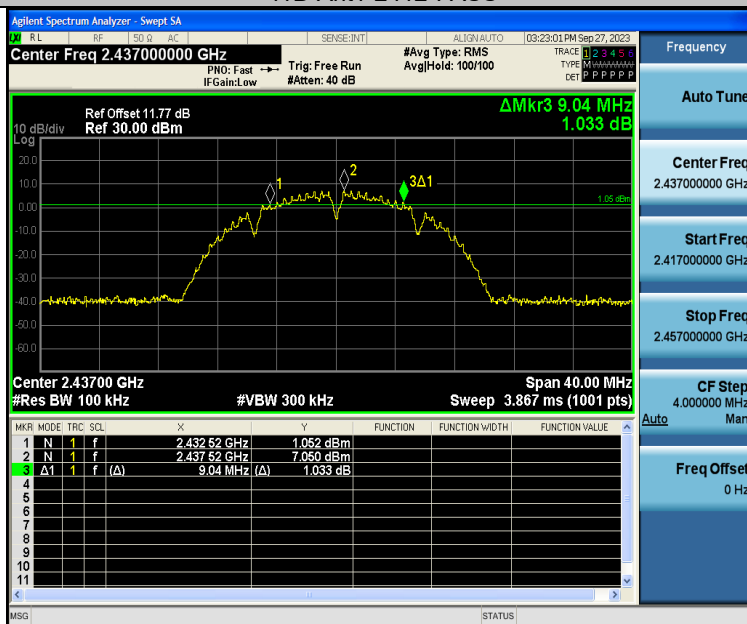


11B-Ant1-2437-PASS

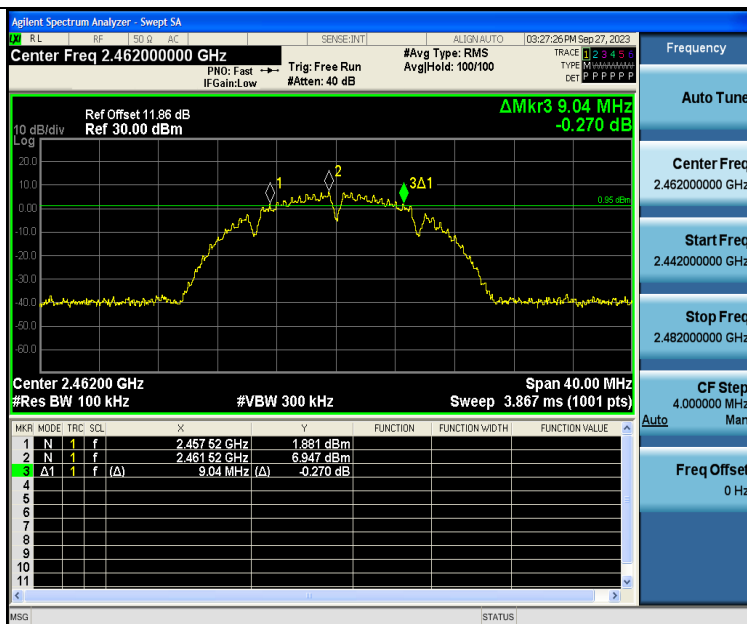


11B-Ant1-2462-PASS




11G-Ant1-2412-PASS

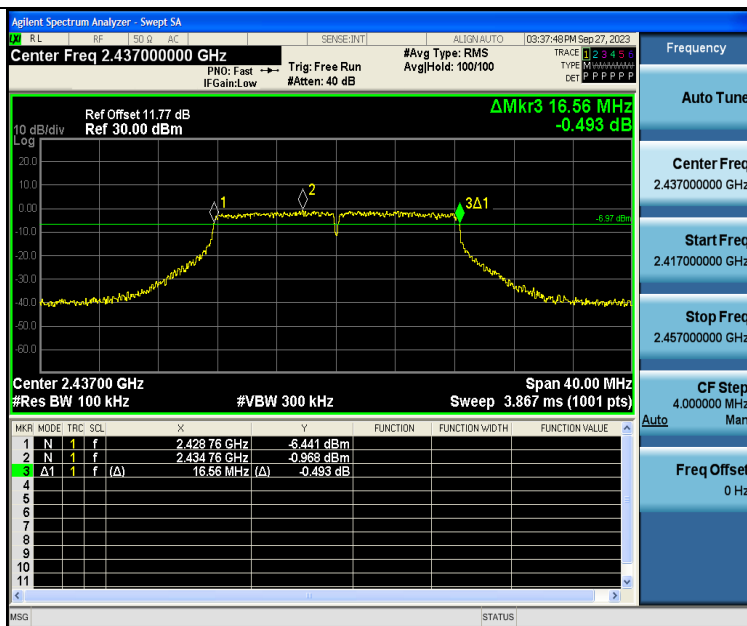


11G-Ant1-2437-PASS

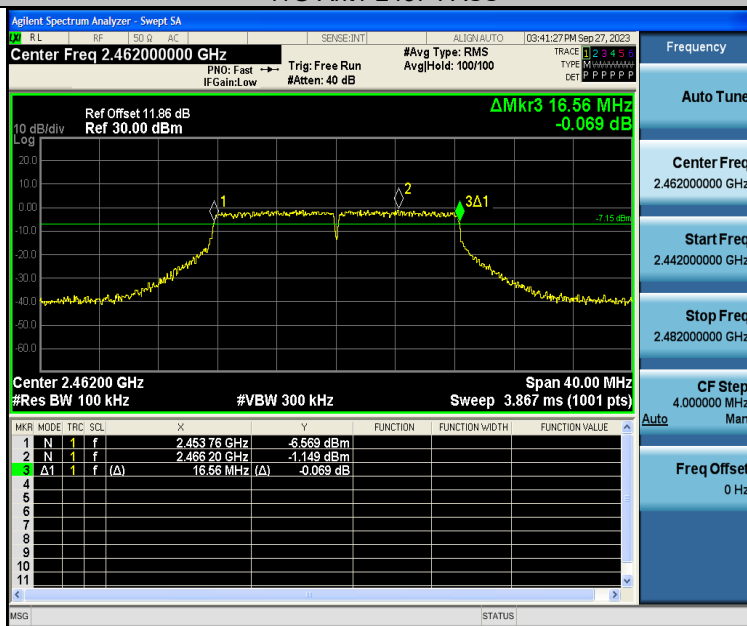

11G-Ant1-2462-PASS

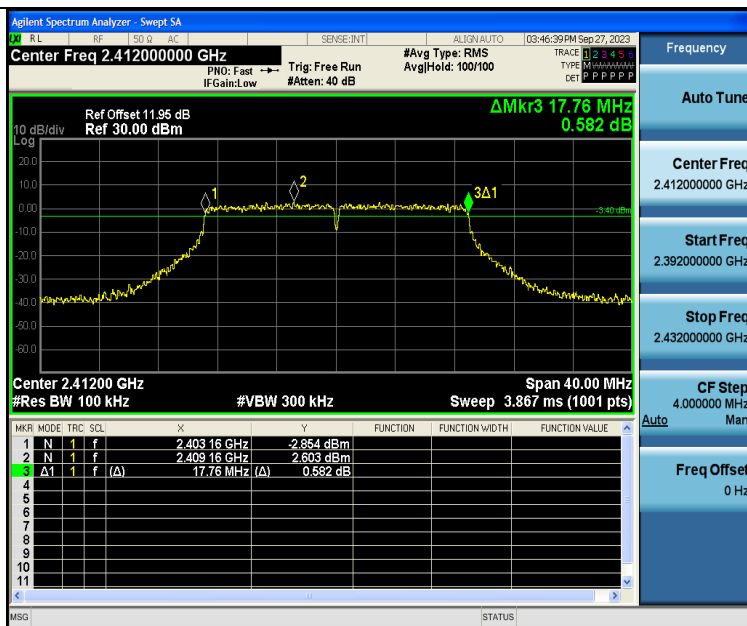


11N20SISO-Ant1-2412-PASS

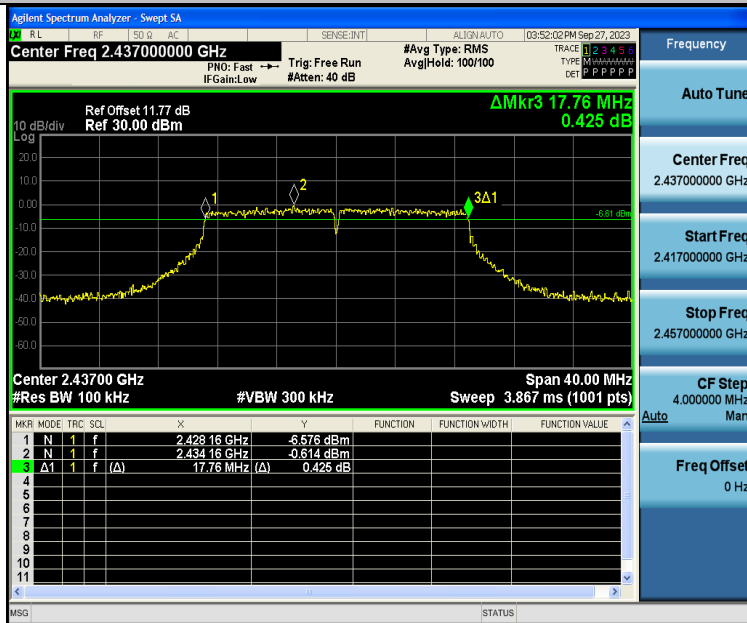


11N20SISO-Ant1-2437-PASS



11N20SISO-Ant1-2462-PASS

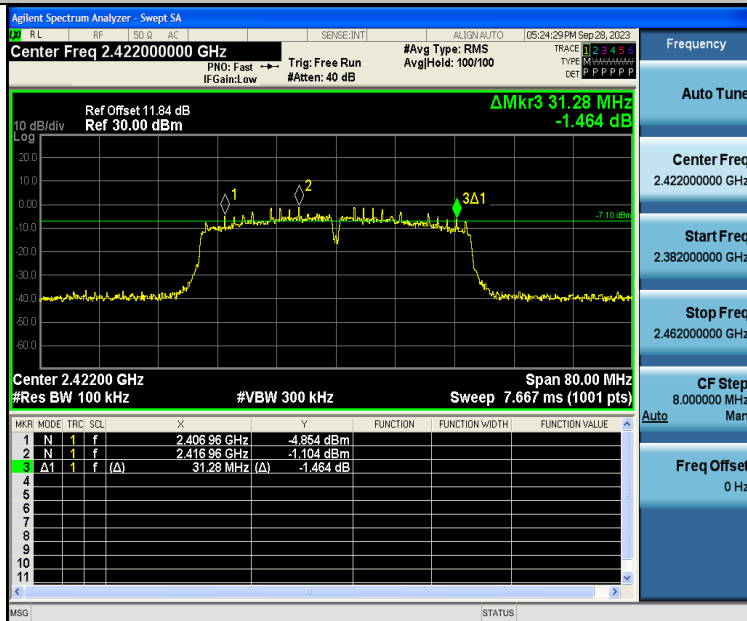

11N40SISO-Ant1-2422-PASS

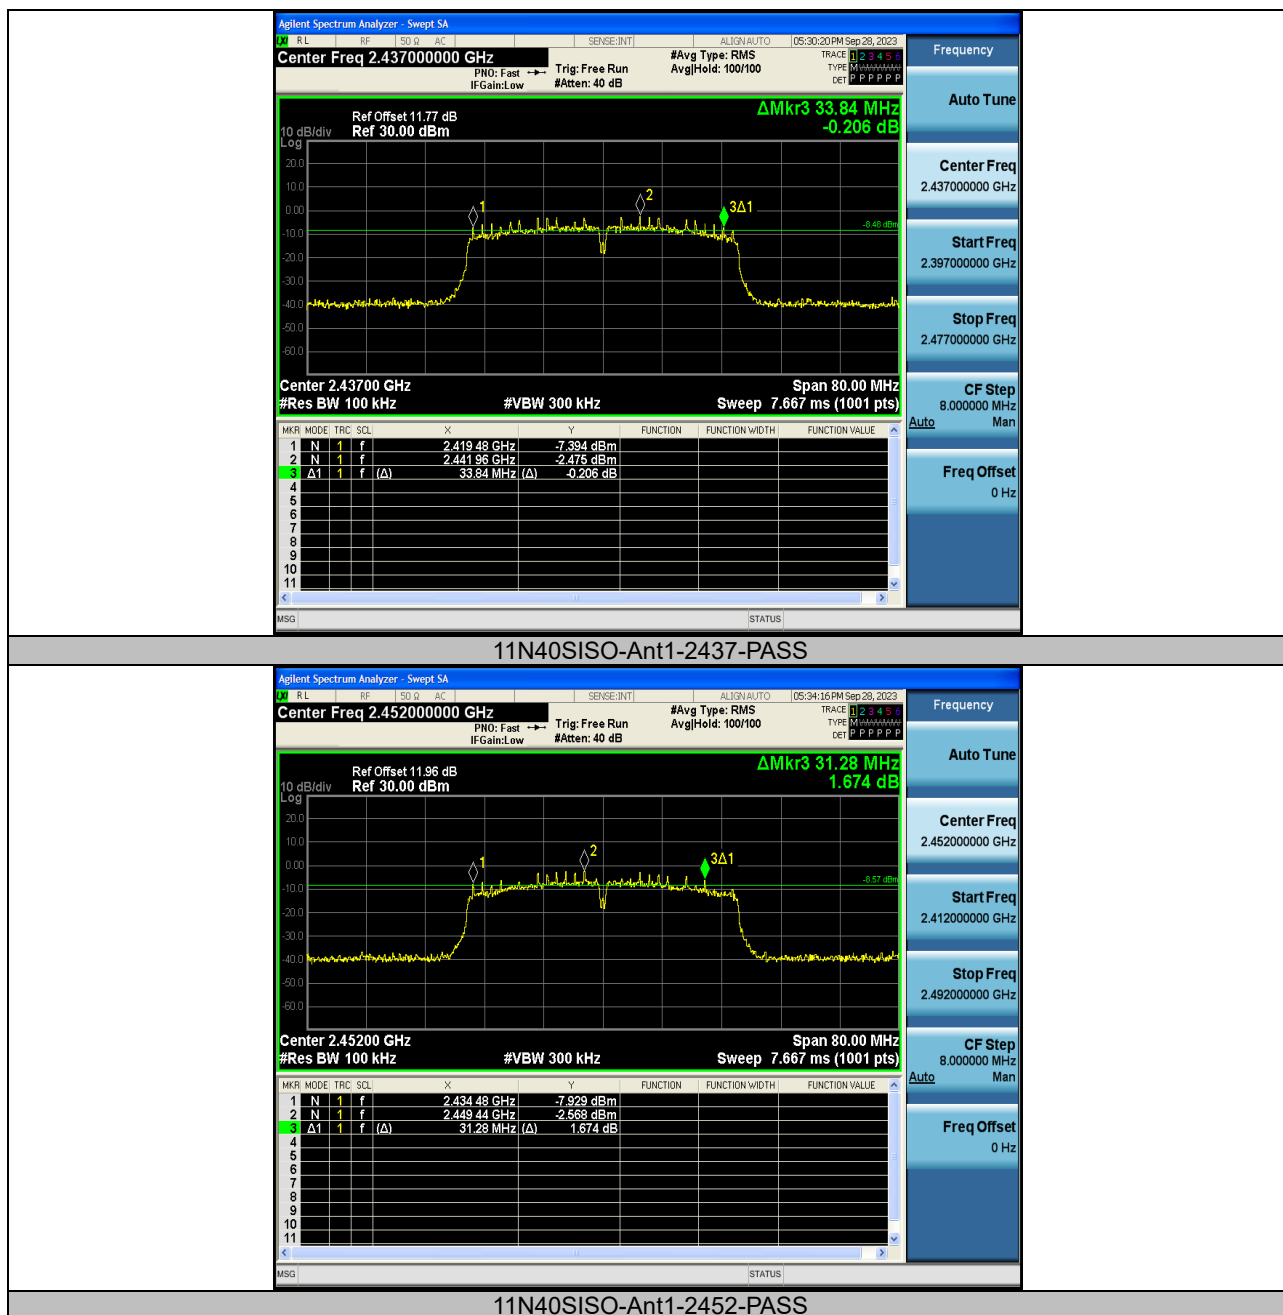


Occupied Channel Bandwidth


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.118	2404.9798	2419.0978	---	---
11B	Ant1	2437	14.114	2429.9768	2444.0908	---	---
11B	Ant1	2462	14.170	2454.9528	2469.1228	---	---
11G	Ant1	2412	17.267	2403.2959	2420.5629	---	---
11G	Ant1	2437	17.183	2428.3603	2445.5433	---	---



11G	Ant1	2462	17.261	2453.3070	2470.5680	---	---
11N20SISO	Ant1	2412	18.254	2402.9038	2421.1578	---	---
11N20SISO	Ant1	2437	18.264	2427.9014	2446.1654	---	---
11N20SISO	Ant1	2462	18.250	2452.8946	2471.1446	---	---
11N40SISO	Ant1	2422	35.654	2404.1391	2439.7931	---	---
11N40SISO	Ant1	2437	35.745	2419.1057	2454.8507	---	---
11N40SISO	Ant1	2452	35.700	2434.1486	2469.8486	---	---

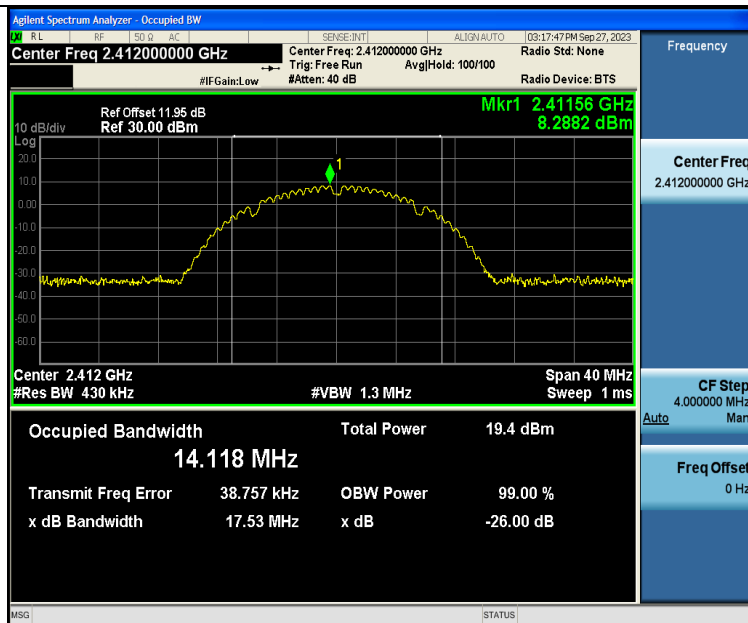

11B-Ant1-2412

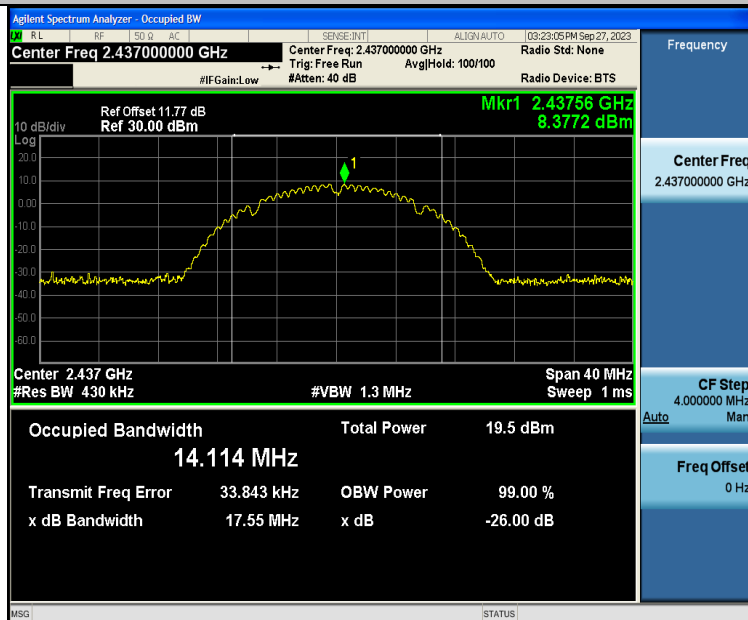


11B-Ant1-2437




11B-Ant1-2462




11G-Ant1-2412

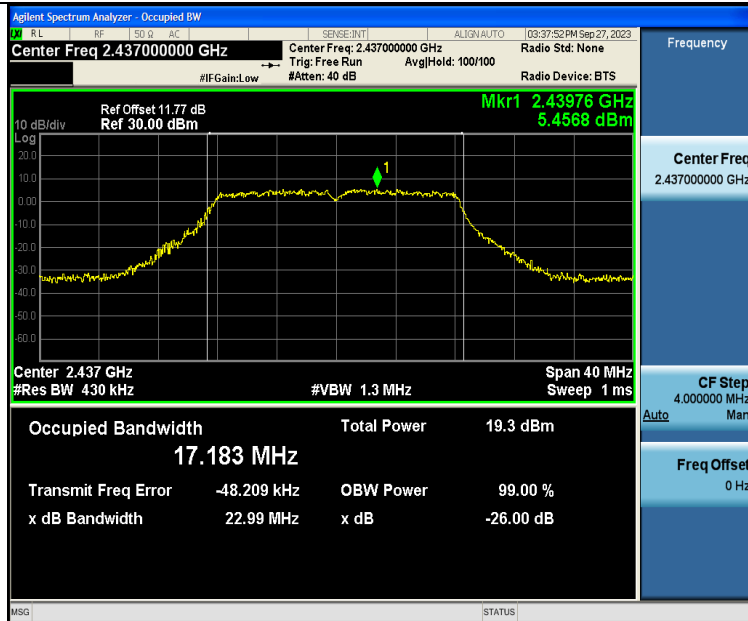

11G-Ant1-2437

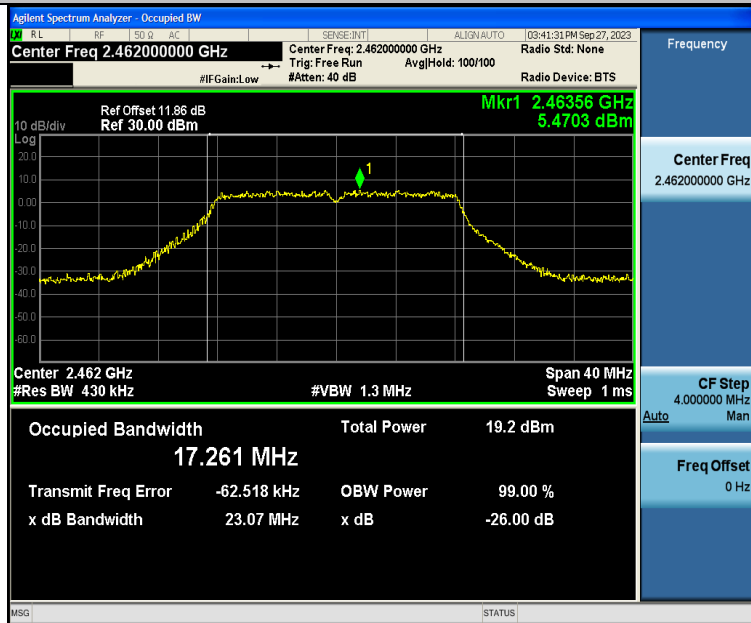

11G-Ant1-2462

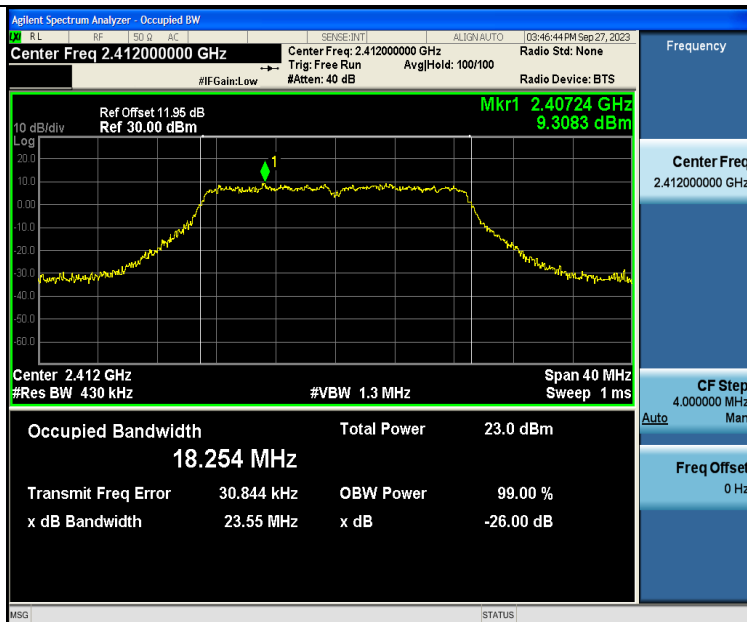

11N20SISO-Ant1-2412



11N20SISO-Ant1-2437



11N20SISO-Ant1-2462



11N40SISO-Ant1-2422



11N40SISO-Ant1-2437



11N40SISO-Ant1-2452




10 Maximum Peak conducted output power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

10.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.2.3.
2. The RF output of EUT Connect the antenna port(s) to the Power Meter input. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. Test set-up(block diagram of configuration):



10.2 Test Result

TestMode	Antenna	Frequency[MHz]	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	---	19.05	≤30.00	PASS
11B	Ant1	2437	---	19.13	≤30.00	PASS
11B	Ant1	2462	---	18.95	≤30.00	PASS
11G	Ant1	2412	---	18.22	≤30.00	PASS
11G	Ant1	2437	---	18.33	≤30.00	PASS
11G	Ant1	2462	---	18.22	≤30.00	PASS
11N20SISO	Ant1	2412	---	18.26	≤30.00	PASS
11N20SISO	Ant1	2437	---	18.55	≤30.00	PASS
11N20SISO	Ant1	2462	---	18.53	≤30.00	PASS
11N40SISO	Ant1	2422	---	17.32	≤30.00	PASS
11N40SISO	Ant1	2437	---	17.43	≤30.00	PASS
11N40SISO	Ant1	2452	---	16.86	≤30.00	PASS




11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


11.1 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span = 1.5 times the DTS bandwidth
RBW = 3KHz, VBW = 10KHz
Sweep time = auto couple
Detector = power averaging (rms) or sample detector (when rms not available)
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.
6. Test set-up(block diagram of configuration):




11.2 Test Result


TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.04	≤8.00	PASS
11B	Ant1	2437	-12.98	≤8.00	PASS
11B	Ant1	2462	-13.12	≤8.00	PASS
11G	Ant1	2412	-15.03	≤8.00	PASS
11G	Ant1	2437	-14.9	≤8.00	PASS
11G	Ant1	2462	-15.1	≤8.00	PASS
11N20SISO	Ant1	2412	-11.22	≤8.00	PASS
11N20SISO	Ant1	2437	-14.9	≤8.00	PASS
11N20SISO	Ant1	2462	-14.99	≤8.00	PASS
11N40SISO	Ant1	2422	-15.8	≤8.00	PASS
11N40SISO	Ant1	2437	-17.26	≤8.00	PASS
11N40SISO	Ant1	2452	-17.07	≤8.00	PASS

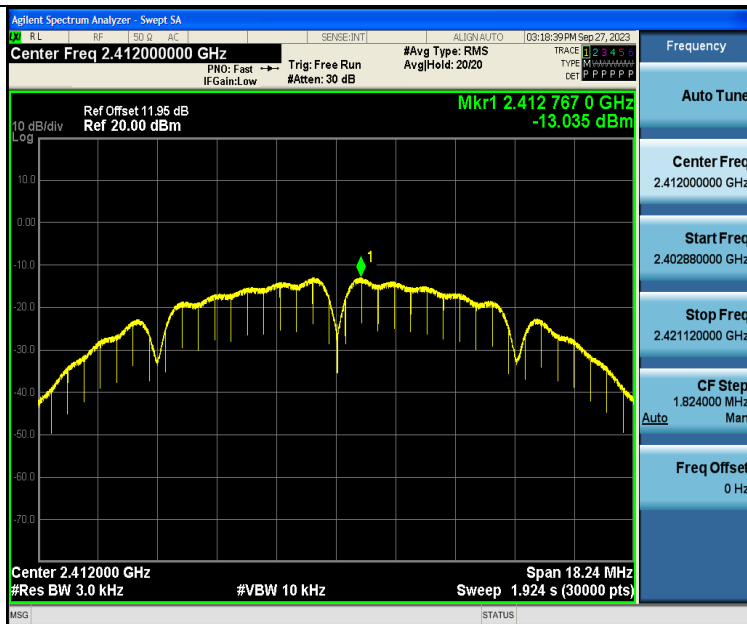


11B-Ant1-2412-PASS

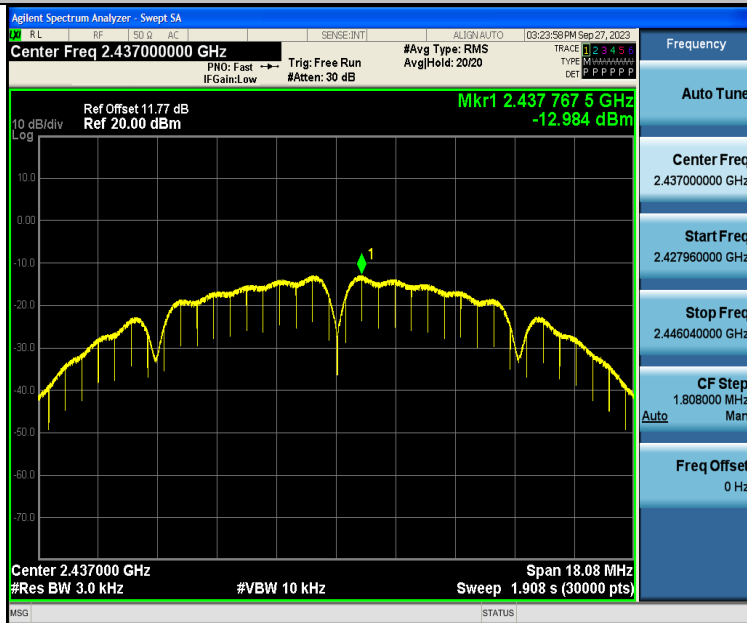


11B-Ant1-2437-PASS

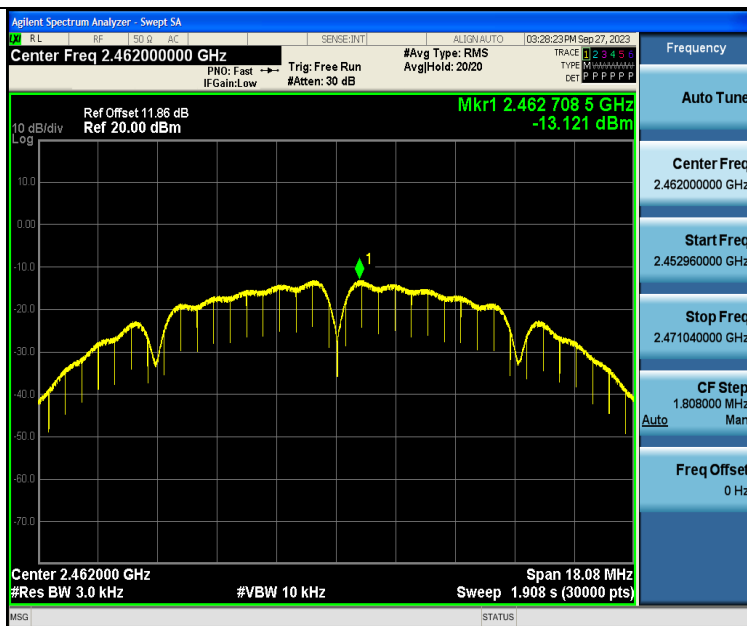


11B-Ant1-2462-PASS

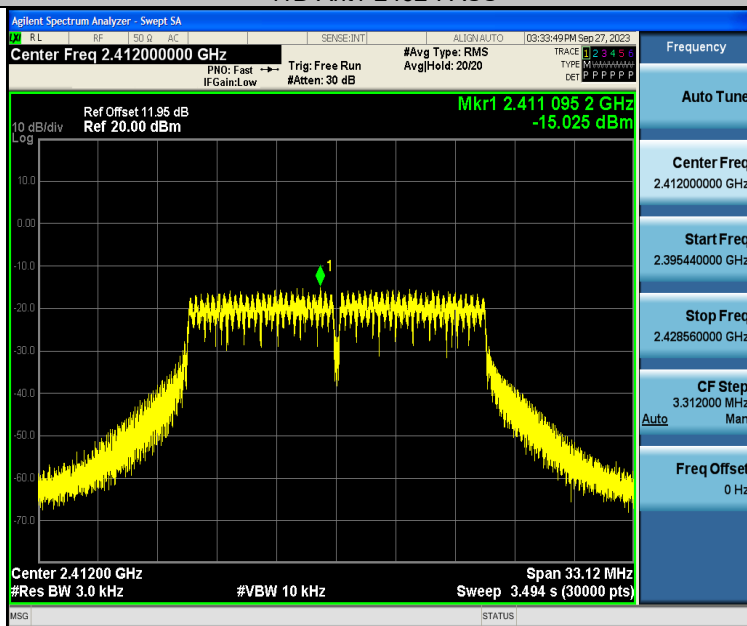


11G-Ant1-2412-PASS

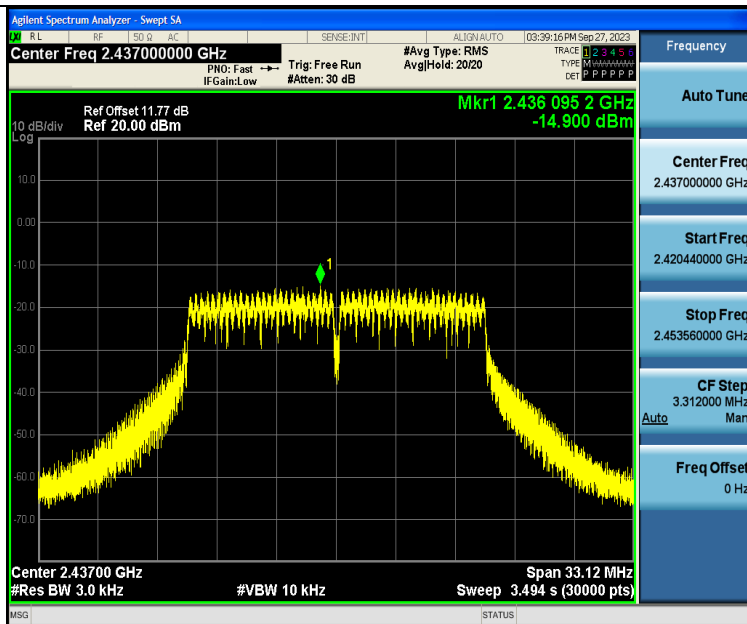


11G-Ant1-2437-PASS

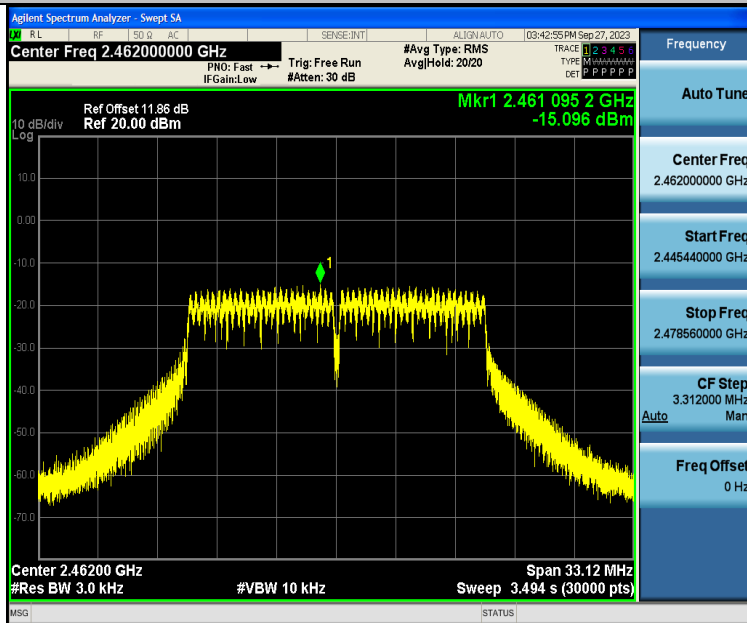


11G-Ant1-2462-PASS

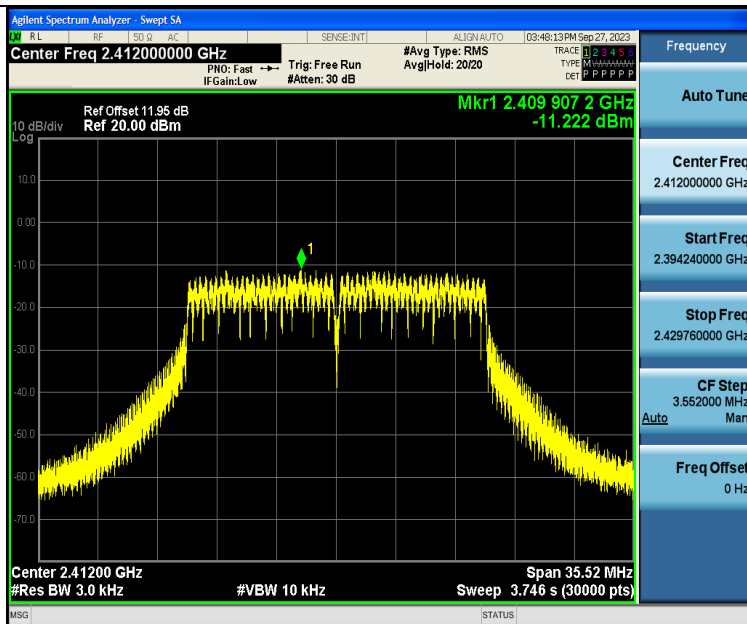


11N20SISO-Ant1-2412-PASS

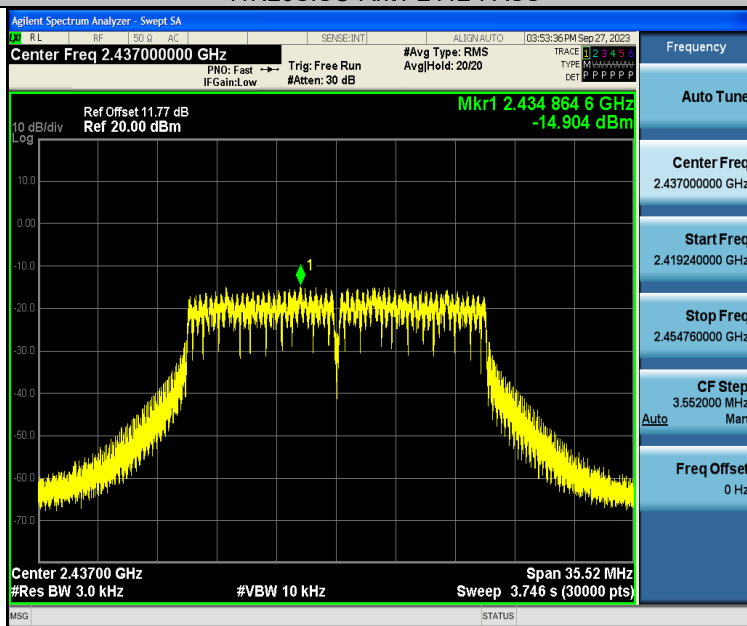


11N20SISO-Ant1-2437-PASS

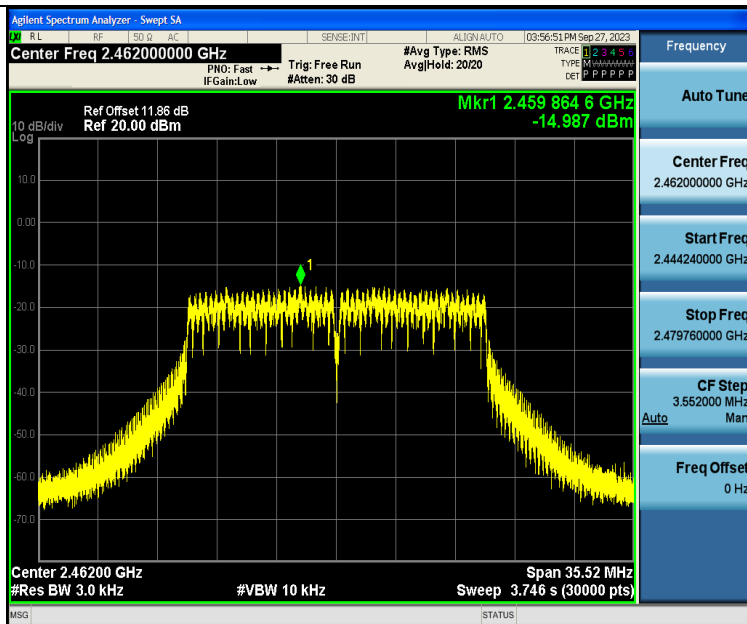


11N20SISO-Ant1-2462-PASS

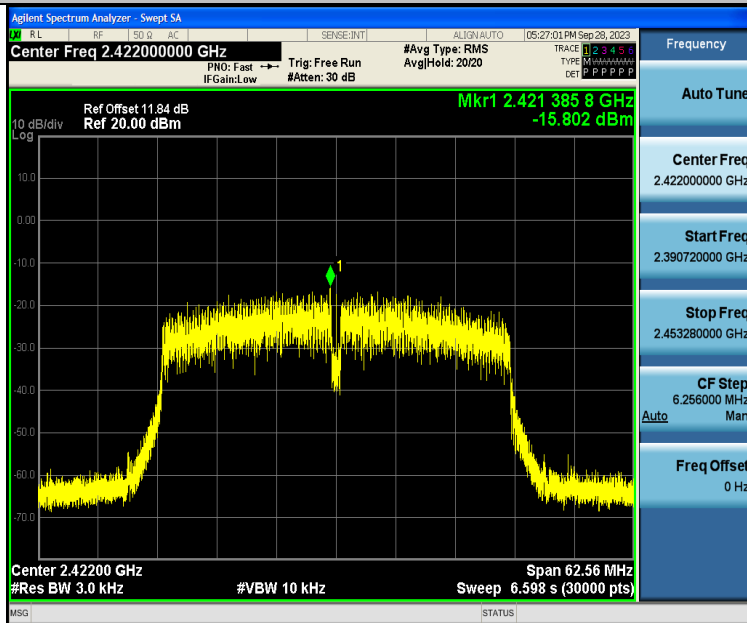

11N40SISO-Ant1-2422-PASS

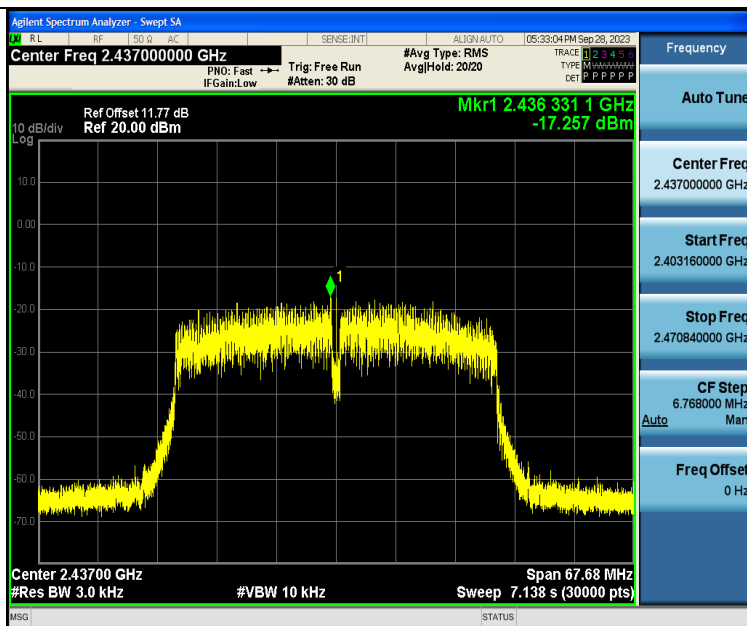

11N40SISO-Ant1-2437-PASS

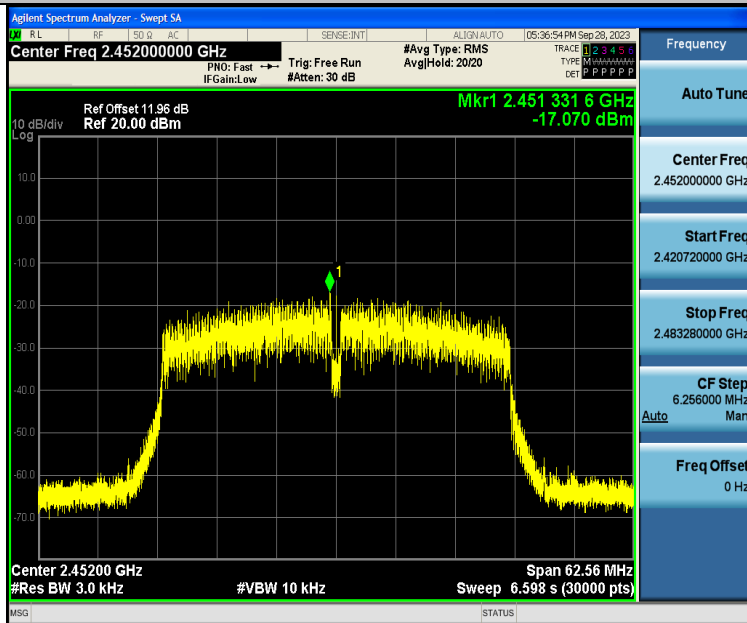

11N40SISO-Ant1-2452-PASS



12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result


The EUT'S antenna, permanent attached antenna, is PCB Antenna. The antenna's gain is 4.54 dBi and meets the requirement.

13 Test Setup


Conducted Emissions



Radiated Spurious Emissions
From 30MHz-1000MHz

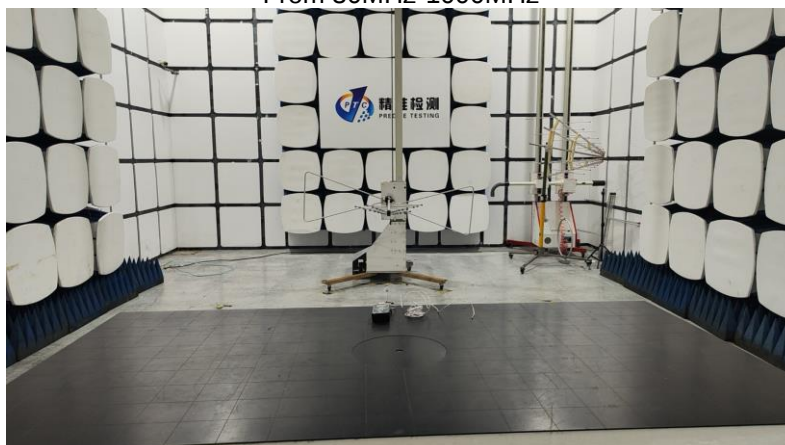

Test frequency from Above 1GHz

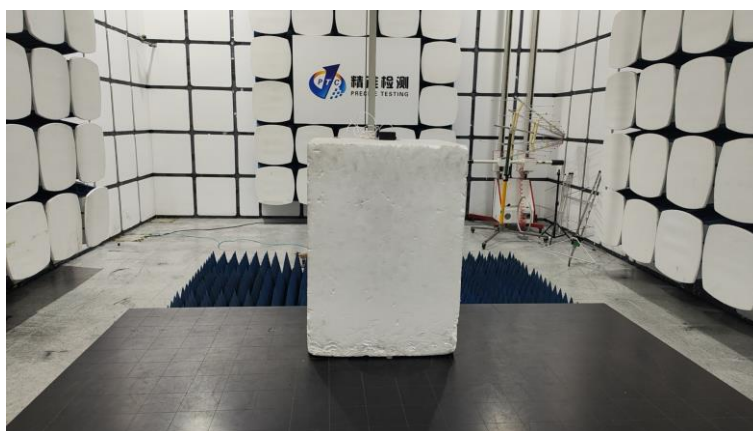



Report No.: PTC2307170220201E-FC01

14 EUT PHOTOS

Please reference "EUT Photos".

*****END*****