

TEST REPORT

Report No.: BCTC2205535730-2E

Applicant: UMOVAL IoT Technology Co., Ltd

Product Name: 3G/4G LTE Solar Security PTZ Cameras

Model/Type
reference: UM-Q6-4G

Tested Date: 2022-05-26 to 2022-06-30

Issued Date: 2022-06-30



Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A7FT-UM-Q6-4G

Product Name: 3G/4G LTE Solar Security PTZ Cameras

Trademark: **UMOVAL**

Model/Type reference: UM-Q6-4G
UM-Q6-4G-BK, UM-Q6-4G-WH, UM-Q7-4G-BK, UM-Q7-4G-WH,
UM-Q8-4G-BK, UM-Q8-4G-WH, UM-Q9-4G-BK, UM-Q9-4G-WH,
UM-Q10-4G-BK, UM-Q10-4G-WH, UM-Q11-4G-BK, UM-Q11-4G-WH,
UM-Q12-4G-BK, UM-Q12-4G-WH

Prepared For: UMOVAL IoT Technology Co., Ltd

Address: 1502-H, Bldg 3A, Tian'an Cyber Park, 449 North Huangge Road, Longgang District,
Shenzhen, China 518172

Manufacturer: UMOVAL Technology (Shenzhen) Co., Ltd

Address: 1502H, Bldg 3A, Tian'an Cyber Park, 449 North Huangge Road, Longgang District,
Shenzhen, Guangdong, China 518172

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2022-05-26

Sample tested Date: 2022-05-26 to 2022-06-30

Issue Date: 2022-06-30


Report No.: BCTC2205535730-2E

Test Standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22
FCC CFR Title 47 Part 24
FCC CFR Title 47 Part 27

Test Results: PASS

Remark: This is radio test report for 4G in US full bands.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.2 Emission Designator	9
4.3 Description Operation Frequency	12
4.4 Test Mode	15
4.5 Support Equipment	18
4.6 Measurement Results Explanation Example.....	18
5. Test Facility And Test Instrument Used.....	19
5.1 Test Facility	19
5.2 Test Instrument Used.....	19
6. RF Output Power.....	20
6.1 Block Diagram Of Test Setup.....	20
6.2 Limit	22
6.3 Test procedure	22
6.4 Test Result.....	23
7. Peak-To-Average Ratio(PAR) Of Transmitter	30
7.1 Block Diagram Of Test Setup.....	30
7.2 Limit	30
7.3 Test procedure	30
7.4 Test Result.....	30
8. Emission Bandwidth	31
8.1 Block Diagram Of Test Setup.....	31
8.2 Standard Applicable	31
8.3 Test procedure	31
8.4 Test Result.....	31
9. Out of Band Emissions at Antenna Terminal.....	32
9.1 Block Diagram Of Test Setup.....	32
9.2 Limit	32
9.3 Test procedure	32
9.4 Test Result.....	32
10. Spurious Radiated Emissions.....	33
10.1 Block Diagram Of Test Setup.....	33
10.2 Limit	34
10.3 Test procedure	34
10.4 Test Result.....	35
11. Frequency Stability.....	40
11.1 Block Diagram Of Test Setup.....	40
11.2 Limit	40

11.3	Test procedure	40
11.4	Test Result	41
12.	EUT Photographs	42
13.	EUT Test Setup Photographs	43

(Note: N/A Means Not Applicable)

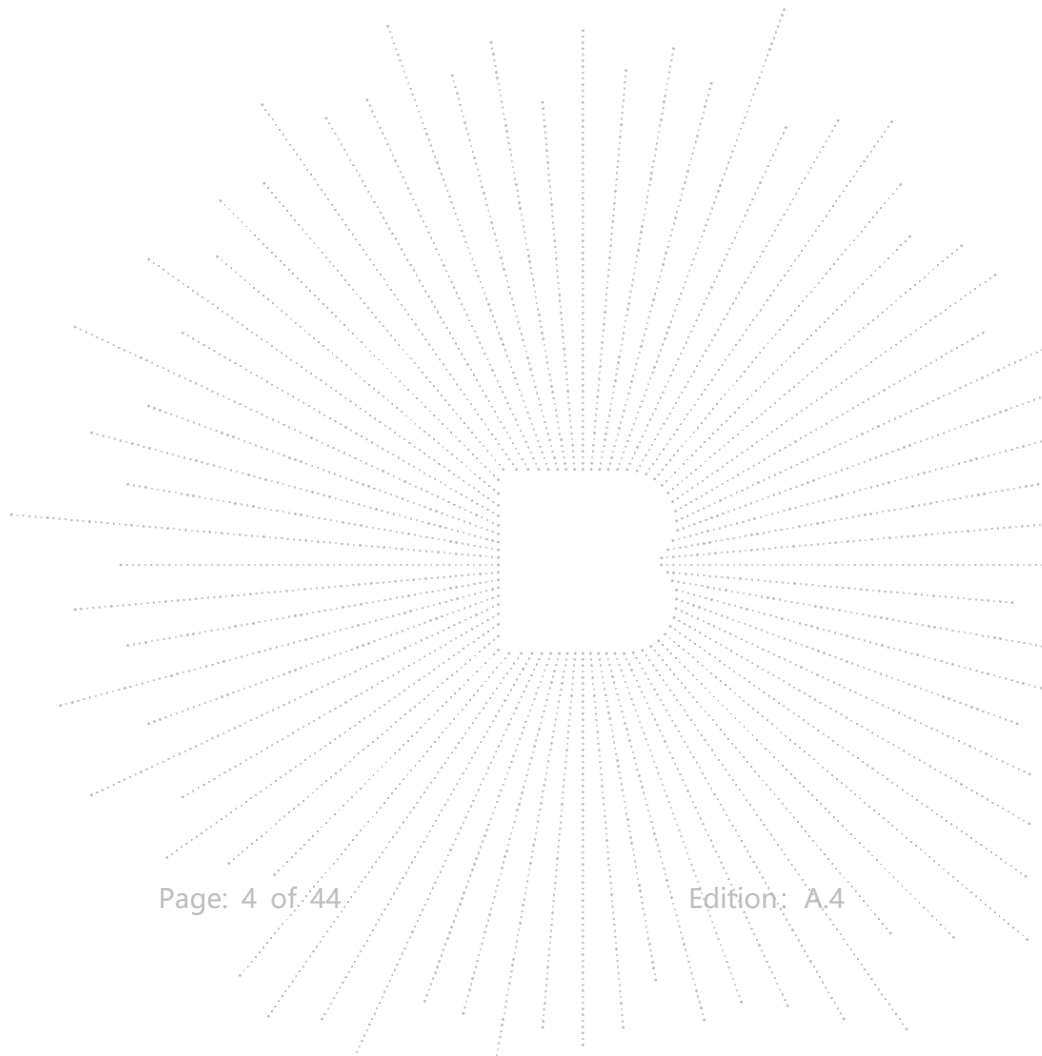

1. Version

Report No.	Issue Date	Description	Approved
BCTC2205535730-2E	2022-06-30	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	RF Exposure	§1.1307, §2.1093	PASS
2	RF Output Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b);	PASS
3	Peak-to-average Ratio(PAR) of Transmitter	§2.1046; §24.232(d) §27.50(d); §27.50(c); §27.50(b);	PASS
4	Emission Bandwidth	§2.1049; §24.238(b); §27.53;	PASS
5	Spurious Emissions at Antenna Terminal	§22.917 (a), §24.238 (a), §27.53(g), §27.53(h)	PASS
6	Spurious Radiation Emissions	§2.1051; §22.917(a); §27.53(h); §27.53(g); §27.53(c); §24.238(a);	PASS
7	Out of Band Emissions	§2.1051; §22.917(a); §27.53(h); §27.53(c); §27.53(g); §24.238(a);	PASS
8	Frequency Stability	§2.1055; §22.355; §27.54; §24.235;	PASS

3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	$U=4.3\text{dB}$
2	3m chamber Radiated spurious emission(9KHz-30MHz)	$U=3.7\text{dB}$
3	3m chamber Radiated spurious emission(1GHz-18GHz)	$U=4.5\text{dB}$
4	3m chamber Radiated spurious emission(18GHz-40GHz)	$U=3.34\text{dB}$
5	Conducted Emission (150kHz-30MHz)	$U=3.20\text{dB}$
6	Conducted Adjacent channel power	$U=1.38\text{dB}$
7	Conducted output power uncertainty Above 1G	$U=1.576\text{dB}$
8	Conducted output power uncertainty below 1G	$U=1.28\text{dB}$
9	humidity uncertainty	$U=5.3\%$
10	Temperature uncertainty	$U=0.59^{\circ}\text{C}$

4. Product Information And Test Setup

4.1 Product Information


Model/Type reference:	UM-Q6-4G UM-Q6-4G-BK, UM-Q6-4G-WH, UM-Q7-4G-BK, UM-Q7-4G-WH, UM-Q8-4G-BK, UM-Q8-4G-WH, UM-Q9-4G-BK, UM-Q9-4G-WH, UM-Q10-4G-BK, UM-Q10-4G-WH, UM-Q11-4G-BK, UM-Q11-4G-WH, UM-Q12-4G-BK, UM-Q12-4G-WH
Model differences:	The main differences are on appearances, colors and video resolutions. Same working principles and RF modules.
Hardware Version:	N/A
Software Version:	N/A
Tx Frequency:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~787 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~698 MHz
Rx Frequency:	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 13: 764 MHz ~756 MHz LTE Band 66: 2110 MHz ~ 2180 MHz LTE Band 71: 617 MHz ~652 MHz
Bandwidth:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 5: 1.4MHz /3MHz /5MHz /10MHz LTE Band 12: 1.4MHz /3MHz /5MHz /10MHz LTE Band 13: 5MHz /10MHz LTE Band 66: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 71: 5MHz /10MHz /15MHz /20MHz
Maximum Output Power to Antenna:	LTE Band 2: 22.38 dBm LTE Band 4: 21.92 dBm LTE Band 5: 22.9 dBm LTE Band 12: 22.96 dBm LTE Band 13: 22.98 dBm LTE Band 66: 22.32 dBm LTE Band 71: 22.25 dBm
99% Occupied Bandwidth:	LTE Band 2: 18M0G7D LTE Band 4: 18M1W7D LTE Band 5: 9M01G7D LTE Band 12: 9M01W7D LTE Band 13: 8M97W7D LTE Band 66: 18M1W7D LTE Band 71: 17M9G7D
Type of Modulation:	QPSK/16QAM
Antenna Type:	External Antenna
Antenna Gain:	LTE Band 2: 5 dBi LTE Band 4: 5 dBi

	LTE Band 5: 5 dBi LTE Band 12: 5 dBi LTE Band 13: 5 dBi LTE Band 66: 5 dBi LTE Band 71: 5 dBi
Connecting I/O Port(s):	Please refer to the User's Manual
Ratings:	Rated Voltage: 3.7V, Charging Voltage: 4.2V, Battery Capacity: 16,000mAh

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission



4.2 Emission Designator

LTE Band 2	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.547	1M10W7D	0.450
3	2M71G7D	0.515	2M71W7D	0.403
5	4M52G7D	0.493	4M52W7D	0.394
10	8M97G7D	0.516	8M96W7D	0.454
15	13M4G7D	0.511	13M5W7D	0.485
20	18M0G7D	0.536	17M9W7D	0.444

LTE Band 4	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.462	1M11W7D	0.358
3	2M71G7D	0.467	2M70W7D	0.389
5	4M52G7D	0.440	4M52W7D	0.348
10	8M96G7D	0.468	8M97W7D	0.372
15	13M5G7D	0.482	13M6W7D	0.385
20	18M1G7D	0.492	18M1W7D	0.356

LTE Band 5	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M11G7D	0.374	1M10W7D	0.307
3	2M71G7D	0.376	2M71W7D	0.326
5	4M53G7D	0.394	4M54W7D	0.282
10	9M01G7D	0.374	8M98W7D	0.305


LTE Band 12	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M11G7D	0.381	1M10W7D	0.286
3	2M71G7D	0.370	2M72W7D	0.309
5	4M54G7D	0.364	4M51W7D	0.302
10	8M96G7D	0.361	9M01W7D	0.287

LTE Band 13	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M53G7D	0.383	4M52W7D	0.293
10	8M96G7D	0.369	8M97W7D	0.331

LTE Band 66	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.540	1M10W7D	0.417

3	2M71G7D	0.764	2M71W7D	0.403
5	4M51G7D	0.474	4M53W7D	0.367
10	8M98G7D	0.495	8M97W7D	0.394
15	13M5G7D	0.505	13M6W7D	0.407
20	18M0G7D	0.511	18M1W7D	0.437

LTE Band 71	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M52G7D	0.324	4M51W7D	0.258
10	9M01G7D	0.313	8M99W7D	0.276
15	13M6G7D	0.305	13M5W7D	0.301
20	17M9G7D	0.348	17M9W7D	0.235

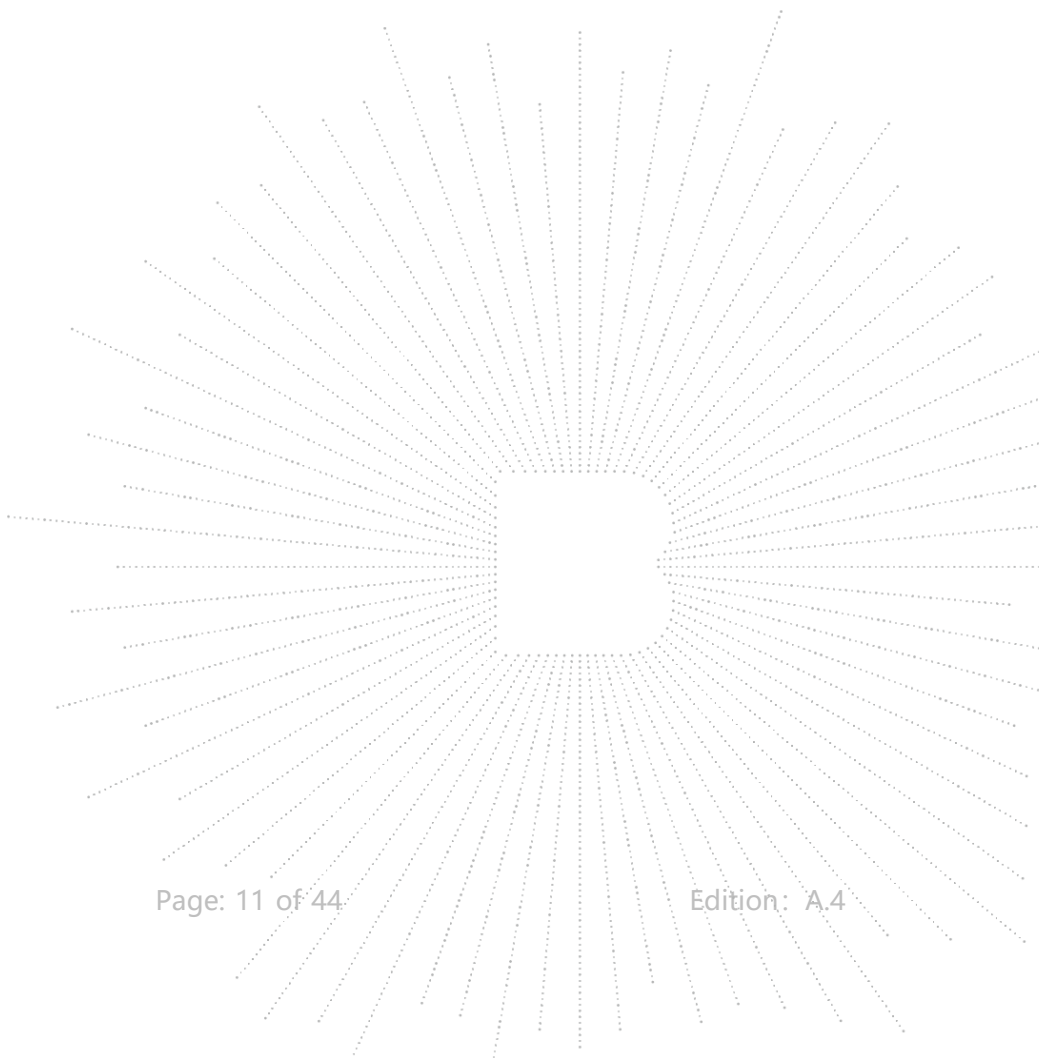

4.3 Description Operation Frequency

LTE Band 2(1.4MHz)		LTE Band 2(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18607	1850.7	18615	1851.5
18900	1880	18900	1880
19193	1909.3	19185	1908.5
LTE Band 2(5MHz)		LTE Band 2(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18625	1852.5	18650	1855
18900	1880	18900	1880
19175	1907.5	19150	1905
LTE Band 2(15MHz)		LTE Band 2(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18675	1857.5	18700	1860
18900	1880	18900	1880
19125	1902.5	19100	1900

LTE Band 4(1.4MHz)		LTE Band 4(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.7	19965	1711.5
20175	1732.5	20175	1732.5
20393	1754.3	20385	1753.5
LTE Band 4(5MHz)		LTE Band 4(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.5	20000	1715
20175	1732.5	20175	1732.5
20375	1752.5	20350	1750
LTE Band 4(15MHz)		LTE Band 4(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.5	20050	1720
20175	1732.5	20175	1732.5
20325	1747.5	20300	1745

LTE Band 5(1.4MHz)		LTE Band 5(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20407	824.7	20415	825.5
20525	836.5	20525	836.5
20643	848.3	20635	847.5
LTE Band 5(5MHz)		LTE Band 5(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20425	826.5	20450	829
20525	836.5	20525	836.5
20625	846.5	20600	844

LTE Band 12(1.4MHz)		LTE Band 12(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23017	699.7	23025	700.5
23095	707.5	23095	707.5
23173	715.3	23165	714.5
LTE Band 12(5MHz)		LTE Band 12(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23035	701.5	23060	704
23095	707.5	23095	707.5
23155	713.5	23130	711

LTE Band 13(5MHz)		LTE Band 13(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23205	779.5	23230	782
23230	782		
23255	784.5		

LTE Band 66(1.4MHz)		LTE Band 66(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131979	1710.7	131987	1711.5
132322	1745	132322	1745
132422	1755	132422	1755
132665	1779.3	132657	1778.5
LTE Band 66(5MHz)		LTE Band 66(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131997	1712.5	132022	1715
132322	1745	132322	1745
132422	1755	132422	1755
132647	1777.5	132622	1775
LTE Band 66(15MHz)		LTE Band 66(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
132047	1717.5	132072	1720
132322	1745	132322	1745
132422	1755	132422	1755
132597	1772.5	132572	1770

LTE Band 71(5MHz)		LTE Band 71(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
133147	665.5	133172	668
133297	680.5	133297	680.5
133447	695.5	133422	693
LTE Band 71(15MHz)		LTE Band 71(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
133197	670.5	133222	673
133297	680.5	133322	683
133397	690.5	133372	688

4.4 Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 2	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 4	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 5	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 12	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 13	QPSK Link (5MHz / 10MHz)	16QAM Link (5MHz / 10MHz)
LTE Band 66	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 71	QPSK Link (5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (5MHz / 10MHz / 15MHz / 20MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max.Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v				-	v	-
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v						
Peak-to-Average Ratio	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13							v	v						
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71							v	v						
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v						
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v						
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	-	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13							v	v						
	66	v	v	v	v	v	v	v	v	v	v	v	v	-	v
	71							v	v						
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	4	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	5	v	v	v	v	-	-	v	v	v	-	-	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v

	13							v	v						
	66	v	v	v	v	v	v	v	v	v	-	-	v	v	v
	71							v	v						
Frequency tability	2	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	4	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	5	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	12	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	13							v	v						
	66	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	71							v	v						
E.R.P./ E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v						
	66	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	71	-	-	v	v	v	v	v	v						
Radiated Spurious Emission	2	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	4	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	5	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	12	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	13							v	v						
	66	v	-	-	-	-	-	v	v	v	-	-	v	v	v
	71							v	v						
Note	1.The mark “v “ means that this configuration is chosen for testing 2.The mark “-“ means that this bandwidth is not supported.														

4.5 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	3G/4G LTE Solar Security PTZ Cameras	UMOVAL	UM-Q6-4G	Ref. the Section 4.1	EUT
E-2	Adapter	N/A	BCTC001	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.3M	USB cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Offset = RF cable loss + attenuator factor.

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583


5.2 Test Instrument Used

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 24, 2022	May 23, 2023
Receiver	R&S	ESRP	101154	May 24, 2022	May 23, 2023
Amplifier	SKET	LAPA_01G18G-45dB	\	May 24, 2022	May 23, 2023
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 24, 2022	May 23, 2023
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	942	May 26, 2022	May 25, 2023
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 26, 2022	May 25, 2023
band rejection filter	ZBSF	ZBSF-C2441.5	1706003606	May 24, 2022	May 23, 2023
Horn antenna	Schwarzbeck	BBHA9170	822	May 24, 2022	May 23, 2023
Preamplifier	MITEQ	TTA1840-35-HG	2034381	May 24, 2022	May 23, 2023
Loop Antenna	Schwarzbeck	FMZB1519B	14	May 24, 2022	May 23, 2023
RF cables1 (9kHz-30MHz)	Huber+Suhner	9kHz-30MHz	B1702988-0008	May 24, 2022	May 23, 2023
RF cables2 (30MHz-1GHz)	Huber+Suhner	30MHz-1GHz	1486150	May 24, 2022	May 23, 2023
RF cables3 (1GHz-40GHz)	Huber+Suhner	1GHz-40GHz	1607106	May 24, 2022	May 23, 2023
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
Spectrum Analyzer	Keysight	N9020A	MY49100060	May 24, 2022	May 23, 2023
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 24, 2022	May 23, 2023
Communication test set	R&S	CMW500	126173	Nov 12, 2021	Nov 11, 2022
Signal Generator	Keysight	N5182B	MY56200519	May 26, 2022	May 25, 2023
RF Room	SKET	RF Room	RF ROOM-1	Nov 05, 2021	Nov 04, 2022
Radio frequency control box	MAIWEI	MW200-RFCB	\	\	\
D.C. Power Supply	Keysight	E3642A	MY40003053	\	\
Programmable constant temperature and humidity test chamber	DGBELL	BTKS5-150C	\	May 26, 2022	May 25, 2023

6. RF Output Power


6.1 Block Diagram Of Test Setup

Conducted output power test method:




Radiated power test method:


(A) Radiated Emission Test-Up Frequency Below 30MHz

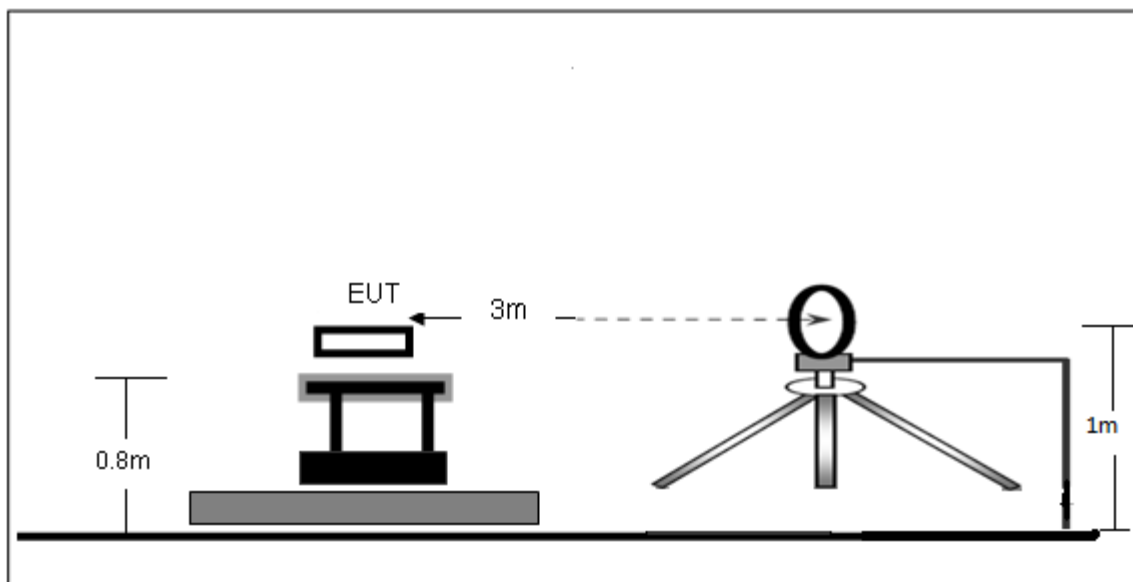

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

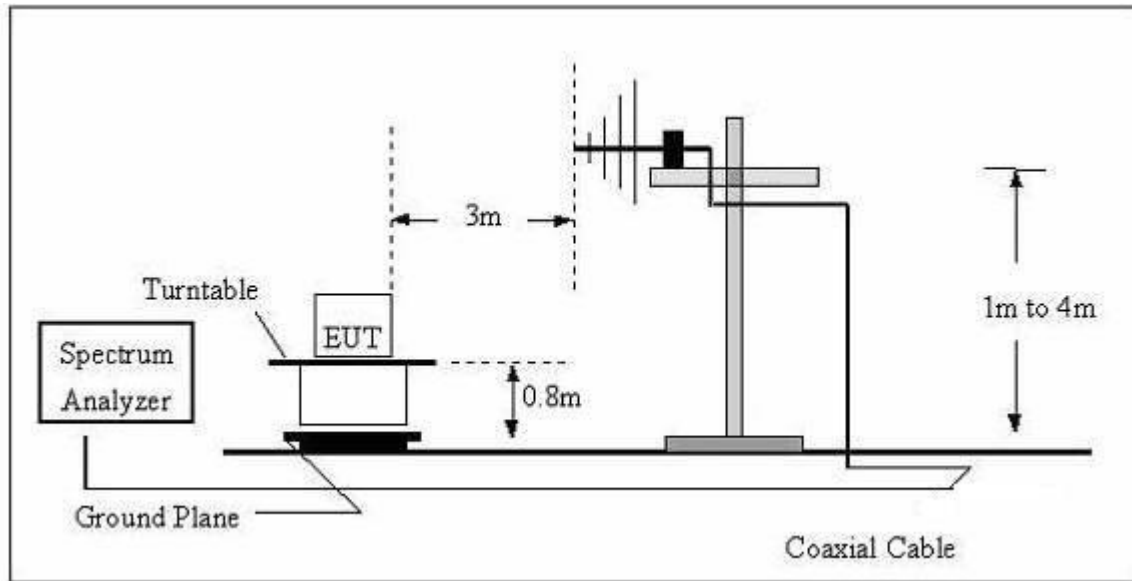

(C) Radiated Emission Test-Up Frequency Above 1GHz

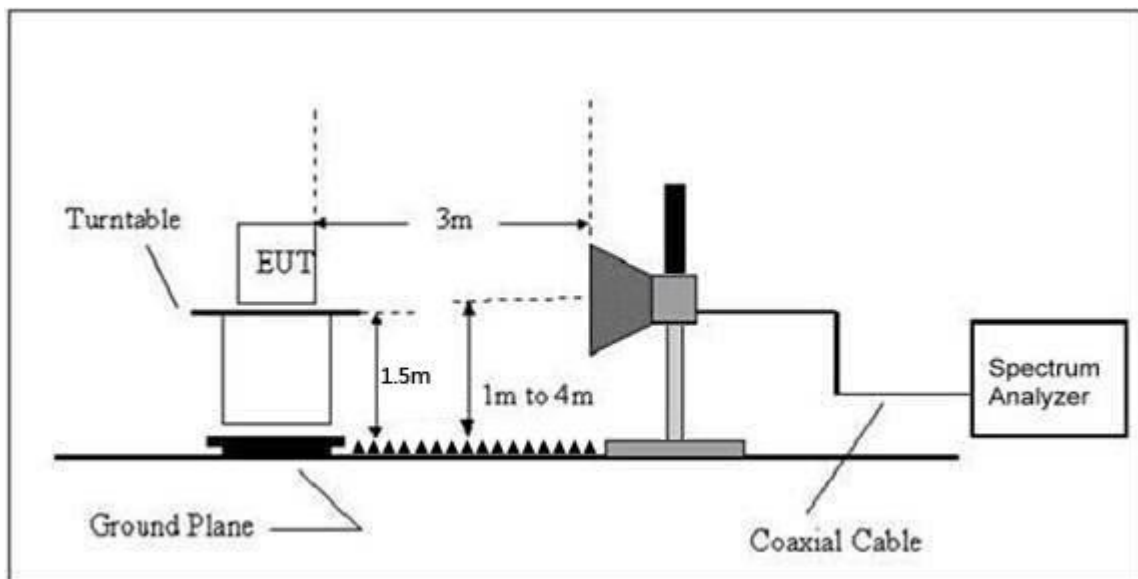

6.2 Limit

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.


According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

6.3 Test procedure

Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

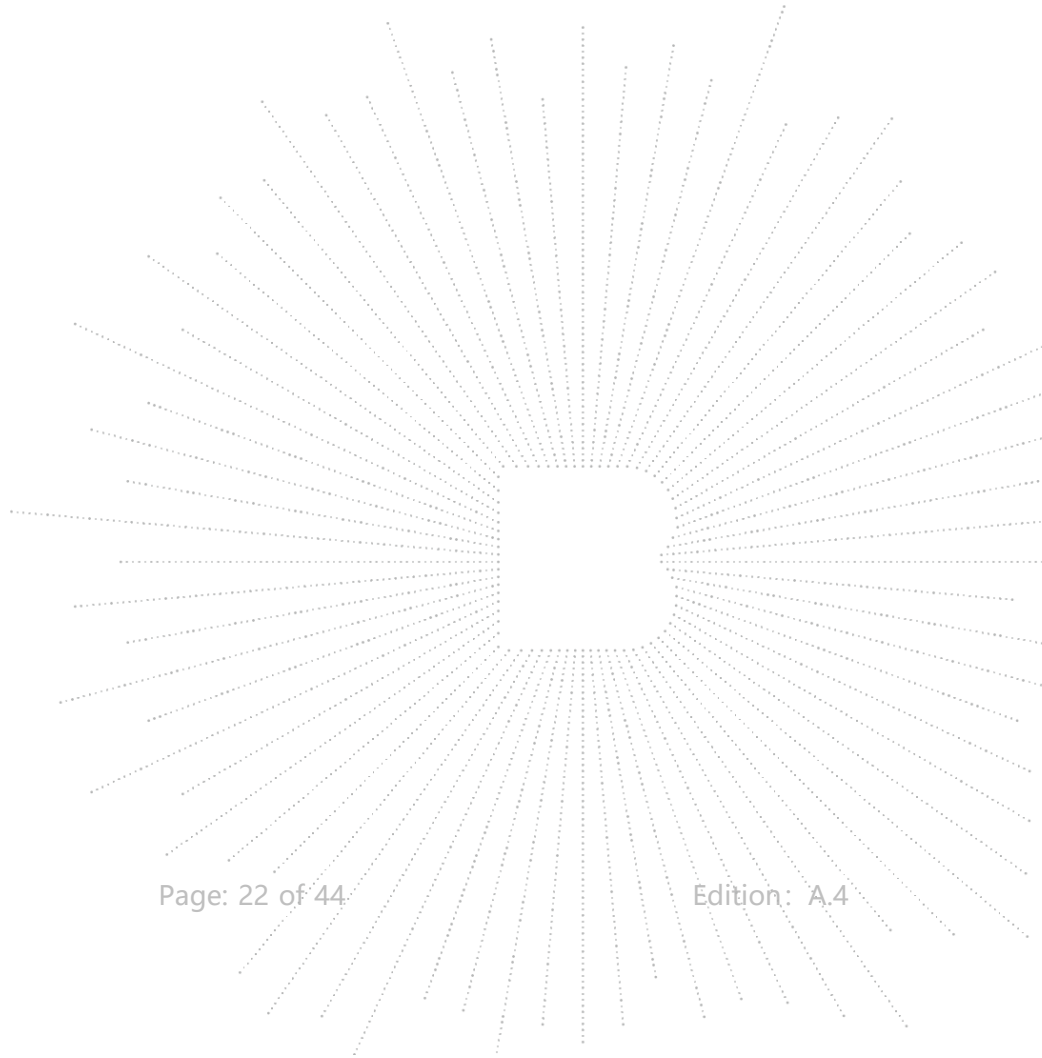

6.4 Test Result

Max Radiated Power:
FDD-LTE Band 2

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.48	PASS
	MCK	24.08	PASS
	HCH	23.66	PASS
16QAM	LCH	22.55	PASS
	MCK	23.23	PASS
	HCH	22.42	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.28	PASS
	MCK	23.82	PASS
	HCH	23.70	PASS
16QAM	LCH	22.75	PASS
	MCK	22.48	PASS
	HCH	22.56	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.43	PASS
	MCK	23.49	PASS
	HCH	23.63	PASS
16QAM	LCH	22.27	PASS
	MCK	22.48	PASS
	HCH	22.65	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	26.80	PASS
	MCK	27.13	PASS
	HCH	26.93	PASS
16QAM	LCH	26.57	PASS
	MCK	26.41	PASS
	HCH	26.19	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.50	PASS
	MCK	23.83	PASS
	HCH	23.63	PASS
16QAM	LCH	23.27	PASS
	MCK	23.11	PASS
	HCH	22.89	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.55	PASS
	MCK	23.99	PASS
	HCH	23.57	PASS
16QAM	LCH	22.38	PASS
	MCK	23.17	PASS
	HCH	22.40	PASS

FDD-LTE Band 4

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.08	PASS
	MCK	23.35	PASS
	HCH	23.16	PASS
16QAM	LCH	21.98	PASS
	MCK	22.24	PASS
	HCH	21.63	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.05	PASS
	MCK	23.39	PASS
	HCH	22.98	PASS
16QAM	LCH	22.60	PASS
	MCK	22.05	PASS
	HCH	21.76	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.07	PASS
	MCK	23.13	PASS
	HCH	23.08	PASS
16QAM	LCH	21.94	PASS
	MCK	22.11	PASS
	HCH	22.04	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.90	PASS
	MCK	23.40	PASS
	HCH	23.17	PASS
16QAM	LCH	22.40	PASS
	MCK	21.94	PASS
	HCH	22.05	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.98	PASS
	MCK	23.53	PASS
	HCH	23.33	PASS
16QAM	LCH	22.48	PASS
	MCK	22.41	PASS
	HCH	22.55	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	22.96	PASS
	MCK	23.62	PASS
	HCH	23.37	PASS
16QAM	LCH	21.94	PASS
	MCK	22.21	PASS
	HCH	21.96	PASS

FDD-LTE Band 5

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.27	PASS
	MCK	22.43	PASS
	HCH	22.02	PASS
16QAM	LCH	21.31	PASS
	MCK	21.57	PASS
	HCH	20.89	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.09	PASS
	MCK	22.45	PASS
	HCH	22.11	PASS
16QAM	LCH	21.83	PASS
	MCK	21.05	PASS
	HCH	21.01	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.17	PASS
	MCK	22.24	PASS
	HCH	22.65	PASS
16QAM	LCH	21.04	PASS
	MCK	21.15	PASS
	HCH	21.20	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.17	PASS
	MCK	22.43	PASS
	HCH	22.43	PASS
16QAM	LCH	21.54	PASS
	MCK	20.77	PASS
	HCH	21.12	PASS

FDD-LTE Band 12

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.51	PASS
	MCK	22.18	PASS
	HCH	22.20	PASS
16QAM	LCH	21.14	PASS
	MCK	20.92	PASS
	HCH	21.27	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.27	PASS
	MCK	22.19	PASS
	HCH	22.38	PASS
16QAM	LCH	21.60	PASS
	MCK	20.72	PASS
	HCH	20.99	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.31	PASS
	MCK	22.14	PASS
	HCH	22.00	PASS
16QAM	LCH	21.50	PASS
	MCK	20.91	PASS
	HCH	21.08	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.88	PASS
	MCK	22.21	PASS
	HCH	22.28	PASS
16QAM	LCH	21.41	PASS
	MCK	20.85	PASS
	HCH	21.28	PASS

FDD-LTE Band 13

Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	22.53	PASS
	MCK	22.21	PASS
	HCH	22.23	PASS
16QAM	LCH	21.37	PASS
	MCK	20.98	PASS
	HCH	21.19	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	/	/	PASS
	23230	22.37	PASS
	/	/	PASS
16QAM	/	/	PASS
	23230	21.90	PASS
	/	/	PASS

FDD-LTE Band 66

Channel Bandwidth: 1.4MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.45	PASS
	MCK	24.02	PASS
	HCH	23.20	PASS
16QAM	LCH	22.33	PASS
	MCK	22.90	PASS
	HCH	22.07	PASS
Channel Bandwidth: 3MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.33	PASS
	MCK	25.53	PASS
	HCH	23.21	PASS
16QAM	LCH	22.75	PASS
	MCK	22.32	PASS
	HCH	22.26	PASS
Channel Bandwidth: 5MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.23	PASS
	MCK	23.46	PASS
	HCH	23.37	PASS
16QAM	LCH	22.21	PASS
	MCK	22.35	PASS
	HCH	22.12	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.18	PASS
	MCK	23.59	PASS
	HCH	23.65	PASS
16QAM	LCH	22.65	PASS
	MCK	22.43	PASS
	HCH	22.26	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.37	PASS
	MCK	23.73	PASS
	HCH	23.46	PASS
16QAM	LCH	22.70	PASS
	MCK	22.53	PASS
	HCH	22.80	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.I.R.P(dBm)	Verdict
QPSK	LCH	23.18	PASS
	MCK	23.78	PASS
	HCH	23.30	PASS
16QAM	LCH	22.05	PASS
	MCK	23.10	PASS
	HCH	21.76	PASS

FDD-LTE Band 71

Channel Bandwidth: 5MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.80	PASS
	MCK	21.36	PASS
	HCH	24.49	PASS
16QAM	LCH	20.71	PASS
	MCK	20.46	PASS
	HCH	20.81	PASS
Channel Bandwidth: 10MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.66	PASS
	MCK	21.63	PASS
	HCH	21.60	PASS
16QAM	LCH	21.11	PASS
	MCK	20.24	PASS
	HCH	20.28	PASS
Channel Bandwidth: 15MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.54	PASS
	MCK	21.55	PASS
	HCH	21.47	PASS
16QAM	LCH	21.49	PASS
	MCK	20.53	PASS
	HCH	21.02	PASS
Channel Bandwidth: 20MHz			
Modulation	Channel	E.R.P(dBm)	Verdict
QPSK	LCH	21.47	PASS
	MCK	22.11	PASS
	HCH	21.47	PASS
16QAM	LCH	20.41	PASS
	MCK	20.29	PASS
	HCH	20.20	PASS


Max Conducted output Power:

Please refer to appendix A: Conducted Output Power

Test Result: Pass

7. Peak-To-Average Ratio(PAR) Of Transmitter

7.1 Block Diagram Of Test Setup

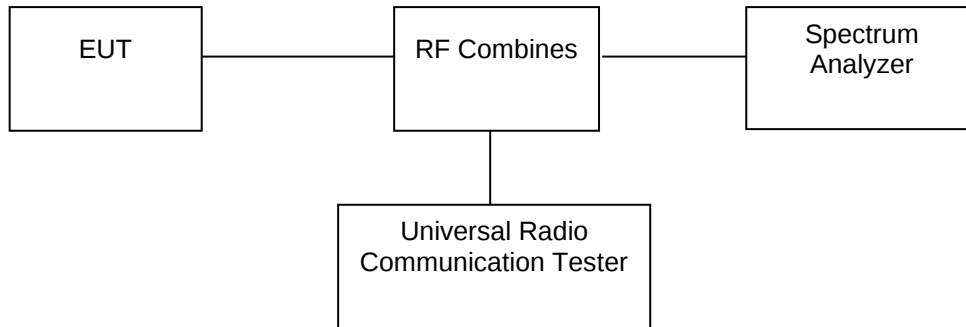

7.2 Limit

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.3 Test procedure


The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

7.4 Test Result

Please refer to Appendix 3: Peak-to-Average Ratio
Test Result: Pass

8. Emission Bandwidth

8.1 Block Diagram Of Test Setup

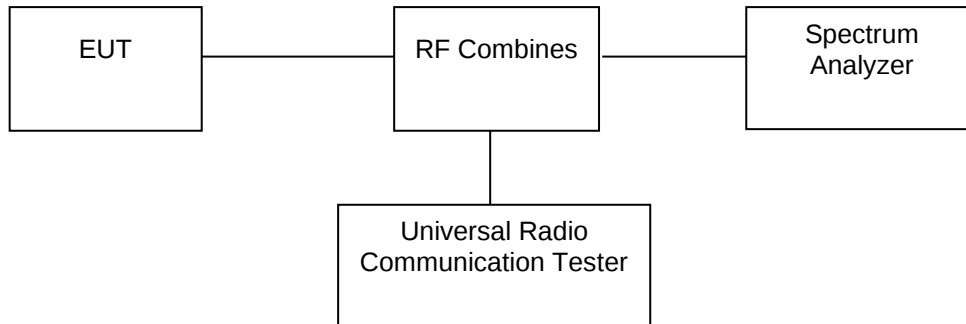

8.2 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.3 Test procedure


1. The testing follows FCC KDB 971168 D01v03 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

8.4 Test Result

Please refer to Appendix 4: Occupied BandWidth
Test Result: Pass

9. Out of Band Emissions at Antenna Terminal

9.1 Block Diagram Of Test Setup

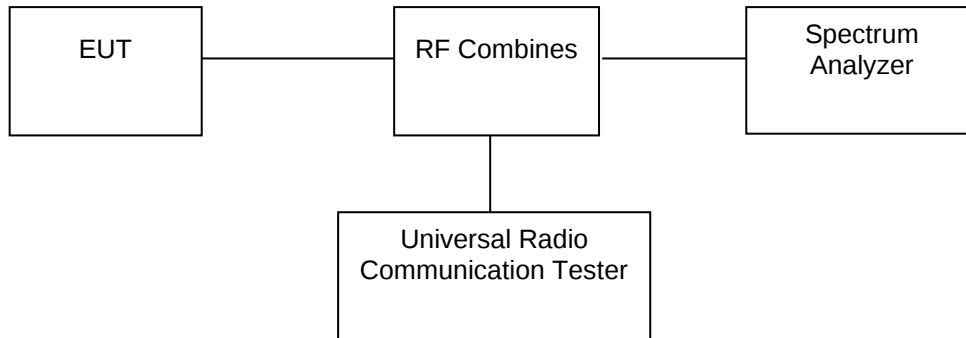

9.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

9.3 Test procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.


9.4 Test Result

Please refer to Appendix 5: Band Edge & Appendix 6: Out-of-band Emissions
Test Result: Pass


10. Spurious Radiated Emissions

10.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

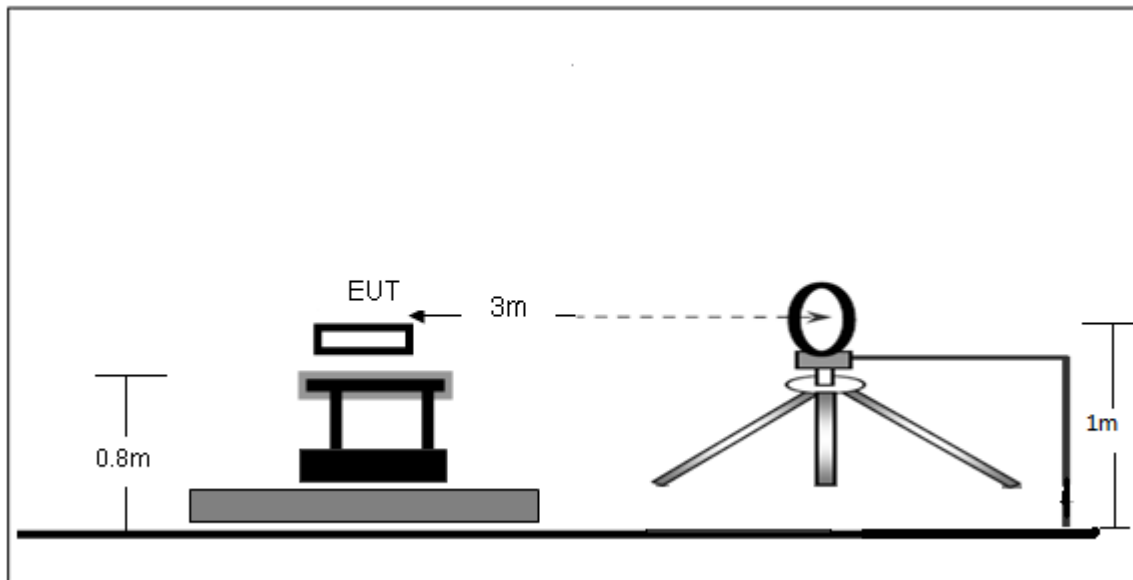

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

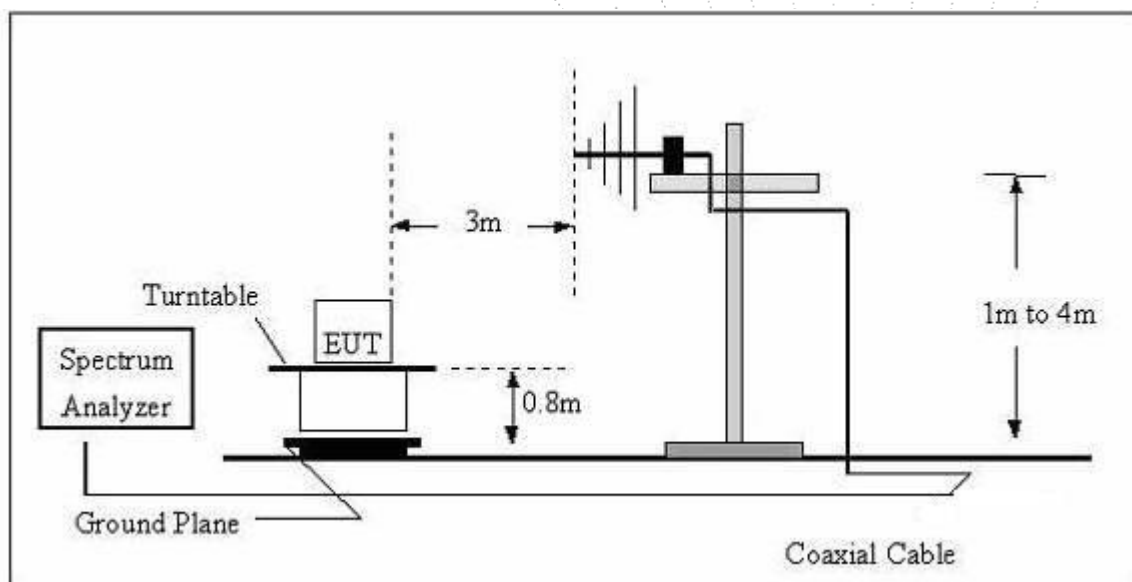

(C) Radiated Emission Test-Up Frequency Above 1GHz

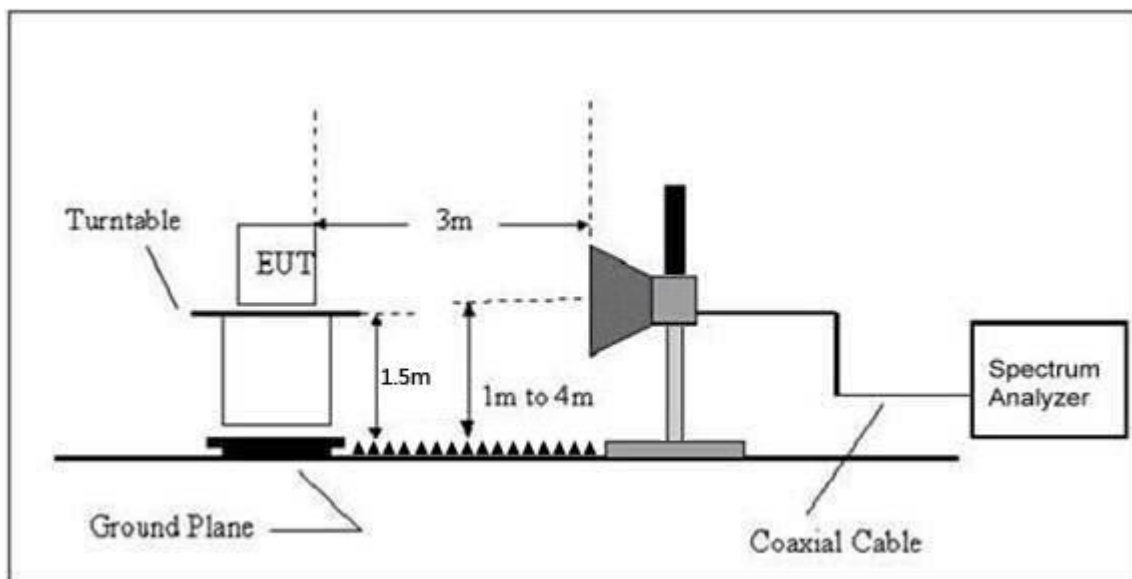

10.2 Limit

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

10.3 Test procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
 2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
 3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
 4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- Spurious attenuation limit in dB
 $= 43 + 10 \log_{10}(\text{power out in Watts})$

10.4 Test Result

For FDD-LTE Band 2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.5MHz)						
72.55	-44.07	-15.75	-59.81	-13.00	-46.81	H
3704.80	-26.85	-17.43	-44.28	-13.00	-31.28	H
5557.20	-29.03	-11.73	-40.76	-13.00	-27.76	H
72.55	-41.73	-15.75	-57.48	-13.00	-44.48	V
3704.80	-27.13	-17.43	-44.56	-13.00	-31.56	V
5557.20	-31.37	-11.73	-43.10	-13.00	-30.10	V
Middle Channel (1880MHz)						
72.55	-42.08	-15.75	-57.83	-13.00	-44.83	H
3760.00	-24.17	-16.98	-41.15	-13.00	-28.15	H
5640.00	-30.91	-11.33	-42.24	-13.00	-29.24	H
72.55	-43.69	-15.75	-59.44	-13.00	-46.44	V
3760.00	-26.19	-16.98	-43.17	-13.00	-30.17	V
5640.00	-29.83	-11.33	-41.16	-13.00	-28.16	V
High Channel (1907.5MHz)						
72.55	-42.58	-15.75	-58.33	-13.00	-45.33	H
3815.00	-24.61	-16.52	-41.13	-13.00	-28.13	H
5722.50	-31.28	-10.93	-42.21	-13.00	-29.21	H
72.55	-43.30	-15.75	-59.05	-13.00	-46.05	V
3815.00	-29.11	-16.52	-45.63	-13.00	-32.63	V
5722.50	-31.57	-10.93	-42.50	-13.00	-29.50	V

For FDD-LTE Band 4 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1710.7MHz)						
72.55	-44.31	-15.75	-60.05	-13.00	-47.05	H
3421.40	-24.57	-17.43	-42.00	-13.00	-29.00	H
5132.10	-30.91	-11.73	-42.64	-13.00	-29.64	H
72.55	-44.61	-15.75	-60.36	-13.00	-47.36	V
3421.40	-28.76	-17.43	-46.19	-13.00	-33.19	V
5132.10	-30.17	-11.73	-41.90	-13.00	-28.90	V
Middle Channel (1732.5MHz)						
72.55	-42.77	-15.75	-58.52	-13.00	-45.52	H
3465.00	-25.24	-16.98	-42.22	-13.00	-29.22	H
5197.50	-29.15	-11.33	-40.48	-13.00	-27.48	H
72.55	-42.06	-15.75	-57.81	-13.00	-44.81	V
3465.00	-28.46	-16.98	-45.44	-13.00	-32.44	V
5197.50	-28.43	-11.33	-39.76	-13.00	-26.76	V
High Channel (1754.3MHz)						
72.55	-44.69	-15.75	-60.43	-13.00	-47.43	H
3508.60	-24.71	-16.52	-41.23	-13.00	-28.23	H
5262.90	-32.17	-10.93	-43.10	-13.00	-30.10	H
72.55	-42.68	-15.75	-58.42	-13.00	-45.42	V
3508.60	-26.02	-16.52	-42.54	-13.00	-29.54	V
5262.90	-28.91	-10.93	-39.84	-13.00	-26.84	V

For FDD-LTE Band 5 Mode


Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.7MHz)						
72.55	-44.30	-15.75	-60.05	-13.00	-47.05	H
1649.40	-24.64	-17.43	-42.07	-13.00	-29.07	H
2474.10	-29.89	-11.73	-41.62	-13.00	-28.62	H
72.55	-44.34	-15.75	-60.09	-13.00	-47.09	V
1649.40	-26.06	-17.43	-43.49	-13.00	-30.49	V
2474.10	-29.78	-11.73	-41.51	-13.00	-28.51	V
Middle Channel (836.5MHz)						
72.55	-44.46	-15.75	-60.21	-13.00	-47.21	H
1673.00	-24.42	-16.98	-41.40	-13.00	-28.40	H
2509.50	-30.75	-11.33	-42.08	-13.00	-29.08	H
72.55	-43.16	-15.75	-58.91	-13.00	-45.91	V
1673.00	-27.59	-16.98	-44.57	-13.00	-31.57	V
2509.50	-31.85	-11.33	-43.18	-13.00	-30.18	V
High Channel (848.3MHz)						
72.55	-44.59	-15.75	-60.33	-13.00	-47.33	H
3508.60	-25.32	-16.52	-41.84	-13.00	-28.84	H
5262.90	-32.33	-10.93	-43.26	-13.00	-30.26	H
72.55	-41.53	-15.75	-57.28	-13.00	-44.28	V
3508.60	-29.11	-16.52	-45.63	-13.00	-32.63	V
5262.90	-29.15	-10.93	-40.08	-13.00	-27.08	V

For FDD-LTE Band 12 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (699.7MHz)						
72.55	-44.40	-15.75	-60.15	-13.00	-47.15	H
1399.40	-25.98	-17.43	-43.41	-13.00	-30.41	H
2099.10	-30.60	-11.73	-42.33	-13.00	-29.33	H
72.55	-43.28	-15.75	-59.03	-13.00	-46.03	V
1399.40	-27.42	-17.43	-44.85	-13.00	-31.85	V
2099.10	-29.76	-11.73	-41.49	-13.00	-28.49	V
Middle Channel (707.5MHz)						
72.55	-41.66	-15.75	-57.40	-13.00	-44.40	H
1415.00	-25.41	-16.98	-42.39	-13.00	-29.39	H
2122.50	-29.36	-11.33	-40.69	-13.00	-27.69	H
72.55	-41.92	-15.75	-57.66	-13.00	-44.66	V
1415.00	-26.99	-16.98	-43.97	-13.00	-30.97	V
2122.50	-28.38	-11.33	-39.71	-13.00	-26.71	V
High Channel (715.3MHz)						
72.55	-44.14	-15.75	-59.89	-13.00	-46.89	H
1430.60	-27.04	-16.52	-43.56	-13.00	-30.56	H
2145.90	-31.93	-10.93	-42.86	-13.00	-29.86	H
72.55	-44.67	-15.75	-60.42	-13.00	-47.42	V
1430.60	-28.73	-16.52	-45.25	-13.00	-32.25	V
2145.90	-31.31	-10.93	-42.24	-13.00	-29.24	V


For FDD-LTE Band 13 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (779.5MHz)						
72.55	-44.79	-15.75	-60.54	-13.00	-47.54	H
1559.00	-27.52	-17.43	-44.95	-13.00	-31.95	H
2338.50	-31.65	-11.73	-43.38	-13.00	-30.38	H
72.55	-43.58	-15.75	-59.33	-13.00	-46.33	V
1559.00	-26.97	-17.43	-44.40	-13.00	-31.40	V
2338.50	-29.20	-11.73	-40.93	-13.00	-27.93	V
Middle Channel (782MHz)						
72.55	-42.73	-15.75	-58.48	-13.00	-45.48	H
1564.00	-27.60	-16.98	-44.58	-13.00	-31.58	H
2346.00	-31.00	-11.33	-42.33	-13.00	-29.33	H
72.55	-43.19	-15.75	-58.94	-13.00	-45.94	V
1564.00	-29.80	-16.98	-46.78	-13.00	-33.78	V
2346.00	-29.70	-11.33	-41.03	-13.00	-28.03	V
High Channel (784.5MHz)						
72.55	-43.06	-15.75	-58.81	-13.00	-45.81	H
1569.00	-27.62	-16.52	-44.14	-13.00	-31.14	H
2353.50	-30.08	-10.93	-41.01	-13.00	-28.01	H
72.55	-43.99	-15.75	-59.73	-13.00	-46.73	V
1569.00	-26.84	-16.52	-43.36	-13.00	-30.36	V
2353.50	-30.12	-10.93	-41.05	-13.00	-28.05	V

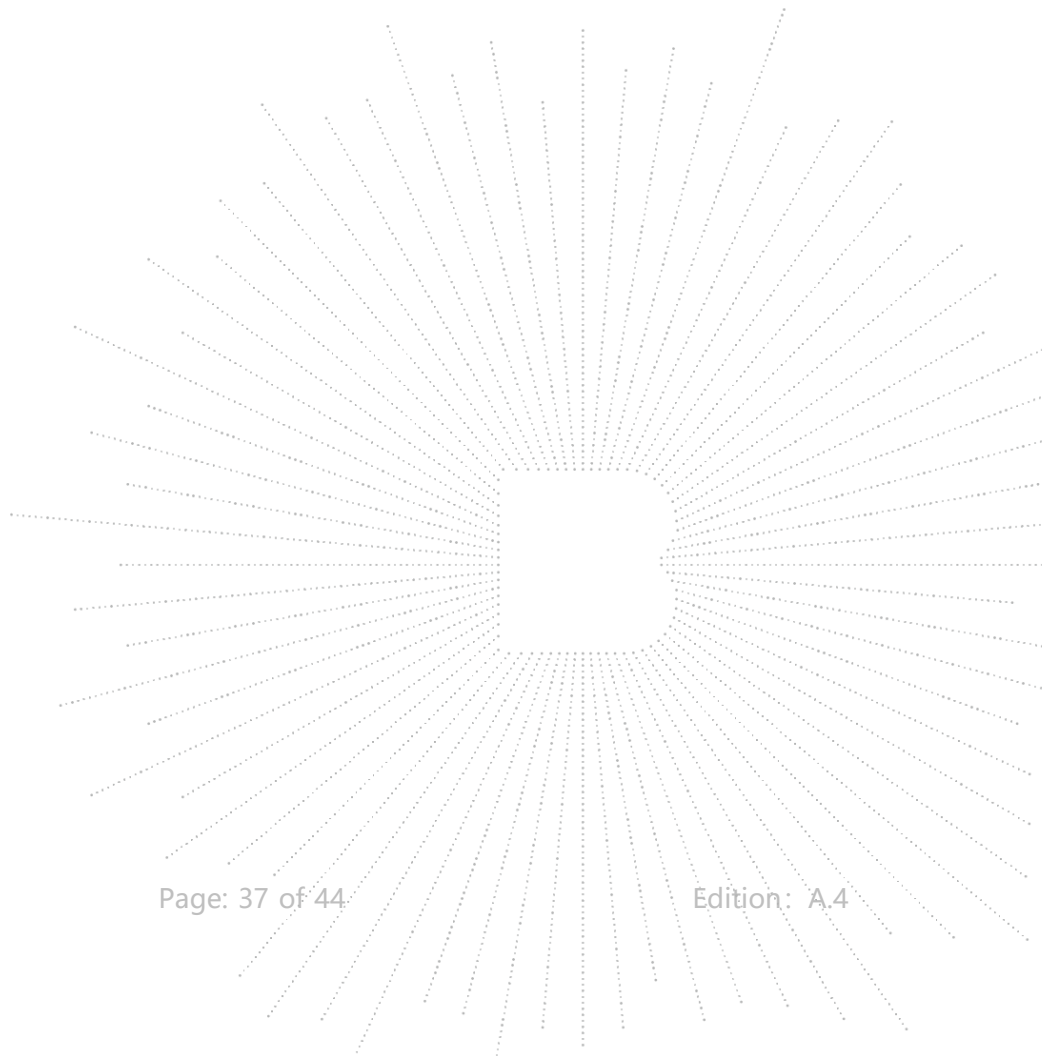

For FDD-LTE Band 66 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1710.7MHz)						
72.55	-43.19	-15.75	-58.93	-13.00	-45.93	H
3421.40	-25.36	-17.43	-42.79	-13.00	-29.79	H
5132.10	-31.60	-11.73	-43.33	-13.00	-30.33	H
72.55	-42.48	-15.75	-58.23	-13.00	-45.23	V
3421.40	-27.33	-17.43	-44.76	-13.00	-31.76	V
5132.10	-29.70	-11.73	-41.43	-13.00	-28.43	V
Middle Channel (1745MHz)						
72.55	-42.99	-15.75	-58.73	-13.00	-45.73	H
3490.00	-25.11	-16.98	-42.09	-13.00	-29.09	H
5235.00	-30.61	-11.33	-41.94	-13.00	-28.94	H
72.55	-43.86	-15.75	-59.61	-13.00	-46.61	V
3490.00	-28.88	-16.98	-45.86	-13.00	-32.86	V
5235.00	-30.69	-11.33	-42.02	-13.00	-29.02	V
Middle Channel (1755MHz)						
72.55	-41.14	-15.75	-56.89	-13.00	-43.89	H
3510.00	-27.43	-16.52	-43.95	-13.00	-30.95	H
5265.00	-31.57	-10.93	-42.50	-13.00	-29.50	H
72.55	-41.30	-15.75	-57.05	-13.00	-44.05	V
3510.00	-27.25	-16.52	-43.77	-13.00	-30.77	V
5265.00	-28.79	-10.93	-39.72	-13.00	-26.72	V
High Channel (1779.3MHz)						
72.55	-44.47	-15.75	-60.22	-13.00	-47.22	H
3558.60	-26.75	-16.52	-43.27	-13.00	-30.27	H
5337.90	-32.38	-10.93	-43.31	-13.00	-30.31	H
72.55	-42.94	-15.75	-58.68	-13.00	-45.68	V
3558.60	-28.38	-16.52	-44.90	-13.00	-31.90	V
5337.90	-28.96	-10.93	-39.89	-13.00	-26.89	V

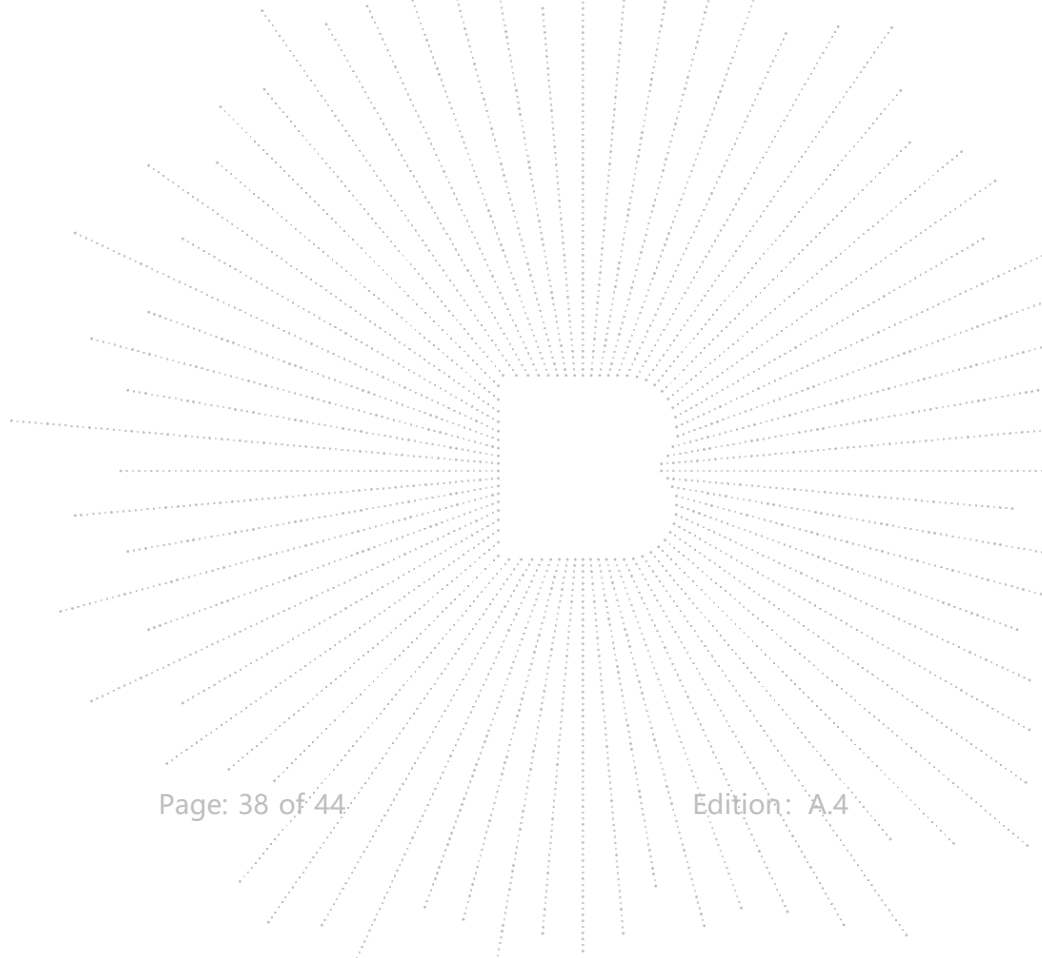


For FDD-LTE Band 71 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (665.5MHz)						
72.55	-44.82	-15.75	-60.56	-13.00	-47.56	H
1331.00	-24.64	-17.43	-42.07	-13.00	-29.07	H
1996.50	-31.00	-11.73	-42.73	-13.00	-29.73	H
72.55	-42.11	-15.75	-57.86	-13.00	-44.86	V
1331.00	-27.82	-17.43	-45.25	-13.00	-32.25	V
1996.50	-29.13	-11.73	-40.86	-13.00	-27.86	V
Middle Channel (680.5MHz)						
72.55	-43.50	-15.75	-59.25	-13.00	-46.25	H
1361.00	-26.55	-16.98	-43.53	-13.00	-30.53	H
2041.50	-32.11	-11.33	-43.44	-13.00	-30.44	H
72.55	-43.63	-15.75	-59.38	-13.00	-46.38	V
1361.00	-27.13	-16.98	-44.11	-13.00	-31.11	V
2041.50	-31.10	-11.33	-42.43	-13.00	-29.43	V
High Channel (695.5MHz)						
72.55	-41.74	-15.75	-57.49	-13.00	-44.49	H
1391.00	-24.30	-16.52	-40.82	-13.00	-27.82	H
2086.50	-32.17	-10.93	-43.10	-13.00	-30.10	H
72.55	-44.48	-15.75	-60.23	-13.00	-47.23	V
1391.00	-28.70	-16.52	-45.22	-13.00	-32.22	V
2086.50	-29.76	-10.93	-40.69	-13.00	-27.69	V


Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

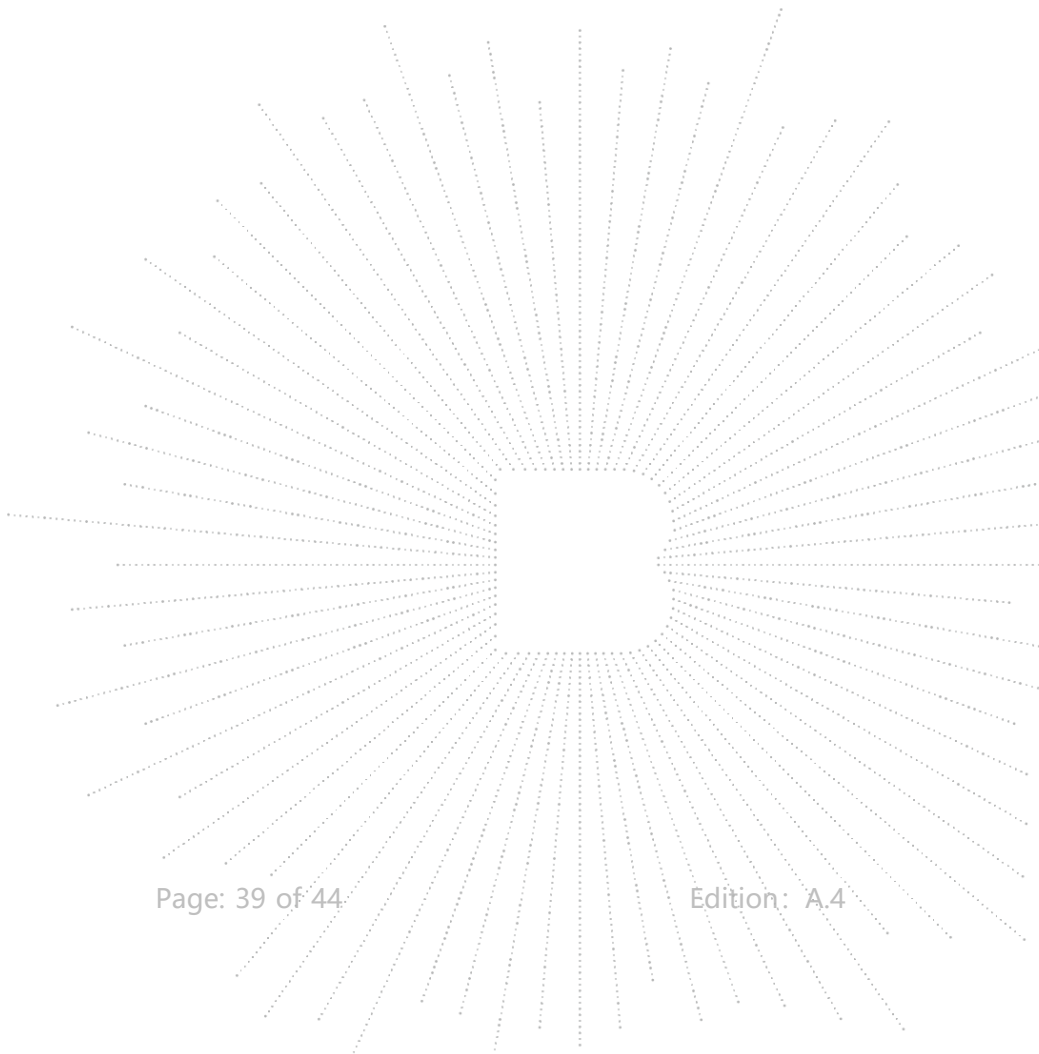

11. Frequency Stability

11.1 Block Diagram Of Test Setup

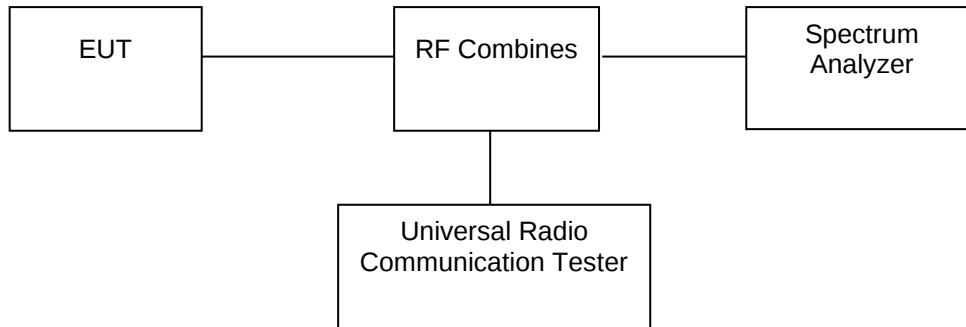

11.2 Limit

± 2.5 ppm

11.3 Test procedure

Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01v03 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01v03 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.
5. The worst case(worst bandwidth) for frequency stability reported in the Test Data.

The worst bandwidth is as follow:

1.4M is for LTE Band 2, 1.4M is for LTE Band 4,
1.4M is for LTE Band 5, 1.4M is for LTE Band 12,
5M is for LTE Band 13, 1.4M is for LTE Band 66, 5M is for LTE Band 71

11.4 Test Result

Please refer to Appendix 2: Frequency Stability
Test Result: Pass

12. EUT Photographs


EUT Photo



NOTE: Appendix-Photographs Of EUT Constructional Details

13. EUT Test Setup Photographs

Radiated Measurement Photos

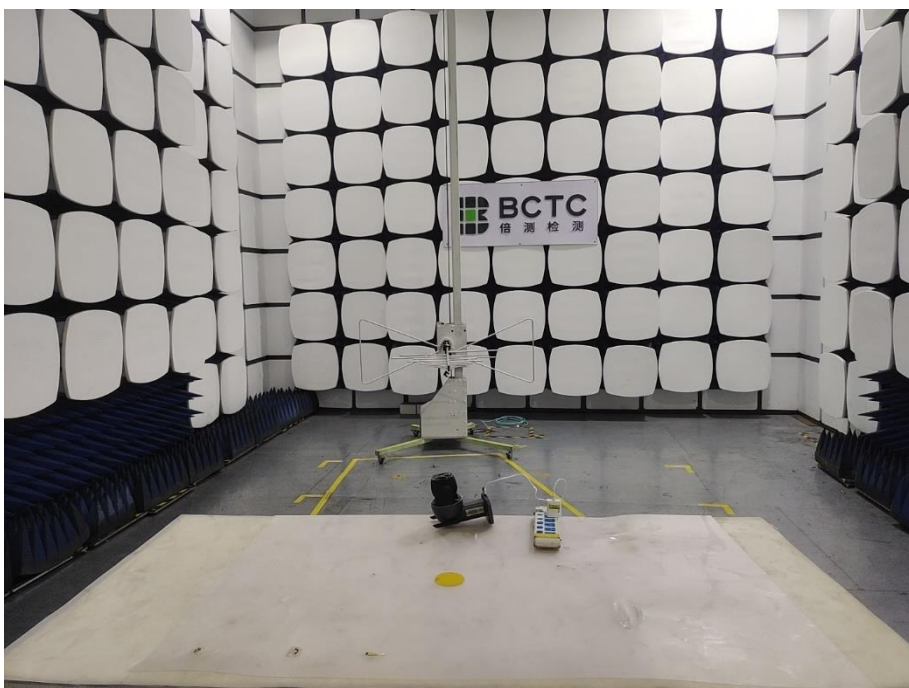

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****