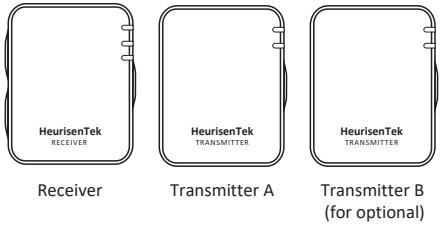
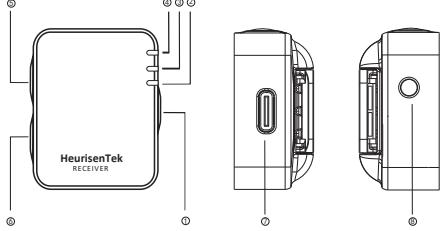
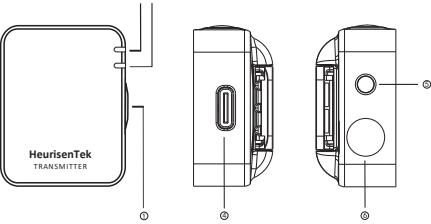


<p><b>HeurisenTek</b></p>  <p><b>Wireless Microphone System</b> <b>User Guide</b></p>	<p><b>OVERVIEW</b></p> <p>HEURISENTEK</p> <p>Thank you for choosing our products. This is a compact wireless microphone system, including one/two Transmitter and one Receiver. It allows for plug and play of various Android/ IOS mobile phones, cameras and other electronic devices, can be widely used in network live stream, program interview, video shooting and other occasions.</p>  <p>2</p>	<p><b>RECEIVER(Rx)</b></p> <p>HEURISENTEK</p>  <p>3. Connection status B: The same as A, it keeps off if you have only one Tx. 4. Charge status: Red LED=Internal battery is below 20% Orange LED=Internal battery is below 40% Green LED=Internal battery is above 40% Green LED flash=Charing through USB-C(solid when 100% charge is reached)</p> <p>5. Volume button 6. Setup button 7. USB-C charging port: DC IN 5V 8. Audio output:Standard 3.5mm TRS output.</p> <p>3</p>	<p><b>RECEIVER(Rx)</b></p> <p>HEURISENTEK</p> <p>3. Connection status B: The same as A, it keeps off if you have only one Tx. 4. Charge status: Red LED=Internal battery is below 20% Orange LED=Internal battery is below 40% Green LED=Internal battery is above 40% Green LED flash=Charing through USB-C(solid when 100% charge is reached)</p> <p>5. Volume button 6. Setup button 7. USB-C charging port: DC IN 5V 8. Audio output:Standard 3.5mm TRS output.</p> <p>4</p>																						
<p><b>TRANSMITTER(Tx)</b></p> <p>HEURISENTEK</p>  <p>1. Power button: Press and hold for 3 seconds to turn on/turn off the Tx. The units are paired by default, quickly press the power button twice to pair if desired. 2. Connection status A: Blue LED Flash=Paring with Rx; Blue LED on=Paired 3. Charge status: Red LED=Internal battery is below 20% Orange LED=Internal battery is below 40%</p> <p>5</p>	<p>Green LED=Internal battery is above 40% Green LED flash=Charing through USB-C(solid when 100% charge is reached)</p> <p>4. USB-C charging port: DC IN 5V 5. Audio output: Standard 3.5mm TRS output. 6. Inbuilt Microphone: Collect and optimize the human voice.</p> <p><b>SET UP</b></p> <p>HEURISENTEK</p> <p>Press and hold the power button for 3 seconds to turn on the RX (receiver). Press and hold the power button for 3 seconds to turn on the TX (transmitter). The units will already be paired and start transmitting audio, the transmitter will be using the internal microphone. Clip on the supplied windshield if required.</p> <p>6</p>	<p>If desired, plug in a compatible external microphone and the TX will automatically switch the audio input. Connect the 3.5mm TRS output of the RX to a camera's microphone input or similar audio device.</p> <p><b>PARAMETERS</b></p> <p>HEURISENTEK</p> <table> <tbody> <tr> <td>Polar pattern</td> <td>Omni-directional</td> </tr> <tr> <td>Transmission frequency</td> <td>2.4GHz</td> </tr> <tr> <td>Transmission distance</td> <td>Max 50M</td> </tr> <tr> <td>Mic Input</td> <td>20Hz-20KHz</td> </tr> <tr> <td>NSR</td> <td>96dB</td> </tr> <tr> <td>Delay</td> <td>170Ah/3.7V</td> </tr> <tr> <td>Battery capacity</td> <td>Up to 8h</td> </tr> <tr> <td>Battery life</td> <td>19ms</td> </tr> <tr> <td>Charging port</td> <td>USB-C</td> </tr> <tr> <td>Weight</td> <td>Tx-23g; Rx-23g</td> </tr> <tr> <td>Dimensions</td> <td>45x35x14mm</td> </tr> </tbody> </table> <p>7</p>	Polar pattern	Omni-directional	Transmission frequency	2.4GHz	Transmission distance	Max 50M	Mic Input	20Hz-20KHz	NSR	96dB	Delay	170Ah/3.7V	Battery capacity	Up to 8h	Battery life	19ms	Charging port	USB-C	Weight	Tx-23g; Rx-23g	Dimensions	45x35x14mm	<p><b>CONTENTS</b></p> <p>HEURISENTEK</p> <p>Transmitter x 1(2 transmitters for optional) Receiver x 1 User Guide x 1 Fur Windshield x 1 USB-A to USB-C 1-to-3 Charging Cable x 1 Audio Cable for Camera x 1 Audio Cable for Phone x 1 Pouch x 1</p> <p><b>Certification</b></p> <p>Model: _____ Inspector: _____ Date: _____</p> <p>8</p>
Polar pattern	Omni-directional																								
Transmission frequency	2.4GHz																								
Transmission distance	Max 50M																								
Mic Input	20Hz-20KHz																								
NSR	96dB																								
Delay	170Ah/3.7V																								
Battery capacity	Up to 8h																								
Battery life	19ms																								
Charging port	USB-C																								
Weight	Tx-23g; Rx-23g																								
Dimensions	45x35x14mm																								

## FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.