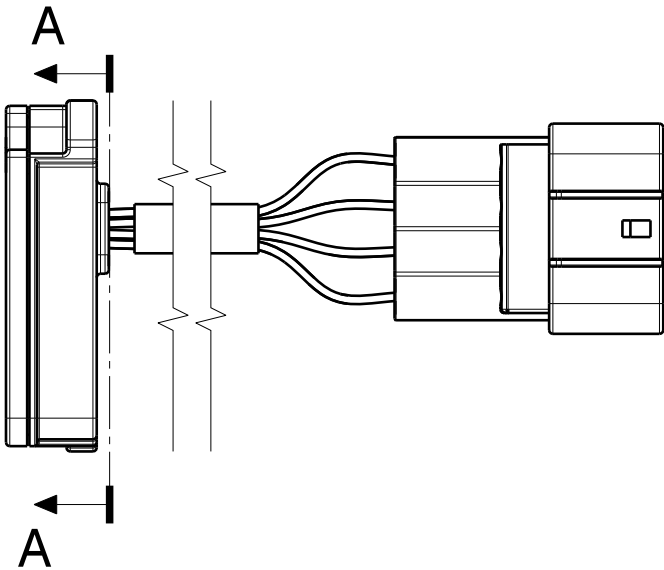
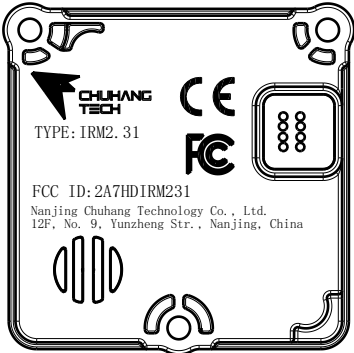



		1	2	3	4	5	6	7	8	9	10			
A				A - A	FRAMES	LTRS	REVISIONS					A		
					DATE		ORIGINATOR	REVIEWER	ENGR APP					
					RELEASED									
					PART NO.:CHS0056N DRAWING NO.:CHS0056NA VER NO.:A0									
B							20241211	LIGUANGHAI	YANGXIANGFEI	TONGHAIJUN	B			
C												C		
D							THIS DRAWING AND ANY INTELLECTUAL PROPERTY RIGHTS THERIN ARE PROPERTY OF CHUHANG CORPORATION AND NO LICENSES ARE GRANTED UNDER THOSE RIGHTS					D		
E						OPERATIONS	UNIT	PLANT		SAFETY		E		
						DRAFTED IN ACCORDANCE WITH CHUHANG ENGINEERING CAD STANDARDS CURRENT AT INITIAL RELEASE				MUST COMPLY WITH CHUHANG AND APPLICABLE OEM RESTRICTED SUBSTANCES MANAGEMENT STANDARDS				
						INITIAL ORIGINATOR	DATE	INITIAL REVIEWER	DATE	INITIAL ENGINEER	DATE			
F							20241211		20241211		20241211	F		
G						LIGUANGHAI		YANGXIANGFEI		TONGHAIJUN		G		
						3RD ANGLE PROJ 	CUSTOMER DATA TYPE		SCALE: 4:1		UNITS: MM			
							CUSTOMER NUMBER		SHT 1/1		RH/LH:			
									CPSC					
						NAME		ST2.5*10自攻螺钉						
						CAD FILE	CHS0056N							
						DWG FILE	CHS0056NA							
						DATA LOC	TCE		DATA TYPE					
						PRODUCT				X-CATIA V5				
						NUMBER	CHS0056NA							
		1	2	3	4	5	6	7	8	9	10			

技术要求:

1. 表面无裂纹、毛刺、麻点等缺陷，按GB845-76标准执行;

2. 材质: SUS304，表面处理: 洗白，规格: 十字槽盘头自攻钉;

3. 盐雾要求: 5%盐水喷雾8h，静置16h，温度15℃-35℃，湿度93%RH，三个循环72h;

4. ★A代表特殊特性，★S代表安全或法规特性;

5. 有害物质需符合GB/T 30512-2014规定。

CHUHANG
TECH

DWG SIZE: A3