

Test Report

Report No.: MTi220629006-01E4

Date of issue: 2022-09-14

Applicant: ShiftCam Limited

Product: SnapGrip+SnapLight

Model(s): SG001-XX, SG001-MN, SG001-AB, SG001-BJ,
SG001-PK, SG001-PO

FCC ID: 2A7IM-SG001

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	6
1.3	Description of support units	7
2	Test facilities and accreditations.....	8
2.1	Test laboratory	8
3	List of test equipment	9
4	Test result	10
4.2	Test setup	11
4.3	Test Procedures.....	12
4.4	Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01.....	13
4.5	Test results	14
	Photographs of the Test Setup.....	18
	Photographs of the EUT.....	18

Test Result Certification	
Applicant:	ShiftCam Limited
Address:	Unit 10, 7/ F, Goldfield Industrial Centre, 1 Sui Wo Road, Fo Tan, Shatin, NT, Hong Kong
Manufacturer:	Shenzhen iSonteck Co., Ltd.
Address:	5th Floor, Central Control Building, Hengfeng Industrial City, No. 739 Zhoushi Road, Hezhou Community, Hangcheng Street, Bao'an District, Shenzhen
Factory:	Shenzhen iSonteck Co., Ltd.
Address:	5th Floor, Central Control Building, Hengfeng Industrial City, No. 739 Zhoushi Road, Hezhou Community, Hangcheng Street, Bao'an District, Shenzhen
Product description	
Product name:	SnapGrip+SnapLight
Trademark:	shiftcam
Model name:	SG001-XX
Serial Model:	SG001-MN, SG001-AB, SG001-BJ, SG001-PK, SG001-PO
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 v03r01
Date of Test	
Date of test:	2022-07-26 ~ 2022-08-27
Test result:	Pass

Test Engineer :

Letter Lan

(Letter Lan)

Reviewed By :

Leon Chen

(Leon Chen)

Approved By :

Tom Xue

(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	SnapGrip+SnapLight
Model name:	SG001-XX
Series Model:	SG001-MN, SG001-AB, SG001-BJ, SG001-PK, SG001-PO
Model difference:	All the models are the same circuit and module, except the model name and color.
Electrical rating:	SnapGrip: USB-C Input: DC 5V/2A/10W Wireless Charging Output: DC 5V/1A/5W Battery: DC 3.7V/3200mAh/11.84Wh SnapLight: USB-C Input: DC 5V/1A/5W Battery: DC 3.7V/320mAh/1.18Wh
Accessories:	Cable: USB-A to USB-C cable
Hardware version:	V8.0
Software version:	V1.0
Test sample number:	MTi220629006-01-S0001
RF specification:	
Operation frequency:	115 kHz – 205 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode 1	Charging (With Snapgrip) + Wireless Output (5W)
The test data only show worst test mode: Mode 1	

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
iPhone	12 mini	/	Apple
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Test facilities and accreditations

2.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

3 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2022/05/05	2023/05/04

4 Test result

4.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz


* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.


Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

4.2 Test setup

For mobile exposure conditions:

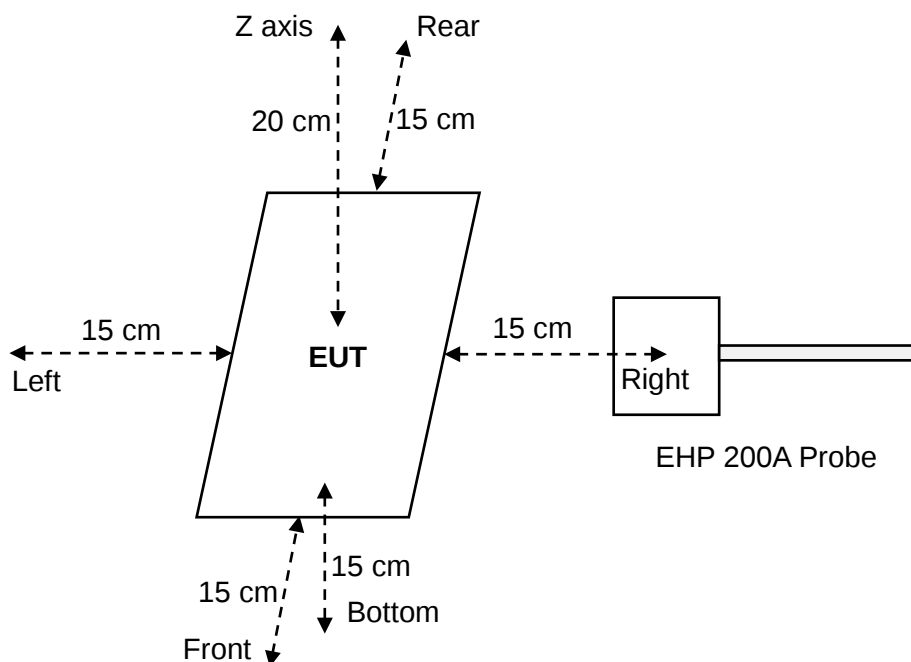

For portable exposure conditions:

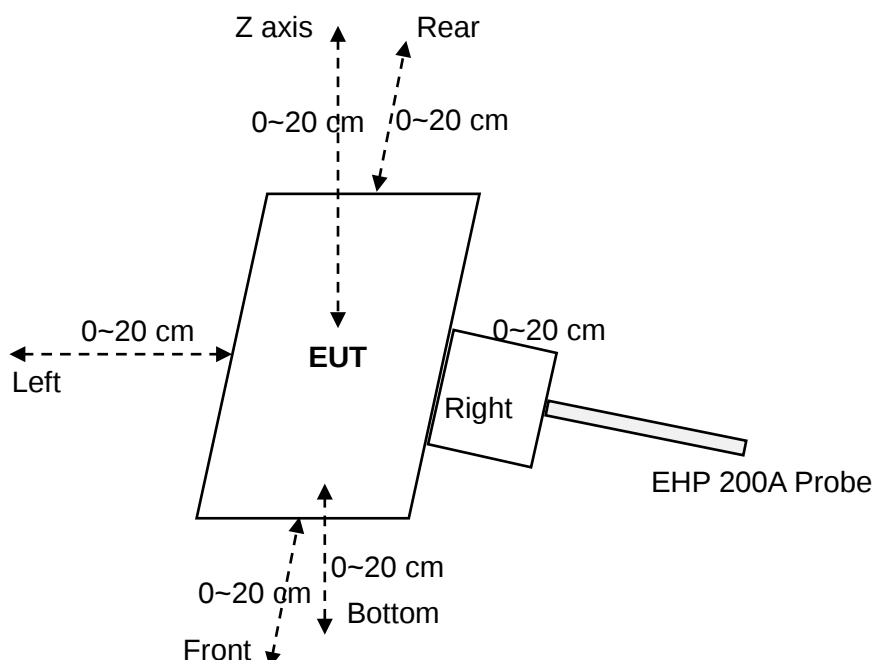

4.3 Test Procedures

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 v03r01.

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- c. The highest emission level was recorded and compared with limit.

4.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies: 115 kHz – 205 kHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The maximum output power: 10W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. The EUT have one source primary coils.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No. The EUT has portable exposure condition.
6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	No, the H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm were also evaluated for portable use condition.

4.5 Test results

For portable exposure condition:

Note: operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

Test condition 1: Mode 4 operating mode with client device (1 % battery status of client device) -test distance: 0cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.8586	1.63	86.92%
	Left	0.248		
	Right	0.187		
	Front	0.6413		
	Rear	0.162		
	Bottom	1.4168		

Test condition 2: Mode 1 operating mode with client device (1 % battery status of client device) -test distance: 2cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.3476	1.63	71.89%
	Left	0.2784		
	Right	0.0498		
	Front	0.7288		
	Rear	0.0816		
	Bottom	1.1718		

Test condition 3: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 4cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.1783	1.63	46.28%
	Left	0.1446		
	Right	0.0823		
	Front	0.1138		
	Rear	0.0524		
	Bottom	0.7543		

Test condition 4: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 6cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.144	1.63	17.93%
	Left	0.109		
	Right	0.0623		
	Front	0.0478		
	Rear	0.0478		
	Bottom	0.2923		

Test condition 5: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 8cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0709	1.63	8.84%
	Left	0.0766		
	Right	0.0495		
	Front	0.0555		
	Rear	0.0528		
	Bottom	0.1441		

Test condition 6: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 10cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0513	1.63	7.02%
	Left	0.0482		
	Right	0.0495		
	Front	0.0495		
	Rear	0.0502		
	Bottom	0.1145		

Test condition 7: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 12cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0482	1.63	3.31%
	Left	0.0513		
	Right	0.0498		
	Front	0.054		
	Rear	0.0482		
	Bottom	0.0482		

Test condition 8: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 14cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0478	1.63	3.24%
	Left	0.0495		
	Right	0.0498		
	Front	0.0482		
	Rear	0.0528		
	Bottom	0.0513		

Test condition 9: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 16cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0498	1.63	3.22%
	Left	0.0495		
	Right	0.0482		
	Front	0.0281		
	Rear	0.0525		
	Bottom	0.0478		

Test condition 10: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 18cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0525	1.63	3.24%
	Left	0.0501		
	Right	0.0495		
	Front	0.0495		
	Rear	0.0528		
	Bottom	0.0495		

Test condition 11: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 20cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.054	1.63	3.31%
	Left	0.054		
	Right	0.0528		
	Front	0.0528		
	Rear	0.0482		
	Bottom	0.0482		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----