



FCC TEST REPORT

FCC ID:2A7IS-NE3

Report Number..... : ZKT-2205313682E

Date of Test..... May. 31, 2022 to Jun. 16, 2022

Date of issue : Jun. 16, 2022

Total number of pages 57

Test Result : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen HuaJieWei Technology Co., Ltd.

Address : 8/F, Block 2, Tenghongxing Science park, Jiazitang, Guangming District, Shenzhen

Manufacturer's name : Shenzhen HuaJieWei Technology Co., Ltd.

Address : 8/F, Block 2, Tenghongxing Science park, Jiazitang, Guangming District, Shenzhen

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : NE3 wireless visible earpick

Trademark : N/A

Model/Type reference : NE3
NE4, NE5, NE6, NE7, NE8

Ratings..... : Input: DC 5V or DC 3.7V Battery



Testing procedure and testing location:

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address..... : 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature)..... : Jim Liu

Jim Liu

Reviewer (name + signature)..... : Tom Zou

Tom Zou

Approved (name + signature)..... : Lake Xie





Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULT	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	17
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
4.2.6 TEST RESULTS	19
5.RADIATED BAND EMISSIONMEASUREMENT	30
5.1 TEST REQUIREMENT:	30
5.2 TEST PROCEDURE	30
5.3 DEVIATION FROM TEST STANDARD	30
5.4 TEST SETUP	31
5.5 EUT OPERATING CONDITIONS	31
5.6 TEST RESULT	32
6.POWER SPECTRAL DENSITY TEST	34
6.1 APPLIED PROCEDURES / LIMIT	34
6.2 TEST PROCEDURE	34
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	34
6.5 EUT OPERATION CONDITIONS	34



6.6 TEST RESULT	35
7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH	43
7.1 APPLIED PROCEDURES / LIMIT	43
7.2 TEST PROCEDURE	43
7.3 DEVIATION FROM STANDARD	43
7.4 TEST SETUP	43
7.5 EUT OPERATION CONDITIONS	43
7.6 TEST RESULT	44
8. PEAK OUTPUT POWER TEST	47
8.1 APPLIED PROCEDURES/LIMIT	47
8.2 TEST PROCEDURE	47
8.3 DEVIATION FROM STANDARD	47
8.4 TEST SETUP	47
8.5 EUT OPERATION CONDITIONS	47
8.6 TEST RESULT	48
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	49
9.1 APPLICABLE STANDARD	49
9.2 TEST PROCEDURE	49
9.3 DEVIATION FROM STANDARD	49
9.4 TEST SETUP	49
9.5 EUT OPERATION CONDITIONS	49
9.6 TEST RESULTS	49
10. ANTENNA REQUIREMENT	56
11. TEST SETUP PHOTO	57
12. EUT CONSTRUCTIONAL DETAILS	57



1. VERSION

Report No.	Version	Description	Approved
ZKT-2205313682E	Rev.01	Initial issue of report	Jun. 16, 2022



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

	FCC Part15 (15.247) , Subpart C			
	Standard Section	Test Item	Result	Remark
	FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
	FCC part 15.207	AC Power Line Conducted Emission	PASS	
	FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
	FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
	FCC part 15.247 (e)	Power Spectral Density	PASS	
	FCC part 15.247(d)	Band Edge	PASS	
	FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	NE3 wireless visible earpick
Model No.:	NE3 NE4, NE5, NE6, NE7, NE8
Model Different.:	Only for different model name.
Serial No.:	N/A
Hardware Version:	H1.0
Software Version:	S1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	Chip Antenna
Antenna gain:	0dBi
Power supply:	Input: DC 5V or DC 3.7V Battery



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

Test Software	Realtek Test Tool
Powerlevelsetup	<13dBm

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission





Conducted Spurious

EUT

3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	NE3 wireless visible earpick	N/A	NE3	N/A	EUT
A-1	AC Adapter	HuaWei	ZKT-01	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9kHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	MWRF Power Meter Test system	MW	MW100-RPCB	\	Sep. 22, 2021	Sep. 21, 2022
17	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
18	RF Software	MW	MTS8310	V2.0.0.0	\	\
19	Turntable	MF	MF-7802BS	\	\	\
20	Antenna tower	MF	MF-7802BS	\	\	\



Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	N/A	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	N/A	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESCI3	101421	Sep. 22, 2021	Sep. 21, 2022
6	Triple-Loop Antenna	LAPLACE	RF300	9194	Sep. 22, 2021	Sep. 21, 2022
7	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022
8	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

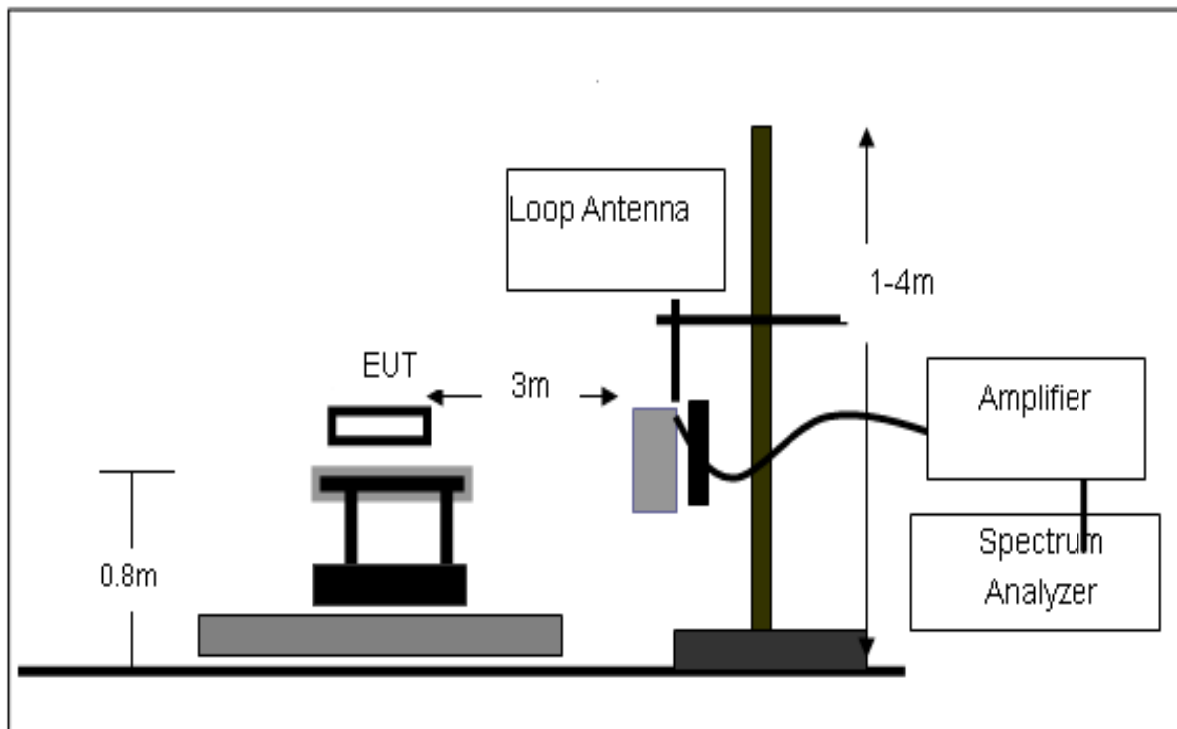

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 TEST RESULT

Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

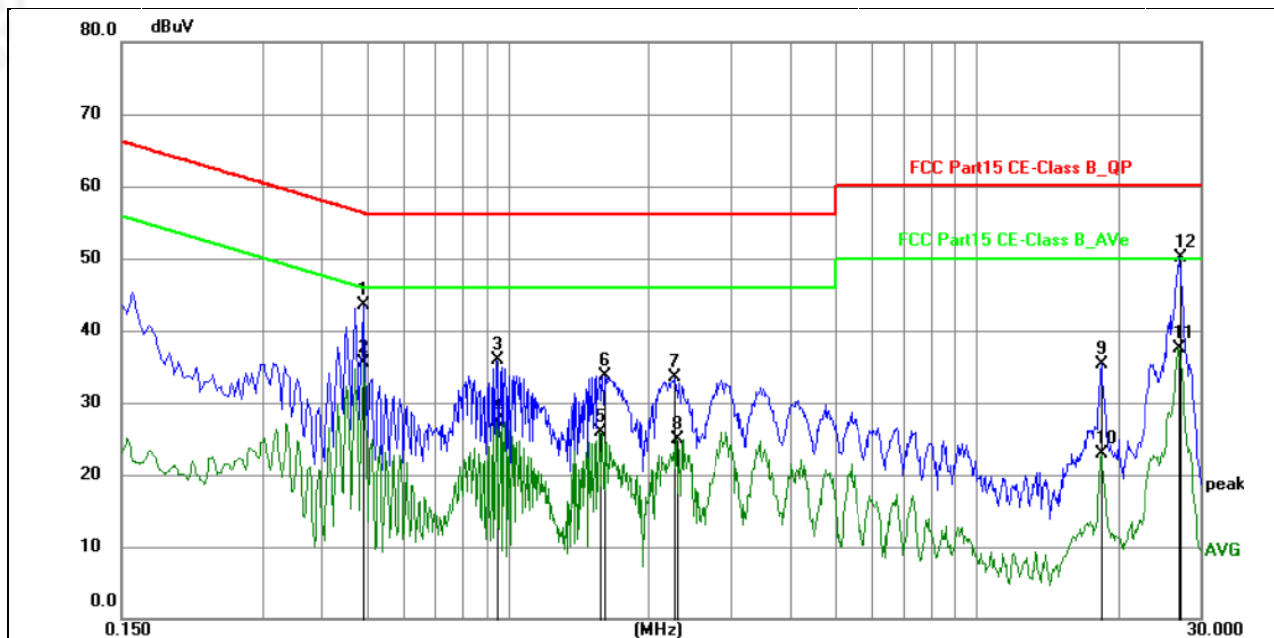


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4920	33.02	10.58	43.60	56.13	-12.53	QP	P	
2	0.4920	24.91	10.58	35.49	46.13	-10.64	AVG	P	
3	0.9464	25.38	10.45	35.83	56.00	-20.17	QP	P	
4	0.9464	16.89	10.45	27.34	46.00	-18.66	AVG	P	
5	1.5764	15.66	10.30	25.96	46.00	-20.04	AVG	P	
6	1.6124	23.34	10.29	33.63	56.00	-22.37	QP	P	
7	2.2694	23.32	10.12	33.44	56.00	-22.56	QP	P	
8	2.2919	14.86	10.12	24.98	46.00	-21.02	AVG	P	
9	18.4605	25.63	9.64	35.27	60.00	-24.73	QP	P	
10	18.4605	13.33	9.64	22.97	50.00	-27.03	AVG	P	
11	26.9610	27.67	9.93	37.60	50.00	-12.40	AVG	P	
12	27.1410	40.14	9.93	50.07	60.00	-9.93	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

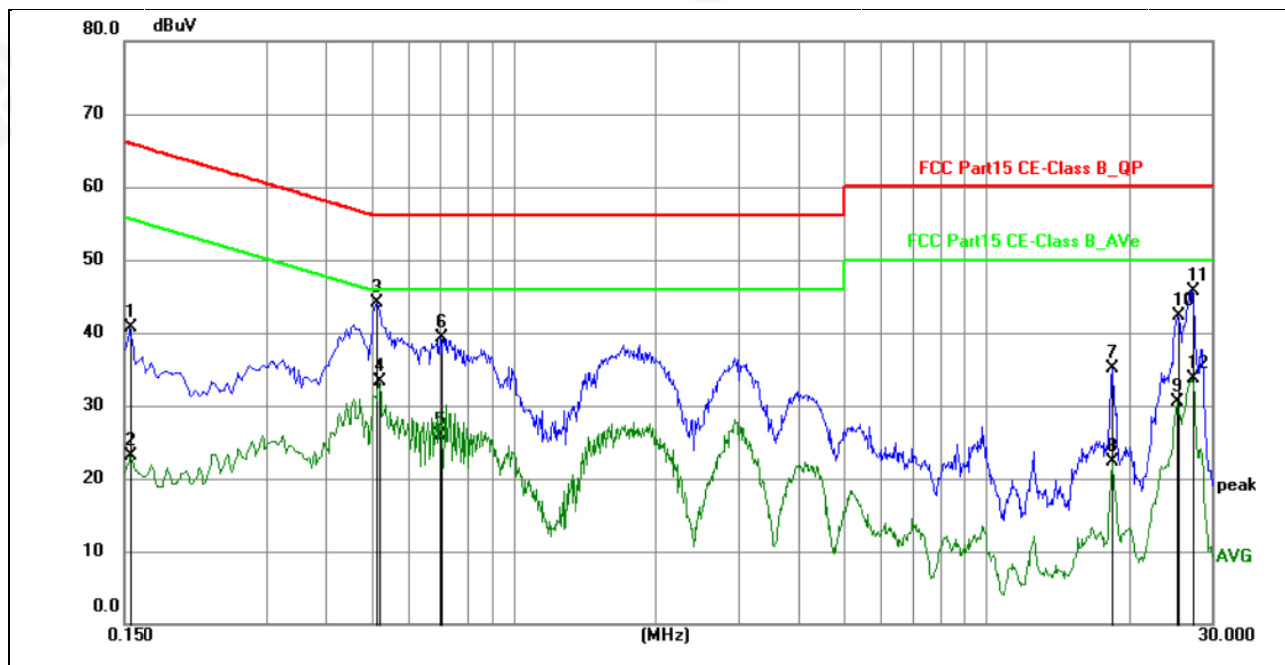

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1545	27.79	12.91	40.70	65.75	-25.05	QP	P	
2	0.1545	10.14	12.91	23.05	55.75	-32.70	AVG	P	
3	0.5144	33.50	10.54	44.04	56.00	-11.96	QP	P	
4	0.5190	22.71	10.54	33.25	46.00	-12.75	AVG	P	
5	0.6990	15.43	10.50	25.93	46.00	-20.07	AVG	P	
6	0.7035	28.88	10.50	39.38	56.00	-16.62	QP	P	
7	18.4470	25.49	9.64	35.13	60.00	-24.87	QP	P	
8	18.4470	12.61	9.64	22.25	50.00	-27.75	AVG	P	
9	25.4535	20.64	9.91	30.55	50.00	-19.45	AVG	P	
10	25.5479	32.36	9.92	42.28	60.00	-17.72	QP	P	
11	27.2895	35.84	9.93	45.77	60.00	-14.23	QP	P	
12	27.2895	23.73	9.93	33.66	50.00	-16.34	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.



- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

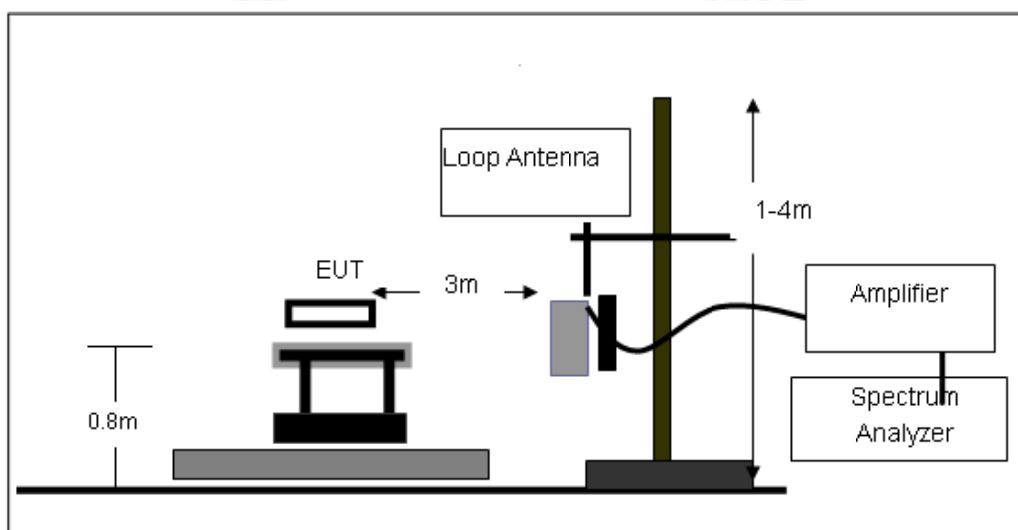




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

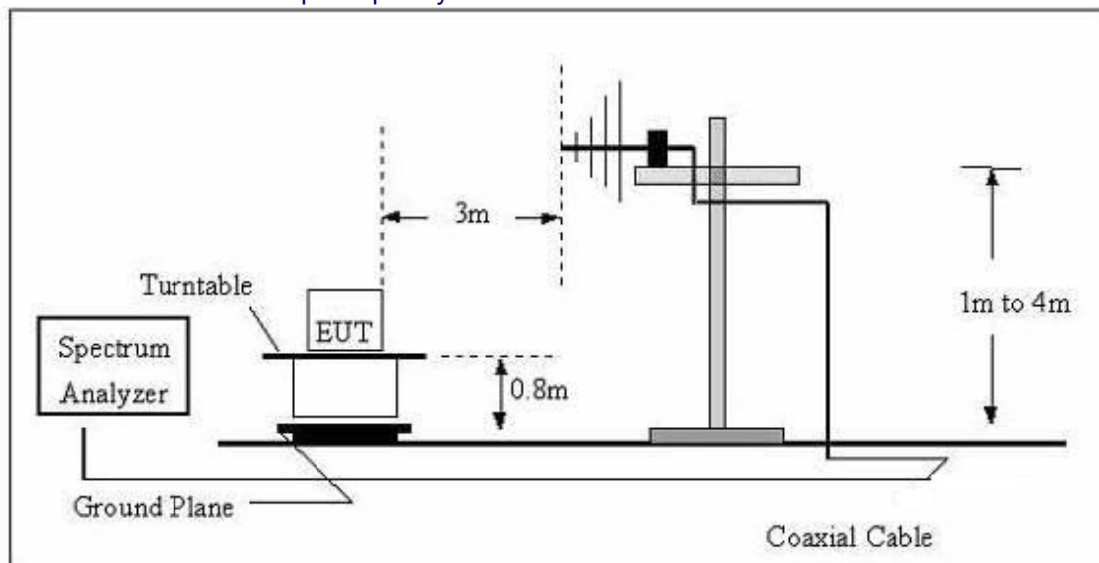

(C) Radiated Emission Test-Up Frequency Above 1GHz

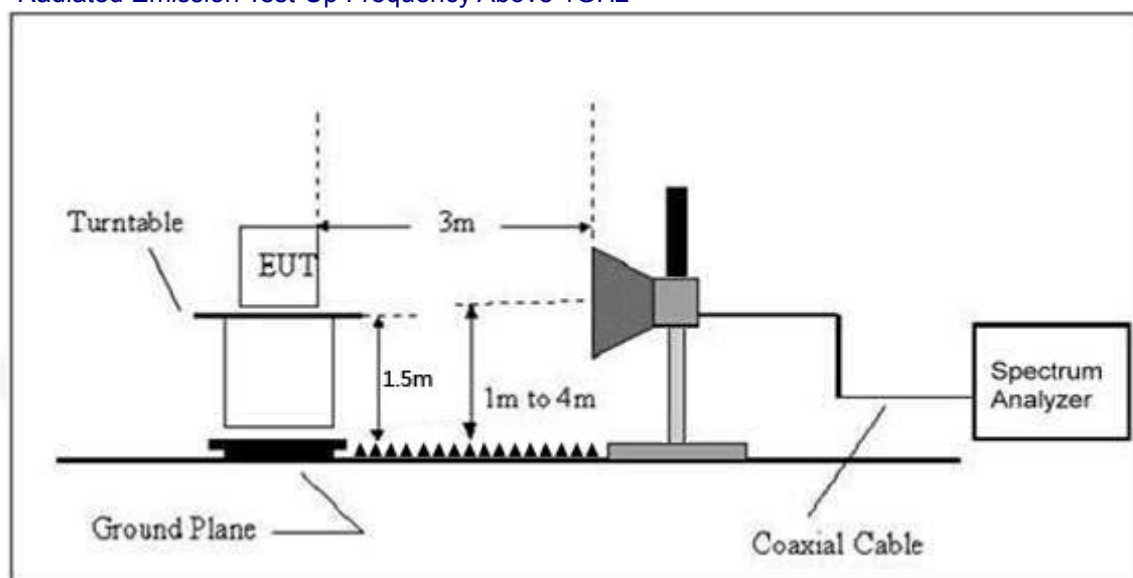

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode	Working

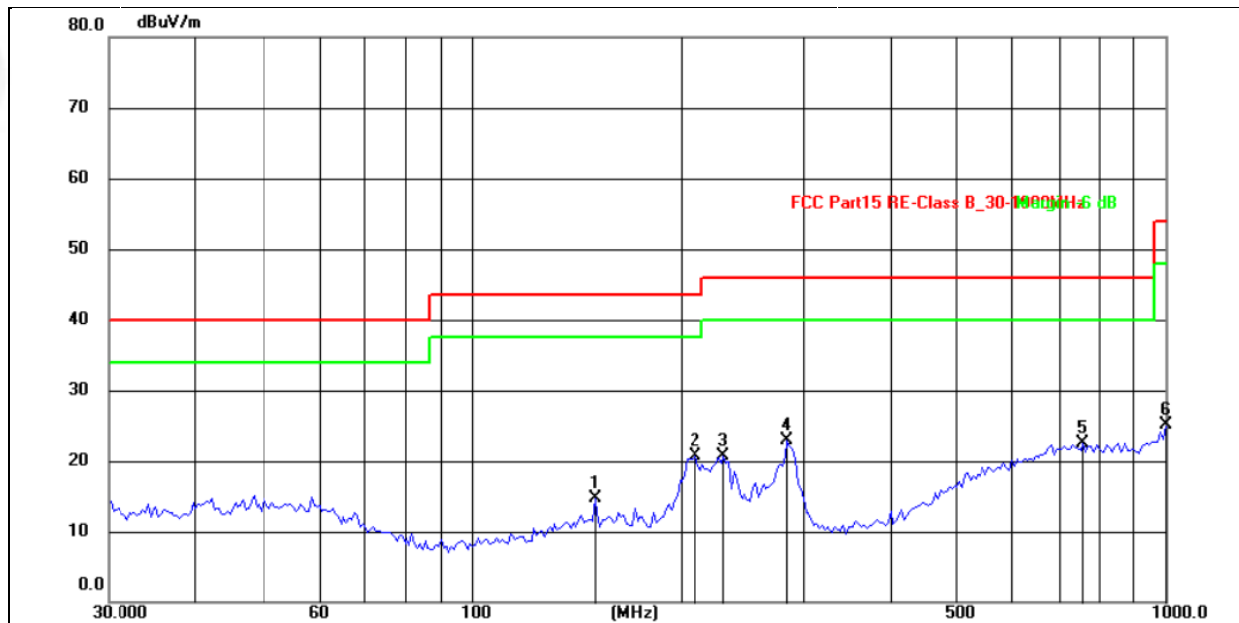

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	150.5377	31.32	-16.54	14.78	43.50	-28.72	QP
2	210.0481	38.91	-18.29	20.62	43.50	-22.88	QP
3	231.3119	37.67	-16.93	20.74	46.00	-25.26	QP
4	285.4768	37.91	-15.07	22.84	46.00	-23.16	QP
5	762.0384	29.29	-6.86	22.43	46.00	-23.57	QP
6	1000.0000	29.92	-4.87	25.05	54.00	-28.95	QP



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode	Working

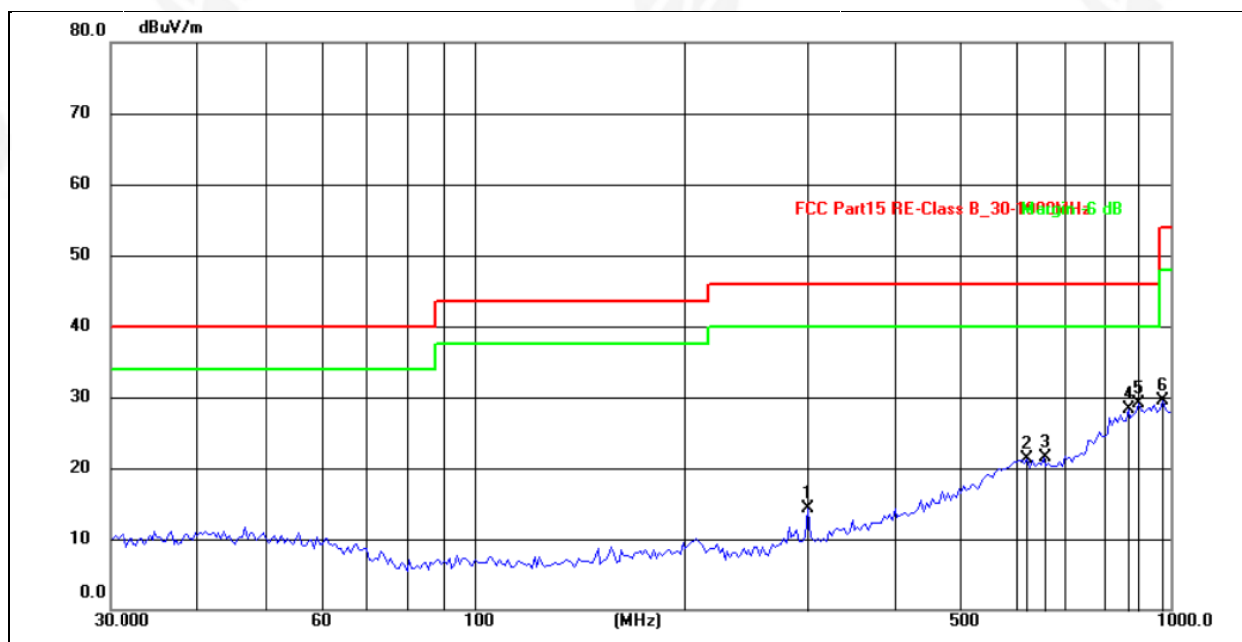

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	300.8943	32.61	-18.30	14.31	46.00	-31.69	QP
2	622.8900	29.12	-7.74	21.38	46.00	-24.62	QP
3	656.5300	29.18	-7.70	21.48	46.00	-24.52	QP
4	869.1302	30.00	-1.62	28.38	46.00	-17.62	QP
5	900.1474	29.84	-0.74	29.10	46.00	-16.90	QP
6	974.0436	29.80	-0.35	29.45	54.00	-24.55	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11b andAC 120Vmode



1GHz~25GHz

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	53.24	30.55	5.77	24.66	53.12	74.00	-20.88	PK
V	4824.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
V	7236.00	53.71	30.33	6.32	24.55	54.25	74.00	-19.75	PK
V	7236.00	43.35	30.33	6.32	24.55	43.89	54.00	-10.11	AV
V	9648.00	50.34	30.85	7.45	24.69	51.63	74.00	-22.37	PK
V	9648.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
V	12060.00	52.16	31.02	8.99	25.57	55.70	74.00	-18.30	PK
V	12060.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV
H	4824.00	53.71	30.55	5.77	24.66	53.59	74.00	-20.41	PK
H	4824.00	43.01	30.55	5.77	24.66	42.89	54.00	-11.11	AV
H	7236.00	50.05	30.33	6.32	24.55	50.59	74.00	-23.41	PK
H	7236.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
H	9648.00	53.87	30.85	7.45	24.69	55.16	74.00	-18.84	PK
H	9648.00	43.95	30.85	7.45	24.69	45.24	54.00	-8.76	AV
H	12060.00	51.74	31.02	8.99	25.57	55.28	74.00	-18.72	PK
H	12060.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	52.89	30.55	5.77	24.66	52.77	74.00	-21.23	PK
V	4874.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
V	7311.00	53.40	30.33	6.32	24.55	53.94	74.00	-20.06	PK
V	7311.00	43.29	30.33	6.32	24.55	43.83	54.00	-10.17	AV
V	9748.00	50.12	30.85	7.45	24.69	51.41	74.00	-22.59	PK
V	9748.00	43.20	30.85	7.45	24.69	44.49	54.00	-9.51	AV
V	12185.00	50.38	31.02	8.99	25.57	53.92	74.00	-20.08	PK
V	12185.00	43.56	31.02	8.99	25.57	47.10	54.00	-6.90	AV
H	4874.00	53.83	30.55	5.77	24.66	53.71	74.00	-20.29	PK
H	4874.00	43.59	30.55	5.77	24.66	43.47	54.00	-10.53	AV
H	7311.00	54.63	30.33	6.32	24.55	55.17	74.00	-18.83	PK
H	7311.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
H	9748.00	54.85	30.85	7.45	24.69	56.14	74.00	-17.86	PK
H	9748.00	43.12	30.85	7.45	24.69	44.41	54.00	-9.59	AV
H	12185.00	54.13	31.02	8.99	25.57	57.67	74.00	-16.33	PK
H	12185.00	43.69	31.02	8.99	25.57	47.23	54.00	-6.77	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	54.50	30.55	5.77	24.66	54.38	74.00	-19.62	PK
V	4924.00	43.90	30.55	5.77	24.66	43.78	54.00	-10.22	AV
V	7386.00	52.80	30.33	6.32	24.55	53.34	74.00	-20.66	PK
V	7386.00	43.39	30.33	6.32	24.55	43.93	54.00	-10.07	AV
V	9848.00	53.90	30.85	7.45	24.69	55.19	74.00	-18.81	PK
V	9848.00	43.54	30.85	7.45	24.69	44.83	54.00	-9.17	AV
V	12310.00	50.00	31.02	8.99	25.57	53.54	74.00	-20.46	PK
V	12310.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV
H	4924.00	51.94	30.55	5.77	24.66	51.82	74.00	-22.18	PK
H	4924.00	43.32	30.55	5.77	24.66	43.20	54.00	-10.80	AV
H	7386.00	53.21	30.33	6.32	24.55	53.75	74.00	-20.25	PK
H	7386.00	43.15	30.33	6.32	24.55	43.69	54.00	-10.31	AV
H	9848.00	50.83	30.85	7.45	24.69	52.12	74.00	-21.88	PK
H	9848.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
H	12310.00	53.19	31.02	8.99	25.57	56.73	74.00	-17.27	PK
H	12310.00	43.07	31.02	8.99	25.57	46.61	54.00	-7.39	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.50	30.55	5.77	24.66	53.38	74.00	-20.62	PK
V	4824.00	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
V	7236.00	53.68	30.33	6.32	24.55	54.22	74.00	-19.78	PK
V	7236.00	43.42	30.33	6.32	24.55	43.96	54.00	-10.04	AV
V	9648.00	54.62	30.85	7.45	24.69	55.91	74.00	-18.09	PK
V	9648.00	43.58	30.85	7.45	24.69	44.87	54.00	-9.13	AV
V	12060.00	52.01	31.02	8.99	25.57	55.55	74.00	-18.45	PK
V	12060.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV
H	4824.00	52.98	30.55	5.77	24.66	52.86	74.00	-21.14	PK
H	4824.00	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
H	7236.00	54.96	30.33	6.32	24.55	55.50	74.00	-18.50	PK
H	7236.00	43.41	30.33	6.32	24.55	43.95	54.00	-10.05	AV
H	9648.00	50.28	30.85	7.45	24.69	51.57	74.00	-22.43	PK
H	9648.00	43.14	30.85	7.45	24.69	44.43	54.00	-9.57	AV
H	12060.00	50.03	31.02	8.99	25.57	53.57	74.00	-20.43	PK
H	12060.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.51	30.55	5.77	24.66	51.39	74.00	-22.61	PK
V	4874.00	43.97	30.55	5.77	24.66	43.85	54.00	-10.15	AV
V	7311.00	51.58	30.33	6.32	24.55	52.12	74.00	-21.88	PK
V	7311.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
V	9748.00	51.55	30.85	7.45	24.69	52.84	74.00	-21.16	PK
V	9748.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12185.00	50.73	31.02	8.99	25.57	54.27	74.00	-19.73	PK
V	12185.00	43.64	31.02	8.99	25.57	47.18	54.00	-6.82	AV
H	4874.00	50.83	30.55	5.77	24.66	50.71	74.00	-23.29	PK
H	4874.00	44.00	30.55	5.77	24.66	43.88	54.00	-10.12	AV
H	7311.00	54.18	30.33	6.32	24.55	54.72	74.00	-19.28	PK
H	7311.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	9748.00	52.48	30.85	7.45	24.69	53.77	74.00	-20.23	PK
H	9748.00	43.33	30.85	7.45	24.69	44.62	54.00	-9.38	AV
H	12185.00	52.50	31.02	8.99	25.57	56.04	74.00	-17.96	PK
H	12185.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	50.95	30.55	5.77	24.66	50.83	74.00	-23.17	PK
V	4924.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
V	7386.00	51.61	30.33	6.32	24.55	52.15	74.00	-21.85	PK
V	7386.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
V	9848.00	51.82	30.85	7.45	24.69	53.11	74.00	-20.89	PK
V	9848.00	43.89	30.85	7.45	24.69	45.18	54.00	-8.82	AV
V	12310.00	51.49	31.02	8.99	25.57	55.03	74.00	-18.97	PK
V	12310.00	43.25	31.02	8.99	25.57	46.79	54.00	-7.21	AV
H	4924.00	52.73	30.55	5.77	24.66	52.61	74.00	-21.39	PK
H	4924.00	43.76	30.55	5.77	24.66	43.64	54.00	-10.36	AV
H	7386.00	53.22	30.33	6.32	24.55	53.76	74.00	-20.24	PK
H	7386.00	43.12	30.33	6.32	24.55	43.66	54.00	-10.34	AV
H	9848.00	54.18	30.85	7.45	24.69	55.47	74.00	-18.53	PK
H	9848.00	43.49	30.85	7.45	24.69	44.78	54.00	-9.22	AV
H	12310.00	51.75	31.02	8.99	25.57	55.29	74.00	-18.71	PK
H	12310.00	43.74	31.02	8.99	25.57	47.28	54.00	-6.72	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.68	30.55	5.77	24.66	54.56	74.00	-19.44	PK
V	4824.00	43.62	30.55	5.77	24.66	43.50	54.00	-10.50	AV
V	7236.00	51.61	30.33	6.32	24.55	52.15	74.00	-21.85	PK
V	7236.00	43.31	30.33	6.32	24.55	43.85	54.00	-10.15	AV
V	9648.00	51.45	30.85	7.45	24.69	52.74	74.00	-21.26	PK
V	9648.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
V	12060.00	54.18	31.02	8.99	25.57	57.72	74.00	-16.28	PK
V	12060.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV
H	4824.00	50.21	30.55	5.77	24.66	50.09	74.00	-23.91	PK
H	4824.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
H	7236.00	50.88	30.33	6.32	24.55	51.42	74.00	-22.58	PK
H	7236.00	43.94	30.33	6.32	24.55	44.48	54.00	-9.52	AV
H	9648.00	50.43	30.85	7.45	24.69	51.72	74.00	-22.28	PK
H	9648.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
H	12060.00	51.35	31.02	8.99	25.57	54.89	74.00	-19.11	PK
H	12060.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.55	30.55	5.77	24.66	52.43	74.00	-21.57	PK
V	4874.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
V	7311.00	53.69	30.33	6.32	24.55	54.23	74.00	-19.77	PK
V	7311.00	43.69	30.33	6.32	24.55	44.23	54.00	-9.77	AV
V	9748.00	50.44	30.85	7.45	24.69	51.73	74.00	-22.27	PK
V	9748.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
V	12185.00	50.70	31.02	8.99	25.57	54.24	74.00	-19.76	PK
V	12185.00	43.53	31.02	8.99	25.57	47.07	54.00	-6.93	AV
H	4874.00	52.50	30.55	5.77	24.66	52.38	74.00	-21.62	PK
H	4874.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
H	7311.00	54.45	30.33	6.32	24.55	54.99	74.00	-19.01	PK
H	7311.00	43.37	30.33	6.32	24.55	43.91	54.00	-10.09	AV
H	9748.00	53.32	30.85	7.45	24.69	54.61	74.00	-19.39	PK
H	9748.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
H	12185.00	53.13	31.02	8.99	25.57	56.67	74.00	-17.33	PK
H	12185.00	43.43	31.02	8.99	25.57	46.97	54.00	-7.03	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2462MHz									
V	4924.00	54.38	30.55	5.77	24.66	54.26	74.00	-19.74	PK
V	4924.00	43.29	30.55	5.77	24.66	43.17	54.00	-10.83	AV
V	7386.00	50.03	30.33	6.32	24.55	50.57	74.00	-23.43	PK
V	7386.00	43.70	30.33	6.32	24.55	44.24	54.00	-9.76	AV
V	9848.00	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
V	9848.00	43.52	30.85	7.45	24.69	44.81	54.00	-9.19	AV
V	12310.00	54.56	31.02	8.99	25.57	58.10	74.00	-15.90	PK
V	12310.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV
H	4924.00	50.71	30.55	5.77	24.66	50.59	74.00	-23.41	PK
H	4924.00	43.05	30.55	5.77	24.66	42.93	54.00	-11.07	AV
H	7386.00	51.99	30.33	6.32	24.55	52.53	74.00	-21.47	PK
H	7386.00	43.35	30.33	6.32	24.55	43.89	54.00	-10.11	AV
H	9848.00	54.42	30.85	7.45	24.69	55.71	74.00	-18.29	PK
H	9848.00	43.53	30.85	7.45	24.69	44.82	54.00	-9.18	AV
H	12310.00	52.03	31.02	8.99	25.57	55.57	74.00	-18.43	PK
H	12310.00	43.98	31.02	8.99	25.57	47.52	54.00	-6.48	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n40

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2422MHz									
V	4844.00	51.98	30.55	5.77	24.66	51.86	74.00	-22.14	PK
V	4844.00	43.34	30.55	5.77	24.66	43.22	54.00	-10.78	AV
V	7266.00	50.87	30.33	6.32	24.55	51.41	74.00	-22.59	PK
V	7266.00	43.49	30.33	6.32	24.55	44.03	54.00	-9.97	AV
V	9688.00	52.33	30.85	7.45	24.69	53.62	74.00	-20.38	PK
V	9688.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
V	12110.00	51.11	31.02	8.99	25.57	54.65	74.00	-19.35	PK
V	12110.00	43.97	31.02	8.99	25.57	47.51	54.00	-6.49	AV
H	4844.00	53.79	30.55	5.77	24.66	53.67	74.00	-20.33	PK
H	4844.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
H	7266.00	50.42	30.33	6.32	24.55	50.96	74.00	-23.04	PK
H	7266.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
H	9688.00	54.91	30.85	7.45	24.69	56.20	74.00	-17.80	PK
H	9688.00	43.01	30.85	7.45	24.69	44.30	54.00	-9.70	AV
H	12110.00	53.91	31.02	8.99	25.57	57.45	74.00	-16.55	PK
H	12110.00	43.10	31.02	8.99	25.57	46.64	54.00	-7.36	AV

Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	52.64	30.55	5.77	24.66	52.52	74.00	-21.48	PK
V	4874.00	43.55	30.55	5.77	24.66	43.43	54.00	-10.57	AV
V	7311.00	51.02	30.33	6.32	24.55	51.56	74.00	-22.44	PK
V	7311.00	43.47	30.33	6.32	24.55	44.01	54.00	-9.99	AV
V	9748.00	54.36	30.85	7.45	24.69	55.65	74.00	-18.35	PK
V	9748.00	43.99	30.85	7.45	24.69	45.28	54.00	-8.72	AV
V	12185.00	54.35	31.02	8.99	25.57	57.89	74.00	-16.11	PK
V	12185.00	43.29	31.02	8.99	25.57	46.83	54.00	-7.17	AV
H	4874.00	50.82	30.55	5.77	24.66	50.70	74.00	-23.30	PK
H	4874.00	43.86	30.55	5.77	24.66	43.74	54.00	-10.26	AV
H	7311.00	54.55	30.33	6.32	24.55	55.09	74.00	-18.91	PK
H	7311.00	43.68	30.33	6.32	24.55	44.22	54.00	-9.78	AV
H	9748.00	50.42	30.85	7.45	24.69	51.71	74.00	-22.29	PK
H	9748.00	43.85	30.85	7.45	24.69	45.14	54.00	-8.86	AV
H	12185.00	50.71	31.02	8.99	25.57	54.25	74.00	-19.75	PK
H	12185.00	43.43	31.02	8.99	25.57	46.97	54.00	-7.03	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amp lifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:2452MHz									
V	4904.00	54.55	30.55	5.77	24.66	54.43	74.00	-19.57	PK
V	4904.00	43.73	30.55	5.77	24.66	43.61	54.00	-10.39	AV
V	7356.00	50.23	30.33	6.32	24.55	50.77	74.00	-23.23	PK
V	7356.00	43.10	30.33	6.32	24.55	43.64	54.00	-10.36	AV
V	9808.00	51.95	30.85	7.45	24.69	53.24	74.00	-20.76	PK
V	9808.00	43.68	30.85	7.45	24.69	44.97	54.00	-9.03	AV
V	12260.00	52.15	31.02	8.99	25.57	55.69	74.00	-18.31	PK
V	12260.00	43.33	31.02	8.99	25.57	46.87	54.00	-7.13	AV
H	4904.00	52.10	30.55	5.77	24.66	51.98	74.00	-22.02	PK
H	4904.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
H	7356.00	51.62	30.33	6.32	24.55	52.16	74.00	-21.84	PK
H	7356.00	43.07	30.33	6.32	24.55	43.61	54.00	-10.39	AV
H	9808.00	50.41	30.85	7.45	24.69	51.70	74.00	-22.30	PK
H	9808.00	43.34	30.85	7.45	24.69	44.63	54.00	-9.37	AV
H	12260.00	54.28	31.02	8.99	25.57	57.82	74.00	-16.18	PK
H	12260.00	43.34	31.02	8.99	25.57	46.88	54.00	-7.12	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel, the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

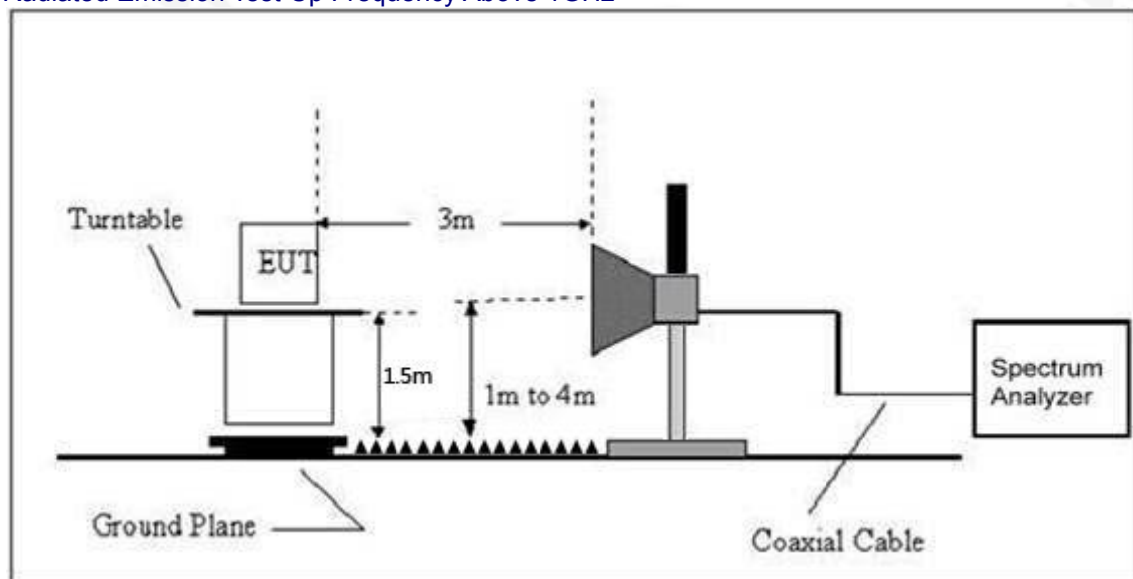

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	53.54	30.22	4.85	23.98	52.15	74.00	PK	PASS
	H	2390.00	44.97	30.22	4.85	23.98	43.58	54.00	AV	PASS
	H	2400.00	53.77	30.22	4.85	23.98	52.38	74.00	PK	PASS
	H	2400.00	44.88	30.22	4.85	23.98	43.49	54.00	AV	PASS
	V	2390.00	54.07	30.22	4.85	23.98	52.68	74.00	PK	PASS
	V	2390.00	44.99	30.22	4.85	23.98	43.60	54.00	AV	PASS
	V	2400.00	54.84	30.22	4.85	23.98	53.45	74.00	PK	PASS
	V	2400.00	44.42	30.22	4.85	23.98	43.03	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.09	30.22	4.85	23.98	51.70	74.00	PK	PASS
	H	2483.50	44.08	30.22	4.85	23.98	42.69	54.00	AV	PASS
	H	2500.00	54.23	30.22	4.85	23.98	52.84	74.00	PK	PASS
	H	2500.00	44.52	30.22	4.85	23.98	43.13	54.00	AV	PASS
	V	2483.50	53.46	30.22	4.85	23.98	52.07	74.00	PK	PASS
	V	2483.50	44.69	30.22	4.85	23.98	43.30	54.00	AV	PASS
	V	2500.00	54.00	30.22	4.85	23.98	52.61	74.00	PK	PASS
	V	2500.00	44.92	30.22	4.85	23.98	43.53	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	54.14	30.22	4.85	23.98	52.75	74.00	PK	PASS
	H	2390.00	44.82	30.22	4.85	23.98	43.43	54.00	AV	PASS
	H	2400.00	54.38	30.22	4.85	23.98	52.99	74.00	PK	PASS
	H	2400.00	44.85	30.22	4.85	23.98	43.46	54.00	AV	PASS
	V	2390.00	53.37	30.22	4.85	23.98	51.98	74.00	PK	PASS
	V	2390.00	44.12	30.22	4.85	23.98	42.73	54.00	AV	PASS
	V	2400.00	54.71	30.22	4.85	23.98	53.32	74.00	PK	PASS
	V	2400.00	44.74	30.22	4.85	23.98	43.35	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.89	30.22	4.85	23.98	52.50	74.00	PK	PASS
	H	2483.50	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	H	2500.00	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	H	2500.00	44.00	30.22	4.85	23.98	42.61	54.00	AV	PASS
	V	2483.50	53.81	30.22	4.85	23.98	52.42	74.00	PK	PASS
	V	2483.50	44.15	30.22	4.85	23.98	42.76	54.00	AV	PASS
	V	2500.00	54.06	30.22	4.85	23.98	52.67	74.00	PK	PASS
	V	2500.00	44.72	30.22	4.85	23.98	43.33	54.00	AV	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	54.49	30.22	4.85	23.98	53.10	74.00	PK	PASS
	H	2390.00	44.71	30.22	4.85	23.98	43.32	54.00	AV	PASS
	H	2400.00	54.08	30.22	4.85	23.98	52.69	74.00	PK	PASS
	H	2400.00	44.58	30.22	4.85	23.98	43.19	54.00	AV	PASS
	V	2390.00	54.64	30.22	4.85	23.98	53.25	74.00	PK	PASS
	V	2390.00	44.30	30.22	4.85	23.98	42.91	54.00	AV	PASS
	V	2400.00	54.70	30.22	4.85	23.98	53.31	74.00	PK	PASS
	V	2400.00	44.08	30.22	4.85	23.98	42.69	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	54.76	30.22	4.85	23.98	53.37	74.00	PK	PASS
	H	2483.50	44.84	30.22	4.85	23.98	43.45	54.00	AV	PASS
	H	2500.00	53.69	30.22	4.85	23.98	52.30	74.00	PK	PASS
	H	2500.00	44.20	30.22	4.85	23.98	42.81	54.00	AV	PASS
	V	2483.50	54.14	30.22	4.85	23.98	52.75	74.00	PK	PASS
	V	2483.50	44.83	30.22	4.85	23.98	43.44	54.00	AV	PASS
	V	2500.00	53.34	30.22	4.85	23.98	51.95	74.00	PK	PASS



	V	2500.00	44.59	30.22	4.85	23.98	43.20	54.00	AV	PASS
802.11n40	Low Channel 2422MHz									
	H	2390.00	54.50	30.22	4.85	23.98	53.11	74.00	PK	PASS
	H	2390.00	44.65	30.22	4.85	23.98	43.26	54.00	AV	PASS
	H	2400.00	54.80	30.22	4.85	23.98	53.41	74.00	PK	PASS
	H	2400.00	44.93	30.22	4.85	23.98	43.54	54.00	AV	PASS
	V	2390.00	53.39	30.22	4.85	23.98	52.00	74.00	PK	PASS
	V	2390.00	44.29	30.22	4.85	23.98	42.90	54.00	AV	PASS
	V	2400.00	54.44	30.22	4.85	23.98	53.05	74.00	PK	PASS
	V	2400.00	44.64	30.22	4.85	23.98	43.25	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	53.62	30.22	4.85	23.98	52.23	74.00	PK	PASS
	H	2483.50	44.61	30.22	4.85	23.98	43.22	54.00	AV	PASS
	H	2500.00	53.29	30.22	4.85	23.98	51.90	74.00	PK	PASS
	H	2500.00	44.10	30.22	4.85	23.98	42.71	54.00	AV	PASS
	V	2483.50	54.16	30.22	4.85	23.98	52.77	74.00	PK	PASS
	V	2483.50	44.80	30.22	4.85	23.98	43.41	54.00	AV	PASS
	V	2500.00	54.44	30.22	4.85	23.98	53.05	74.00	PK	PASS
	V	2500.00	44.51	30.22	4.85	23.98	43.12	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-11.402	8	PASS
2437 MHz	-10.897	8	PASS
2462 MHz	-11.001	8	PASS

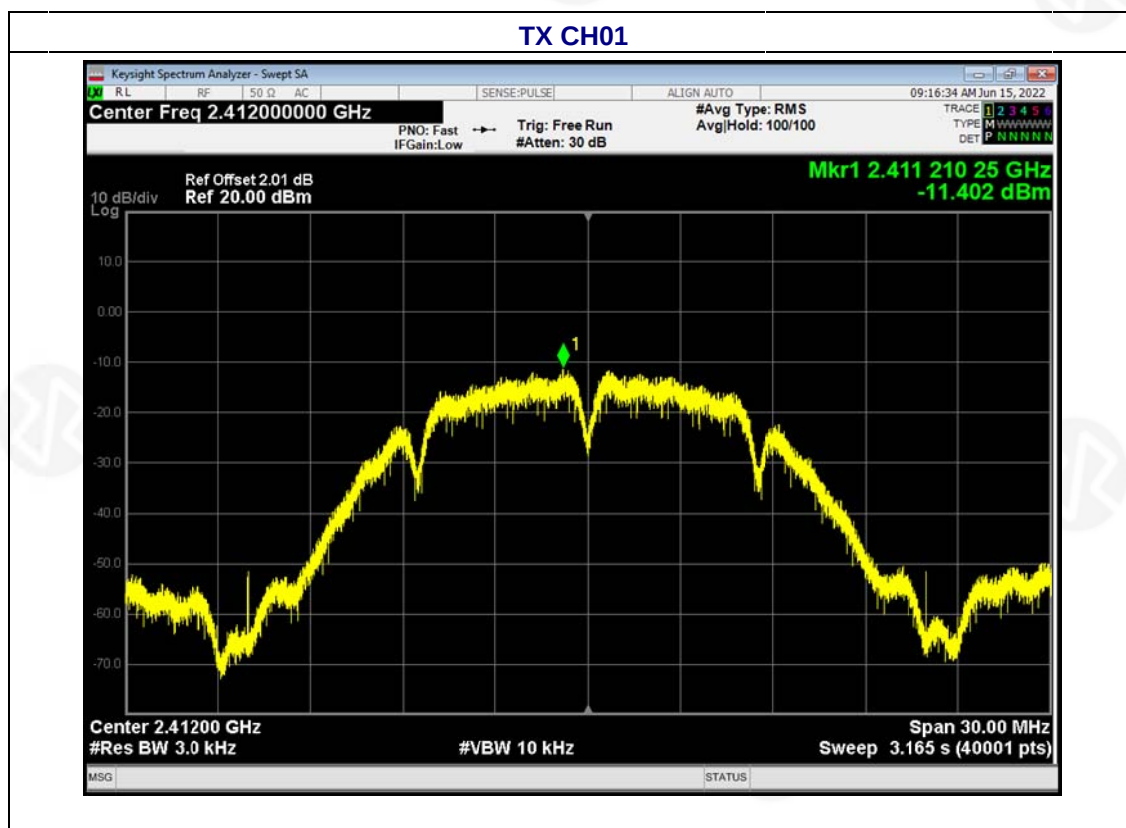




TX CH06

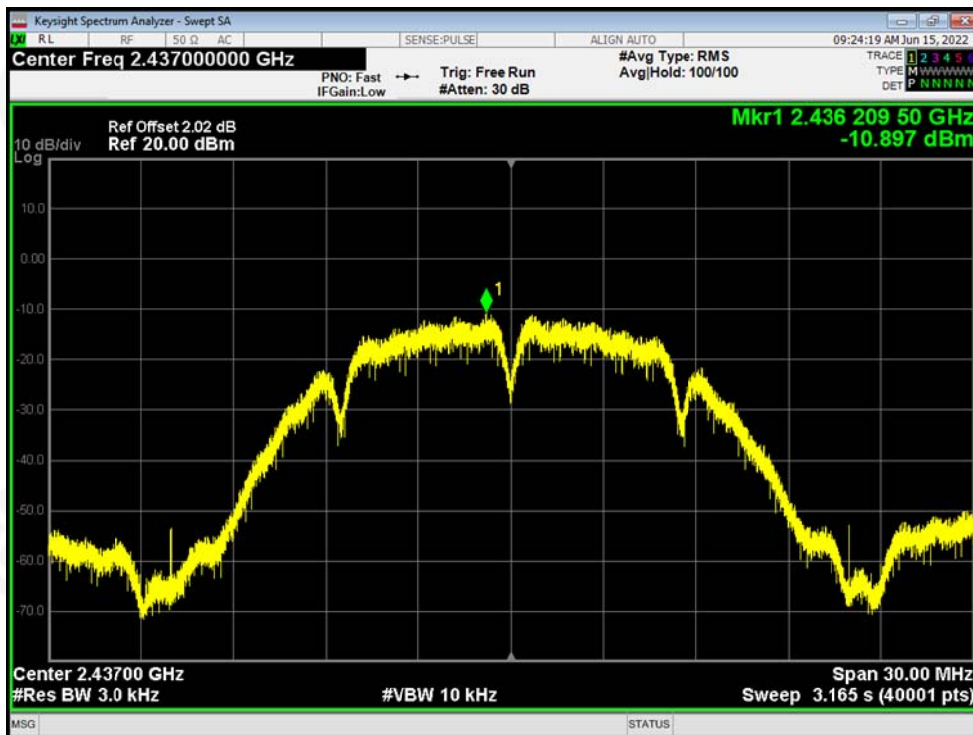


TX CH11

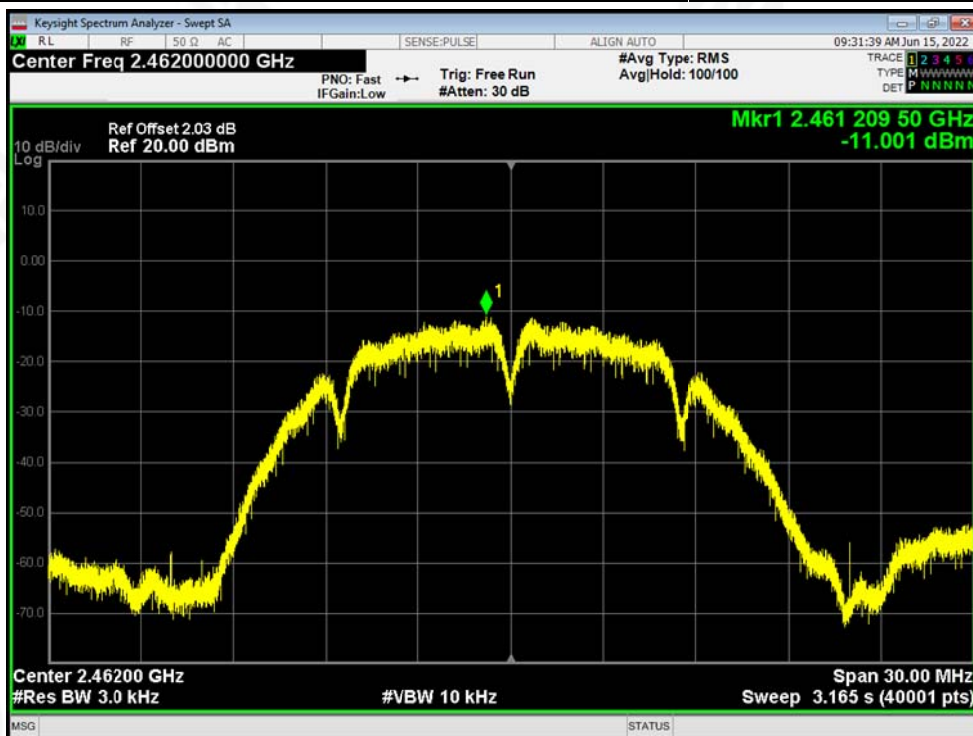




Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-13.545	8	PASS
2437 MHz	-10.562	8	PASS
2462 MHz	-14.779	8	PASS

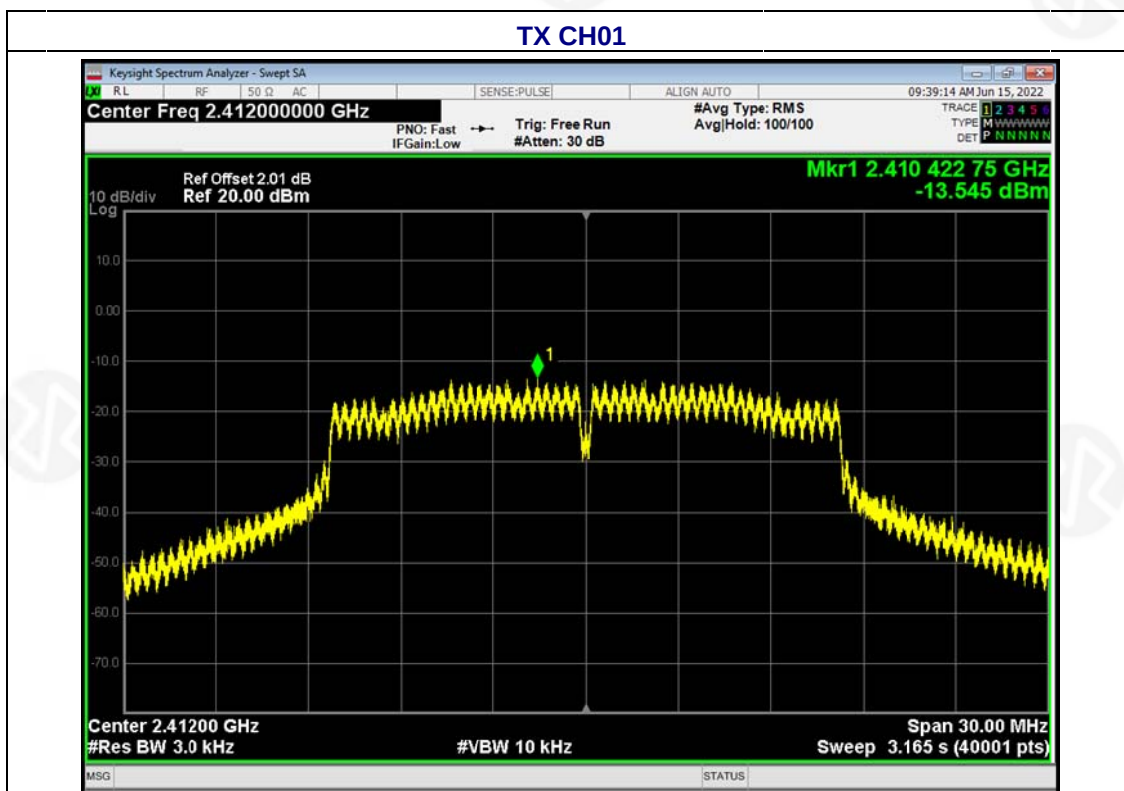




TX CH06

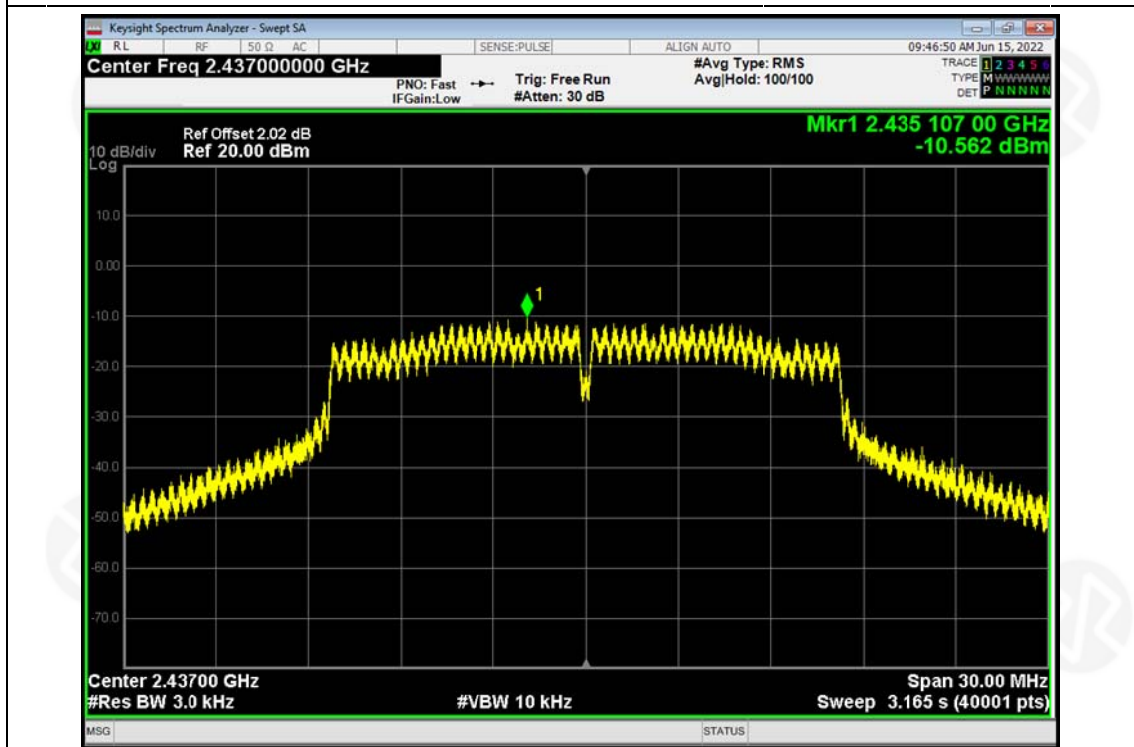


TX CH11

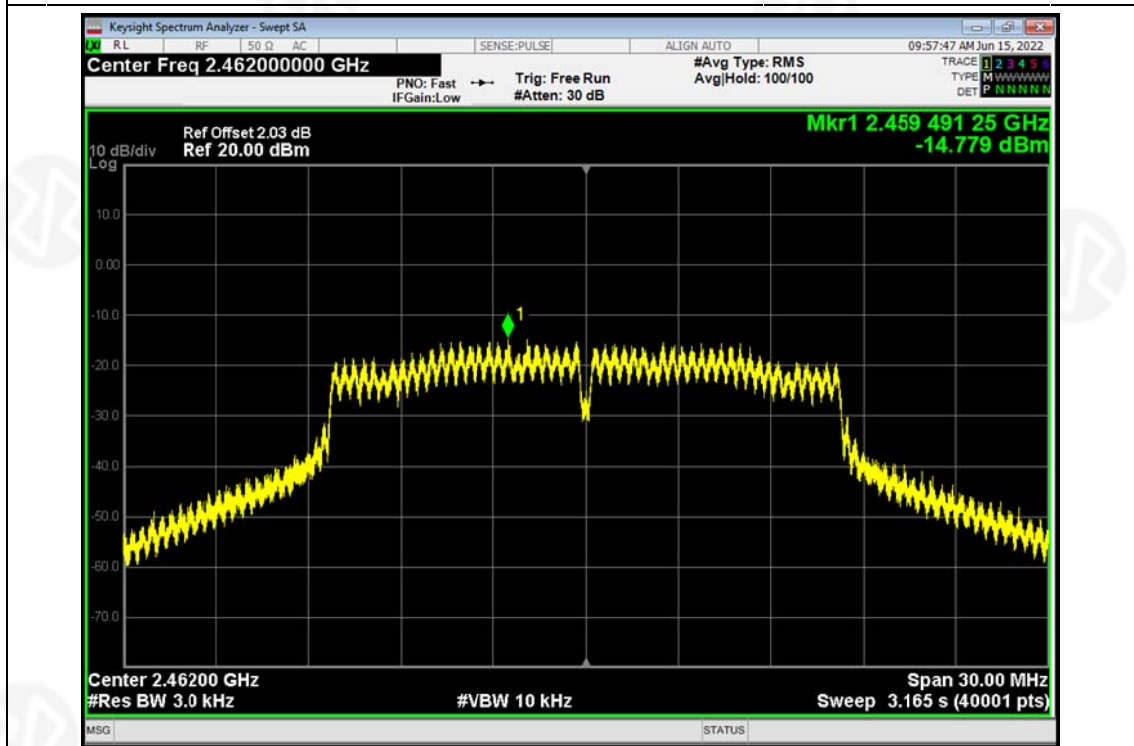




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-11.661	8	PASS
2437 MHz	-8.951	8	PASS
2462 MHz	-13.798	8	PASS

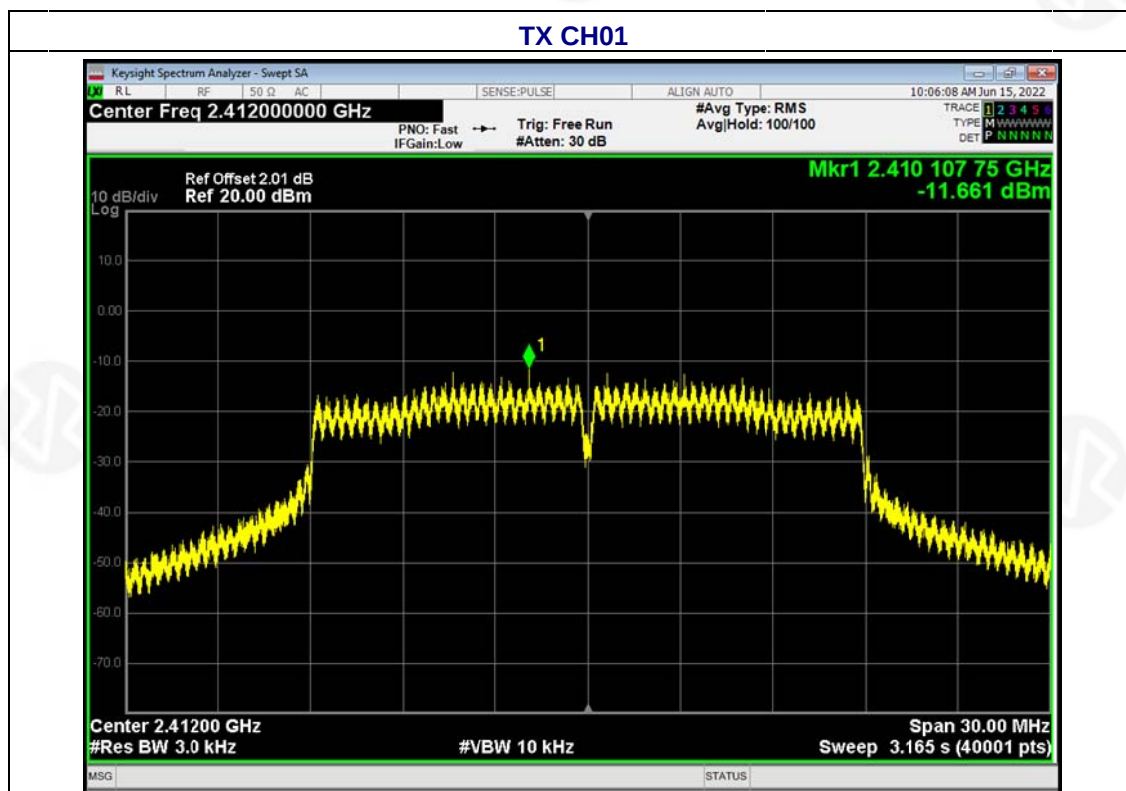




TX CH06

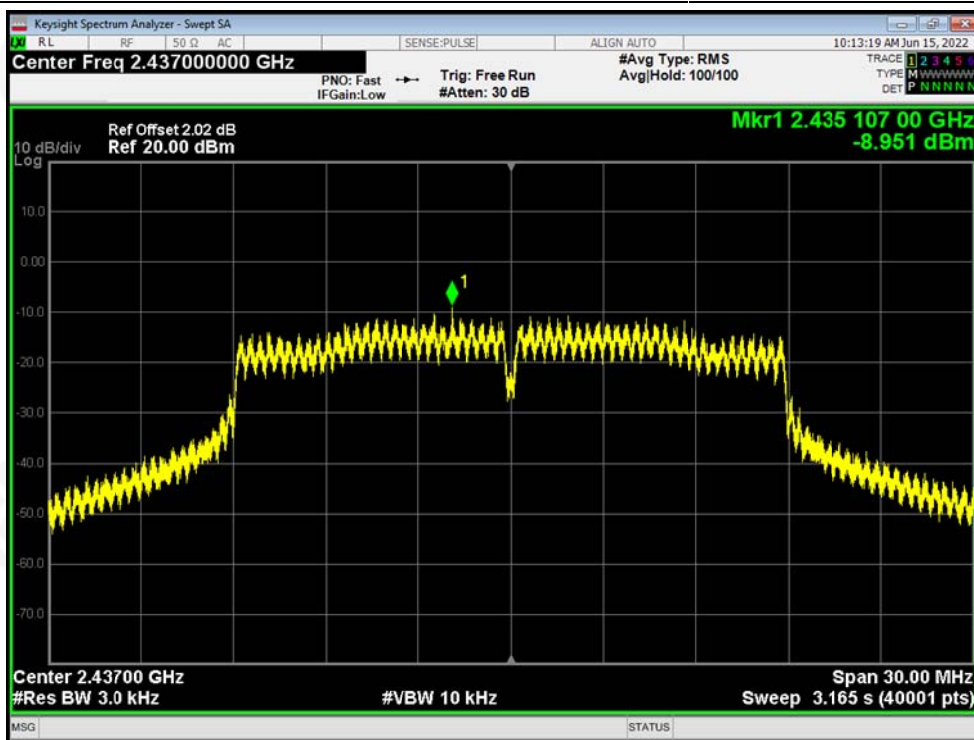

TX CH11

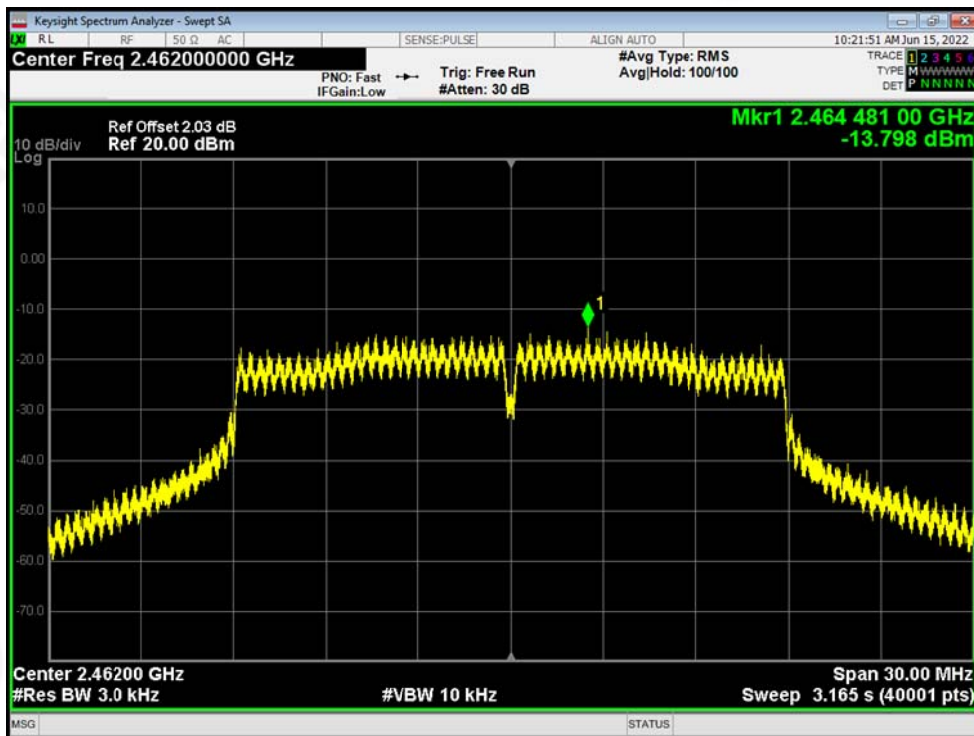




Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M)		


Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2422 MHz	-16.137	8	PASS
2437 MHz	-12.996	8	PASS
2452 MHz	-17.167	8	PASS

TX CH03

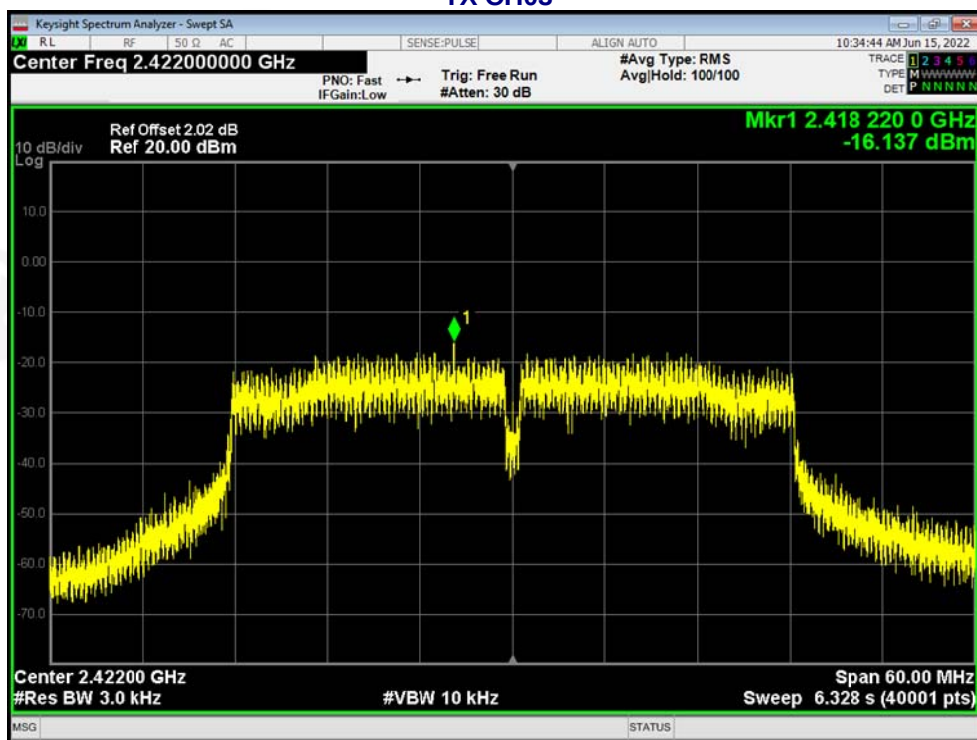




TX CH06

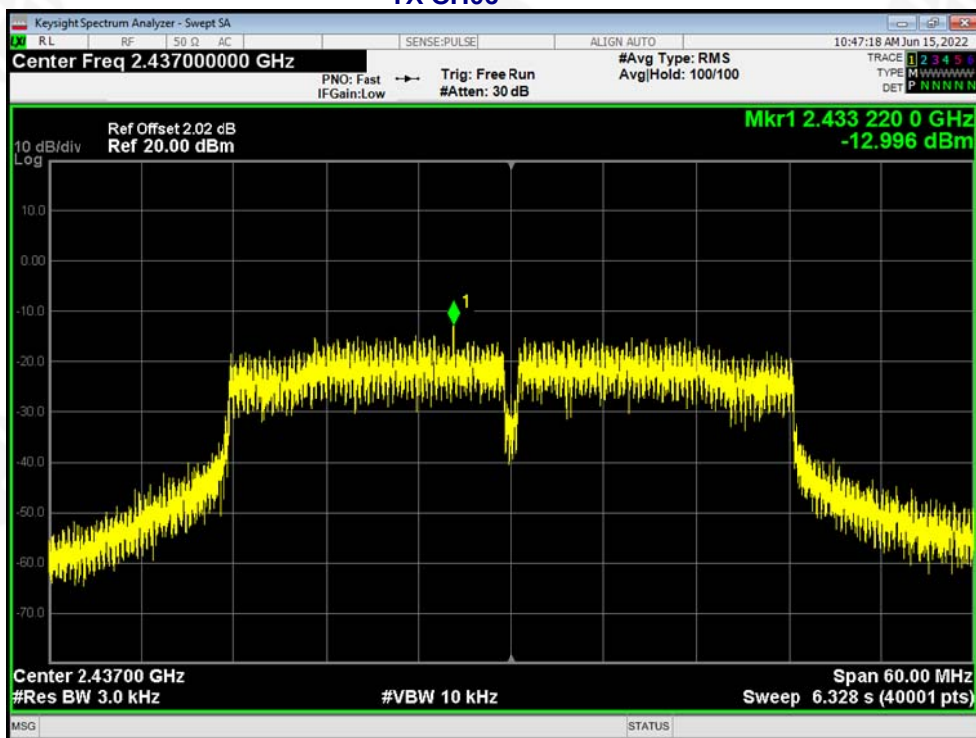

TX CH09

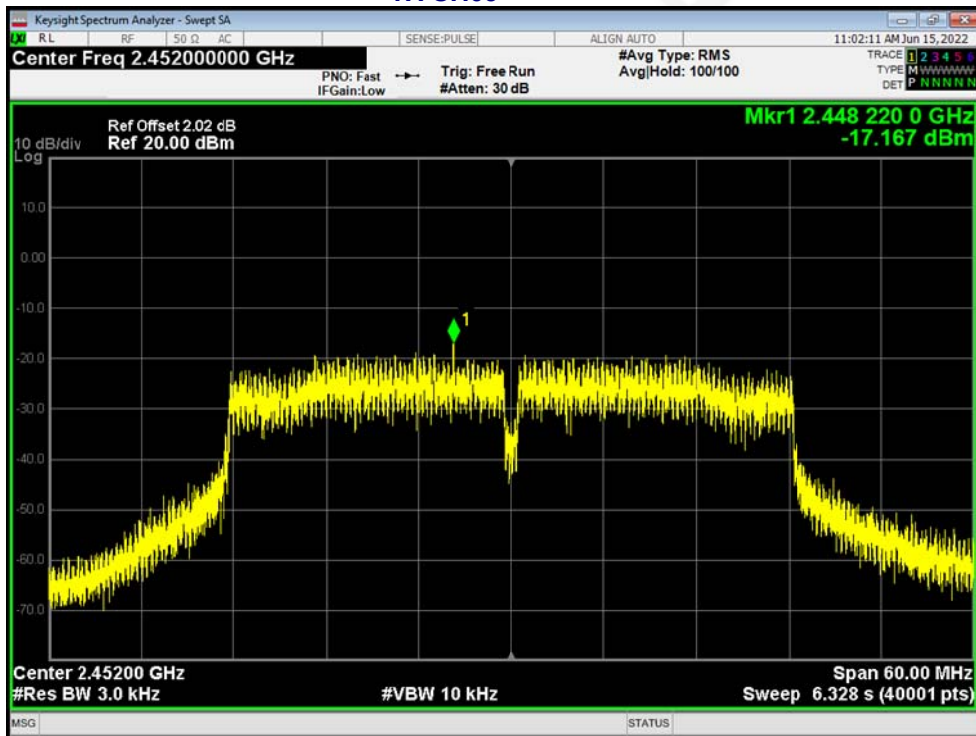



7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Test CH	-6dB Occupy Bandwidth (MHz)					Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Limit(KHz)	
Lowest	9.087	15.030	15.060	35.110	>500	Pass
Middle	9.830	15.320	15.120	35.040		
Highest	9.116	14.650	13.850	35.080		



Test plot as follows:

802.11b

802.11g

Lowest channel



Middle channel



Highest channel





802.11n20

802.11n40


Lowest channel



Middle channel



Highest channel

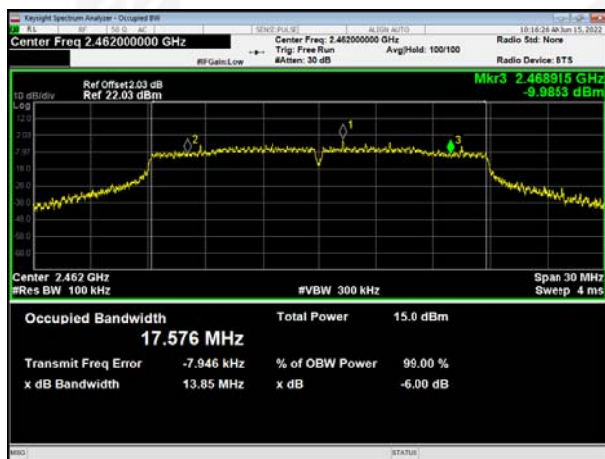



8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	8.155	7.887	6.369	6.218	30.00	Pass
Middle	8.054	7.673	6.157	6.207		
Highest	8.019	7.783	6.244	6.193		



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS




Test plot as follows:

Test mode:802.11b

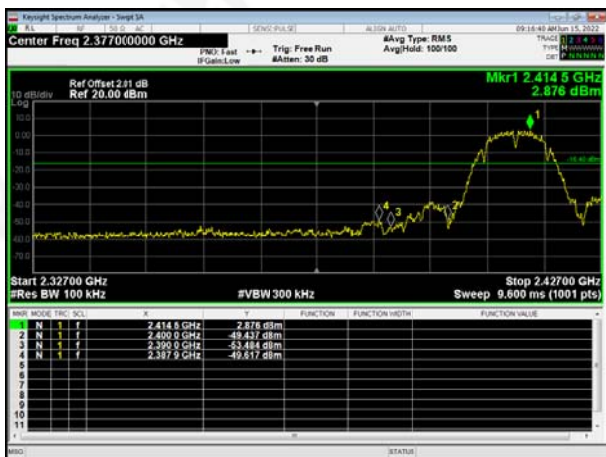


Lowest channel

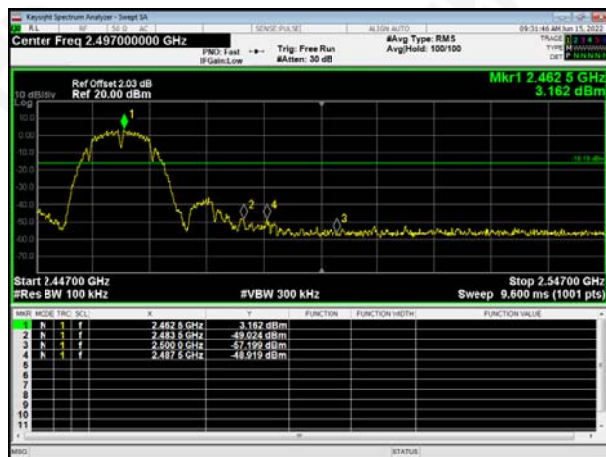

Highest channel

Test mode:802.11g

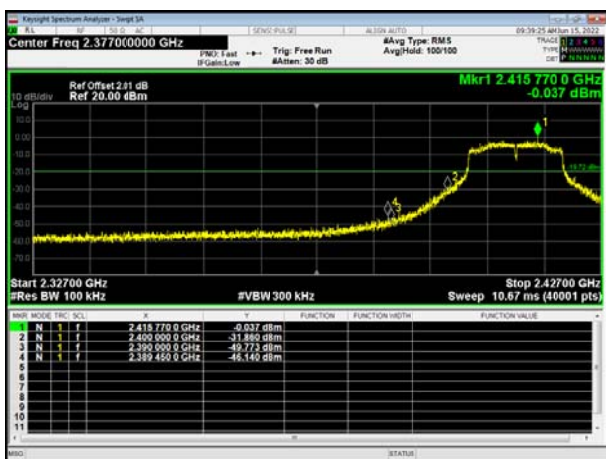

Lowest channel



Highest channel

[illegible][illegible]

Keysight Spectrum Analyzer - Single SW

Center Freq 2.40200000 GHz

Ref Offset 2.0 dB
Ref 20.0 dBm

Start 2.35200 GHz
#Res BW 100 kHz

Stop 2.45200 GHz
Sweep 10.67 ms (40001 pts)

Marker 1: 2.425 GHz, -2.958 dBm

Marker	Mode	Freq (GHz)	Amplitude (dBm)
1	N	2.425 727 ± GHz	-2.958 dBm
2	N	2.400 000 ± GHz	-34.771 dBm
3	N	2.390 000 ± GHz	-47.714 dBm
4	N	2.389 245 ± GHz	-49.315 dBm

KeySight Spectrum Analyzer - Dgen21 10

File Edit View Settings Help

Source: FPL601

AL100n AUTO

11:52:26 AM Jan 15, 2022

Center Freq 2.472000000 GHz

PNO: Fast

Trig: Free Run

MAnten: 30 dB

Avg Type: RMS

Avg Hold: 100/100

Trace: 0 2 4 7

Time: 0.000000000

Def: 2.472000000

11:52:26 AM Jan 15, 2022

Ref Offset: 2.02 dB

Ref: 20.00 dBm

Mkr1 2.444 482.5 GHz

-4.142 dBm

10 dBm

0 dBm

30 dBm

40 dBm

50 dBm

60 dBm

70 dBm

Start 2.42200 GHz

Res BW 100 kHz

VBW 300 kHz

Stop 2.52200 GHz

Sweep 10.67 ms (40001 pts)

Marker 1: 2.444 482.5 GHz, -4.142 dBm

Marker 2: 2.483 800.0 GHz, -43.094 dBm

Marker 3: 2.550 000.0 GHz, -56.721 dBm

Marker 4: 2.488 117.5 GHz, -40.017 dBm

Marker 5: 2.488 117.5 GHz, -40.017 dBm

Marker 6: 2.488 117.5 GHz, -40.017 dBm

Marker 7: 2.488 117.5 GHz, -40.017 dBm

Marker 8: 2.488 117.5 GHz, -40.017 dBm

Marker 9: 2.488 117.5 GHz, -40.017 dBm

Marker 10: 2.488 117.5 GHz, -40.017 dBm

Marker 11: 2.488 117.5 GHz, -40.017 dBm

Marker 12: 2.488 117.5 GHz, -40.017 dBm

Marker 13: 2.488 117.5 GHz, -40.017 dBm

Marker 14: 2.488 117.5 GHz, -40.017 dBm

Marker 15: 2.488 117.5 GHz, -40.017 dBm

Marker 16: 2.488 117.5 GHz, -40.017 dBm

Marker 17: 2.488 117.5 GHz, -40.017 dBm

Marker 18: 2.488 117.5 GHz, -40.017 dBm

Marker 19: 2.488 117.5 GHz, -40.017 dBm

Marker 20: 2.488 117.5 GHz, -40.017 dBm

Marker 21: 2.488 117.5 GHz, -40.017 dBm

Marker 22: 2.488 117.5 GHz, -40.017 dBm

Marker 23: 2.488 117.5 GHz, -40.017 dBm

Marker 24: 2.488 117.5 GHz, -40.017 dBm

Marker 25: 2.488 117.5 GHz, -40.017 dBm

Marker 26: 2.488 117.5 GHz, -40.017 dBm

Marker 27: 2.488 117.5 GHz, -40.017 dBm

Marker 28: 2.488 117.5 GHz, -40.017 dBm

Marker 29: 2.488 117.5 GHz, -40.017 dBm

Marker 30: 2.488 117.5 GHz, -40.017 dBm

Marker 31: 2.488 117.5 GHz, -40.017 dBm

Marker 32: 2.488 117.5 GHz, -40.017 dBm

Marker 33: 2.488 117.5 GHz, -40.017 dBm

Marker 34: 2.488 117.5 GHz, -40.017 dBm

Marker 35: 2.488 117.5 GHz, -40.017 dBm

Marker 36: 2.488 117.5 GHz, -40.017 dBm

Marker 37: 2.488 117.5 GHz, -40.017 dBm

Marker 38: 2.488 117.5 GHz, -40.017 dBm

Marker 39: 2.488 117.5 GHz, -40.017 dBm

Marker 40: 2.488 117.5 GHz, -40.017 dBm

Marker 41: 2.488 117.5 GHz, -40.017 dBm

Marker 42: 2.488 117.5 GHz, -40.017 dBm

Marker 43: 2.488 117.5 GHz, -40.017 dBm

Marker 44: 2.488 117.5 GHz, -40.017 dBm

Marker 45: 2.488 117.5 GHz, -40.017 dBm

Marker 46: 2.488 117.5 GHz, -40.017 dBm

Marker 47: 2.488 117.5 GHz, -40.017 dBm

Marker 48: 2.488 117.5 GHz, -40.017 dBm

Marker 49: 2.488 117.5 GHz, -40.017 dBm

Marker 50: 2.488 117.5 GHz, -40.017 dBm

Marker 51: 2.488 117.5 GHz, -40.017 dBm

Marker 52: 2.488 117.5 GHz, -40.017 dBm

Marker 53: 2.488 117.5 GHz, -40.017 dBm

Marker 54: 2.488 117.5 GHz, -40.017 dBm

Marker 55: 2.488 117.5 GHz, -40.017 dBm

Marker 56: 2.488 117.5 GHz, -40.017 dBm

Marker 57: 2.488 117.5 GHz, -40.017 dBm

Marker 58: 2.488 117.5 GHz, -40.017 dBm

Marker 59: 2.488 117.5 GHz, -40.017 dBm

Marker 60: 2.488 117.5 GHz, -40.017 dBm

Marker 61: 2.488 117.5 GHz, -40.017 dBm

Marker 62: 2.488 117.5 GHz, -40.017 dBm

Marker 63: 2.488 117.5 GHz, -40.017 dBm

Marker 64: 2.488 117.5 GHz, -40.017 dBm

Marker 65: 2.488 117.5 GHz, -40.017 dBm

Marker 66: 2.488 117.5 GHz, -40.017 dBm

Marker 67: 2.488 117.5 GHz, -40.017 dBm

Marker 68: 2.488 117.5 GHz, -40.017 dBm

Marker 69: 2.488 117.5 GHz, -40.017 dBm

Marker 70: 2.488 117.5 GHz, -40.017 dBm

Marker 71: 2.488 117.5 GHz, -40.017 dBm

Marker 72: 2.488 117.5 GHz, -40.017 dBm

Marker 73: 2.488 117.5 GHz, -40.017 dBm

Marker 74: 2.488 117.5 GHz, -40.017 dBm

Marker 75: 2.488 117.5 GHz, -40.017 dBm

Marker 76: 2.488 117.5 GHz, -40.017 dBm

Marker 77: 2.488 117.5 GHz, -40.017 dBm

Marker 78: 2.488 117.5 GHz, -40.017 dBm

Marker 79: 2.488 117.5 GHz, -40.017 dBm

Marker 80: 2.488 117.5 GHz, -40.017 dBm

Marker 81: 2.488 117.5 GHz, -40.017 dBm

Marker 82: 2.488 117.5 GHz, -40.017 dBm

Marker 83: 2.488 117.5 GHz, -40.017 dBm

Marker 84: 2.488 117.5 GHz, -40.017 dBm

Marker 85: 2.488 117.5 GHz, -40.017 dBm

Marker 86: 2.488 117.5 GHz, -40.017 dBm

Marker 87: 2.488 117.5 GHz, -40.017 dBm

Marker 88: 2.488 117.5 GHz, -40.017 dBm

Marker 89: 2.488 117.5 GHz, -40.017 dBm

Marker 90: 2.488 117.5 GHz, -40.017 dBm

Marker 91: 2.488 117.5 GHz, -40.017 dBm

Marker 92: 2.488 117.5 GHz, -40.017 dBm

Marker 93: 2.488 117.5 GHz, -40.017 dBm

Marker 94: 2.488 117.5 GHz, -40.017 dBm

Marker 95: 2.488 117.5 GHz, -40.017 dBm

Marker 96: 2.488 117.5 GHz, -40.017 dBm

Marker 97: 2.488 117.5 GHz, -40.017 dBm

Marker 98: 2.488 117.5 GHz, -40.017 dBm

Marker 99: 2.488 117.5 GHz, -40.017 dBm

Marker 100: 2.488 117.5 GHz, -40.017 dBm

Marker 101: 2.488 117.5 GHz, -40.017 dBm

Marker 102: 2.488 117.5 GHz, -40.017 dBm

Marker 103: 2.488 117.5 GHz, -40.017 dBm

Marker 104: 2.488 117.5 GHz, -40.017 dBm

Marker 105: 2.488 117.5 GHz, -40.017 dBm

Marker 106: 2.488 117.5 GHz, -40.017 dBm

Marker 107: 2.488 117.5 GHz, -40.017 dBm

Marker 108: 2.488 117.5 GHz, -40.017 dBm

Marker 109: 2.488 117.5 GHz, -40.017 dBm

Marker 110: 2.488 117.5 GHz, -40.017 dBm

Marker 111: 2.488 117.5 GHz, -40.017 dBm

Marker 1

 www.zkt-lab.com



Test plot as follows:

802.11b


Lowest channel



Middle channel




Highest channel

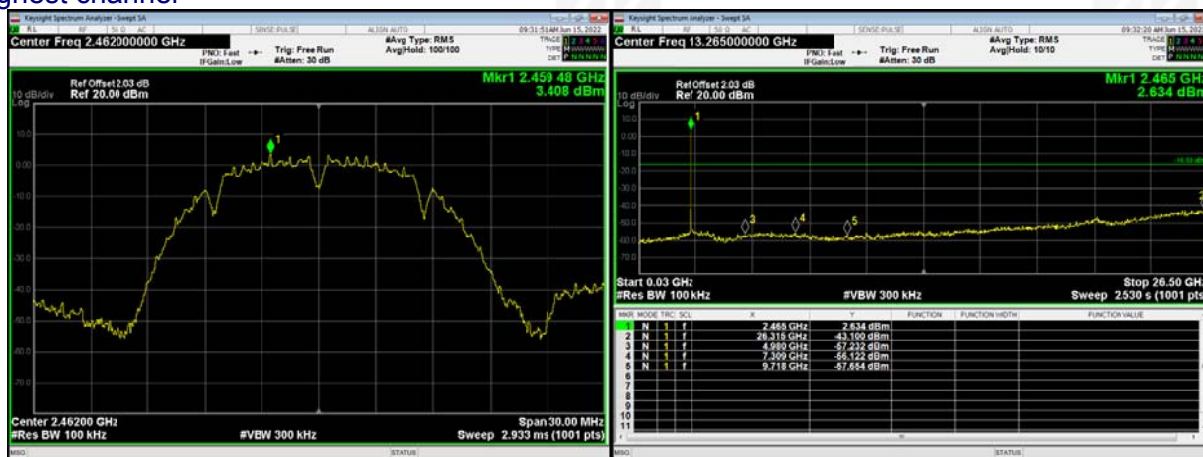




802.11g


Lowest channel

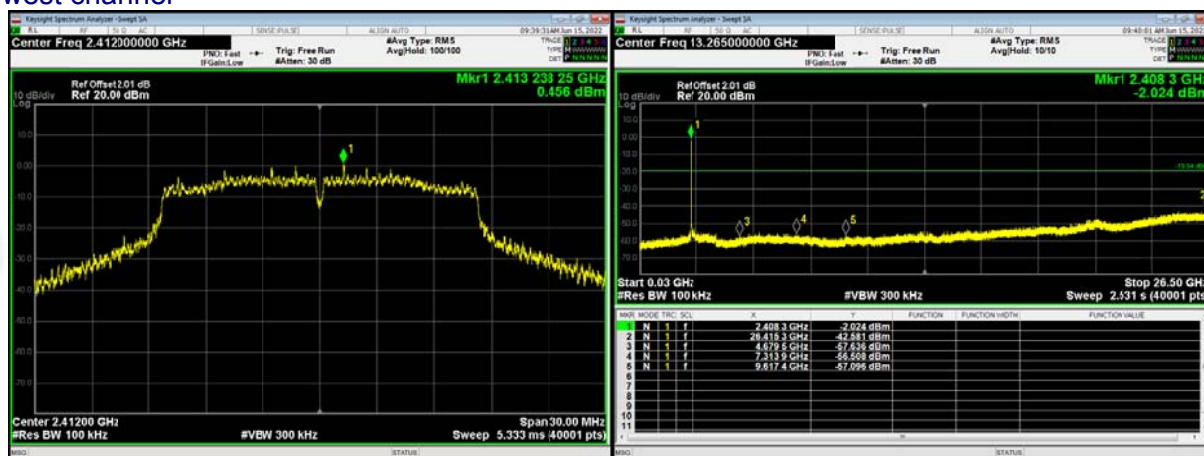

Middle channel

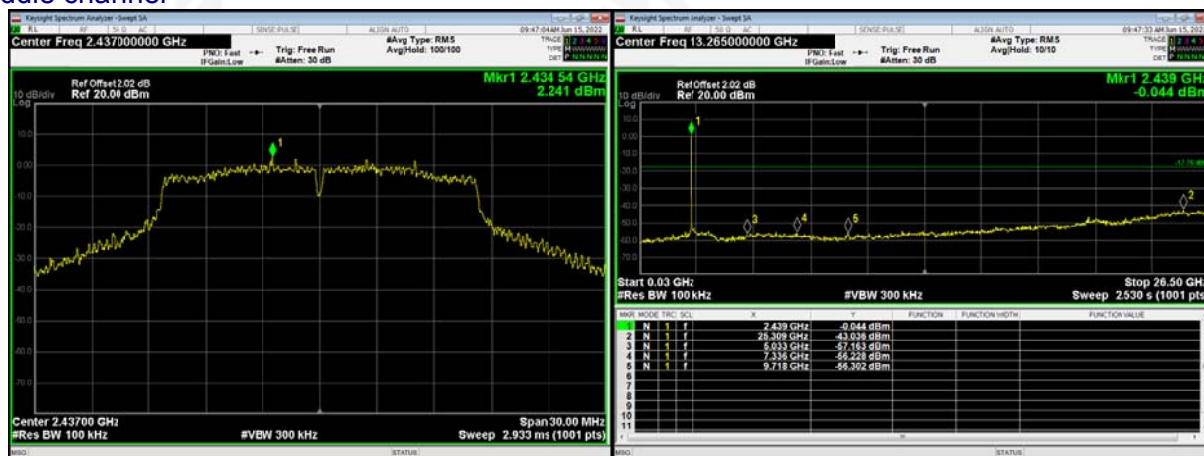


Highest channel

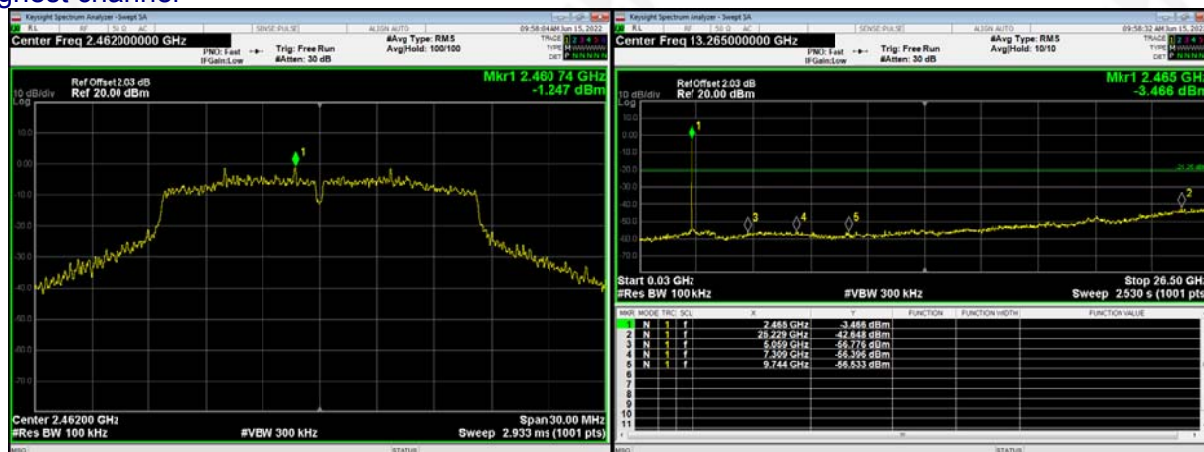




802.11n(HT20)


Lowest channel

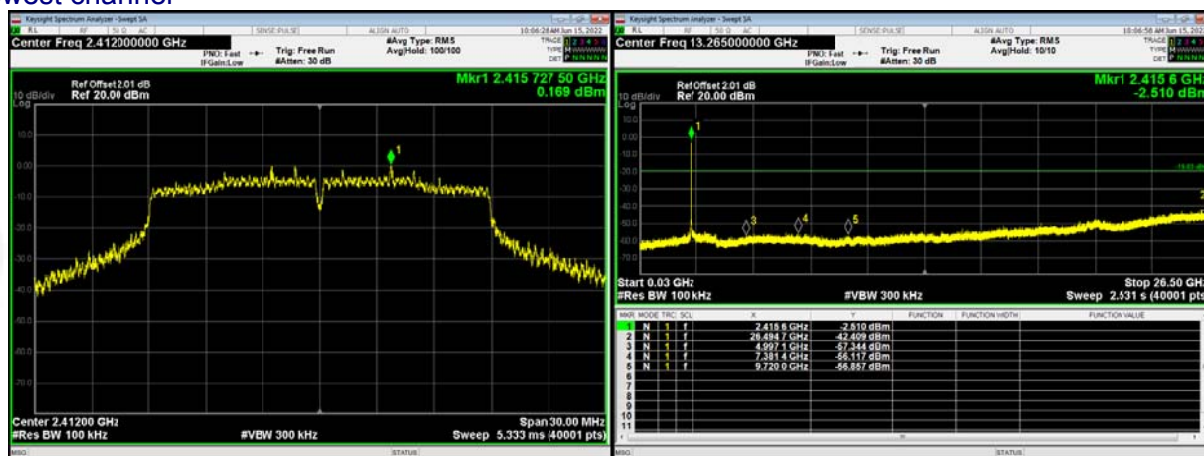

Middle channel

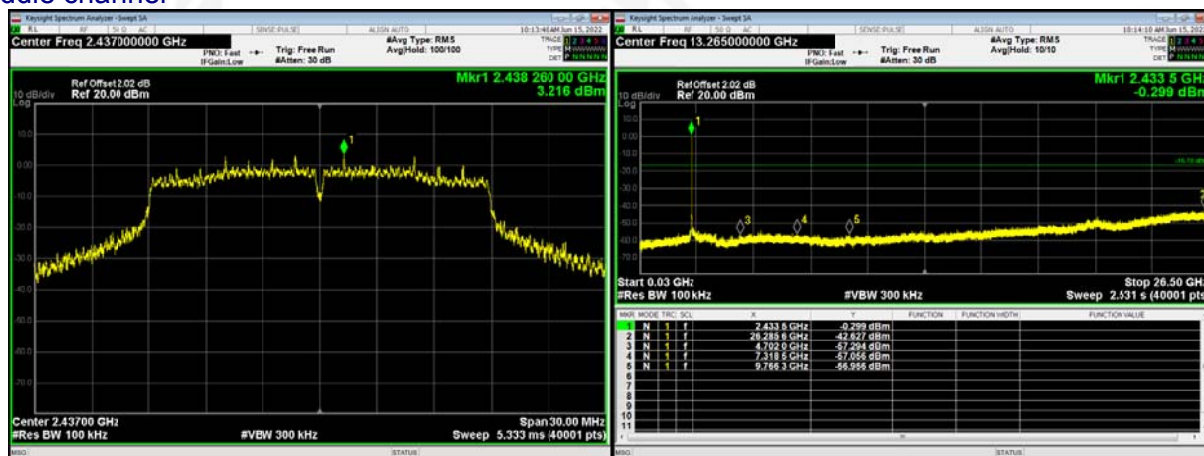


Highest channel

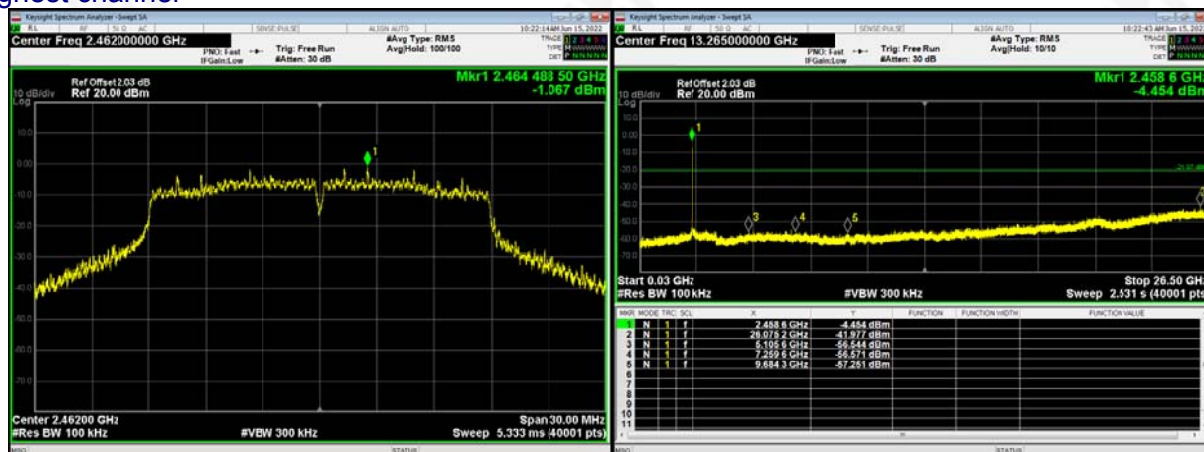




802.11n(HT40)


Lowest channel

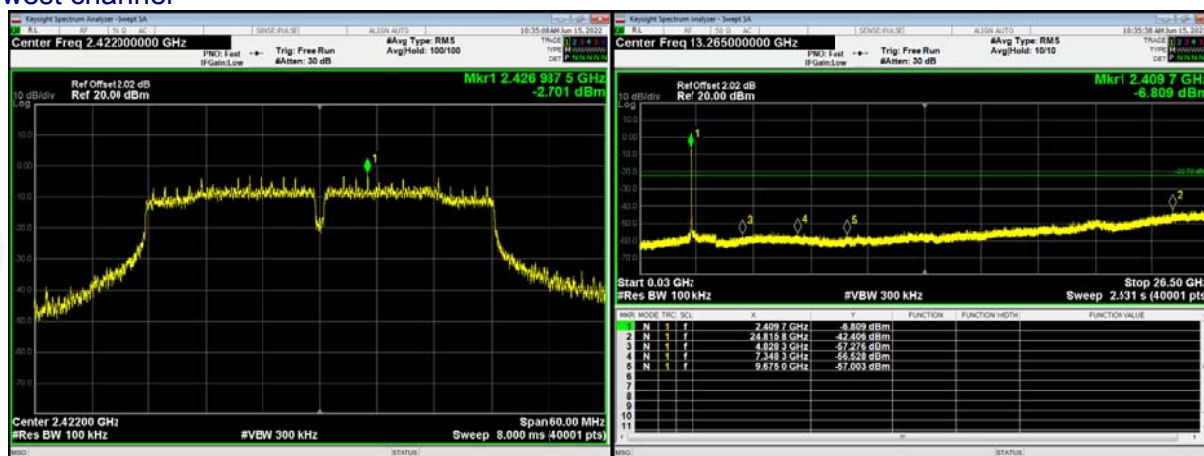

Middle channel

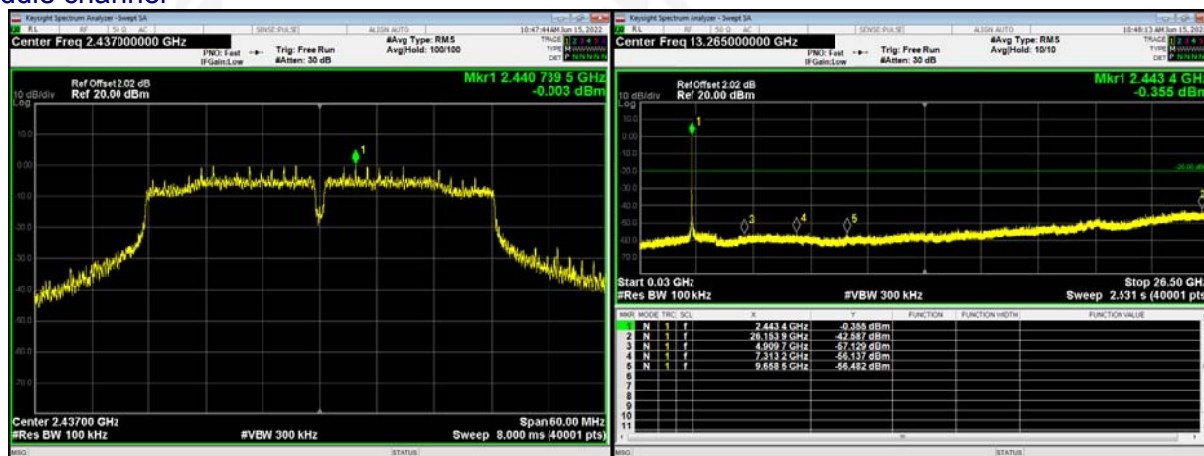

Highest channel

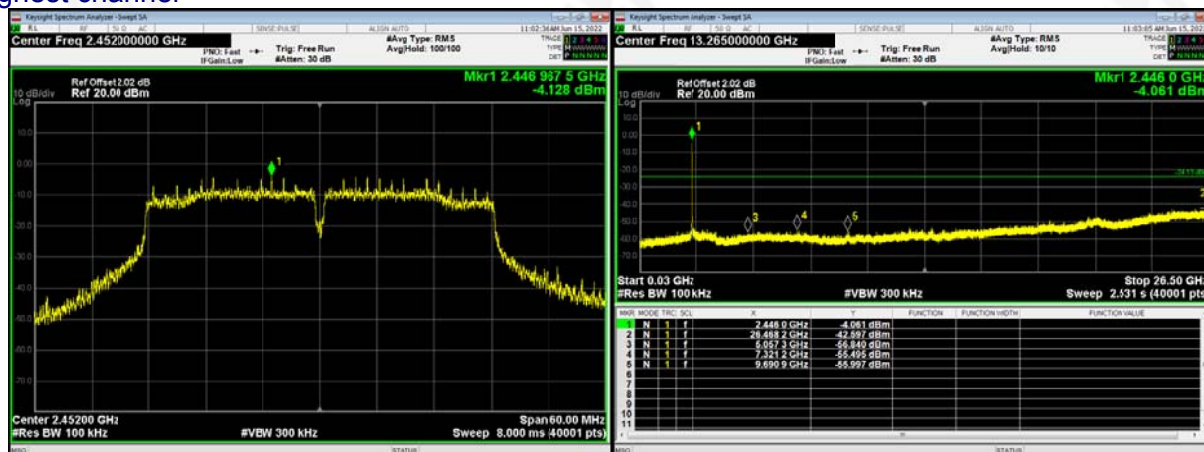



10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Chip Antenna, the best case gain of the antenna is 0dBi, reference to the appendix II for details	



11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****