




RADIO EXPOSURE TEST REPORT

FCC ID : 2A7JMDNL1R0
Equipment : Argus
Brand Name : PLATO
Model Name : DNL1R0
Applicant : Unison Labs
Suite 505, 1300 South El Camino Real, San Mateo, California
Manufacturer : AIMobile Co., Ltd.
6F, No. 166, Section 4, Chengde Road, Shilin District, Taipei
City, 111
Standard : 47 CFR Part 2.1091

The product was received on May 25, 2022, and testing was started from Jul. 05, 2022 and completed on Jul. 25, 2023. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

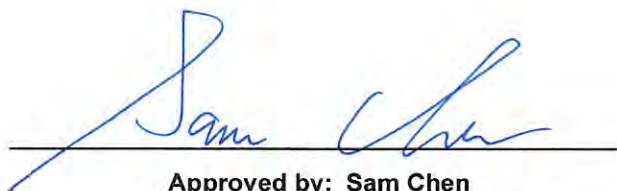

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	5
1.3 Table for Waveform information	5
1.4 Accessories	6
1.5 Applicable Standards	6
1.6 Testing Location	6
2 Maximum Permissible Exposure	7
2.1 Limit of Maximum Permissible Exposure	7
2.2 MPE Calculation Method	7
2.3 MPE Exemption	8
2.4 Calculated Result and Limit.....	9

Photographs of EUT v01



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A1_1 Ver1.1

Page Number : 3 of 12
Issued Date : Oct. 13, 2023
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-
Reference to Sporton Project No.: 252312-01				

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Viola Huang



1 General Description

1.1 EUT General Information

RF General Information				
Evaluation Mode	Frequency Range (GHz)	Operating Frequency (GHz)	Waveform	Modulation Type
60 GHz	57-71	61.02~61.249	Hawk	Frequency Modulated Continuous Wave
		61.02~61.447	Owl, Parliament	

1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	PLATO	01566000101	PCB Antenna	N/A	7
2	PLATO	01566000101	PCB Antenna	N/A	7
3	PLATO	01566000101	PCB Antenna	N/A	7

Note: The above information was declared by manufacturer.

For Hawk waveform

For 3TX

Ant. 1, Ant. 2 and Ant. 3 can be use as all antenna transmitting.

For Owl waveform and Parliament waveform

For 1TX

The EUT supports the Ant. 1 and Ant. 3 with TX diversity function.

At any time, there is only one antenna port can transmitting RF signal.

1.3 Table for Waveform information

Waveform	Frequency range	Bandwidth	Radio Function
Hawk	61.02GHz~61.249GHz	229MHz	3 path transmit
Owl	61.02GHz~61.447GHz	427.336MHz	1 path transmit
Parliament	61.02 GHz~61.447 GHz	427.249 MHz	1 path transmit

Note: The above information was declared by manufacturer.



1.4 Accessories

Wall mount*1

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.6 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= Pth.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance

R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.
Note: R is in meters, f is in MHz.	



2.4 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For Hawk waveform

Worst-case Integrated Band Power of Unwanted Emission (30MHz ~ 40GHz)						
Start (MHz)	Stop (MHz)	Limit (dBuV/m at 3m)	Limit (mW EIRP)	RBW (MHz)	Num Intervals	Integrated Band Power (mW)
30	88	40	3.01995E-06	0.1	580	0.002
88	216	43.5	6.76083E-06	0.1	1280	0.009
216	960	46	1.20226E-05	0.1	7440	0.089
960	1000	54	7.58578E-05	0.1	400	0.030
1000	40000	54	7.58578E-05	1	39000	2.958
Total						3.089

Total Integrated Band Power of All Emission (30MHz ~ 200GHz)				
Test Frequency (GHz)	30MHz ~ 40GHz Integrated Band Power (mW)	40 ~ 200GHz EIRP (dBm)	40 ~ 200GHz EIRP (mW)	30MHz ~200GHz Total Integrated Band Power (mW)
61.1345	3.089	17.73	59.34	62.426

Maximum Permissible Exposure of Fundamental Emissions							
Separation Distance (cm)	20						
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
61.1345	7	17.73	0.50	18.23	66.58	0.013	1.00

Maximum Permissible Exposure of Fundamental + Unwanted Emissions								
Separation Distance (cm)	20							
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Average EIRP Power (mW)	Tolerance (dB)	Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
61.1345	7	17.95	62.43	0.50	18.45	70.04	0.014	1.00

**For Owl waveform**

Worst-case Integrated Band Power of Unwanted Emission (30MHz ~ 40GHz)						
Start (MHz)	Stop (MHz)	Limit (dBuV/m at 3m)	Limit (mW EIRP)	RBW (MHz)	Num Intervals	Integrated Band Power (mW)
30	88	40	3.01995E-06	0.1	580	0.002
88	216	43.5	6.76083E-06	0.1	1280	0.009
216	960	46	1.20226E-05	0.1	7440	0.089
960	1000	54	7.58578E-05	0.1	400	0.030
1000	40000	54	7.58578E-05	1	39000	2.958
Total						3.089

Total Integrated Band Power of All Emission (30MHz ~ 200GHz)				
Test Frequency (GHz)	30MHz ~ 40GHz Integrated Band Power (mW)	40 ~ 200GHz EIRP (dBm)	40 ~ 200GHz EIRP (mW)	30MHz ~ 200GHz Total Integrated Band Power (mW)
61.25	3.089	14.10	25.70	28.791

Maximum Permissible Exposure of Fundamental Emissions							
Separation Distance (cm)	20						
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
61.25	7	14.10	0.50	14.60	28.84	0.006	1.00

Maximum Permissible Exposure of Fundamental + Unwanted Emissions								
Separation Distance (cm)	20							
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Average EIRP Power (mW)	Tolerance (dB)	Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
61.25	7	14.59	28.79	0.50	15.09	32.30	0.006	1.00

**For Parliament waveform**

Worst-case Integrated Band Power of Unwanted Emission (30MHz ~ 40GHz)						
Start (MHz)	Stop (MHz)	Limit (dBuV/m at 3m)	Limit (mW EIRP)	RBW (MHz)	Num Intervals	Integrated Band Power (mW)
30	88	40	3.01995E-06	0.1	580	0.002
88	216	43.5	6.76083E-06	0.1	1280	0.009
216	960	46	1.20226E-05	0.1	7440	0.089
960	1000	54	7.58578E-05	0.1	400	0.030
1000	40000	54	7.58578E-05	1	39000	2.958
Total						3.089

Total Integrated Band Power of All Emission (30MHz ~ 200GHz)				
Test Frequency (GHz)	30MHz ~ 40GHz Integrated Band Power (mW)	40 ~ 200GHz EIRP (dBm)	40 ~ 200GHz EIRP (mW)	30MHz ~ 200GHz Total Integrated Band Power (mW)
61.25	3.089	16.45	44.15	47.243

Maximum Permissible Exposure of Fundamental Emissions							
Separation Distance (cm)	20						
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
61.25	7	16.45	0.50	16.95	49.54	0.010	1.00

Maximum Permissible Exposure of Fundamental + Unwanted Emissions								
Separation Distance (cm)	20							
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Average EIRP Power (mW)	Tolerance (dB)	Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
61.25	7	16.74	47.24	0.50	17.24	53.01	0.011	1.00

**For Hawk waveform**

MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
61130	0.0008	0.2	18.23	16.08	0.041	0.768	Complies

For Owl waveform

MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
61250	0.0008	0.2	14.60	12.45	0.018	0.768	Complies

For Parliament waveform

MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
61250	0.0008	0.2	16.95	14.80	0.030	0.768	Complies

————THE END————