





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR220900038302

Page: 1 of 27

TEST REPORT

Application No.: FYCR2209000383ME

Applicant: MIO LABS INC.

Address of Applicant: #1023, ZGC Innovation Center 4500 Great America Pkwy, Santa Clara

California, 95054 United States

Manufacturer: MIO LABS INC.

Address of Manufacturer: #1023, ZGC Innovation Center 4500 Great America Pkwy, Santa Clara

California, 95054 United States

Factory: VivaChek Biotech (Hangzhou) Co., Ltd

Address of Factory: 1/2/3 F Building 1, 16 East Zhenxing Rd., Yuhang Economy Development

Zone, Hangzhou, 311100, Zhejiang, China

Equipment Under Test (EUT):

EUT Name: Mio Blood Glucose Meter

Model No.: TeleBGM 2282-G

FCC ID: 2A7JQTELEBGM2282-G Standard(s): CFR 47, FCC Part 2

> CFR 47, FCC Part 24 subpart E CFR 47, FCC Part 27 subpart C

Date of Receipt: 2022-09-27

Date of Test: 2022-09-28 to 2022-10-31

Date of Issue: 2022-10-31

Test Result: Pass*

EMC Technical Manager

WinkeyWang



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions/Terms-a-Document.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditio

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: FYCR220900038302

Page: 2 of 27

	Revision Record				
Version Chapter Date Modifier Remark					
01		2022-10-31		Original	

Authorized for issue by:		
	(ree 2han	
	Tree Zhan/Project Engineer	-
	WinkeyWarg	
	Winkey Wang/Reviewer	-



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or examile CPA Descheck/Pages.com.



Report No.: FYCR220900038302

Page: 3 of 27

2 Test Summary

CatM1 Band 2

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §24.232	EIRP≤2W	PASS
Peak-Average Ratio	§2.1046 §24.232	≤13dB	PASS
Modulation Characteristics	§2.1047	.1047 Digital modulation	
Bandwidth	§2.1049(h)	§2.1049(h) OBW: No limit EBW: No limit	
Band Edge Compliance	Compliance \$2.1051 ≤ -13dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		PASS
Spurious emissions at antenna terminals	§2.1051 §24.238	≤ -13 dBm/1MHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	PASS
Field strength of spurious radiation	§2.1053 §24.238	≤ -13dBm/1MHz	PASS
Frequency stability	§2.1055 §24.235	≤ ±2.5ppm	PASS

CatM1 Band 4

	F00			
Test Item	FCC	Requirements	Verdict	
1 001 110	Rule No.	noquii oillollio	7 01 0101	
Effective (Isotropic)	§2.1046			
Radiated Power Output	§27.50(d)	EIRP≤1W	PASS	
Data				
Peak-Average Ratio	§2.1046	≤13dB	PASS	
Teak-Average Natio	§27.50(d)	31000	1 700	
Modulation	§2.1047	Digital modulation	PASS	
Characteristics	92.1047	Digital Hodulation	PASS	
Bandwidth	\$2.4040/b\	OBW: No limit	PASS	
Danuwium	§2.1049(h)	EBW: No limit	PASS	
Pand Edge Compliance	§2.1051	≤ -13dBm/1%*EBW, in 1 MHz bands immediately	PASS	
Band Edge Compliance	§27.53(h)	outside and adjacent to the frequency block.	PASS	
Spurious emissions at	§2.1051	≤ -13 dBm/1MHz, from 9 kHz to 10th harmonics but	DACC	
antenna terminals	§27.53(h)	outside authorized operating frequency ranges.	PASS	
Field strength of	§2.1053	42dDm/4MU=	PASS	
spurious radiation	§27.53(h)	≤ -13dBm/1MHz	PASS	
Eroquonov stability	§2.1055	< ±2 5ppm	DV66	
Frequency stability	§27.54	≤ ±2.5ppm	PASS	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-and-Comments, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Ter



Report No.: FYCR220900038302

Page: 4 of 27

CatM1 Band 12

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)	ERP≤3W	PASS
Peak-Average Ratio	§2.1046 §27.50(c)	≤13dB	PASS
Modulation Characteristics	§2.1047	Digital modulation	PASS
Bandwidth	§2.1049(h)	OBW: No limit EBW: No limit	PASS
Band Edge Compliance	§2.1051 §27.53(g)	≤ -13dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS
Spurious emissions at antenna terminals	§2.1051 §27.53(g)	≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	PASS
Field strength of spurious radiation	§2.1053 §27.53(g)	≤ -13dBm/100KHz	PASS
Frequency stability	§2.1055 §27.54	≤ ±2.5ppm	PASS

CatM1 Band 13

Cativi Banu 13				
Test Item FCC Rule No.		Requirements	Verdict	
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)	ERP≤3W	PASS	
Peak-Average Ratio	§2.1046 §27.50(c)	≤13dB	PASS	
Modulation Characteristics	§2.1047	Digital modulation	PASS	
Bandwidth	§2.1049(h)	OBW: No limit EBW: No limit	PASS	
Band Edge Compliance	§2.1051 §27.53(g)	≤ -13dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	PASS	
Spurious emissions at antenna terminals	§2.1051 §27.53(g)	≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	PASS	
Field strength of spurious radiation	§2.1053 §27.53(g)	≤ -13dBm/100KHz	PASS	
Frequency stability	§2.1055 §27.54	≤ ±2.5ppm	PASS	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or examile CPA Descheck/Pages.com.



Report No.: FYCR220900038302

Page: 5 of 27

3 Contents

		Pa	age
1	COVE	R PAGE	1
2	TEST	SUMMARY	3
3	CONT	ENTS	5
4	GENE	RAL INFORMATION	7
	4.1 D	DETAILS OF E.U.T	7
		DESCRIPTION OF SUPPORT UNITS	
		MEASUREMENT UNCERTAINTY	
	4.4 T	EST FREQUENCY	9
		EST ENVIRONMENT	
		EST LOCATION	
		EST FACILITY	
		DEVIATION FROM STANDARDS	
	4.9 A	ABNORMALITIES FROM STANDARD CONDITIONS	11
5	EQUIF	PMENT LIST	12
6	D A DIC	O SPECTRUM MATTER TEST RESULTS	1/
U			
		EFFECTIVE (ISOTROPIC) RADIATED POWER OUTPUT DATA	
	6.1.1	E.U.T. Operation	
	6.1.2 6.1.3	Test Mode Description	
	6.1.3 6.1.4	Test Setup Diagram Measurement Procedure and Data	
		Peak-Average Ratio	
	6.2.1	E.U.T. Operation	
	6.2.2	Test Mode Description	
	6.2.3	Test Setup Diagram	
	6.2.4	Measurement Procedure and Data	
		MODULATION CHARACTERISTICS	
	6.3.1	E.U.T. Operation	
	6.3.2	Test Mode Description	16
	6.3.3	Test Setup Diagram	16
	6.3.4	Measurement Procedure and Data	16
	6.4 B	BANDWIDTH	17
	6.4.1	E.U.T. Operation	17
	6.4.2	Test Mode Description	
	6.4.3	Test Setup Diagram	
	6.4.4	Measurement Procedure and Data	
		BAND EDGE COMPLIANCE	
	6.5.1	E.U.T. Operation	
	6.5.2	Test Mode Description	
	6.5.3	Test Setup Diagram	
	6.5.4 6.6 S	Measurement Procedure and Data Spurious emissions at antenna terminals	
	0.0	DPUKIUUS EIIISSIUNS AT ANTENNA TEKIMINALS	ι ≿



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.gspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: FYCR220900038302

Page: 6 of 27

6.6.1	E.U.T. Operation	
6.6.2	Test Mode Description	
6.6.3	Test Setup Diagram	
6.6.4	Measurement Procedure and Data	
6.7 F	ELD STRENGTH OF SPURIOUS RADIATION	20
6.7.1	Zioiii opoiadoiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii	20
6.7.2	Test Mode Description	20
6.7.3	Test Setup Diagram	20
6.7.4	Measurement Procedure and Data	21
6.8 F	REQUENCY STABILITY	
6.8.1	E.U.T. Operation	26
6.8.2	Test Mode Description	26
6.8.3	Test Setup Diagram	26
6.8.4	Measurement Procedure and Data	
7 TEST	SETUP PHOTO	27
8 EUT C	CONSTRUCTIONAL DETAILS (EUT PHOTOS)	27



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.gspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: FYCR220900038302

Page: 7 of 27

4 General Information

4.1 Details of E.U.T.

Power supply:	AC Adapter
	Model: BLJ06L050100U-U
	Input: AC 100-240V, 50/60Hz, 0.2A Max
	Output: DC 5.0V, 1.0A
	·
	3.7VDC 800mAh Rechargeable Lithium Ion Battery
Test voltage:	AC 120V, 60Hz
	Note: Both nominal AC 120V, 60Hz and AC 240 V, 60Hz are required for testing in accordance with FCC KDB174176, this report only shows the results of the worst test result(AC 120V, 60Hz);
Cable(s):	DC cable:146cm unshielded
Internal Source:	More than 108MHz
Sample Type:	Portable device
Operation Frequency Band:	CatM1 Band 2, 4, 12, 13
Modulation Type:	QPSK, 16QAM
Antenna Type:	FPC Antenna
Antenna Gain:	CatM1 Band 2: 0.22dBi, CatM1 Band 4: 1.37dBi, CatM1 Band 12: - 2.18dBi, CatM1 Band 13: -1.72dBi,
Extreme temp. Tolerance:	-30°C to +50°C

Remark: The information in this section is provided by the applicant or manufacturer, CCS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.		
	-	-	-		
The EUT has been tested as an independent unit.					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443.



Report No.: FYCR220900038302

Page: 8 of 27

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Effective (Isotropic) Radiated Power Output Data	± 3.1dB (Below 1GHz),± 4.4dB (Above 1GHz)
Peak-Average Ratio	± 0.8dB
Modulation Characteristics	± 0.8dB
Bandwidth	± 0.3%
Band Edge Compliance	± 2.7dB
Spurious emissions at antenna terminals	± 2.7dB
Field strength of spurious radiation	± 2.7dB
Frequency stability	± 5.4 x 10-8



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or examile CPA Descheck/Pages.com.



Report No.: FYCR220900038302

Page: 9 of 27

4.4 Test Frequency

, ,	Nominal		RF Channel	
Test Mode	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
	1.4	1850.7	1880	1909.3
	3	1850.87	1879.37	1909.13
CatM1 Band 2	5	1850.79	1878.29	1909.21
Cally i Banu 2	10	1851.22	1876.22	1908.78
	15	1851.47	1873.97	1908.53
	20	1851.9	1871.9	1908.1
	Nominal		RF Channel	
Test Mode	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
	1.4	1710.7	1732.5	1754.3
	3	1710.87	1731.87	1754.13
CatM1 Band 4	5	1710.79	1730.79	1754.21
Cativii Band 4	10	1711.22	1728.72	1753.78
	15	1711.47	1726.47	1753.53
	20	1711.9	1724.4	1753.1
	Nominal	RF Channel		
Test Mode	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
	1.4	699.7	707.5	715.3
CatM1 Band 12	3	699.87	706.87	715.13
Cativii Bana 12	5	699.79	705.79	715.21
	10	700.22	703.72	714.78
	Nominal		RF Channel	
Test Mode	Bandwidth	Low (L)	Middle (M)	High (H)
	(MHz)	MHz	MHz	MHz
CatM1 Band 13	5	777.79	780.29	786.21
Calivi i Daliu 13	10	778.22	778.22	785.78



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or examile CPA Descheck/Pages.com.



Report No.: FYCR220900038302

Page: 10 of 27

4.5 Test Environment

Environment Parameter	Selected Values During Tests		
Relative Humidity	55.7%		
Atmospheric Pressure:	1015Pa		
	TL	-30°C	
Temperature:	TN	+20°C	
	TH	+50°C	
	VL	102 V	
Voltage:	VN	120 V	
	VH	138 V	

NOTE: VL= lower extreme test voltage

VN= nominal voltage

VH= upper extreme test voltage TL= lower extreme test temperature

TN= normal temperature

TH= upper extreme test temperature



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443.



Report No.: FYCR220900038302

Page: 11 of 27

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark,Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China

Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6606.01)

Compliance Certification Services (Kunshan) Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

• FCC -Designation Number: CN1322

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

• Innovation, Science and Economic Development Canada

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and.for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.Terms-a



Report No.: FYCR220900038302

Page: 12 of 27

5 Equipment List

RF conducted test							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date		
Programmable DC Source	Chroma	62024P-80-60	SEM011-09	2022/07/12	2023/07/11		
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2022/07/12	2023/07/11		
Spectrum Analyzer	Rohde & Schwarz	FSU43	SEM004-08	2022/07/12	2023/07/11		
Measurement Software	TST	TST PASS V2.0	N/A	N/A	N/A		
Attenuator	Huber+Suhner	6620_SMA- 50-1	SEM021-09	2022/07/12	2023/07/11		
Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2022/03/29	2023/03/28		
Power Sensor	KEYSIGHT	U2021XA	SEM009-15	2022/07/12	2023/07/11		

Field strength of spurious radiation(Below 1GHz & Above 1GHz)								
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date			
3m Anechoic Chamber	CRT	N/A	SEM001-13	2021/7/13	2024/7/12			
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-33	2021/9/25	2024/9/24			
Biconical Antenna	Schwarzbeck	VUBA9117	SEM003-35	2021/12/26	2024/12/25			
Loop Antenna	ETS-LINDGREN	6502	SEM003-36	2021/9/26	2024/9/25			
MXE EMI receiver	Agilent	N9038A	SEM004-05	2022/7/12	2023/7/11			
Pre-amplifier	HP	8447D	SEM005-02	2022/7/12	2023/7/11			
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2021/7/11	2024/7/10			
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2021/9/26	2024/9/25			
Double-ridged waveguide horn	ETS-LINDGREN	3117	SEM003-34	2021/9/25	2024/9/24			
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-23	2022/4/24	2023/4/23			
Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2022/7/12	2023/7/11			
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2022/7/12	2023/7/11			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.gspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: FYCR220900038302

Page: 13 of 27

General used equipment									
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date				
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-22	2022-07-12	2023-07-11				
Humidity/ Temperature Indicator	Mingle	TH607	SEM002-23	2022-07-12	2023-07-11				
Barometer	DUMAI	DYM3	SEM002-24	2022-07-12	2023-07-11				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate, Please contact us at telephone: (86-755) 8307 1443, **Certificate,



Report No.: FYCR220900038302

Page: 14 of 27

6 Radio Spectrum Matter Test Results

6.1 Effective (Isotropic) Radiated Power Output Data

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.1.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.1.3 Test Setup Diagram

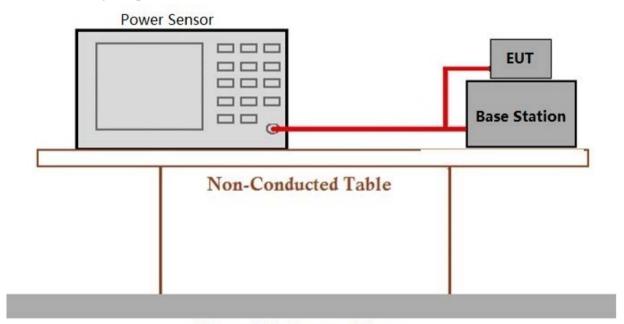

Ground Reference Plane

6.1.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Co



Report No.: FYCR220900038302

Page: 15 of 27

6.2 Peak-Average Ratio

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.2.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.2.2 Test Mode Description

	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.2.3 Test Setup Diagram

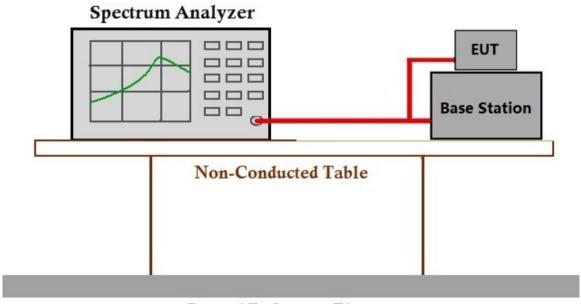

Ground Reference Plane

6.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



Report No.: FYCR220900038302

Page: 16 of 27

6.3 Modulation Characteristics

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.3.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.3.3 Test Setup Diagram

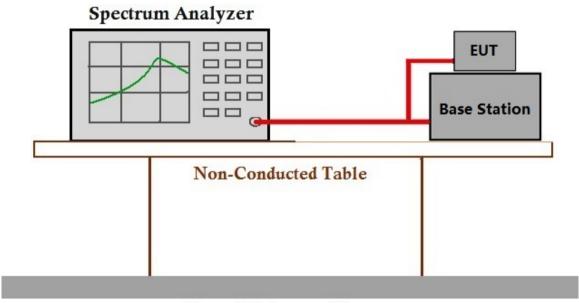

Ground Reference Plane

6.3.4 Measurement Procedure and Data

Note: This device uses digital modulation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents, subject to Terms and Conditions (Federal Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-And-Conditions-and-C



Report No.: FYCR220900038302

Page: 17 of 27

6.4 Bandwidth

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.4.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.4.3 Test Setup Diagram

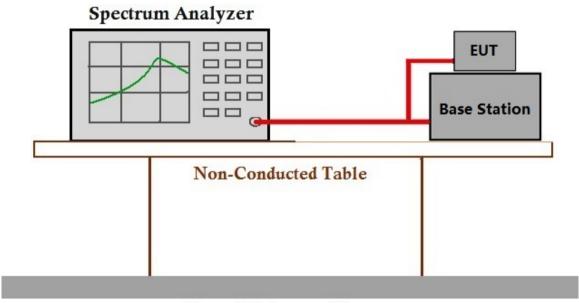

Ground Reference Plane

6.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



Report No.: FYCR220900038302

Page: 18 of 27

6.5 Band Edge Compliance

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.5.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.5.3 Test Setup Diagram

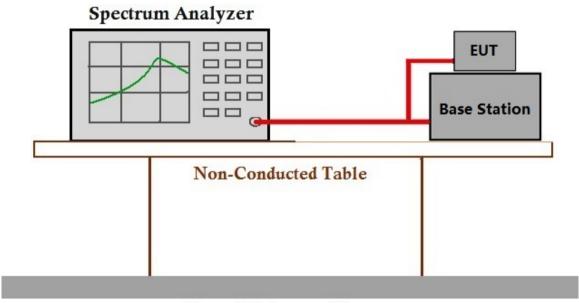

Ground Reference Plane

6.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



Report No.: FYCR220900038302

Page: 19 of 27

6.6 Spurious emissions at antenna terminals

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.6.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.6.3 Test Setup Diagram

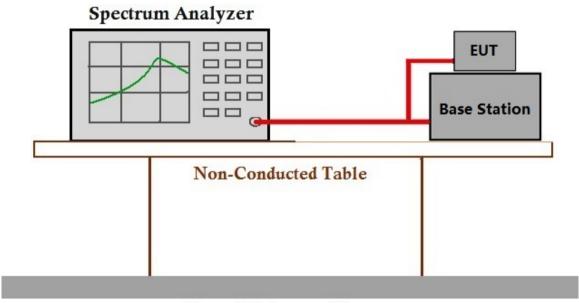

Ground Reference Plane

6.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



Report No.: FYCR220900038302

Page: 20 of 27

6.7 Field strength of spurious radiation

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Measurement Distance: 3m

Limit: Reference test summary

6.7.1 E.U.T. Operation


Operating Environment:


Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.7.3 Test Setup Diagram





EUT

Substiute Antenna+Signal Generator



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



Report No.: FYCR220900038302

Page: 21 of 27

6.7.4 Measurement Procedure and Data

Test Procedure:

- (1)On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4)The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360 in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11)The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17)The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-



Report No.: FYCR220900038302

Page: 22 of 27

	CatM1 Band 2-20MHz Low channel, Modulation: QPSK, 1 RB							
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3702	-50.2	-13	-37.2	-52.42	6.99	9.21	Horizontal	Pass
5553	-46.67	-13	-33.67	-48.99	8.27	10.59	Horizontal	Pass
7404	-44.24	-13	-31.24	-47.78	8.19	11.73	Horizontal	Pass
3702	-50.03	-13	-37.03	-52.25	6.99	9.21	Vertical	Pass
5553	-46.87	-13	-33.87	-49.19	8.27	10.59	Vertical	Pass
7404	-44.32	-13	-31.32	-47.86	8.19	11.73	Vertical	Pass

	CatM1 Band 2-20MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
3742	-50.06	-13	-37.06	-52.28	6.99	9.21	Horizontal	Pass	
5613	-46.45	-13	-33.45	-48.77	8.27	10.59	Horizontal	Pass	
7484	-44.02	-13	-31.02	-47.56	8.19	11.73	Horizontal	Pass	
3742	-50.81	-13	-37.81	-53.03	6.99	9.21	Vertical	Pass	
5613	-47.22	-13	-34.22	-49.54	8.27	10.59	Vertical	Pass	
7484	-43.51	-13	-30.51	-47.05	8.19	11.73	Vertical	Pass	

	CatM1 Band 2-20MHz High channel, Modulation: QPSK, 1 RB							
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3782	-50.51	-13	-37.51	-52.73	6.99	9.21	Horizontal	Pass
5673	-47.09	-13	-34.09	-49.41	8.27	10.59	Horizontal	Pass
7564	-44.21	-13	-31.21	-48.04	8.43	12.26	Horizontal	Pass
3782	-49.69	-13	-36.69	-51.91	6.99	9.21	Vertical	Pass
5673	-47.32	-13	-34.32	-49.64	8.27	10.59	Vertical	Pass
7564	-43.62	-13	-30.62	-47.45	8.43	12.26	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined herein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or examile CPA Descheck/Pages.com.



Report No.: FYCR220900038302

Page: 23 of 27

	CatM1 Band 4-20MHz Low channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
3422	-51.11	-13	-38.11	-53.69	5.72	8.3	Horizontal	Pass	
5133	-47.87	-13	-34.87	-49.87	8.3	10.3	Horizontal	Pass	
6844	-46.05	-13	-33.05	-49.6	7.7	11.25	Horizontal	Pass	
3422	-50.47	-13	-37.47	-53.05	5.72	8.3	Vertical	Pass	
5133	-47.38	-13	-34.38	-49.38	8.3	10.3	Vertical	Pass	
6844	-46.84	-13	-33.84	-50.39	7.7	11.25	Vertical	Pass	

	CatM1 Band 4-20MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
3447	-51.03	-13	-38.03	-53.61	5.72	8.3	Horizontal	Pass	
5170.5	-47.64	-13	-34.64	-49.64	8.3	10.3	Horizontal	Pass	
6894	-46.43	-13	-33.43	-49.98	7.7	11.25	Horizontal	Pass	
3447	-49.66	-13	-36.66	-52.24	5.72	8.3	Vertical	Pass	
5170.5	-46.8	-13	-33.8	-48.8	8.3	10.3	Vertical	Pass	
6894	-47.03	-13	-34.03	-50.58	7.7	11.25	Vertical	Pass	

	CatM1 Band 4-20MHz High channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
3472	-50.33	-13	-37.33	-52.91	5.72	8.3	Horizontal	Pass	
5208	-47.89	-13	-34.89	-49.89	8.3	10.3	Horizontal	Pass	
6944	-45.18	-13	-32.18	-48.73	7.7	11.25	Horizontal	Pass	
3472	-49.94	-13	-36.94	-52.52	5.72	8.3	Vertical	Pass	
5208	-47.75	-13	-34.75	-49.75	8.3	10.3	Vertical	Pass	
6944	-45.45	-13	-32.45	-49	7.7	11.25	Vertical	Pass	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only.



Report No.: FYCR220900038302

Page: 24 of 27

	CatM1 Band 12-10MHz Low channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
1399	-55.97	-13	-42.97	-58.5	2.64	5.17	Horizontal	Pass	
2098.5	-53.92	-13	-40.92	-56.25	4.75	7.08	Horizontal	Pass	
2798	-52.19	-13	-39.19	-54.66	5.13	7.6	Horizontal	Pass	
1399	-55.89	-13	-42.89	-58.42	2.64	5.17	Vertical	Pass	
2098.5	-55.02	-13	-42.02	-57.35	4.75	7.08	Vertical	Pass	
2798	-51.68	-13	-38.68	-54.15	5.13	7.6	Vertical	Pass	

	CatM1 Band 12-10MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
1406	-55.09	-13	-42.09	-57.62	2.64	5.17	Horizontal	Pass	
2109	-55.15	-13	-42.15	-57.48	4.75	7.08	Horizontal	Pass	
2812	-51.86	-13	-38.86	-54.33	5.13	7.6	Horizontal	Pass	
1406	-56.32	-13	-43.32	-58.85	2.64	5.17	Vertical	Pass	
2109	-55.08	-13	-42.08	-57.41	4.75	7.08	Vertical	Pass	
2812	-51.29	-13	-38.29	-53.76	5.13	7.6	Vertical	Pass	

	CatM1 Band 12-10MHz High channel, Modulation: QPSK, 1 RB							
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
1413	-56.46	-13	-43.46	-58.99	2.64	5.17	Horizontal	Pass
2119.5	-54.45	-13	-41.45	-56.78	4.75	7.08	Horizontal	Pass
2826	-50.04	-13	-37.04	-52.51	5.13	7.6	Horizontal	Pass
1413	-55.79	-13	-42.79	-58.32	2.64	5.17	Vertical	Pass
2119.5	-54.96	-13	-41.96	-57.29	4.75	7.08	Vertical	Pass
2826	-50.01	-13	-37.01	-52.48	5.13	7.6	Vertical	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-and-Comments, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Ter



Report No.: FYCR220900038302

Page: 25 of 27

	CatM1 Band 13-10MHz Middle channel, Modulation: QPSK, 1 RB								
Frequency (MHz)	EIRP (dBm)	Limit(dBm)	Over Limit (dB)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result	
1555	-43.18	-13	-30.18	-46.84	3.77	7.43	Horizontal	Pass	
2332.5	-51.9	-13	-38.9	-54.23	4.75	7.08	Horizontal	Pass	
3110	-48.76	-13	-35.76	-51.34	5.72	8.3	Horizontal	Pass	
1555	-50.87	-13	-37.87	-54.53	3.77	7.43	Vertical	Pass	
2332.5	-53.52	-13	-40.52	-55.85	4.75	7.08	Vertical	Pass	
3110	-48.65	-13	-35.65	-51.23	5.72	8.3	Vertical	Pass	

Note: All modes have been tested and we found QPSK test mode has the worst test result. Only record the worst test result.

EIRP= S.G. Power- Cable loss+ Antenna Gain



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.gspx.and, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: FYCR220900038302

Page: 26 of 27

6.8 Frequency stability

Test Requirement Reference test summary

Test Method: ANSI C63.26, KDB 971168 D01 v03

Limit: Reference test summary

6.8.1 E.U.T. Operation


Operating Environment:

Temperature: 21.5 °C Humidity: 55.7 % RH Atmospheric Pressure: 1015 mbar

6.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in transmitting mode

6.8.3 Test Setup Diagram

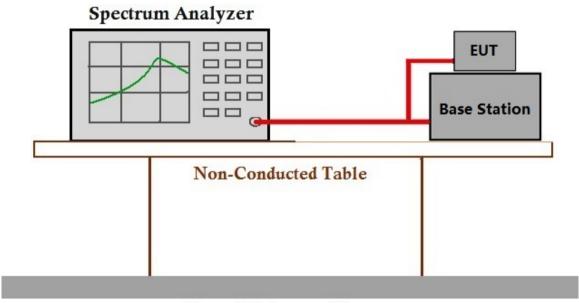

Ground Reference Plane

6.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



Report No.: FYCR220900038302

Page: 27 of 27

7 Test Setup Photo

Refer to Appendix -Setup Photos for FYCR2209000383ME

8 EUT Constructional Details (EUT Photos)

Refer to Appendix - External photo and Internal Photo for FYCR2209000383ME

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and