



Appendix A

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Antenna Gain (dBi)	E.i.r.p (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-1.44	-1.44	21	-0.58	-2.02	36.02	Pass
NVNT	1-DH5	2441	Ant1	-1.48	-1.48	21	-0.58	-2.06	36.02	Pass
NVNT	1-DH5	2480	Ant1	-2.01	-2.01	21	-0.58	-2.59	36.02	Pass
NVNT	2-DH5	2402	Ant1	-0.68	-0.68	21	-0.58	-1.26	36.02	Pass
NVNT	2-DH5	2441	Ant1	-0.69	-0.69	21	-0.58	-1.27	36.02	Pass
NVNT	2-DH5	2480	Ant1	-1.17	-1.17	21	-0.58	-1.75	36.02	Pass
NVNT	3-DH5	2402	Ant1	-0.29	-0.29	21	-0.58	-0.87	36.02	Pass
NVNT	3-DH5	2441	Ant1	-0.28	-0.28	21	-0.58	-0.86	36.02	Pass
NVNT	3-DH5	2480	Ant1	-0.78	-0.78	21	-0.58	-1.36	36.02	Pass


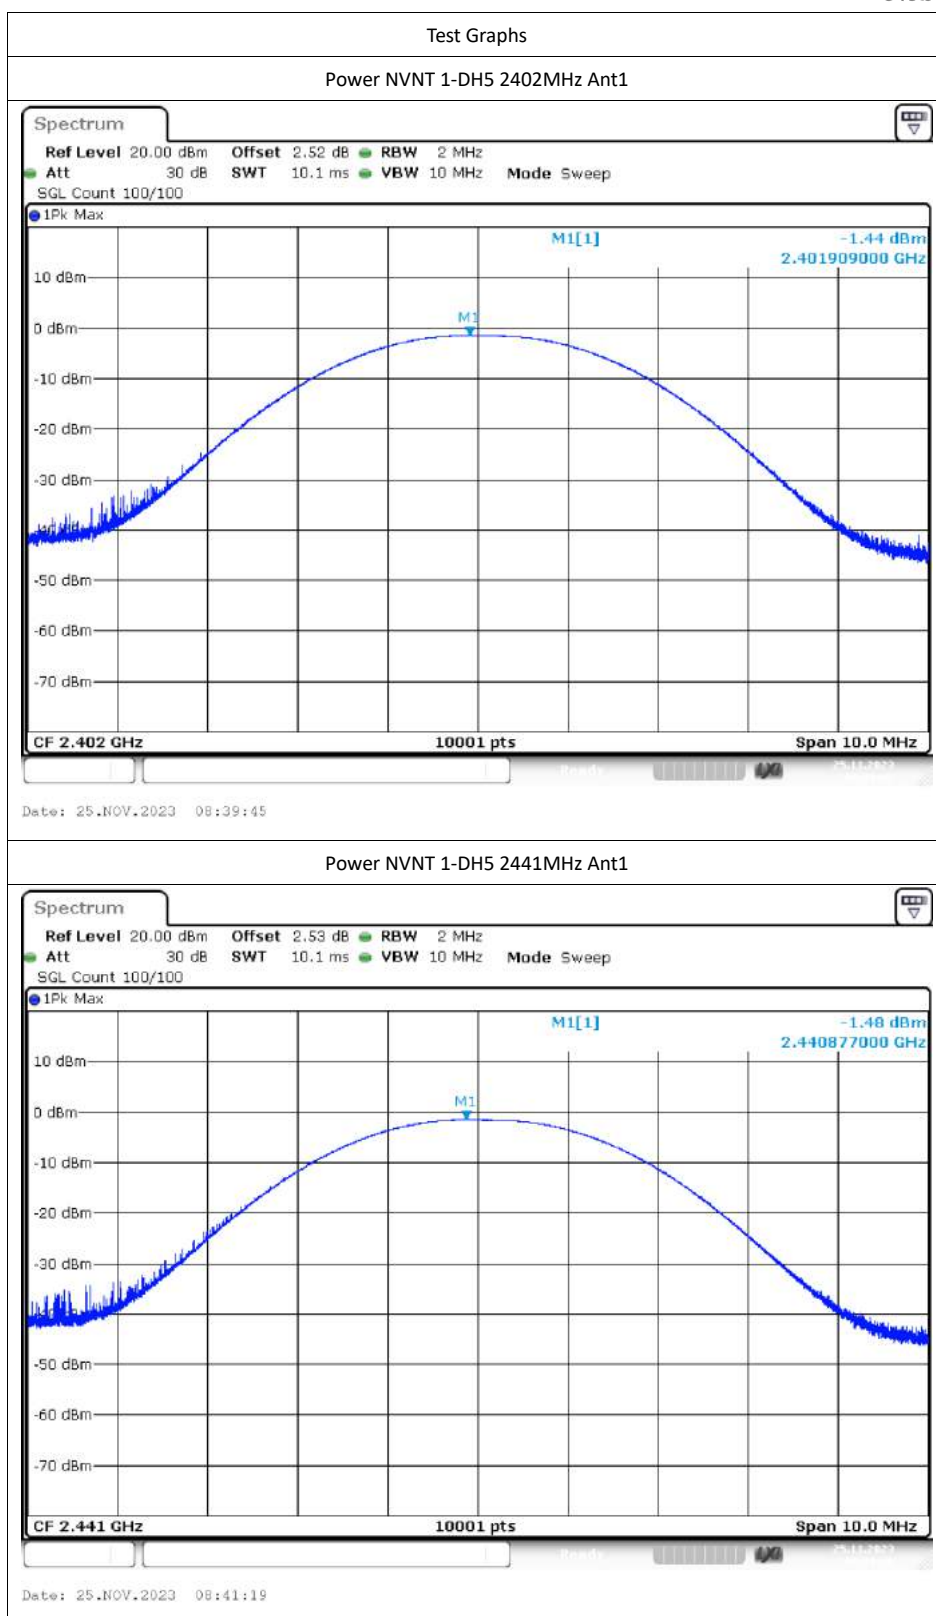



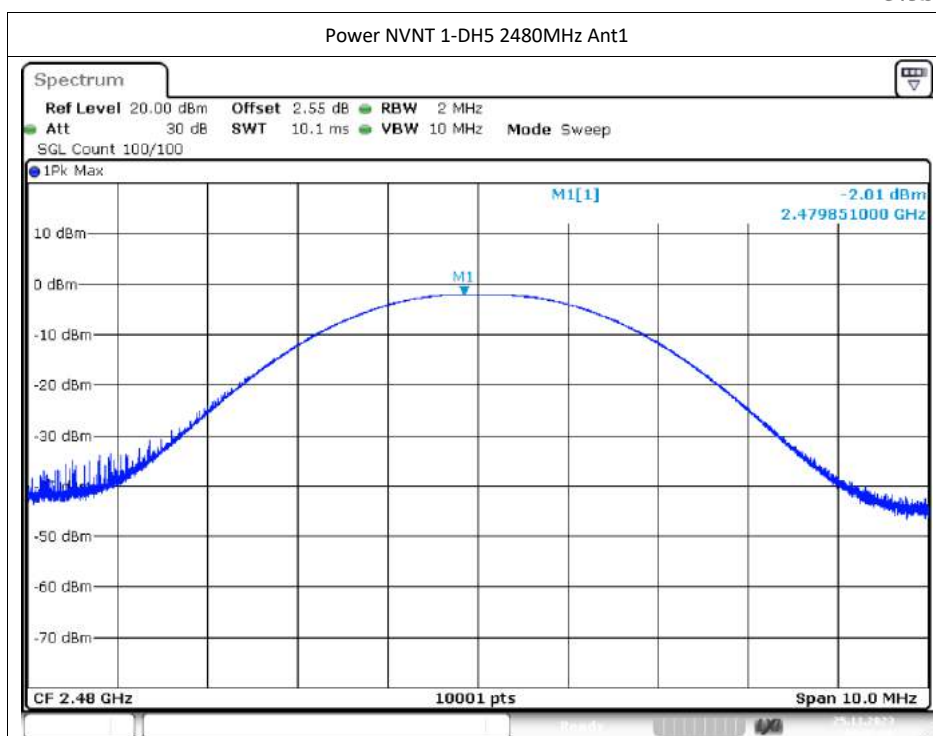



Date: 25.NOV.2023 08:42:28



Date: 25.NOV.2023 09:05:59

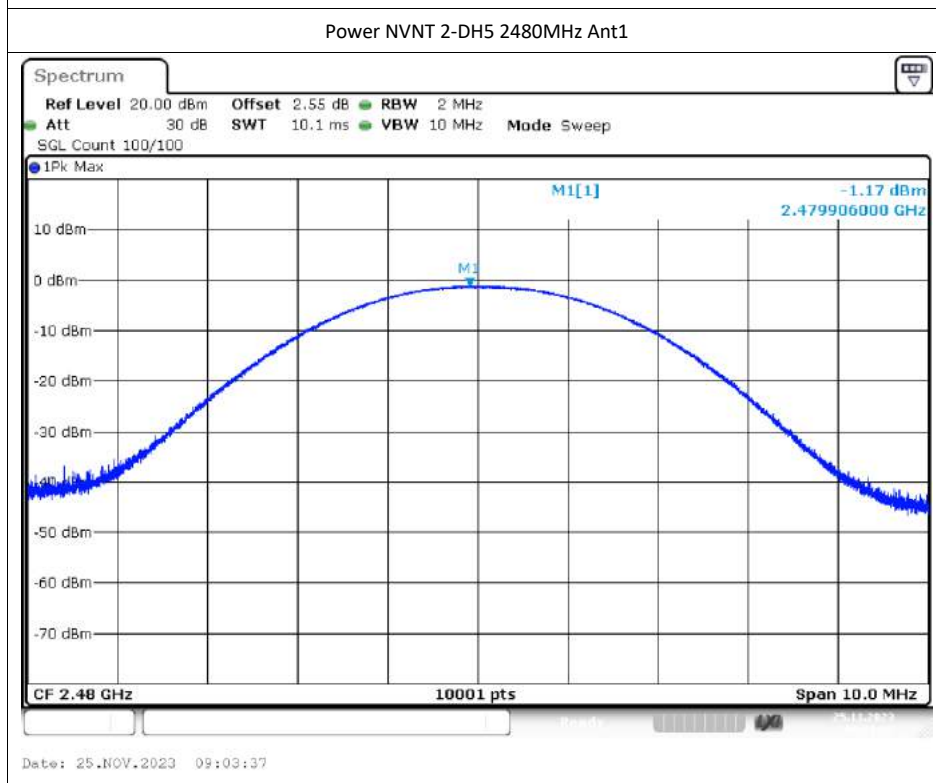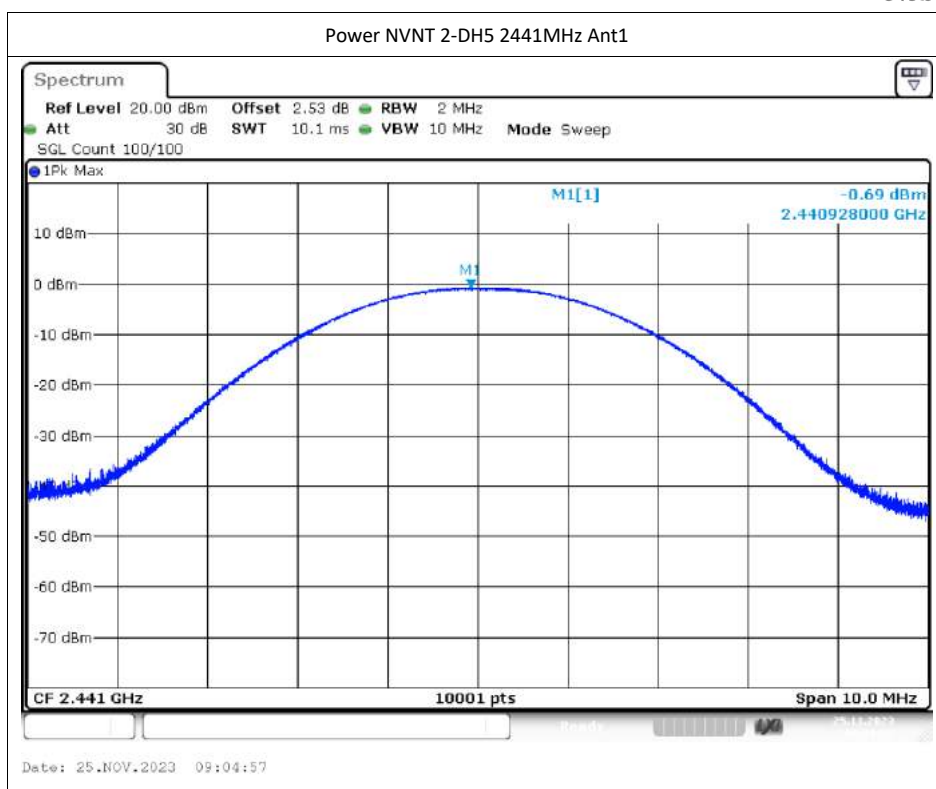


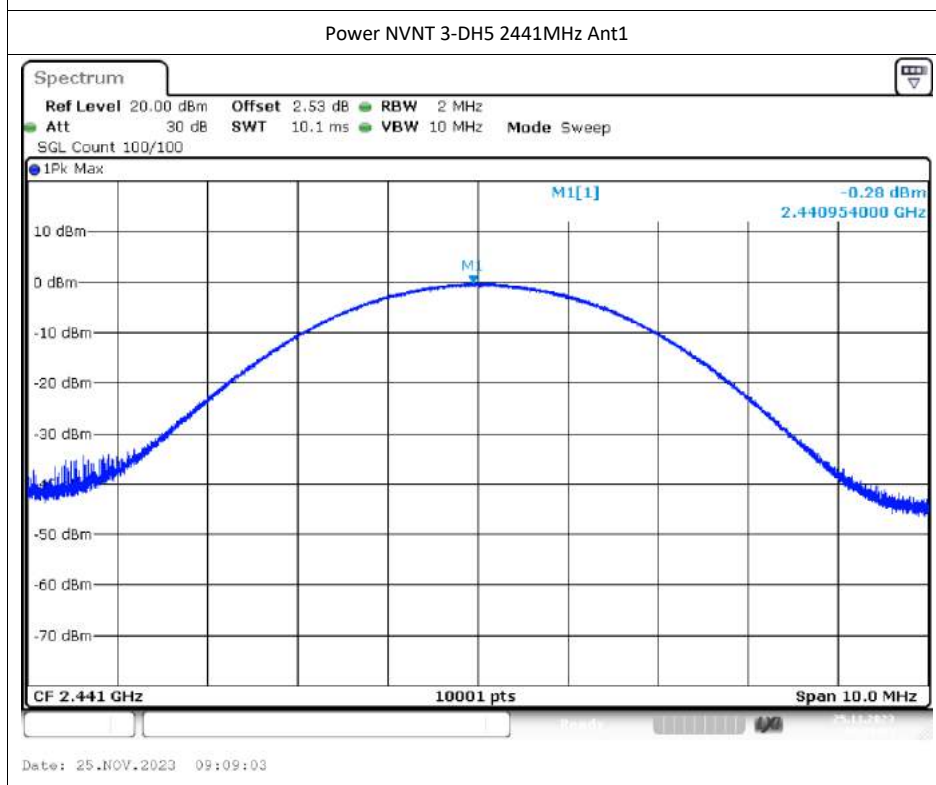
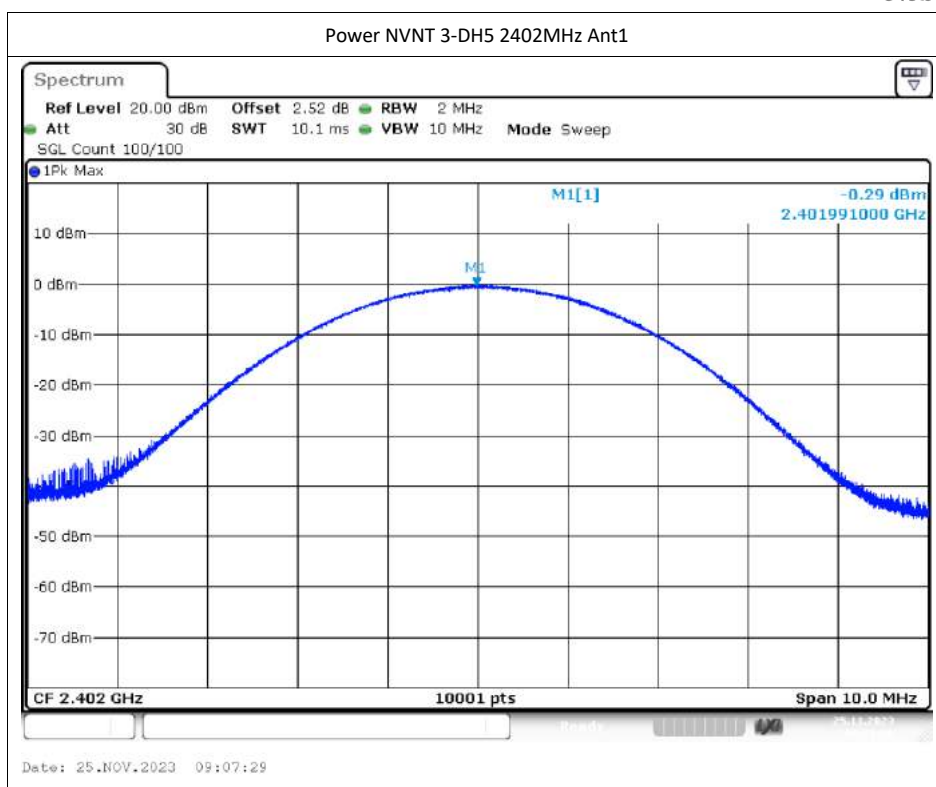



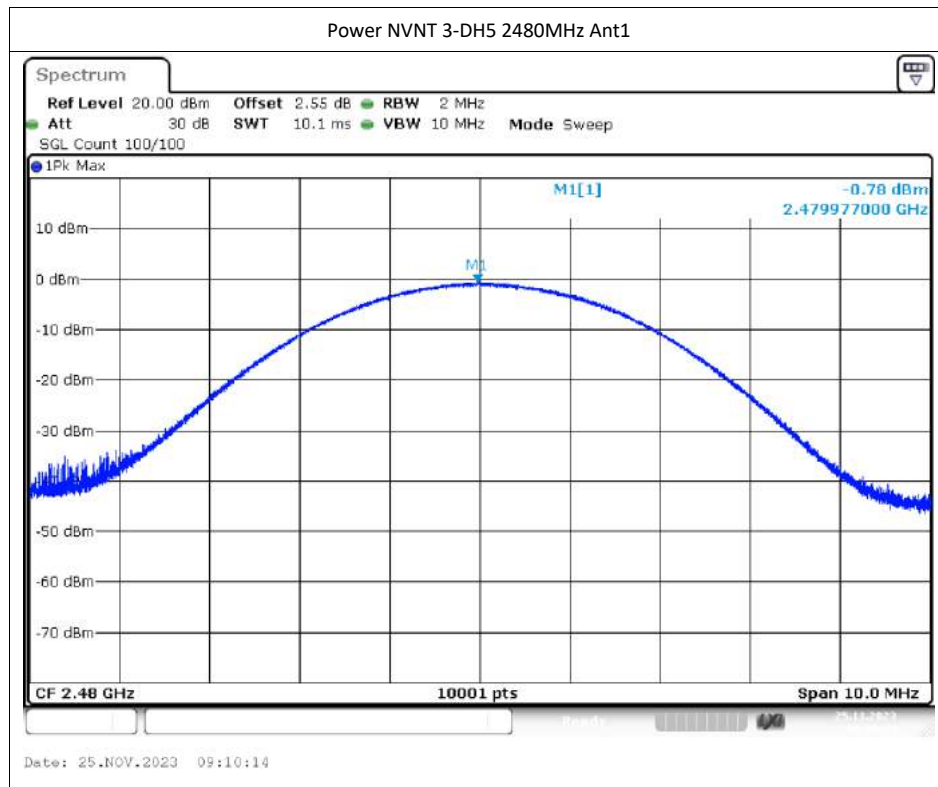




-20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.949	0	Pass
NVNT	1-DH5	2441	Ant1	0.957	0	Pass
NVNT	1-DH5	2480	Ant1	0.949	0	Pass
NVNT	2-DH5	2402	Ant1	1.28	0	Pass
NVNT	2-DH5	2441	Ant1	1.278	0	Pass
NVNT	2-DH5	2480	Ant1	1.3	0	Pass
NVNT	3-DH5	2402	Ant1	1.29	0	Pass
NVNT	3-DH5	2441	Ant1	1.293	0	Pass
NVNT	3-DH5	2480	Ant1	1.295	0	Pass

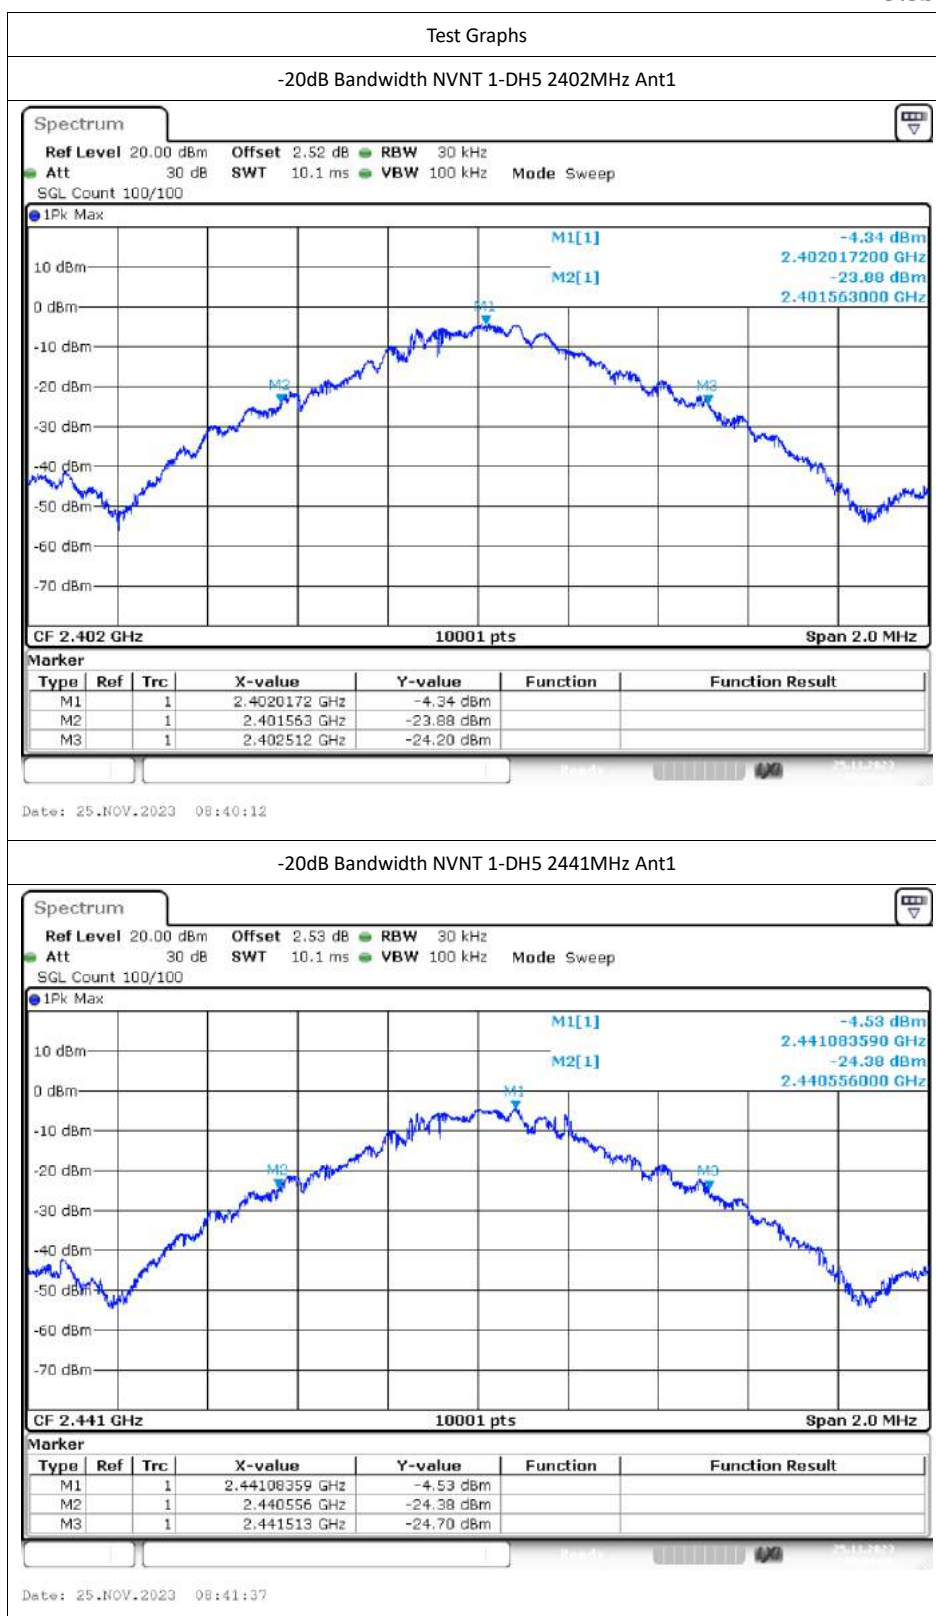

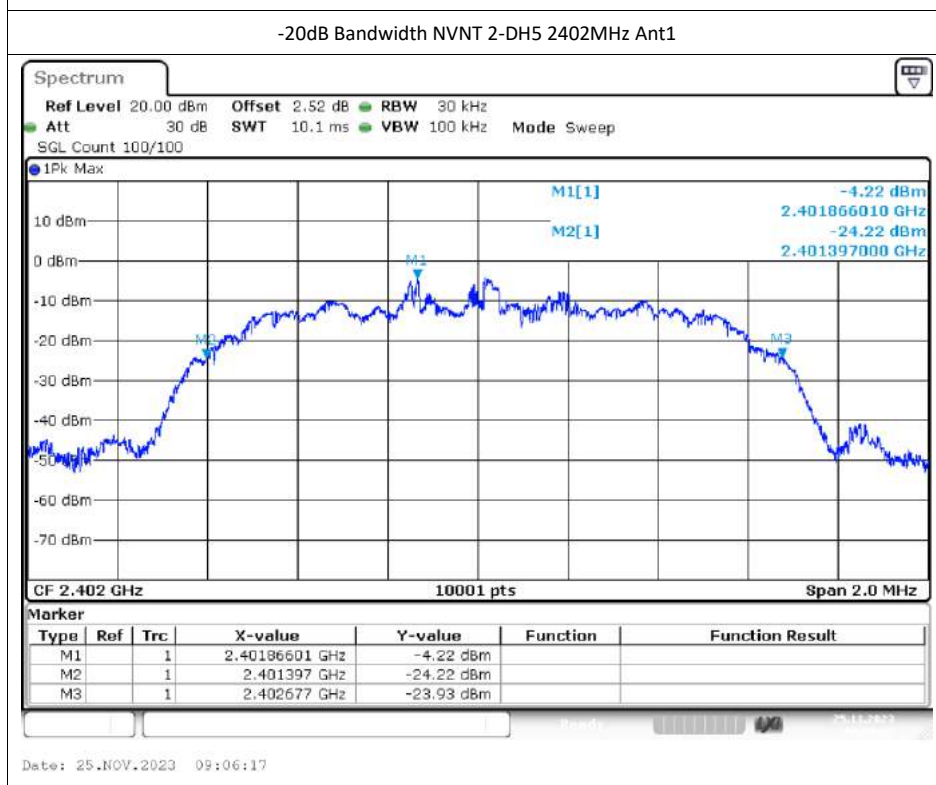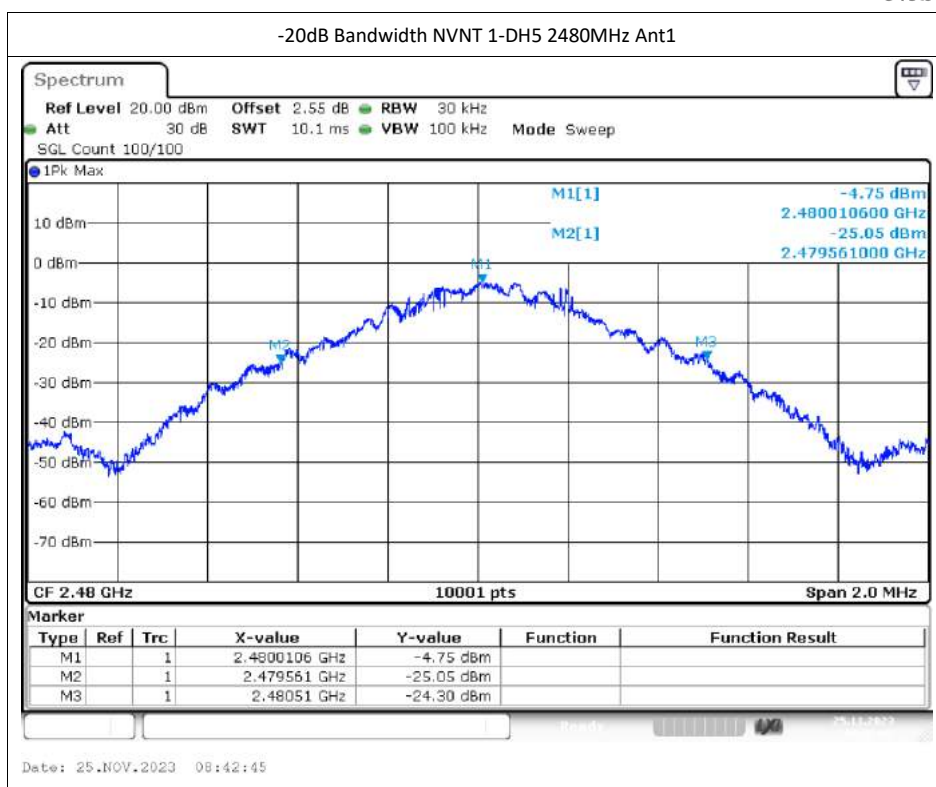

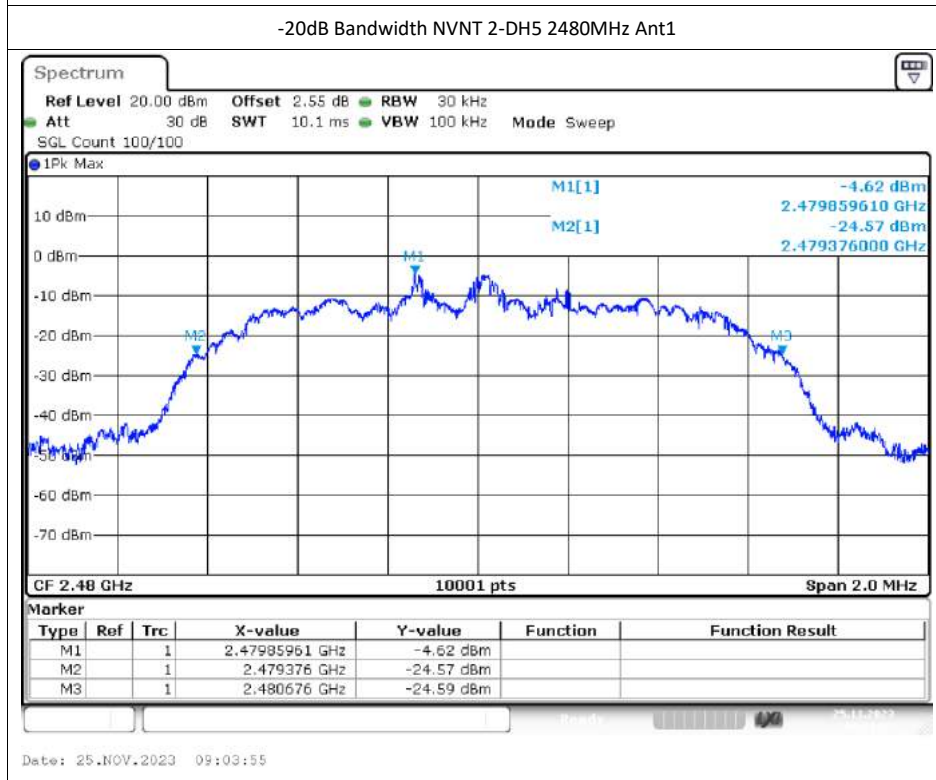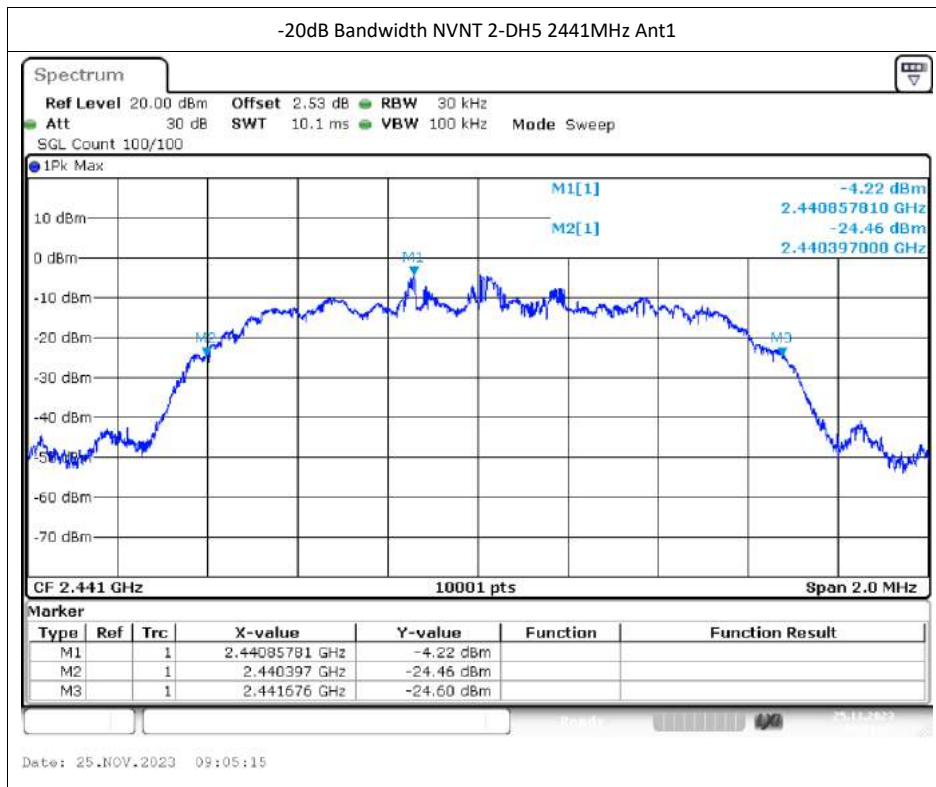


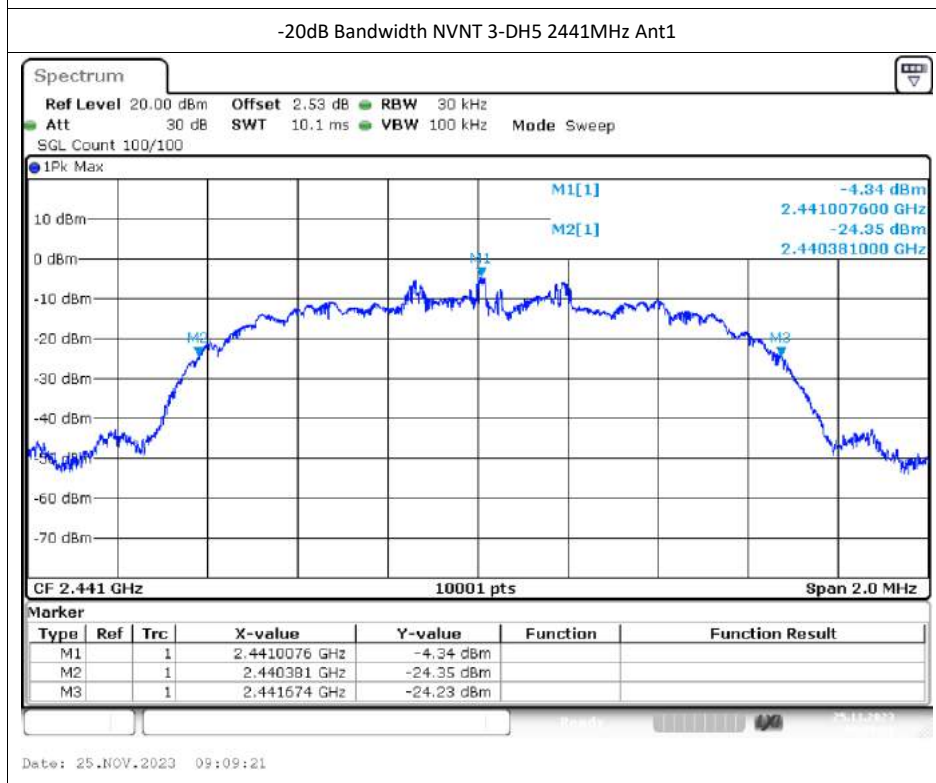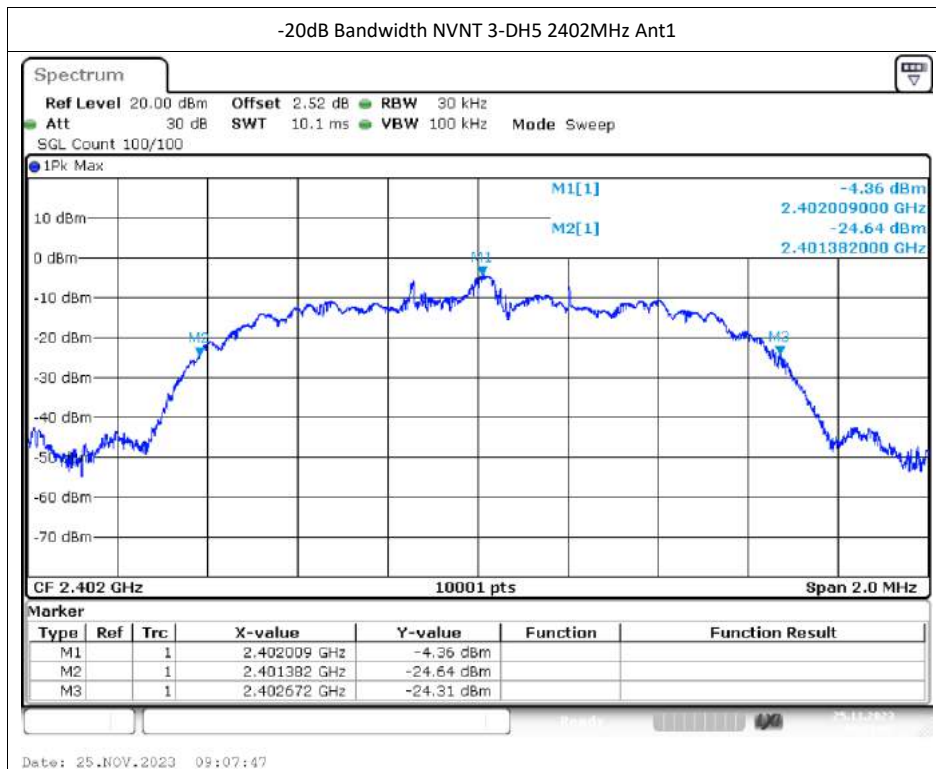


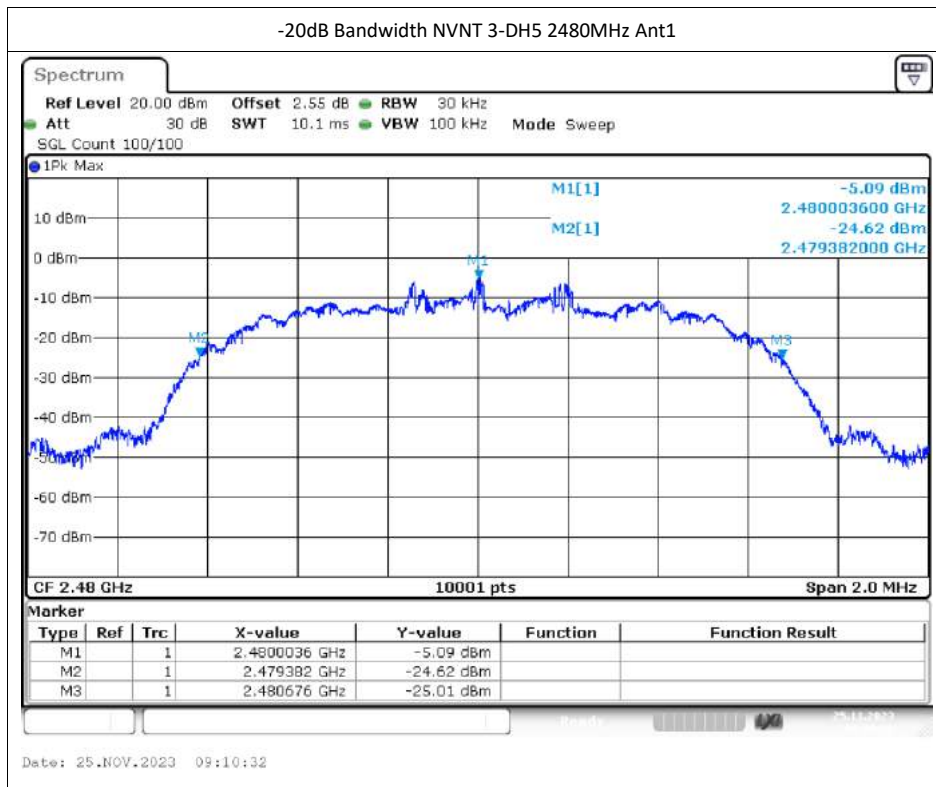

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.871
NVNT	1-DH5	2441	Ant1	0.864
NVNT	1-DH5	2480	Ant1	0.873
NVNT	2-DH5	2402	Ant1	1.188
NVNT	2-DH5	2441	Ant1	1.187
NVNT	2-DH5	2480	Ant1	1.192
NVNT	3-DH5	2402	Ant1	1.196
NVNT	3-DH5	2441	Ant1	1.191
NVNT	3-DH5	2480	Ant1	1.199

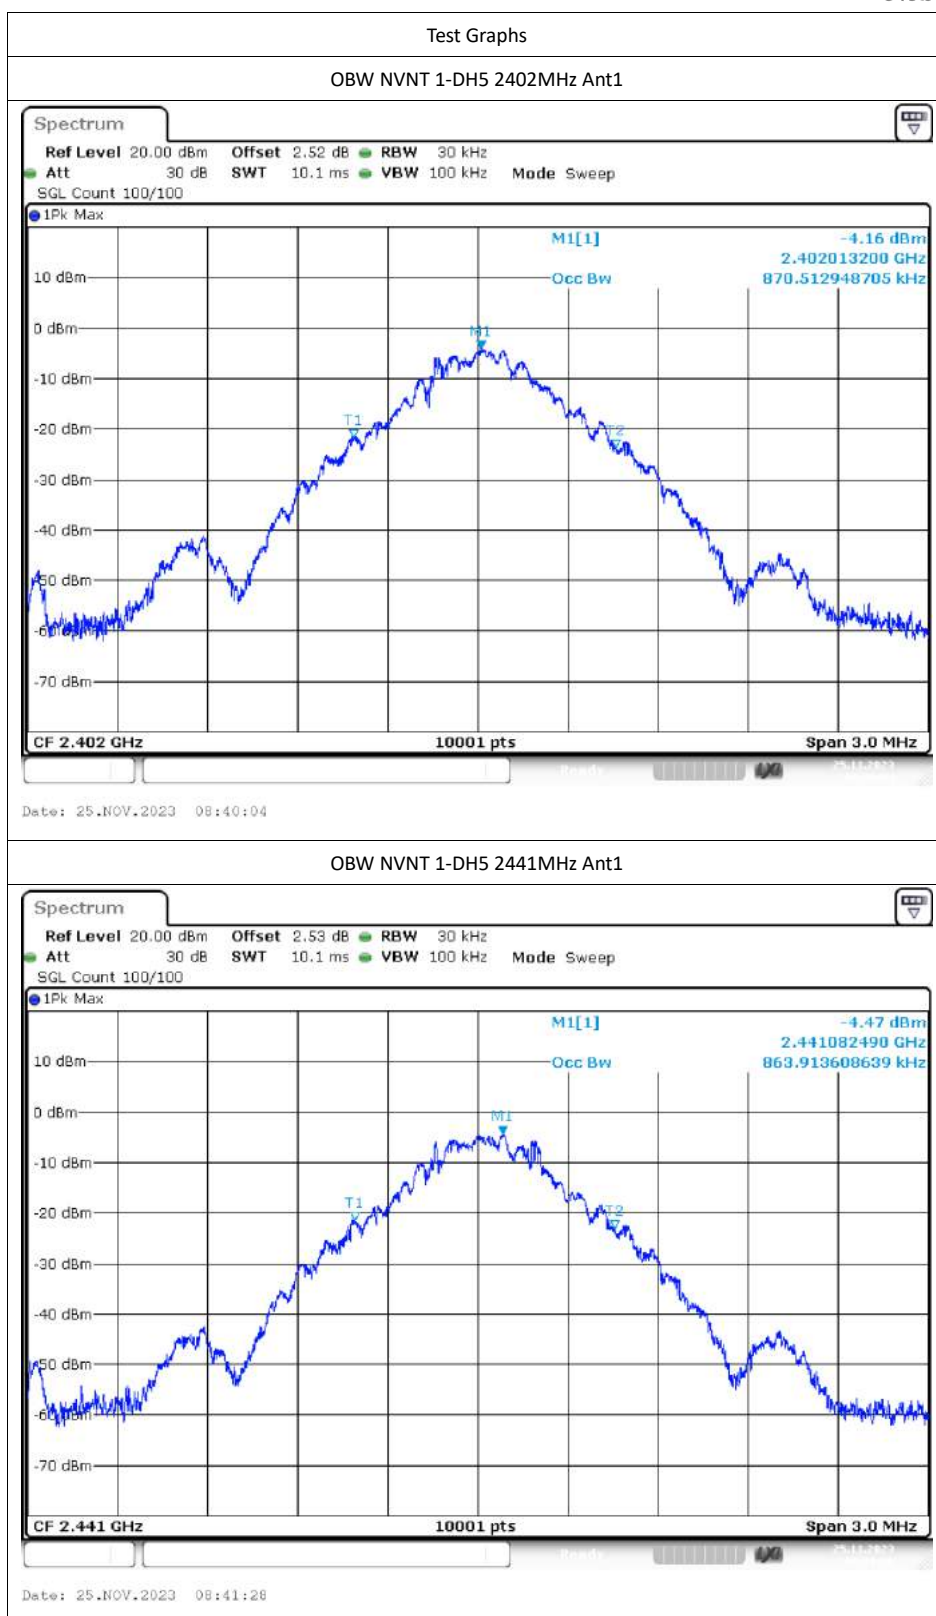

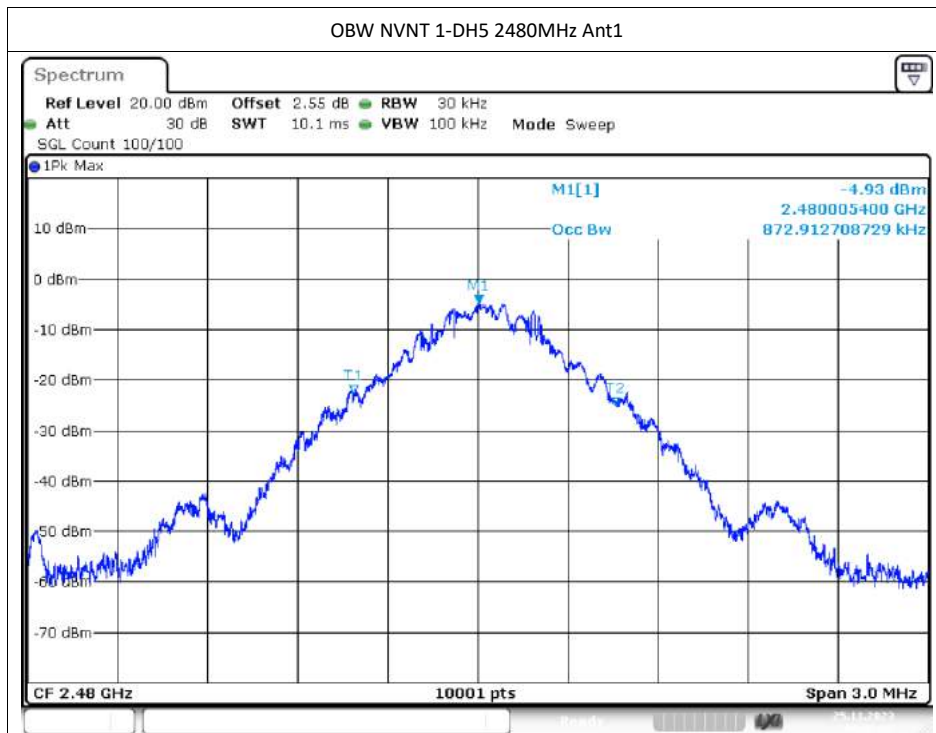

Date: 25.NOV.2023 08:42:37



Date: 25.NOV.2023 09:06:09



Date: 25.NOV.2023 09:05:07




Date: 25.NOV.2023 09:03:46



Date: 25.NOV.2023 09:07:38



Date: 25.NOV.2023 09:09:12

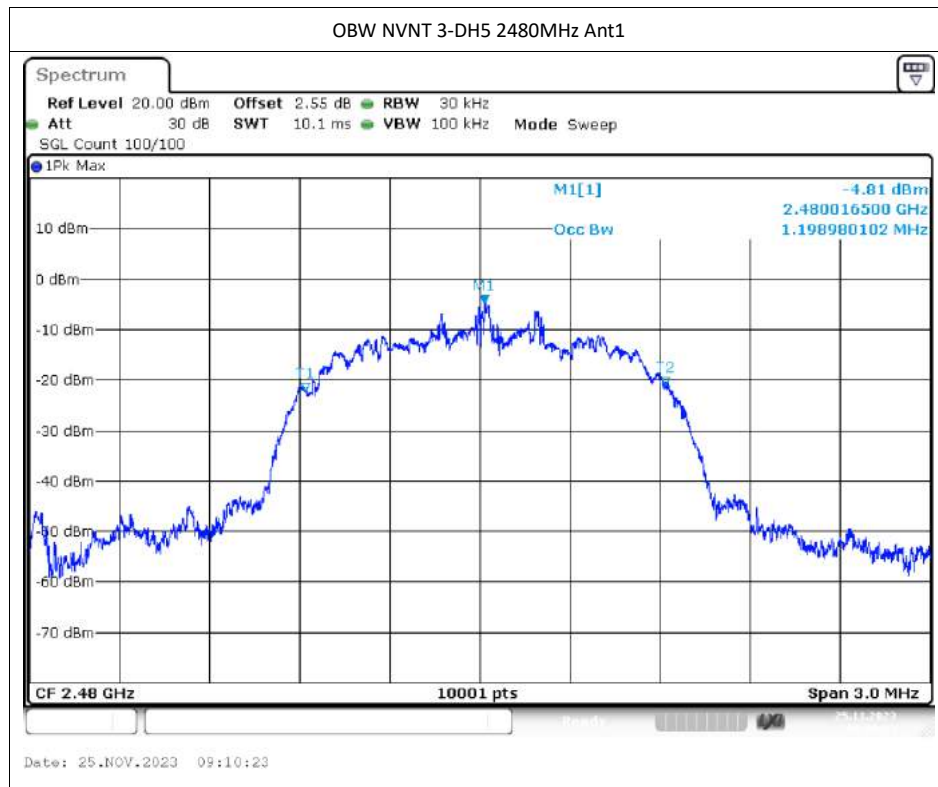


Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.082	2403.084	1.002	0.633	Pass
NVNT	1-DH5	Ant1	2441.082	2442.084	1.002	0.638	Pass
NVNT	1-DH5	Ant1	2479.004	2480.008	1.004	0.633	Pass
NVNT	2-DH5	Ant1	2401.864	2402.866	1.002	0.897	Pass
NVNT	2-DH5	Ant1	2441.002	2442.02	1.018	0.888	Pass
NVNT	2-DH5	Ant1	2478.862	2479.866	1.004	0.889	Pass
NVNT	3-DH5	Ant1	2402.004	2403.018	1.014	0.025	Pass
NVNT	3-DH5	Ant1	2441.018	2442.014	0.996	0.025	Pass
NVNT	3-DH5	Ant1	2479.02	2480.02	1	0.025	Pass



Test Graphs



CFS NVNT 1-DH5 2402MHz Ant1


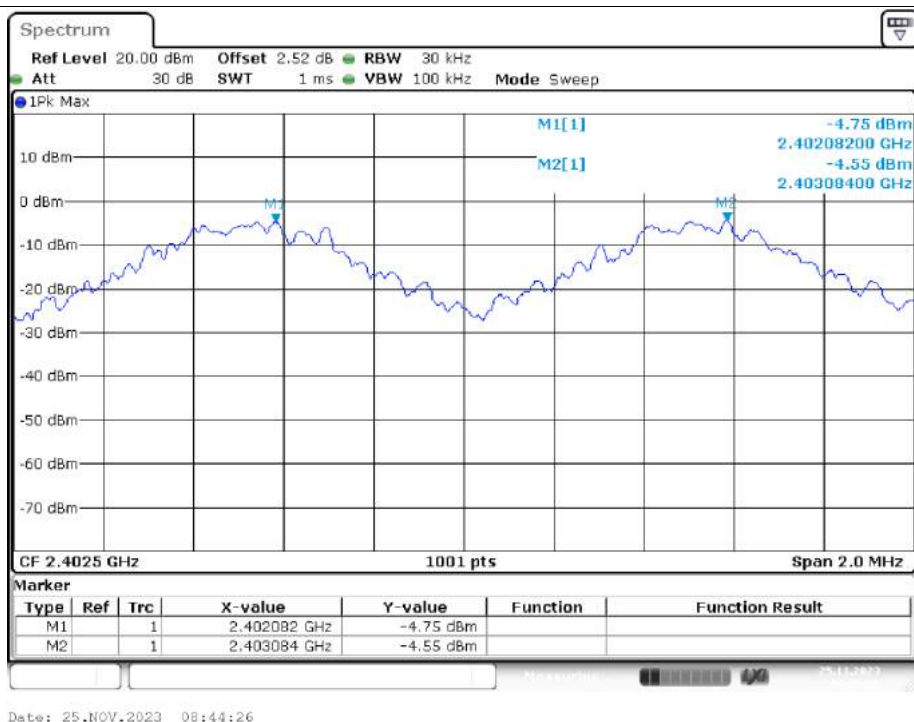



CFS NVNT 1-DH5 2441MHz Ant1

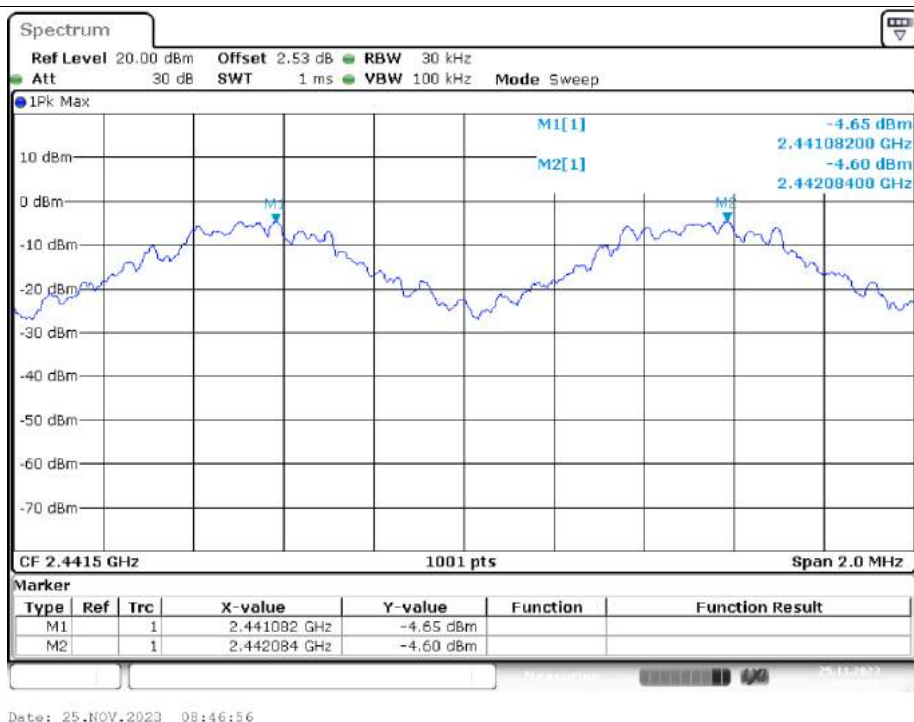

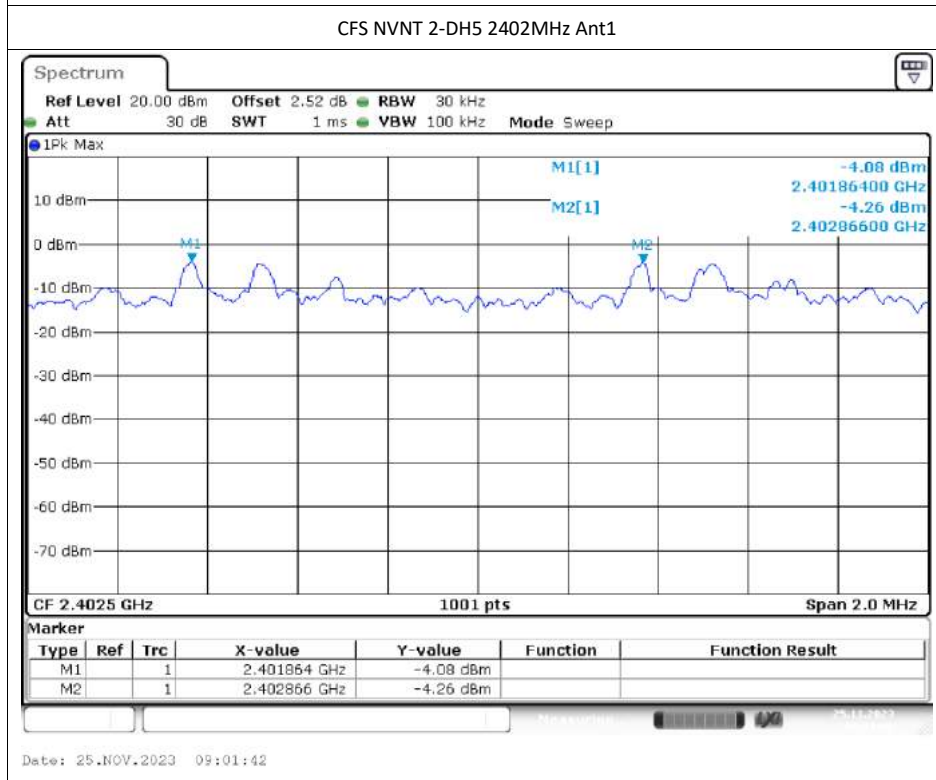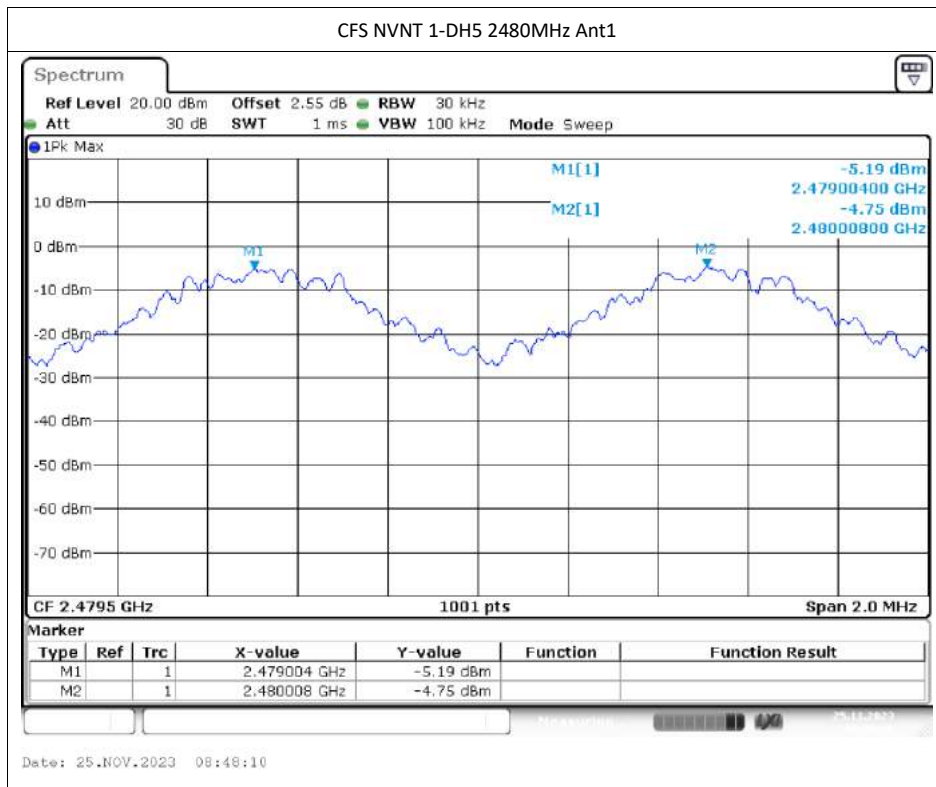

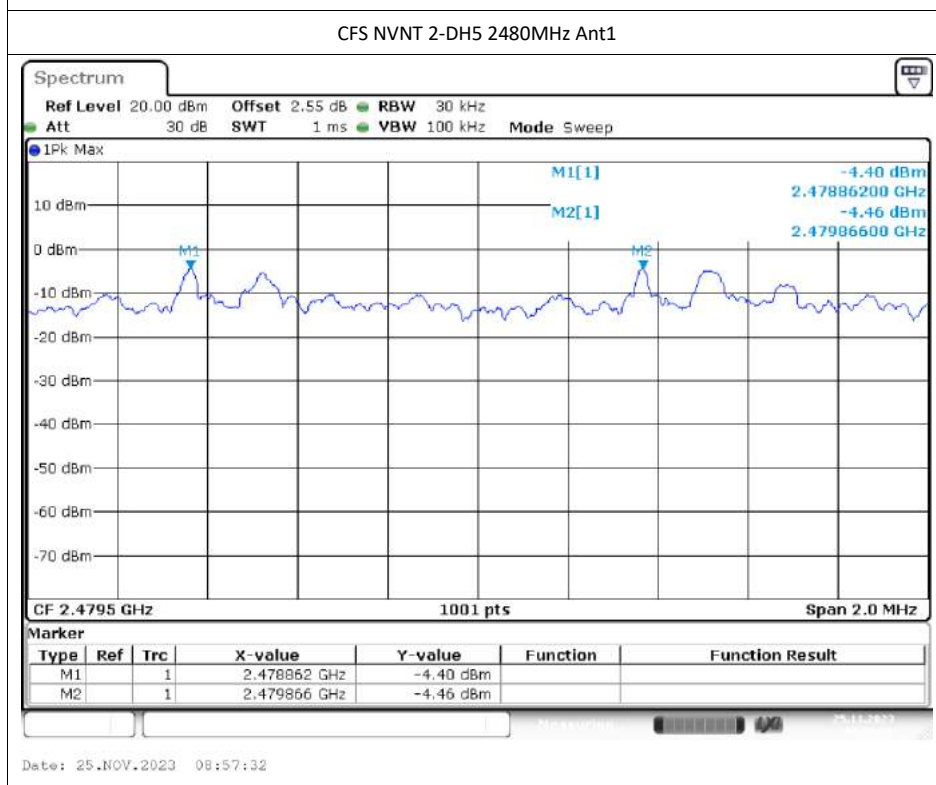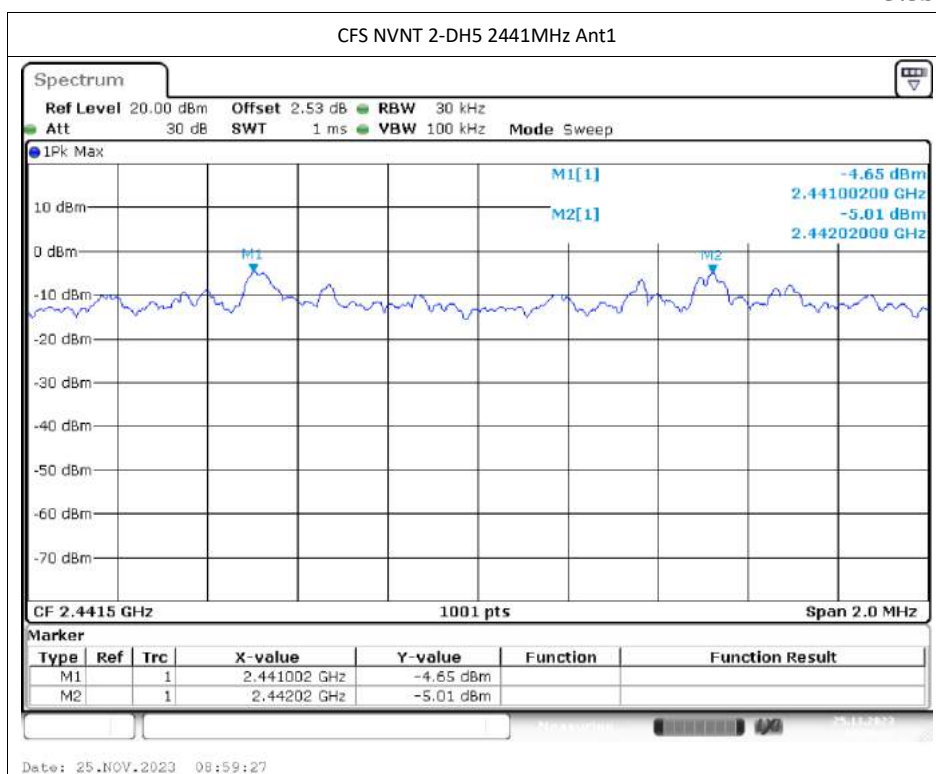

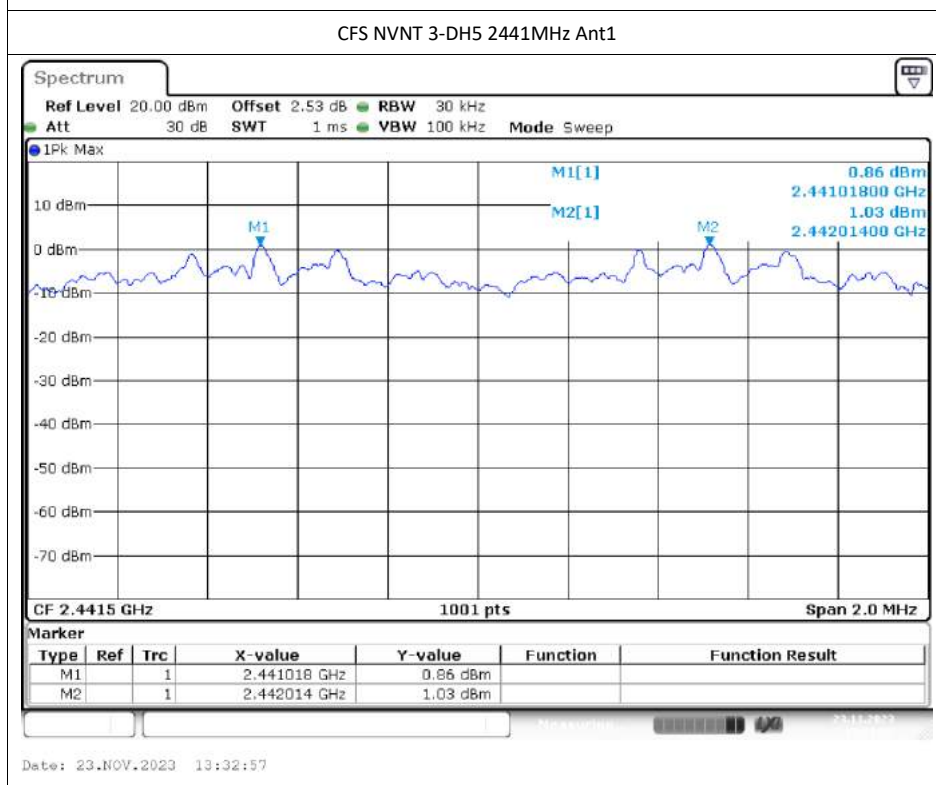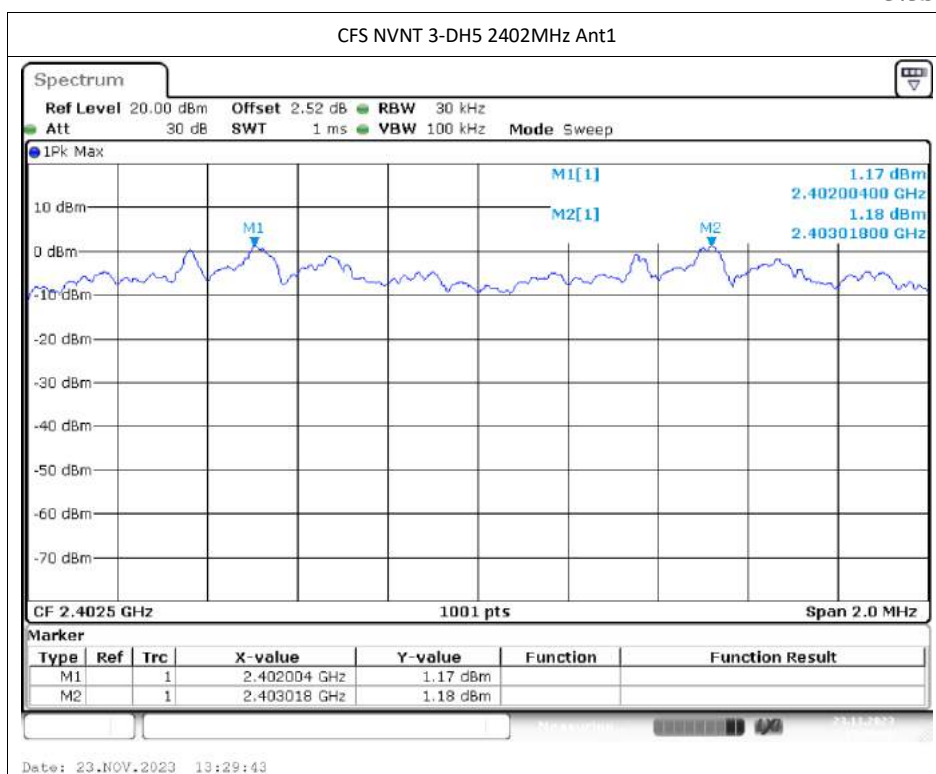

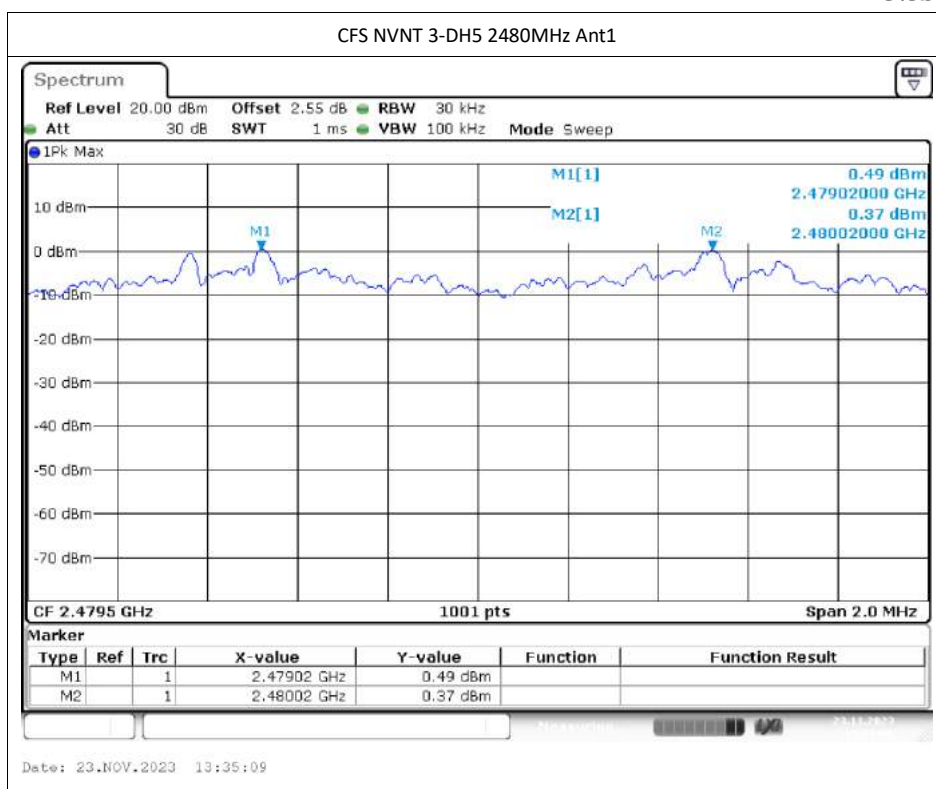


Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass


Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

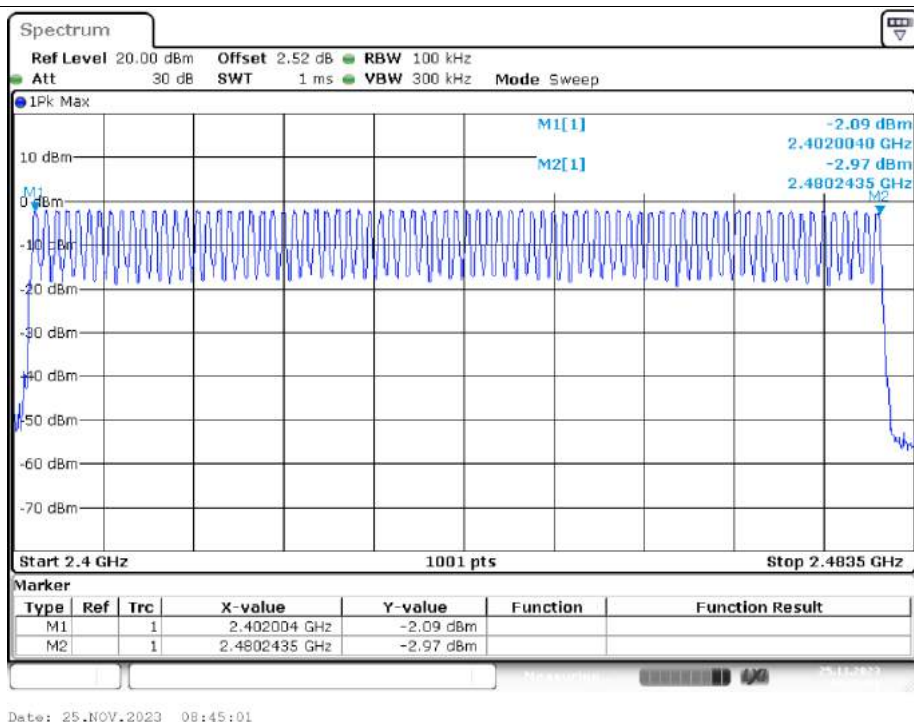


Hopping No. NVNT 2-DH5 2402MHz Ant1


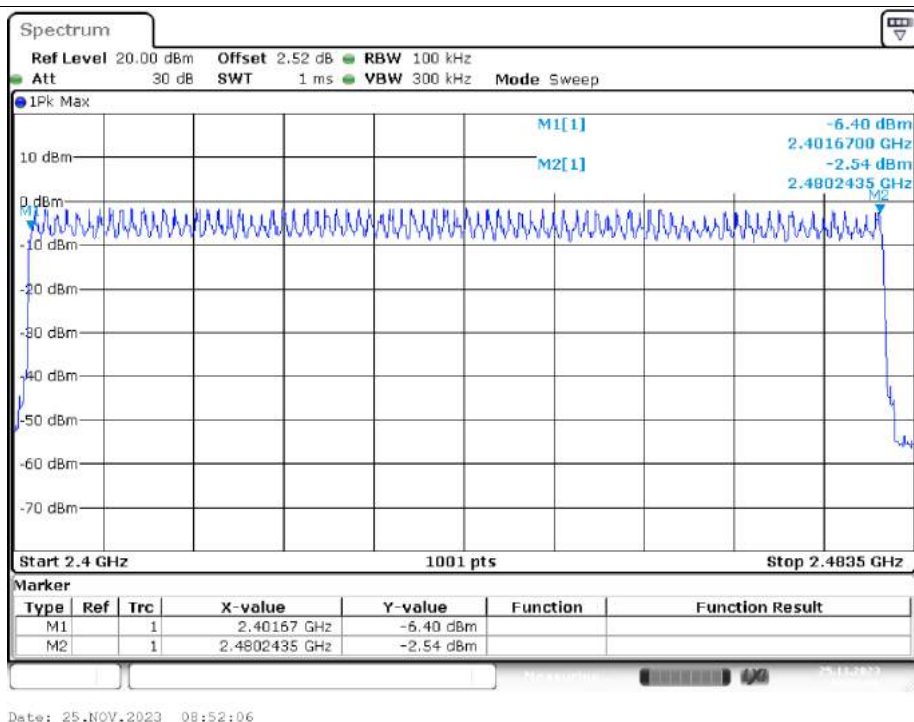



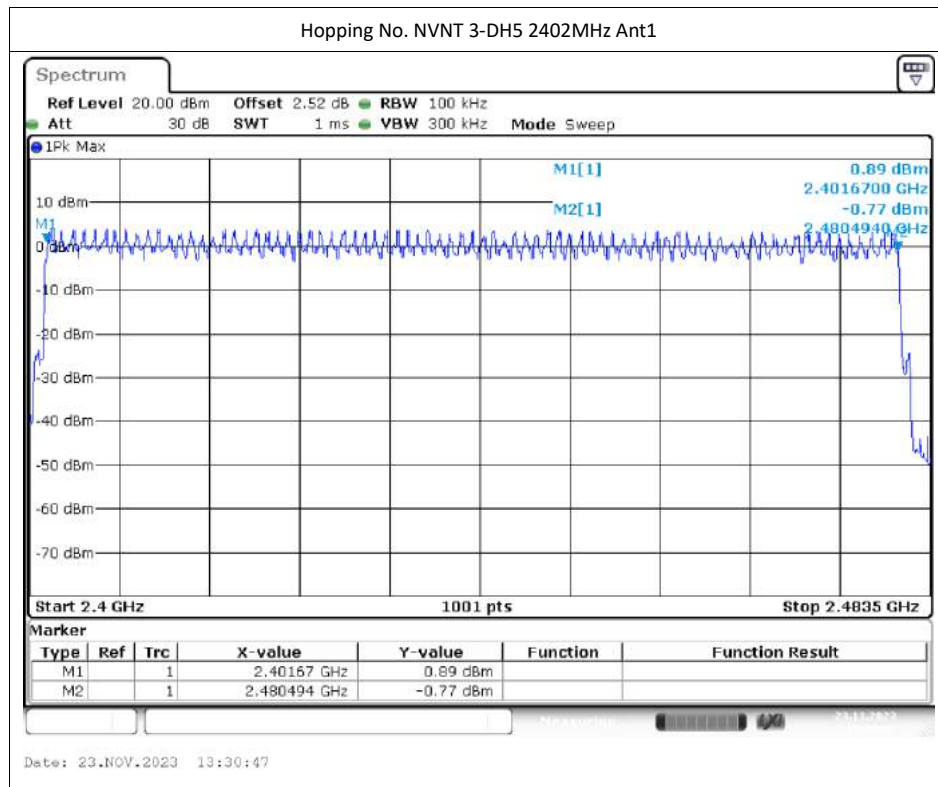




Dwell Time



Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.887	308.909	107	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.887	317.57	110	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.887	282.926	98	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.887	265.604	92	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.891	289.1	100	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.892	294.984	102	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	323.344	112	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.886	288.6	100	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.886	363.636	126	31600	400	Pass


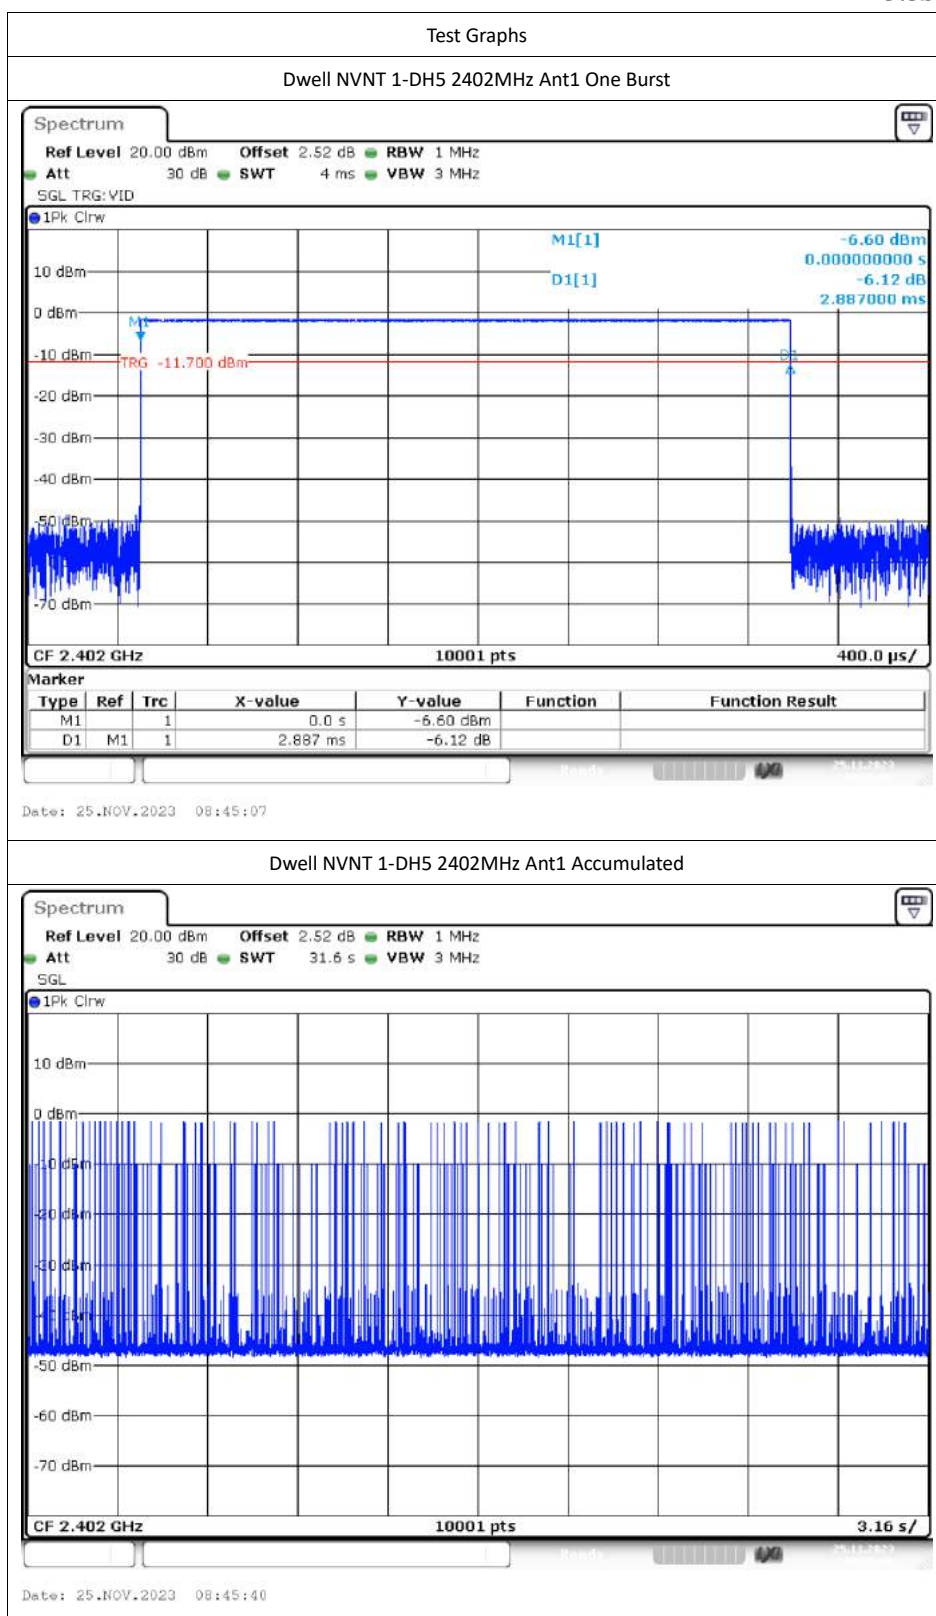


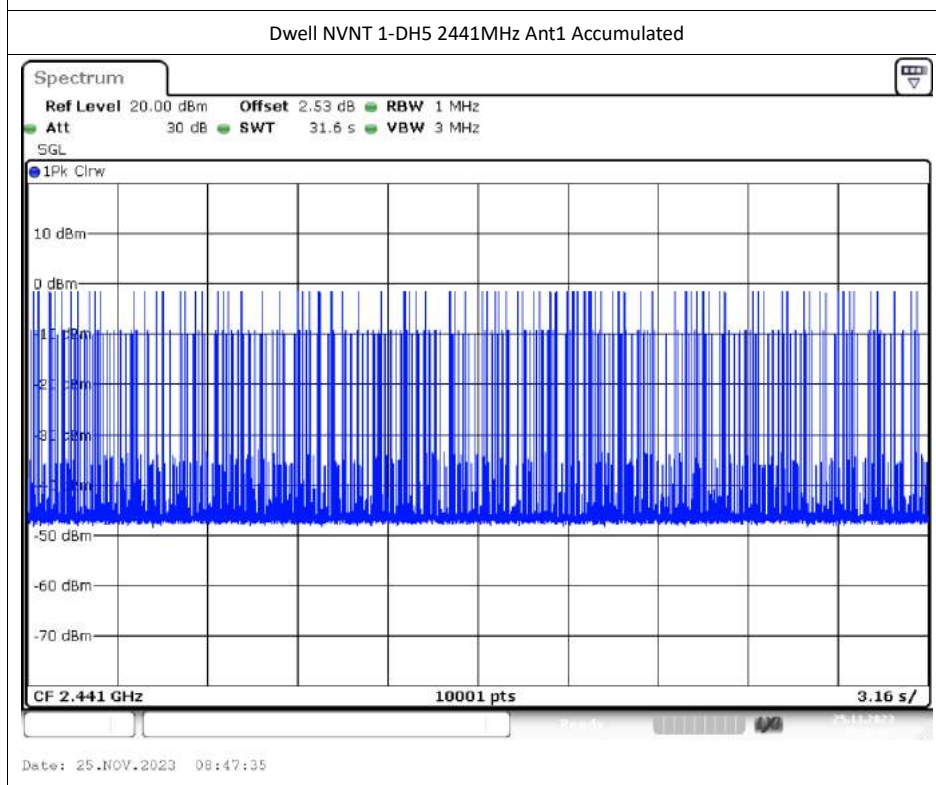
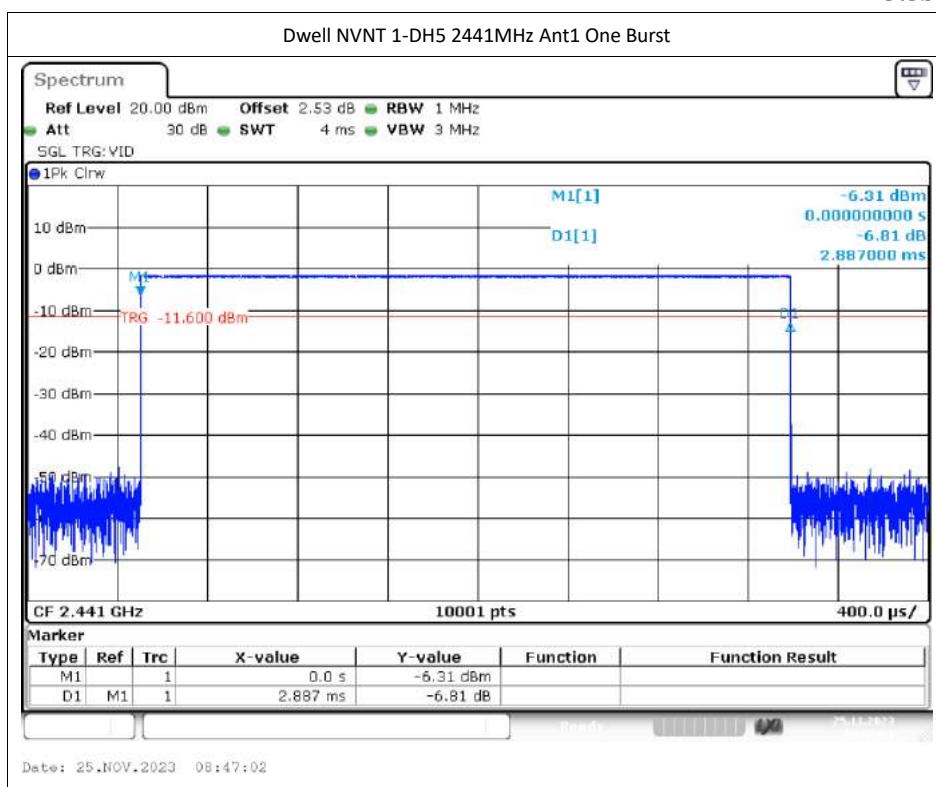


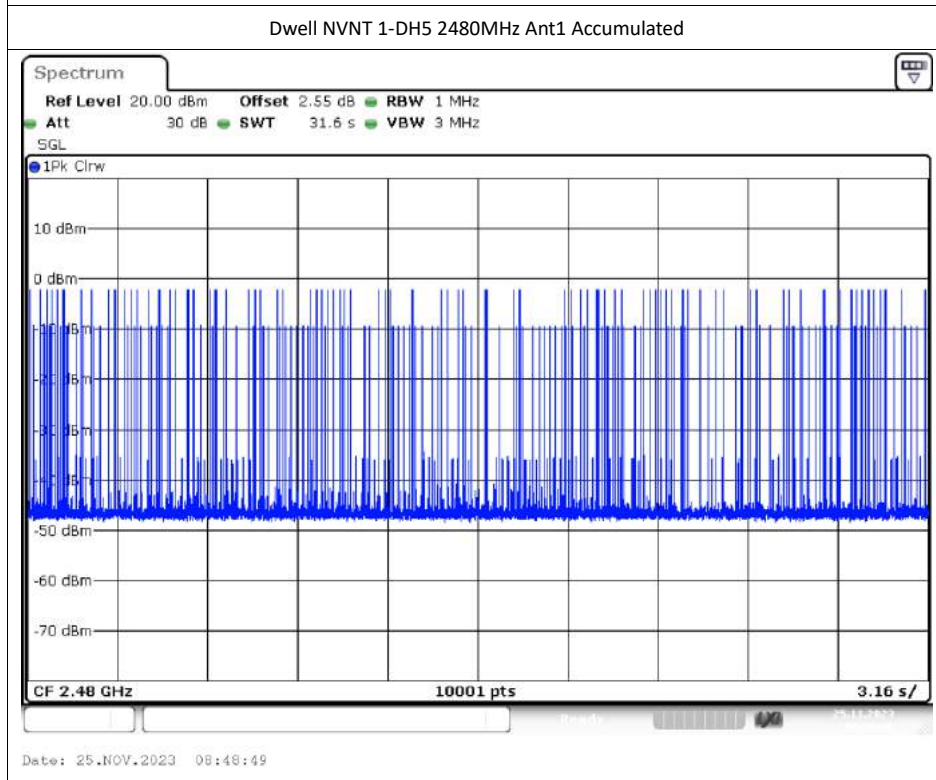
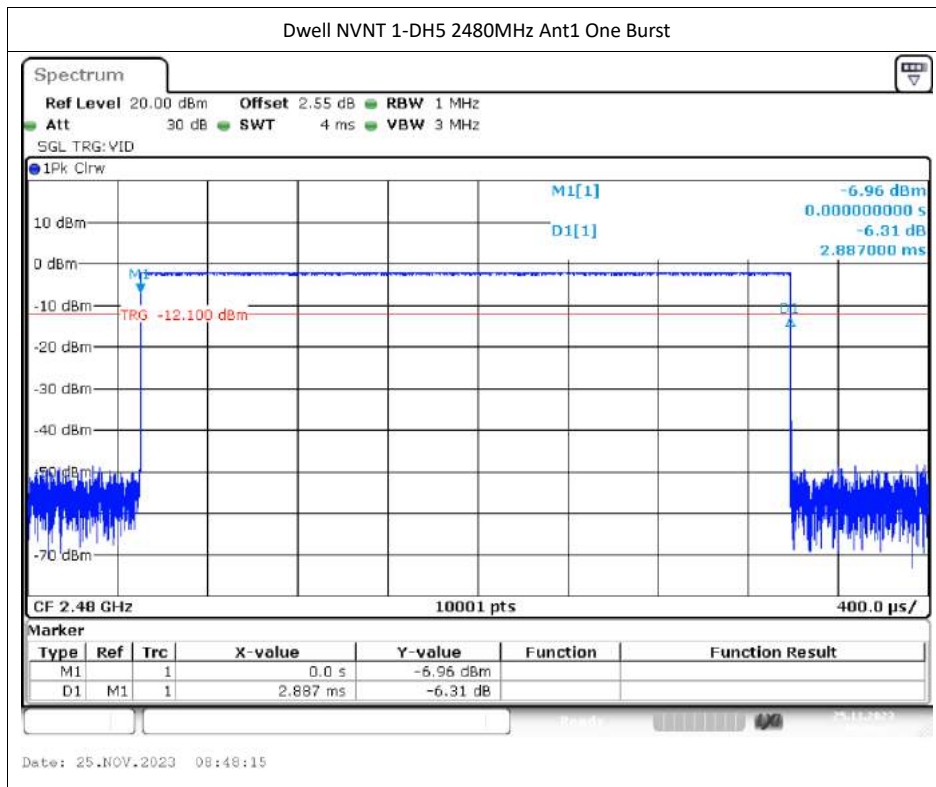


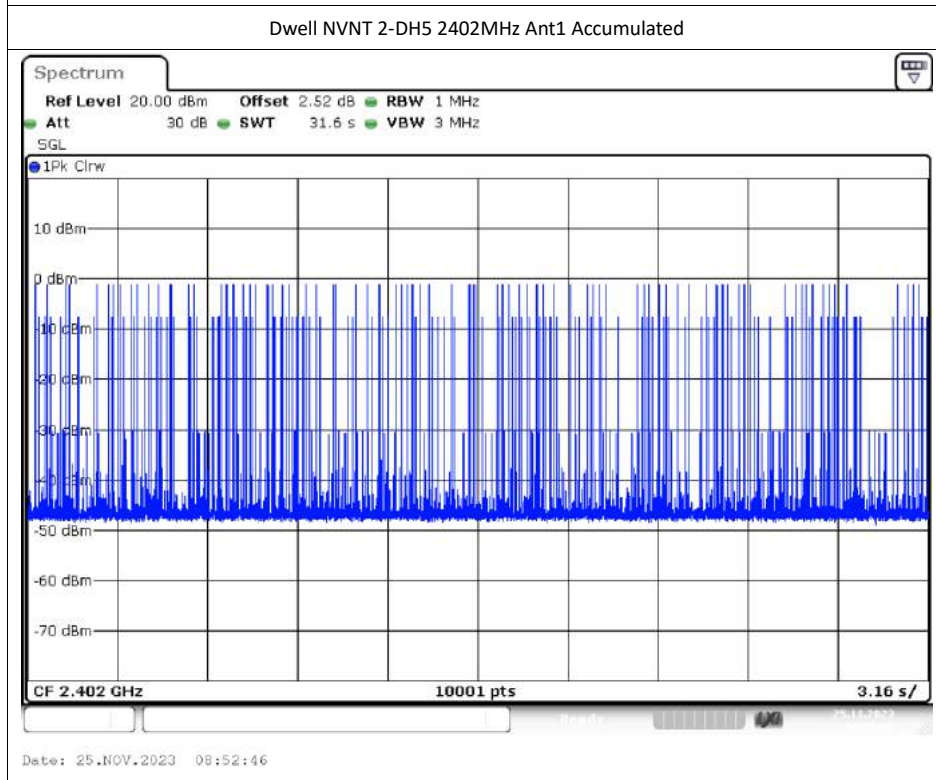
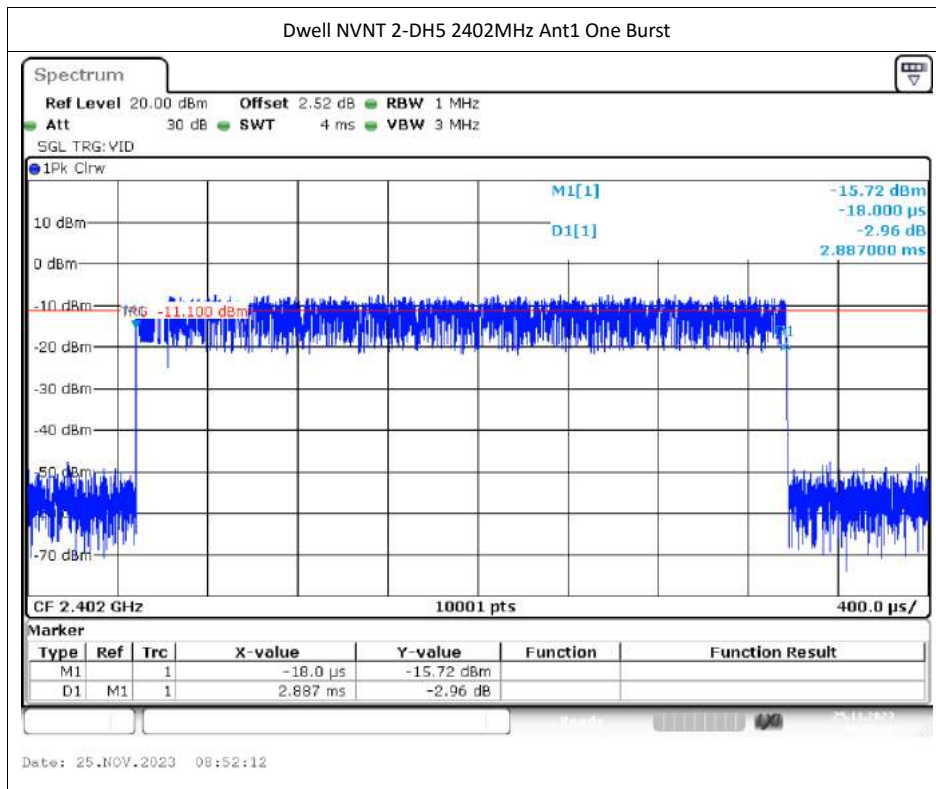


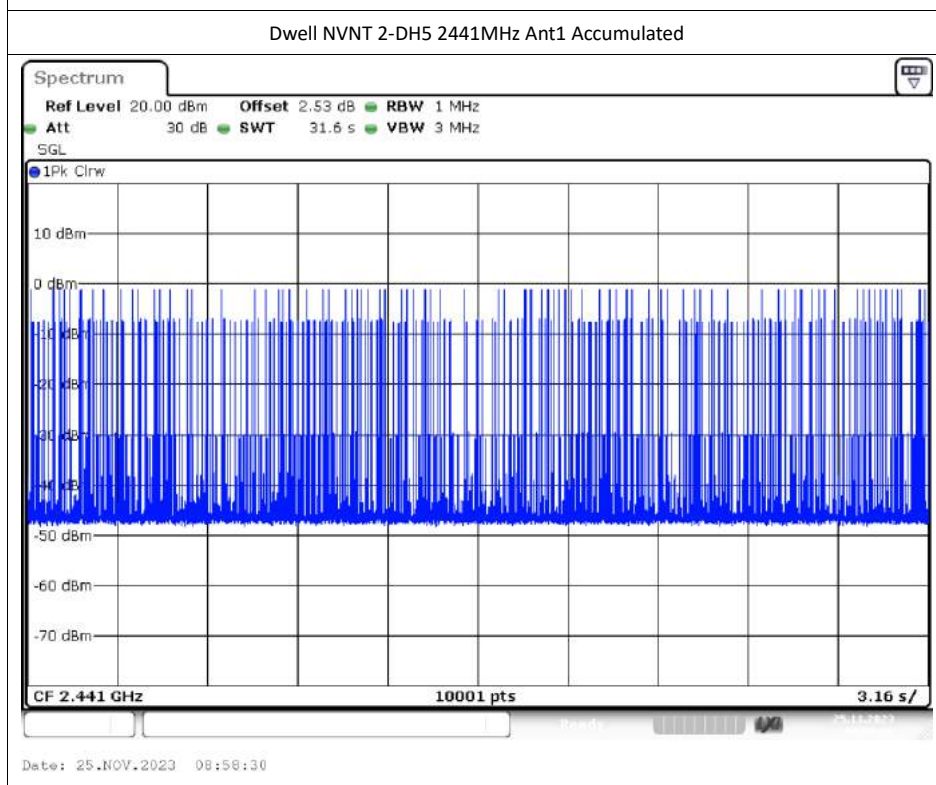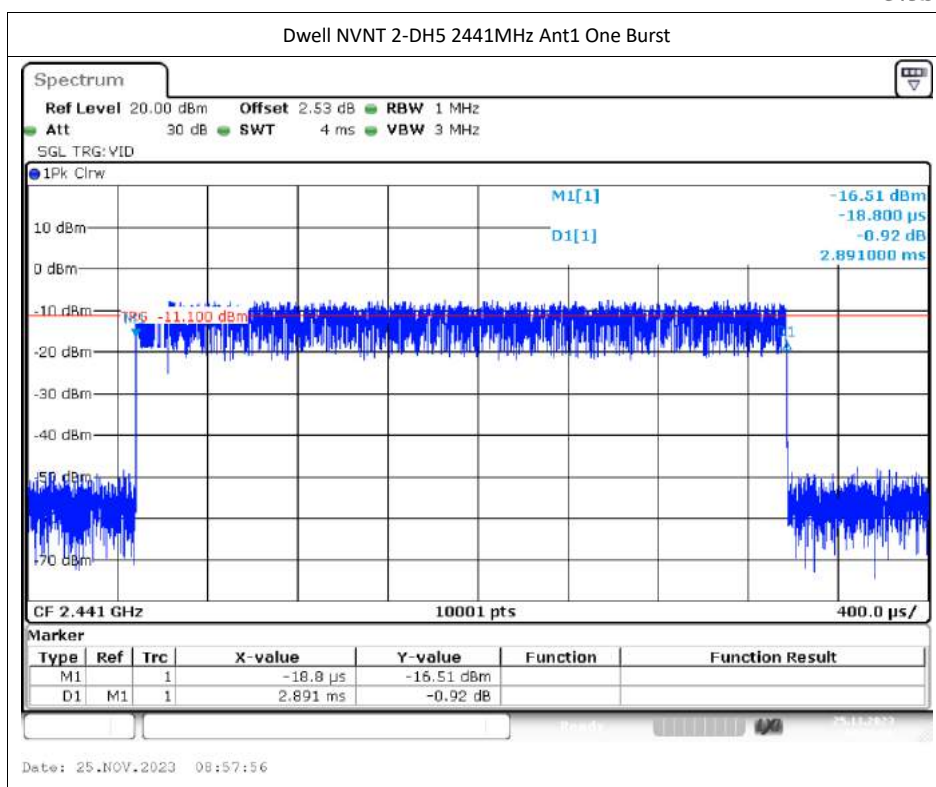

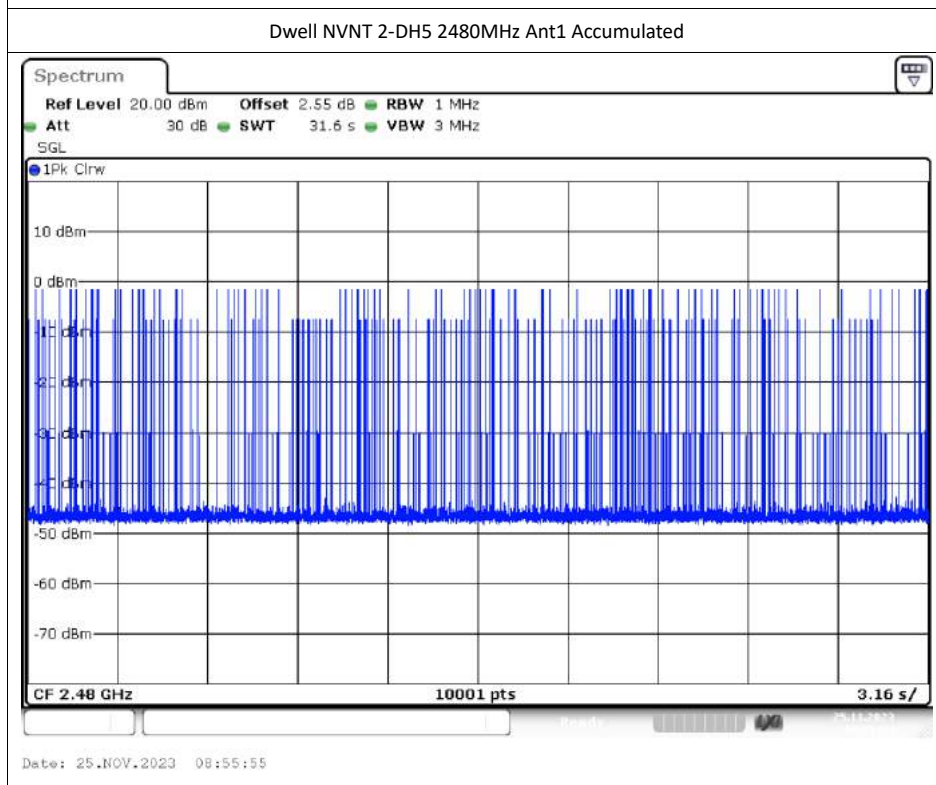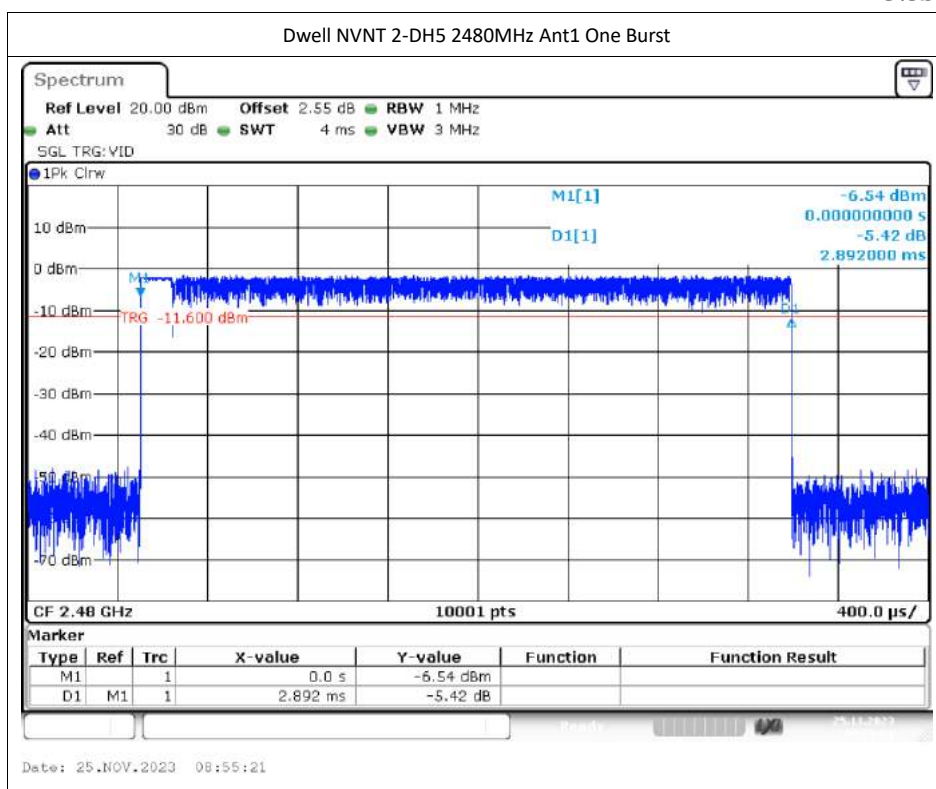

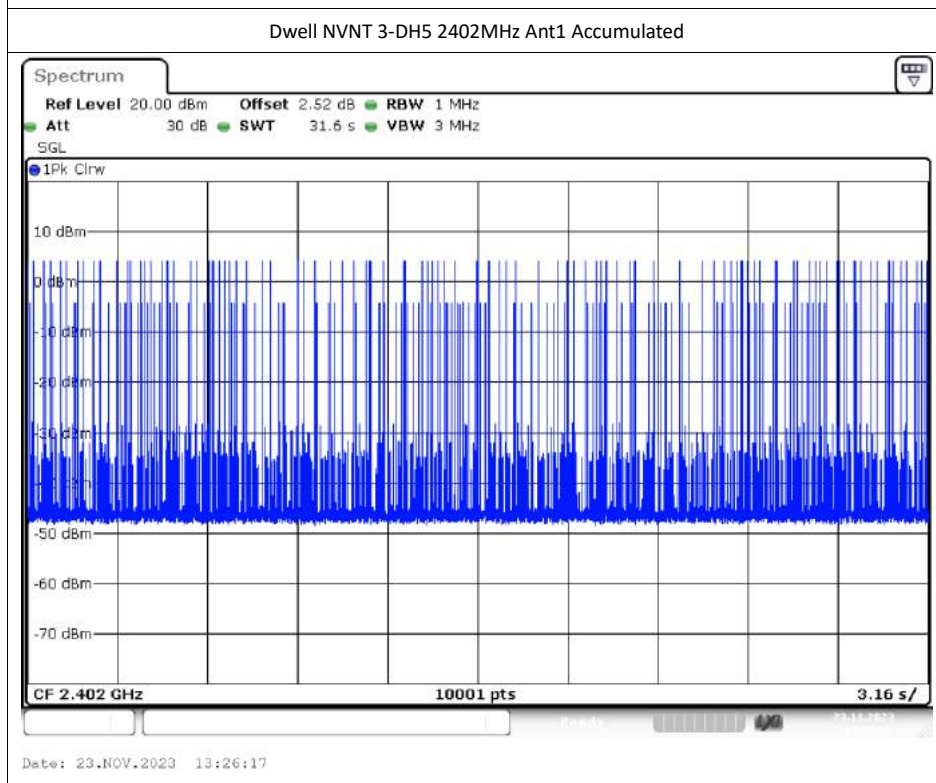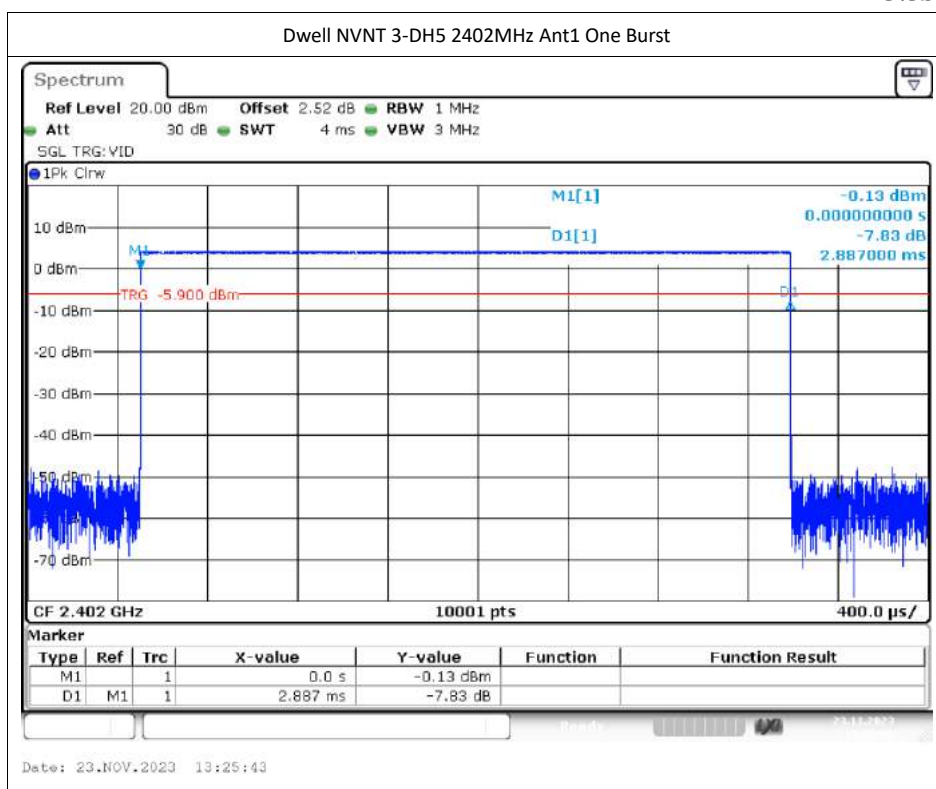


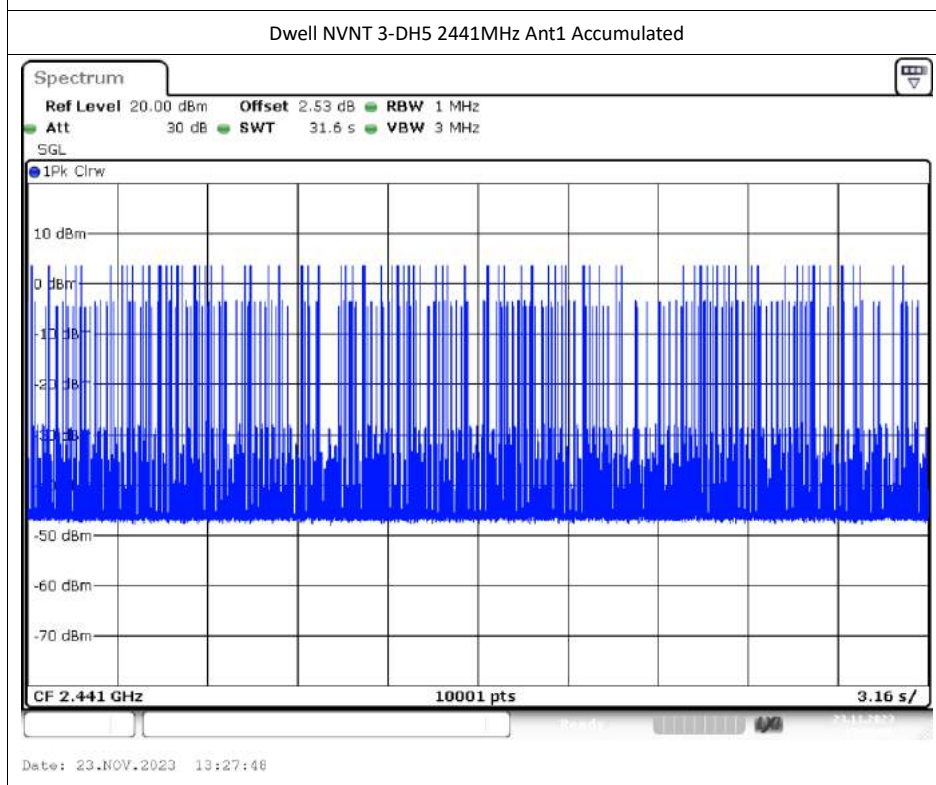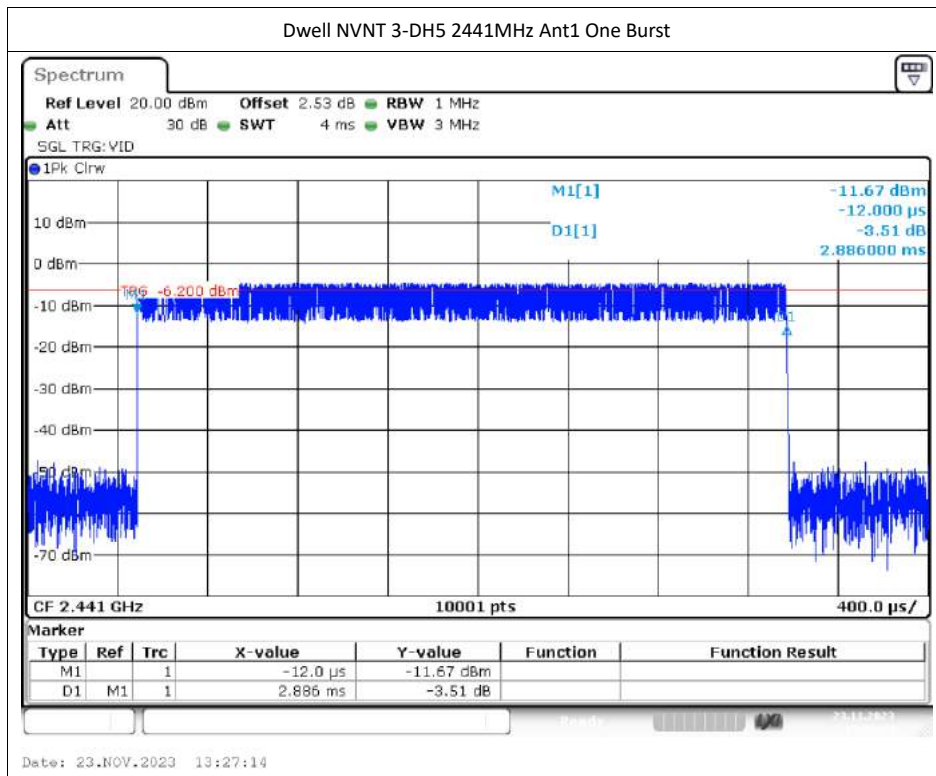


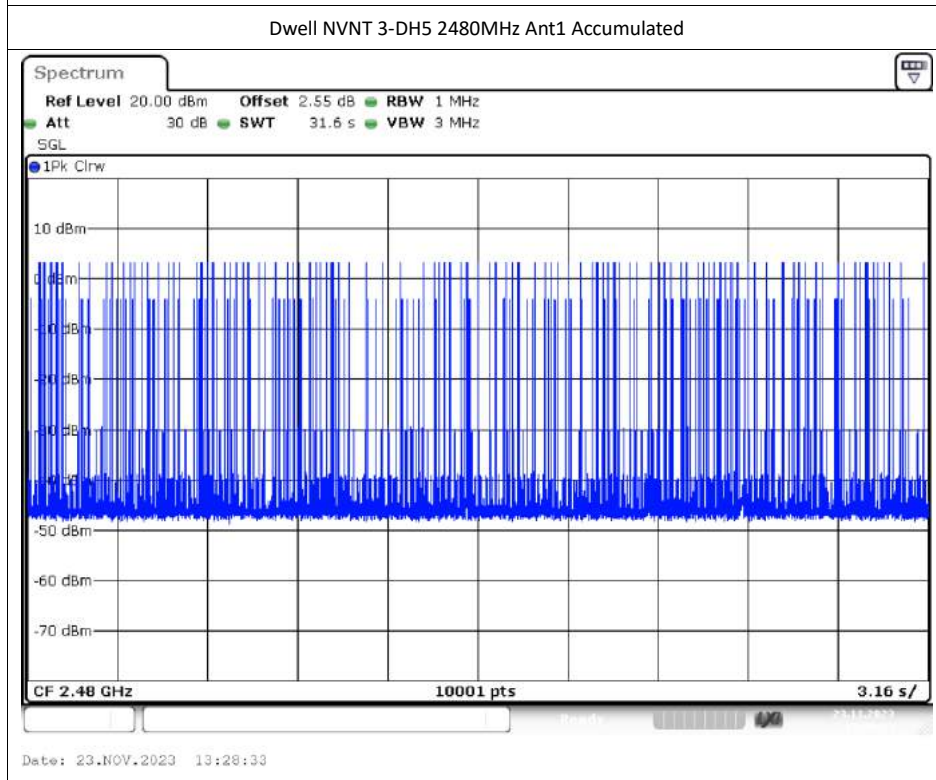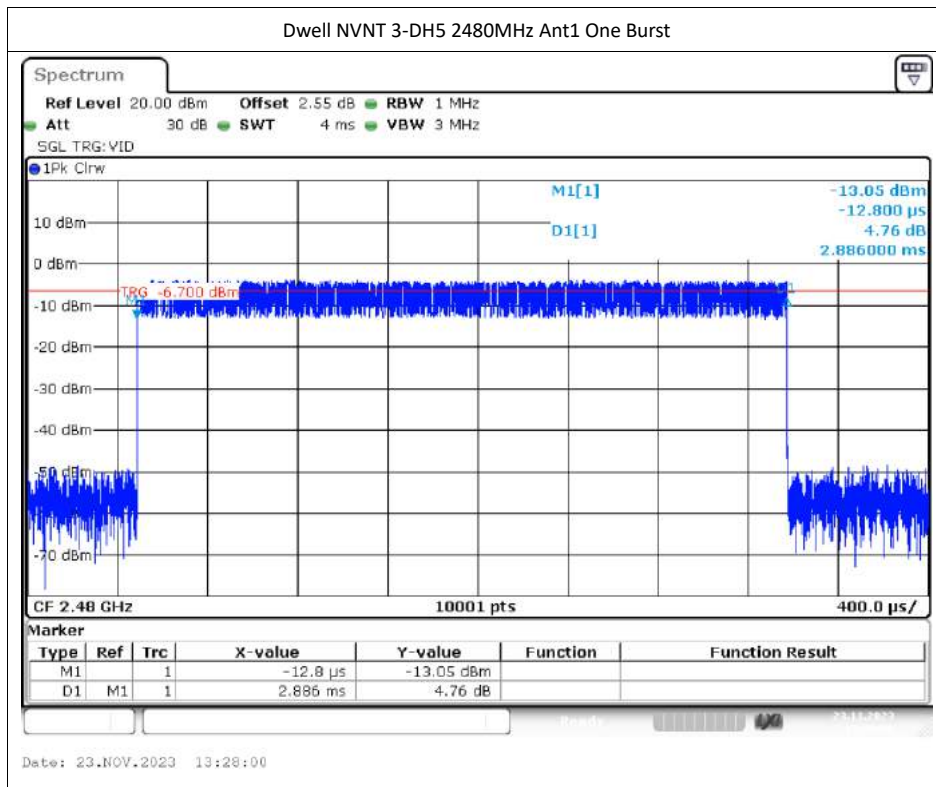



Band Edge



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-47	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-49.9	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-47.26	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-53.9	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-49.44	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-51.91	-20	Pass

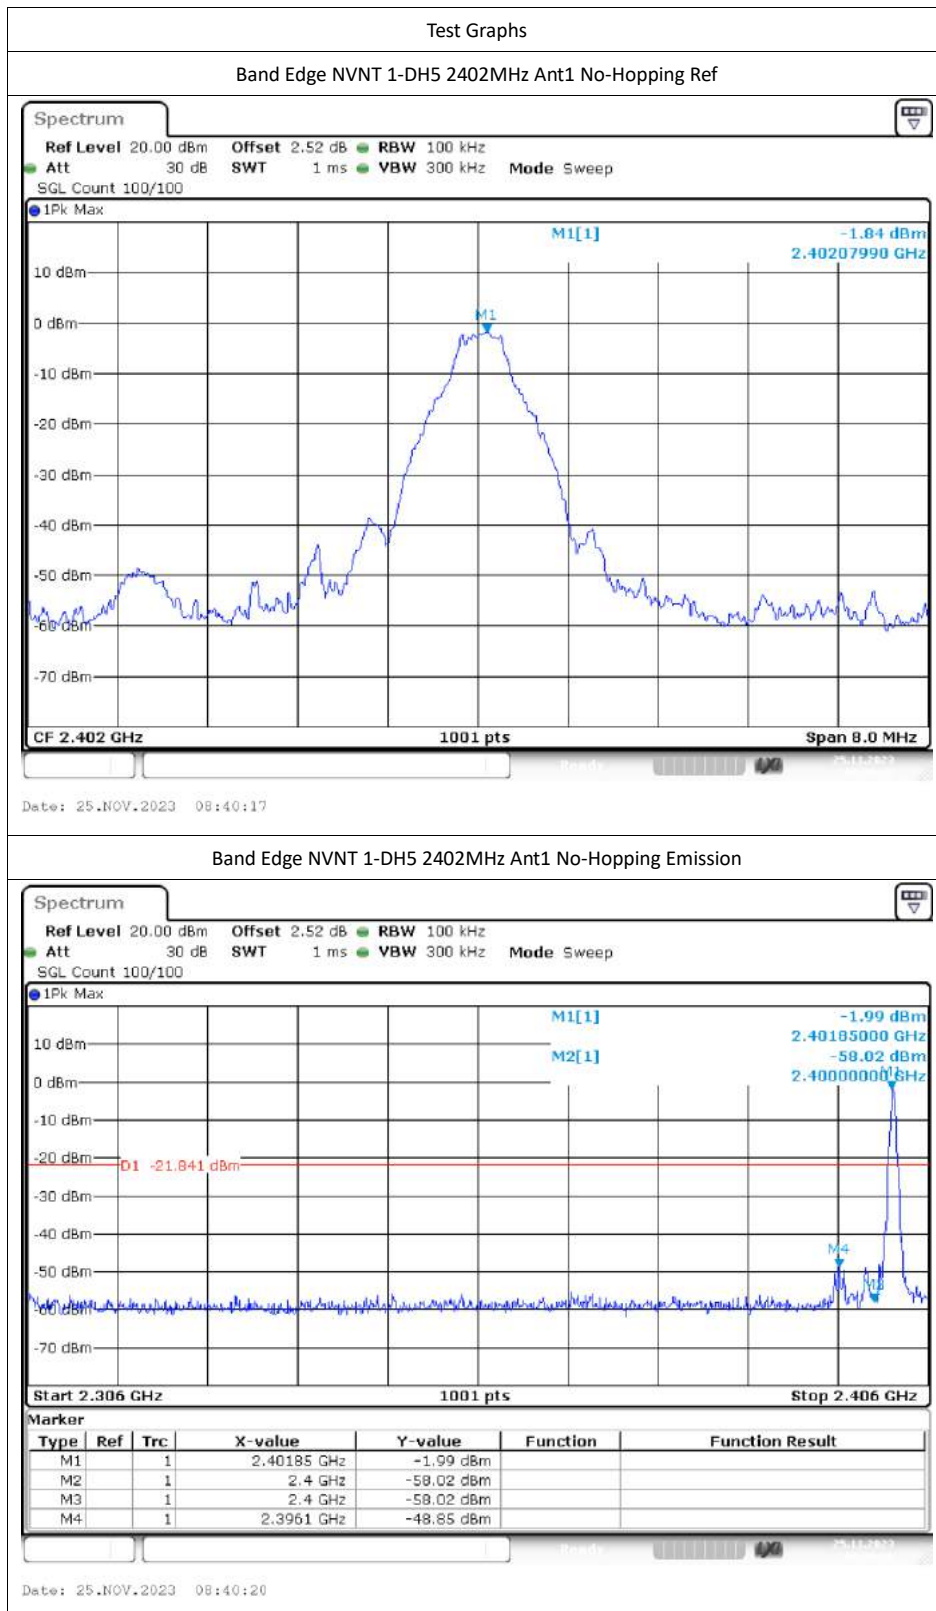


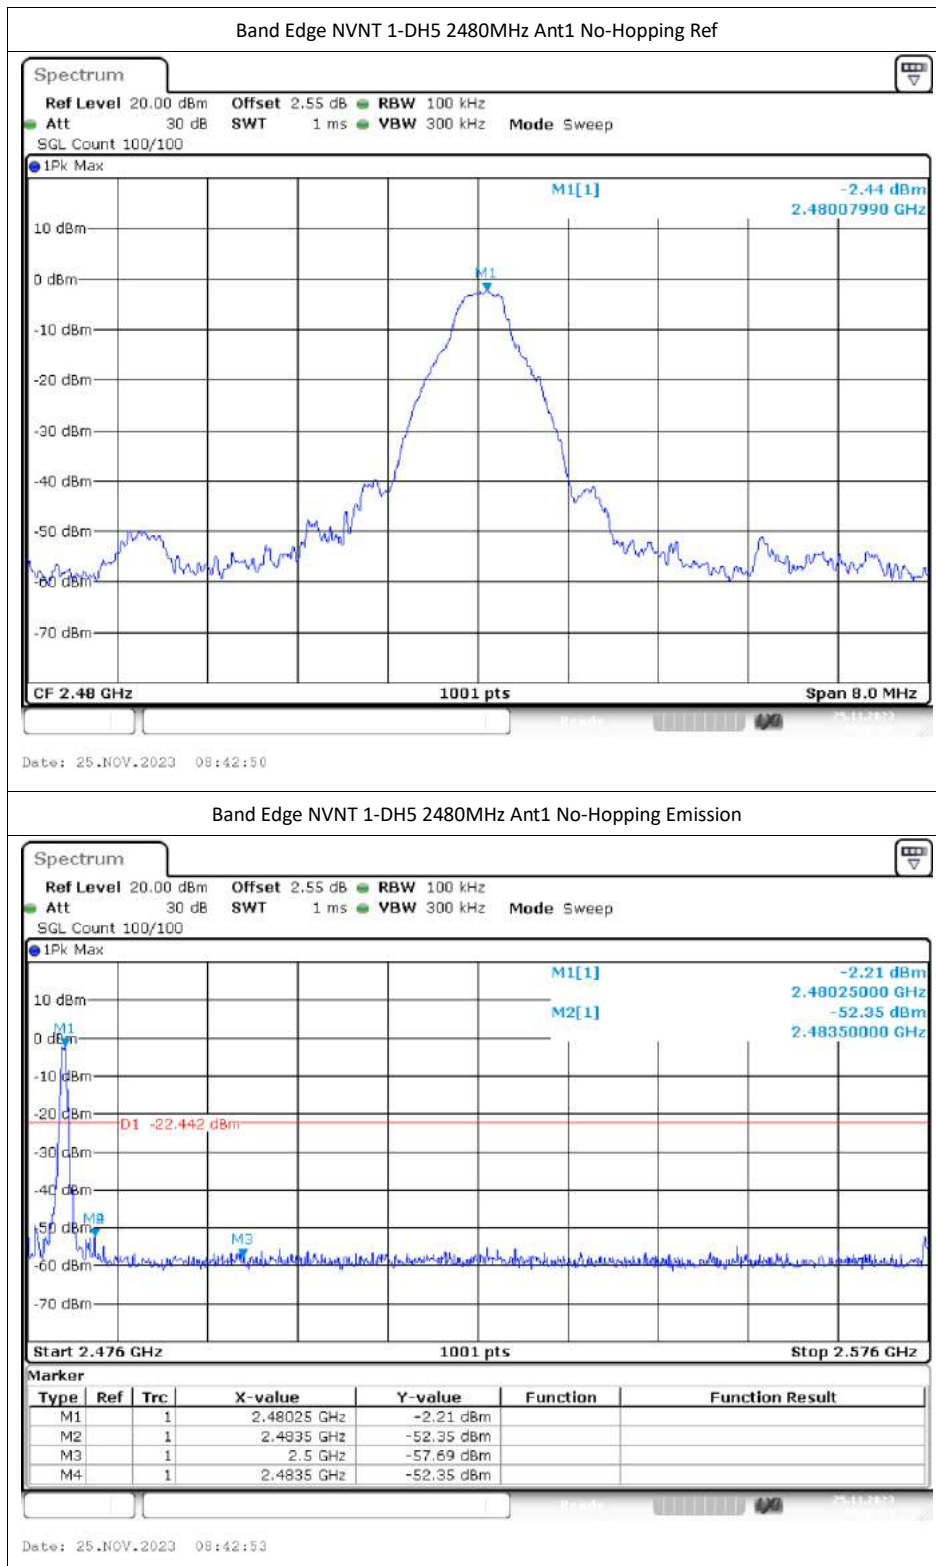

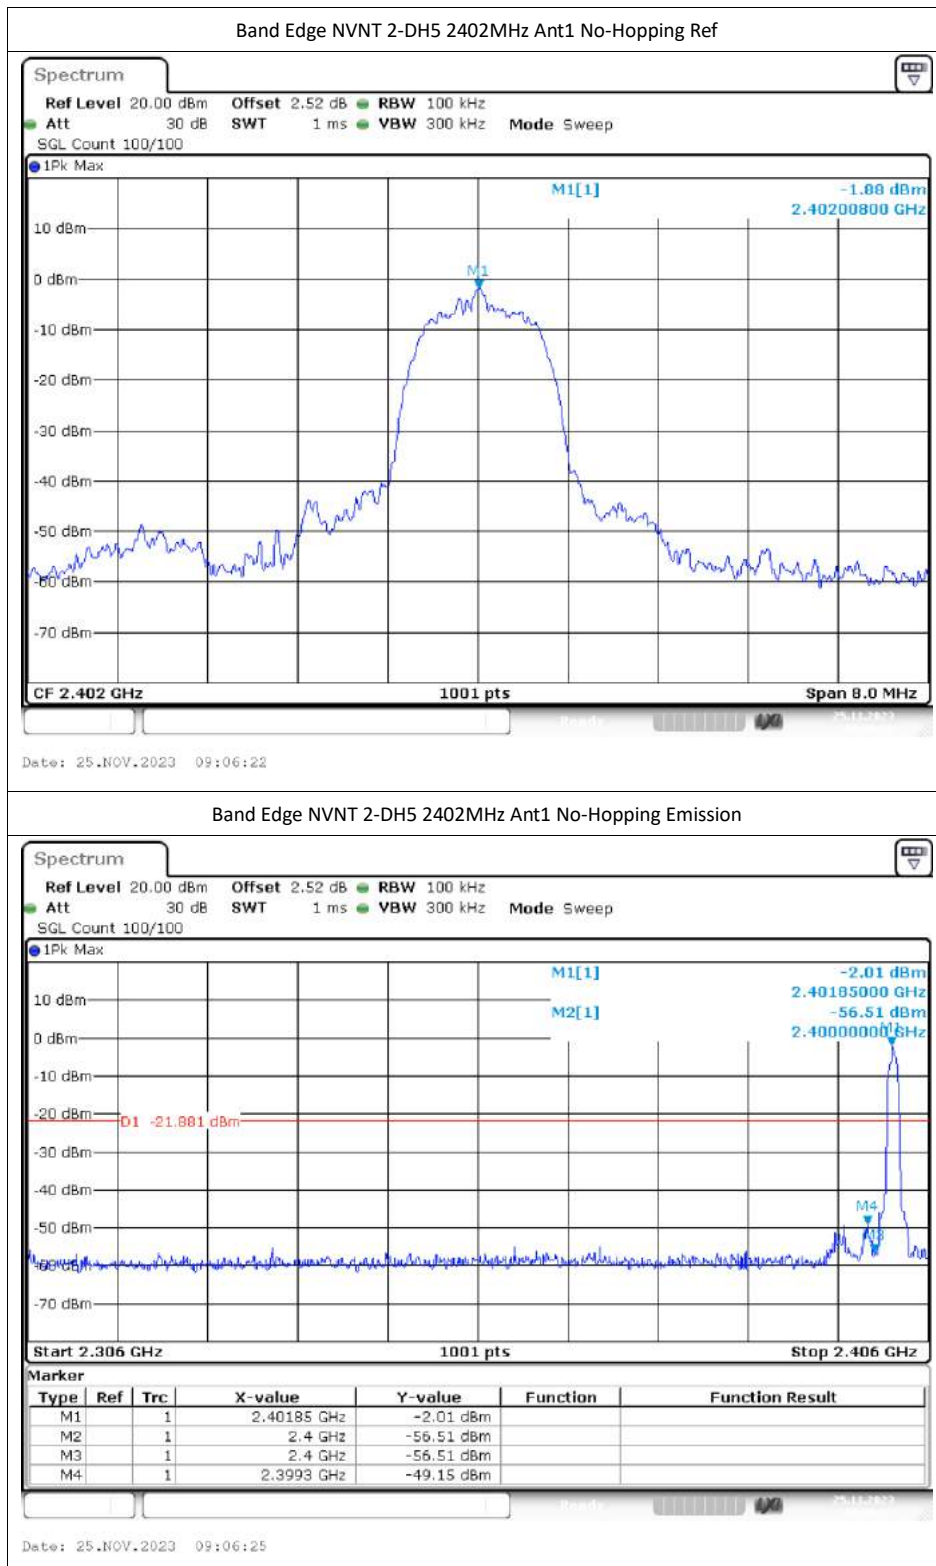

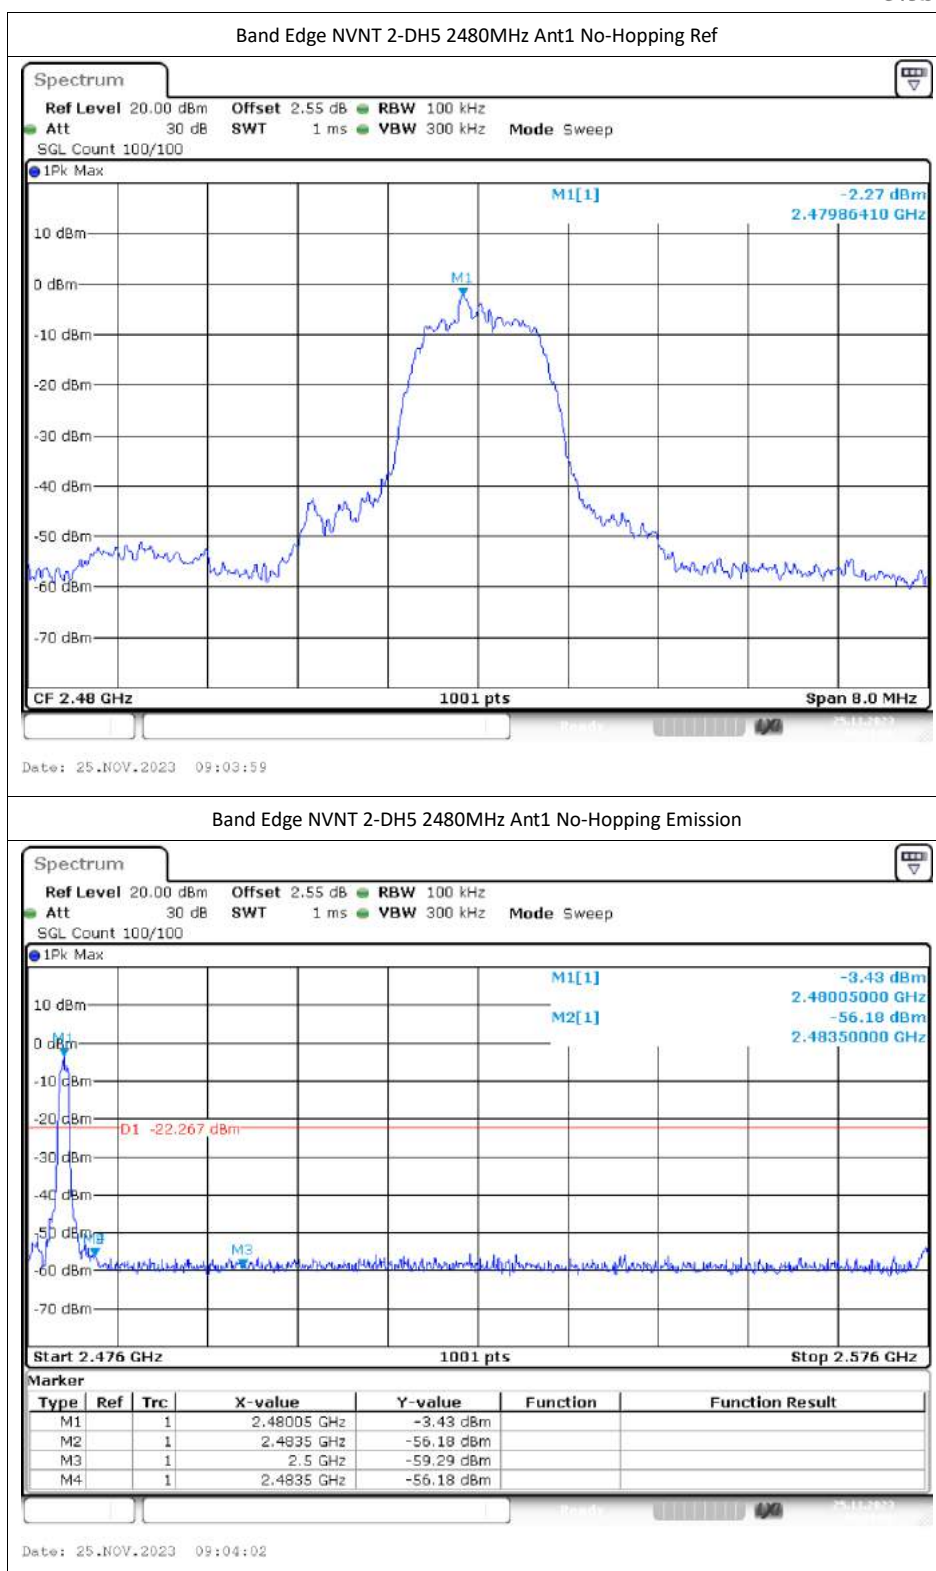


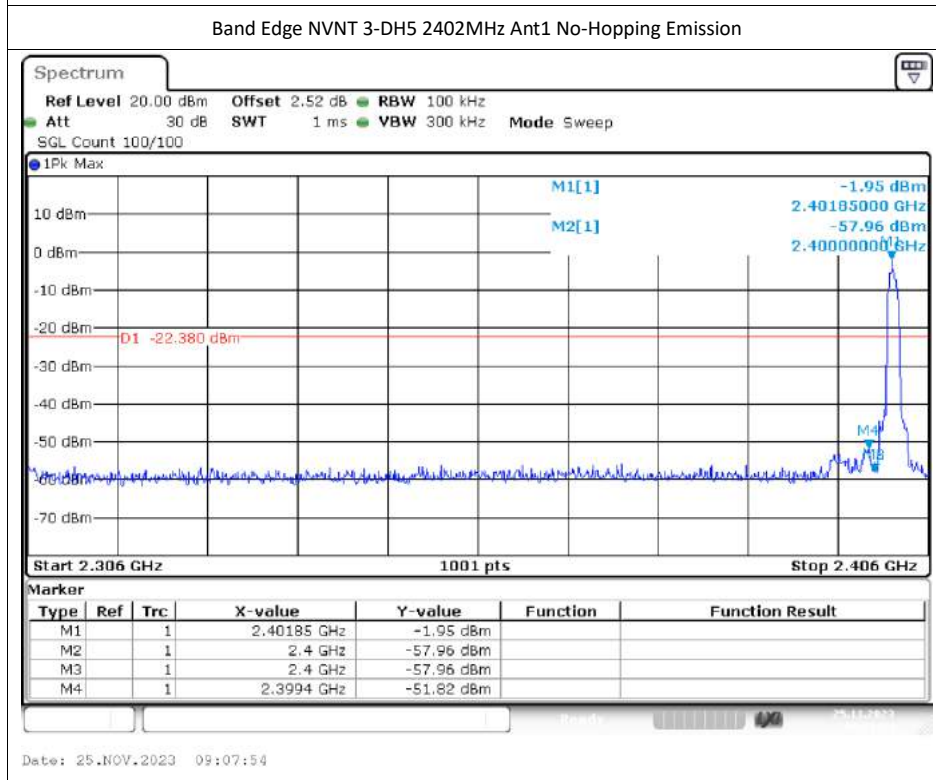
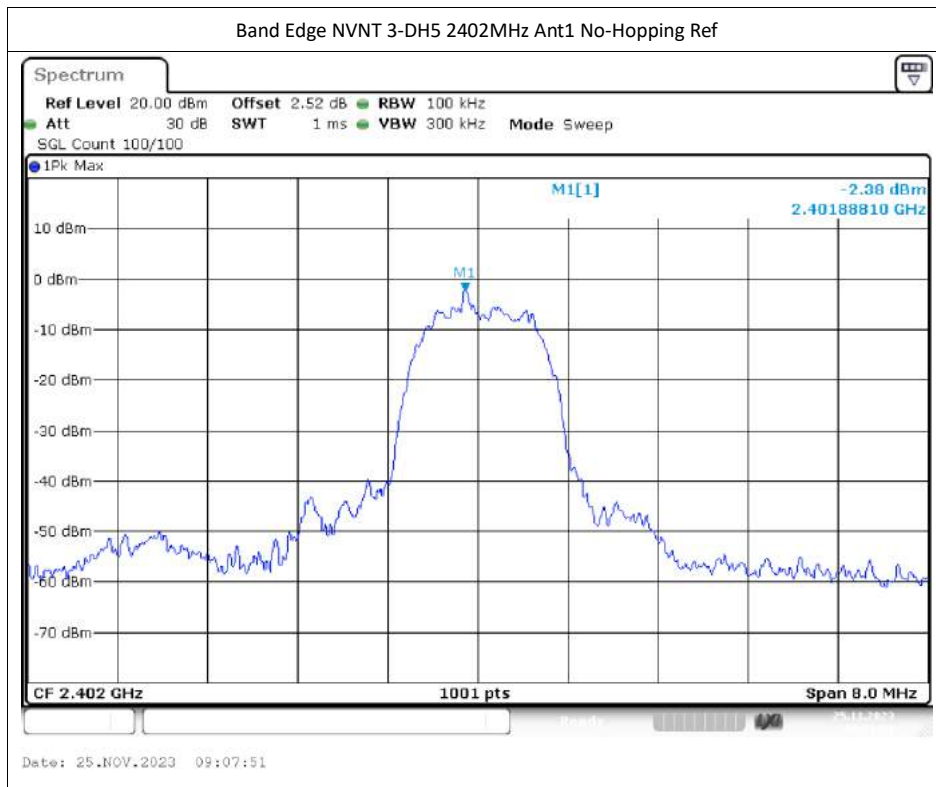


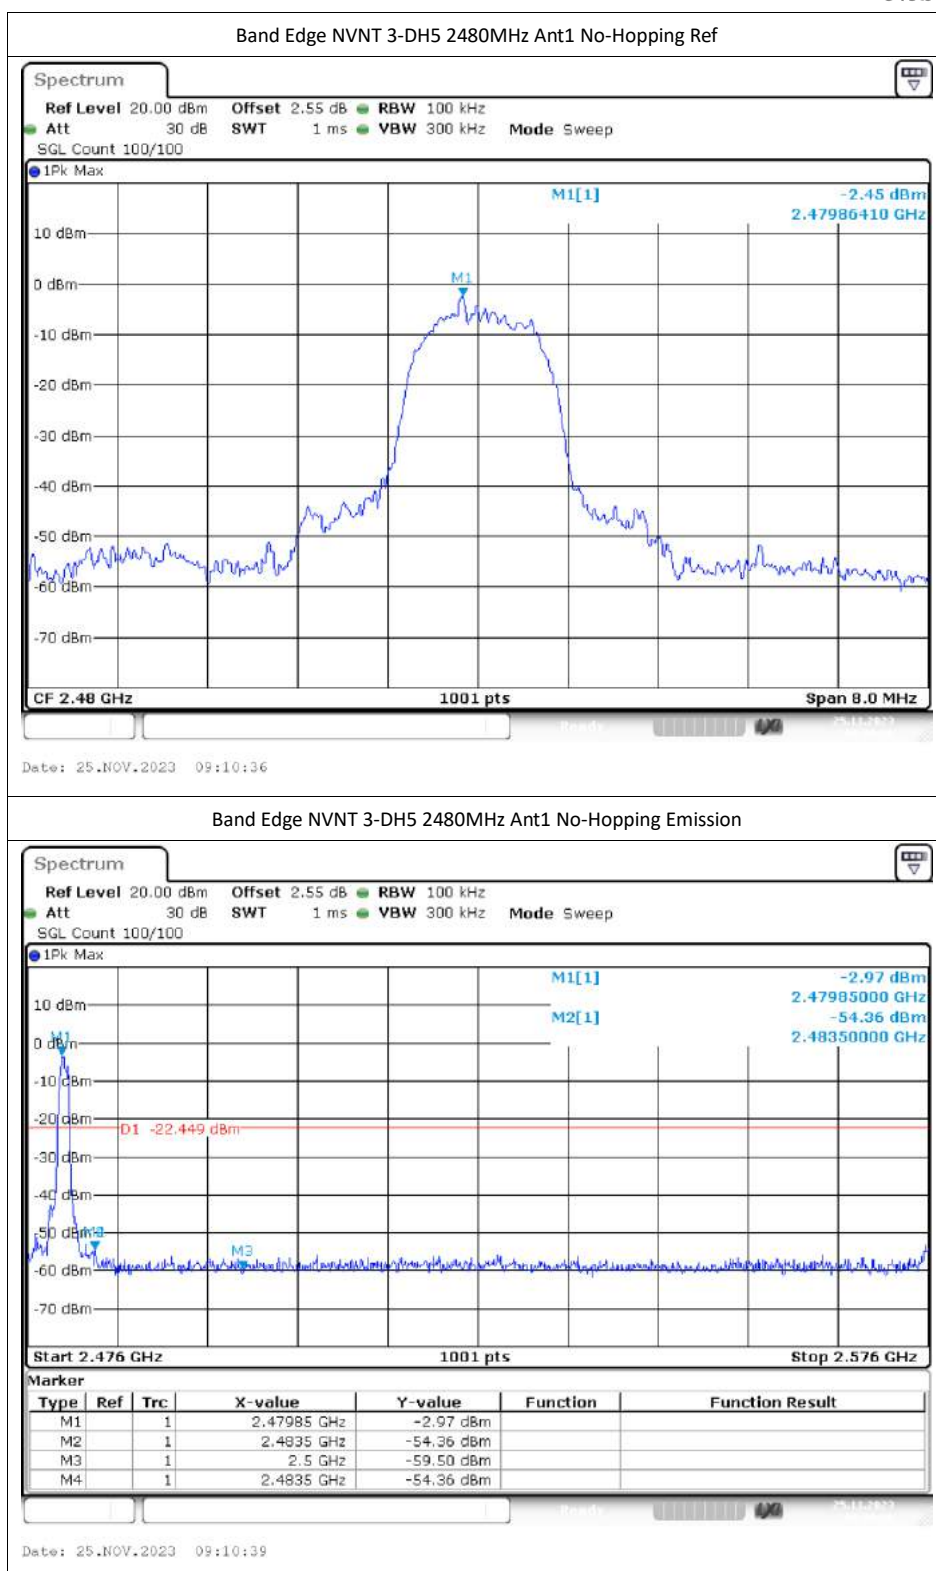



Band Edge(Hopping)



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-47.43	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-48.49	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-48.65	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-50.42	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-40.29	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-52.16	-20	Pass

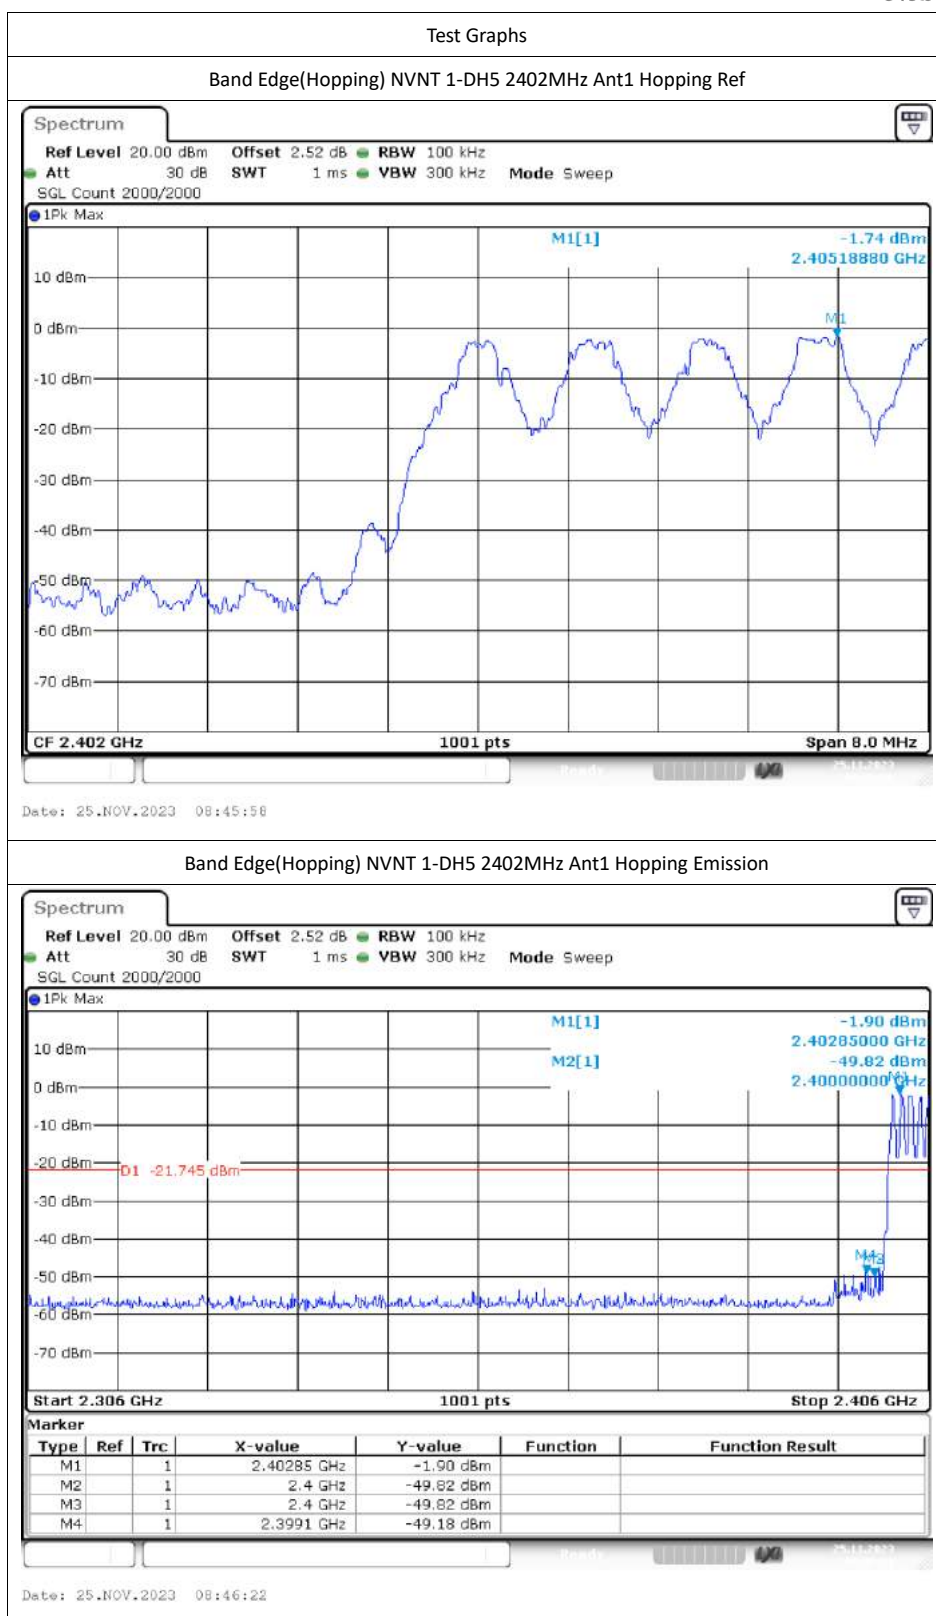


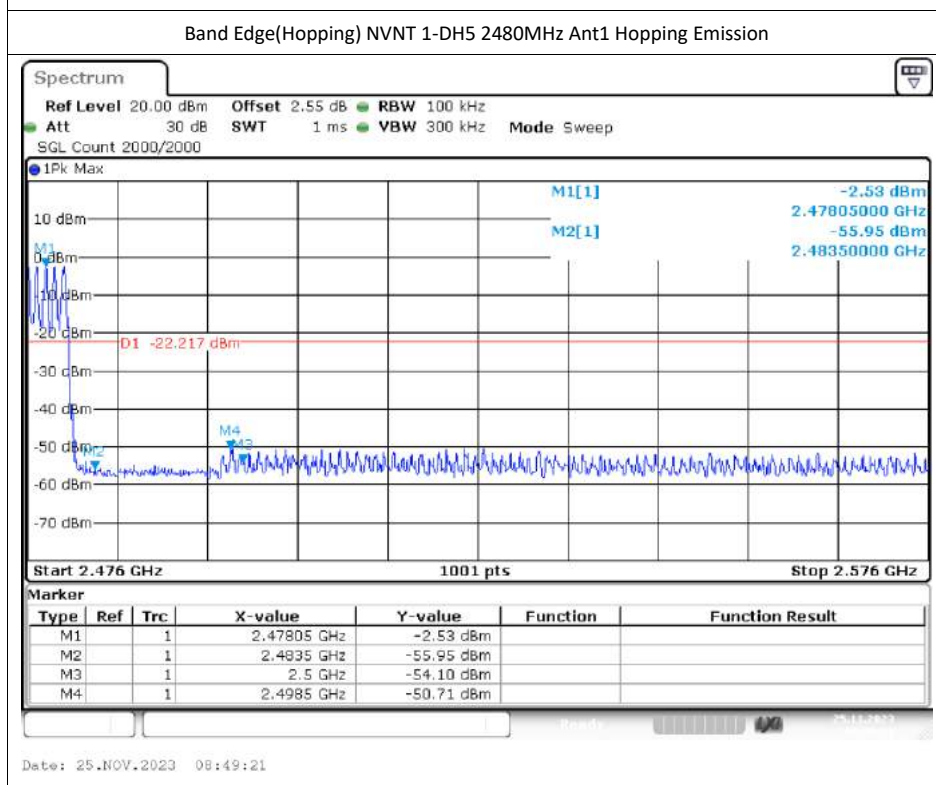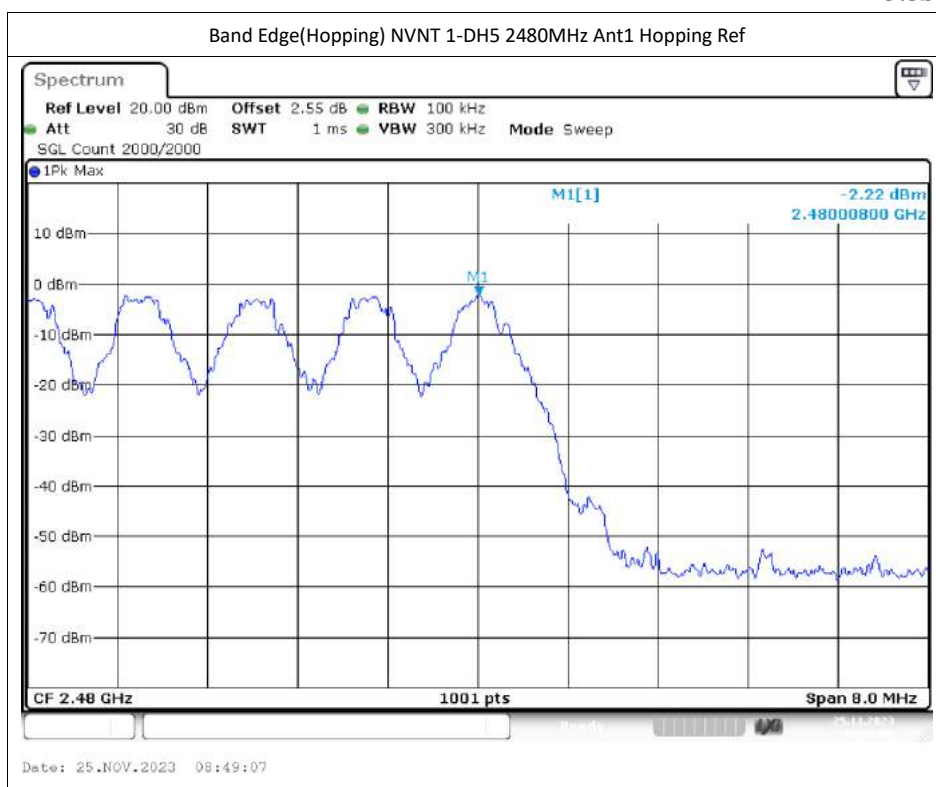

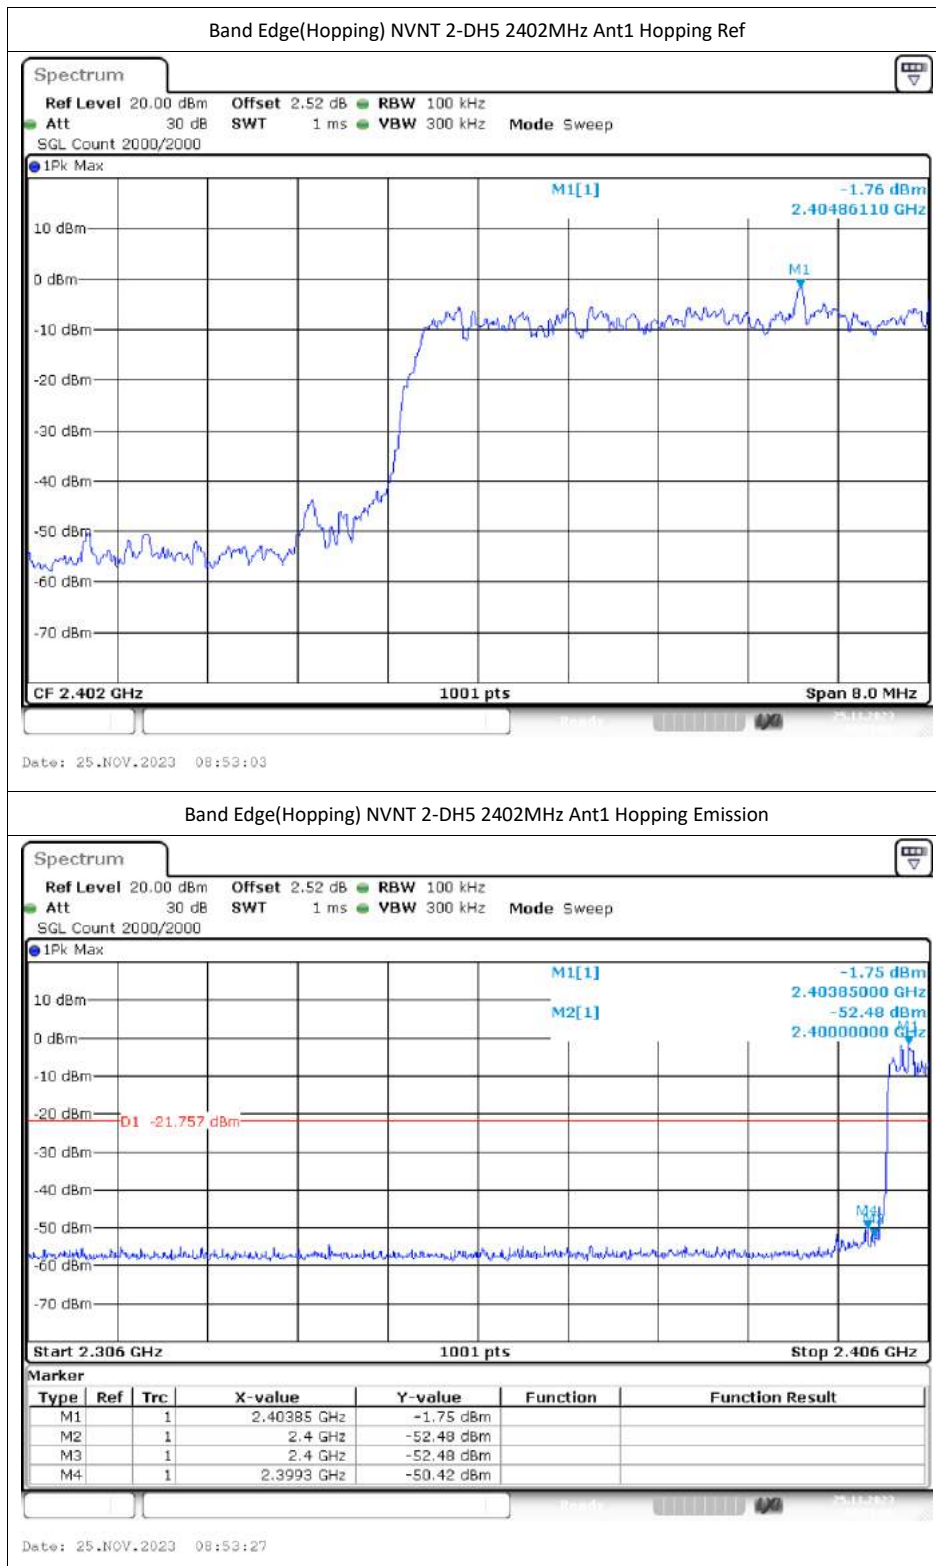

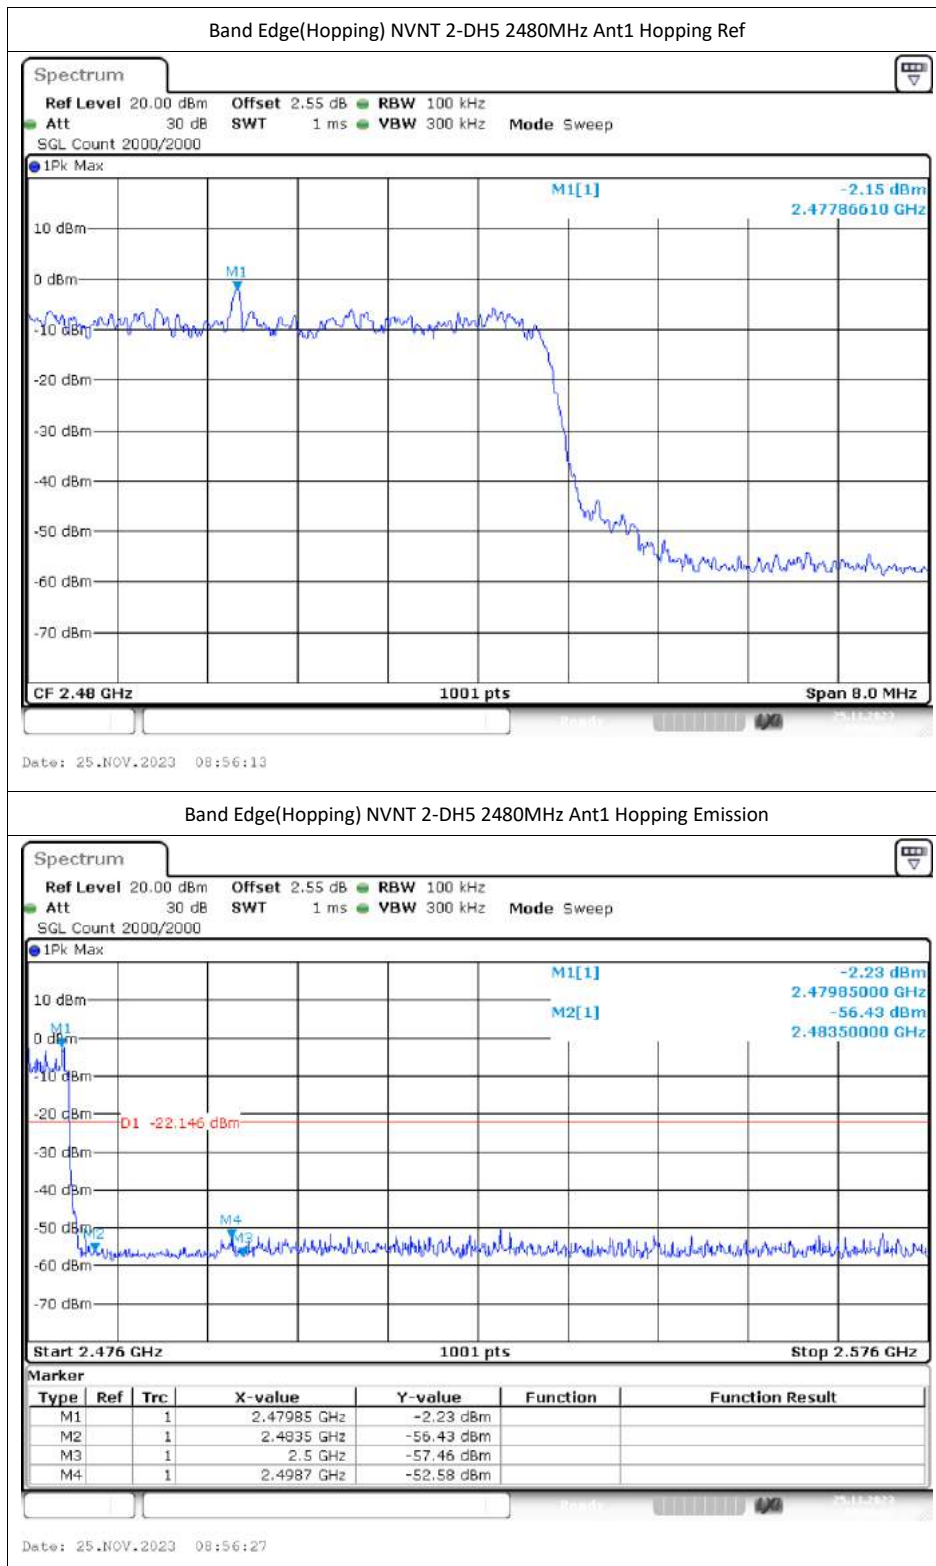


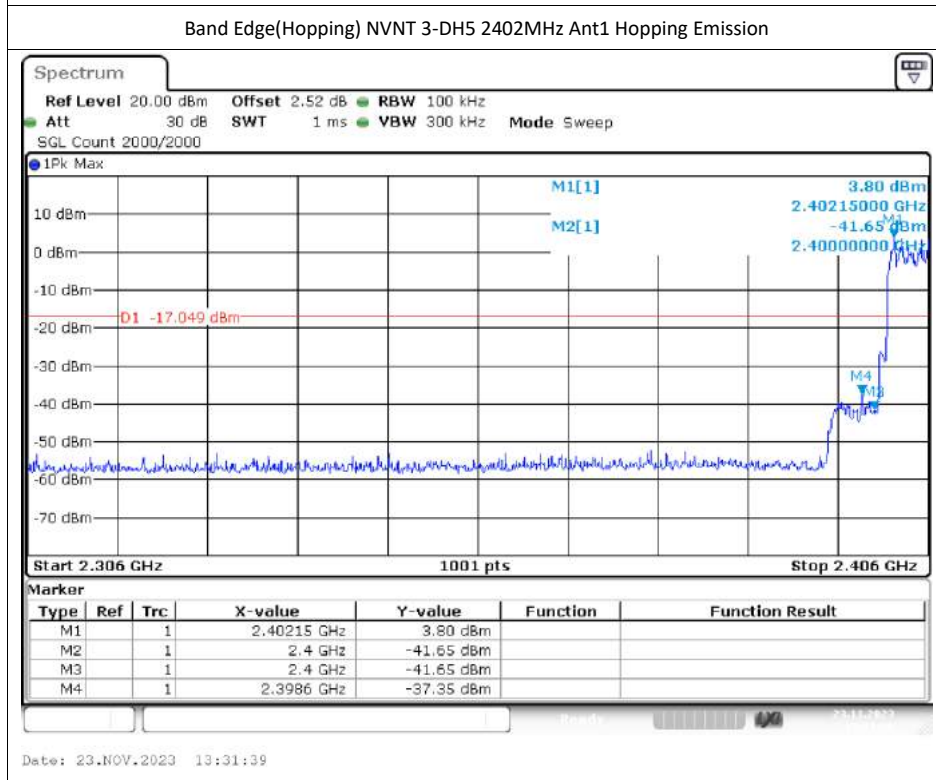
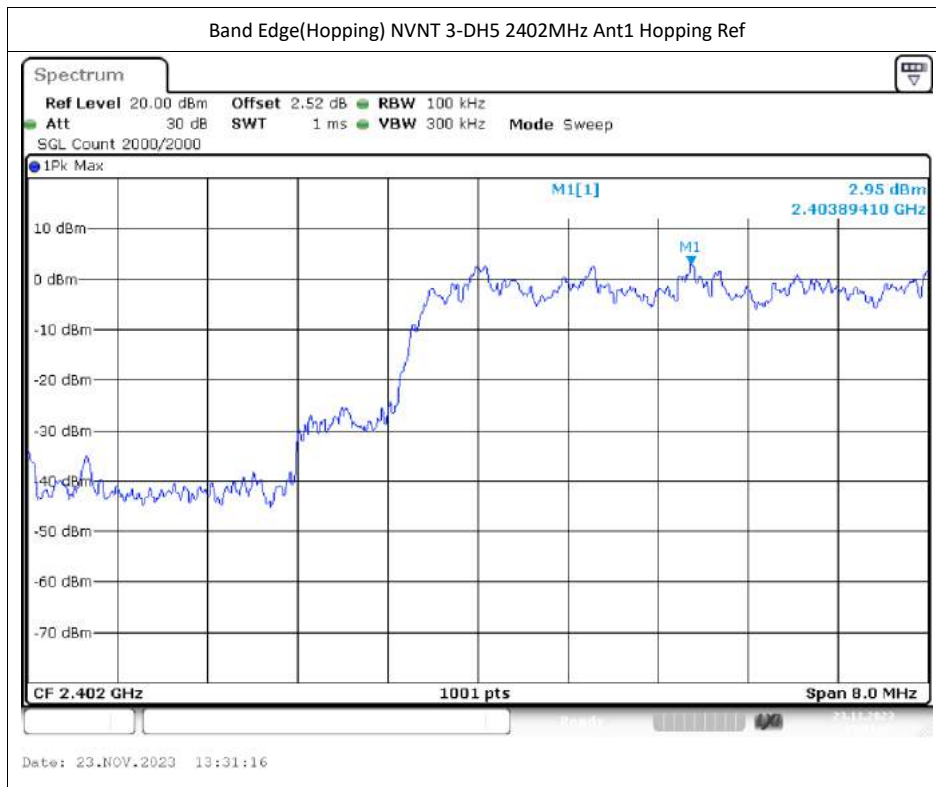



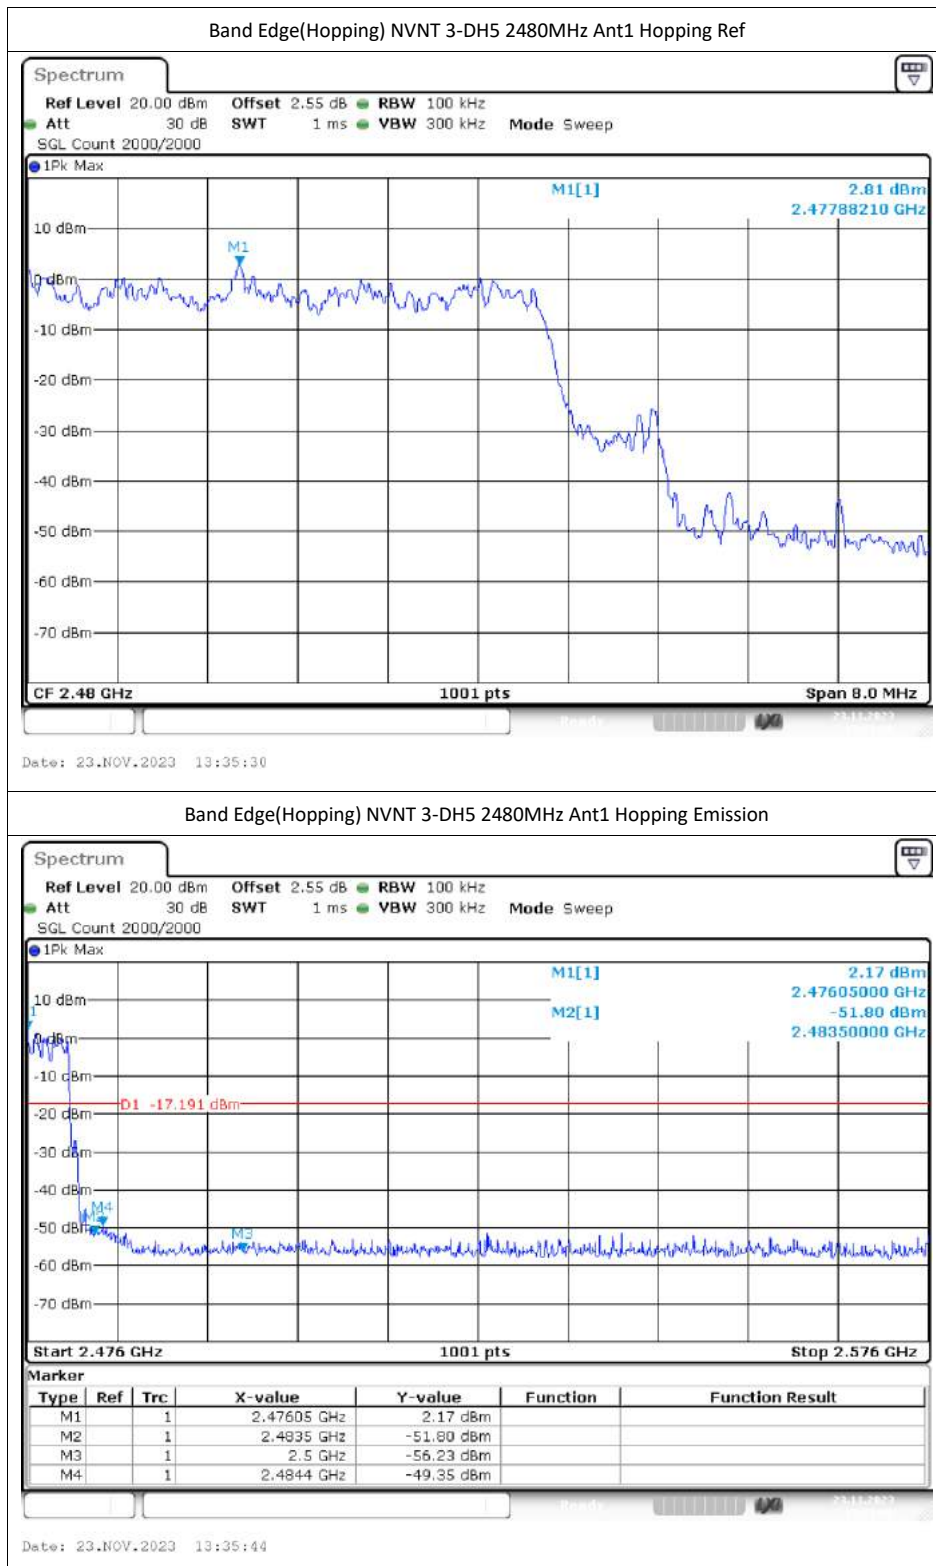




Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-48.06	-20	Pass
NVNT	1-DH5	2441	Ant1	-44.35	-20	Pass
NVNT	1-DH5	2480	Ant1	-44.11	-20	Pass
NVNT	2-DH5	2402	Ant1	-47.64	-20	Pass
NVNT	2-DH5	2441	Ant1	-44.63	-20	Pass
NVNT	2-DH5	2480	Ant1	-44.24	-20	Pass
NVNT	3-DH5	2402	Ant1	-47.64	-20	Pass
NVNT	3-DH5	2441	Ant1	-44.86	-20	Pass
NVNT	3-DH5	2480	Ant1	-42.33	-20	Pass


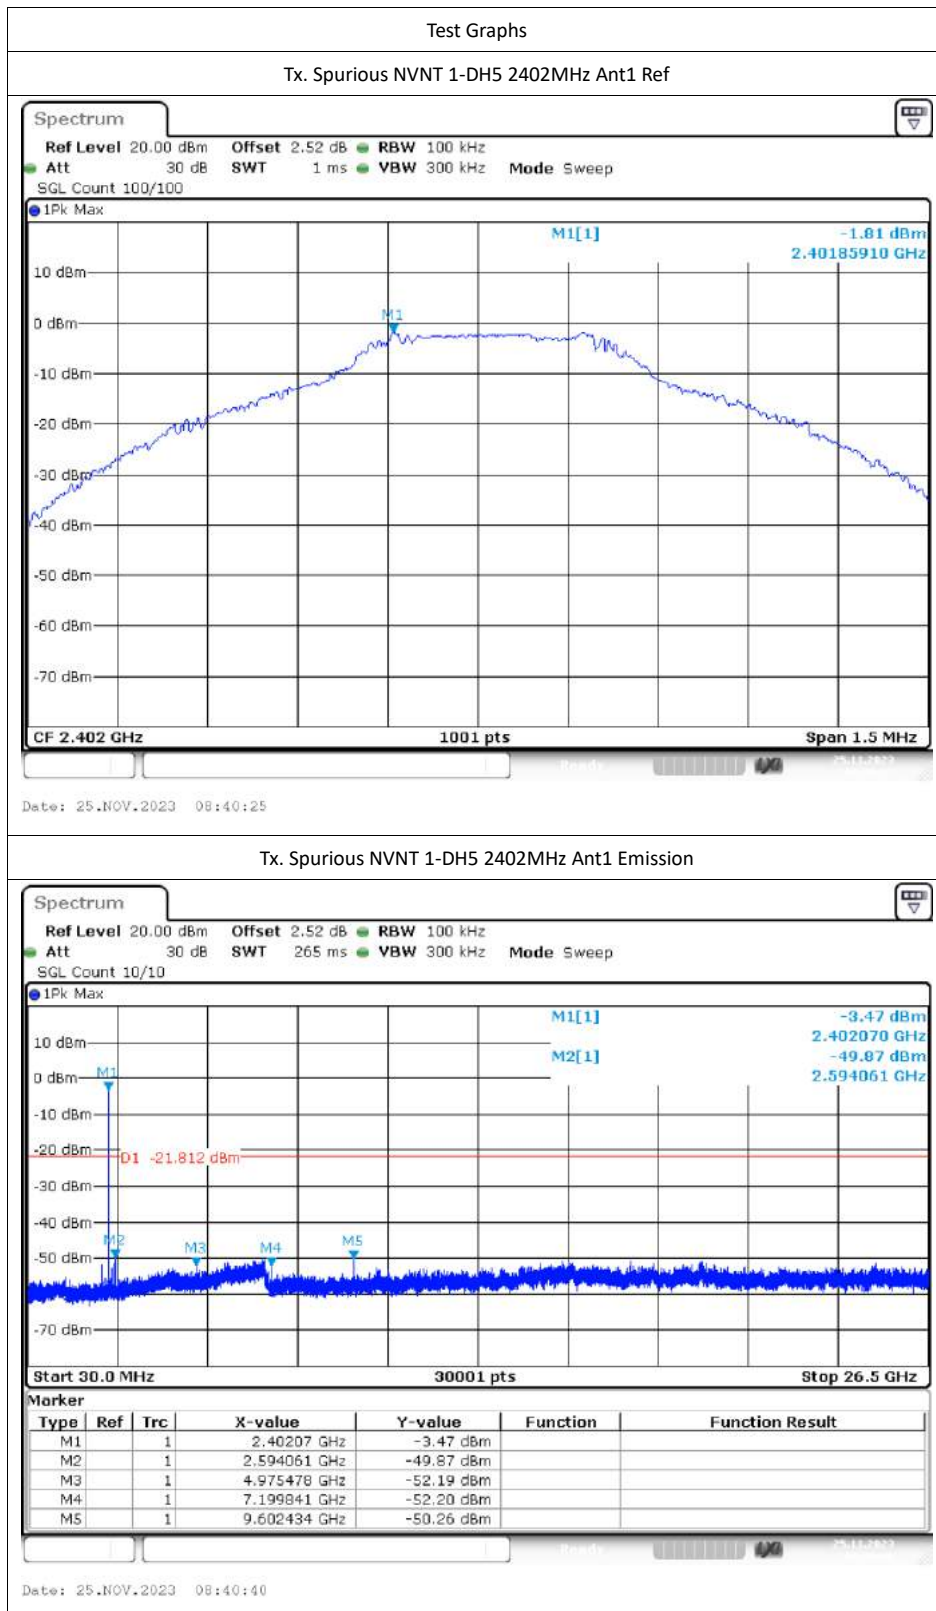


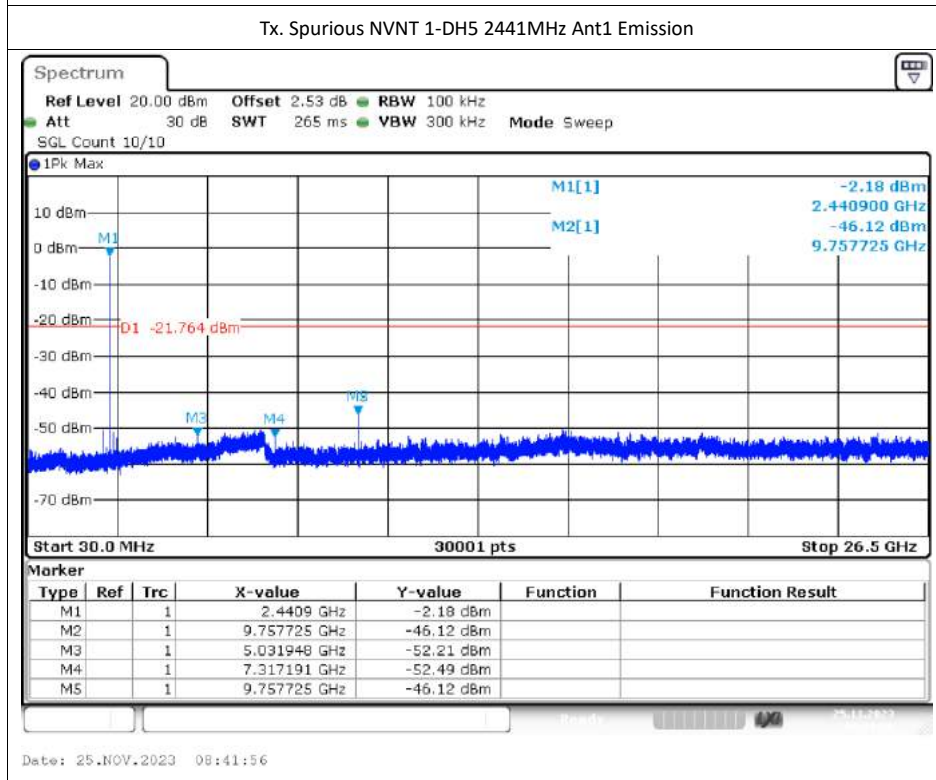
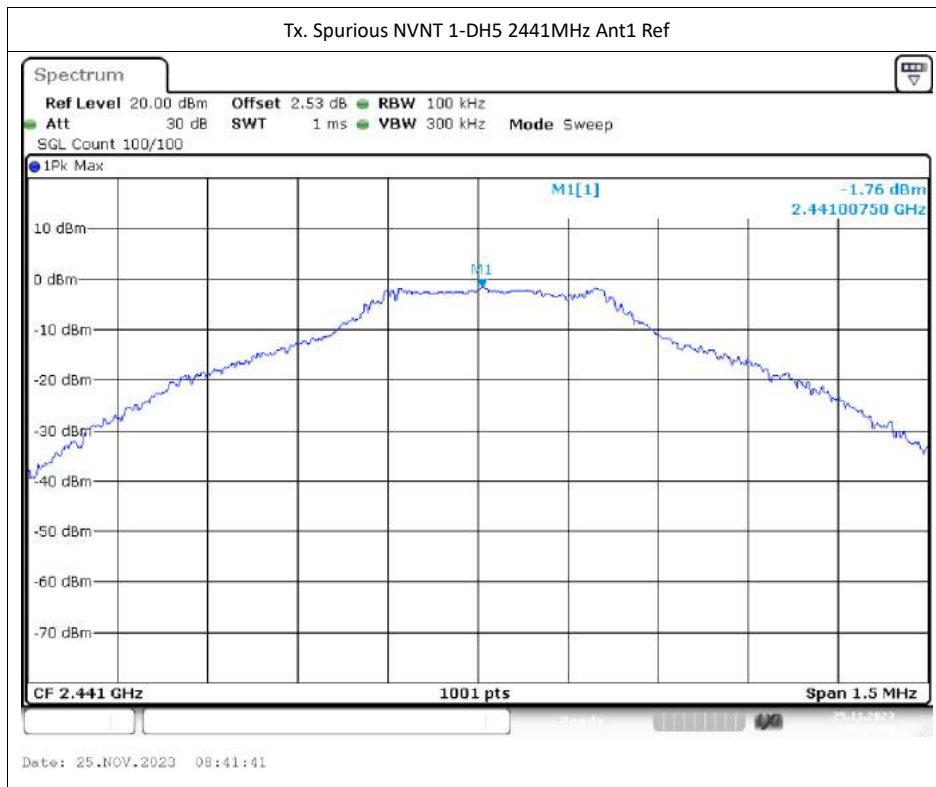


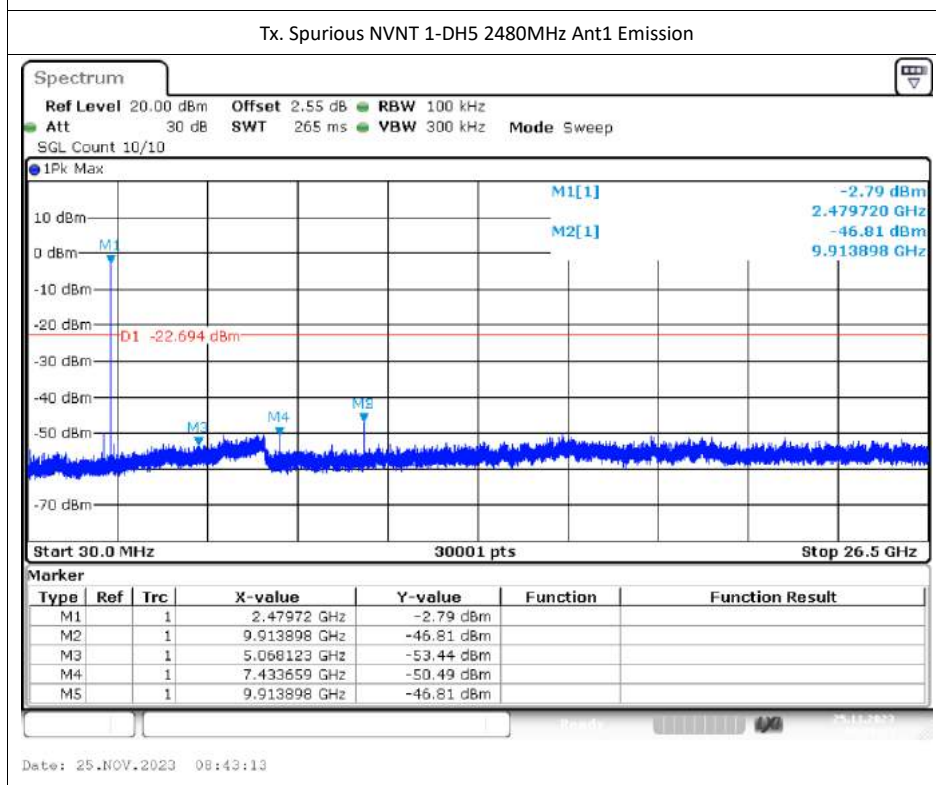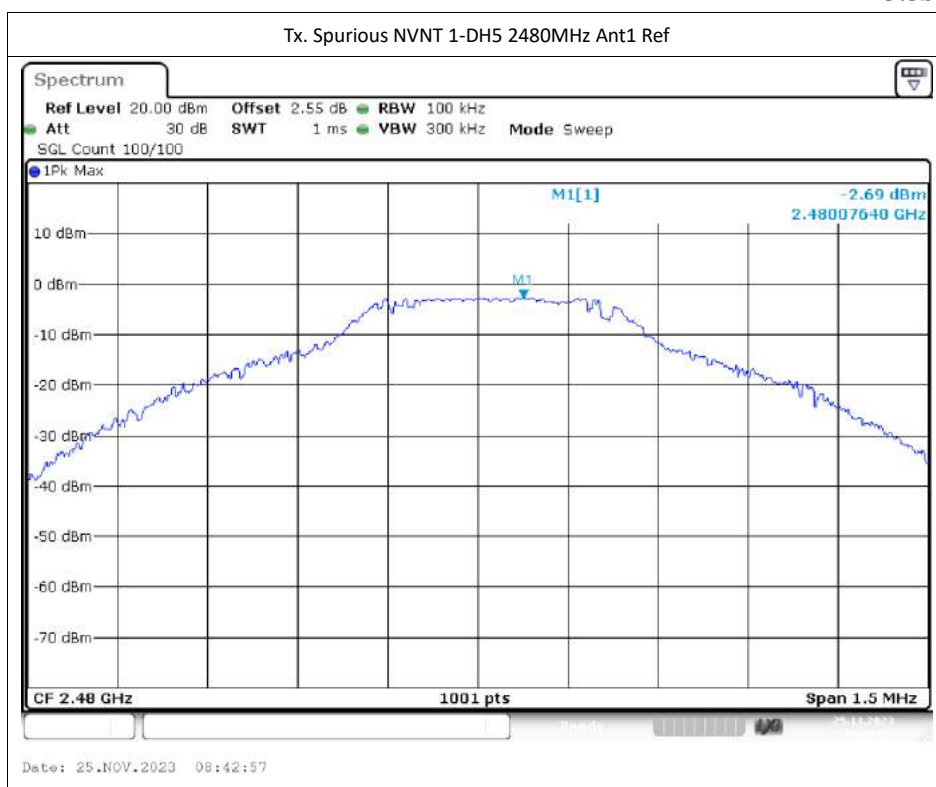


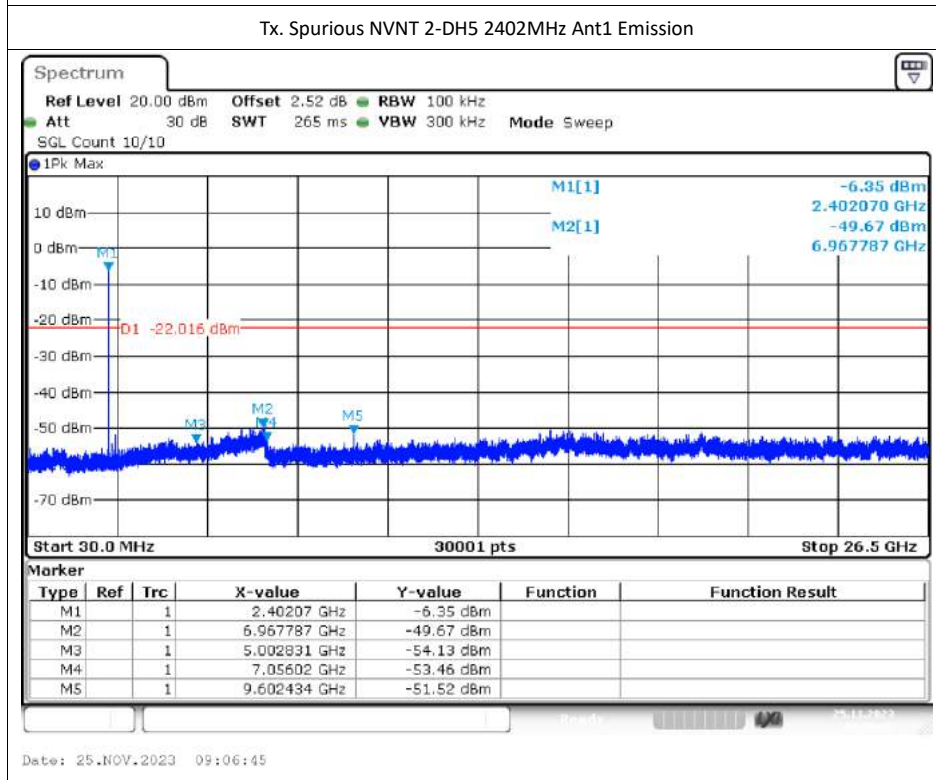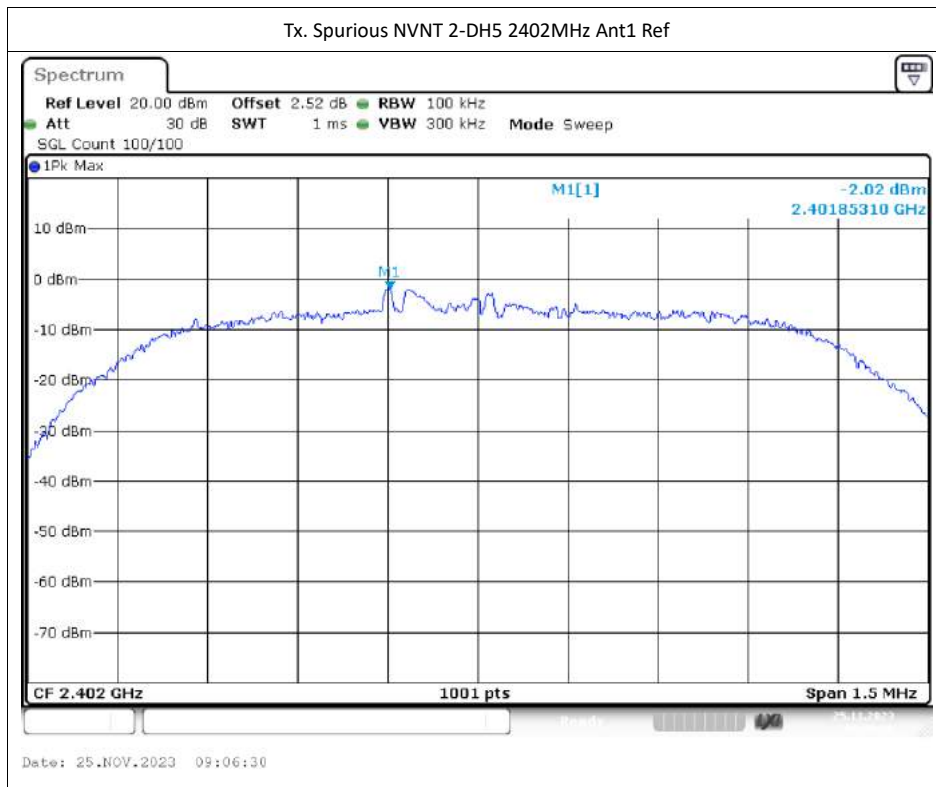

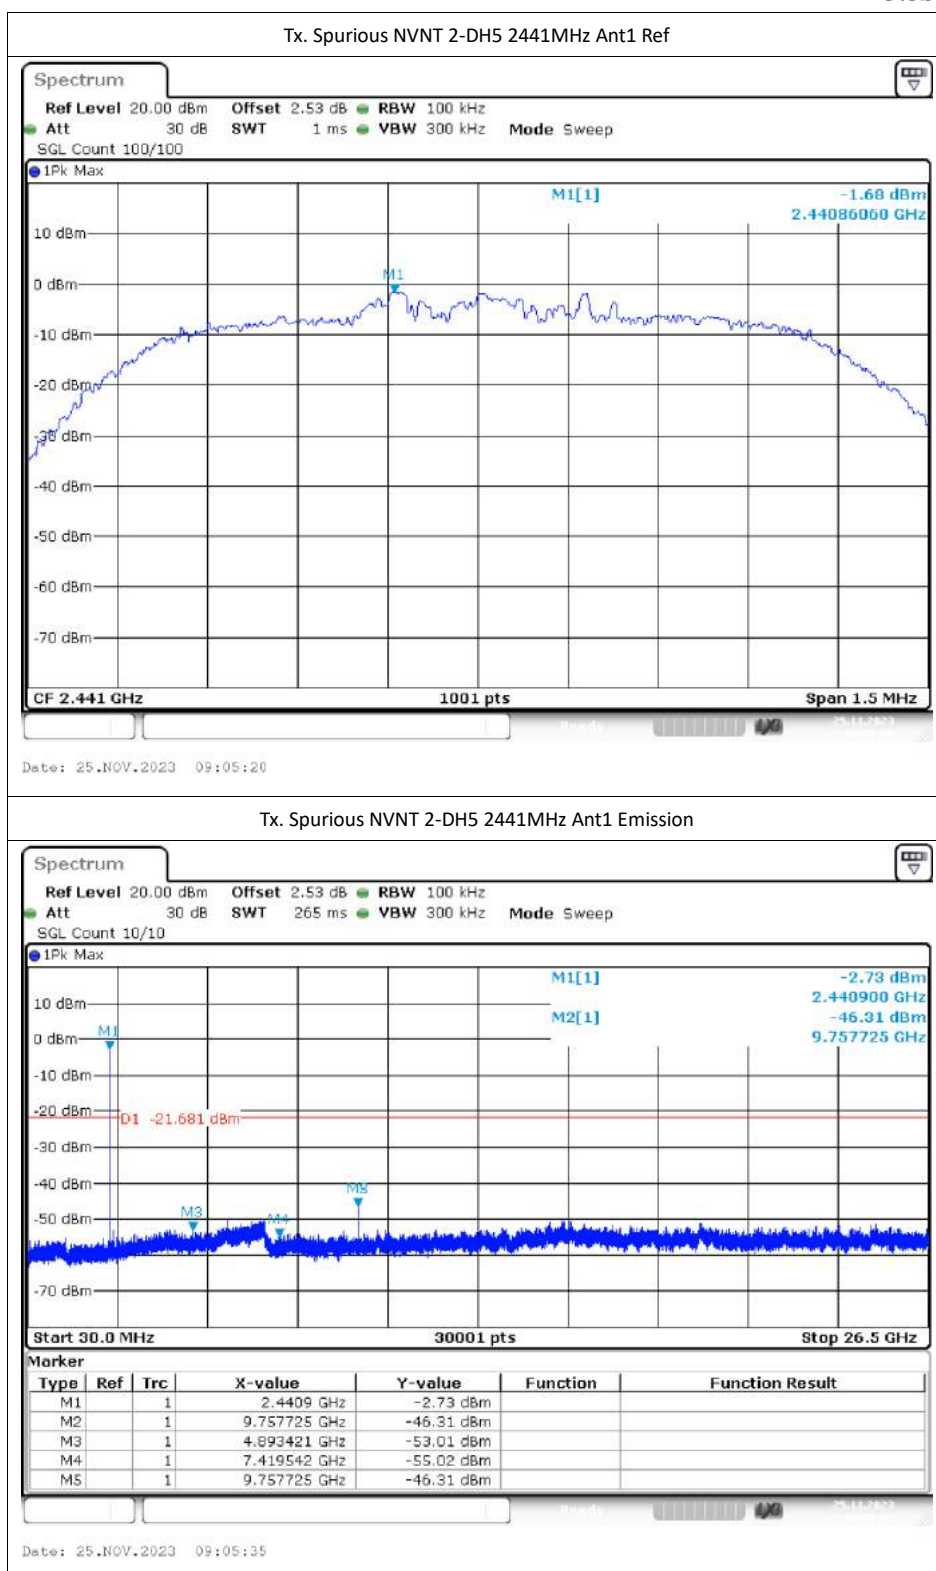


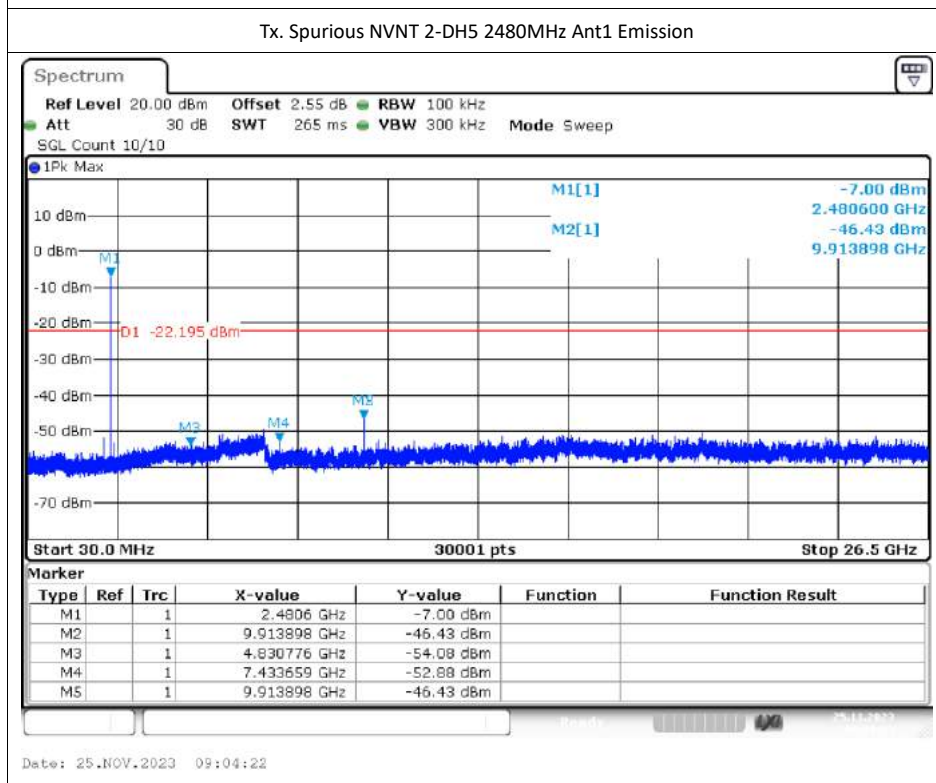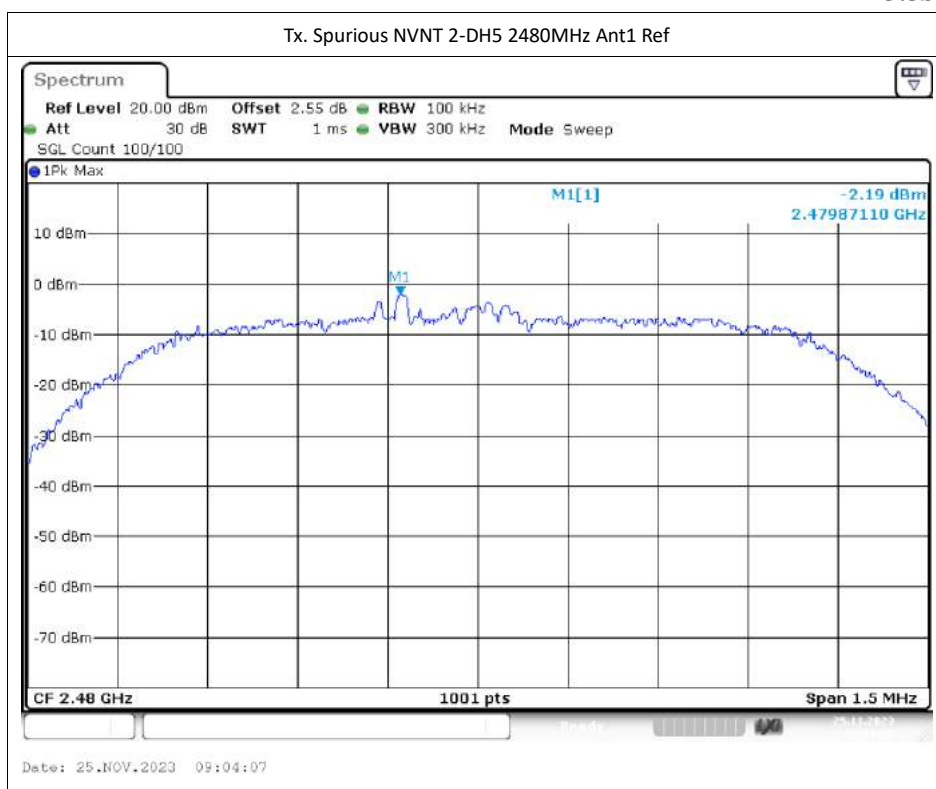

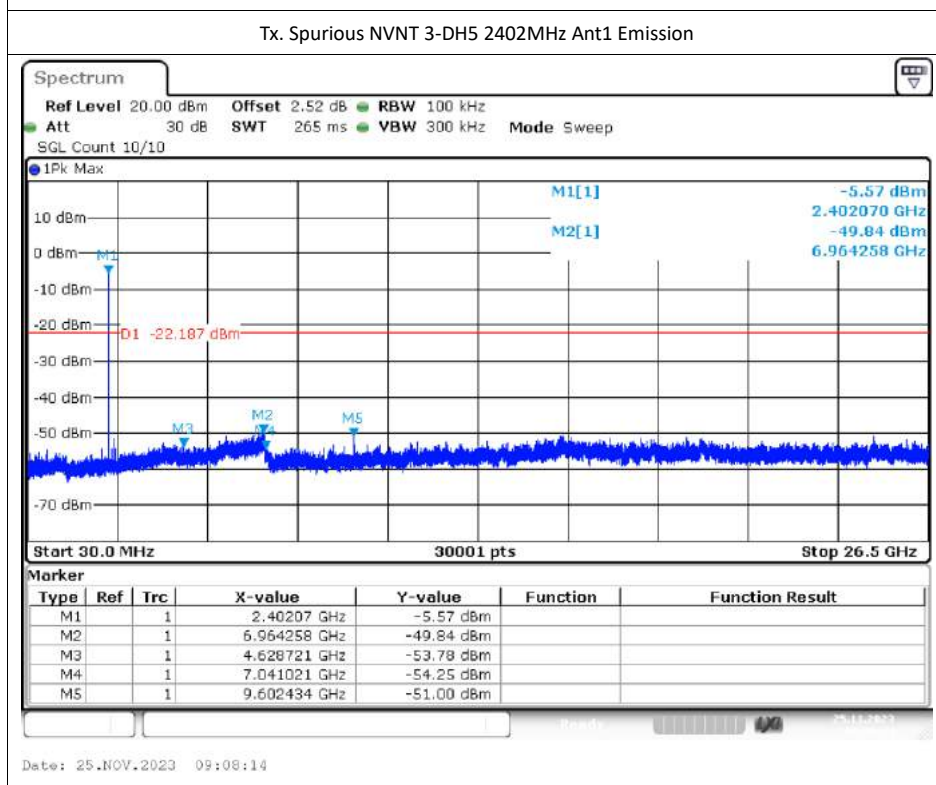
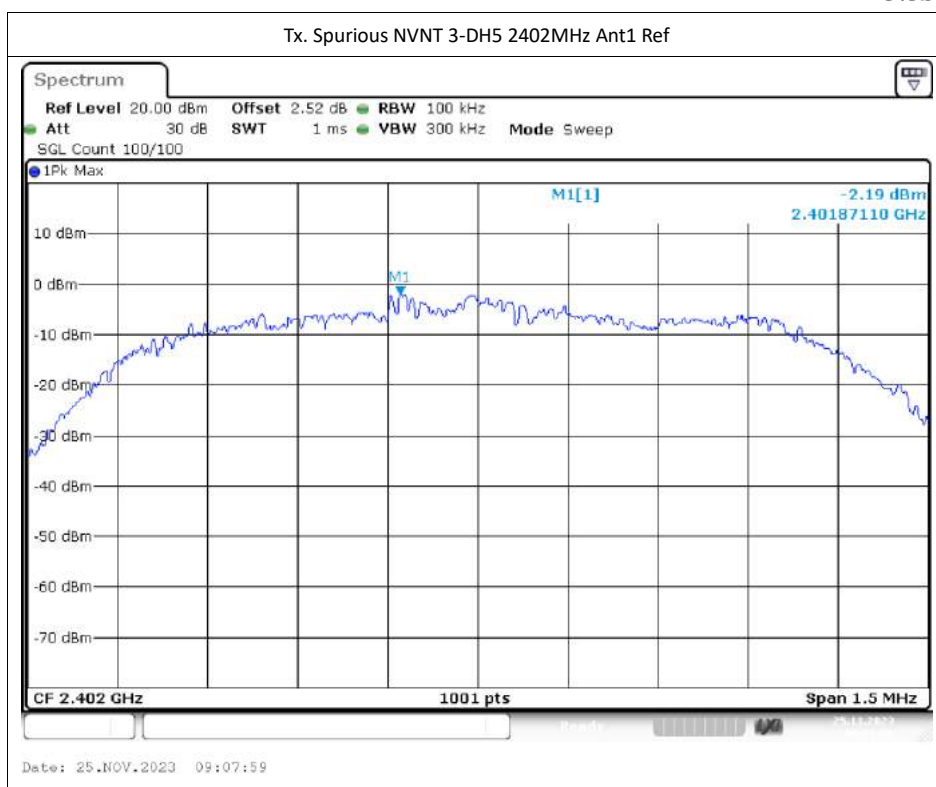


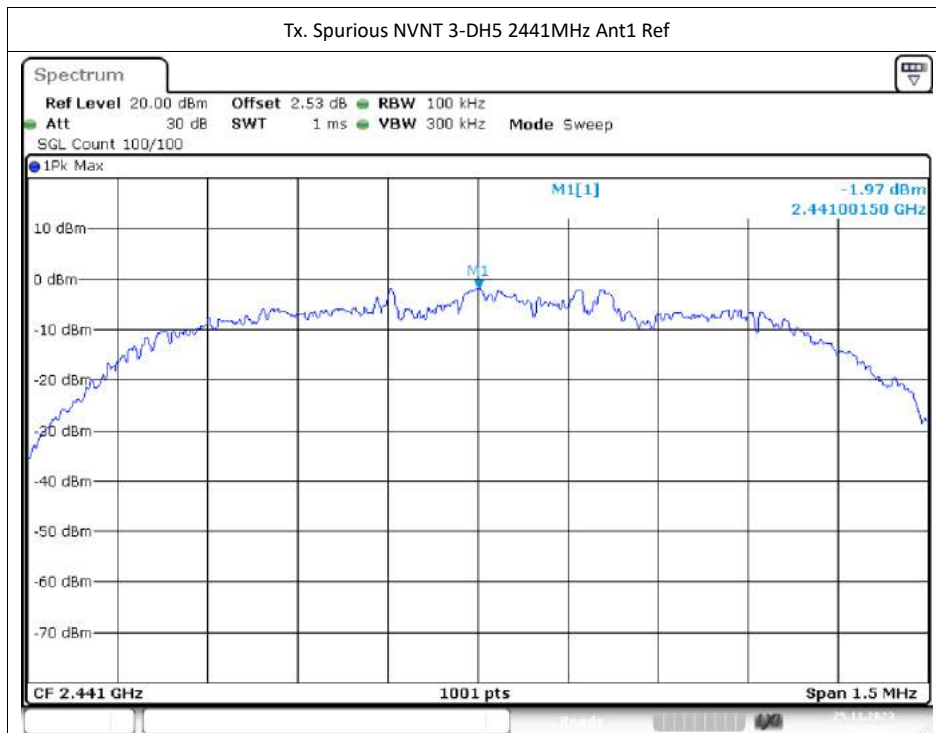

Date: 25.NOV.2023 09:09:25

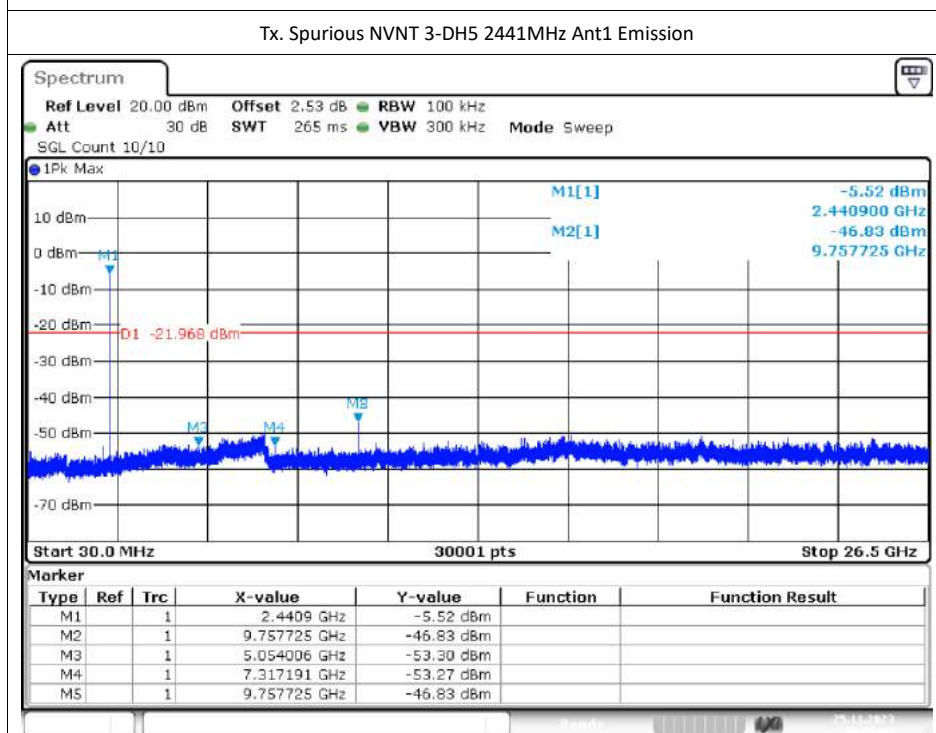

Date: 25.NOV.2023 09:09:41

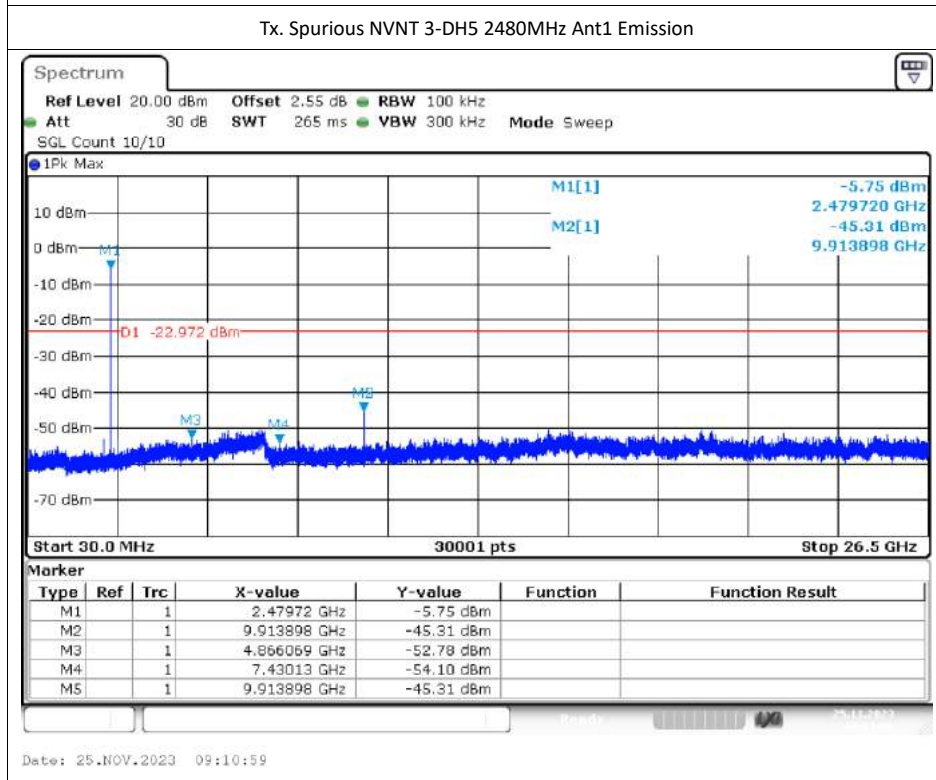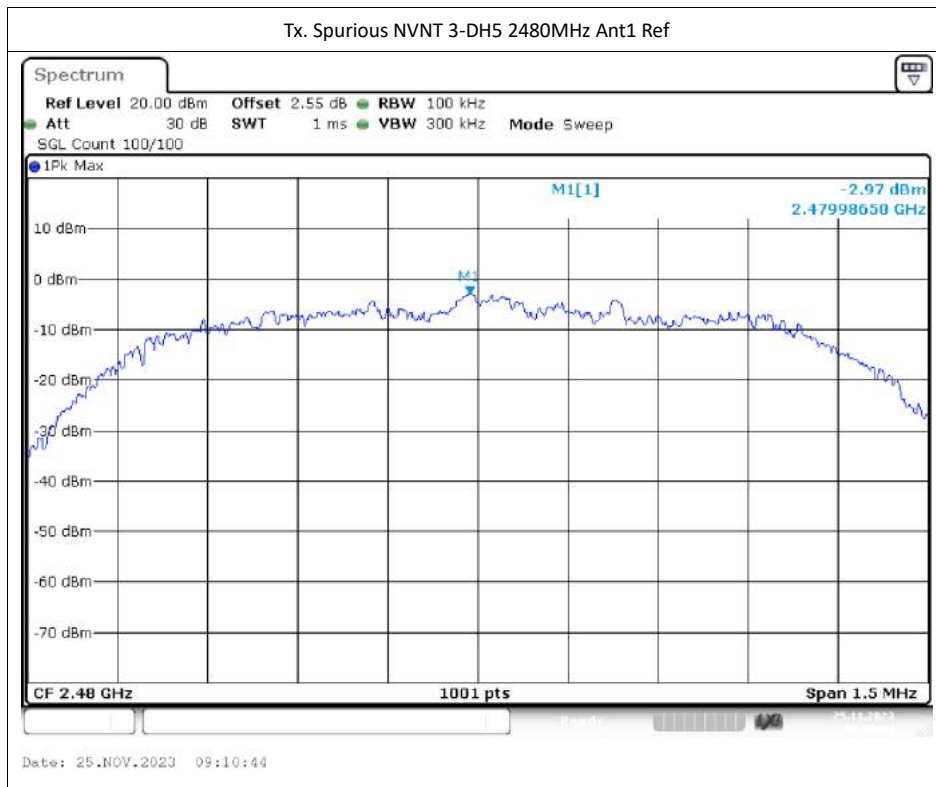


RADIATED TEST RESULTS

The data of the mode (3-DH5 2402) are recorded in the following pages.

The worst result as bellow:


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2402
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

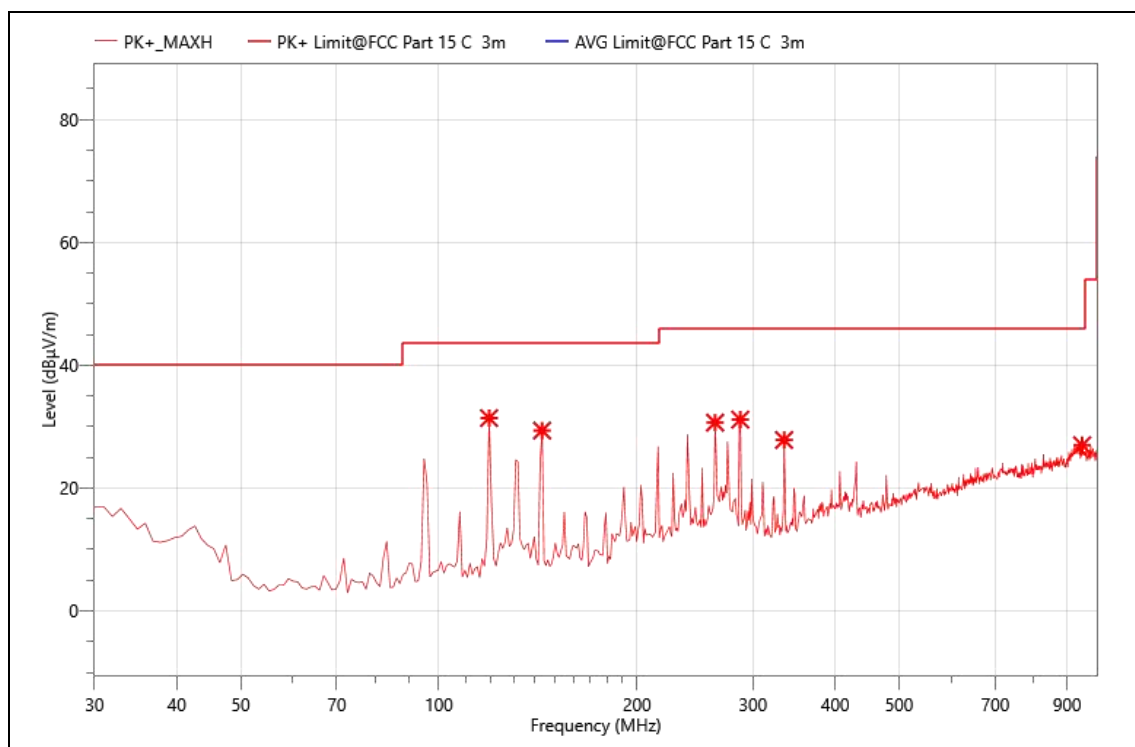

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	119.240	55.94	31.40	43.50	12.10	PK+	H	-24.54
2	143.490	52.89	29.37	43.50	14.13	PK+	H	-23.52
3	262.800	49.02	30.66	46.00	15.34	PK+	H	-18.36
4	287.050	50.69	31.15	46.00	14.85	PK+	H	-19.54
5	334.580	45.00	27.84	46.00	18.16	PK+	H	-17.16
6	948.590	30.40	26.98	46.00	19.02	PK+	H	-3.42

EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2402
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

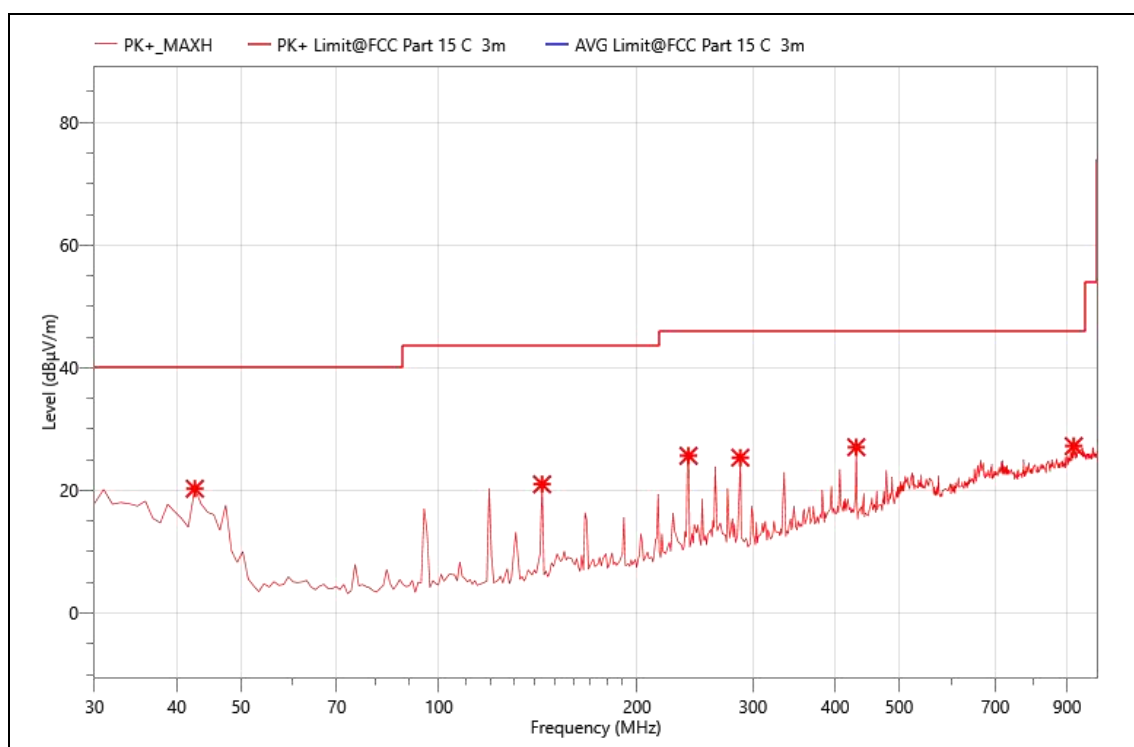


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	42.610	41.75	20.29	40.00	19.71	PK+	V	-21.46
2	143.490	44.53	21.01	43.50	22.49	PK+	V	-23.52
3	239.520	45.31	25.65	46.00	20.35	PK+	V	-19.66
4	287.050	44.89	25.35	46.00	20.65	PK+	V	-19.54
5	430.610	41.20	27.05	46.00	18.95	PK+	V	-14.15
6	921.430	30.72	27.24	46.00	18.76	PK+	V	-3.48

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

Above 1000MHz~10th Harmonics:

EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2402
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

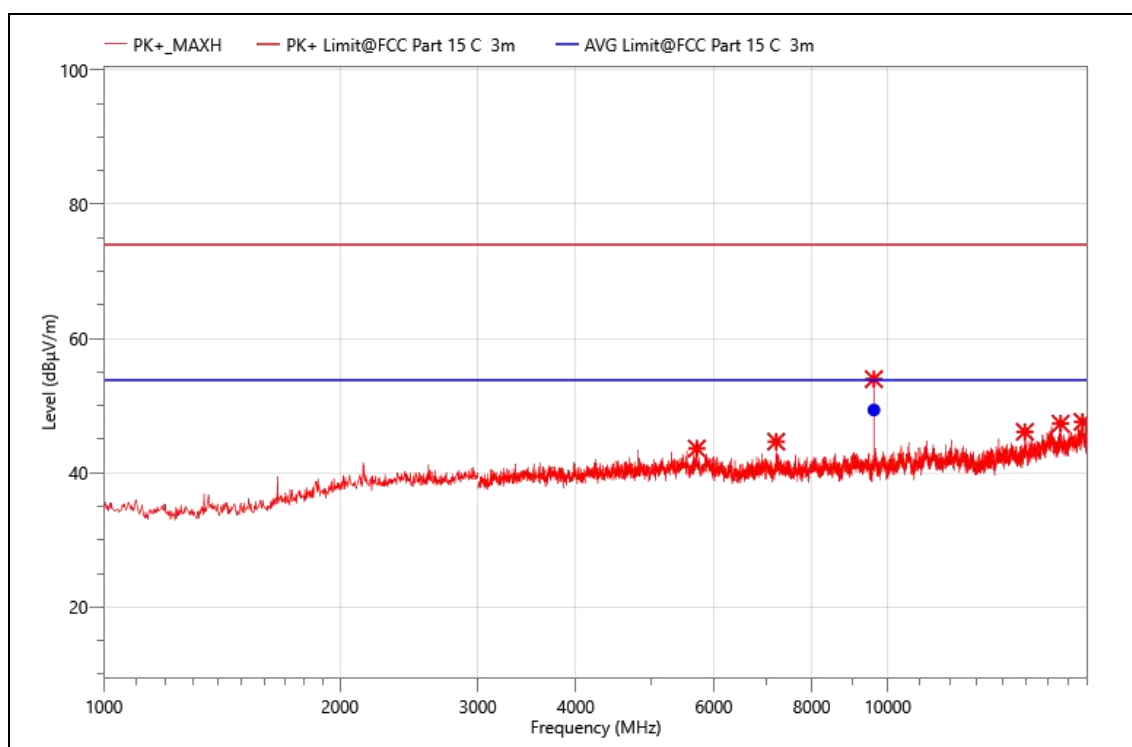


Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	5707.500	52.14	43.63	74.00	30.37	PK+	H	-8.51
2	7206.000	52.43	44.65	74.00	29.35	PK+	H	-7.78
3	9601.500	60.65	53.96	74.00	20.04	PK+	H	-6.69
4	14962.500	48.77	46.11	74.00	27.89	PK+	H	-2.66
5	16618.500	48.38	47.33	74.00	26.67	PK+	H	-1.05
6	17728.500	47.08	47.60	74.00	26.40	PK+	H	0.52

Final_Result

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)	Verdict
1	9601.500	56.06	49.37	53.90	4.53	AVG	H	-6.69	PASS

EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2402
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

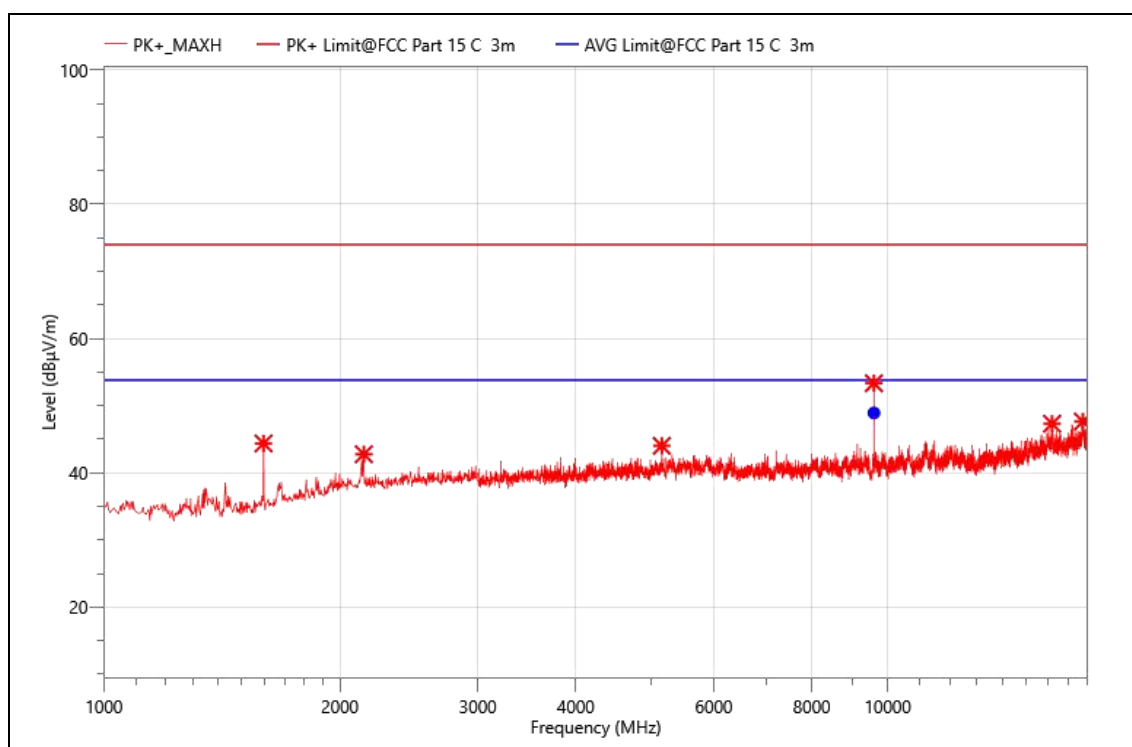


Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)	Det.	Pol.	Corr. (dB)
1	1598.000	66.10	44.39	74.00	29.61	PK+	V	-21.71
2	2146.000	60.77	42.78	74.00	31.22	PK+	V	-17.99
3	5149.500	54.07	44.03	74.00	29.97	PK+	V	-10.04
4	9603.000	60.06	53.35	74.00	20.65	PK+	V	-6.71
5	16209.000	47.69	47.32	74.00	26.68	PK+	V	-0.37
6	17745.000	47.11	47.65	74.00	26.35	PK+	V	0.54

Final_Result

No.	Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)	Det.	Pol.	Corr. (dB)	Verdict
1	9603.000	55.63	48.92	53.90	4.98	AVG	V	-6.71	PASS


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2441
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

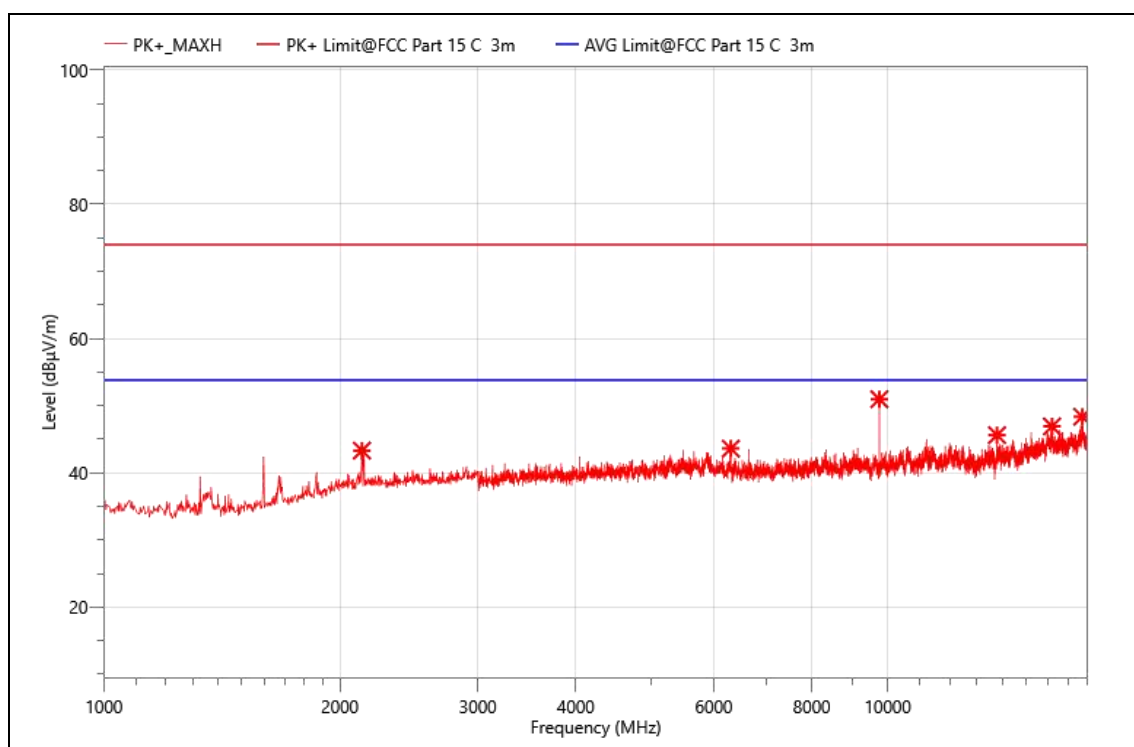

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)	Det.	Pol.	Corr. (dB)
1	2134.000	61.35	43.32	74.00	30.68	PK+	V	-18.03
2	6307.500	50.98	43.62	74.00	30.38	PK+	V	-7.36
3	9757.500	57.92	50.97	74.00	23.03	PK+	V	-6.95
4	13788.000	48.63	45.63	74.00	28.37	PK+	V	-3
5	16204.500	47.29	46.92	74.00	27.08	PK+	V	-0.37
6	17710.500	48.12	48.36	74.00	25.64	PK+	V	0.24


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2441
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

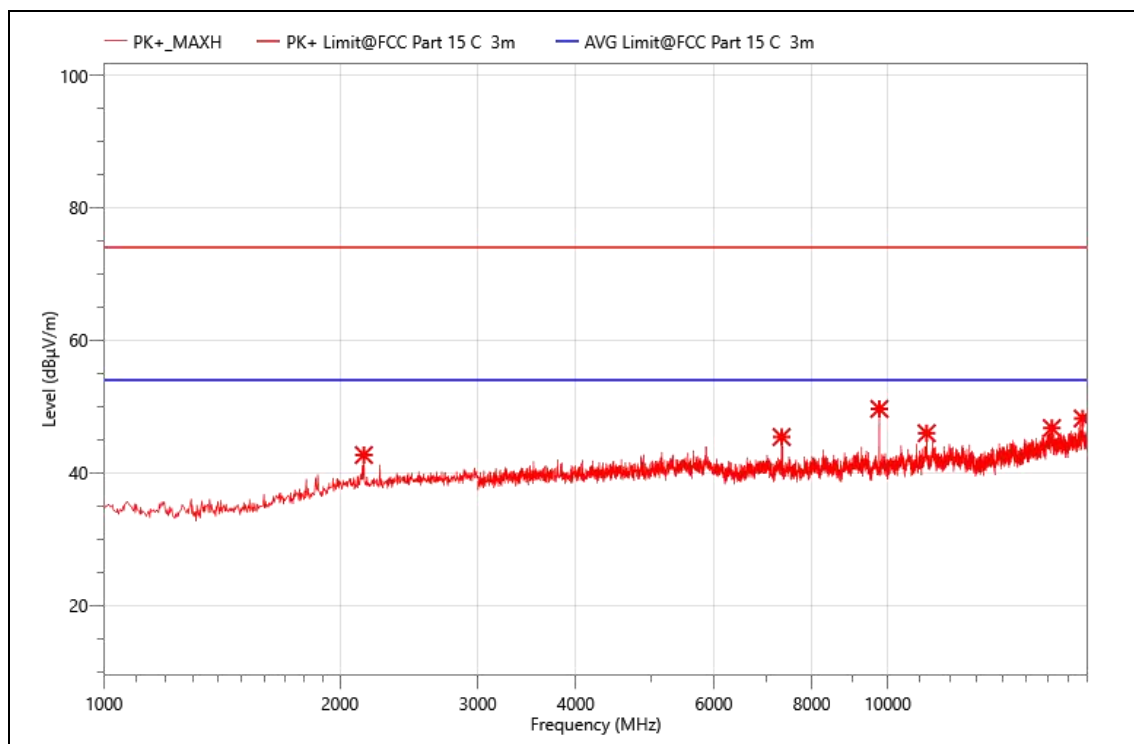

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	2146.000	60.66	42.67	74.00	31.33	PK+	H	-17.99
2	7323.000	53.55	45.39	74.00	28.61	PK+	H	-8.16
3	9759.000	56.61	49.63	74.00	24.37	PK+	H	-6.98
4	11212.500	49.39	45.96	74.00	28.04	PK+	H	-3.43
5	16198.500	47.10	46.74	74.00	27.26	PK+	H	-0.36
6	17734.500	47.66	48.19	74.00	25.81	PK+	H	0.53


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2480
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

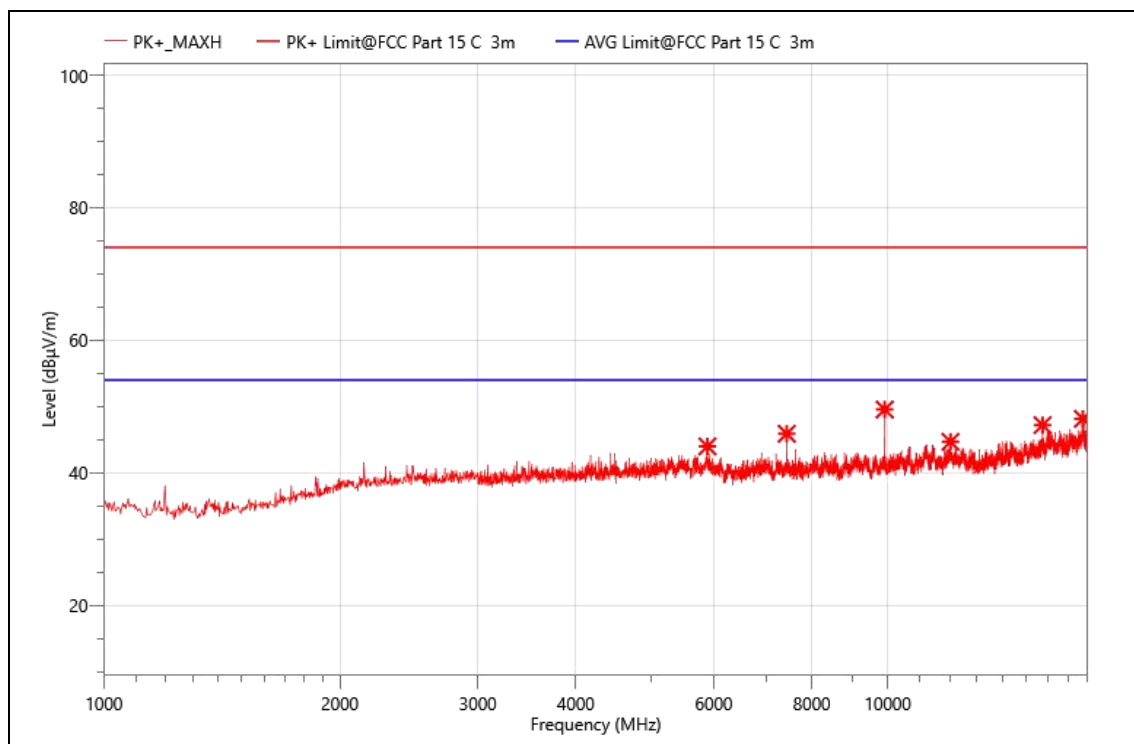

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	5889.000	52.42	43.97	74.00	30.03	PK+	H	-8.45
2	7434.000	53.68	45.88	74.00	28.12	PK+	H	-7.8
3	9913.500	55.75	49.54	74.00	24.46	PK+	H	-6.21
4	12025.500	48.65	44.67	74.00	29.33	PK+	H	-3.98
5	15763.500	49.17	47.18	74.00	26.82	PK+	H	-1.99
6	17746.500	47.59	48.13	74.00	25.87	PK+	H	0.54

EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2480
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

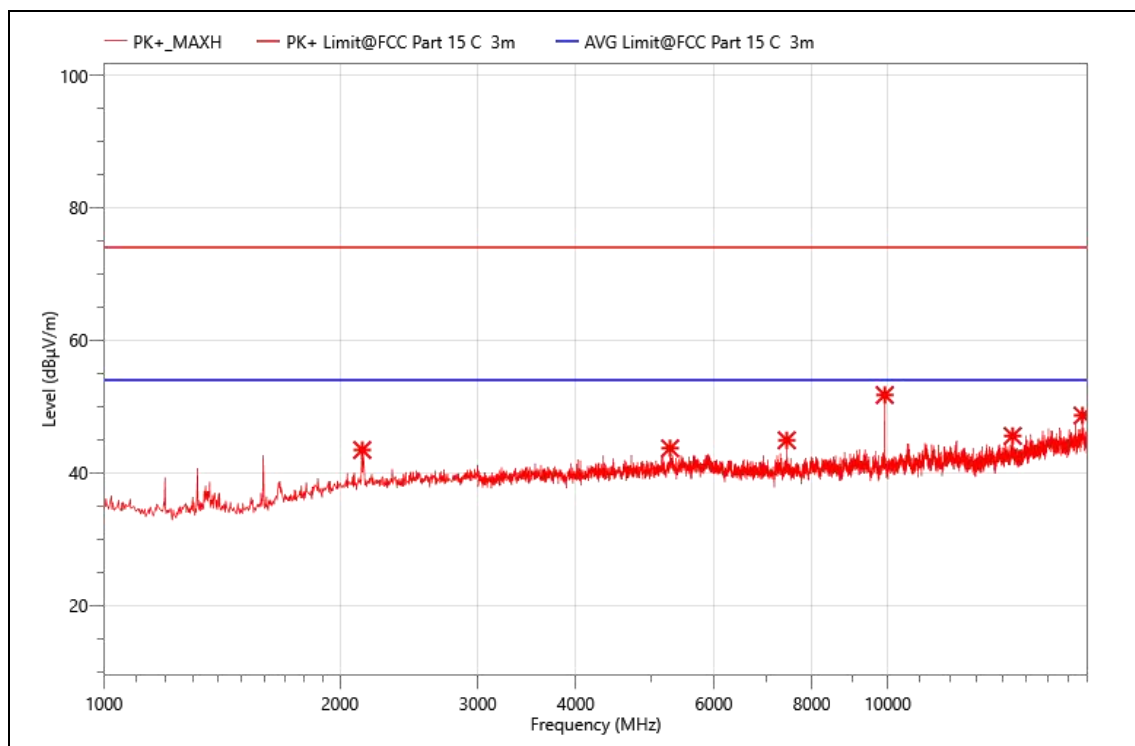

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	2136.000	61.45	43.43	74.00	30.57	PK+	V	-18.02
2	5277.000	53.19	43.69	74.00	30.31	PK+	V	-9.5
3	7434.000	52.70	44.90	74.00	29.10	PK+	V	-7.8
4	9915.000	57.94	51.73	74.00	22.27	PK+	V	-6.21
5	14436.000	48.68	45.55	74.00	28.45	PK+	V	-3.13
6	17727.000	48.13	48.64	74.00	25.36	PK+	V	0.51

Other harmonics emissions are lower than 20dB below the allowable limit.

Note: (1) All Readings are Peak Value and AV.


(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.

(3) The average measurement was not performed when the peak measured data under the limit of average detection.

(4) Measuring frequencies from 1GHz to 25GHz.

Band edge:


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2402
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C/51%/101Kpa

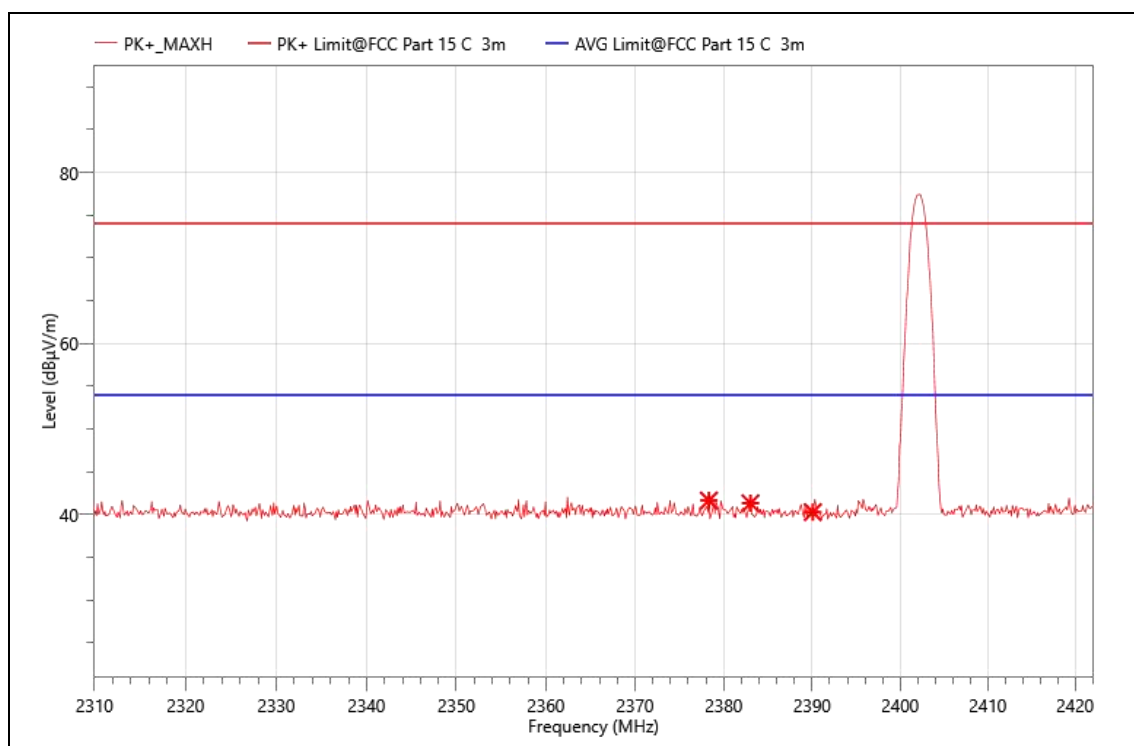

Critical_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dBμV/m)	Det.	Pol.	Corr. (dB)
1	2378.320	59.64	41.63	74.00	32.37	PK+	V	-18.01
2	2383.024	59.31	41.31	74.00	32.69	PK+	V	-18
3	2390.080	58.26	40.27	74.00	33.73	PK+	V	-17.99


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2402
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C /51%/101Kpa

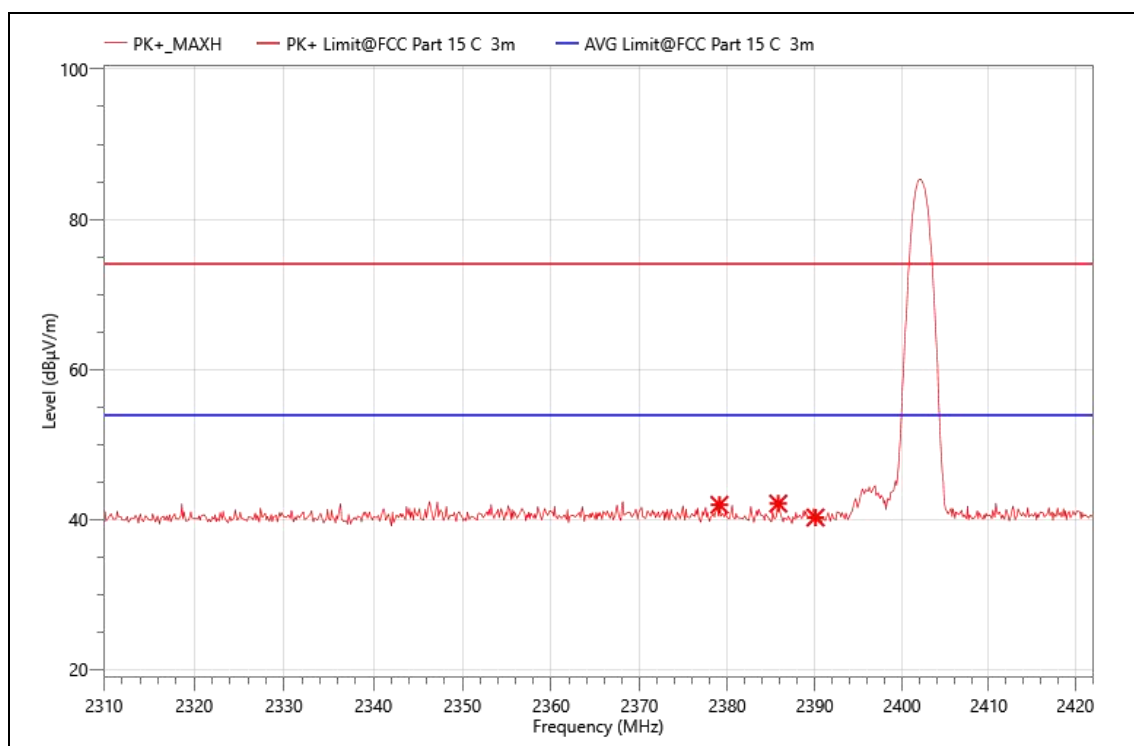

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)	Det.	Pol.	Corr. (dB)
1	2379.104	59.96	41.95	74.00	32.05	PK+	H	-18.01
2	2385.824	60.11	42.11	74.00	31.89	PK+	H	-18
3	2390.080	58.24	40.25	74.00	33.75	PK+	H	-17.99


EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2480
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C /51%/101Kpa

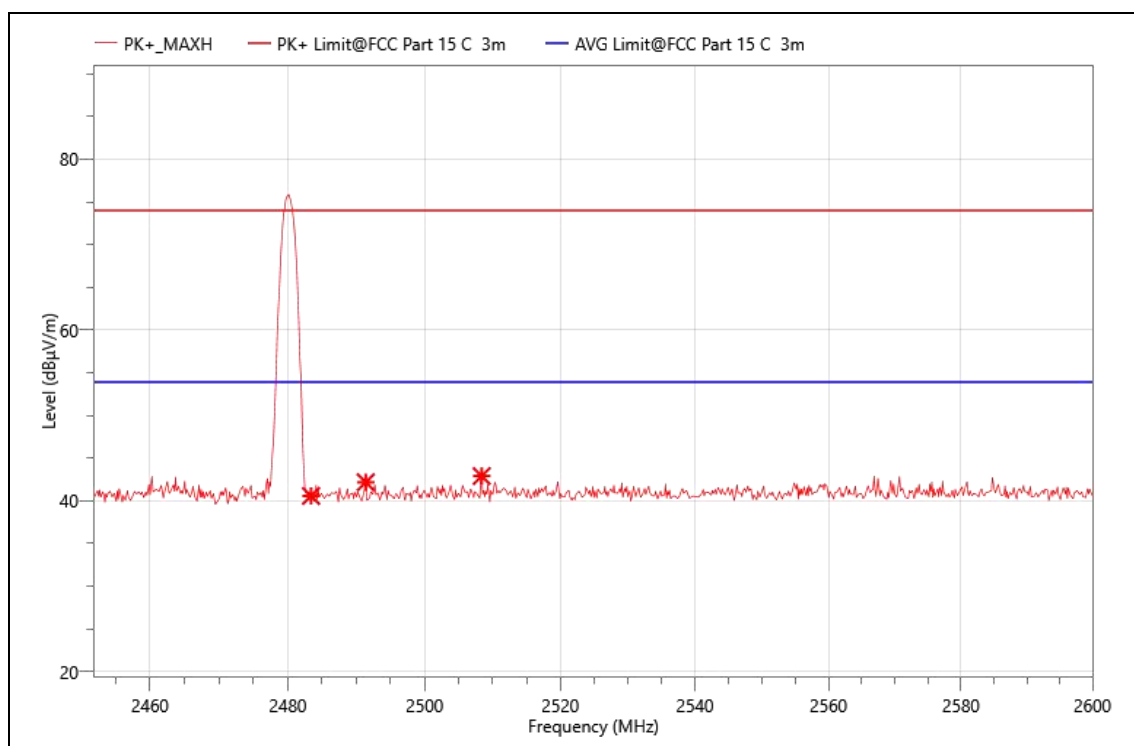

Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)	Det.	Pol.	Corr. (dB)
1	2483.376	58.29	40.58	74.00	33.42	PK+	V	-17.71
2	2491.368	59.88	42.19	74.00	31.81	PK+	V	-17.69
3	2508.388	60.57	42.91	74.00	31.09	PK+	V	-17.66

EUT :	USB Dongle
MN:	Captain 300F
Mode:	3-DH5 2480
Power:	DC 5V
TE:	Vier
Date	2023/11/24
T/A/P	24°C /51%/101Kpa

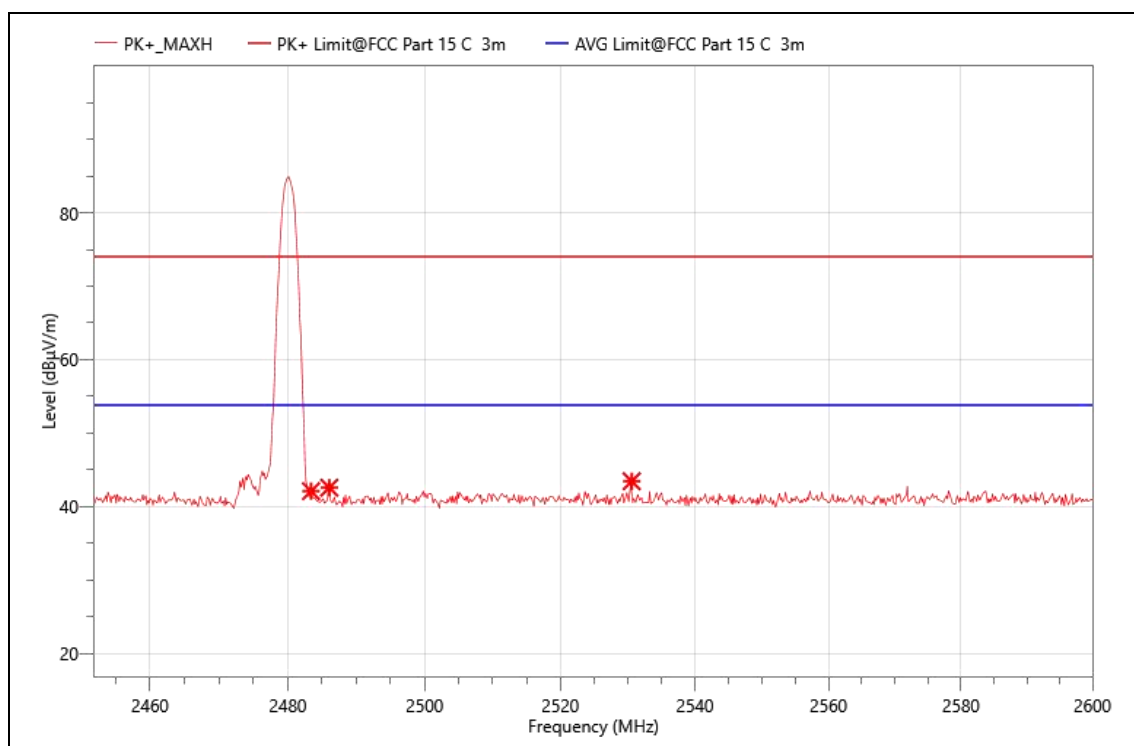


Critical_Freqs

No.	Freq. (MHz)	Reading (dBµV)	Meas. (dBµV/m)	Limit (dBµV/m)	Margin (dBµV/m)	Det.	Pol.	Corr. (dB)
1	2483.376	59.81	42.10	74.00	31.90	PK+	H	-17.71
2	2486.040	60.27	42.57	74.00	31.43	PK+	H	-17.7
3	2530.588	61.04	43.46	74.00	30.54	PK+	H	-17.58

AC POWER LINE CONDUCTED EMISSIONS

LINE L1 RESULTS (3-DH5 2480)

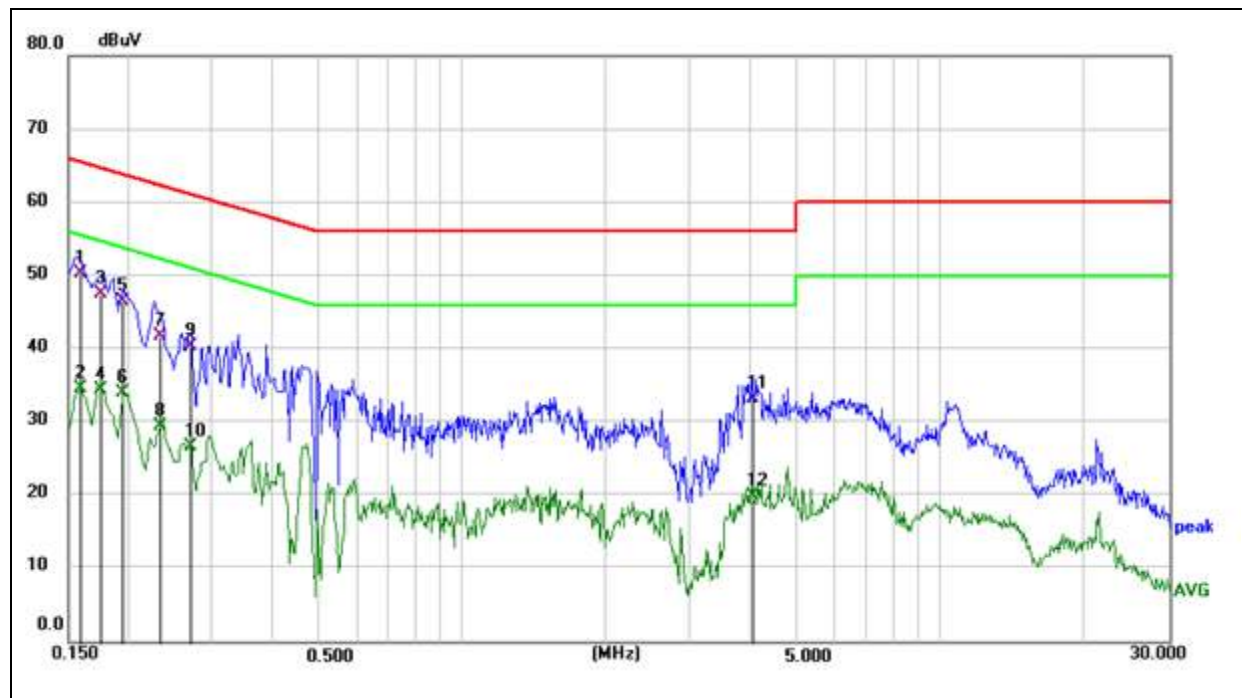


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1590	40.54	9.76	50.30	65.52	-15.22	QP
2	0.1590	24.87	9.76	34.63	55.52	-20.89	AVG
3	0.1758	37.72	9.78	47.50	64.68	-17.18	QP
4	0.1758	24.58	9.78	34.36	54.68	-20.32	AVG
5	0.1949	36.77	9.83	46.60	63.83	-17.23	QP
6	0.1949	24.13	9.83	33.96	53.83	-19.87	AVG
7	0.2328	32.10	9.70	41.80	62.35	-20.55	QP
8	0.2328	19.74	9.70	29.44	52.35	-22.91	AVG
9	0.2714	30.66	9.74	40.40	61.07	-20.67	QP
10	0.2714	16.92	9.74	26.66	51.07	-24.41	AVG
11	4.0605	23.31	9.99	33.30	56.00	-22.70	QP
12	4.0605	9.92	9.99	19.91	46.00	-26.09	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS (3-DH5 2480)

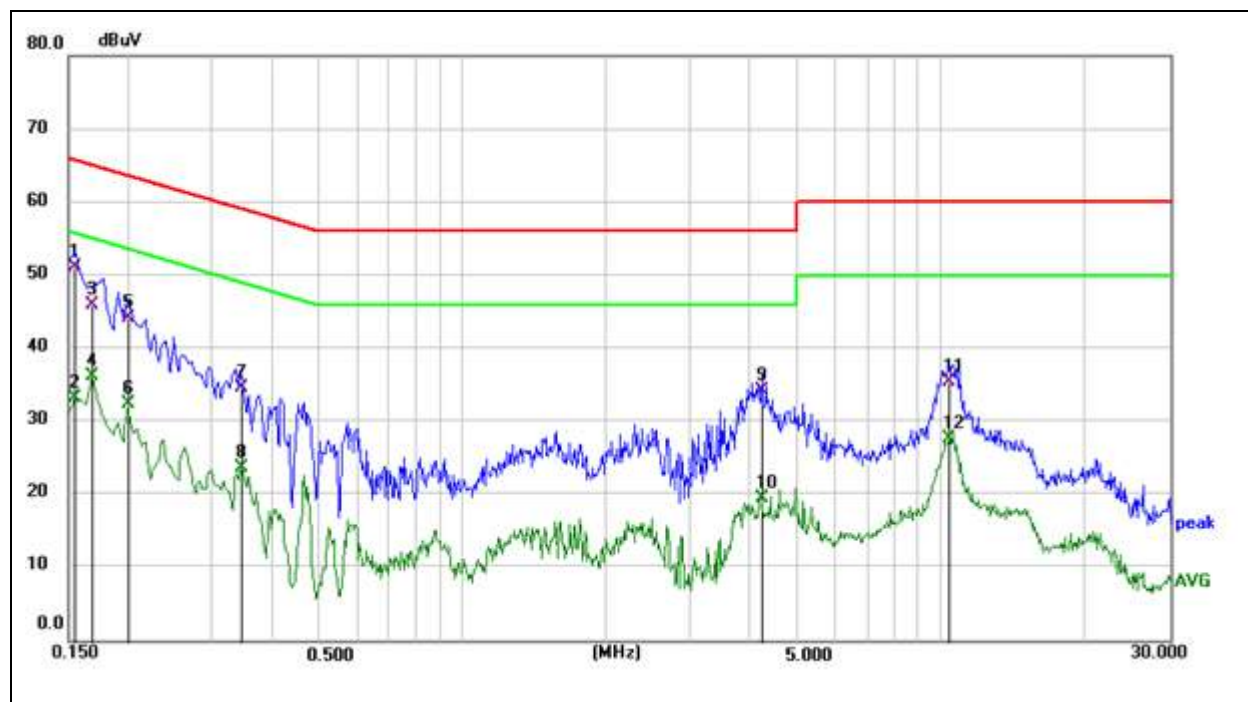

Phase: N

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1544	41.43	9.67	51.10	65.76	-14.66	QP
2	0.1544	23.53	9.67	33.20	55.76	-22.56	AVG
3	0.1680	36.17	9.73	45.90	65.06	-19.16	QP
4	0.1680	26.53	9.73	36.26	55.06	-18.80	AVG
5	0.1995	34.34	9.76	44.10	63.63	-19.53	QP
6	0.1995	22.67	9.76	32.43	53.63	-21.20	AVG
7	0.3435	24.85	9.75	34.60	59.12	-24.52	QP
8	0.3435	14.04	9.75	23.79	49.12	-25.33	AVG
9	4.2045	24.28	9.92	34.20	56.00	-21.80	QP
10	4.2045	9.69	9.92	19.61	46.00	-26.39	AVG
11	10.3874	25.49	10.01	35.50	60.00	-24.50	QP
12	10.3874	17.63	10.01	27.64	50.00	-22.36	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. All test modes had been tested, only the worst data record in the report.