

EUT Specification

FCC ID: 2A7KB-SMC300

Characteristics	Description
Product Name	5-in-1 Magnetic fast wireless charger
Model number	SMC-300
Power Supply	AC120V/60Hz for adapter
Operating Frequency Range	110-205KHz for iphone 325.3KHz for Apple Watch 112.2KHz for Airpods
Modulation Technique	FSK for iphone charging ASK for Apple Watch charging ASK for Airpods charging
Antenna Type	Induction coil
Device category	☐ Portable (<20cm separation) ☒ Mobile (>20cm separation) ☐ Others ____
Exposure classification	☐ Occupational/Controlled exposure (S = 5mW/cm ²) ☒ General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	☐ Single antenna ☒ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity
Evaluation applied	☒ MPE Evaluation ☐ SAR Evaluation

Applicable Standard:

FCC Part 1(1.1310) ,Part 2(2.1091) and KDB 680106 D01 RF Exposure
Wireless Charging Apps v03

Applicable Requirement:

Three different categories of transmitters are defined by the FCC in OET

Bulletin 65.

These categories are fixed installation, mobile, and portable and are defined as follows:

Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.

Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.

Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093).

The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure.

These two categories are defined as follows:


Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for transient persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase exercise control means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.


General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Licensees and applicants are responsible for compliance with both the occupational/controlled exposure limits and the general population/uncontrolled exposure limits as they apply to transmitters under their jurisdiction. Licensees and applicants should be aware that the occupational/controlled exposure limits apply especially in situations where workers may have access to areas in very close proximity to antennas and access to the general public may be restricted.

In lieu of evaluation with the general population/uncontrolled exposure limits, amateur licensees authorized under part 97 of this chapter and members of his or her immediate household may be evaluated with respect to the occupational/controlled exposure limits in this section, provided appropriate training and information has been provided to the amateur licensee and members of his/her household. Other nearby persons who are not members of the amateur licensee's household must be evaluated with respect to the general population/uncontrolled exposure limits.

Test Setup Block

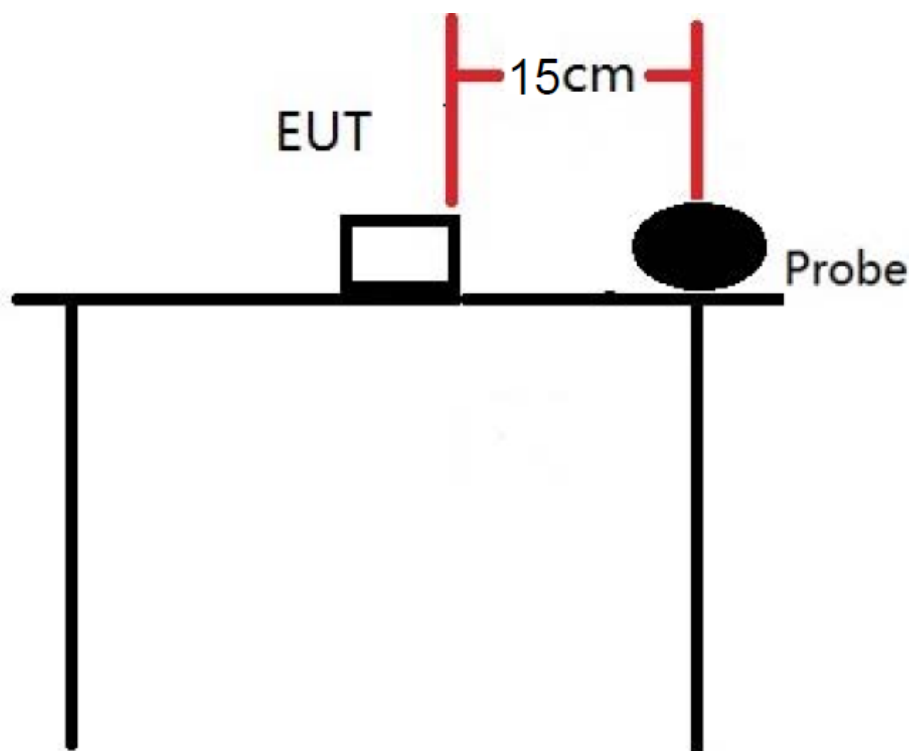

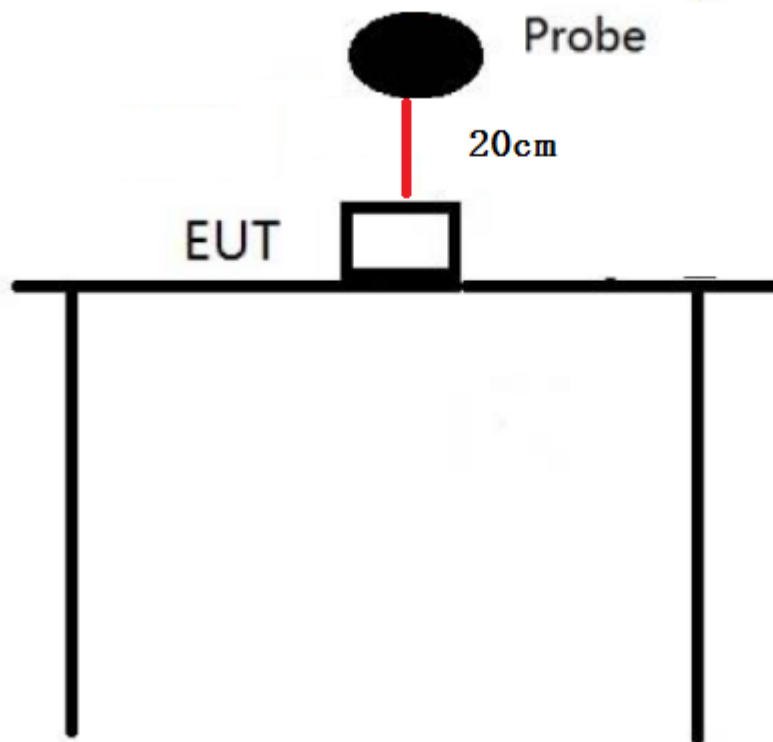

Test Procedure

1. Connect the EUT and equipment as above diagram of test configuration.
2. EUT was placed on a table, and the measure probe was placed at a measurement distance of 15cm from the EUT to the center of the probe.
3. Power on the measuring probe, the EUT was set at the maximum field strength emission state.
4. The EUT was put in different directions (Left, Right, Front, Rear, Top and Bottom) toward to the measure probe. The distance from the top of the EUT to the probe is 20CM, and the distance from other directions is 15cm. Measure the value of field strength.
5. Record the worst data of the different directions.

Measuring Device And Test Equipment

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☒	E-Field &H-Field Probe(9kHz-30M Hz)	Narda	EHP-200A	180ZX11012	2022.01.19	1 Year

Description of Support Device

iPhone	: Manufacturer: Apple Inc. M/N: A2404 S/N: N/A
Adapter	: Model number:CD272 Input: AC 100-240V, 50/60Hz
Airpods	: Manufacturer: Apple Inc. M/N:A2190 S/N: N/A
Apple Watch	: Manufacturer: Apple Inc. M/N:A1859 S/N: N/A

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm ²)	Average Time
(A) Limits for Occupational/Control Exposures				
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	F/300	6
1500-100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	F/1500	30
1500-100000	--	--	1	30

Note: f denotes for frequency in MHz.

* denotes for plane-wave equivalent power density.

Measurement Result

We pretested four modes (max load, mid load, Standby) for EUT. The worst mode (max load) and worst test frequency(frequency: 112.2KHz for iphone, 325.3KHz for iwatch, 112.2KHz for Airpods)test data see the following.

Magnetic Field (H-Field) strength at 15cm from the boundaries of EUT, and 20cm from the top.

Test mode: Wireless Charging for iphone:

Test Mode: Wireless Charging 10w for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0398	0.0193	1.63	0.815
Measurement Point 2	Back	15	0.0373	0.0187		
Measurement Point 3	Left	15	0.0366	0.0189		
Measurement Point 4	Right	15	0.0365	0.0190		
Measurement Point 5	Bottom	15	0.0347	0.0167		
Measurement Point 6	Top	20	0.0395	0.0195		

Test Mode: Wireless Charging 10w for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3427	0.1732	614	307
Measurement Point 2	Back	15	0.3449	0.1723		
Measurement Point 3	Left	15	0.3532	0.1767		
Measurement Point 4	Right	15	0.3378	0.1685		
Measurement Point 5	Bottom	15	0.3205	0.1559		
Measurement Point 6	Top	20	0.3637	0.1761		

Test Mode: Wireless Charging 10w for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0392	0.0195	1.63	0.815
Measurement Point 2	Back	15	0.0377	0.0191		
Measurement Point 3	Left	15	0.0371	0.0192		
Measurement Point 4	Right	15	0.0369	0.0194		
Measurement Point 5	Bottom	15	0.0351	0.0171		
Measurement Point 6	Top	20	0.0398	0.0199		

Test Mode: Wireless Charging 10w for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3429	0.1737	614	307
Measurement Point 2	Back	15	0.3452	0.1726		
Measurement Point 3	Left	15	0.3536	0.1771		
Measurement Point 4	Right	15	0.3391	0.1692		
Measurement Point 5	Bottom	15	0.3212	0.1563		
Measurement Point 6	Top	20	0.3642	0.1765		

Test Mode: Wireless Charging 10w for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0395	0.0197	1.63	0.815
Measurement Point 2	Back	15	0.0379	0.0195		
Measurement Point 3	Left	15	0.0374	0.0196		
Measurement Point 4	Right	15	0.0372	0.0197		
Measurement Point 5	Bottom	15	0.0356	0.0173		
Measurement Point 6	Top	20	0.0391	0.0201		

Test Mode: Wireless Charging 10w for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3426	0.1714	614	307
Measurement Point 2	Back	15	0.3325	0.1665		
Measurement Point 3	Left	15	0.3238	0.1621		
Measurement Point 4	Right	15	0.3371	0.1688		
Measurement Point 5	Bottom	15	0.3208	0.1606		
Measurement Point 6	Top	20	0.3416	0.1711		

Test mode: Wireless Charging for Apple Watch :

Test Mode: Wireless Charging 2w for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0341	0.0171	1.63	0.815
Measurement Point 2	Back	15	0.0343	0.0172		
Measurement Point 3	Left	15	0.0335	0.0168		
Measurement Point 4	Right	15	0.0359	0.0180		
Measurement Point 5	Bottom	15	0.0328	0.0164		
Measurement Point 6	Top	20	0.0356	0.0178		

Test Mode: Wireless Charging 2w for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3456	0.1728	614	307
Measurement Point 2	Back	15	0.3433	0.1717		
Measurement Point 3	Left	15	0.3363	0.1682		
Measurement Point 4	Right	15	0.3369	0.1685		
Measurement Point 5	Bottom	15	0.3231	0.1616		
Measurement Point 6	Top	20	0.3396	0.1698		

Test Mode: Wireless Charging 2w for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0332	0.0166	1.63	0.815
Measurement Point 2	Back	15	0.0334	0.0167		
Measurement Point 3	Left	15	0.0341	0.0171		
Measurement Point 4	Right	15	0.0342	0.0171		
Measurement Point 5	Bottom	15	0.0316	0.0158		
Measurement Point 6	Top	20	0.0346	0.0173		

Test Mode: Wireless Charging 2w for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3423	0.1712	614	307
Measurement Point 2	Back	15	0.3456	0.1728		
Measurement Point 3	Left	15	0.3471	0.1736		
Measurement Point 4	Right	15	0.3426	0.1713		
Measurement Point 5	Bottom	15	0.3169	0.1585		
Measurement Point 6	Top	20	0.3458	0.1729		

Test Mode: Wireless Charging 2w for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0332	0.0166	1.63	0.815
Measurement Point 2	Back	15	0.0342	0.0171		
Measurement Point 3	Left	15	0.0346	0.0173		
Measurement Point 4	Right	15	0.0346	0.0173		
Measurement Point 5	Bottom	15	0.0325	0.0163		
Measurement Point 6	Top	20	0.0351	0.0176		

Test Mode: Wireless Charging 2w for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3303	0.1652	614	307
Measurement Point 2	Back	15	0.3314	0.1657		
Measurement Point 3	Left	15	0.3352	0.1676		
Measurement Point 4	Right	15	0.3322	0.1661		
Measurement Point 5	Bottom	15	0.3125	0.1563		
Measurement Point 6	Top	20	0.3419	0.1710		

Test mode: Wireless Charging for AirPods

Test Mode: Wireless Charging 3w for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0337	0.0168	1.63	0.815
Measurement Point 2	Back	15	0.0331	0.0167		
Measurement Point 3	Left	15	0.0342	0.0174		
Measurement Point 4	Right	15	0.0329	0.0167		
Measurement Point 5	Bottom	15	0.0317	0.0159		
Measurement Point 6	Top	20	0.0341	0.0174		

Test Mode: Wireless Charging 3w for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3461	0.1731	614	307
Measurement Point 2	Back	15	0.3465	0.1739		
Measurement Point 3	Left	15	0.3329	0.1672		
Measurement Point 4	Right	15	0.3253	0.1657		
Measurement Point 5	Bottom	15	0.3144	0.1582		
Measurement Point 6	Top	20	0.3437	0.1726		

Test Mode: Wireless Charging 3w for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0341	0.0174	1.63	0.815
Measurement Point 2	Back	15	0.0336	0.0172		
Measurement Point 3	Left	15	0.0345	0.0181		
Measurement Point 4	Right	15	0.0332	0.0169		
Measurement Point 5	Bottom	15	0.0322	0.0164		
Measurement Point 6	Top	20	0.0346	0.0178		

Test Mode: Wireless Charging 3w for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3465	0.1736	614	307
Measurement Point 2	Back	15	0.3469	0.1742		
Measurement Point 3	Left	15	0.3334	0.1675		
Measurement Point 4	Right	15	0.3259	0.1661		
Measurement Point 5	Bottom	15	0.3147	0.1584		
Measurement Point 6	Top	20	0.3442	0.1728		

Test Mode: Wireless Charging 3w for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0344	0.0177	1.63	0.815
Measurement Point 2	Back	15	0.0341	0.0173		
Measurement Point 3	Left	15	0.0348	0.0183		
Measurement Point 4	Right	15	0.0337	0.0171		
Measurement Point 5	Bottom	15	0.0325	0.0166		
Measurement Point 6	Top	20	0.0349	0.0179		

Test Mode: Wireless Charging 3w for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3469	0.1738	614	307
Measurement Point 2	Back	15	0.3471	0.1745		
Measurement Point 3	Left	15	0.3337	0.1677		
Measurement Point 4	Right	15	0.3261	0.1664		
Measurement Point 5	Bottom	15	0.3149	0.1583		
Measurement Point 6	Top	20	0.3445	0.1732		

Test mode : Wireless Charging for iphone+Apple Watch+Airpods

Test Mode: iphone 15W+ Apple Watch 2W+Airpods 3W for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0387	0.0191	1.63	0.815
Measurement Point 2	Back	15	0.0383	0.0194		
Measurement Point 3	Left	15	0.0379	0.0188		
Measurement Point 4	Right	15	0.0382	0.0196		
Measurement Point 5	Bottom	15	0.0352	0.0179		
Measurement Point 6	Top	20	0.0393	0.0196		


Test Mode: iphone 15W+ Apple Watch 2W+Airpods 3W for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3541	0.1781	614	307
Measurement Point 2	Back	15	0.3546	0.1783		
Measurement Point 3	Left	15	0.3545	0.1769		
Measurement Point 4	Right	15	0.3542	0.1772		
Measurement Point 5	Bottom	15	0.3251	0.1623		
Measurement Point 6	Top	20	0.3649	0.1831		

Test Mode: iphone 15W+ Apple Watch 2W+Airpods 3W for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0389	0.0194	1.63	0.815
Measurement Point 2	Back	15	0.0385	0.0197		
Measurement Point 3	Left	15	0.0380	0.0184		
Measurement Point 4	Right	15	0.0384	0.0197		
Measurement Point 5	Bottom	15	0.0355	0.0183		
Measurement Point 6	Top	20	0.0394	0.0201		

Test Mode: iphone 15W+ Apple Watch 2W+Airpods 3W for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3544	0.1784	614	307
Measurement Point 2	Back	15	0.3549	0.1785		
Measurement Point 3	Left	15	0.3547	0.1771		
Measurement Point 4	Right	15	0.3546	0.1774		
Measurement Point 5	Bottom	15	0.3254	0.1625		
Measurement Point 6	Top	20	0.3651	0.1834		

Test Mode: iphone 15W+ Apple Watch 2W+Airpods 3W for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.0391	0.0196	1.63	0.815
Measurement Point 2	Back	15	0.0387	0.0199		
Measurement Point 3	Left	15	0.0382	0.0187		
Measurement Point 4	Right	15	0.0387	0.0198		
Measurement Point 5	Bottom	15	0.0358	0.0186		
Measurement Point 6	Top	20	0.0395	0.0204		

Test Mode: iphone 15W+ Apple Watch 2W+Airpods 3W for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	0.3547	0.1787	614	307
Measurement Point 2	Back	15	0.3551	0.1788		
Measurement Point 3	Left	15	0.3549	0.1773		
Measurement Point 4	Right	15	0.3548	0.1775		
Measurement Point 5	Bottom	15	0.3256	0.1631		
Measurement Point 6	Top	20	0.3654	0.1837		

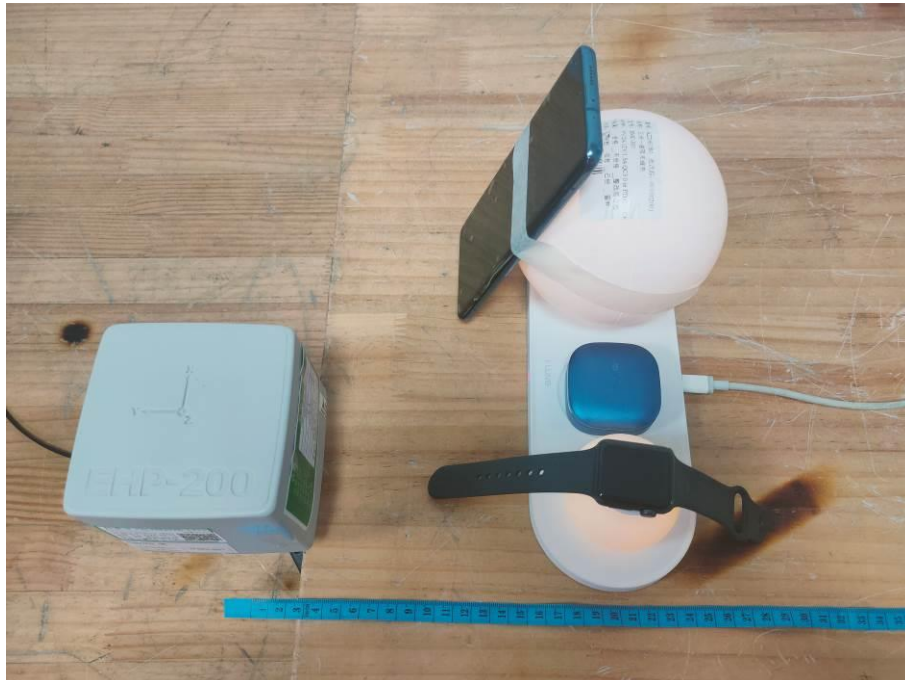PHOTOGRAPHS OF TEST SETUP

Signature

A handwritten signature in black ink that reads 'Tomas Yang'.

Tomas Yang

Manager

Date: 2022-07-06