

Dates of Tests: June 22, 2022 ~ July 11, 2022  
 Test Report S/N: LR500112207D  
 Test Site : LTA CO., LTD.

## CERTIFICATION OF COMPLIANCE

FCC ID.

**2A7KGGK-WL3B001**

APPLICANT

**BIZBUDDY**

<b>Equipment Class</b>	:	<b>Digital Transmission System (DTS)</b>
<b>Manufacturing Description</b>	:	<b>Galaxy Keeper Controller</b>
<b>Manufacturer</b>	:	<b>BIZBUDDY</b>
<b>Model name</b>	:	<b>GK-WL3B001</b>
<b>Test Device Serial No.:</b>	:	<b>Identical prototype</b>
<b>Rule Part(s)</b>	:	<b>FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013</b>
<b>Frequency Range</b>	:	<b>2402 MHz ~ 2480 MHz(BLE)</b> <b>2412 MHz ~ 2462 MHz(802.11 b/g/n20)</b> <b>2422 MHz ~ 2452 MHz(802.11 n40)</b>
<b>Max. Output Power</b>	:	<b>Max -0.24 dBm – Conducted(BLE)</b> <b>Max 14.64 dBm – Conducted(802.11 b)</b> <b>Max 19.49 dBm – Conducted(802.11 g)</b> <b>Max 18.87 dBm – Conducted(802.11 n20)</b> <b>Max 17.86 dBm – Conducted(802.11 n40)</b>
<b>Data of issue</b>	:	<b>July 11, 2022</b>

This test report is issued under the authority of:

The test was supervised by:




Ja-Beom, Koo / Manager

Jae-hum, Yeon / Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

## **TABLE OF CONTENTS**

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 RADIATED SPURIOUS EMISSIONS	-----	6
3.2.2 AC CONDUCTED EMISSIONS	-----	11
APPENDIX	-----	
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	12

## 1. General information

### 1-1 Test Performed

Company name : LTA Co., Ltd.  
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822  
 Web site : <http://www.ltalab.com>  
 E-mail : [chahn@ltalab.com](mailto:chahn@ltalab.com)  
 Telephone : +82-31-323-6008  
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

### 1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2023-04-08	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2023-01-25	FCC CAB
VCCI	JAPAN	C-4948,	2023-09-10	VCCI registration
VCCI	JAPAN	T-2416,	2023-09-10	VCCI registration
VCCI	JAPAN	R-4483(10 m),	2023-08-15	VCCI registration
VCCI	JAPAN	G-847	2022-12-13	VCCI registration
IC	CANADA	5799A-1	2022-10-18	IC filing

## 2. Information about test item

### 2-1 Client & Manufacturer

Client Company name : BIZBUDDY

Address : 2, Neureul 2-ro 14beon-gil, Namyangju-si, Gyeonggi-do, South Korea

Tel / Fax : TEL No : +82-010-5223-6555 / FAX No : -

:

:

### 2-2 Equipment Under Test (EUT)

Model name : GK-WL3B001

Serial number : Identical prototype

Date of receipt : June 22, 2022

EUT condition : Pre-production, not damaged

Antenna type : Dipole Antenna (Max Gain 2.37 dBi) - BLE

Pattern Antenna (Max Gain 2.0 dBi) – 802.11 b/g/n20/n40

Frequency Range : 2402 MHz ~ 2480 MHz (BLE)

2412 MHz ~ 2462 MHz (802.11 b/g/n20)

2422 MHz ~ 2452 MHz (802.11 n40)

RF output power : Max -0.24 dBm – Conducted(BLE)

Max 14.64 dBm – Conducted(802.11 b)

Max 19.49 dBm – Conducted(802.11 g)

Max 18.87 dBm – Conducted(802.11 n20)

Max 17.86 dBm – Conducted(802.11 n40)

Type of Modulation : GFSK, QPSK, Direct Sequence Spread Spectrum(DSSS)

Power Source : DC 12 V

Firmware Version : V1.0.0

### 2-3 Tested frequency

	LOW	MID	HIGH
<b>BLE - Frequency (MHz)</b>	2402	2442	2480
<b>802.11 b/g/n20 - Frequency (MHz)</b>	2412	2437	2462
<b>802.11 n40 - Frequency (MHz)</b>	2422	2437	2452

### 2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	CR720	MS-1736	MSI

### 3. Test Report

#### 3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	N/A
15.247(b)	Transmitter Peak Output Power	< 1 Watt		N/A
15.247(d)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		N/A
15.247(d)	Band Edge	> 20 dBc		N/A
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	NA
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

N/A: The product replaces this test with a certificate using an authenticated module.

→ Antenna Requirement

BIZBUDDY FCC ID: 2A7KGGK-WL3B001 unit complies with the requirement of §15.203.

The antenna type is Dipole, Pattern Antenna

The sample was tested according to the following specification:

\*FCC Parts 15.247; ANSI C-63.4-2014;ANSI C-63.10-2013

\*FCC KDB Publication No. 558074 D01 v05r02

\*FCC TCB Workshop 2012, April

### 3.2 Technical Characteristics Test

### 3.2.1 Radiated Spurious Emissions

## Procedure:

The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10<sup>th</sup> harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz)

$$\mathbf{VBW} \geq \mathbf{RBW}$$


= 1 MHz (1 GHz ~ 10<sup>th</sup> harmonic )



Detector function = peak

Trace = max hold

Sweep = auto

**below 30 MHz**

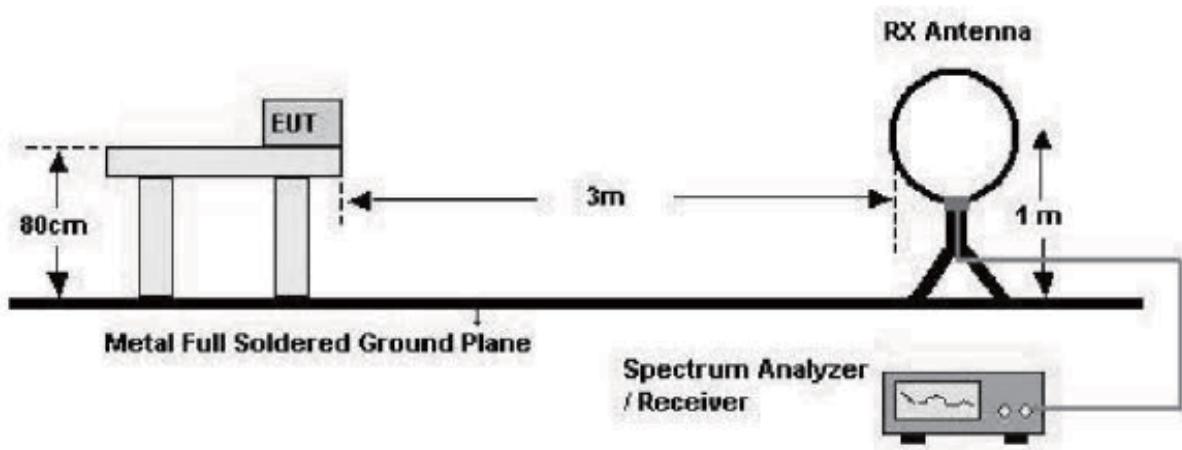

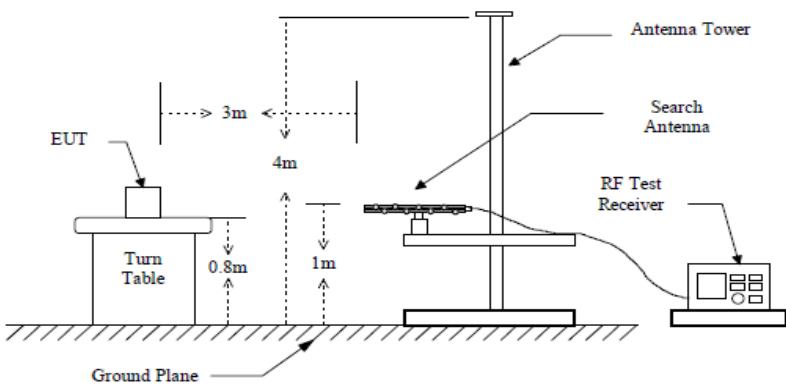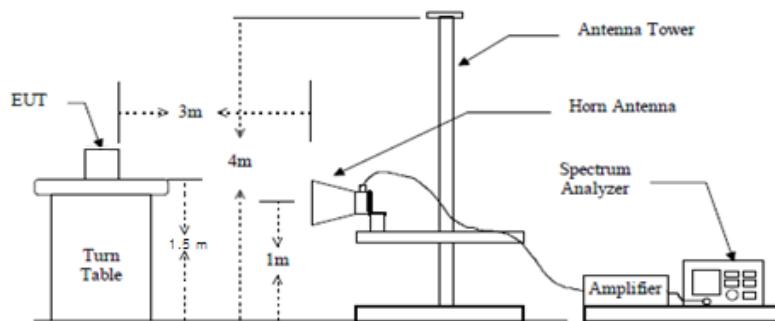
**below 1 GHz (30 MHz to 1 GHz)****above 1 GHz****Measurement Data: Complies**

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30 MHz.

**Minimum Standard: FCC Part 15.209(a)**


Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

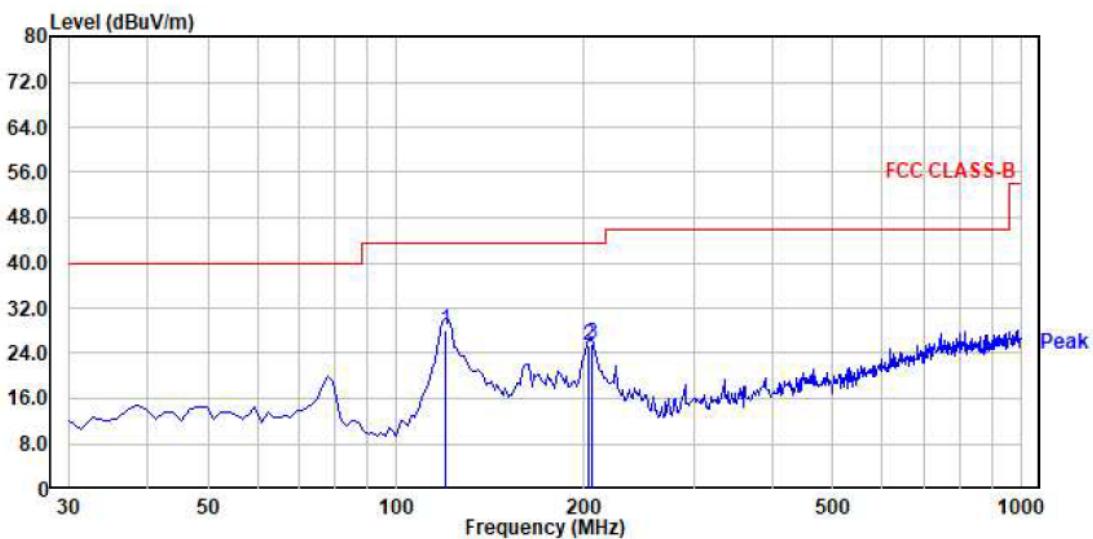Radiated Emissions (Below 1 GHz)


No.	Freq	Reading	C.F	Result QP	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
<hr/>									
1.	119.97	44.50	-16.42	28.08	43.50	15.42	100	79	horizontal
2.	202.91	41.92	-16.44	25.48	43.50	18.02	100	257	horizontal
3.	205.72	42.12	-16.48	25.64	43.50	17.86	100	257	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

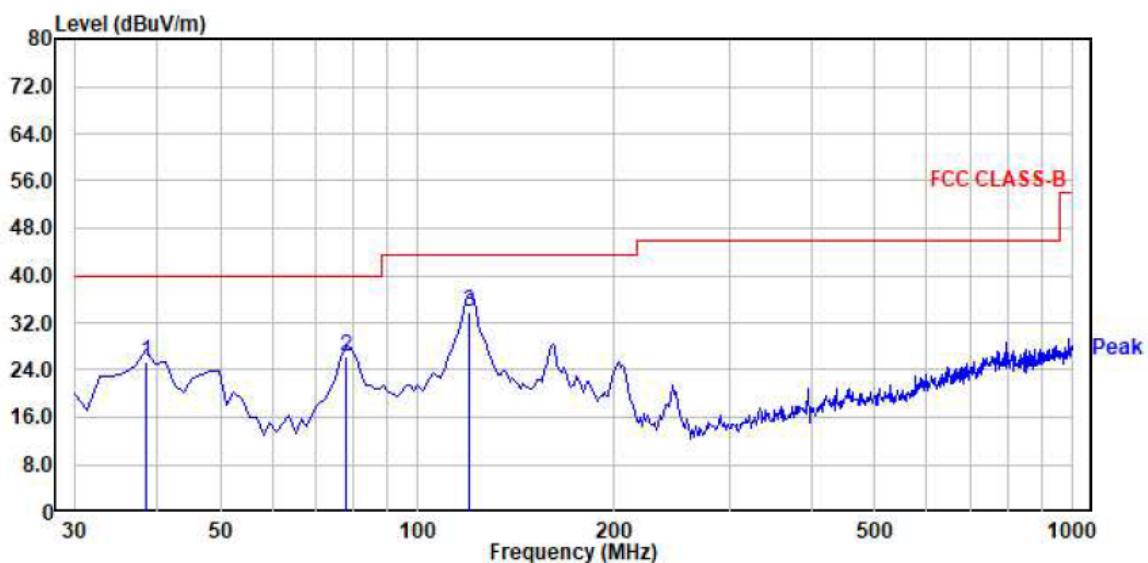


No.	Freq	Reading	C.F	Result QP	Limit	Margin	Height	Angle	Polarity
	MHz	dB $\mu$ V	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB	cm	deg	
<hr/>									
1.	38.43	40.81	-15.39	25.42	40.00	14.58	100	360	vertical
2.	77.80	44.10	-17.96	26.14	40.00	13.86	100	272	vertical
3.	119.97	50.12	-16.42	33.70	43.50	9.80	100	117	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

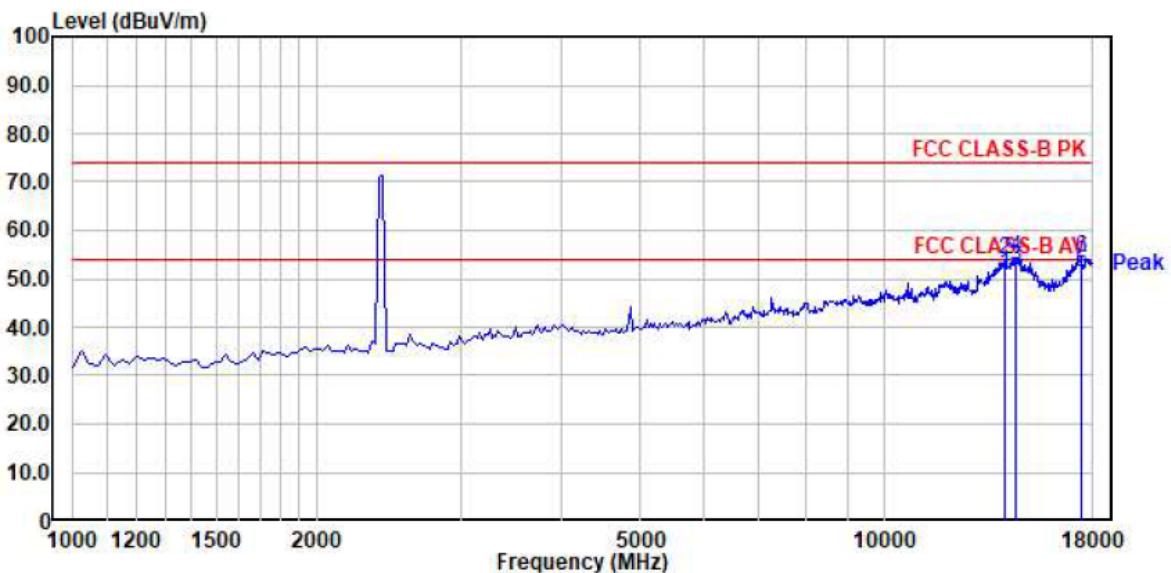**Radiated Emissions (Above 1 GHz)**


No.	Freq	RD	RD	C.F	Result		Result		Limit		Limit		Margin	Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV					
	MHz	dB <sub>u</sub> V	dB <sub>u</sub> V		dB	dB <sub>u</sub> V	dB <sub>u</sub> V	dB <sub>u</sub> V	dB <sub>u</sub> V	dB	dB	cm	deg				
2.	14082.61	33.41	30.41	20.68	54.09	51.09	74.00	54.00	19.91	2.91	100	332	horizontal				
4.	14501.45	33.10	31.10	21.26	54.36	52.36	74.00	54.00	19.64	1.64	100	150	horizontal				
6.	17433.33	32.14	29.14	22.26	54.40	51.40	74.00	54.00	19.60	2.60	100	256	horizontal				

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

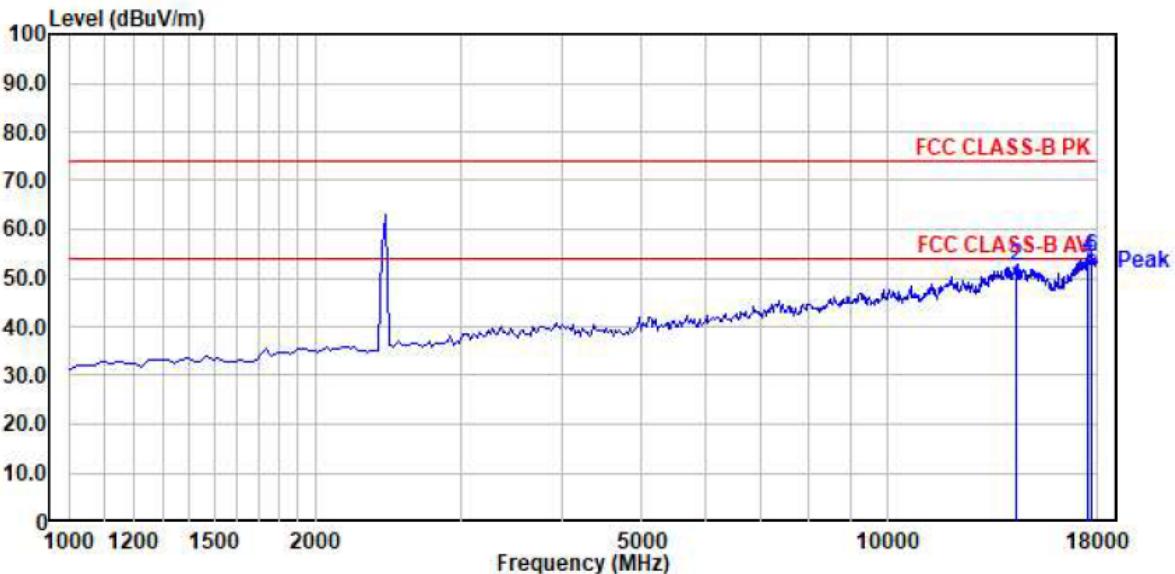


No.	Freq	RD	RD	C.F	Result		Result		Limit		Limit		Margin	Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV	PK	AV					
	MHz	dB <sub>u</sub> V	dB <sub>u</sub> V		dB	dB <sub>u</sub> V	dB <sub>u</sub> V	dB <sub>u</sub> V	dB <sub>u</sub> V	dB	dB	cm	deg				
2.	14328.99	31.36	27.36	21.04	52.40	48.40	74.00	54.00	21.60	5.60	100	360	vertical				
4.	17556.52	30.95	28.00	23.39	54.34	51.39	74.00	54.00	19.66	2.61	100	145	vertical				
6.	17778.26	29.23	26.23	25.28	54.51	51.51	74.00	54.00	19.49	2.49	100	238	vertical				

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

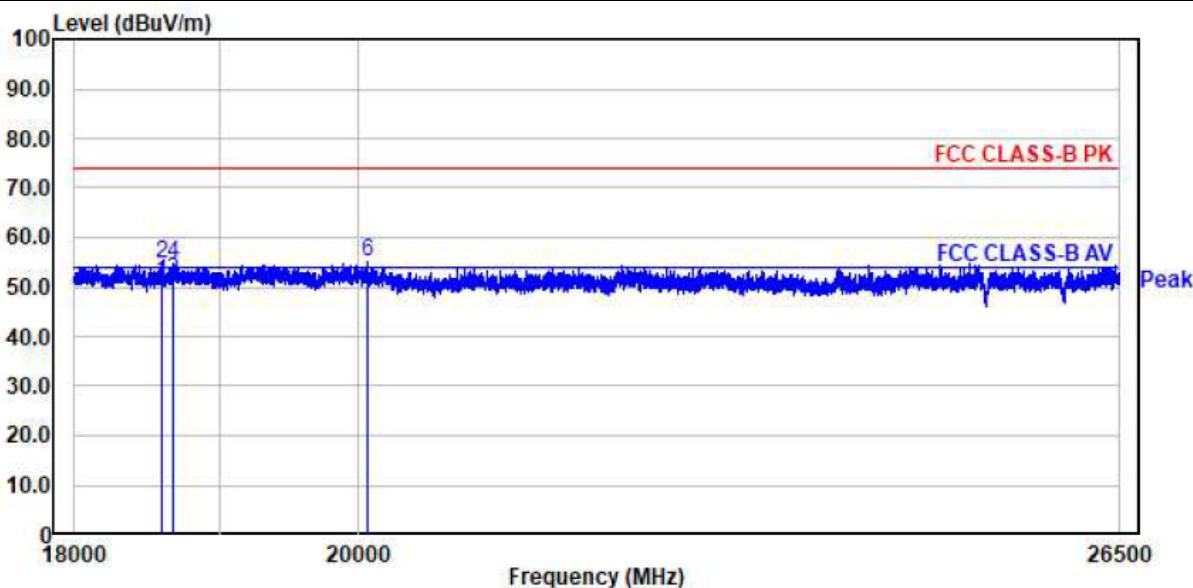

No.	Freq	RD	RD	C.F	Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV				
MHz	dB $\mu$ V	dB $\mu$ V	dB	dB $\mu$ V	dB	dB	cm	deg						
2.	18587.56	37.95	33.98	16.90	54.85	50.88	74.00	54.00	19.15	3.12	147	140	0	horizontal
4.	18670.44	37.99	34.40	16.86	54.85	51.26	74.00	54.00	19.15	2.74	0	0	0	horizontal
6.	20059.13	39.67	34.12	15.39	55.06	49.51	74.00	54.00	18.94	4.49	164	159	0	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

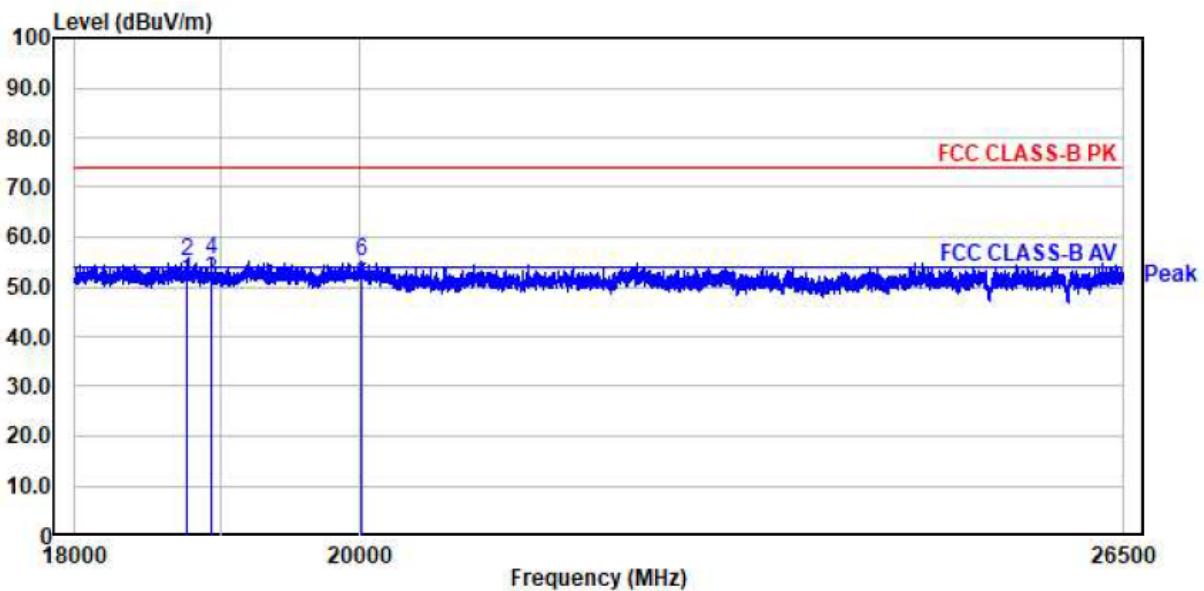

No.	Freq	RD	RD	C.F	Result		Limit		Margin		Margin	Height	Angle	Polarity
					PK	AV	PK	AV	PK	AV				
MHz	dB $\mu$ V	dB $\mu$ V	dB	dB $\mu$ V	dB	dB	cm	deg						
2.	18757.56	38.31	34.55	16.78	55.09	51.33	74.00	54.00	18.91	2.67	0	0	0	vertical
4.	18925.44	38.74	34.63	16.58	55.32	51.21	74.00	54.00	18.68	2.79	149	156	0	vertical
6.	20010.25	39.75	34.70	15.44	55.19	50.14	74.00	54.00	18.81	3.86	0	0	0	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

### 3.2.6 AC Conducted Emissions

#### Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

#### Measurement Data: **NA**

#### Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

**APPENDIX**  
**TEST EQUIPMENT USED FOR TESTS**

Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2022-09-06
2	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2023-03-20
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2023-03-20
4	Attenuator (3 dB)	8491A	37822	HP	1 year	2022-09-06
5	Attenuator (10 dB)	8491A	63196	HP	1 year	2022-09-06
6	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2022-09-06
7	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2022-09-06
8	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2023-03-20
9	■ Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-09-06
10	■ DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2023-03-20
11	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2023-03-20
12	■ TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2023-03-20
13	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2023-03-20
14	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■ DC Power Supply	6674A	3637A01657	Agilent	-	-
17	■ Power Meter	EPM-441A	GB32481702	HP	1 year	2023-03-20
18	■ Power Sensor	8481A	3318A94972	HP	1 year	2022-09-06
19	Audio Analyzer	8903B	3729A18901	HP	1 year	2022-09-06
20	Moduleation Analyzer	8901B	3749A05878	HP	1 year	2022-09-06
21	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	Jin Young Tech	1 year	2022-09-06
22	Stop Watch	HS-3	812Q08R	CASIO	2 year	2023-03-20
23	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2022-09-06
24	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2023-03-20
25	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2023-03-20
26	Highpass Filter	WPKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2023-03-20
27	Highpass Filter	WPKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2023-03-20
28	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2023-03-20
29	■ Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2023-03-20
30	■ Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2023-03-20
31	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2023-03-20