

Outdoor Power Supply

Model: M1000

Rated Capacity: 999Wh, 22.2V, 45000mAh

Output Waveform: Pure sine wave

Solar Charging Input: 18-23V---8A(150W Max) MPPT

DC Charging Input: DC24V---6.25A(150W Max)

DC Output*2: 12V---5A

Cigarette Lighter Output: 12V---10A(120W)

USB-C PD Output*1: 5V---3A, 9V---3A, 12V---3A,
15V---3A, 20V---3A (60W Max)

USB-A QC Output*3: 5V---3A, 9V---2A,
12V---1.5A(18W Max) each

Wireless Charging Output: 10W Max

AC Output*2: 110V~60Hz Total 1000W Max

LED Light*2: 5W

Discharging Temperature: 14 to 104°F (-10 to 40°C)

Charging Temperature: 32 to 104°F (0 to 40°C)

Production Date: 2022.7

FCC ID: 2A7MU-M1000


Guangdong MIQ Power Co., Ltd.

⚠️WARNING!

- a) Do not overcharge the internal battery.
See Instruction Manual.
- b) Do not smoke, strike a match, or cause a spark in the vicinity of the power pack
- c) Only charge the internal battery in a well ventilated area.
- d) Risk of Electric Shock. Connect only to properly grounded outlets
- e) Risk of Injury To Persons. Do not use this product if the power cord or the battery cables are damaged in any way
- f) This device is not intended for use in a commercial repair facility
- g) This device is intended to be used indoors only. Do not use outdoors.



This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

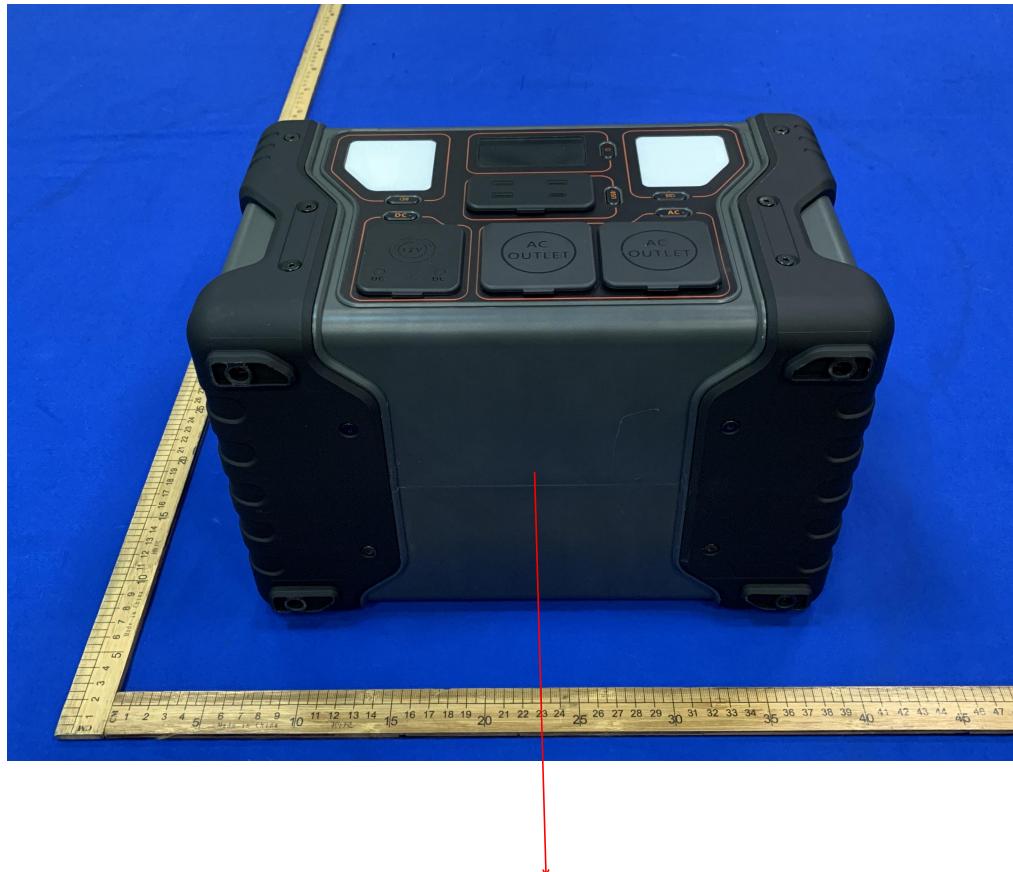

Label location