

Appendix A(Radiated Spurious Emissions Above 1GHz Test Result)

Test Result

Environmental Conditions


Temperature:	22.1 to 25 °C
Relative Humidity:	51 to 59 %
ATM Pressure:	101.3 kPa
Test Engineer:	Jimi Zheng
Test Date:	2025-04-08 to 2025-04-27
EUT Operation Mode:	5G WIFI Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: For 18GHz-40GHz, the maximum output power mode and channel:802.11ac80 5775MHz was tested.


Note 2: The 18GHz-40GHz test without filter, and others used.

1GHz~6.6GHz 802.11a Ant0:

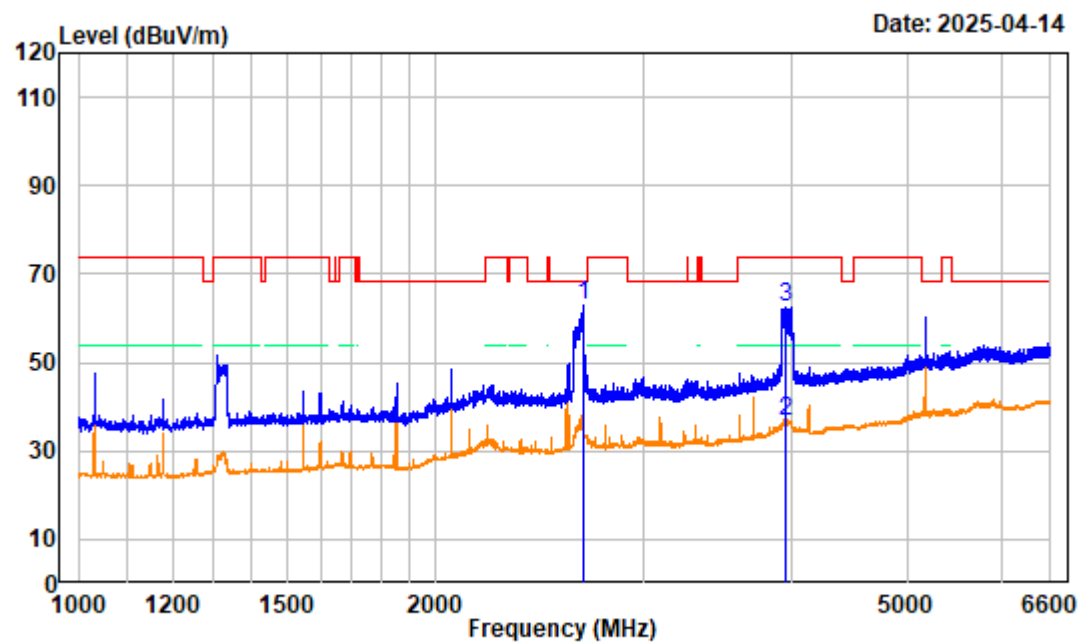


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2665.300	-10.28	73.03	62.75	68.20	-5.45 Peak
2	3951.200	-8.38	44.99	36.61	54.00	-17.39 Average
3	3951.200	-8.38	71.01	62.63	74.00	-11.37 Peak

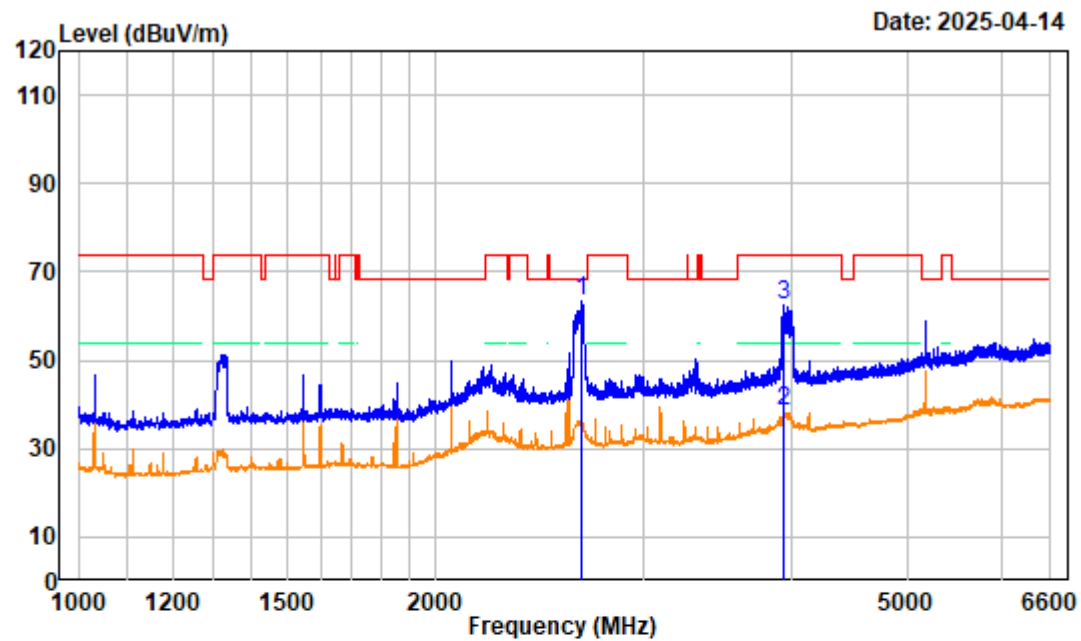


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.700	-10.36	73.58	63.22	68.20	-4.98	Peak
2	3937.200	-8.27	46.94	38.67	54.00	-15.33	average
3	3937.200	-8.27	70.89	62.62	74.00	-11.38	peak

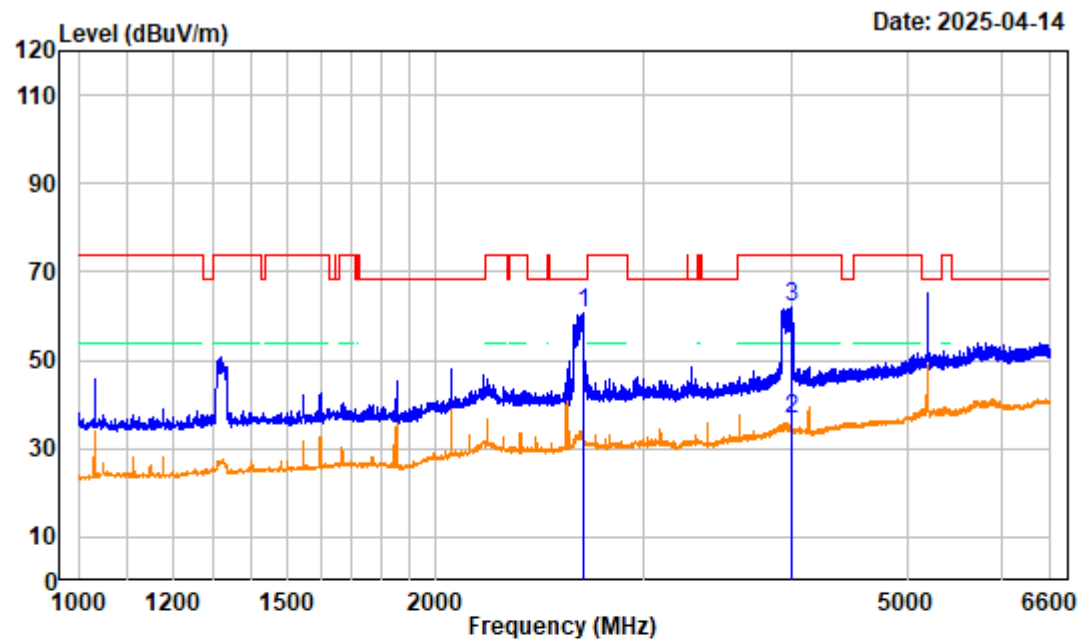


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	70.87	60.56	68.20	-7.64 Peak
2	3996.000	-8.13	44.92	36.79	54.00	-17.21 average
3	3996.000	-8.13	70.22	62.09	74.00	-11.91 peak

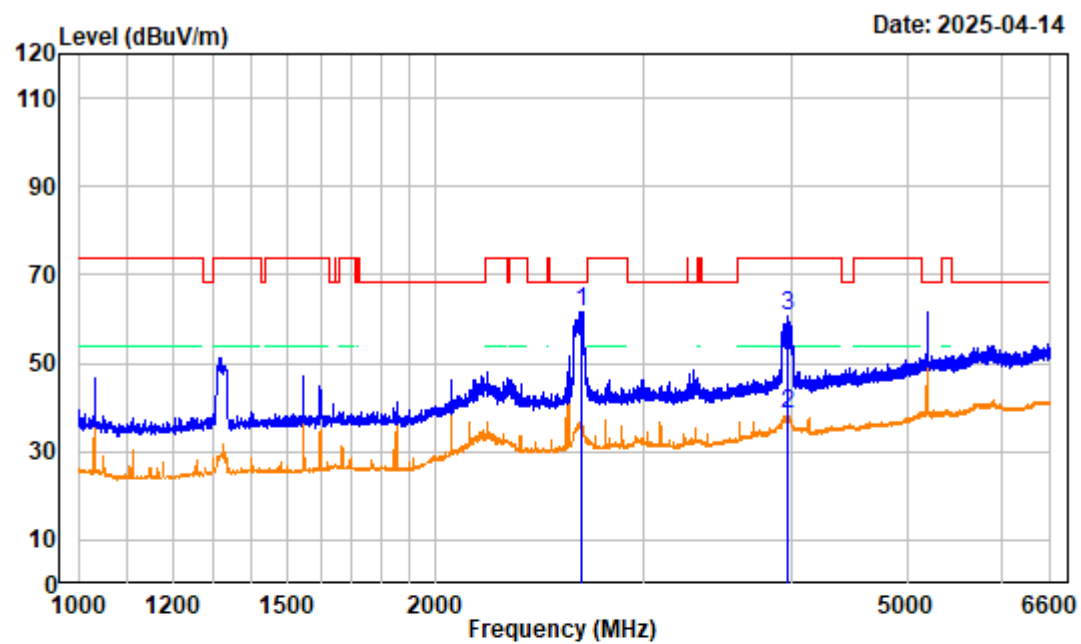


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2658.300	-10.39	72.15	61.76	68.20	-6.44	Peak
2 3955.400	-8.36	46.67	38.31	54.00	-15.69	average
3 3955.400	-8.36	69.01	60.65	74.00	-13.35	peak

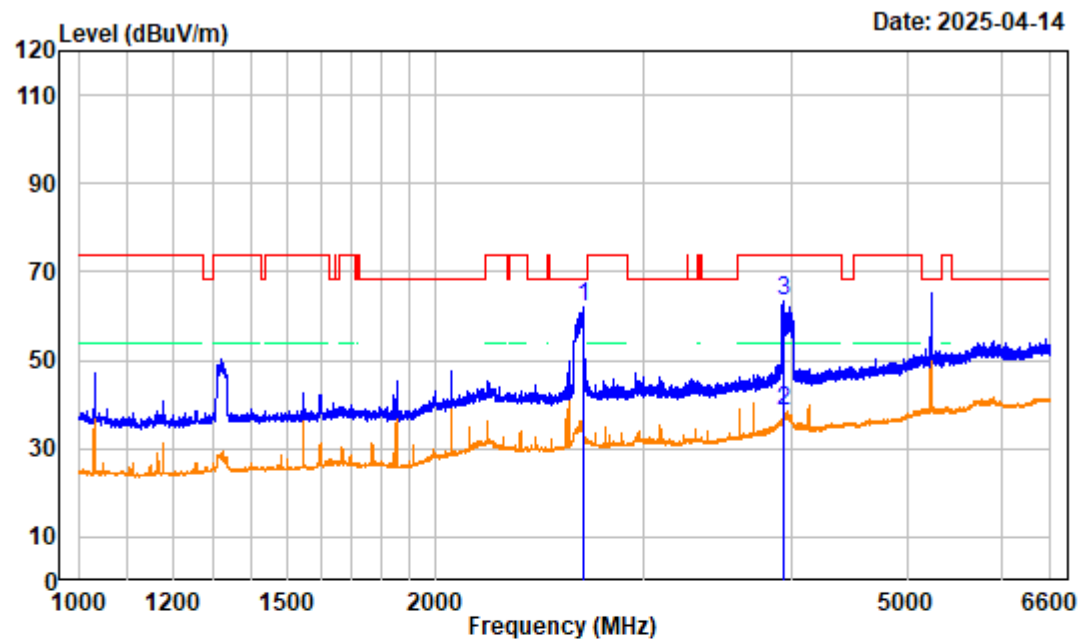


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	72.29	62.04	68.20	-6.16 Peak
2	3935.800	-8.25	46.91	38.66	54.00	-15.34 average
3	3935.800	-8.25	71.58	63.33	74.00	-10.67 peak

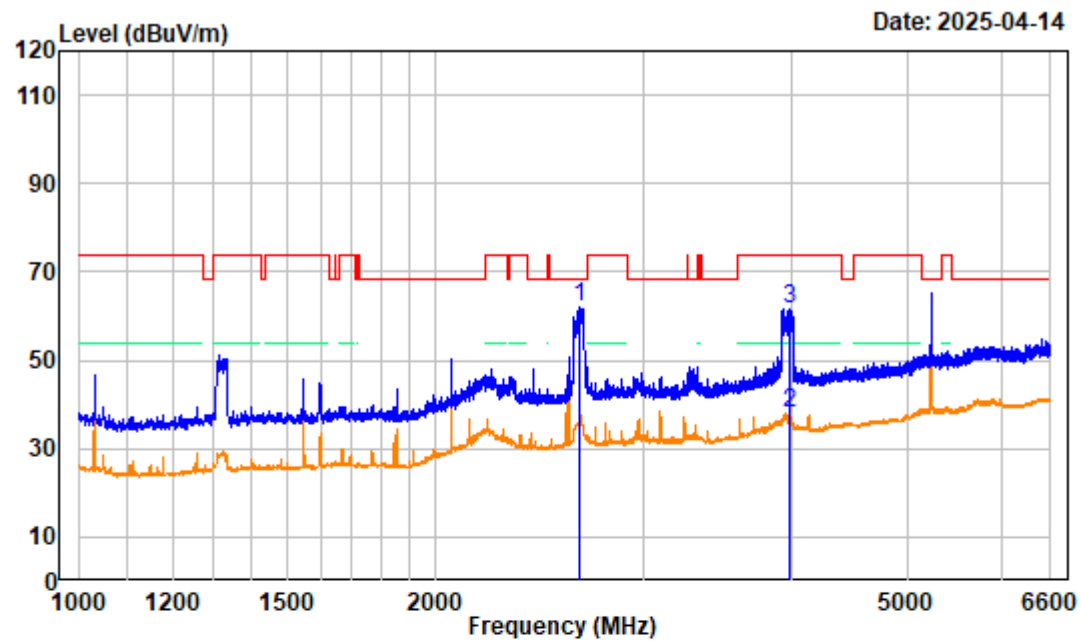


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2649.900	-10.52	72.48	61.96	68.20	-6.24	Peak
2	3980.600	-8.22	46.18	37.96	54.00	-16.04	average
3	3980.600	-8.22	69.88	61.66	74.00	-12.34	peak

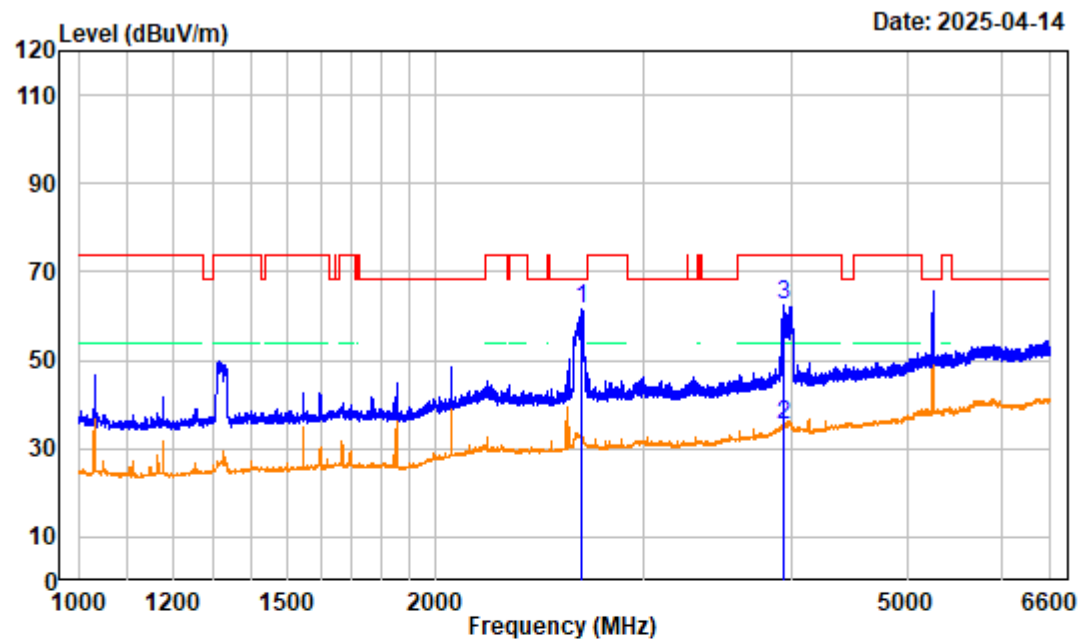


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2653.400	-10.46	71.90	61.44	68.20	-6.76 peak
2	3936.500	-8.27	43.44	35.17	54.00	-18.83 average
3	3936.500	-8.27	70.59	62.32	74.00	-11.68 peak

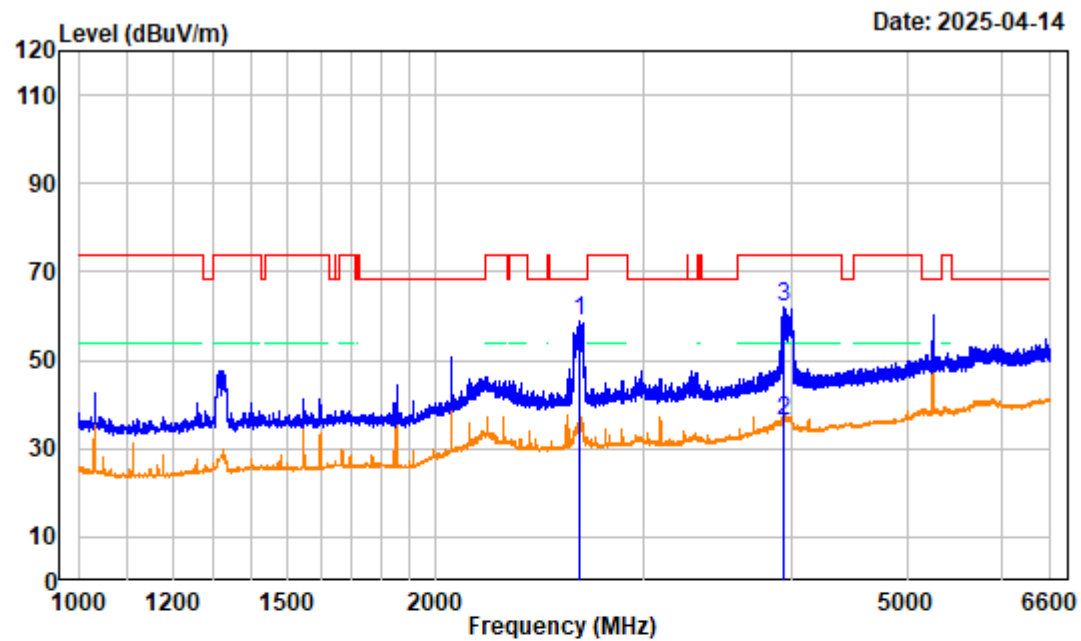


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2649.200	-10.51	69.42	58.91	68.20	-9.29	peak
2 3936.500	-8.27	44.65	36.38	54.00	-17.62	average
3 3936.500	-8.27	70.11	61.84	74.00	-12.16	peak

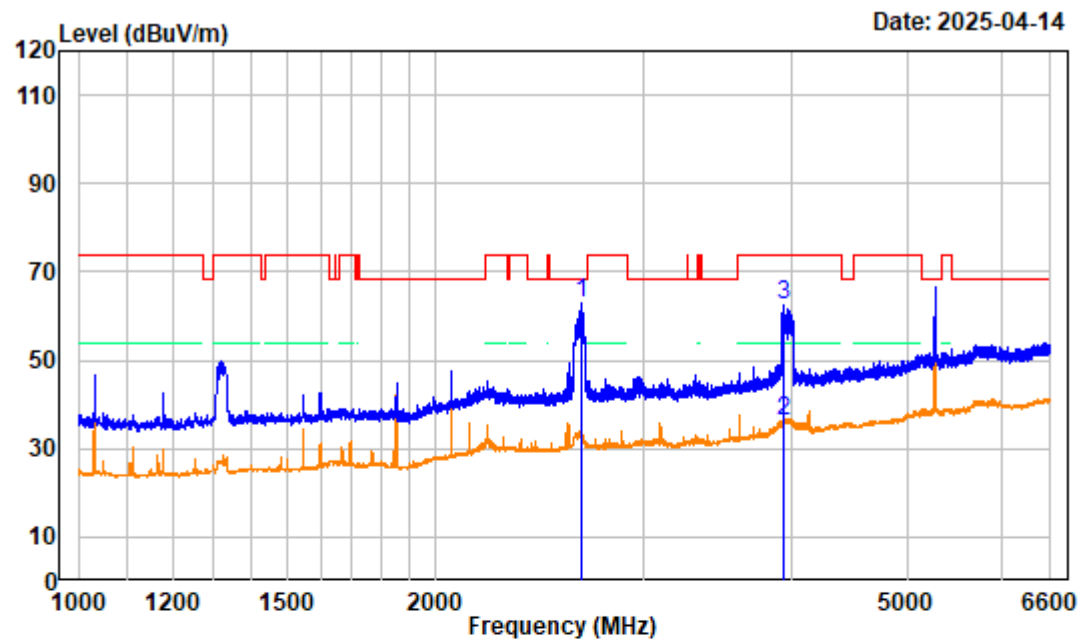


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.700	-10.36	73.46	63.10	68.20	-5.10	peak
2	3935.800	-8.25	44.47	36.22	54.00	-17.78	average
3	3935.800	-8.25	70.77	62.52	74.00	-11.48	peak

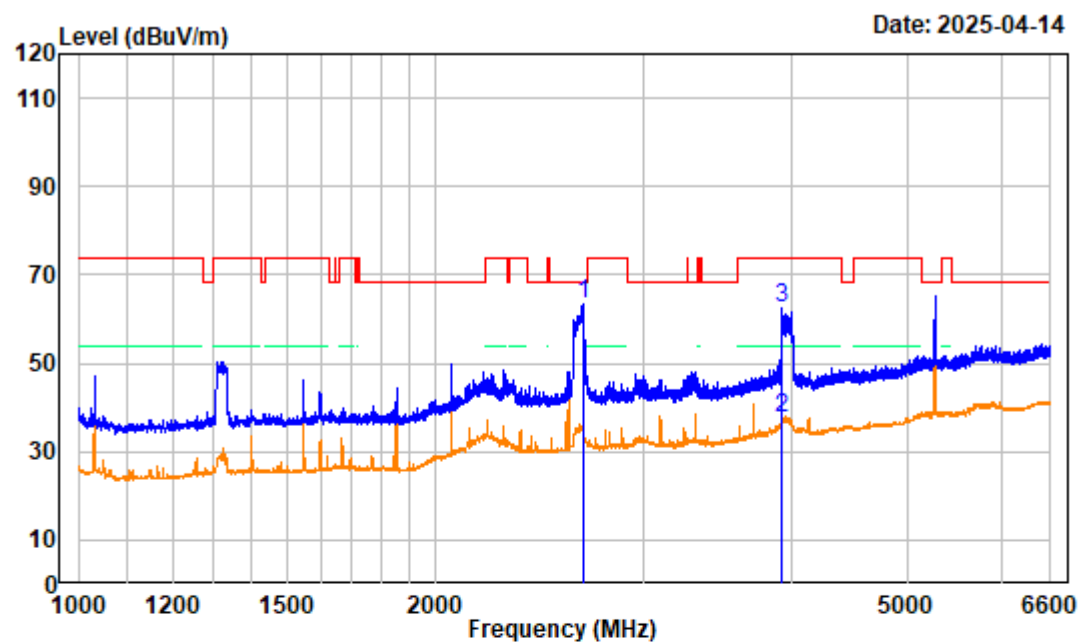


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	73.64	63.39	68.20	-4.81 peak
2	3922.500	-8.12	45.50	37.38	54.00	-16.62 average
3	3922.500	-8.12	70.49	62.37	74.00	-11.63 peak

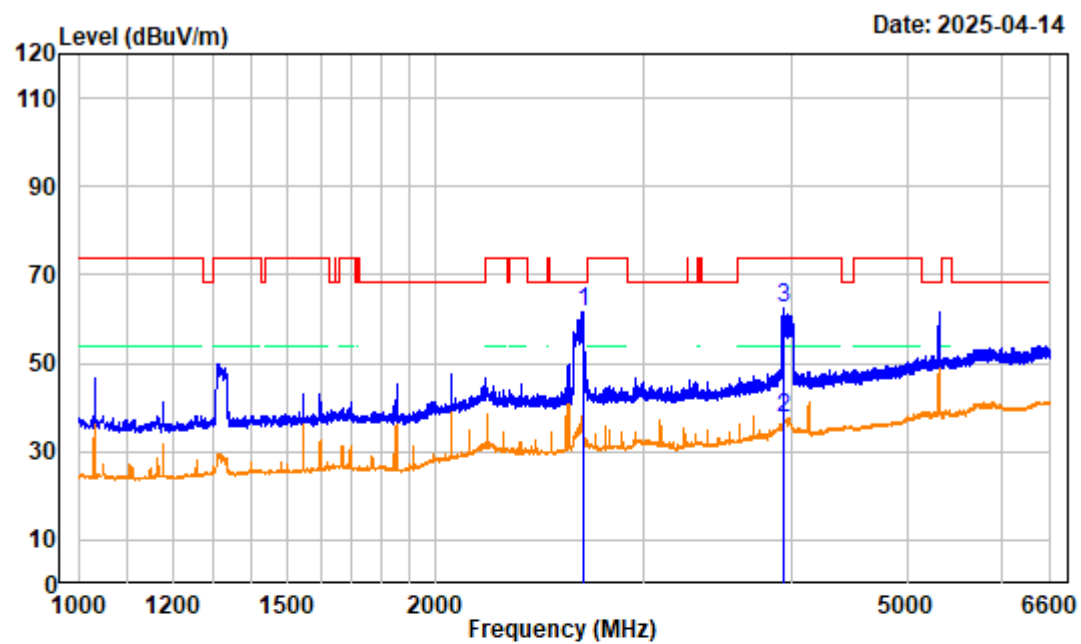


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2661.100	-10.34	71.82	61.48	68.20	-6.72 peak
2	3929.500	-8.19	45.73	37.54	54.00	-16.46 average
3	3929.500	-8.19	70.79	62.60	74.00	-11.40 peak

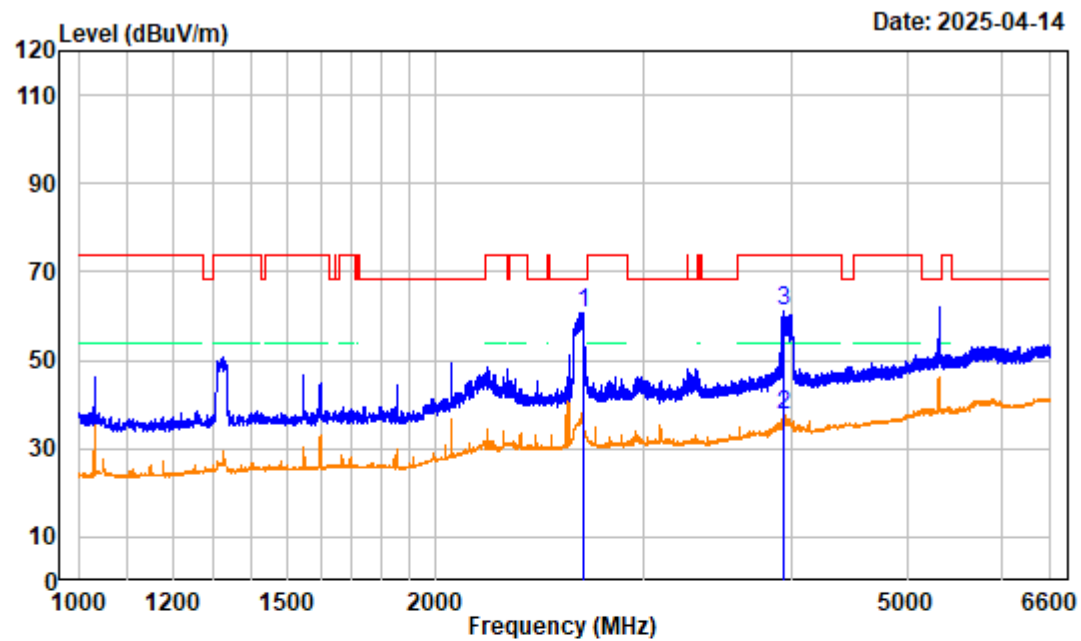


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2661.800	-10.33	71.15	60.82	68.20	-7.38 peak
2	3935.100	-8.24	45.86	37.62	54.00	-16.38 average
3	3935.100	-8.24	69.26	61.02	74.00	-12.98 peak

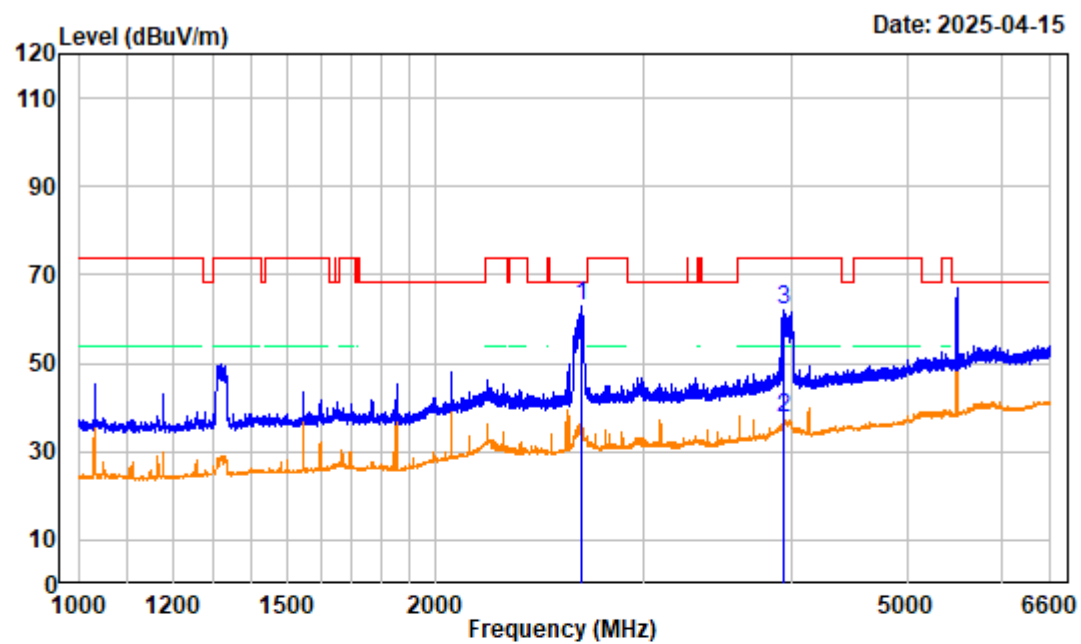


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2657.600	-10.40	73.42	63.02	68.20	-5.18 peak
2	3939.300	-8.29	45.73	37.44	54.00	-16.56 average
3	3939.300	-8.29	70.44	62.15	74.00	-11.85 peak

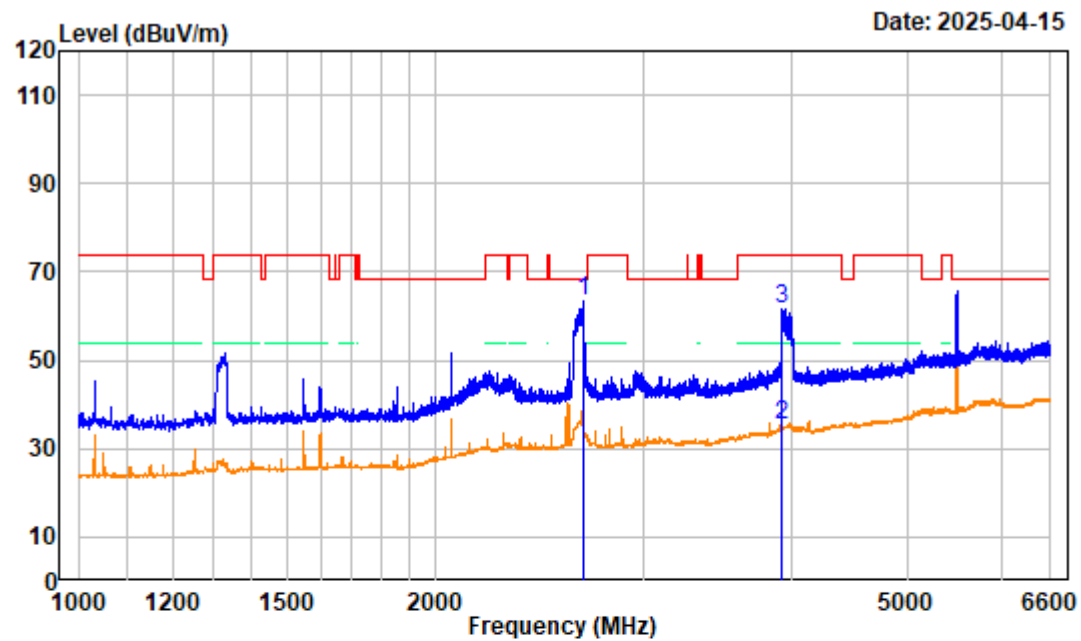


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2667.400	-10.24	73.81	63.57	68.20	-4.63	peak
2	3921.100	-8.12	43.29	35.17	54.00	-18.83	average
3	3921.100	-8.12	69.91	61.79	74.00	-12.21	peak

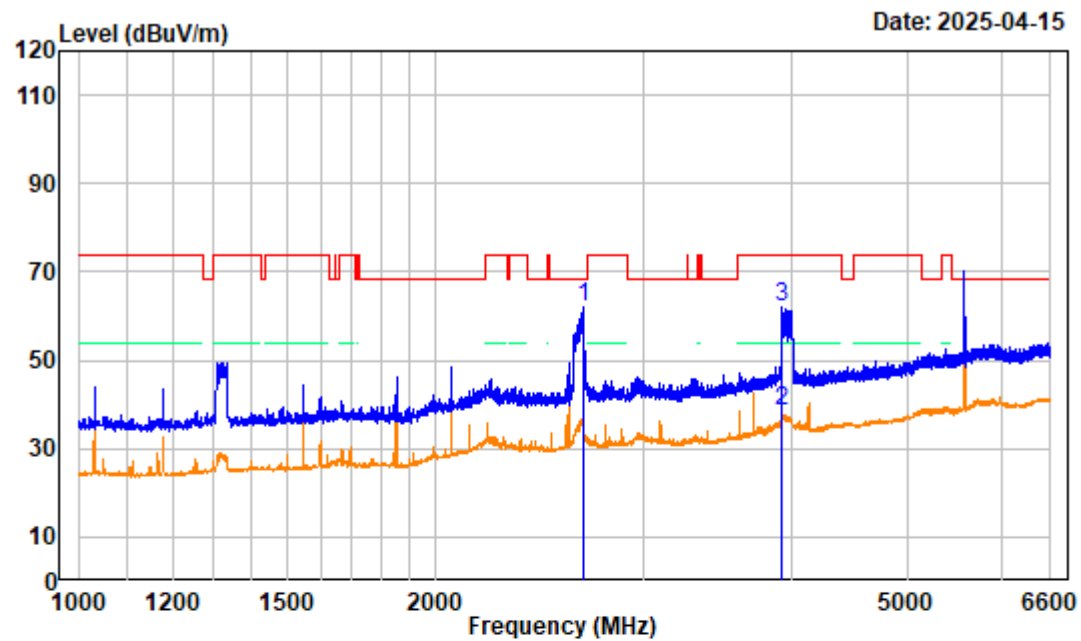


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	72.37	62.11	68.20	-6.09 peak
2	3923.200	-8.12	46.68	38.56	54.00	-15.44 average
3	3923.200	-8.12	70.13	62.01	74.00	-11.99 peak

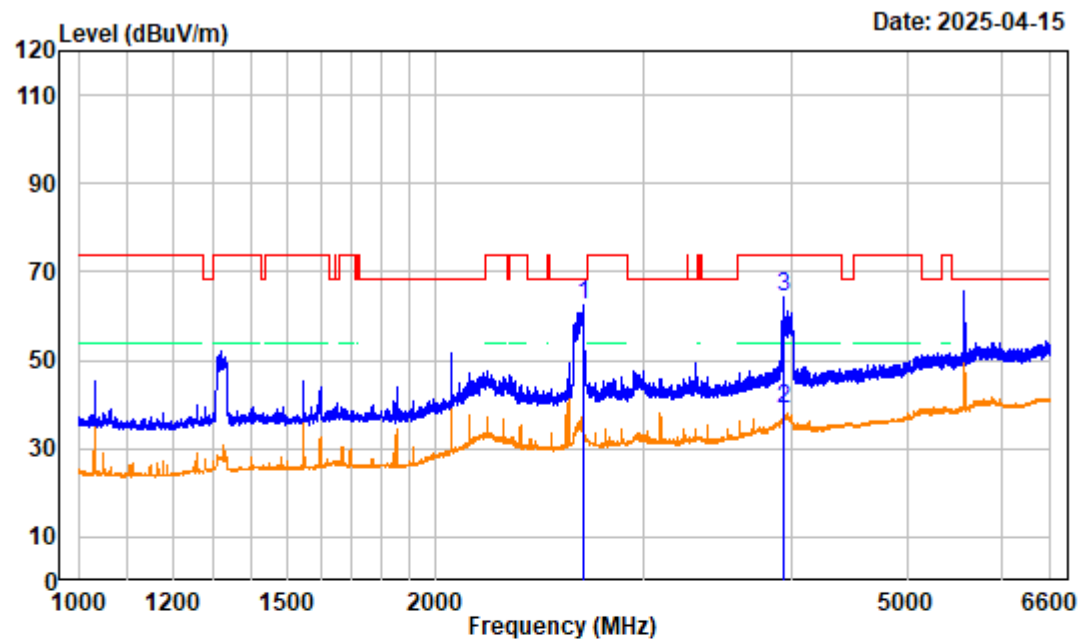


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	72.52	62.27	68.20	-5.93 peak
2	3929.500	-8.19	47.08	38.89	54.00	-15.11 average
3	3929.500	-8.19	72.38	64.19	74.00	-9.81 peak

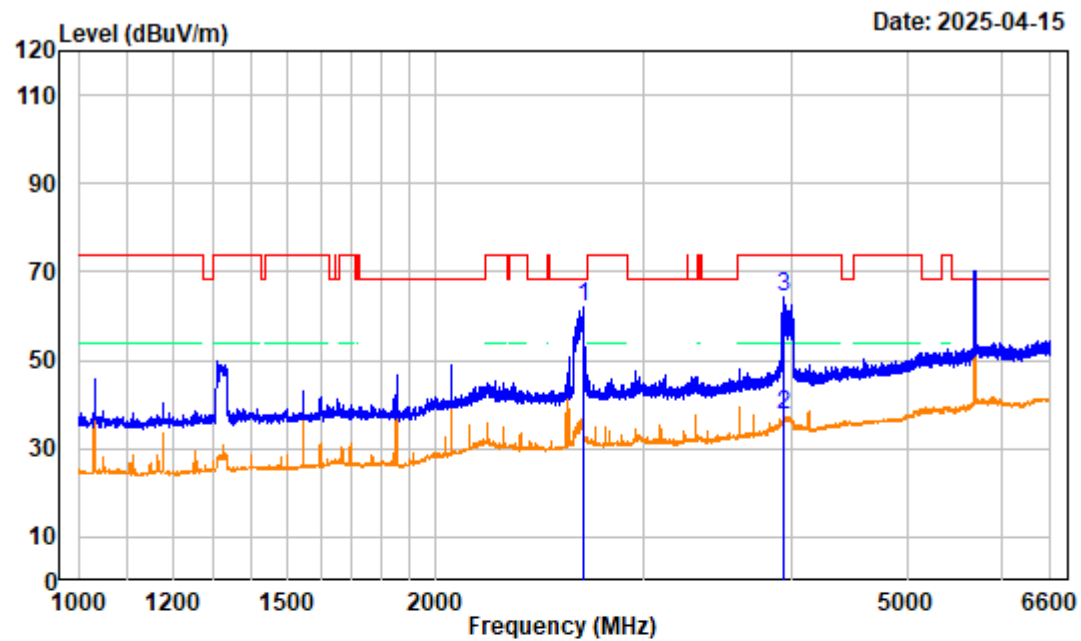


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	72.25	62.00	68.20	-6.20 peak
2	3933.700	-8.23	45.95	37.72	54.00	-16.28 average
3	3933.700	-8.23	72.74	64.51	74.00	-9.49 peak

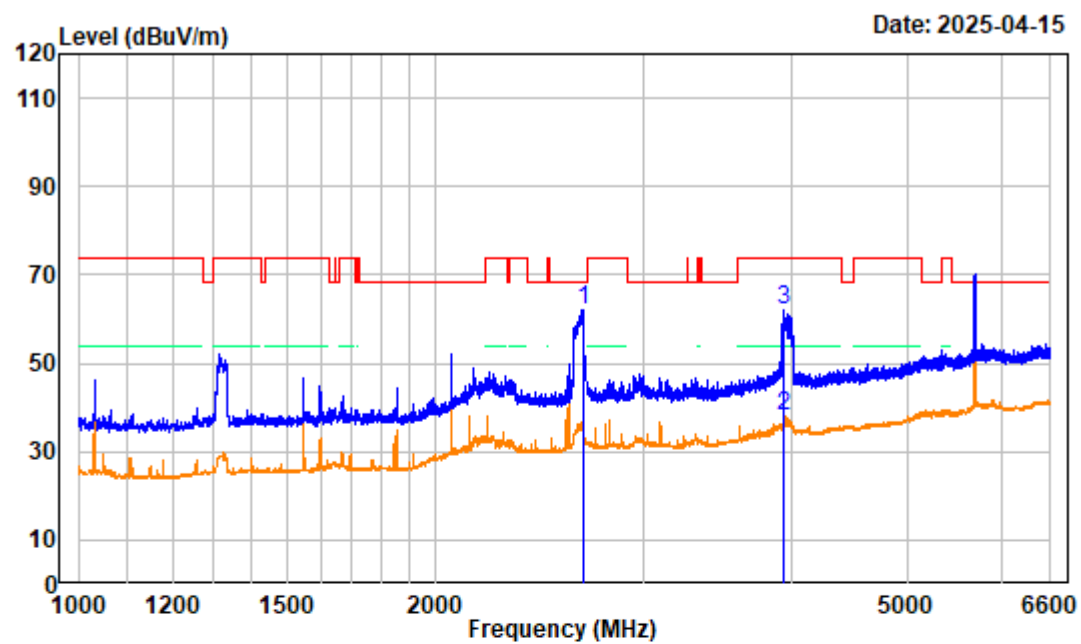


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2662.500	-10.32	72.36	62.04	68.20	-6.16	peak
2	3934.400	-8.24	46.47	38.23	54.00	-15.77	average
3	3934.400	-8.24	70.48	62.24	74.00	-11.76	peak

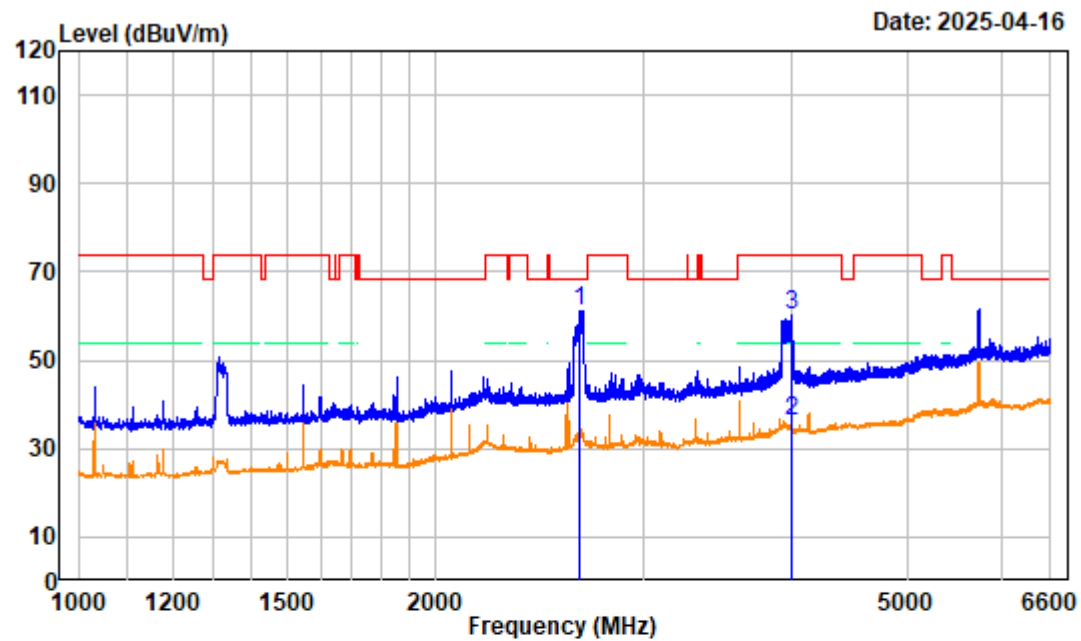


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2646.400	-10.47	71.77	61.30	68.20	-6.90	peak
2	3989.700	-8.17	44.34	36.17	54.00	-17.83	average
3	3989.700	-8.17	68.23	60.06	74.00	-13.94	peak

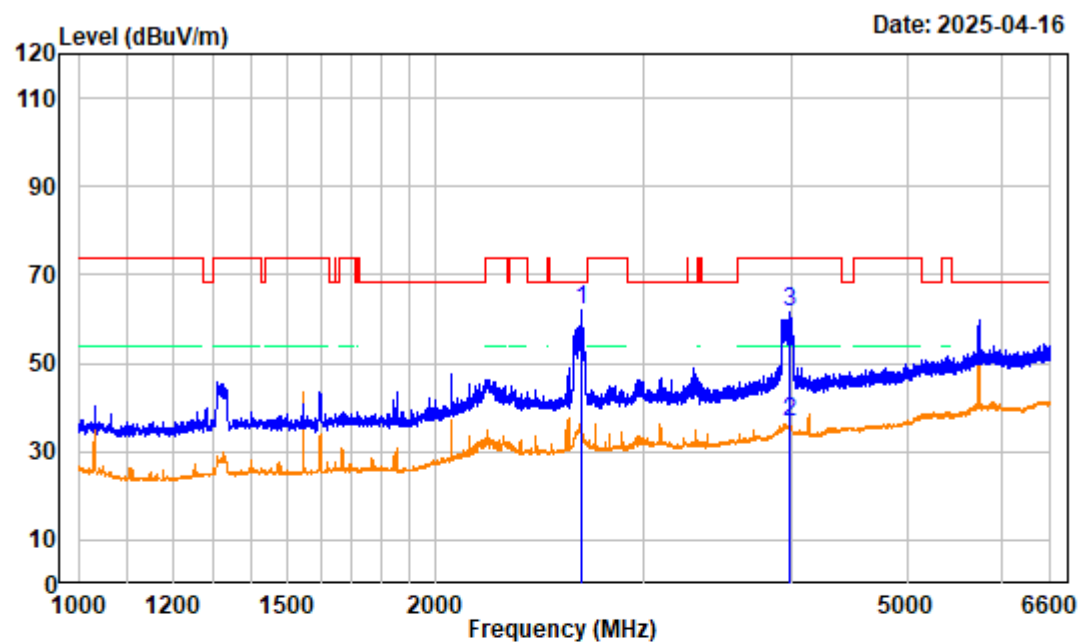


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.000	-10.38	72.35	61.97	68.20	-6.23 peak
2	3978.500	-8.23	44.75	36.52	54.00	-17.48 average
3	3978.500	-8.23	69.77	61.54	74.00	-12.46 peak

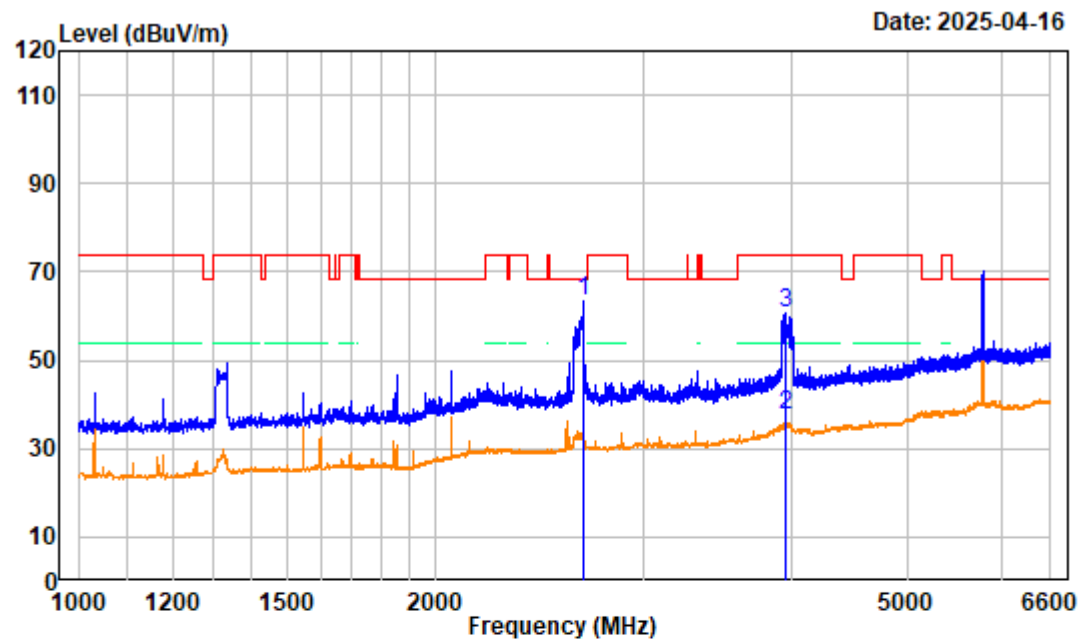


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	73.53	63.22	68.20	-4.98	peak
2	3942.800	-8.32	46.06	37.74	54.00	-16.26	average
3	3942.800	-8.32	68.81	60.49	74.00	-13.51	peak

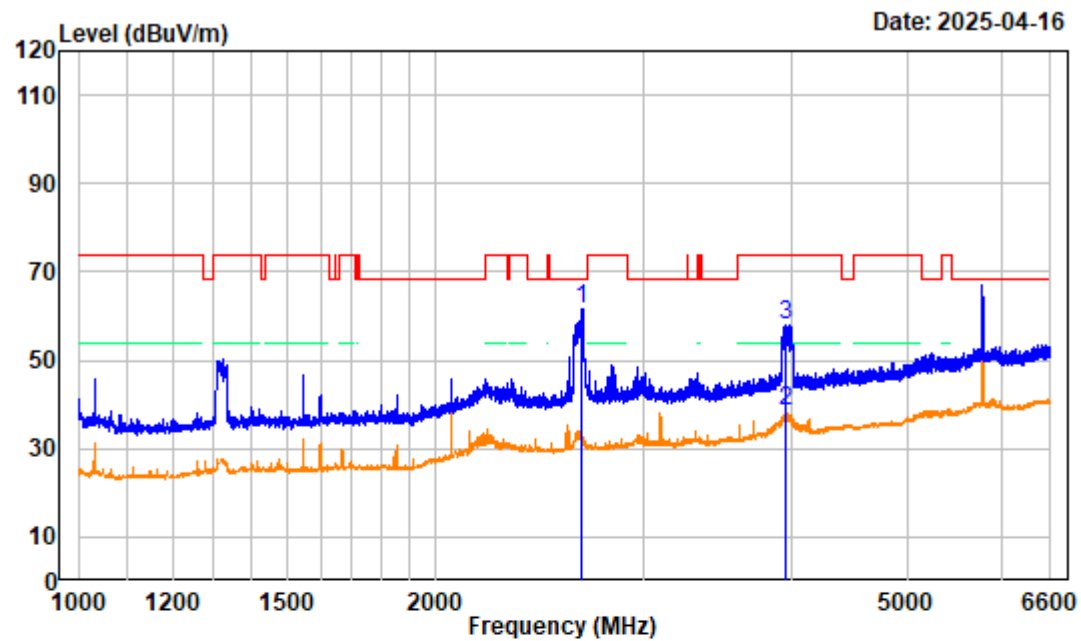


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.000	-10.38	71.94	61.56	68.20	-6.64 peak
2	3945.600	-8.35	46.99	38.64	54.00	-15.36 average
3	3945.600	-8.35	66.43	58.08	74.00	-15.92 peak

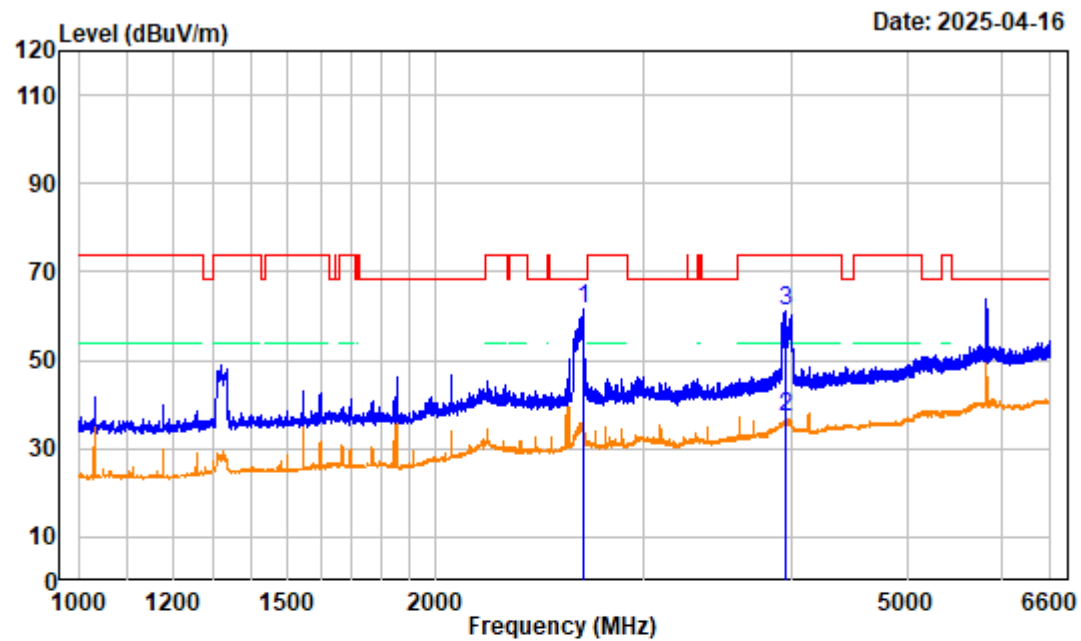

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	71.69	61.44	68.20	-6.76	peak
2	3946.300	-8.36	45.47	37.11	54.00	-16.89	average
3	3946.300	-8.36	69.27	60.91	74.00	-13.09	peak

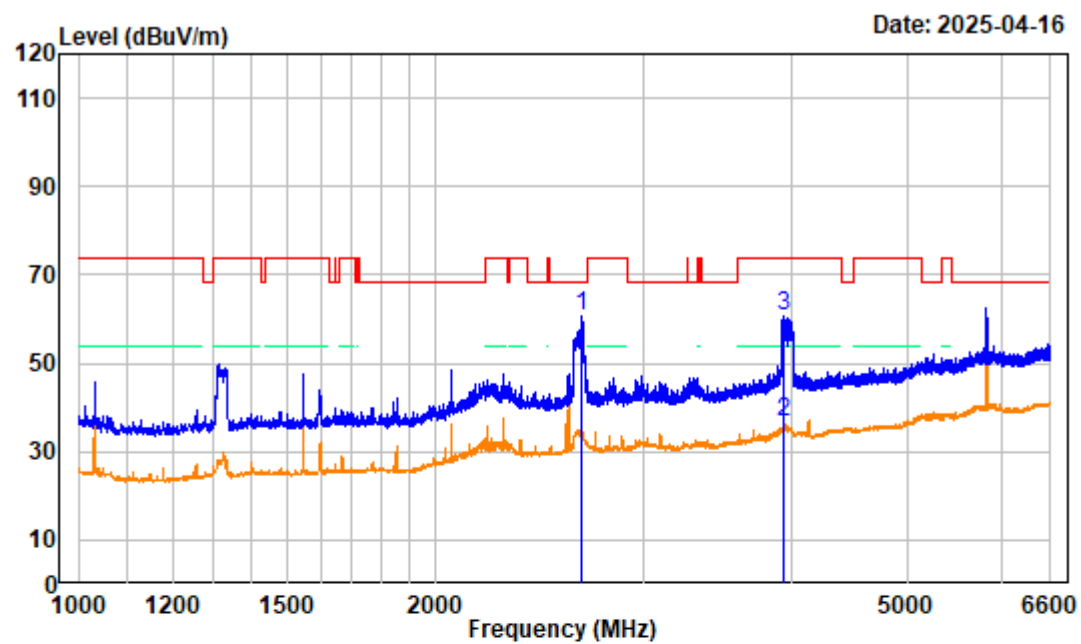

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.700	-10.48	71.10	60.62	68.20	-7.58	peak
2	3934.400	-8.24	45.03	36.79	54.00	-17.21	average
3	3934.400	-8.24	68.88	60.64	74.00	-13.36	peak

1GHz~6.6GHz 802.11a Ant1:

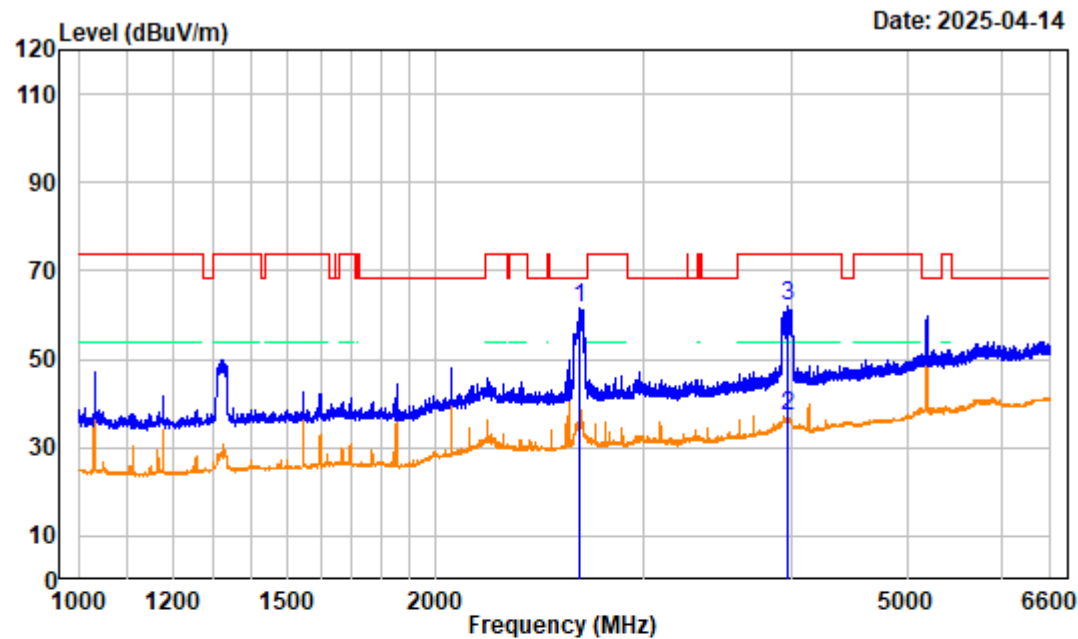


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2649.900	-10.52	72.16	61.64	68.20	-6.56 peak
2	3967.300	-8.30	45.57	37.27	54.00	-16.73 average
3	3967.300	-8.30	70.16	61.86	74.00	-12.14 peak

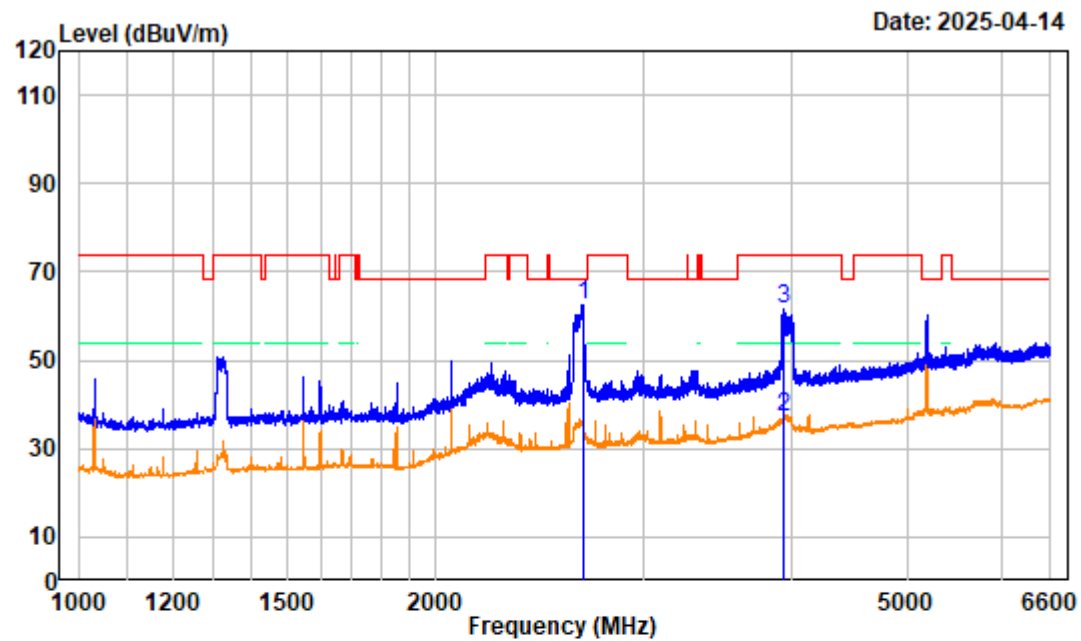


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	72.84	62.58	68.20	-5.62 peak
2	3930.900	-8.21	45.27	37.06	54.00	-16.94 average
3	3930.900	-8.21	69.64	61.43	74.00	-12.57 peak

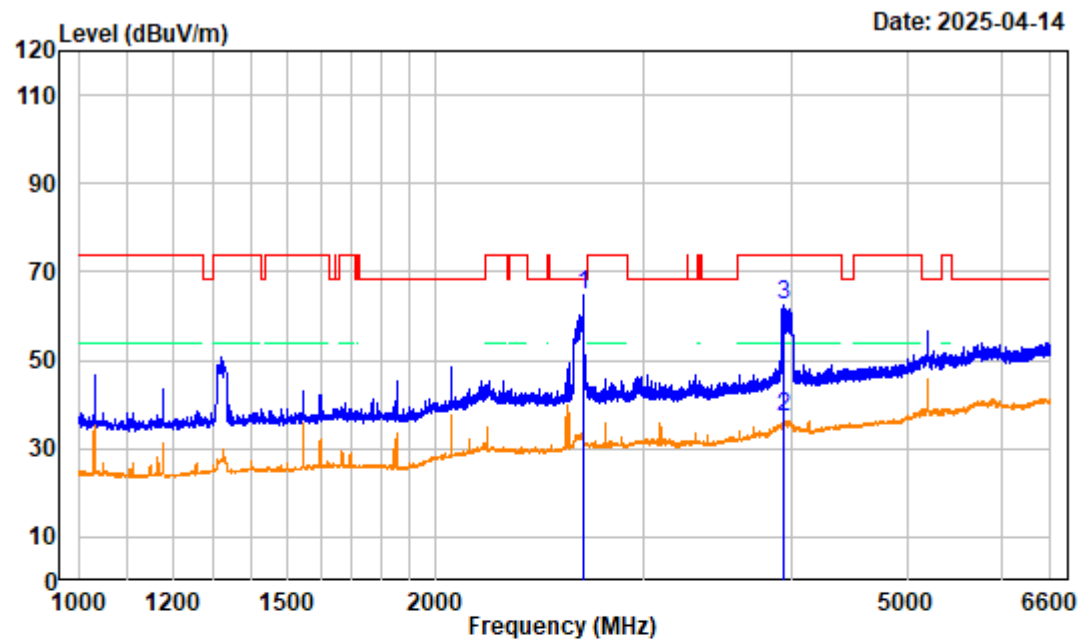


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2661.800	-10.33	75.20	64.87	68.20	-3.33	peak
2	3927.400	-8.18	45.11	36.93	54.00	-17.07	average
3	3927.400	-8.18	70.79	62.61	74.00	-11.39	peak

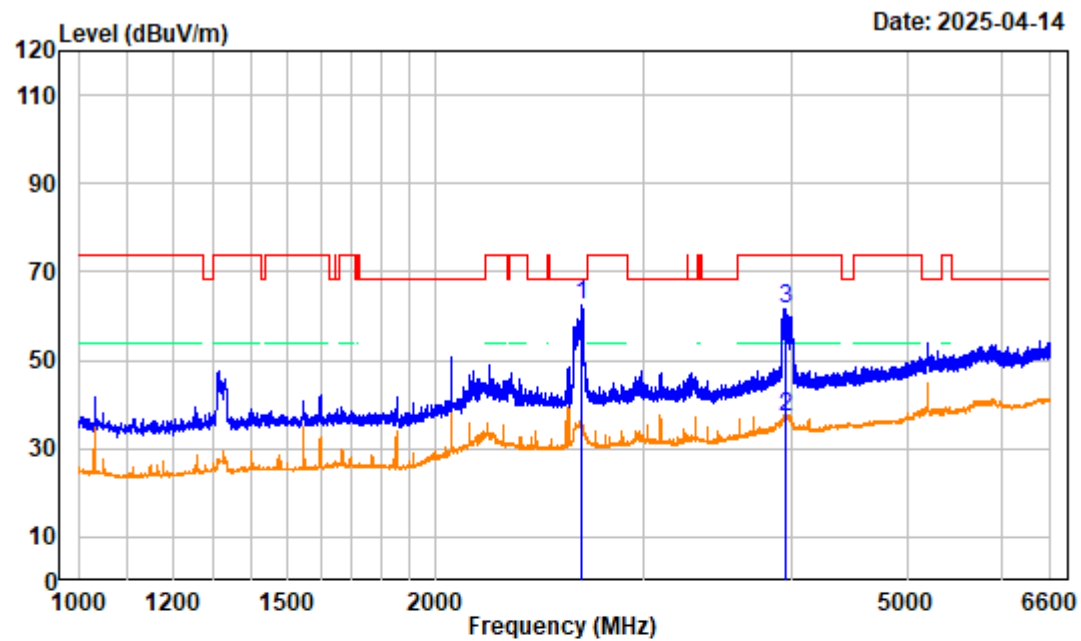


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2660.400	-10.35	72.66	62.31	68.20	-5.89 peak
2	3944.900	-8.34	45.55	37.21	54.00	-16.79 average
3	3944.900	-8.34	69.97	61.63	74.00	-12.37 peak

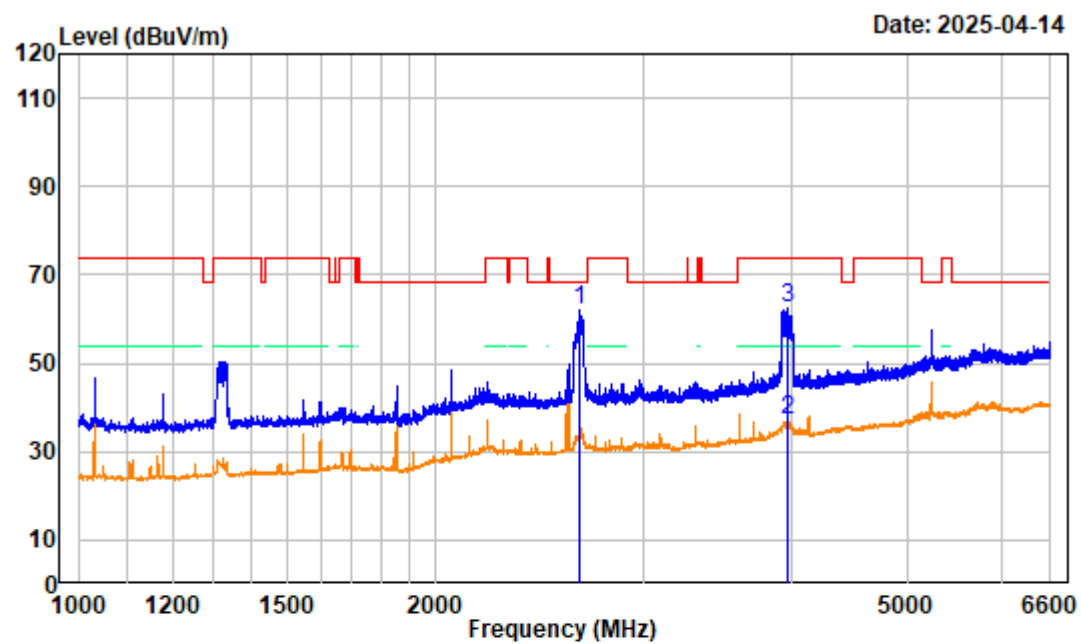


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2649.900	-10.52	72.48	61.96	68.20	-6.24	peak
2	3959.600	-8.33	45.51	37.18	54.00	-16.82	average
3	3959.600	-8.33	70.77	62.44	74.00	-11.56	peak

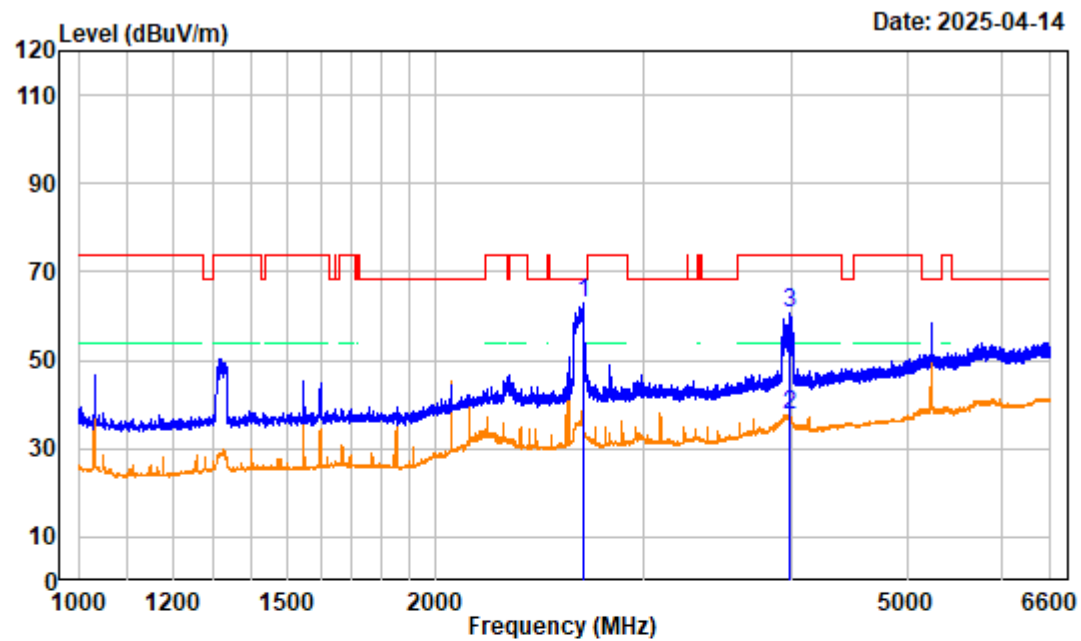


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	73.17	62.91	68.20	-5.29 peak
2	3975.000	-8.25	45.78	37.53	54.00	-16.47 average
3	3975.000	-8.25	68.83	60.58	74.00	-13.42 peak

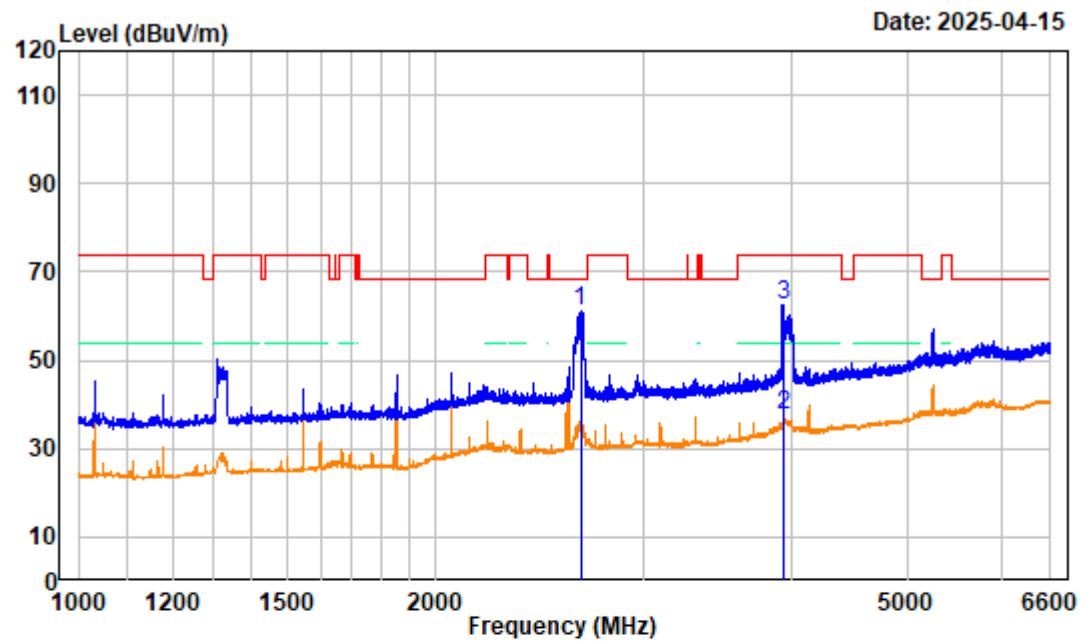


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2650.600	-10.51	71.73	61.22	68.20	-6.98	peak
2	3931.600	-8.22	45.69	37.47	54.00	-16.53	average
3	3931.600	-8.22	70.62	62.40	74.00	-11.60	peak

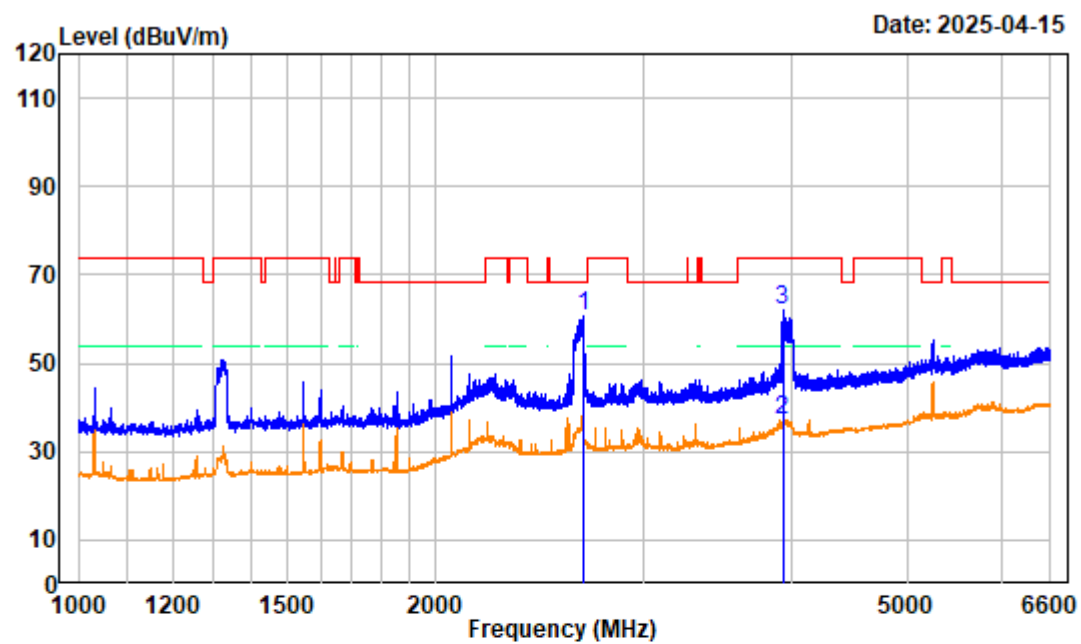


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	70.78	60.52	68.20	-7.68 peak
2	3924.600	-8.15	45.20	37.05	54.00	-16.95 average
3	3924.600	-8.15	70.38	62.23	74.00	-11.77 peak

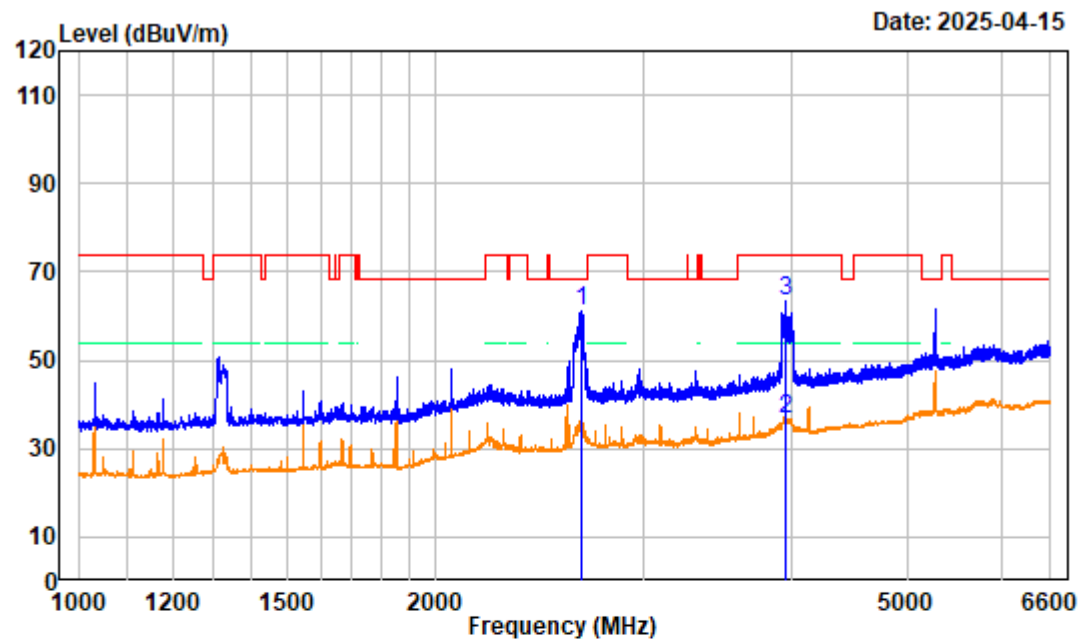


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2656.200	-10.42	71.58	61.16	68.20	-7.04	peak
2	3949.100	-8.38	44.98	36.60	54.00	-17.40	average
3	3949.100	-8.38	71.86	63.48	74.00	-10.52	peak

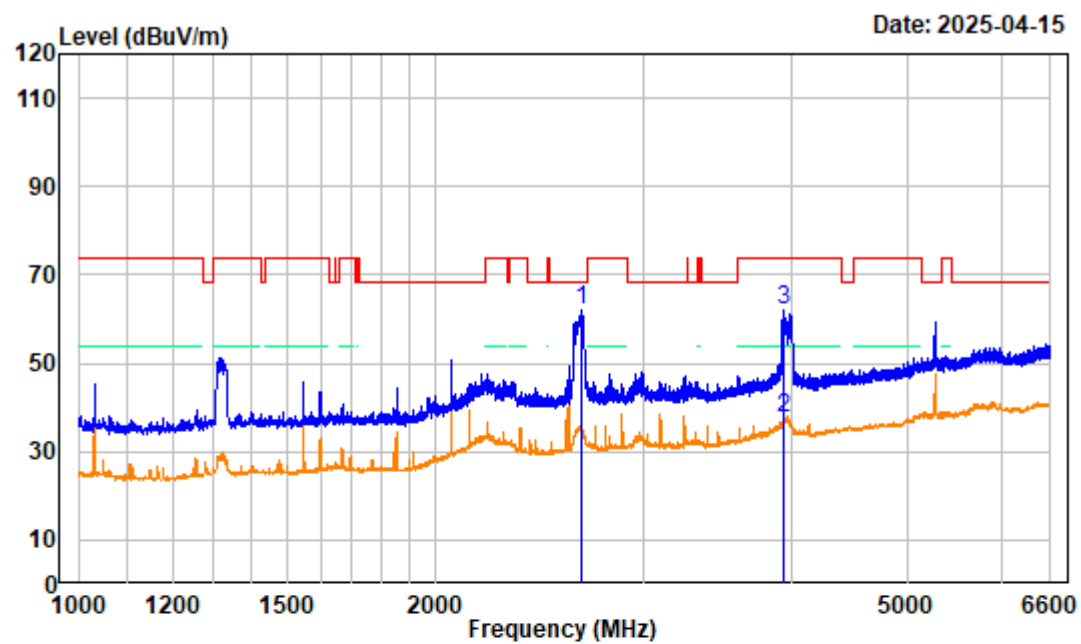


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.000	-10.38	72.23	61.85	68.20	-6.35 peak
2	3935.100	-8.24	45.72	37.48	54.00	-16.52 average
3	3935.100	-8.24	70.49	62.25	74.00	-11.75 peak

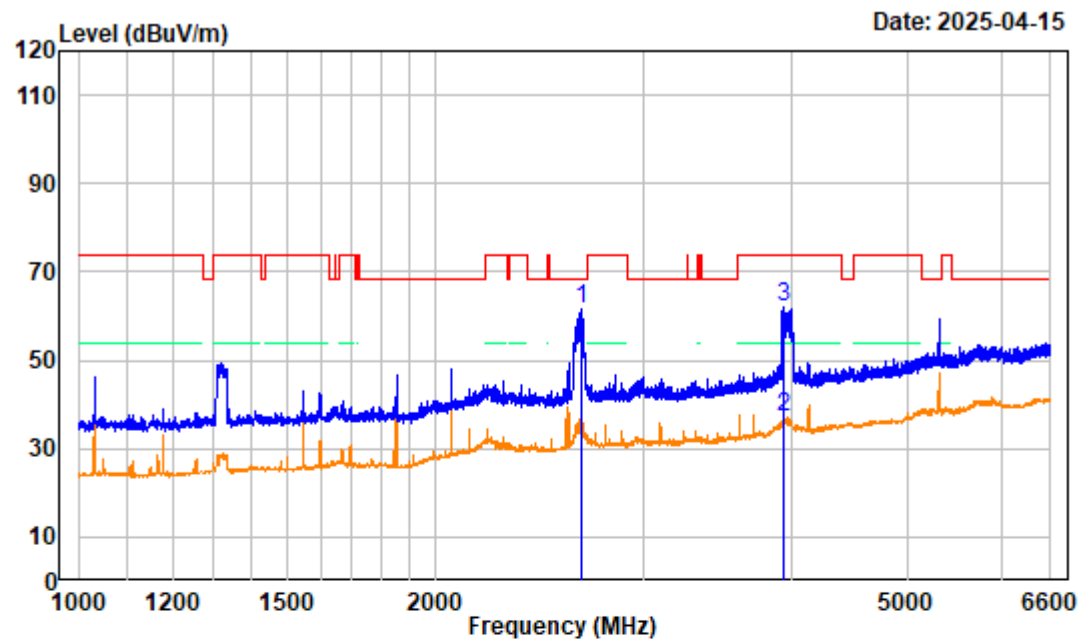


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2656.200	-10.42	72.09	61.67	68.20	-6.53	peak
2	3926.000	-8.16	45.51	37.35	54.00	-16.65	average
3	3926.000	-8.16	70.14	61.98	74.00	-12.02	peak

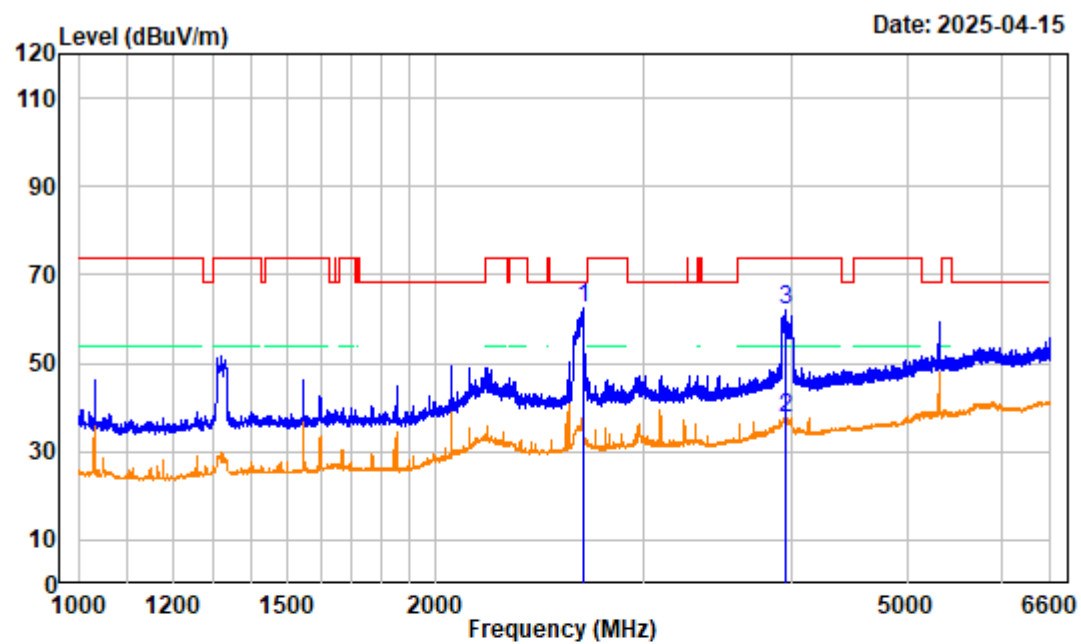


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2666.700	-10.25	72.69	62.44	68.20	-5.76	peak
2 3950.500	-8.39	45.95	37.56	54.00	-16.44	average
3 3950.500	-8.39	70.25	61.86	74.00	-12.14	peak

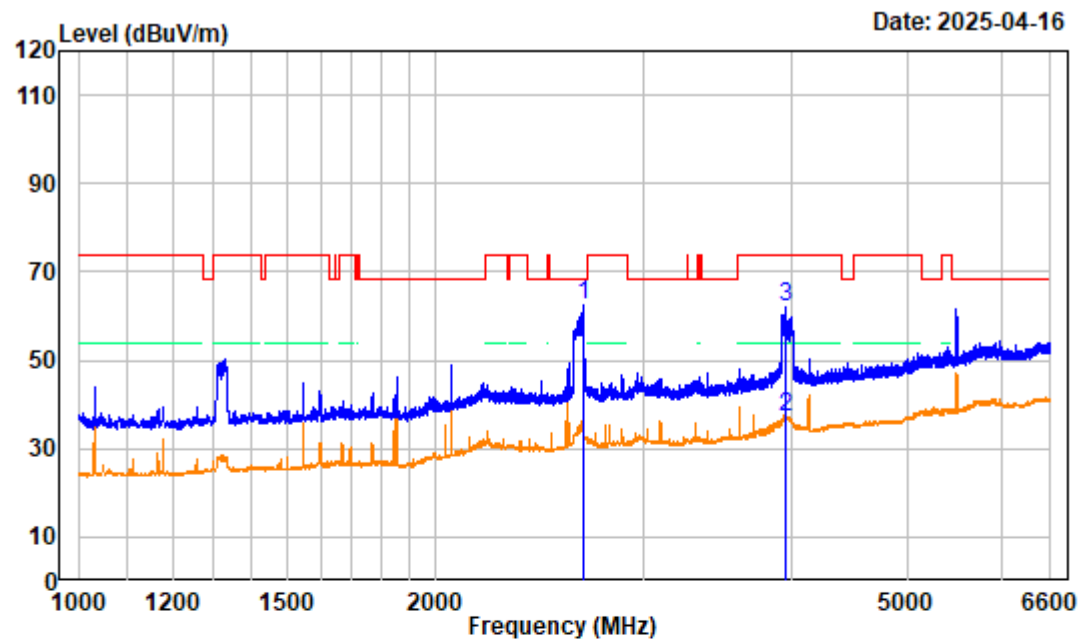


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2664.600	-10.29	72.89	62.60	68.20	-5.60	peak
2	3942.800	-8.32	45.60	37.28	54.00	-16.72	average
3	3942.800	-8.32	70.29	61.97	74.00	-12.03	peak

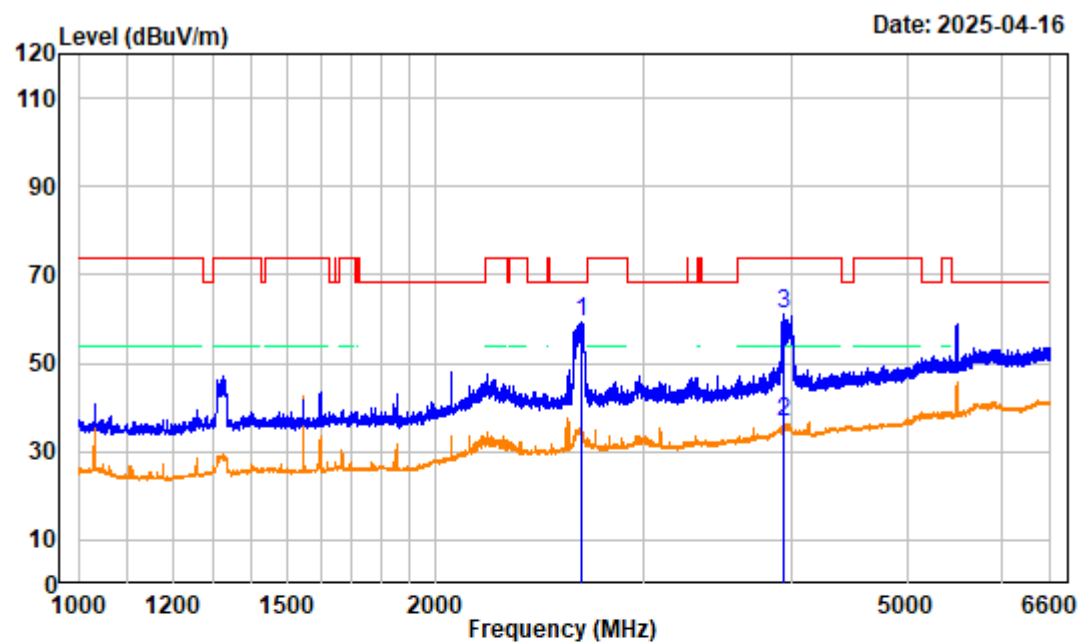


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2657.600	-10.40	69.64	59.24	68.20	-8.96 peak
2	3933.700	-8.23	45.09	36.86	54.00	-17.14 average
3	3933.700	-8.23	69.46	61.23	74.00	-12.77 peak

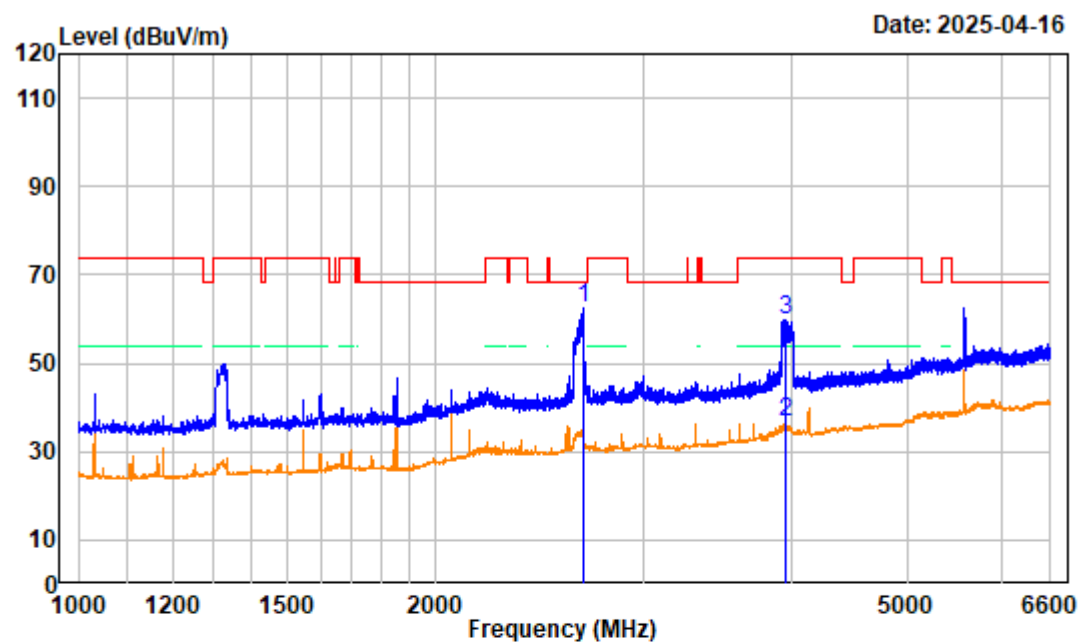


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	72.72	62.46	68.20	-5.74	peak
2	3942.100	-8.31	45.16	36.85	54.00	-17.15	average
3	3942.100	-8.31	68.05	59.74	74.00	-14.26	peak

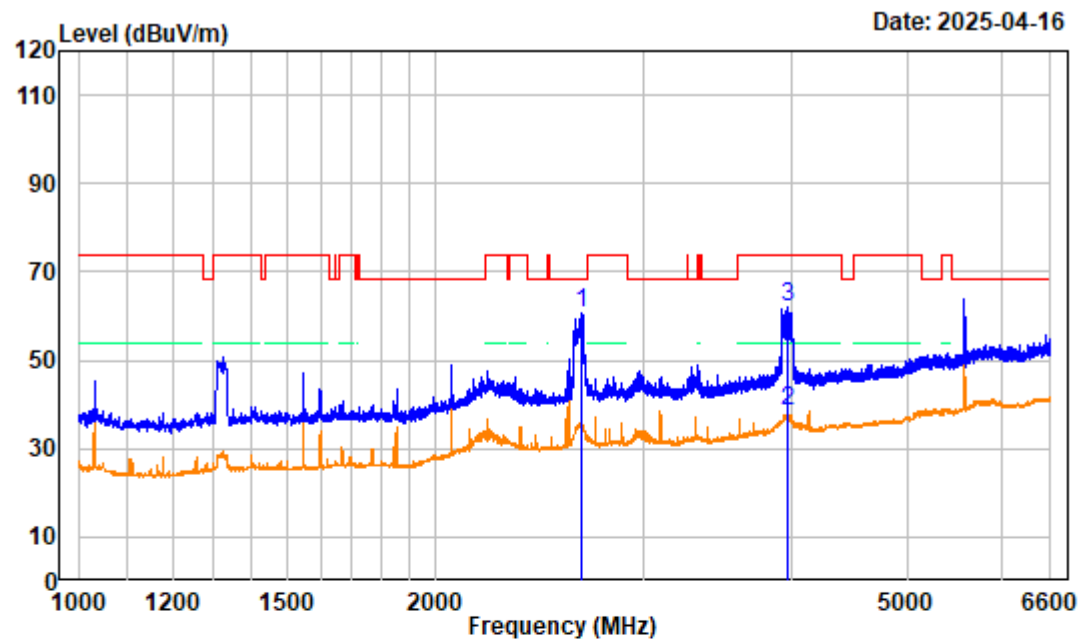


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2653.400	-10.46	70.93	60.47	68.20	-7.73 peak
2	3967.300	-8.30	46.74	38.44	54.00	-15.56 average
3	3967.300	-8.30	70.17	61.87	74.00	-12.13 peak

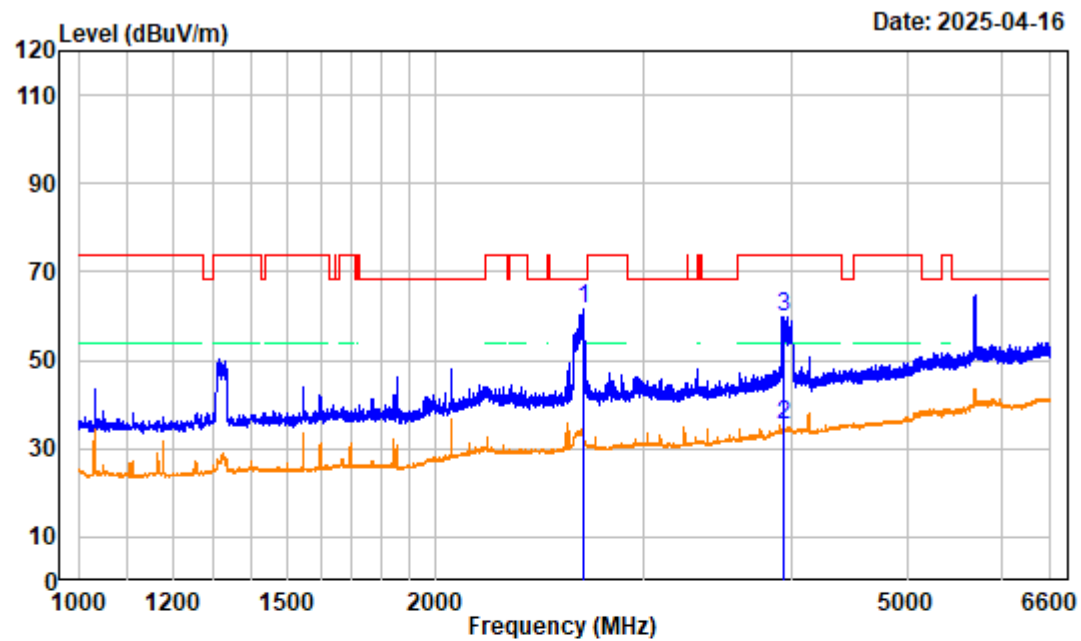


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	71.80	61.49	68.20	-6.71	peak
2	3929.500	-8.19	43.58	35.39	54.00	-18.61	average
3	3929.500	-8.19	67.85	59.66	74.00	-14.34	peak

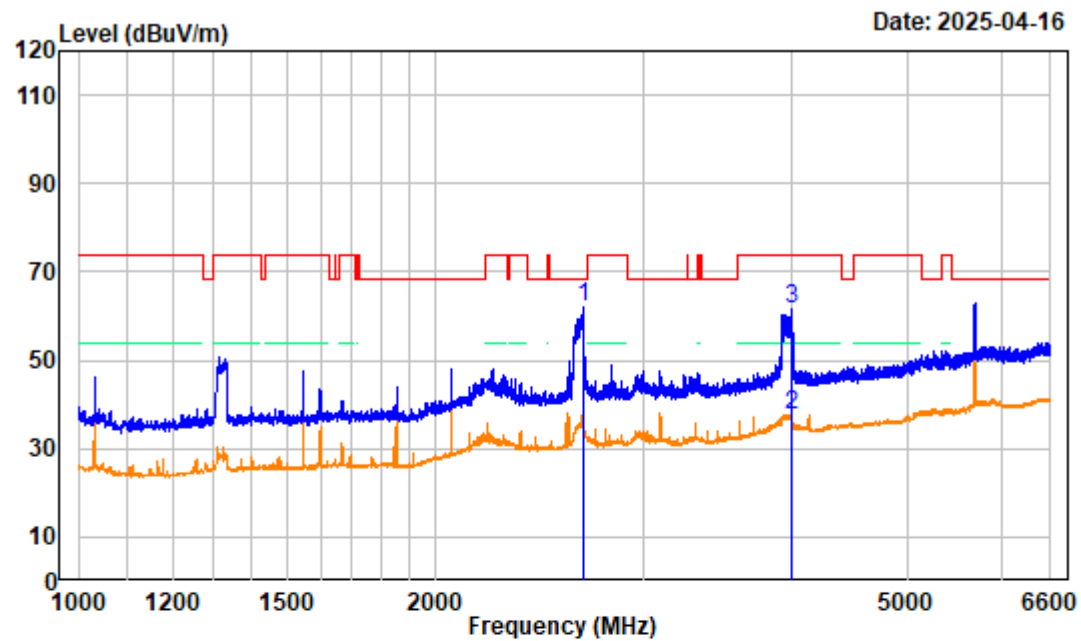


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	72.14	61.88	68.20	-6.32 peak
2	3989.000	-8.18	45.95	37.77	54.00	-16.23 average
3	3989.000	-8.18	69.60	61.42	74.00	-12.58 peak

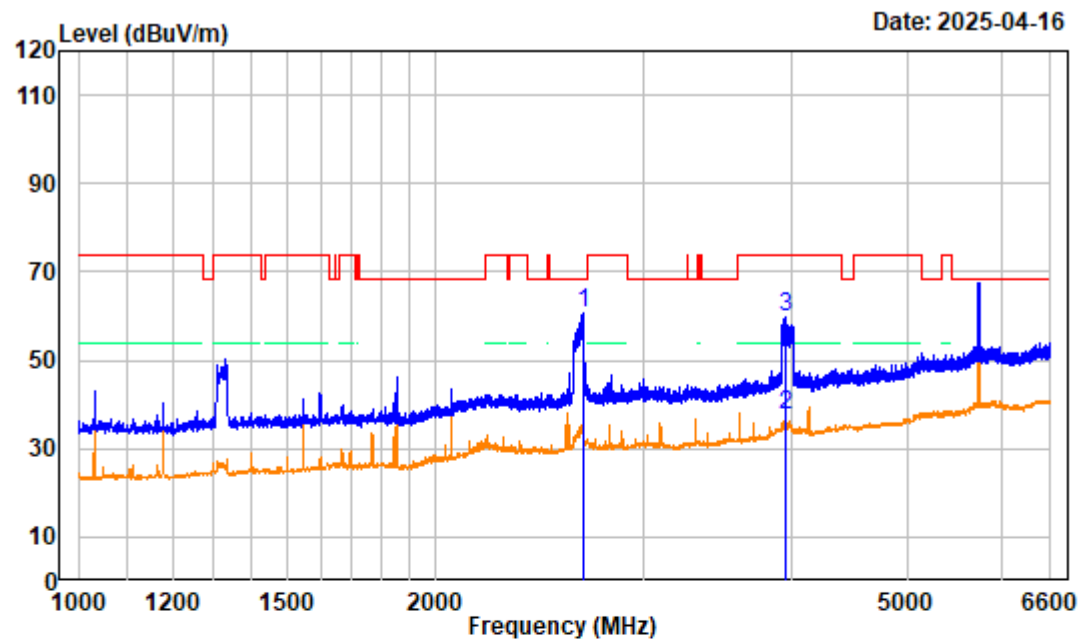


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	71.09	60.79	68.20	-7.41	peak
2	3948.400	-8.37	45.99	37.62	54.00	-16.38	average
3	3948.400	-8.37	68.16	59.79	74.00	-14.21	peak

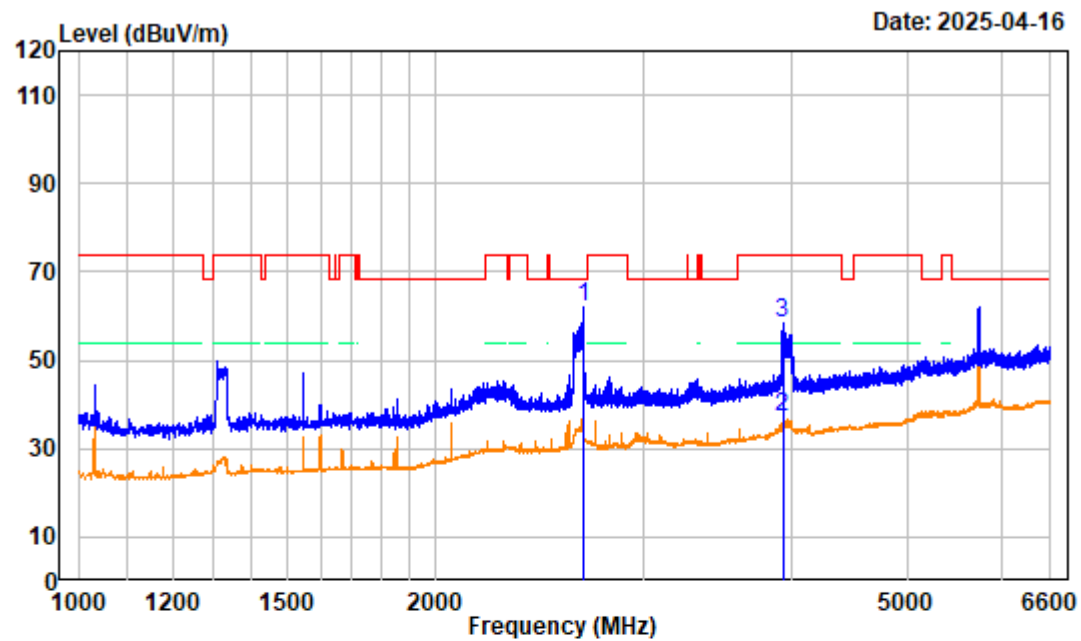


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2665.300	-10.28	72.10	61.82	68.20	-6.38	peak
2	3924.600	-8.15	45.09	36.94	54.00	-17.06	average
3	3924.600	-8.15	66.69	58.54	74.00	-15.46	peak

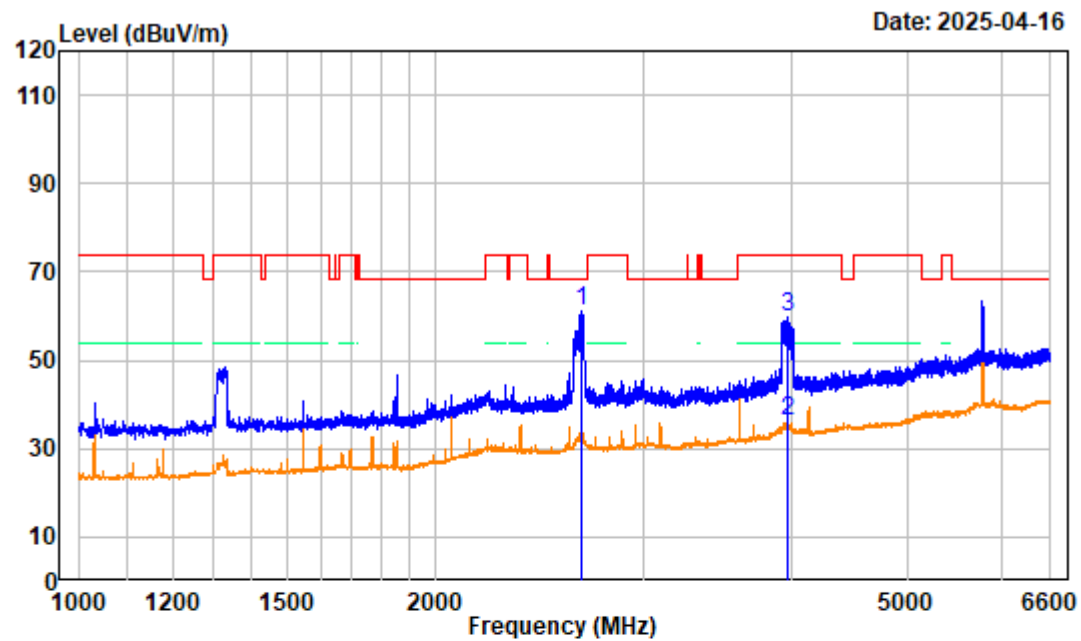


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	71.34	60.95	68.20	-7.25 peak
2	3958.900	-8.34	44.66	36.32	54.00	-17.68 average
3	3958.900	-8.34	68.08	59.74	74.00	-14.26 peak

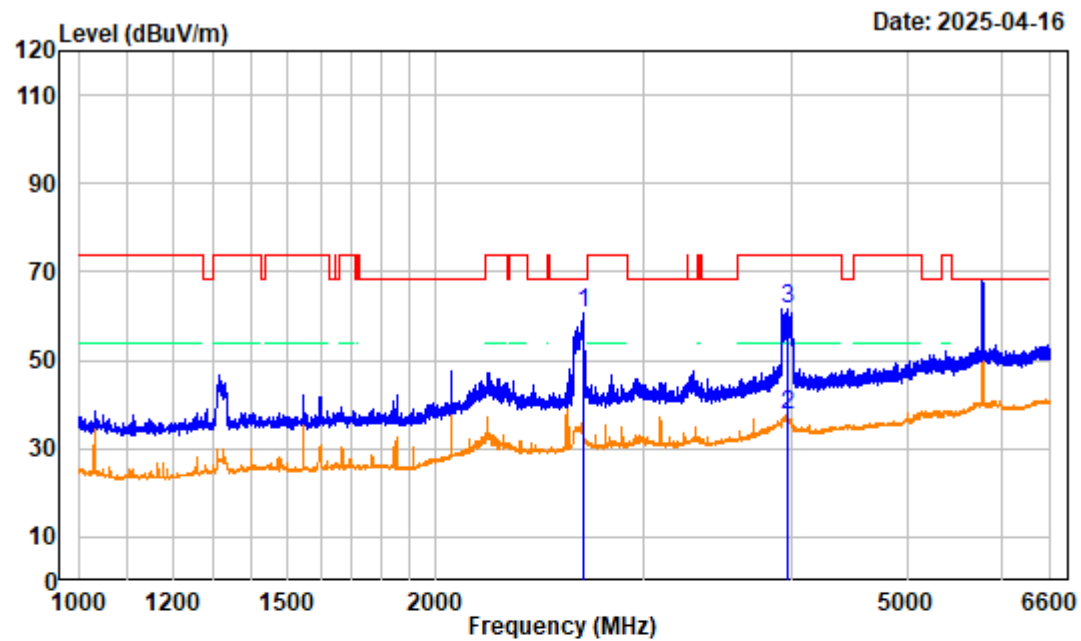


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2664.600	-10.29	70.98	60.69	68.20	-7.51 peak
2	3963.100	-8.32	45.84	37.52	54.00	-16.48 average
3	3963.100	-8.32	70.05	61.73	74.00	-12.27 peak

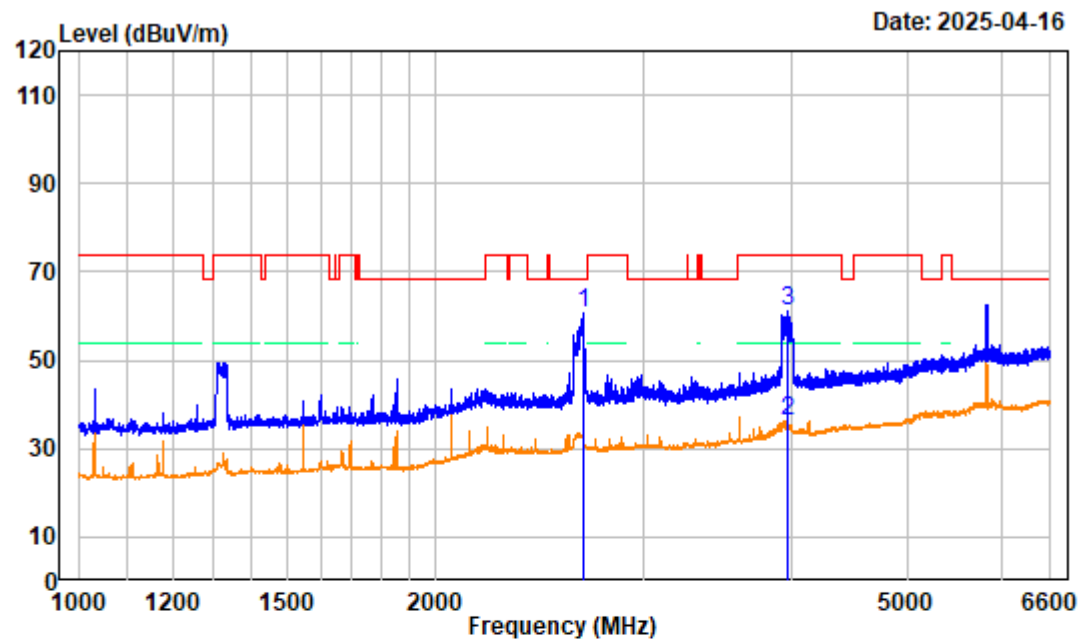

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	70.88	60.62	68.20	-7.58 peak
2	3961.000	-8.32	44.74	36.42	54.00	-17.58 average
3	3961.000	-8.32	69.65	61.33	74.00	-12.67 peak

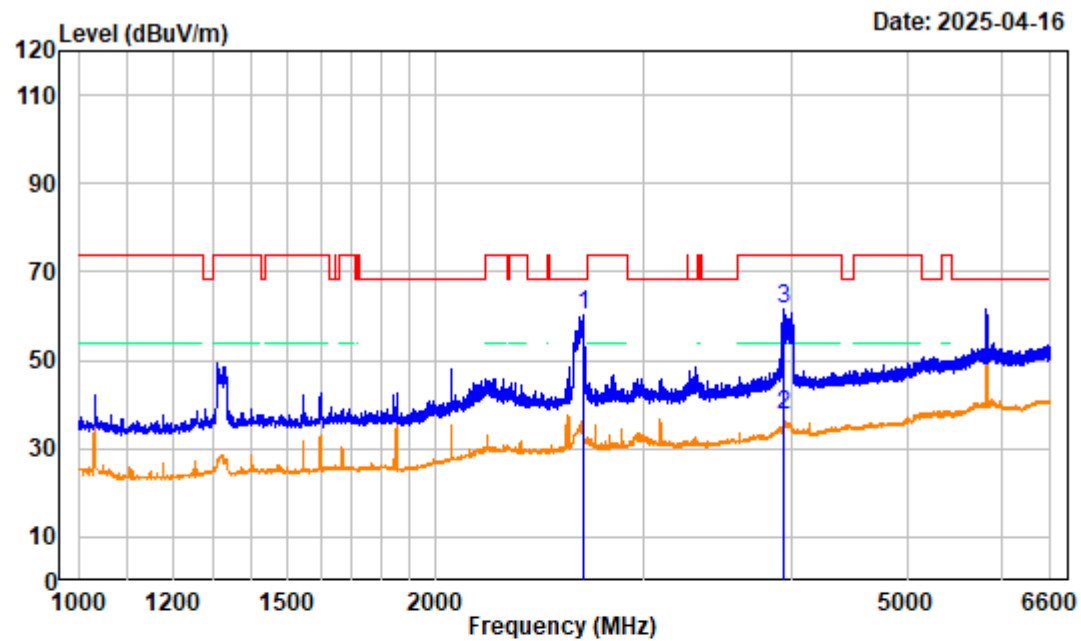

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2664.600	-10.29	70.52	60.23	68.20	-7.97 peak
2	3935.800	-8.25	45.91	37.66	54.00	-16.34 average
3	3935.800	-8.25	69.97	61.72	74.00	-12.28 peak

1GHz~6.6GHz802.11n20:

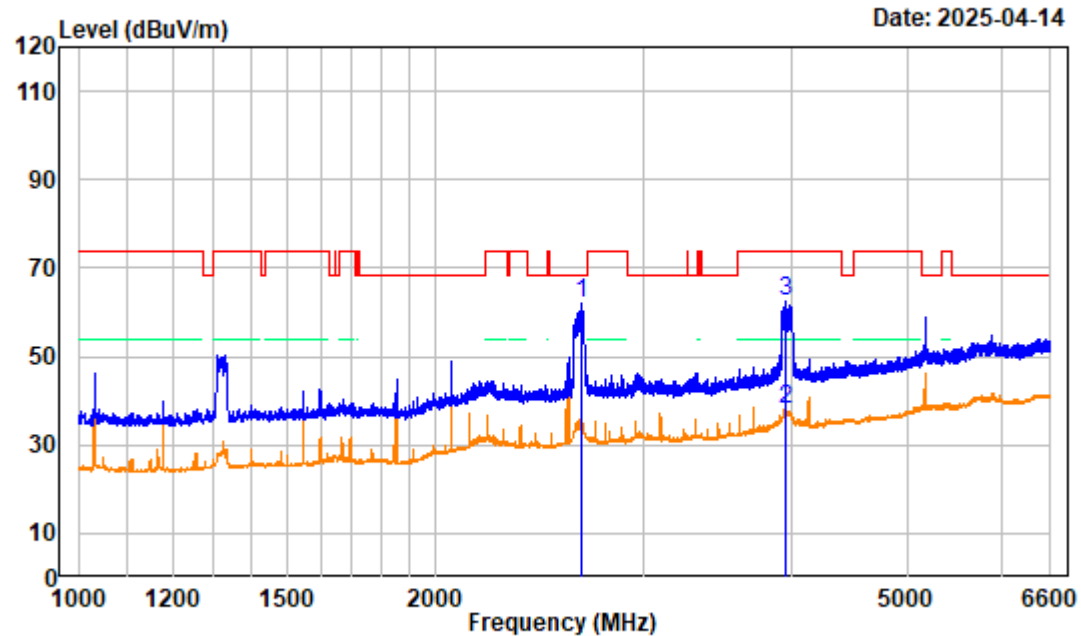


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2651.300	-10.50	72.50	62.00	68.20	-6.20	Peak
2	3953.300	-8.37	46.50	38.13	54.00	-15.87	average
3	3953.300	-8.37	70.77	62.40	74.00	-11.60	peak

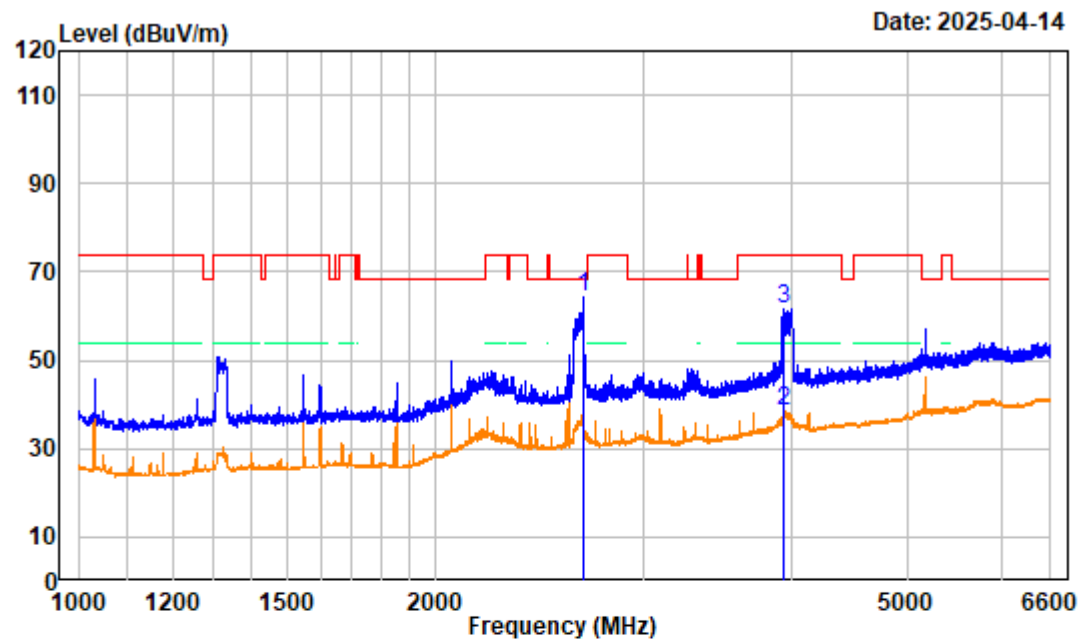


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	74.63	64.38	68.20	-3.82	Peak
2	3935.100	-8.24	46.92	38.68	54.00	-15.32	average
3	3935.100	-8.24	69.92	61.68	74.00	-12.32	peak

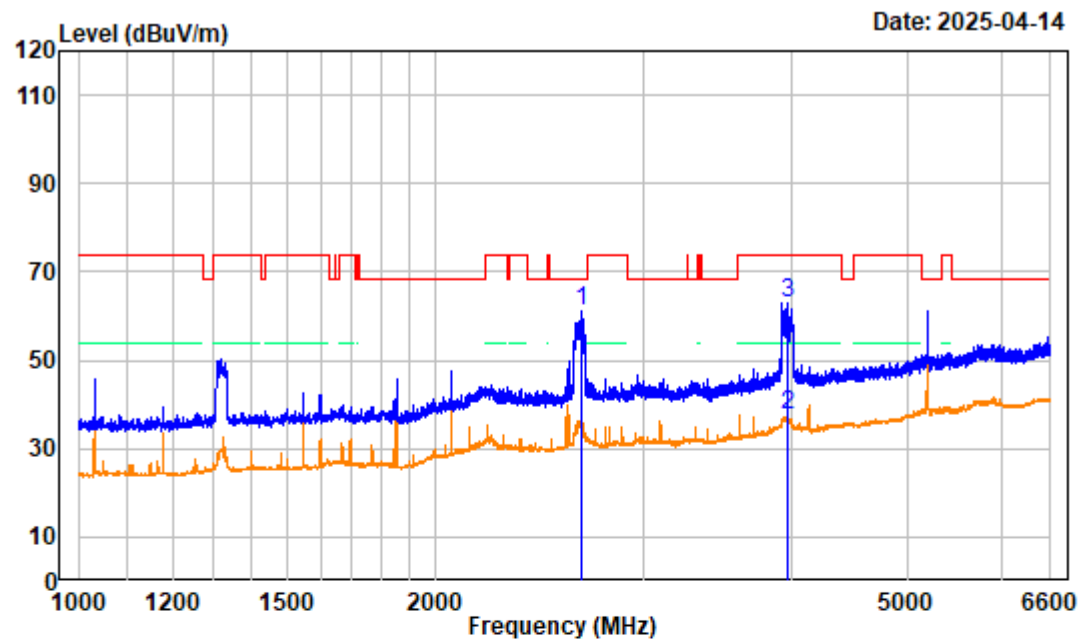


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.700	-10.48	71.44	60.96	68.20	-7.24 Peak
2	3968.000	-8.29	45.81	37.52	54.00	-16.48 average
3	3968.000	-8.29	71.44	63.15	74.00	-10.85 peak

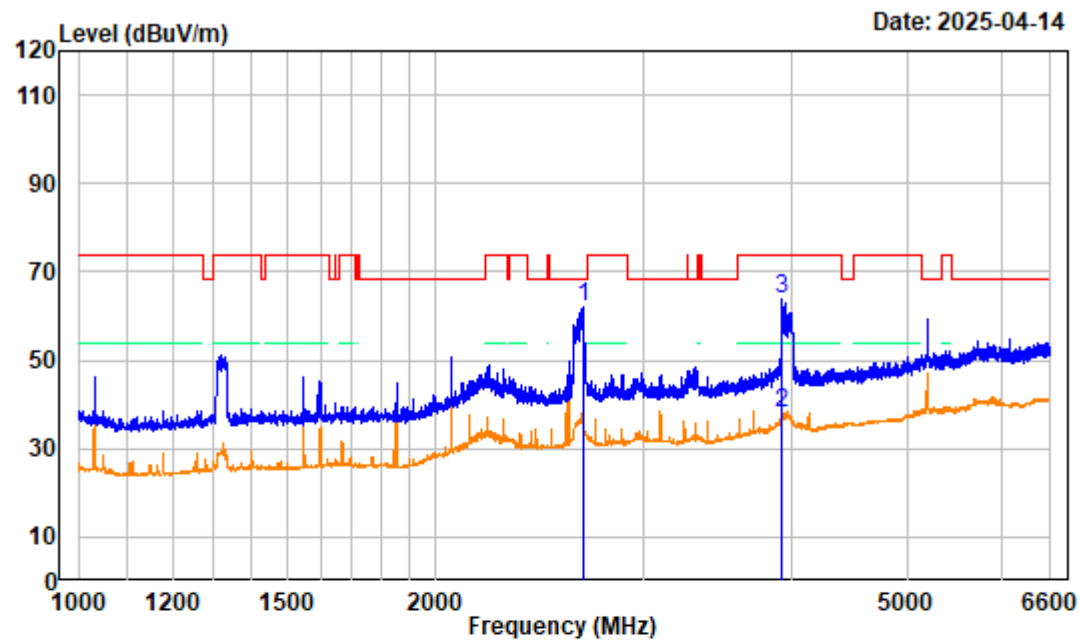


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	72.52	62.26	68.20	-5.94 Peak
2	3921.100	-8.12	46.10	37.98	54.00	-16.02 average
3	3921.100	-8.12	72.04	63.92	74.00	-10.08 peak

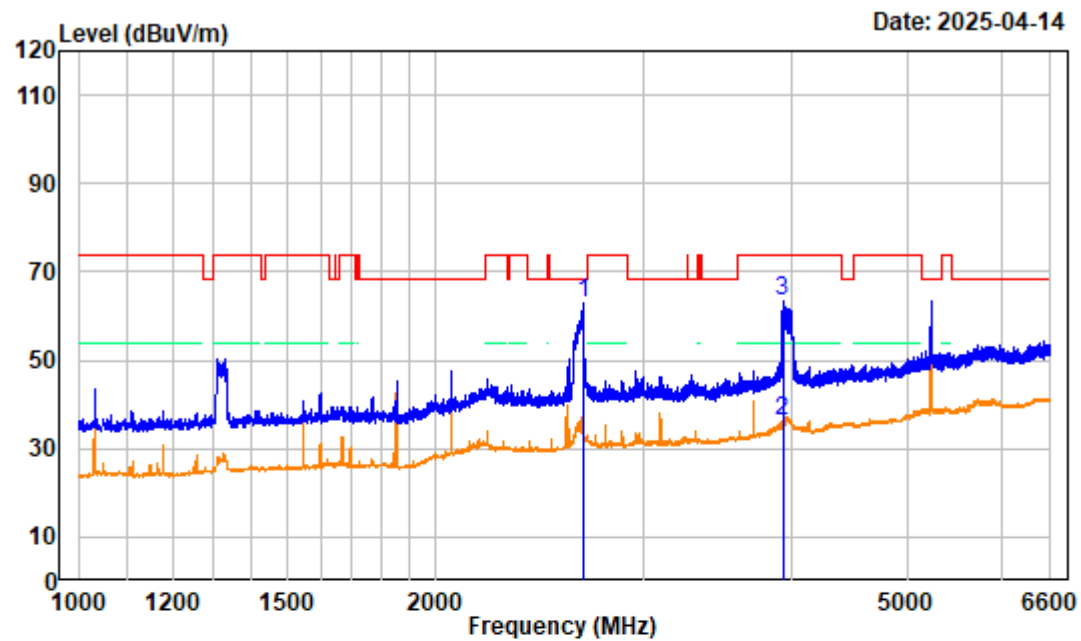


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2662.500	-10.32	73.12	62.80	68.20	-5.40	Peak
2	3924.600	-8.15	44.33	36.18	54.00	-17.82	average
3	3924.600	-8.15	71.54	63.39	74.00	-10.61	peak

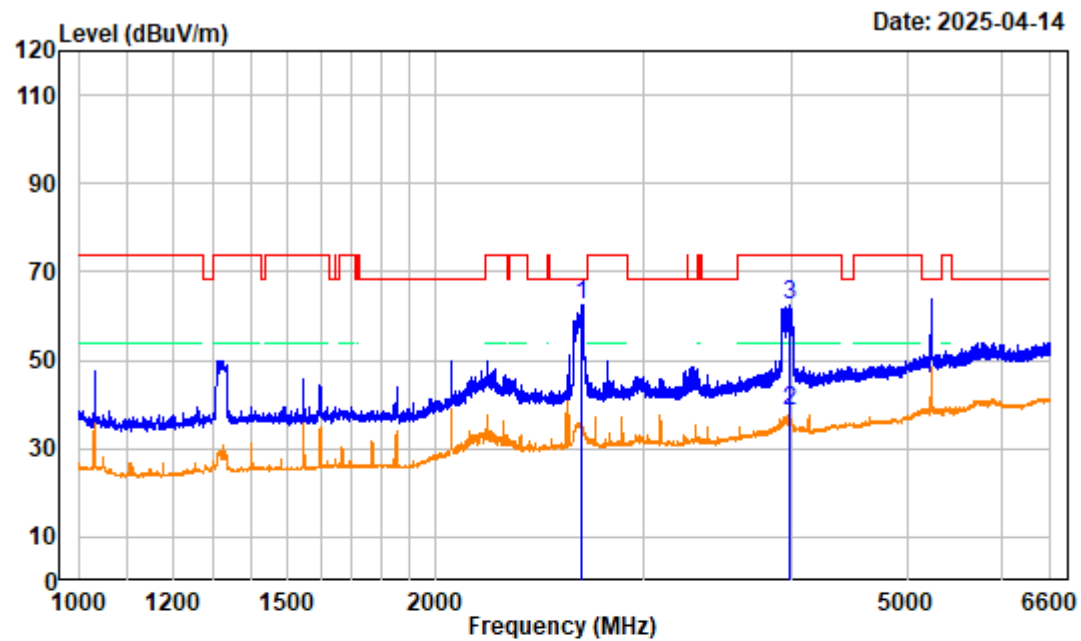


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2653.400	-10.46	73.15	62.69	68.20	-5.51 Peak
2	3971.500	-8.27	46.56	38.29	54.00	-15.71 average
3	3971.500	-8.27	70.73	62.46	74.00	-11.54 peak

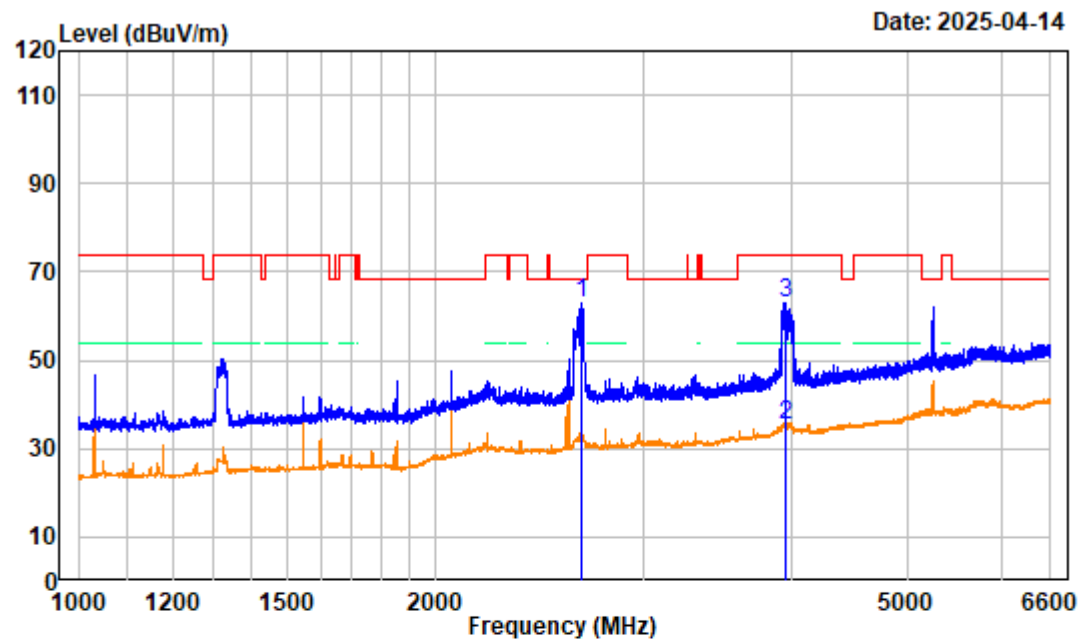


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2660.400	-10.35	73.16	62.81	68.20	-5.39	peak
2	3944.900	-8.34	43.74	35.40	54.00	-18.60	average
3	3944.900	-8.34	71.28	62.94	74.00	-11.06	peak

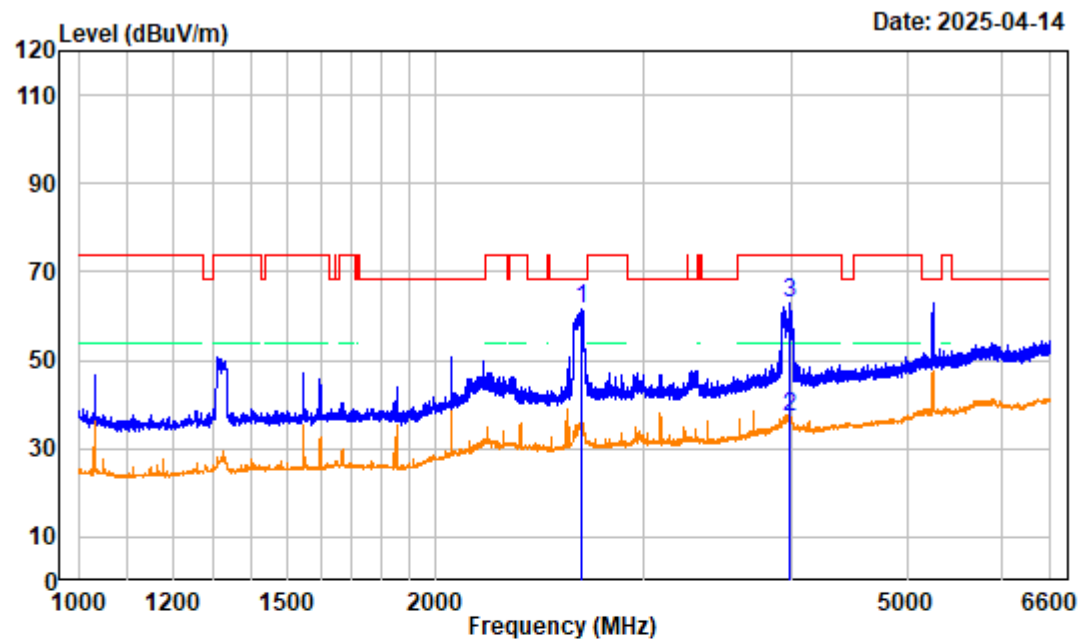


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	71.94	61.55	68.20	-6.65 peak
2	3971.500	-8.27	45.45	37.18	54.00	-16.82 average
3	3971.500	-8.27	71.09	62.82	74.00	-11.18 peak

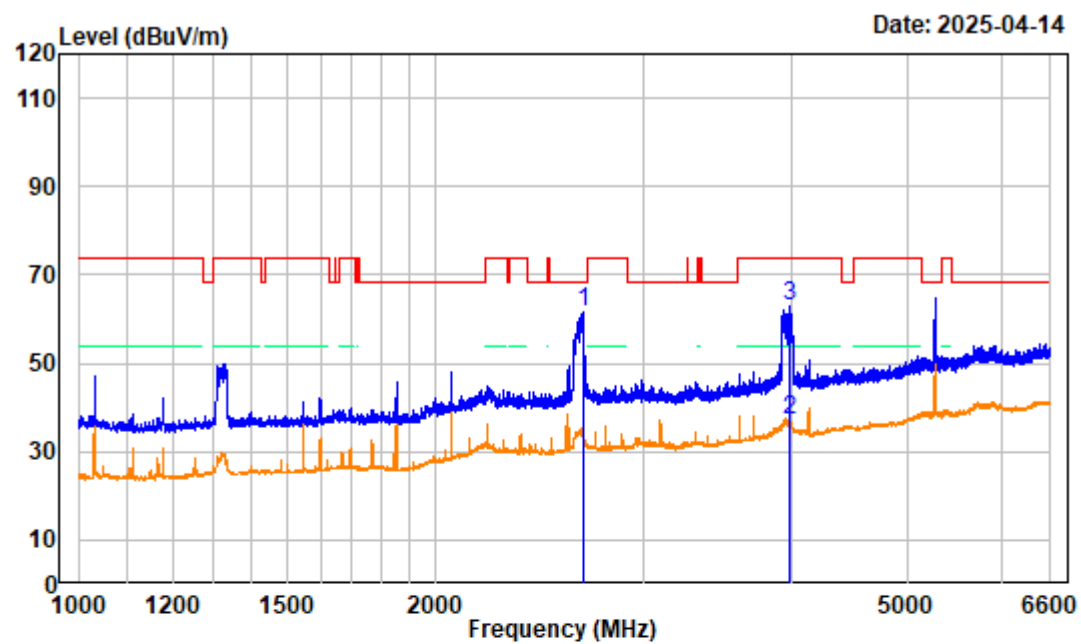


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	71.98	61.72	68.20	-6.48 peak
2	3980.600	-8.22	45.34	37.12	54.00	-16.88 average
3	3980.600	-8.22	71.08	62.86	74.00	-11.14 peak

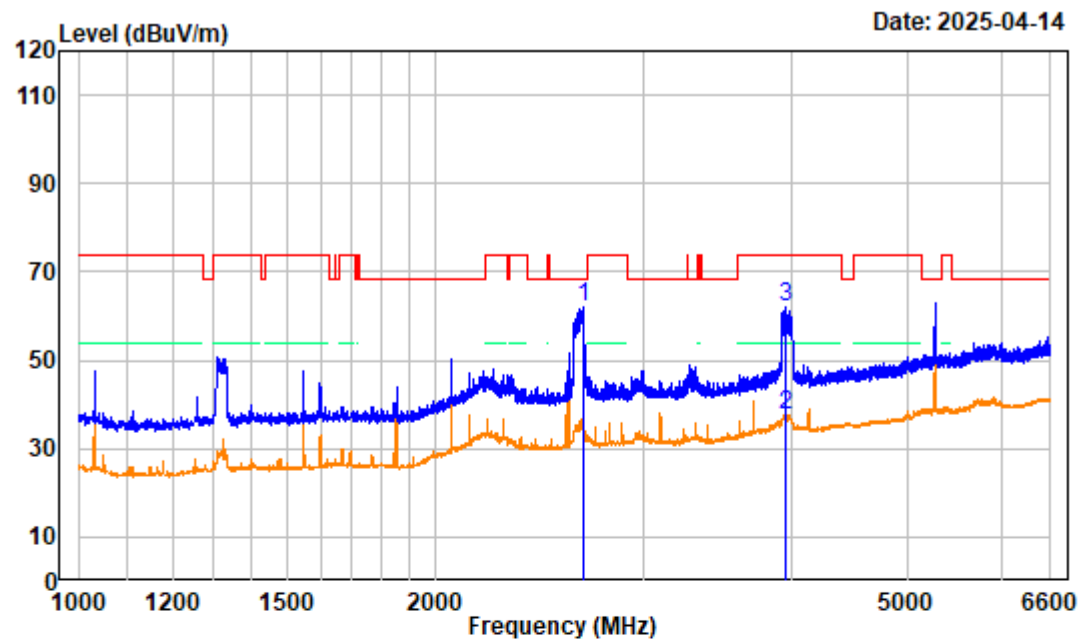


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2662.500	-10.32	72.21	61.89	68.20	-6.31	peak
2 3951.900	-8.38	45.90	37.52	54.00	-16.48	average
3 3951.900	-8.38	70.20	61.82	74.00	-12.18	peak

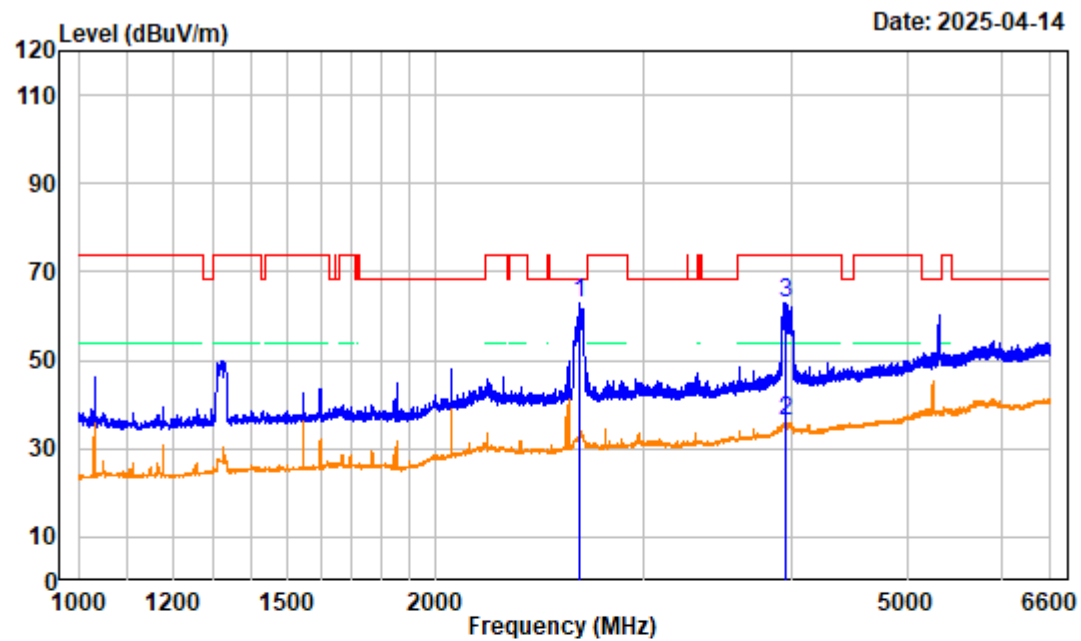


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2649.900	-10.52	73.43	62.91	68.20	-5.29	peak
2	3954.700	-8.36	44.62	36.26	54.00	-17.74	average
3	3954.700	-8.36	71.24	62.88	74.00	-11.12	peak

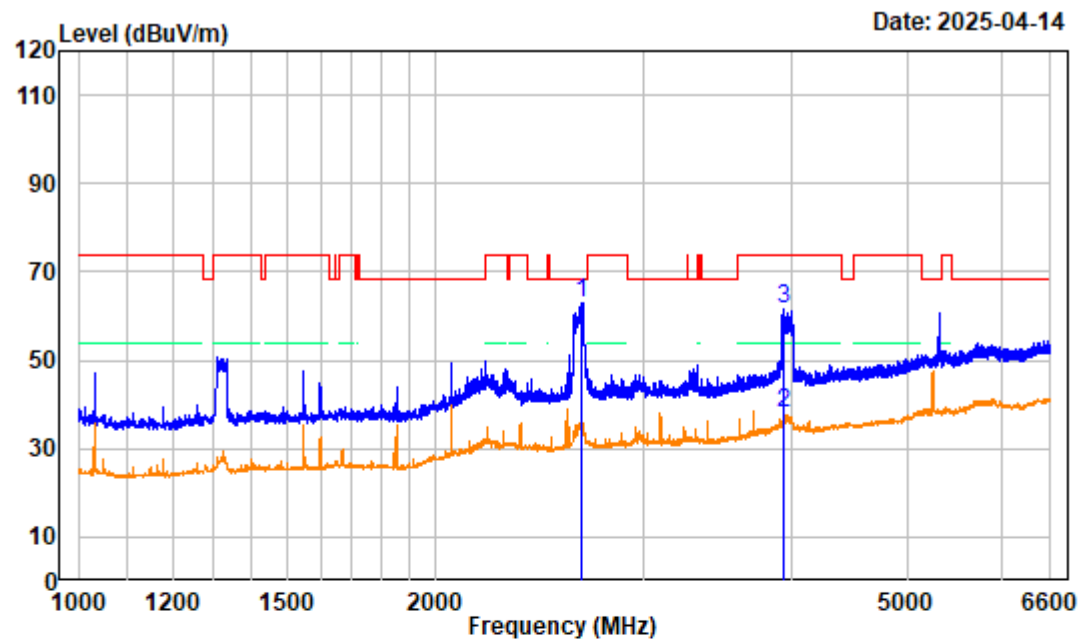


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2656.900	-10.41	73.21	62.80	68.20	-5.40	peak
2	3939.300	-8.29	46.17	37.88	54.00	-16.12	average
3	3939.300	-8.29	69.79	61.50	74.00	-12.50	peak

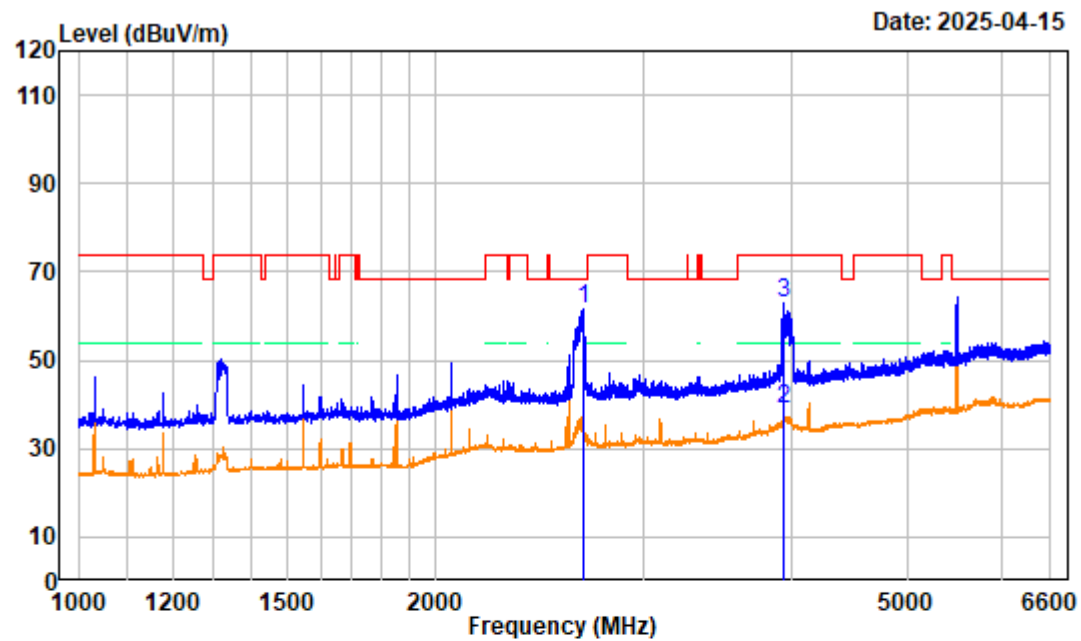


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	72.04	61.74	68.20	-6.46 peak
2	3933.700	-8.23	47.16	38.93	54.00	-15.07 average
3	3933.700	-8.23	71.34	63.11	74.00	-10.89 peak

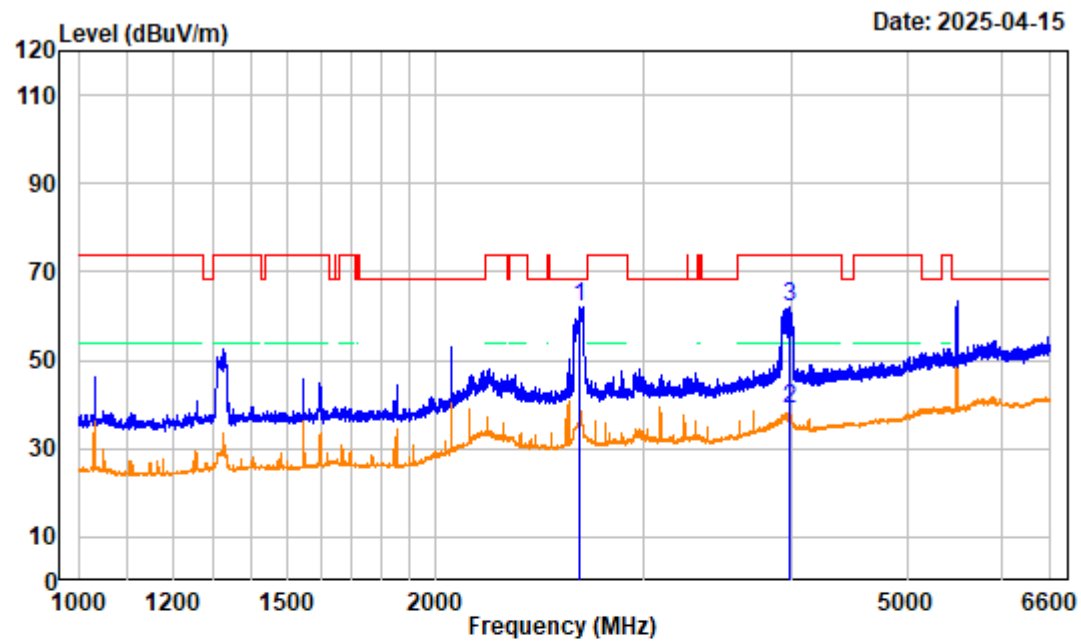


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2644.300	-10.44	72.45	62.01	68.20	-6.19	peak
2	3984.100	-8.20	46.92	38.72	54.00	-15.28	average
3	3984.100	-8.20	70.32	62.12	74.00	-11.88	peak

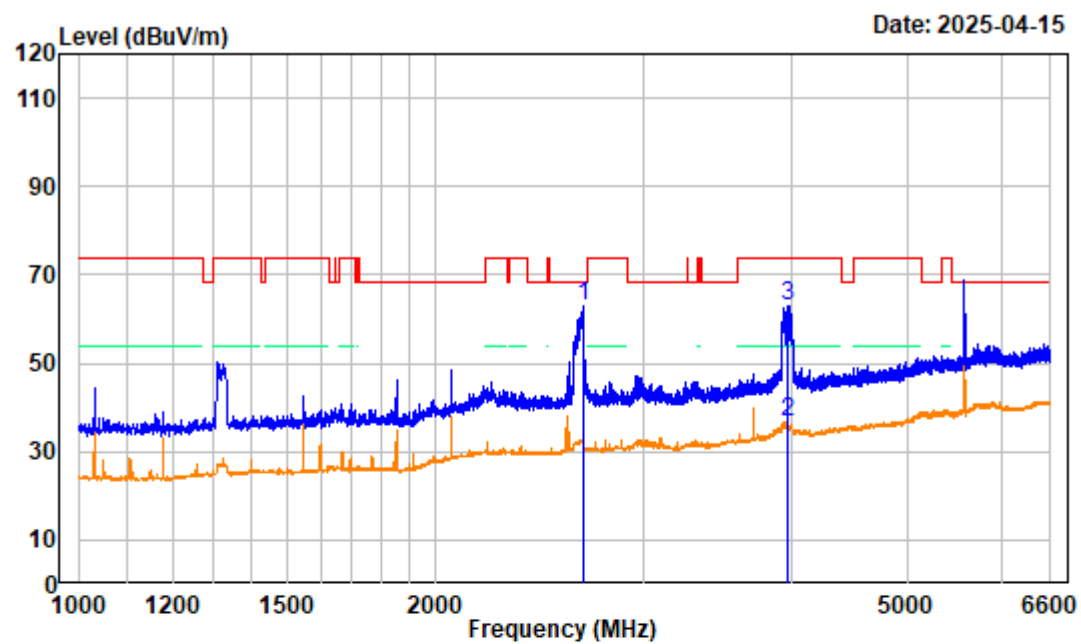


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	73.46	63.16	68.20	-5.04	peak
2	3965.900	-8.30	44.91	36.61	54.00	-17.39	average
3	3965.900	-8.30	71.26	62.96	74.00	-11.04	peak

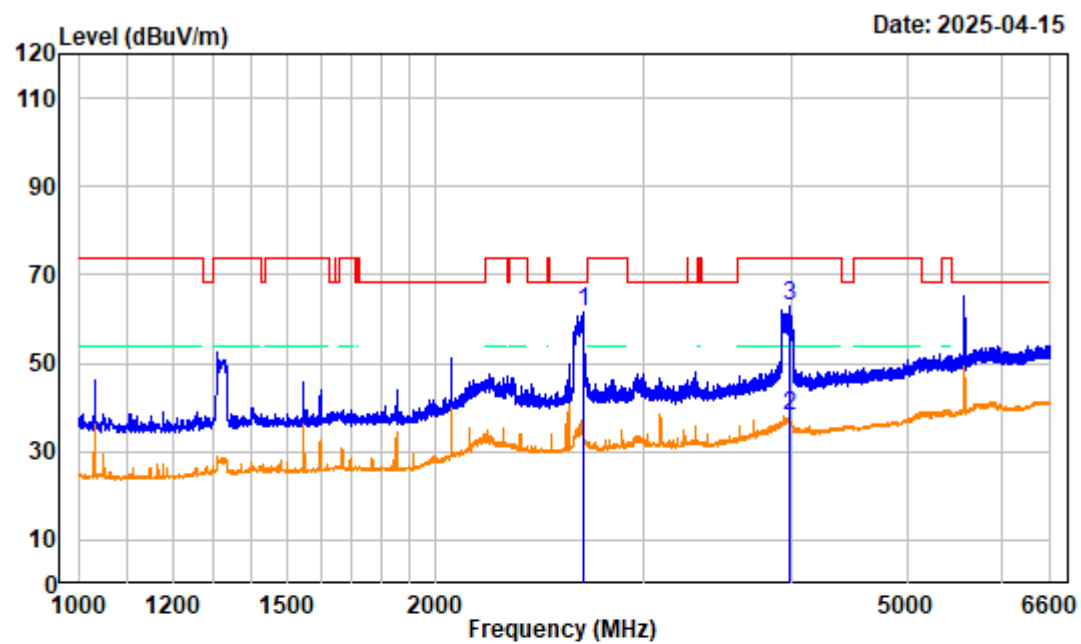


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	71.68	61.42	68.20	-6.78 peak
2	3972.200	-8.27	46.22	37.95	54.00	-16.05 average
3	3972.200	-8.27	71.18	62.91	74.00	-11.09 peak

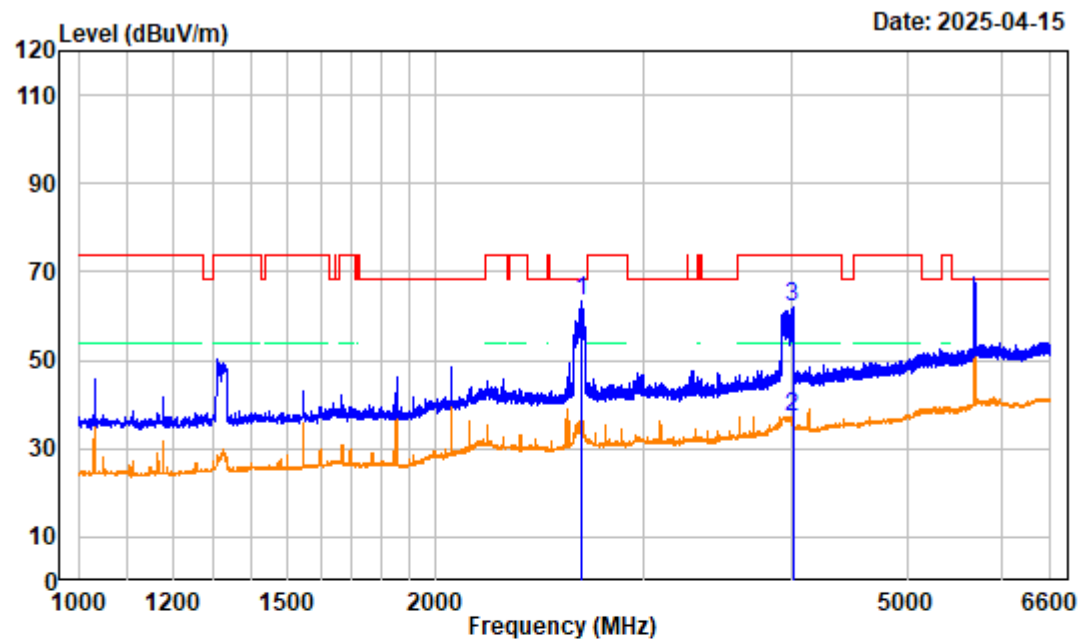


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.100	-10.45	73.86	63.41	68.20	-4.79	peak
2	4001.600	-8.10	45.26	37.16	54.00	-16.84	average
3	4001.600	-8.10	70.07	61.97	74.00	-12.03	peak

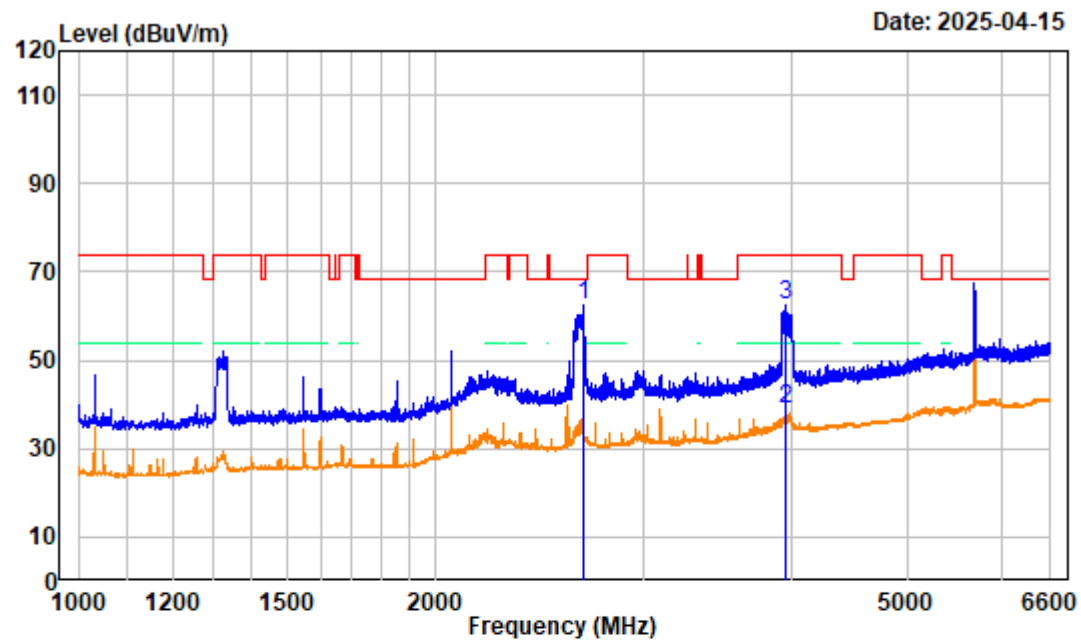


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	72.85	62.60	68.20	-5.60 peak
2	3949.100	-8.38	47.16	38.78	54.00	-15.22 average
3	3949.100	-8.38	70.65	62.27	74.00	-11.73 peak

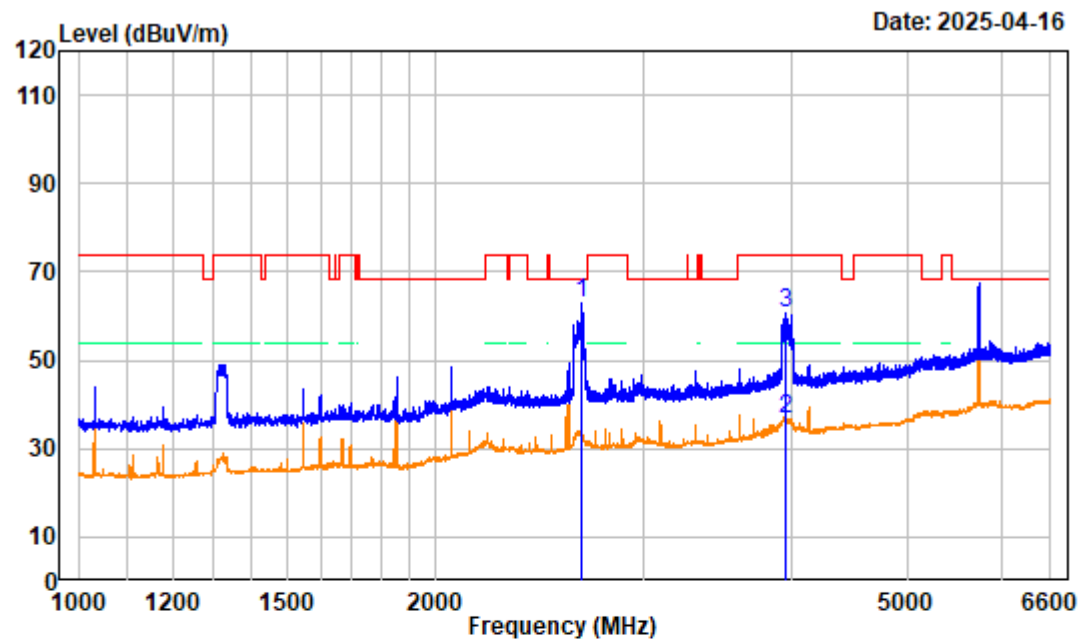


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.700	-10.36	73.34	62.98	68.20	-5.22	peak
2	3954.000	-8.37	45.20	36.83	54.00	-17.17	average
3	3954.000	-8.37	69.15	60.78	74.00	-13.22	peak

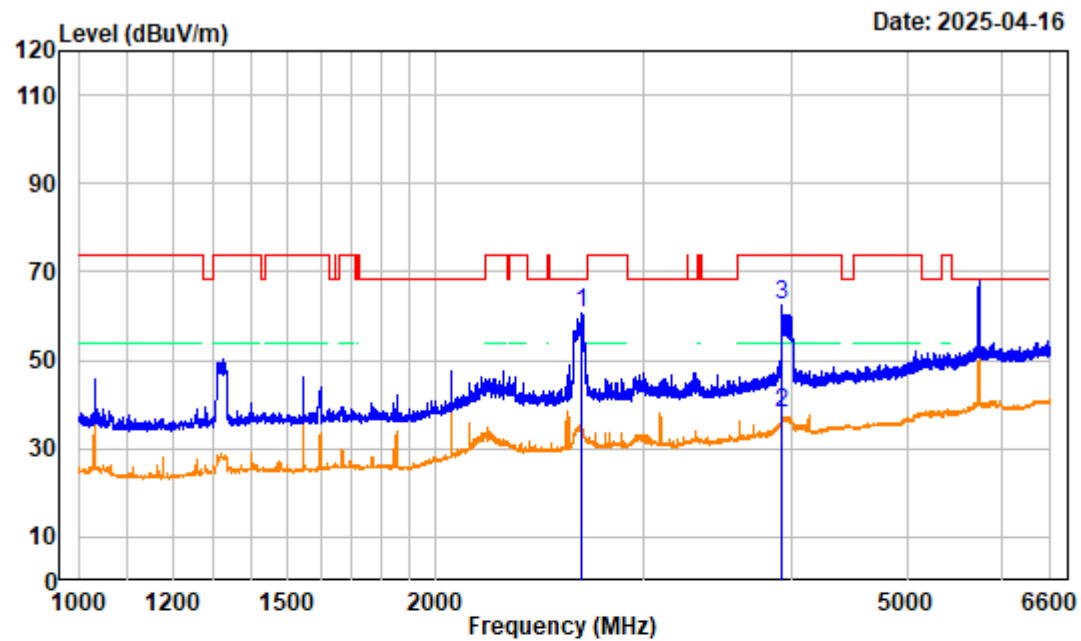


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	71.16	60.77	68.20	-7.43	peak
2	3922.500	-8.12	45.97	37.85	54.00	-16.15	average
3	3922.500	-8.12	70.62	62.50	74.00	-11.50	peak

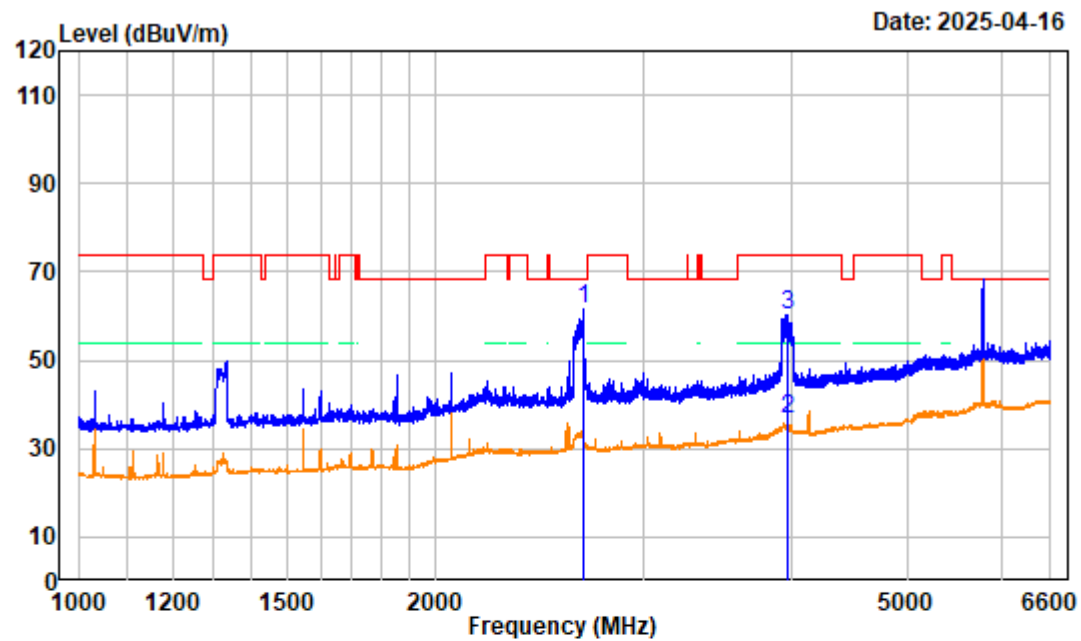


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	71.65	61.40	68.20	-6.80 peak
2	3968.700	-8.29	44.94	36.65	54.00	-17.35 average
3	3968.700	-8.29	68.55	60.26	74.00	-13.74 peak

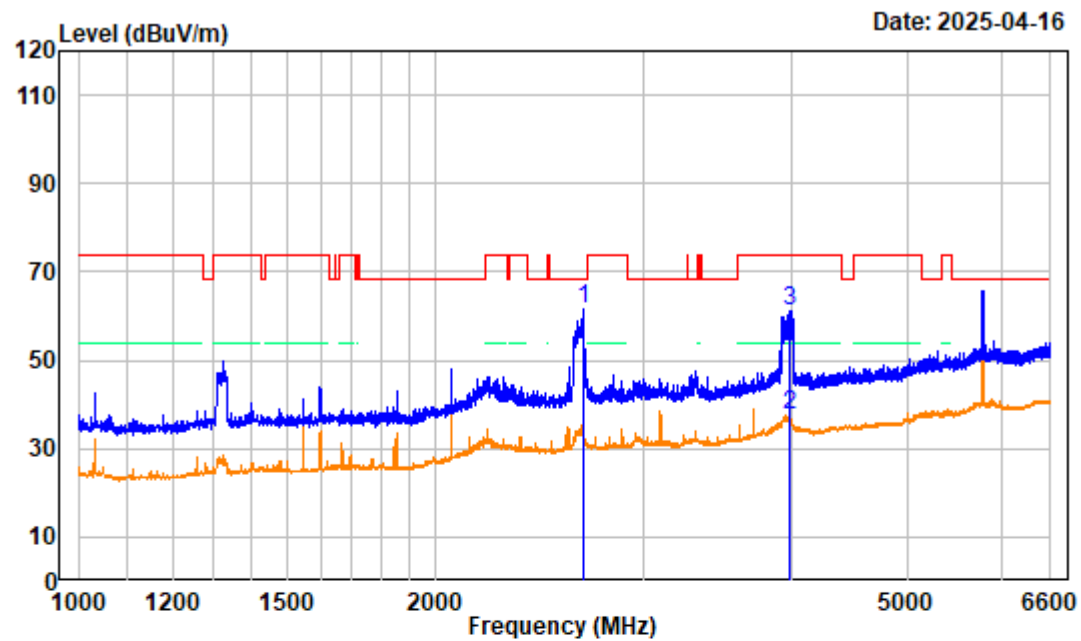


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2667.400	-10.24	71.64	61.40	68.20	-6.80 peak
2	3983.400	-8.20	45.75	37.55	54.00	-16.45 average
3	3983.400	-8.20	69.29	61.09	74.00	-12.91 peak

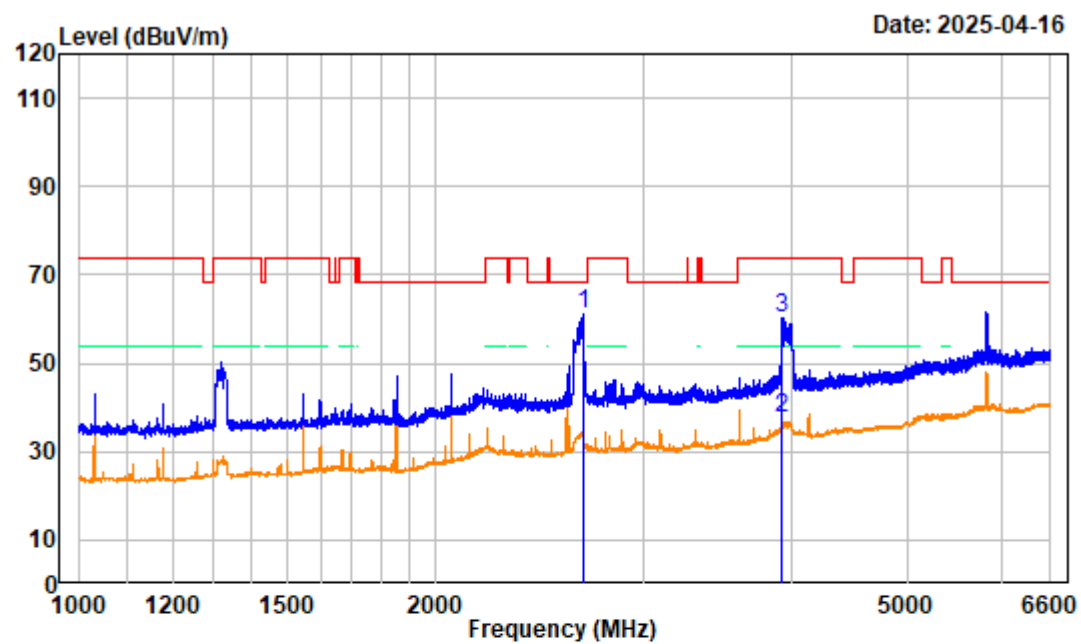

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	71.45	61.15	68.20	-7.05 peak
2	3921.100	-8.12	45.51	37.39	54.00	-16.61 average
3	3921.100	-8.12	68.45	60.33	74.00	-13.67 peak

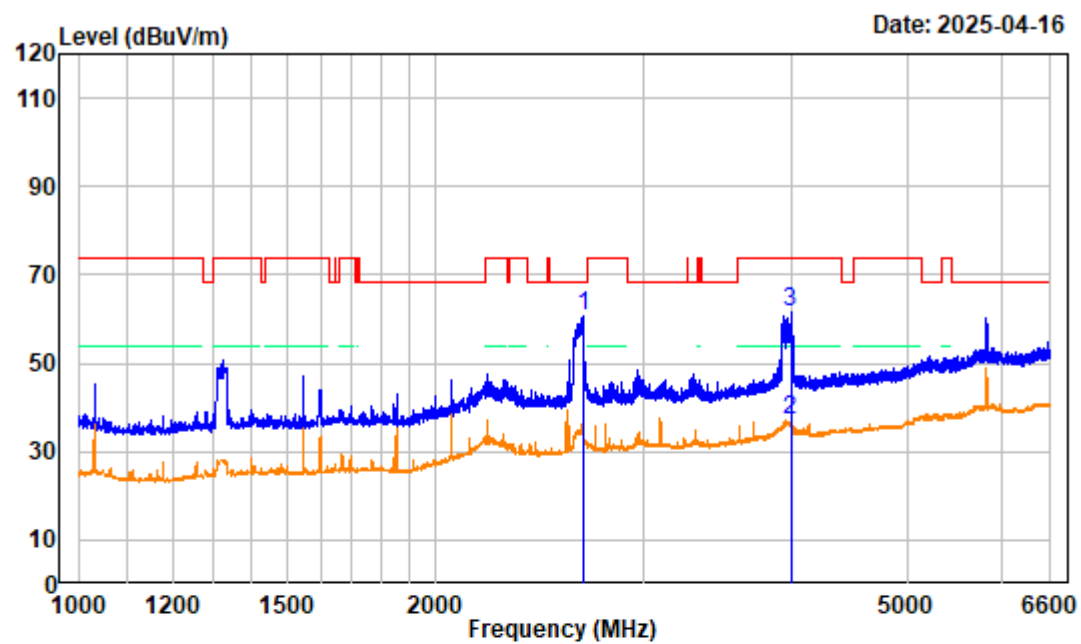

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2665.300	-10.28	71.17	60.89	68.20	-7.31	peak
2	3986.200	-8.18	45.29	37.11	54.00	-16.89	average
3	3986.200	-8.18	69.68	61.50	74.00	-12.50	peak

1GHz~6.6GHz 802.11n40:

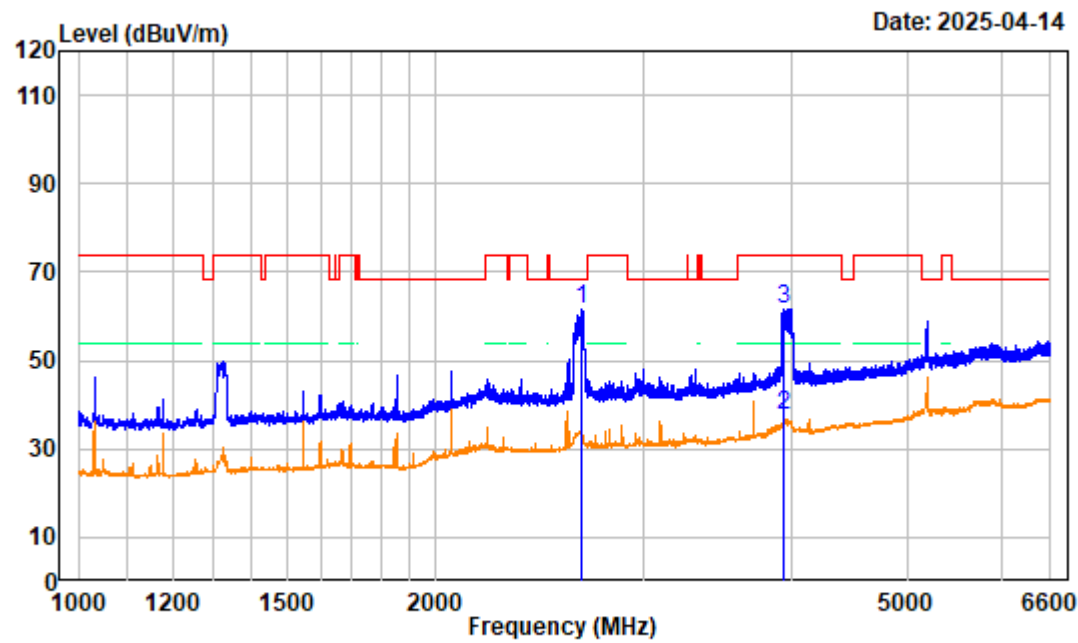


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2653.400	-10.46	72.19	61.73	68.20	-6.47 Peak
2	3935.100	-8.24	46.03	37.79	54.00	-16.21 average
3	3935.100	-8.24	70.05	61.81	74.00	-12.19 peak

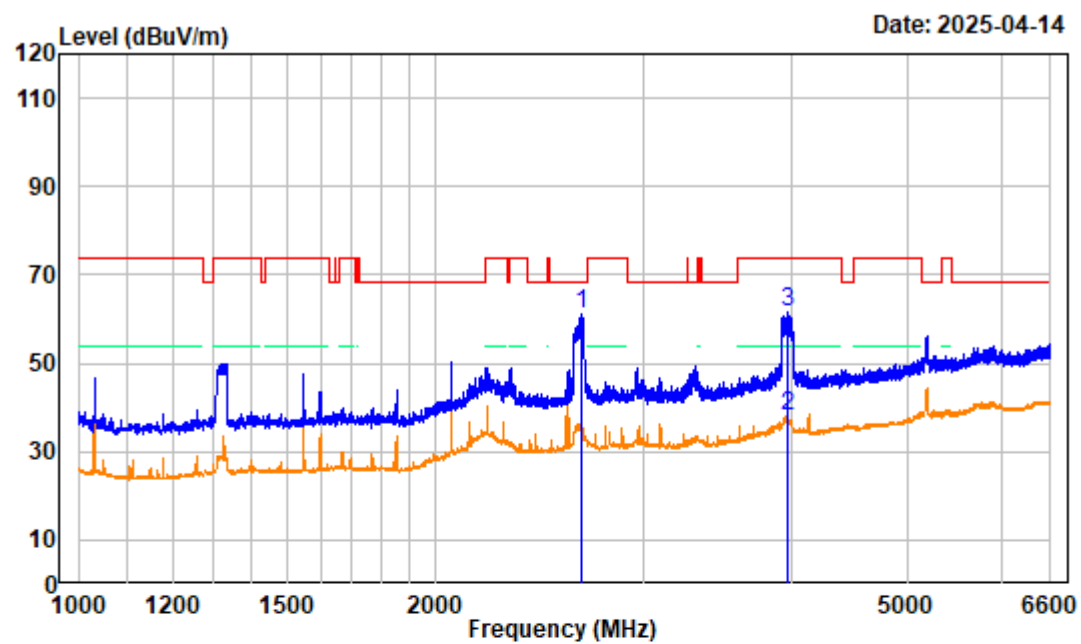


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.700	-10.36	71.57	61.21	68.20	-6.99 Peak
2	3961.700	-8.32	46.38	38.06	54.00	-15.94 average
3	3961.700	-8.32	69.73	61.41	74.00	-12.59 peak

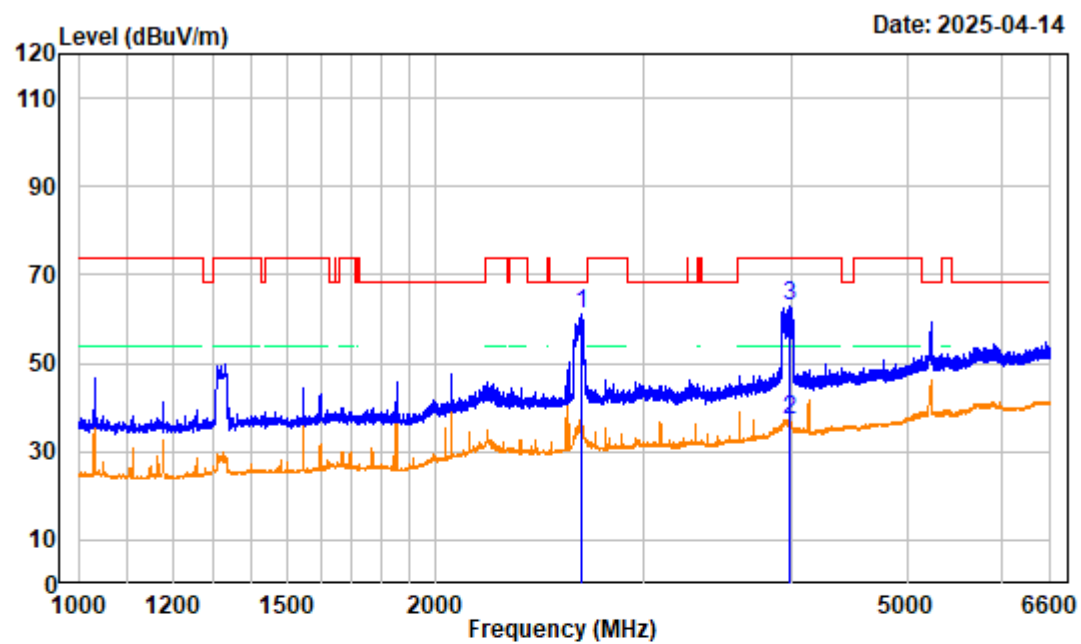


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	71.40	61.01	68.20	-7.19 Peak
2	3980.600	-8.22	45.43	37.21	54.00	-16.79 average
3	3980.600	-8.22	71.08	62.86	74.00	-11.14 peak

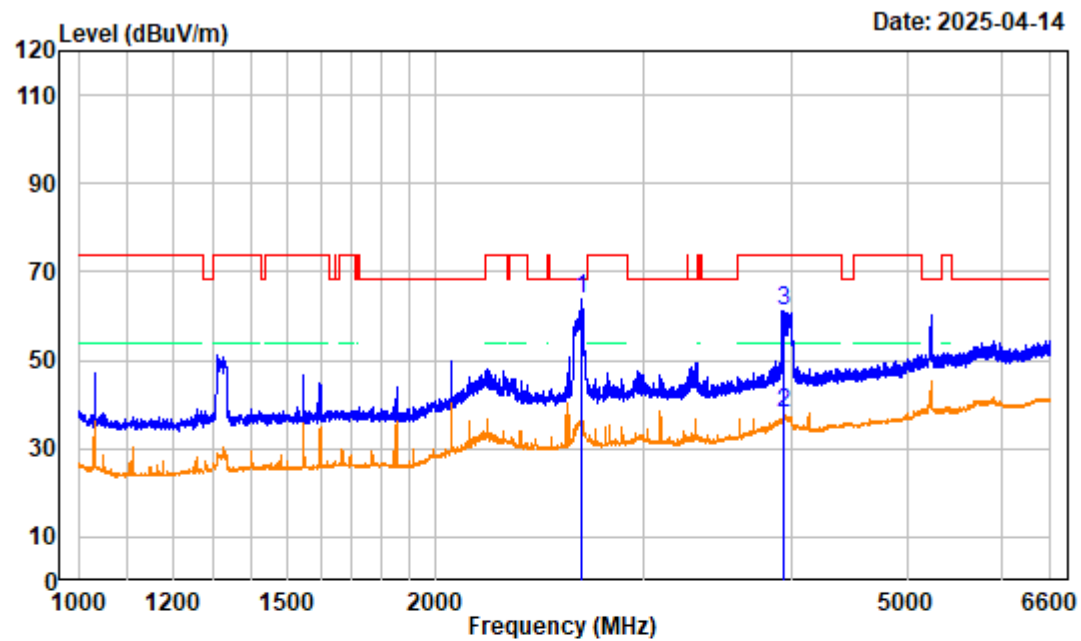


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.700	-10.48	74.22	63.74	68.20	-4.46	Peak
2	3928.800	-8.18	46.24	38.06	54.00	-15.94	average
3	3928.800	-8.18	69.20	61.02	74.00	-12.98	peak

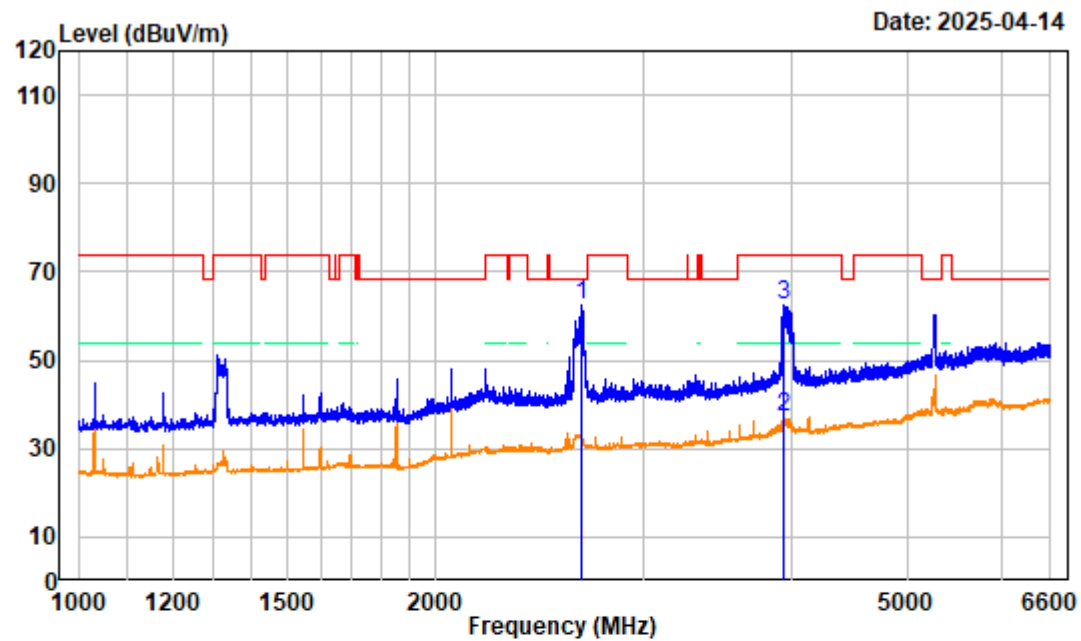


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.700	-10.36	72.97	62.61	68.20	-5.59	peak
2	3933.700	-8.23	45.41	37.18	54.00	-16.82	average
3	3933.700	-8.23	70.65	62.42	74.00	-11.58	peak

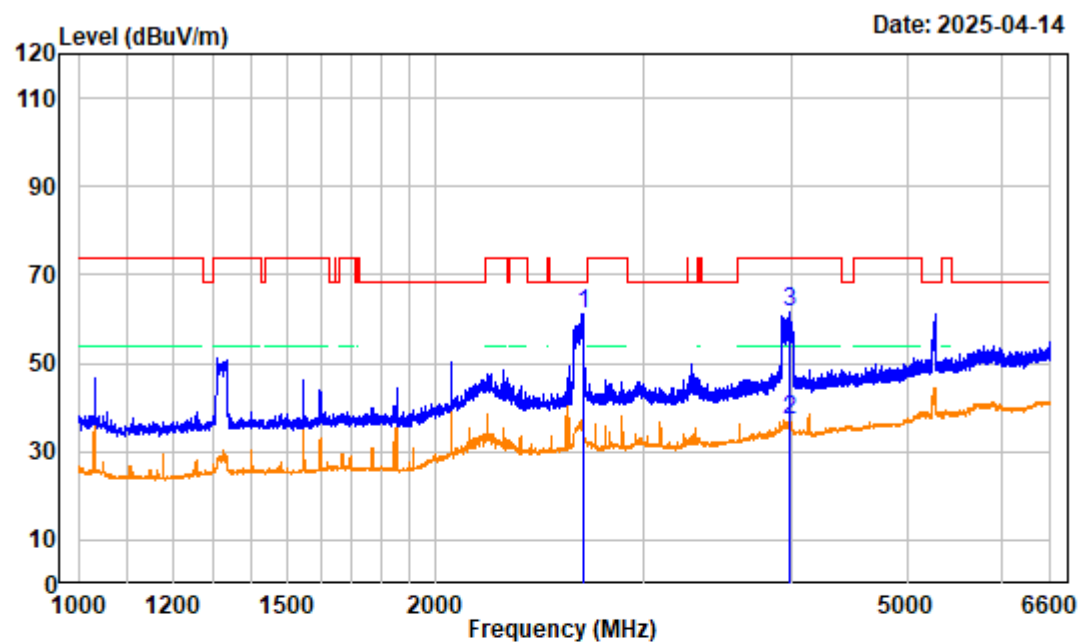


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	71.43	61.17	68.20	-7.03 peak
2	3985.500	-8.19	45.39	37.20	54.00	-16.80 average
3	3985.500	-8.19	69.73	61.54	74.00	-12.46 peak

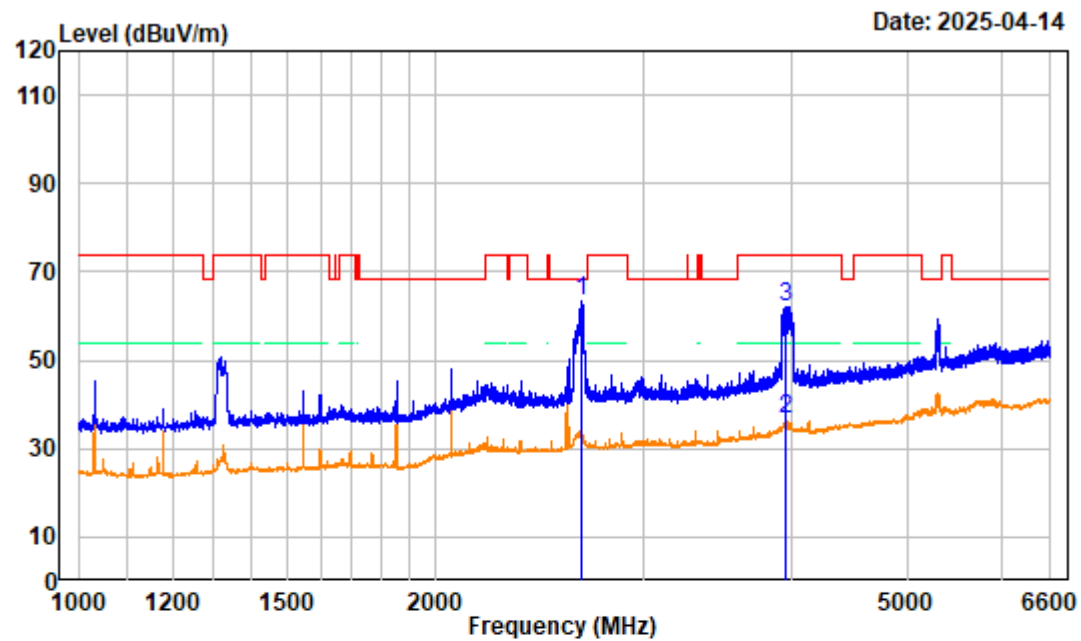


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5310MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2655.500	-10.43	73.87	63.44	68.20	-4.76	peak
2	3954.000	-8.37	45.20	36.83	54.00	-17.17	average
3	3954.000	-8.37	70.59	62.22	74.00	-11.78	peak

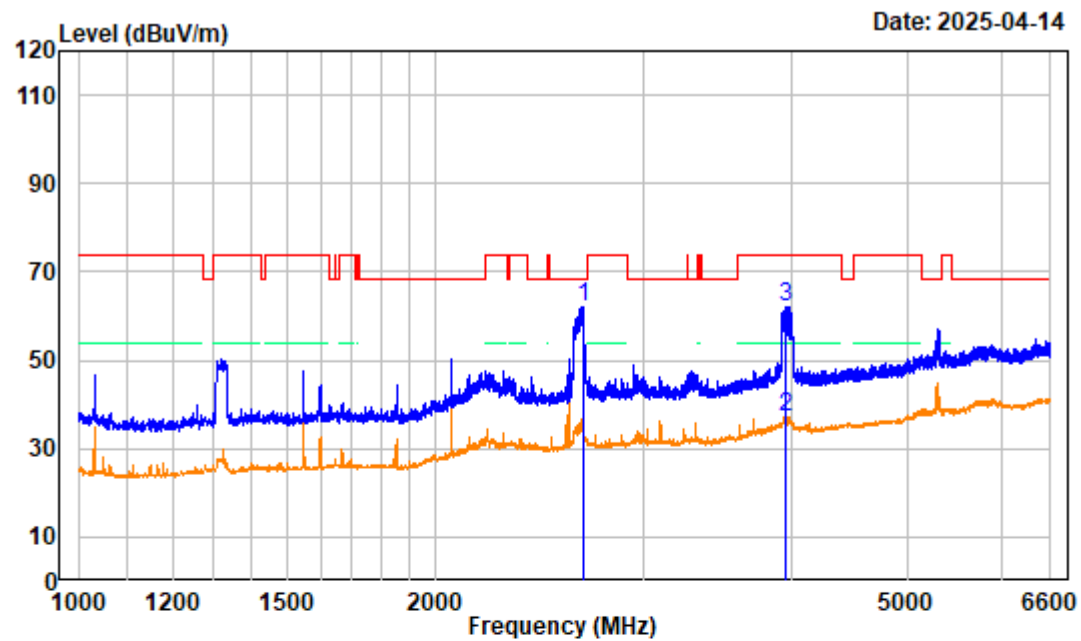


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5310MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	72.24	61.93	68.20	-6.27	peak
2	3954.700	-8.36	45.38	37.02	54.00	-16.98	average
3	3954.700	-8.36	70.57	62.21	74.00	-11.79	peak

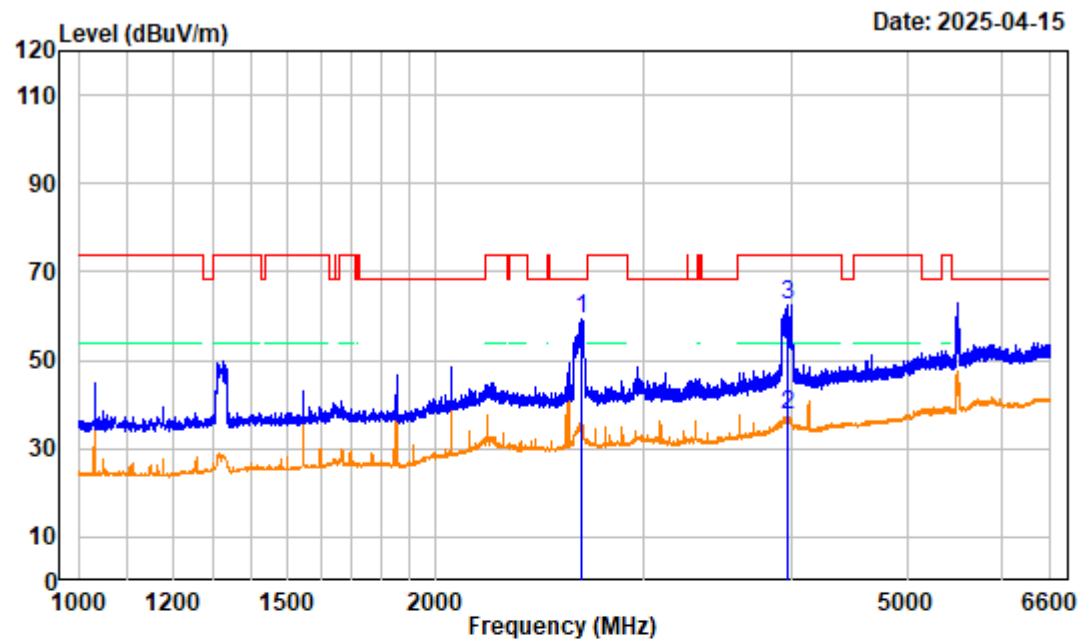


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.100	-10.45	69.76	59.31	68.20	-8.89	peak
2	3968.000	-8.29	45.89	37.60	54.00	-16.40	average
3	3968.000	-8.29	70.79	62.50	74.00	-11.50	peak

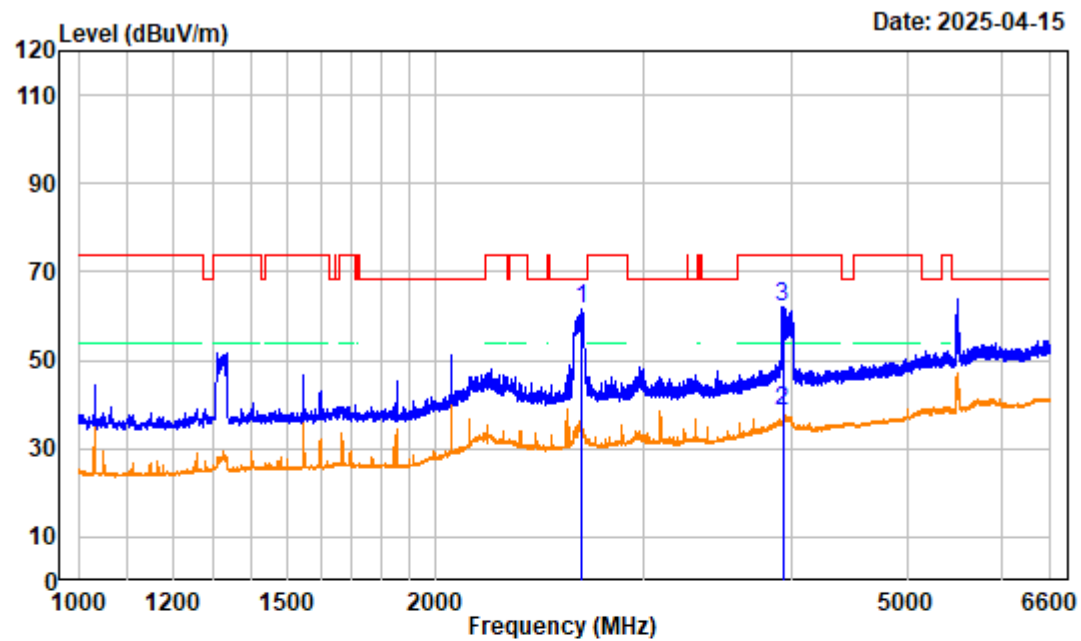


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.700	-10.48	72.21	61.73	68.20	-6.47	peak
2	3924.600	-8.15	46.73	38.58	54.00	-15.42	average
3	3924.600	-8.15	70.36	62.21	74.00	-11.79	peak

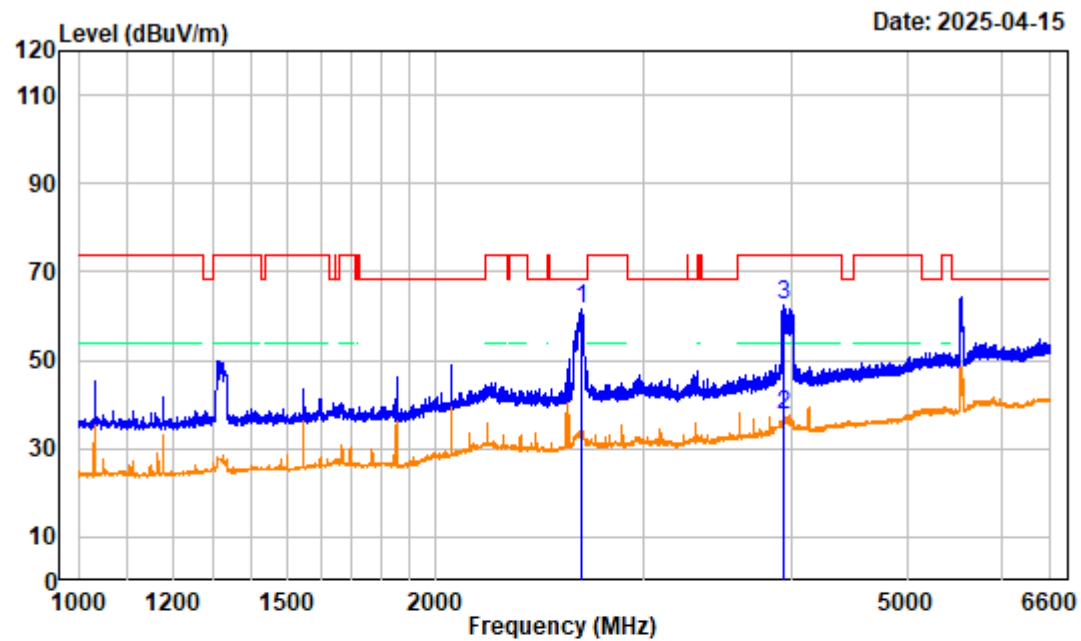


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Middle Channel 5550MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.800	-10.44	72.08	61.64	68.20	-6.56	peak
2	3937.900	-8.27	45.85	37.58	54.00	-16.42	average
3	3937.900	-8.27	70.56	62.29	74.00	-11.71	peak

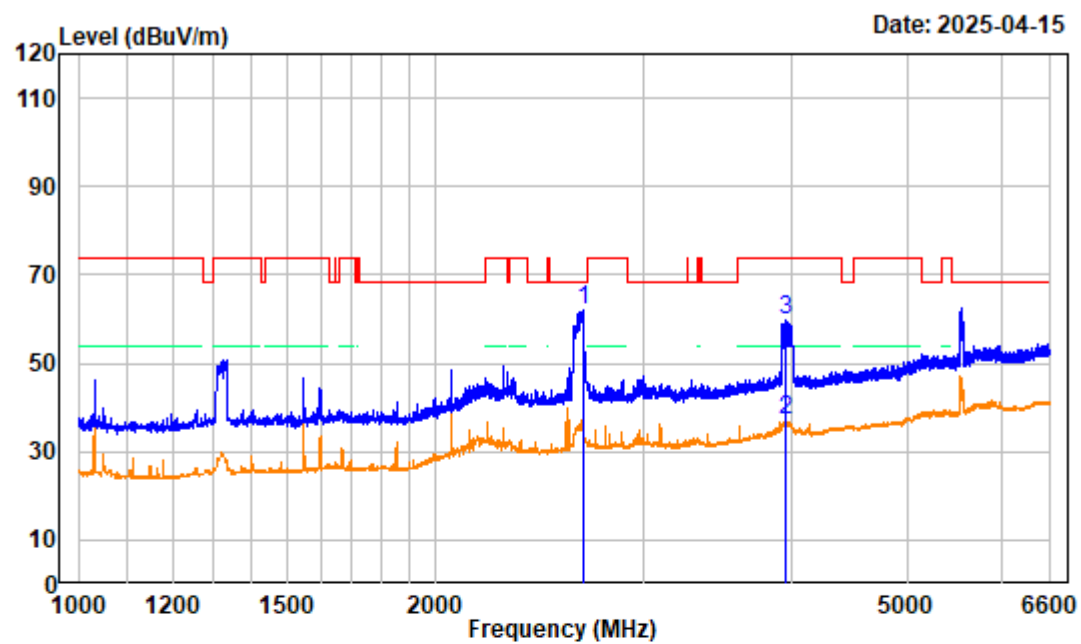


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Middle Channel 5550MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	72.26	61.96	68.20	-6.24 peak
2	3948.400	-8.37	45.66	37.29	54.00	-16.71 average
3	3948.400	-8.37	68.00	59.63	74.00	-14.37 peak

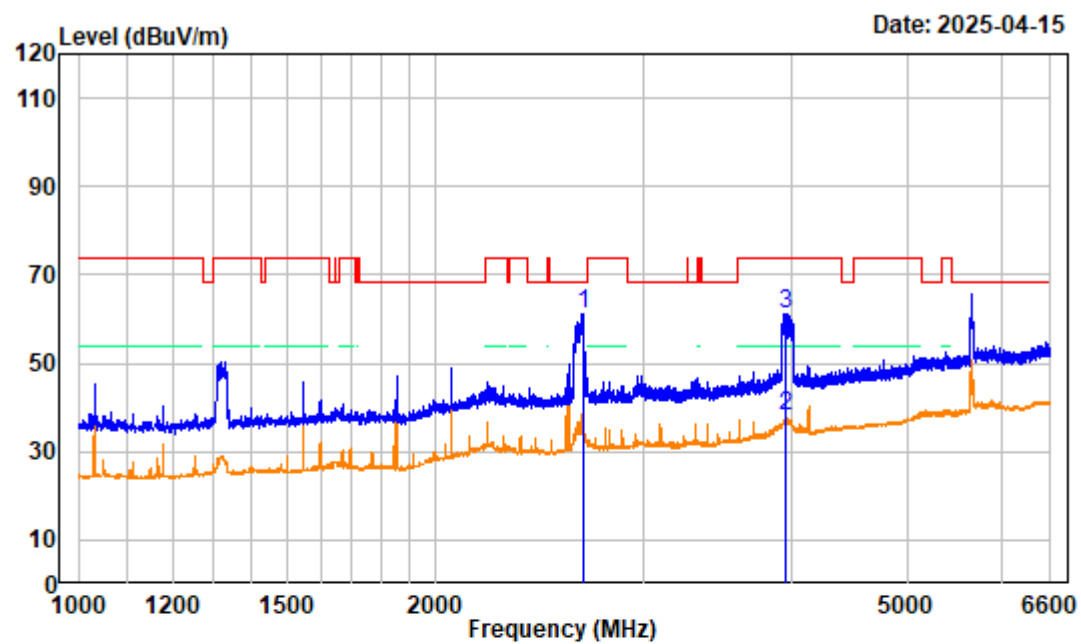


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	71.46	61.16	68.20	-7.04 peak
2	3945.600	-8.35	46.39	38.04	54.00	-15.96 average
3	3945.600	-8.35	69.52	61.17	74.00	-12.83 peak

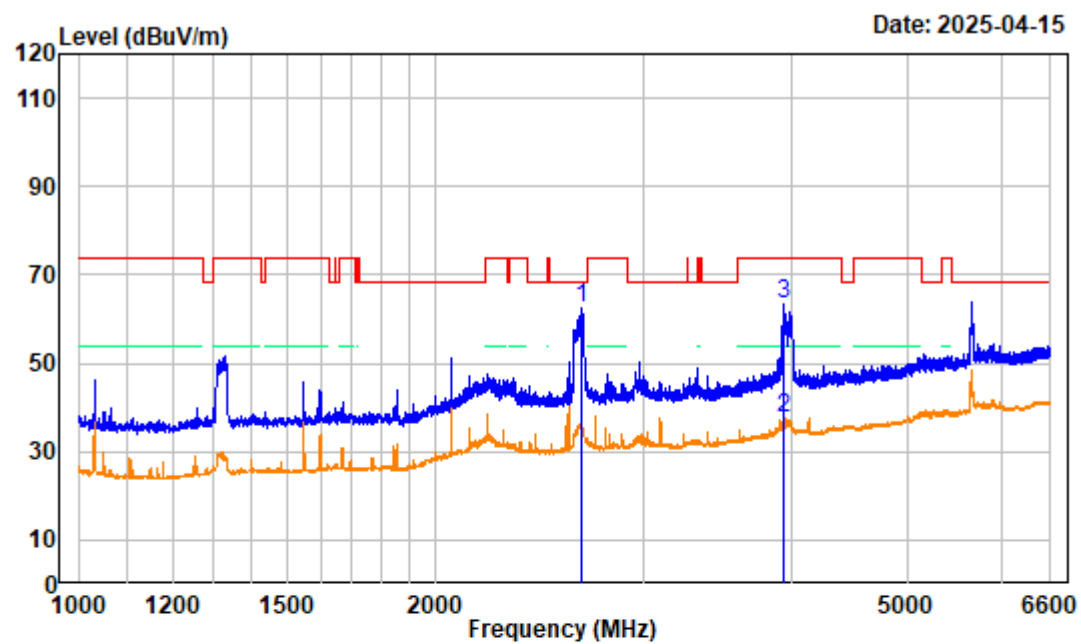


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2660.400	-10.35	72.64	62.29	68.20	-5.91	peak
2	3933.000	-8.23	45.99	37.76	54.00	-16.24	average
3	3933.000	-8.23	71.54	63.31	74.00	-10.69	peak

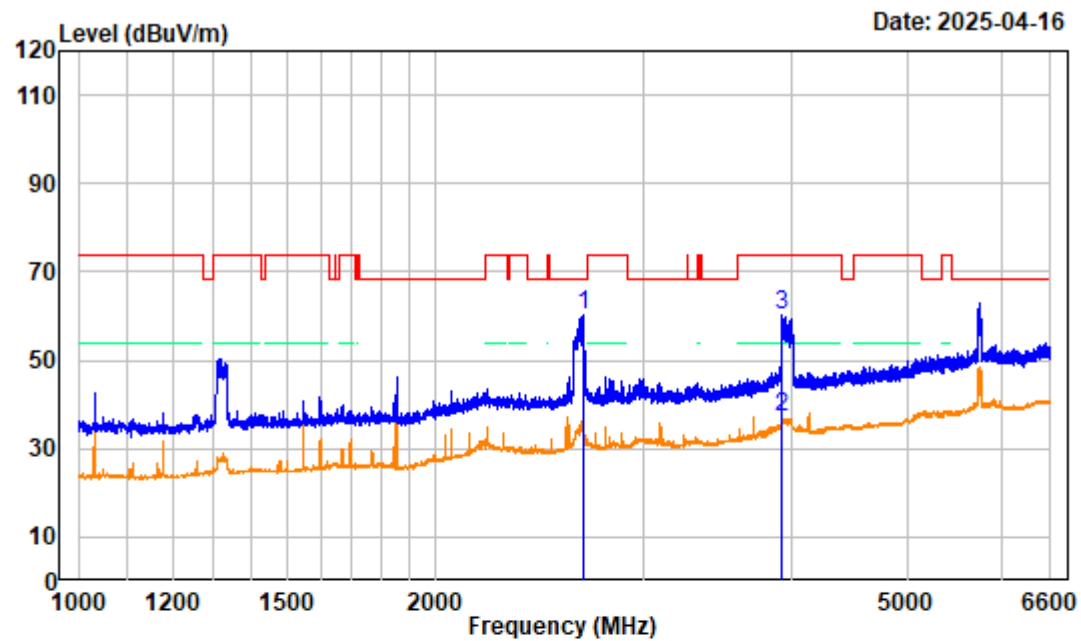


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5755MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	70.32	60.02	68.20	-8.18	peak
2	3922.500	-8.12	45.41	37.29	54.00	-16.71	average
3	3922.500	-8.12	68.37	60.25	74.00	-13.75	peak

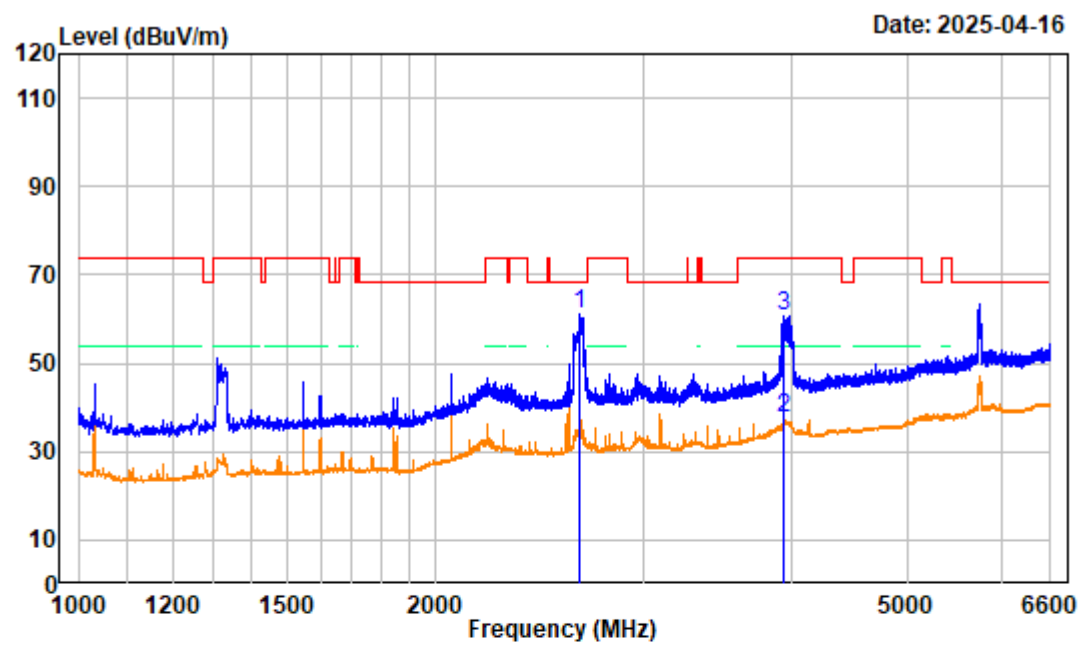


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5755MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2647.800	-10.49	71.51	61.02	68.20	-7.18 peak
2	3928.800	-8.18	45.70	37.52	54.00	-16.48 average
3	3928.800	-8.18	69.03	60.85	74.00	-13.15 peak

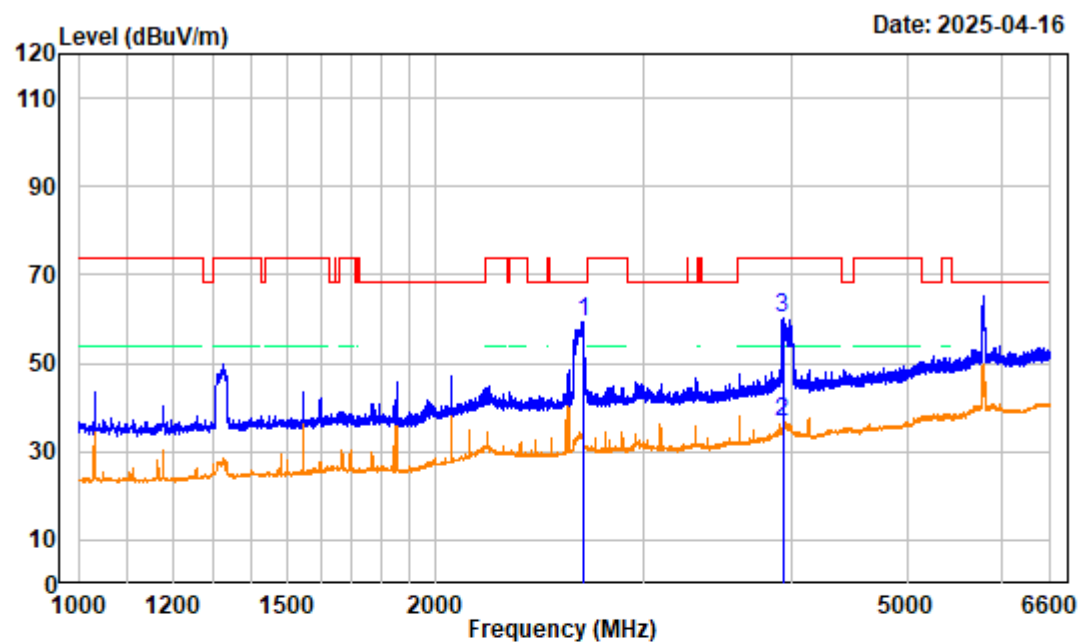

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5795MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2661.800	-10.33	69.74	59.41	68.20	-8.79	peak
2	3924.600	-8.15	44.78	36.63	54.00	-17.37	average
3	3924.600	-8.15	68.54	60.39	74.00	-13.61	peak

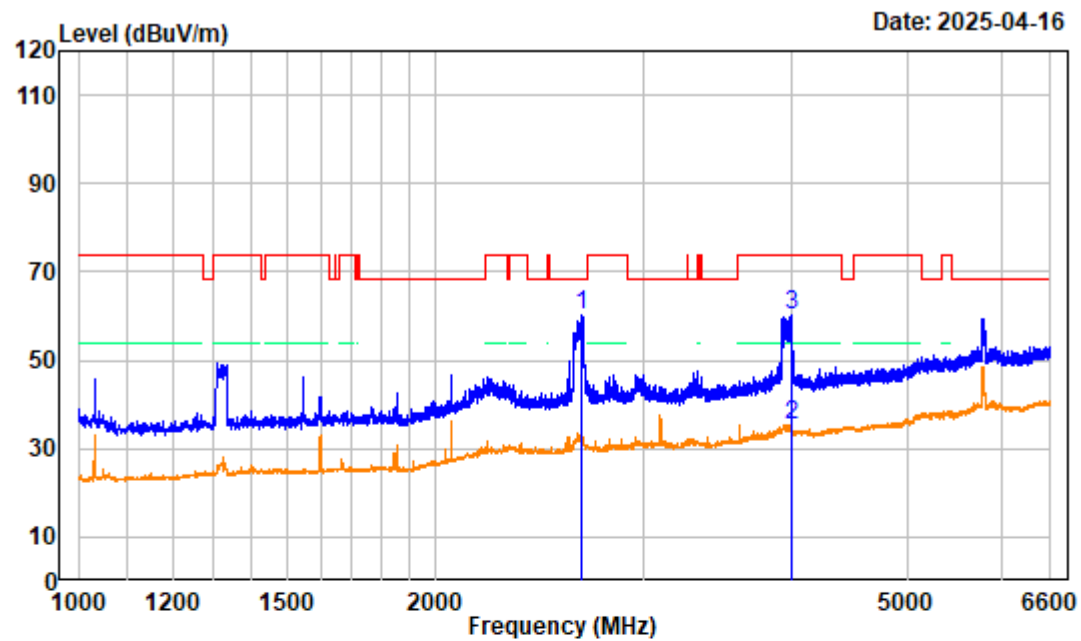

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5795MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.000	-10.38	70.69	60.31	68.20	-7.89	peak
2	3988.300	-8.18	43.39	35.21	54.00	-18.79	average
3	3988.300	-8.18	68.46	60.28	74.00	-13.72	peak

1GHz~6.6GHz 802.11ac20:

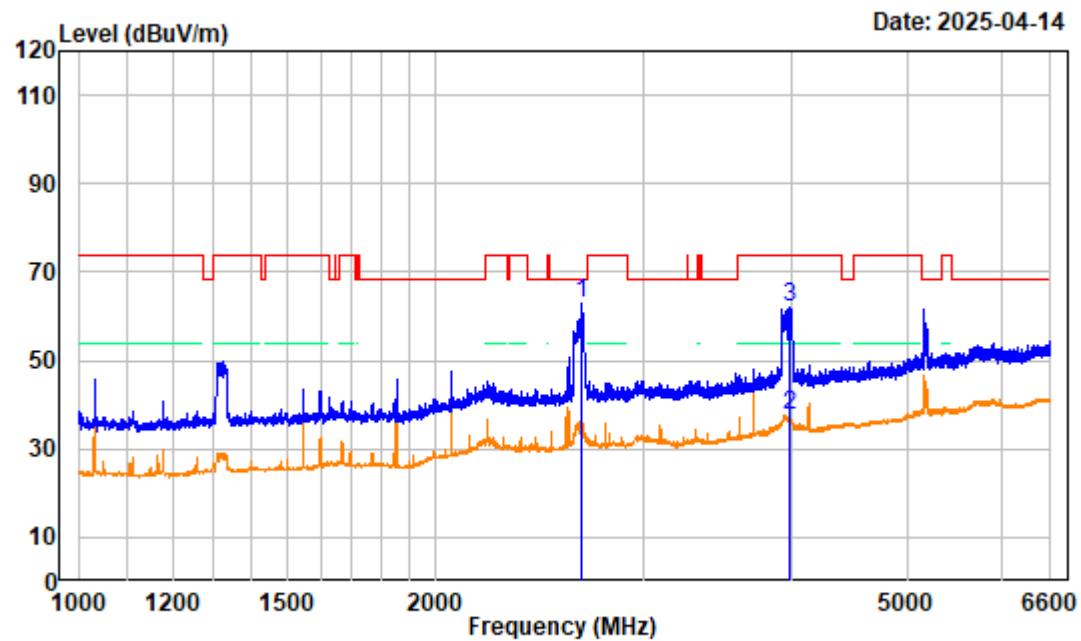


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	73.55	63.16	68.20	-5.04 Peak
2	3974.300	-8.25	45.68	37.43	54.00	-16.57 average
3	3974.300	-8.25	70.37	62.12	74.00	-11.88 peak

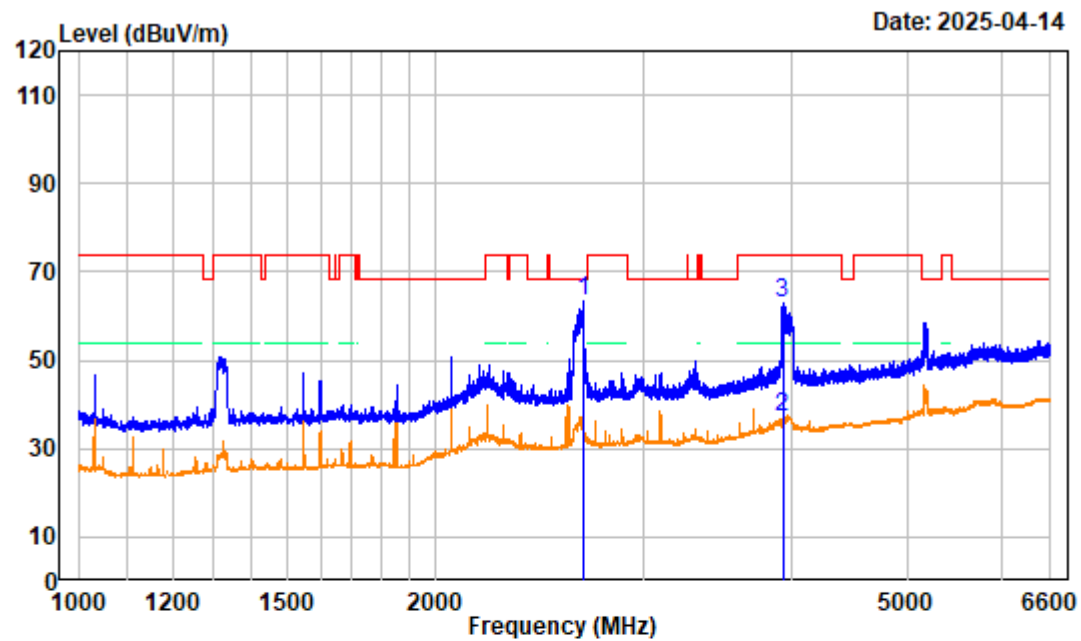


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	73.53	63.22	68.20	-4.98	Peak
2	3924.600	-8.15	45.16	37.01	54.00	-16.99	average
3	3924.600	-8.15	71.17	63.02	74.00	-10.98	peak

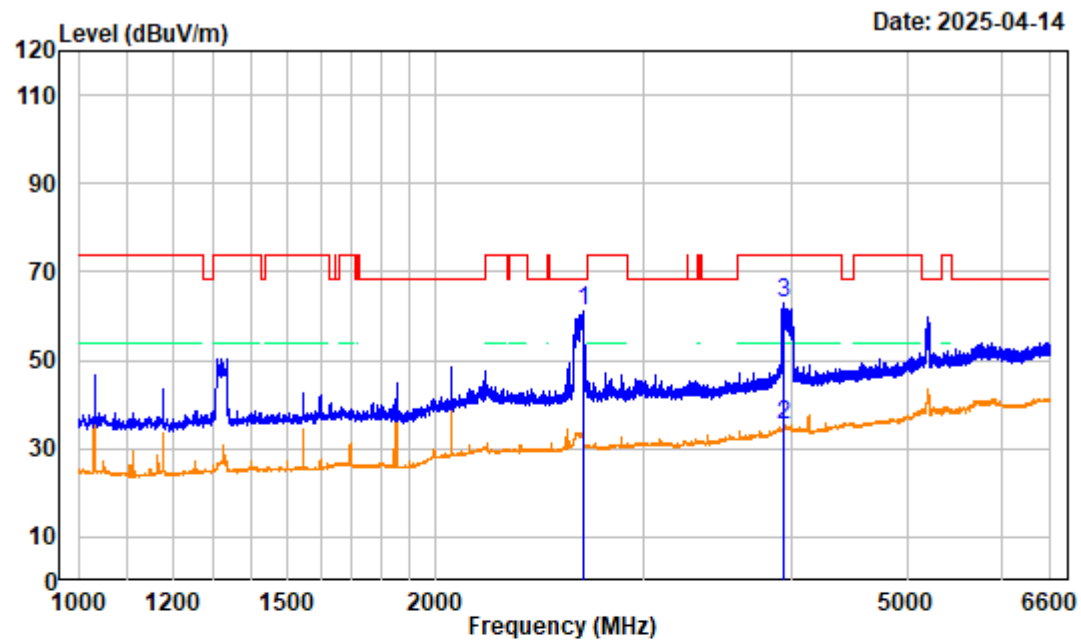


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	71.33	61.02	68.20	-7.18	peak
2	3926.000	-8.16	43.30	35.14	54.00	-18.86	average
3	3926.000	-8.16	71.22	63.06	74.00	-10.94	peak

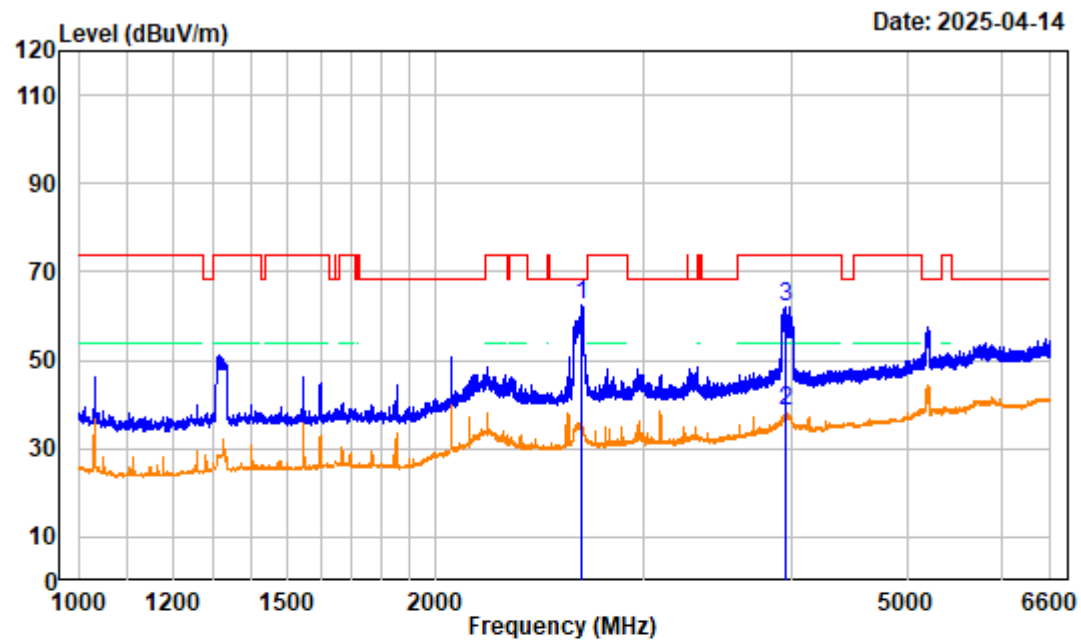


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5200MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.100	-10.45	72.90	62.45	68.20	-5.75	peak
2	3948.400	-8.37	46.85	38.48	54.00	-15.52	average
3	3948.400	-8.37	70.56	62.19	74.00	-11.81	peak

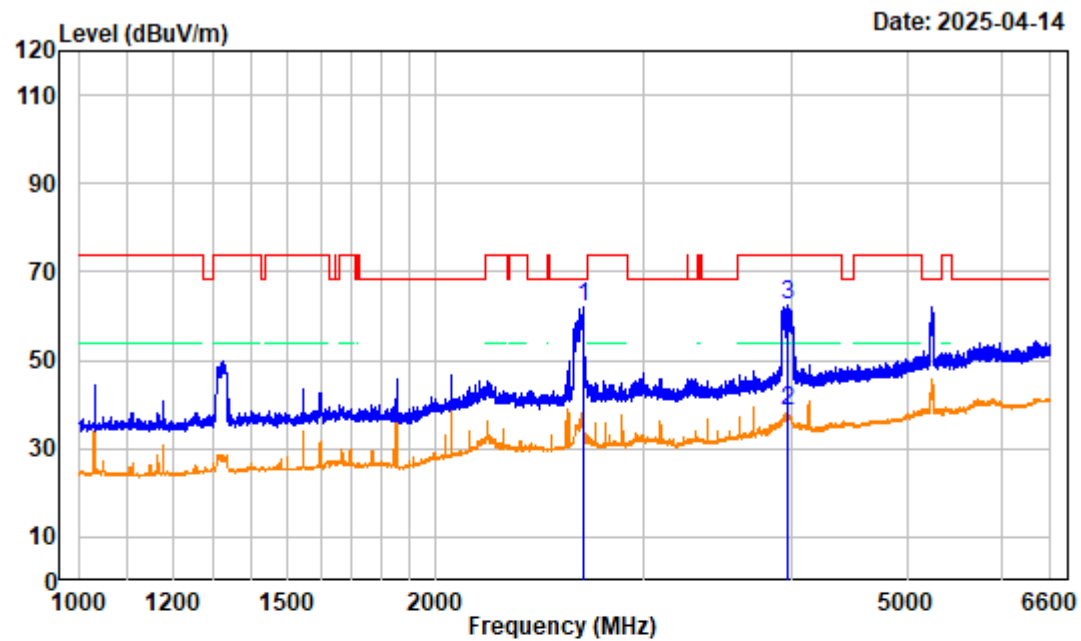


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2665.300	-10.28	72.36	62.08	68.20	-6.12 peak
2	3968.000	-8.29	46.56	38.27	54.00	-15.73 average
3	3968.000	-8.29	70.68	62.39	74.00	-11.61 peak

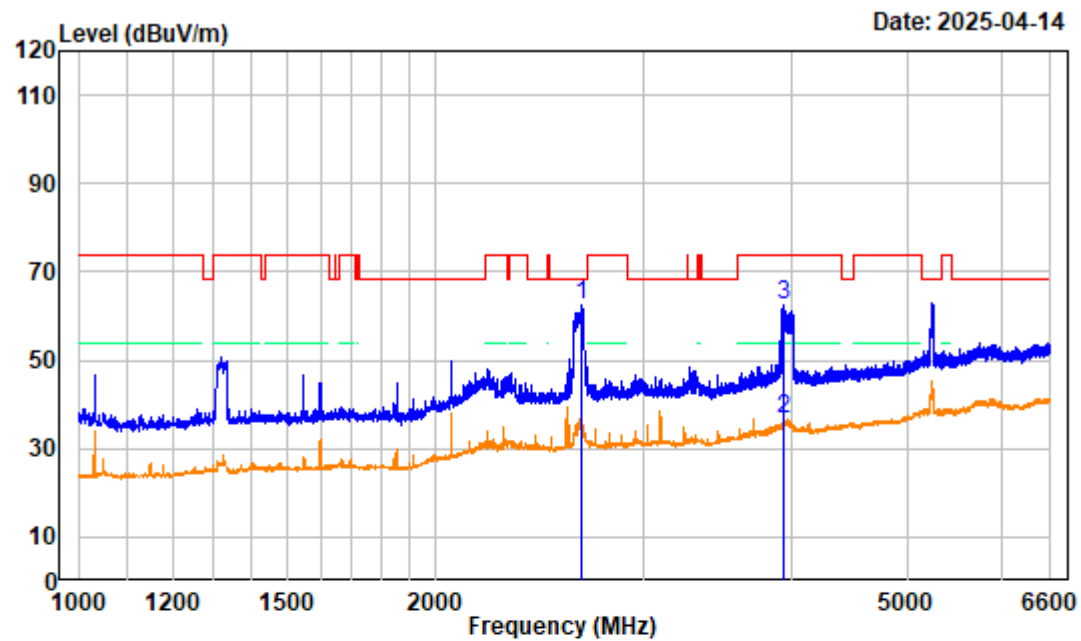


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.800	-10.44	72.98	62.54	68.20	-5.66 peak
2	3926.000	-8.16	44.85	36.69	54.00	-17.31 average
3	3926.000	-8.16	70.81	62.65	74.00	-11.35 peak

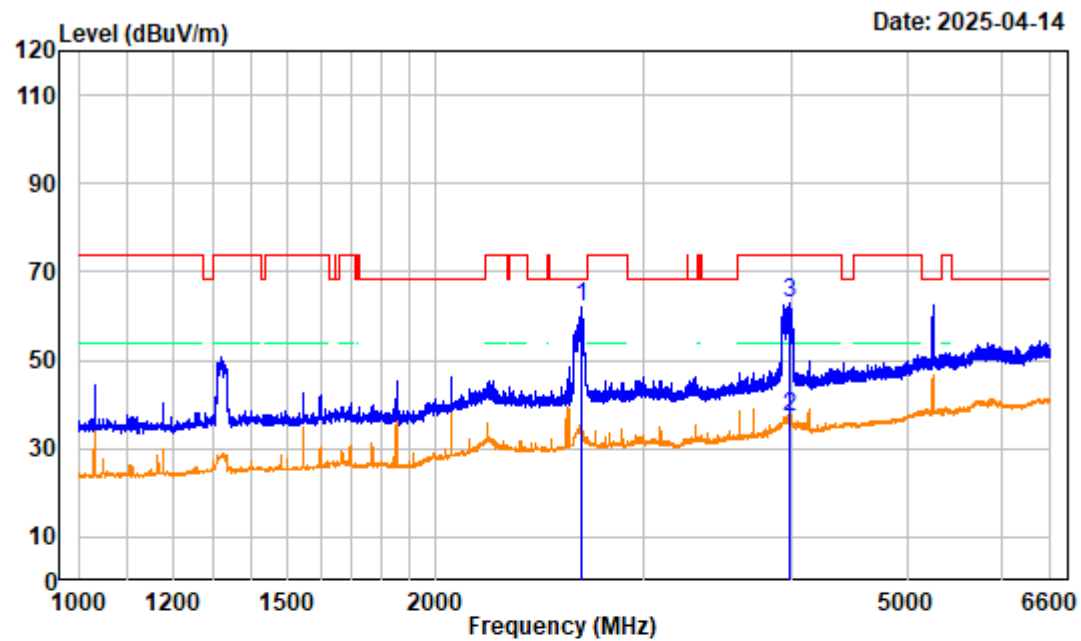


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.700	-10.48	72.42	61.94	68.20	-6.26 peak
2	3982.700	-8.20	45.28	37.08	54.00	-16.92 average
3	3982.700	-8.20	71.31	63.11	74.00	-10.89 peak

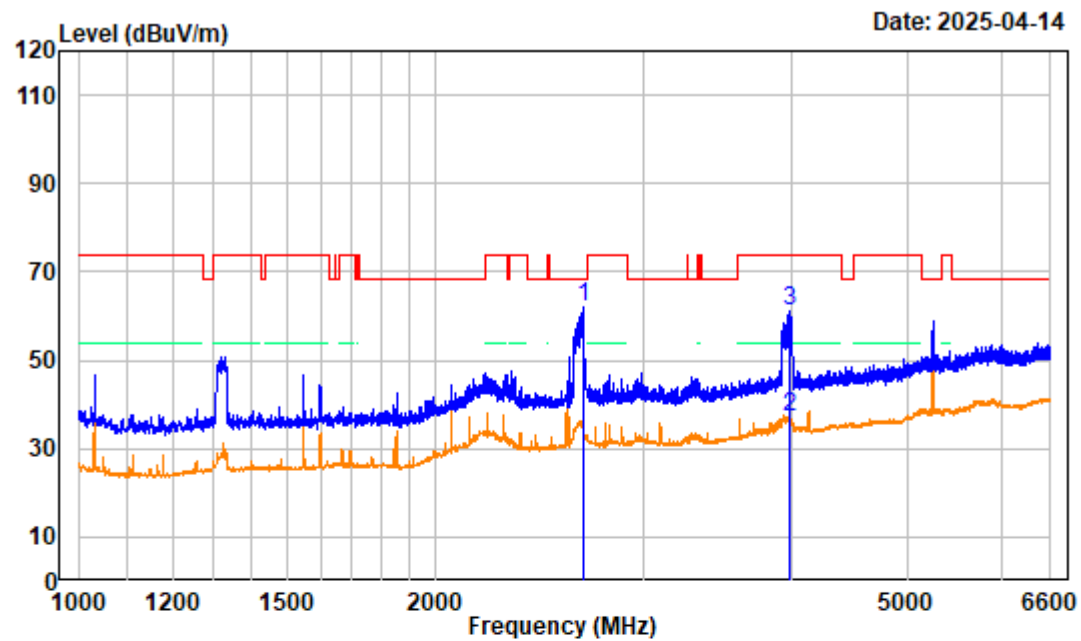


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.900	-10.30	72.24	61.94	68.20	-6.26	peak
2	3982.700	-8.20	45.53	37.33	54.00	-16.67	average
3	3982.700	-8.20	69.17	60.97	74.00	-13.03	peak

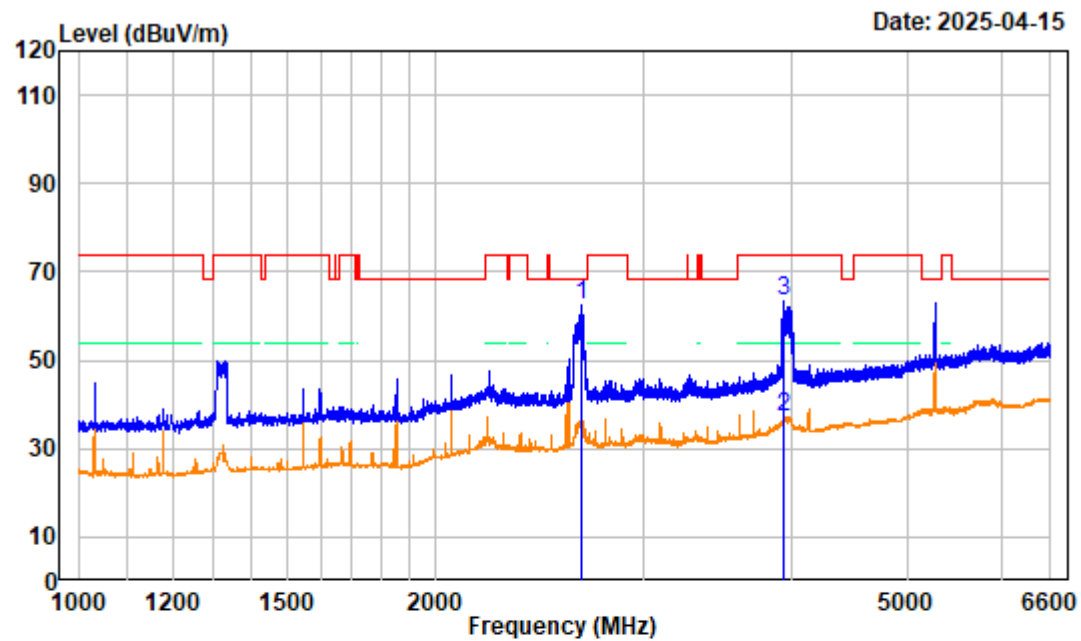


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2653.400	-10.46	72.84	62.38	68.20	-5.82	peak
2	3935.100	-8.24	45.56	37.32	54.00	-16.68	average
3	3935.100	-8.24	71.77	63.53	74.00	-10.47	peak

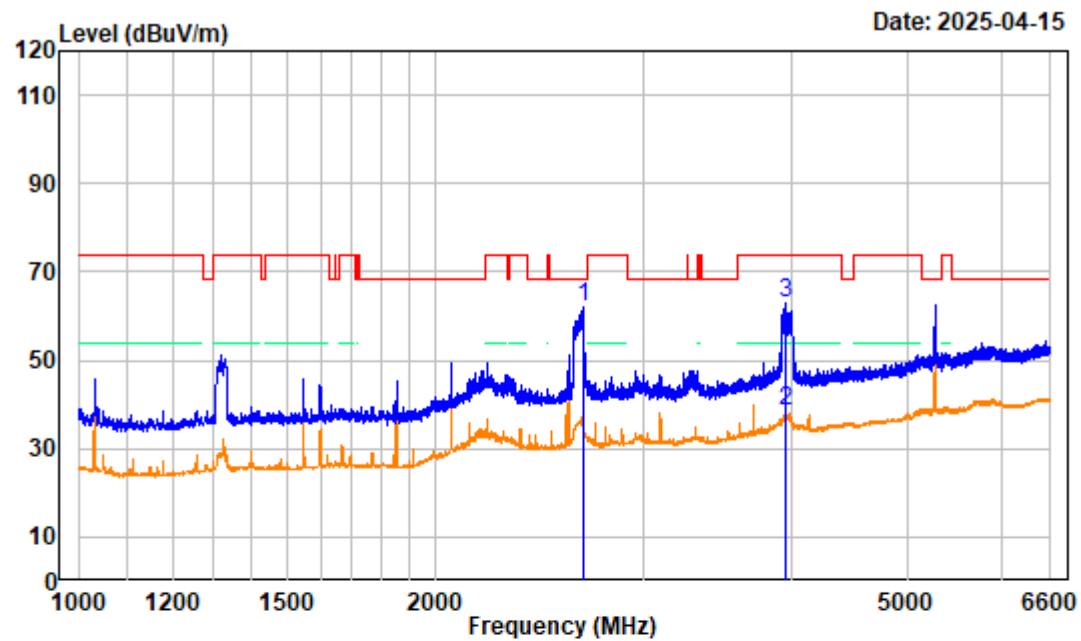


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5280MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	72.49	62.24	68.20	-5.96 peak
2	3941.400	-8.31	46.73	38.42	54.00	-15.58 average
3	3941.400	-8.31	71.16	62.85	74.00	-11.15 peak

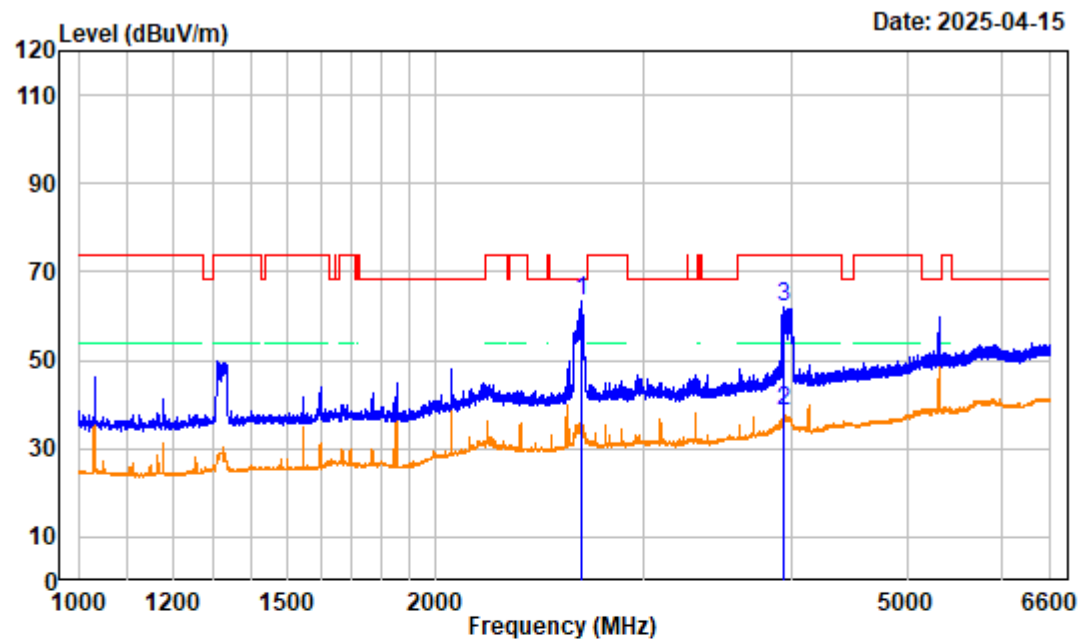


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2656.900	-10.41	73.61	63.20	68.20	-5.00	peak
2 3935.100	-8.24	46.56	38.32	54.00	-15.68	average
3 3935.100	-8.24	70.36	62.12	74.00	-11.88	peak

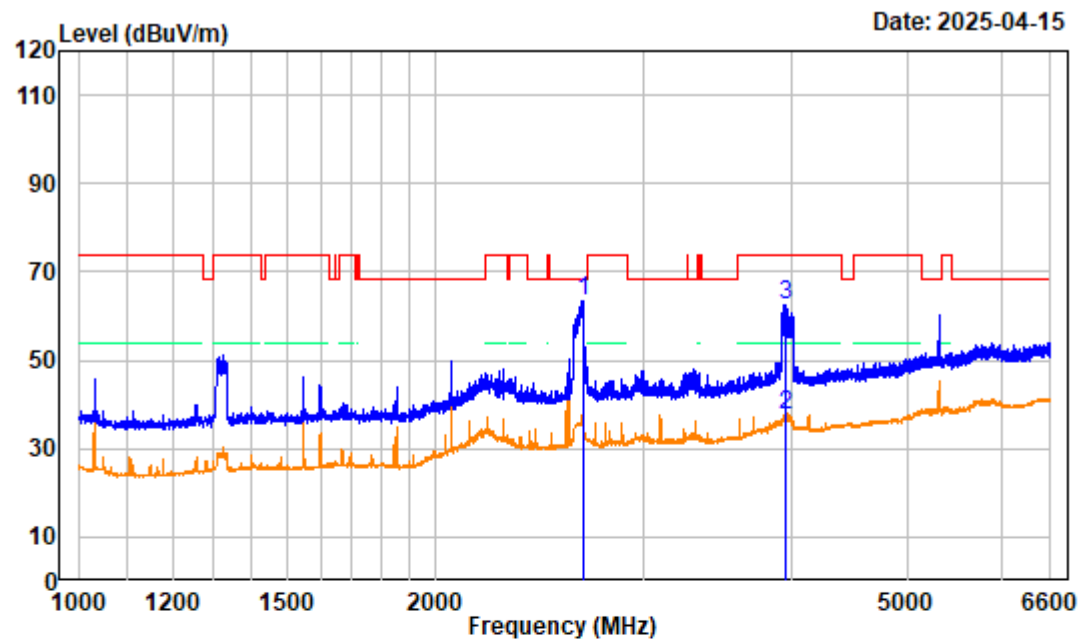


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2665.300	-10.28	73.75	63.47	68.20	-4.73 peak
2	3952.600	-8.37	45.82	37.45	54.00	-16.55 average
3	3952.600	-8.37	70.76	62.39	74.00	-11.61 peak

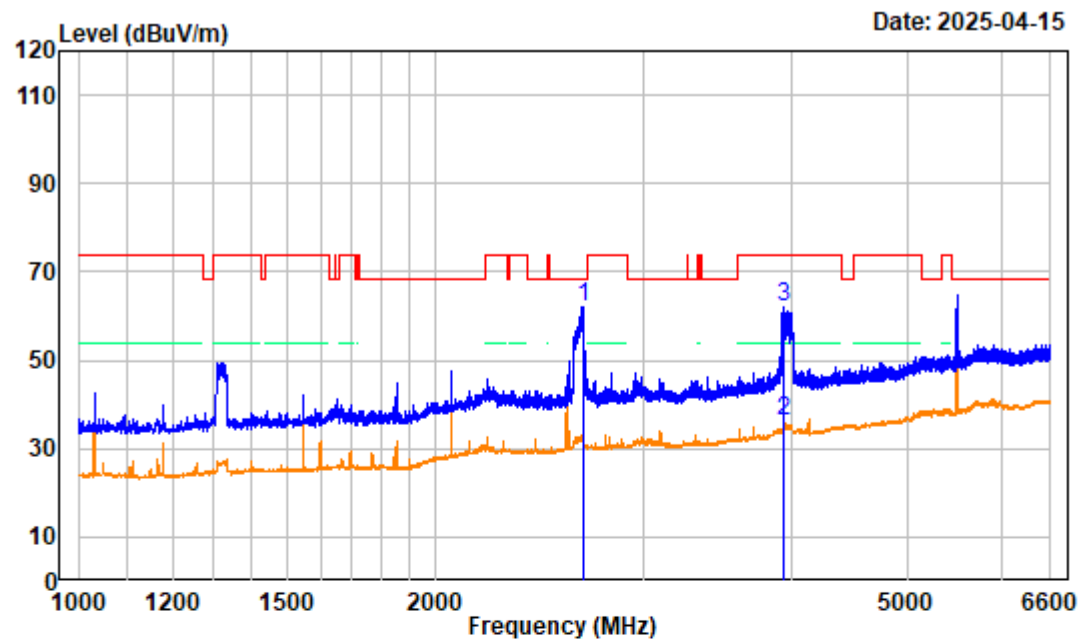


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2661.100	-10.34	72.36	62.02	68.20	-6.18	peak
2 3935.100	-8.24	44.27	36.03	54.00	-17.97	average
3 3935.100	-8.24	70.10	61.86	74.00	-12.14	peak

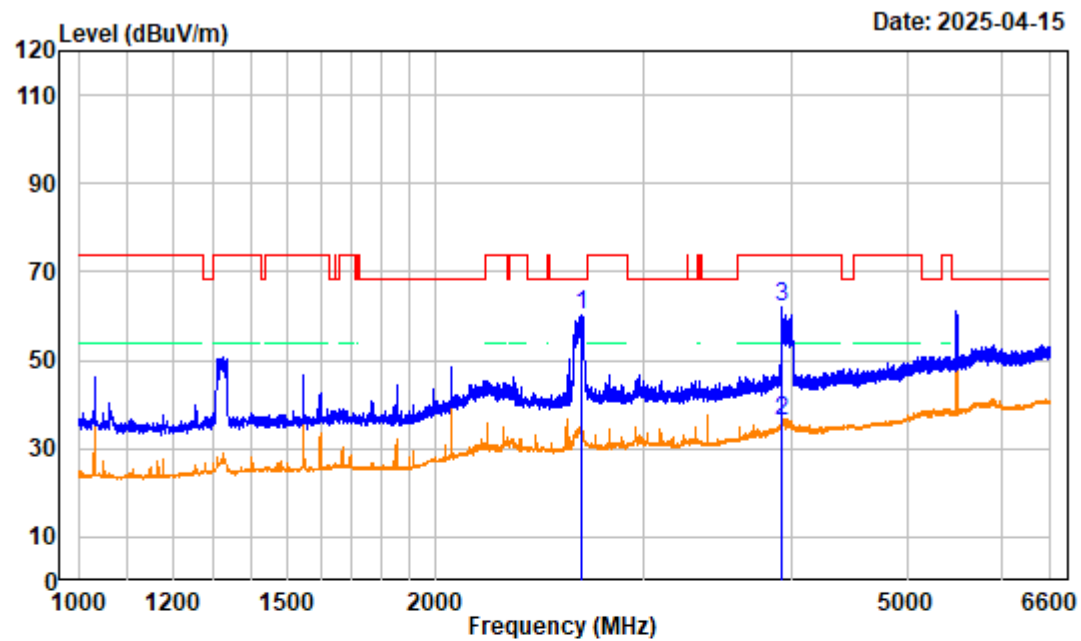


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2657.600	-10.40	70.82	60.42	68.20	-7.78 peak
2	3922.500	-8.12	44.53	36.41	54.00	-17.59 average
3	3922.500	-8.12	70.21	62.09	74.00	-11.91 peak

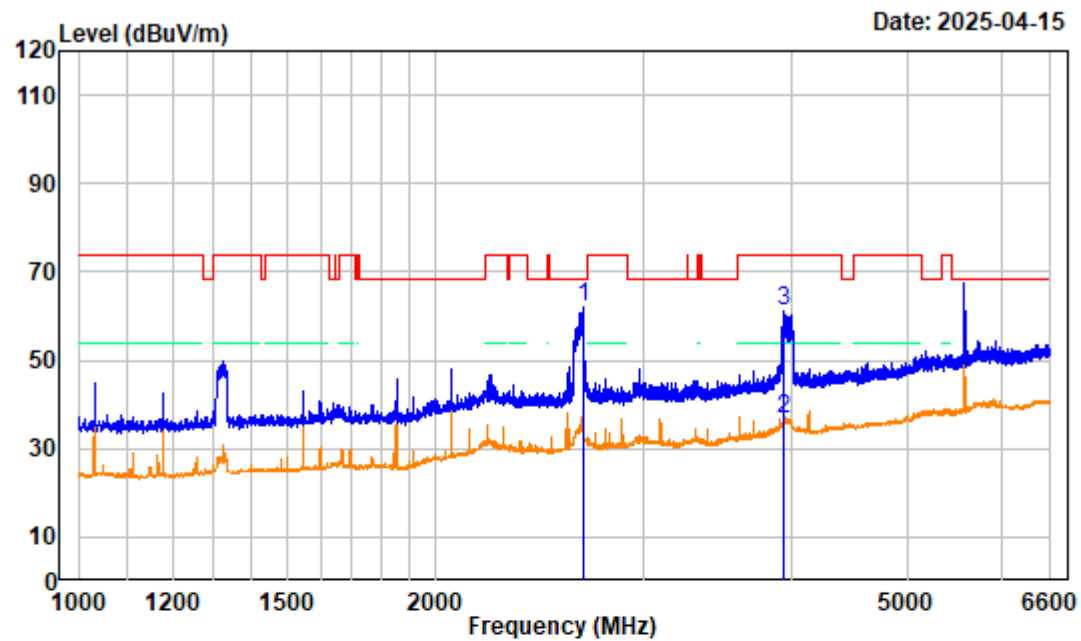


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2662.500	-10.32	72.39	62.07	68.20	-6.13 peak
2	3935.800	-8.25	44.92	36.67	54.00	-17.33 average
3	3935.800	-8.25	69.20	60.95	74.00	-13.05 peak

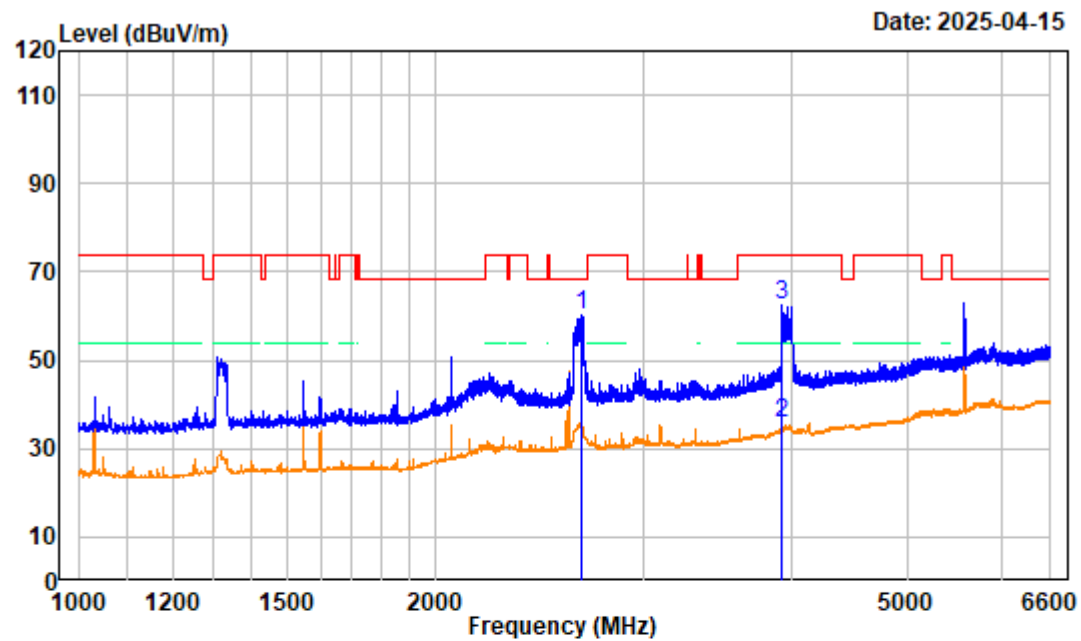


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5580MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2651.300	-10.50	70.81	60.31	68.20	-7.89	peak
2	3922.500	-8.12	43.91	35.79	54.00	-18.21	average
3	3922.500	-8.12	70.59	62.47	74.00	-11.53	peak

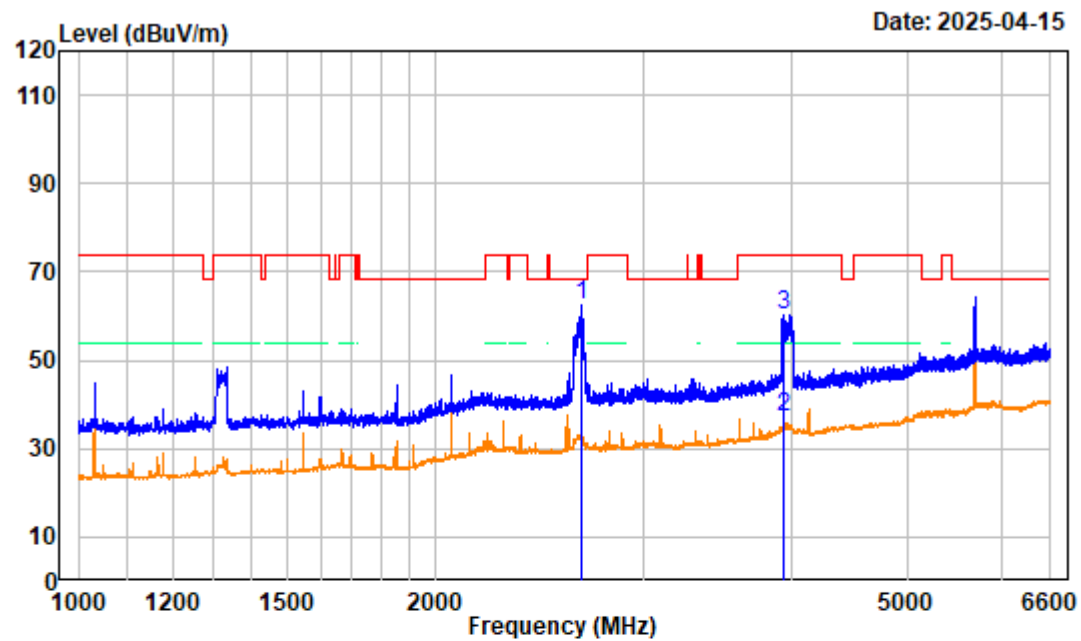

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	72.71	62.32	68.20	-5.88	peak
2	3937.900	-8.27	45.25	36.98	54.00	-17.02	average
3	3937.900	-8.27	68.68	60.41	74.00	-13.59	peak

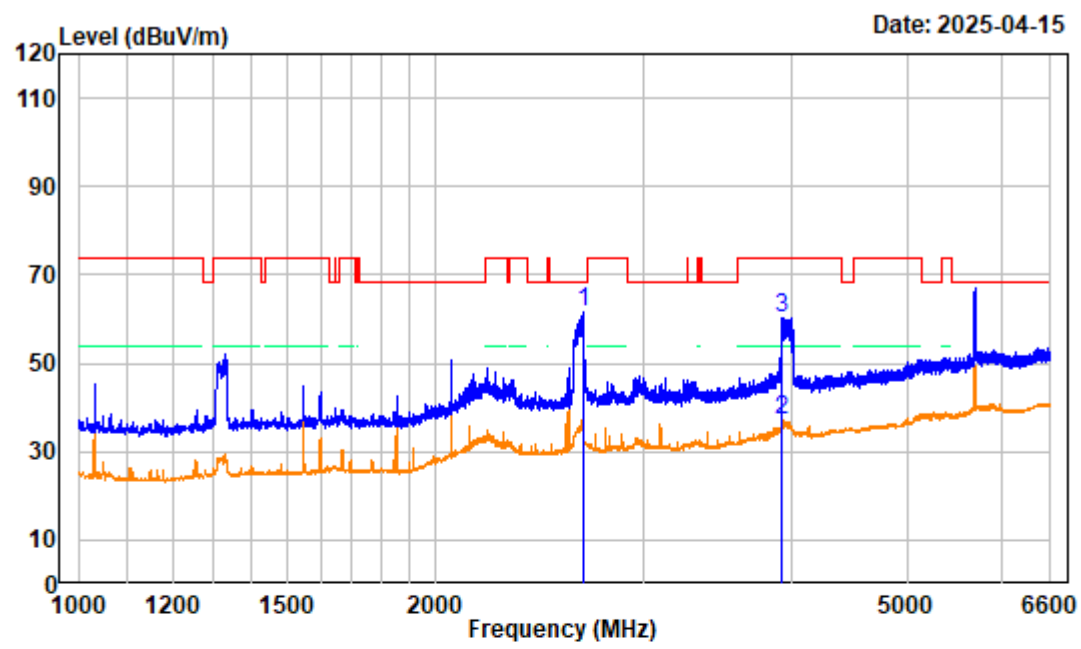

Site : chamber

Condition : 3m VERTICAL


Project No.: 2504R28083E-RFTester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 High Channel 5700MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	71.97	61.66	68.20	-6.54 peak
2	3923.200	-8.12	45.35	37.23	54.00	-16.77 average
3	3923.200	-8.12	68.28	60.16	74.00	-13.84 peak

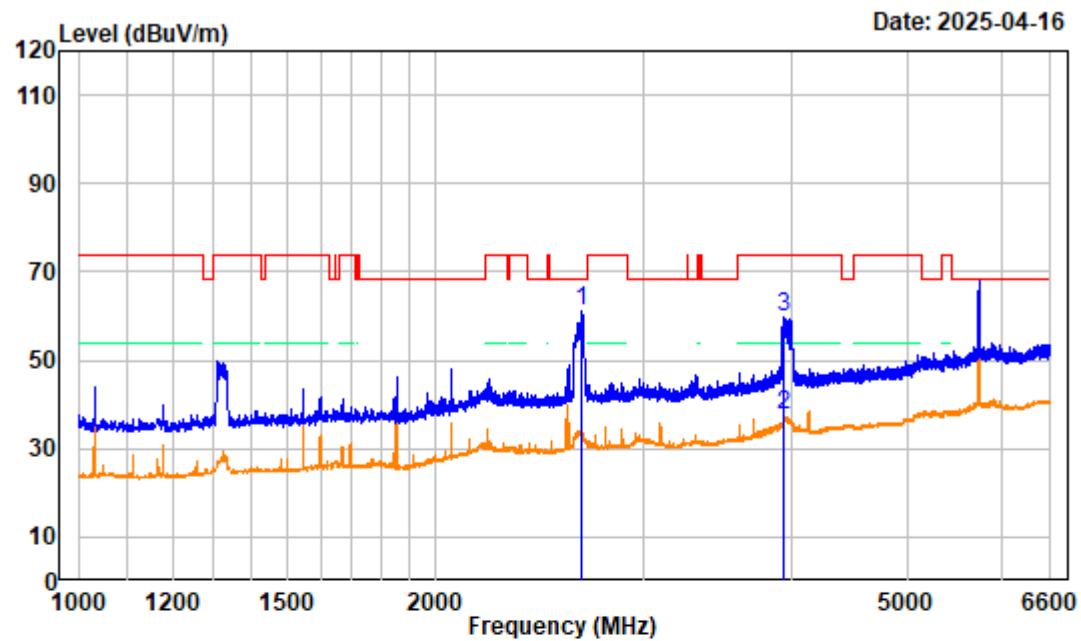


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.700	-10.48	71.44	60.96	68.20	-7.24	peak
2	3930.200	-8.20	45.69	37.49	54.00	-16.51	average
3	3930.200	-8.20	68.01	59.81	74.00	-14.19	peak

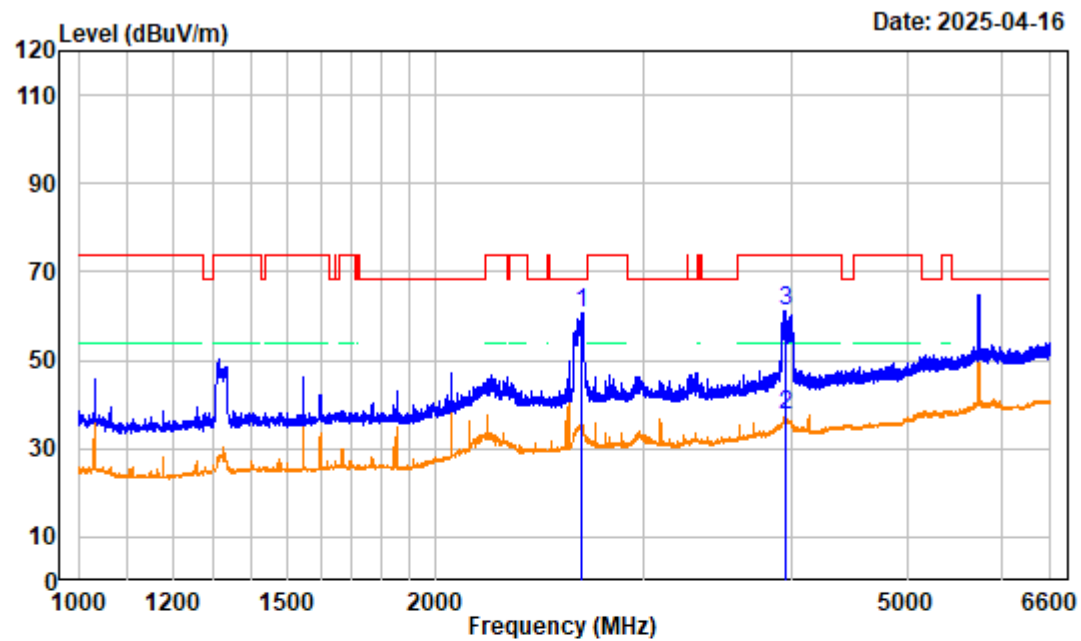


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5745MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2656.900	-10.41	70.99	60.58	68.20	-7.62 peak
2	3945.600	-8.35	45.86	37.51	54.00	-16.49 average
3	3945.600	-8.35	69.32	60.97	74.00	-13.03 peak

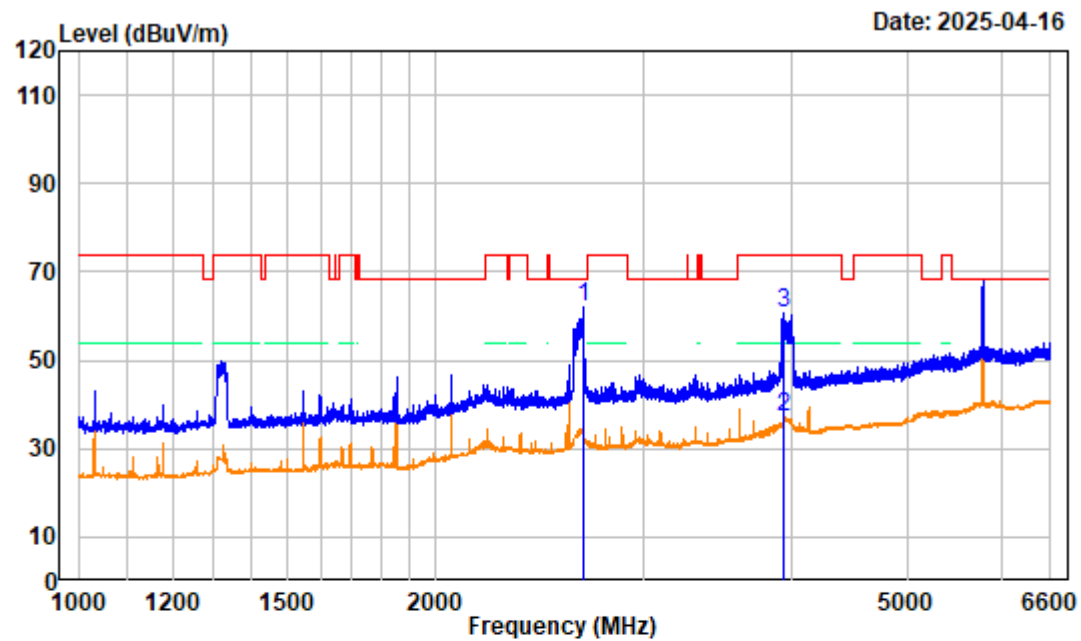


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2664.600	-10.29	72.46	62.17	68.20	-6.03 peak
2	3926.000	-8.16	45.41	37.25	54.00	-16.75 average
3	3926.000	-8.16	68.70	60.54	74.00	-13.46 peak

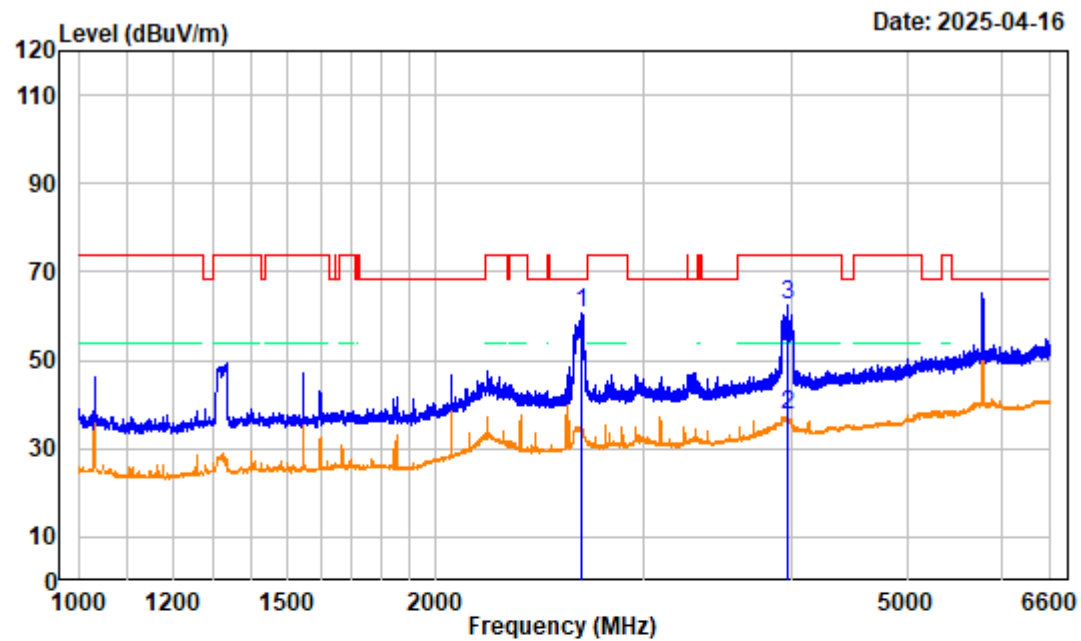


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Middle Channel 5785MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	71.08	60.69	68.20	-7.51	peak
2	3963.800	-8.32	45.84	37.52	54.00	-16.48	average
3	3963.800	-8.32	70.67	62.35	74.00	-11.65	peak

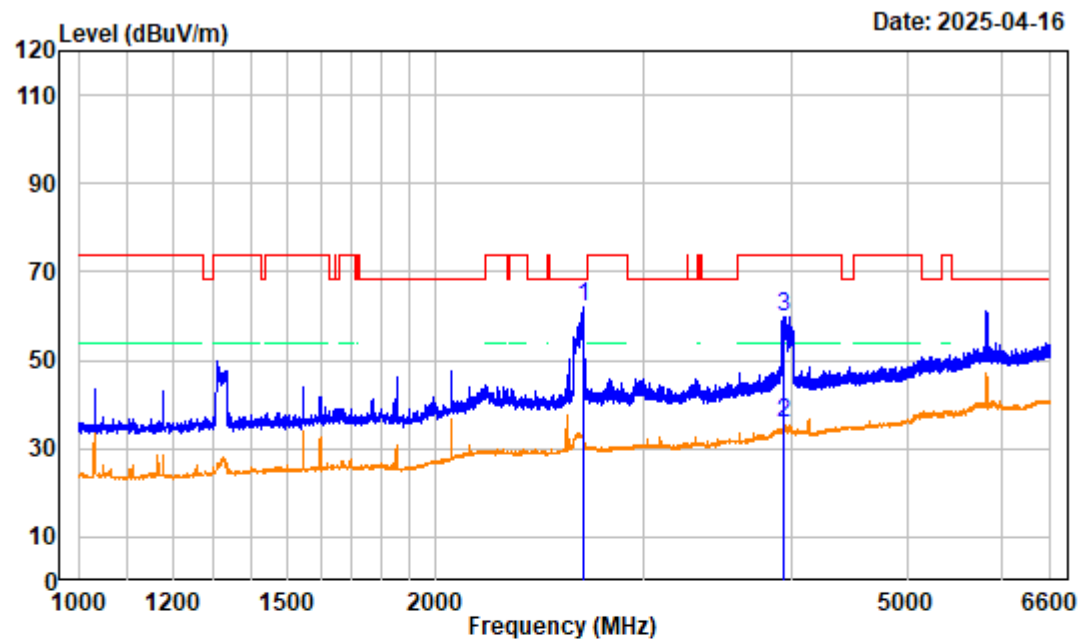

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	72.41	62.15	68.20	-6.05 peak
2	3933.700	-8.23	43.86	35.63	54.00	-18.37 average
3	3933.700	-8.23	68.19	59.96	74.00	-14.04 peak

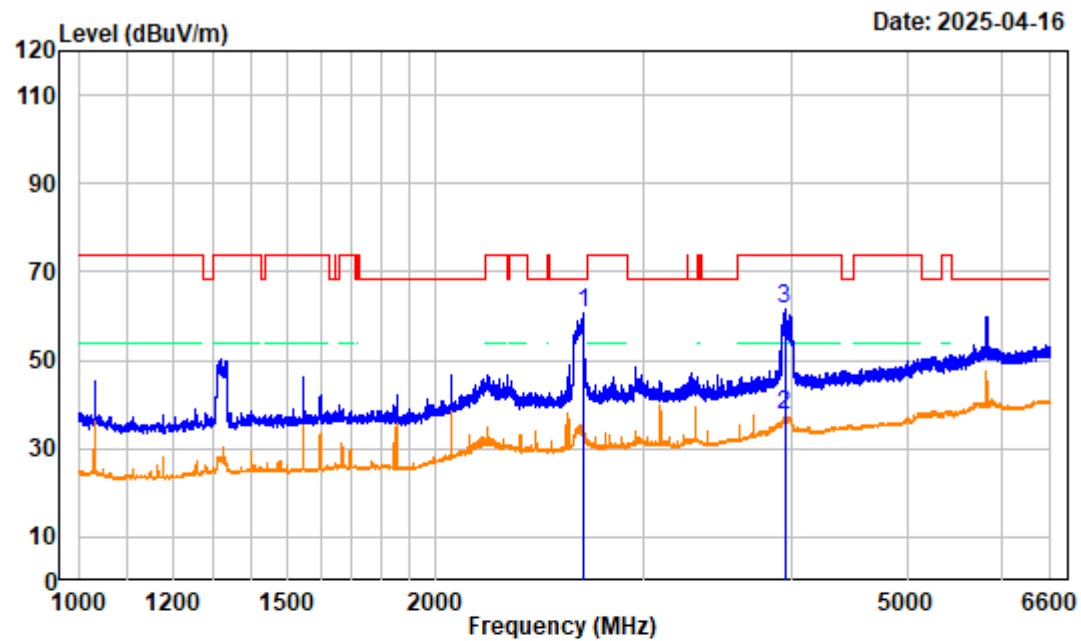

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5825MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2667.400	-10.24	70.89	60.65	68.20	-7.55 peak
2	3940.000	-8.30	45.77	37.47	54.00	-16.53 average
3	3940.000	-8.30	69.81	61.51	74.00	-12.49 peak

1GHz~6.6GHz 802.11ac40:

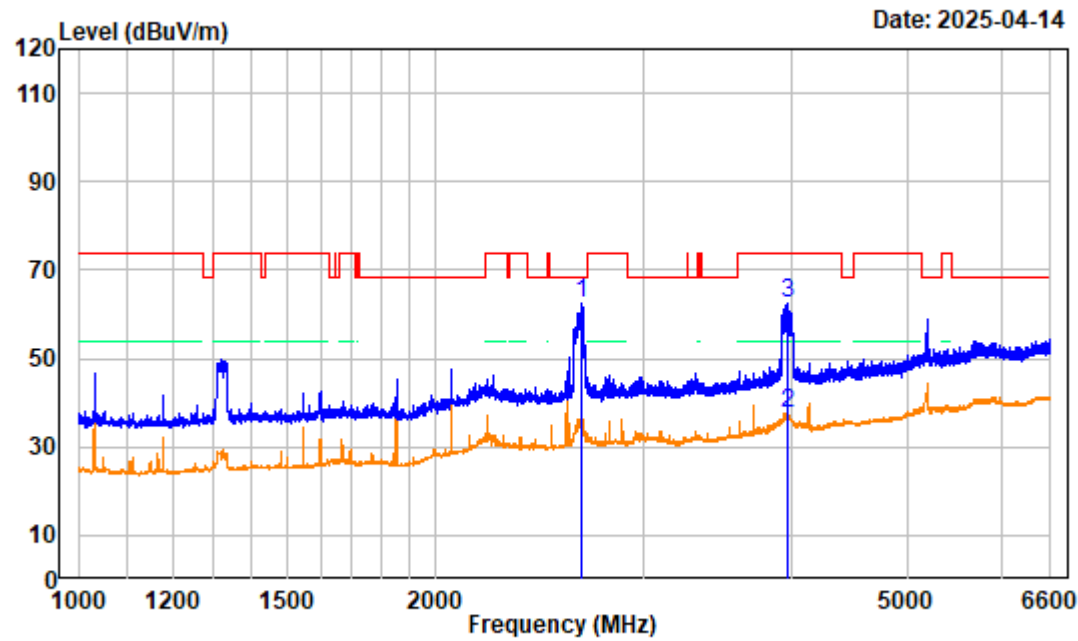


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.100	-10.45	73.12	62.67	68.20	-5.53 peak
2	3957.500	-8.35	45.73	37.38	54.00	-16.62 average
3	3957.500	-8.35	70.71	62.36	74.00	-11.64 peak

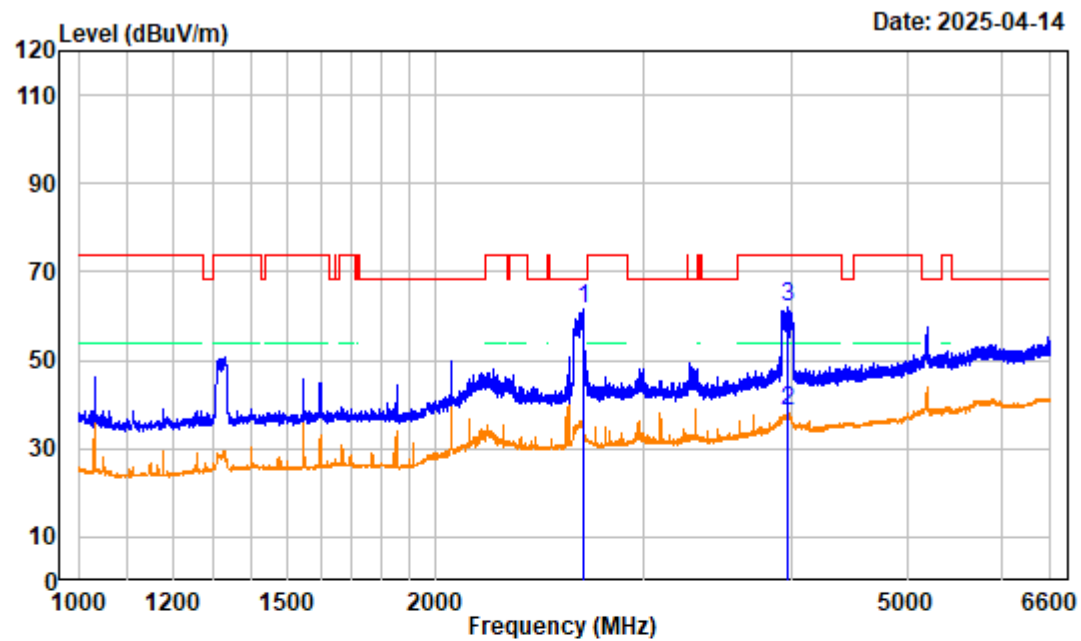


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	71.98	61.72	68.20	-6.48 peak
2	3963.100	-8.32	46.59	38.27	54.00	-15.73 average
3	3963.100	-8.32	70.58	62.26	74.00	-11.74 peak

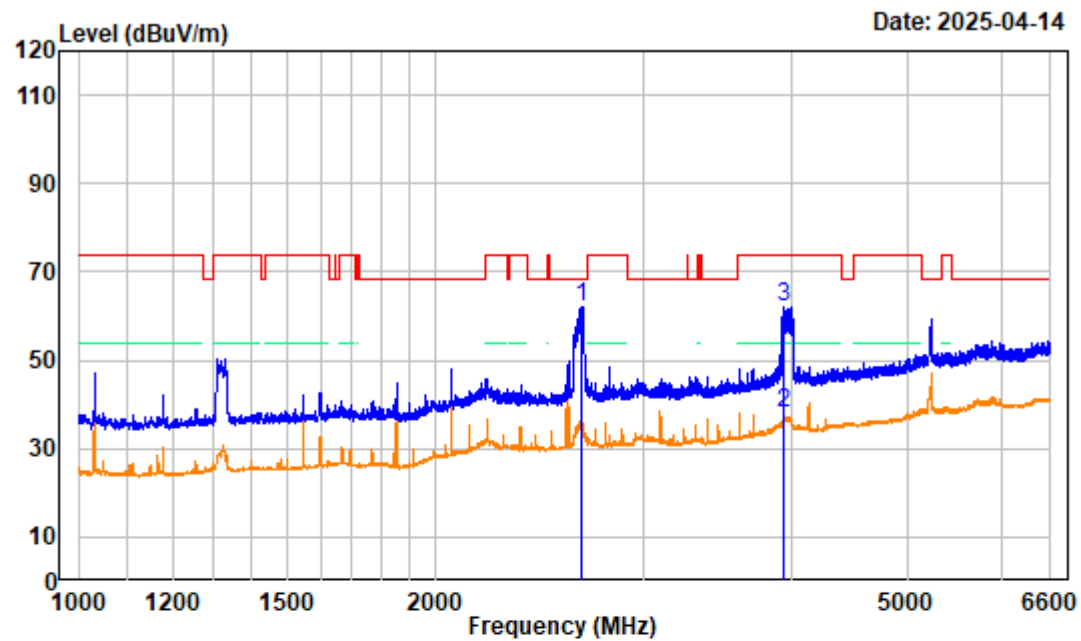


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2654.100	-10.45	72.50	62.05	68.20	-6.15	peak
2 3933.700	-8.23	46.44	38.21	54.00	-15.79	average
3 3933.700	-8.23	70.40	62.17	74.00	-11.83	peak

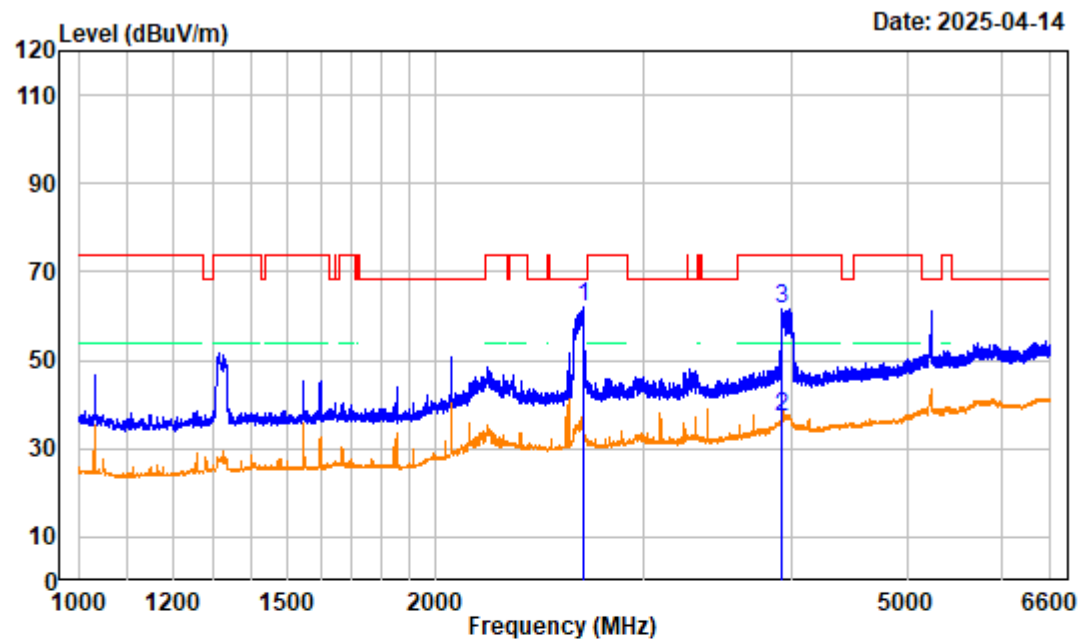


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2661.800	-10.33	72.56	62.23	68.20	-5.97	peak
2 3921.800	-8.12	45.15	37.03	54.00	-16.97	average
3 3921.800	-8.12	69.87	61.75	74.00	-12.25	peak

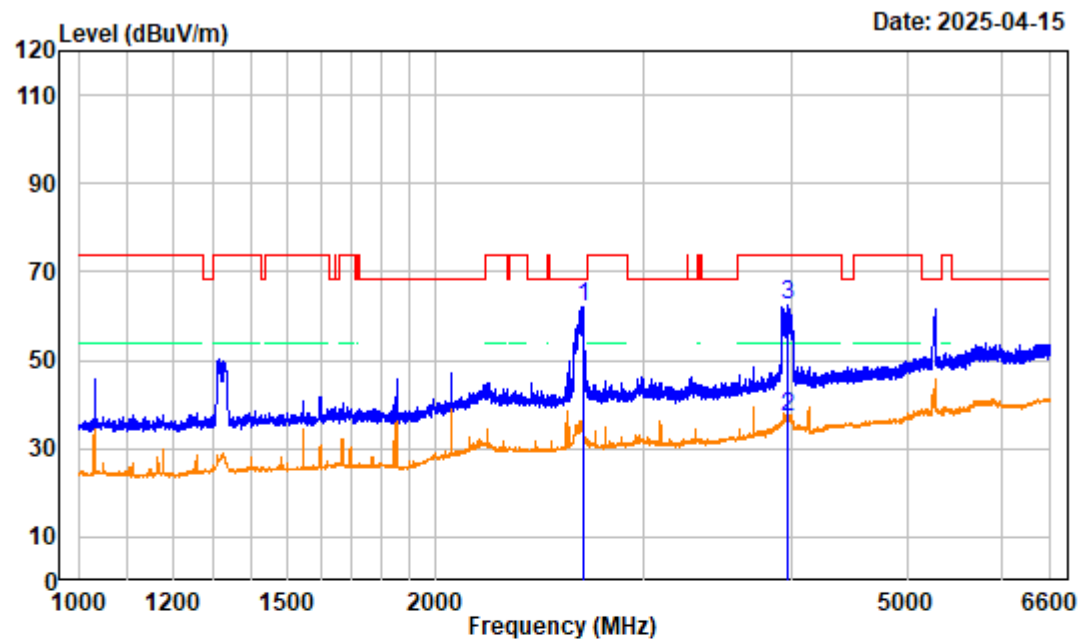


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2661.100	-10.34	72.50	62.16	68.20	-6.04 peak
2	3955.400	-8.36	45.40	37.04	54.00	-16.96 average
3	3955.400	-8.36	70.79	62.43	74.00	-11.57 peak

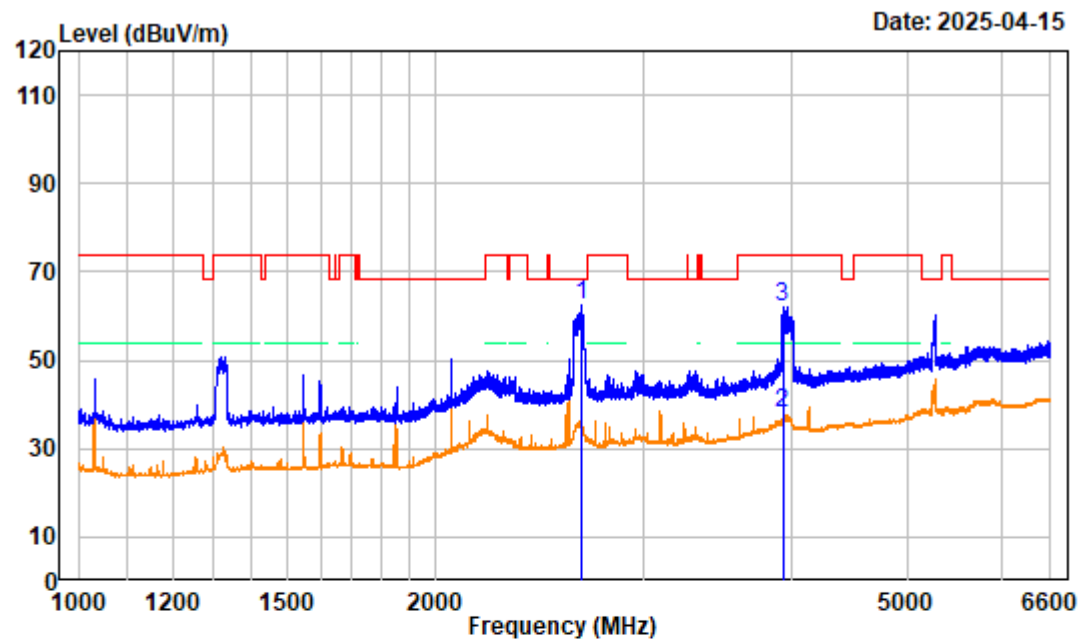


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2656.900	-10.41	73.07	62.66	68.20	-5.54 peak
2	3924.600	-8.15	46.33	38.18	54.00	-15.82 average
3	3924.600	-8.15	70.29	62.14	74.00	-11.86 peak

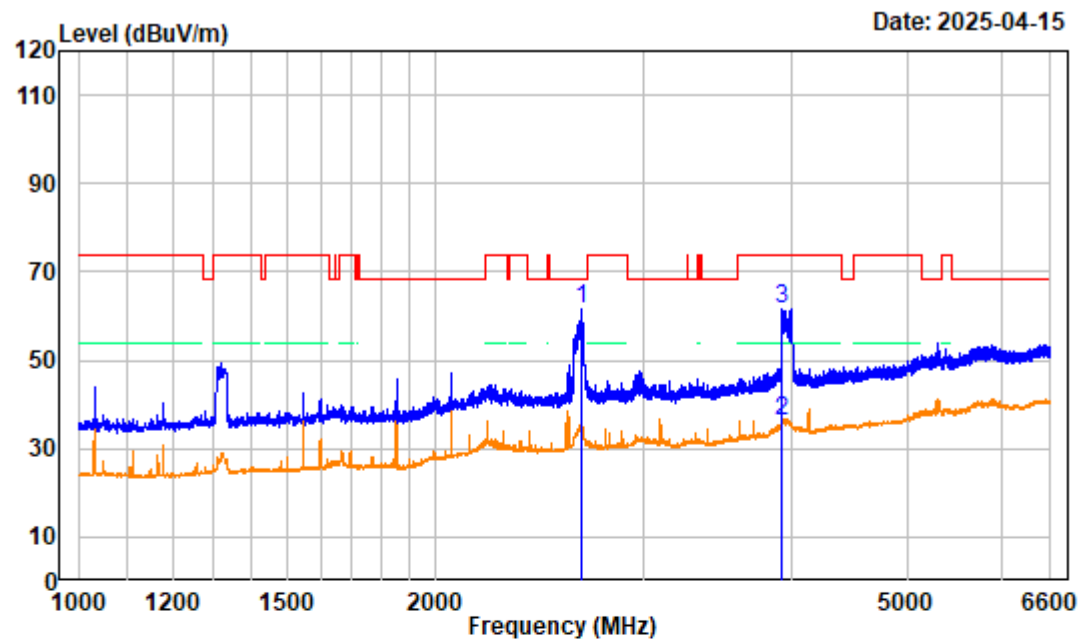

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5310MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2657.600	-10.40	71.87	61.47	68.20	-6.73	peak
2 3921.800	-8.12	44.34	36.22	54.00	-17.78	average
3 3921.800	-8.12	69.84	61.72	74.00	-12.28	peak

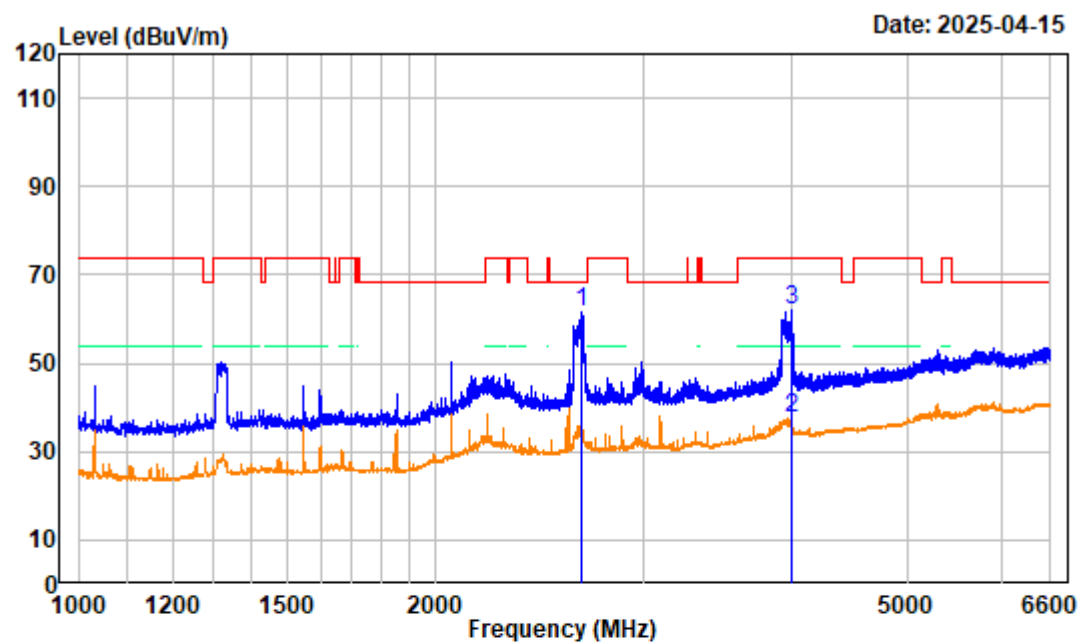

Site : chamber

Condition : 3m VERTICAL


Project No.: 2504R28083E-RFTester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5310MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.700	-10.36	72.11	61.75	68.20	-6.45	peak
2	3994.600	-8.14	45.89	37.75	54.00	-16.25	average
3	3994.600	-8.14	70.02	61.88	74.00	-12.12	peak

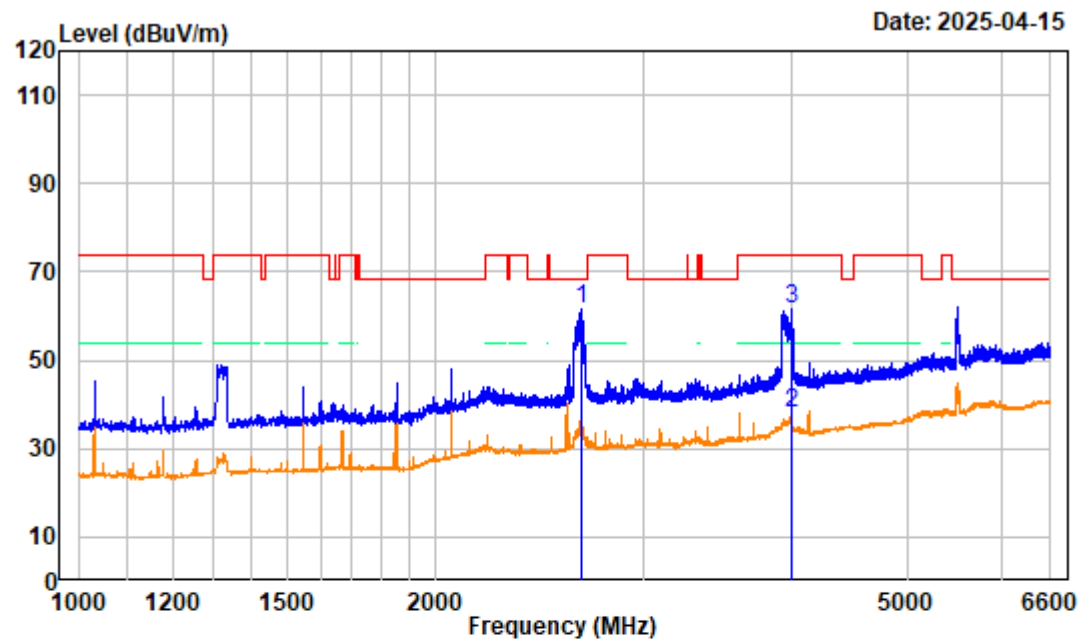


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.100	-10.45	72.10	61.65	68.20	-6.55	peak
2	3996.000	-8.13	46.01	37.88	54.00	-16.12	average
3	3996.000	-8.13	69.76	61.63	74.00	-12.37	peak

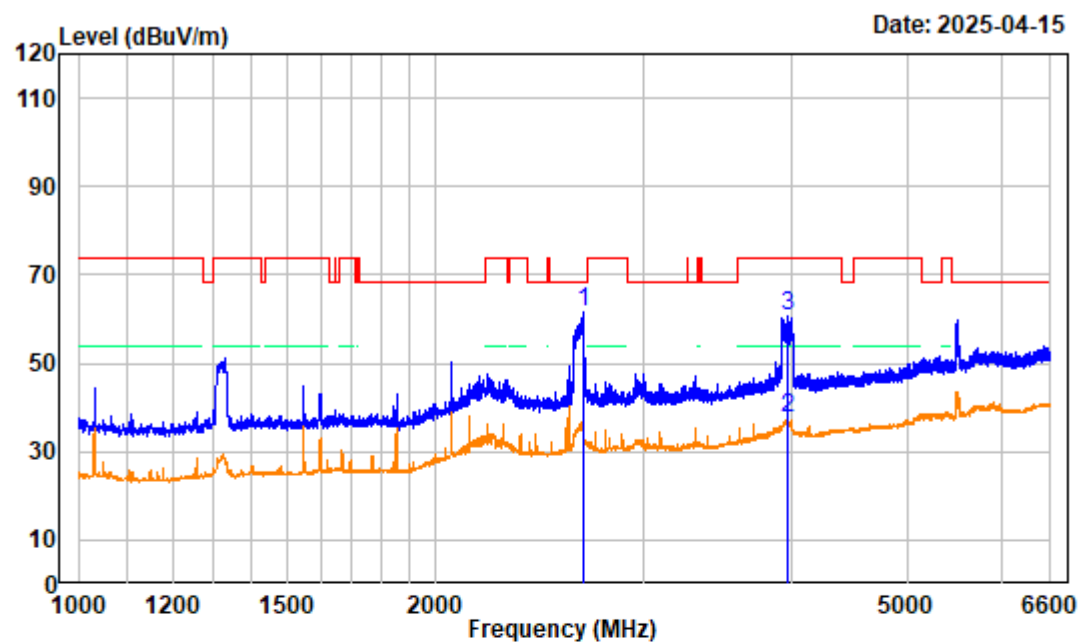


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2661.100	-10.34	71.73	61.39	68.20	-6.81	peak
2 3967.300	-8.30	46.06	37.76	54.00	-16.24	average
3 3967.300	-8.30	68.96	60.66	74.00	-13.34	peak

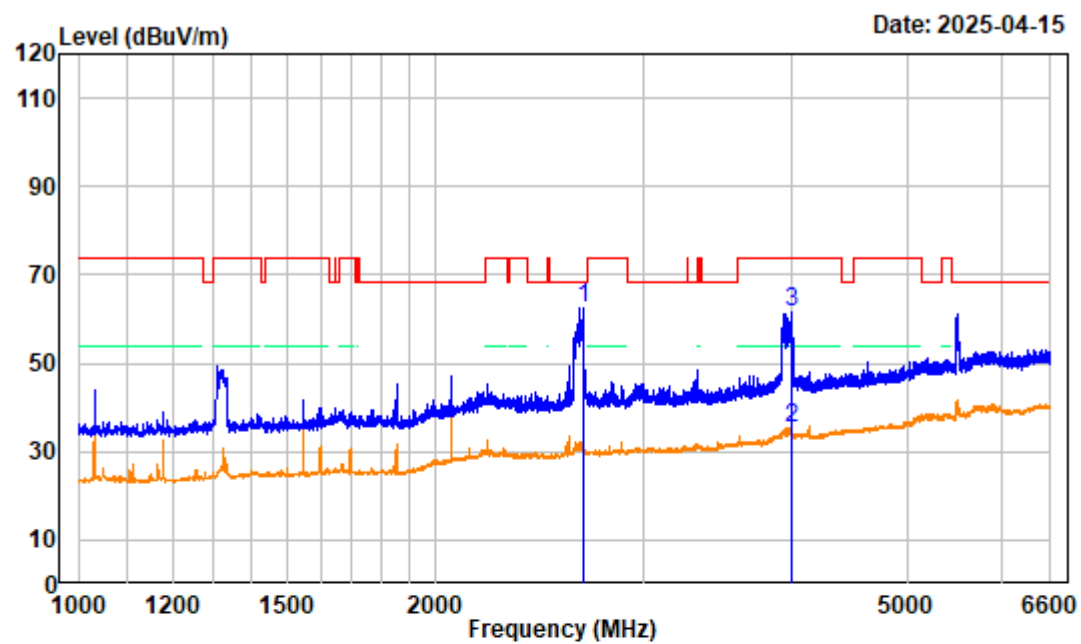


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Middle Channel 5550MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2663.200	-10.31	72.95	62.64	68.20	-5.56 peak
2	3998.100	-8.12	43.38	35.26	54.00	-18.74 average
3	3998.100	-8.12	69.54	61.42	74.00	-12.58 peak

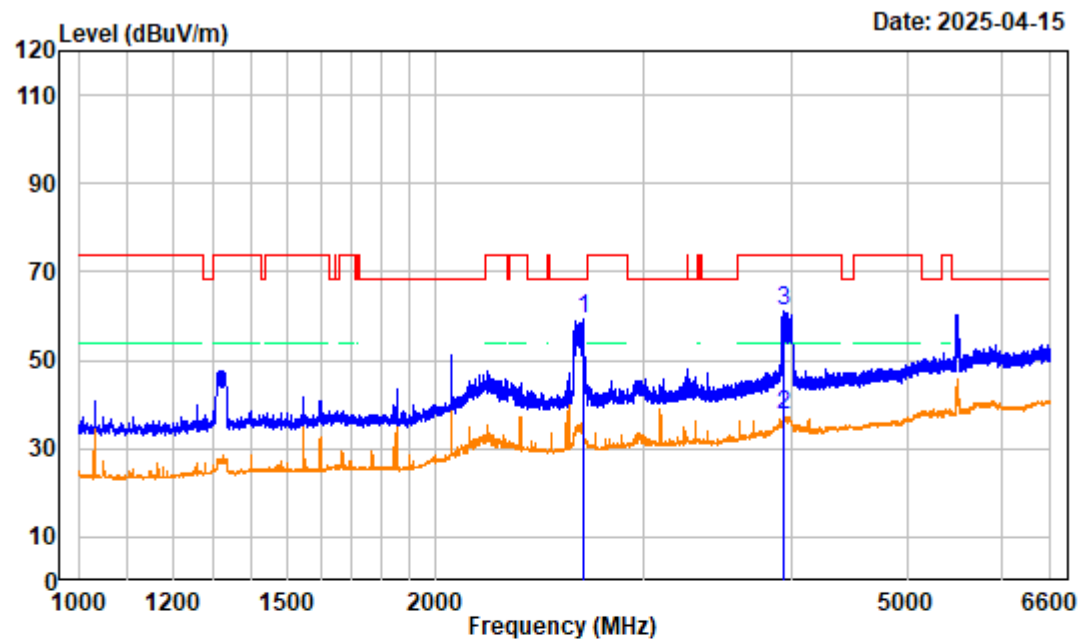


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Middle Channel 5550MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.000	-10.26	69.41	59.15	68.20	-9.05 peak
2	3937.900	-8.27	45.96	37.69	54.00	-16.31 average
3	3937.900	-8.27	69.58	61.31	74.00	-12.69 peak

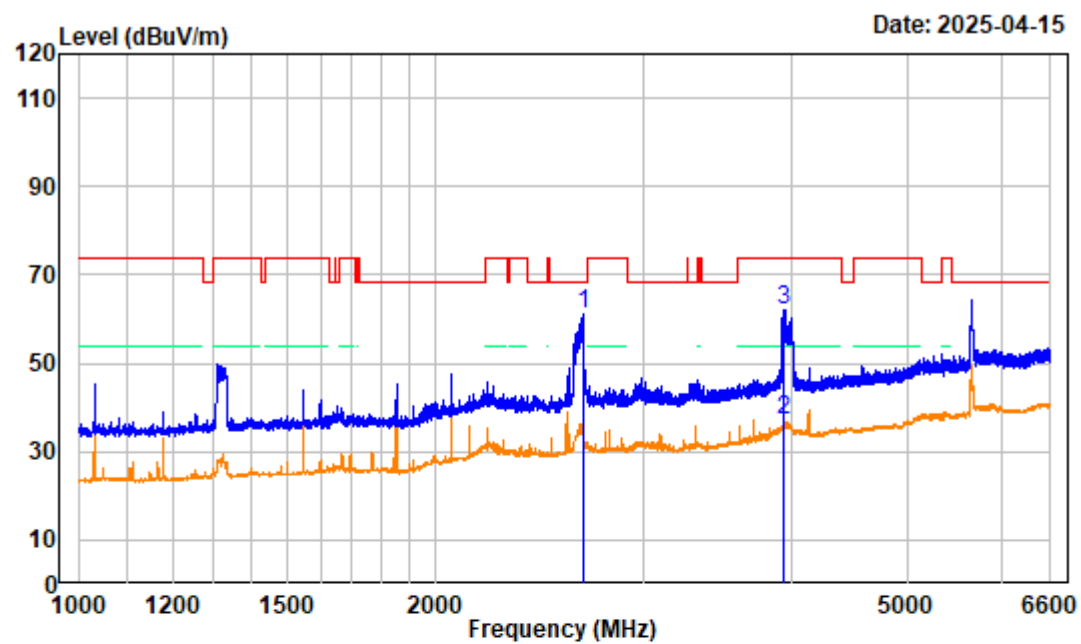


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2665.300	-10.28	71.38	61.10	68.20	-7.10	peak
2 3939.300	-8.29	45.55	37.26	54.00	-16.74	average
3 3939.300	-8.29	70.51	62.22	74.00	-11.78	peak

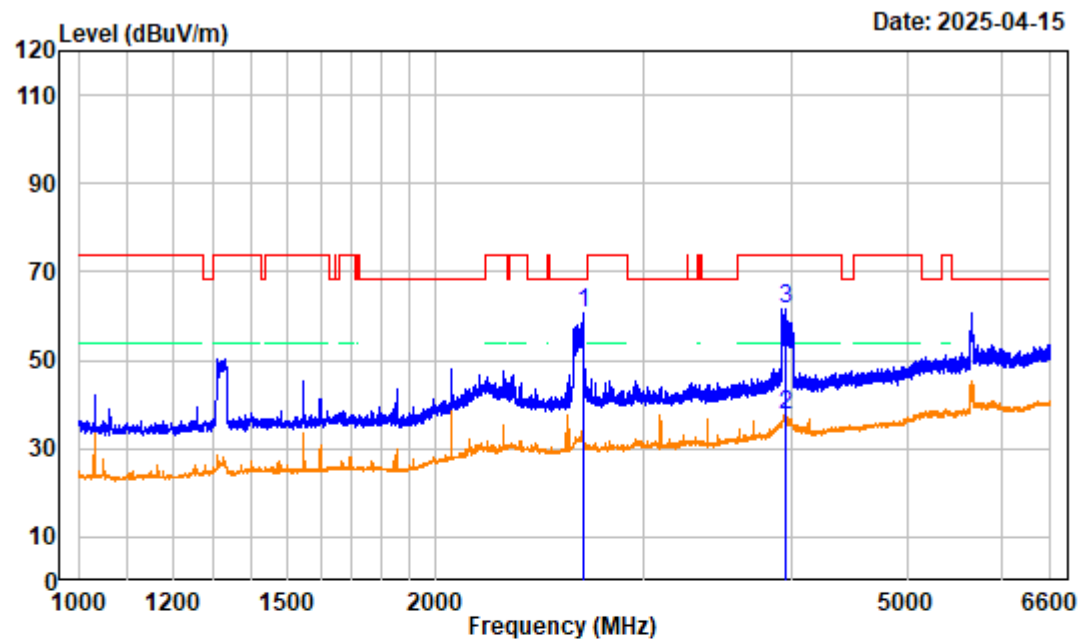


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2666.700	-10.25	70.77	60.52	68.20	-7.68	peak
2	3950.500	-8.39	46.06	37.67	54.00	-16.33	average
3	3950.500	-8.39	70.18	61.79	74.00	-12.21	peak

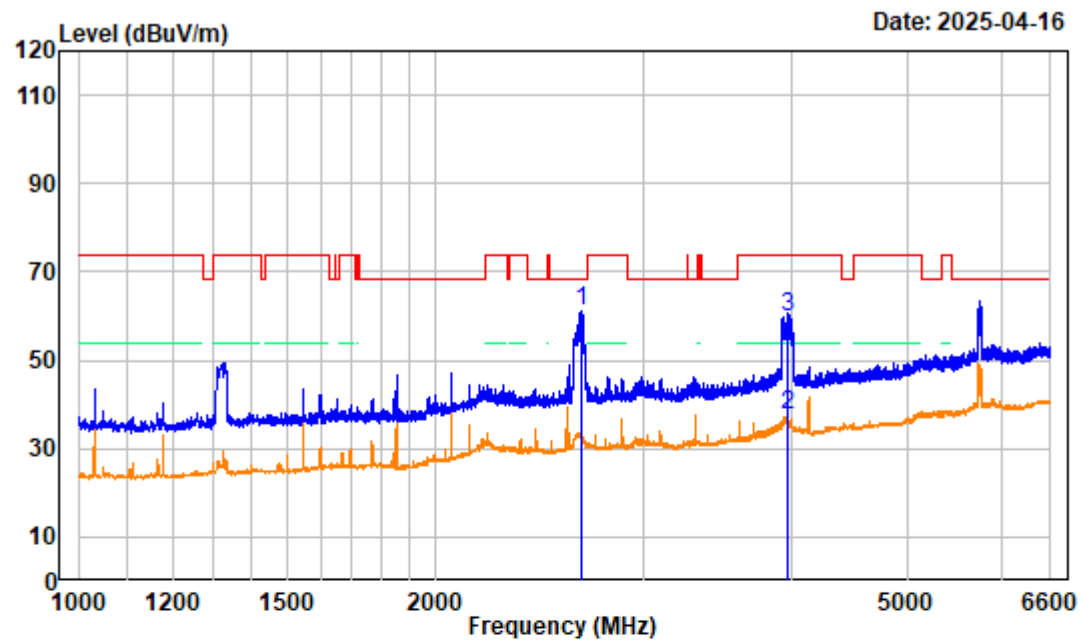


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5755MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2659.000	-10.38	71.57	61.19	68.20	-7.01 peak
2	3966.600	-8.30	46.10	37.80	54.00	-16.20 average
3	3966.600	-8.30	68.19	59.89	74.00	-14.11 peak

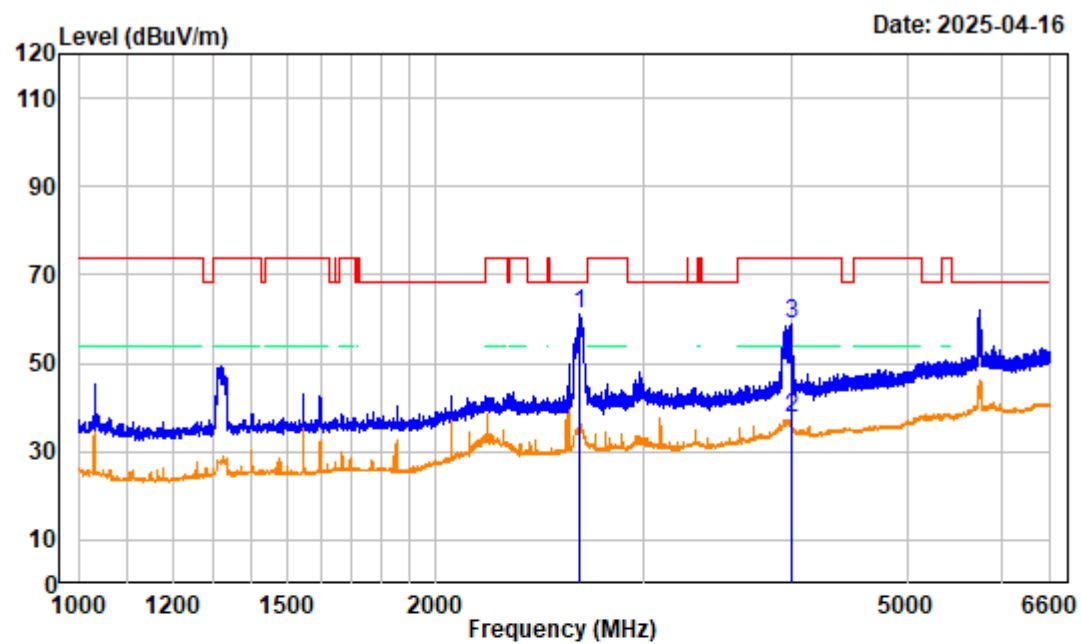


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5755MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2649.200	-10.51	71.67	61.16	68.20	-7.04	peak
2 3993.200	-8.15	45.93	37.78	54.00	-16.22	average
3 3993.200	-8.15	67.00	58.85	74.00	-15.15	peak

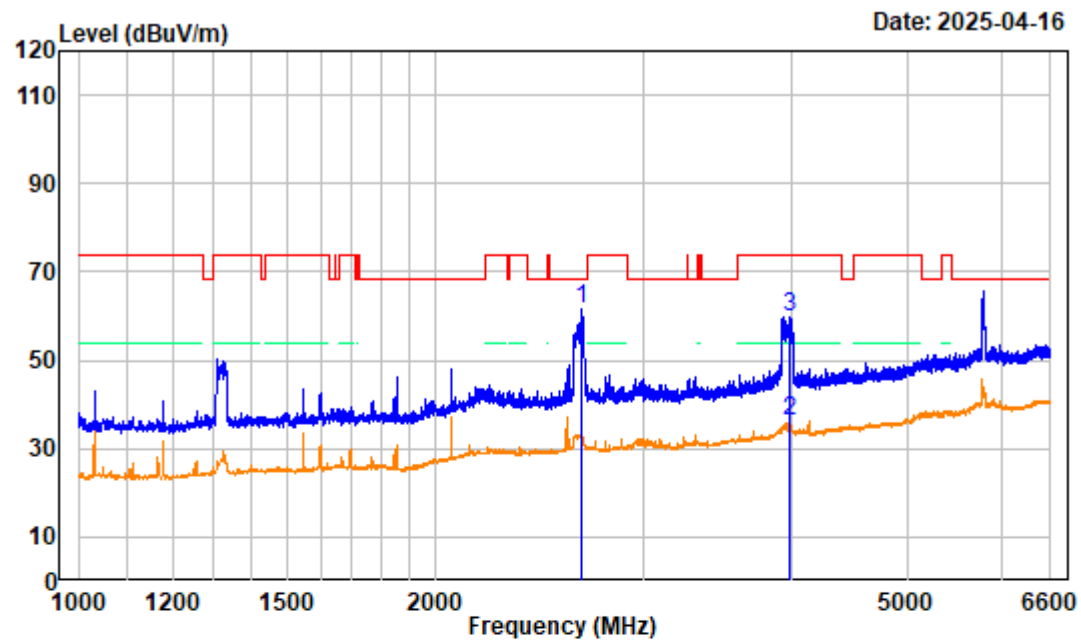

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5795MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2654.100	-10.45	71.86	61.41	68.20	-6.79	peak
2	3977.100	-8.24	44.69	36.45	54.00	-17.55	average
3	3977.100	-8.24	68.08	59.84	74.00	-14.16	peak

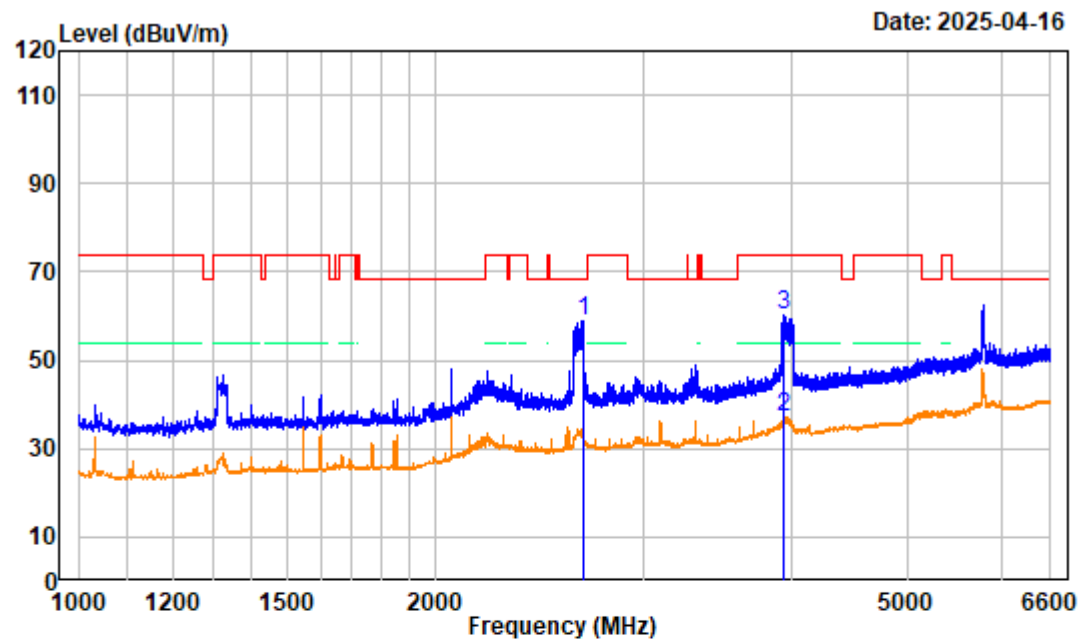

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5795MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2665.300	-10.28	69.21	58.93	68.20	-9.27	peak
2 3931.600	-8.22	45.43	37.21	54.00	-16.79	average
3 3931.600	-8.22	68.57	60.35	74.00	-13.65	peak

1GHz~6.6GHz 802.11ac80:

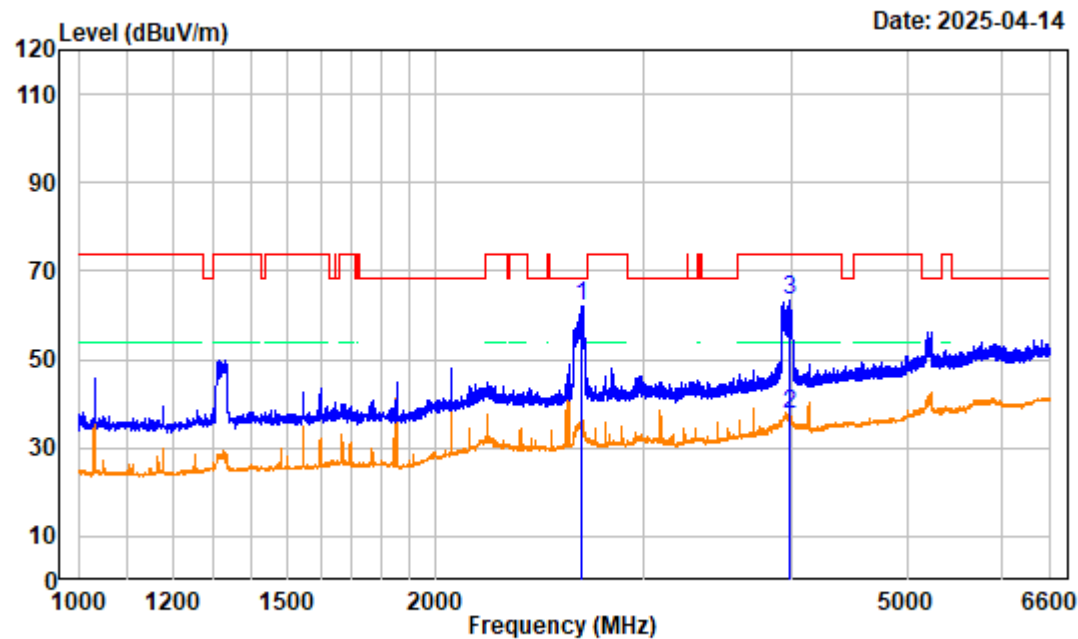


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5210MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2657.600	-10.40	72.64	62.24	68.20	-5.96 peak
2	3974.300	-8.25	45.66	37.41	54.00	-16.59 average
3	3974.300	-8.25	71.46	63.21	74.00	-10.79 peak

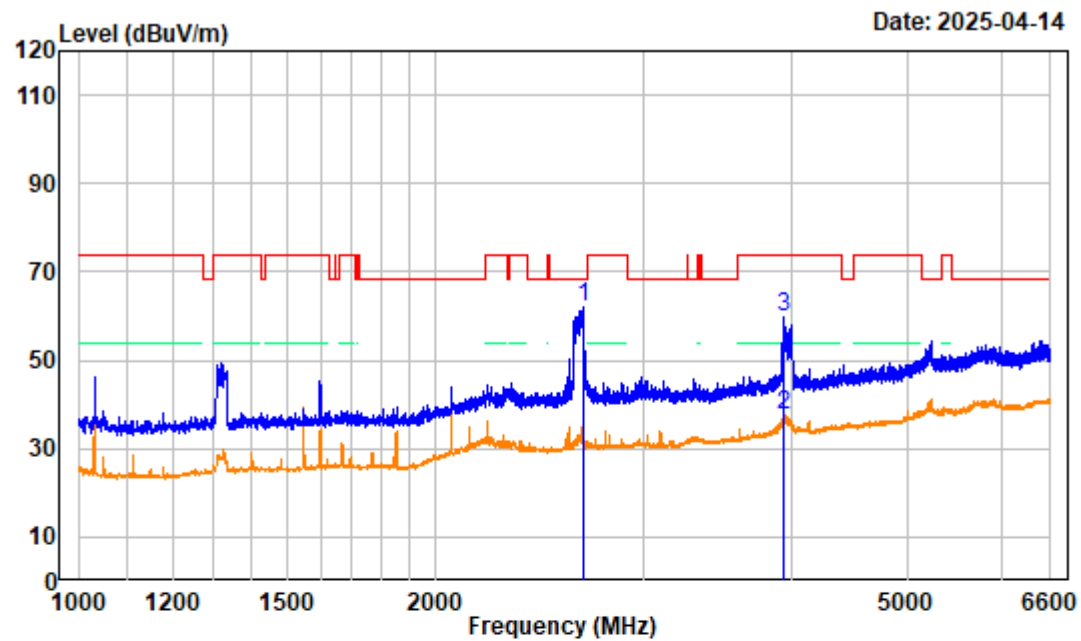


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5210MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2665.300	-10.28	72.36	62.08	68.20	-6.12	peak
2 3926.000	-8.16	45.58	37.42	54.00	-16.58	average
3 3926.000	-8.16	67.87	59.71	74.00	-14.29	peak

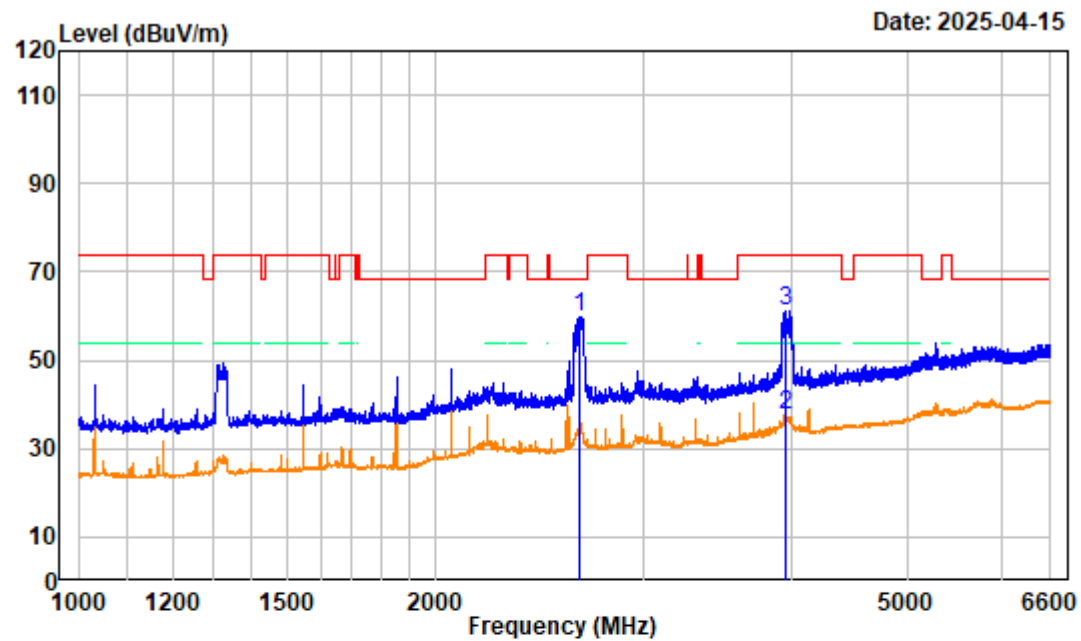


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5290MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2649.200	-10.51	70.48	59.97	68.20	-8.23	peak
2	3943.500	-8.33	45.99	37.66	54.00	-16.34	average
3	3943.500	-8.33	69.39	61.06	74.00	-12.94	peak

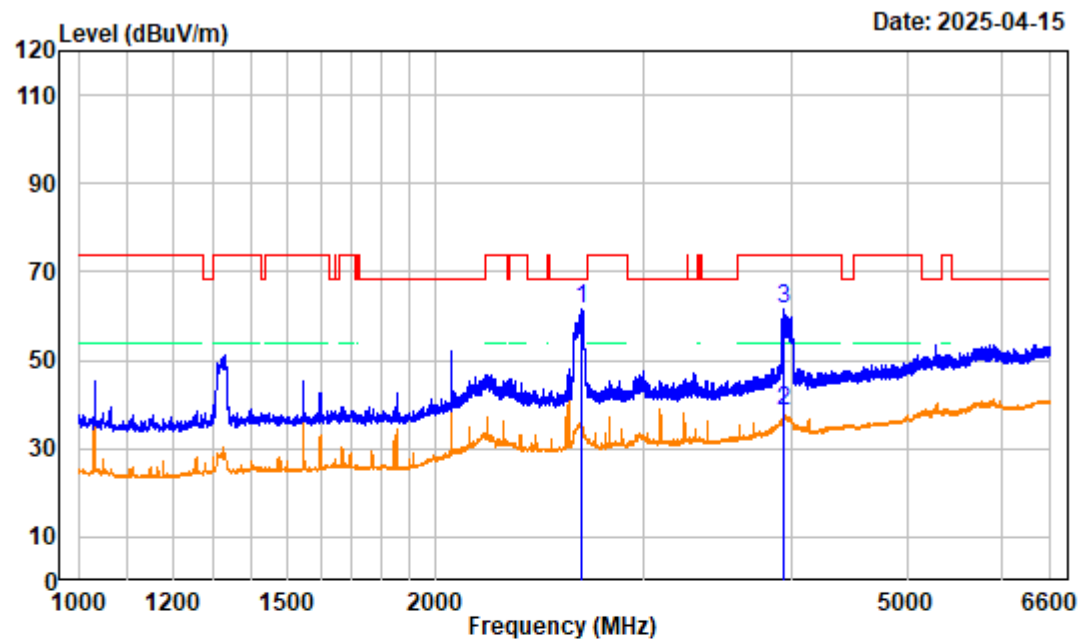


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5290MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2652.000	-10.49	72.15	61.66	68.20	-6.54	peak
2	3935.100	-8.24	46.66	38.42	54.00	-15.58	average
3	3935.100	-8.24	69.91	61.67	74.00	-12.33	peak

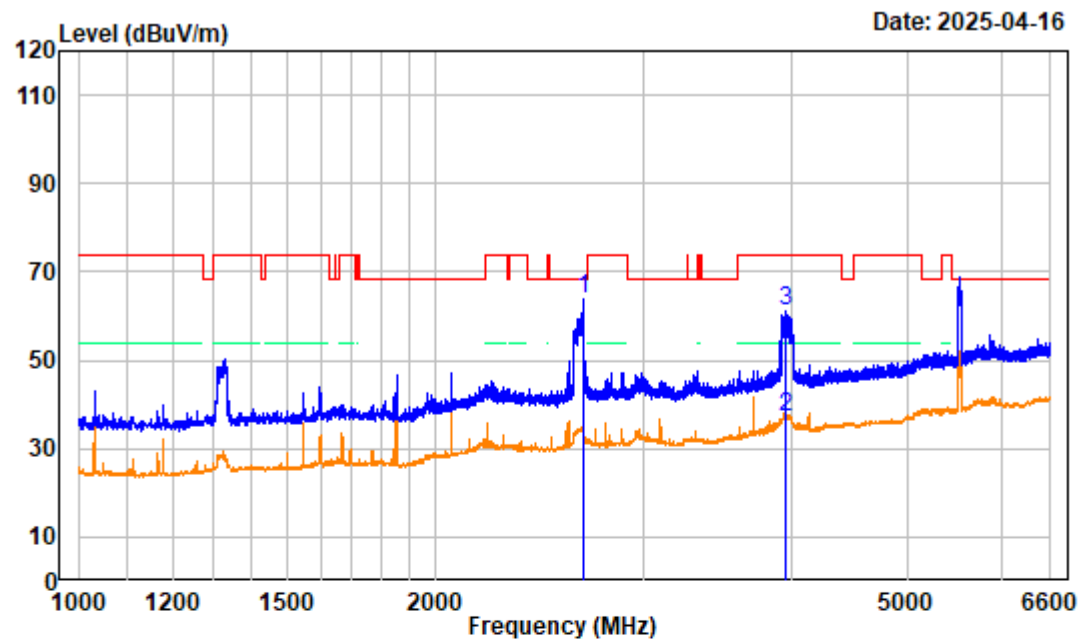


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 Low Channel 5530MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2665.300	-10.28	74.01	63.73	68.20	-4.47	peak
2	3942.800	-8.32	45.51	37.19	54.00	-16.81	average
3	3942.800	-8.32	69.47	61.15	74.00	-12.85	peak

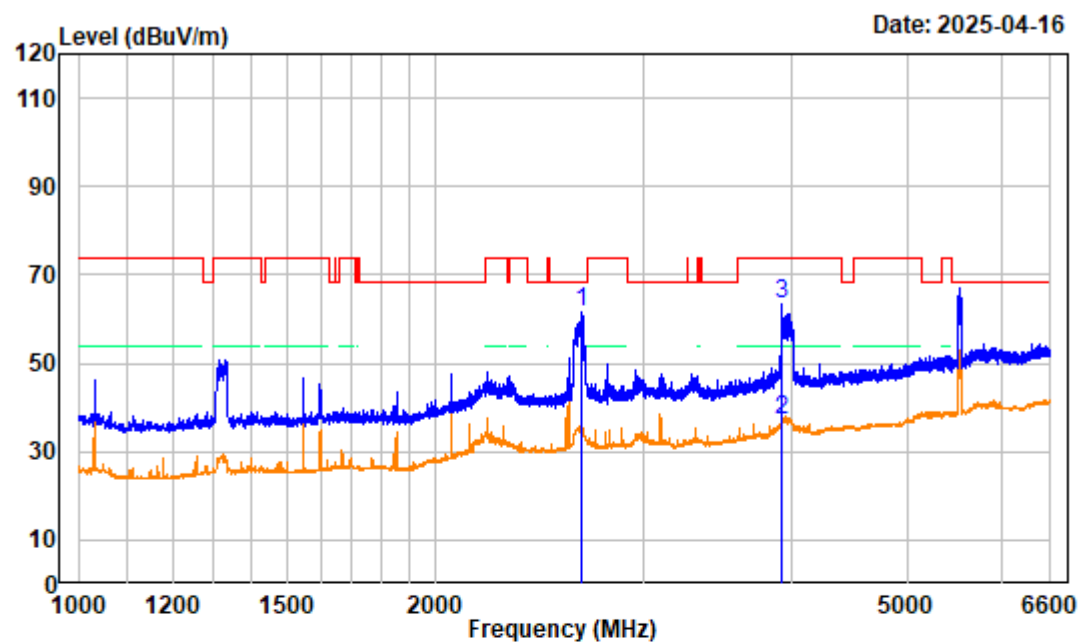


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 Low Channel 5530MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2658.300	-10.39	72.00	61.61	68.20	-6.59 peak
2	3921.800	-8.12	45.17	37.05	54.00	-16.95 average
3	3921.800	-8.12	71.50	63.38	74.00	-10.62 peak

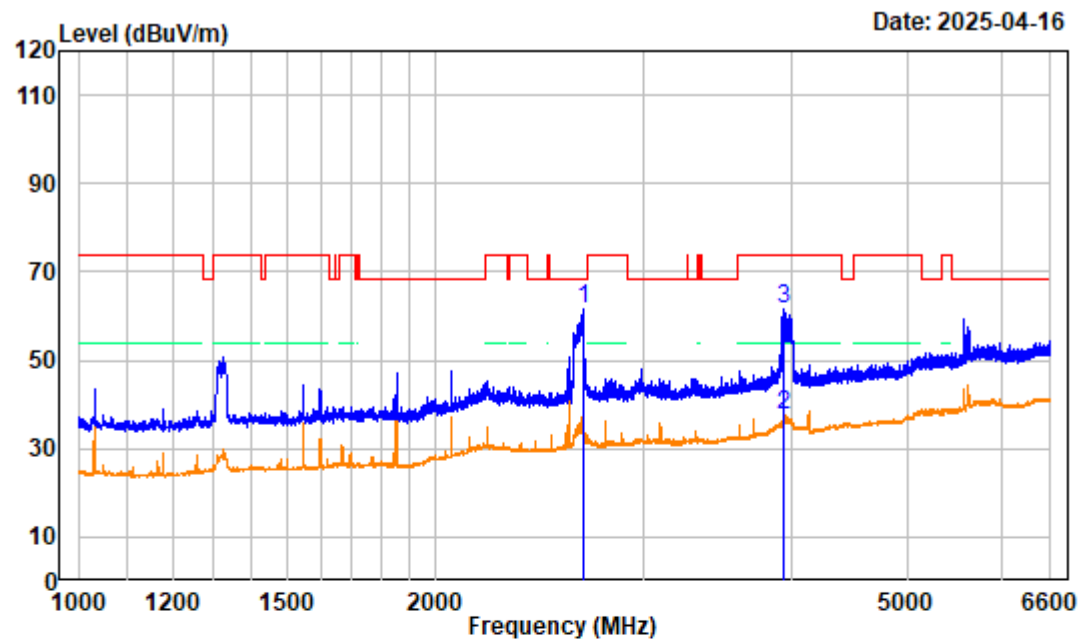


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 High Channel 5610MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2661.800	-10.33	71.93	61.60	68.20	-6.60 peak
2	3934.400	-8.24	45.68	37.44	54.00	-16.56 average
3	3934.400	-8.24	69.96	61.72	74.00	-12.28 peak

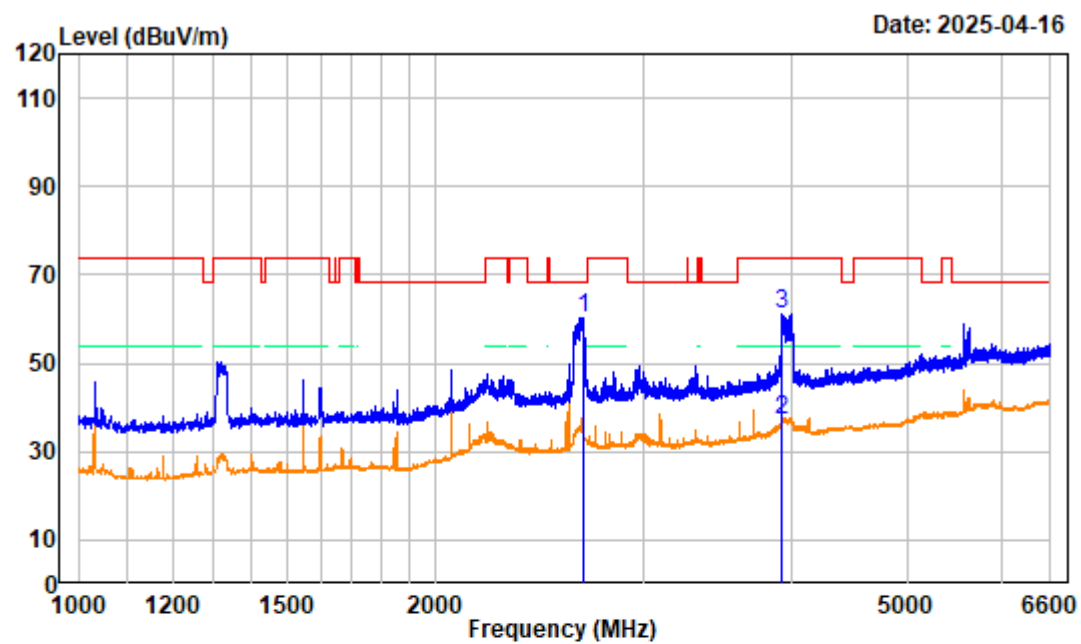


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 High Channel 5610MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read	Limit	Over	Remark
			Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	2667.400	-10.24	70.61	60.37	68.20	-7.83 peak
2	3922.500	-8.12	45.29	37.17	54.00	-16.83 average
3	3922.500	-8.12	69.27	61.15	74.00	-12.85 peak

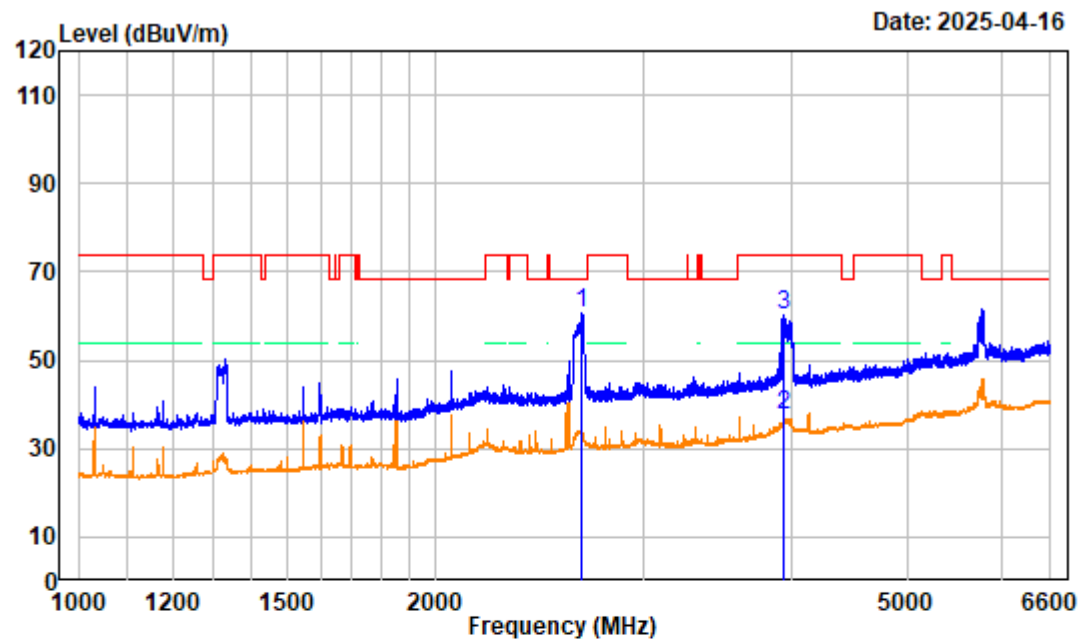

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5775MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2659.700	-10.36	71.22	60.86	68.20	-7.34	peak
2 3931.600	-8.22	45.63	37.41	54.00	-16.59	average
3 3931.600	-8.22	68.36	60.14	74.00	-13.86	peak

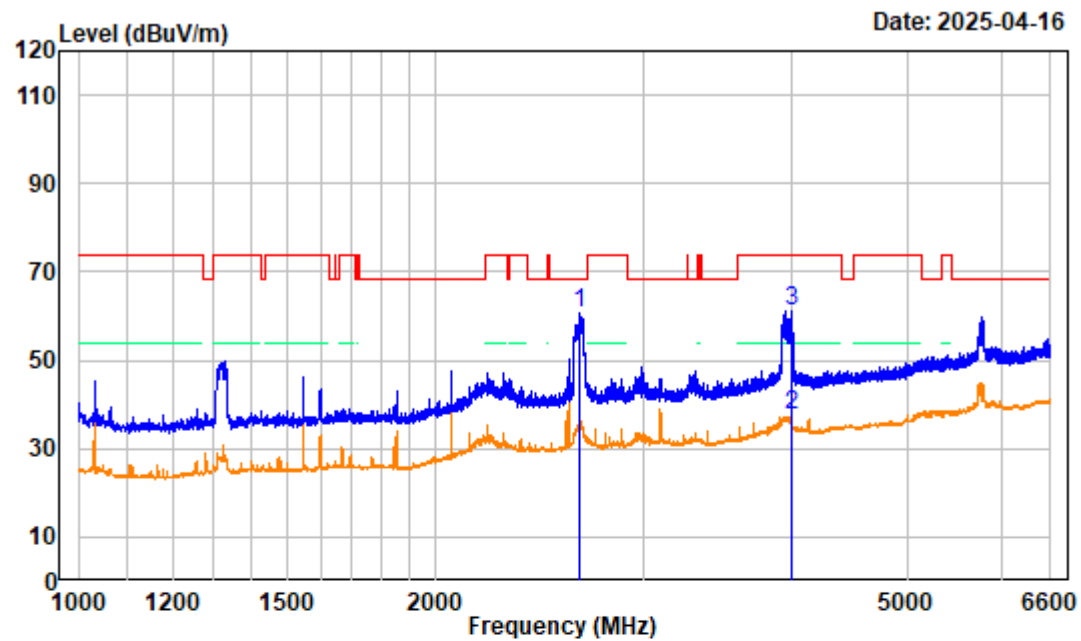

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5775MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2646.400	-10.47	71.05	60.58	68.20	-7.62	peak
2	3999.500	-8.11	45.78	37.67	54.00	-16.33	average
3	3999.500	-8.11	69.35	61.24	74.00	-12.76	peak

6.6GHz~18GHz 802.11a Ant0:

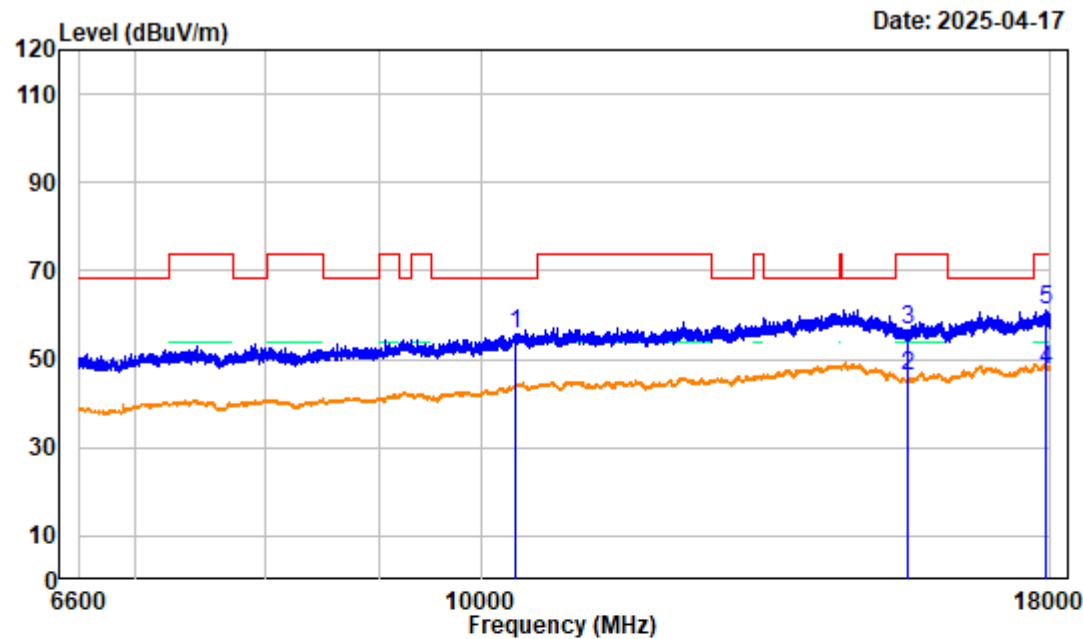

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.84	52.00	55.84	68.20	-12.36	peak
2 15540.000	4.75	41.39	46.14	54.00	-7.86	average
3 15540.000	4.75	51.93	56.68	74.00	-17.32	peak
4 17914.500	8.22	39.51	47.73	54.00	-6.27	average
5 17914.500	8.22	52.79	61.01	74.00	-12.99	peak

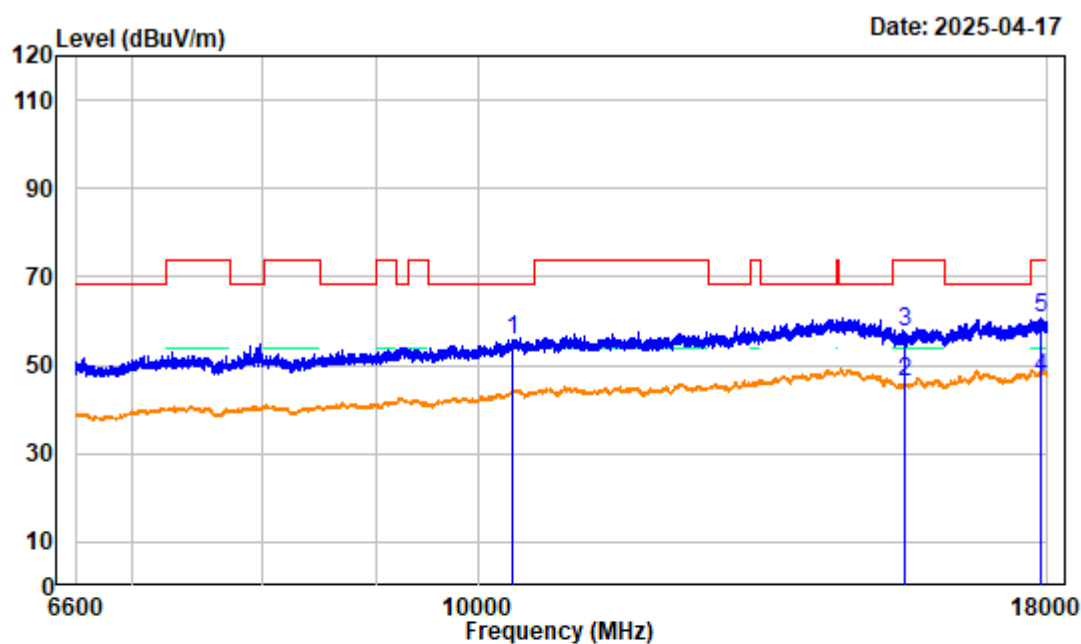

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5180MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	52.05	55.89	68.20	-12.31	peak
2	15540.000	4.75	41.59	46.34	54.00	-7.66	average
3	15540.000	4.75	52.65	57.40	74.00	-16.60	peak
4	17870.320	8.23	38.97	47.20	54.00	-6.80	average
5	17870.320	8.23	52.32	60.55	74.00	-13.45	peak

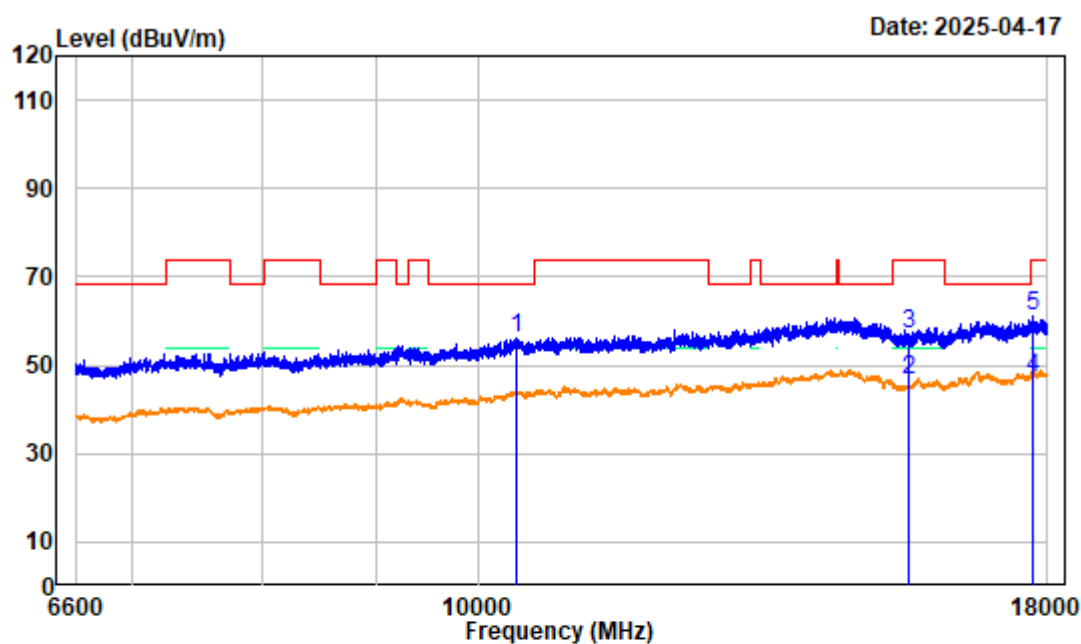

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5200MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.88	55.98	68.20	-12.22	peak
2	15600.000	4.60	41.92	46.52	54.00	-7.48	average
3	15600.000	4.60	52.68	57.28	74.00	-16.72	peak
4	17726.400	7.66	39.59	47.25	54.00	-6.75	average
5	17726.400	7.66	53.25	60.91	74.00	-13.09	peak

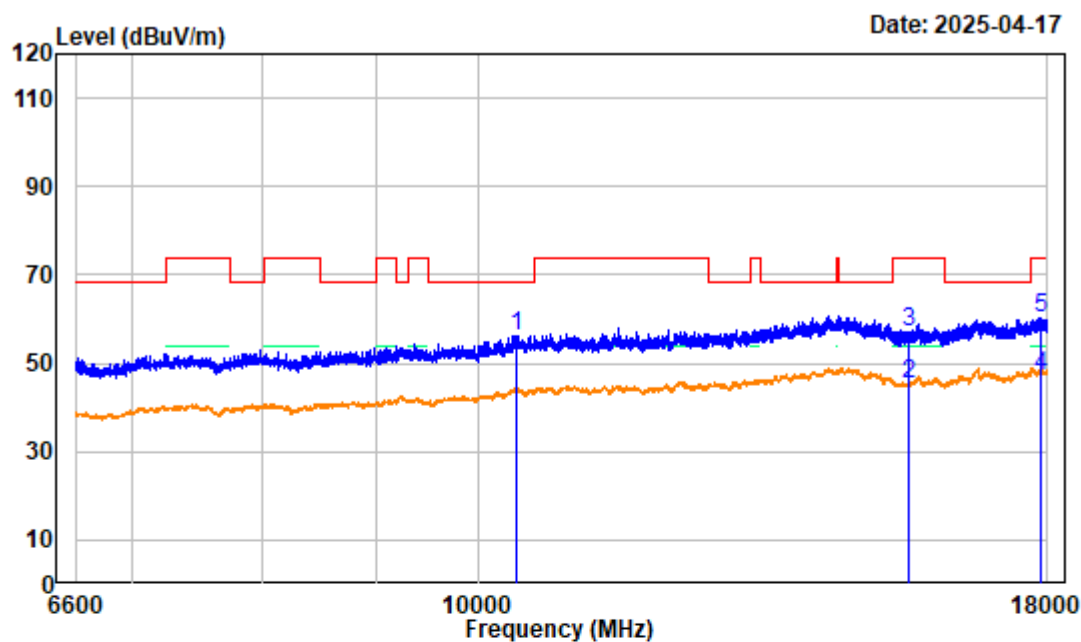

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5200MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.91	56.01	68.20	-12.19	peak
2	15600.000	4.60	40.53	45.13	54.00	-8.87	average
3	15600.000	4.60	52.30	56.90	74.00	-17.10	peak
4	17888.850	8.23	38.94	47.17	54.00	-6.83	average
5	17888.850	8.23	51.84	60.07	74.00	-13.93	peak

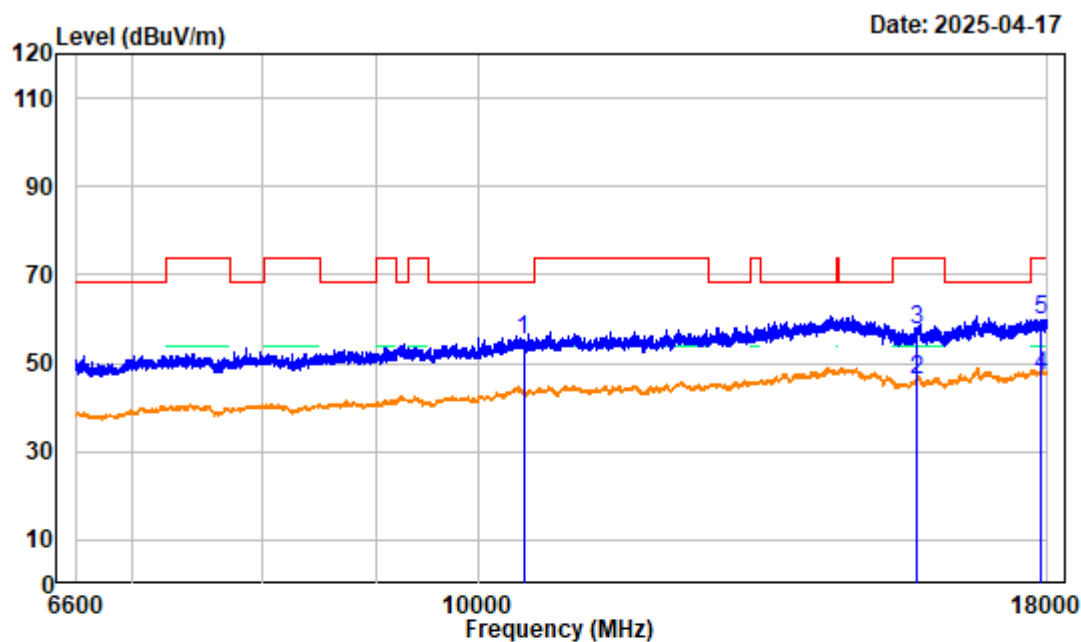

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.29	55.21	68.20	-12.99	peak
2	15720.000	4.90	41.37	46.27	54.00	-7.73	average
3	15720.000	4.90	52.39	57.29	74.00	-16.71	peak
4	17867.470	8.23	39.00	47.23	54.00	-6.77	average
5	17867.470	8.23	51.71	59.94	74.00	-14.06	peak

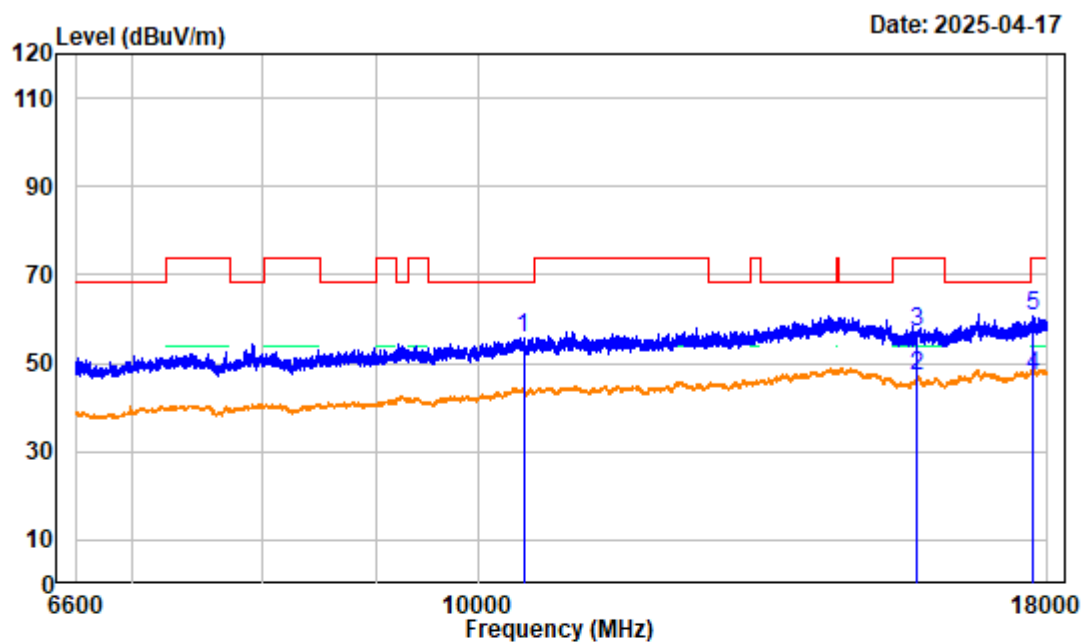

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.58	55.50	68.20	-12.70	peak
2	15720.000	4.90	42.13	47.03	54.00	-6.97	average
3	15720.000	4.90	52.34	57.24	74.00	-16.76	peak
4	17739.220	7.70	39.45	47.15	54.00	-6.85	average
5	17739.220	7.70	52.89	60.59	74.00	-13.41	peak

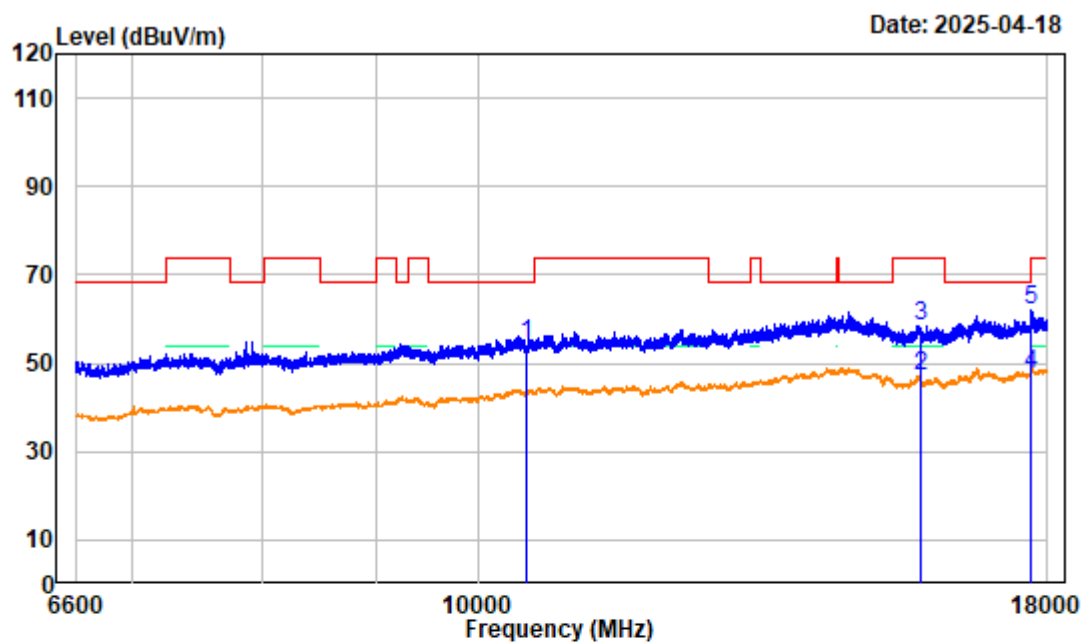

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.59	54.49	68.20	-13.71	peak
2	15780.000	5.17	41.95	47.12	54.00	-6.88	average
3	15780.000	5.17	53.32	58.49	74.00	-15.51	peak
4	17702.180	7.61	39.80	47.41	54.00	-6.59	average
5	17702.180	7.61	54.61	62.22	74.00	-11.78	peak

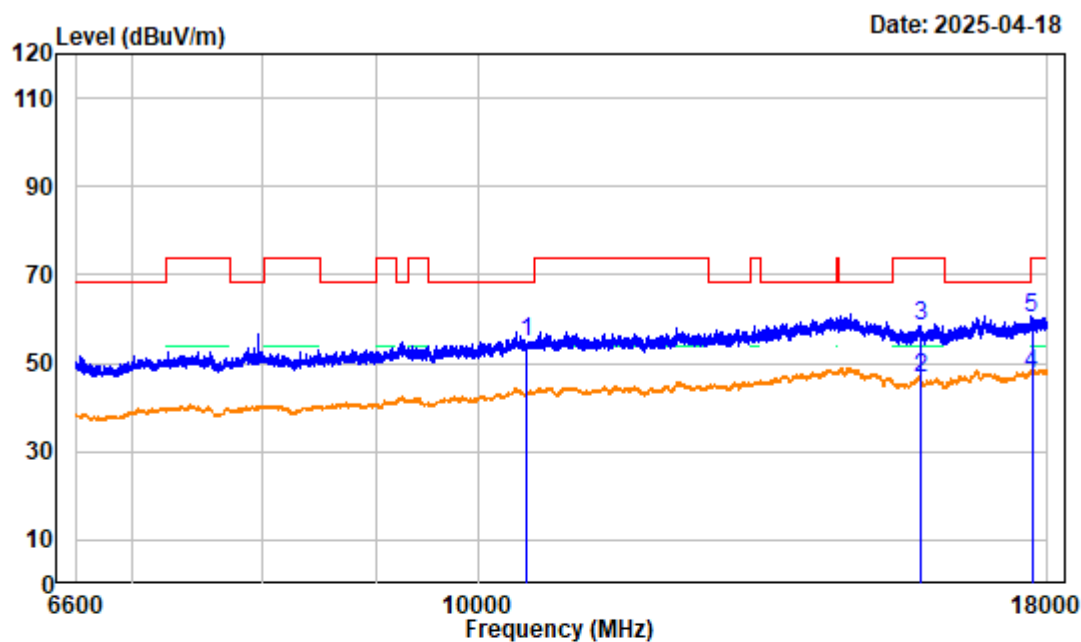

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.69	54.59	68.20	-13.61	peak
2	15780.000	5.17	41.37	46.54	54.00	-7.46	average
3	15780.000	5.17	53.24	58.41	74.00	-15.59	peak
4	17713.570	7.64	40.00	47.64	54.00	-6.36	average
5	17713.570	7.64	52.72	60.36	74.00	-13.64	peak

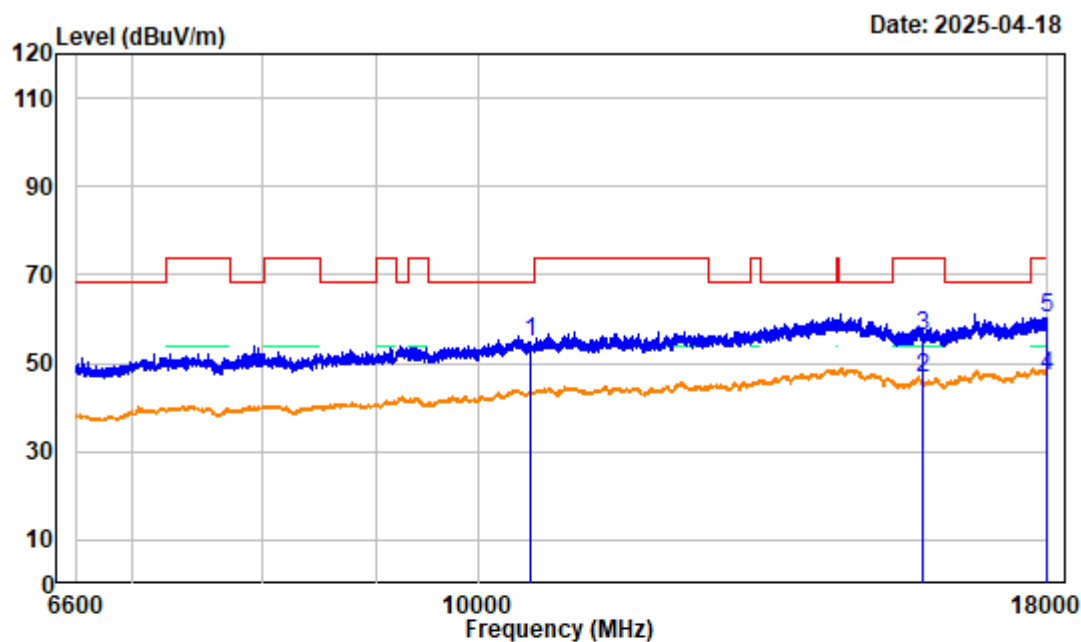

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5280MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	50.77	54.92	68.20	-13.28	peak
2	15840.000	5.04	41.43	46.47	54.00	-7.53	average
3	15840.000	5.04	51.22	56.26	74.00	-17.74	peak
4	17984.320	8.29	38.95	47.24	54.00	-6.76	average
5	17984.320	8.29	52.15	60.44	74.00	-13.56	peak

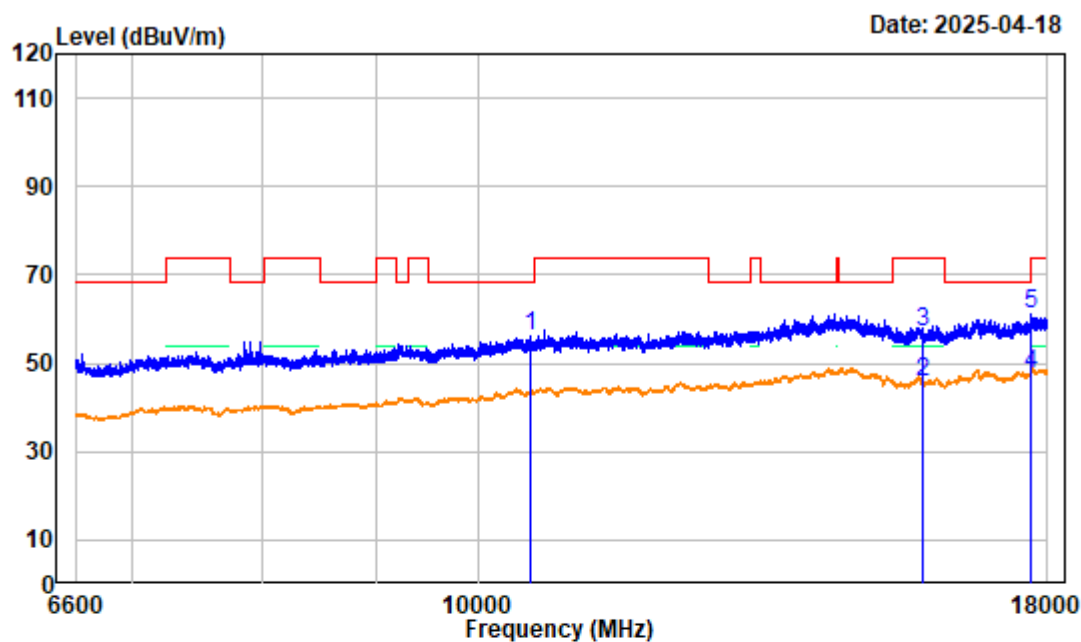

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5280MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	51.99	56.14	68.20	-12.06	peak
2	15840.000	5.04	40.60	45.64	54.00	-8.36	average
3	15840.000	5.04	51.86	56.90	74.00	-17.10	peak
4	17709.300	7.62	39.78	47.40	54.00	-6.60	average
5	17709.300	7.62	53.50	61.12	74.00	-12.88	peak

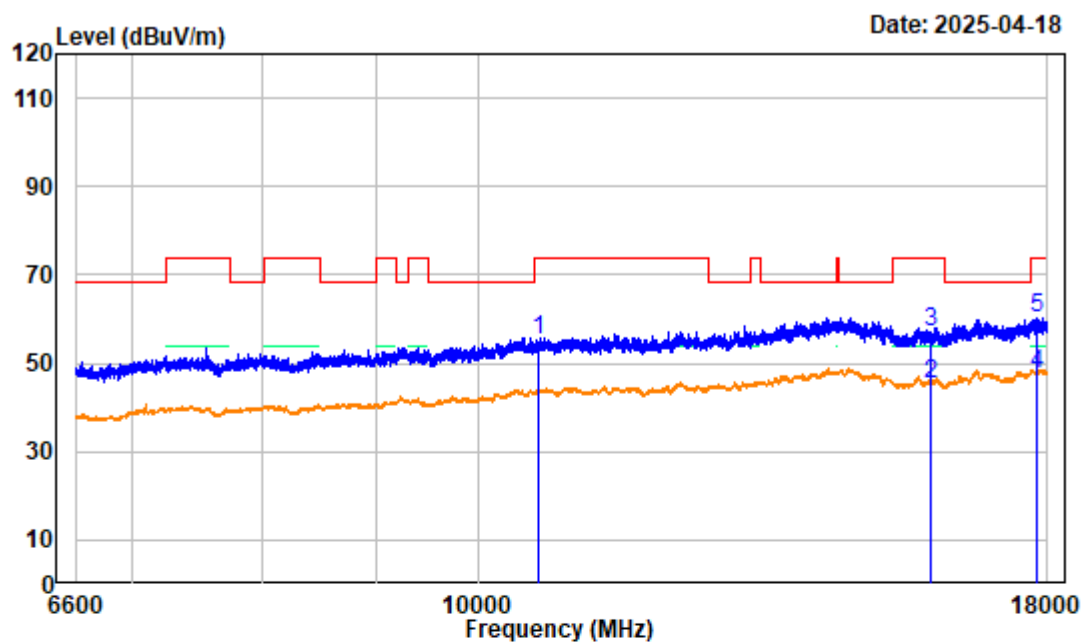

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5320MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.67	55.09	74.00	-18.91	peak
2	15960.000	4.76	40.51	45.27	54.00	-8.73	average
3	15960.000	4.76	52.08	56.84	74.00	-17.16	peak
4	17817.600	7.81	39.81	47.62	54.00	-6.38	average
5	17817.600	7.81	52.32	60.13	74.00	-13.87	peak

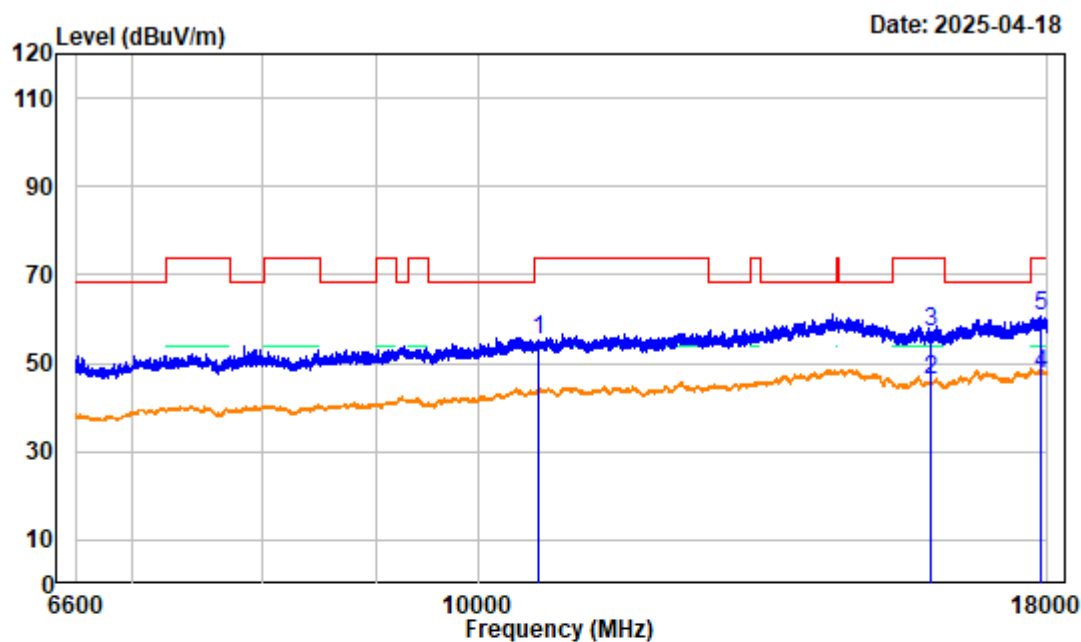

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5320MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.73	55.15	74.00	-18.85	peak
2	15960.000	4.76	41.35	46.11	54.00	-7.89	average
3	15960.000	4.76	52.30	57.06	74.00	-16.94	peak
4	17887.430	8.24	39.43	47.67	54.00	-6.33	average
5	17887.430	8.24	52.44	60.68	74.00	-13.32	peak

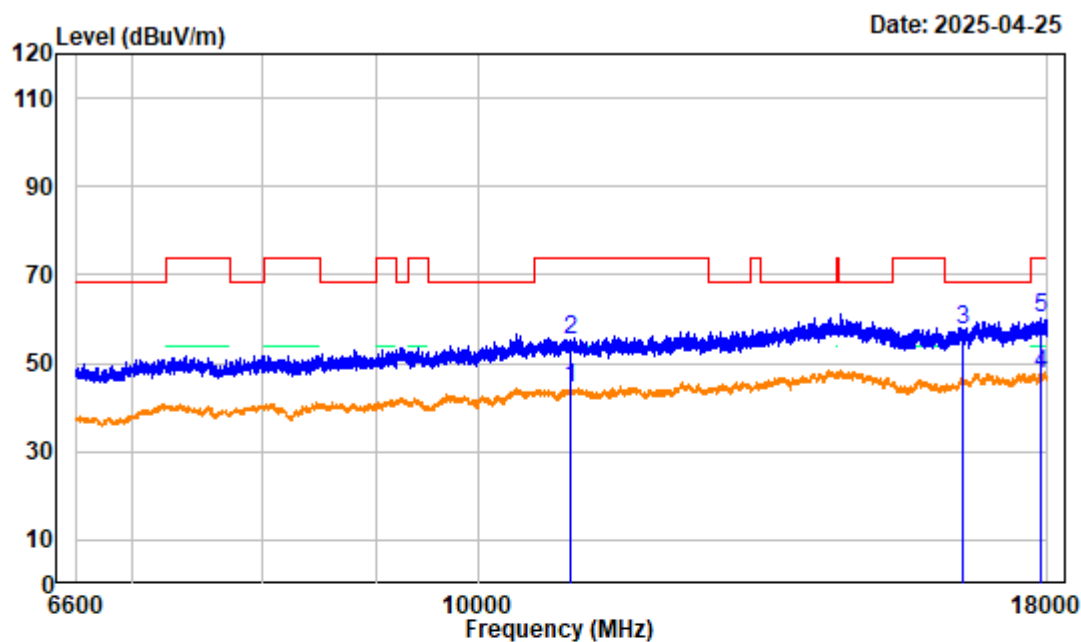

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	38.98	44.25	54.00	-9.75	average
2	11000.000	5.27	50.16	55.43	74.00	-18.57	peak
3	16500.000	5.92	51.80	57.72	68.20	-10.48	peak
4	17895.970	8.24	39.53	47.77	54.00	-6.23	average
5	17895.970	8.24	51.77	60.01	74.00	-13.99	peak

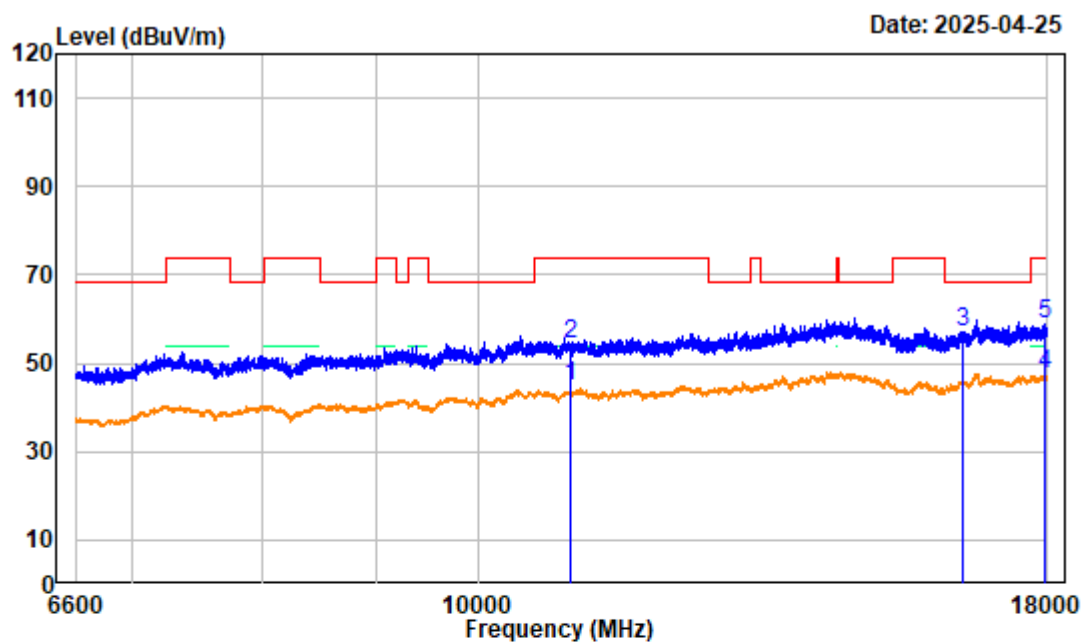

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	39.38	44.65	54.00	-9.35	average
2	11000.000	5.27	49.13	54.40	74.00	-19.60	peak
3	16500.000	5.92	51.26	57.18	68.20	-11.02	peak
4	17965.800	8.22	39.24	47.46	54.00	-6.54	average
5	17965.800	8.22	50.80	59.02	74.00	-14.98	peak

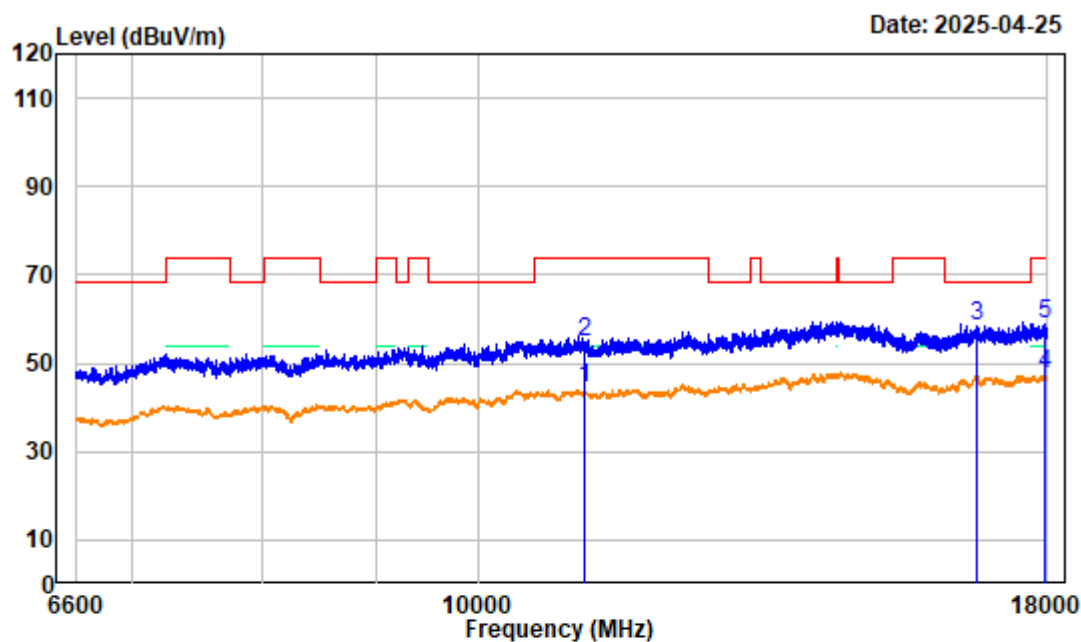

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5580MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	40.15	44.47	54.00	-9.53	average
2	11160.000	4.32	50.43	54.75	74.00	-19.25	peak
3	16740.000	7.63	50.68	58.31	68.20	-9.89	peak
4	17945.850	8.19	39.20	47.39	54.00	-6.61	average
5	17945.850	8.19	50.78	58.97	74.00	-15.03	peak

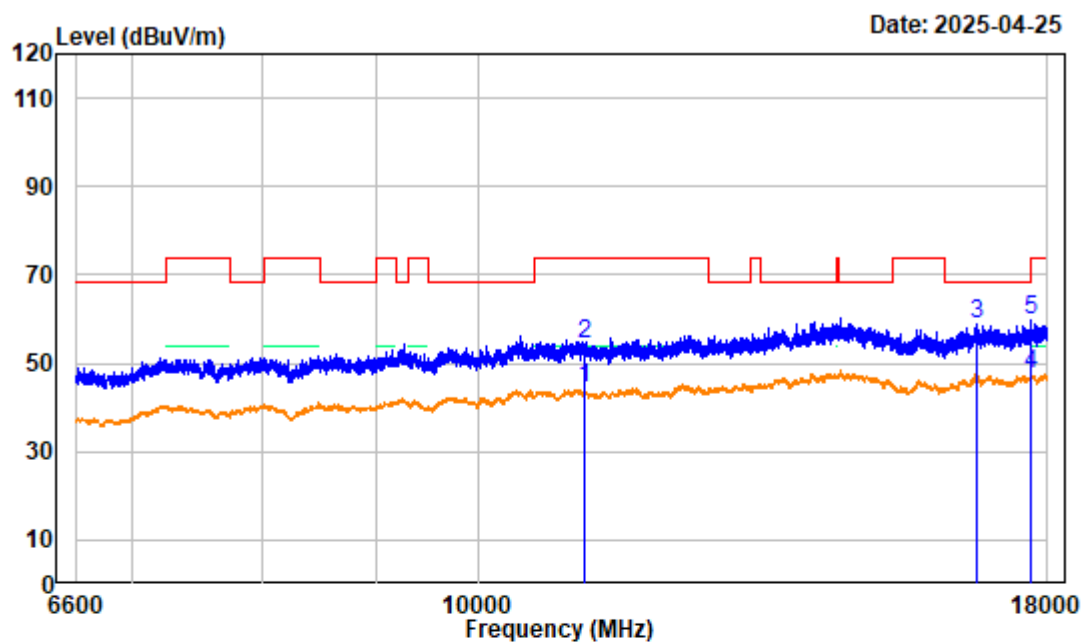

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5580MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	39.93	44.25	54.00	-9.75	average
2	11160.000	4.32	50.01	54.33	74.00	-19.67	peak
3	16740.000	7.63	51.14	58.77	68.20	-9.43	peak
4	17703.600	7.61	39.79	47.40	54.00	-6.60	average
5	17703.600	7.61	52.13	59.74	74.00	-14.26	peak

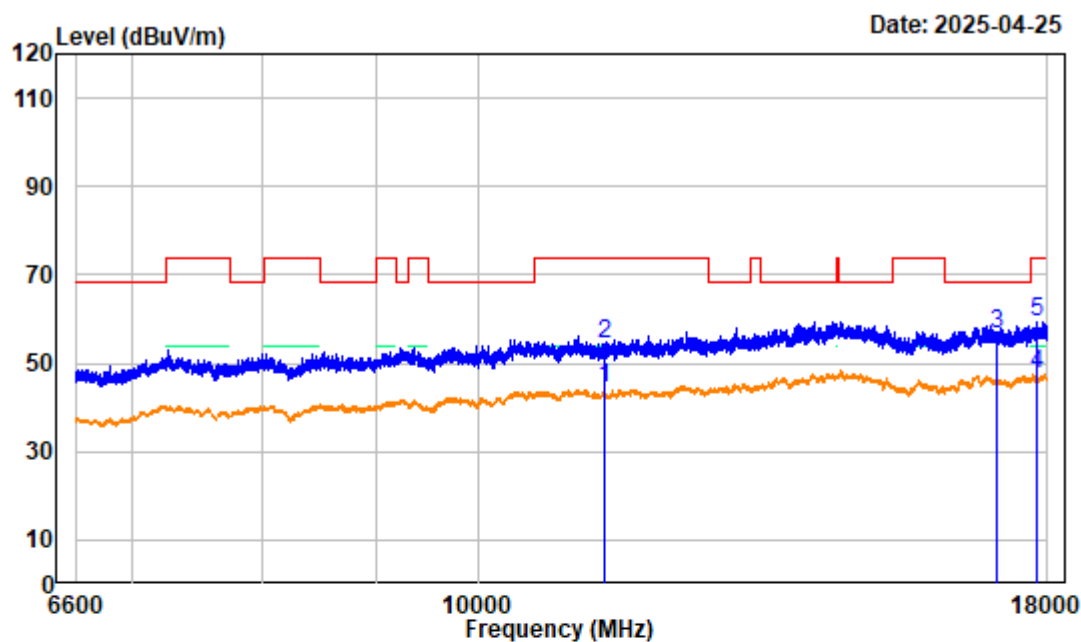


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.69	44.36	54.00	-9.64	average
2	11400.000	5.67	48.87	54.54	74.00	-19.46	peak
3	17100.000	6.92	49.83	56.75	68.20	-11.45	peak
4	17814.750	7.77	39.60	47.37	54.00	-6.63	average
5	17814.750	7.77	51.49	59.26	74.00	-14.74	peak

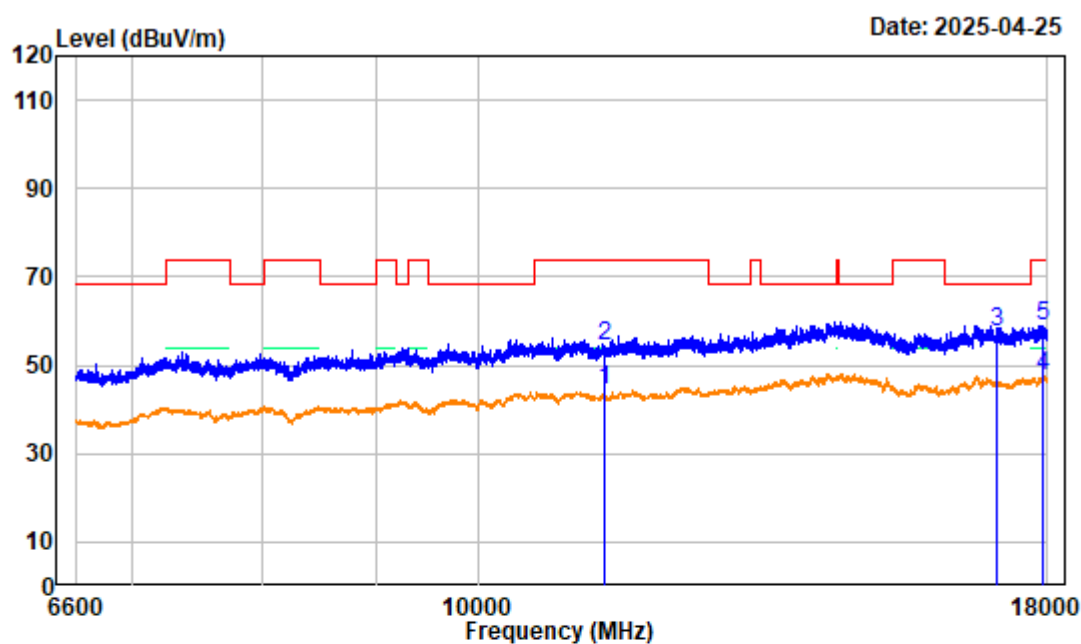

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.76	44.43	54.00	-9.57	average
2	11400.000	5.67	48.72	54.39	74.00	-19.61	peak
3	17100.000	6.92	50.47	57.39	68.20	-10.81	peak
4	17900.250	8.24	39.45	47.69	54.00	-6.31	average
5	17900.250	8.24	50.82	59.06	74.00	-14.94	peak

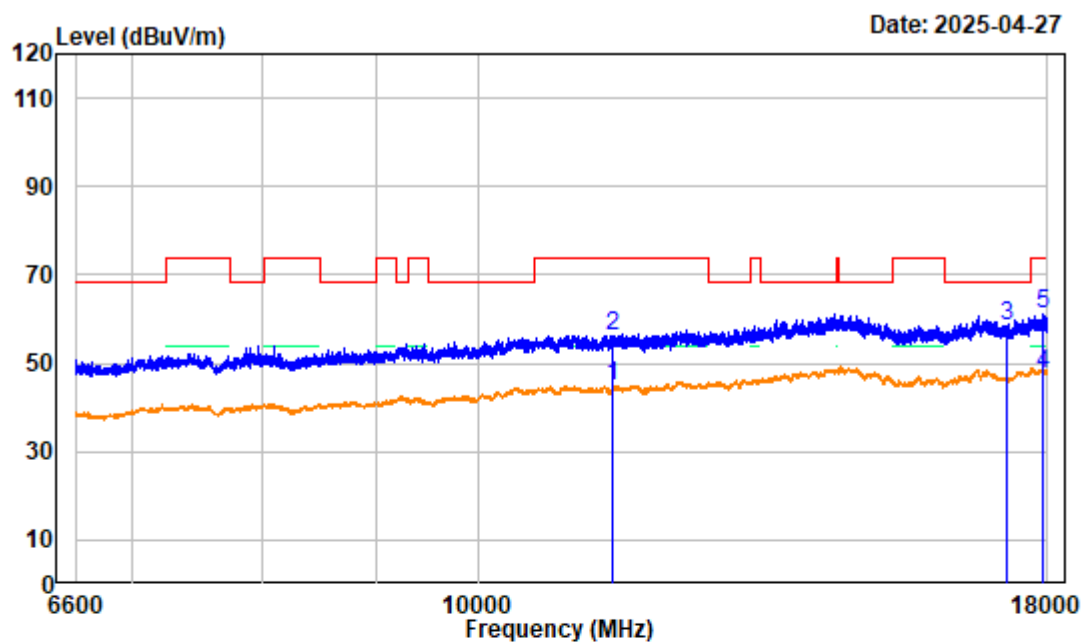

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.23	38.70	44.93	54.00	-9.07	average
2	11490.000	6.10	49.83	55.93	74.00	-18.07	peak
3	17265.000	6.67	51.85	58.52	68.20	-9.68	peak
4	17911.650	8.22	39.44	47.66	54.00	-6.34	average
5	17911.650	8.22	52.78	61.00	74.00	-13.00	peak

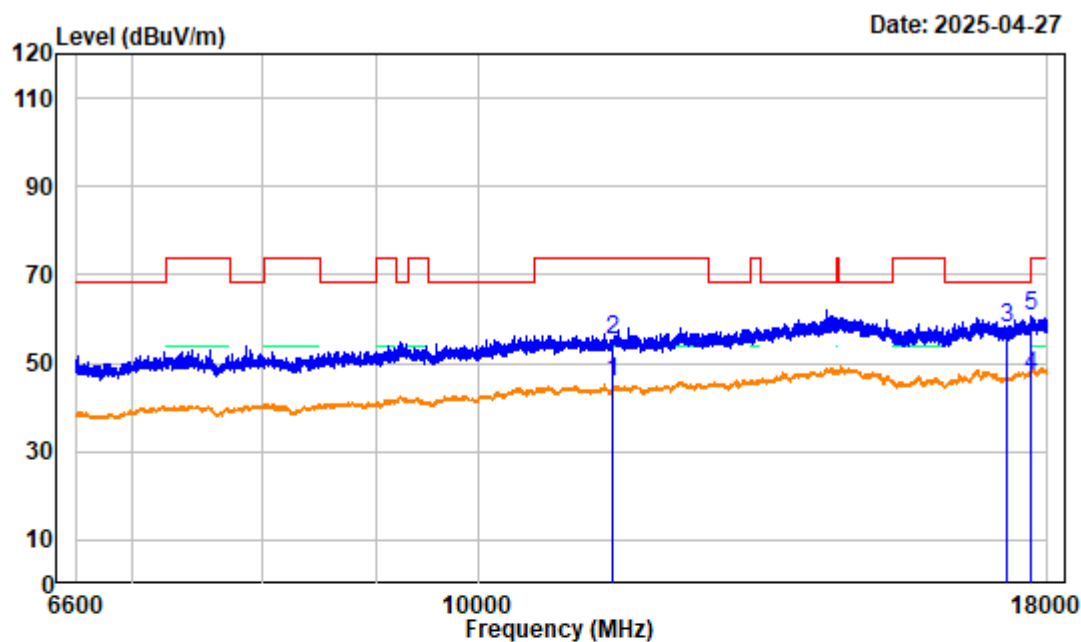

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	39.74	45.84	54.00	-8.16	average
2	11490.000	6.10	49.23	55.33	74.00	-18.67	peak
3	17265.000	6.67	51.45	58.12	68.20	-10.08	peak
4	17700.750	7.61	39.63	47.24	54.00	-6.76	average
5	17700.750	7.61	53.07	60.68	74.00	-13.32	peak

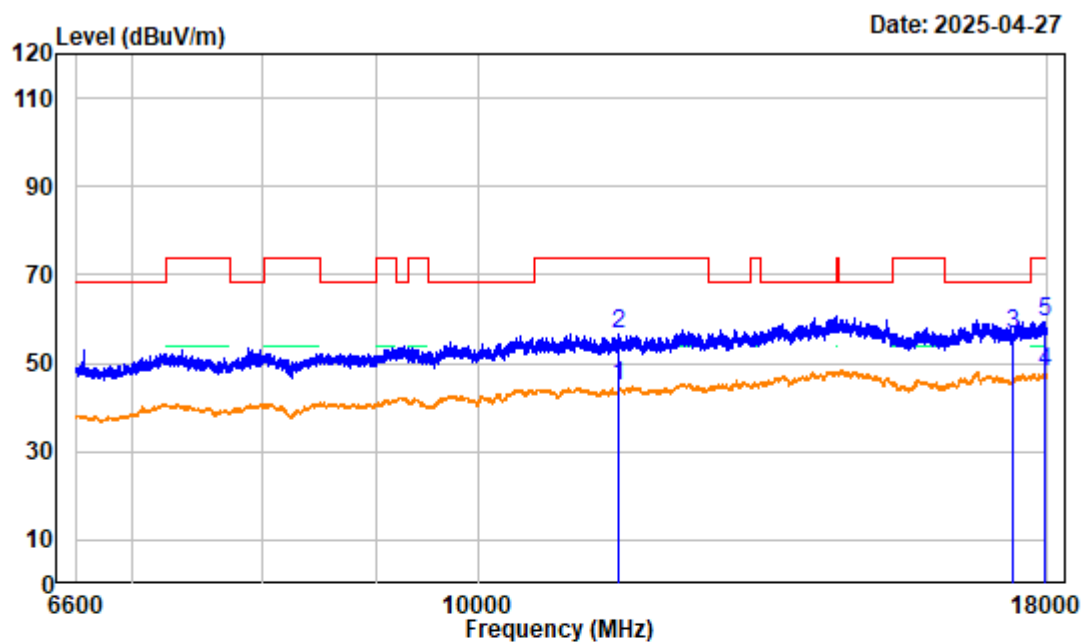

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5785MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.95	44.88	54.00	-9.12	average
2	11570.000	5.93	50.81	56.74	74.00	-17.26	peak
3	17355.000	6.58	50.23	56.81	68.20	-11.39	peak
4	17947.280	8.18	39.66	47.84	54.00	-6.16	average
5	17947.280	8.18	51.19	59.37	74.00	-14.63	peak

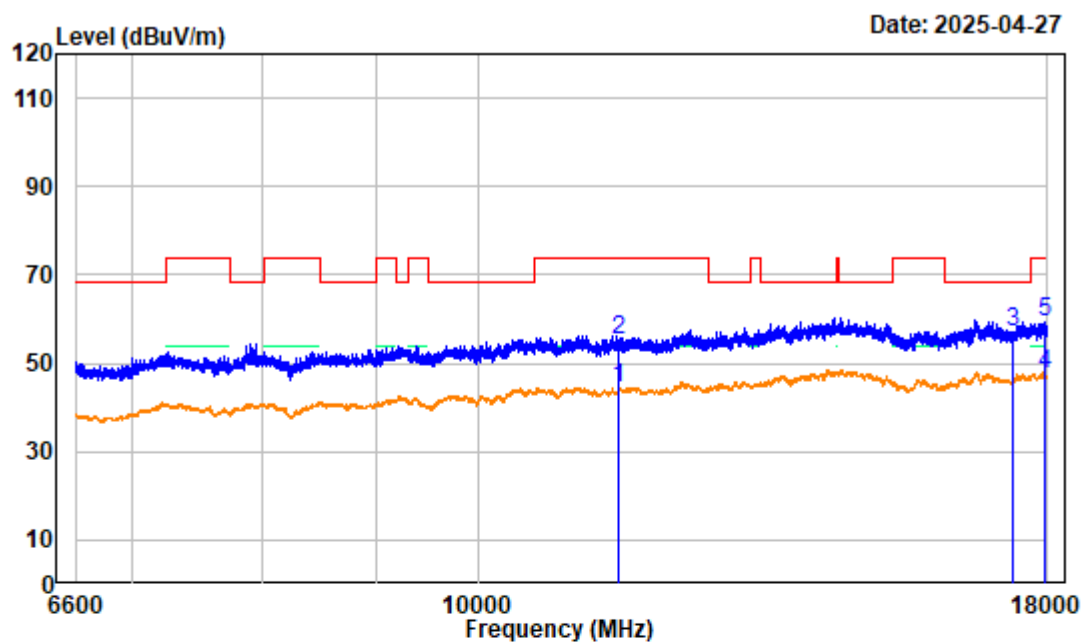

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5785MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.65	44.58	54.00	-9.42	average
2	11570.000	5.93	49.39	55.32	74.00	-18.68	peak
3	17355.000	6.58	50.33	56.91	68.20	-11.29	peak
4	17941.570	8.19	39.55	47.74	54.00	-6.26	average
5	17941.570	8.19	50.91	59.10	74.00	-14.90	peak

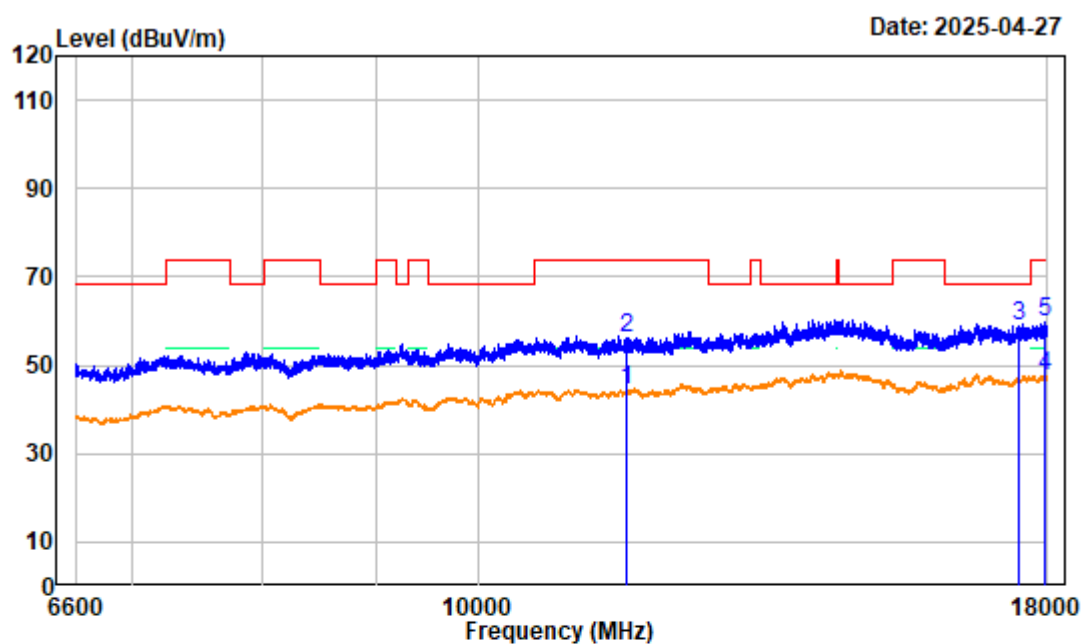

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5825MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.04	44.41	54.00	-9.59	average
2	11650.000	5.37	50.66	56.03	74.00	-17.97	peak
3	17475.000	7.12	51.58	58.70	68.20	-9.50	peak
4	17962.950	8.23	39.17	47.40	54.00	-6.60	average
5	17962.950	8.23	51.45	59.68	74.00	-14.32	peak

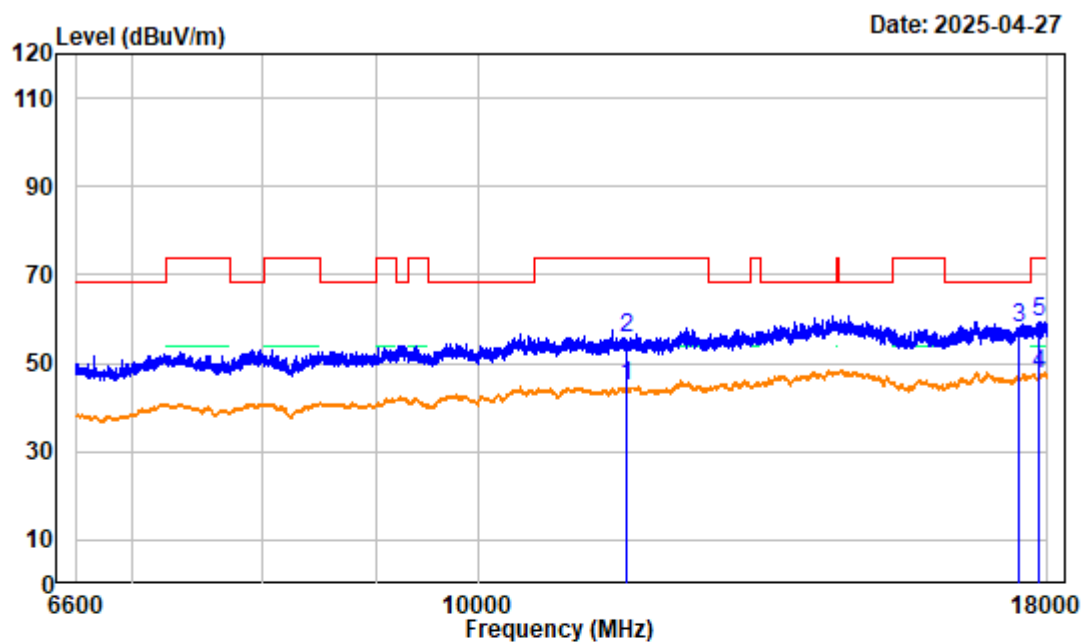

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.28	44.65	54.00	-9.35	average
2	11650.000	5.37	50.54	55.91	74.00	-18.09	peak
3	17475.000	7.12	50.96	58.08	68.20	-10.12	peak
4	17856.070	8.23	39.16	47.39	54.00	-6.61	average
5	17856.070	8.23	51.20	59.43	74.00	-14.57	peak

6.6GHz~18GHz 802.11a Ant1:

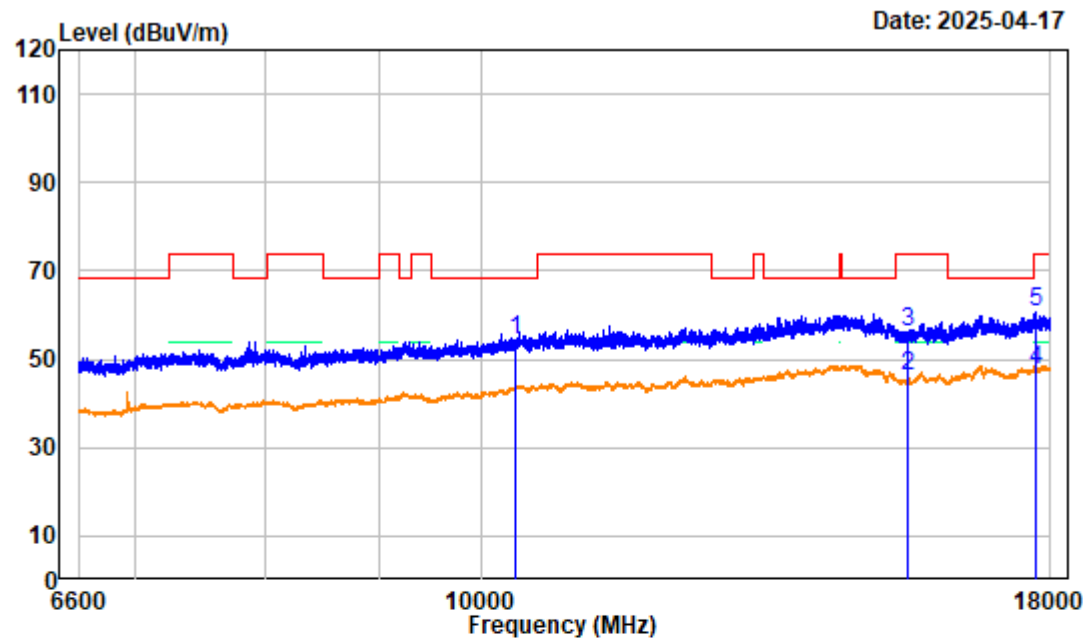

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.84	50.49	54.33	68.20	-13.87	peak
2 15540.000	4.75	41.40	46.15	54.00	-7.85	average
3 15540.000	4.75	51.36	56.11	74.00	-17.89	peak
4 17723.550	7.66	40.07	47.73	54.00	-6.27	average
5 17723.550	7.66	52.82	60.48	74.00	-13.52	peak

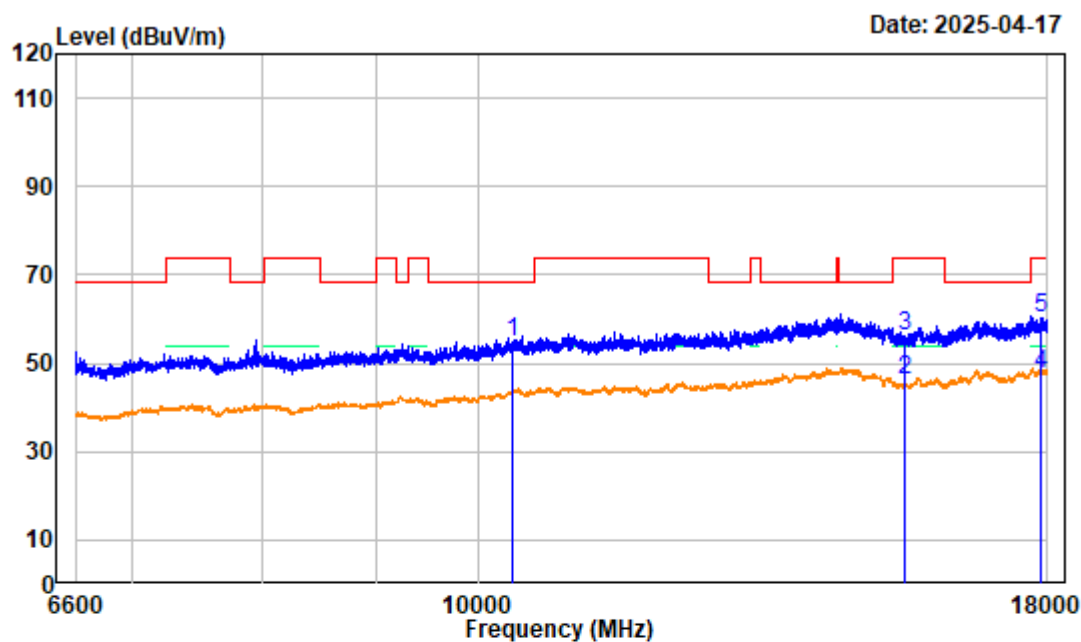

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5180MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	50.98	54.82	68.20	-13.38	peak
2	15540.000	4.75	41.46	46.21	54.00	-7.79	average
3	15540.000	4.75	51.50	56.25	74.00	-17.75	peak
4	17866.050	8.24	39.48	47.72	54.00	-6.28	average
5	17866.050	8.24	52.12	60.36	74.00	-13.64	peak

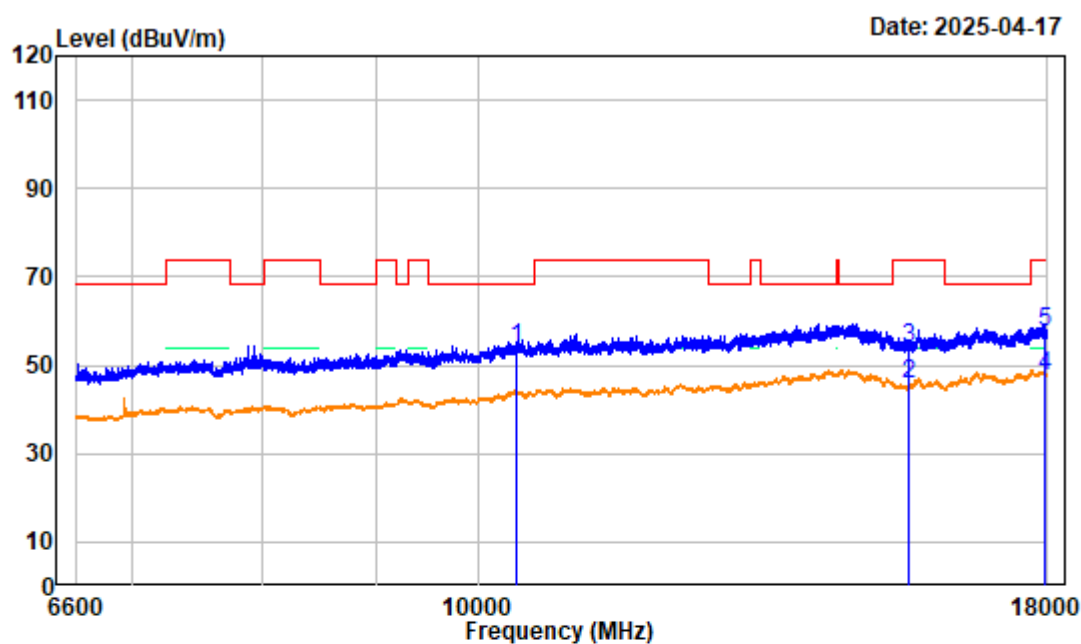

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5200MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	49.75	53.85	68.20	-14.35	peak
2	15600.000	4.60	41.01	45.61	54.00	-8.39	average
3	15600.000	4.60	49.36	53.96	74.00	-20.04	peak
4	17967.220	8.23	39.29	47.52	54.00	-6.48	average
5	17967.220	8.23	49.22	57.45	74.00	-16.55	peak

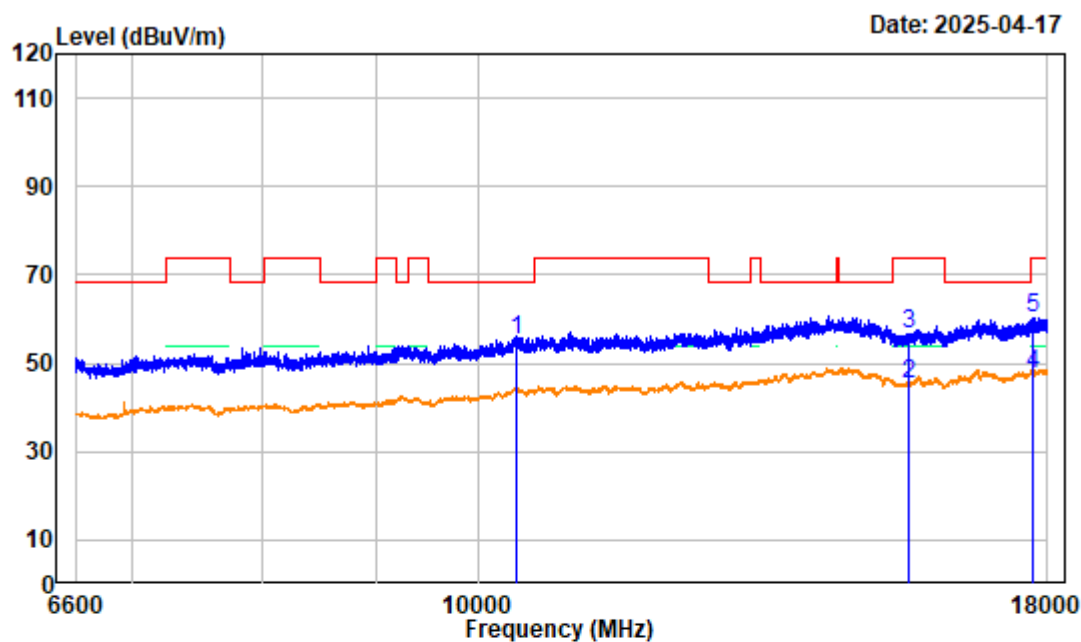

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.07	55.17	68.20	-13.03	peak
2	15600.000	4.60	40.82	45.42	54.00	-8.58	average
3	15600.000	4.60	52.14	56.74	74.00	-17.26	peak
4	17733.530	7.68	39.85	47.53	54.00	-6.47	average
5	17733.530	7.68	52.75	60.43	74.00	-13.57	peak

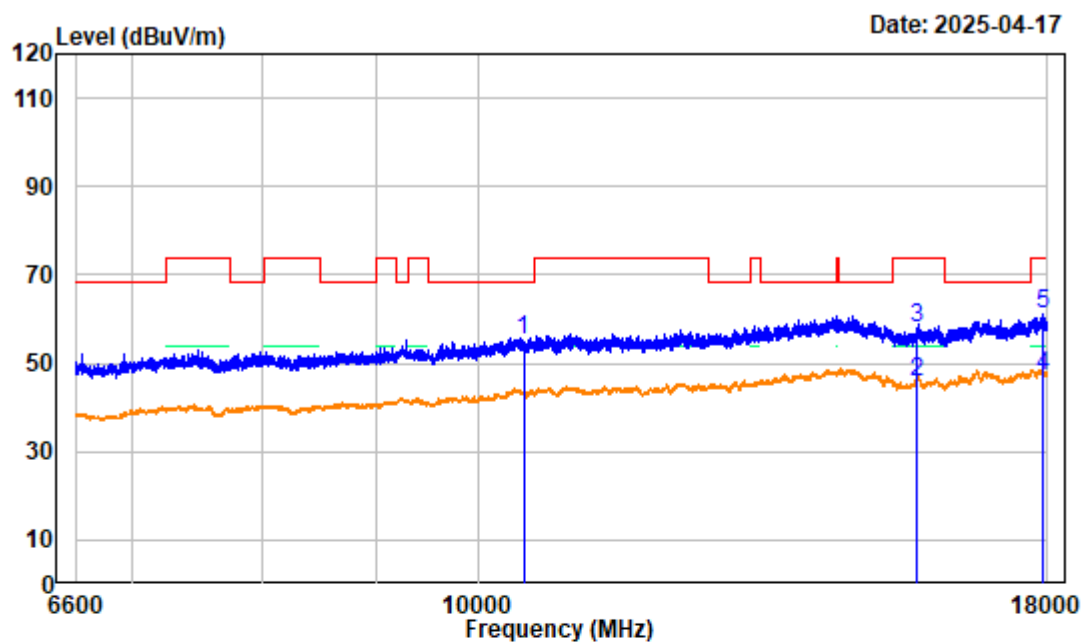

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.55	55.47	68.20	-12.73	peak
2	15720.000	4.90	40.87	45.77	54.00	-8.23	average
3	15720.000	4.90	53.09	57.99	74.00	-16.01	peak
4	17920.200	8.21	39.06	47.27	54.00	-6.73	average
5	17920.200	8.21	52.82	61.03	74.00	-12.97	peak

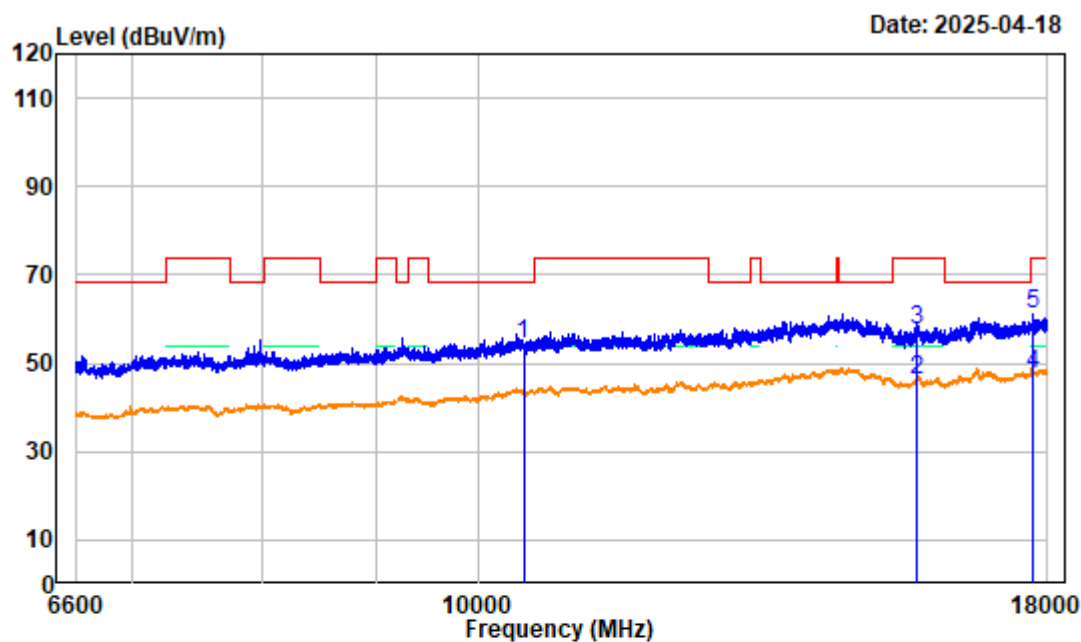

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	50.62	54.54	68.20	-13.66	peak
2	15720.000	4.90	41.35	46.25	54.00	-7.75	average
3	15720.000	4.90	52.69	57.59	74.00	-16.41	peak
4	17729.250	7.67	40.09	47.76	54.00	-6.24	average
5	17729.250	7.67	53.43	61.10	74.00	-12.90	peak

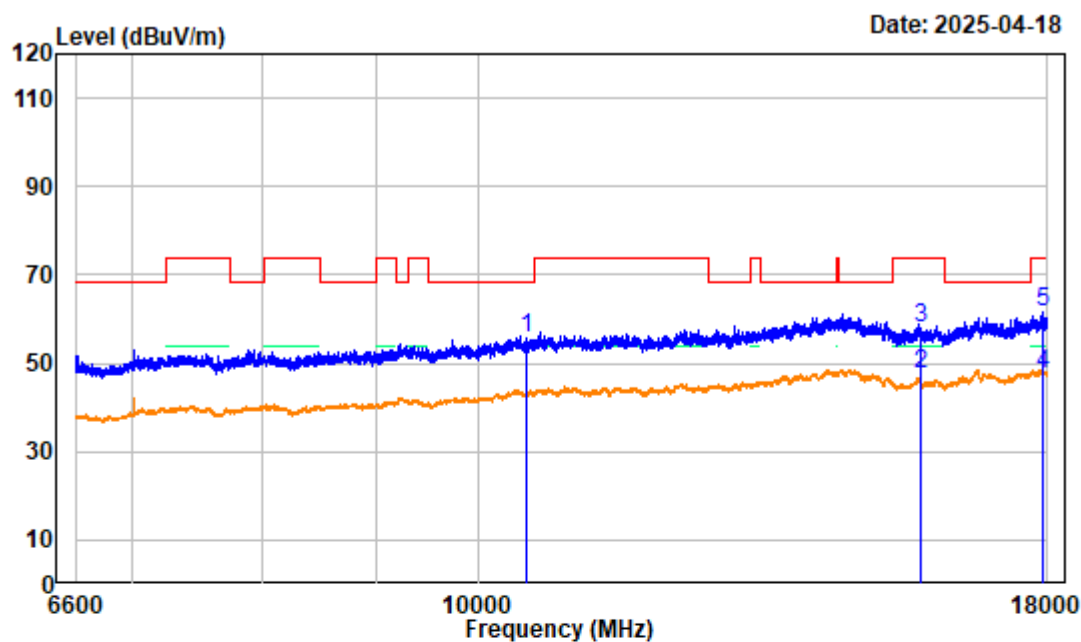

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	51.77	55.67	68.20	-12.53	peak
2	15780.000	5.17	42.18	47.35	54.00	-6.65	average
3	15780.000	5.17	52.66	57.83	74.00	-16.17	peak
4	17910.220	8.23	39.11	47.34	54.00	-6.66	average
5	17910.220	8.23	53.29	61.52	74.00	-12.48	peak

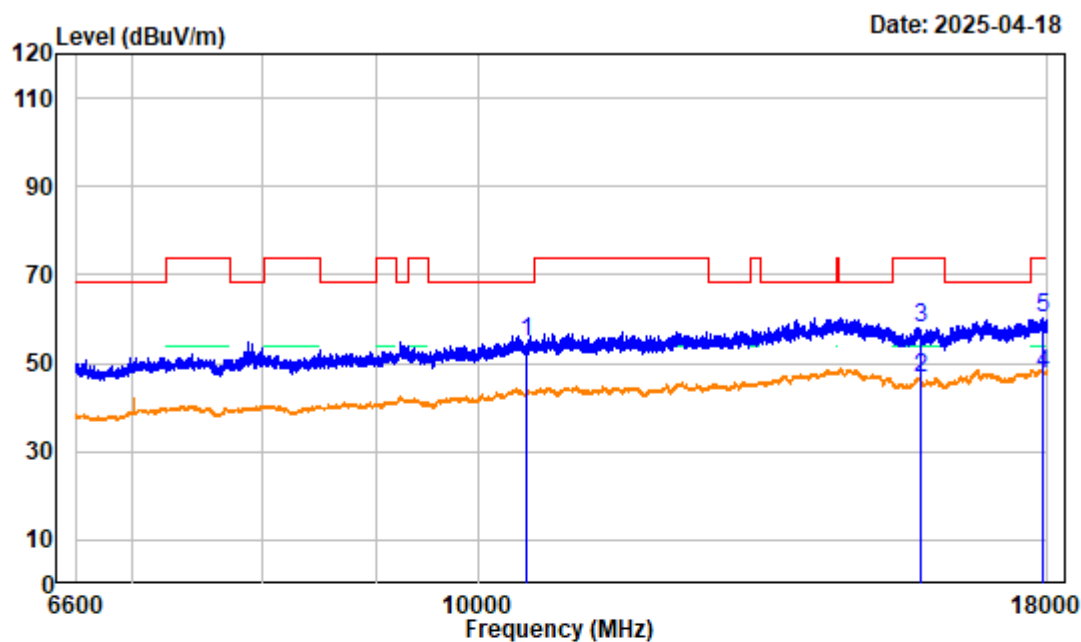

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.78	54.68	68.20	-13.52	peak
2	15780.000	5.17	41.38	46.55	54.00	-7.45	average
3	15780.000	5.17	52.76	57.93	74.00	-16.07	peak
4	17903.100	8.24	39.52	47.76	54.00	-6.24	average
5	17903.100	8.24	52.11	60.35	74.00	-13.65	peak

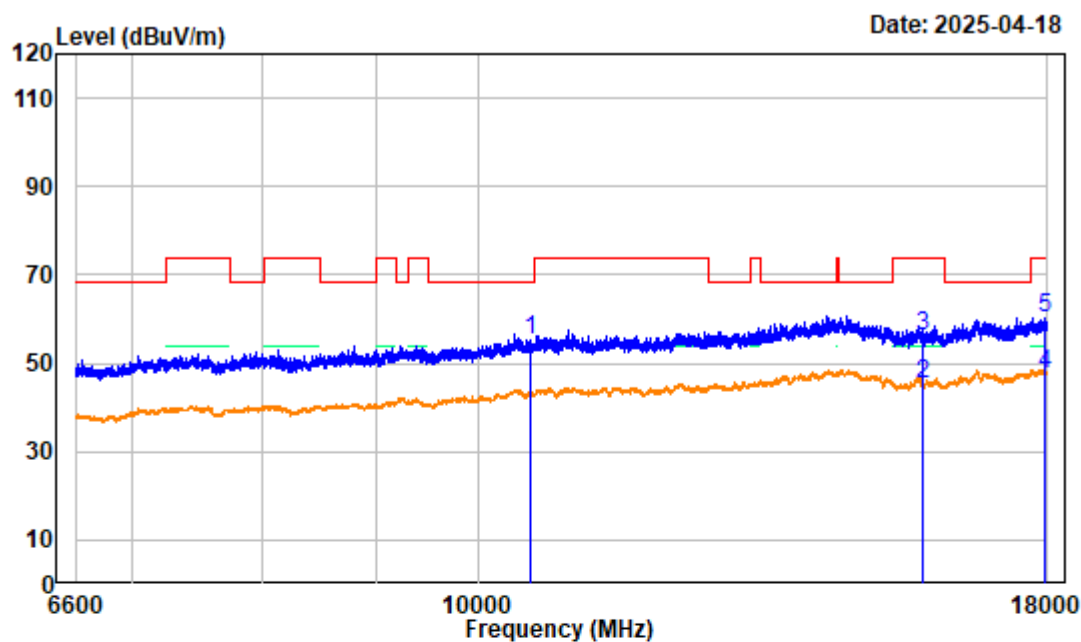

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5280MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	50.91	55.06	68.20	-13.14	peak
2	15840.000	5.04	40.37	45.41	54.00	-8.59	average
3	15840.000	5.04	51.26	56.30	74.00	-17.70	peak
4	17944.430	8.19	39.40	47.59	54.00	-6.41	average
5	17944.430	8.19	52.13	60.32	74.00	-13.68	peak

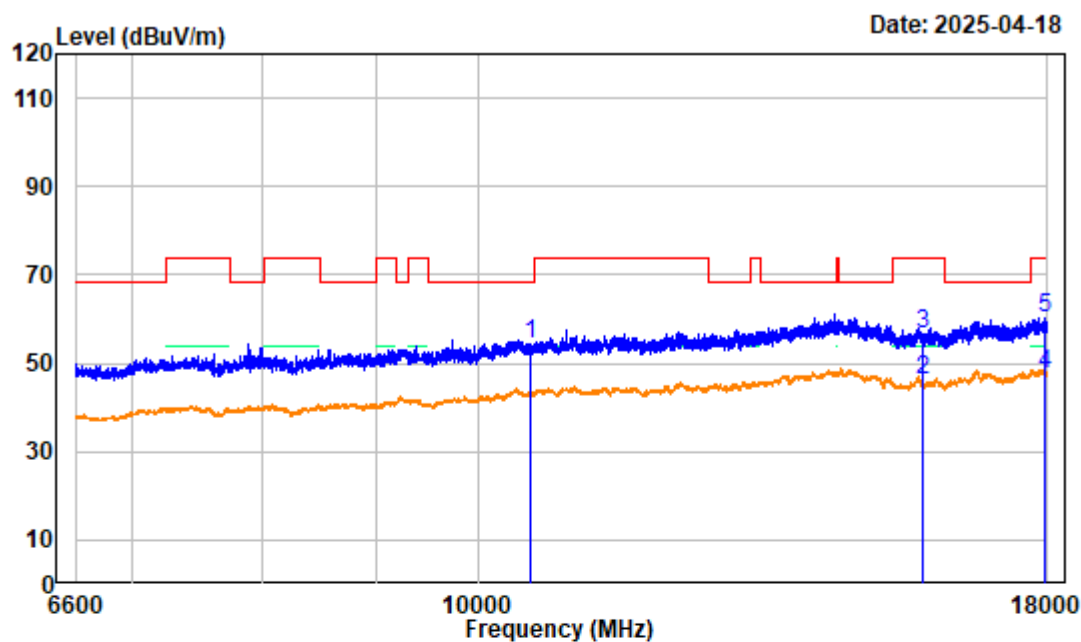

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5280MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	50.23	54.38	68.20	-13.82	peak
2	15840.000	5.04	41.28	46.32	54.00	-7.68	average
3	15840.000	5.04	51.37	56.41	74.00	-17.59	peak
4	17935.880	8.20	39.21	47.41	54.00	-6.59	average
5	17935.880	8.20	52.10	60.30	74.00	-13.70	peak

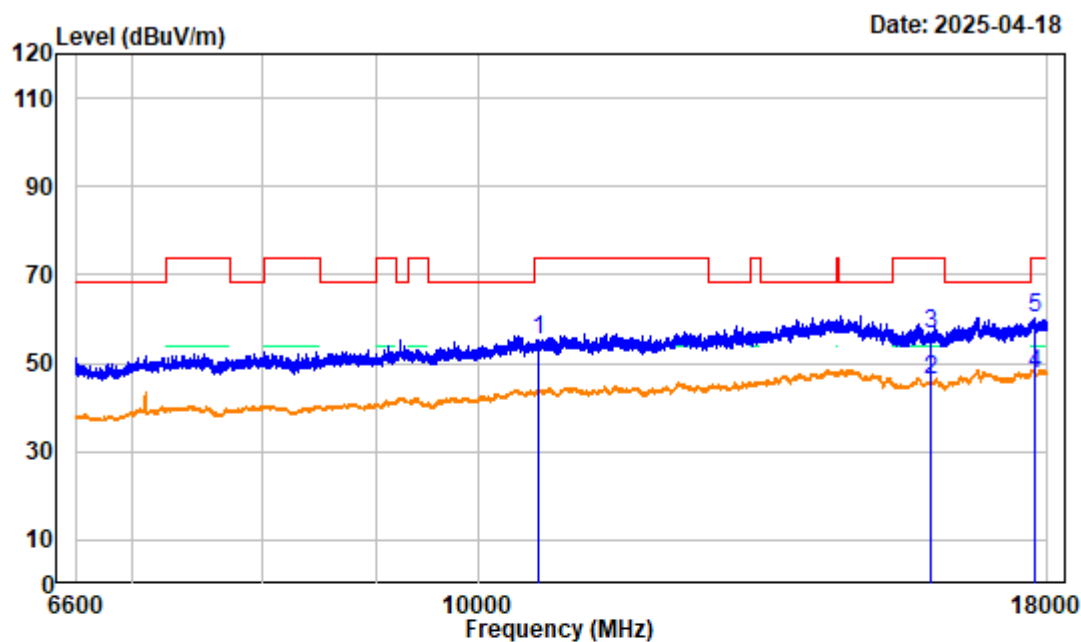


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5320MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.96	55.38	74.00	-18.62	peak
2	15960.000	4.76	41.39	46.15	54.00	-7.85	average
3	15960.000	4.76	52.04	56.80	74.00	-17.20	peak
4	17779.130	7.63	40.02	47.65	54.00	-6.35	average
5	17779.130	7.63	52.55	60.18	74.00	-13.82	peak

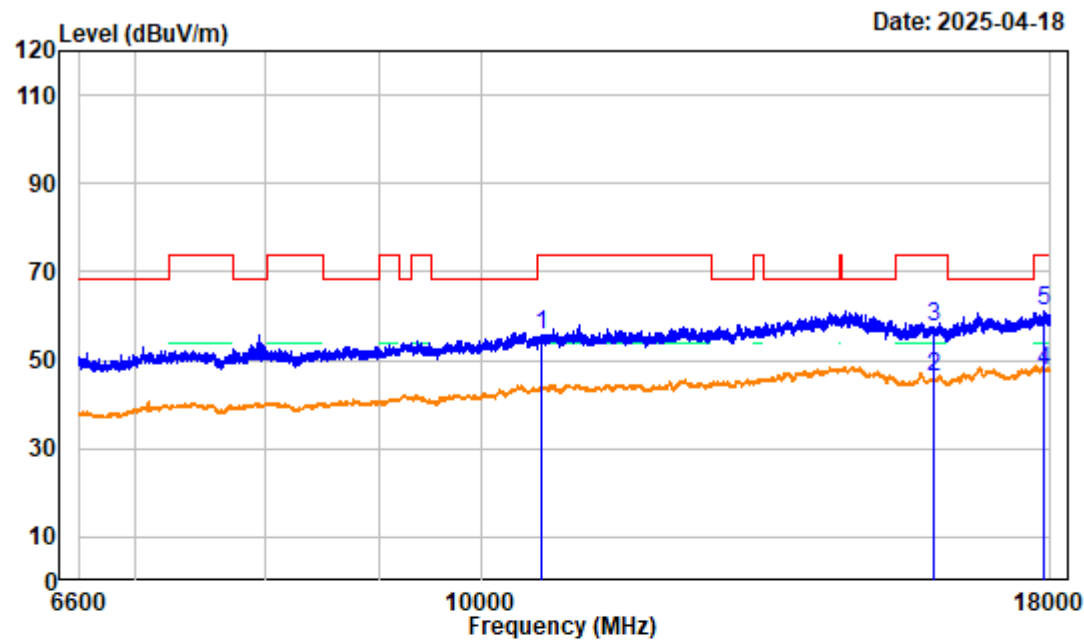

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	4.42	51.20	55.62	74.00	-18.38	peak
2 15960.000	4.76	41.42	46.18	54.00	-7.82	average
3 15960.000	4.76	52.66	57.42	74.00	-16.58	peak
4 17870.320	8.23	39.50	47.73	54.00	-6.27	average
5 17870.320	8.23	52.88	61.11	74.00	-12.89	peak

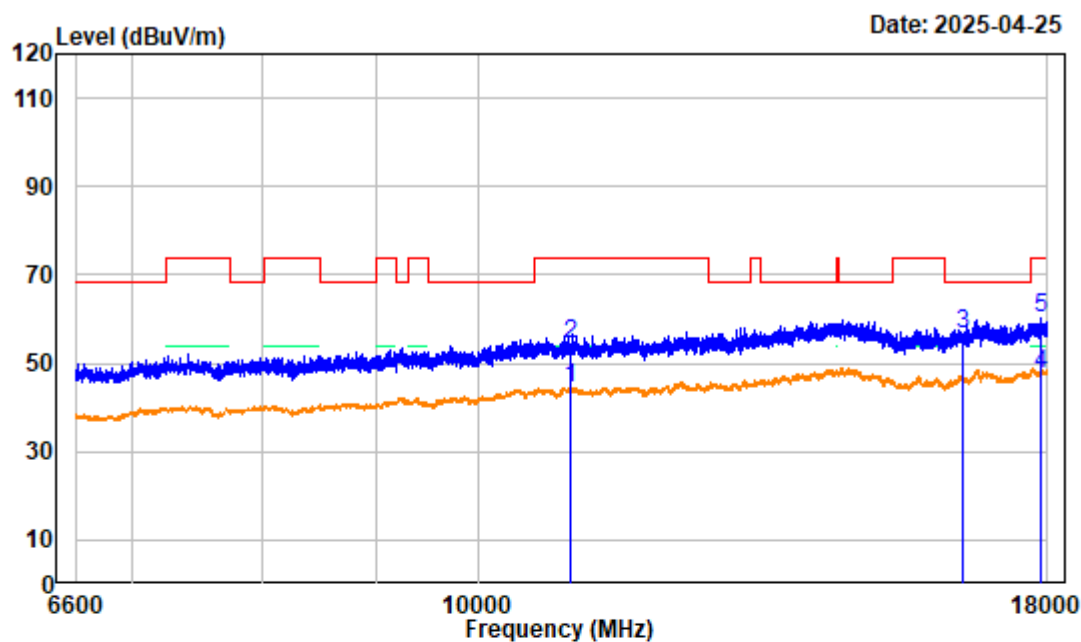

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	39.15	44.42	54.00	-9.58	average
2	11000.000	5.27	48.97	54.24	74.00	-19.76	peak
3	16500.000	5.92	50.80	56.72	68.20	-11.48	peak
4	17874.600	8.23	39.15	47.38	54.00	-6.62	average
5	17874.600	8.23	52.22	60.45	74.00	-13.55	peak

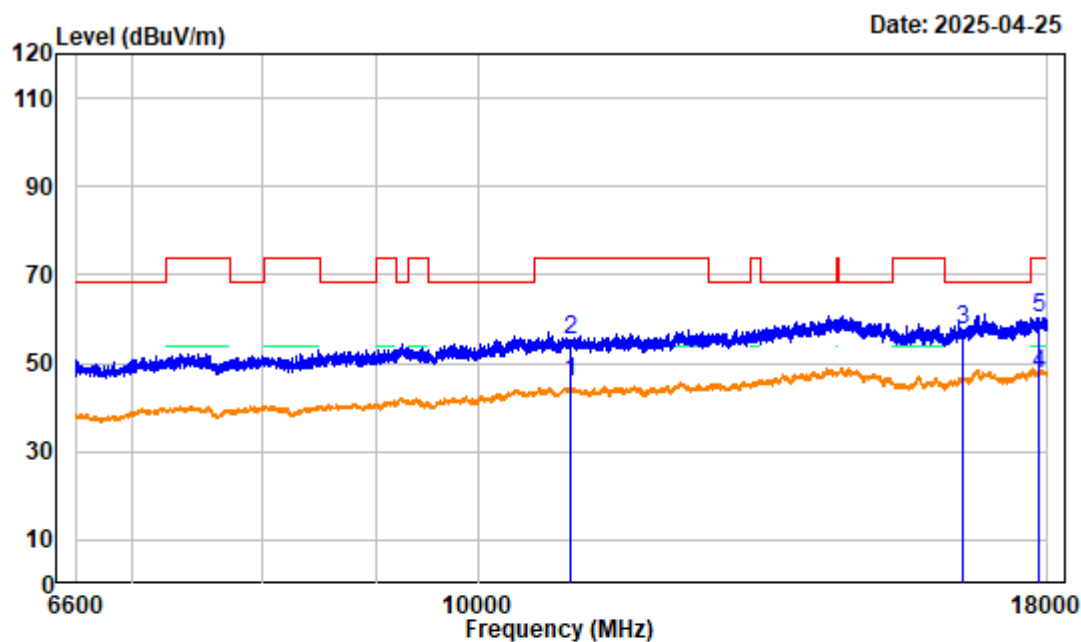

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	40.49	45.76	54.00	-8.24	average
2	11000.000	5.27	50.07	55.34	74.00	-18.66	peak
3	16500.000	5.92	51.36	57.28	68.20	-10.92	peak
4	17840.400	8.11	39.38	47.49	54.00	-6.51	average
5	17840.400	8.11	52.26	60.37	74.00	-13.63	peak

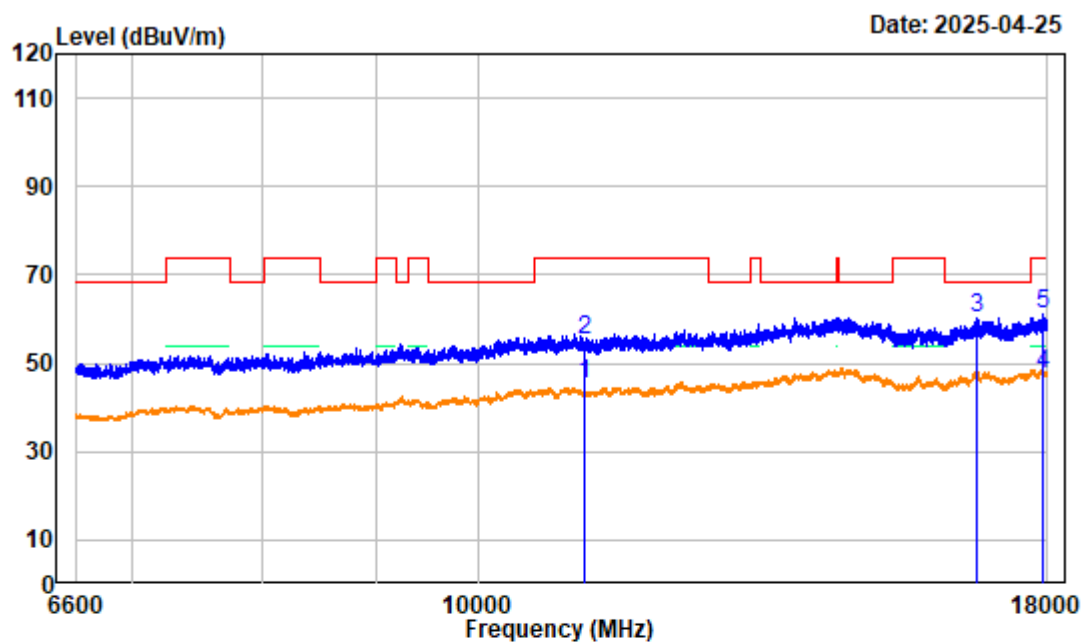

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5580MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	40.84	45.16	54.00	-8.84	average
2	11160.000	4.32	51.02	55.34	74.00	-18.66	peak
3	16740.000	7.63	52.52	60.15	68.20	-8.05	peak
4	17928.750	8.21	39.32	47.53	54.00	-6.47	average
5	17928.750	8.21	52.85	61.06	74.00	-12.94	peak

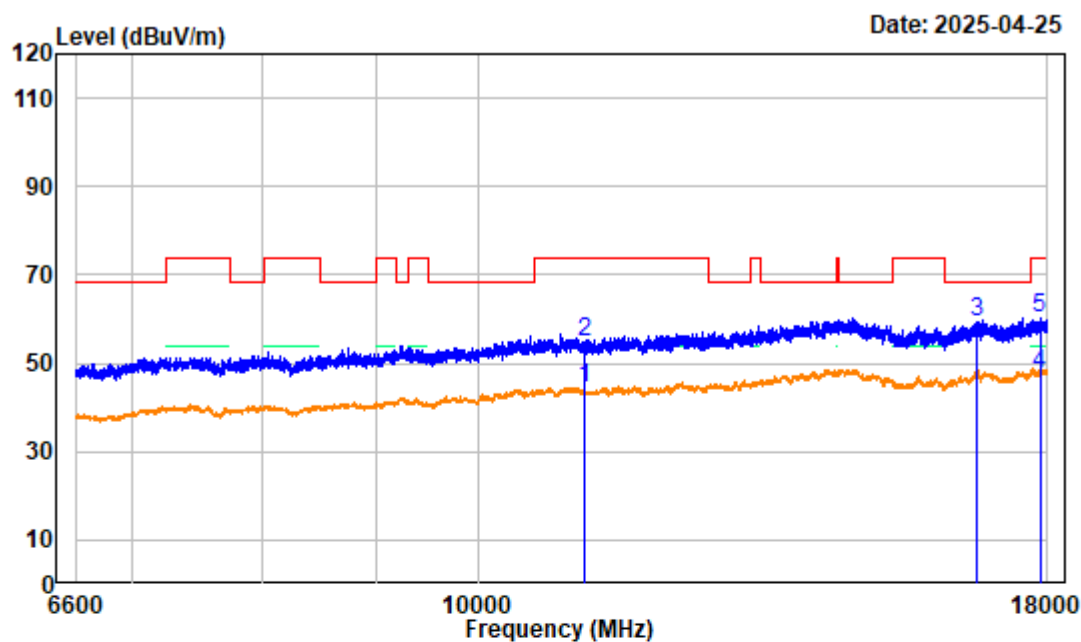

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5580MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	39.95	44.27	54.00	-9.73	average
2	11160.000	4.32	50.40	54.72	74.00	-19.28	peak
3	16740.000	7.63	51.54	59.17	68.20	-9.03	peak
4	17860.350	8.24	39.50	47.74	54.00	-6.26	average
5	17860.350	8.24	51.90	60.14	74.00	-13.86	peak

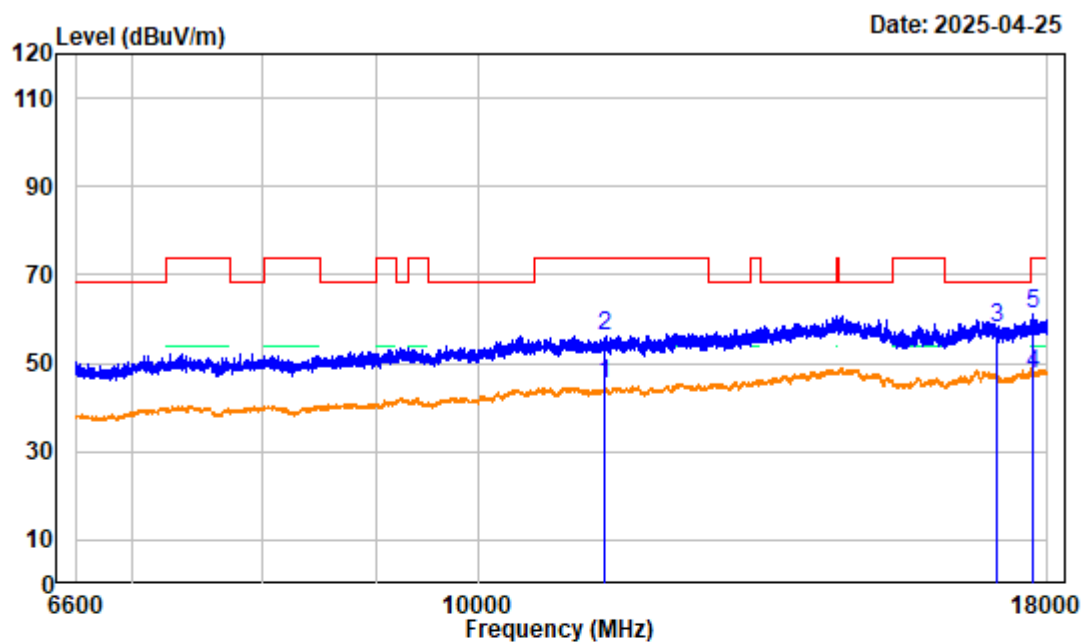

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5700MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	39.67	45.34	54.00	-8.66	average
2	11400.000	5.67	50.38	56.05	74.00	-17.95	peak
3	17100.000	6.92	51.12	58.04	68.20	-10.16	peak
4	17717.850	7.65	39.72	47.37	54.00	-6.63	average
5	17717.850	7.65	53.49	61.14	74.00	-12.86	peak

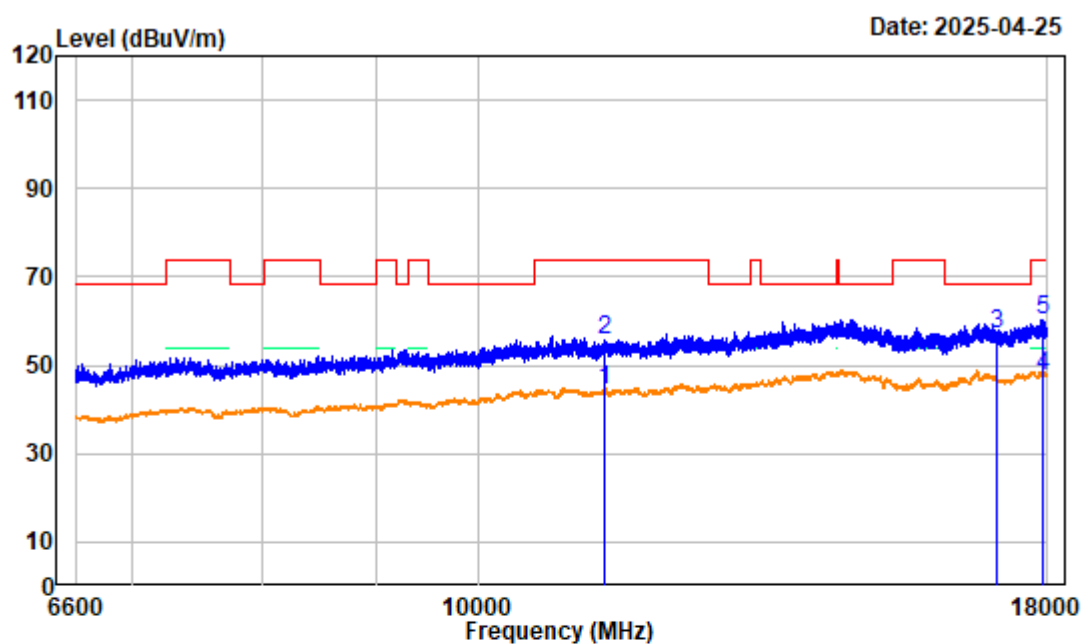

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5700MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.55	44.22	54.00	-9.78	average
2	11400.000	5.67	49.98	55.65	74.00	-18.35	peak
3	17100.000	6.92	50.30	57.22	68.20	-10.98	peak
4	17925.900	8.22	39.42	47.64	54.00	-6.36	average
5	17925.900	8.22	51.95	60.17	74.00	-13.83	peak

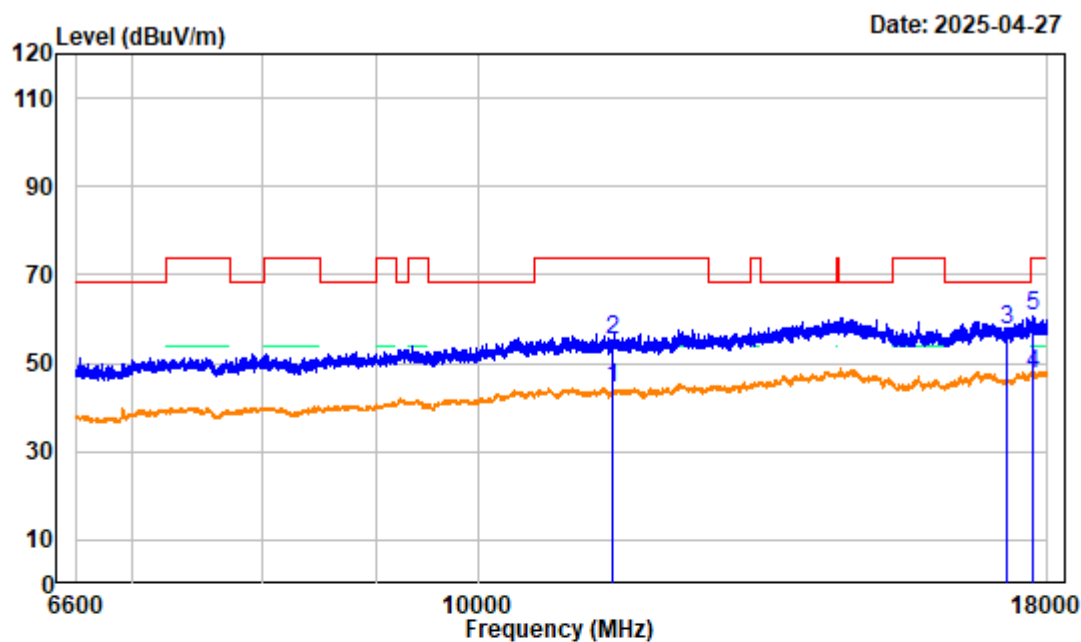

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.43	44.53	54.00	-9.47	average
2	11490.000	6.10	48.99	55.09	74.00	-18.91	peak
3	17265.000	6.67	51.06	57.73	68.20	-10.47	peak
4	17722.130	7.65	39.82	47.47	54.00	-6.53	average
5	17722.130	7.65	53.04	60.69	74.00	-13.31	peak

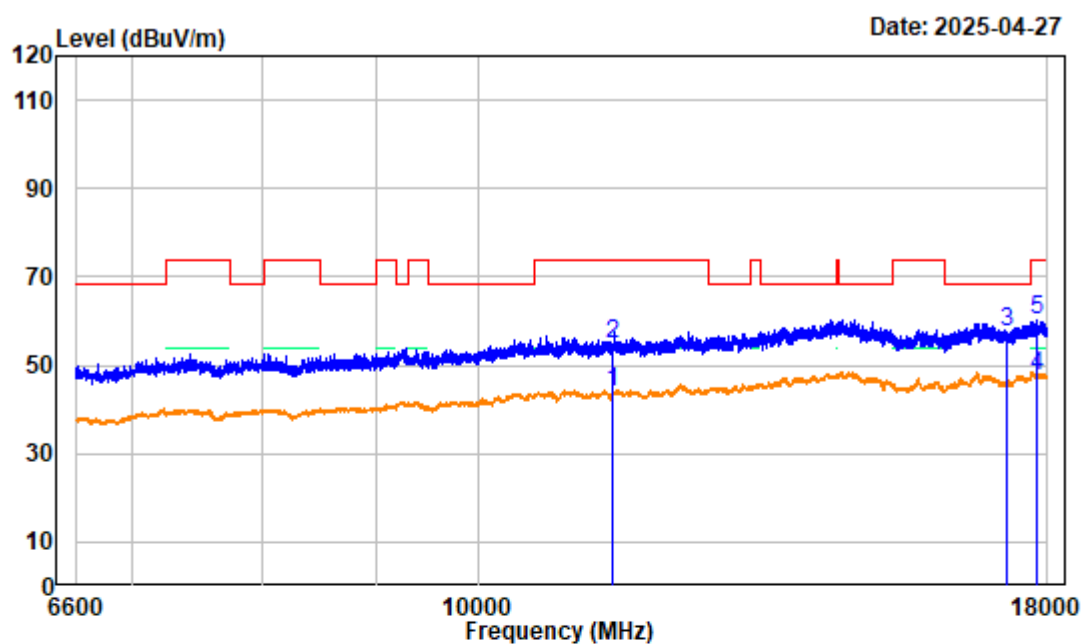

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	37.84	43.94	54.00	-10.06	average
2	11490.000	6.10	48.88	54.98	74.00	-19.02	peak
3	17265.000	6.67	51.05	57.72	68.20	-10.48	peak
4	17789.100	7.61	40.04	47.65	54.00	-6.35	average
5	17789.100	7.61	52.50	60.11	74.00	-13.89	peak

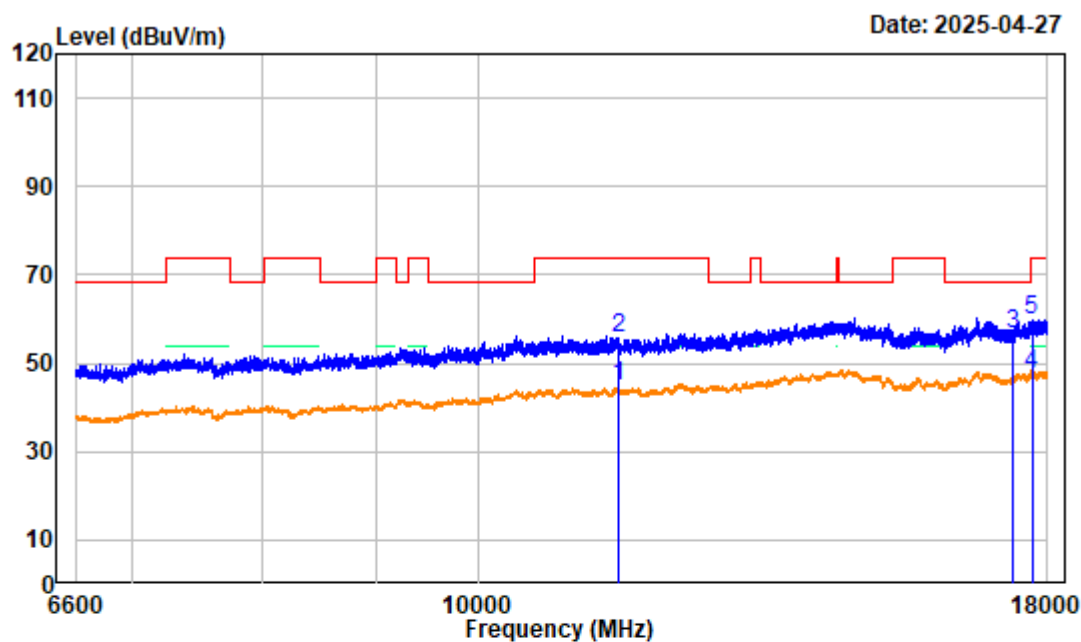

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Middle Channel 5785MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.81	44.74	54.00	-9.26	average
2	11570.000	5.93	49.75	55.68	74.00	-18.32	peak
3	17355.000	6.58	50.24	56.82	68.20	-11.38	peak
4	17713.570	7.64	39.94	47.58	54.00	-6.42	average
5	17713.570	7.64	52.23	59.87	74.00	-14.13	peak

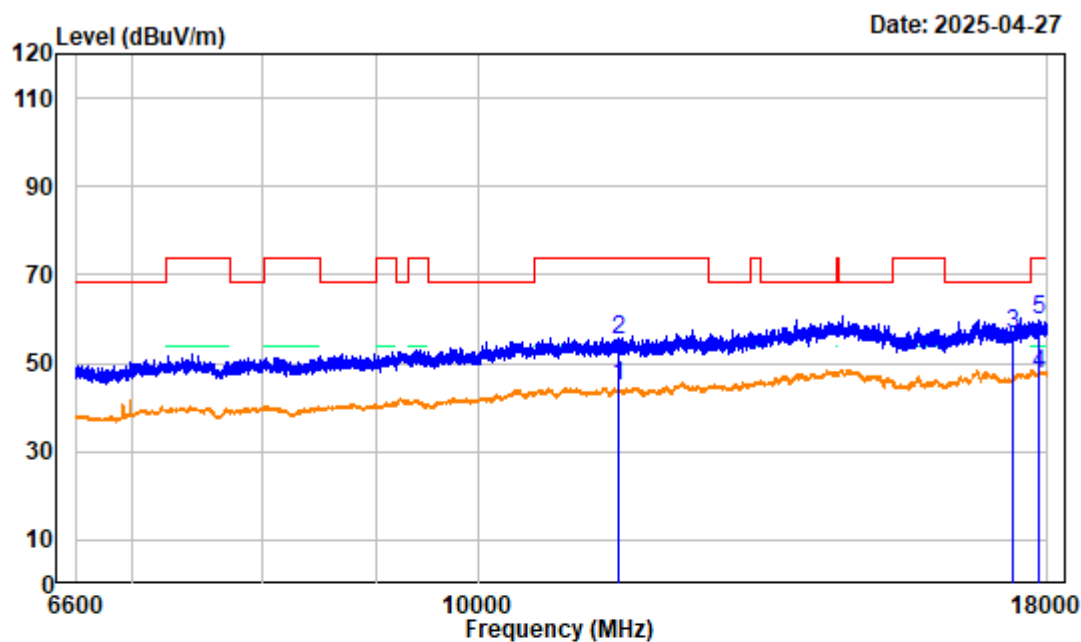

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a Middle Channel 5785MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.71	44.64	54.00	-9.36	average
2	11570.000	5.93	49.52	55.45	74.00	-18.55	peak
3	17355.000	6.58	50.19	56.77	68.20	-11.43	peak
4	17850.380	8.24	39.53	47.77	54.00	-6.23	average
5	17850.380	8.24	51.37	59.61	74.00	-14.39	peak

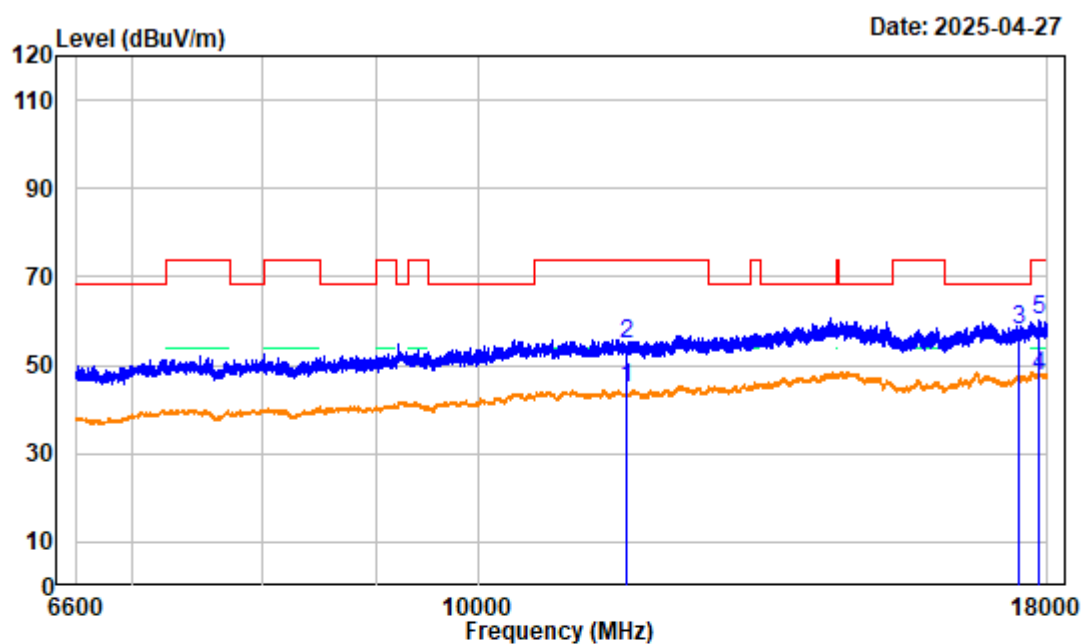

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5825MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.51	44.88	54.00	-9.12	average
2	11650.000	5.37	49.36	54.73	74.00	-19.27	peak
3	17475.000	7.12	51.02	58.14	68.20	-10.06	peak
4	17830.430	7.98	39.73	47.71	54.00	-6.29	average
5	17830.430	7.98	52.11	60.09	74.00	-13.91	peak

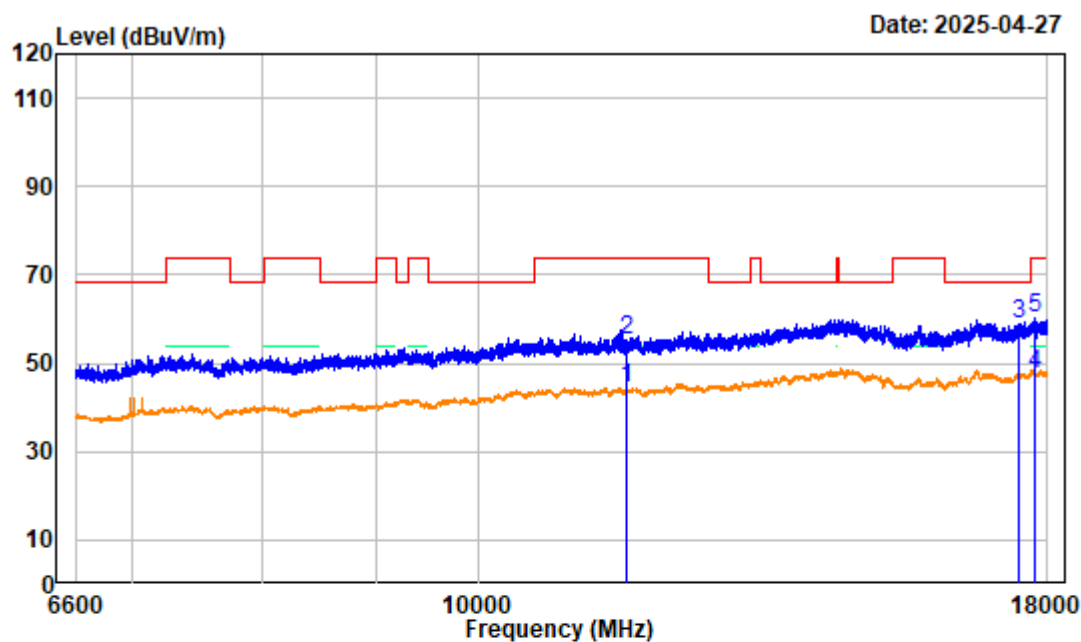

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	38.88	44.25	54.00	-9.75	average
2	11650.000	5.37	49.89	55.26	74.00	-18.74	peak
3	17475.000	7.12	51.87	58.99	68.20	-9.21	peak
4	17757.750	7.70	39.84	47.54	54.00	-6.46	average
5	17757.750	7.70	52.48	60.18	74.00	-13.82	peak

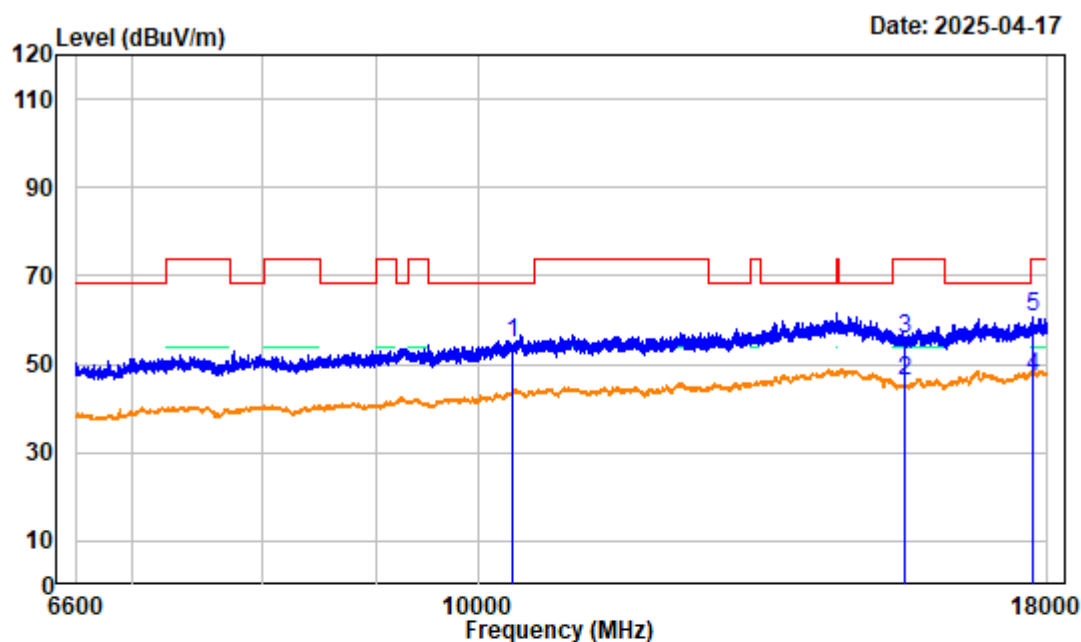6.6GHz~18GHz 802.11n20:

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5180MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	51.10	54.94	68.20	-13.26	peak
2	15540.000	4.75	41.39	46.14	54.00	-7.86	average
3	15540.000	4.75	51.14	55.89	74.00	-18.11	peak
4	17723.550	7.66	39.44	47.10	54.00	-6.90	average
5	17723.550	7.66	53.23	60.89	74.00	-13.11	peak

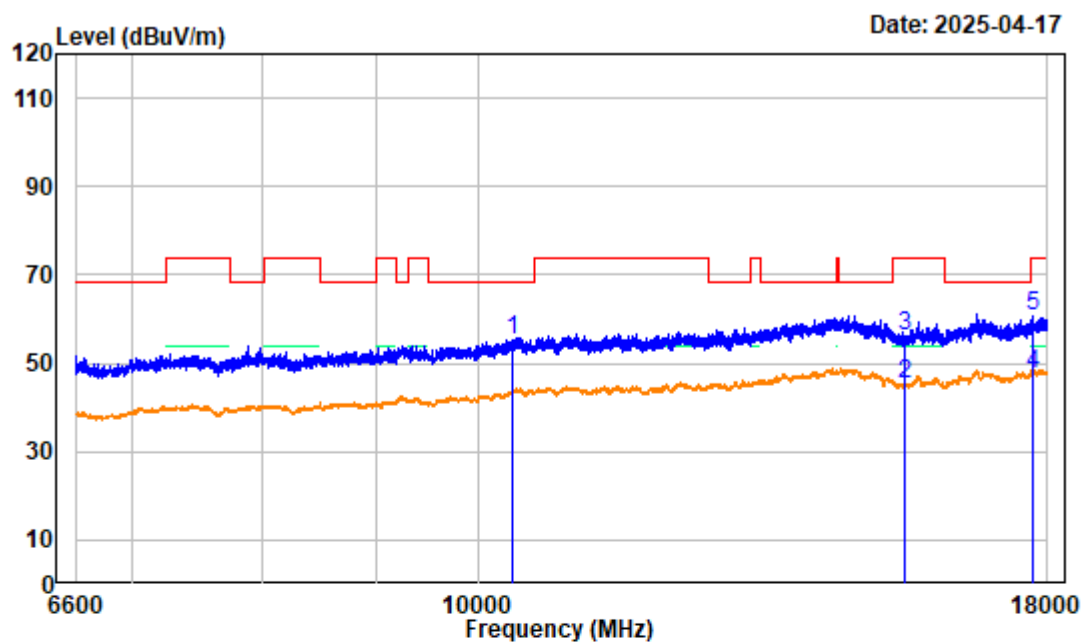


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Low Channel 5180MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	51.48	55.32	68.20	-12.88	peak
2	15540.000	4.75	40.34	45.09	54.00	-8.91	average
3	15540.000	4.75	51.47	56.22	74.00	-17.78	peak
4	17722.130	7.65	39.70	47.35	54.00	-6.65	average
5	17722.130	7.65	53.16	60.81	74.00	-13.19	peak

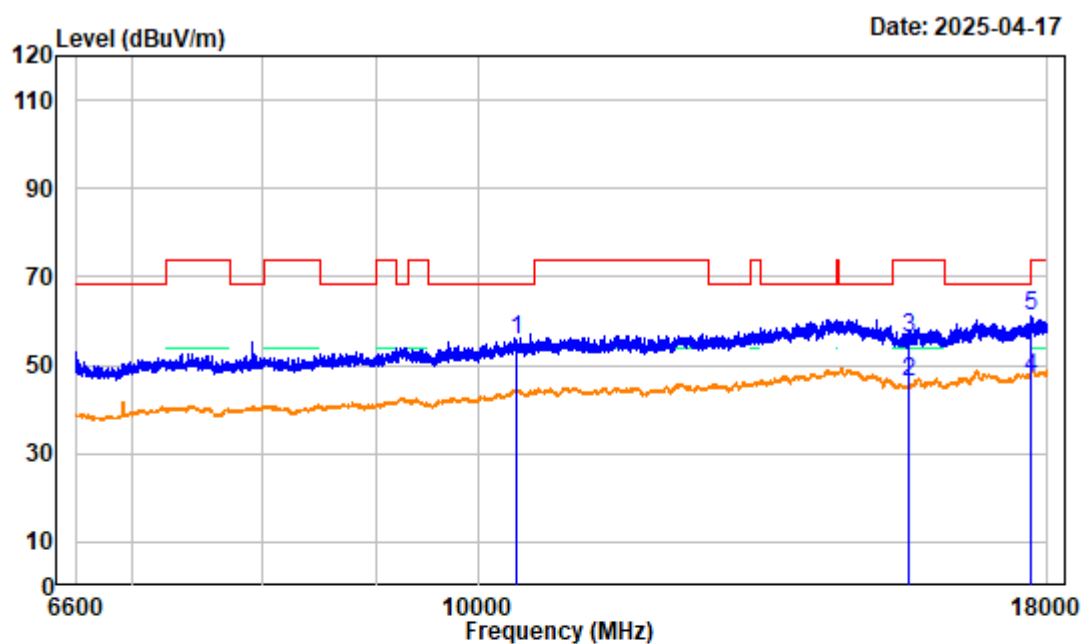

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.66	55.76	68.20	-12.44	peak
2	15600.000	4.60	41.46	46.06	54.00	-7.94	average
3	15600.000	4.60	51.47	56.07	74.00	-17.93	peak
4	17706.450	7.61	39.62	47.23	54.00	-6.77	average
5	17706.450	7.61	53.71	61.32	74.00	-12.68	peak

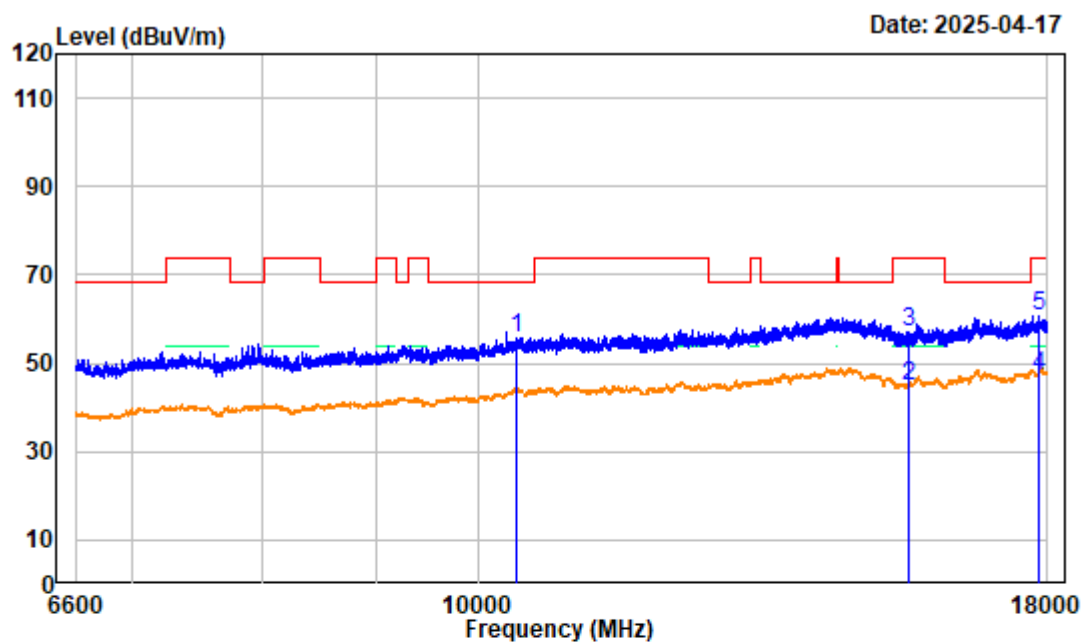

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Middle Channel 5200MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.43	55.53	68.20	-12.67	peak
2	15600.000	4.60	40.45	45.05	54.00	-8.95	average
3	15600.000	4.60	52.55	57.15	74.00	-16.85	peak
4	17851.800	8.23	38.91	47.14	54.00	-6.86	average
5	17851.800	8.23	52.52	60.75	74.00	-13.25	peak

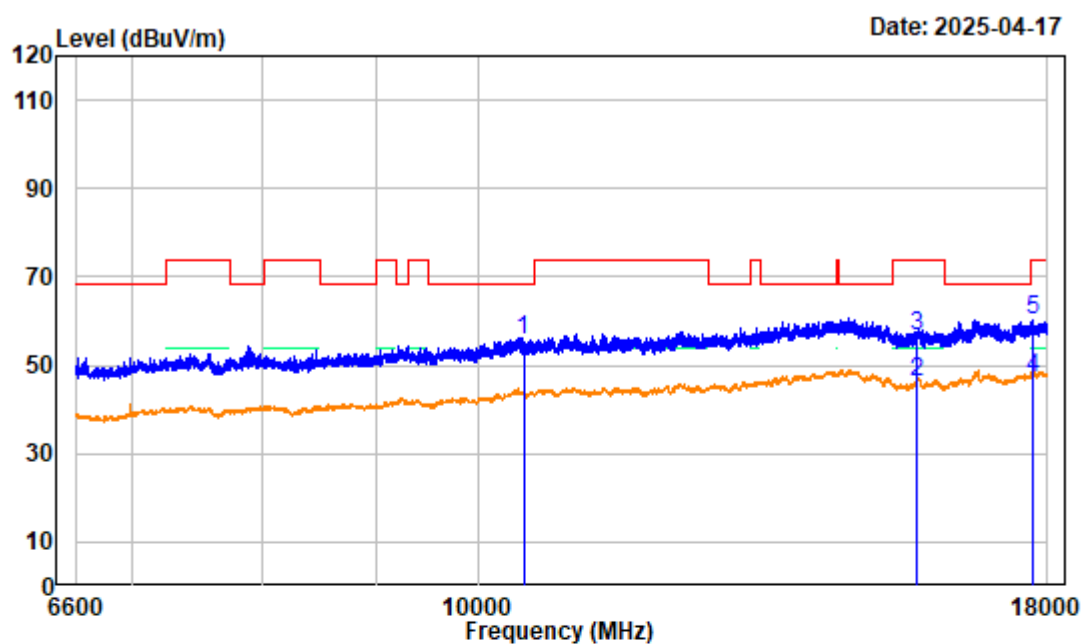

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.89	55.81	68.20	-12.39	peak
2	15720.000	4.90	41.23	46.13	54.00	-7.87	average
3	15720.000	4.90	51.92	56.82	74.00	-17.18	peak
4	17739.220	7.70	39.39	47.09	54.00	-6.91	average
5	17739.220	7.70	52.63	60.33	74.00	-13.67	peak

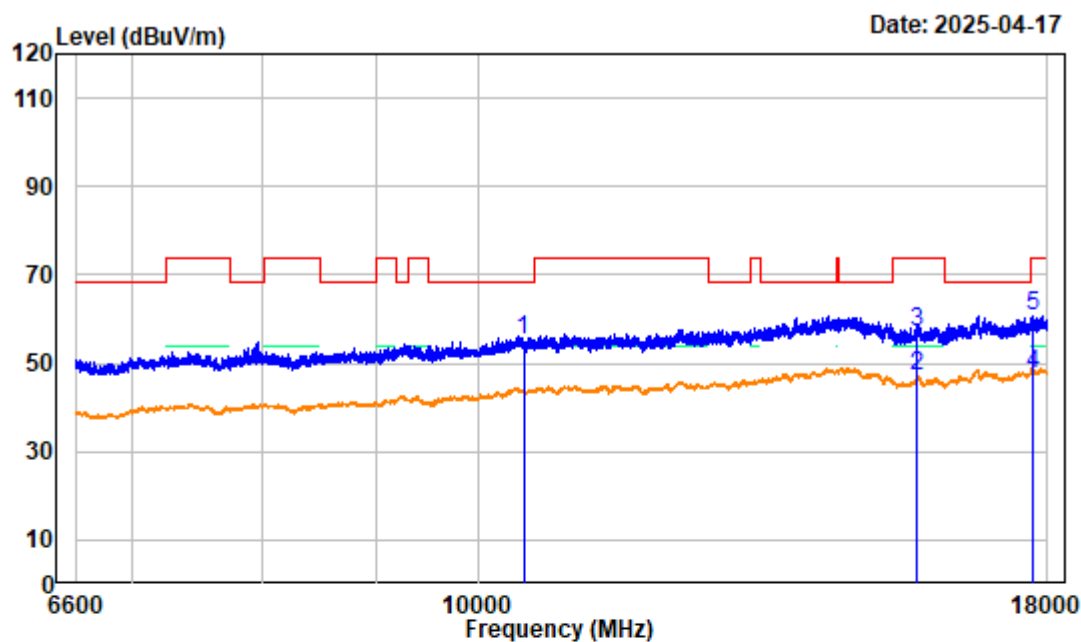

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.52	55.44	68.20	-12.76	peak
2	15720.000	4.90	42.24	47.14	54.00	-6.86	average
3	15720.000	4.90	52.17	57.07	74.00	-16.93	peak
4	17733.530	7.68	39.67	47.35	54.00	-6.65	average
5	17733.530	7.68	53.07	60.75	74.00	-13.25	peak

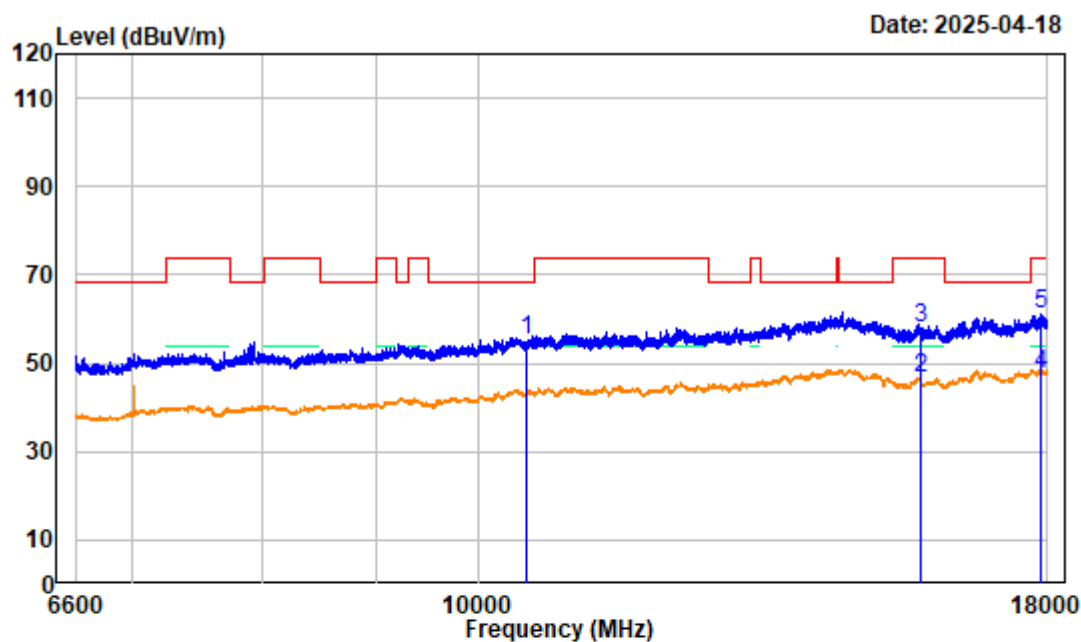

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF

Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	51.34	55.24	68.20	-12.96	peak
2	15780.000	5.17	41.59	46.76	54.00	-7.24	average
3	15780.000	5.17	52.79	57.96	74.00	-16.04	peak
4	17863.200	8.23	39.42	47.65	54.00	-6.35	average
5	17863.200	8.23	52.70	60.93	74.00	-13.07	peak