


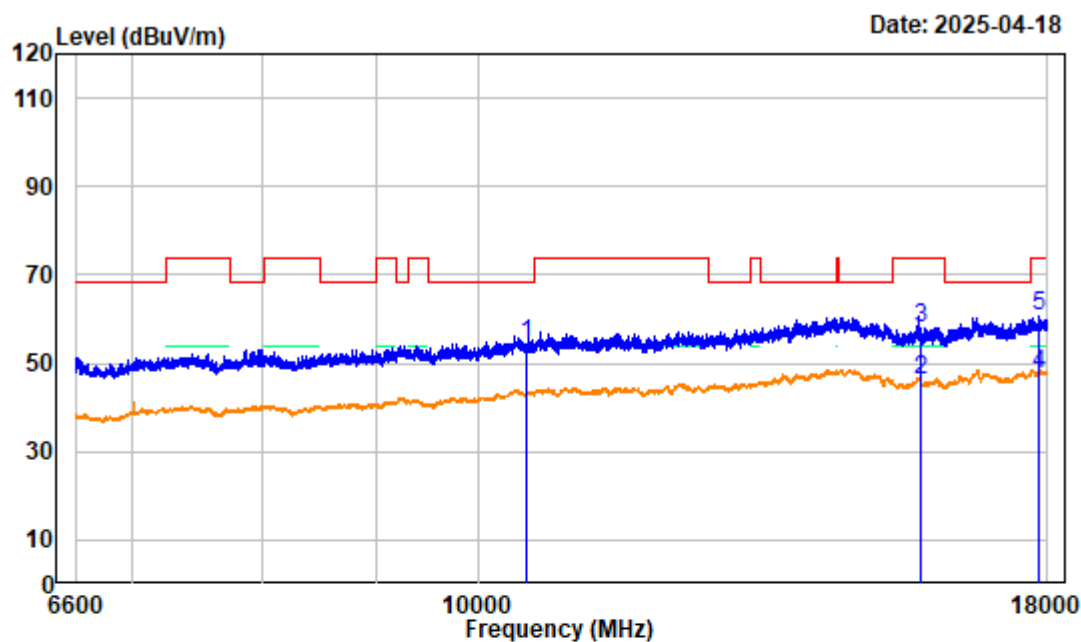

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.56	54.46	68.20	-13.74	peak
2	15780.000	5.17	41.24	46.41	54.00	-7.59	average
3	15780.000	5.17	52.64	57.81	74.00	-16.19	peak
4	17838.970	8.08	39.32	47.40	54.00	-6.60	average
5	17838.970	8.08	52.47	60.55	74.00	-13.45	peak

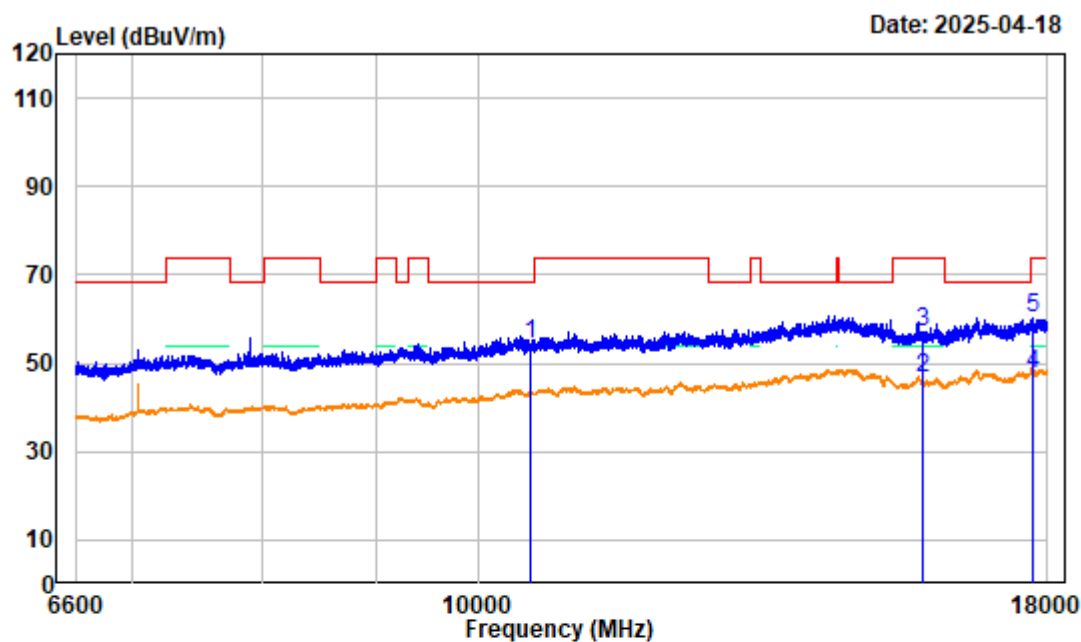

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Middle Channel 5280MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	50.36	54.51	68.20	-13.69	peak
2	15840.000	5.04	41.42	46.46	54.00	-7.54	average
3	15840.000	5.04	52.00	57.04	74.00	-16.96	peak
4	17717.850	7.65	39.84	47.49	54.00	-6.51	average
5	17717.850	7.65	52.67	60.32	74.00	-13.68	peak

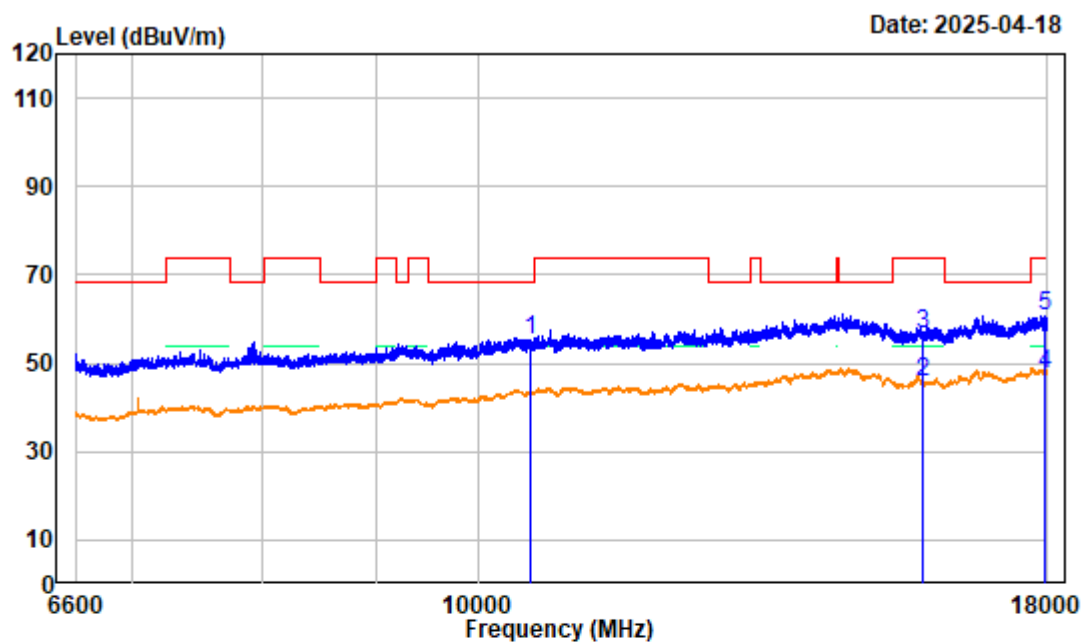

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Middle Channel 5280MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	51.18	55.33	68.20	-12.87	peak
2	15840.000	5.04	40.48	45.52	54.00	-8.48	average
3	15840.000	5.04	51.77	56.81	74.00	-17.19	peak
4	17938.720	8.20	39.39	47.59	54.00	-6.41	average
5	17938.720	8.20	52.57	60.77	74.00	-13.23	peak

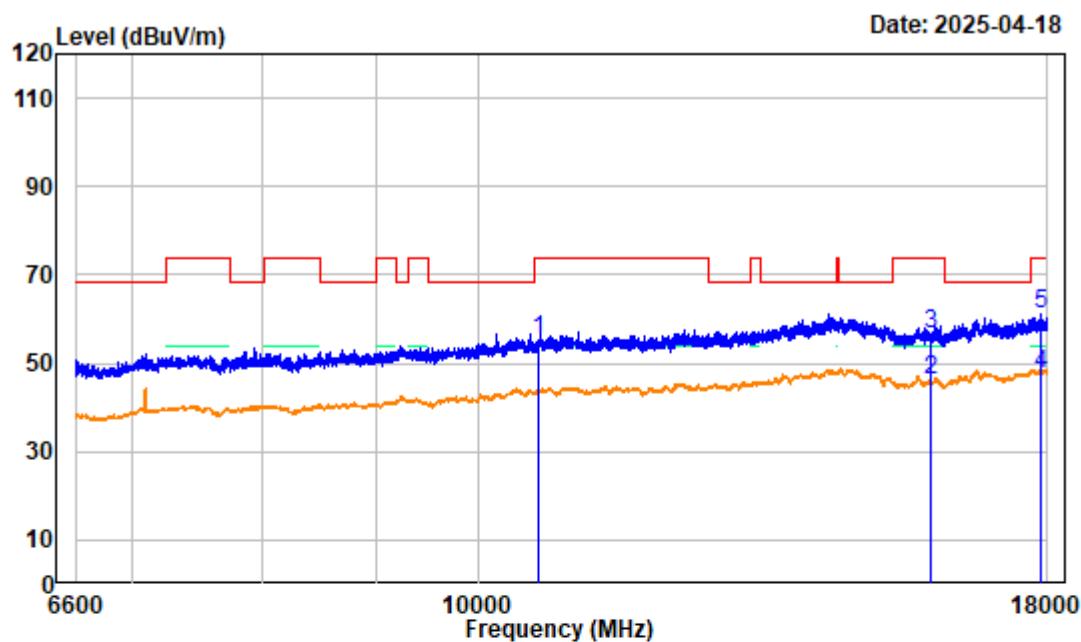

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5320MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.62	55.04	74.00	-18.96	peak
2	15960.000	4.76	41.25	46.01	54.00	-7.99	average
3	15960.000	4.76	51.92	56.68	74.00	-17.32	peak
4	17891.700	8.24	39.37	47.61	54.00	-6.39	average
5	17891.700	8.24	52.78	61.02	74.00	-12.98	peak

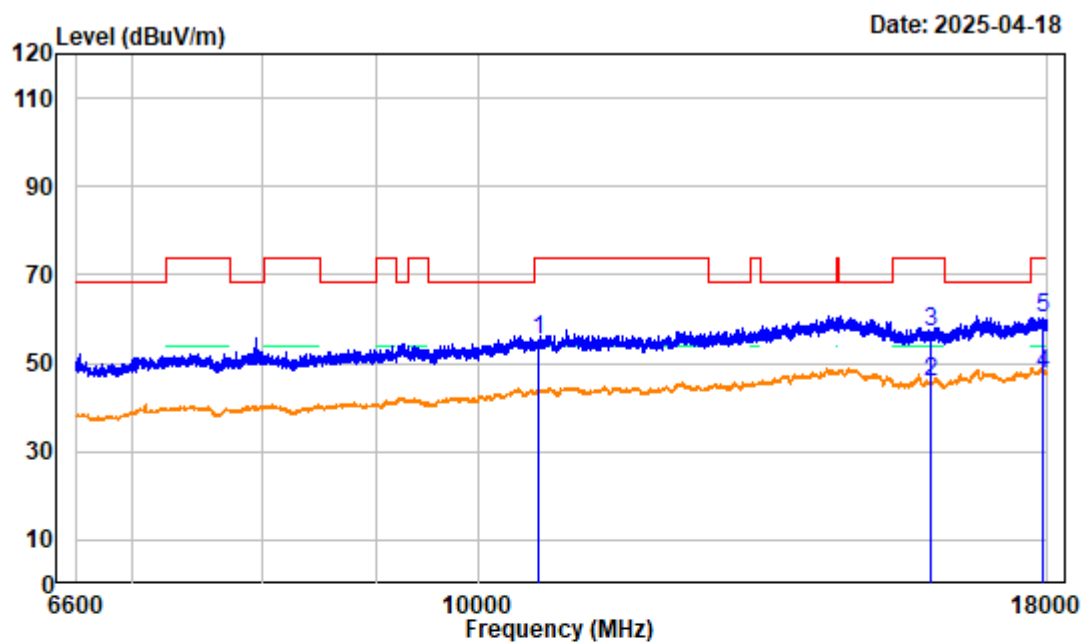

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5320MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.86	55.28	74.00	-18.72	peak
2	15960.000	4.76	40.89	45.65	54.00	-8.35	average
3	15960.000	4.76	52.17	56.93	74.00	-17.07	peak
4	17907.380	8.22	39.54	47.76	54.00	-6.24	average
5	17907.380	8.22	51.99	60.21	74.00	-13.79	peak

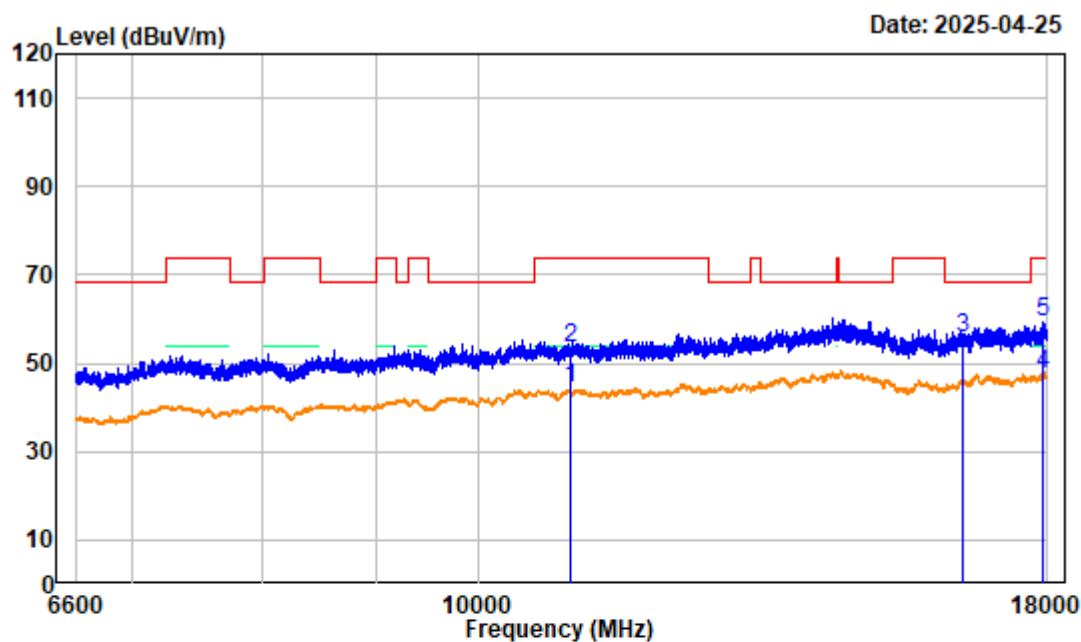

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	39.01	44.28	54.00	-9.72	average
2	11000.000	5.27	48.04	53.31	74.00	-20.69	peak
3	16500.000	5.92	50.00	55.92	68.20	-12.28	peak
4	17931.600	8.20	39.33	47.53	54.00	-6.47	average
5	17931.600	8.20	51.23	59.43	74.00	-14.57	peak

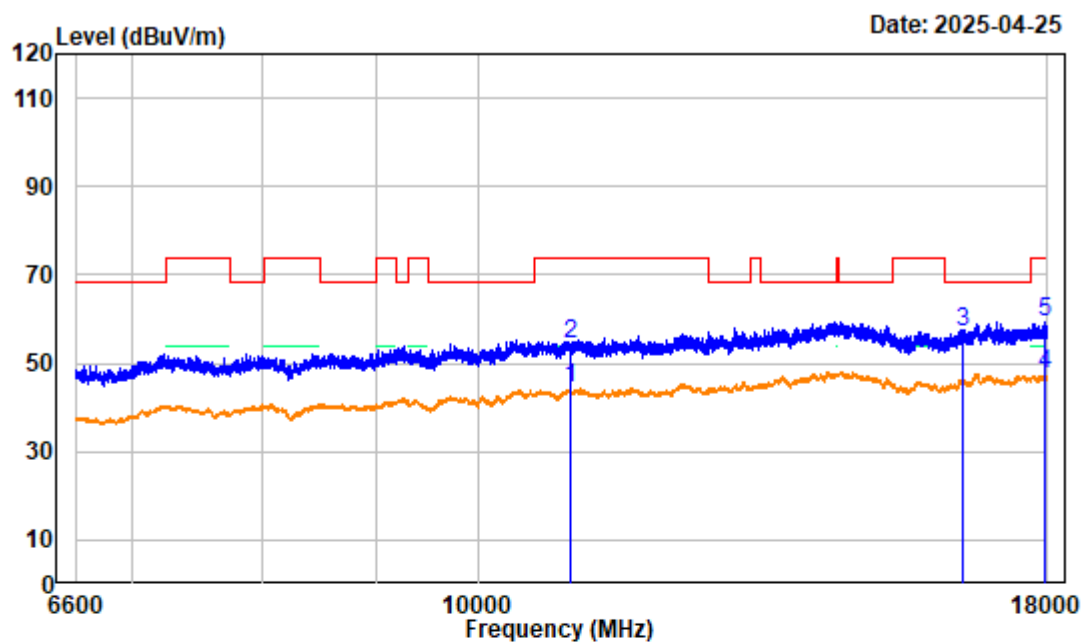

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	39.25	44.52	54.00	-9.48	average
2	11000.000	5.27	48.85	54.12	74.00	-19.88	peak
3	16500.000	5.92	50.95	56.87	68.20	-11.33	peak
4	17961.530	8.21	39.55	47.76	54.00	-6.24	average
5	17961.530	8.21	51.07	59.28	74.00	-14.72	peak

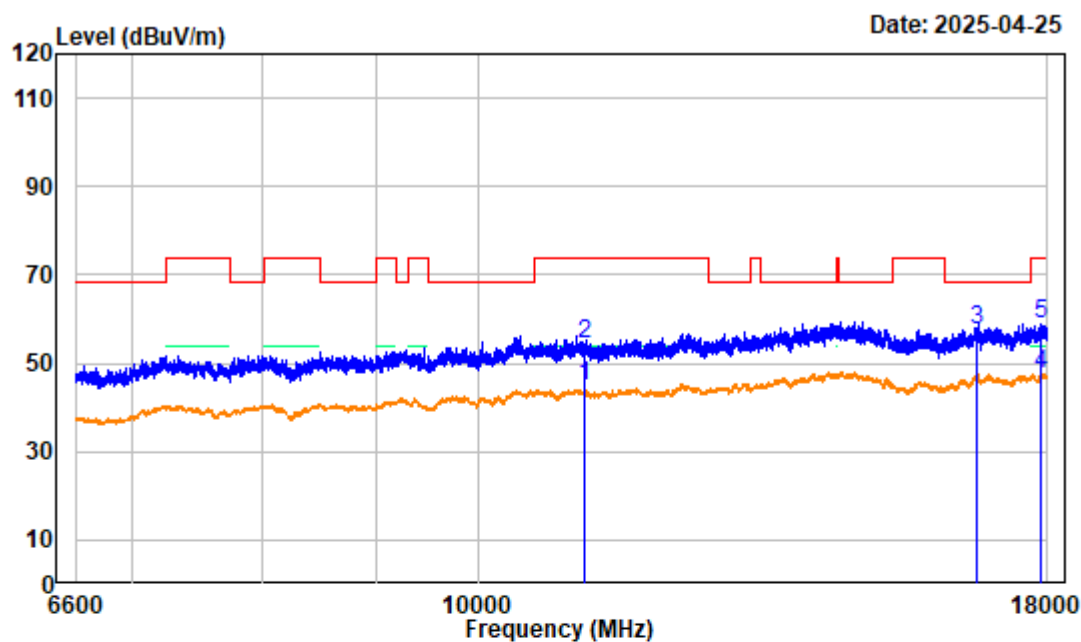

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Middle Channel 5580MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	40.29	44.61	54.00	-9.39	average
2	11160.000	4.32	50.13	54.45	74.00	-19.55	peak
3	16740.000	7.63	49.95	57.58	68.20	-10.62	peak
4	17861.780	8.24	39.31	47.55	54.00	-6.45	average
5	17861.780	8.24	50.44	58.68	74.00	-15.32	peak

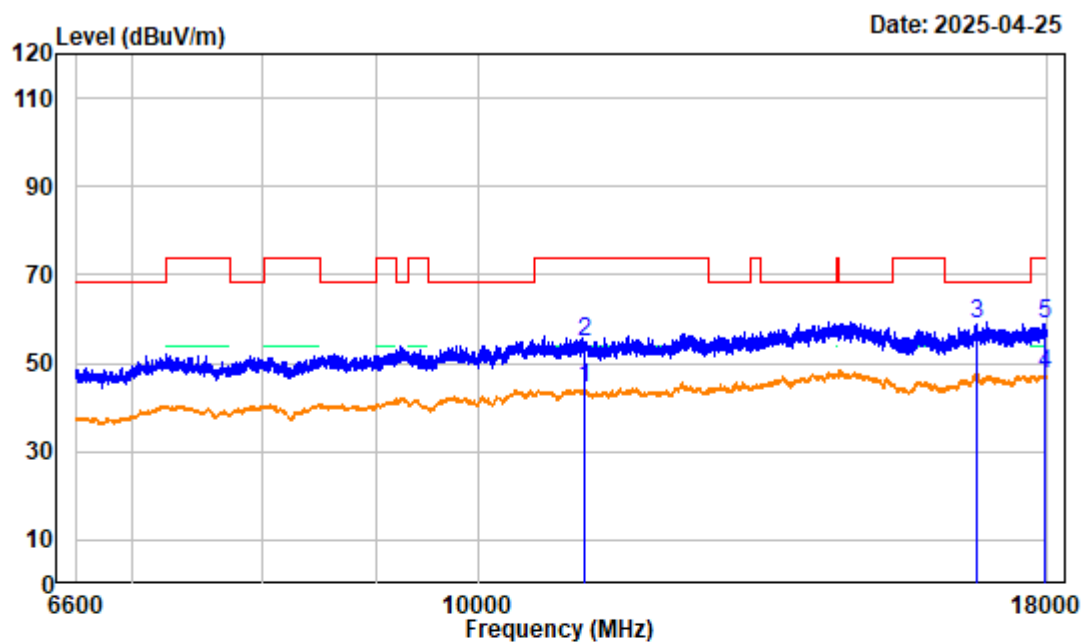

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Middle Channel 5580MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	40.18	44.50	54.00	-9.50	average
2	11160.000	4.32	50.28	54.60	74.00	-19.40	peak
3	16740.000	7.63	51.40	59.03	68.20	-9.17	peak
4	17943.000	8.19	39.30	47.49	54.00	-6.51	average
5	17943.000	8.19	50.80	58.99	74.00	-15.01	peak

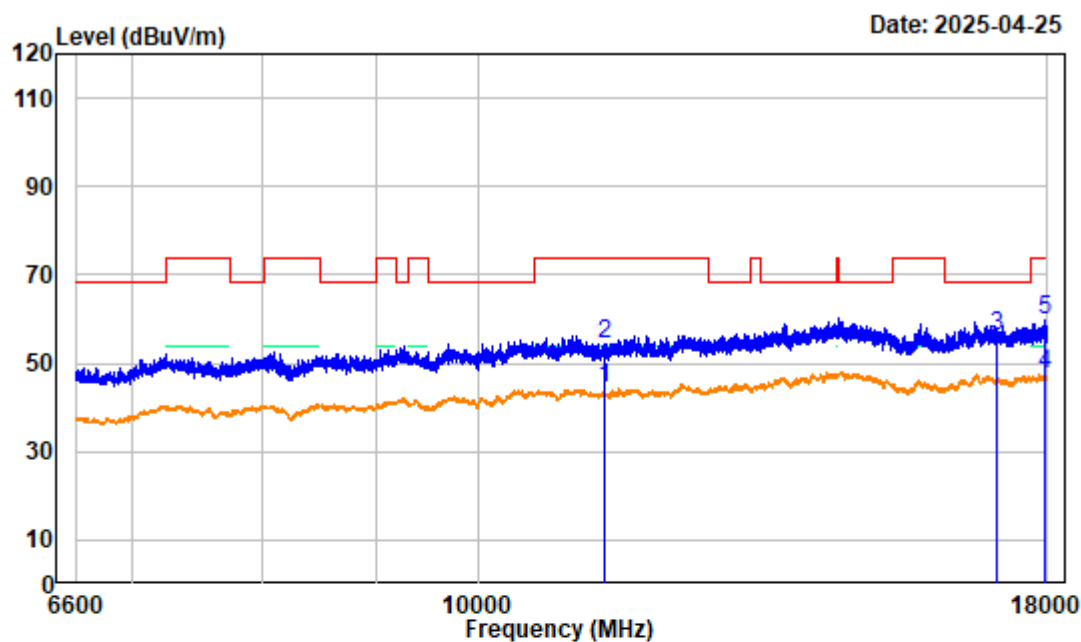

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5700MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.85	44.52	54.00	-9.48	average
2	11400.000	5.67	48.68	54.35	74.00	-19.65	peak
3	17100.000	6.92	49.40	56.32	68.20	-11.88	peak
4	17945.850	8.19	39.24	47.43	54.00	-6.57	average
5	17945.850	8.19	51.68	59.87	74.00	-14.13	peak

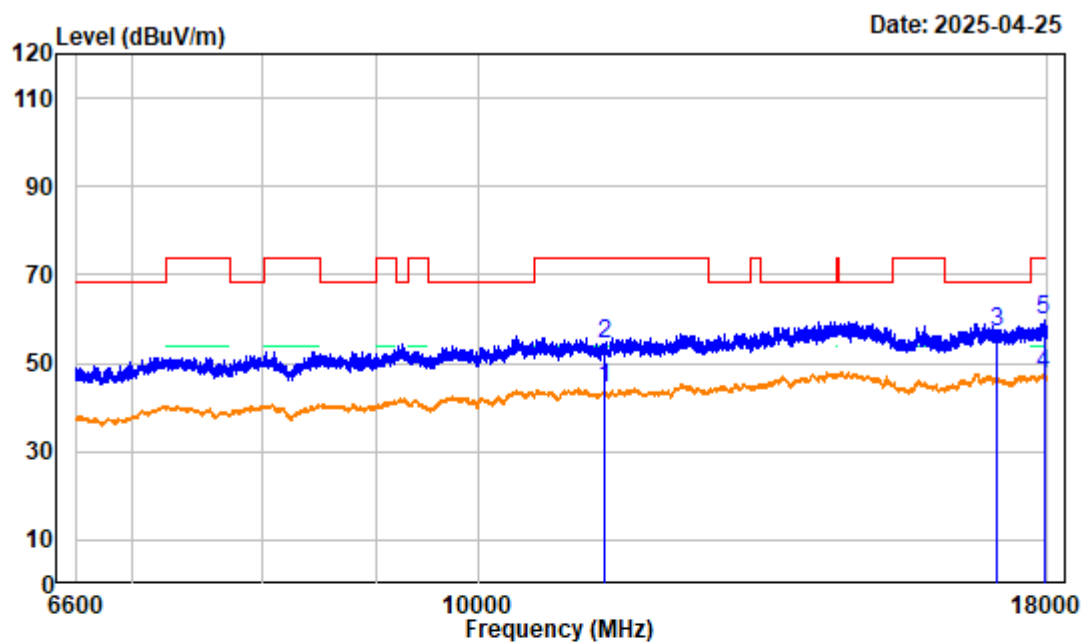

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5700MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.60	44.27	54.00	-9.73	average
2	11400.000	5.67	48.69	54.36	74.00	-19.64	peak
3	17100.000	6.92	50.35	57.27	68.20	-10.93	peak
4	17934.450	8.20	39.28	47.48	54.00	-6.52	average
5	17934.450	8.20	51.41	59.61	74.00	-14.39	peak

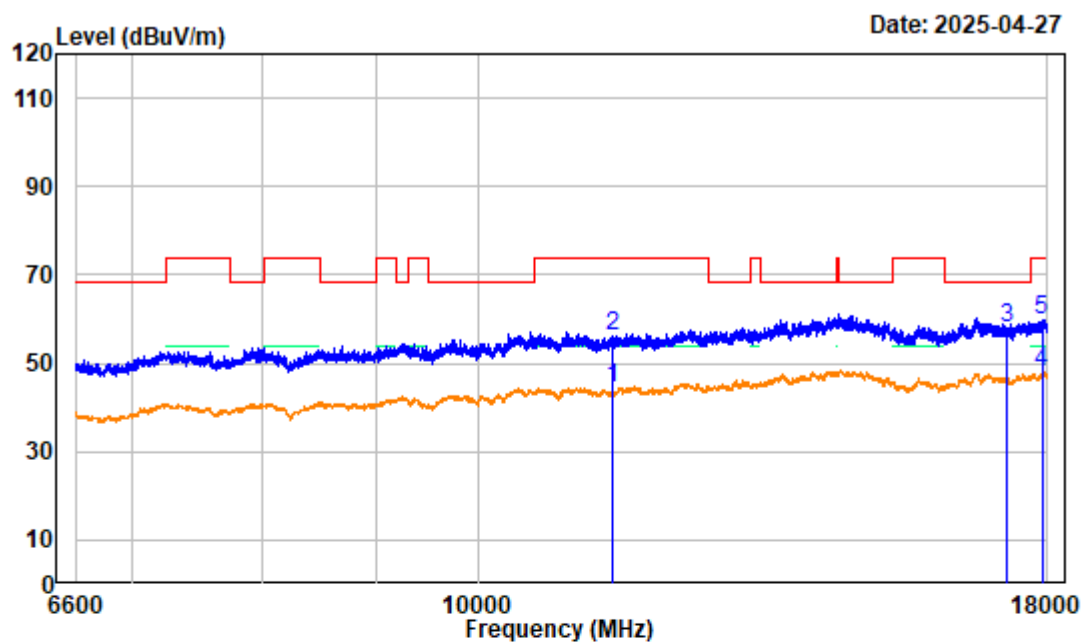

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Low Channel 5745MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.15	44.25	54.00	-9.75	average
2	11490.000	6.10	50.11	56.21	74.00	-17.79	peak
3	17265.000	6.67	51.07	57.74	68.20	-10.46	peak
4	17897.400	8.24	39.64	47.88	54.00	-6.12	average
5	17897.400	8.24	51.56	59.80	74.00	-14.20	peak

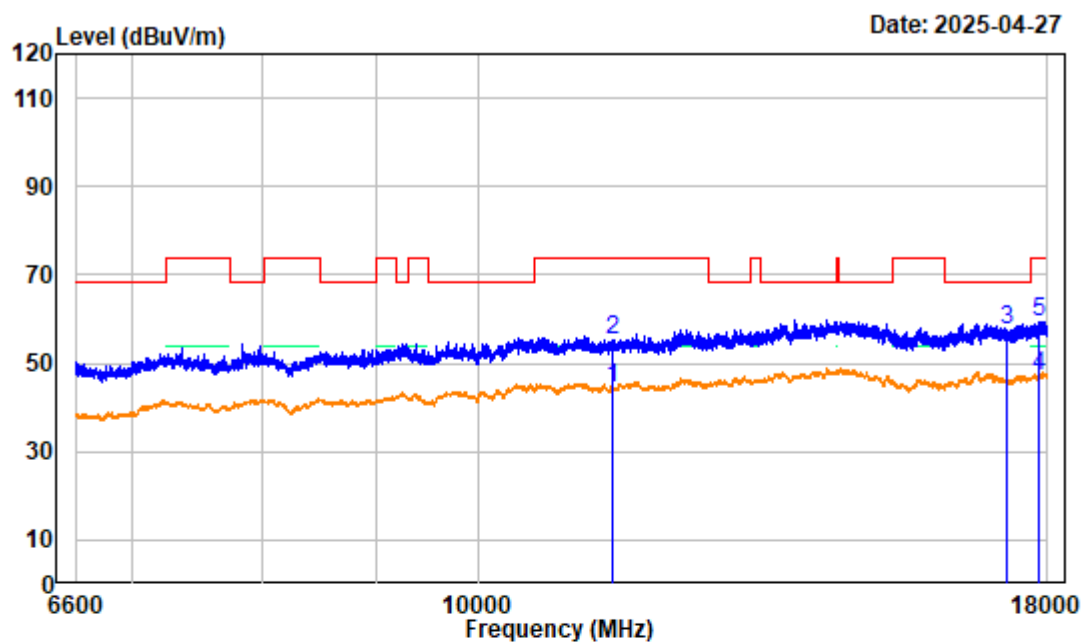

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.22	44.32	54.00	-9.68	average
2	11490.000	6.10	49.28	55.38	74.00	-18.62	peak
3	17265.000	6.67	50.90	57.57	68.20	-10.63	peak
4	17829.000	7.96	39.31	47.27	54.00	-6.73	average
5	17829.000	7.96	51.58	59.54	74.00	-14.46	peak

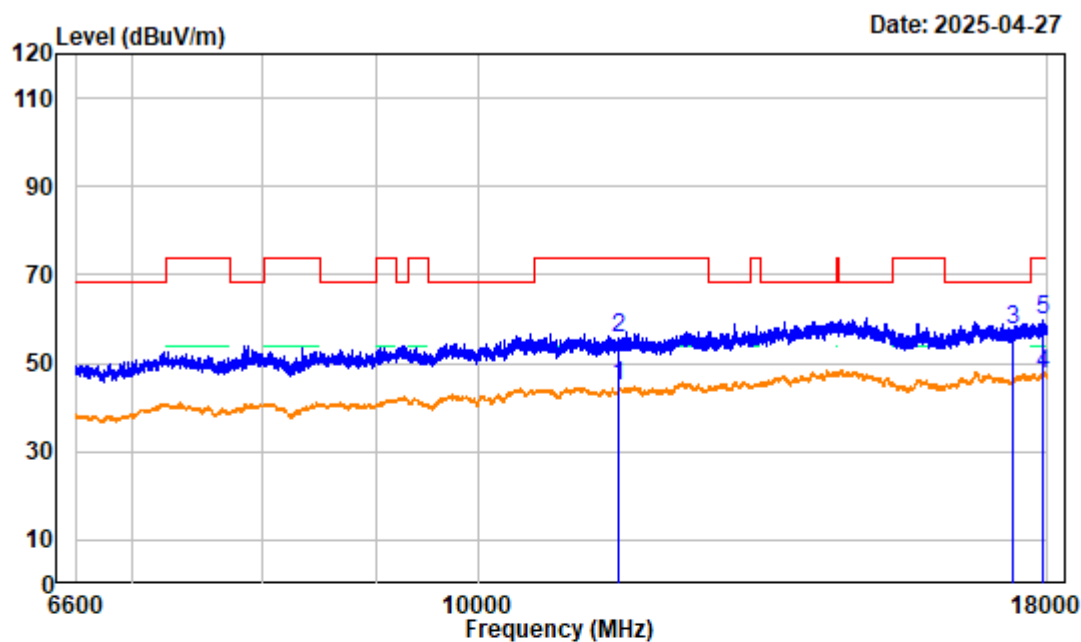

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Middle Channel 5785MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.78	44.71	54.00	-9.29	average
2	11570.000	5.93	49.84	55.77	74.00	-18.23	peak
3	17355.000	6.58	50.86	57.44	68.20	-10.76	peak
4	17933.030	8.20	39.46	47.66	54.00	-6.34	average
5	17933.030	8.20	51.60	59.80	74.00	-14.20	peak

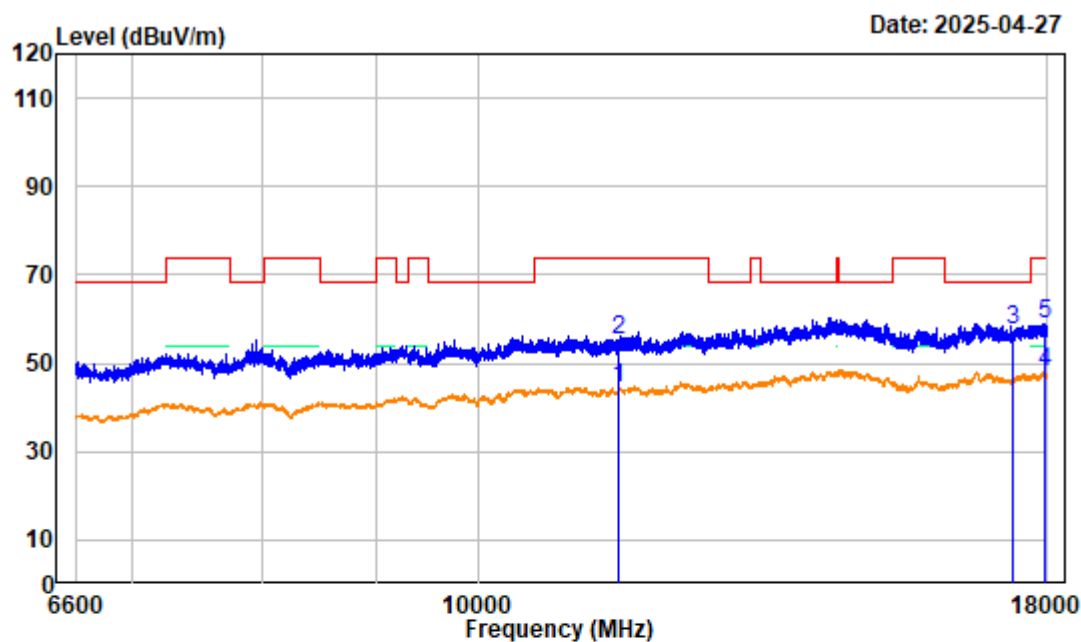


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Middle Channel 5785MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.38	44.31	54.00	-9.69	average
2	11570.000	5.93	49.38	55.31	74.00	-18.69	peak
3	17355.000	6.58	50.76	57.34	68.20	-10.86	peak
4	17947.280	8.18	39.66	47.84	54.00	-6.16	average
5	17947.280	8.18	50.87	59.05	74.00	-14.95	peak

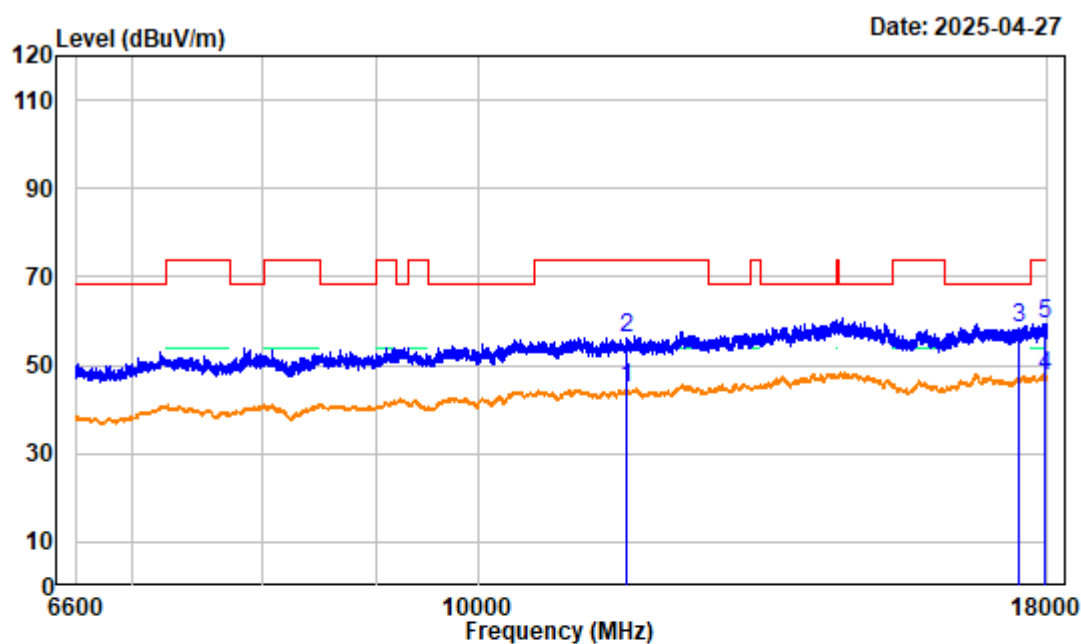


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.26	44.63	54.00	-9.37	average
2	11650.000	5.37	50.85	56.22	74.00	-17.78	peak
3	17475.000	7.12	51.33	58.45	68.20	-9.75	peak
4	17962.950	8.23	39.34	47.57	54.00	-6.43	average
5	17962.950	8.23	51.30	59.53	74.00	-14.47	peak

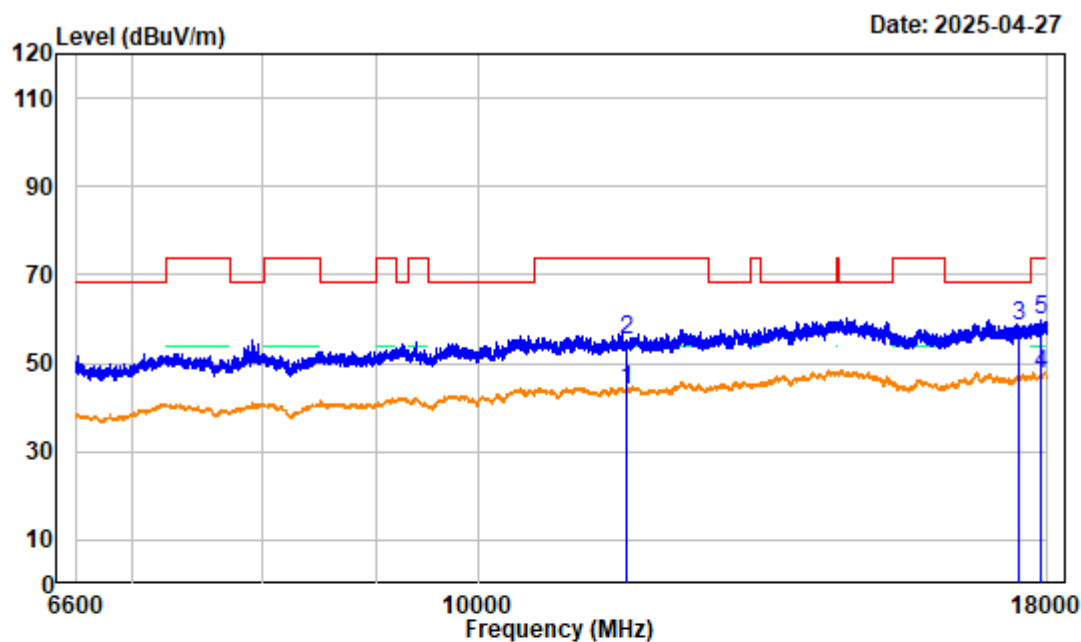

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	38.76	44.13	54.00	-9.87	average
2	11650.000	5.37	49.80	55.17	74.00	-18.83	peak
3	17475.000	7.12	51.33	58.45	68.20	-9.75	peak
4	17870.320	8.23	39.22	47.45	54.00	-6.55	average
5	17870.320	8.23	51.46	59.69	74.00	-14.31	peak

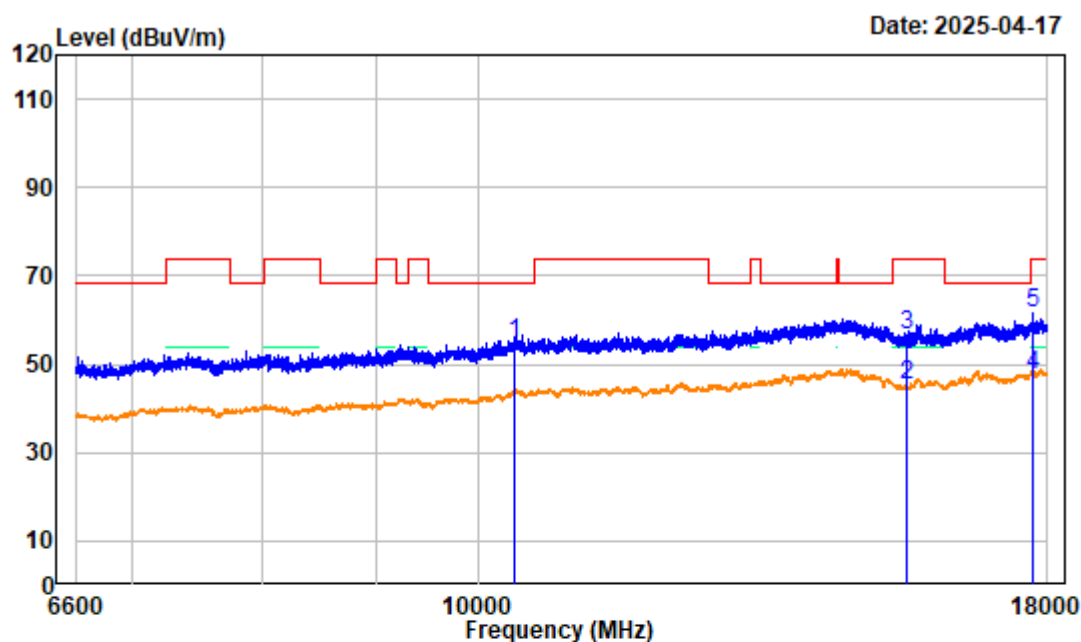6.6GHz~18GHz 802.11n40:

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5190MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	50.95	54.92	68.20	-13.28	peak
2	15570.000	4.70	40.68	45.38	54.00	-8.62	average
3	15570.000	4.70	51.93	56.63	74.00	-17.37	peak
4	17715.000	7.64	39.88	47.52	54.00	-6.48	average
5	17715.000	7.64	54.10	61.74	74.00	-12.26	peak

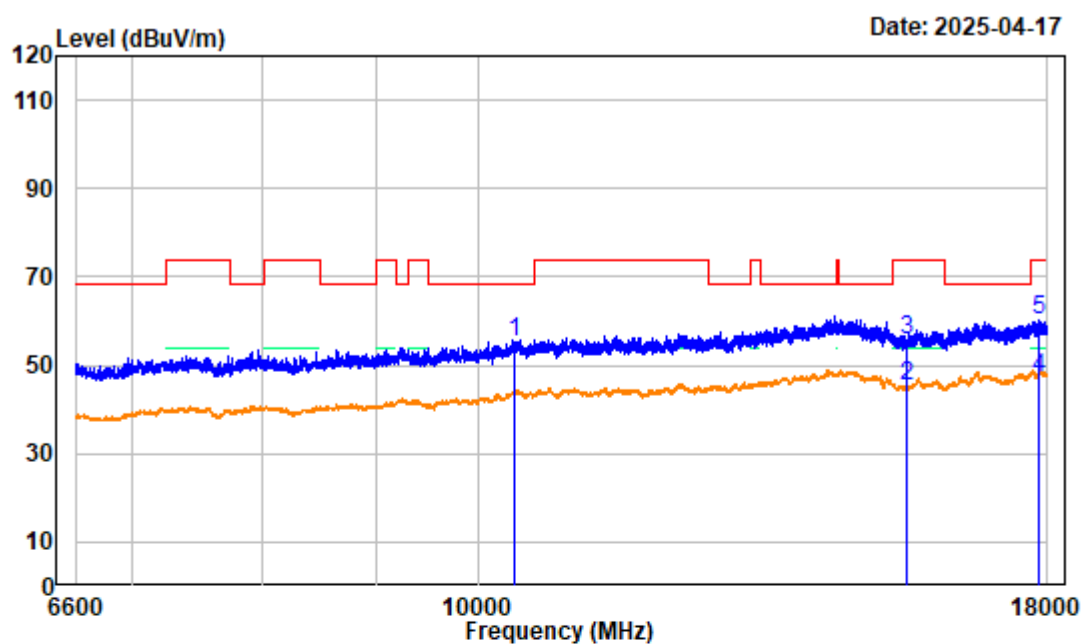

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5190MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	51.30	55.27	68.20	-12.93	peak
2	15570.000	4.70	40.41	45.11	54.00	-8.89	average
3	15570.000	4.70	51.07	55.77	74.00	-18.23	peak
4	17853.220	8.23	39.04	47.27	54.00	-6.73	average
5	17853.220	8.23	52.00	60.23	74.00	-13.77	peak

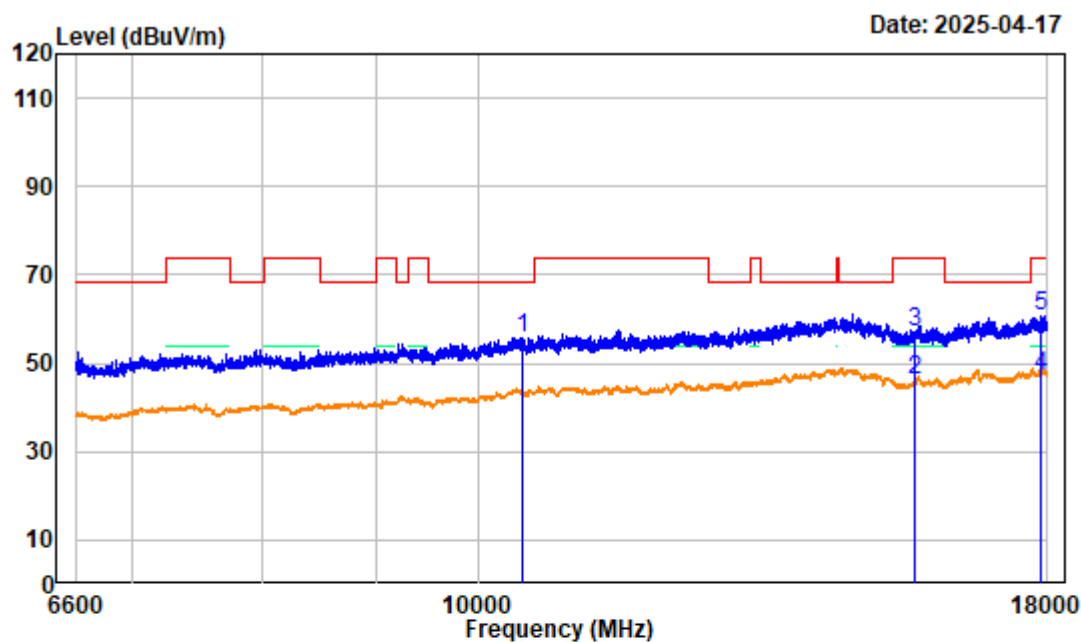

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5230MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	51.58	55.76	68.20	-12.44	peak
2	15690.000	4.67	41.36	46.03	54.00	-7.97	average
3	15690.000	4.67	52.42	57.09	74.00	-16.91	peak
4	17878.880	8.23	38.89	47.12	54.00	-6.88	average
5	17878.880	8.23	52.47	60.70	74.00	-13.30	peak

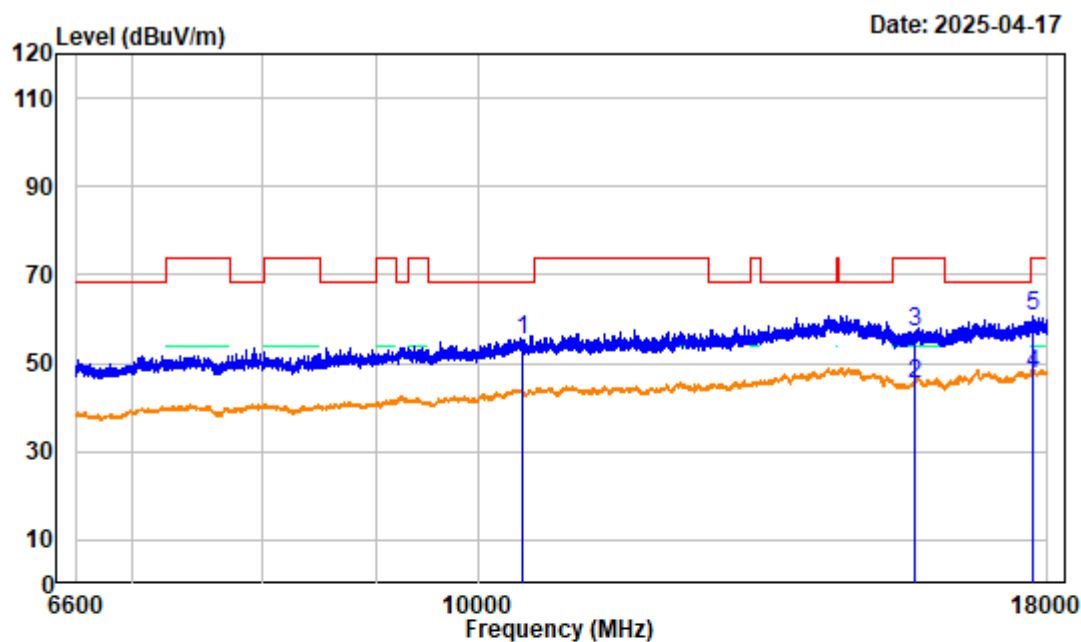

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5230MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	50.87	55.05	68.20	-13.15	peak
2	15690.000	4.67	40.71	45.38	54.00	-8.62	average
3	15690.000	4.67	52.21	56.88	74.00	-17.12	peak
4	17715.000	7.64	40.08	47.72	54.00	-6.28	average
5	17715.000	7.64	53.12	60.76	74.00	-13.24	peak

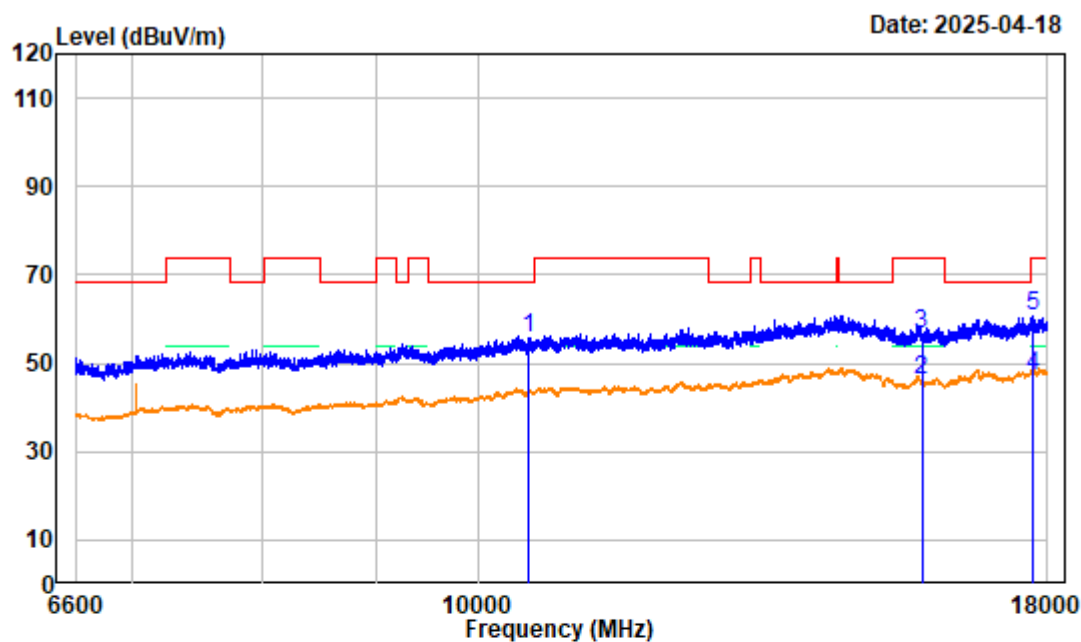

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5270MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.11	51.45	55.56	68.20	-12.64	peak
2	15810.000	5.10	41.11	46.21	54.00	-7.79	average
3	15810.000	5.10	51.60	56.70	74.00	-17.30	peak
4	17737.800	7.70	39.52	47.22	54.00	-6.78	average
5	17737.800	7.70	52.99	60.69	74.00	-13.31	peak

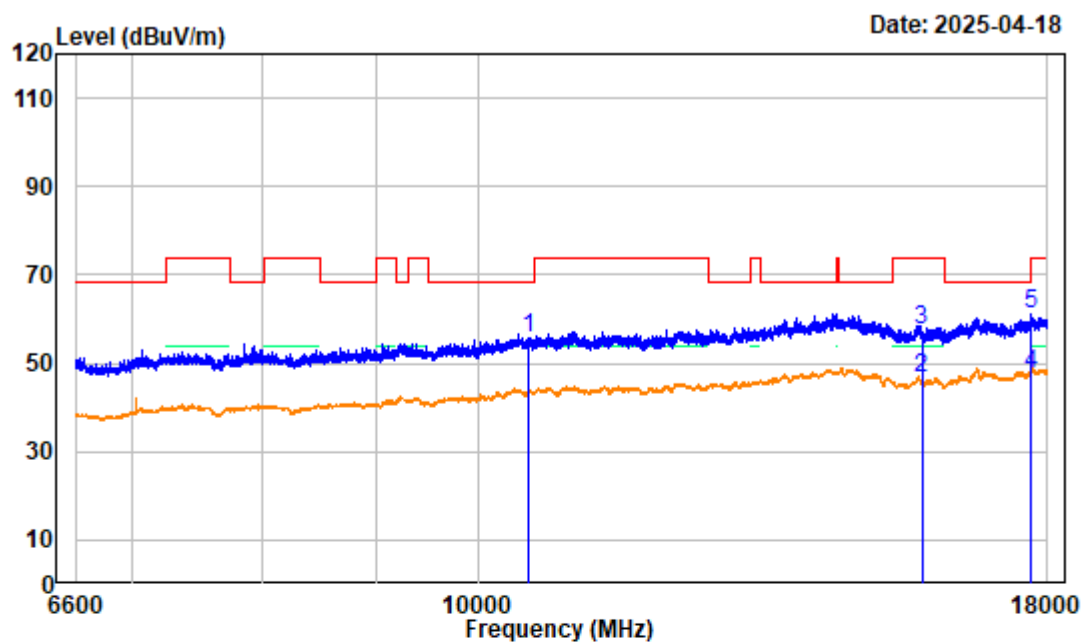

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5270MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.11	51.53	55.64	68.20	-12.56	peak
2	15810.000	5.10	41.46	46.56	54.00	-7.44	average
3	15810.000	5.10	52.22	57.32	74.00	-16.68	peak
4	17707.880	7.62	40.03	47.65	54.00	-6.35	average
5	17707.880	7.62	53.39	61.01	74.00	-12.99	peak

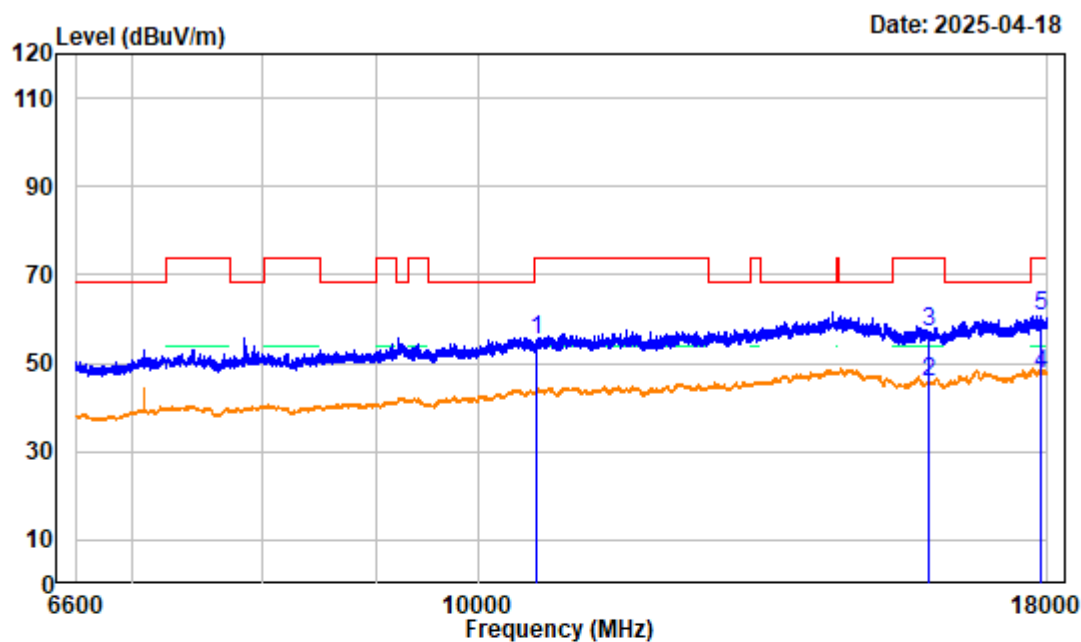

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5310MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	51.07	55.21	74.00	-18.79	peak
2	15930.000	4.93	40.97	45.90	54.00	-8.10	average
3	15930.000	4.93	52.06	56.99	74.00	-17.01	peak
4	17861.780	8.24	39.19	47.43	54.00	-6.57	average
5	17861.780	8.24	52.43	60.67	74.00	-13.33	peak

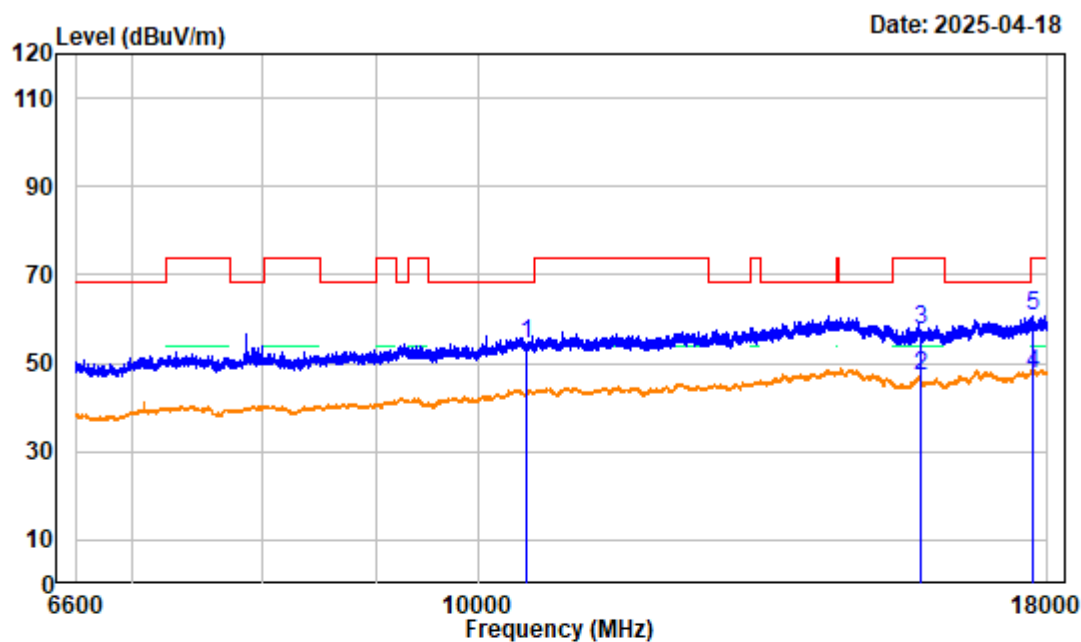

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5310MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.50	54.40	68.20	-13.80	peak
2	15780.000	5.17	42.09	47.26	54.00	-6.74	average
3	15780.000	5.17	52.36	57.53	74.00	-16.47	peak
4	17719.280	7.64	39.77	47.41	54.00	-6.59	average
5	17719.280	7.64	53.24	60.88	74.00	-13.12	peak

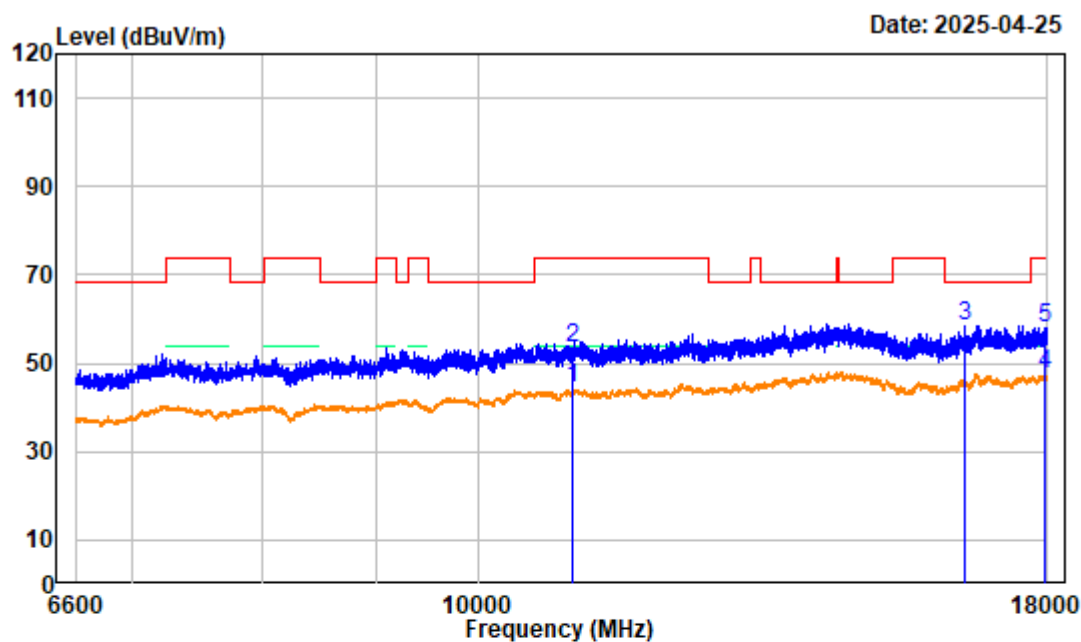

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5510MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.22	39.11	44.33	54.00	-9.67	average
2	11020.000	5.22	48.30	53.52	74.00	-20.48	peak
3	16530.000	6.09	52.17	58.26	68.20	-9.94	peak
4	17955.820	8.20	39.45	47.65	54.00	-6.35	average
5	17955.820	8.20	49.98	58.18	74.00	-15.82	peak

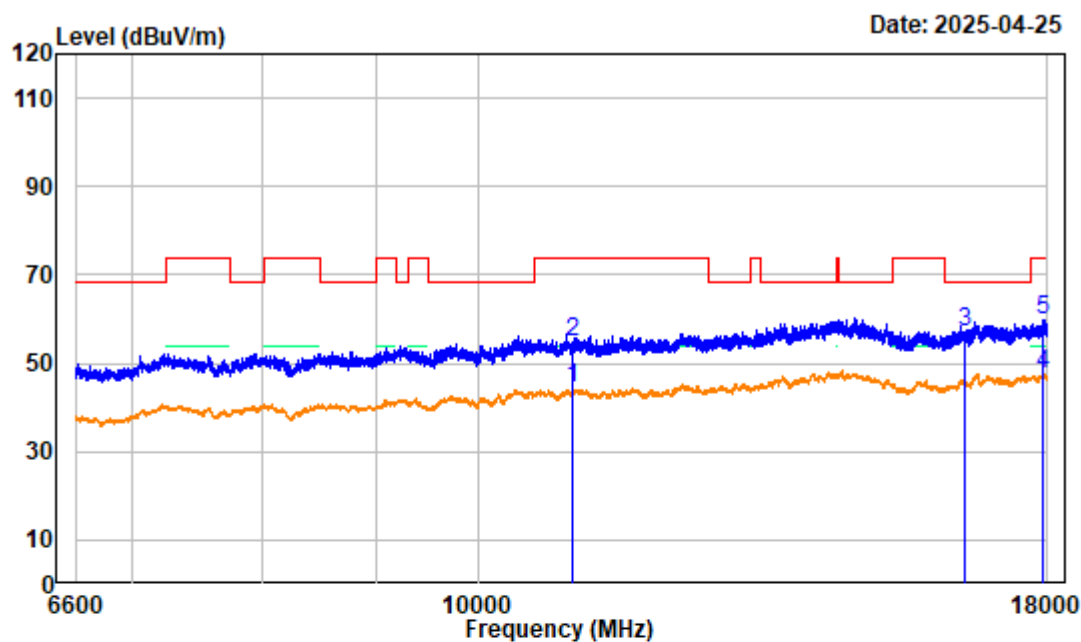

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5510MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.22	39.03	44.25	54.00	-9.75	average
2	11020.000	5.22	49.35	54.57	74.00	-19.43	peak
3	16530.000	6.09	51.04	57.13	68.20	-11.07	peak
4	17931.600	8.20	39.20	47.40	54.00	-6.60	average
5	17931.600	8.20	51.79	59.99	74.00	-14.01	peak

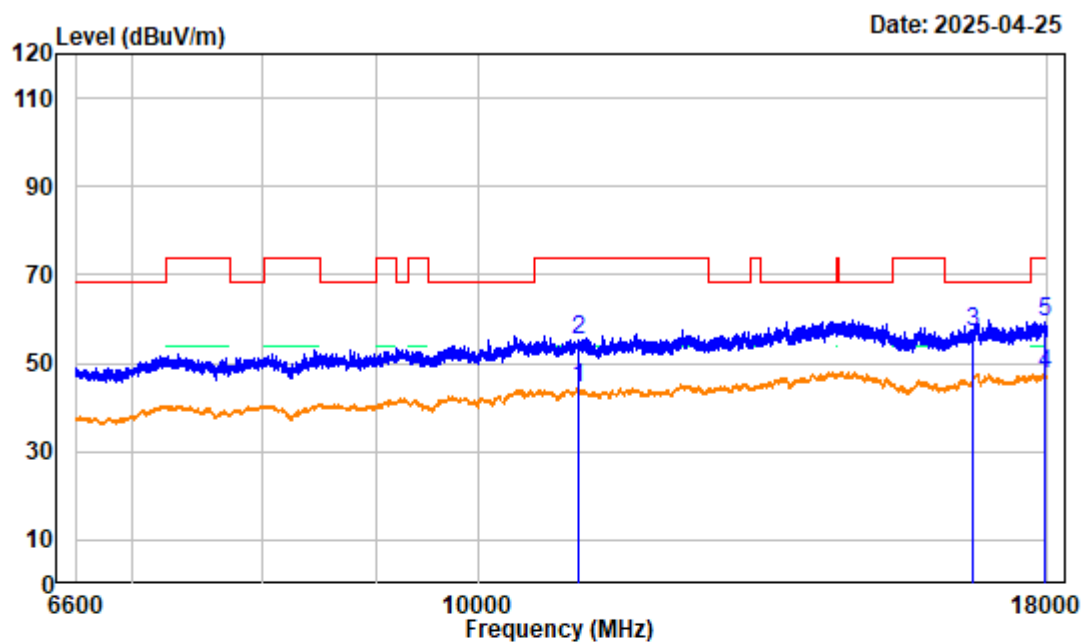

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Middle Channel 5550MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.76	39.50	44.26	54.00	-9.74	average
2	11100.000	4.76	50.47	55.23	74.00	-18.77	peak
3	16650.000	6.50	50.55	57.05	68.20	-11.15	peak
4	17952.970	8.19	39.19	47.38	54.00	-6.62	average
5	17952.970	8.19	51.18	59.37	74.00	-14.63	peak

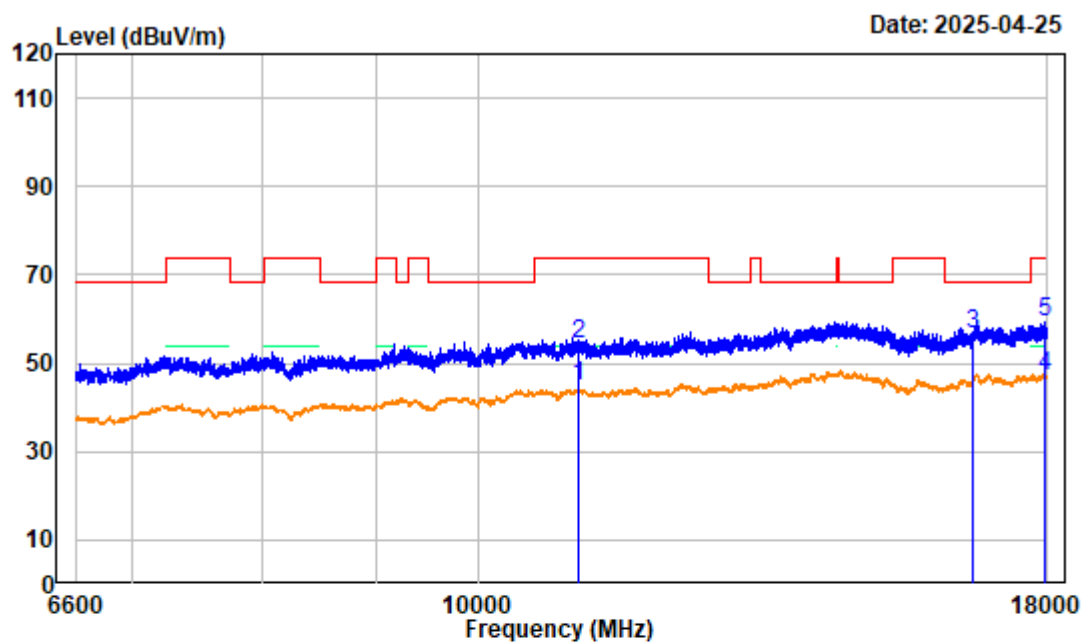

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n40 Middle Channel 5550MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.76	39.99	44.75	54.00	-9.25	average
2	11100.000	4.76	49.63	54.39	74.00	-19.61	peak
3	16650.000	6.50	49.97	56.47	68.20	-11.73	peak
4	17951.550	8.18	39.11	47.29	54.00	-6.71	average
5	17951.550	8.18	51.07	59.25	74.00	-14.75	peak

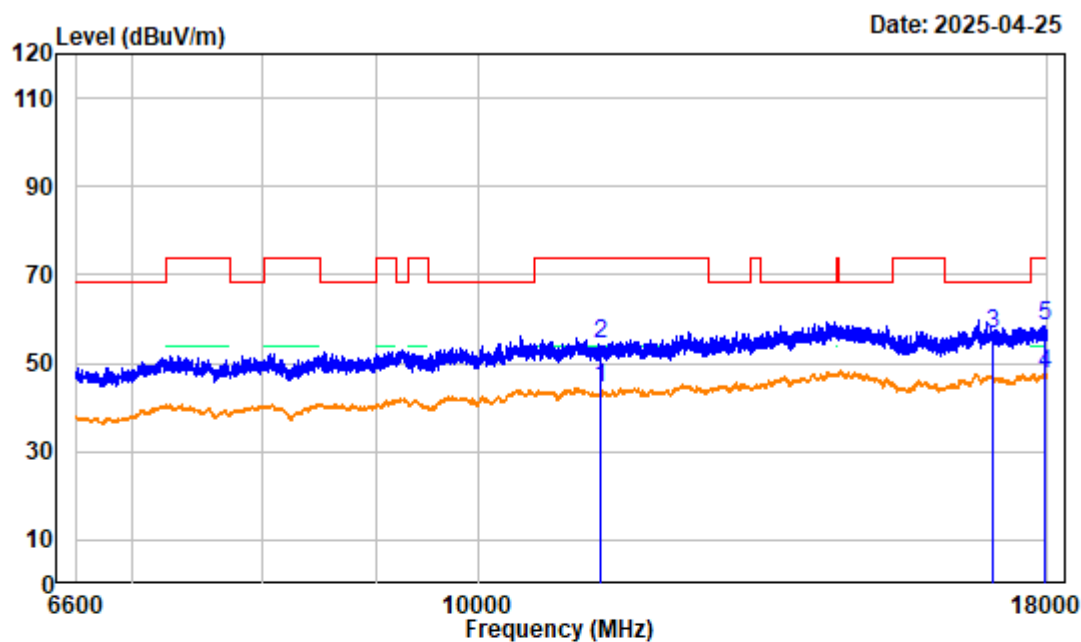

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5670MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.91	39.53	44.44	54.00	-9.56	average
2	11340.000	4.91	49.49	54.40	74.00	-19.60	peak
3	17010.000	7.57	49.20	56.77	68.20	-11.43	peak
4	17944.430	8.19	39.56	47.75	54.00	-6.25	average
5	17944.430	8.19	50.16	58.35	74.00	-15.65	peak

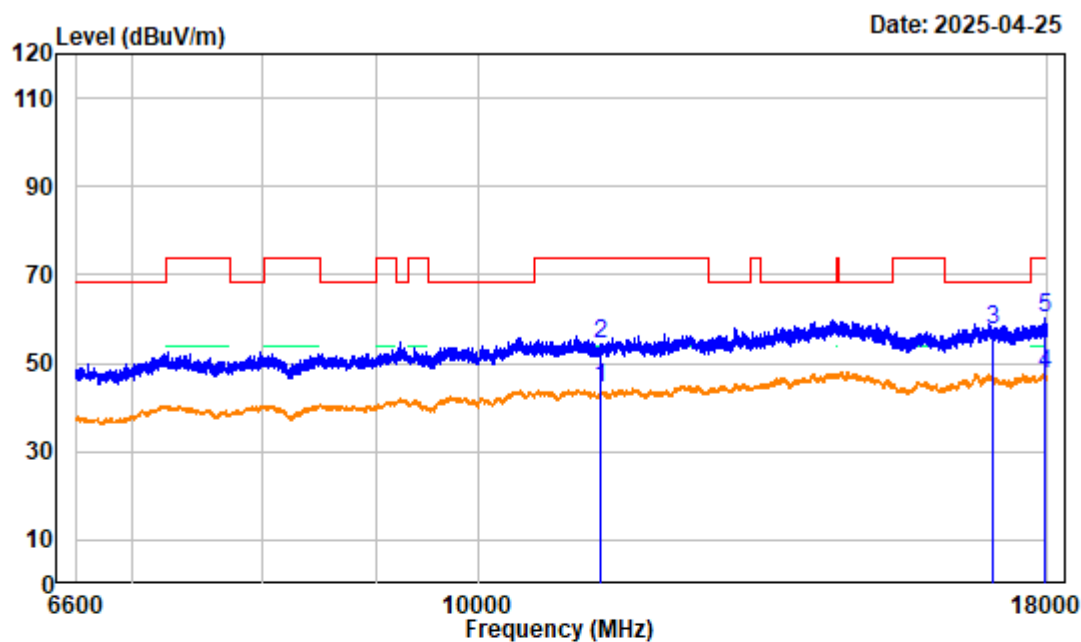

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5670MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.91	39.32	44.23	54.00	-9.77	average
2	11340.000	4.91	49.43	54.34	74.00	-19.66	peak
3	17010.000	7.57	50.14	57.71	68.20	-10.49	peak
4	17960.100	8.21	39.12	47.33	54.00	-6.67	average
5	17960.100	8.21	52.07	60.28	74.00	-13.72	peak

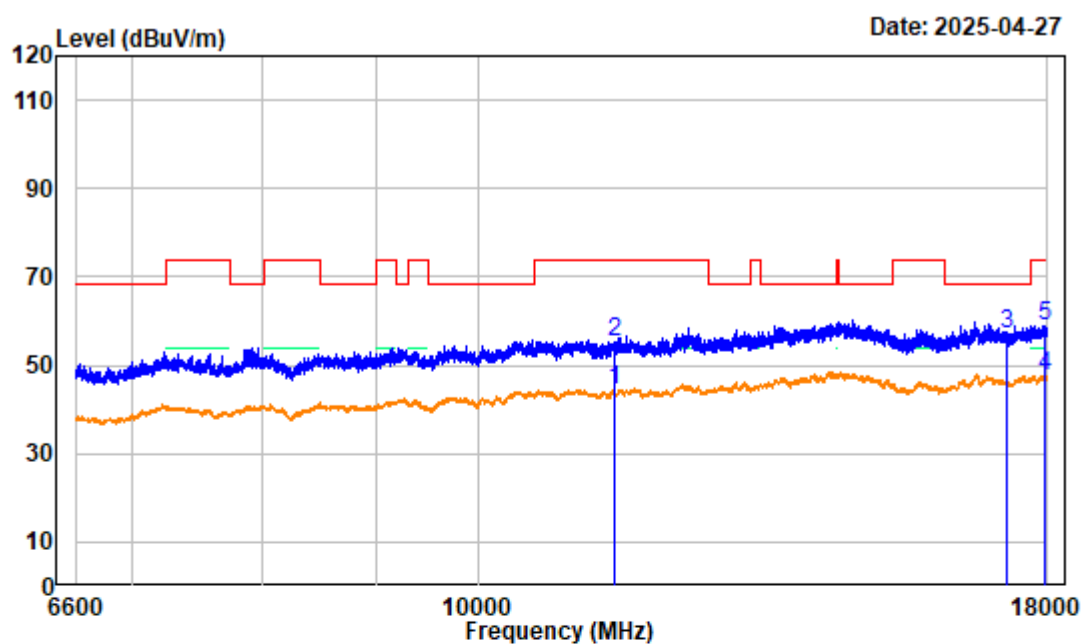

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n40 Low Channel 5755MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.01	44.31	54.00	-9.69	average
2	11510.000	6.30	49.02	55.32	74.00	-18.68	peak
3	17265.000	6.67	50.39	57.06	68.20	-11.14	peak
4	17957.250	8.20	39.45	47.65	54.00	-6.35	average
5	17957.250	8.20	50.87	59.07	74.00	-14.93	peak

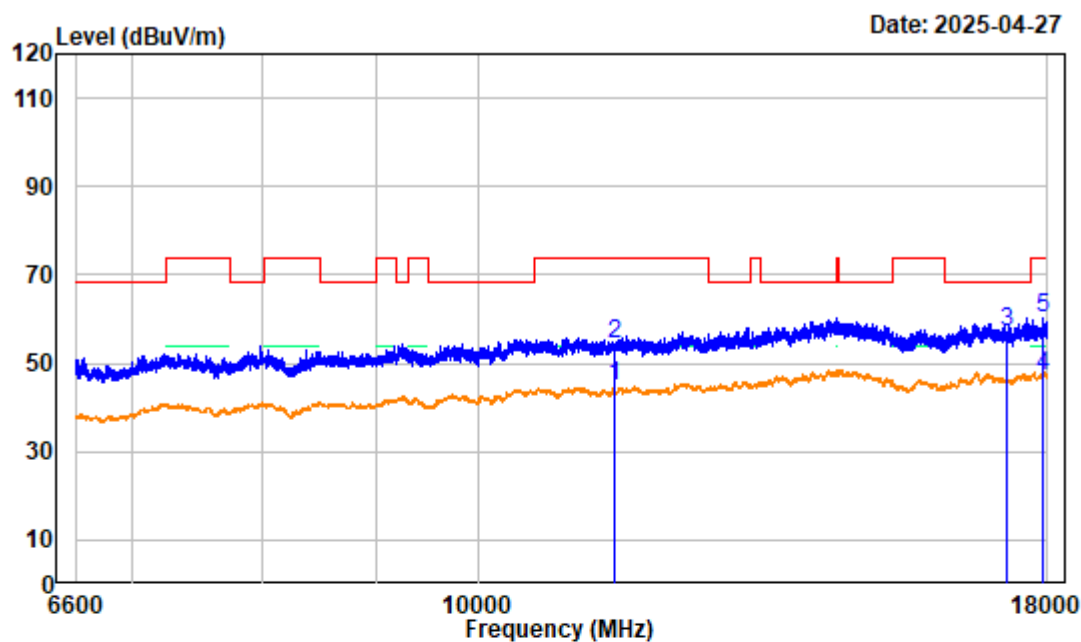

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5755MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.64	44.94	54.00	-9.06	average
2	11510.000	6.30	48.26	54.56	74.00	-19.44	peak
3	17265.000	6.67	50.20	56.87	68.20	-11.33	peak
4	17915.930	8.23	39.02	47.25	54.00	-6.75	average
5	17915.930	8.23	52.09	60.32	74.00	-13.68	peak

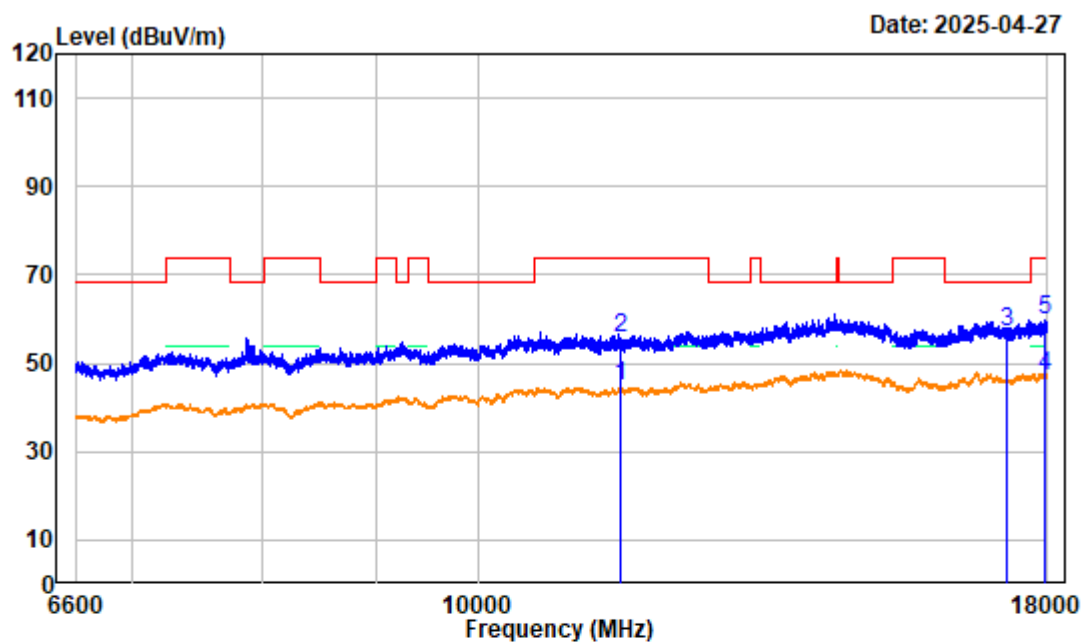

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 High Channel 5795MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	39.03	44.80	54.00	-9.20	average
2	11590.000	5.77	49.72	55.49	74.00	-18.51	peak
3	17265.000	6.67	50.33	57.00	68.20	-11.20	peak
4	17948.700	8.18	39.04	47.22	54.00	-6.78	average
5	17948.700	8.18	51.52	59.70	74.00	-14.30	peak

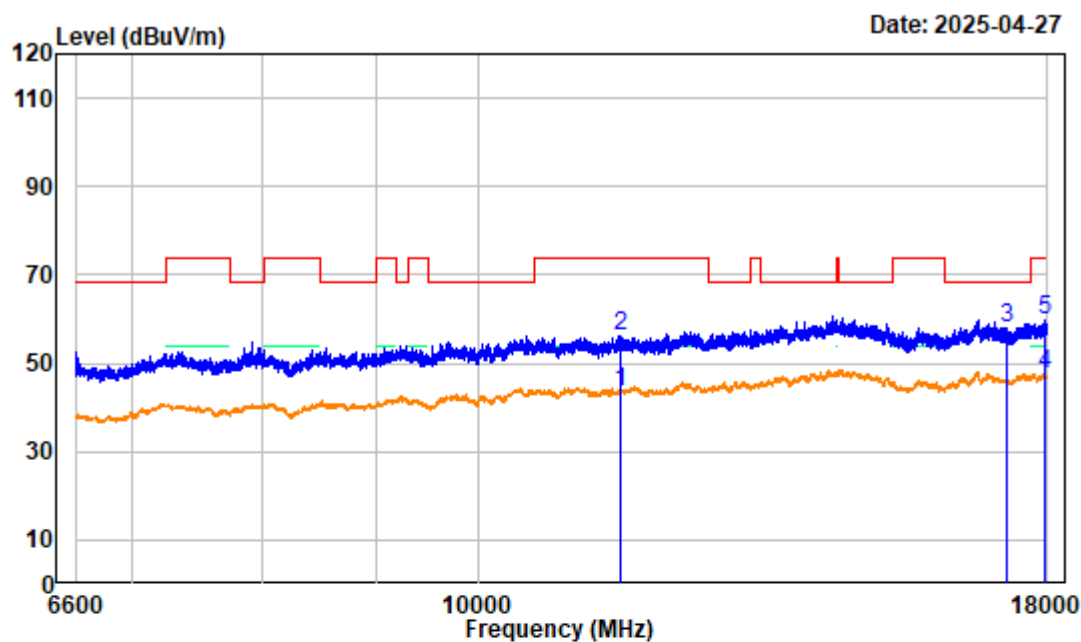

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF

Tester:Jimi Zheng


Test Mode : Transmitting

Note : 802.11n40 High Channel 5795MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	37.68	43.45	54.00	-10.55	average
2	11590.000	5.77	50.19	55.96	74.00	-18.04	peak
3	17265.000	6.67	51.29	57.96	68.20	-10.24	peak
4	17957.250	8.20	39.41	47.61	54.00	-6.39	average
5	17957.250	8.20	51.36	59.56	74.00	-14.44	peak

6.6GHz~18GHz 802.11ac20:

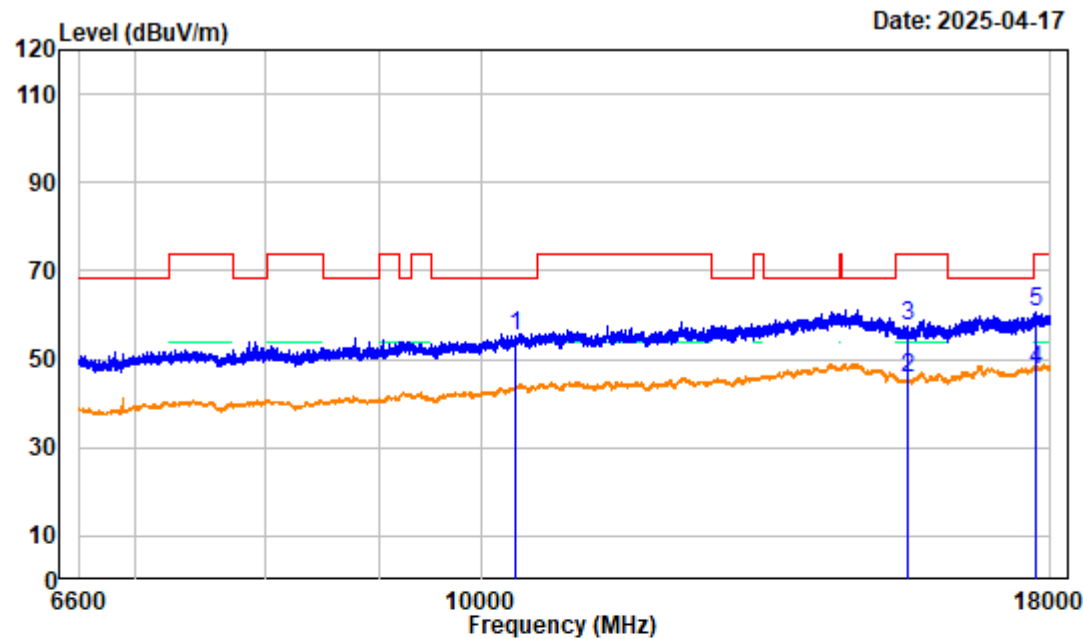

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	51.28	55.12	68.20	-13.08	peak
2	15540.000	4.75	40.85	45.60	54.00	-8.40	average
3	15540.000	4.75	52.91	57.66	74.00	-16.34	peak
4	17724.970	7.67	39.75	47.42	54.00	-6.58	average
5	17724.970	7.67	52.85	60.52	74.00	-13.48	peak

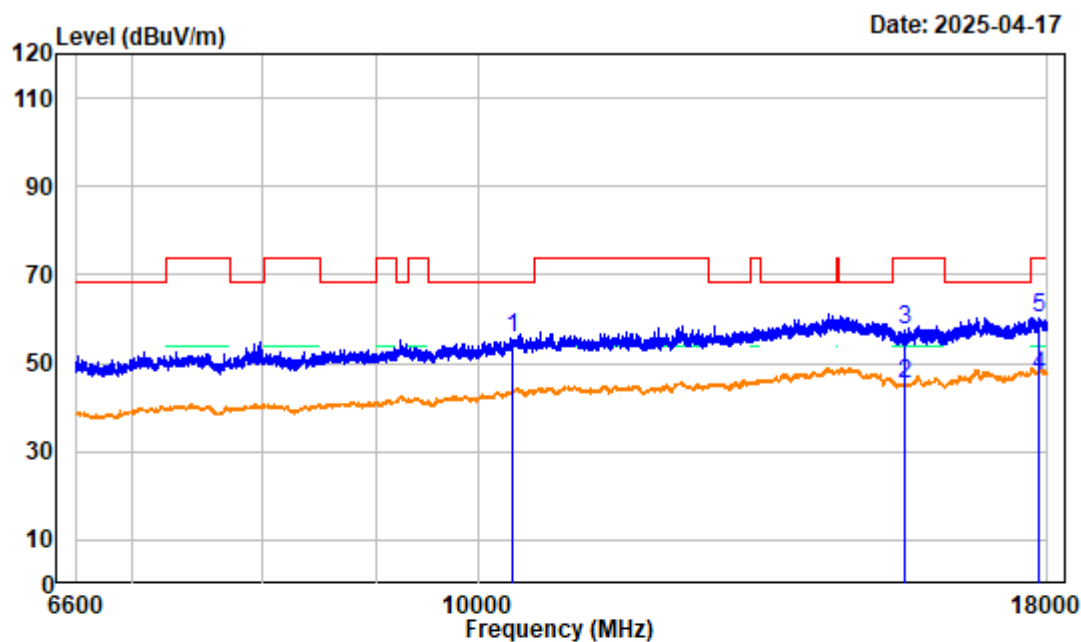

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5180MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.84	51.82	55.66	68.20	-12.54	peak
2	15540.000	4.75	40.39	45.14	54.00	-8.86	average
3	15540.000	4.75	52.76	57.51	74.00	-16.49	peak
4	17853.220	8.23	38.92	47.15	54.00	-6.85	average
5	17853.220	8.23	52.22	60.45	74.00	-13.55	peak

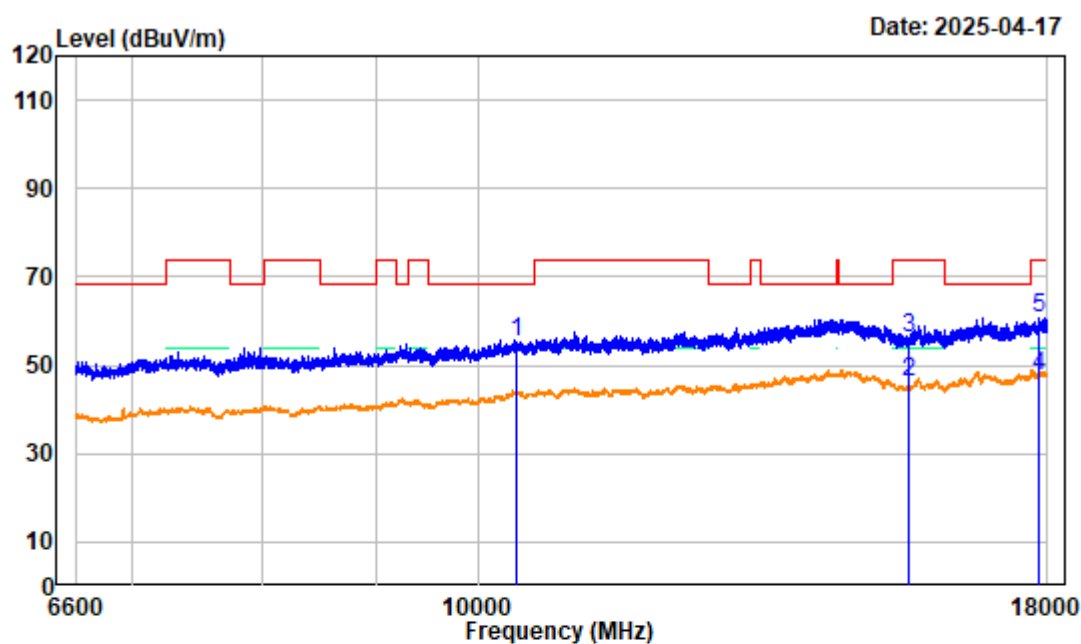

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 Middle Channel 5200MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.04	55.14	68.20	-13.06	peak
2	15600.000	4.60	41.51	46.11	54.00	-7.89	average
3	15600.000	4.60	51.58	56.18	74.00	-17.82	peak
4	17848.950	8.21	39.20	47.41	54.00	-6.59	average
5	17848.950	8.21	52.43	60.64	74.00	-13.36	peak

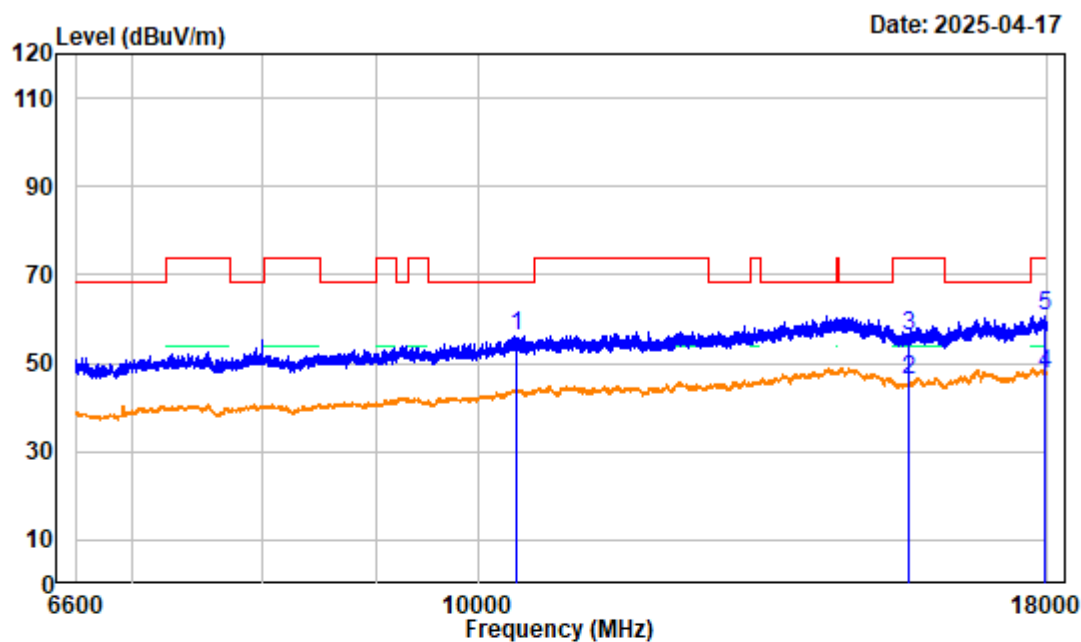

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Middle Channel 5200MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.10	51.91	56.01	68.20	-12.19	peak
2	15600.000	4.60	41.52	46.12	54.00	-7.88	average
3	15600.000	4.60	51.53	56.13	74.00	-17.87	peak
4	17968.650	8.23	39.53	47.76	54.00	-6.24	average
5	17968.650	8.23	52.57	60.80	74.00	-13.20	peak

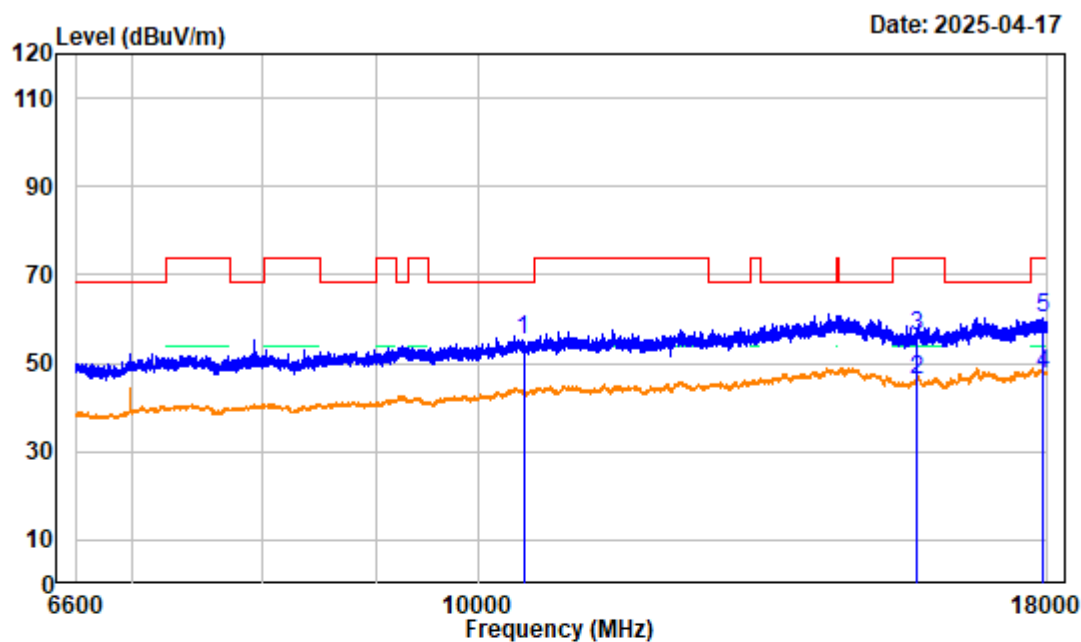

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 High Channel 5240MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	51.20	55.12	68.20	-13.08	peak
2	15720.000	4.90	41.35	46.25	54.00	-7.75	average
3	15720.000	4.90	51.41	56.31	74.00	-17.69	peak
4	17910.220	8.23	39.30	47.53	54.00	-6.47	average
5	17910.220	8.23	52.17	60.40	74.00	-13.60	peak

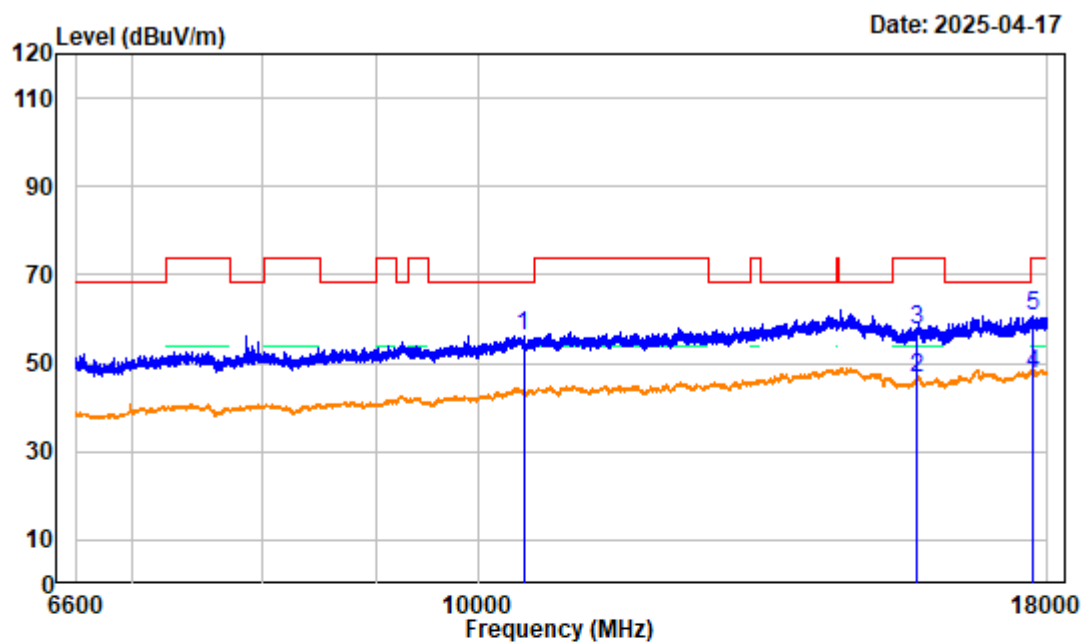

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	3.92	52.15	56.07	68.20	-12.13	peak
2	15720.000	4.90	41.56	46.46	54.00	-7.54	average
3	15720.000	4.90	52.43	57.33	74.00	-16.67	peak
4	17727.820	7.67	40.02	47.69	54.00	-6.31	average
5	17727.820	7.67	52.82	60.49	74.00	-13.51	peak

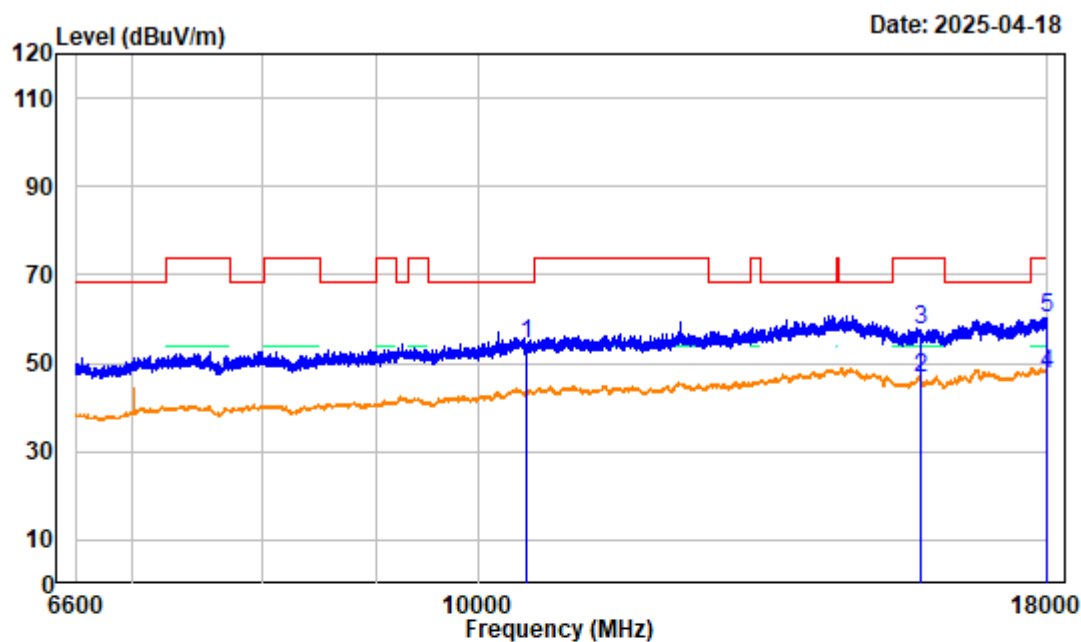

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5260MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.58	54.48	68.20	-13.72	peak
2	15780.000	5.17	41.48	46.65	54.00	-7.35	average
3	15780.000	5.17	52.56	57.73	74.00	-16.27	peak
4	18000.000	8.33	39.32	47.65	54.00	-6.35	average
5	18000.000	8.33	51.98	60.31	74.00	-13.69	peak

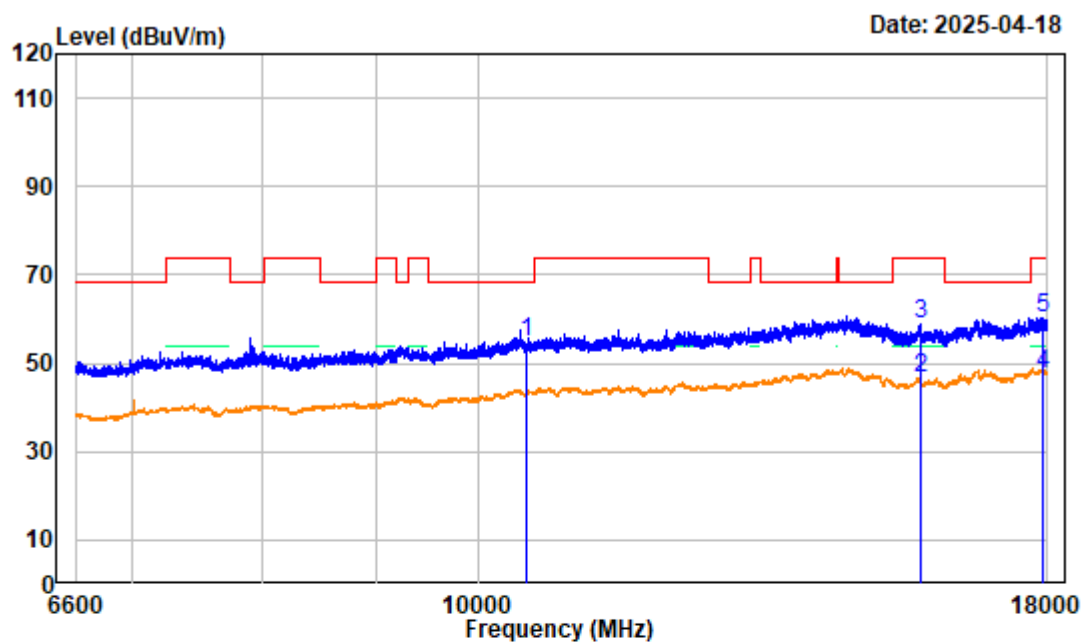

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5260MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.90	50.70	54.60	68.20	-13.60	peak
2	15780.000	5.17	41.55	46.72	54.00	-7.28	average
3	15780.000	5.17	53.49	58.66	74.00	-15.34	peak
4	17913.070	8.23	39.47	47.70	54.00	-6.30	average
5	17913.070	8.23	52.14	60.37	74.00	-13.63	peak

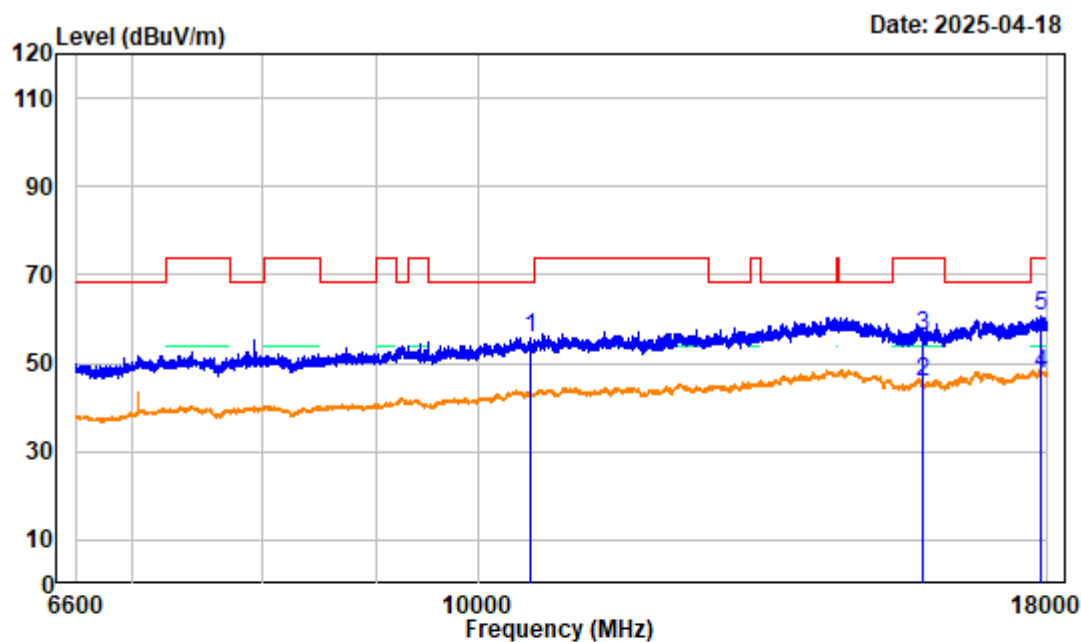


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 Middle Channel 5280MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	51.67	55.82	68.20	-12.38	peak
2	15840.000	5.04	40.66	45.70	54.00	-8.30	average
3	15840.000	5.04	51.31	56.35	74.00	-17.65	peak
4	17893.130	8.24	39.40	47.64	54.00	-6.36	average
5	17893.130	8.24	52.31	60.55	74.00	-13.45	peak

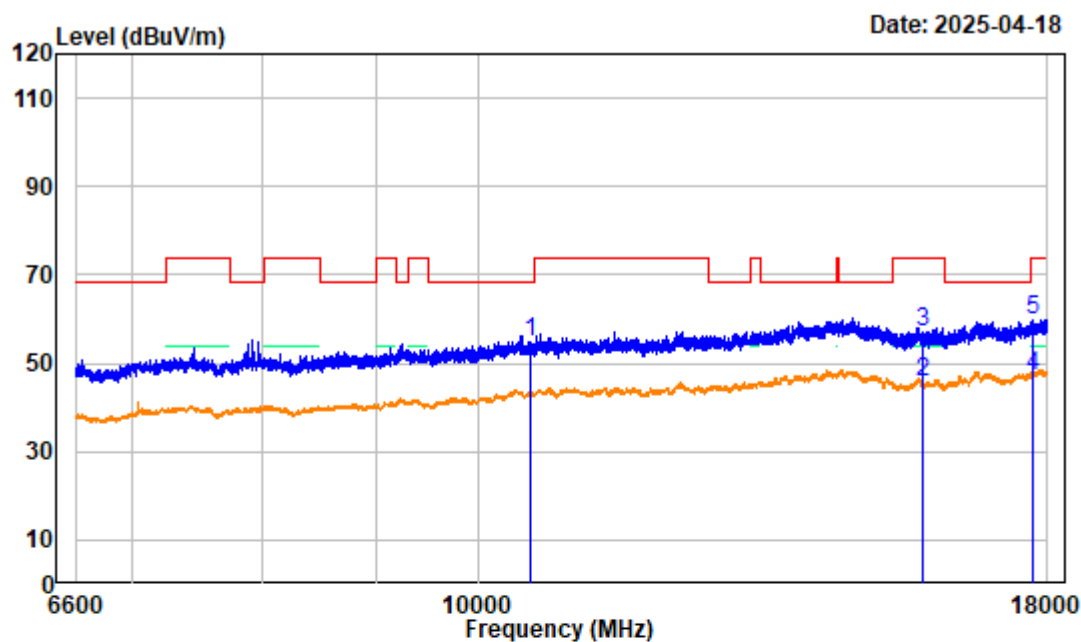

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 Middle Channel 5280MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10560.000	4.15	50.85	55.00	68.20	-13.20	peak
2	15840.000	5.04	40.71	45.75	54.00	-8.25	average
3	15840.000	5.04	51.88	56.92	74.00	-17.08	peak
4	17722.130	7.65	39.45	47.10	54.00	-6.90	average
5	17722.130	7.65	52.33	59.98	74.00	-14.02	peak

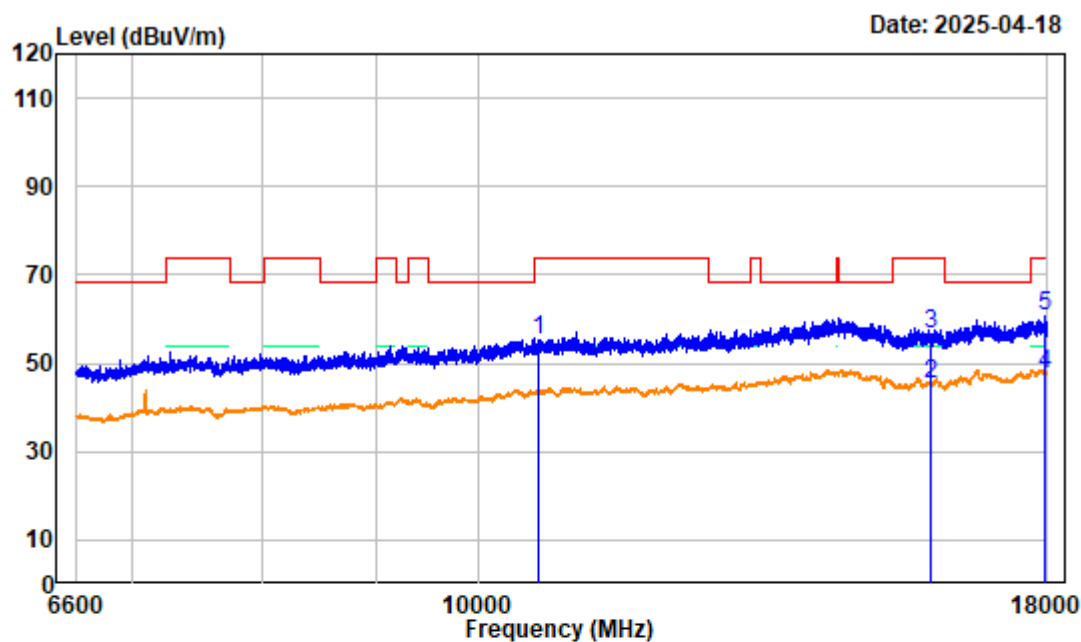

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 High Channel 5320MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.99	55.41	74.00	-18.59	peak
2	15960.000	4.76	40.59	45.35	54.00	-8.65	average
3	15960.000	4.76	51.73	56.49	74.00	-17.51	peak
4	17948.700	8.18	39.53	47.71	54.00	-6.29	average
5	17948.700	8.18	52.31	60.49	74.00	-13.51	peak

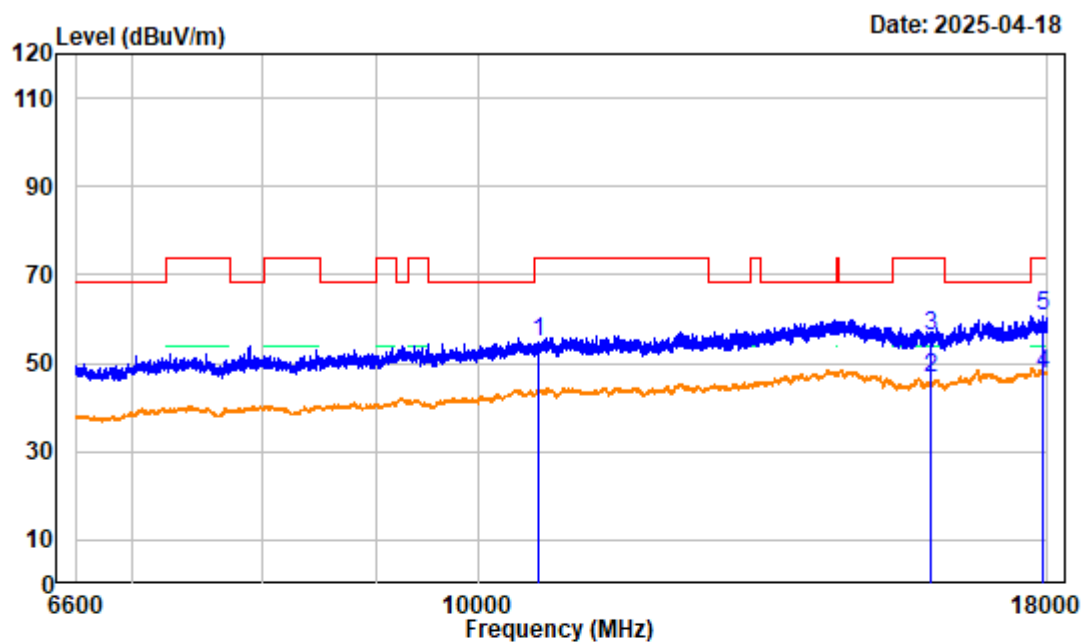

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 High Channel 5320MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.42	50.32	54.74	74.00	-19.26	peak
2	15960.000	4.76	41.71	46.47	54.00	-7.53	average
3	15960.000	4.76	51.59	56.35	74.00	-17.65	peak
4	17907.380	8.22	39.20	47.42	54.00	-6.58	average
5	17907.380	8.22	52.51	60.73	74.00	-13.27	peak

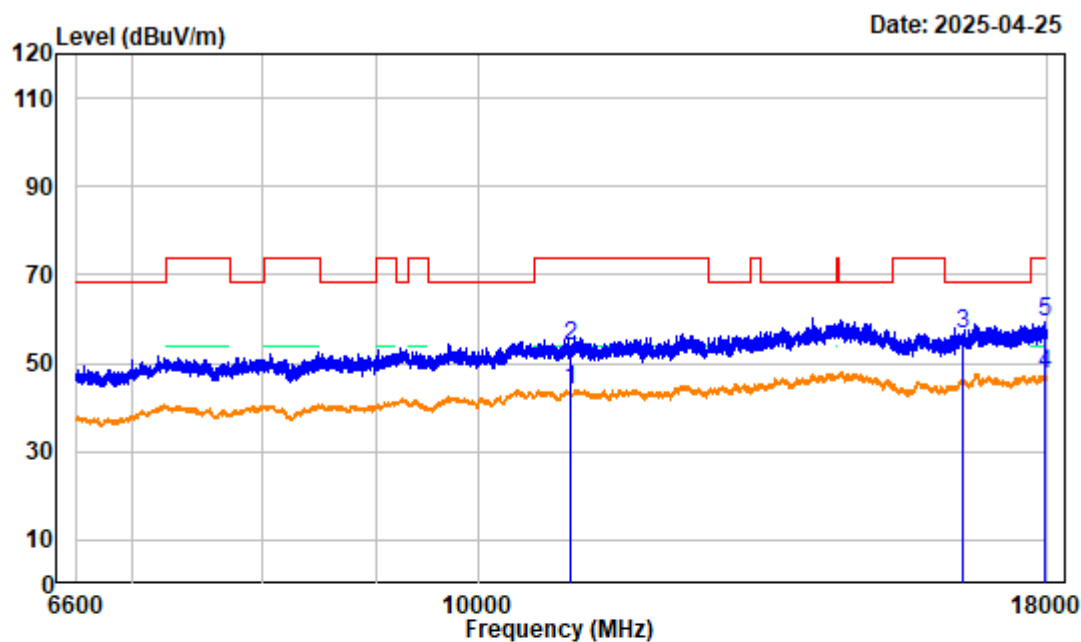

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5500MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	38.68	43.95	54.00	-10.05	average
2	11000.000	5.27	48.71	53.98	74.00	-20.02	peak
3	16500.000	5.92	50.88	56.80	68.20	-11.40	peak
4	17948.700	8.18	39.53	47.71	54.00	-6.29	average
5	17948.700	8.18	51.21	59.39	74.00	-14.61	peak

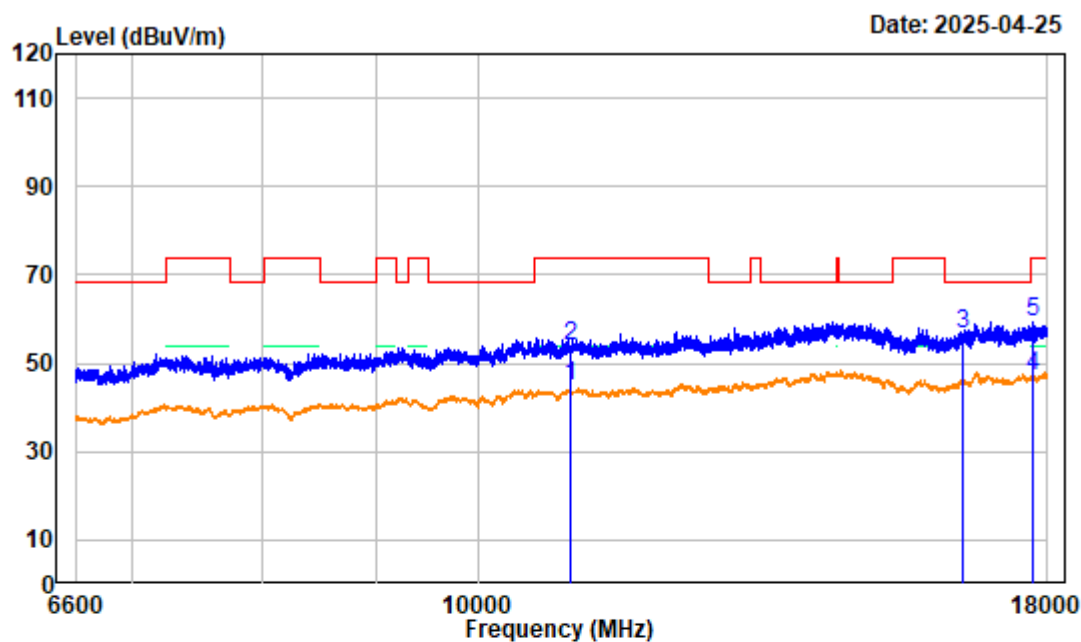

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5500MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.27	39.37	44.64	54.00	-9.36	average
2	11000.000	5.27	48.74	54.01	74.00	-19.99	peak
3	16500.000	5.92	50.60	56.52	68.20	-11.68	peak
4	17734.950	7.68	39.62	47.30	54.00	-6.70	average
5	17734.950	7.68	51.59	59.27	74.00	-14.73	peak

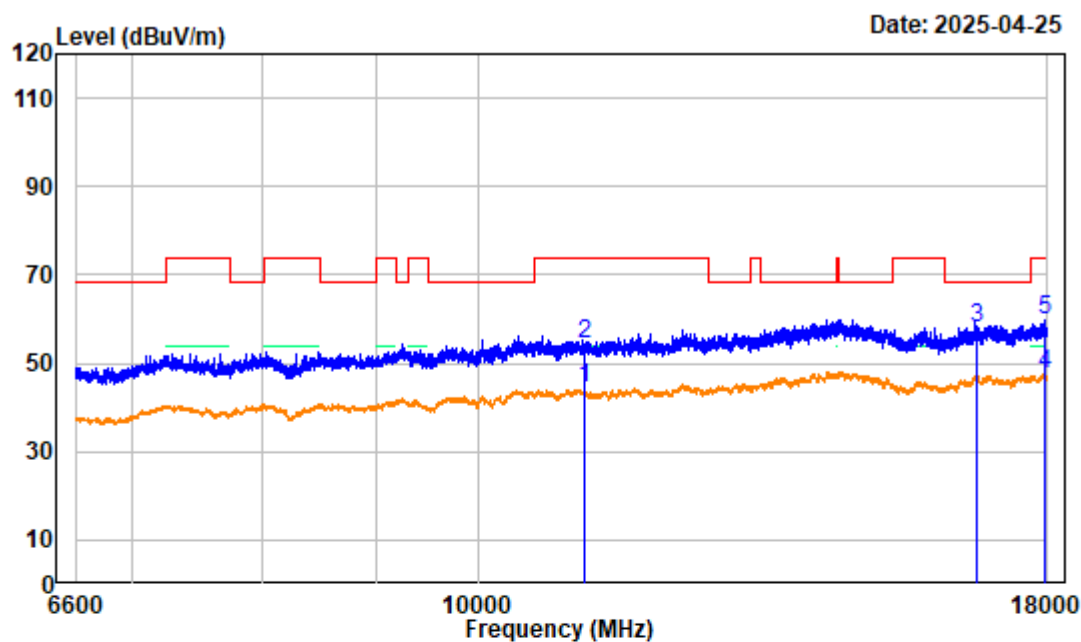

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 Middle Channel 5580MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	39.98	44.30	54.00	-9.70	average
2	11160.000	4.32	50.16	54.48	74.00	-19.52	peak
3	16740.000	7.63	50.21	57.84	68.20	-10.36	peak
4	17943.000	8.19	39.39	47.58	54.00	-6.42	average
5	17943.000	8.19	51.66	59.85	74.00	-14.15	peak

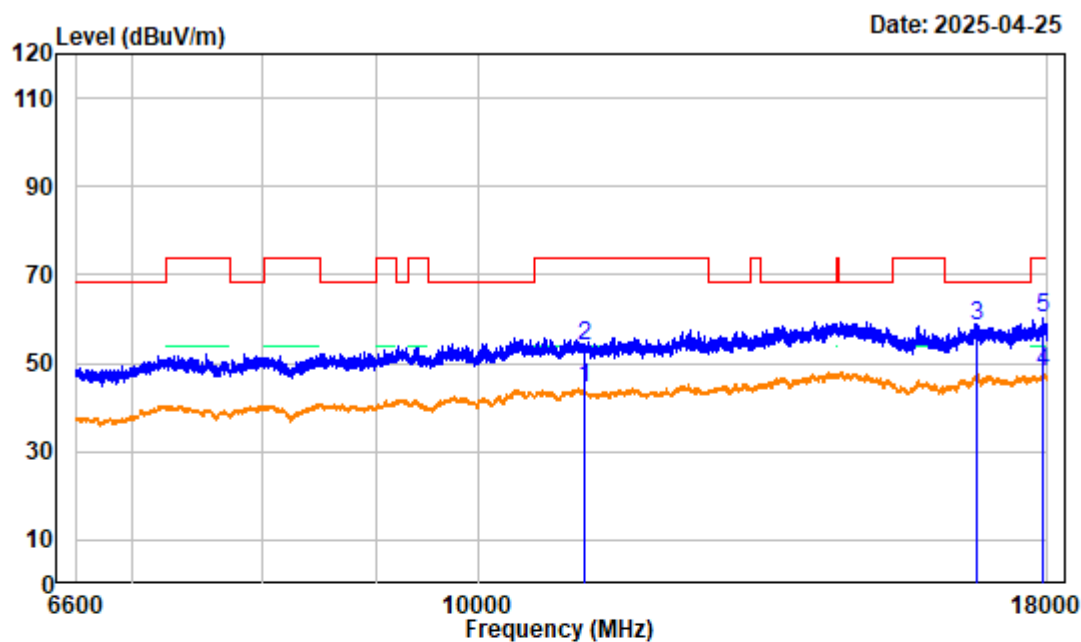

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Middle Channel 5580MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.32	39.85	44.17	54.00	-9.83	average
2	11160.000	4.32	49.77	54.09	74.00	-19.91	peak
3	16740.000	7.63	50.59	58.22	68.20	-9.98	peak
4	17925.900	8.22	39.65	47.87	54.00	-6.13	average
5	17925.900	8.22	52.10	60.32	74.00	-13.68	peak

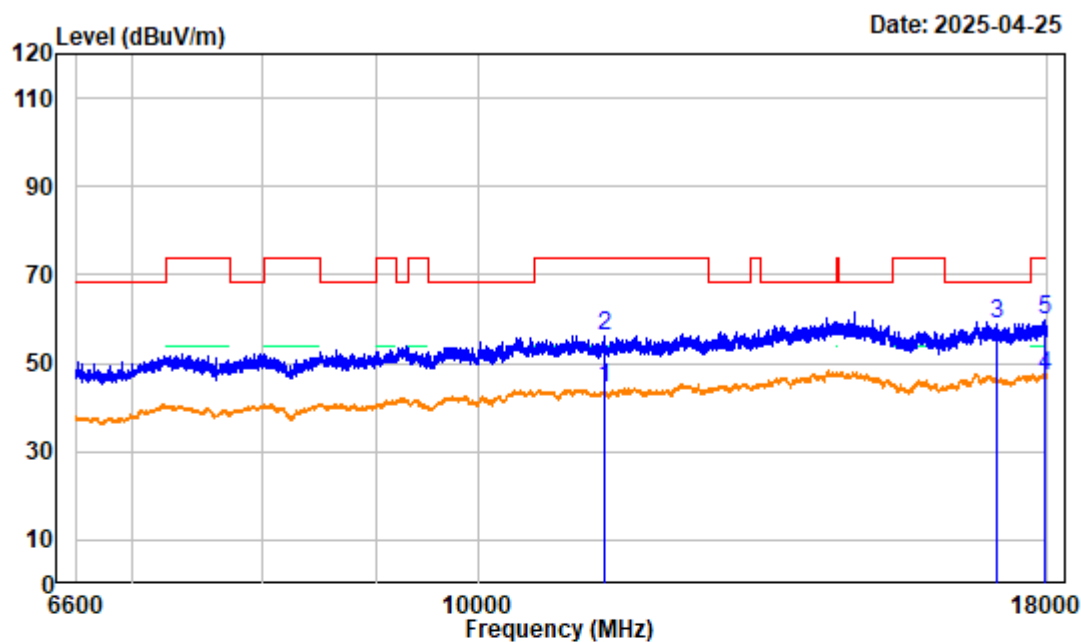

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.83	44.50	54.00	-9.50	average
2	11400.000	5.67	50.25	55.92	74.00	-18.08	peak
3	17100.000	6.92	52.12	59.04	68.20	-9.16	peak
4	17965.800	8.22	39.06	47.28	54.00	-6.72	average
5	17965.800	8.22	51.72	59.94	74.00	-14.06	peak

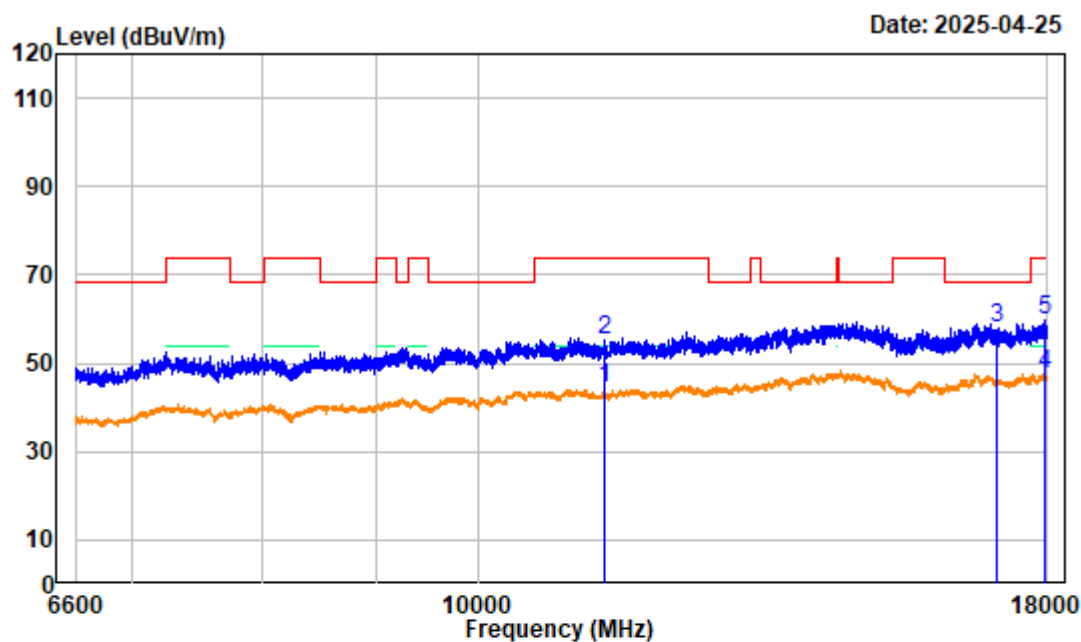

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 High Channel 5700MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.66	44.33	54.00	-9.67	average
2	11400.000	5.67	49.54	55.21	74.00	-18.79	peak
3	17100.000	6.92	50.92	57.84	68.20	-10.36	peak
4	17944.430	8.19	39.53	47.72	54.00	-6.28	average
5	17944.430	8.19	51.70	59.89	74.00	-14.11	peak

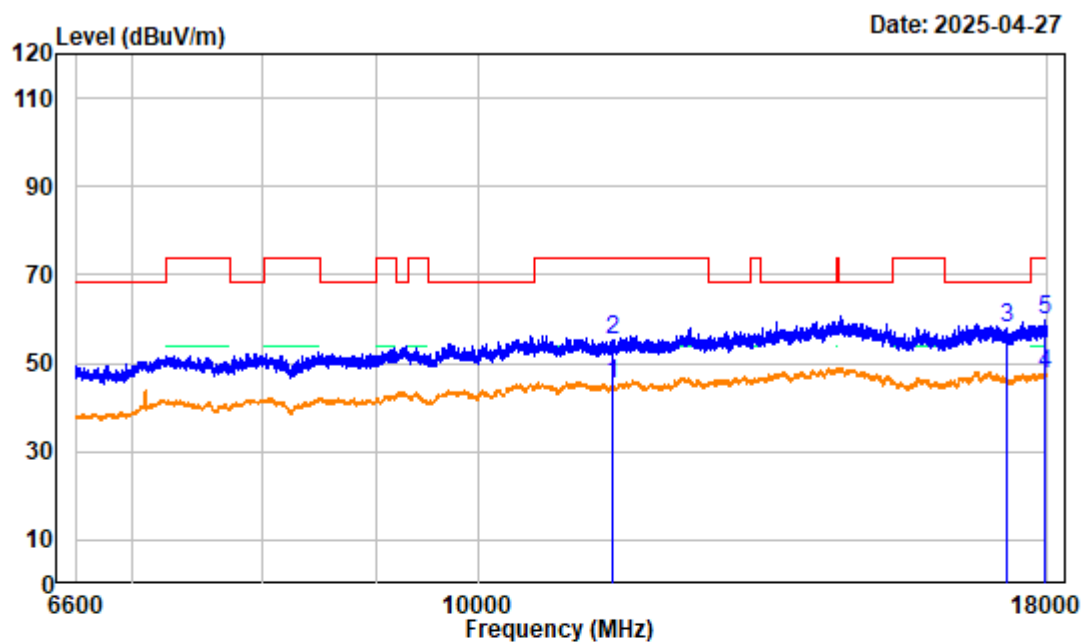

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	39.01	45.11	54.00	-8.89	average
2	11490.000	6.10	49.10	55.20	74.00	-18.80	peak
3	17265.000	6.67	51.18	57.85	68.20	-10.35	peak
4	17951.550	8.18	39.23	47.41	54.00	-6.59	average
5	17951.550	8.18	51.42	59.60	74.00	-14.40	peak

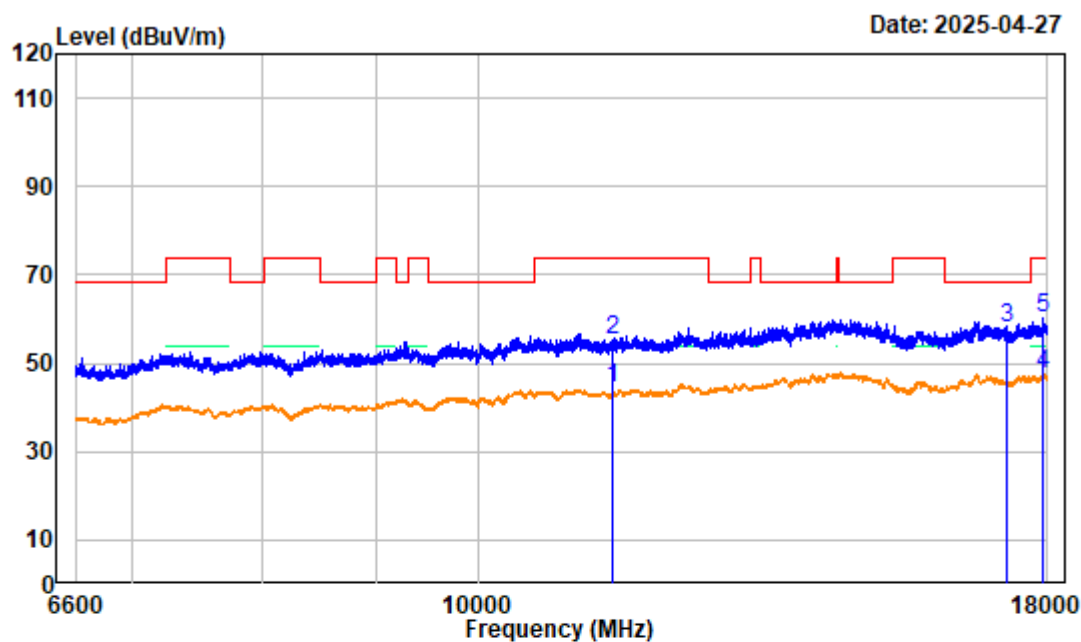

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.31	44.41	54.00	-9.59	average
2	11490.000	6.10	49.12	55.22	74.00	-18.78	peak
3	17265.000	6.67	51.12	57.79	68.20	-10.41	peak
4	17898.820	8.23	39.30	47.53	54.00	-6.47	average
5	17898.820	8.23	52.02	60.25	74.00	-13.75	peak

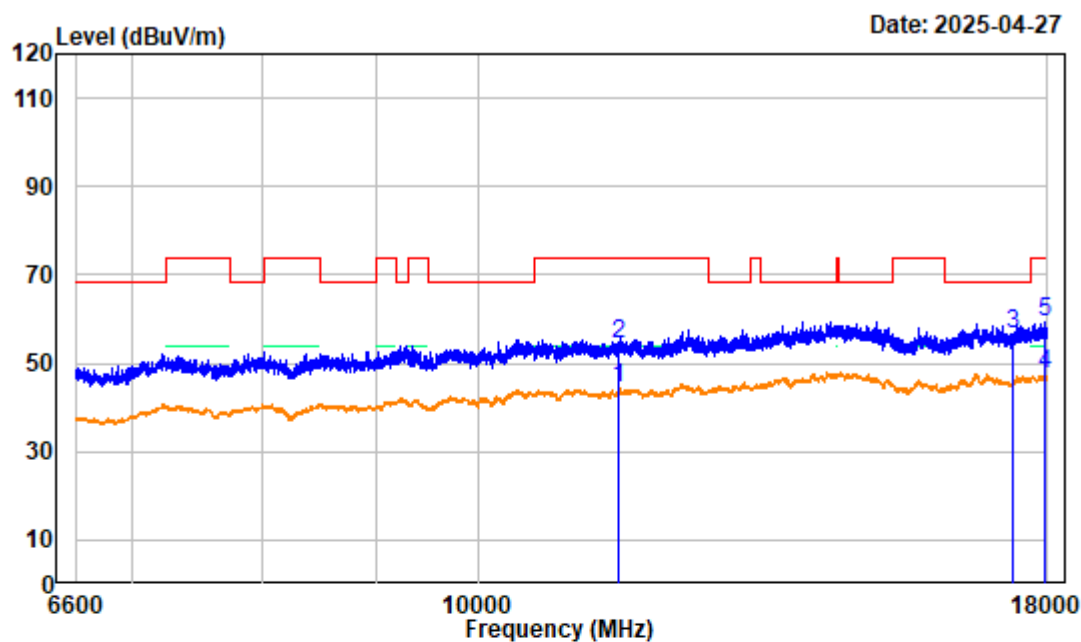

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Middle Channel 5785MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.25	44.18	54.00	-9.82	average
2	11570.000	5.93	48.47	54.40	74.00	-19.60	peak
3	17355.000	6.58	49.84	56.42	68.20	-11.78	peak
4	17954.400	8.20	39.53	47.73	54.00	-6.27	average
5	17954.400	8.20	50.94	59.14	74.00	-14.86	peak

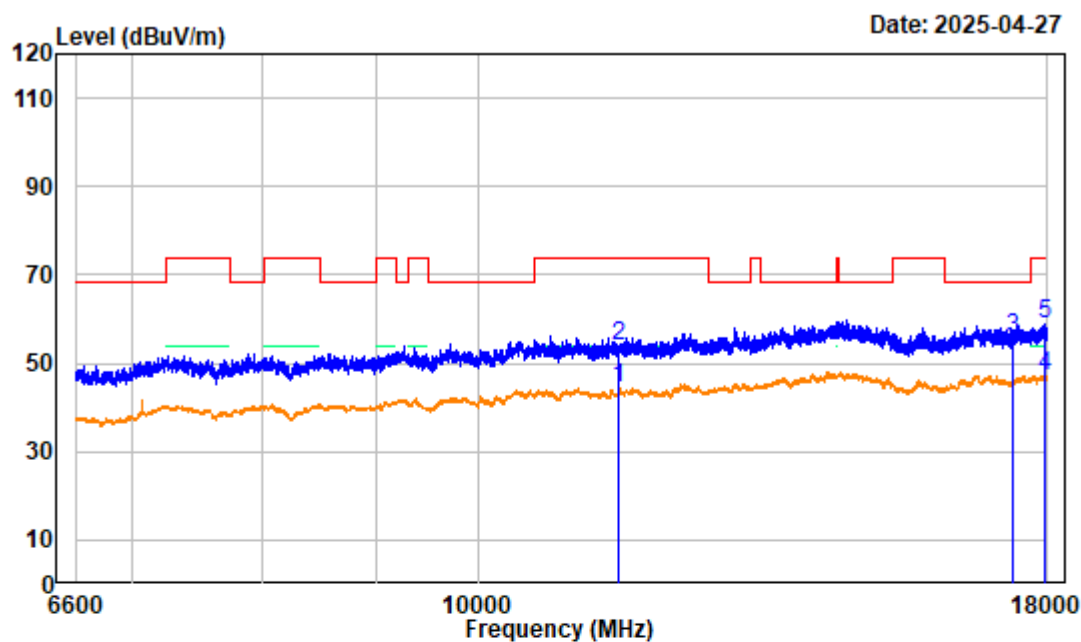

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Middle Channel 5785MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.59	44.52	54.00	-9.48	average
2	11570.000	5.93	48.16	54.09	74.00	-19.91	peak
3	17355.000	6.58	49.32	55.90	68.20	-12.30	peak
4	17951.550	8.18	39.03	47.21	54.00	-6.79	average
5	17951.550	8.18	50.54	58.72	74.00	-15.28	peak

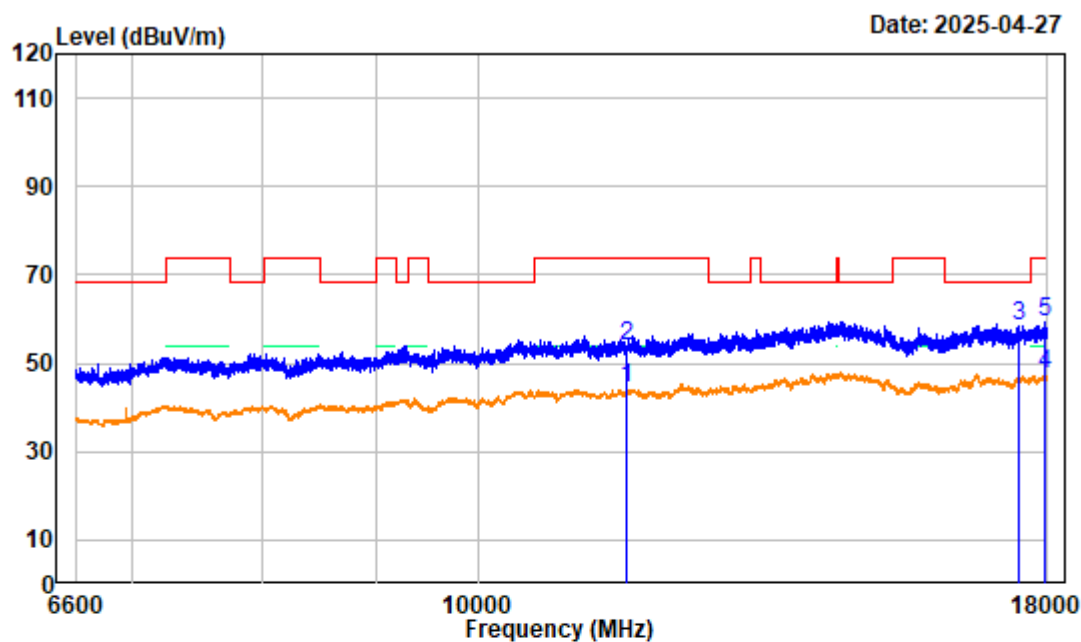

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.23	44.60	54.00	-9.40	average
2	11650.000	5.37	48.49	53.86	74.00	-20.14	peak
3	17475.000	7.12	51.07	58.19	68.20	-10.01	peak
4	17947.280	8.18	39.34	47.52	54.00	-6.48	average
5	17947.280	8.18	51.36	59.54	74.00	-14.46	peak

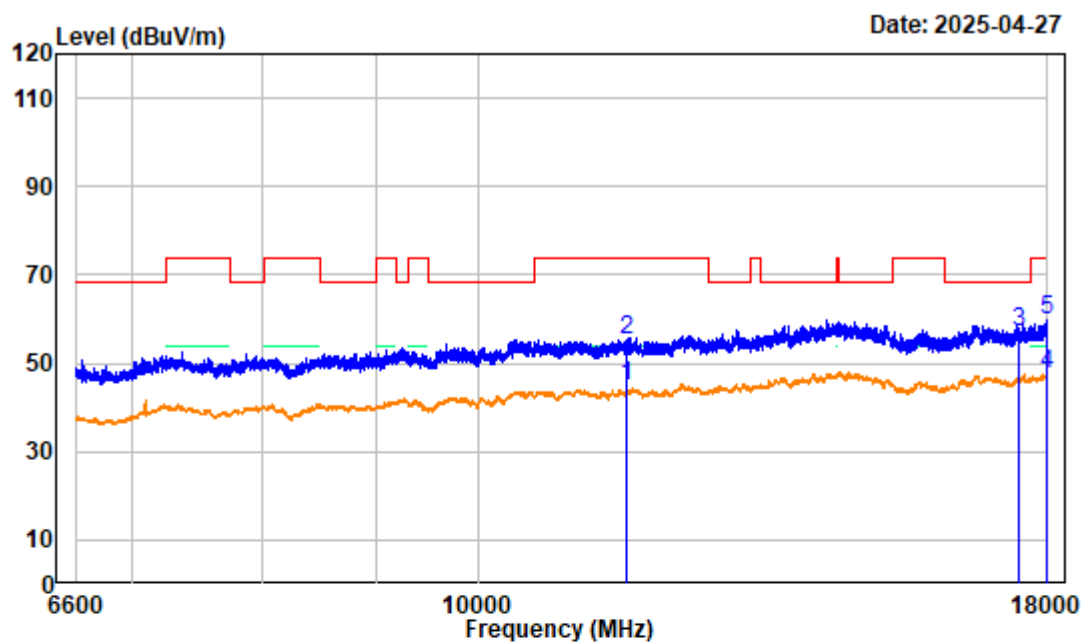

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF

Tester:Jimi Zheng


Test Mode : Transmitting

Note : 802.11ac20 High Channel 5825MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.50	44.87	54.00	-9.13	average
2	11650.000	5.37	50.00	55.37	74.00	-18.63	peak
3	17475.000	7.12	49.98	57.10	68.20	-11.10	peak
4	17988.600	8.30	39.11	47.41	54.00	-6.59	average
5	17988.600	8.30	51.25	59.55	74.00	-14.45	peak

6.6GHz~18GHz 802.11ac40:

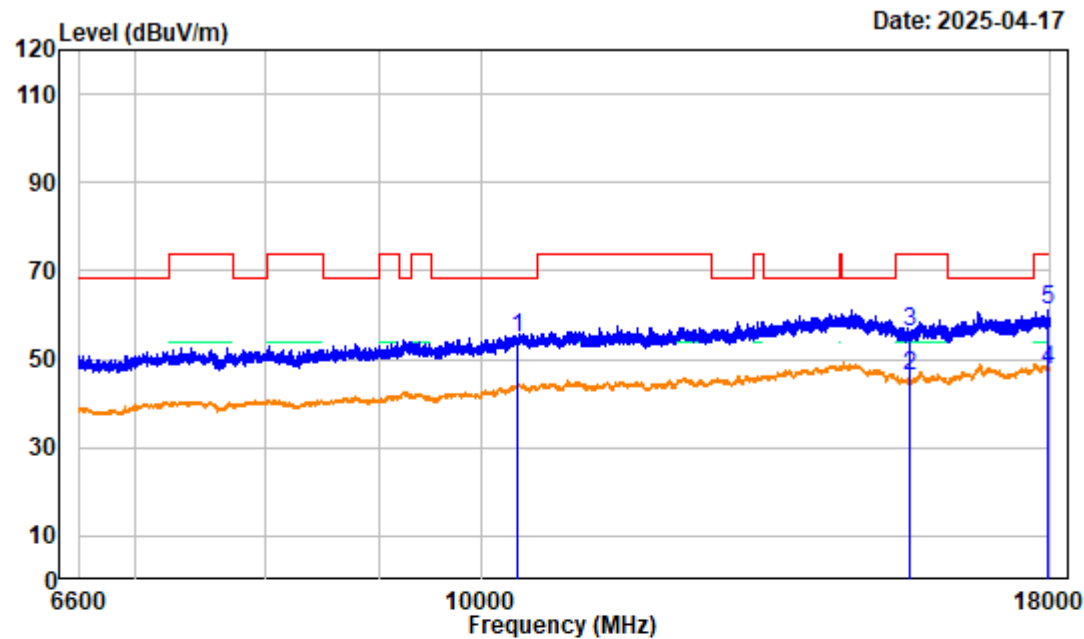

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	3.97	50.97	54.94	68.20	-13.26	peak
2 15570.000	4.70	41.44	46.14	54.00	-7.86	average
3 15570.000	4.70	51.60	56.30	74.00	-17.70	peak
4 17948.700	8.18	39.38	47.56	54.00	-6.44	average
5 17948.700	8.18	52.91	61.09	74.00	-12.91	peak

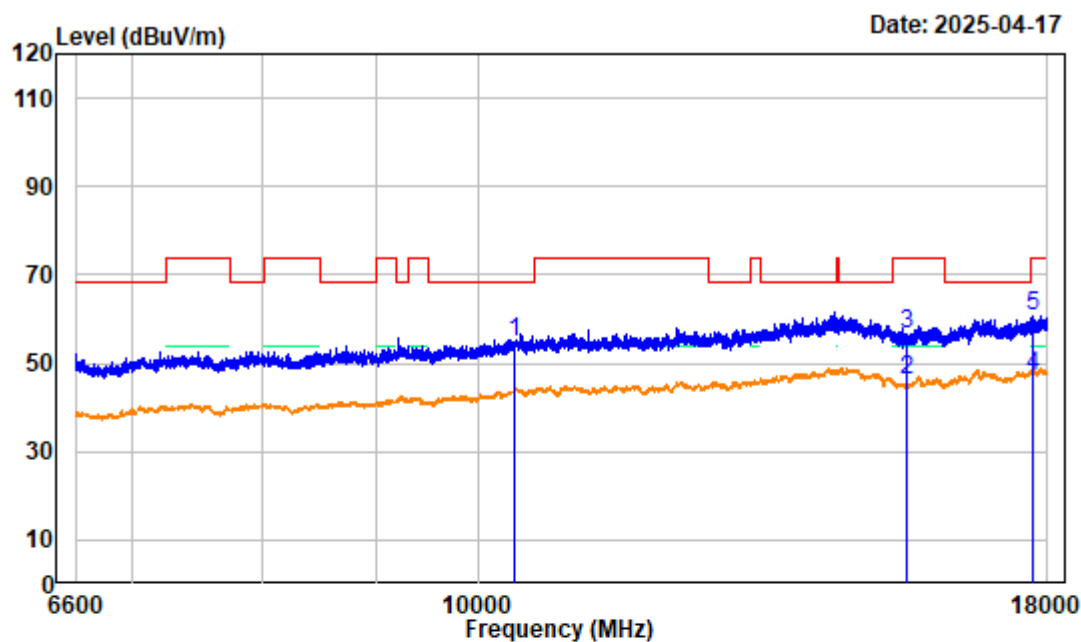

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5190MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	3.97	50.96	54.93	68.20	-13.27	peak
2	15570.000	4.70	41.71	46.41	54.00	-7.59	average
3	15570.000	4.70	51.79	56.49	74.00	-17.51	peak
4	17729.250	7.67	39.64	47.31	54.00	-6.69	average
5	17729.250	7.67	53.08	60.75	74.00	-13.25	peak

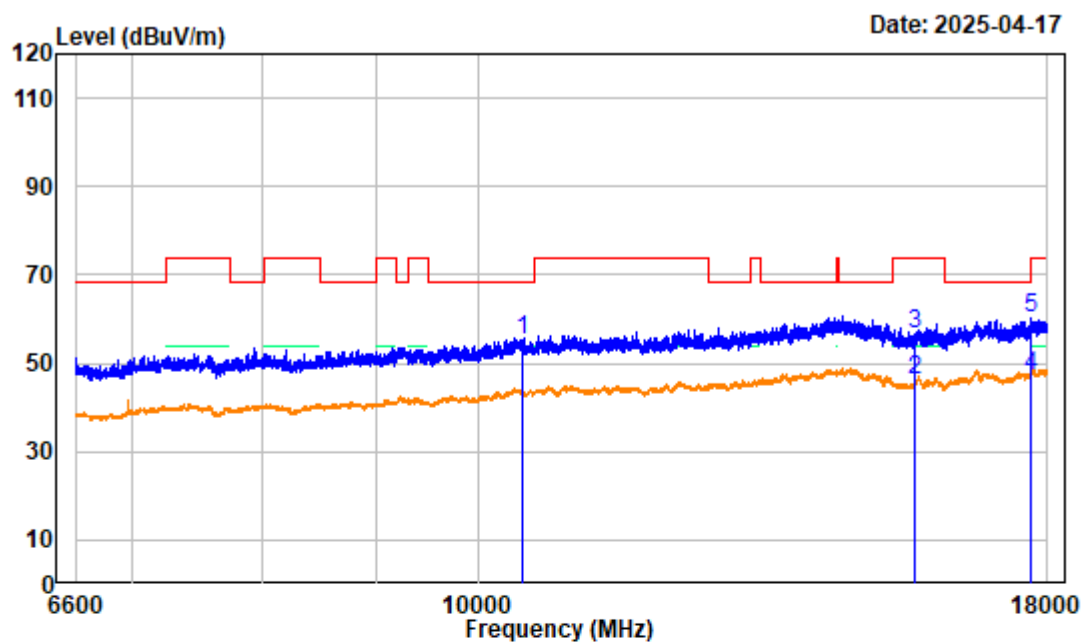

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5230MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	51.07	55.25	68.20	-12.95	peak
2	15690.000	4.67	41.39	46.06	54.00	-7.94	average
3	15690.000	4.67	51.95	56.62	74.00	-17.38	peak
4	17700.750	7.61	39.68	47.29	54.00	-6.71	average
5	17700.750	7.61	52.74	60.35	74.00	-13.65	Peak

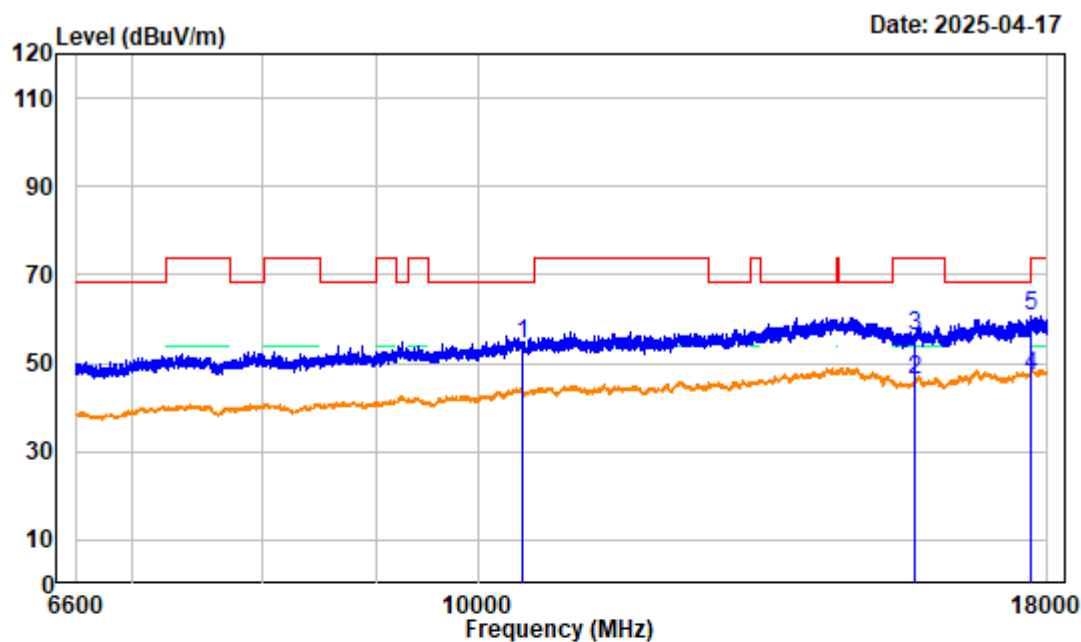

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5230MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.18	50.21	54.39	68.20	-13.81	peak
2	15690.000	4.67	41.46	46.13	54.00	-7.87	average
3	15690.000	4.67	51.61	56.28	74.00	-17.72	peak
4	17703.600	7.61	39.47	47.08	54.00	-6.92	average
5	17703.600	7.61	53.18	60.79	74.00	-13.21	peak

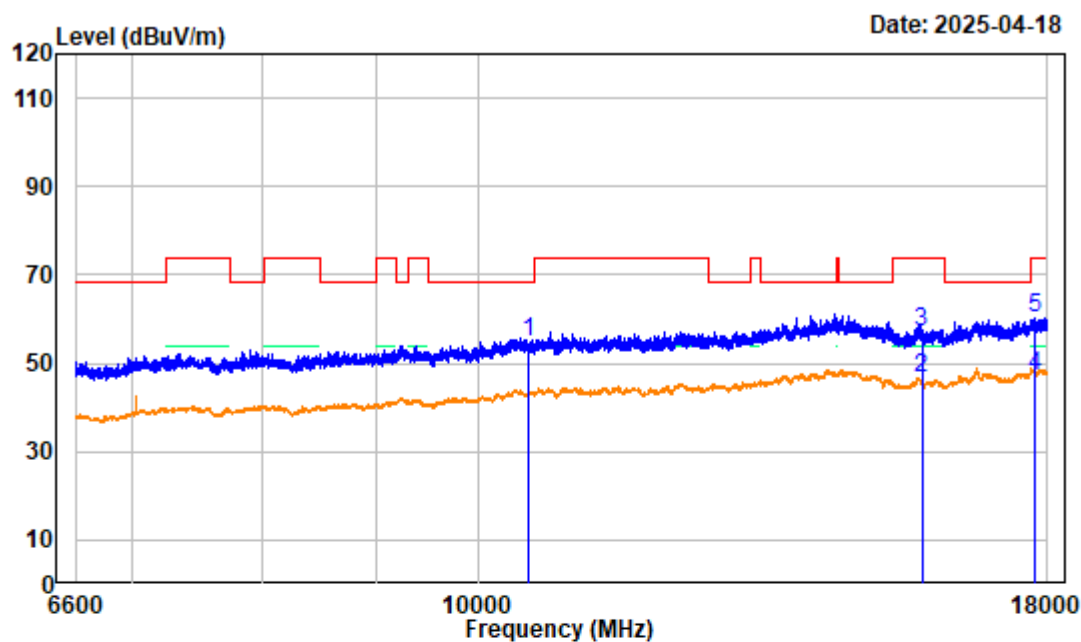

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5270MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.11	50.69	54.80	68.20	-13.40	peak
2	15810.000	5.10	41.53	46.63	54.00	-7.37	average
3	15810.000	5.10	51.75	56.85	74.00	-17.15	peak
4	17752.050	7.71	39.55	47.26	54.00	-6.74	average
5	17752.050	7.71	52.43	60.14	74.00	-13.86	peak

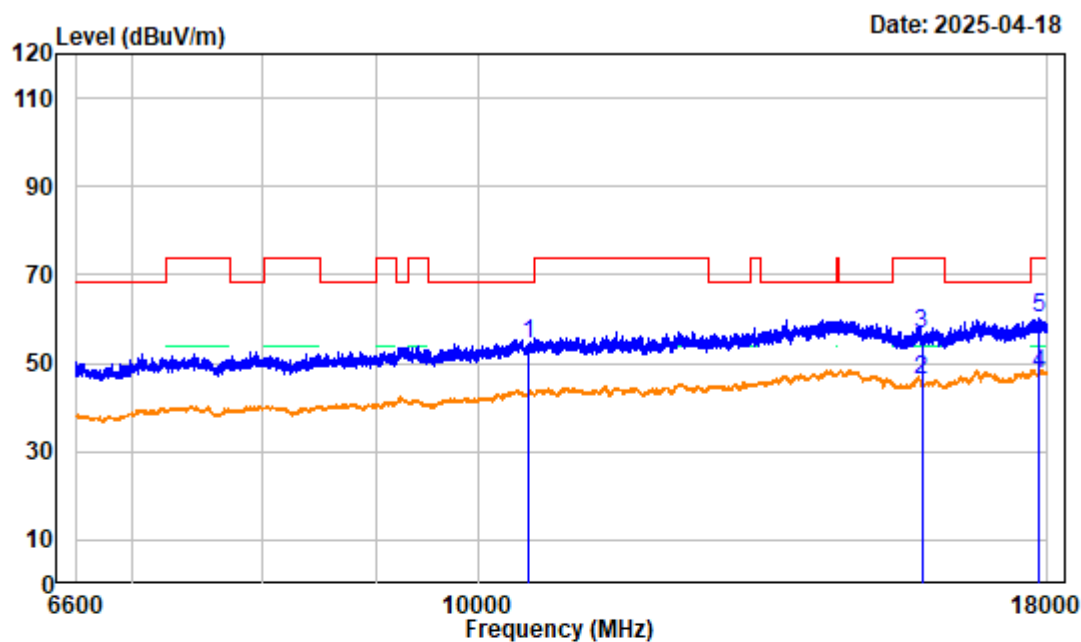


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac40 Low Channel 5270MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.11	50.23	54.34	68.20	-13.86	peak
2	15810.000	5.10	41.21	46.31	54.00	-7.69	average
3	15810.000	5.10	51.36	56.46	74.00	-17.54	peak
4	17843.250	8.15	39.57	47.72	54.00	-6.28	average
5	17843.250	8.15	52.08	60.23	74.00	-13.77	peak

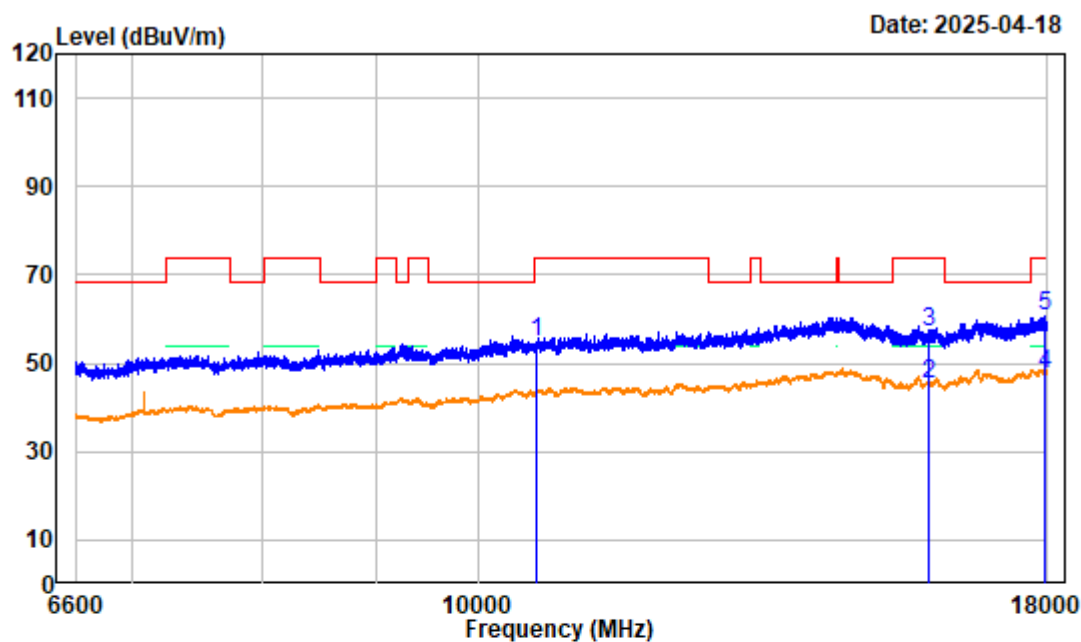

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac40 High Channel 5310MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	50.83	54.97	74.00	-19.03	peak
2	15930.000	4.93	40.24	45.17	54.00	-8.83	average
3	15930.000	4.93	52.06	56.99	74.00	-17.01	peak
4	17967.220	8.23	39.30	47.53	54.00	-6.47	average
5	17967.220	8.23	52.34	60.57	74.00	-13.43	peak

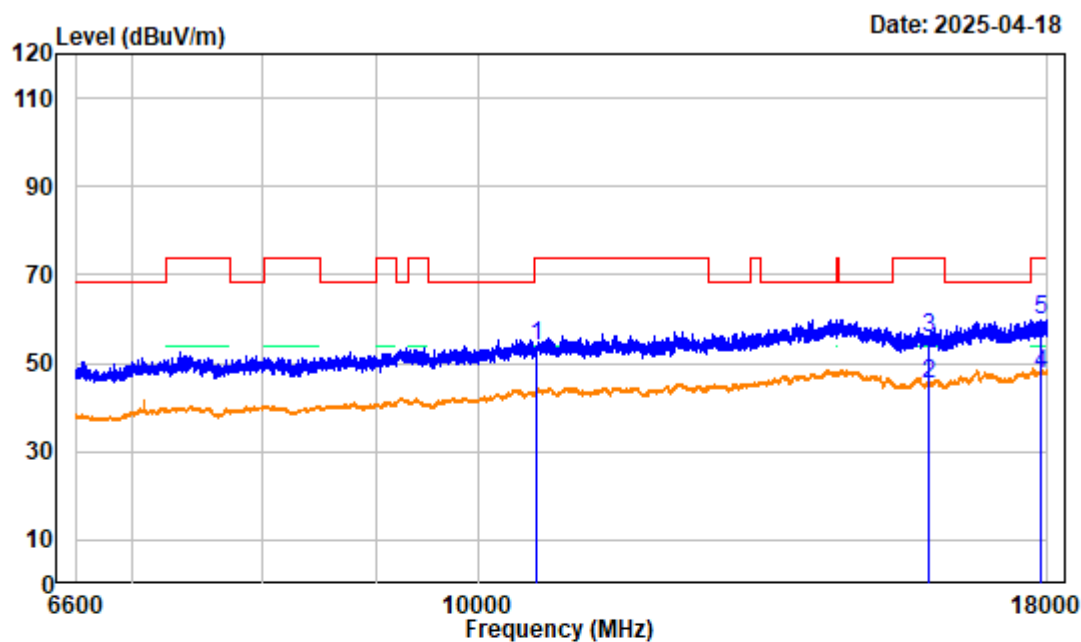

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5310MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	49.63	53.77	74.00	-20.23	peak
2	15930.000	4.93	40.29	45.22	54.00	-8.78	average
3	15930.000	4.93	50.79	55.72	74.00	-18.28	peak
4	17863.200	8.23	39.34	47.57	54.00	-6.43	average
5	17863.200	8.23	51.66	59.89	74.00	-14.11	peak

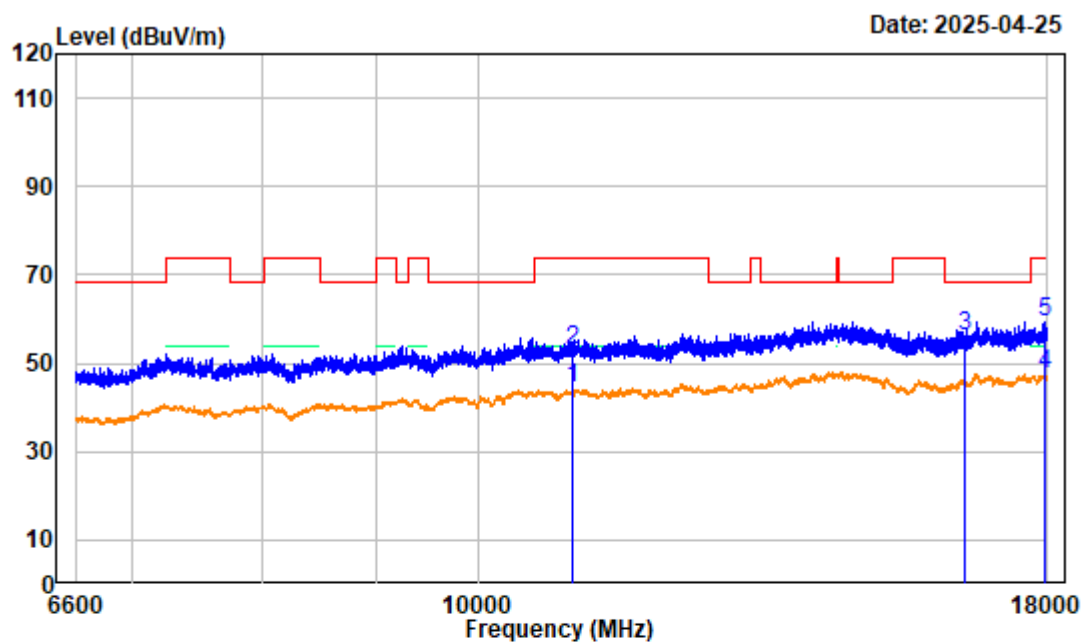

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5510MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.22	39.29	44.51	54.00	-9.49	average
2	11020.000	5.22	47.88	53.10	74.00	-20.90	peak
3	16530.000	6.09	50.22	56.31	68.20	-11.89	peak
4	17950.130	8.18	39.37	47.55	54.00	-6.45	average
5	17950.130	8.18	51.04	59.22	74.00	-14.78	peak

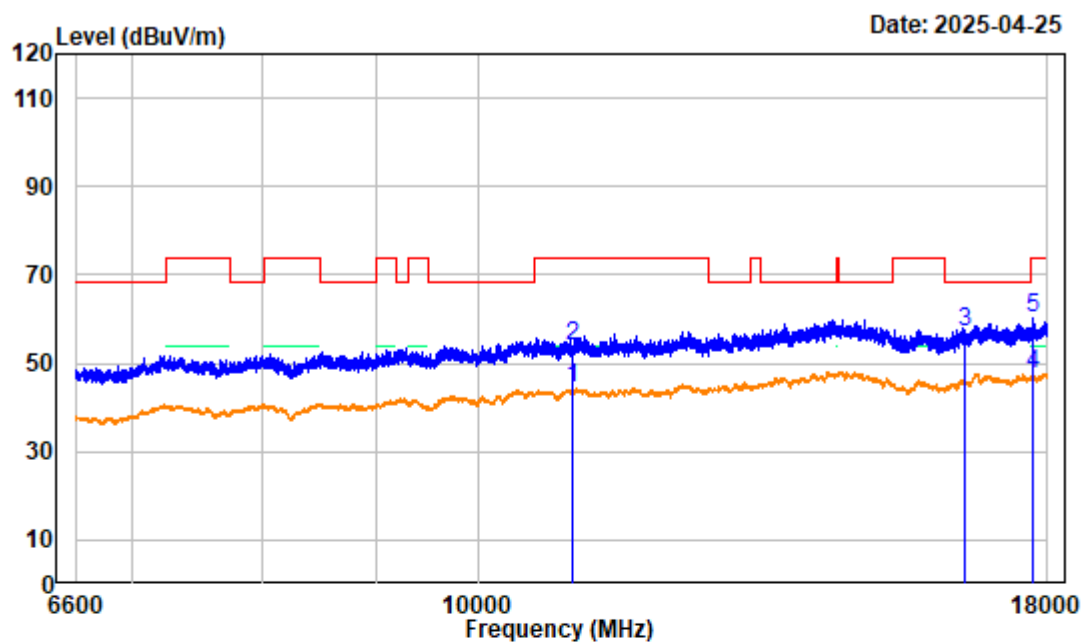

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5510MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.22	39.27	44.49	54.00	-9.51	average
2	11020.000	5.22	48.45	53.67	74.00	-20.33	peak
3	16530.000	6.09	50.80	56.89	68.20	-11.31	peak
4	17729.250	7.67	39.82	47.49	54.00	-6.51	average
5	17729.250	7.67	52.74	60.41	74.00	-13.59	peak

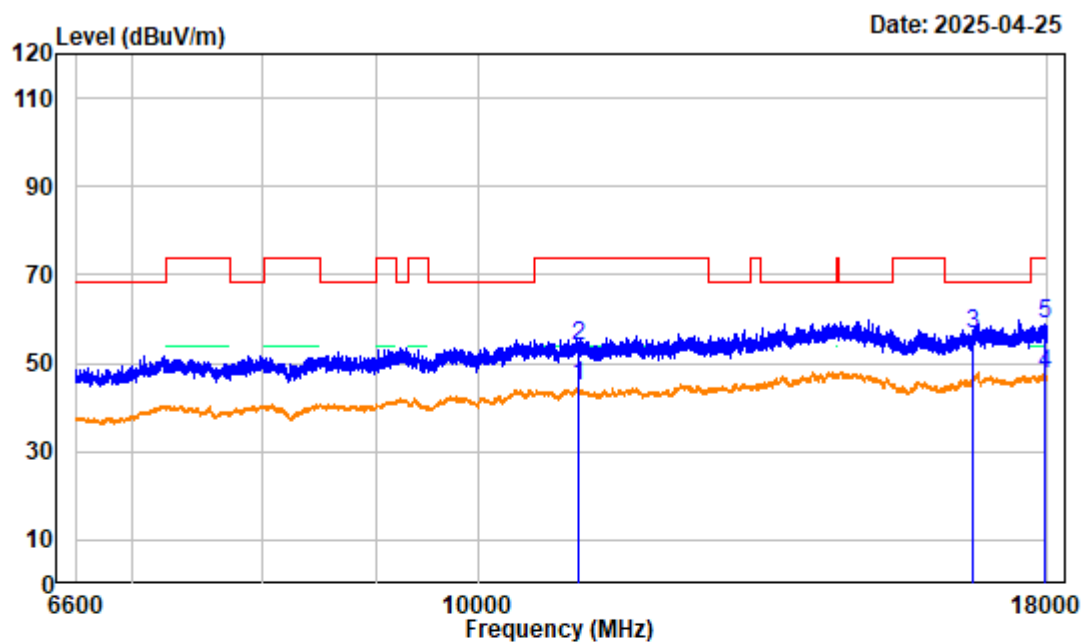

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Middle Channel 5550MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.76	39.85	44.61	54.00	-9.39	average
2	11100.000	4.76	49.06	53.82	74.00	-20.18	peak
3	16650.000	6.50	49.98	56.48	68.20	-11.72	peak
4	17948.700	8.18	39.44	47.62	54.00	-6.38	average
5	17948.700	8.18	50.76	58.94	74.00	-15.06	peak

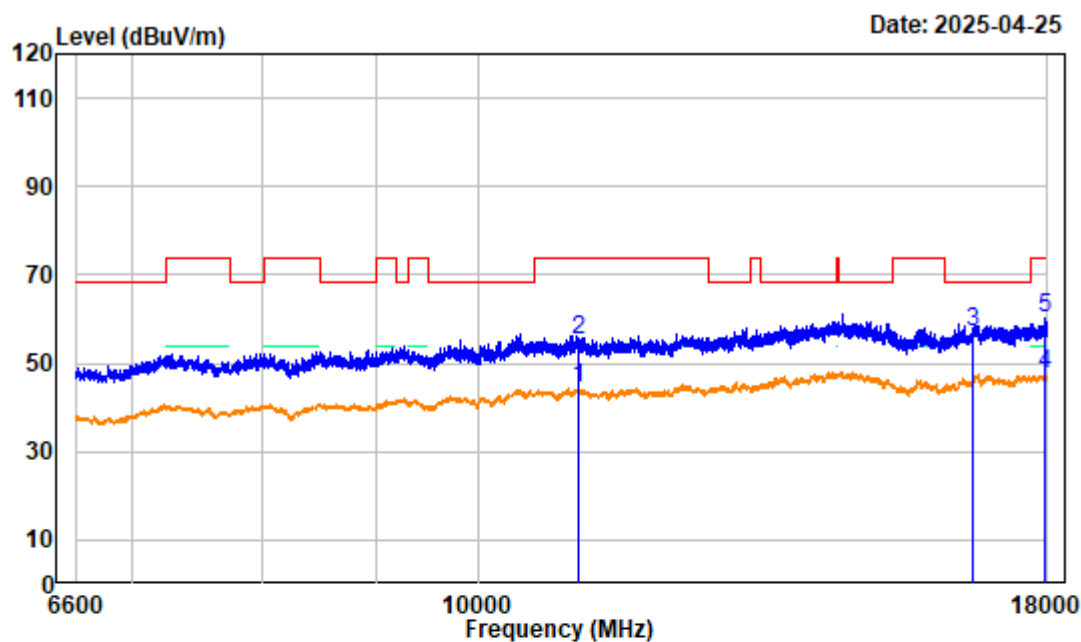

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac40 Middle Channel 5550MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.76	39.43	44.19	54.00	-9.81	average
2	11100.000	4.76	50.33	55.09	74.00	-18.91	peak
3	16650.000	6.50	50.71	57.21	68.20	-10.99	peak
4	17958.680	8.20	39.36	47.56	54.00	-6.44	average
5	17958.680	8.20	52.07	60.27	74.00	-13.73	peak

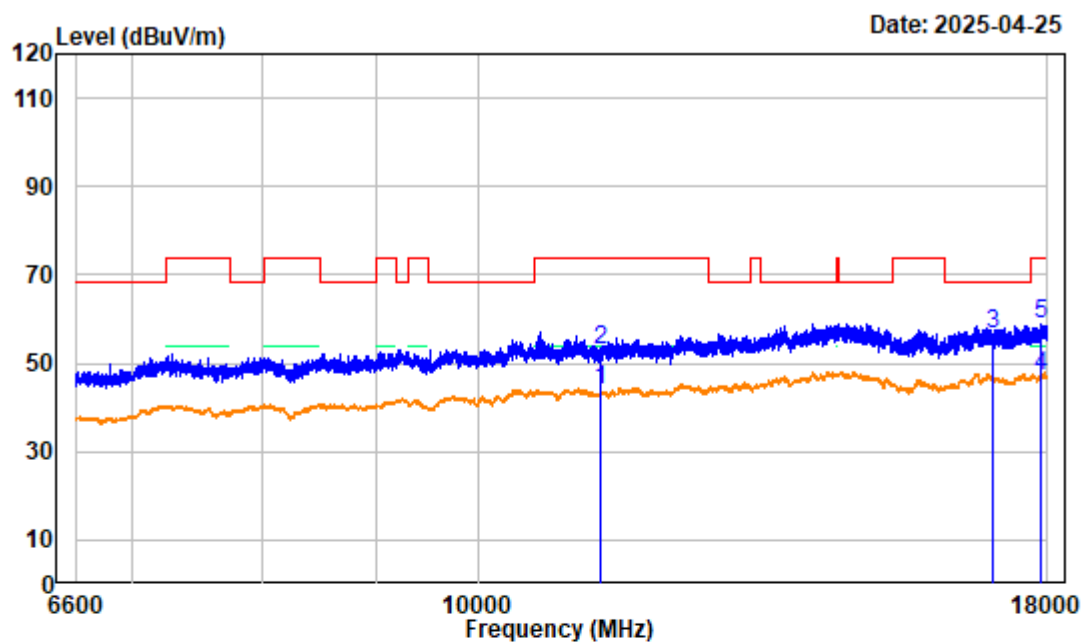

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5670MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.91	39.19	44.10	54.00	-9.90	average
2	11340.000	4.91	48.08	52.99	74.00	-21.01	peak
3	17010.000	7.57	49.11	56.68	68.20	-11.52	peak
4	17881.720	8.24	38.98	47.22	54.00	-6.78	average
5	17881.720	8.24	50.85	59.09	74.00	-14.91	peak

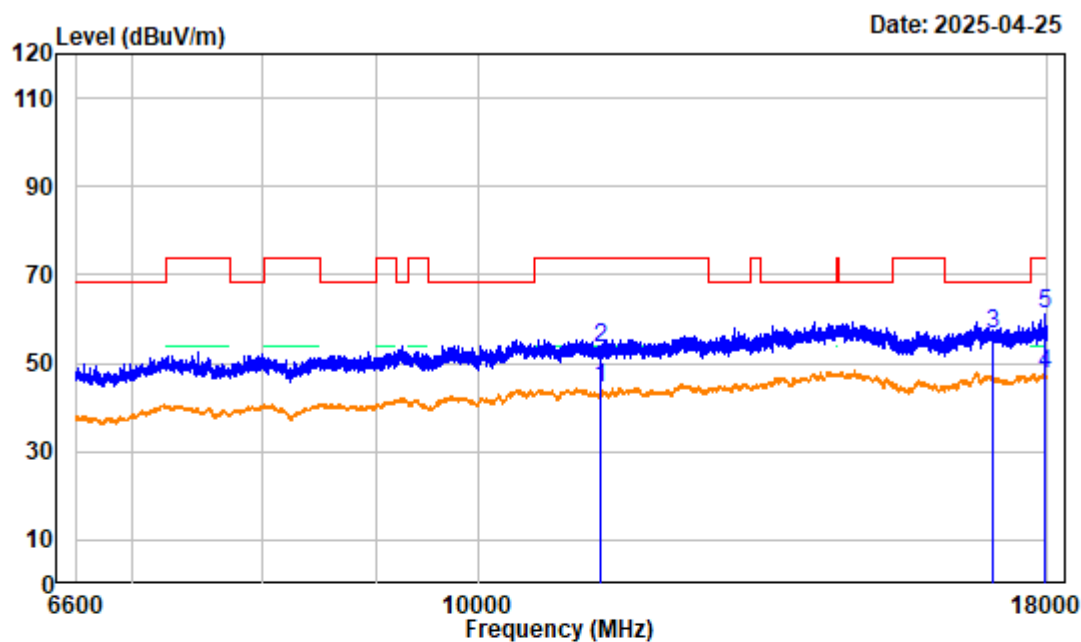

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5670MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.91	39.51	44.42	54.00	-9.58	average
2	11340.000	4.91	48.39	53.30	74.00	-20.70	peak
3	17010.000	7.57	49.12	56.69	68.20	-11.51	peak
4	17943.000	8.19	39.20	47.39	54.00	-6.61	average
5	17943.000	8.19	52.87	61.06	74.00	-12.94	peak

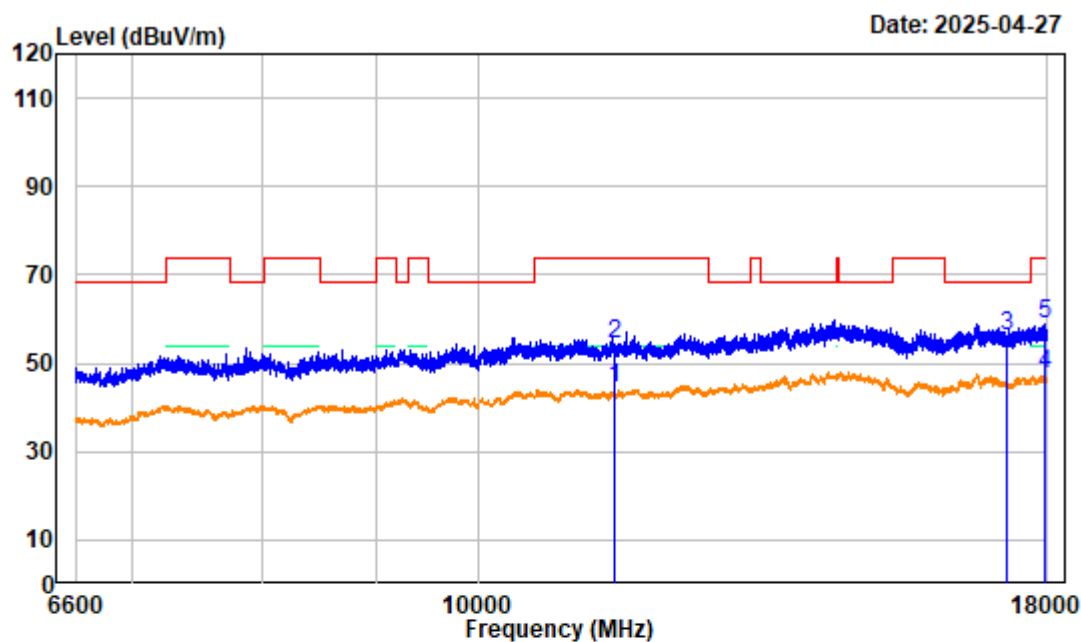

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5755MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.17	44.47	54.00	-9.53	average
2	11510.000	6.30	47.89	54.19	74.00	-19.81	peak
3	17265.000	6.67	49.52	56.19	68.20	-12.01	peak
4	17951.550	8.18	39.59	47.77	54.00	-6.23	average
5	17951.550	8.18	50.79	58.97	74.00	-15.03	peak

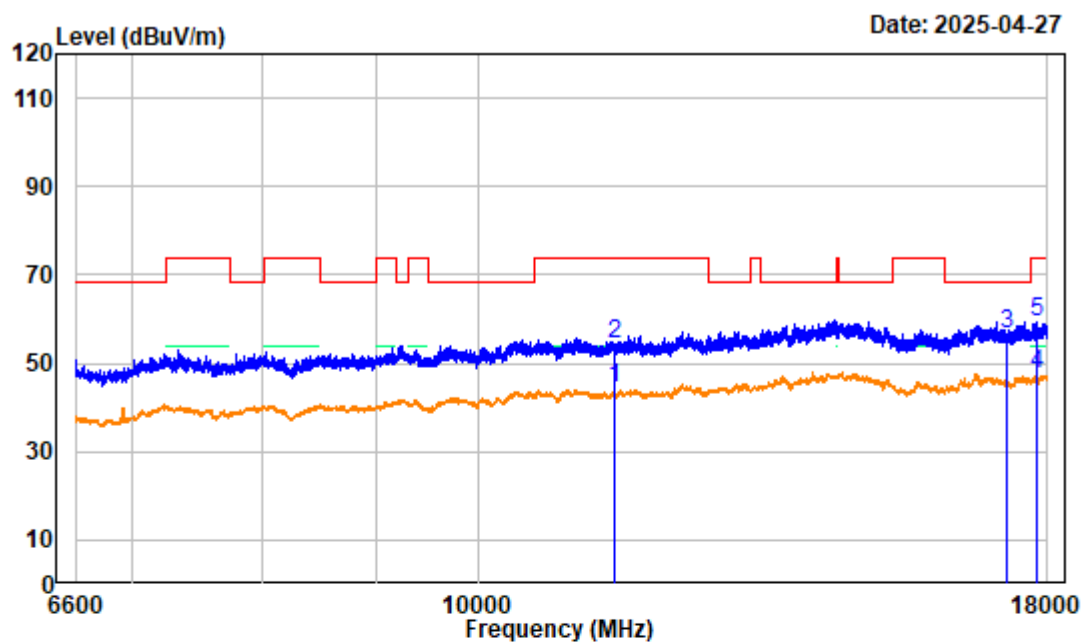

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac40 Low Channel 5755MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	38.22	44.52	54.00	-9.48	average
2	11510.000	6.30	47.85	54.15	74.00	-19.85	peak
3	17265.000	6.67	49.93	56.60	68.20	-11.60	peak
4	17799.070	7.58	39.74	47.32	54.00	-6.68	average
5	17799.070	7.58	51.81	59.39	74.00	-14.61	peak

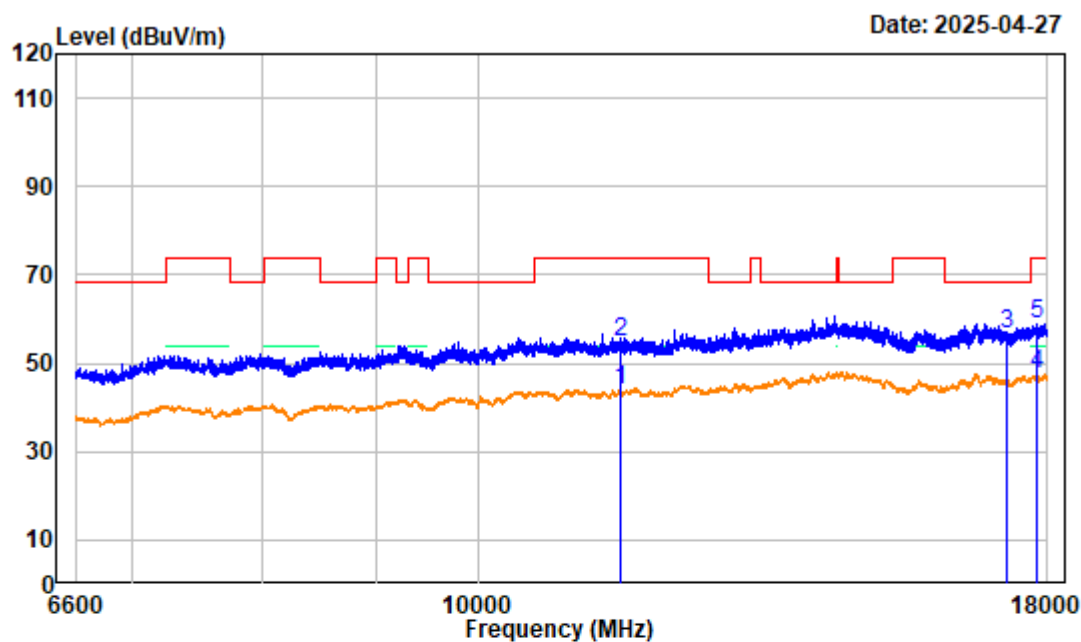

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5795MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	38.20	43.97	54.00	-10.03	average
2	11590.000	5.77	49.16	54.93	74.00	-19.07	peak
3	17265.000	6.67	49.79	56.46	68.20	-11.74	peak
4	17797.650	7.59	40.04	47.63	54.00	-6.37	average
5	17797.650	7.59	51.30	58.89	74.00	-15.11	peak

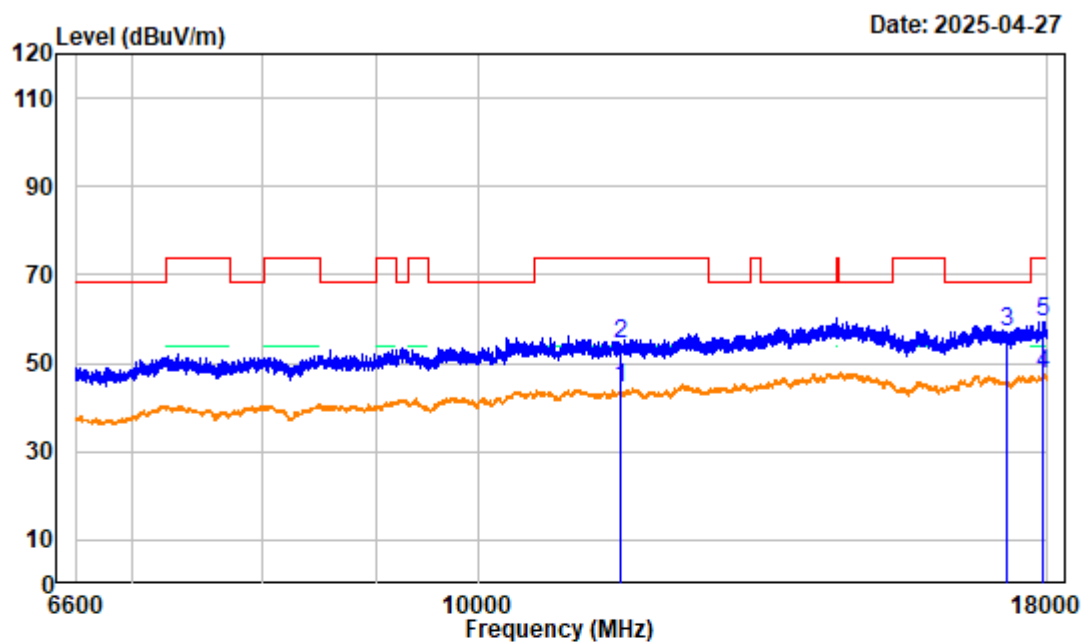

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac40 High Channel 5795MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	38.44	44.21	54.00	-9.79	average
2	11590.000	5.77	48.39	54.16	74.00	-19.84	peak
3	17265.000	6.67	50.21	56.88	68.20	-11.32	peak
4	17917.350	8.21	39.27	47.48	54.00	-6.52	average
5	17917.350	8.21	51.20	59.41	74.00	-14.59	peak

6.6GHz~18GHz 802.11ac80:

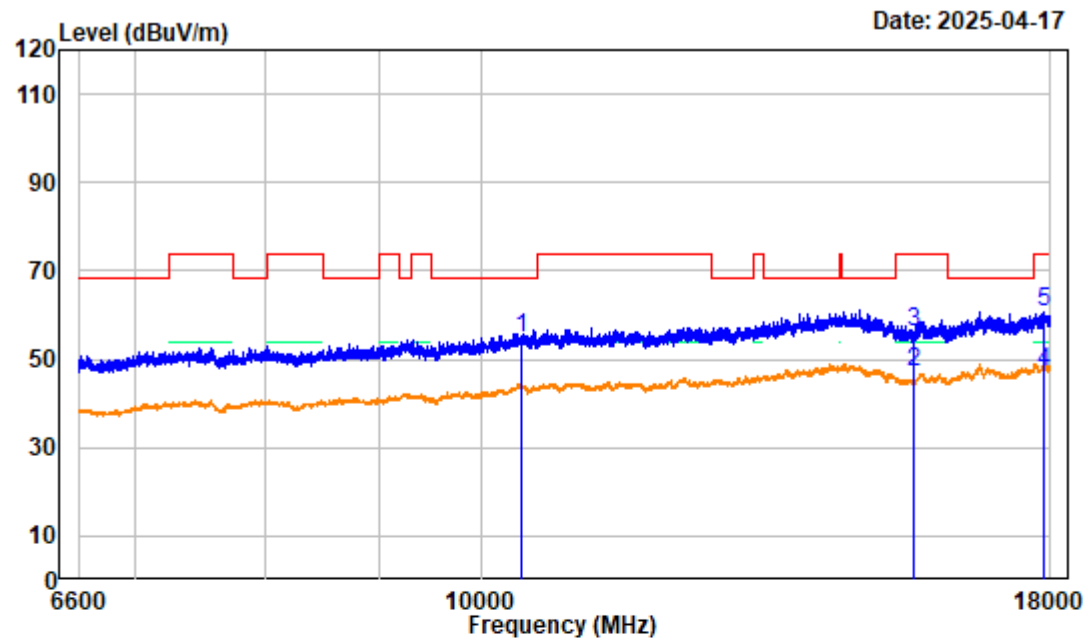

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5210MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10420.000	4.18	50.76	54.94	68.20	-13.26	peak
2 15630.000	4.65	42.23	46.88	54.00	-7.12	average
3 15630.000	4.65	51.70	56.35	74.00	-17.65	peak
4 17877.450	8.23	39.03	47.26	54.00	-6.74	average
5 17877.450	8.23	52.57	60.80	74.00	-13.20	peak

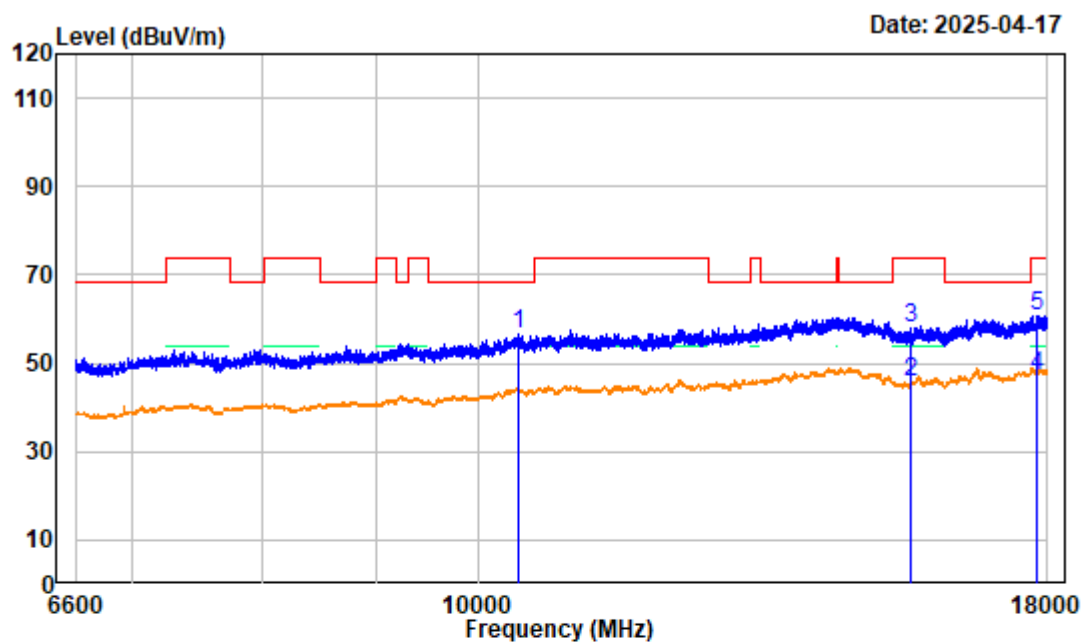

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5210MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	4.18	52.55	56.73	68.20	-11.47	peak
2	15630.000	4.65	41.11	45.76	54.00	-8.24	average
3	15630.000	4.65	53.26	57.91	74.00	-16.09	peak
4	17811.900	7.74	39.47	47.21	54.00	-6.79	average
5	17811.900	7.74	52.97	60.71	74.00	-13.29	peak

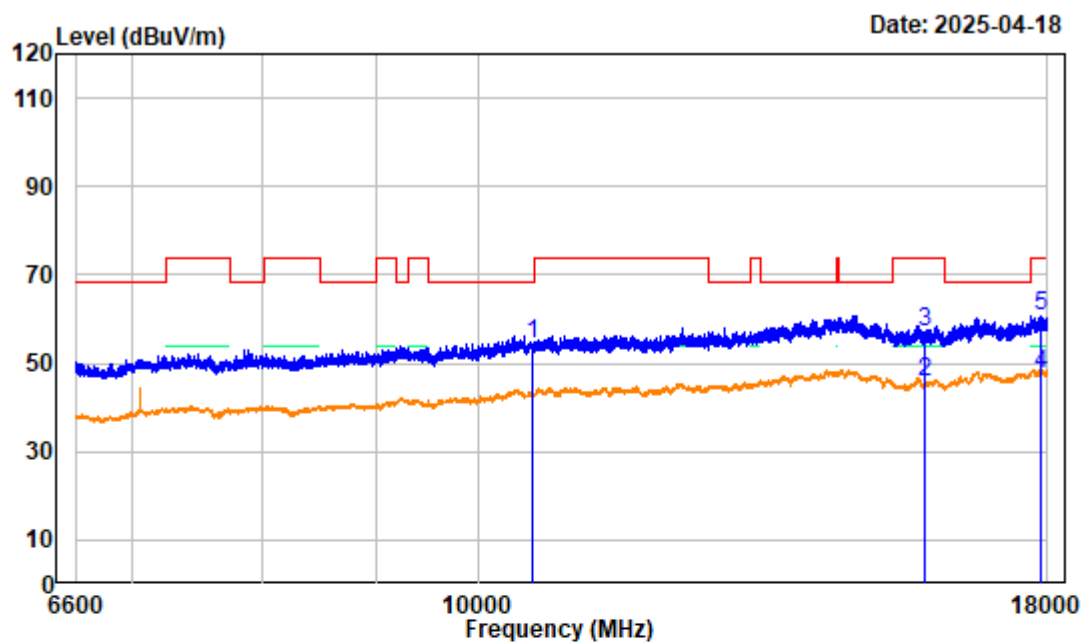

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5290MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	4.00	50.49	54.49	68.20	-13.71	peak
2	15870.000	5.07	40.74	45.81	54.00	-8.19	average
3	15870.000	5.07	51.80	56.87	74.00	-17.13	peak
4	17881.720	8.24	39.38	47.62	54.00	-6.38	average
5	17881.720	8.24	52.42	60.66	74.00	-13.34	peak

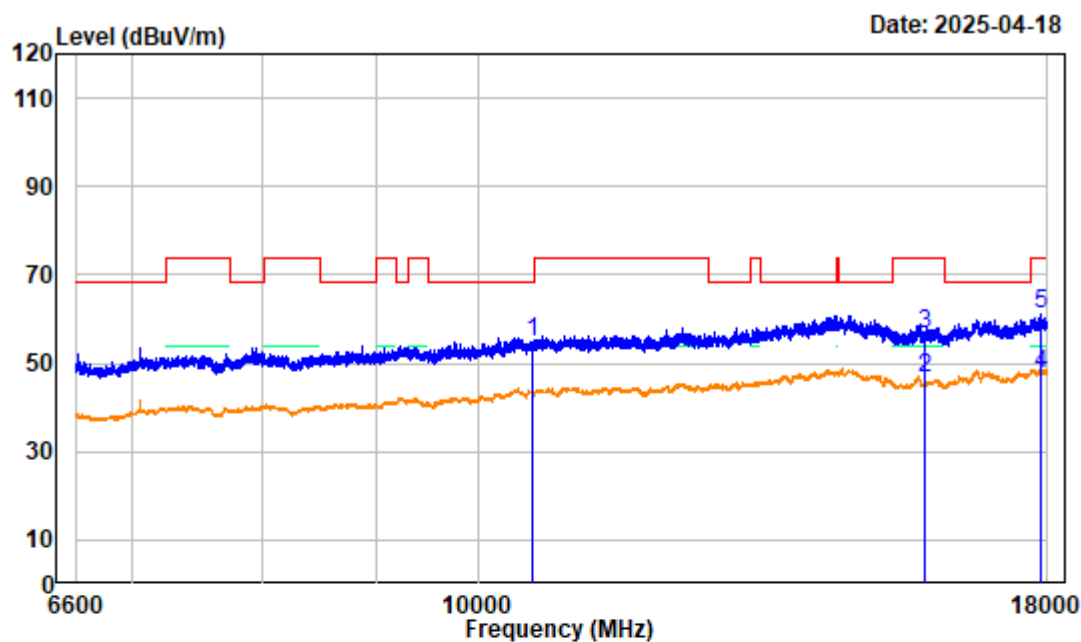

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5290MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10580.000	4.00	50.85	54.85	68.20	-13.35	peak
2	15870.000	5.07	41.39	46.46	54.00	-7.54	average
3	15870.000	5.07	51.56	56.63	74.00	-17.37	peak
4	17870.320	8.23	39.30	47.53	54.00	-6.47	average
5	17870.320	8.23	52.99	61.22	74.00	-12.78	peak

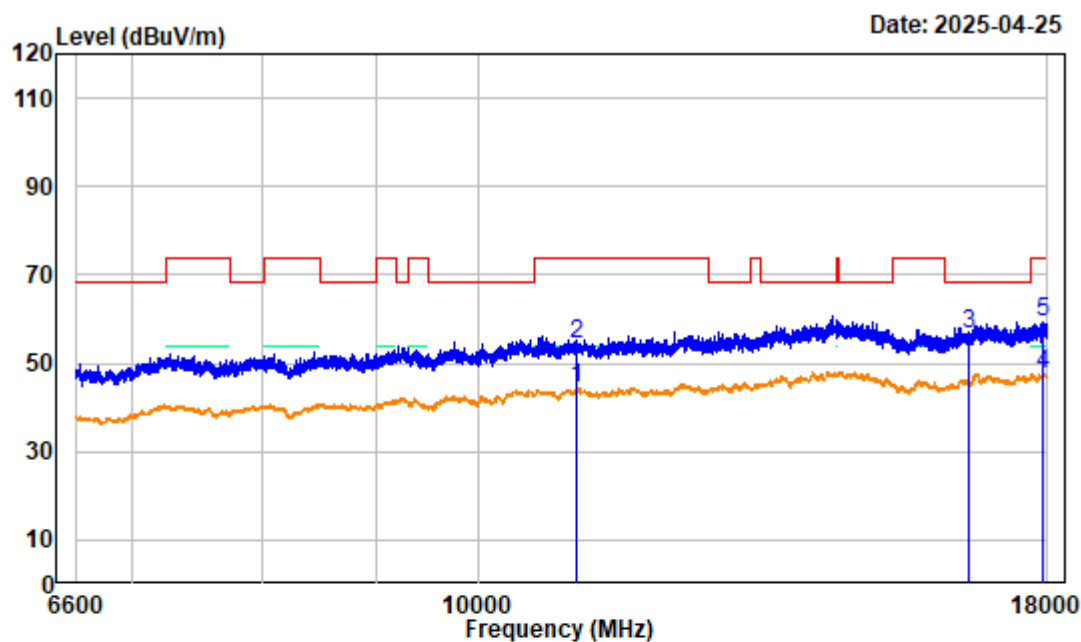

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 Low Channel 5530MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	5.08	39.50	44.58	54.00	-9.42	average
2	11060.000	5.08	49.39	54.47	74.00	-19.53	peak
3	16590.000	5.64	51.03	56.67	68.20	-11.53	peak
4	17933.030	8.20	39.21	47.41	54.00	-6.59	average
5	17933.030	8.20	51.34	59.54	74.00	-14.46	peak

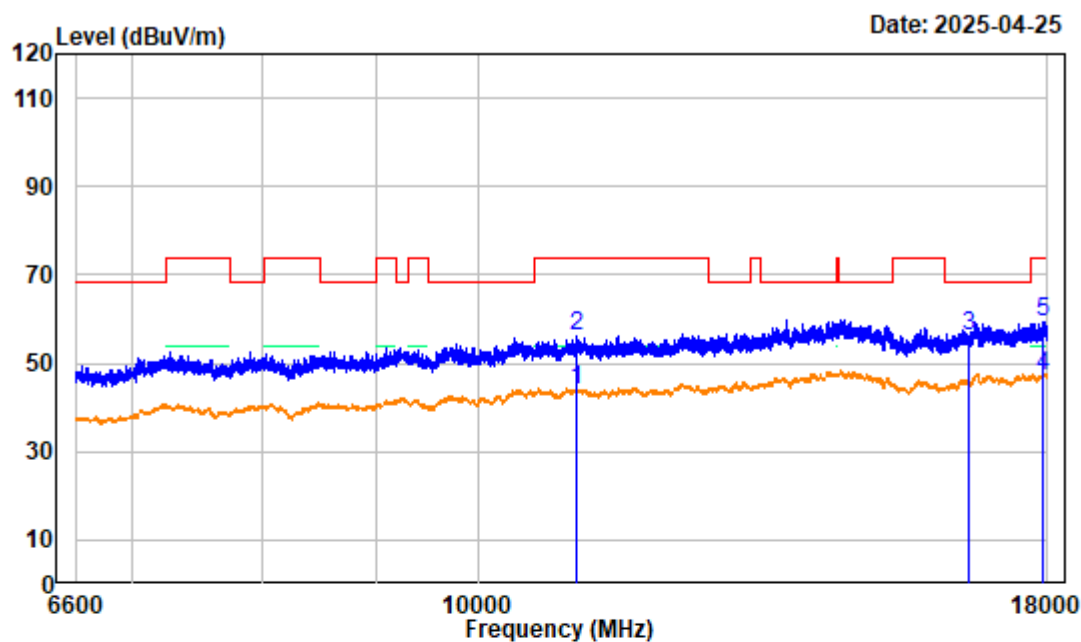

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 Low Channel 5530MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11060.000	5.08	38.98	44.06	54.00	-9.94	average
2	11060.000	5.08	51.02	56.10	74.00	-17.90	peak
3	16590.000	5.64	50.63	56.27	68.20	-11.93	peak
4	17925.900	8.22	38.93	47.15	54.00	-6.85	average
5	17925.900	8.22	50.97	59.19	74.00	-14.81	peak

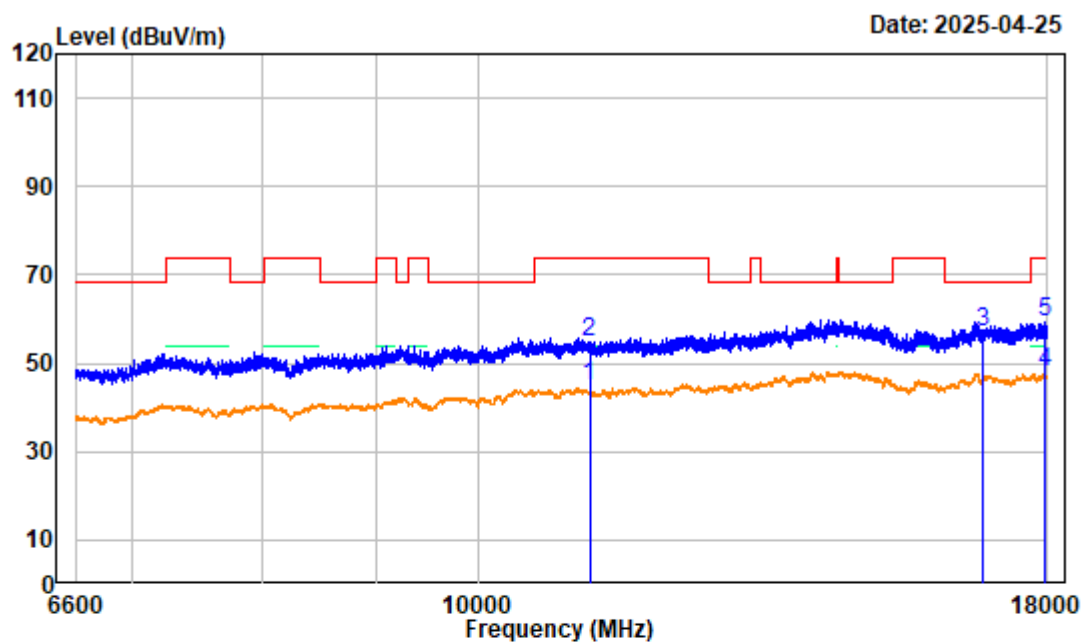

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 High Channel 5610MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11220.000	4.51	40.23	44.74	54.00	-9.26	average
2	11220.000	4.51	50.06	54.57	74.00	-19.43	peak
3	16830.000	7.57	49.56	57.13	68.20	-11.07	peak
4	17943.000	8.19	39.67	47.86	54.00	-6.14	average
5	17943.000	8.19	50.91	59.10	74.00	-14.90	peak

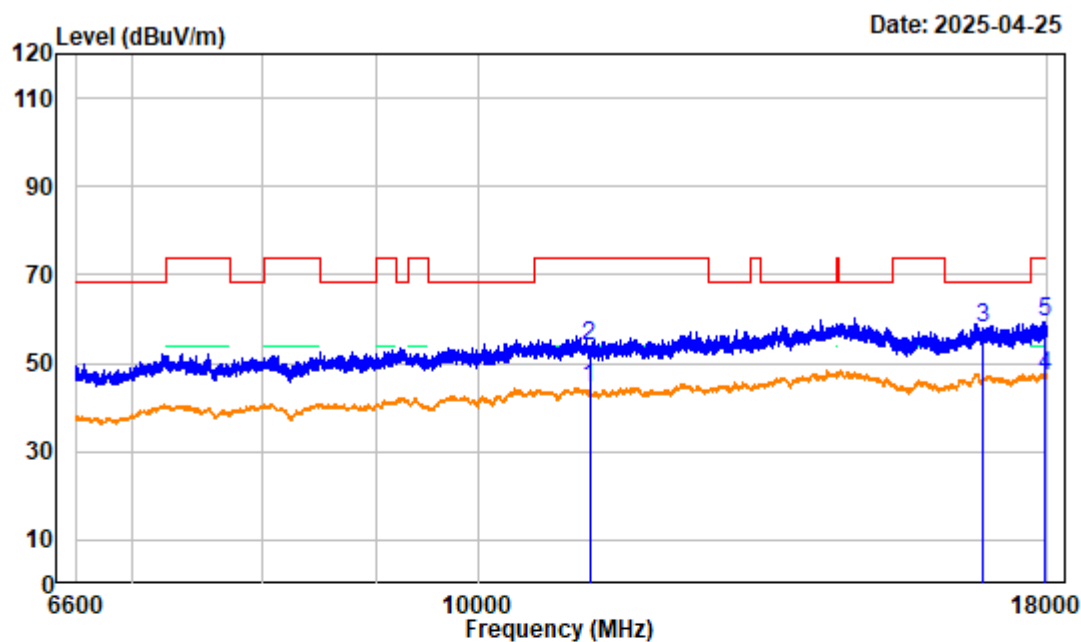

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 High Channel 5610MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11220.000	4.51	39.68	44.19	54.00	-9.81	average
2	11220.000	4.51	49.20	53.71	74.00	-20.29	peak
3	16830.000	7.57	50.49	58.06	68.20	-10.14	peak
4	17948.700	8.18	38.90	47.08	54.00	-6.92	average
5	17948.700	8.18	51.25	59.43	74.00	-14.57	peak

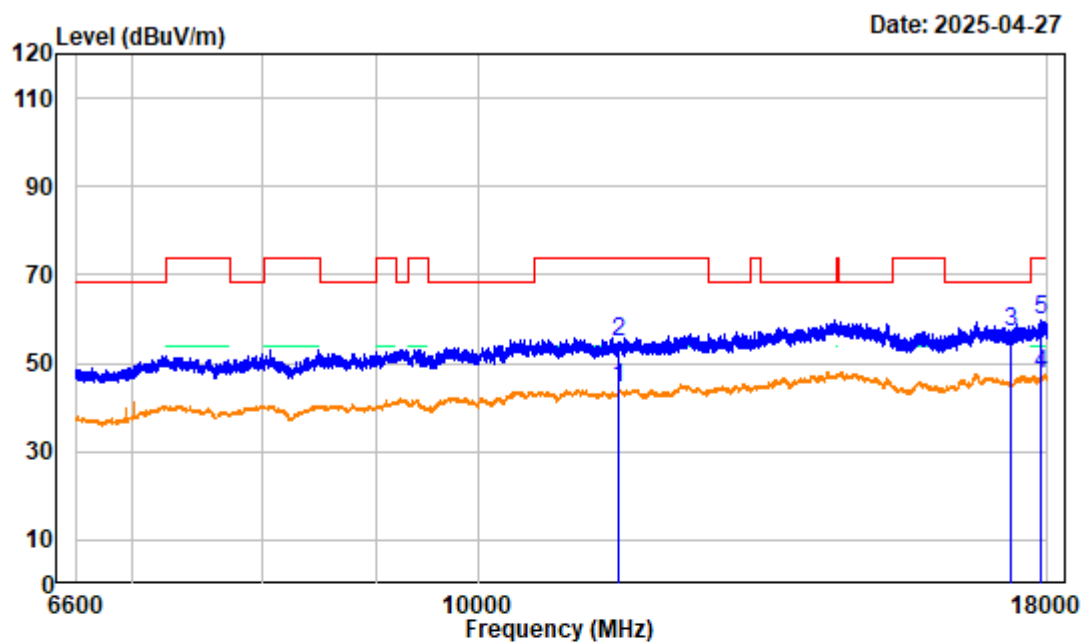

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5775MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.08	38.32	44.40	54.00	-9.60	average
2	11550.000	6.08	48.93	55.01	74.00	-18.99	peak
3	17325.000	6.54	50.49	57.03	68.20	-11.17	peak
4	17876.030	8.24	39.21	47.45	54.00	-6.55	average
5	17876.030	8.24	51.64	59.88	74.00	-14.12	peak

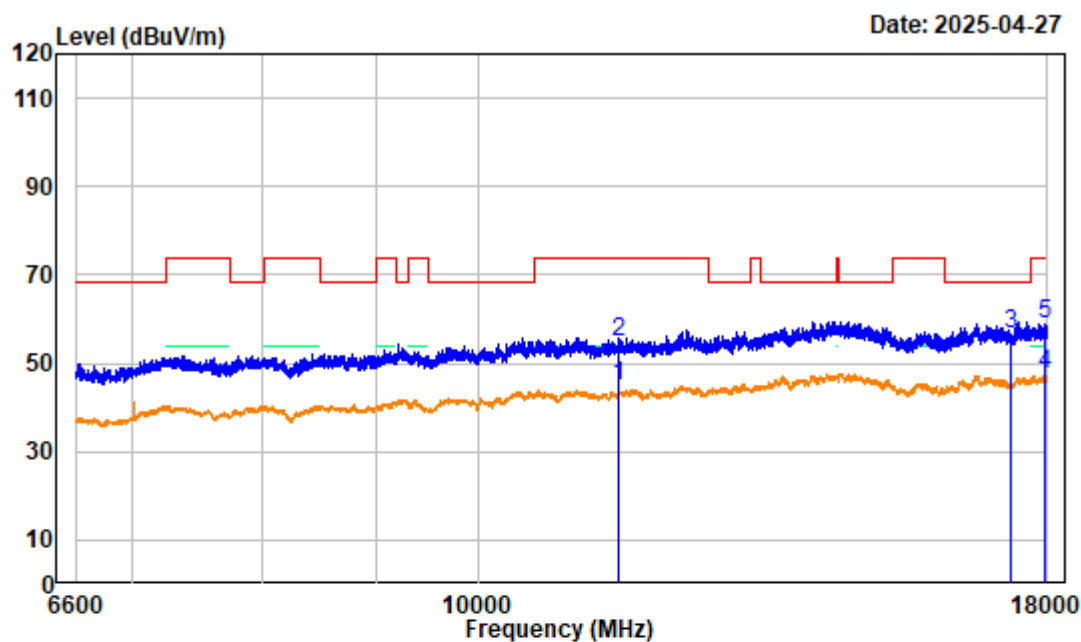

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5775MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.08	38.68	44.76	54.00	-9.24	average
2	11550.000	6.08	48.58	54.66	74.00	-19.34	peak
3	17325.000	6.54	50.15	56.69	68.20	-11.51	peak
4	17935.880	8.20	39.16	47.36	54.00	-6.64	average
5	17935.880	8.20	50.83	59.03	74.00	-14.97	peak

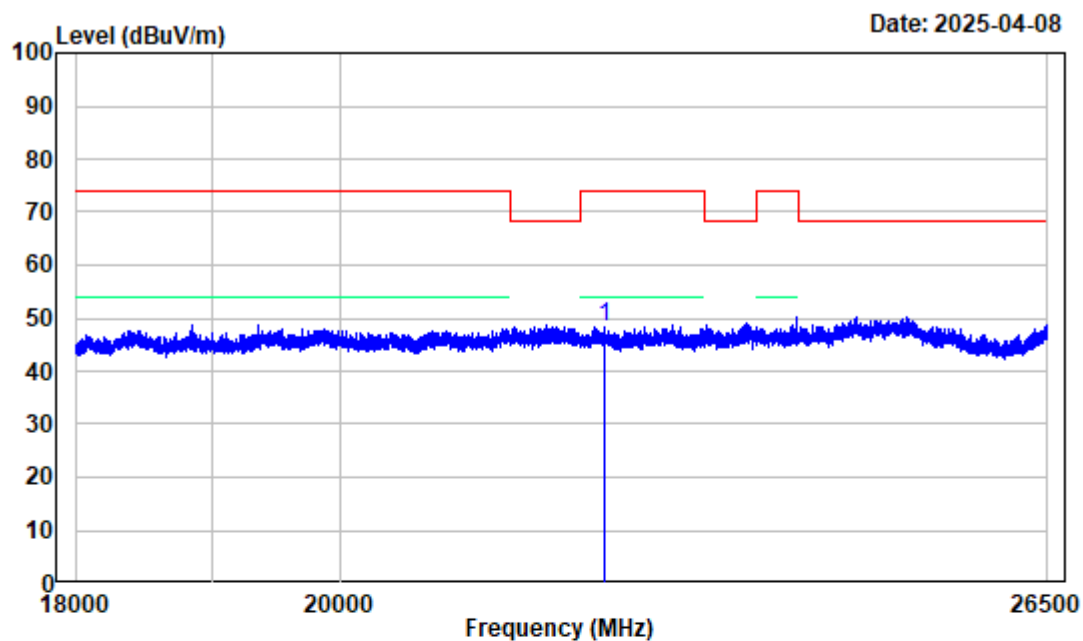18GHz-40GHz:


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac80 5775MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 22218.130	-4.04	52.53	48.49	74.00	-25.51	Peak

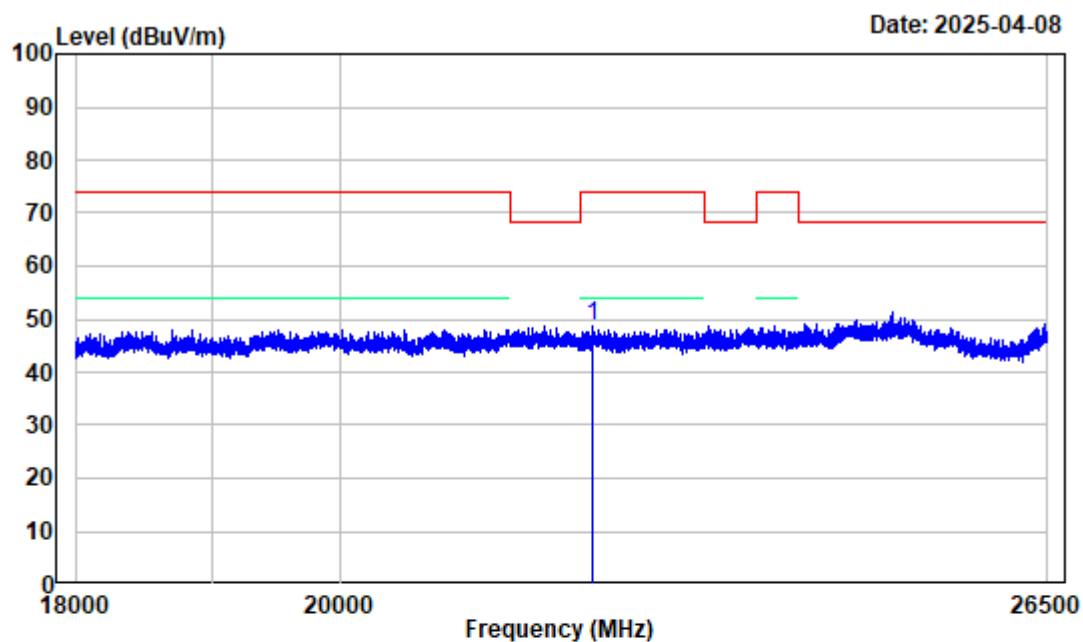

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac80 5775MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read	Limit	Over	Remark
			Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dB	
1	22114.000	-4.11	52.93	74.00	-25.18	Peak

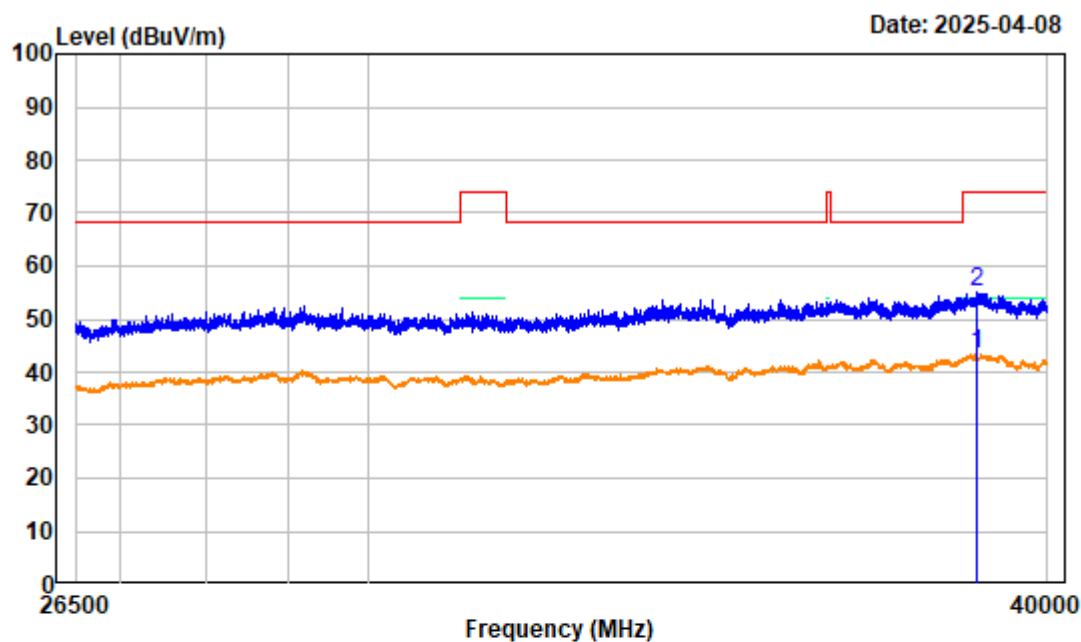

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5775MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	38812.000	2.85	40.49	43.34	54.00	-10.66	Average
2	38812.000	2.85	52.28	55.13	74.00	-18.87	Peak

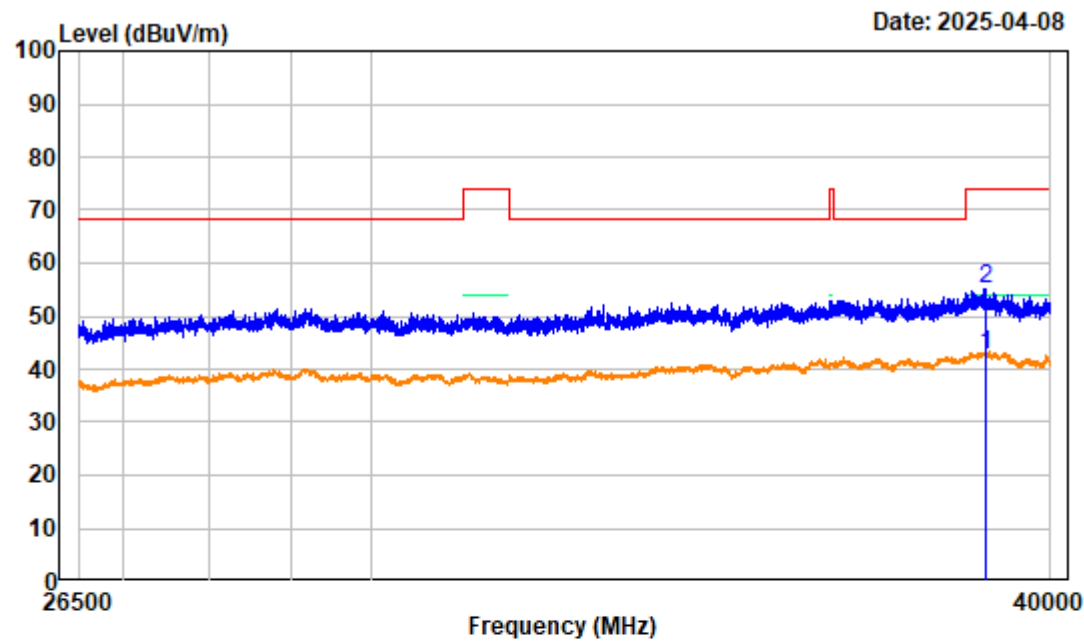

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5775MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz


Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 38924.750	3.05	39.74	42.79	54.00	-11.21	Average
2 38924.750	3.05	52.23	55.28	74.00	-18.72	Peak

Band edge 802.11a Ant0:

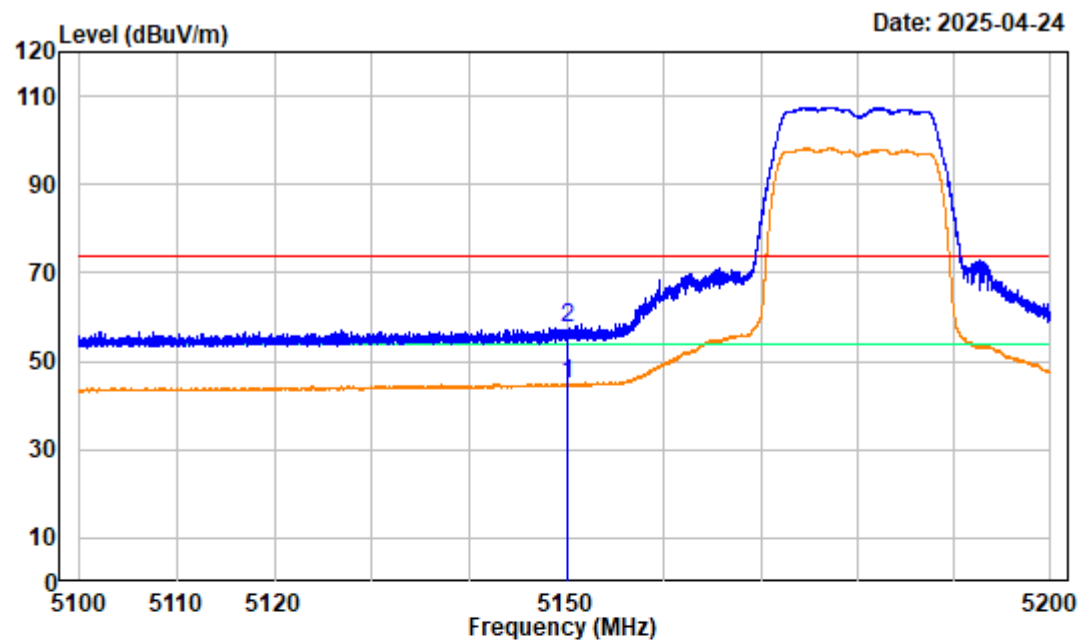


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.74	44.75	54.00	-9.25 average
2	5150.000	-5.99	63.48	57.49	74.00	-16.51 peak

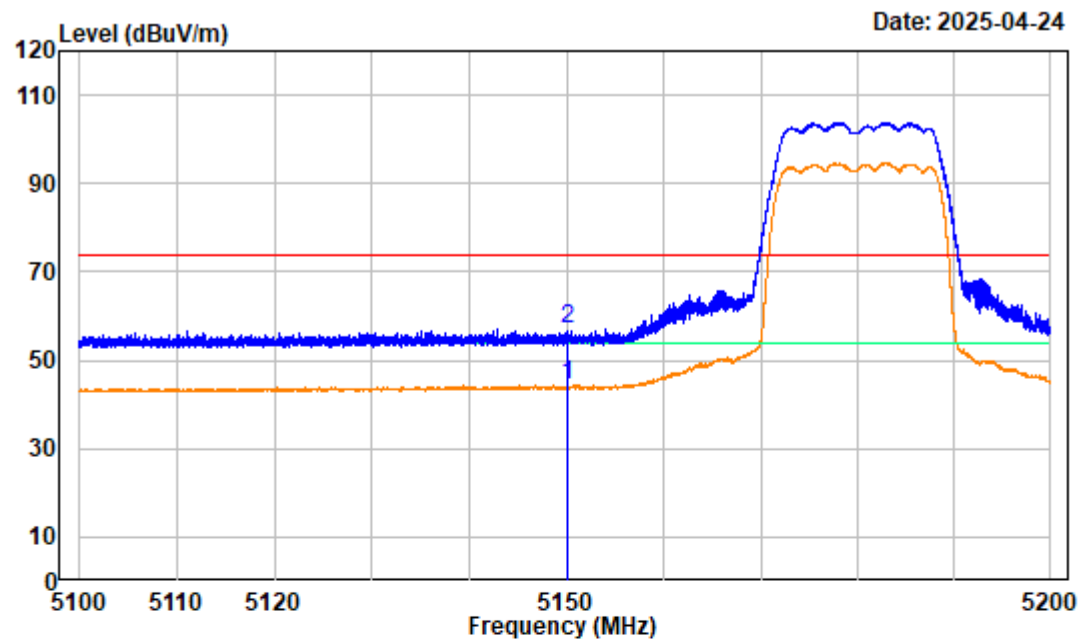


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.24	44.25	54.00	-9.75	average
2	5150.000	-5.99	62.82	56.83	74.00	-17.17	peak

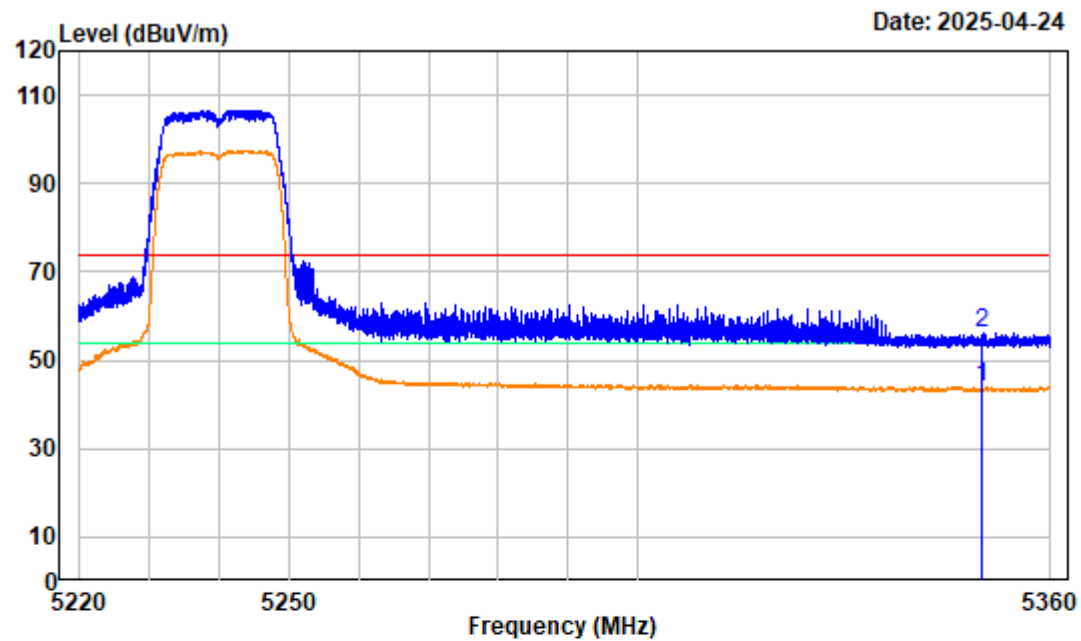


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.93	44.12	54.00	-9.88	average
2	5350.000	-5.81	61.87	56.06	74.00	-17.94	peak

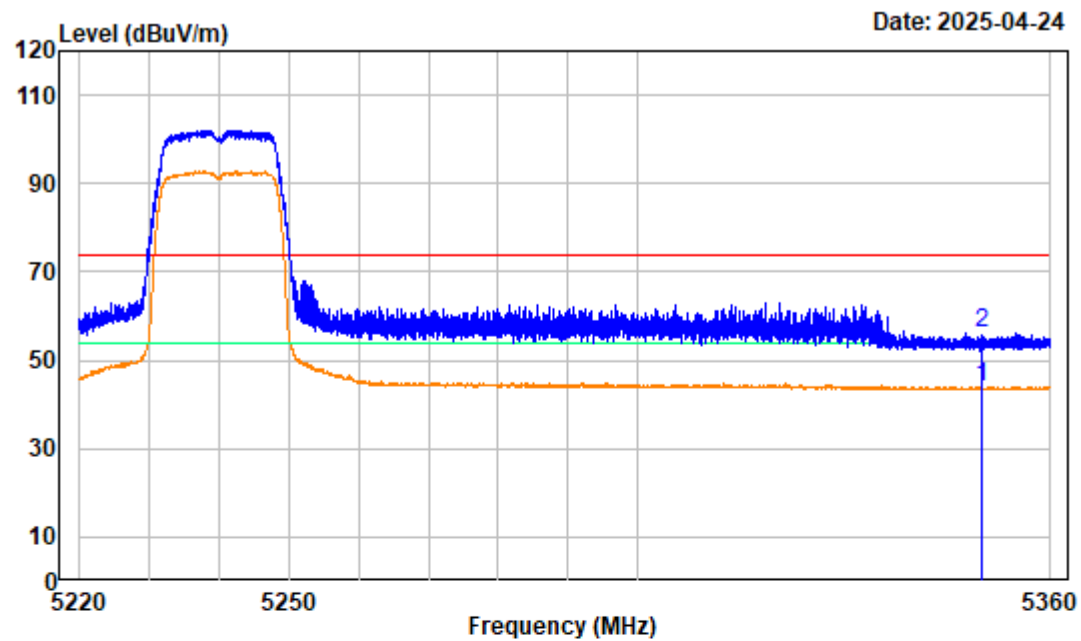


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.82	44.01	54.00	-9.99	average
2	5350.000	-5.81	62.15	56.34	74.00	-17.66	peak

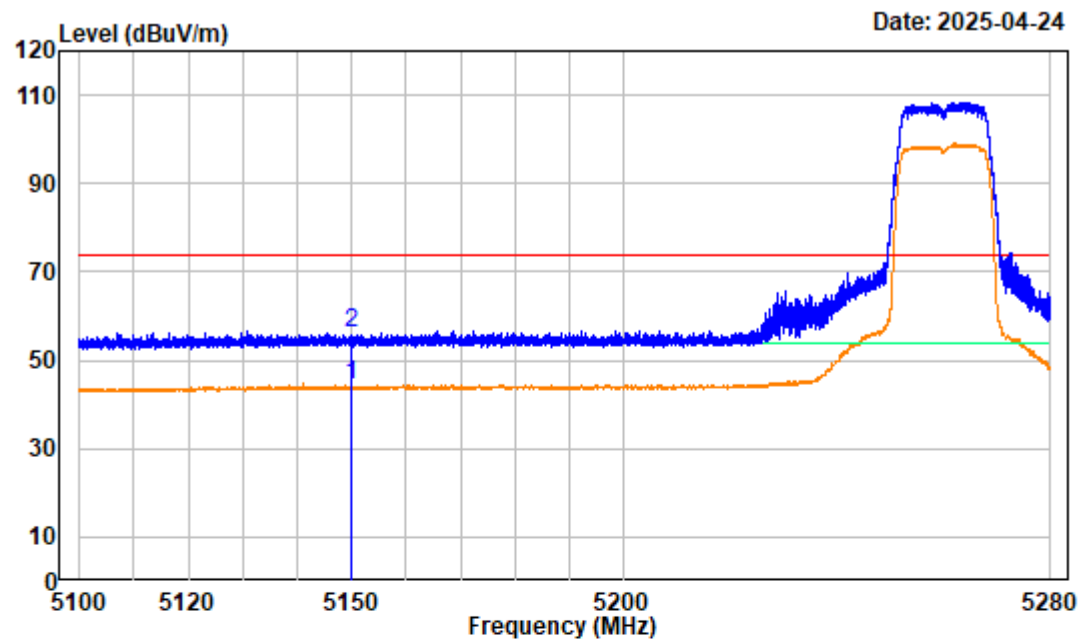


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.56	44.57	54.00	-9.43	average
2	5150.000	-5.99	61.95	55.96	74.00	-18.04	peak

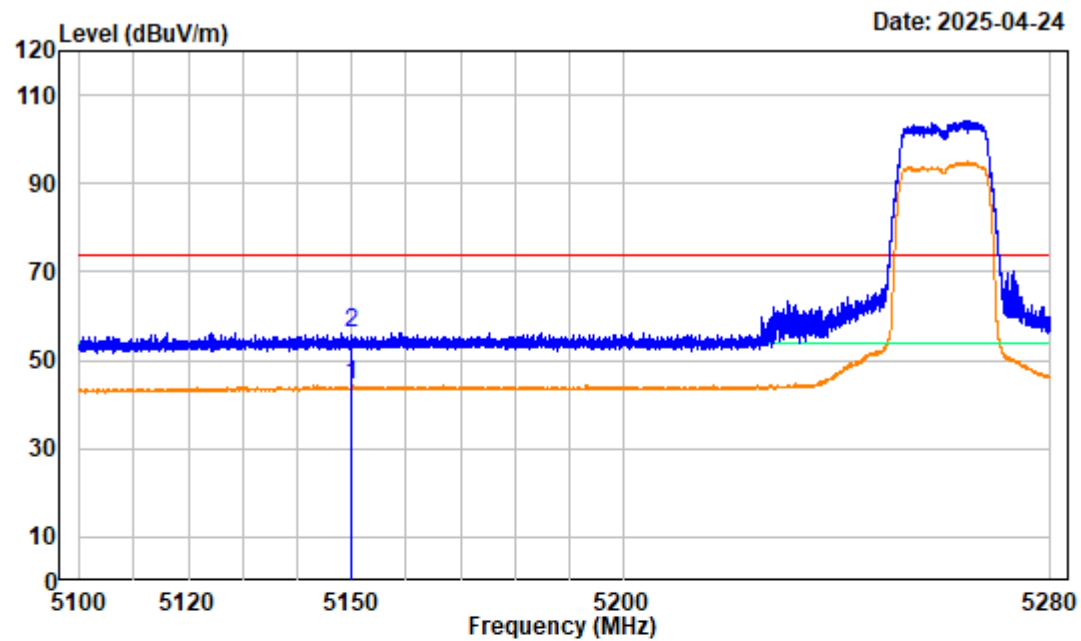


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.40	44.41	54.00	-9.59	average
2	5150.000	-5.99	62.12	56.13	74.00	-17.87	peak

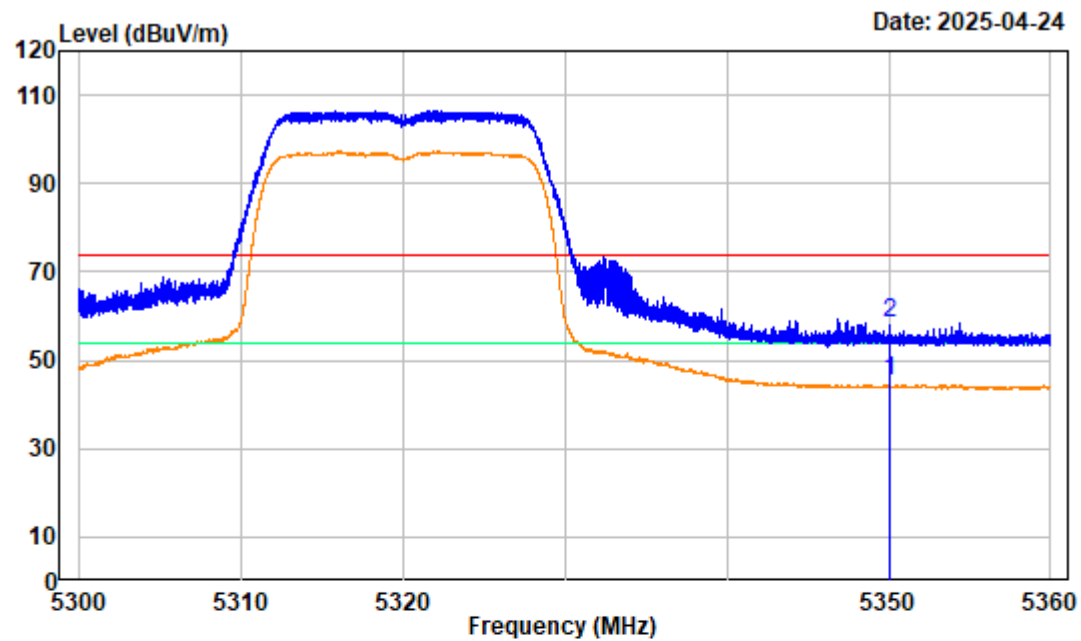


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	51.17	45.36	54.00	-8.64	average
2	5350.000	-5.81	64.19	58.38	74.00	-15.62	peak

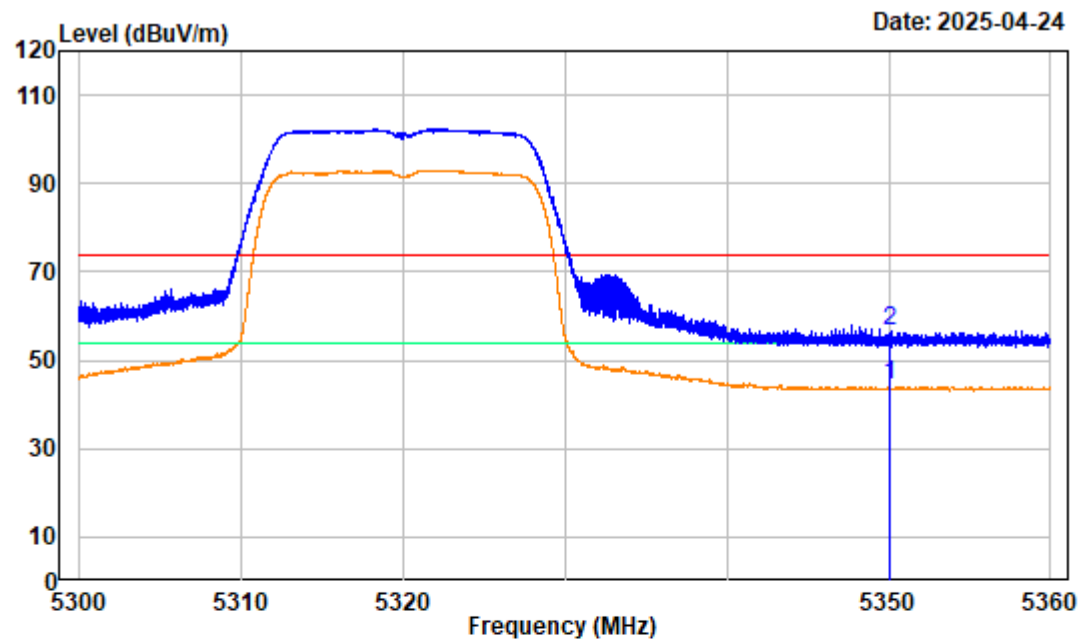


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.32	44.51	54.00	-9.49	average
2	5350.000	-5.81	62.36	56.55	74.00	-17.45	peak

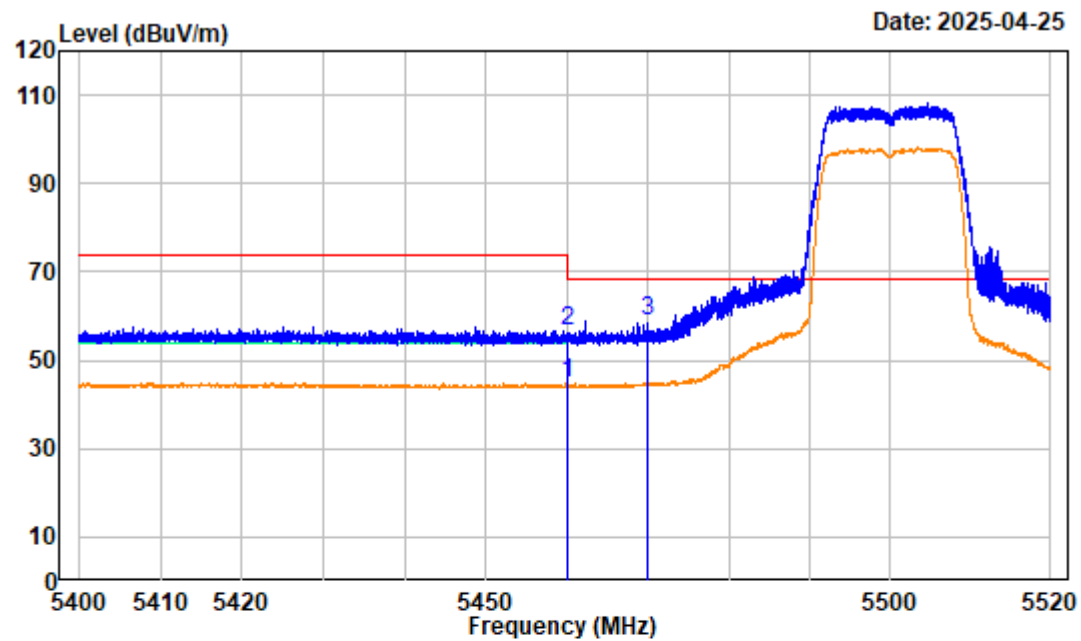


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.49	44.90	54.00	-9.10	average
2	5460.000	-5.58	62.26	56.68	74.00	-17.32	peak
3	5470.000	-5.61	64.60	58.99	68.20	-9.21	peak

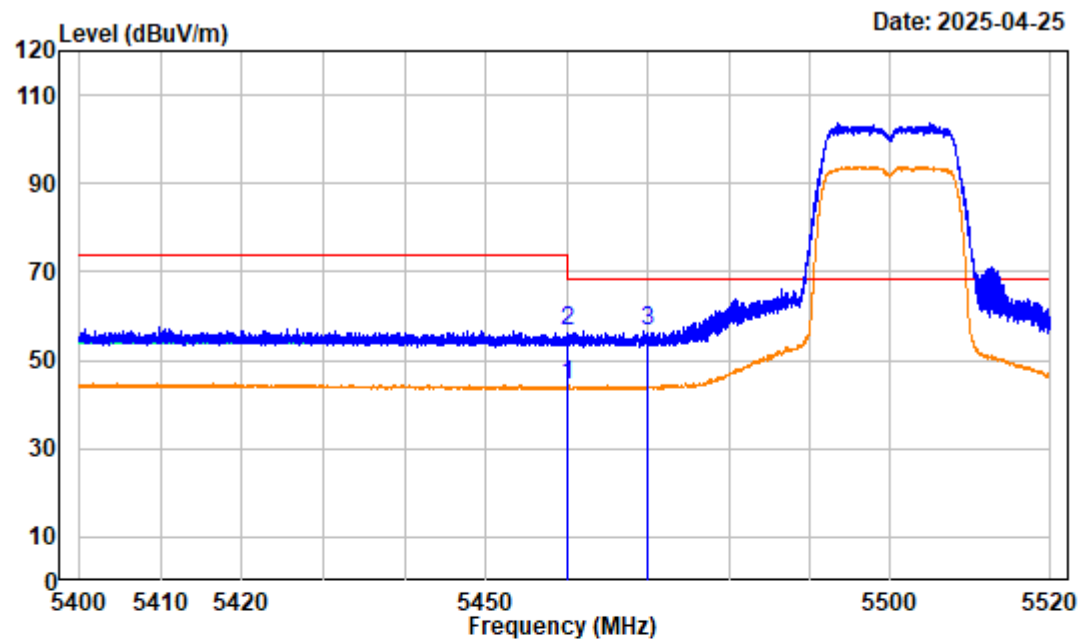


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	49.75	44.16	54.00	-9.84	average
2	5460.000	-5.59	62.20	56.61	74.00	-17.39	peak
3	5470.000	-5.61	62.21	56.60	68.20	-11.60	peak

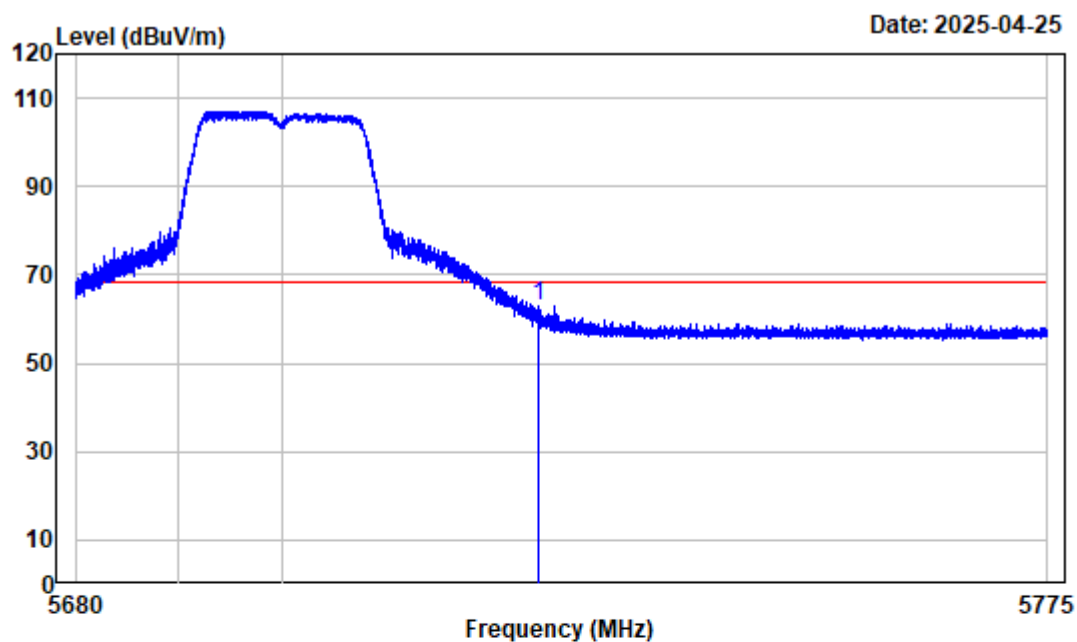


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	67.40	62.94	68.20	-5.26	peak

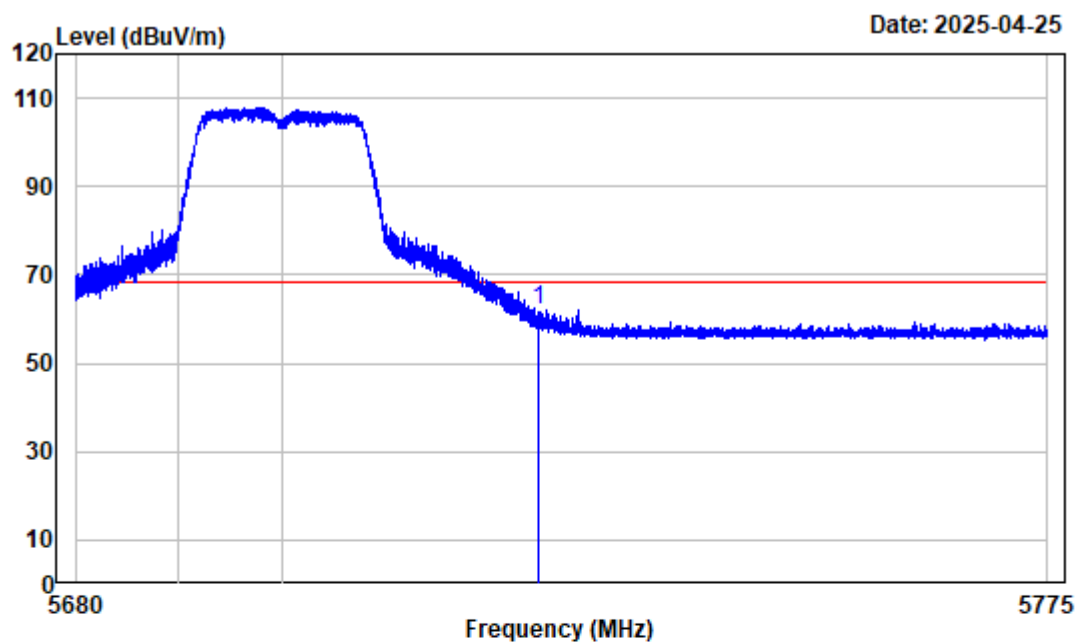

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	66.52	62.06	68.20	-6.14	peak

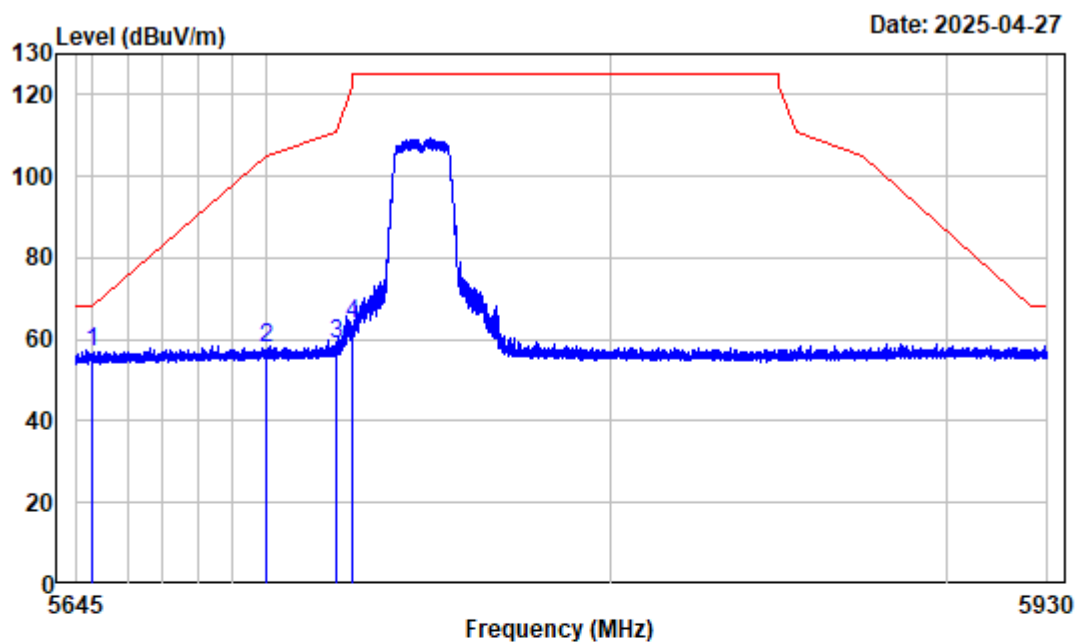

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.64	56.80	68.20	-11.40	Peak
2	5700.000	-4.41	62.21	57.80	105.20	-47.40	Peak
3	5720.000	-4.44	63.24	58.80	110.80	-52.00	Peak
4	5725.000	-4.46	68.26	63.80	122.20	-58.40	Peak

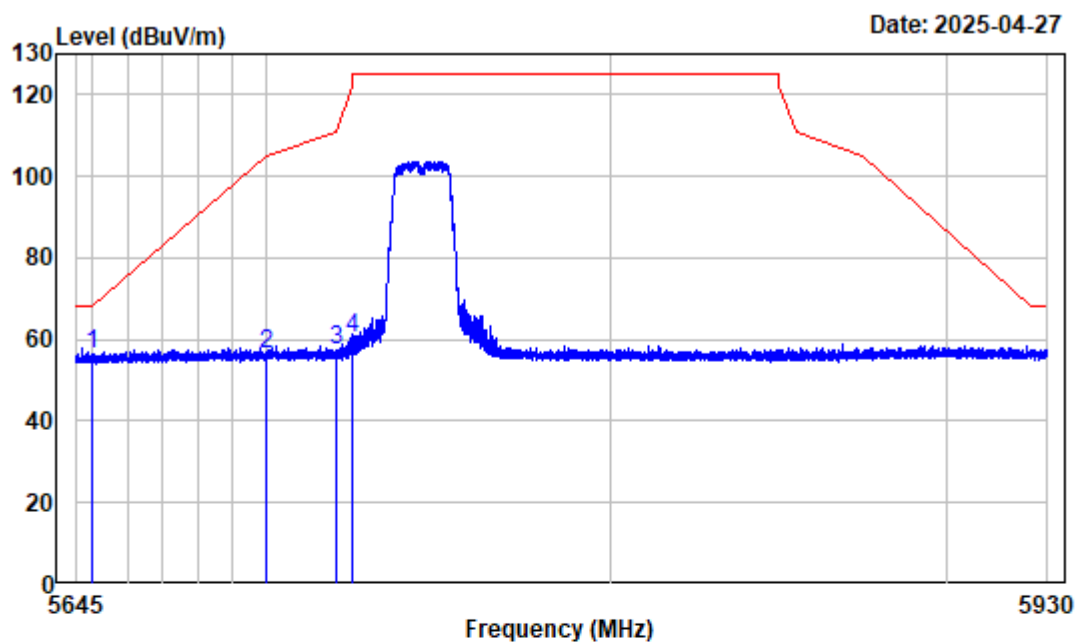

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.26	56.42	68.20	-11.78	Peak
2	5700.000	-4.41	60.83	56.42	105.20	-48.78	Peak
3	5720.000	-4.44	61.86	57.42	110.80	-53.38	Peak
4	5725.000	-4.46	64.88	60.42	122.20	-61.78	Peak

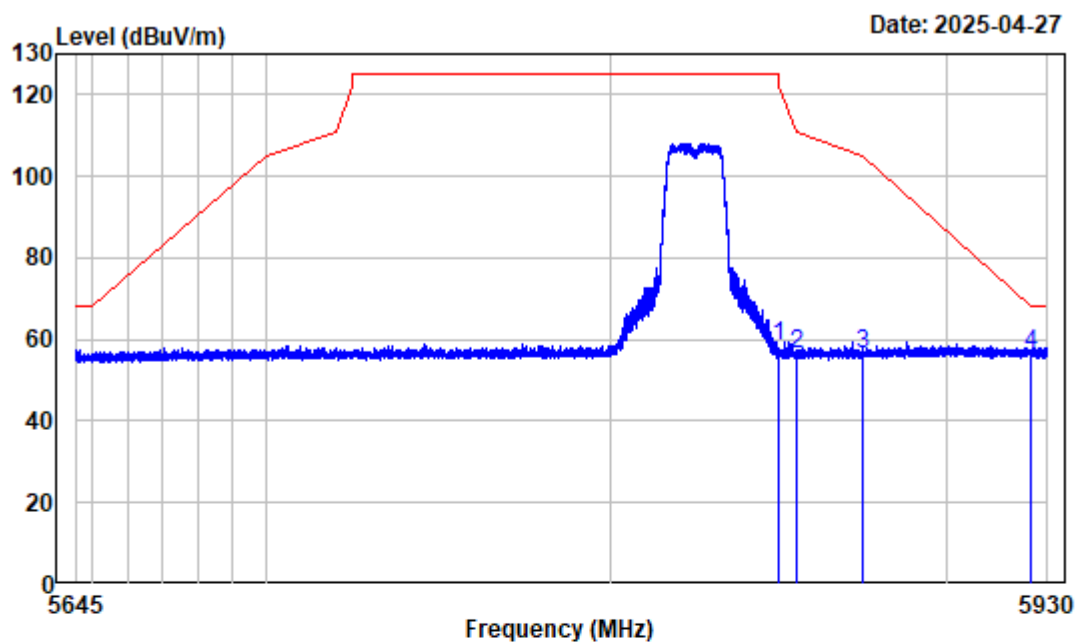

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	62.86	58.33	122.20	-63.87	Peak
2	5855.000	-4.48	60.81	56.33	110.80	-54.47	Peak
3	5875.000	-4.28	60.61	56.33	105.20	-48.87	Peak
4	5925.000	-4.43	60.76	56.33	68.20	-11.87	Peak

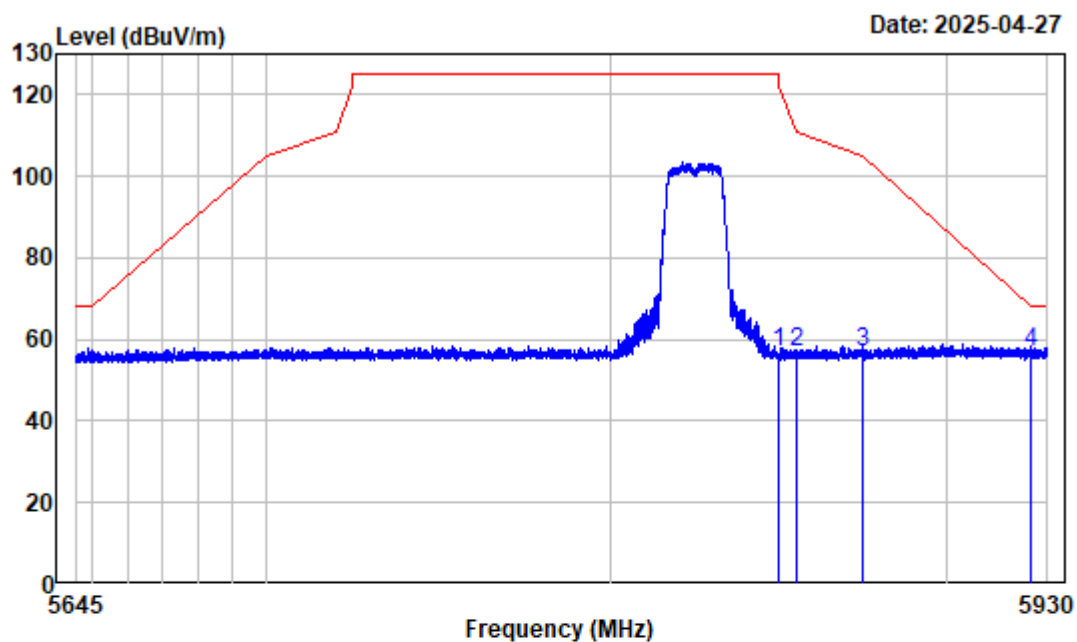

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF

Tester:Jimi Zheng


Test Mode : Transmitting

Note : 802.11a High Channel 5825MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.62	57.09	122.20	-65.11	Peak
2	5855.000	-4.48	61.57	57.09	110.80	-53.71	Peak
3	5875.000	-4.28	61.37	57.09	105.20	-48.11	Peak
4	5925.000	-4.43	61.52	57.09	68.20	-11.11	Peak

Band edge 802.11a Ant1:

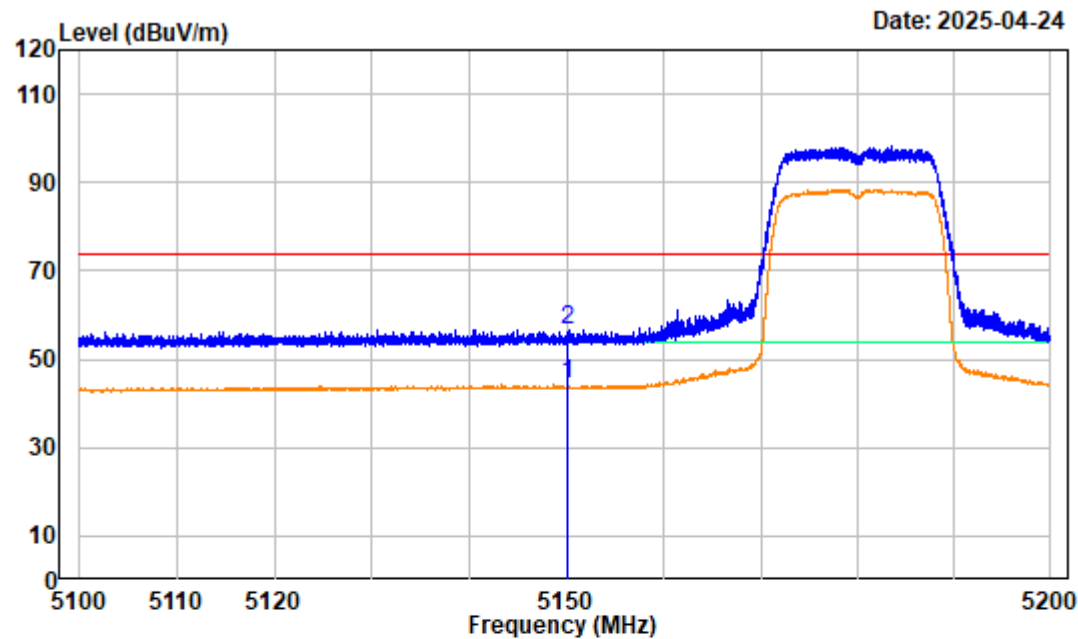

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.18	44.19	54.00	-9.81 average
2	5150.000	-5.99	62.81	56.82	74.00	-17.18 peak

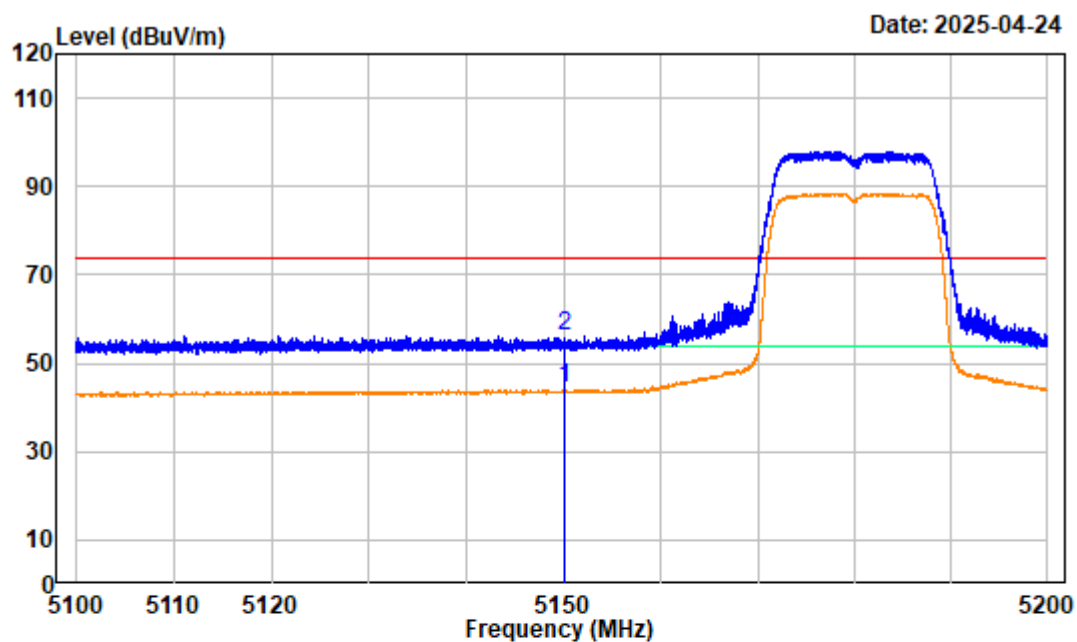

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5180MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.17	44.18	54.00	-9.82	average
2	5150.000	-5.99	61.94	55.95	74.00	-18.05	peak

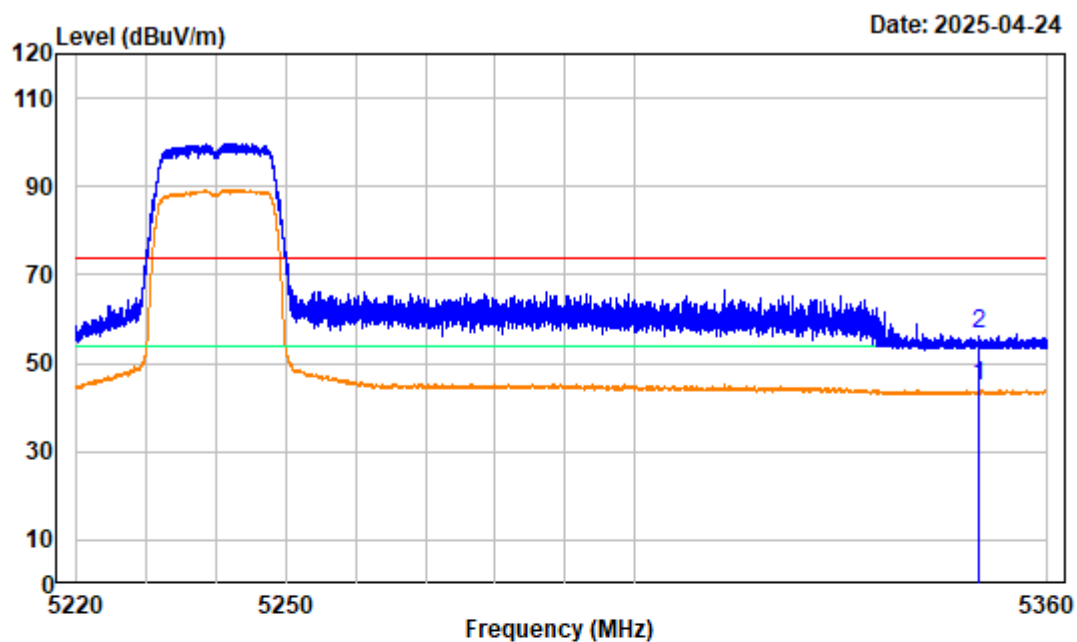

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5240MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.66	44.85	54.00	-9.15	average
2	5350.000	-5.81	62.48	56.67	74.00	-17.33	peak

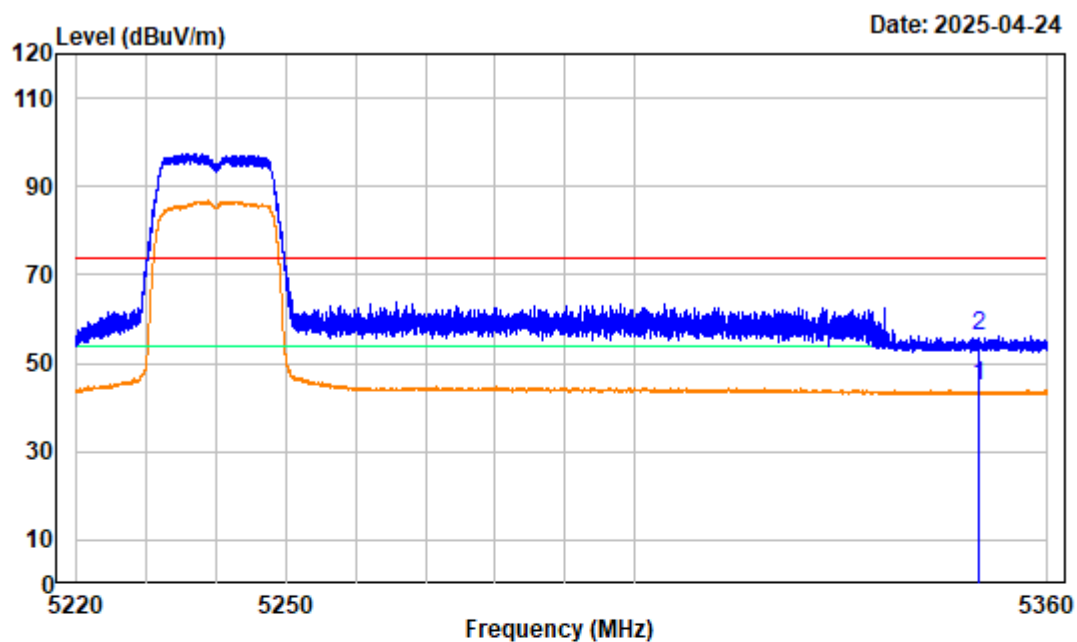

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5240MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.44	44.63	54.00	-9.37	average
2	5350.000	-5.81	62.12	56.31	74.00	-17.69	peak

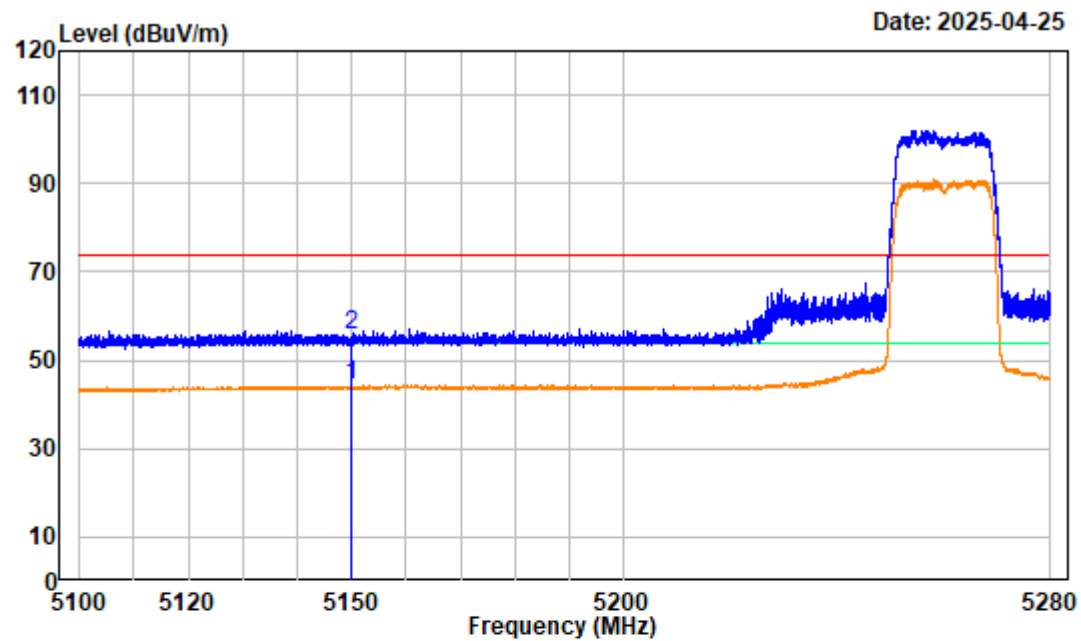


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.51	44.52	54.00	-9.48	average
2	5150.000	-5.99	61.91	55.92	74.00	-18.08	peak

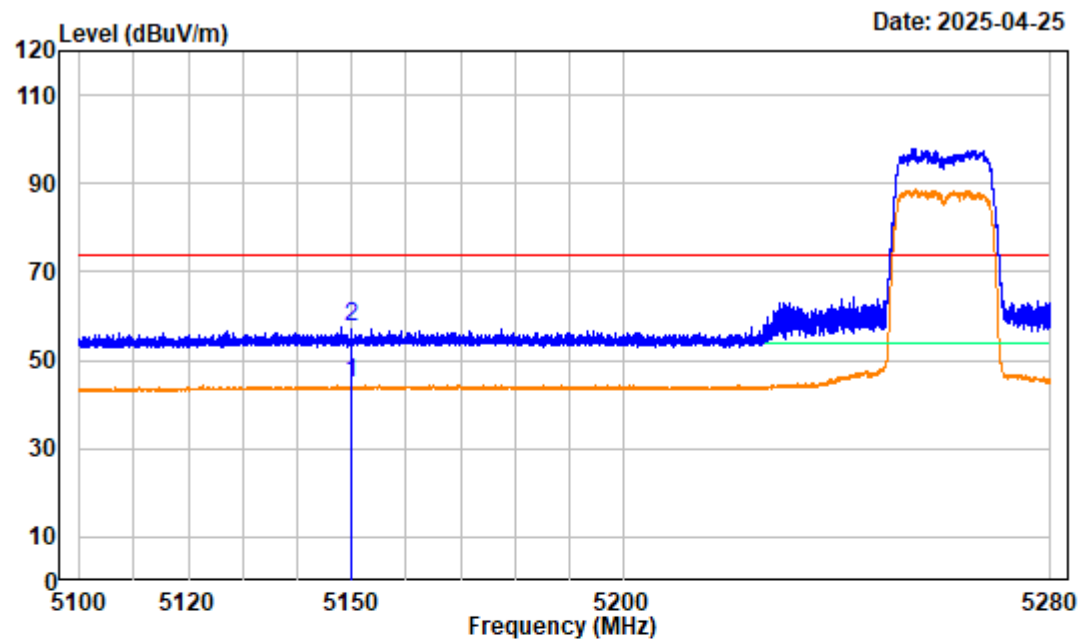


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.86	44.87	54.00	-9.13	average
2	5150.000	-5.99	63.50	57.51	74.00	-16.49	peak

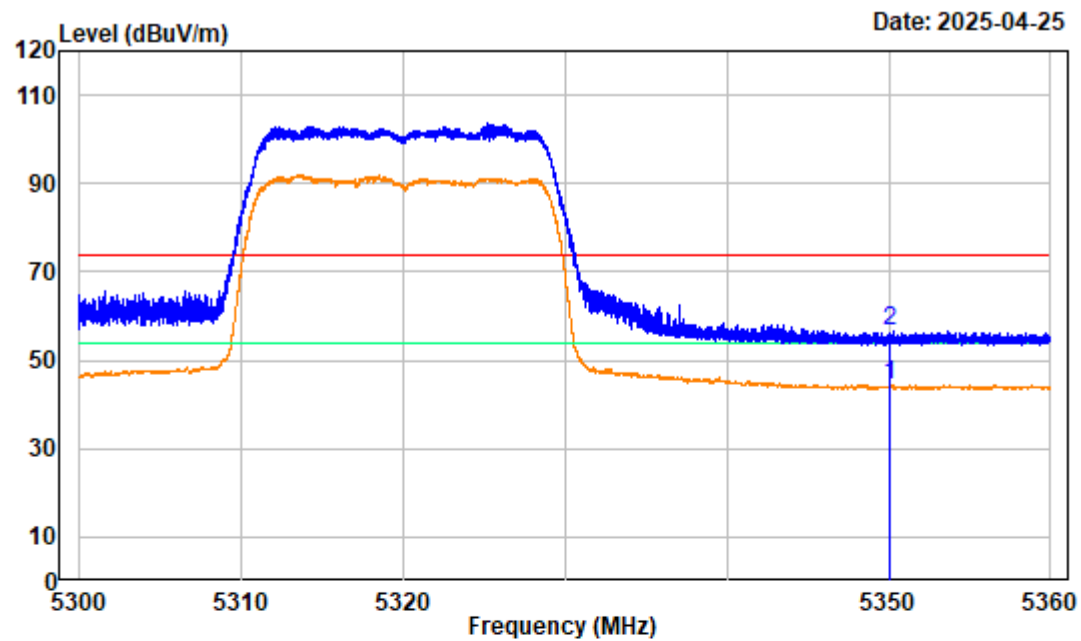


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.06	44.25	54.00	-9.75	average
2	5350.000	-5.81	62.60	56.79	74.00	-17.21	peak

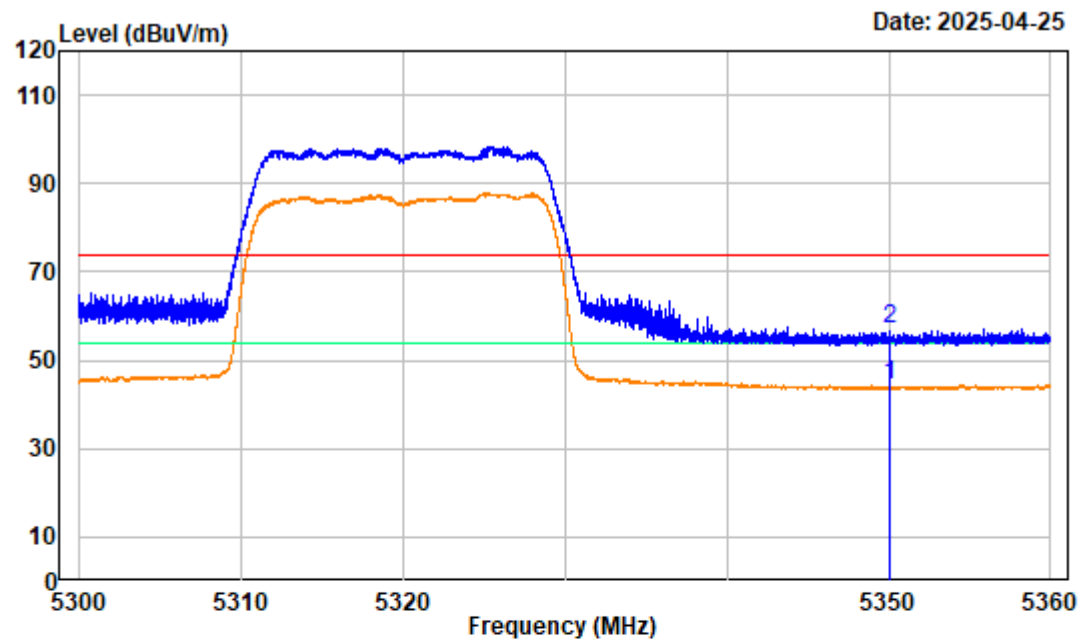


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.00	44.19	54.00	-9.81	average
2	5350.000	-5.81	63.03	57.22	74.00	-16.78	peak

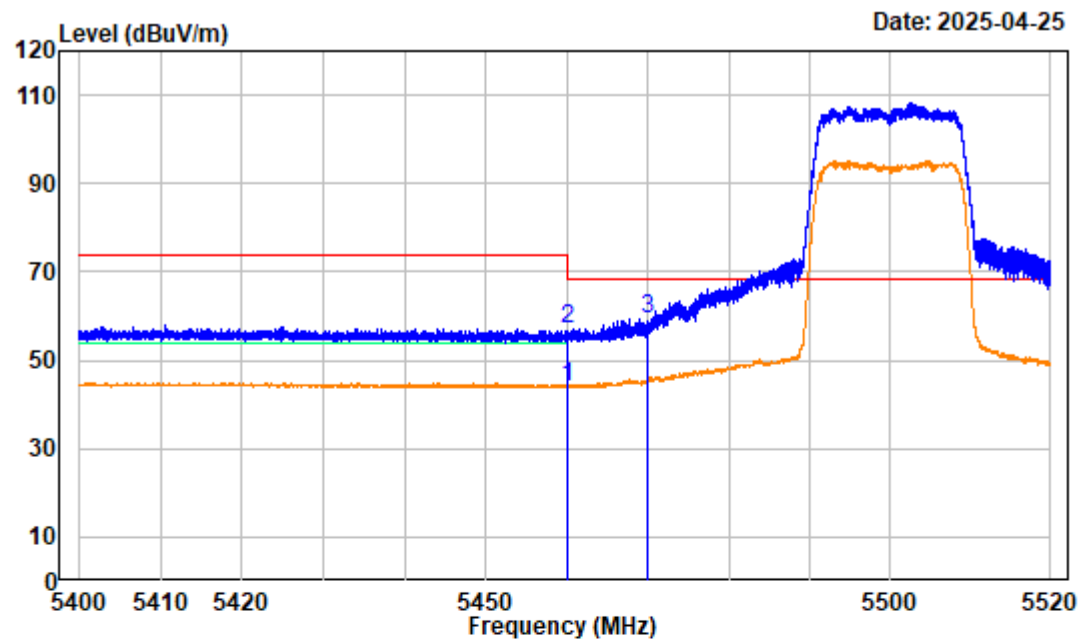


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	49.68	44.09	54.00	-9.91	average
2	5460.000	-5.59	62.61	57.02	74.00	-16.98	peak
3	5470.000	-5.61	64.76	59.15	68.20	-9.05	peak

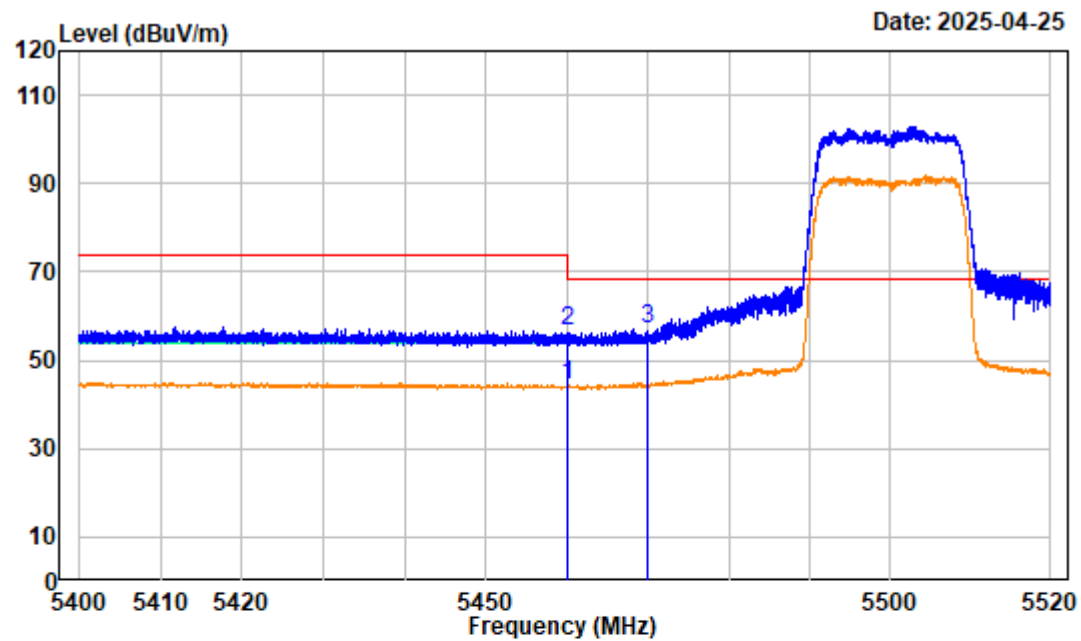


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11a Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	49.82	44.23	54.00	-9.77	average
2	5460.000	-5.58	62.24	56.66	74.00	-17.34	peak
3	5470.000	-5.61	62.67	57.06	68.20	-11.14	peak

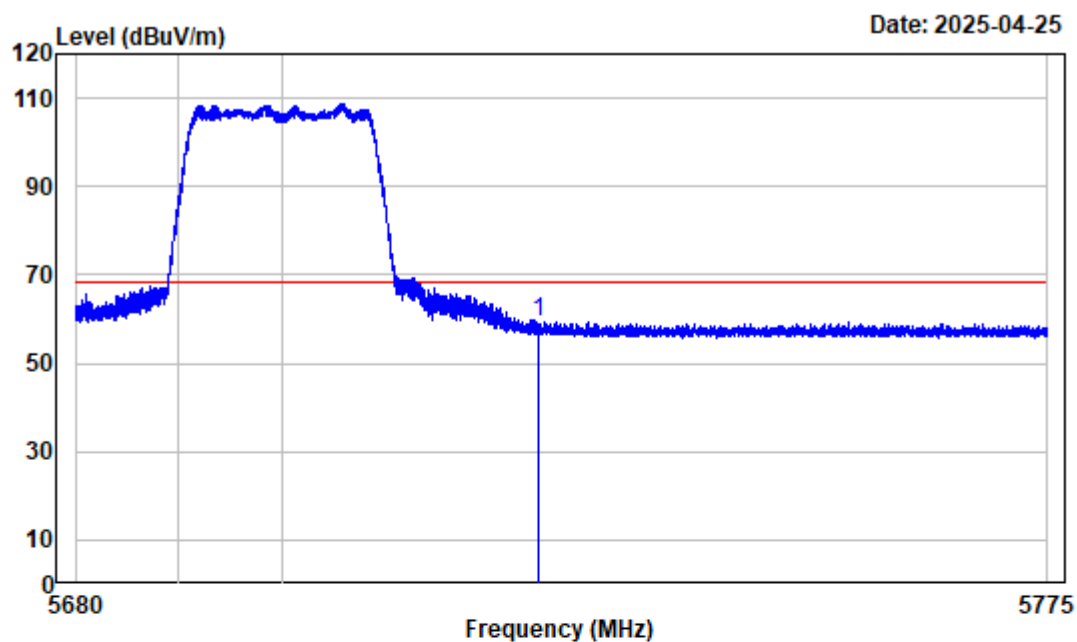


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.89	59.43	68.20	-8.77	peak

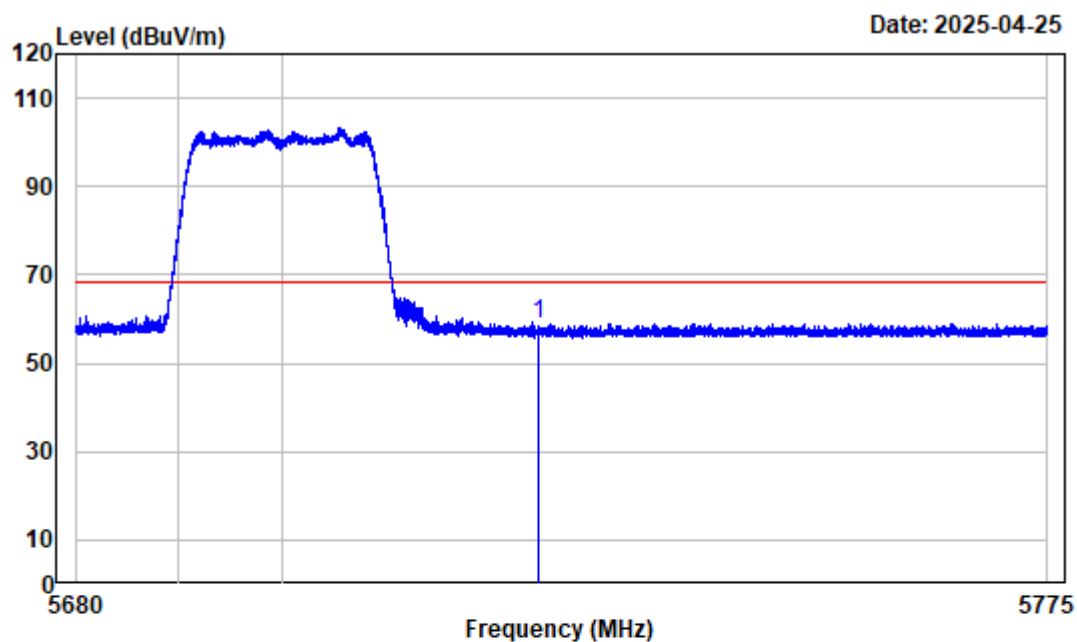

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.44	58.98	68.20	-9.22	peak

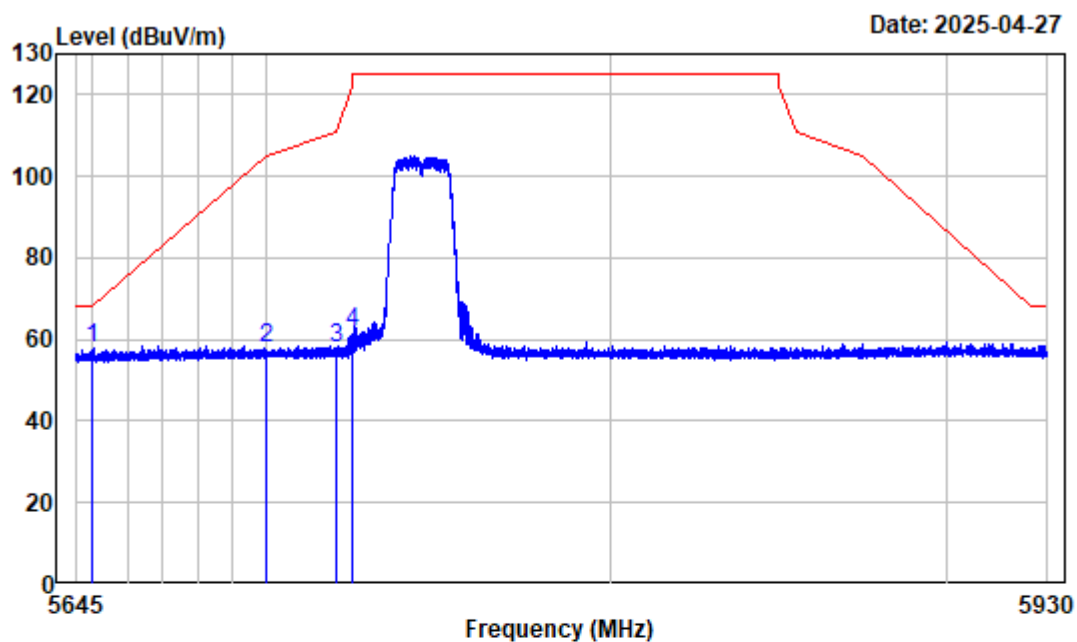

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	62.66	57.82	68.20	-10.38	Peak
2	5700.000	-4.41	62.23	57.82	105.20	-47.38	Peak
3	5720.000	-4.44	62.26	57.82	110.80	-52.98	Peak
4	5725.000	-4.46	66.28	61.82	122.20	-60.38	Peak

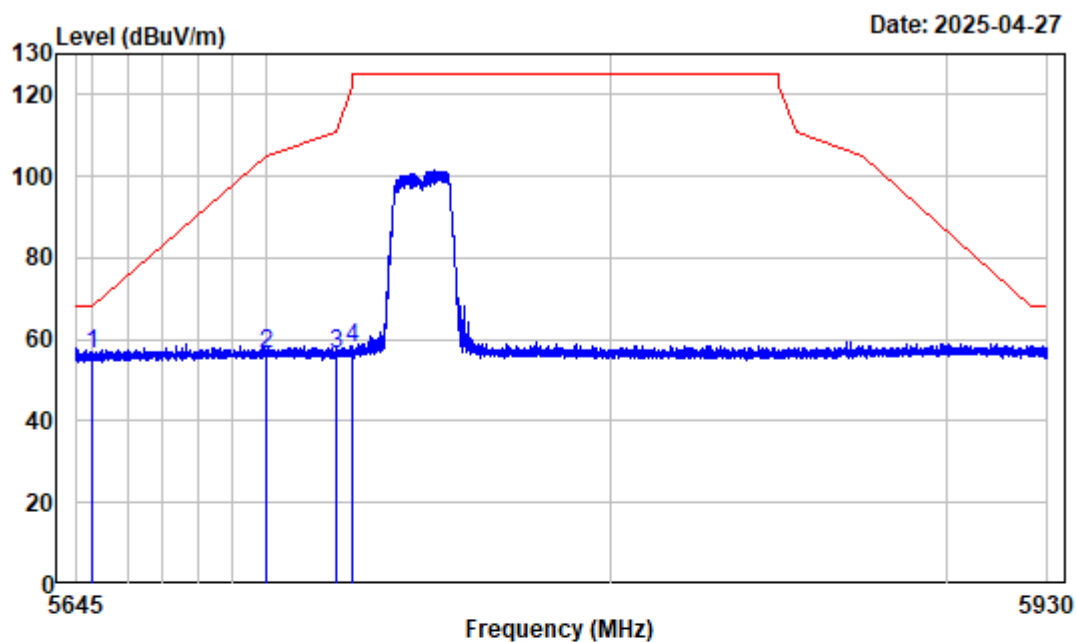

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.49	56.65	68.20	-11.55	Peak
2	5700.000	-4.41	61.06	56.65	105.20	-48.55	Peak
3	5720.000	-4.44	61.09	56.65	110.80	-54.15	Peak
4	5725.000	-4.46	62.11	57.65	122.20	-64.55	Peak

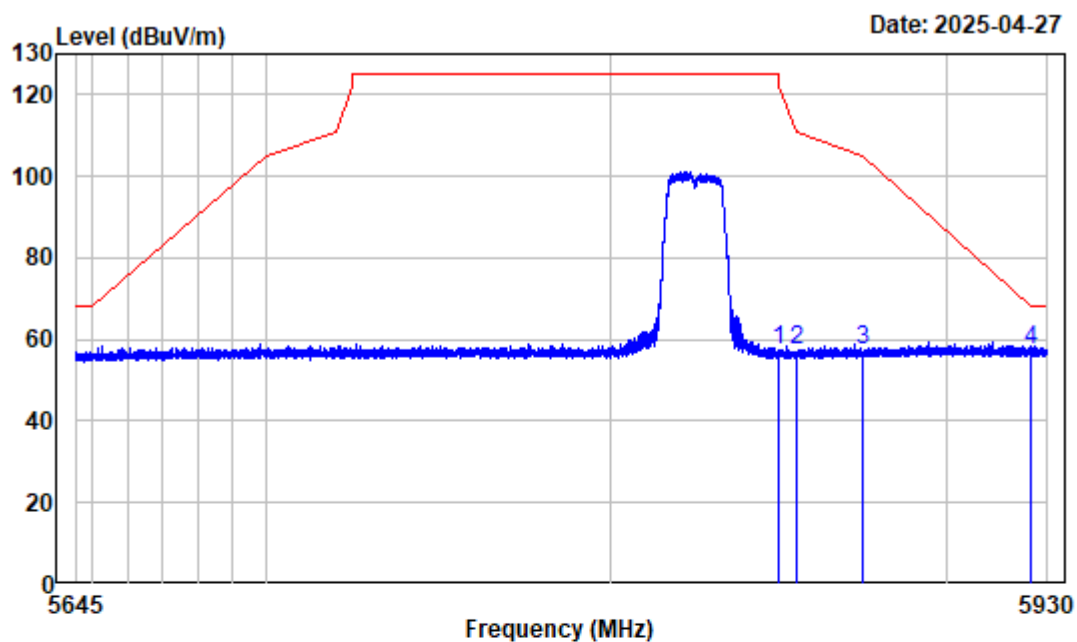

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11a High Channel 5825MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	62.15	57.62	122.20	-64.58	Peak
2	5855.000	-4.48	62.10	57.62	110.80	-53.18	Peak
3	5875.000	-4.28	61.90	57.62	105.20	-47.58	Peak
4	5925.000	-4.43	62.05	57.62	68.20	-10.58	Peak

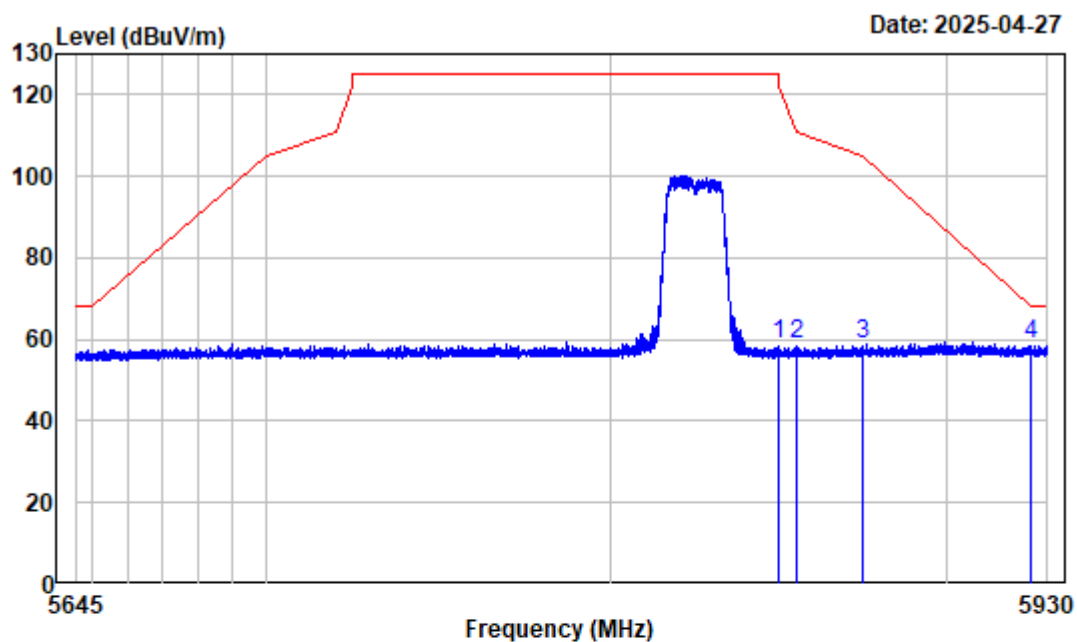

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11a High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.35	58.82	122.20	-63.38	Peak
2	5855.000	-4.48	63.30	58.82	110.80	-51.98	Peak
3	5875.000	-4.28	63.10	58.82	105.20	-46.38	Peak
4	5925.000	-4.43	63.25	58.82	68.20	-9.38	Peak

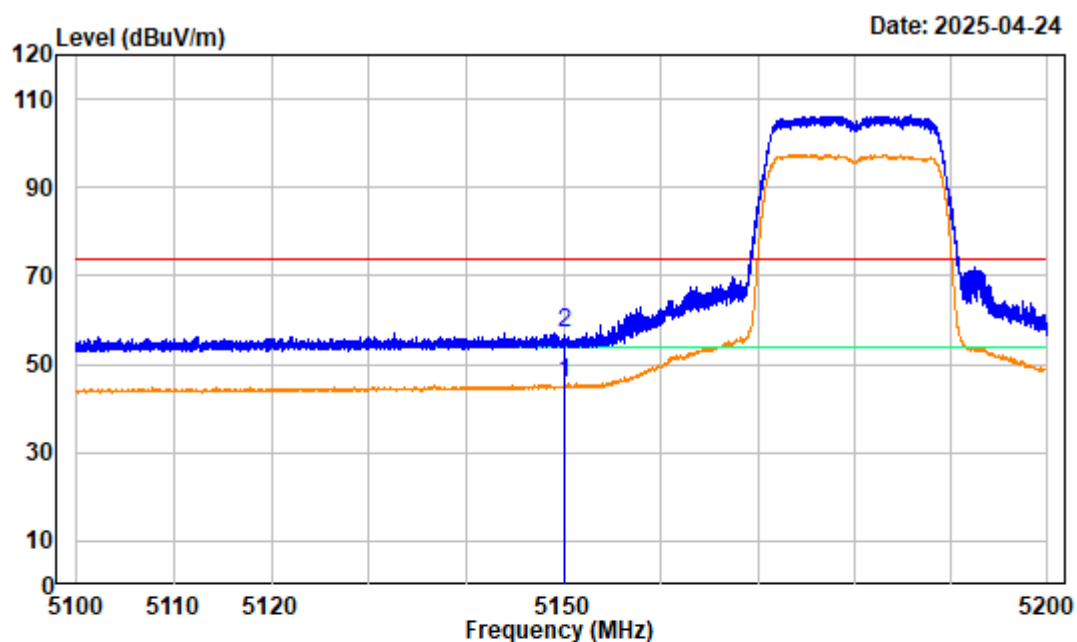Band edge 802.11n20:

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5180MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.61	45.62	54.00	-8.38	average
2	5150.000	-5.99	63.27	57.28	74.00	-16.72	peak

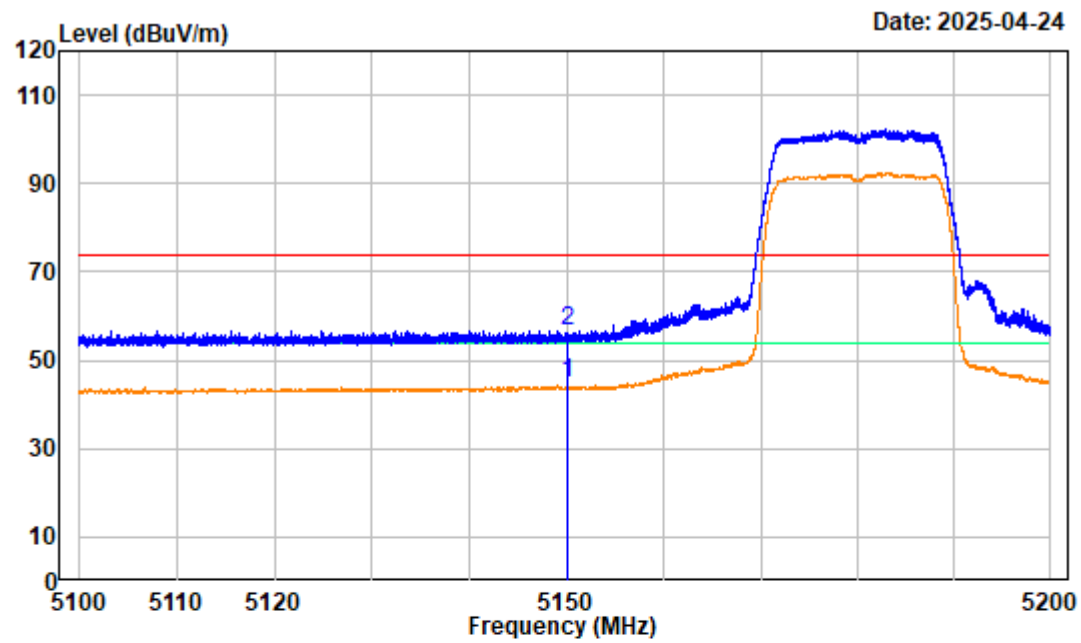


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.83	44.84	54.00	-9.16	average
2	5150.000	-5.99	62.69	56.70	74.00	-17.30	peak

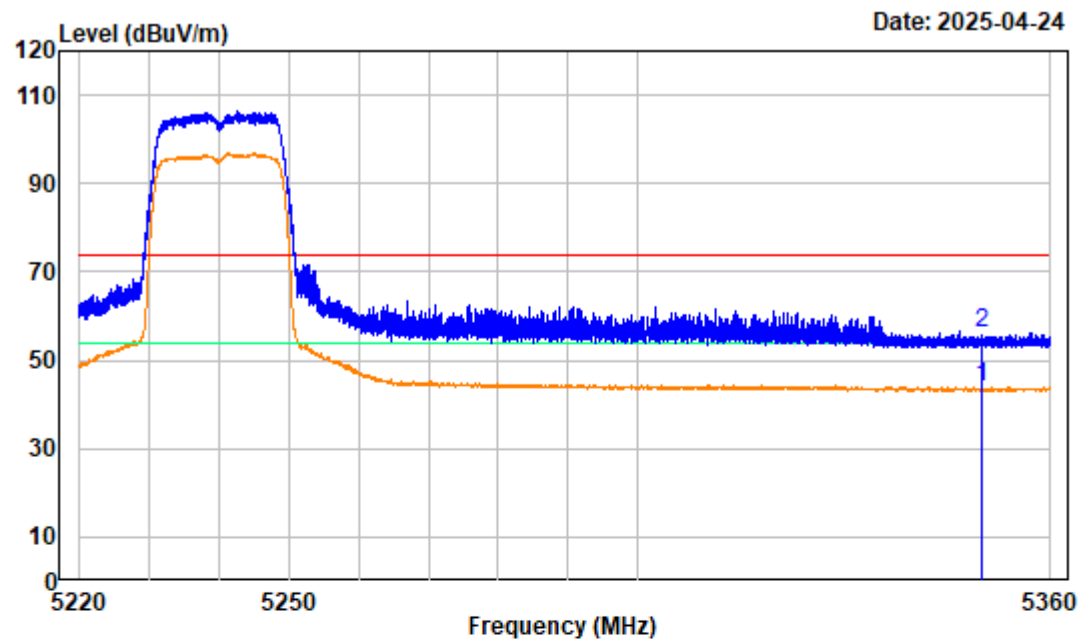

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.91	44.10	54.00	-9.90	average
2	5350.000	-5.81	61.98	56.17	74.00	-17.83	peak

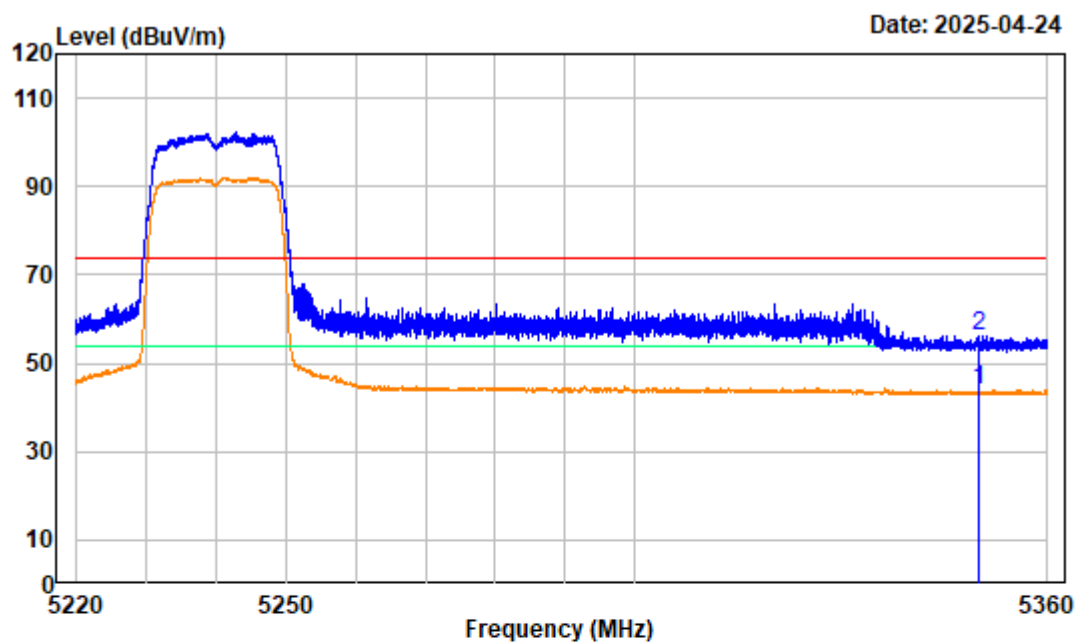

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5240MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.83	44.02	54.00	-9.98	average
2	5350.000	-5.81	62.01	56.20	74.00	-17.80	peak

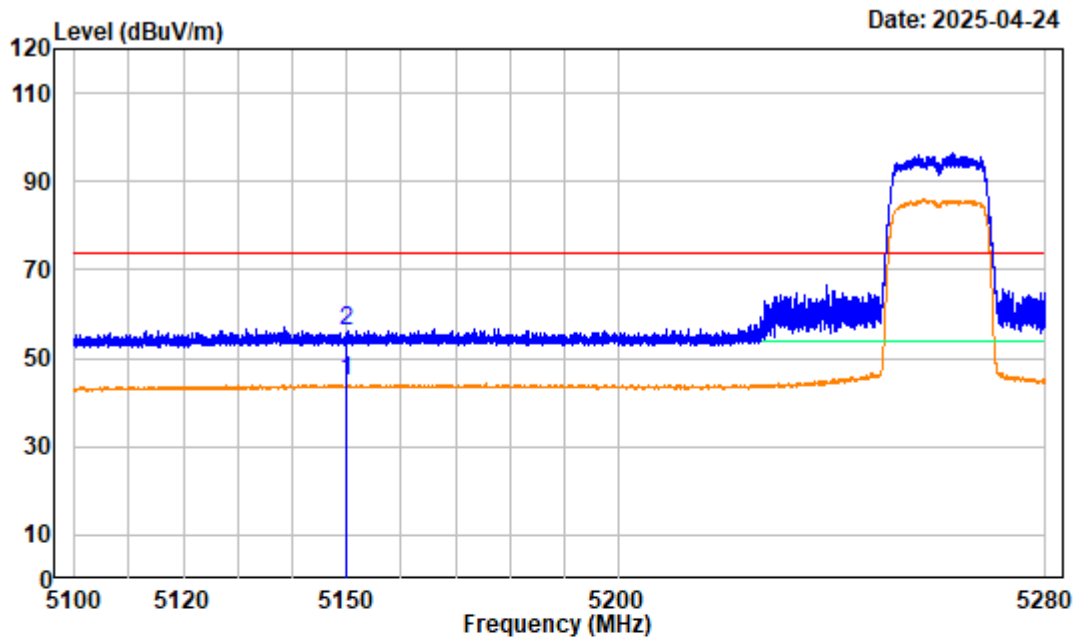


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Low Channel 5260MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.68	44.69	54.00	-9.31	average
2	5150.000	-5.99	62.23	56.24	74.00	-17.76	peak

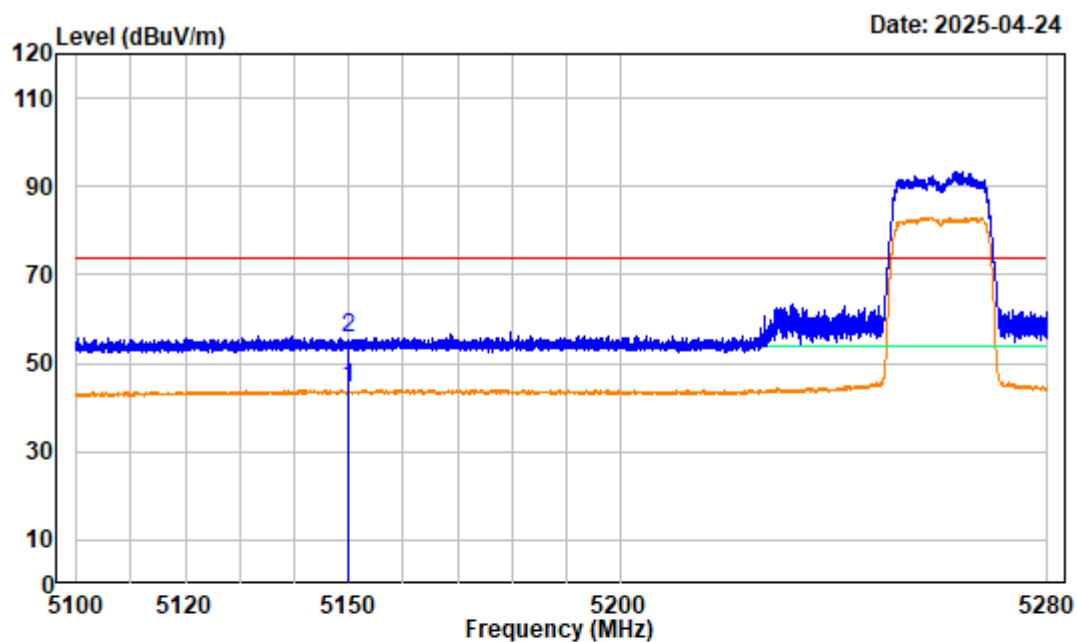

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 Low Channel 5260MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.51	44.52	54.00	-9.48	average
2	5150.000	-5.99	61.53	55.54	74.00	-18.46	peak

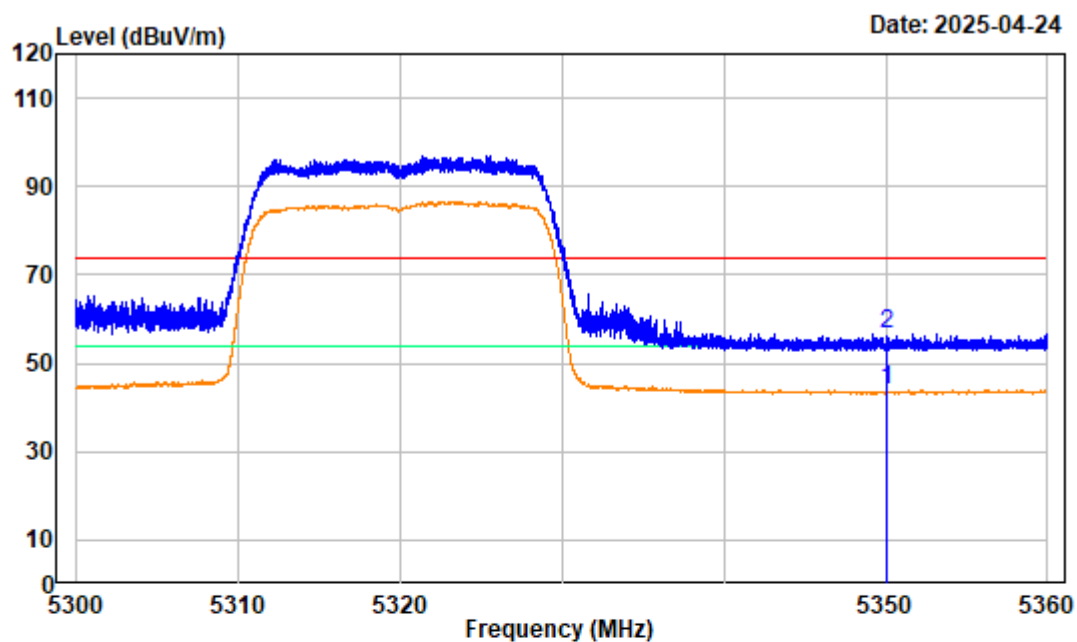

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 High Channel 5320MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.90	44.09	54.00	-9.91	average
2	5350.000	-5.81	62.48	56.67	74.00	-17.33	peak

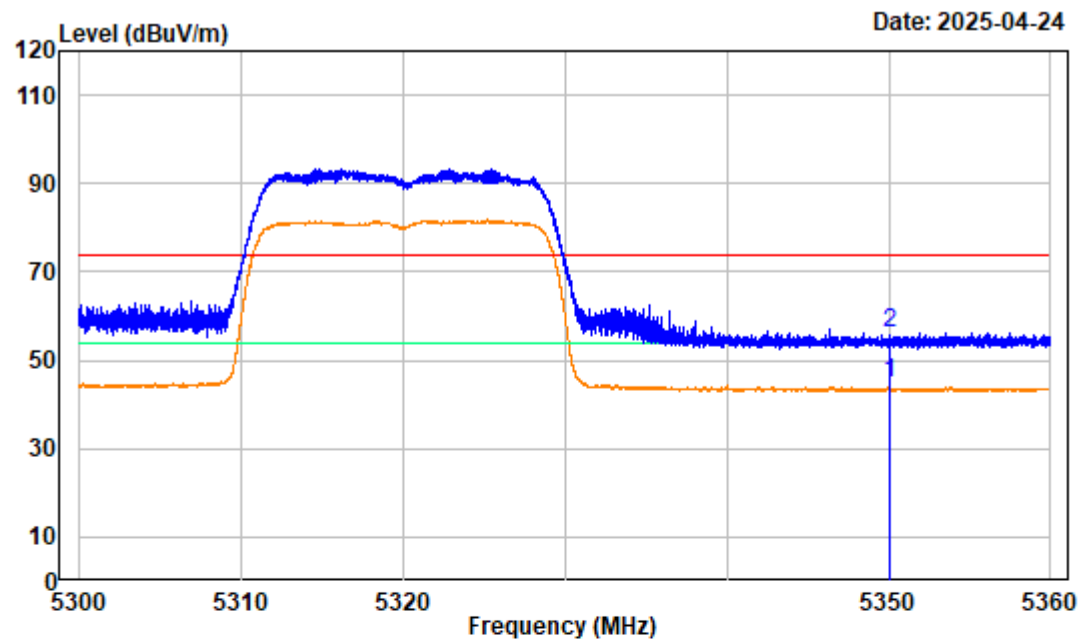

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.45	44.64	54.00	-9.36	average
2	5350.000	-5.81	62.03	56.22	74.00	-17.78	peak

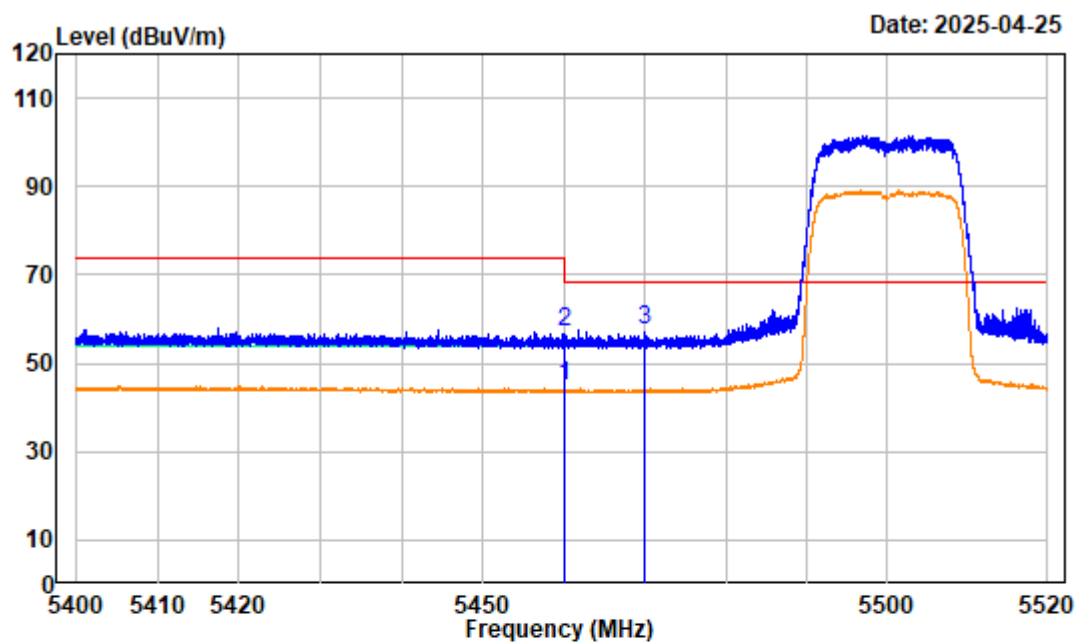

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5500MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.21	44.62	54.00	-9.38	average
2	5460.000	-5.58	62.57	56.99	74.00	-17.01	peak
3	5470.000	-5.61	63.10	57.49	68.20	-10.71	peak

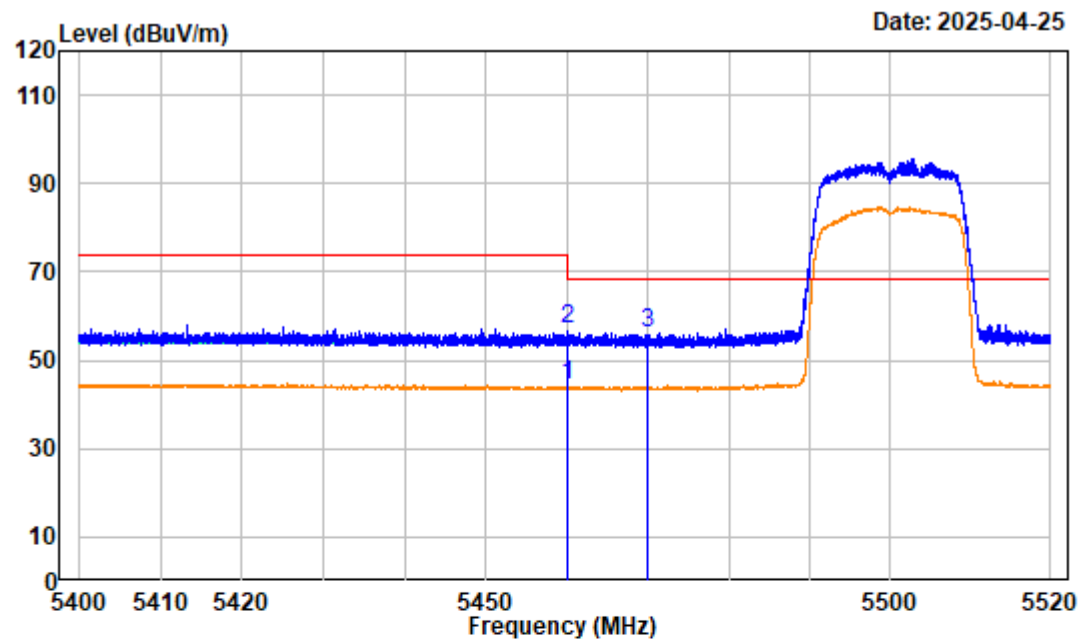


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.03	44.44	54.00	-9.56	average
2	5460.000	-5.58	62.41	56.83	74.00	-17.17	peak
3	5470.000	-5.61	61.92	56.31	68.20	-11.89	peak

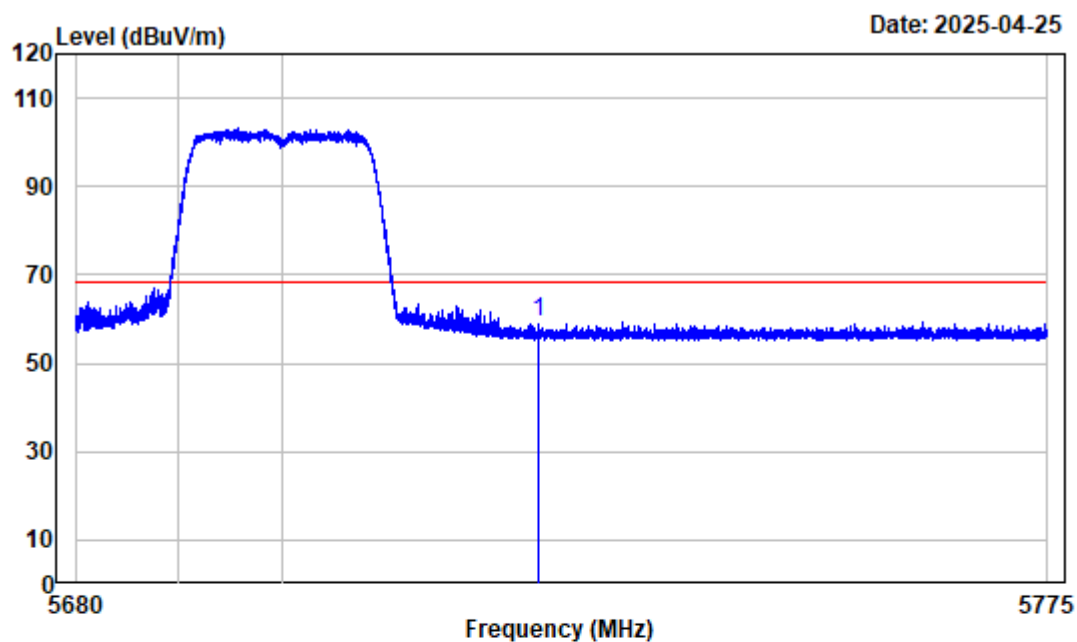


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.69	59.23	68.20	-8.97	peak

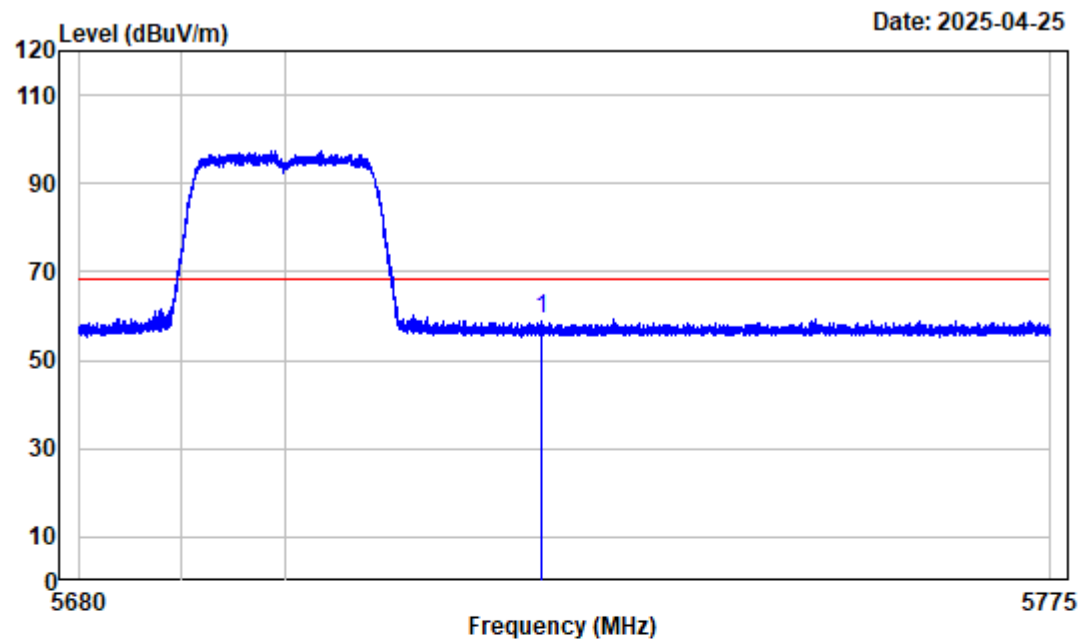

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n20 High Channel 5700MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.69	59.23	68.20	-8.97	peak

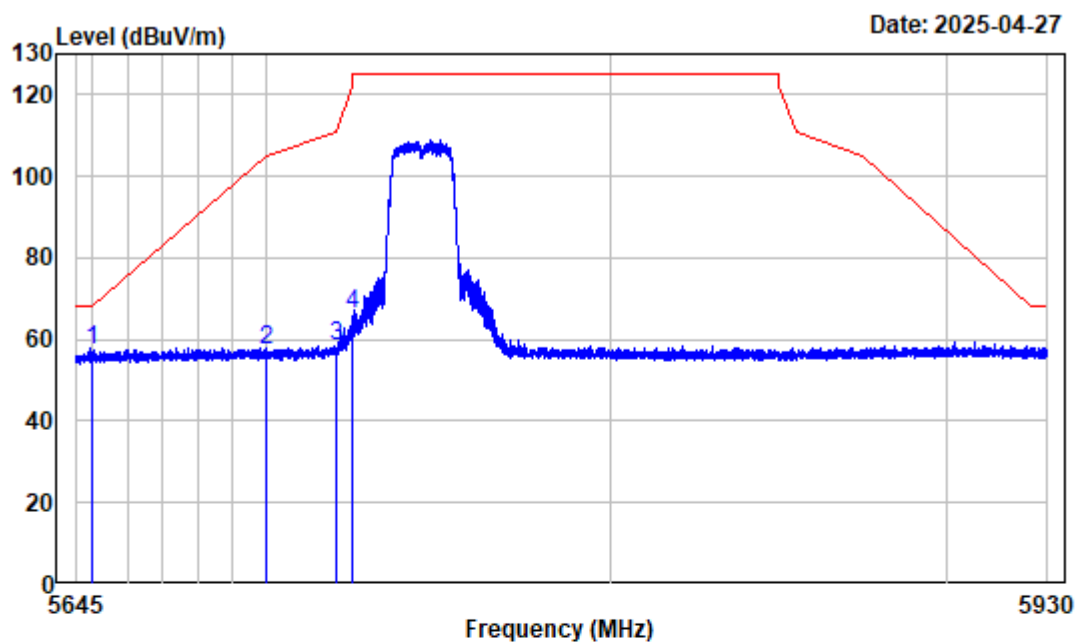

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	62.25	57.41	68.20	-10.79	Peak
2	5700.000	-4.41	61.82	57.41	105.20	-47.79	Peak
3	5720.000	-4.44	62.85	58.41	110.80	-52.39	Peak
4	5725.000	-4.46	70.87	66.41	122.20	-55.79	Peak

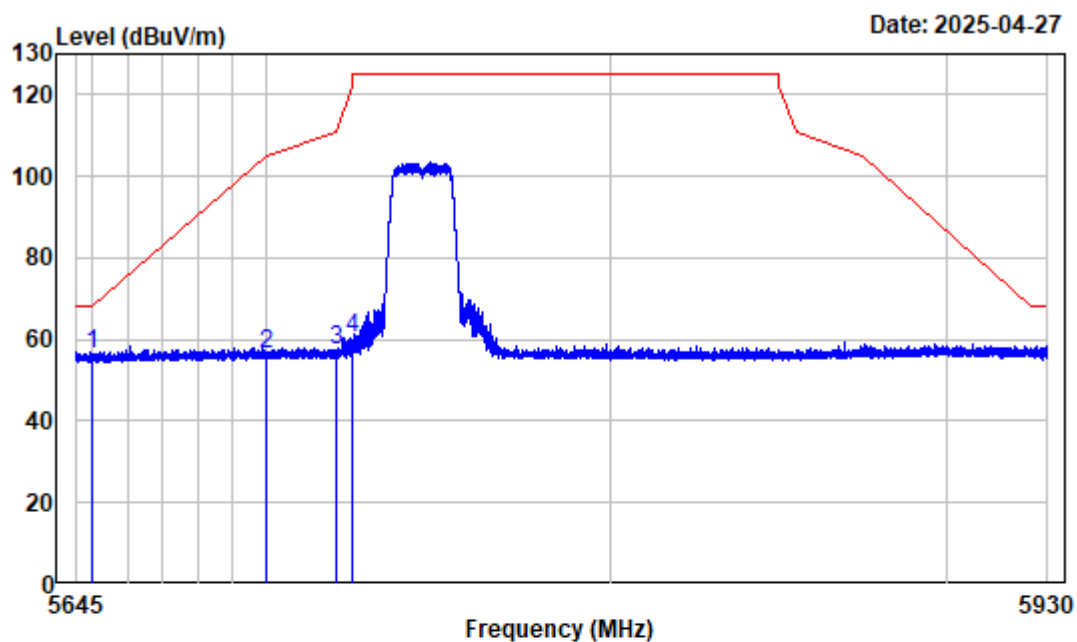

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n20 Low Channel 5745MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.30	56.46	68.20	-11.74	Peak
2	5700.000	-4.41	60.87	56.46	105.20	-48.74	Peak
3	5720.000	-4.44	61.90	57.46	110.80	-53.34	Peak
4	5725.000	-4.46	64.92	60.46	122.20	-61.74	Peak

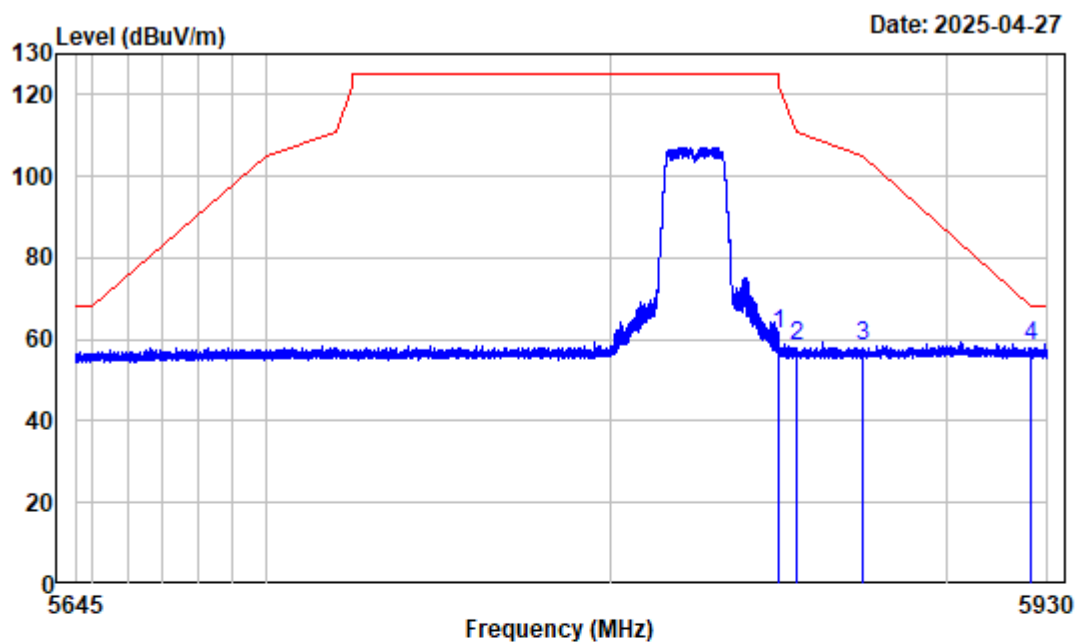

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	66.06	61.53	122.20	-60.67	Peak
2	5855.000	-4.48	63.01	58.53	110.80	-52.27	Peak
3	5875.000	-4.28	62.81	58.53	105.20	-46.67	Peak
4	5925.000	-4.43	62.96	58.53	68.20	-9.67	Peak

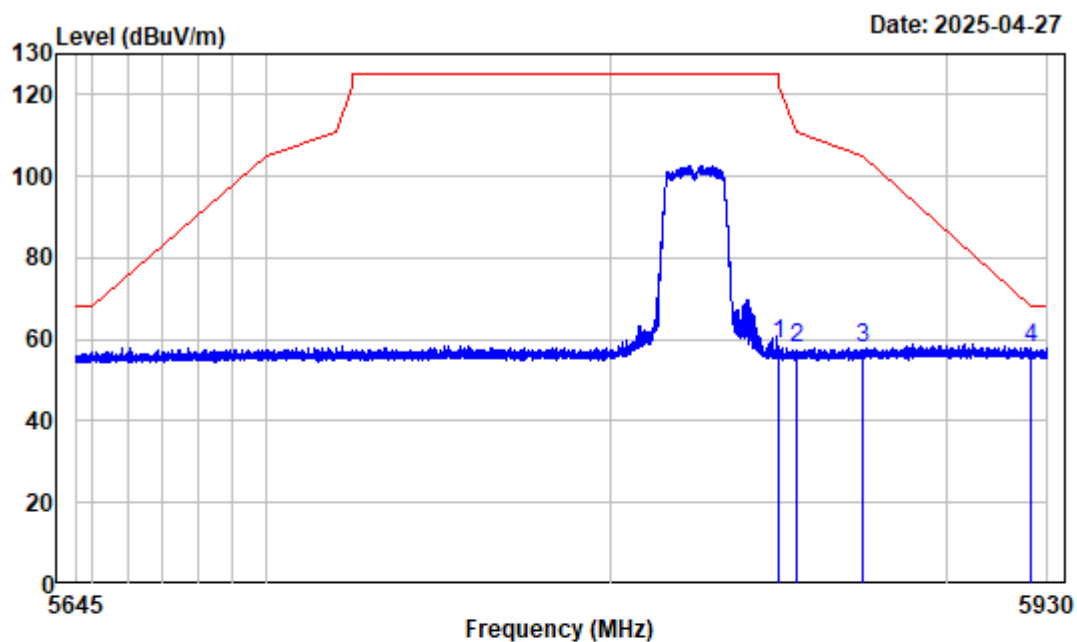

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n20 High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.34	58.81	122.20	-63.39	Peak
2	5855.000	-4.48	62.29	57.81	110.80	-52.99	Peak
3	5875.000	-4.28	62.09	57.81	105.20	-47.39	Peak
4	5925.000	-4.43	62.24	57.81	68.20	-10.39	Peak

Band edge 802.11n40:

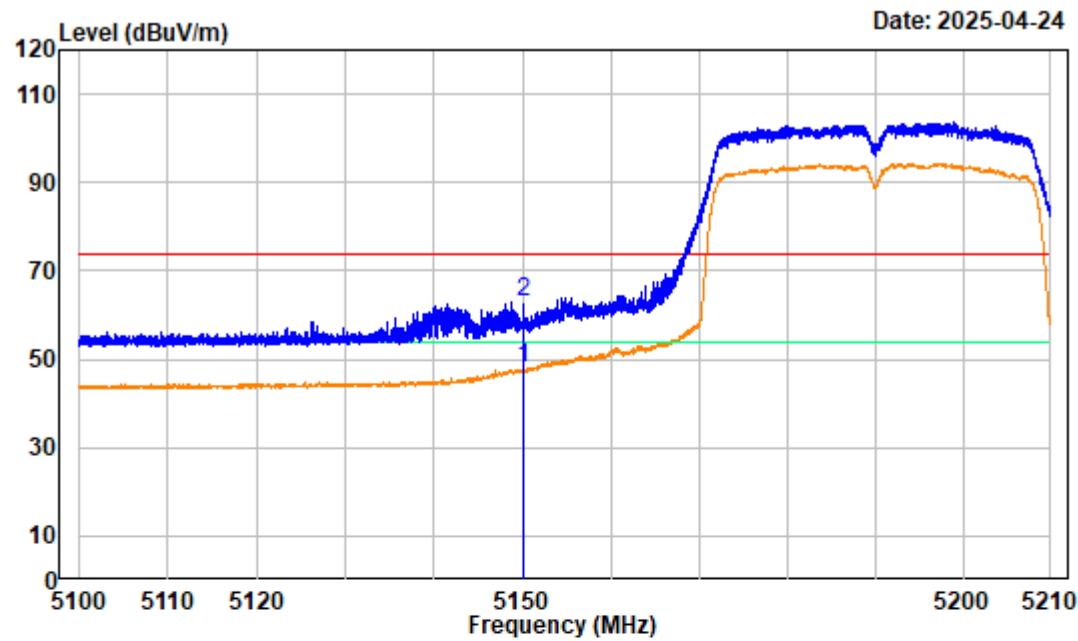


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	54.14	48.15	54.00	-5.85 average
2	5150.000	-5.99	68.80	62.81	74.00	-11.19 peak

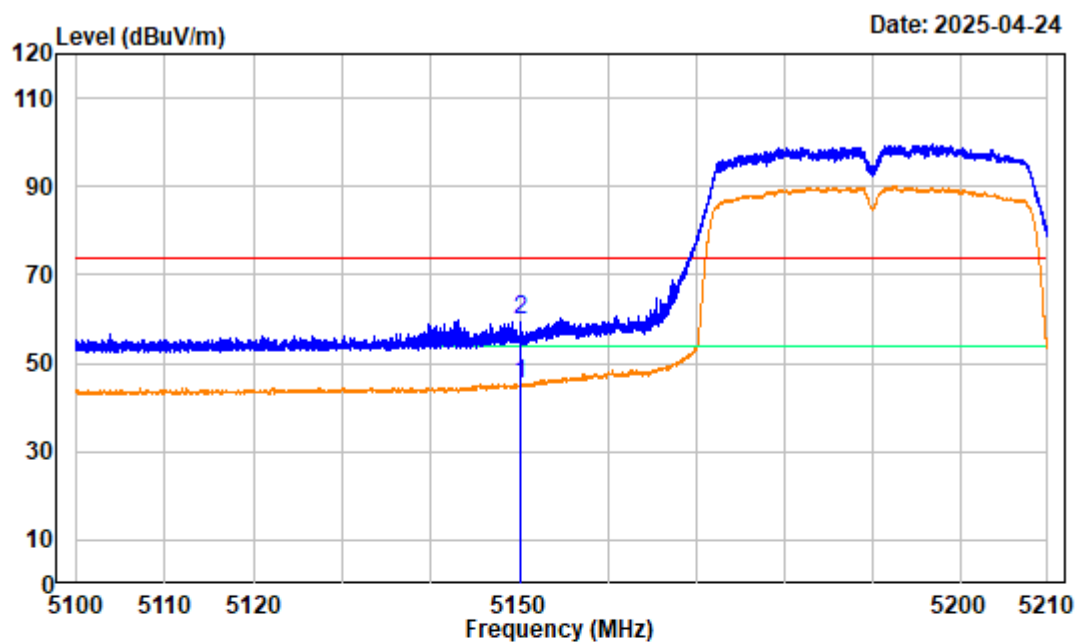


Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n40 Low Channel 5190MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.09	45.10	54.00	-8.90	average
2	5150.000	-5.99	65.55	59.56	74.00	-14.44	peak

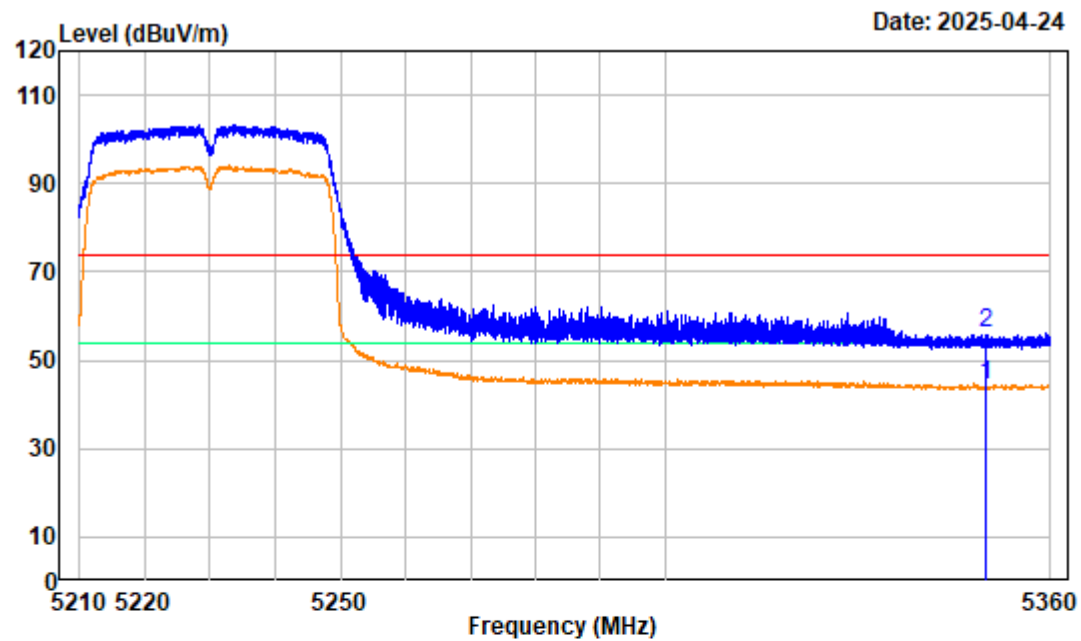


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.05	44.24	54.00	-9.76	average
2	5350.000	-5.81	62.09	56.28	74.00	-17.72	peak

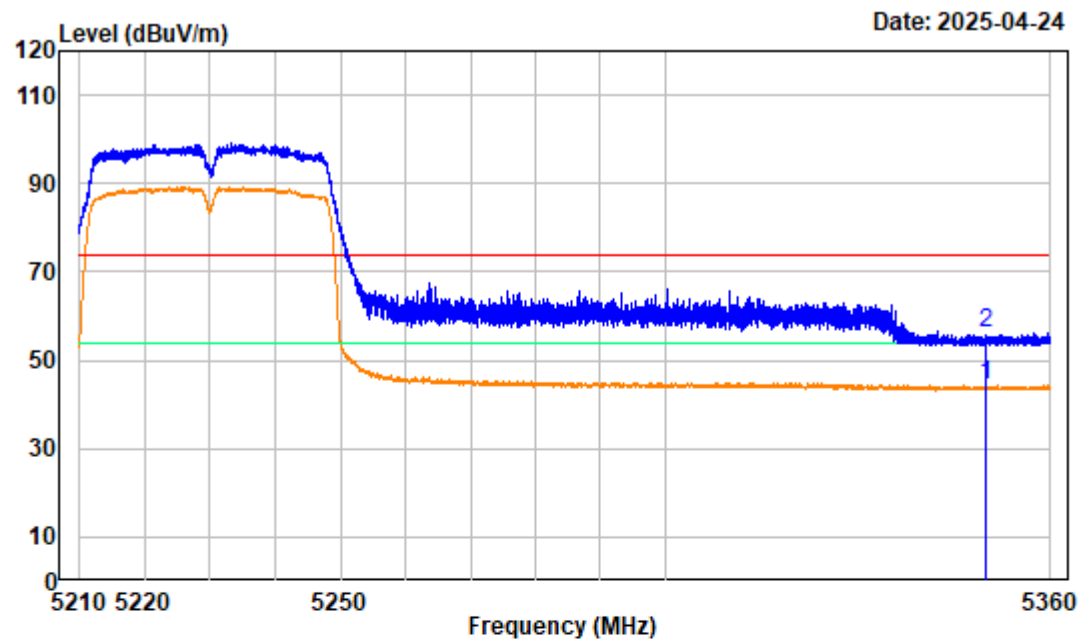


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	dB	
1	5350.000	-5.81	50.07	44.26	54.00	-9.74	average
2	5350.000	-5.81	61.90	56.09	74.00	-17.91	peak

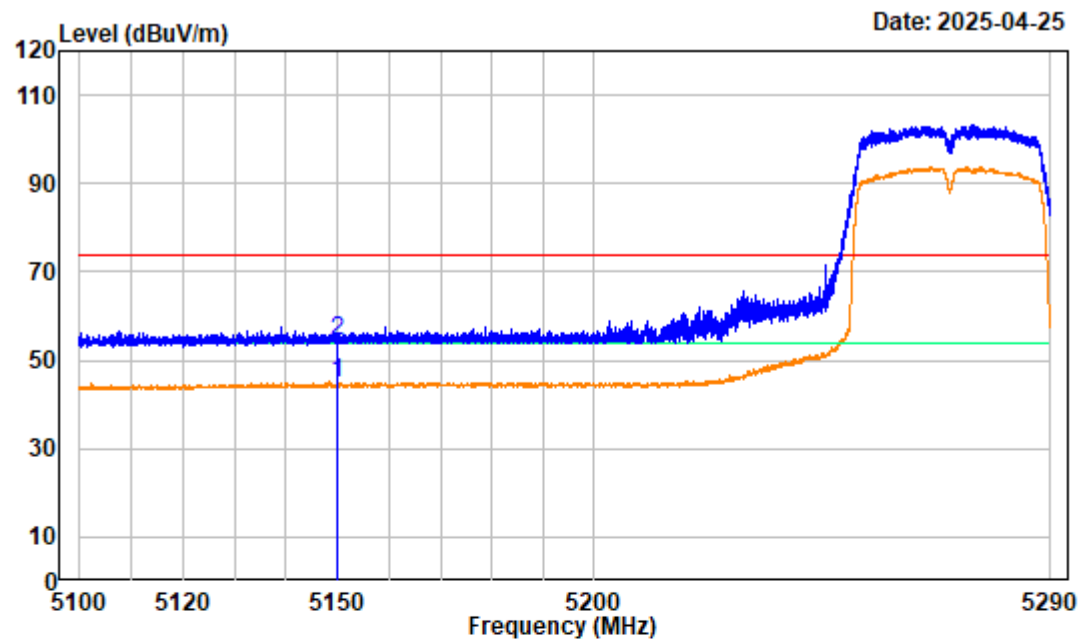


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.90	44.91	54.00	-9.09	Average
2	5150.000	-5.99	60.48	54.49	74.00	-19.51	Peak

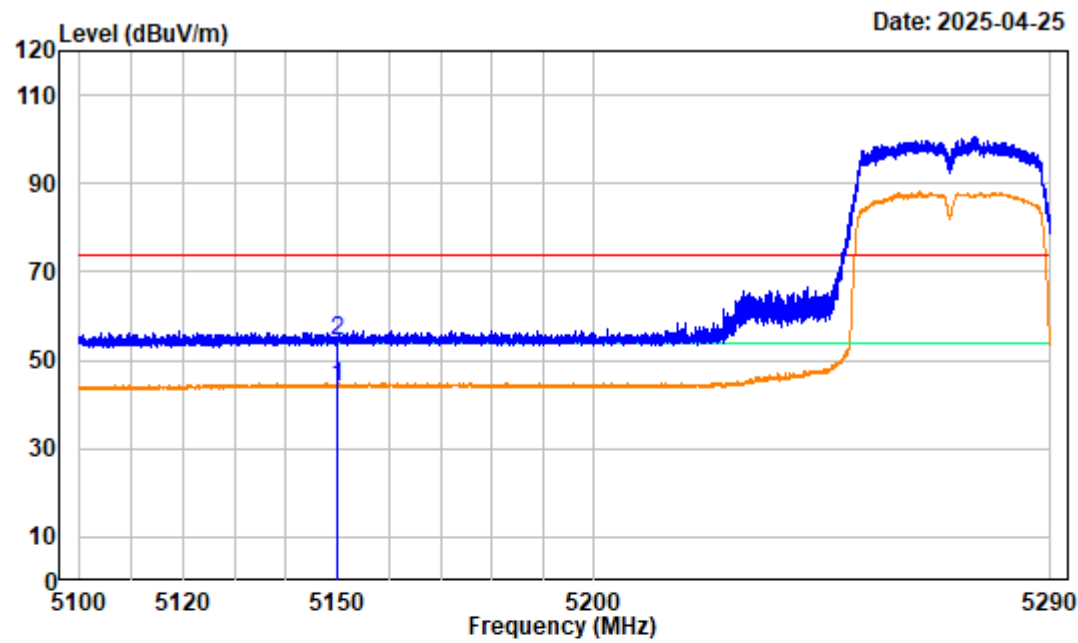


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	49.89	43.90	54.00	-10.10	Average
2	5150.000	-5.99	60.27	54.28	74.00	-19.72	Peak

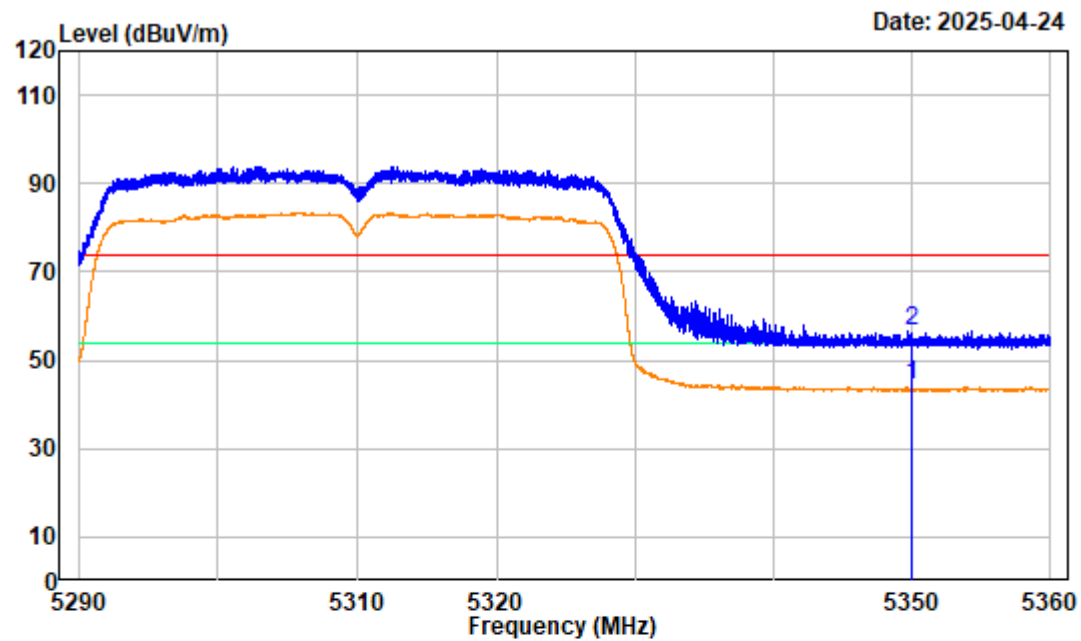


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5310MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.11	44.30	54.00	-9.70	average
2	5350.000	-5.81	62.20	56.39	74.00	-17.61	peak

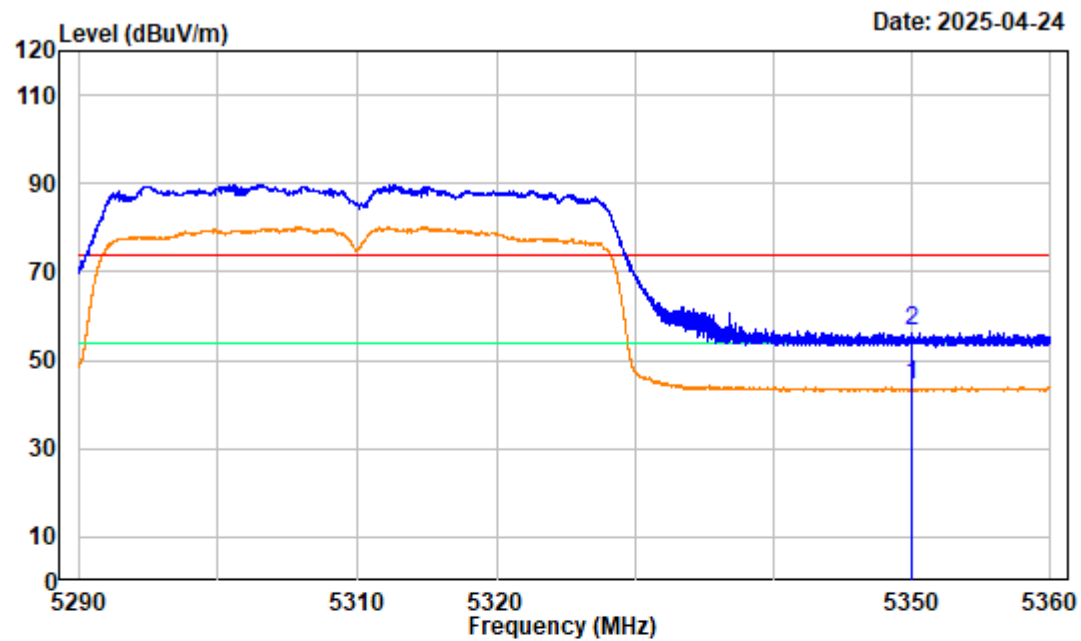


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5310MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.96	44.15	54.00	-9.85	average
2	5350.000	-5.81	62.41	56.60	74.00	-17.40	peak

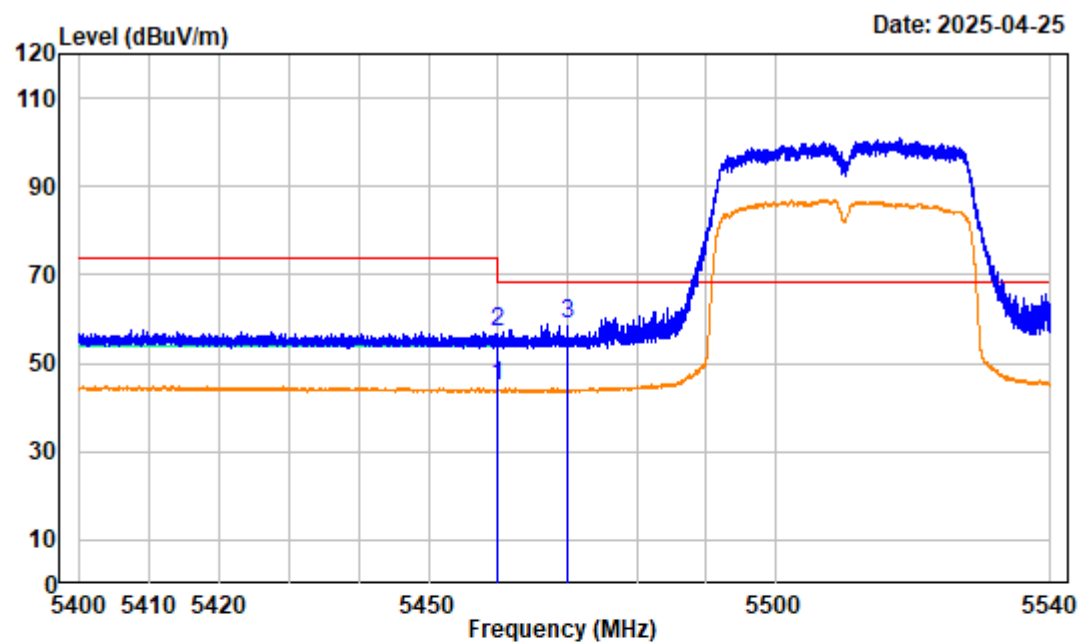


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.21	44.62	54.00	-9.38	average
2	5460.000	-5.60	62.49	56.89	74.00	-17.11	peak
3	5470.000	-5.61	64.38	58.77	68.20	-9.43	peak

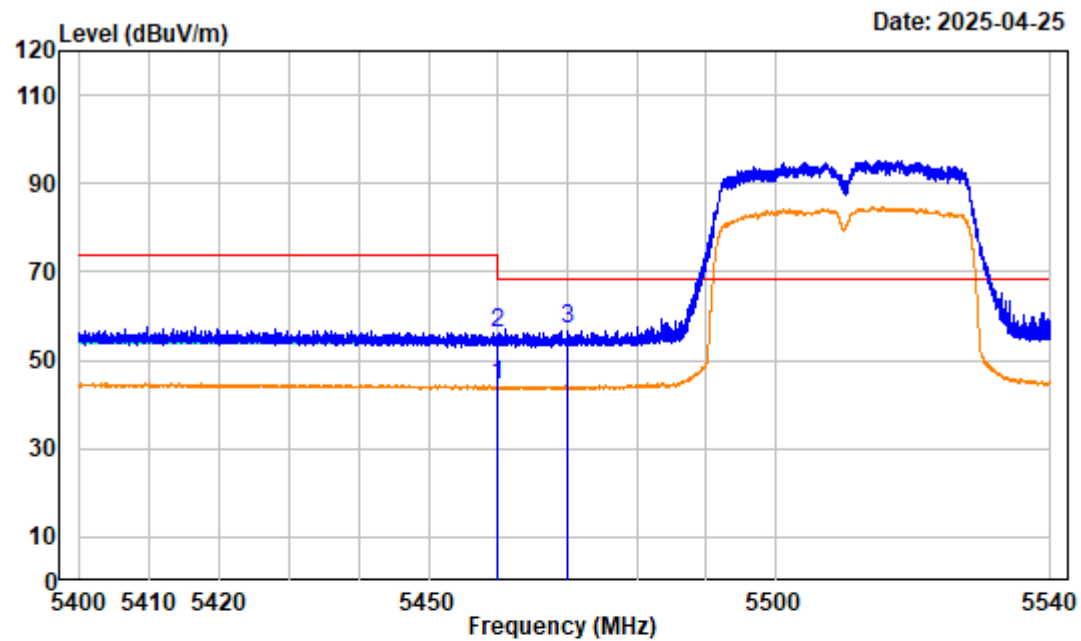


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.02	44.43	54.00	-9.57	average
2	5460.000	-5.59	61.96	56.37	74.00	-17.63	peak
3	5470.000	-5.61	62.49	56.88	68.20	-11.32	peak

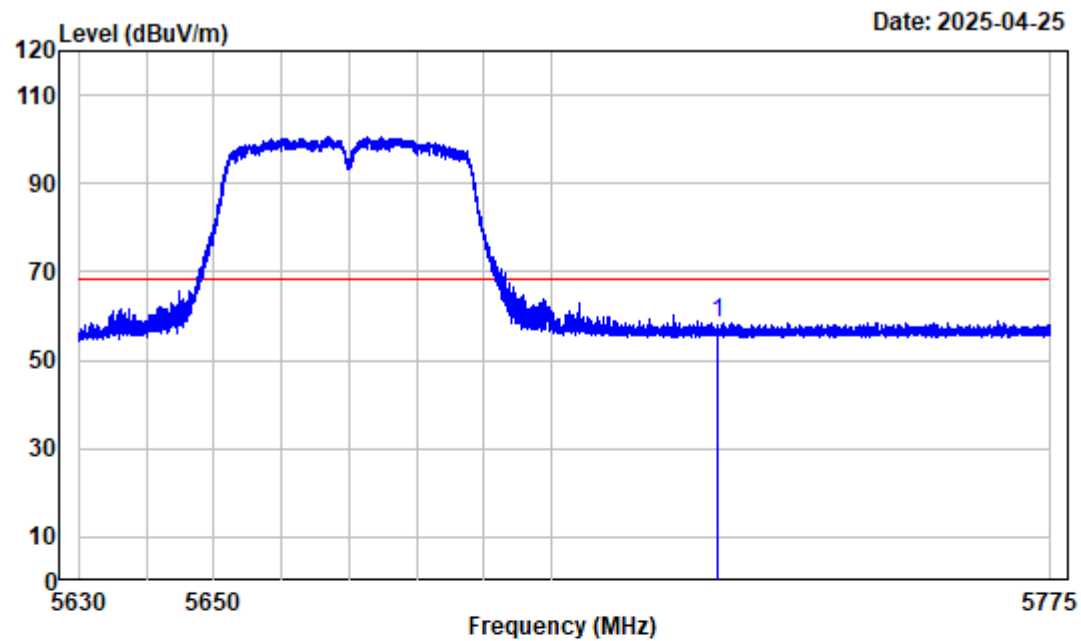


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	62.76	58.30	68.20	-9.90	peak

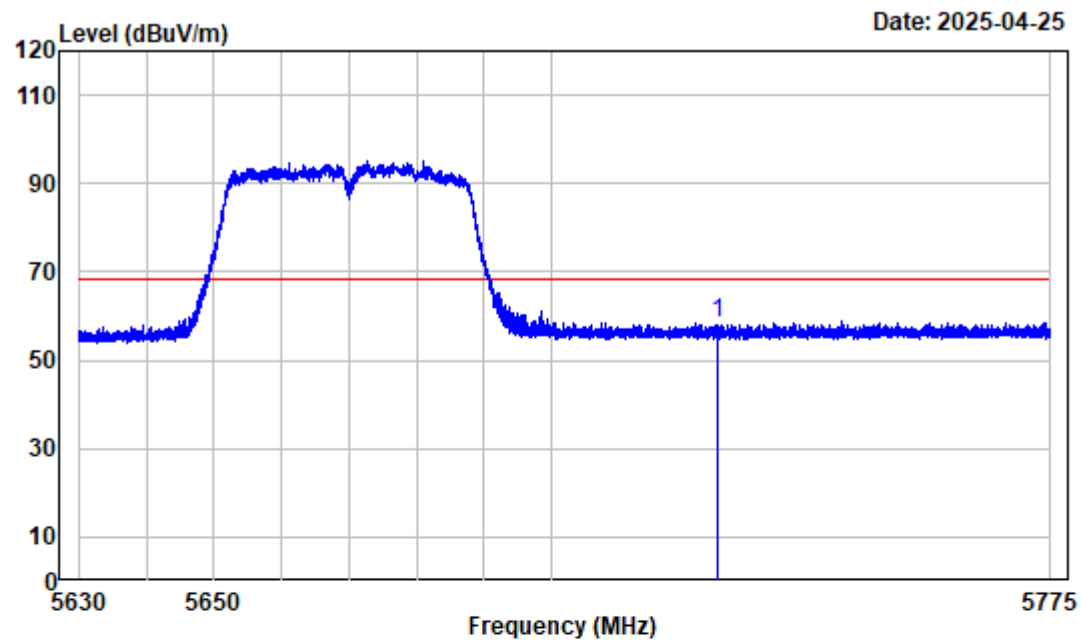


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11n40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	62.76	58.30	68.20	-9.90	peak

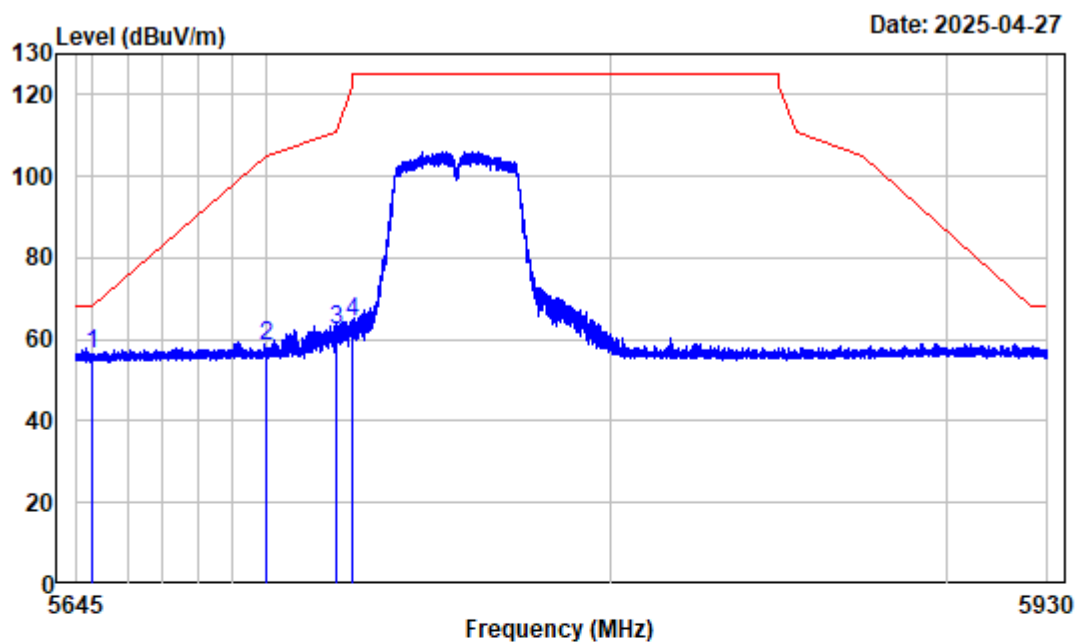

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n40 Low Channel 5755MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.09	56.25	68.20	-11.95	Peak
2	5700.000	-4.41	62.66	58.25	105.20	-46.95	Peak
3	5720.000	-4.44	66.69	62.25	110.80	-48.55	Peak
4	5725.000	-4.46	68.71	64.25	122.20	-57.95	Peak

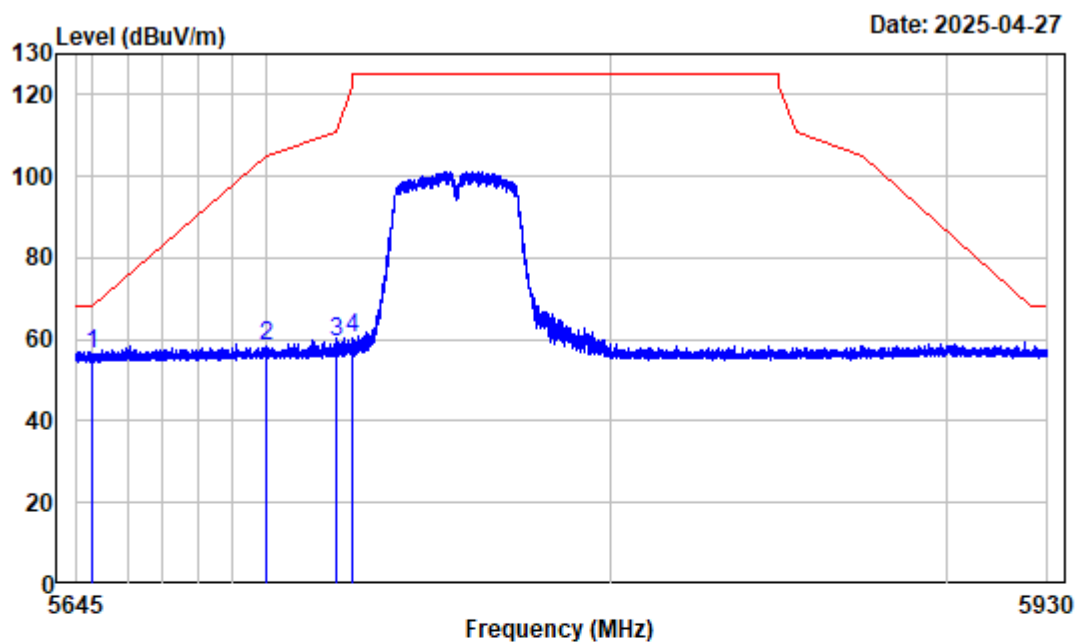

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11n40 Low Channel 5755MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.27	56.43	68.20	-11.77	Peak
2	5700.000	-4.41	62.84	58.43	105.20	-46.77	Peak
3	5720.000	-4.44	63.87	59.43	110.80	-51.37	Peak
4	5725.000	-4.46	64.89	60.43	122.20	-61.77	Peak

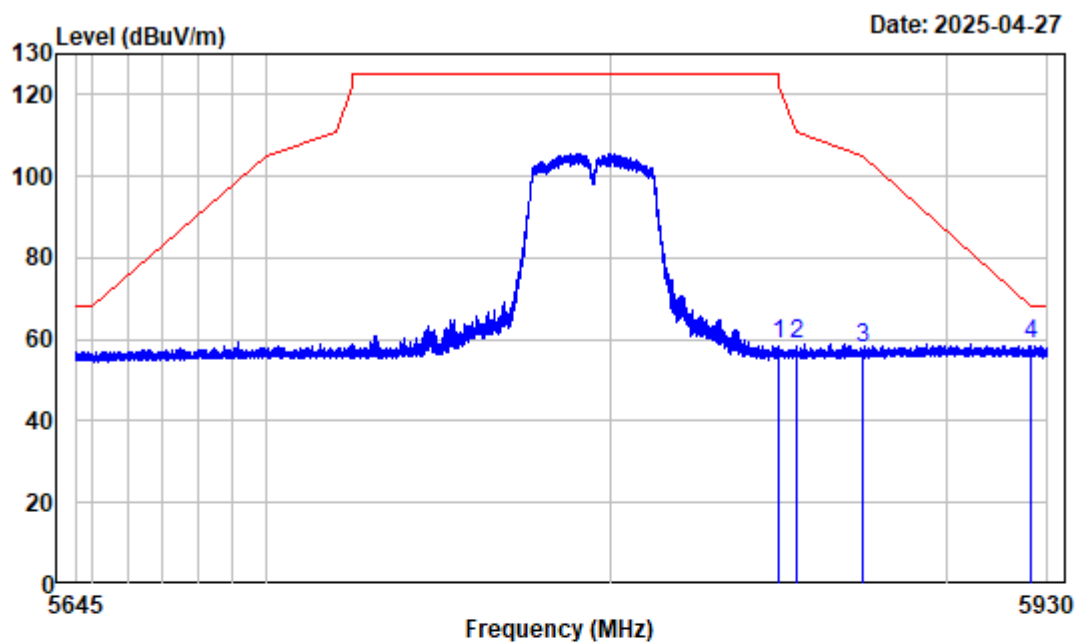

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester: Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n40 High Channel 5795MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.34	58.81	122.20	-63.39	Peak
2	5855.000	-4.48	63.29	58.81	110.80	-51.99	Peak
3	5875.000	-4.28	62.09	57.81	105.20	-47.39	Peak
4	5925.000	-4.43	63.24	58.81	68.20	-9.39	Peak

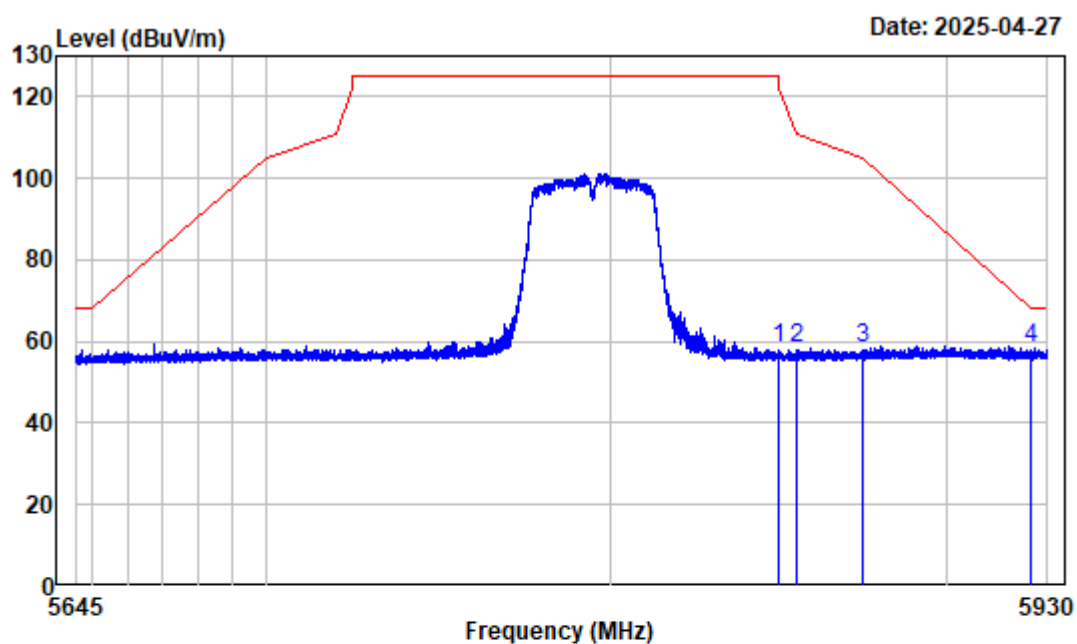

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11n40 High Channel 5795MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	62.91	58.38	122.20	-63.82	Peak
2	5855.000	-4.48	62.86	58.38	110.80	-52.42	Peak
3	5875.000	-4.28	62.66	58.38	105.20	-46.82	Peak
4	5925.000	-4.43	62.81	58.38	68.20	-9.82	Peak

Band edge 802.11ac20:

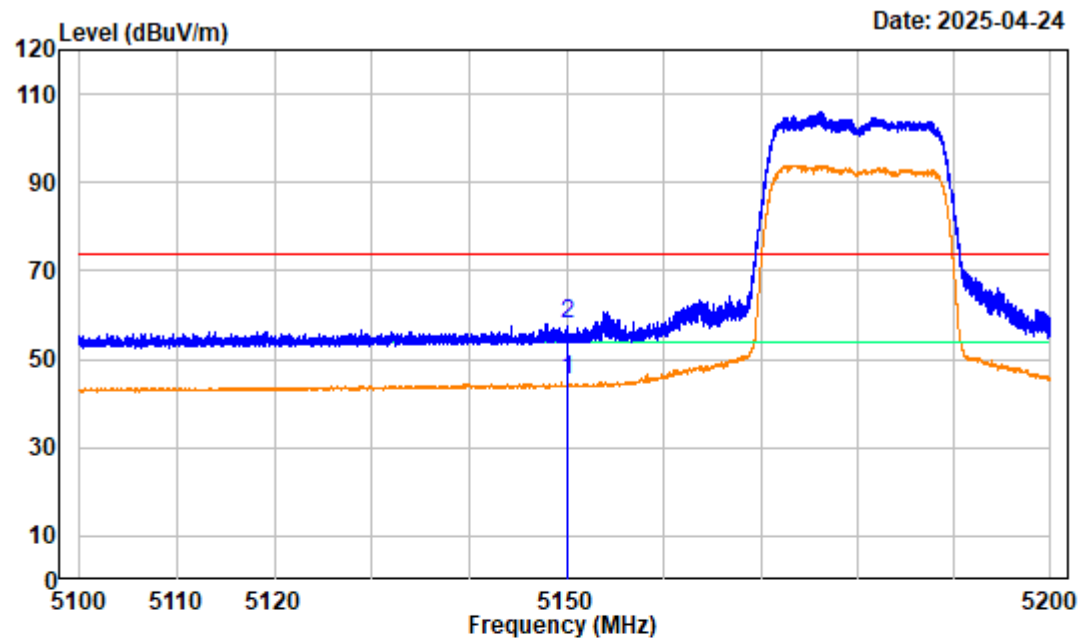

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5180MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.09	45.10	54.00	-8.90 average
2	5150.000	-5.99	64.00	58.01	74.00	-15.99 peak

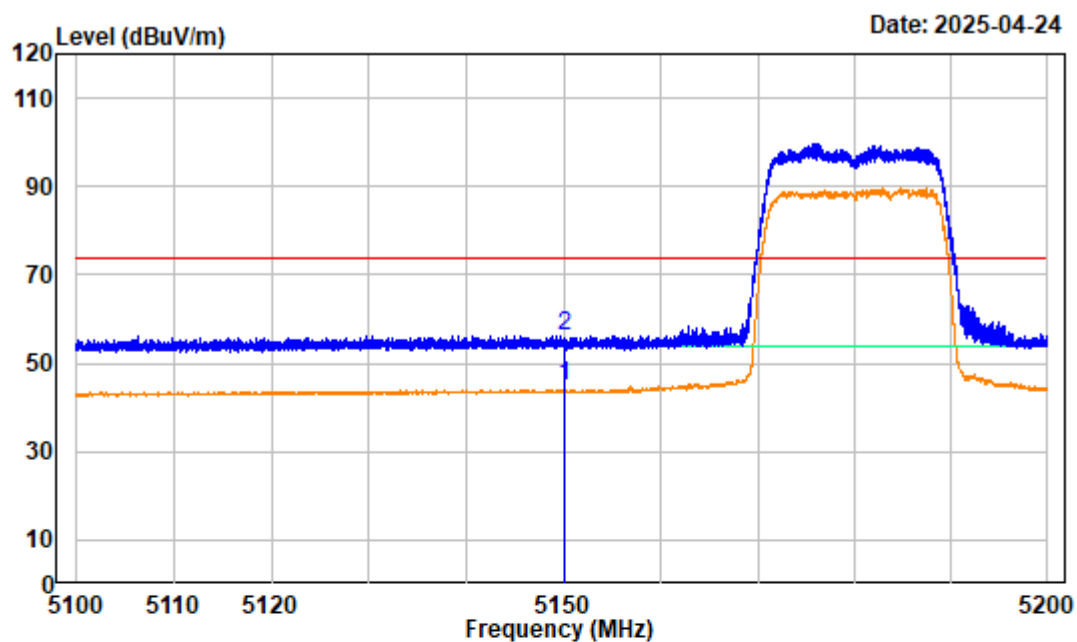

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5180MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.88	44.89	54.00	-9.11	average
2	5150.000	-5.99	62.30	56.31	74.00	-17.69	peak

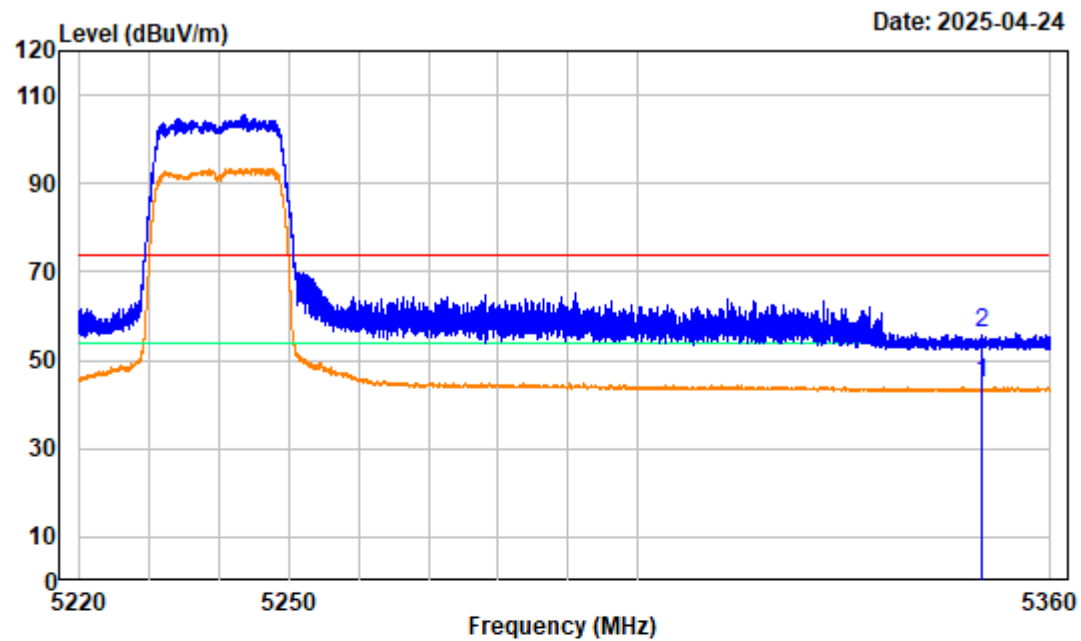


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.58	44.77	54.00	-9.23	average
2	5350.000	-5.81	61.85	56.04	74.00	-17.96	peak

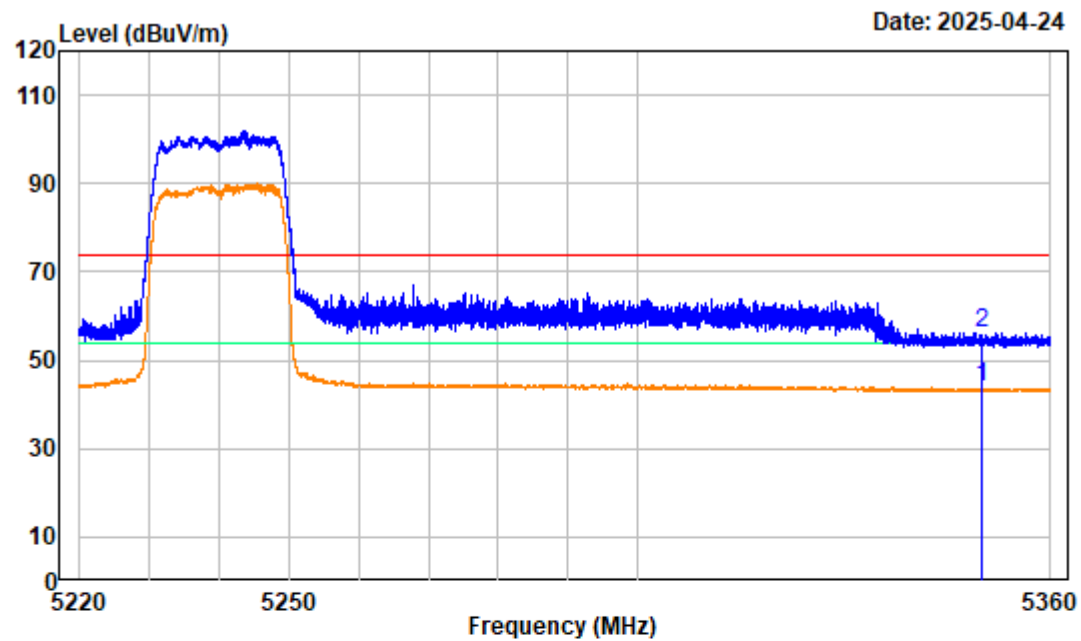


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5240MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.82	44.01	54.00	-9.99	average
2	5350.000	-5.81	62.04	56.23	74.00	-17.77	peak

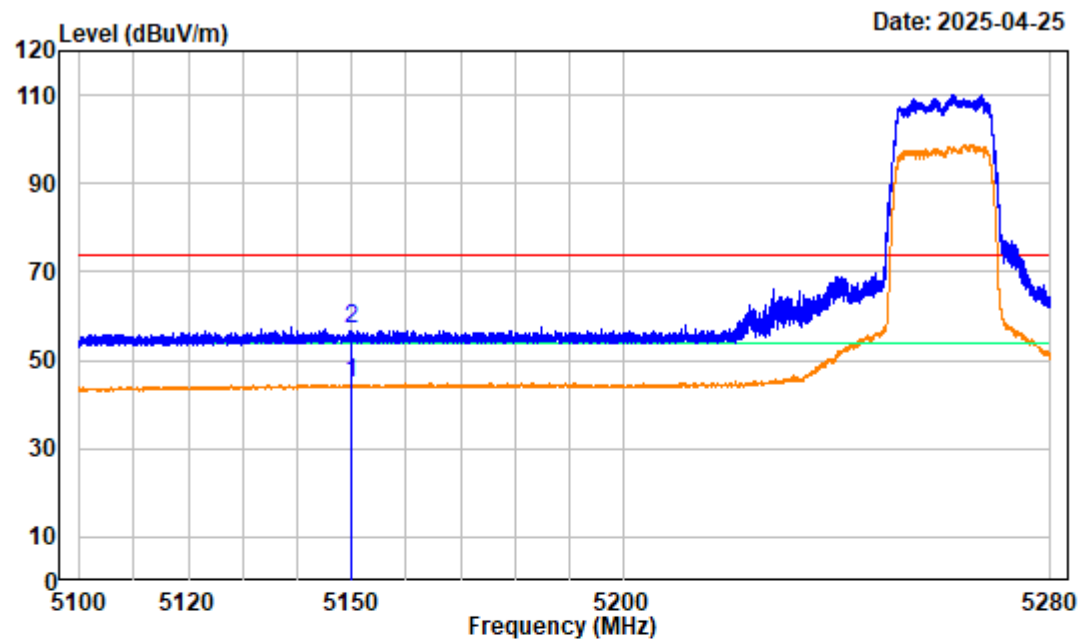


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.67	44.68	54.00	-9.32	average
2	5150.000	-5.99	62.89	56.90	74.00	-17.10	peak

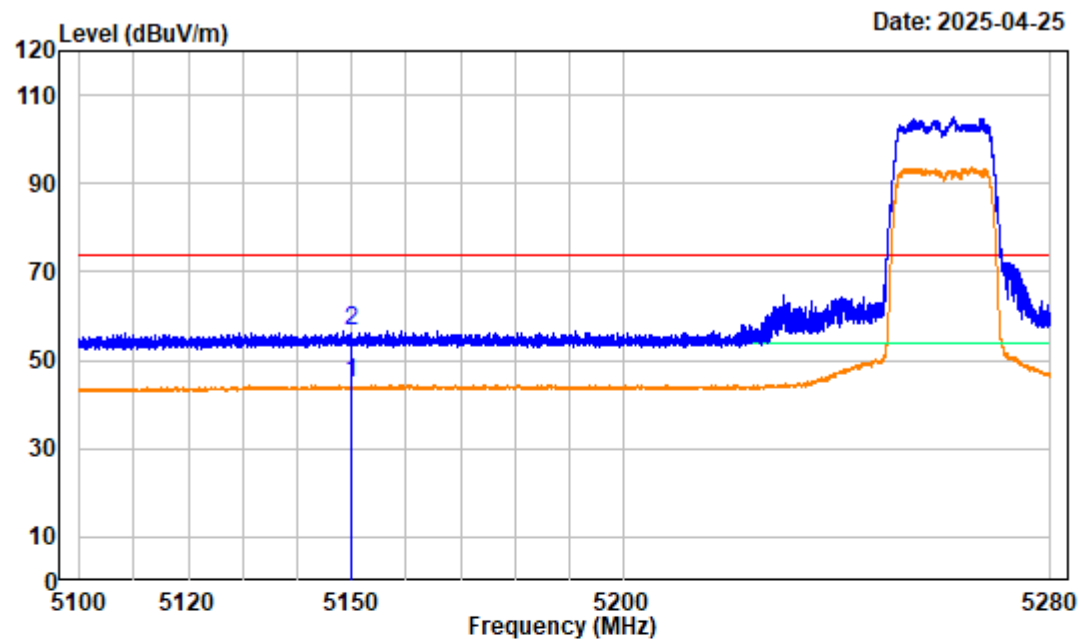


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5260MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.90	44.91	54.00	-9.09 average
2	5150.000	-5.99	62.41	56.42	74.00	-17.58 peak

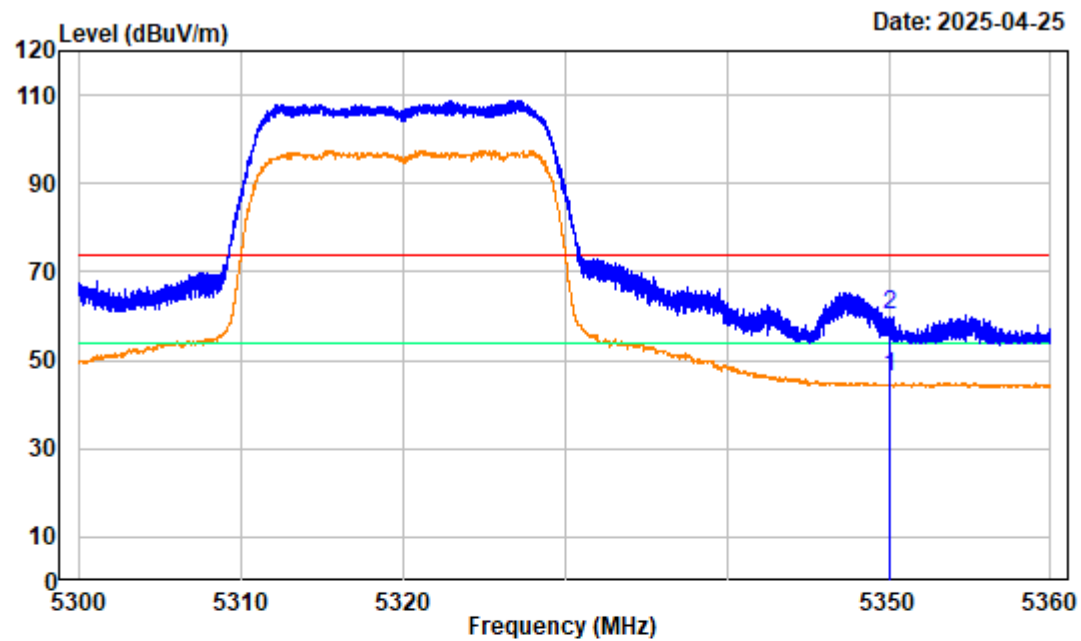


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	51.79	45.98	54.00	-8.02	average
2	5350.000	-5.81	66.26	60.45	74.00	-13.55	peak

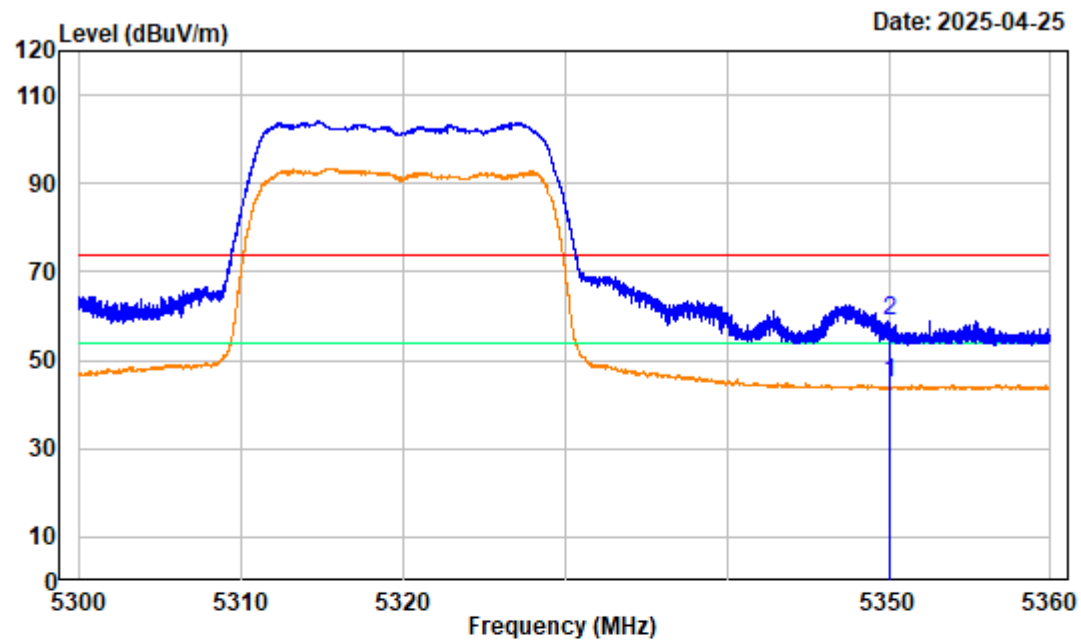

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 High Channel 5320MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.52	44.71	54.00	-9.29 average
2	5350.000	-5.81	64.88	59.07	74.00	-14.93 peak

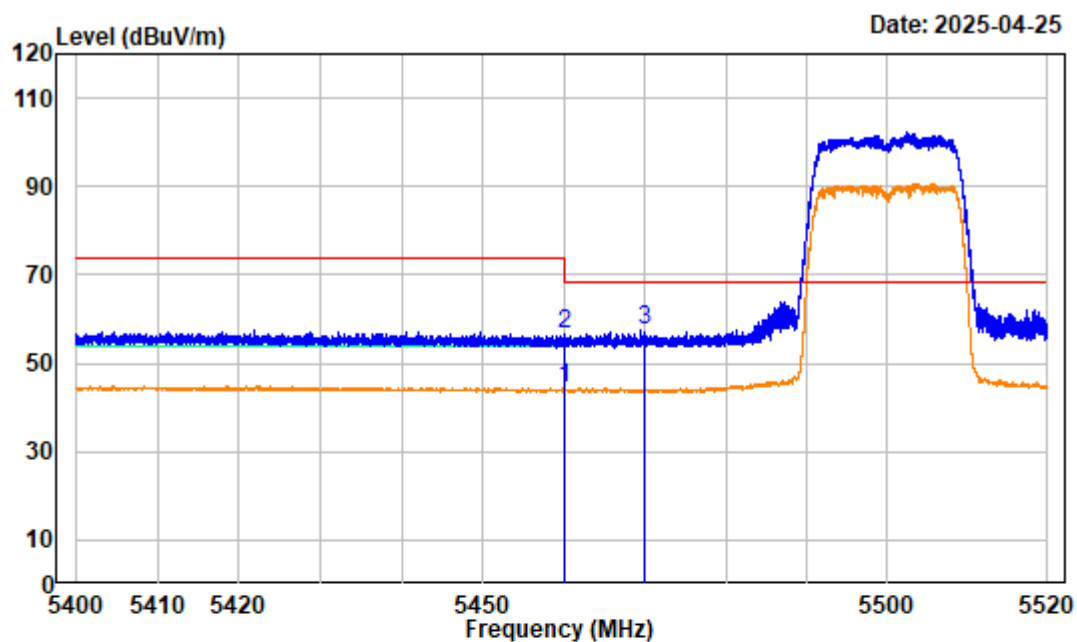

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5500MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	49.78	44.19	54.00	-9.81	average
2	5460.000	-5.59	62.29	56.70	74.00	-17.30	peak
3	5470.000	-5.61	62.97	57.36	68.20	-10.84	peak

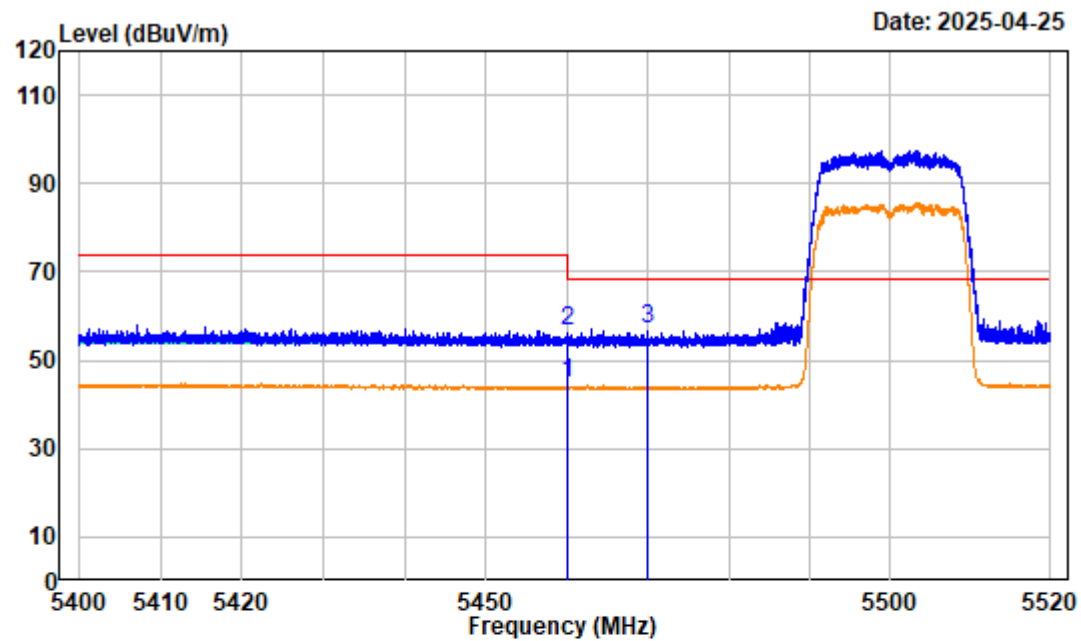


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac20 Low Channel 5500MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.36	44.77	54.00	-9.23	average
2	5460.000	-5.58	62.35	56.77	74.00	-17.23	peak
3	5470.000	-5.61	62.71	57.10	68.20	-11.10	peak

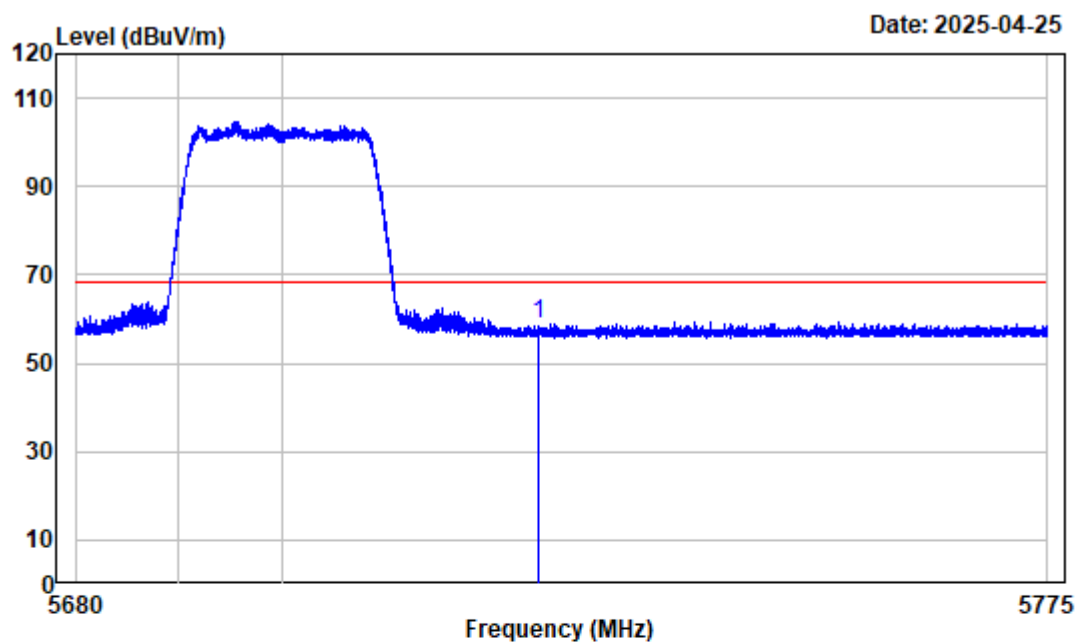


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.44	58.98	68.20	-9.22	peak

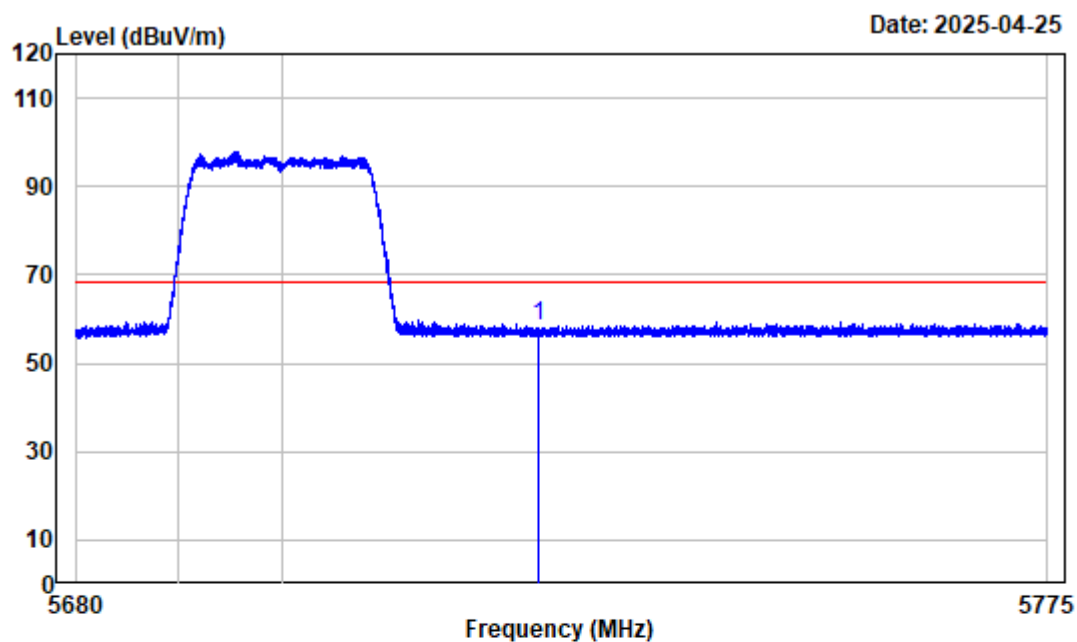

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 High Channel 5700MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.04	58.58	68.20	-9.62	peak

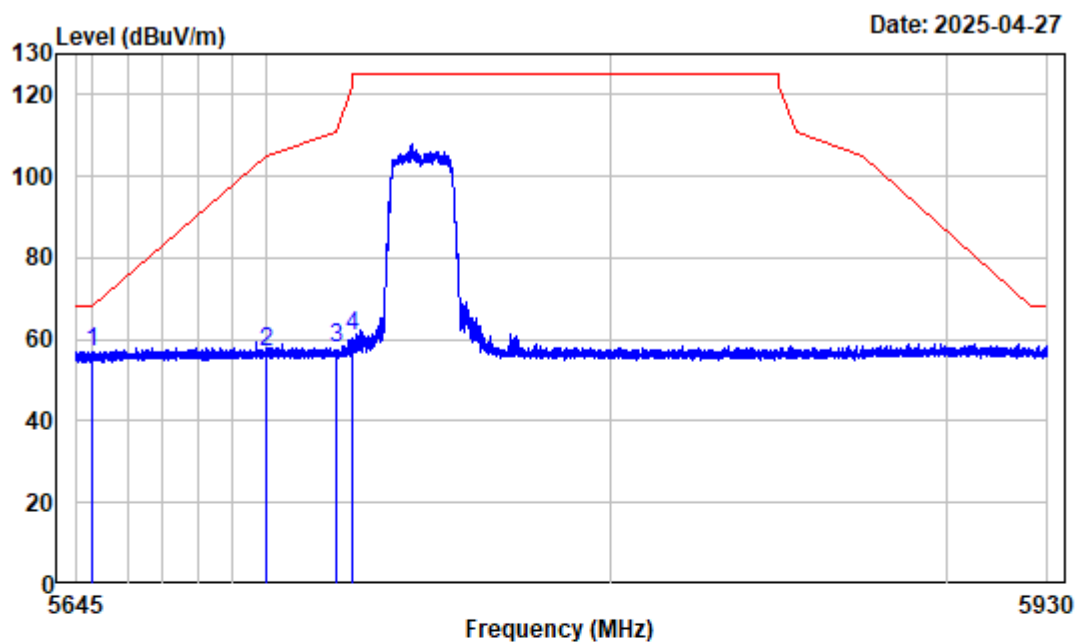

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.75	56.91	68.20	-11.29	Peak
2	5700.000	-4.41	61.32	56.91	105.20	-48.29	Peak
3	5720.000	-4.44	62.35	57.91	110.80	-52.89	Peak
4	5725.000	-4.46	65.37	60.91	122.20	-61.29	Peak

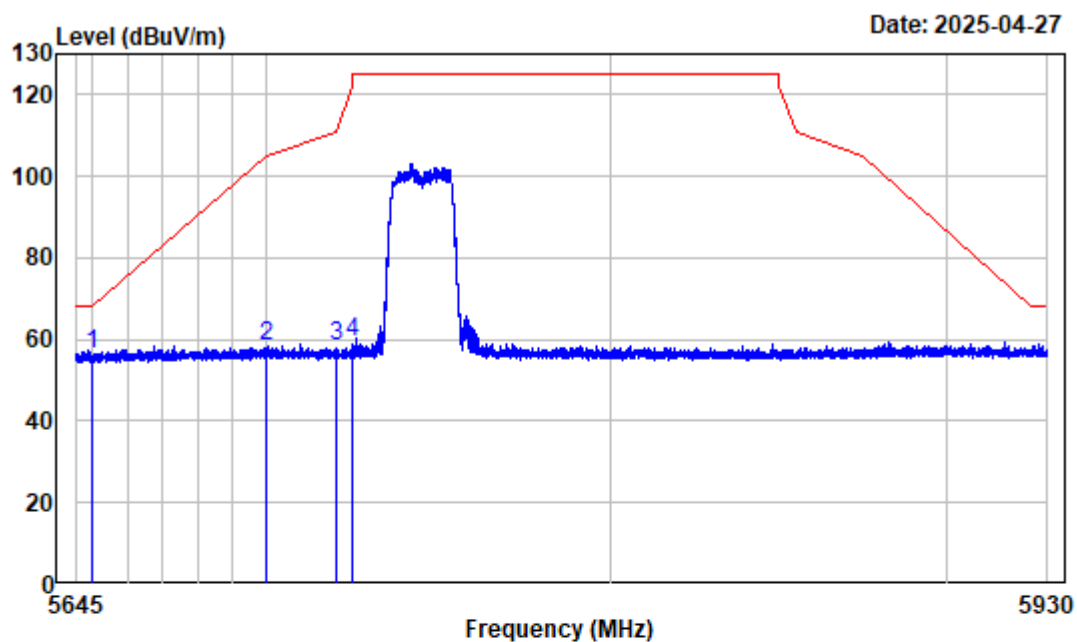

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 Low Channel 5745MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.27	56.43	68.20	-11.77	Peak
2	5700.000	-4.41	62.84	58.43	105.20	-46.77	Peak
3	5720.000	-4.44	62.87	58.43	110.80	-52.37	Peak
4	5725.000	-4.46	63.89	59.43	122.20	-62.77	Peak

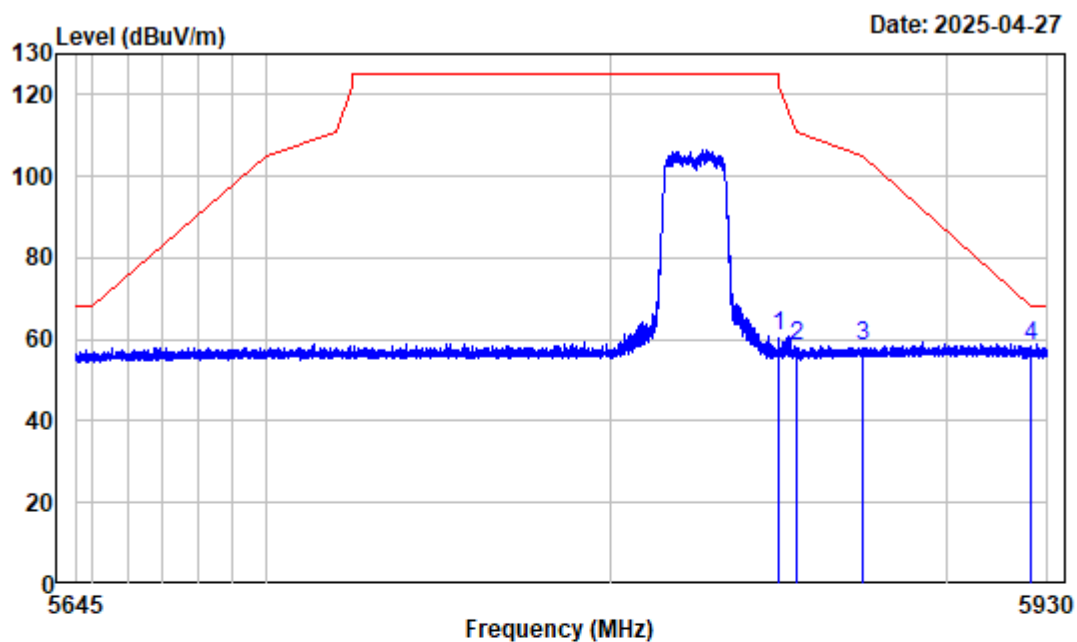

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac20 High Channel 5825MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	65.13	60.60	122.20	-61.60	Peak
2	5855.000	-4.48	63.08	58.60	110.80	-52.20	Peak
3	5875.000	-4.28	62.88	58.60	105.20	-46.60	Peak
4	5925.000	-4.43	63.03	58.60	68.20	-9.60	Peak

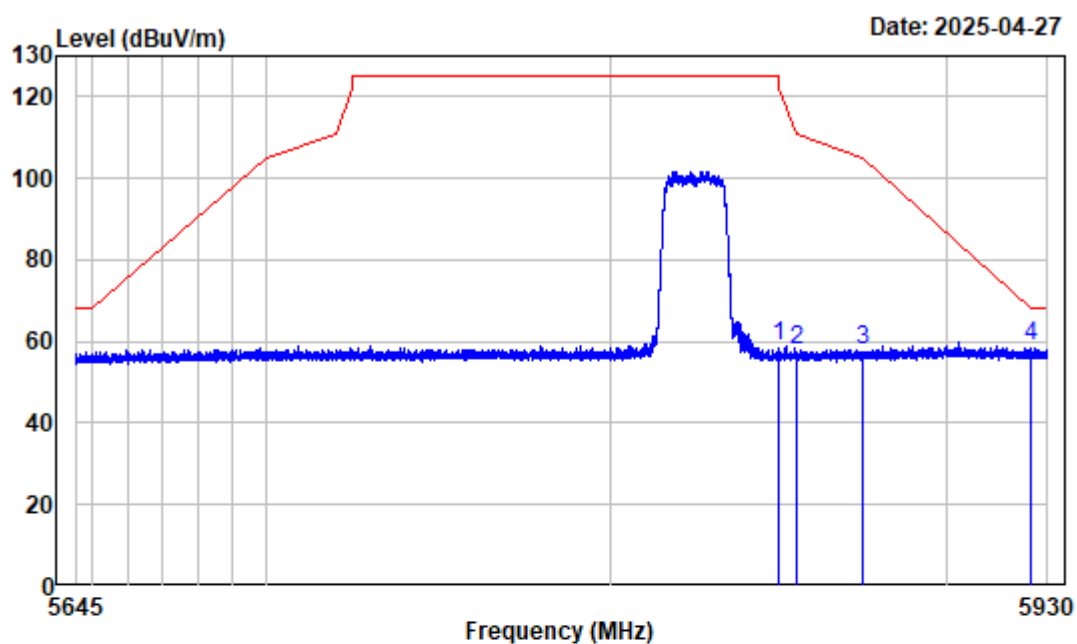

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac20 High Channel 5825MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.60	59.07	122.20	-63.13	Peak
2	5855.000	-4.48	62.55	58.07	110.80	-52.73	Peak
3	5875.000	-4.28	62.35	58.07	105.20	-47.13	Peak
4	5925.000	-4.43	63.50	59.07	68.20	-9.13	Peak

Band edge 802.11ac40:

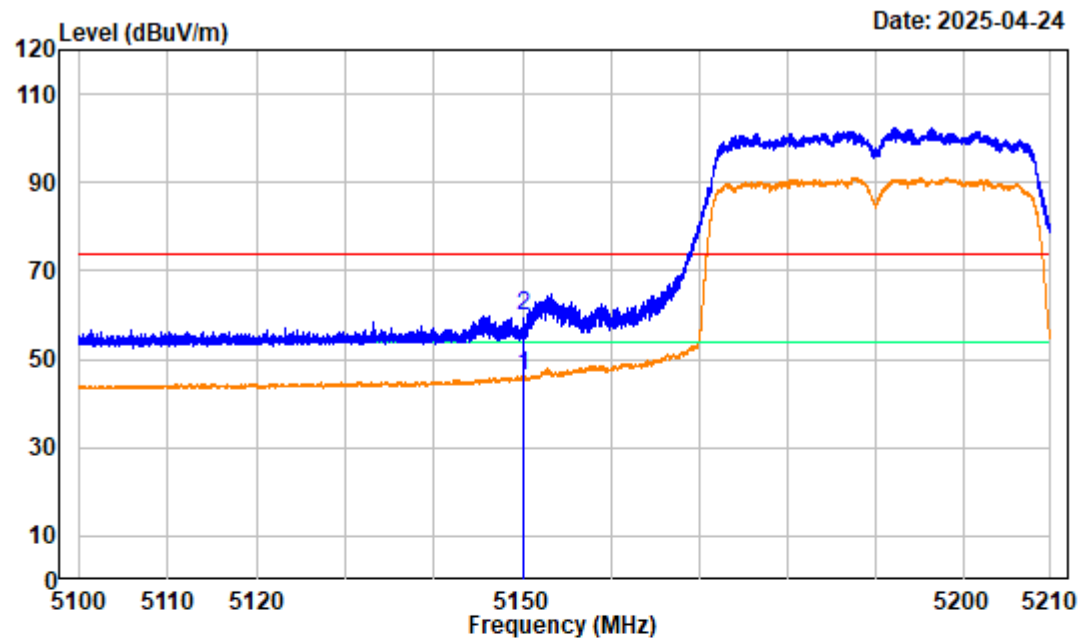


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.00	46.01	54.00	-7.99 average
2	5150.000	-5.99	65.77	59.78	74.00	-14.22 peak

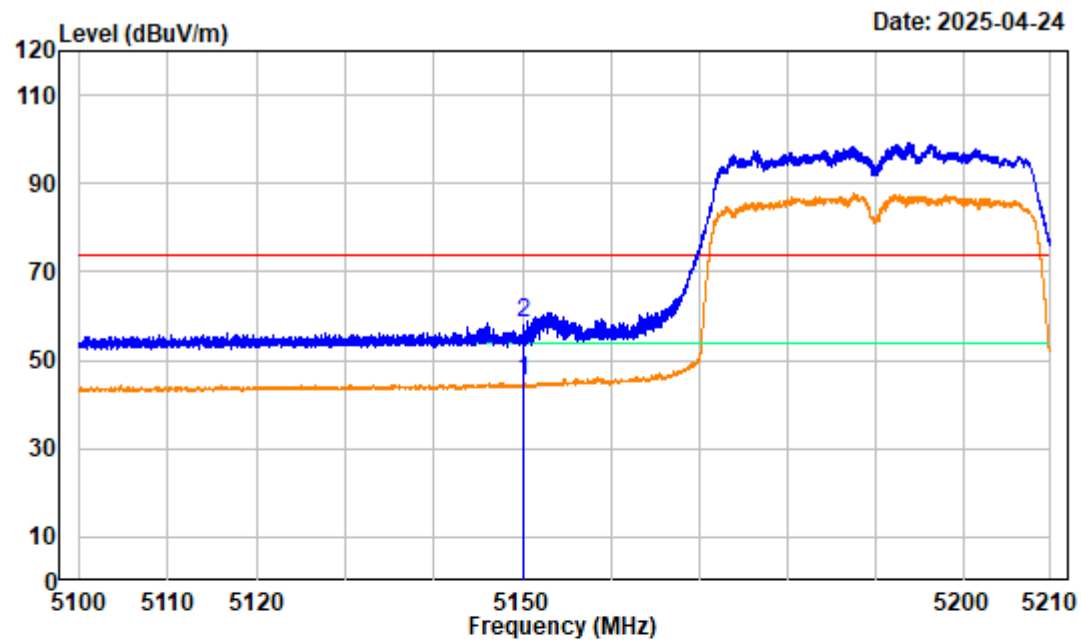


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5190MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.21	45.22	54.00	-8.78	average
2	5150.000	-5.99	64.24	58.25	74.00	-15.75	peak

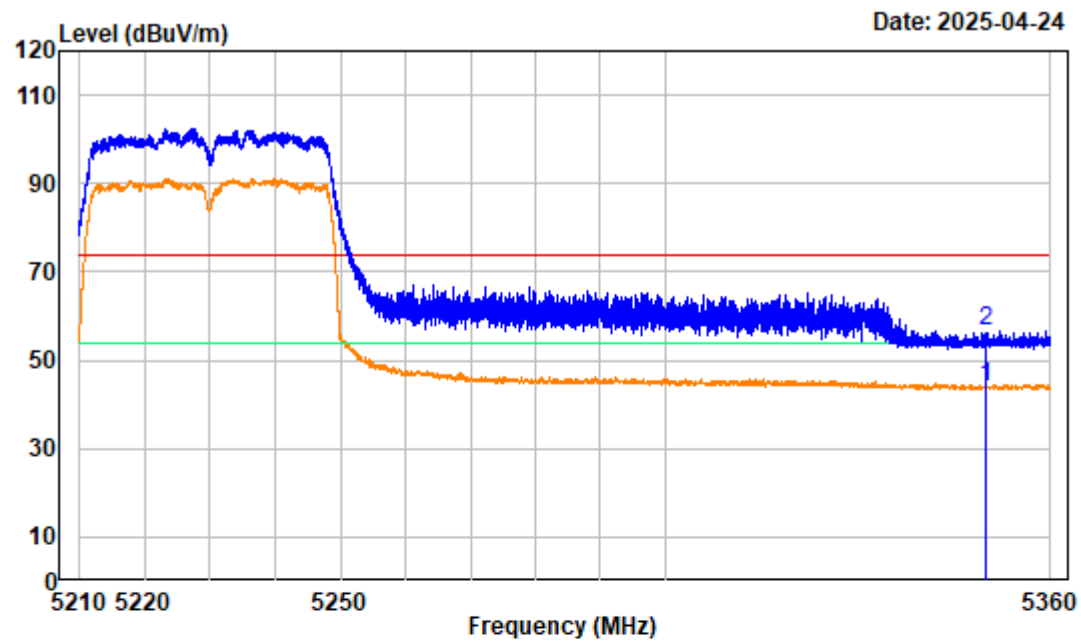


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.84	44.03	54.00	-9.97	average
2	5350.000	-5.81	62.48	56.67	74.00	-17.33	peak

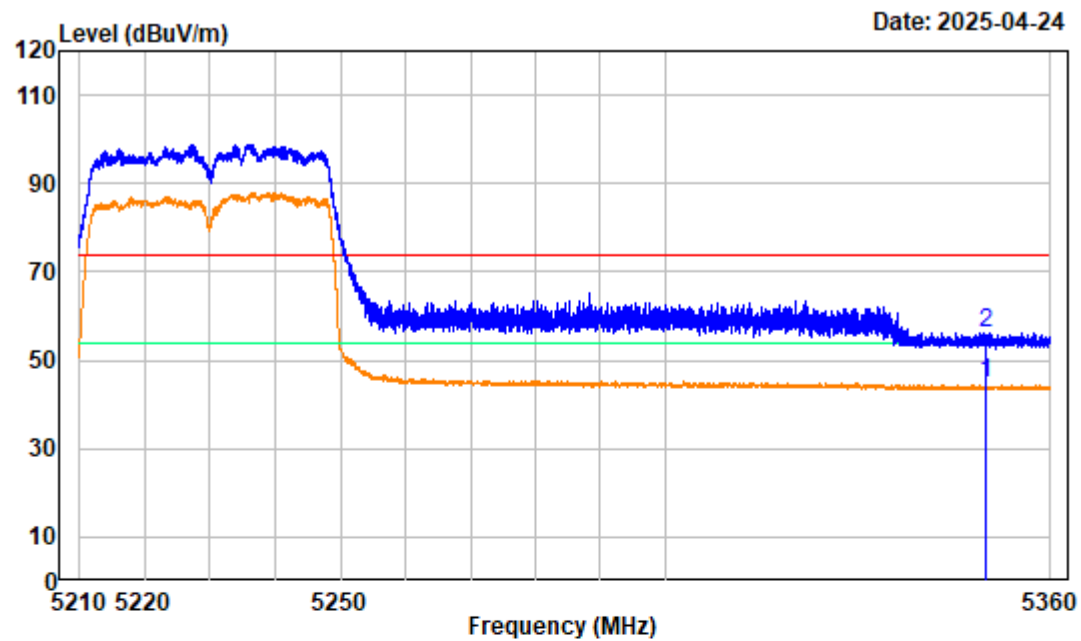


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5230MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.50	44.69	54.00	-9.31	average
2	5350.000	-5.81	62.06	56.25	74.00	-17.75	peak

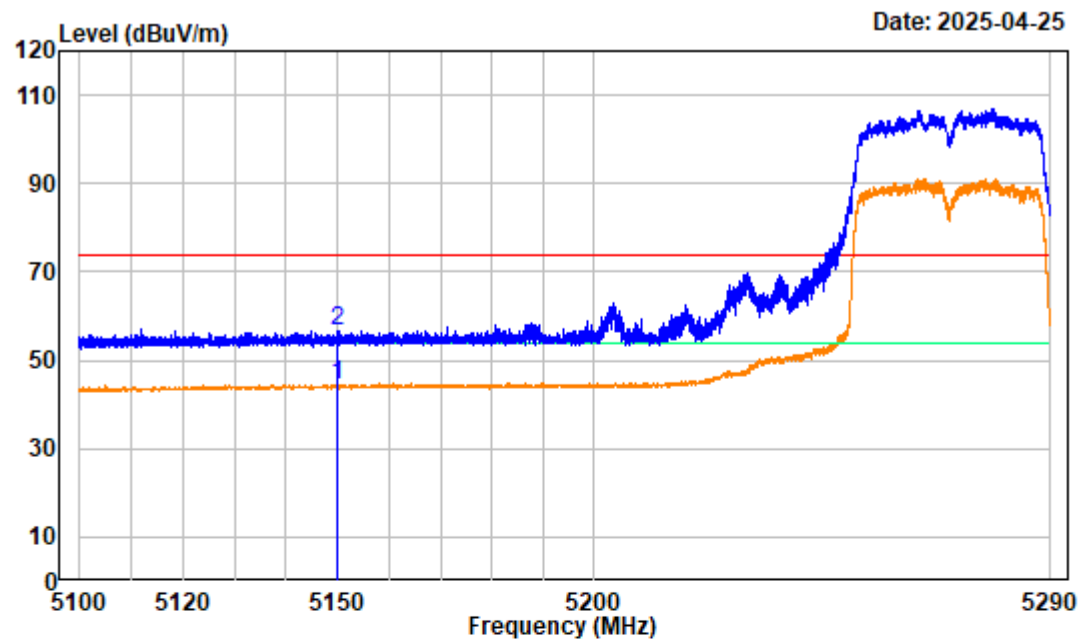


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.40	44.41	54.00	-9.59	average
2	5150.000	-5.99	62.74	56.75	74.00	-17.25	peak

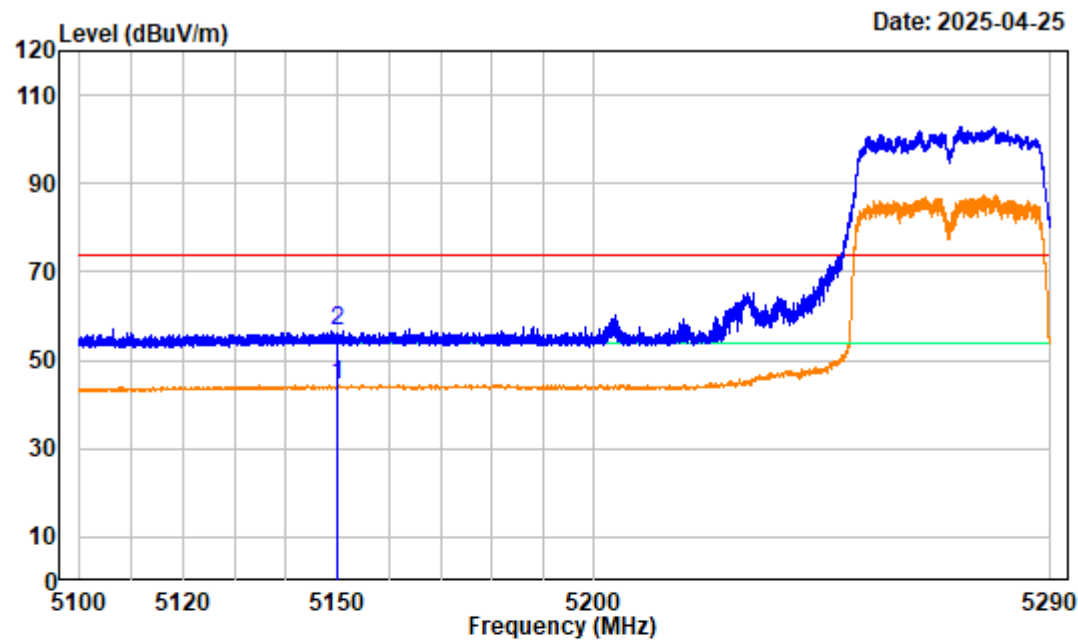

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5270MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.26	44.27	54.00	-9.73 average
2	5150.000	-5.99	62.42	56.43	74.00	-17.57 peak

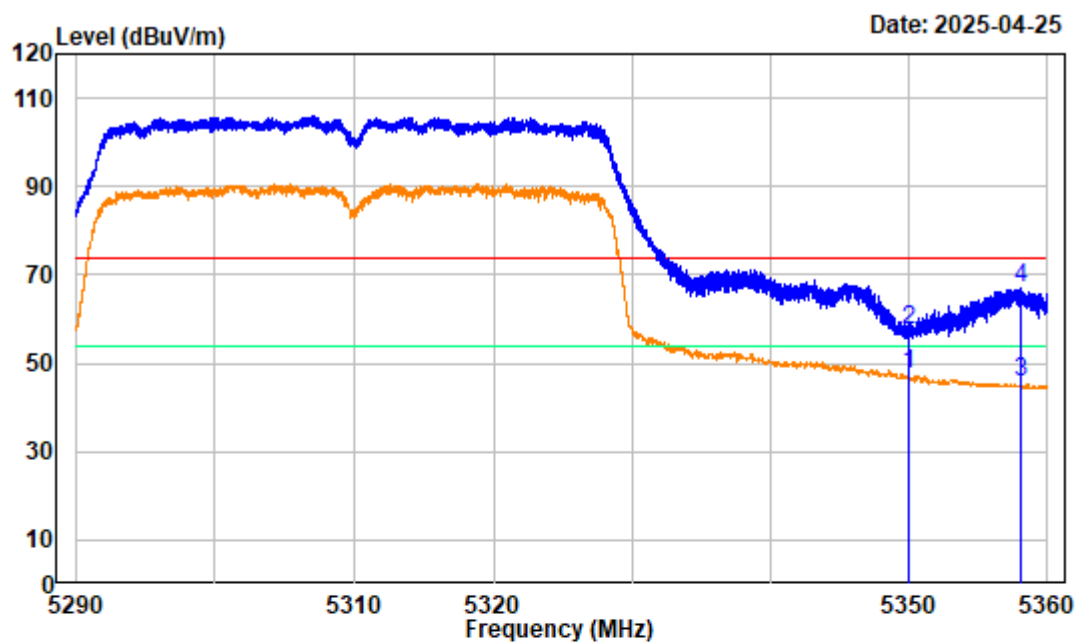

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5310MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	53.57	47.76	54.00	-6.24	Average
2	5350.000	-5.81	63.26	57.45	74.00	-16.55	Peak
3	5358.031	-5.76	51.36	45.60	54.00	-8.40	Average
4	5358.031	-5.76	72.62	66.86	74.00	-7.14	Peak

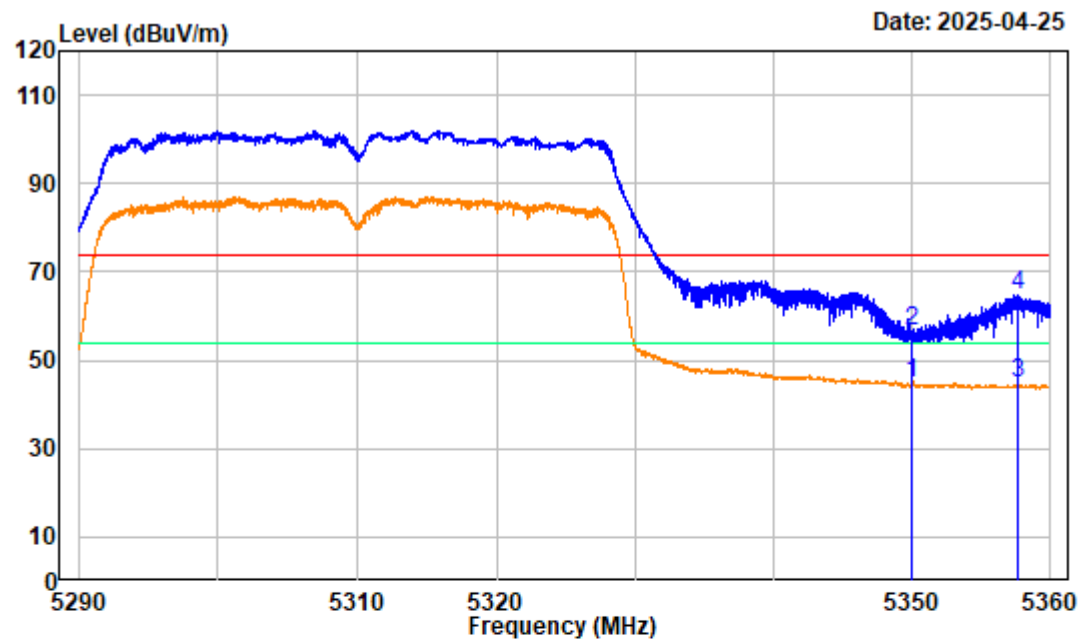


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5310MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.82	45.01	54.00	-8.99	Average
2	5350.000	-5.81	62.50	56.69	74.00	-17.31	peak
3	5357.585	-5.76	50.56	44.80	54.00	-9.20	Average
4	5357.585	-5.76	70.45	64.69	74.00	-9.31	Peak

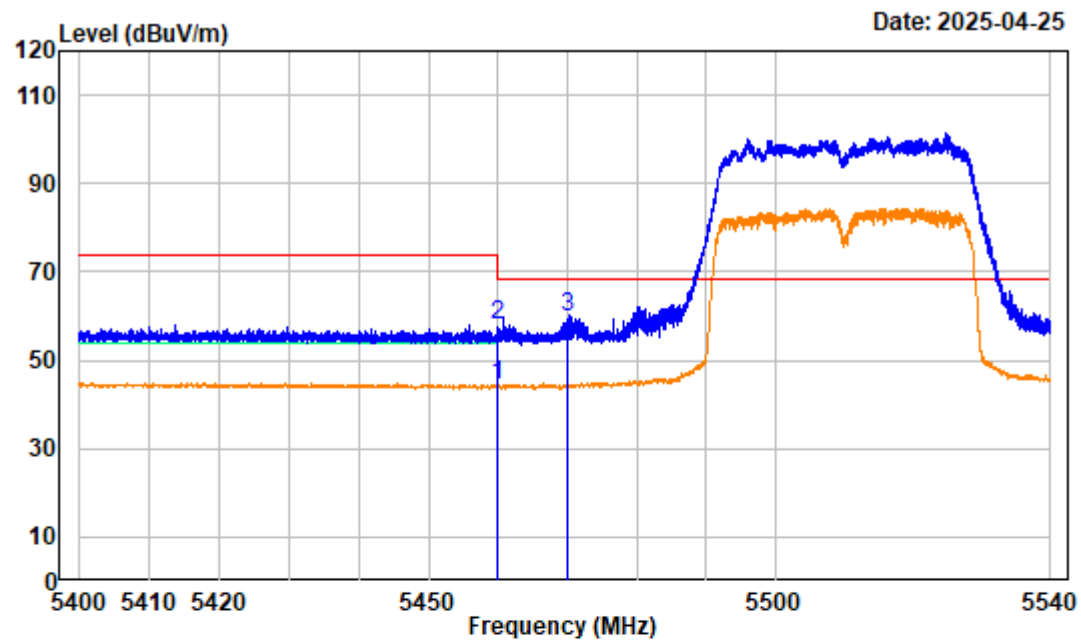


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	49.93	44.34	54.00	-9.66	average
2	5460.000	-5.58	63.50	57.92	74.00	-16.08	peak
3	5470.000	-5.61	65.23	59.62	68.20	-8.58	peak

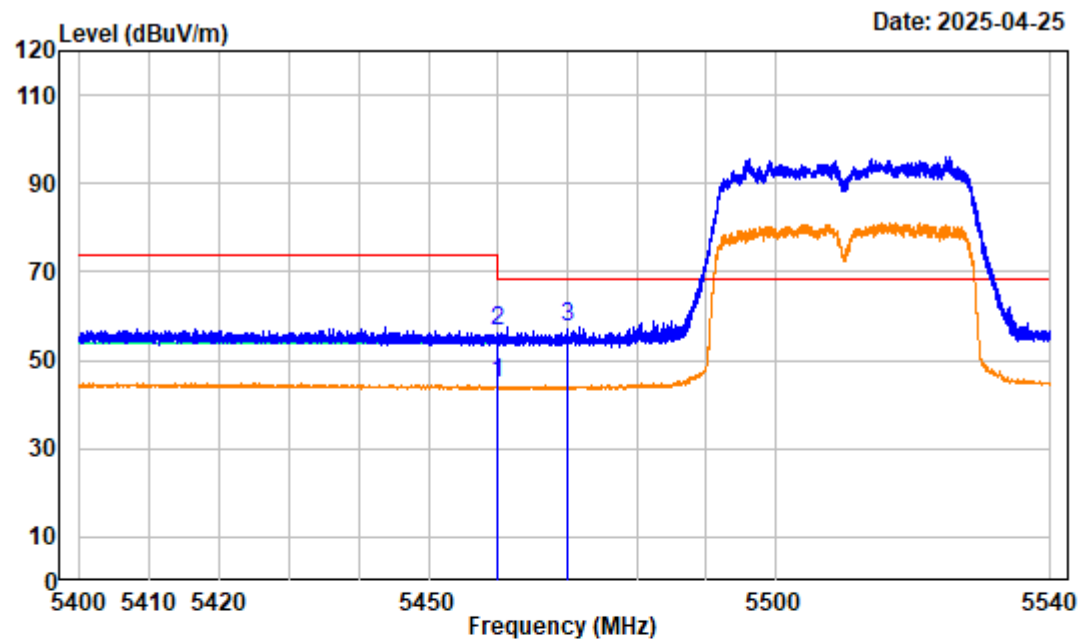

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 Low Channel 5510MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.21	44.62	54.00	-9.38	average
2	5460.000	-5.58	62.40	56.82	74.00	-17.18	peak
3	5470.000	-5.61	62.96	57.35	68.20	-10.85	peak

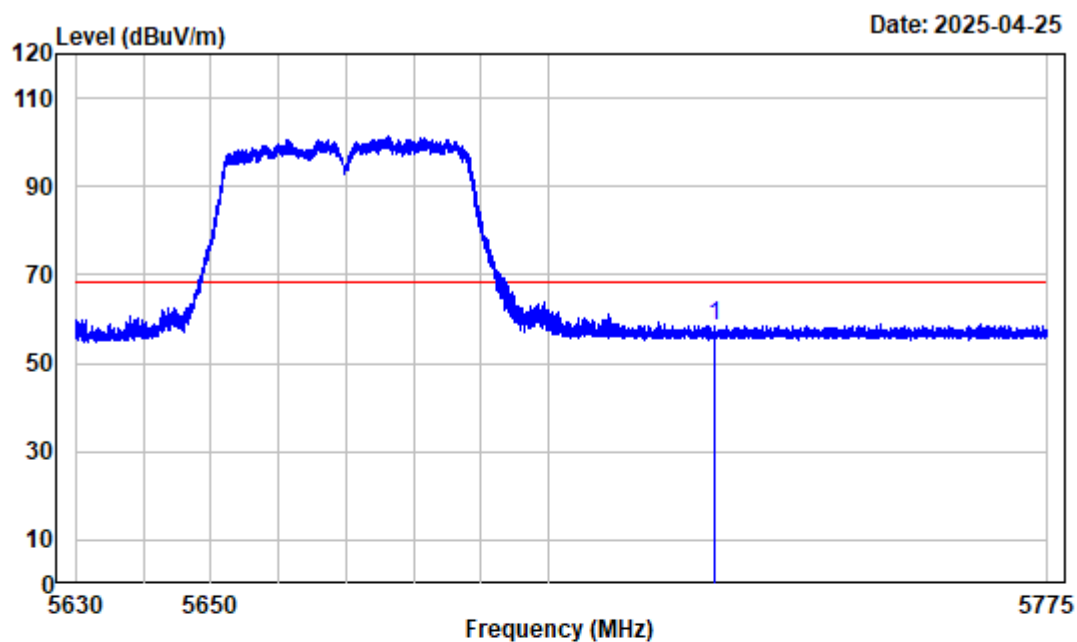

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5670MHz


SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	62.97	58.51	68.20	-9.69	peak

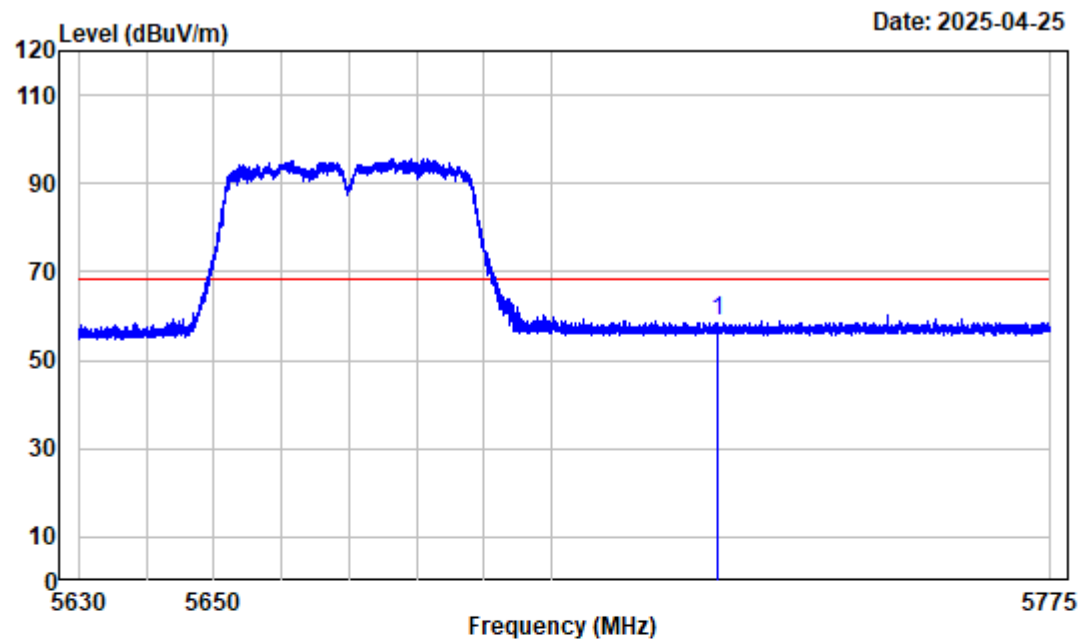

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac40 High Channel 5670MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.34	58.88	68.20	-9.32	peak

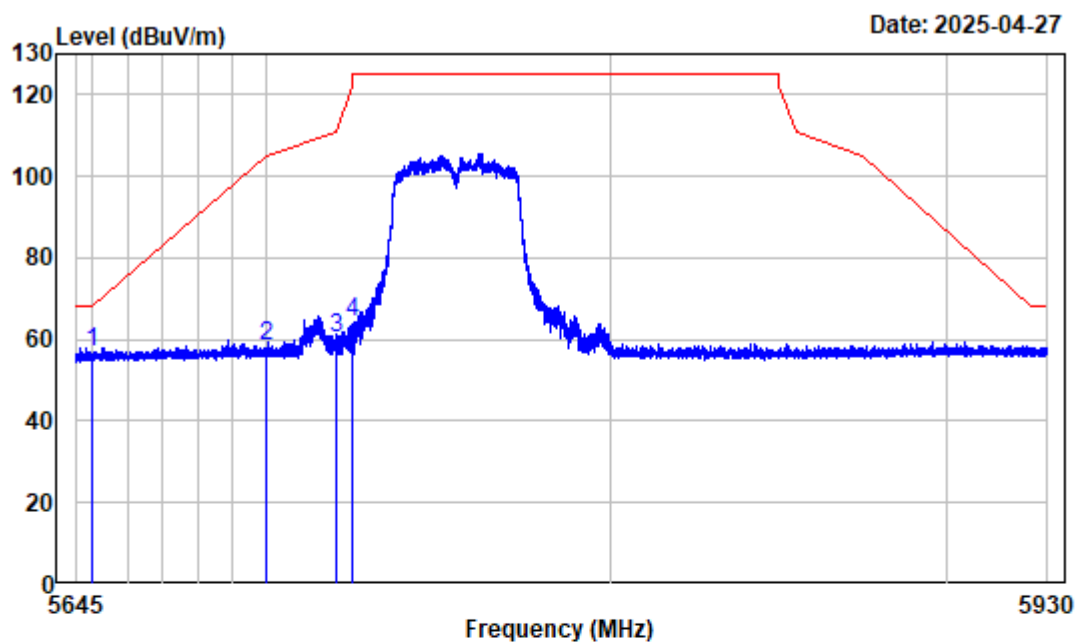

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5755MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.98	57.14	68.20	-11.06	Peak
2	5700.000	-4.41	62.91	58.50	105.20	-46.70	Peak
3	5720.000	-4.44	64.94	60.50	110.80	-50.30	Peak
4	5725.000	-4.46	68.96	64.50	122.20	-57.70	Peak

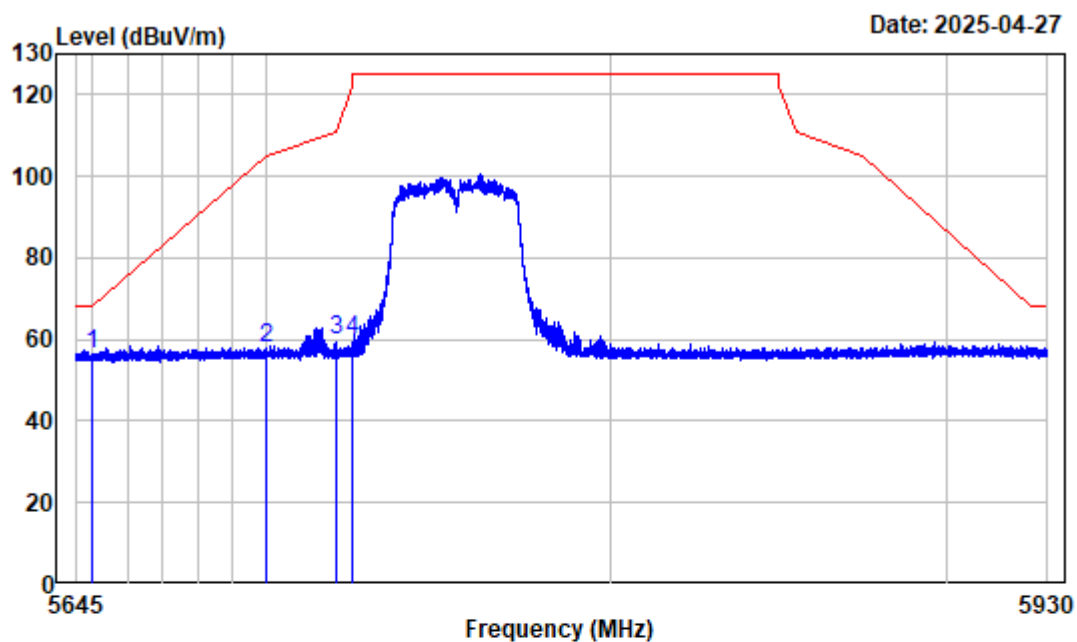

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 Low Channel 5755MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.47	56.63	68.20	-11.57	Peak
2	5700.000	-4.41	62.17	57.76	105.20	-47.44	Peak
3	5720.000	-4.44	64.20	59.76	110.80	-51.04	Peak
4	5725.000	-4.46	64.22	59.76	122.20	-62.44	Peak

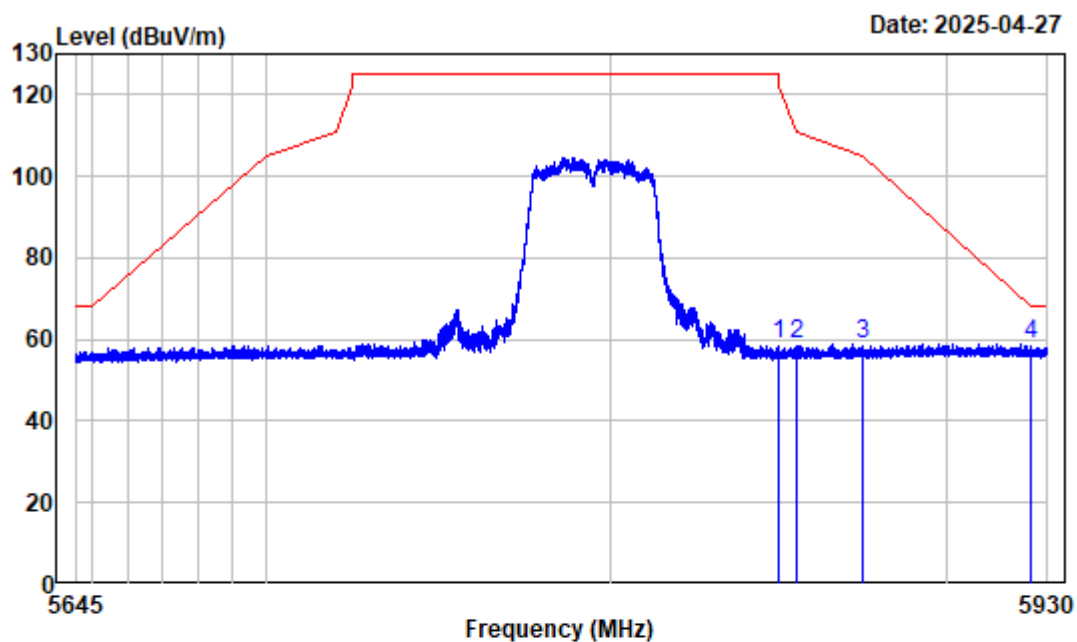

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester:Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac40 High Channel 5795MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.38	58.85	122.20	-63.35	Peak
2	5855.000	-4.48	63.33	58.85	110.80	-51.95	Peak
3	5875.000	-4.28	63.13	58.85	105.20	-46.35	Peak
4	5925.000	-4.43	63.28	58.85	68.20	-9.35	Peak

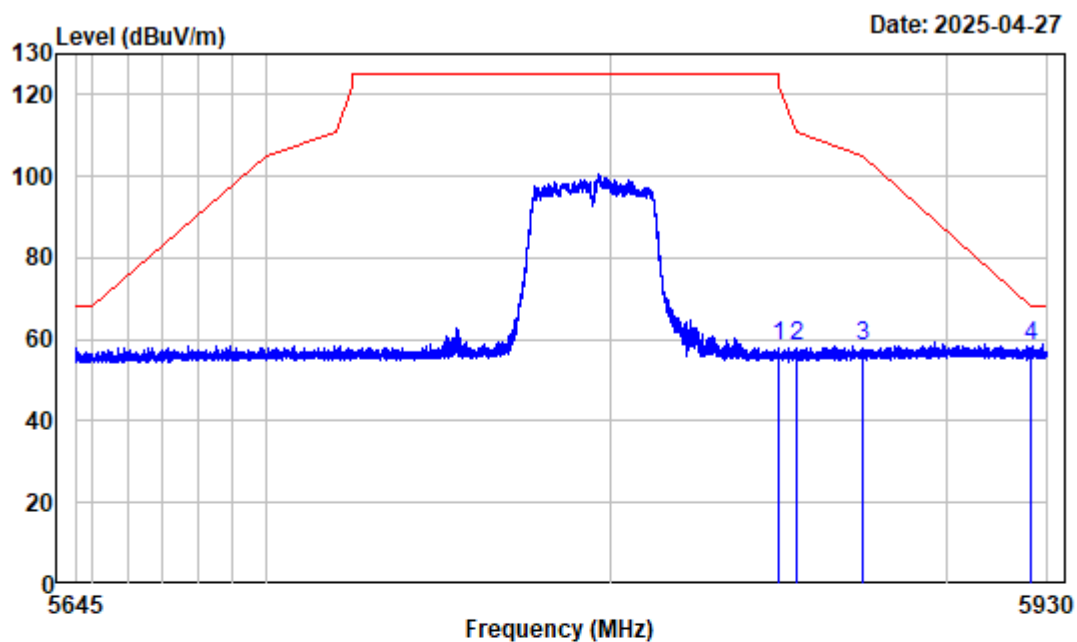

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF

Tester:Jimi Zheng


Test Mode : Transmitting

Note : 802.11ac40 High Channel 5795MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	63.15	58.62	122.20	-63.58	Peak
2	5855.000	-4.48	63.10	58.62	110.80	-52.18	Peak
3	5875.000	-4.28	62.90	58.62	105.20	-46.58	Peak
4	5925.000	-4.43	63.05	58.62	68.20	-9.58	Peak

Band edge 802.11ac80:

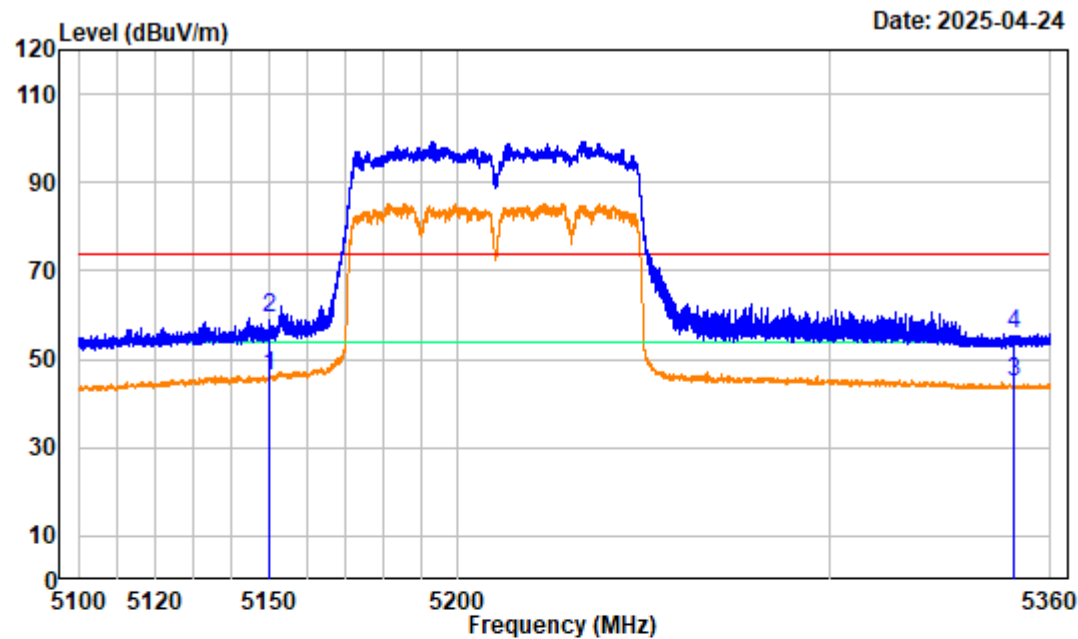


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5210MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.13	46.14	54.00	-7.86	average
2	5150.000	-5.99	65.30	59.31	74.00	-14.69	peak
3	5350.000	-5.81	50.55	44.74	54.00	-9.26	average
4	5350.000	-5.81	61.73	55.92	74.00	-18.08	peak

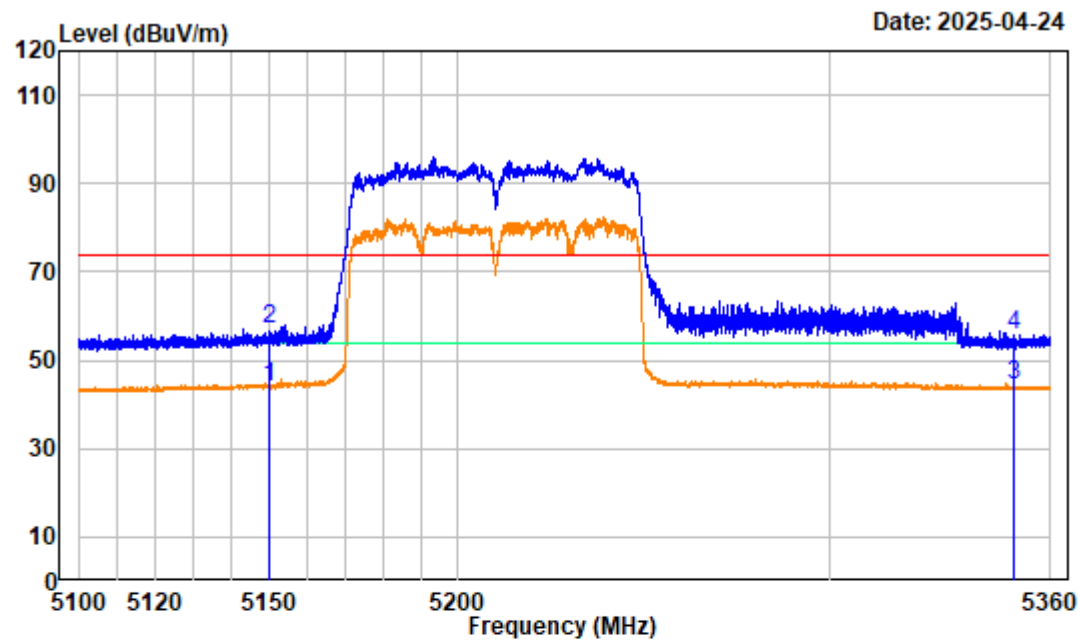


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5210MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	5150.000	-5.99	50.14	44.15	54.00	-9.85	average
2	5150.000	-5.99	62.85	56.86	74.00	-17.14	peak
3	5350.000	-5.81	50.35	44.54	54.00	-9.46	average
4	5350.000	-5.81	61.61	55.80	74.00	-18.20	peak

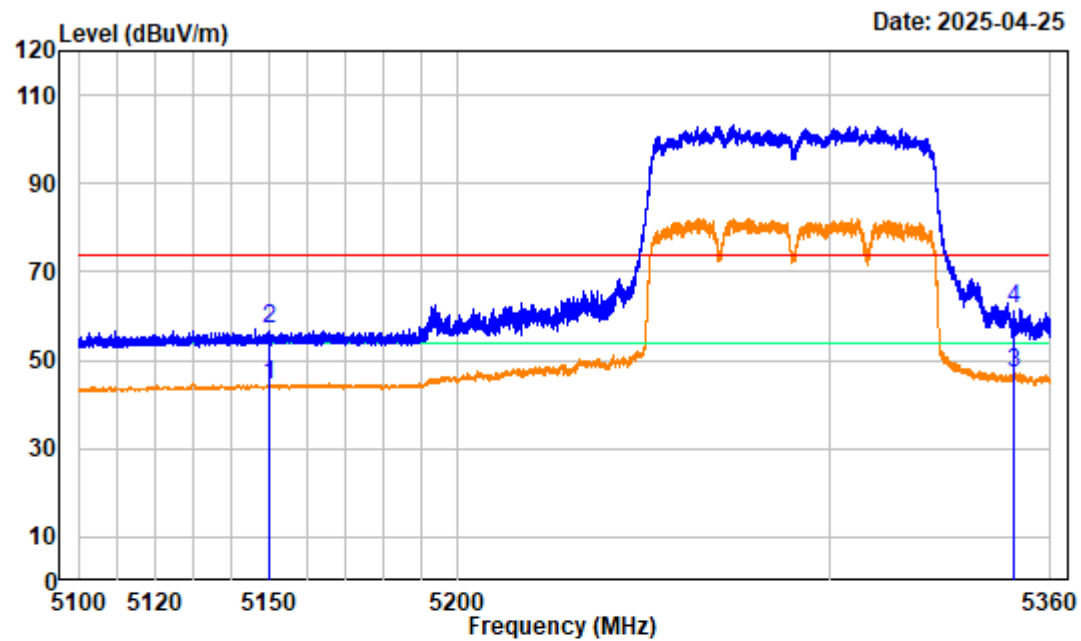


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5290MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	5150.000	-5.99	50.37	44.38	54.00	-9.62	average
2	5150.000	-5.99	62.83	56.84	74.00	-17.16	peak
3	5350.000	-5.81	52.69	46.88	54.00	-7.12	average
4	5350.000	-5.81	67.26	61.45	74.00	-12.55	peak

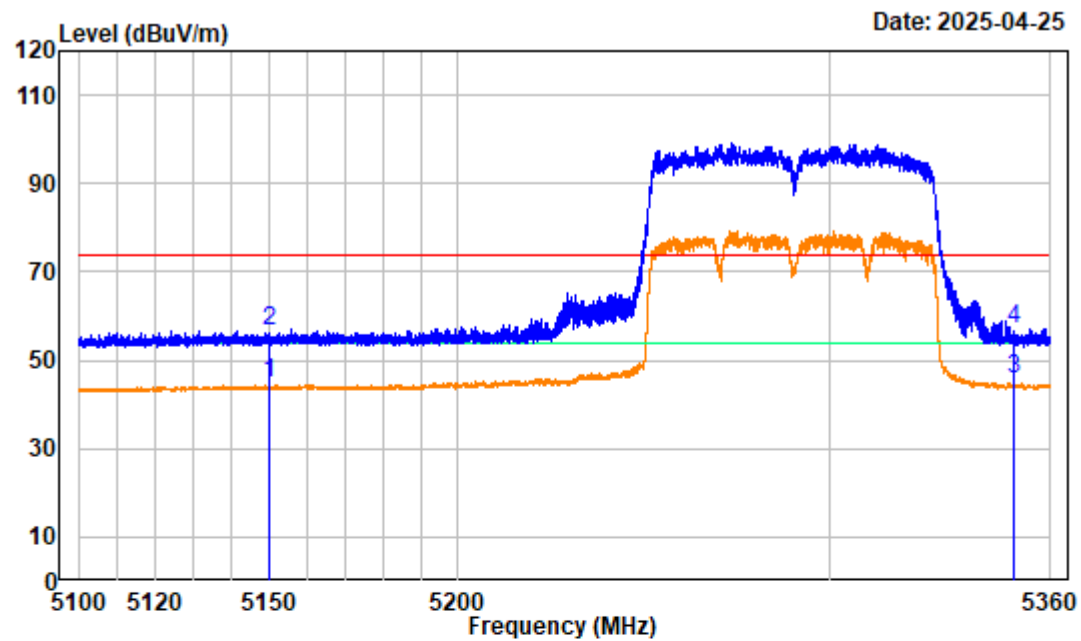


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 5290MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.76	44.77	54.00	-9.23	average
2	5150.000	-5.99	62.52	56.53	74.00	-17.47	peak
3	5350.000	-5.81	51.51	45.70	54.00	-8.30	average
4	5350.000	-5.81	62.88	57.07	74.00	-16.93	peak

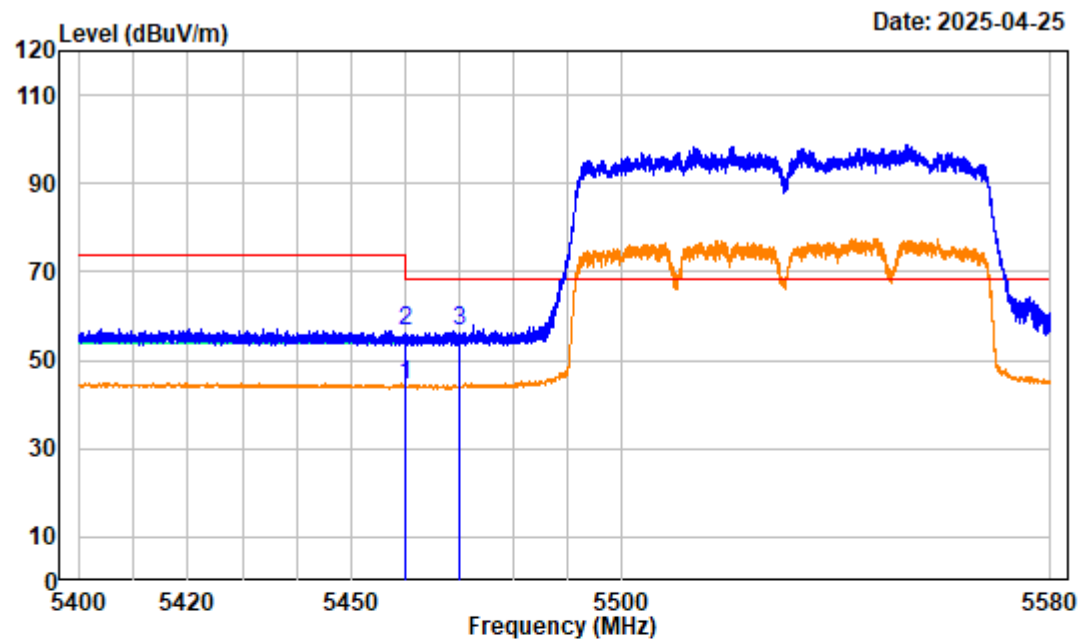


Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 Low Channel 5530MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	49.90	44.31	54.00	-9.69	average
2	5460.000	-5.58	62.32	56.74	74.00	-17.26	peak
3	5470.000	-5.61	62.29	56.68	68.20	-11.52	peak

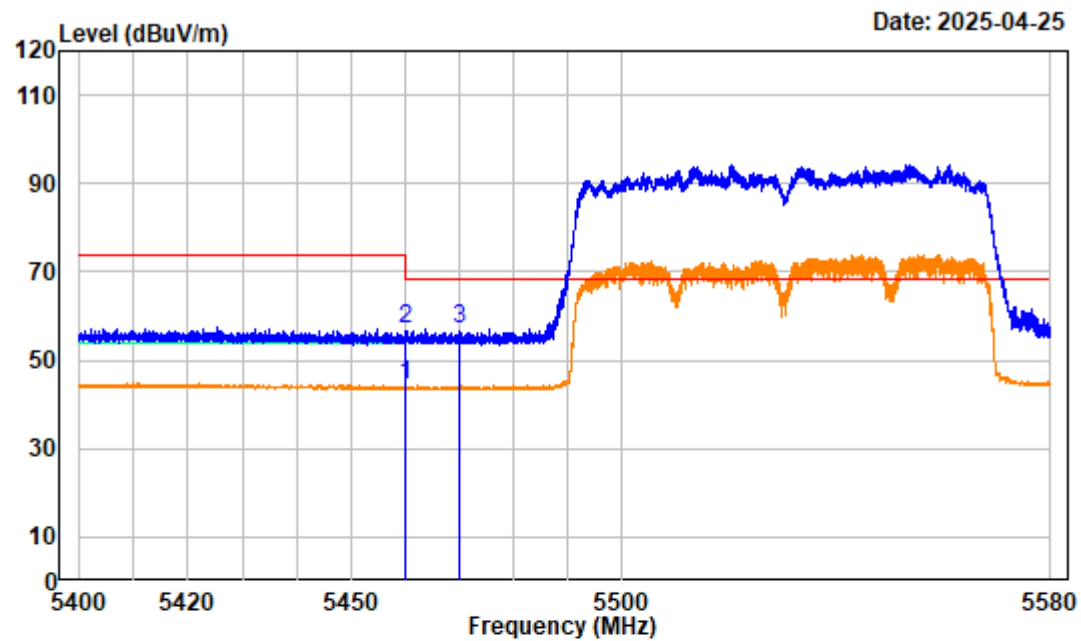


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 Low Channel 5530MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.18	44.59	54.00	-9.41	average
2	5460.000	-5.59	62.71	57.12	74.00	-16.88	peak
3	5470.000	-5.61	62.83	57.22	68.20	-10.98	peak

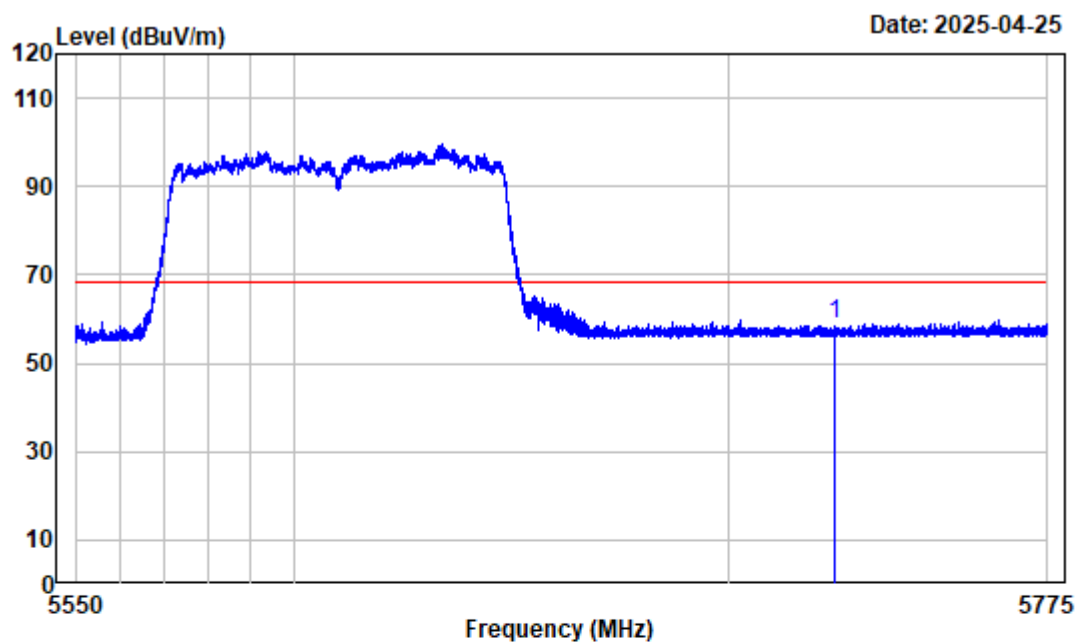


Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504R28083E-RF Tester:Jimi Zheng
 Test Mode : Transmitting
 Note : 802.11ac80 High Channel 5610MHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.55	59.09	68.20	-9.11	peak

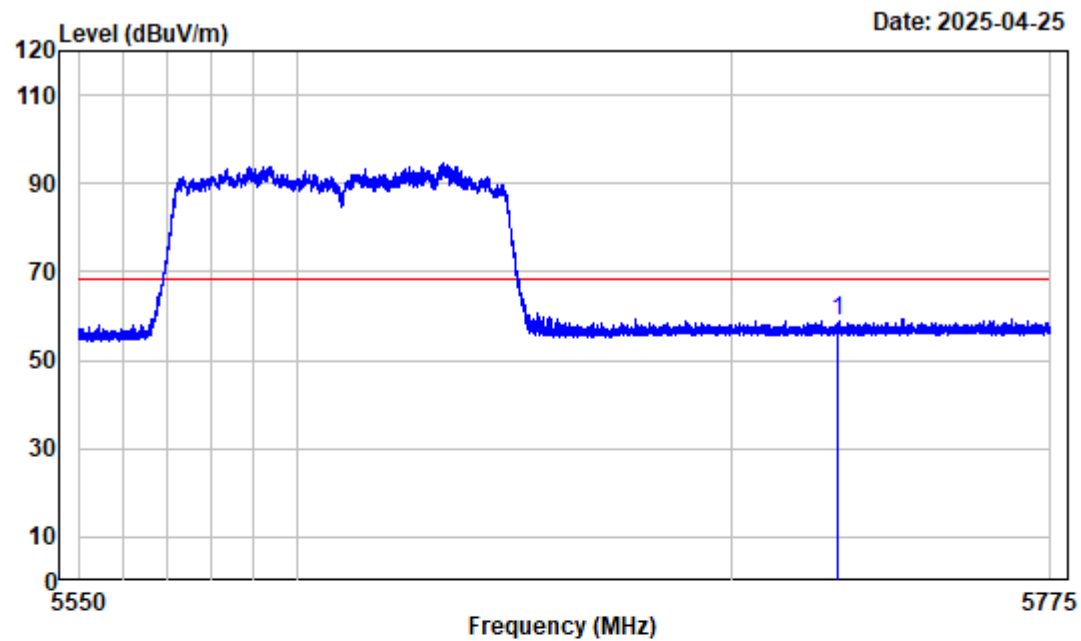

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504R28083E-RF Tester:Jimi Zheng
Test Mode : Transmitting
Note : 802.11ac80 High Channel 5610MHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-4.46	63.12	58.66	68.20	-9.54	peak

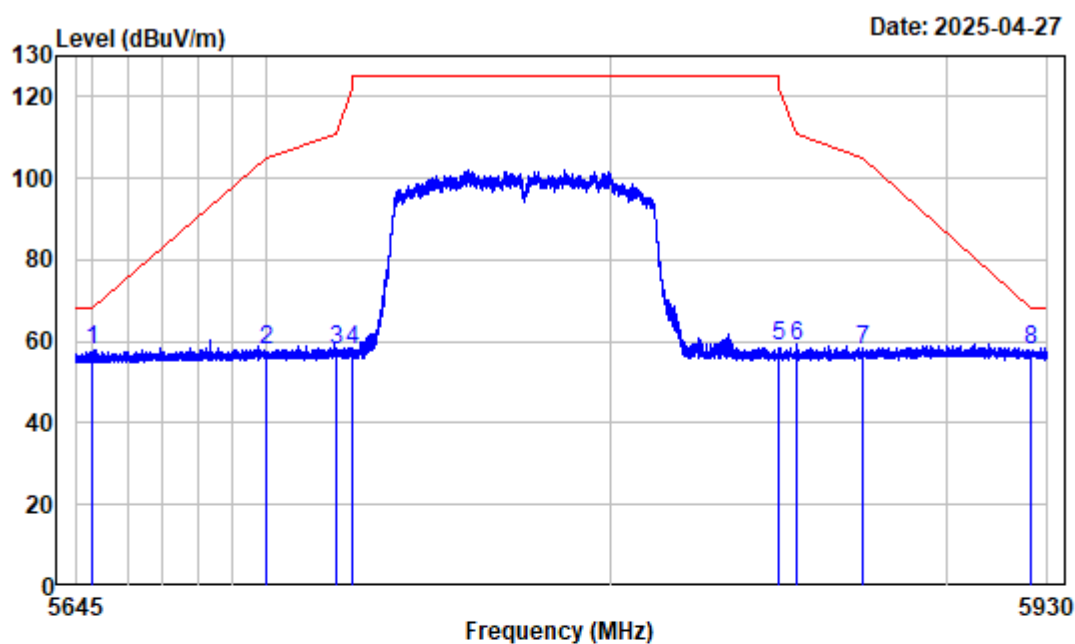

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504R28083E-RF


Tester: Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5775MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	62.95	58.11	68.20	-10.09	Peak
2	5700.000	-4.41	62.52	58.11	105.20	-47.09	Peak
3	5720.000	-4.44	62.55	58.11	110.80	-52.69	Peak
4	5725.000	-4.46	62.57	58.11	122.20	-64.09	Peak
5	5850.000	-4.53	63.64	59.11	122.20	-63.09	Peak
6	5855.000	-4.48	63.59	59.11	110.80	-51.69	Peak
7	5875.000	-4.28	62.39	58.11	105.20	-47.09	Peak
8	5925.000	-4.43	62.54	58.11	68.20	-10.09	Peak

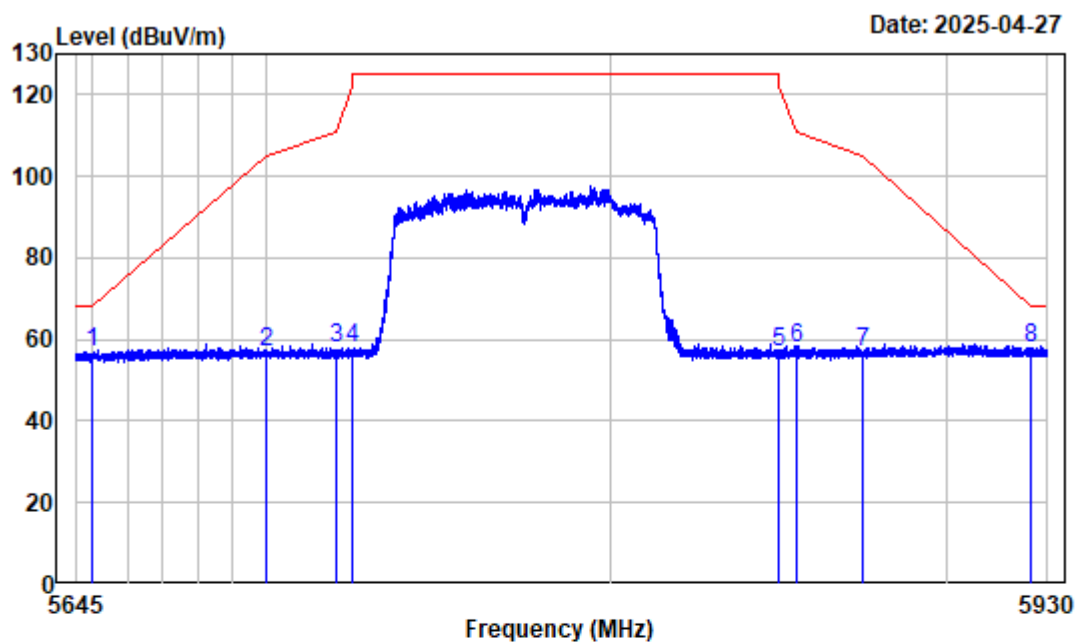

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504R28083E-RF

Tester: Jimi Zheng

Test Mode : Transmitting

Note : 802.11ac80 5775MHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.72	56.88	68.20	-11.32	Peak
2	5700.000	-4.41	61.29	56.88	105.20	-48.32	Peak
3	5720.000	-4.44	62.32	57.88	110.80	-52.92	Peak
4	5725.000	-4.46	62.34	57.88	122.20	-64.32	Peak
5	5850.000	-4.53	61.41	56.88	122.20	-65.32	Peak
6	5855.000	-4.48	62.36	57.88	110.80	-52.92	Peak
7	5875.000	-4.28	61.16	56.88	105.20	-48.32	Peak
8	5925.000	-4.43	62.31	57.88	68.20	-10.32	Peak