




802.11g/LCH



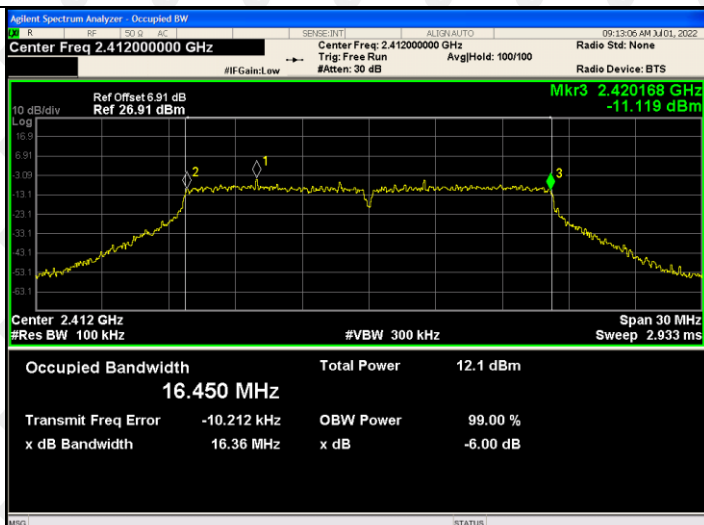





802.11g/MCH

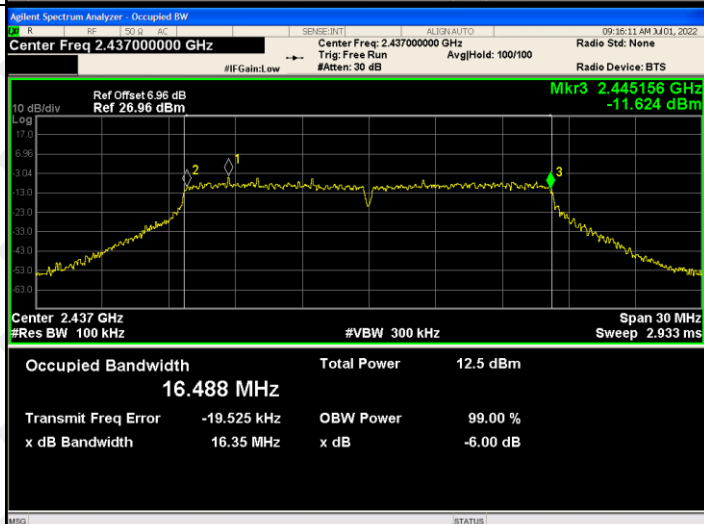

802.11g/HCH

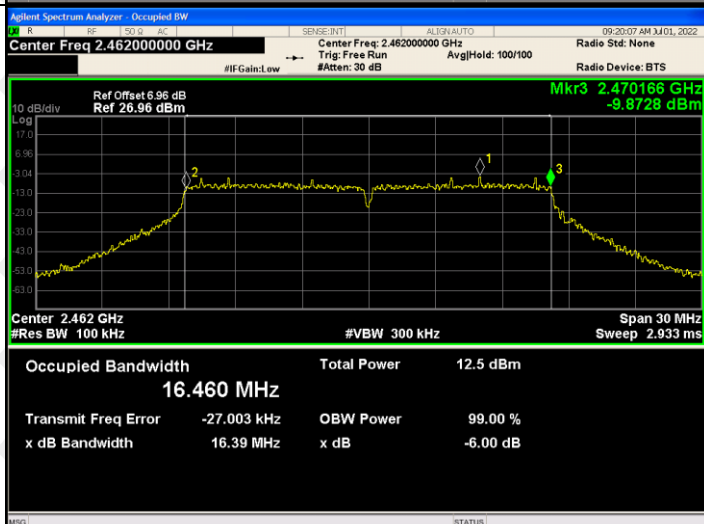


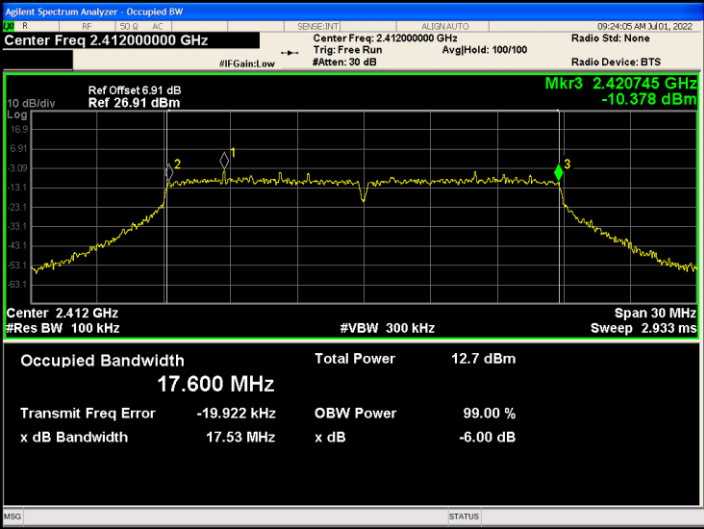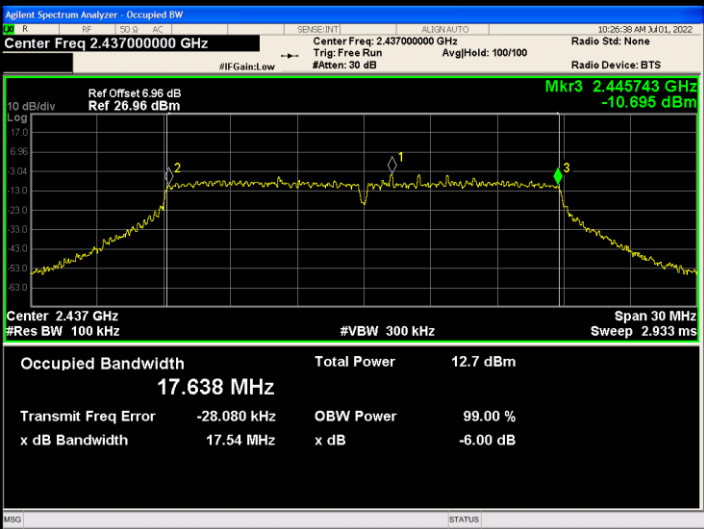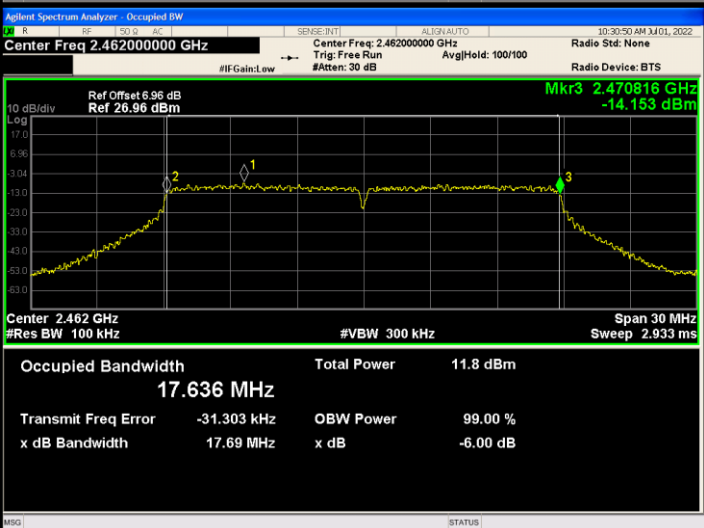802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 26.91 dBm Mkr3 2.420745 GHz -10.378 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.600 MHz Total Power 12.7 dBm Transmit Freq Error -19.922 kHz OBW Power 99.00 % x dB Bandwidth 17.53 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.445743 GHz -10.696 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.638 MHz Total Power 12.7 dBm Transmit Freq Error -28.080 kHz OBW Power 99.00 % x dB Bandwidth 17.54 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Mkr3 2.470816 GHz -14.153 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.636 MHz Total Power 11.8 dBm Transmit Freq Error -31.303 kHz OBW Power 99.00 % x dB Bandwidth 17.69 MHz x dB -6.00 dB

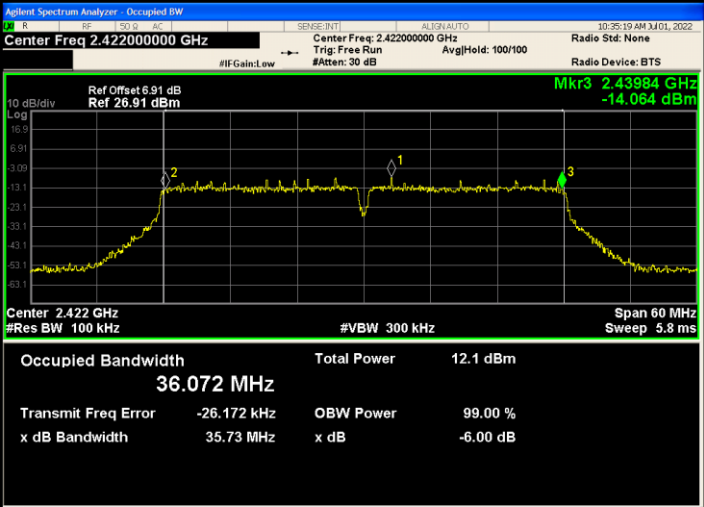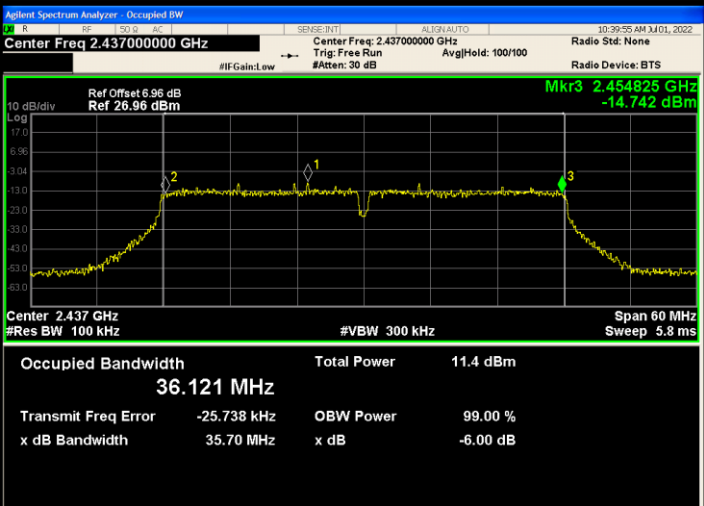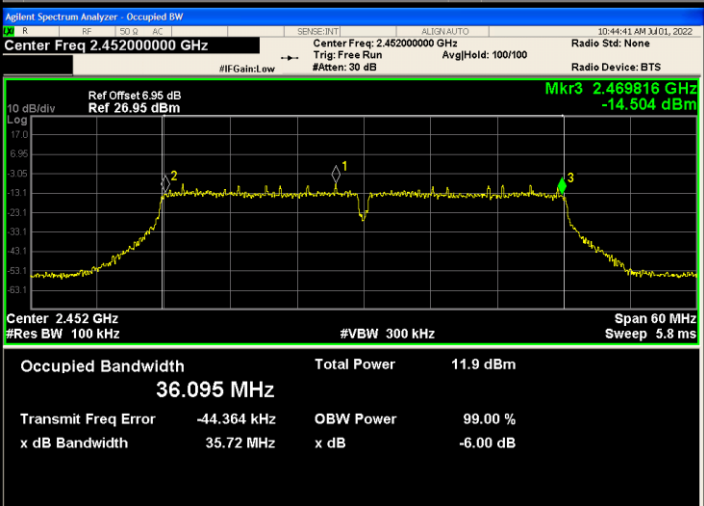
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset: 6.91 dB Ref: 26.91 dBm Mkr3 2.43984 GHz -14.064 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.072 MHz Total Power 12.1 dBm Transmit Freq Error -26.172 kHz OBW Power 99.00 % x dB Bandwidth 35.73 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset: 6.96 dB Ref: 26.96 dBm Mkr3 2.454825 GHz -14.742 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.121 MHz Total Power 11.4 dBm Transmit Freq Error -25.738 kHz OBW Power 99.00 % x dB Bandwidth 35.70 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset: 6.95 dB Ref: 26.95 dBm Mkr3 2.469816 GHz -14.504 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.095 MHz Total Power 11.9 dBm Transmit Freq Error -44.364 kHz OBW Power 99.00 % x dB Bandwidth 35.72 MHz x dB -6.00 dB

ANT2:


Test Graph:

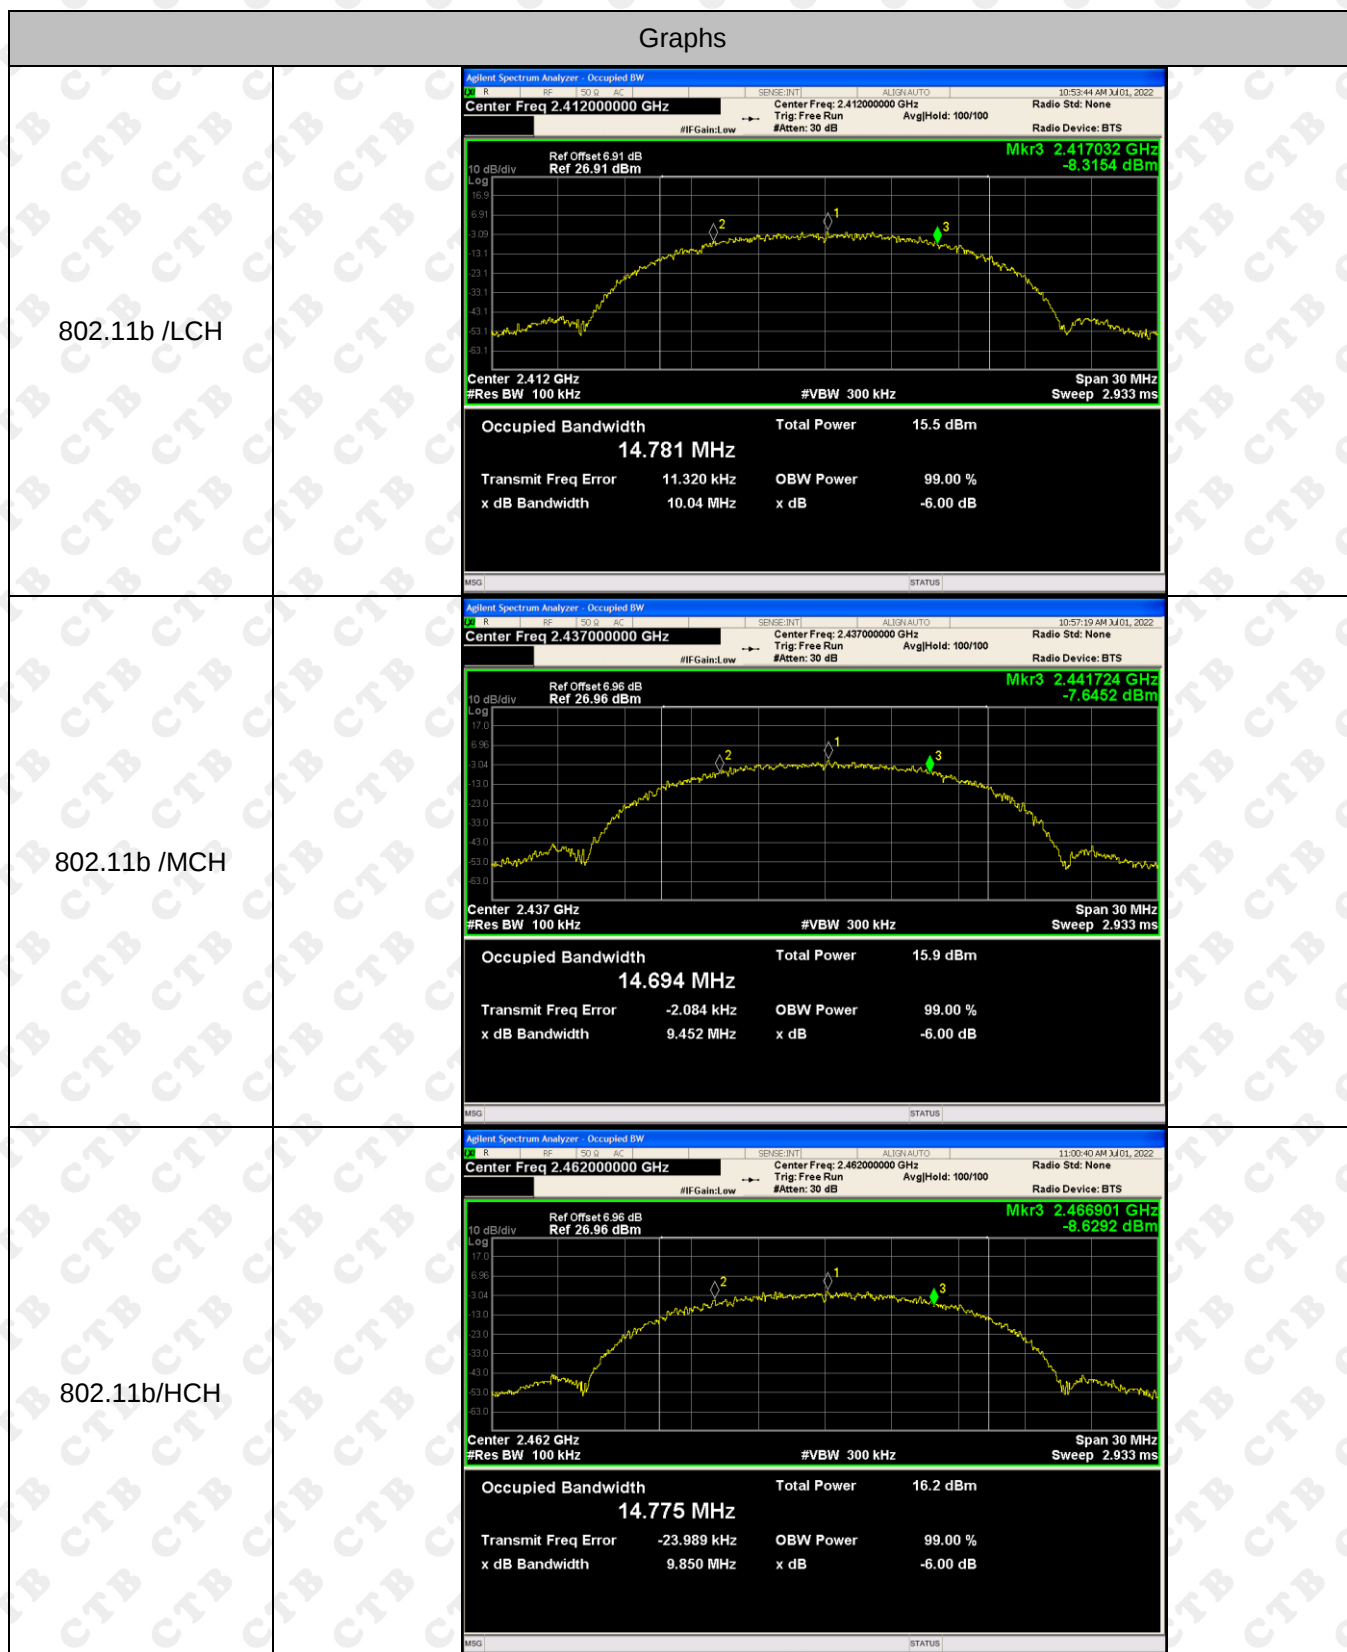


802.11g/LCH



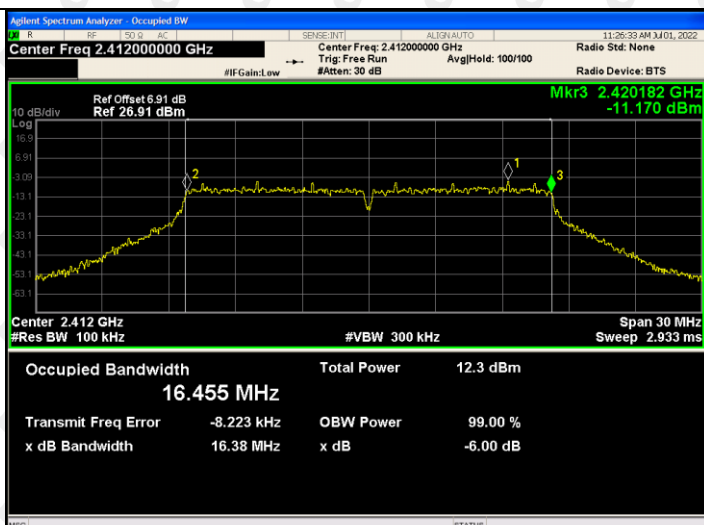


802.11g/MCH

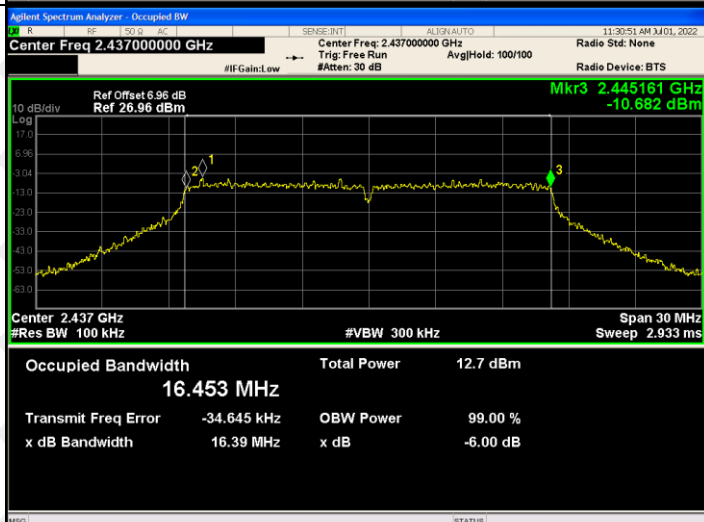

802.11g/HCH

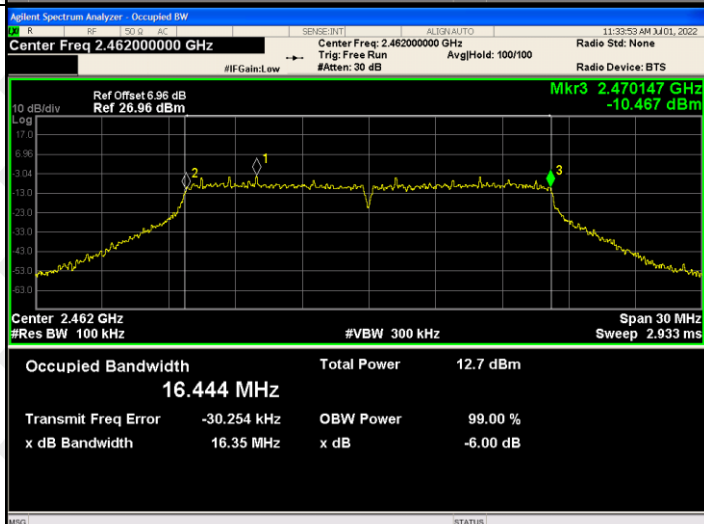


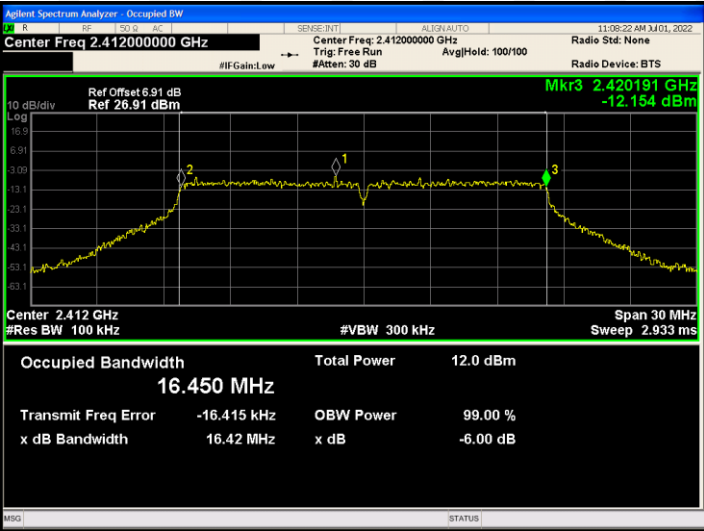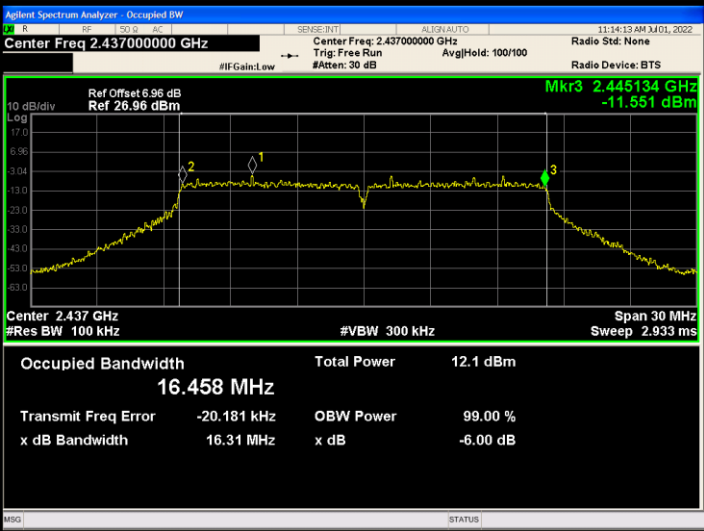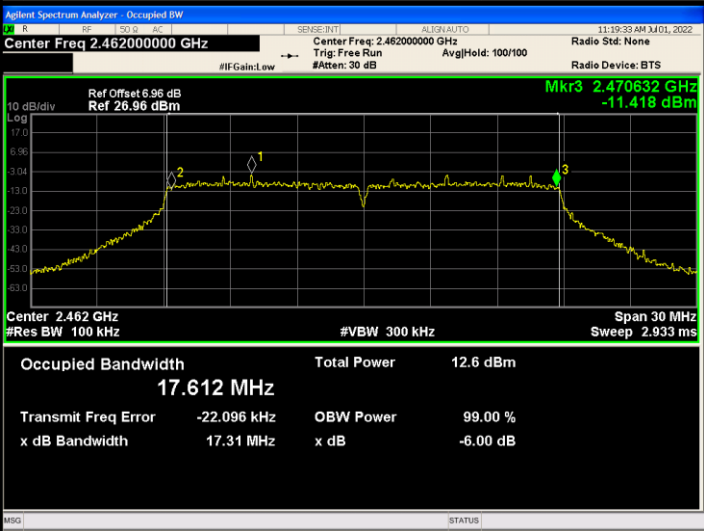802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 26.91 dBm Occupied Bandwidth 16.450 MHz Total Power 12.0 dBm Transmit Freq Error -16.415 kHz OBW Power 99.00 % x dB Bandwidth 16.42 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Occupied Bandwidth 16.458 MHz Total Power 12.1 dBm Transmit Freq Error -20.181 kHz OBW Power 99.00 % x dB Bandwidth 16.31 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.96 dB Ref 26.96 dBm Occupied Bandwidth 17.612 MHz Total Power 12.6 dBm Transmit Freq Error -22.096 kHz OBW Power 99.00 % x dB Bandwidth 17.31 MHz x dB -6.00 dB

802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

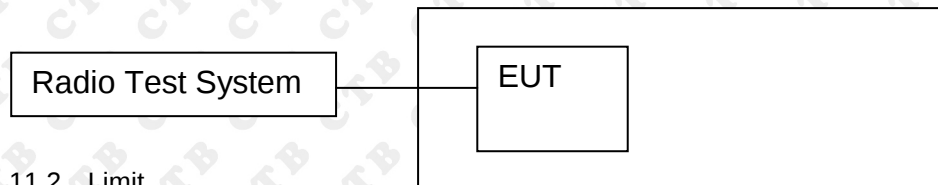

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-14.502	-15.329	/	8
	MCH	-14.061	-15.454	/	8
	HCH	-13.905	-15.211	/	8
802.11g	LCH	-19.012	-17.916	/	8
	MCH	-18.396	-17.917	/	8
	HCH	-18.817	-18.38	/	8
802.11n(H T20)	LCH	-18.787	-19.072	-15.917	8
	MCH	-18.651	-22.873	-17.258	8
	HCH	-21.973	-18.578	-16.942	8
802.11n(H T40)	LCH	-22.262	-22.089	-19.164	8
	MCH	-23.069	-22.493	-19.761	8
	HCH	-23.082	-22.591	-19.819	8


ANT1: Test Graph

Graphs


802.11b /LCH

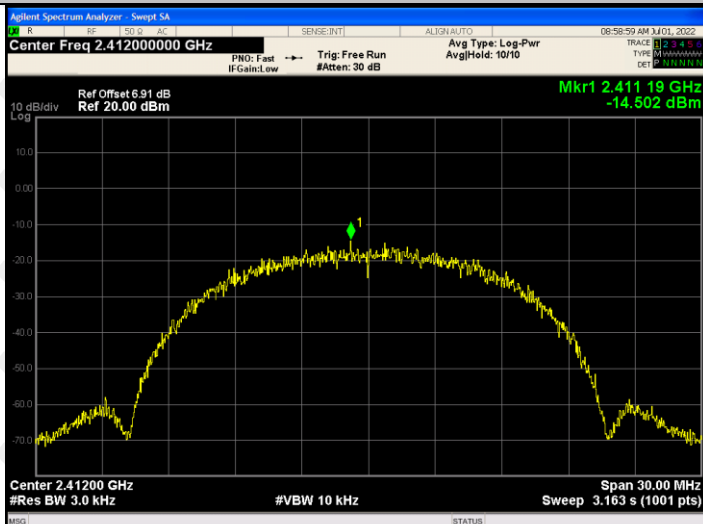


802.11b /MCH

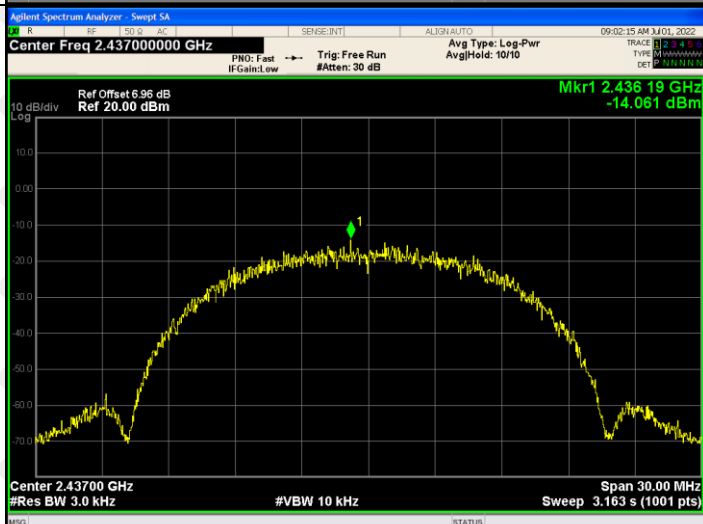


802.11b/HCH

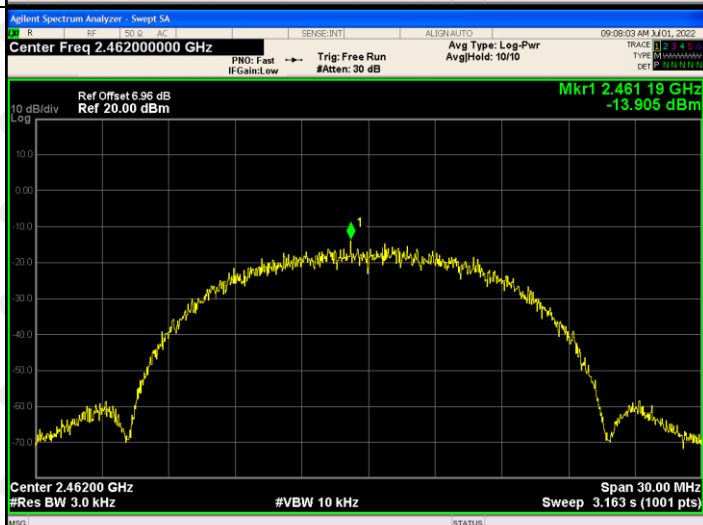


802.11g/LCH



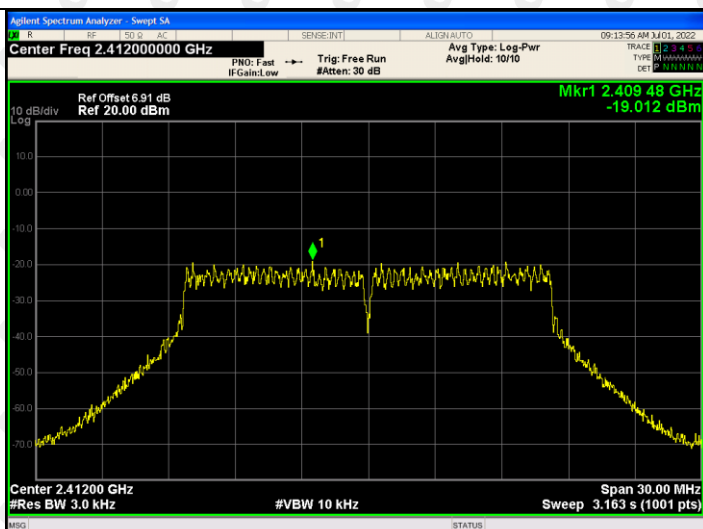





802.11g/MCH

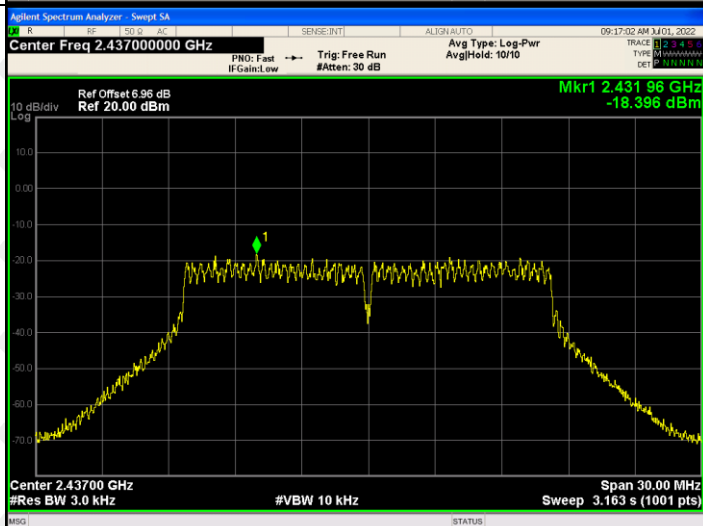

802.11g/HCH

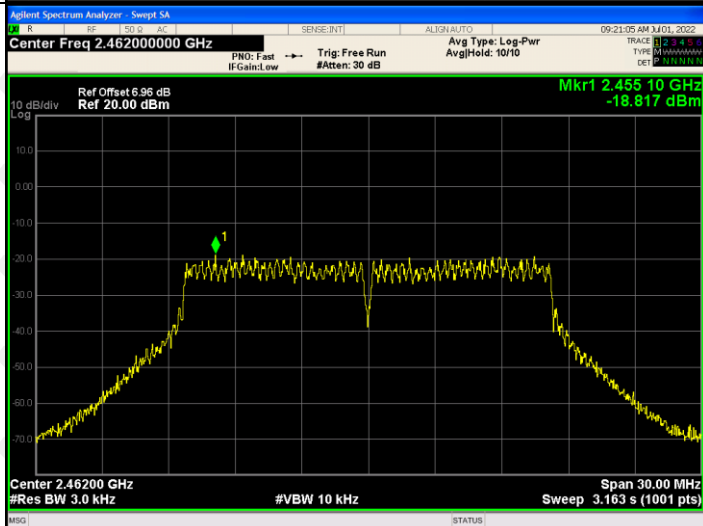

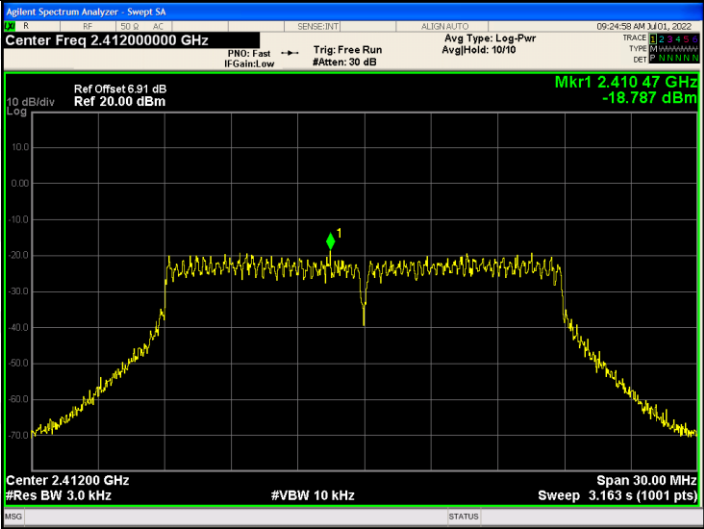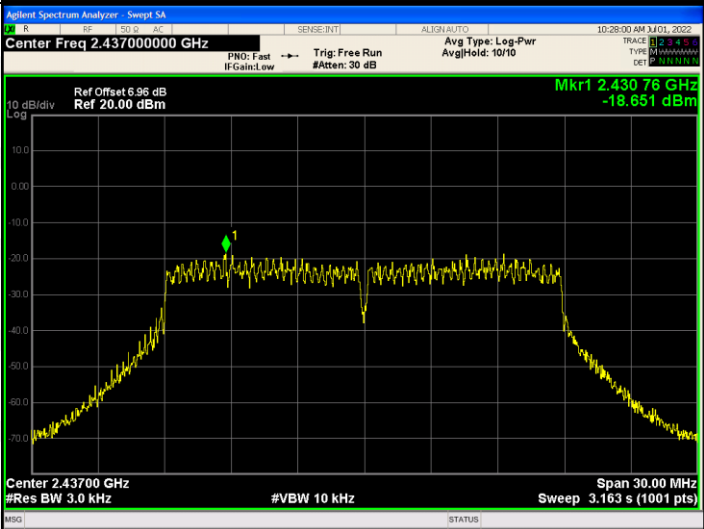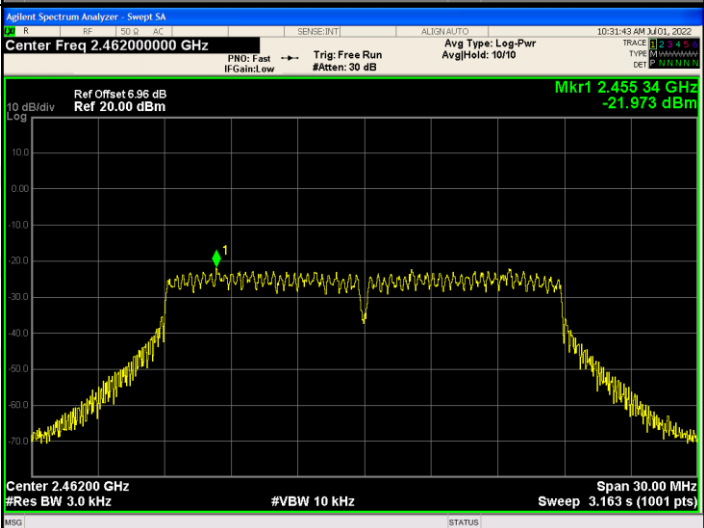
802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.410 47 GHz -18.787 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.430 76 GHz -18.651 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.95 dB Ref 20.00 dBm Mkr1 2.455 34 GHz -21.973 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

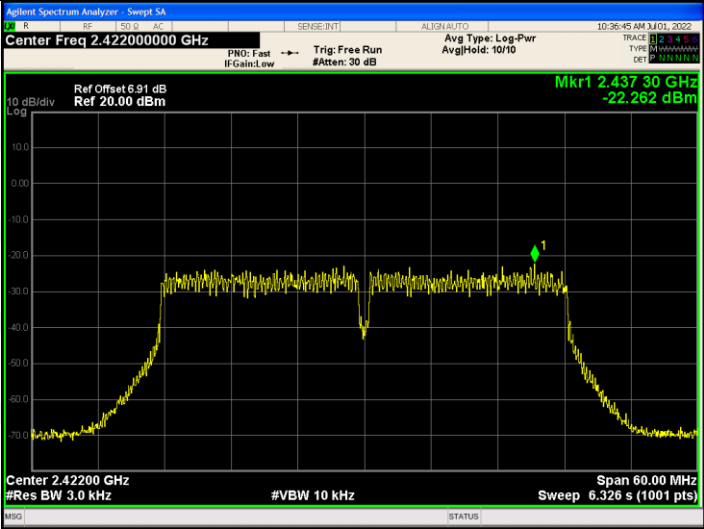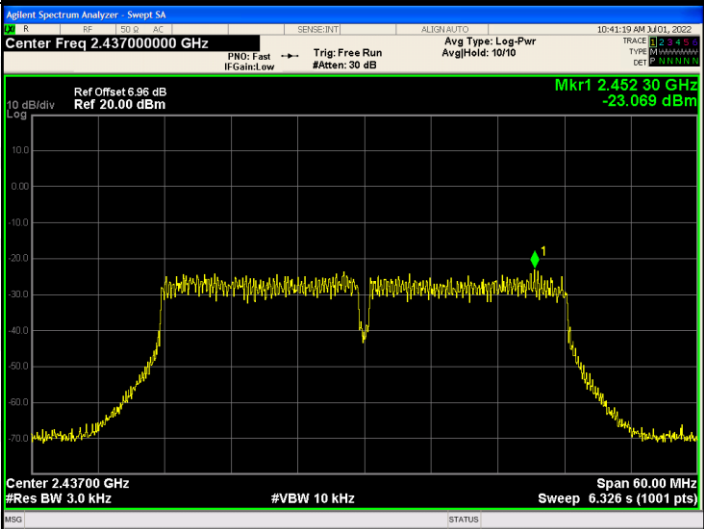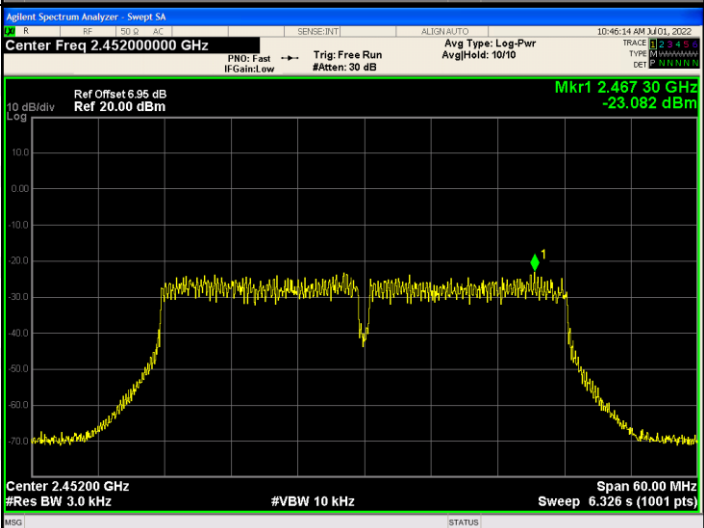802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	


ANT 2: Test Graph

Graphs


802.11b /LCH

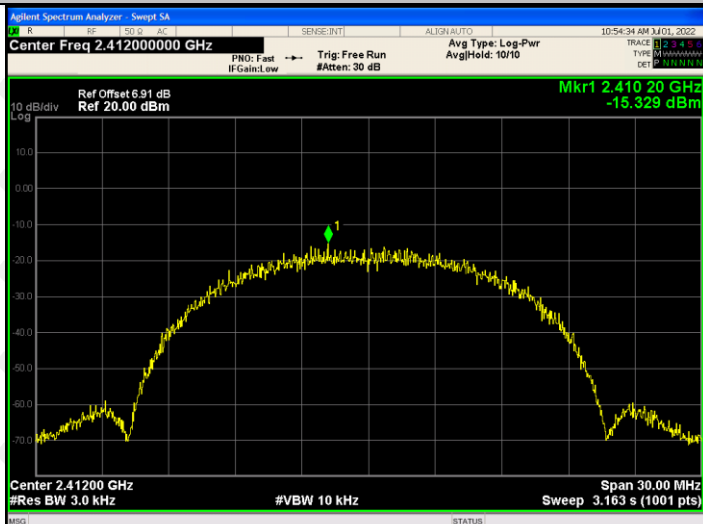


802.11b /MCH

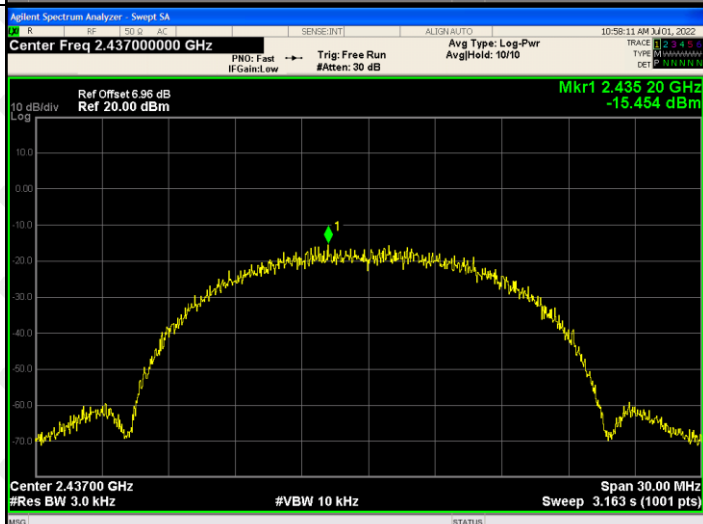


802.11b/HCH

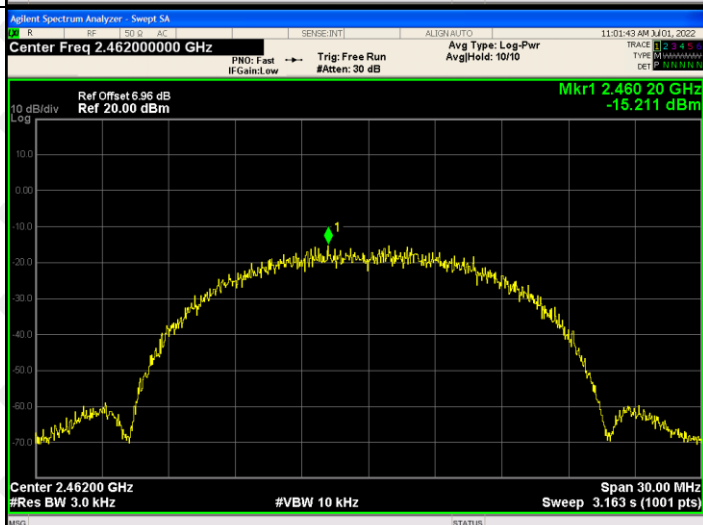


802.11g/LCH



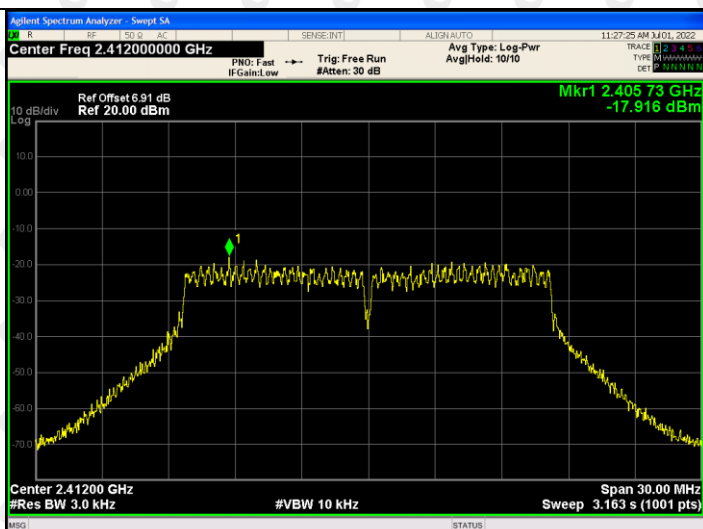





802.11g/MCH

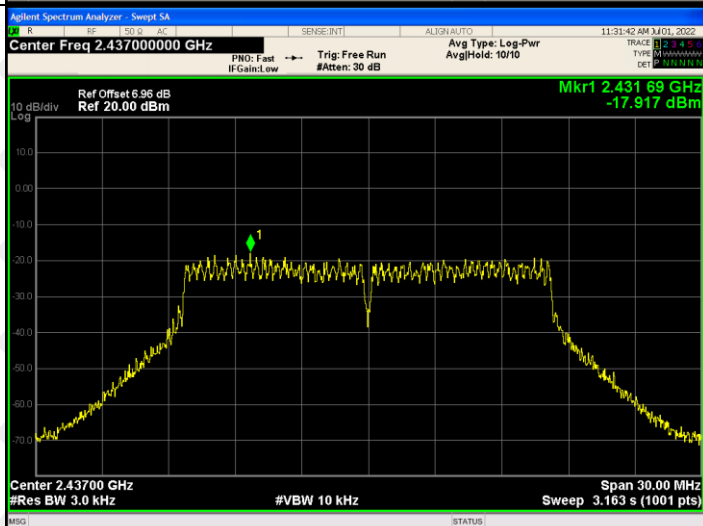

802.11g/HCH

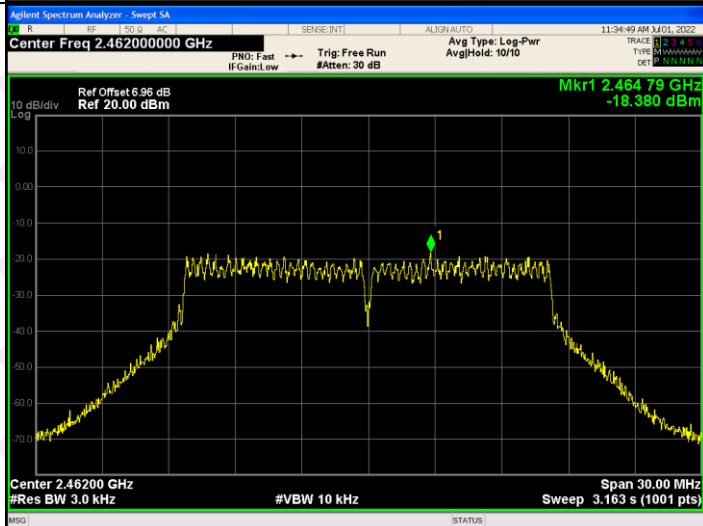

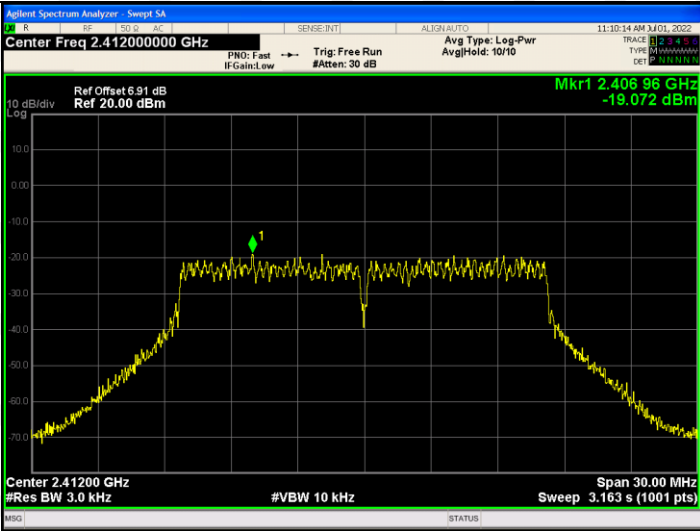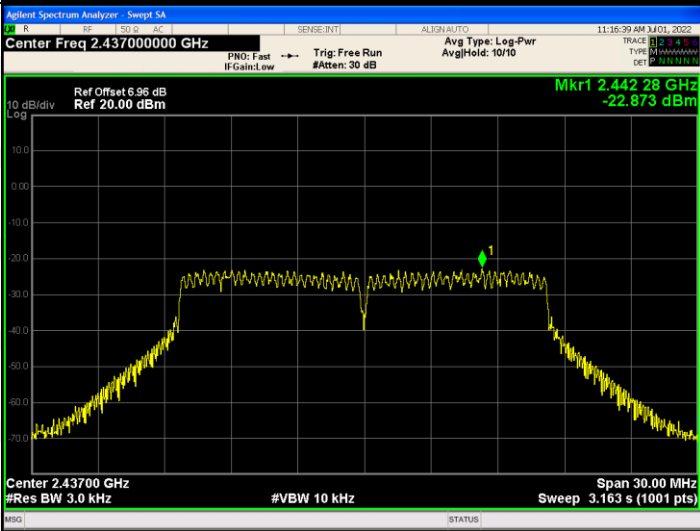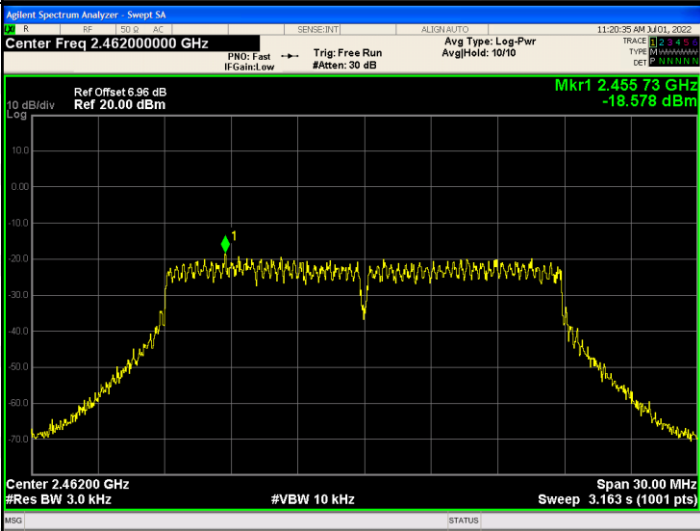802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

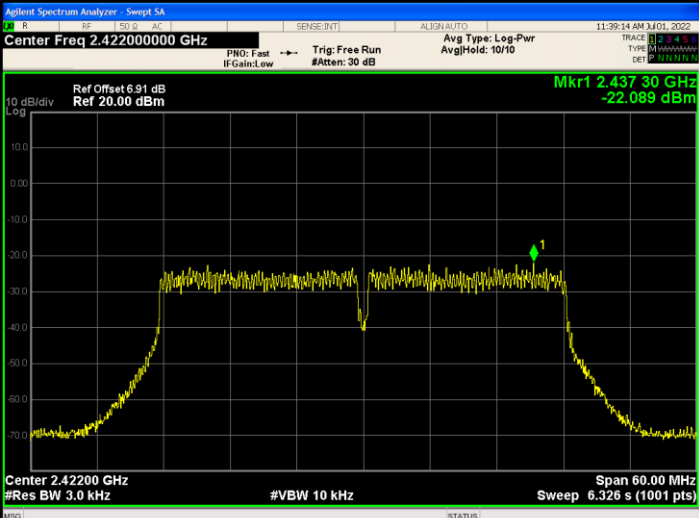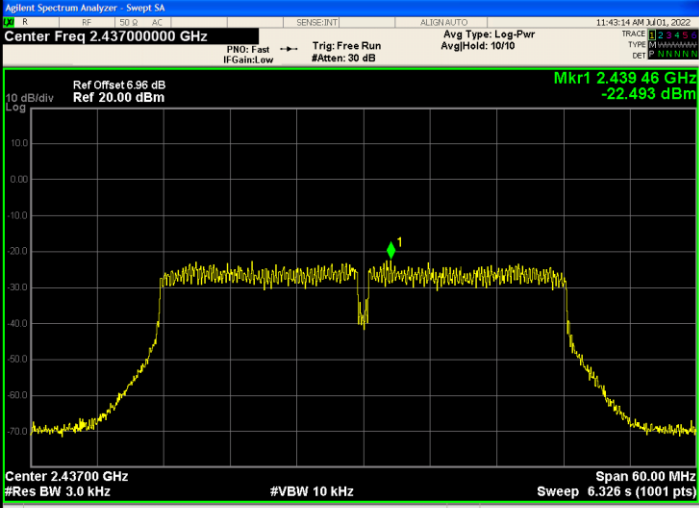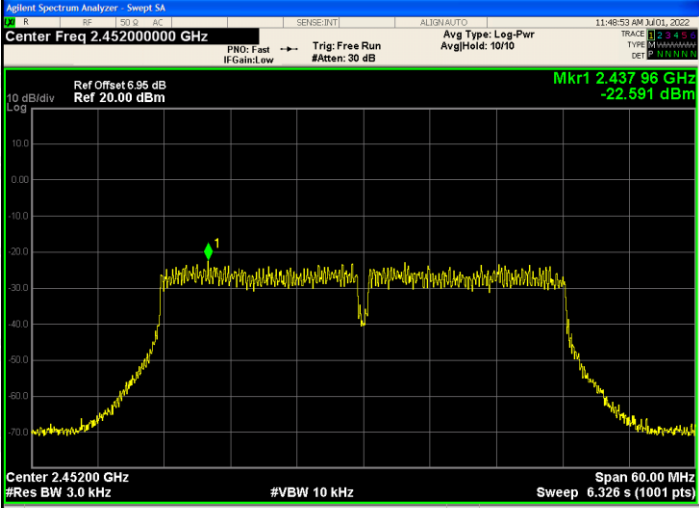802.11n(HT40)/LC H		
802.11n(HT40)/MC H		
802.11n(HT40)/HC H		

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.


13. EUT PHOTOGRAPHS

External Photos

EUT Photo 1




EUT Photo 2

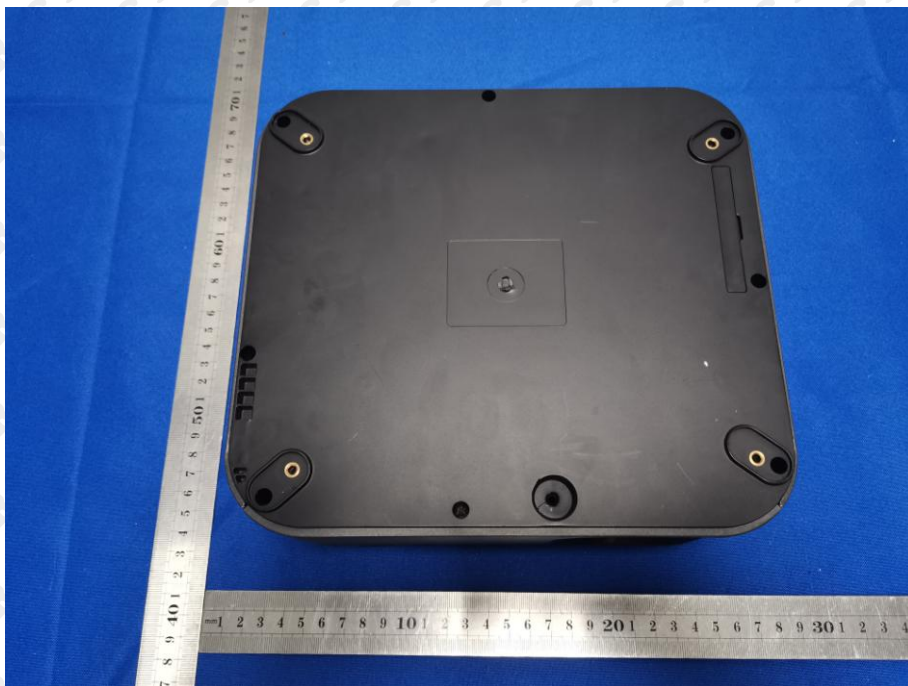

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

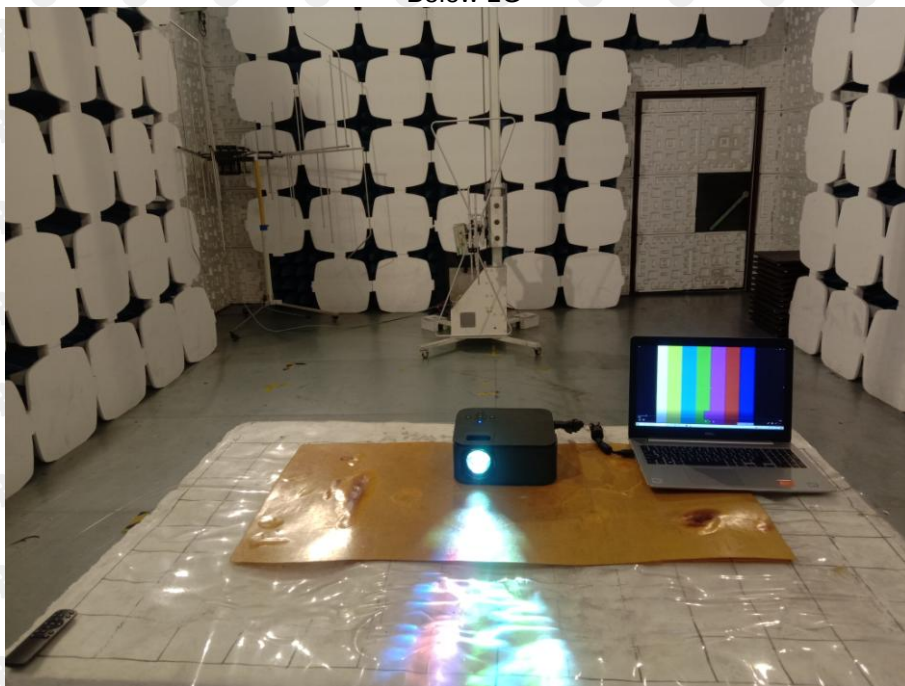

Above 1G



Conducted Emission



***** END OF REPORT *****