

# FCC Test Report

Client Name : Guangdong Hongguan Electrical Appliance CO., LTD

Address : No. 62, Xinzhou West Street, Lincun Community,  
TangxiaTown, Dongguan, Guangdong Province, China

Product Name : Inline Fan

Date : July 02, 2022

**Shenzhen Anbotek Compliance Laboratory Limited**

# Contents

1. General Information .....	4
1.1. Client Information .....	4
1.2. Description of Device (EUT) .....	4
1.3. Auxiliary Equipment Used During Test .....	5
1.4. Description of Test Mode .....	5
1.5. Test Summary .....	5
1.6. Test Equipment List .....	6
1.7. Description of Test Facility .....	7
1.8. Measurement Uncertainty .....	7
2. Power Line Conducted Emission Test .....	8
2.1. Test Standard and Limit .....	8
2.2. Test Setup .....	8
2.3. EUT Configuration on Measurement .....	8
2.4. Operating Condition of EUT .....	8
2.5. Test Procedure .....	9
2.6. Test Results .....	9
3. Radiated Emission Test .....	12
3.1. Test Standard and Limit .....	12
3.2. Test Setup .....	13
3.3. EUT Configuration on Measurement .....	14
3.4. Operating Condition of EUT .....	14
3.5. Test Procedure .....	14
3.6. Test Results .....	14
PPENDIX I -- TEST SETUP PHOTOGRAPH .....	19
APPENDIX II -- EXTERNAL PHOTOGRAPH .....	21
APPENDIX III -- INTERNAL PHOTOGRAPH .....	24

# TEST REPORT

Applicant : Guangdong Hongguan Electrical Appliance CO.,LTD  
Manufacturer : No. 62, Xinzhou West Street, Lincun Community, TangxiaTown, Dongguan, Guangdong Province, China  
Product Name : Inline Fan  
Model No. : GF-800\200P, GF-800\200PM, GF-500\150P, GF-500\150PM, GF-300\125P, GF-300\125PM, GF-200\100P, GF-200\100PM  
Trade Mark : N/A  
Rating(s) : AC 110~120V/60Hz

**Test Standard(s)** : FCC Rules and Regulations Part 15 Subpart B  
**Test Method(s)** : ANSI C63.4-2014

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited

Date of Receipt  
Date of Test

July 02, 2022  
June. 27~July 02, 2022

Prepared By

(Ella Liang)



Approved & Authorized Signer

  
(Kingkong Jin)

## 1. General Information

### 1.1. Client Information

Applicant	:	Guangdong Hongguan Electrical Appliance CO.,LTD
Address	:	No. 62, Xinzhou West Street, Lincun Community, TangxiaTown, Dongguan, Guangdong Province, China
Manufacturer	:	Shenzhen Hongguan Mechatronics Co, Ltd. Dongguan Branch
Address	:	No. 62, Xinzhou West Street, Lincun, Tangxia Town, Dongguan, Guangdong Province
Factory	:	Shenzhen Hongguan Mechatronics Co, Ltd. Dongguan Branch
Address	:	No. 62, Xinzhou West Street, Lincun, Tangxia Town, Dongguan, Guangdong Province

### 1.2. Description of Device (EUT)

Product Name	:	Inline Fan
Model No.	:	GF-800\200P, GF-800\200PM, GF-500\150P, GF-500\150PM, GF-300\125P, GF-300\125PM, GF-200\100P, GF-200\100PM (Note: All samples are the same except the model number, so we prepare "AR-09" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 110~120V/60Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	:	Adapter: N/A
<b>Remark:</b> (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		


### 1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

### 1.4. Description of Test Mode

Pretest Mode	Description
Mode 1	On Mode

For Mode 1 Block Diagram of Test Setup



### 1.5. Test Summary

Test Items	Test Mode	Status
Power Line Conducted Emission Test (150KHz To 30MHz)	Mode 1	P
Radiated Emission Test (30MHz To 6000MHz)	Mode 1	P
P) Indicates "PASS".		
N) Indicates "Not applicable".		

**1.6. Test Equipment List**

## Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 22, 2021	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	Jul 05, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A

## Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
3.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
4.	Software Name EZ-EMC	Ferrari Technology	ANB-03A	N/A	N/A	N/A
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year

## 1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128

## 1.8. Measurement Uncertainty

Radiation Uncertainty	: Ur = 3.9 dB (Horizontal)
	: Ur = 3.8 dB (Vertical)
Conduction Uncertainty	: Uc = 3.4 dB

## 2. Power Line Conducted Emission Test

### 2.1. Test Standard and Limit

Test Standard	FCC Part 15 Subpart B	
---------------	-----------------------	--


#### Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B)

Test Limit	Frequency (MHz)	At mains terminals (dB $\mu$ V)	
		Quasi-peak Level	Average Level
	0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
	0.50 ~ 5.00	56	46
	5.00 ~ 30.00	60	50

**Remark:** (1) The lower limit shall apply at the transition frequencies.

(2) \* Decreasing linearly with logarithm of frequency.

### 2.2. Test Setup

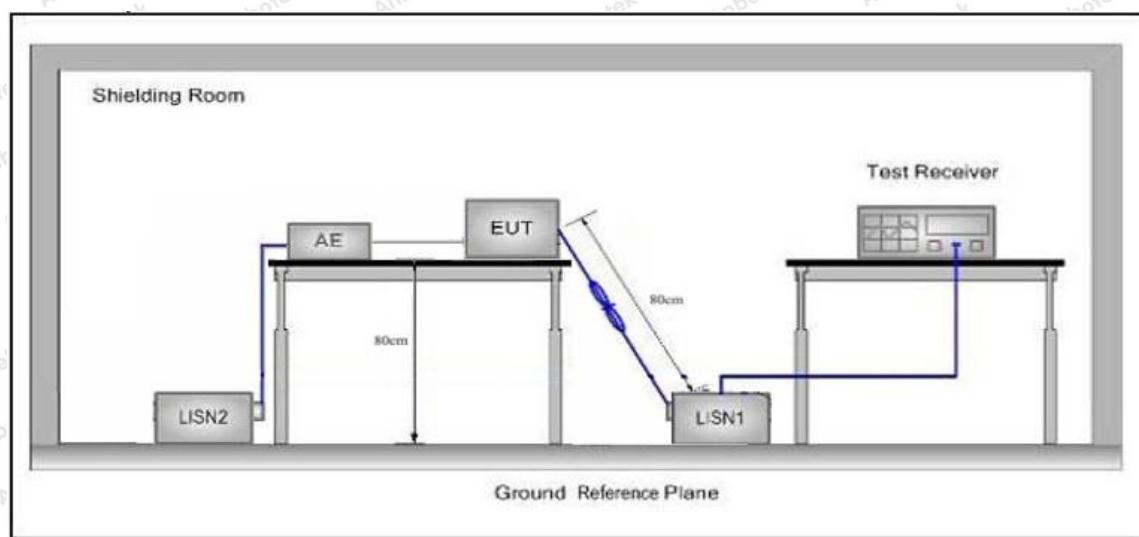

### 2.3. EUT Configuration on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 2.4. Operating Condition of EUT

- 2.4.1. Setup the EUT as shown in Section 2.2.
- 2.4.2. Turn on the power of all equipments.
- 2.4.3. Let the EUT work in test mode and measure it.

## 2.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2014 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

All the test results are listed in Section 2.6.

## 2.6. Test Results

### PASS


The frequency range from 150KHz to 30MHz is investigated.

Only the worst case data was showed in the report, please to see the following pages.



## Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for Power cord  
 Comment: Live Line  
 Tem.: 26.4°C Hum.: 53%

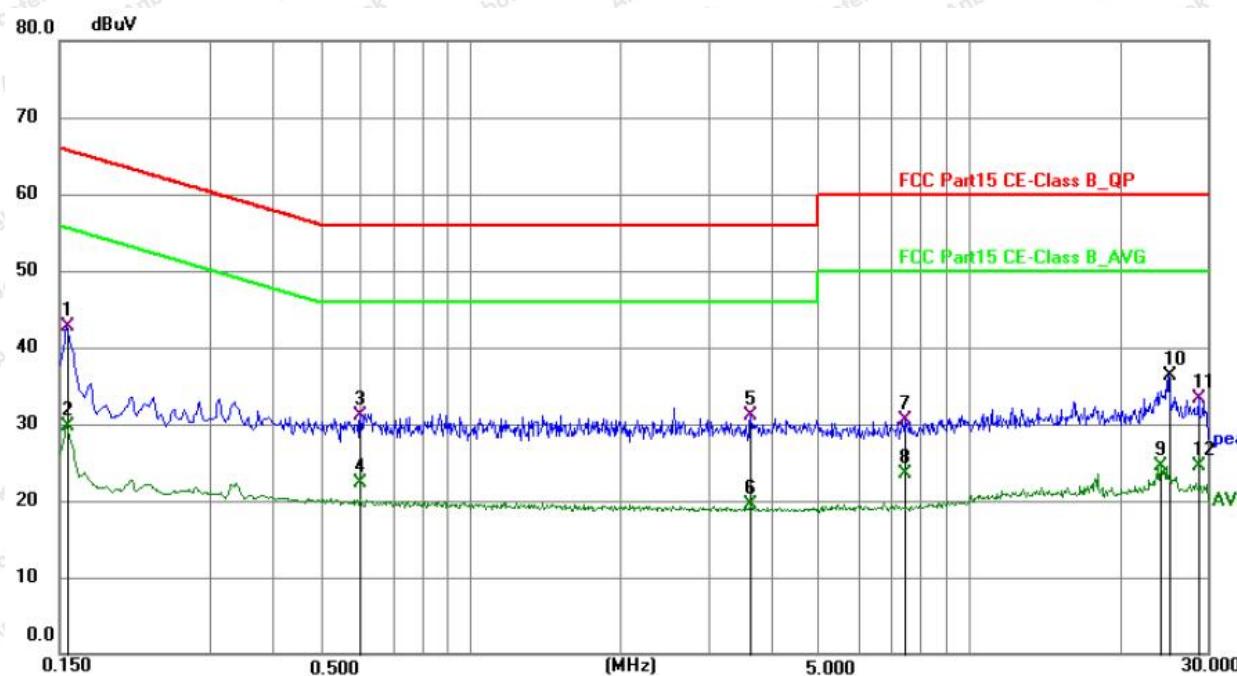

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.1545	32.34	10.29	42.63	65.75	-23.12	QP	P
2	0.1545	19.40	10.29	29.69	55.75	-26.06	AVG	P
3	0.6000	20.72	10.32	31.04	56.00	-24.96	QP	P
4	0.6000	11.92	10.32	22.24	46.00	-23.76	AVG	P
5	3.6465	20.74	10.42	31.16	56.00	-24.84	QP	P
6	3.6465	9.11	10.42	19.53	46.00	-26.47	AVG	P
7	7.4210	20.07	10.50	30.57	60.00	-29.43	QP	P
8	7.4210	12.91	10.50	23.41	50.00	-26.59	AVG	P
9	24.1750	13.83	10.72	24.55	50.00	-25.45	AVG	P
10	25.0839	25.58	10.72	36.30	60.00	-23.70	peak	P
11	28.7830	22.51	10.73	33.24	60.00	-26.76	QP	P
12	28.7830	13.82	10.73	24.55	50.00	-25.45	AVG	P

Note: Result=Reading+Factor    Over Limit=Result-Limit

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-EMC-04-a


Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440   Fax: (86) 755-26014772   Email: service@anbotek.com

Hotline  
 400-003-0500  
[www.anbotek.com](http://www.anbotek.com)

## Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for Power cord  
 Comment: Neutral Line  
 Tem.: 26.4°C Hum.: 53%

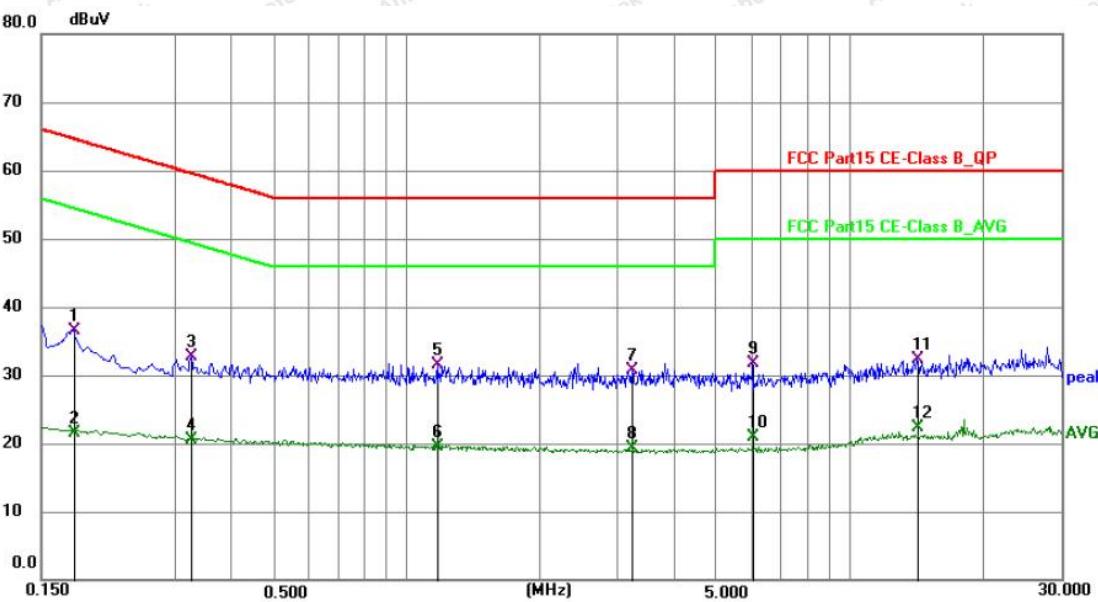

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1770	26.18	10.31	36.49	64.63	-28.14	QP	P
2	0.1770	11.28	10.31	21.59	54.63	-33.04	AVG	P
3	0.3255	22.30	10.33	32.63	59.57	-26.94	QP	P
4	0.3255	10.22	10.33	20.55	49.57	-29.02	AVG	P
5 *	1.1760	21.08	10.37	31.45	56.00	-24.55	QP	P
6	1.1760	9.23	10.37	19.60	46.00	-26.40	AVG	P
7	3.2280	20.30	10.43	30.73	56.00	-25.27	QP	P
8	3.2280	8.93	10.43	19.36	46.00	-26.64	AVG	P
9	6.0440	21.17	10.49	31.66	60.00	-28.34	QP	P
10	6.0440	10.42	10.49	20.91	50.00	-29.09	AVG	P
11	14.1580	21.64	10.60	32.24	60.00	-27.76	QP	P
12	14.1580	11.67	10.60	22.27	50.00	-27.73	AVG	P

Note: Result=Reading+Factor Over Limit=Result-Limit

### 3. Radiated Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part 15 Subpart B				
---------------	-----------------------	--	--	--	--

#### Radiated Emission Test Limit (Subpart B Class B)

Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

#### Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 3.2. Test Setup

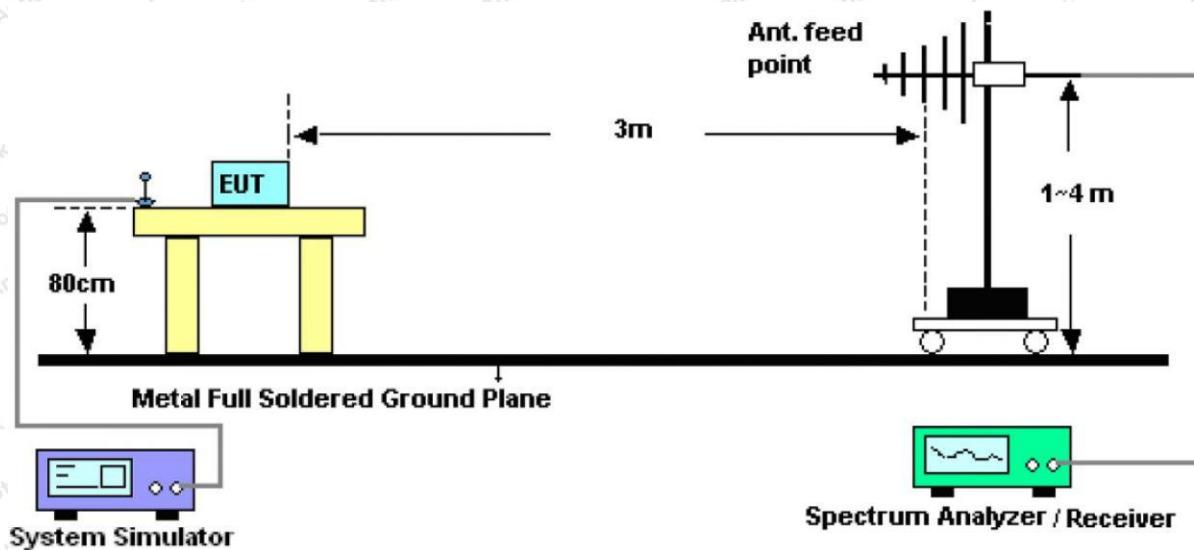


Figure 1. 30MHz to 1GHz

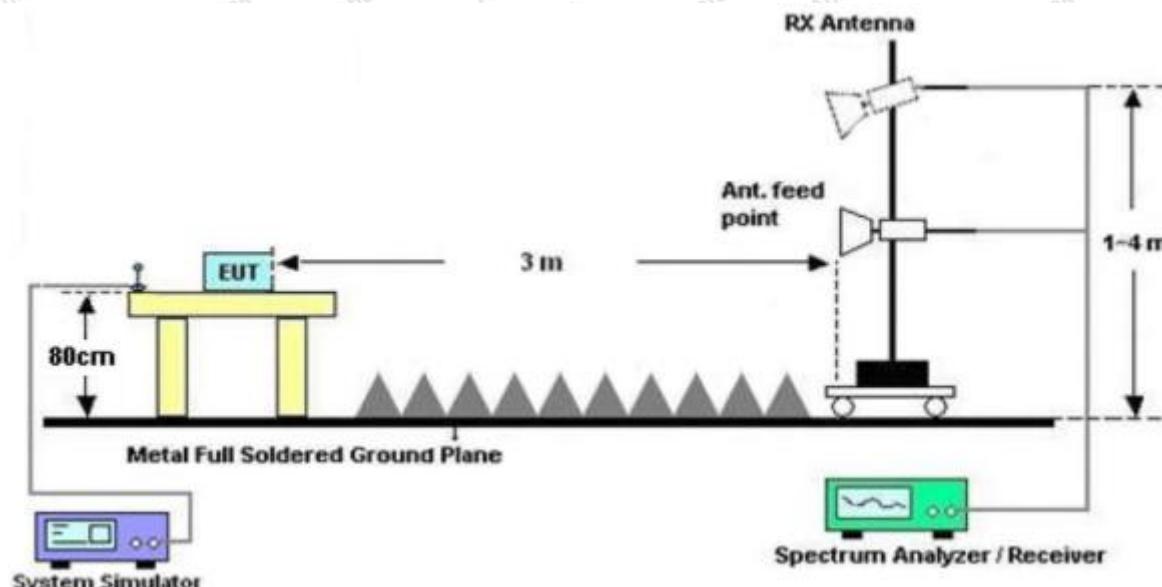


Figure 2. Above 1GHz

### 3.3. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT as shown in Section 3.2.
- 3.4.2. Turn on the power of all equipments.
- 3.4.3. Let the EUT work in test mode and measure it.

### 3.5. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Bilog antenna & Double Ridged Horn Antenna is used as a receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2014 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESR26) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The bandwidth of the EMI test receiver (ESR26) is set at 1MHz.

The frequency range from 1000MHz to 6000MHz is checked.

The test results are listed in Section 3.6.

### 3.6. Test Results


**PASS**

Only the worst case data was showed in the report, please to see the following pages.


## Test Results (30~1000MHz)

Test item:	Radiation Test	Polarization:	Horizontal																																																								
Standard:	(RE)FCC Part 15 Subpart B	Power Source:	AC 120V, 60Hz for Power cord																																																								
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	24°C/60%RH																																																								
<table border="1"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr> </thead> <tbody> <tr> <td>1</td><td>37.0704</td><td>30.09</td><td>-13.62</td><td>16.47</td><td>40.00</td><td>-23.53</td><td>QP</td></tr> <tr> <td>2</td><td>65.3890</td><td>30.75</td><td>-16.80</td><td>13.95</td><td>40.00</td><td>-26.05</td><td>QP</td></tr> <tr> <td>3</td><td>125.5777</td><td>29.63</td><td>-16.60</td><td>13.03</td><td>43.50</td><td>-30.47</td><td>QP</td></tr> <tr> <td>4</td><td>161.5307</td><td>31.64</td><td>-15.35</td><td>16.29</td><td>43.50</td><td>-27.21</td><td>QP</td></tr> <tr> <td>5</td><td>364.1318</td><td>30.60</td><td>-13.25</td><td>17.35</td><td>46.00</td><td>-28.65</td><td>QP</td></tr> <tr> <td>6 *</td><td>900.1474</td><td>32.01</td><td>-3.14</td><td>28.87</td><td>46.00</td><td>-17.13</td><td>QP</td></tr> </tbody> </table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	37.0704	30.09	-13.62	16.47	40.00	-23.53	QP	2	65.3890	30.75	-16.80	13.95	40.00	-26.05	QP	3	125.5777	29.63	-16.60	13.03	43.50	-30.47	QP	4	161.5307	31.64	-15.35	16.29	43.50	-27.21	QP	5	364.1318	30.60	-13.25	17.35	46.00	-28.65	QP	6 *	900.1474	32.01	-3.14	28.87	46.00	-17.13	QP
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																				
1	37.0704	30.09	-13.62	16.47	40.00	-23.53	QP																																																				
2	65.3890	30.75	-16.80	13.95	40.00	-26.05	QP																																																				
3	125.5777	29.63	-16.60	13.03	43.50	-30.47	QP																																																				
4	161.5307	31.64	-15.35	16.29	43.50	-27.21	QP																																																				
5	364.1318	30.60	-13.25	17.35	46.00	-28.65	QP																																																				
6 *	900.1474	32.01	-3.14	28.87	46.00	-17.13	QP																																																				
Note: Result=Reading+Factor Over Limit=Result-Limit																																																											


## Test Results (30~1000MHz)

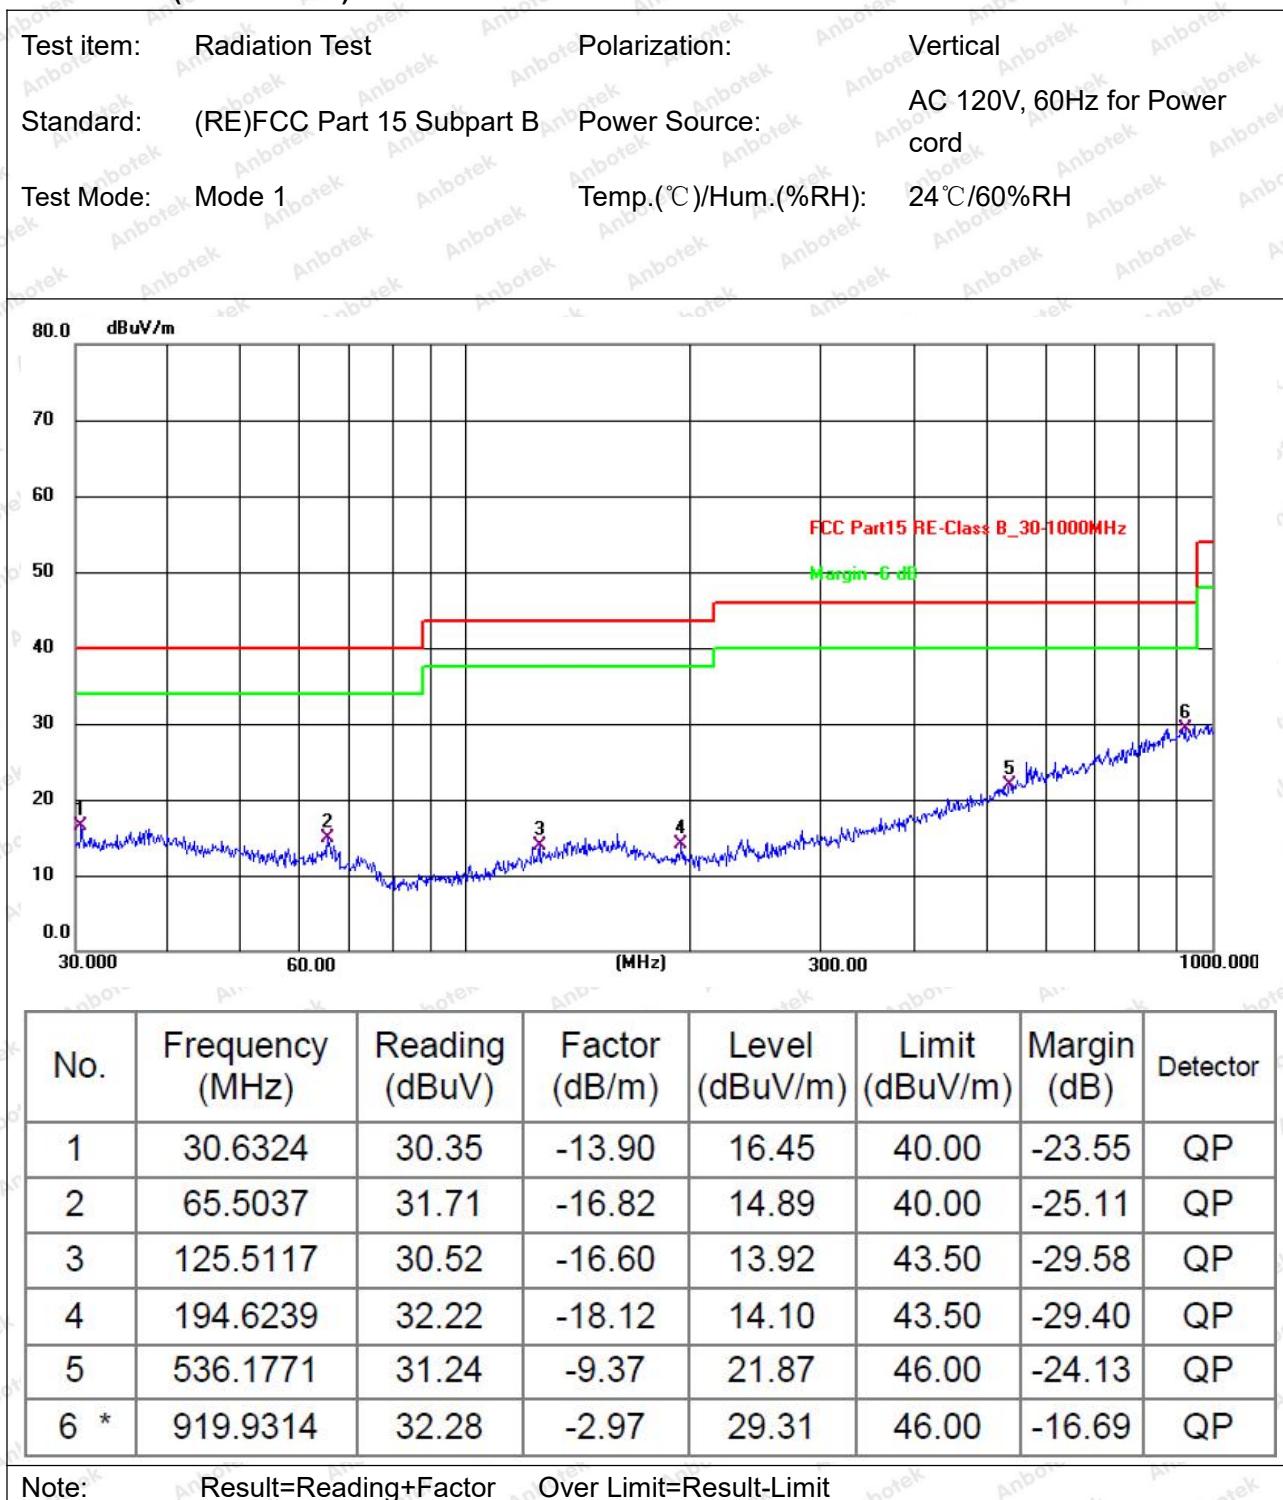

## Test Results (1GHz-12.75GHz)


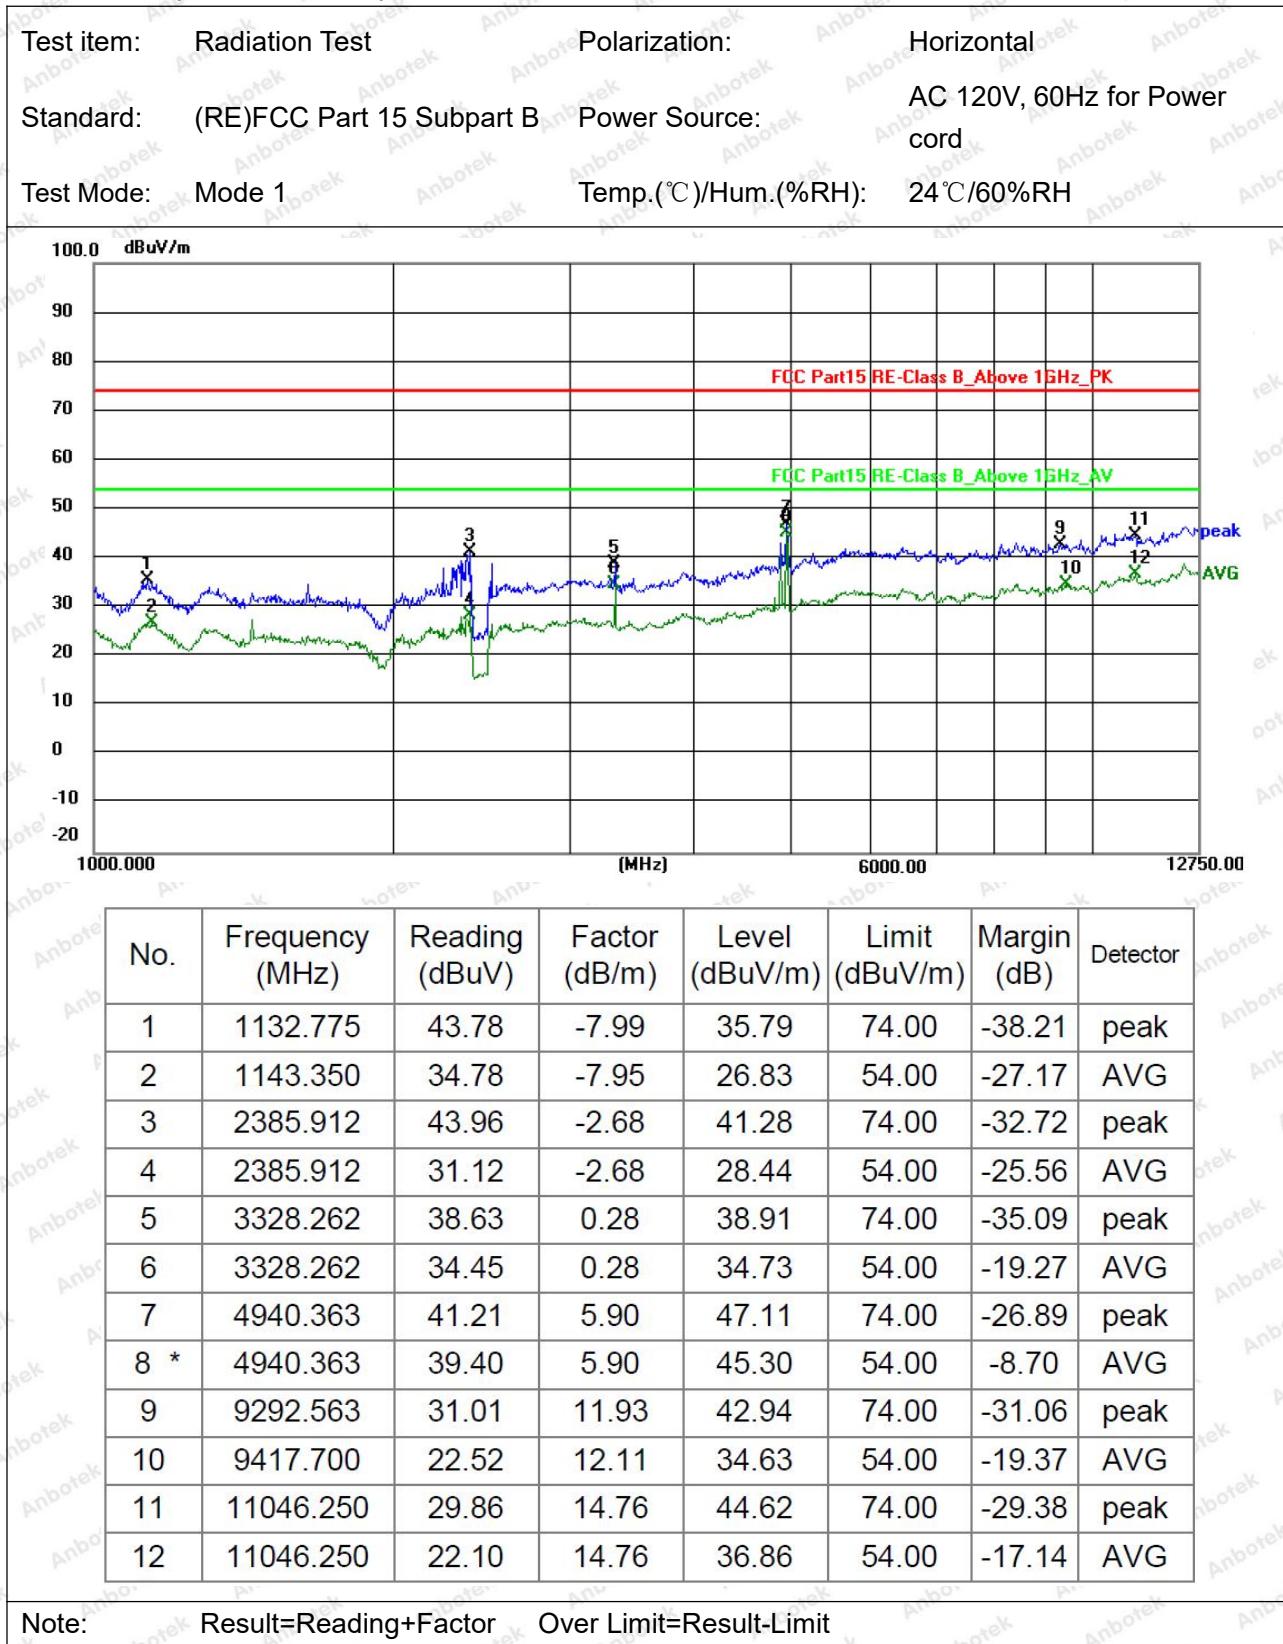


## Test Results (1GHz-12.75GHz)

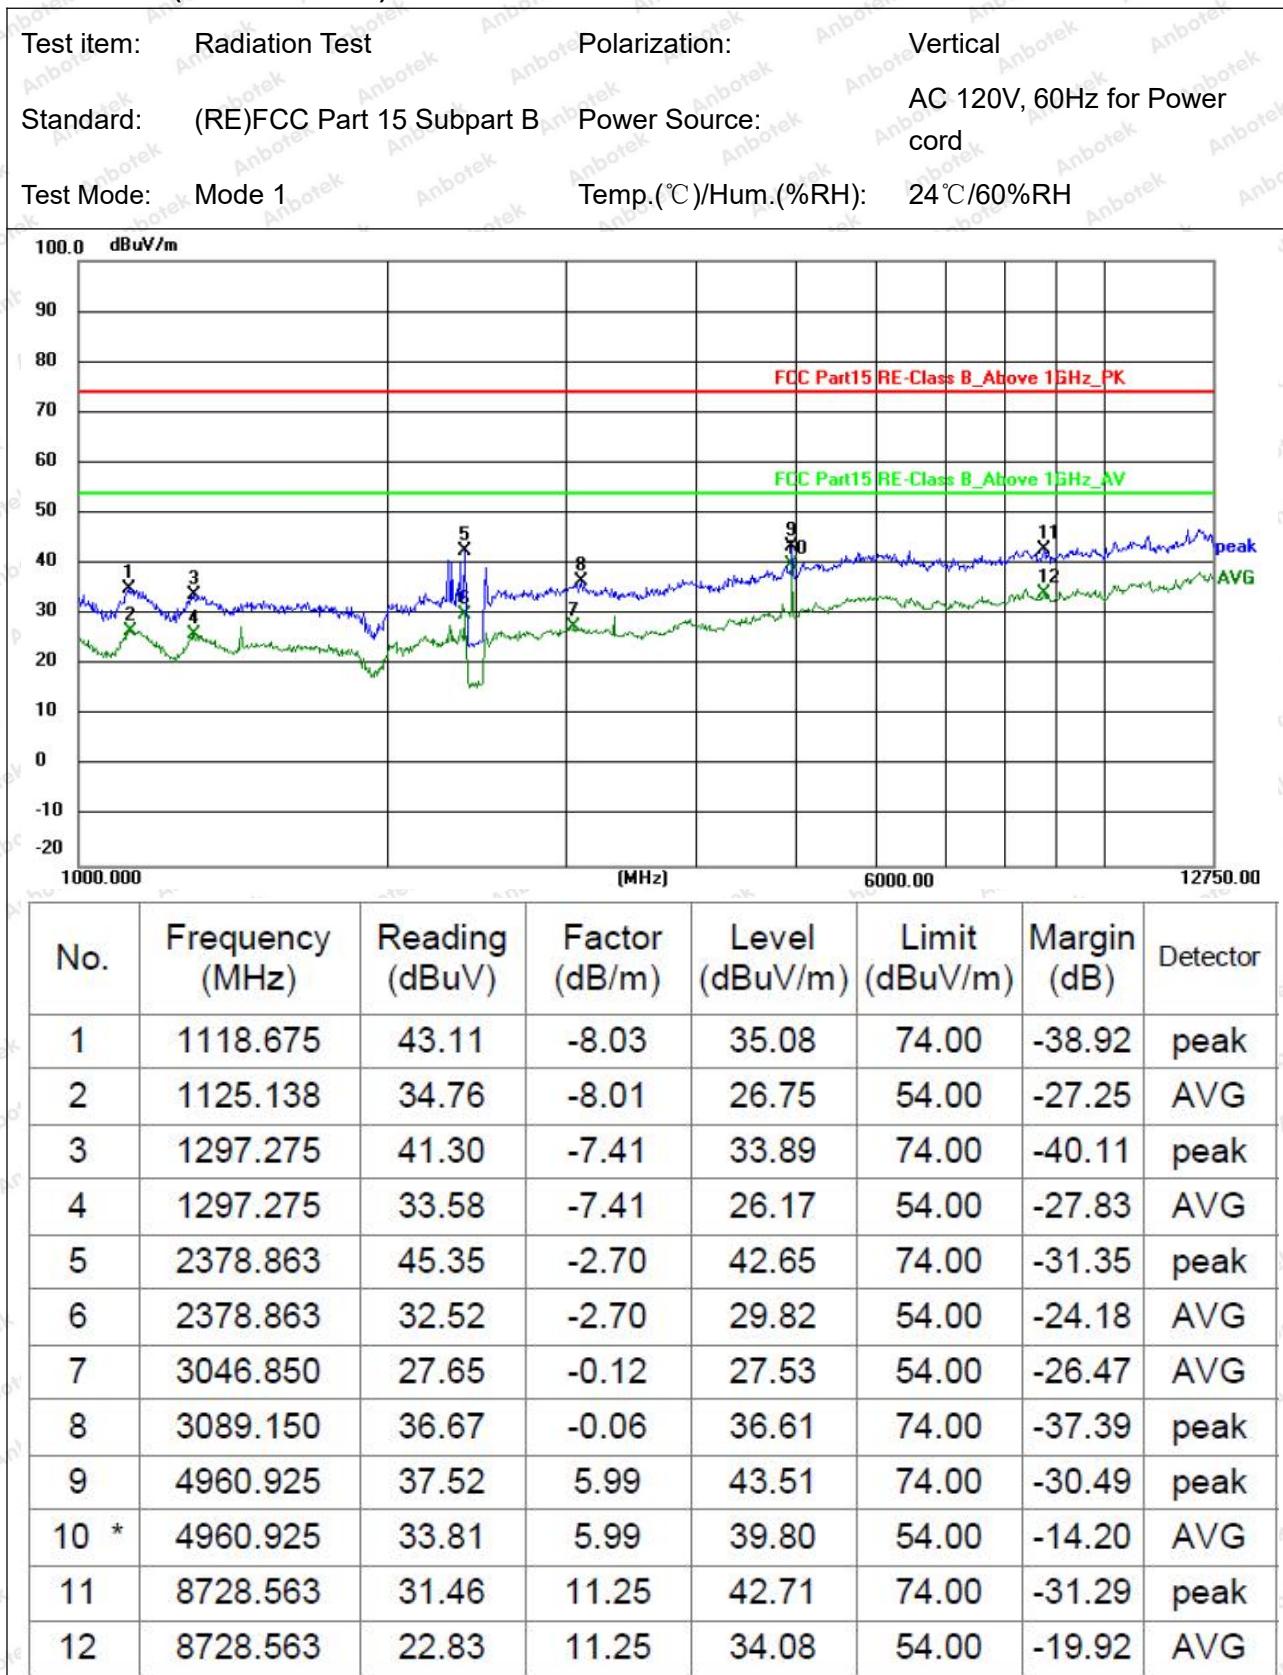

**PPENDIX I -- TEST SETUP PHOTOGRAPH**

Photo of Radiation Emission Test

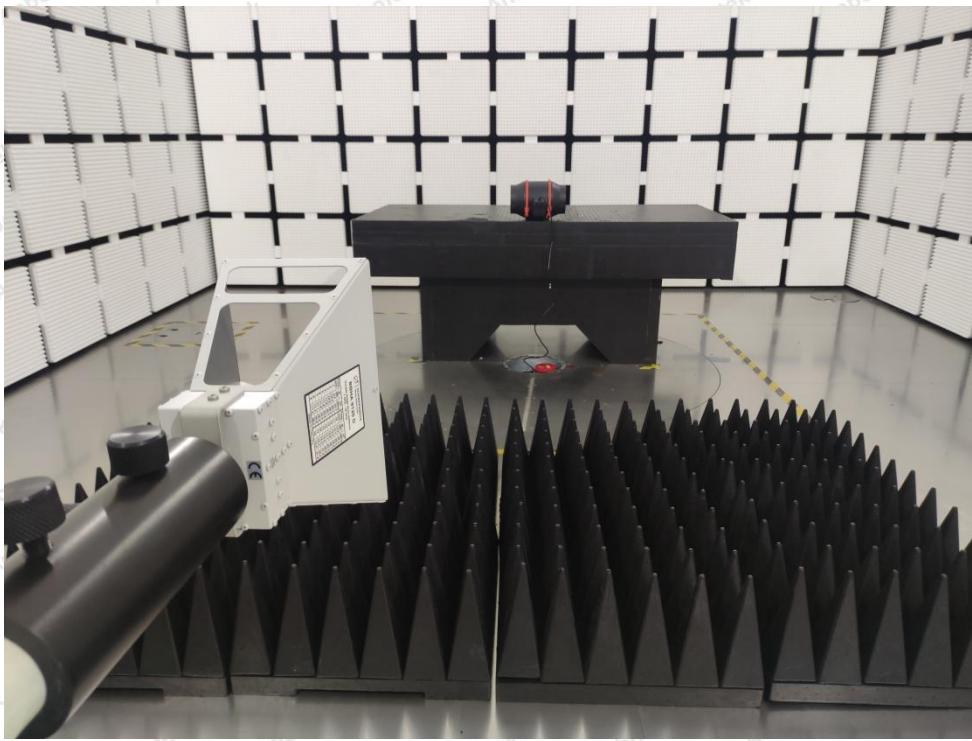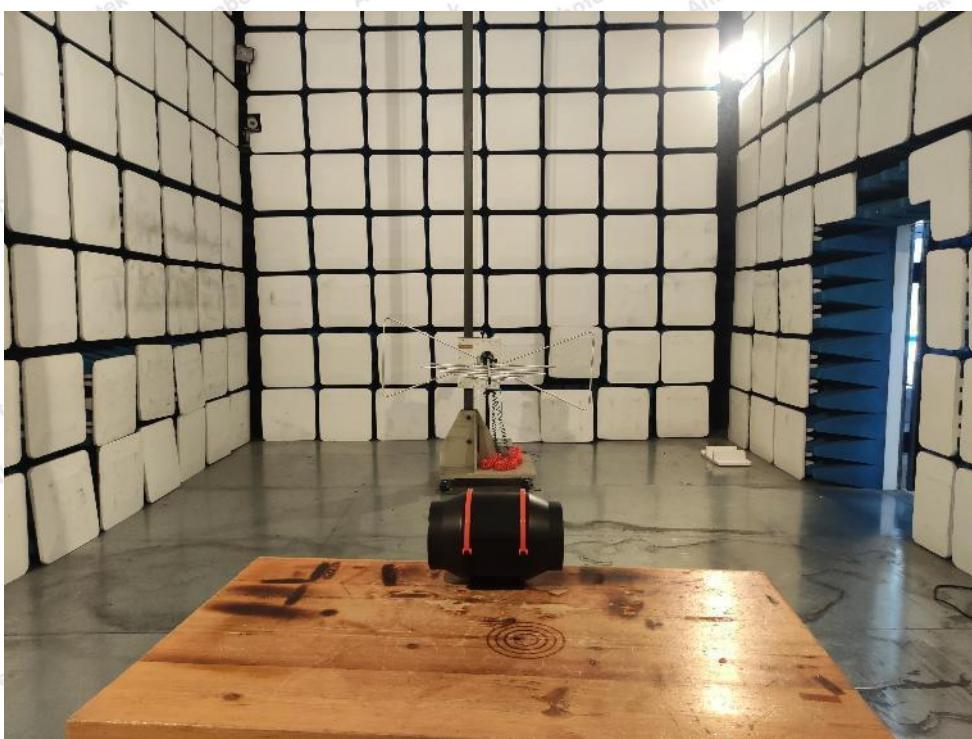



Report No.: TH2206472-C01-R01

FCC ID: 2A7Q8-GF-800-200P



Page 20 of 25


### Photo of Conducted Emission Test

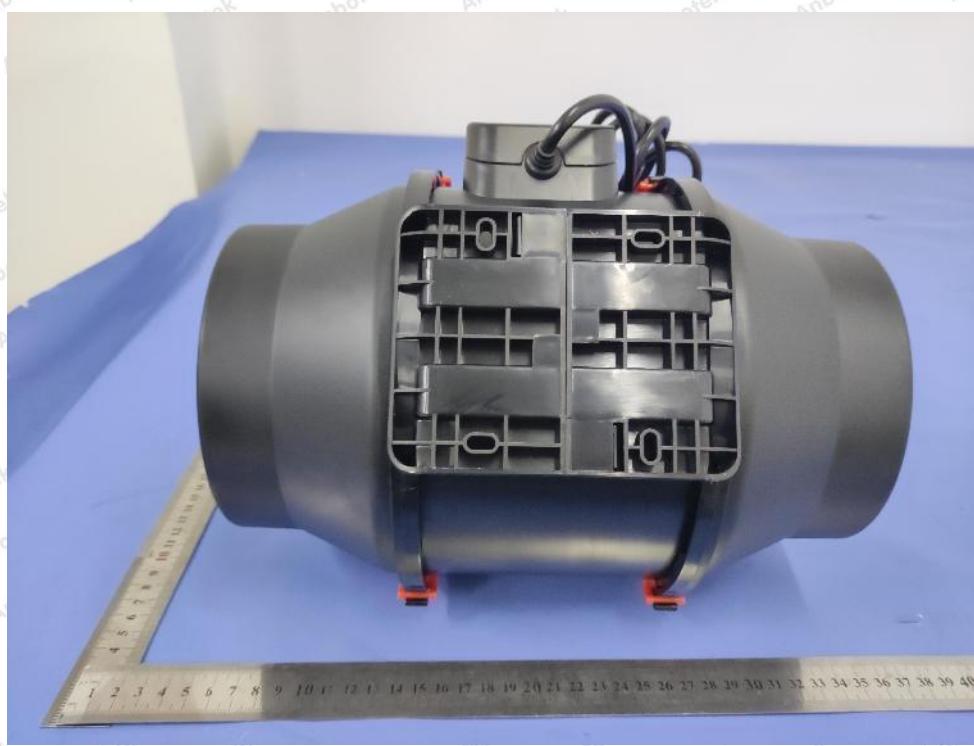
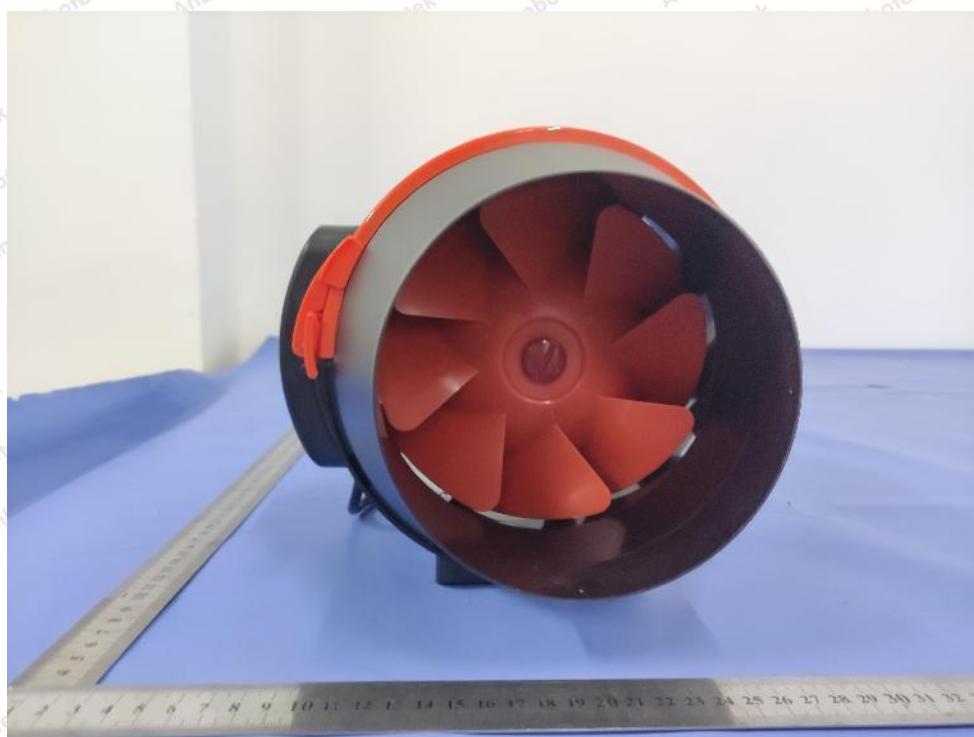


**APPENDIX II -- EXTERNAL PHOTOGRAPH**



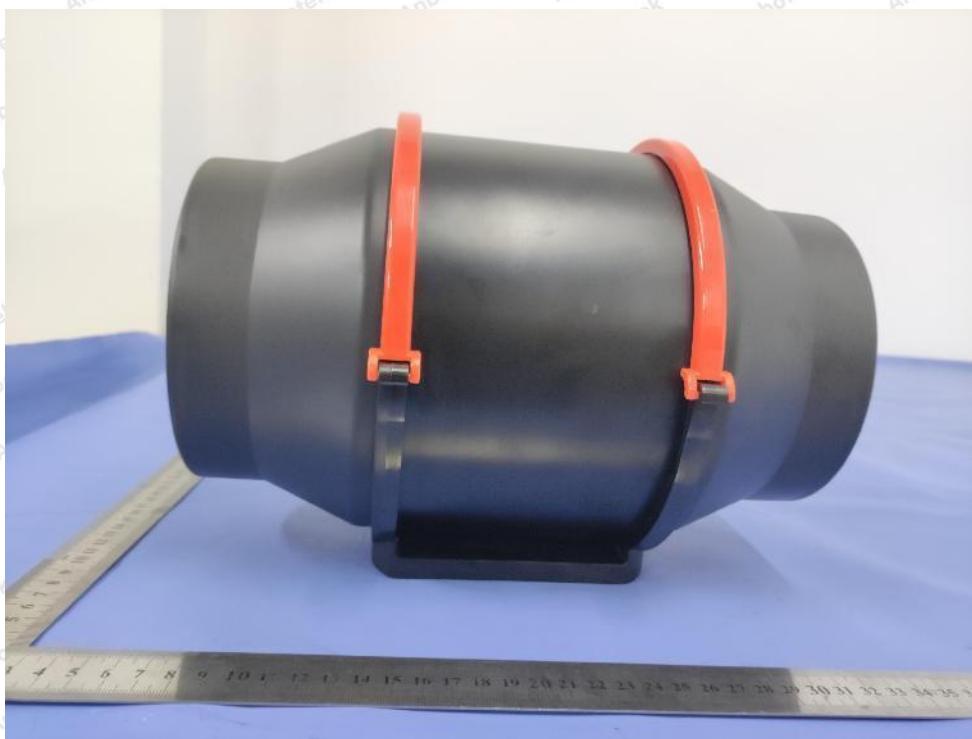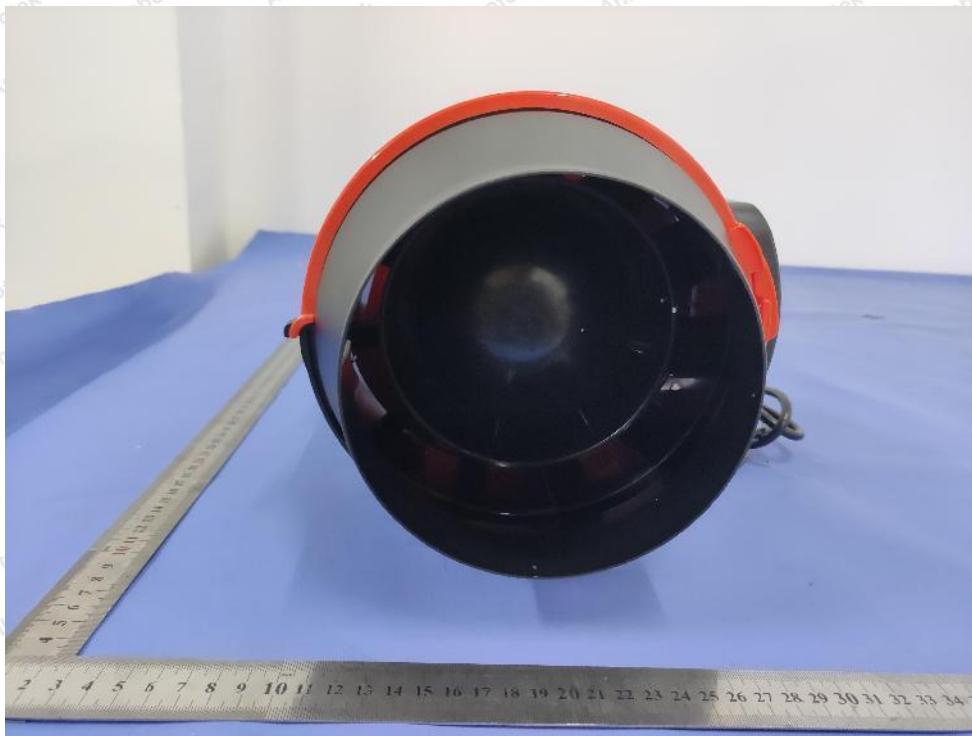

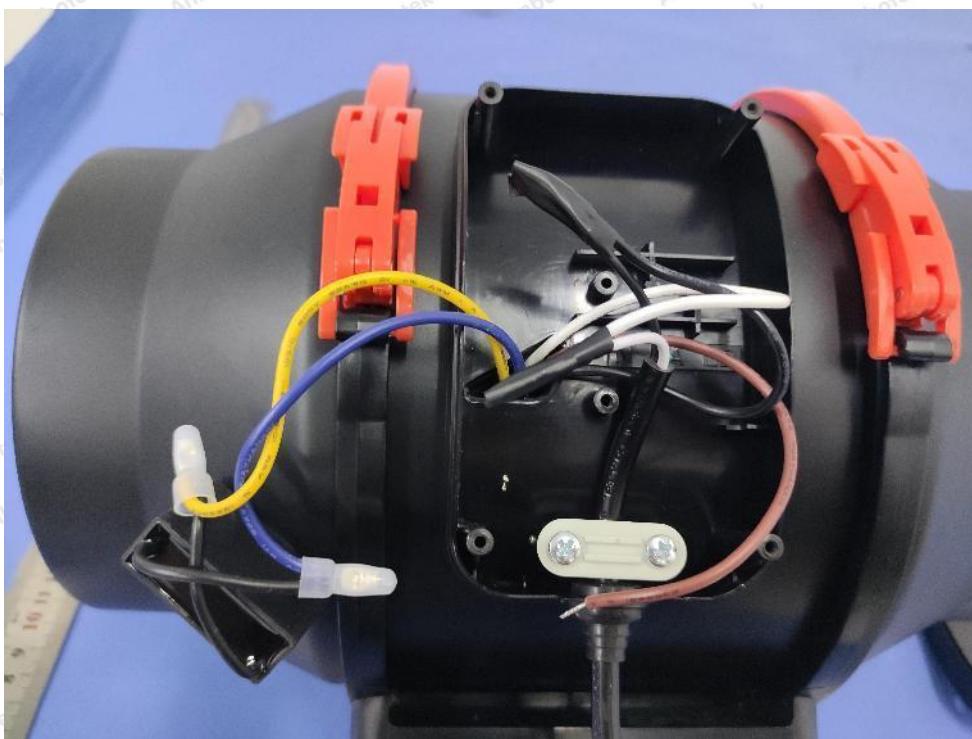**APPENDIX III -- INTERNAL PHOTOGRAPH**

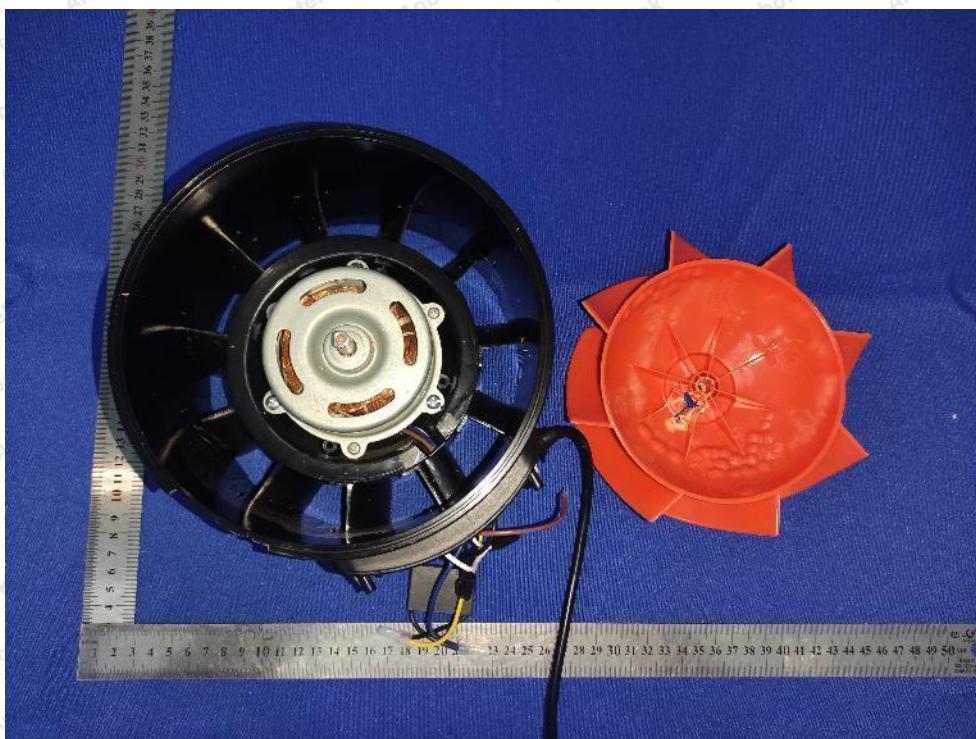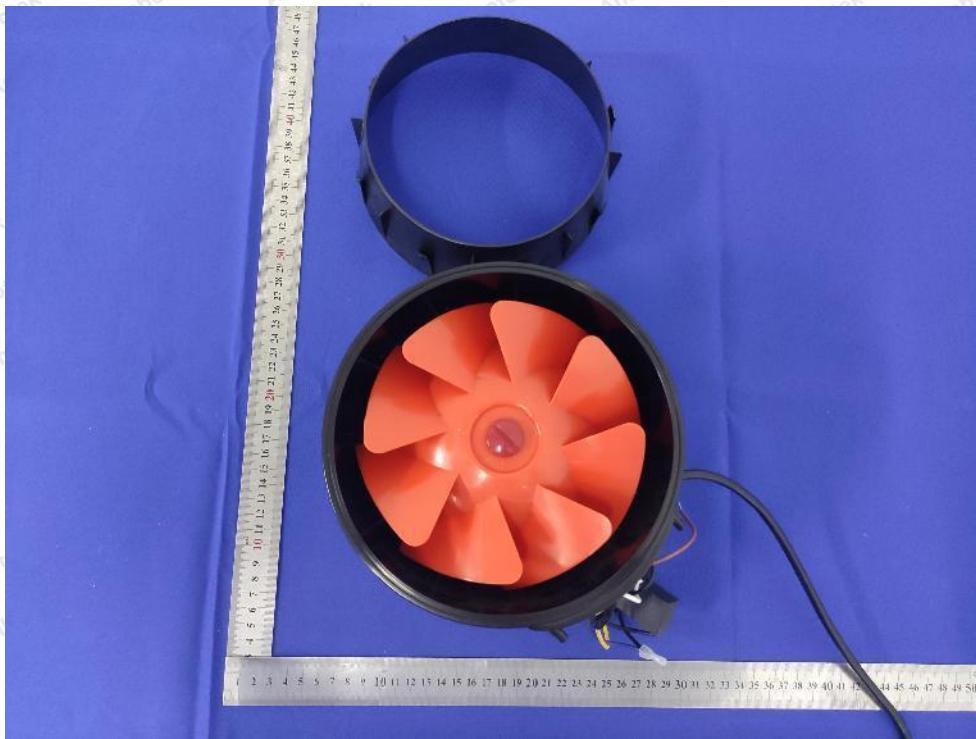

----- End of Report -----