



## TABLE OF CONTENTS

1. Test Certification .....	3
2. GENERAL DESCRIPTION OF EUT .....	4
3. Test Result Summary .....	5
4. TEST METHODOLOGY .....	6
4.1. CONFIGURATION OF SYSTEM UNDER TEST .....	7
4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE) .....	8
5. MEASUREMENT INSTRUMENTS .....	9
6. Facilities and Accreditations .....	10
6.1. FACILITIES .....	10
6.2. ACCREDITATIONS .....	10
6.3. MEASUREMENT UNCERTAINTY .....	11
7. EMC EMISSION TEST .....	12
7.1. CONDUCTED EMISSION MEASUREMENT .....	12
7.2. TEST RESULTS .....	14
7.3. RADIATED EMISSION MEASUREMENT .....	16
8. Test Setup Photographs .....	23



## 1. Test Certification

Product:	Open-Ear True Wireless Earbuds
Model No.:	OPN-675
Additional Model:	oraimo
Applicant:	<b>ORAIMO TECHNOLOGY LIMITED</b> FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	<b>ORAIMO TECHNOLOGY LIMITED</b> FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of receipt:	10 December 2024
Date of Test:	11 December 2024 ~ 20 December 2024
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart B

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Jiang Guanliang  
(Jiang Guanliang)

Checked By: Qin Shuiquan  
( Qin Shuiquan)

Approved By: Li Huaibi  
( Li Huaibi)

Date: 23 December 2024



## 2. GENERAL DESCRIPTION OF EUT

<b>Product Name:</b>	Open-Ear True Wireless Earbuds
<b>Model :</b>	OPN-675
<b>Trade Mark:</b>	oraimo
<b>Hardware version:</b>	V1.5
<b>Operating Voltage</b>	Li-ion Polymer Battery: ZWD76230V Nominal Voltage: 3.8V Rated Capacity: 85mAh/0.323Wh Limited charge voltage:4.35V Charging Box: ZWD403538V Nominal Voltage: 3.8V Capacity:750mAh/3.8V/2.85Wh
<b>Remark:</b>	N/A.

Note: 1. N/A stands for no applicable.

2. Antenna gain provided by the applicant

### 3. Test Result Summary

Requirement	CFR 47 Section	Result
CONDUCTED EMISSION	§15.107	PASS
RADIATED EMISSION	§15.109	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

## 4. TEST METHODOLOGY

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging
Mode 2	Bluetooth
Mode 3	Bluetooth + charging


Note: Bluetooth earphones cannot be turned on while charging in the charging compartment.

Report No.: WSCT-ANAB-R&amp;E241200070A-15B

## 4.1. CONFIGURATION OF SYSTEM UNDER TEST

Mode 1&amp; Mode 3

&amp; Mode 2

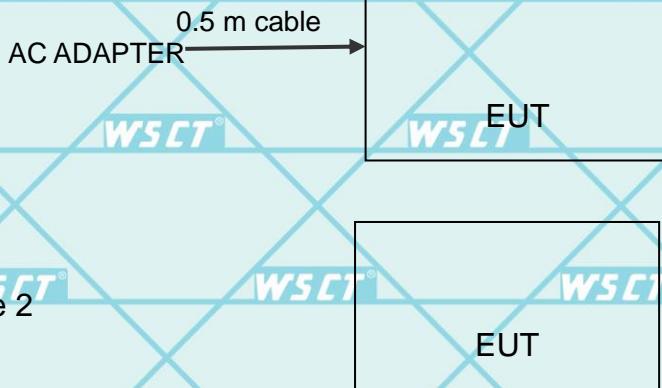

(EUT: Open-Ear True Wireless Earbuds)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
Power	1	0.5m USB cable, unshielded	/
Earphone	/	/	/

## 4.2. DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	/	/	/
2	Keyboard	/	/	/	/
3	Mouse	WSCT /	WSCT /	WSCT /	/

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.

## 5. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
Test software	-	EZ-EMC	CON-03A	-	-
ESCI Test Receiver	R&S	ESCI	100005	11/05/2024	11/04/2025
LISN	AFJ	WSCT LS16	16010222119	11/05/2024	11/04/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2024	11/04/2025
pre-amplifier	CDSI	PAP-1G18-38	-	11/05/2024	11/04/2025
System Controller	WSCT	SC100	-	11/05/2024	11/04/2025
Bi-log Antenna	Chase	CBL6111C	2576	11/05/2024	11/04/2025
Spectrum analyzer	R&S	FSU26	200409	11/05/2024	11/04/2025
Horn Antenna	SCHWARZBECK	9120D	W1141	11/05/2024	11/04/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	07/29/2024	07/28/2025
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2024	11/04/2025
9*6*6 Anechoic	WSCT	WSCT	-	11/05/2024	11/04/2025

Report No.: WSCT-ANAB-R&amp;E241200070A-15B

## 6. Facilities and Accreditations

### 6.1. Facilities

All measurement facilities used to collect the measurement data are located at

**World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.**

**Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

#### CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

#### FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

#### ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951

## 6.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	±3.2dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(<1GHz)	±4.7dB
5	All emissions, radiated(>1GHz)	±4.7dB
6	Temperature	±0.5°C
7	Humidity	±2.0%

## 7. EMC EMISSION TEST

### 7.1. CONDUCTED EMISSION MEASUREMENT

#### 7.1.1. POWER LINE CONDUCTED EMISSION LIMITS

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:


- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

**TEST PROCEDURE**


- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

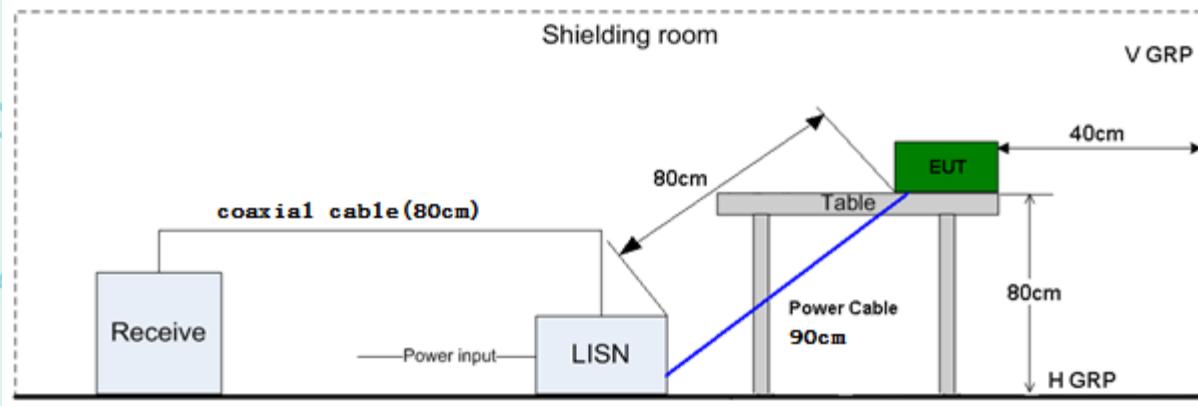**TEST SETUP**

## 7.2. Test Results


Temperature	20 °C	WSCT	Relative Humidity	48%	WSCT
Pressure	1010 hPa		Test Mode	Mode 3	

### Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

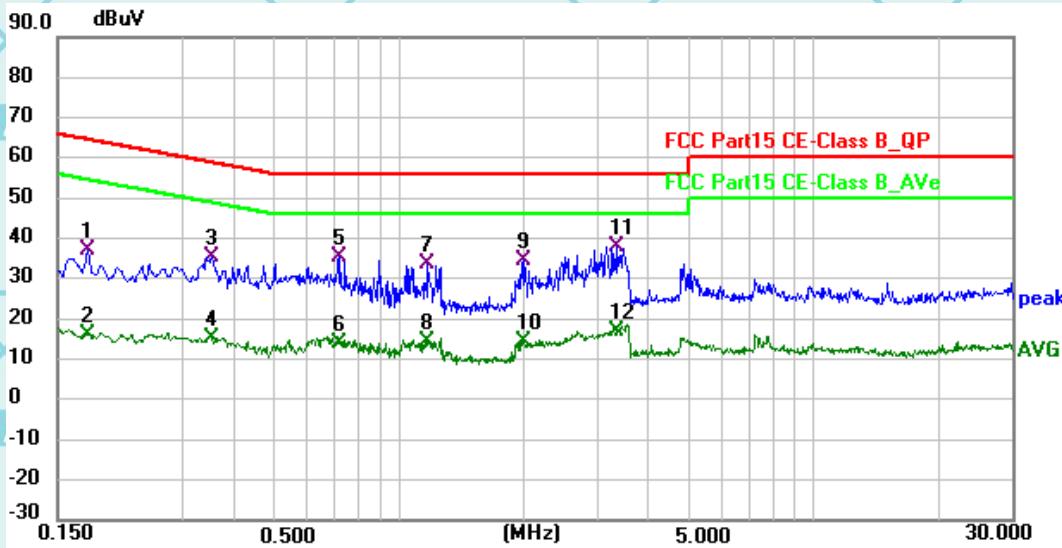

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1770	16.41	20.71	37.12	64.63	-27.51	QP
2	0.1770	-4.56	20.71	16.15	54.63	-38.48	AVG
3	0.3525	14.69	20.60	35.29	58.90	-23.61	QP
4	0.3525	-5.43	20.60	15.17	48.90	-33.73	AVG
5	0.7215	14.96	20.55	35.51	56.00	-20.49	QP
6	0.7215	-6.54	20.55	14.01	46.00	-31.99	AVG
7	1.1760	13.07	20.66	33.73	56.00	-22.27	QP
8	1.1760	-6.32	20.66	14.34	46.00	-31.66	AVG
9	2.0085	13.91	20.61	34.52	56.00	-21.48	QP
10	2.0085	-6.28	20.61	14.33	46.00	-31.67	AVG
11 *	3.3360	17.53	20.59	38.12	56.00	-17.88	QP
12	3.3360	-3.51	20.59	17.08	46.00	-28.92	AVG

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

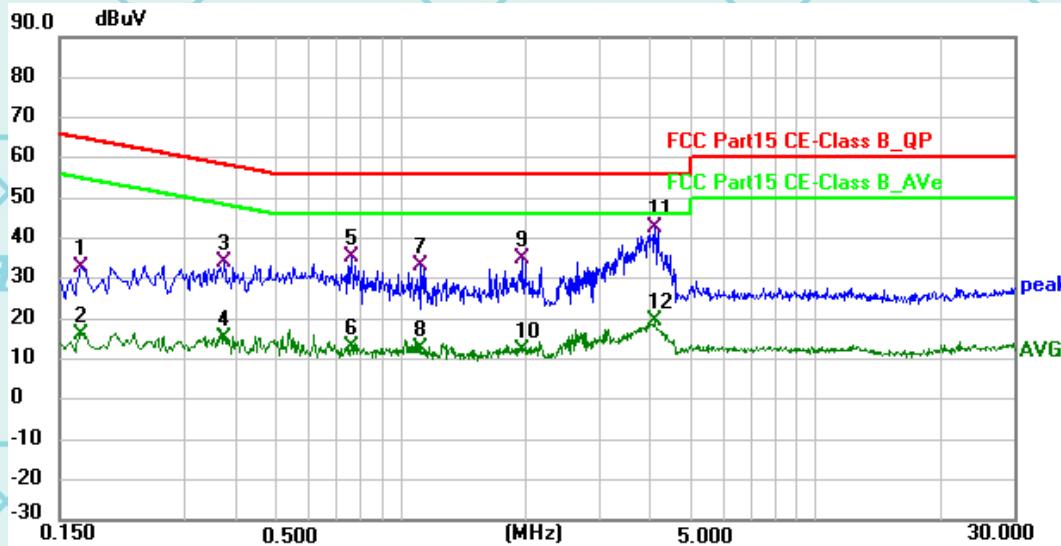

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1680	12.14	20.72	32.86	65.06	-32.20	QP
2	0.1680	-4.80	20.72	15.92	55.06	-39.14	AVG
3	0.3750	13.44	20.59	34.03	58.39	-24.36	QP
4	0.3750	-5.48	20.59	15.11	48.39	-33.28	AVG
5	0.7620	14.68	20.57	35.25	56.00	-20.75	QP
6	0.7620	-7.32	20.57	13.25	46.00	-32.75	AVG
7	1.1174	12.44	20.66	33.10	56.00	-22.90	QP
8	1.1174	-8.21	20.66	12.45	46.00	-33.55	AVG
9	1.9545	14.20	20.61	34.81	56.00	-21.19	QP
10	1.9545	-8.47	20.61	12.14	46.00	-33.86	AVG
11 *	4.0739	22.02	20.58	42.60	56.00	-13.40	QP
12	4.0739	-1.28	20.58	19.30	46.00	-26.70	AVG

## Note1:

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading

Corr. Factor (dB) = LISN Factor + Cable loss

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)Limit (dB $\mu$ V) = Limit stated in standardMargin (dB) = Measurement (dB $\mu$ V) - Limits (dB $\mu$ V)

Q.P. =Quasi-Peak AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Report No.: WSCT-ANAB-R&amp;E241200070A-15B

## 7.3.RADIATED EMISSION MEASUREMENT

### 7.3.1. Radiated Emission Limits

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**TEST PROCEDURE**


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**TEST SETUP**

## (A) Radiated Emission Test-Up Frequency 30MHz~1GHz

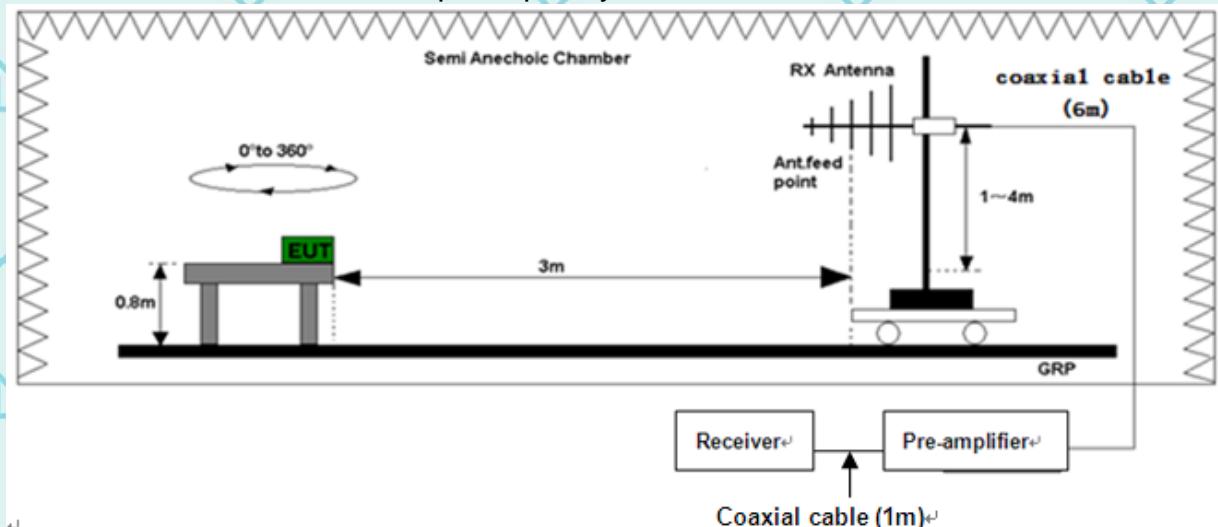

## (B) Radiated Emission Test-Up Frequency Above 1GHz

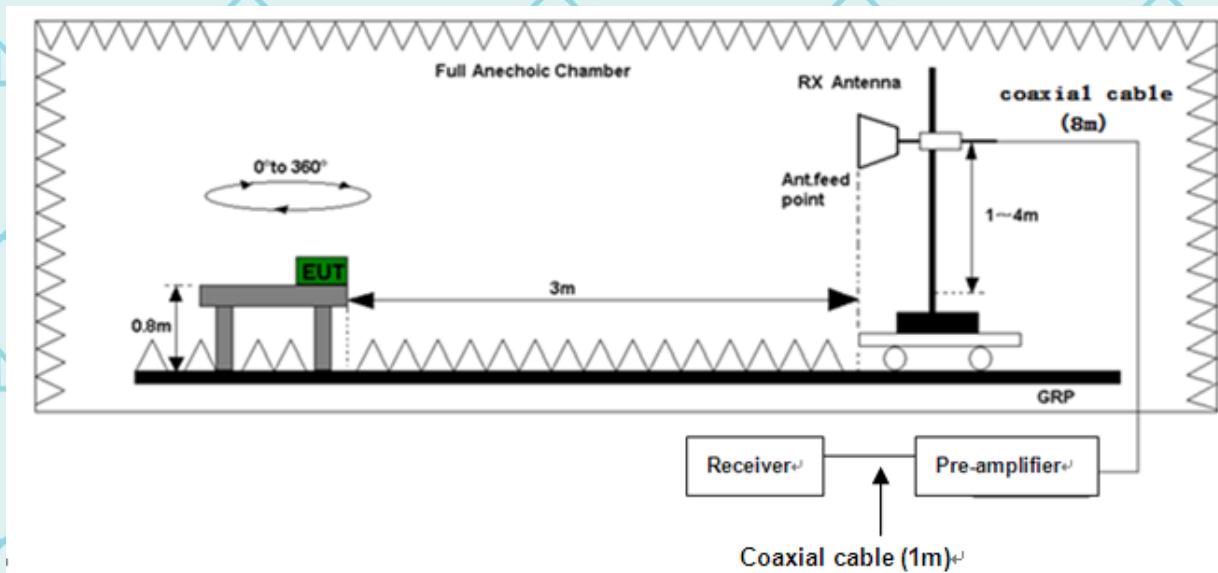

### 7.3.2. Test Results

Temperature	20 °C	WSCT	Relative Humidity	48%	WSCT
Pressure	1010 hPa		Test Mode	Mode 2	


Please refer to following diagram for individual

Horizontal:



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.7670	31.37	-19.09	12.28	40.00	-27.72	QP
2	81.7833	38.59	-24.08	14.51	40.00	-25.49	QP
3 *	200.9521	44.09	-23.92	20.17	43.50	-23.33	QP
4	330.3396	32.92	-19.24	13.68	46.00	-32.32	QP
5	575.8866	30.45	-14.43	16.02	46.00	-29.98	QP
6	935.1364	29.96	-9.51	20.45	46.00	-25.55	QP

Vertical:

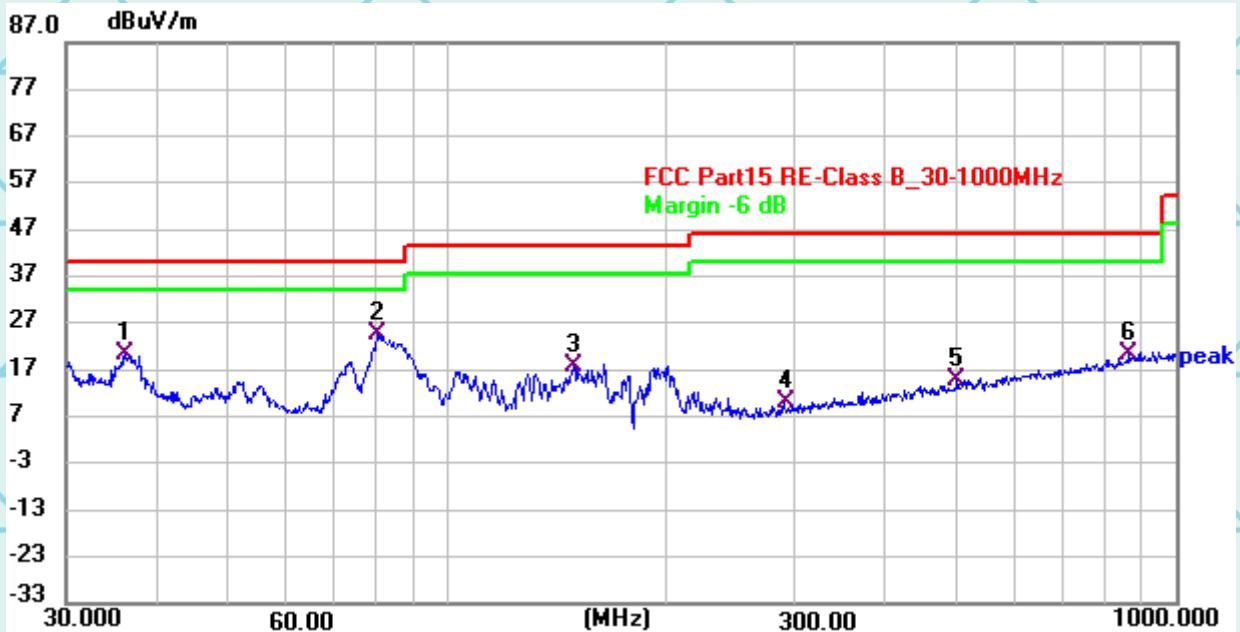

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	36.2381	39.66	-19.45	20.21	40.00	-19.79	QP
2 *	80.4324	48.56	-24.01	24.55	40.00	-15.45	QP
3	149.5513	37.20	-19.48	17.72	43.50	-25.78	QP
4	291.0360	30.43	-20.55	9.88	46.00	-36.12	QP
5	502.7191	30.24	-15.43	14.81	46.00	-31.19	QP
6	864.1919	30.61	-10.04	20.57	46.00	-25.43	QP

## Note1:

Freq. = Emission frequency in MHz

Reading level (dB $\mu$ V) = Receiver reading


Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dB $\mu$ V) = Reading level (dB $\mu$ V) + Corr. Factor (dB)Limit (dB $\mu$ V) = Limit stated in standardMargin (dB) = Measurement (dB $\mu$ V) – Limits (dB $\mu$ V)

## TEST RESULTS


Above 1GHz(1~26GHz) :( Mode 2—worst case)

Horizontal:

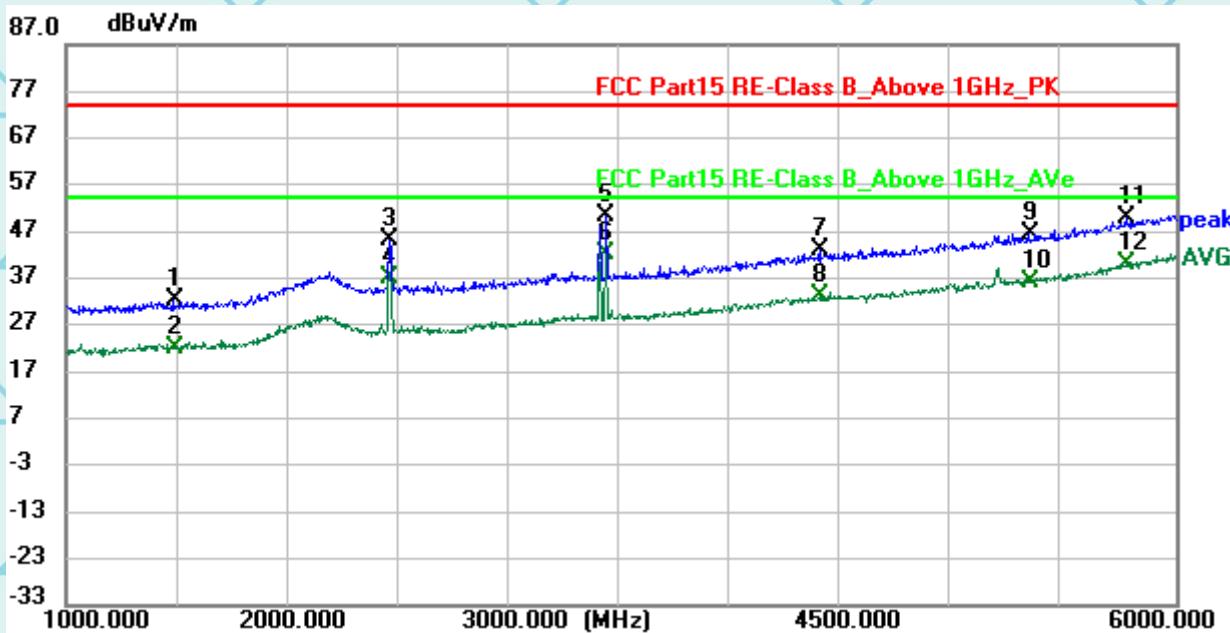

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1490.625	39.77	-7.41	32.36	74.00	-41.64	peak
2	1490.625	29.54	-7.41	22.13	54.00	-31.87	AVG
3	2462.500	49.00	-3.79	45.21	74.00	-28.79	peak
4	2462.500	40.65	-3.79	36.86	54.00	-17.14	AVG
5	3436.250	51.57	-1.28	50.29	74.00	-23.71	peak
6 *	3436.250	43.52	-1.28	42.24	54.00	-11.76	AVG
7	4400.000	40.44	2.59	43.03	74.00	-30.97	peak
8	4400.000	30.44	2.59	33.03	54.00	-20.97	AVG
9	5340.625	40.10	6.36	46.46	74.00	-27.54	peak
10	5340.625	30.03	6.36	36.39	54.00	-17.61	AVG
11	5778.125	41.58	8.31	49.89	74.00	-24.11	peak
12	5778.125	31.58	8.31	39.89	54.00	-14.11	AVG

Vertical:

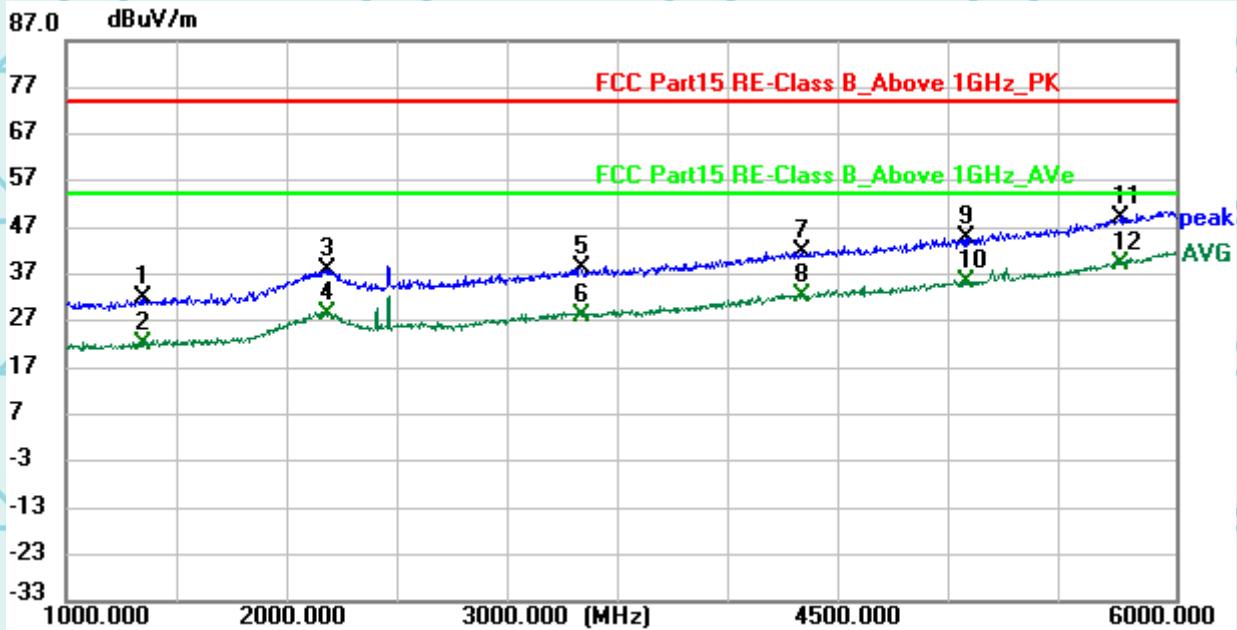

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1349.375	39.52	-7.65	31.87	74.00	-42.13	peak
2	1349.375	29.68	-7.65	22.03	54.00	-31.97	AVG
3	2180.000	39.57	-1.51	38.06	74.00	-35.94	peak
4	2180.000	29.99	-1.51	28.48	54.00	-25.52	AVG
5	3323.125	39.74	-1.55	38.19	74.00	-35.81	peak
6	3323.125	29.43	-1.55	27.88	54.00	-26.12	AVG
7	4318.125	39.59	2.25	41.84	74.00	-32.16	peak
8	4318.125	30.22	2.25	32.47	54.00	-21.53	AVG
9	5059.375	39.28	5.44	44.72	74.00	-29.28	peak
10	5059.375	29.81	5.44	35.25	54.00	-18.75	AVG
11	5754.375	40.76	8.16	48.92	74.00	-25.08	peak
12 *	5754.375	30.88	8.16	39.04	54.00	-14.96	AVG

## Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Freq. = Emission frequency in MHz

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.



## 8. Test Setup Photographs

Please refer to the attachment "Set Up Photos-15B" for relevant test setup photos

\*\*\*\*\***END OF REPORT**\*\*\*\*\*

