


TEST REPORT

Application No.: BTEK250620088A02-T05
Applicant: Spacio Innovations Inc.
Address of Applicant: 1388 Spruce Street Winnipeg MB R3E 2V7 Canada
Manufacturer: Jiangsu Byecold Technology Co., Ltd.
Address of Manufacturer: NO. 8 Xingye Road, Lingang Industrial Park, Zhaodun Town, Pizhou City, Xuzhou City, Jiangsu, P.R. China
Equipment Under Test (EUT):
EUT Name: Infrared Electric Heater
Test Model.: CT-3000W
Adding Model(s): CT-1000B, CT-1000W, CT-1500B, CT-1500W, CT-1800B, CT-1800W, CT-2400B, CT-2400W, CT-3000B
Trade Mark: 
FCC ID: 2A7RI-CT
Standard(s) : 47 CFR Part 15, Subpart C 15.247
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013
Date of Receipt Sample(s): 2025-07-02
Date of Test: 2025-07-03 to 2025-07-17
Date of Issue: 2025-07-18

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Alex Wang/ Approved & Authorized
EMC Laboratory Manager



Revision Record			
Version	Issue Date	Revisions	Remarks
V0	2025-07-18	Initial	Valid

Authorized for issue by:			
		<i>Karl Liu</i>	
		Karl Liu / File Editor	
		<i>June Li</i>	
		June Li/Reviewer	

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Test Summary

Radio Spectrum Technical Requirement				
Standard	Item	Method	Requirement	Result
47 CFR Part 15, Subpart C 15.247	Antenna Requirement	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Standard	Item	Method	Requirement	Result
47 CFR Part 15, Subpart C 15.247	Conducted Emissions at AC Power Line (150kHz-30MHz)	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
	Conducted Peak Output Power	ANSI C63.10 (2013) Section 11.9.1.3	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
	Minimum 6dB Bandwidth	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
	Power Spectrum Density	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
	Conducted Band Edges Measurement	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
	Conducted Spurious Emissions	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
	Radiated Emissions which fall in the restricted bands	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
	Radiated Spurious Emissions	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 EUT Test Mode and Test Condition	5
4.3 Measurement Uncertainty	5
4.4 Test Location	6
4.5 Deviation from Standards	6
4.6 Abnormalities from Standard Conditions	6
5 Equipment List.....	7
6 Radio Spectrum Technical Requirement	9
6.1 Antenna Requirement.....	9
6.1.1 Test Requirement:	9
6.1.2 Conclusion	9
7 Radio Spectrum Matter Test Results.....	10
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	10
7.1.1 Test Setup Diagram.....	10
7.1.2 Measurement Procedure and Data	10
7.2 Conducted Peak Output Power	15
7.2.1 Test Setup Diagram.....	15
7.2.2 Measurement Procedure and Data	15
7.3 Minimum 6dB Bandwidth	16
7.3.1 Test Setup Diagram.....	16
7.3.2 Measurement Procedure and Data	16
7.4 Power Spectrum Density.....	17
7.4.1 Test Setup Diagram.....	17
7.4.2 Measurement Procedure and Data	17
7.5 Conducted Band Edges Measurement	18
7.5.1 Test Setup Diagram.....	18
7.5.2 Measurement Procedure and Data	18
7.6 Conducted Spurious Emissions	19
7.6.1 Test Setup Diagram.....	19
7.6.2 Measurement Procedure and Data	19
7.7 Radiated Emissions which fall in the restricted bands.....	20
7.7.1 Test Setup Diagram.....	20
7.7.2 Measurement Procedure and Data	21
7.8 Radiated Spurious Emissions	23
7.8.1 Test Setup Diagram.....	23
7.8.2 Measurement Procedure and Data	24
8 Test Setup Photo	30
9 EUT Constructional Details (EUT Photos)	30



4 General Information

4.1 Details of E.U.T.

Power supply:	INPUT:AC 120V-240V~ 60Hz 12.5A
Frequency Range:	2402MHz to 2480MHz
Bluetooth Version:	V4.2 BLE
Modulation Type:	GFSK
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	2.54dBi
Sample No.:	BTEK250620088A02-1-1/2
Model(s) Difference Statement	☐ Single Model.
	☒ Multi-Models:CT-3000W, CT-1000B,CT-1000W, CT-1500B, CT-1500W, CT-1800B, CT-1800W, CT-2400B, CT-2400W, CT-3000B Only the model CT-3000W was tested. According to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions of other models are identical for the above models, with only difference on Model No

4.2 EUT Test Mode and Test Condition

Test Mode	Description	Remark
1	Low/mid/High Channel	2402MHz/2440MHz/2480MHz
Remark:1.only show the worst case in the test report.		

Channel Frequency Tabel:

BLE	
Channel	Frequency (MHz)
00	2402
01	2404
19	2440
38	2478
39	2480

Test Conditions

Temperature:	23.8 °C
Relative Humidity:	45 %
ATM Pressure:	1010 mbar

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	±3.12dB
Conducted Peak Output Power	± 0.75dB
Minimum 6dB Bandwidth	± 3%



Power Spectrum Density	$\pm 2.84\text{dB}$
Conducted Band Edges Measurement	$\pm 0.75\text{dB}$
Conducted Spurious Emissions	$\pm 0.75\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (above 6GHz)
Radiated Spurious Emissions (Below 1GHz)	$\pm 5.06\text{dB}$ (3m); $\pm 4.46\text{dB}$ (10m)
Radiated Spurious Emissions (Above 1GHz)	$\pm 5.08\text{dB}$ (1GHz-6GHz); $\pm 5.14\text{dB}$ (above 6GHz)

4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Tel: +86 0755-2334 4200 Fax: +86 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Shielding Room	YIHENG ENELECTRONIC	9*5*3.3	YH-BT-220304-04	2025-02-15	2028-02-14
EMI Test Receiver	Rohde&Schwarz	ESCI	101021	2025-06-18	2026-06-17
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	N/A	N/A
LISN	Rohde&Schwarz	ENV216	101472	2025-06-18	2026-06-17
LISN	Schwarzbeck	NSLK 8128	05127	2025-06-18	2026-06-17

RF Conducted					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Shielding Room	YIHENG ENELECTRONIC	5.5*3.1*3	YH-BT-220304-03	2025-02-15	2028-02-14
EXA Signal Analyzer	KEYSIGHT	N9020A	MY54230486	2025-06-19	2026-06-18
DC Power Supply	E3632A	E3642A	KR75304416	2025-06-19	2026-06-18
Attenuator	RswTech	SMA-JK-6dB	N/A	2025-06-19	2026-06-18
Attenuator	RswTech	SMA-JK-3dB	N/A	2025-06-19	2026-06-18
RF Control Unit	Techy	TR1029-1	N/A	2025-06-19	2026-06-18
RF Sensor Unit	Techy	TR1029-2	N/A	2025-06-19	2026-06-18
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	141258	2025-06-19	2026-06-18
MXG Vector Signal Generator	Agilent	N5182A	US46240522	2025-06-19	2026-06-18
Programmable Temperature&Humidity Chamber	GRT	GR-HWX1000	GR22051001	2025-06-19	2026-06-18
Measurement Software	TACHOY	RF TestSoft	N/A	N/A	N/A

RSE					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	YIHENG ENELECTRONIC	966	YH-BT-220304-01	2025-02-15	2028-02-14
EMI Test Receiver	Rohde&Schwarz	ESCI	100694	2025-06-18	2026-06-17
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	01324	2025-06-18	2026-06-17
Pre-Amplifier	Schwarzbeck	BBV 9745	#180	2025-06-18	2026-06-17
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	2025-06-18	2026-06-17
EXA Signal Analyzer	Keysight	N9020A	MY54440290	2025-06-18	2026-06-17
Horn Antenna	Schwarzbeck	BBHA 9120D	02695	2025-06-18	2026-06-17
Pre-Amplifier	Tonscend	TAP0118045	AP20K806109	2025-06-18	2026-06-17
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2025-06-18	2026-06-17
Low Noise Pre-amplifier	SKET	LNPA-1840G-50	SK2022032902	2025-06-18	2026-06-17
Signal analyzer	ROHDE&SCHWARZ	FSQ40	100010	2025-06-18	2026-06-17



Loop Antenna	ETS	6502	00201177	2025-06-18	2026-06-17
Cable	BTEK	LMR400UF-NMNM-7.00M	/	2025-06-18	2026-06-17
Cable	BTEK	LMR400UF-NMNM-2.50M	/	2025-06-18	2026-06-17
Cable	BTEK	LMR400UF-NMNM-3.00M	/	2025-06-18	2026-06-17
Cable	BTEK	SFT205PUR-MNSWSM-7.00M	/	2025-06-18	2026-06-17
Cable	BTEK	SFT205PUR-MNSWSM-2.50M	/	2025-06-18	2026-06-17
Cable	BTEK	SFT205PUR-MNSWSM-2.50M	/	2025-06-18	2026-06-17
Cable	BTEK	SFT205PUR-MNSWSM-0.30M	/	2025-06-18	2026-06-17



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

This product has a PCB antenna, fulfill the requirement of this section.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2


Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.1.1 Test Setup Diagram

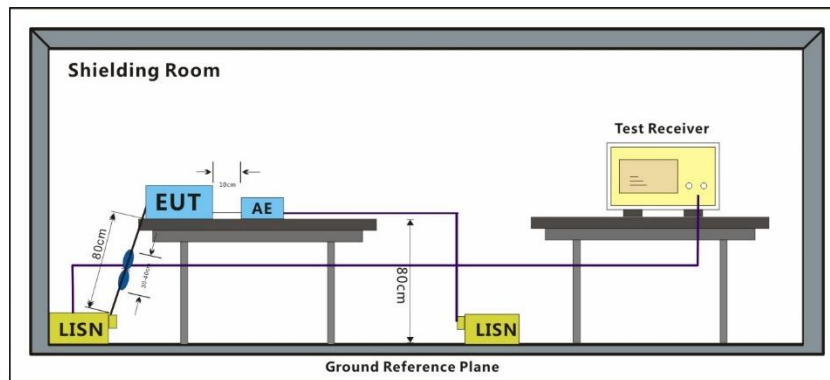

7.1.2 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor, Margin=Level-Limit



CT-3000W


Test Mode	Communication-TX	Polarity:	Neutral
-----------	------------------	-----------	---------

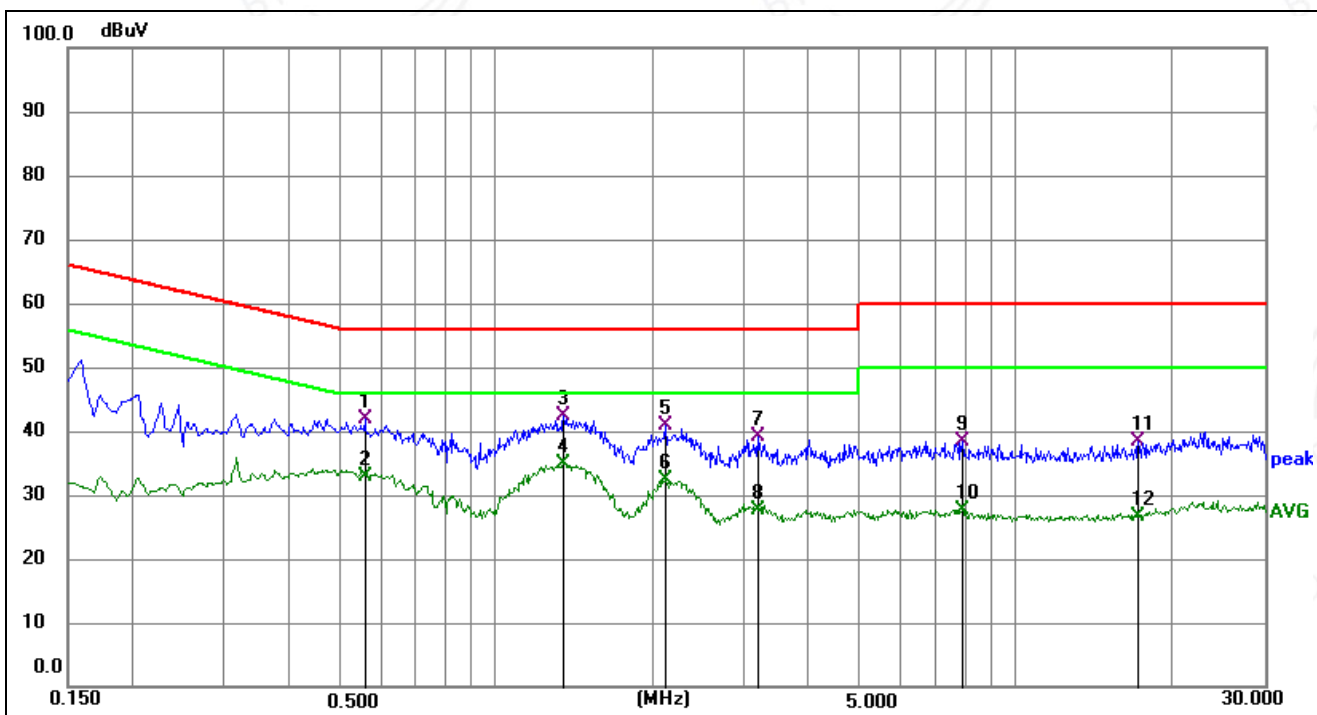

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5595	22.29	19.58	41.87	56.00	-14.13	QP	P	
2	0.5595	13.42	19.58	33.00	46.00	-13.00	AVG	P	
3	1.3515	22.77	19.54	42.31	56.00	-13.69	QP	P	
4 *	1.3515	15.41	19.54	34.95	46.00	-11.05	AVG	P	
5	2.1165	21.09	19.68	40.77	56.00	-15.23	QP	P	
6	2.1165	12.79	19.68	32.47	46.00	-13.53	AVG	P	
7	3.1740	19.41	19.74	39.15	56.00	-16.85	QP	P	
8	3.1740	8.01	19.74	27.75	46.00	-18.25	AVG	P	
9	7.8810	18.37	19.95	38.32	60.00	-21.68	QP	P	
10	7.8810	7.60	19.95	27.55	50.00	-22.45	AVG	P	
11	17.1600	18.04	20.24	38.28	60.00	-21.72	QP	P	
12	17.1600	6.50	20.24	26.74	50.00	-23.26	AVG	P	



Test Mode	Communication-TX	Polarity:	Line
-----------	------------------	-----------	------

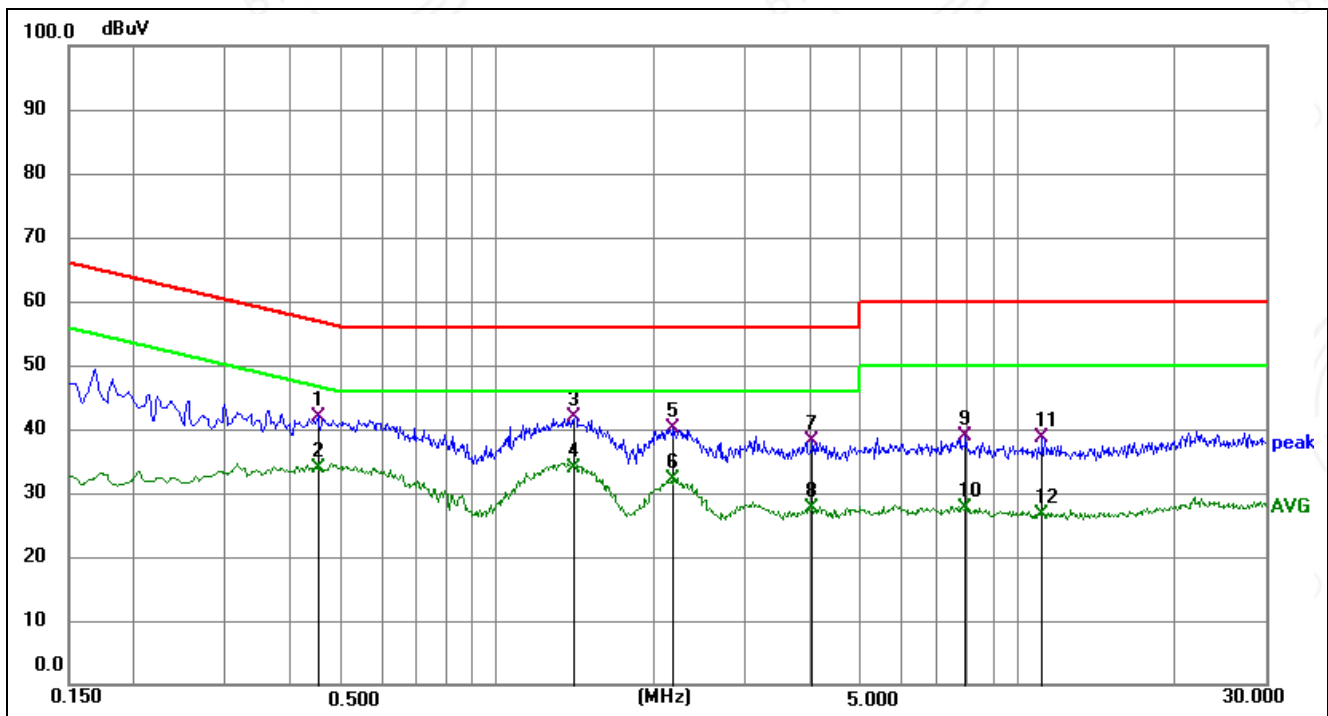


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4515	22.36	19.64	42.00	56.85	-14.85	QP	P	
2	0.4515	14.31	19.64	33.95	46.85	-12.90	AVG	P	
3	1.4144	22.22	19.54	41.76	56.00	-14.24	QP	P	
4 *	1.4144	14.35	19.54	33.89	46.00	-12.11	AVG	P	
5	2.1795	20.51	19.71	40.22	56.00	-15.78	QP	P	
6	2.1795	12.49	19.71	32.20	46.00	-13.80	AVG	P	
7	4.0470	18.21	19.81	38.02	56.00	-17.98	QP	P	
8	4.0470	7.75	19.81	27.56	46.00	-18.44	AVG	P	
9	7.9440	18.79	20.00	38.79	60.00	-21.21	QP	P	
10	7.9440	7.65	20.00	27.65	50.00	-22.35	AVG	P	
11	11.1479	18.48	20.16	38.64	60.00	-21.36	QP	P	
12	11.1479	6.41	20.16	26.57	50.00	-23.43	AVG	P	



CT-1500B


Test Mode	Communication-TX	Polarity:	Neutral
-----------	------------------	-----------	---------

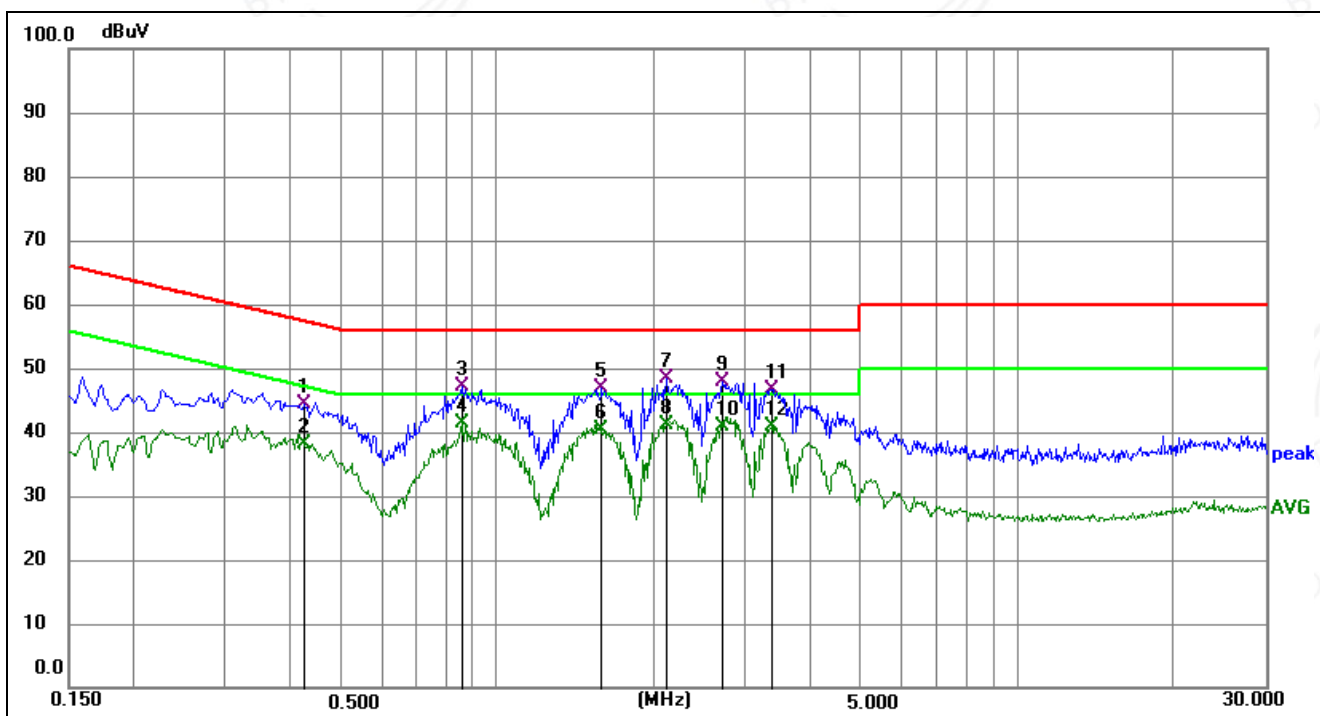

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4245	24.87	19.60	44.47	57.36	-12.89	QP	P	
2	0.4245	18.59	19.60	38.19	47.36	-9.17	AVG	P	
3	0.8565	27.61	19.46	47.07	56.00	-8.93	QP	P	
4 *	0.8565	21.85	19.46	41.31	46.00	-4.69	AVG	P	
5	1.5900	27.29	19.59	46.88	56.00	-9.12	QP	P	
6	1.5900	20.85	19.59	40.44	46.00	-5.56	AVG	P	
7	2.1210	28.71	19.68	48.39	56.00	-7.61	QP	P	
8	2.1210	21.37	19.68	41.05	46.00	-4.95	AVG	P	
9	2.7195	28.06	19.71	47.77	56.00	-8.23	QP	P	
10	2.7195	21.16	19.71	40.87	46.00	-5.13	AVG	P	
11	3.3765	26.95	19.75	46.70	56.00	-9.30	QP	P	
12	3.3765	21.24	19.75	40.99	46.00	-5.01	AVG	P	



Test Mode	Communication-TX	Polarity:	Line
-----------	------------------	-----------	------

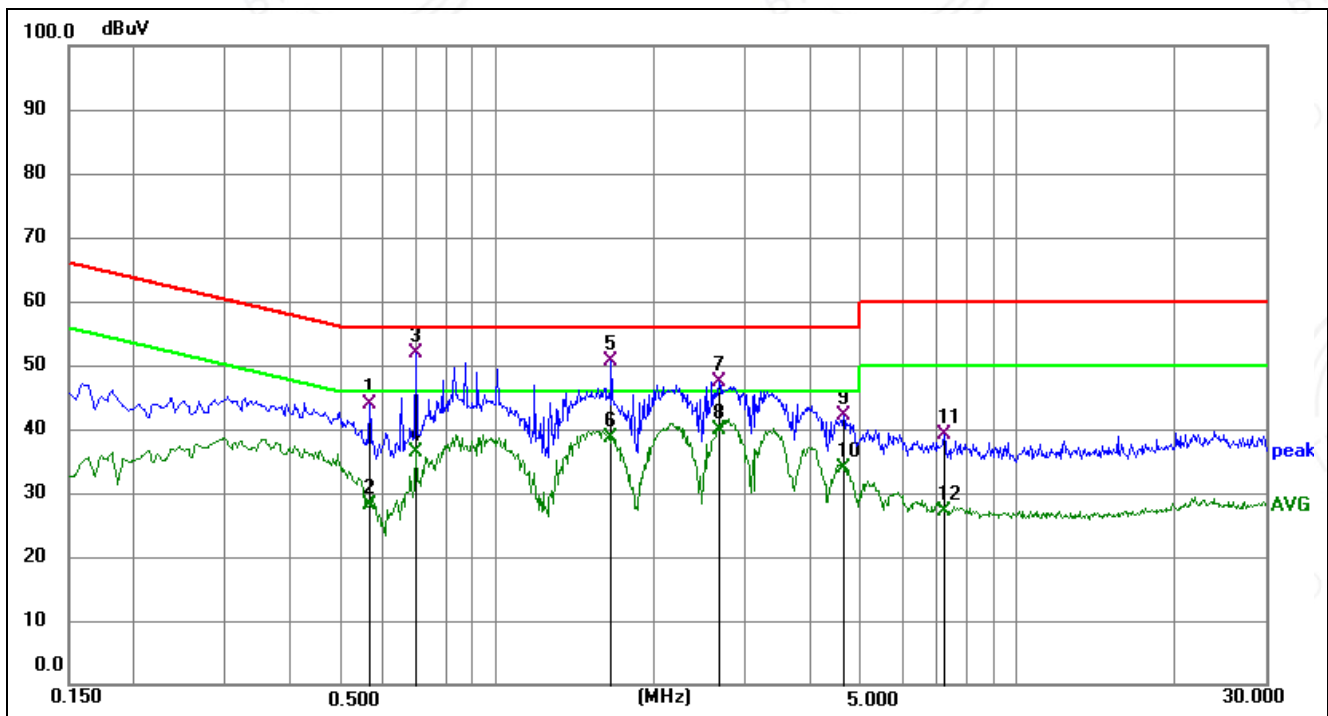

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5685	24.16	19.61	43.77	56.00	-12.23	QP	P	
2	0.5685	8.57	19.61	28.18	46.00	-17.82	AVG	P	
3 *	0.6990	32.32	19.45	51.77	56.00	-4.23	QP	P	
4	0.6990	16.92	19.45	36.37	46.00	-9.63	AVG	P	
5	1.6620	30.97	19.60	50.57	56.00	-5.43	QP	P	
6	1.6620	18.94	19.60	38.54	46.00	-7.46	AVG	P	
7	2.6745	27.55	19.73	47.28	56.00	-8.72	QP	P	
8	2.6745	20.13	19.73	39.86	46.00	-6.14	AVG	P	
9	4.6364	22.34	19.86	42.20	56.00	-13.80	QP	P	
10	4.6364	13.98	19.86	33.84	46.00	-12.16	AVG	P	
11	7.2195	19.22	19.94	39.16	60.00	-20.84	QP	P	
12	7.2195	7.26	19.94	27.20	50.00	-22.80	AVG	P	



7.2 Conducted Peak Output Power


Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1.3

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 Test Setup Diagram

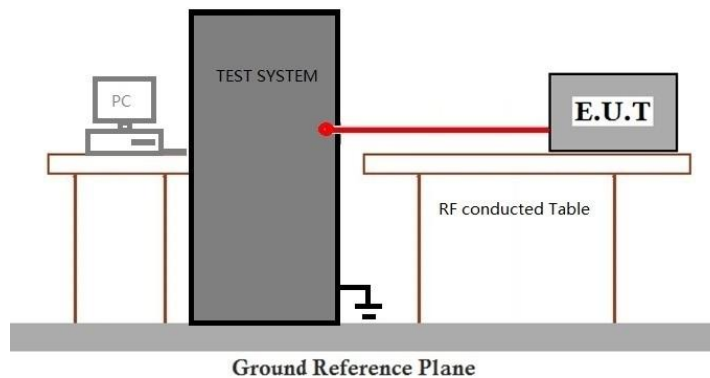

7.2.2 Measurement Procedure and Data

Please Refer to Appendix for Details




7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥ 500 kHz

7.3.1 Test Setup Diagram

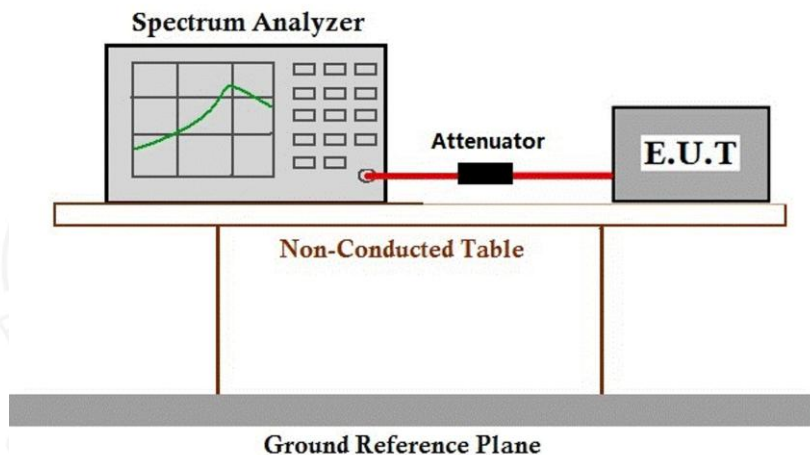

7.3.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.4 Power Spectrum Density


Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.4.1 Test Setup Diagram

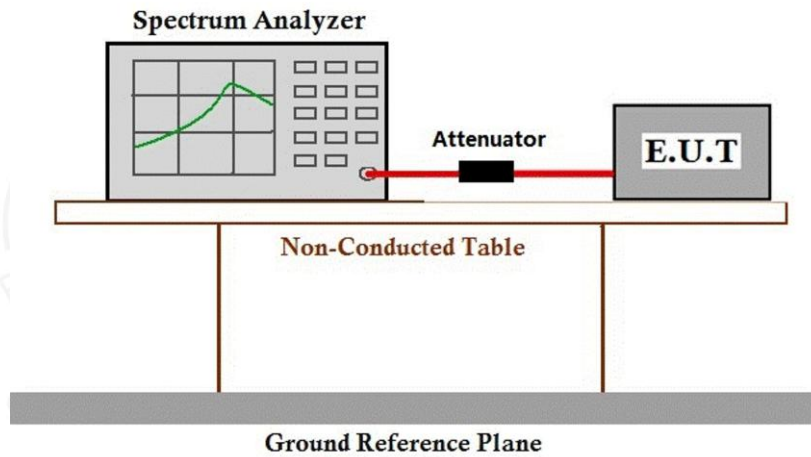

7.4.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.5 Conducted Band Edges Measurement


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.5.1 Test Setup Diagram

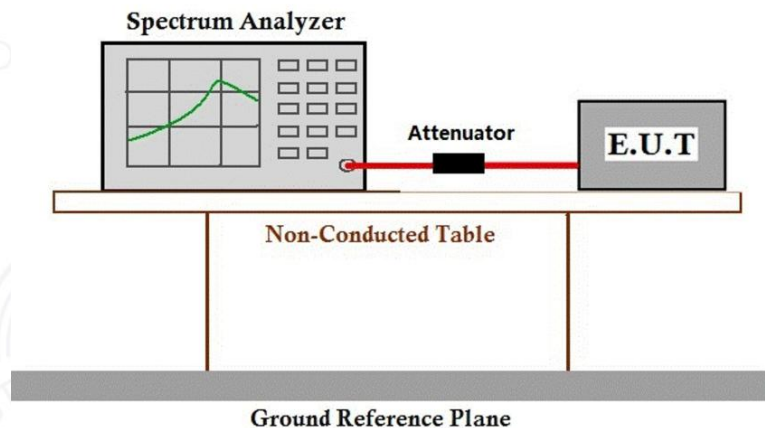

7.5.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.6 Conducted Spurious Emissions


Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.6.1 Test Setup Diagram

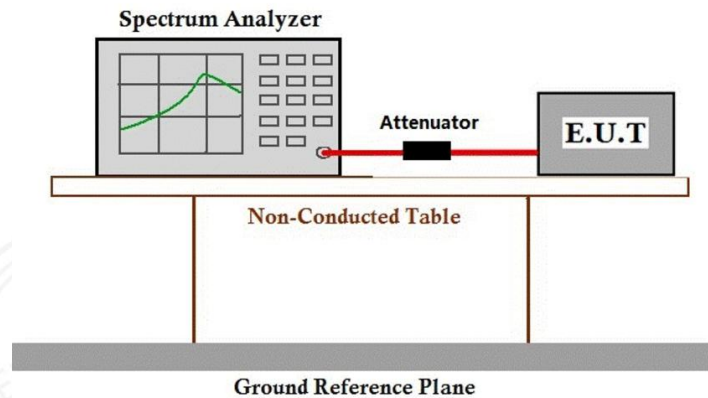

7.6.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209


Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 Test Setup Diagram

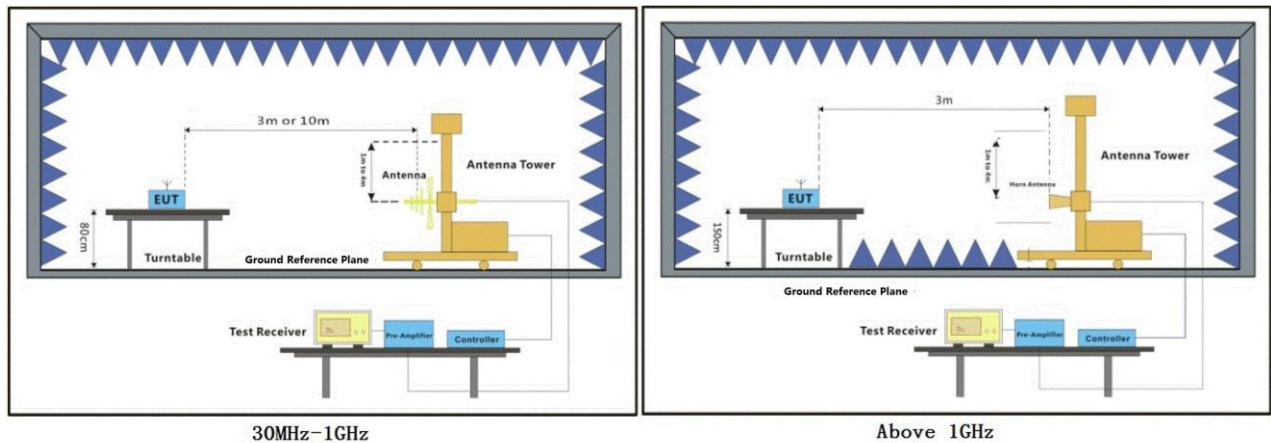

7.7.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp gain}$, $\text{Margin} = \text{Level} - \text{Limit}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

3. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.



Horizontal; Modulation:GFSK; ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	65.71	-24.14	41.57	74.00	-32.43	peak	P
2	2390.000	71.98	-23.92	48.06	74.00	-25.94	peak	P
3	2400.000	63.73	-23.92	39.81	74.00	-34.19	peak	P

Polarity: Vertical; Modulation:GFSK; ; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2310.000	68.79	-24.14	44.65	74.00	-29.35	peak	P
2	2390.000	70.76	-23.92	46.84	74.00	-27.16	peak	P
3	2400.000	69.17	-23.92	45.25	74.00	-28.75	peak	P

Polarity: Horizontal; Modulation:GFSK; ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	68.77	-23.65	45.12	74.00	-28.88	peak	P
2	2500.000	74.41	-23.65	50.76	74.00	-23.24	peak	P

Polarity: Vertical; Modulation:GFSK; ; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2483.500	67.91	-23.65	44.26	74.00	-29.74	peak	P
2	2500.000	71.67	-23.65	48.02	74.00	-25.98	peak	P



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209




Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 Test Setup Diagram

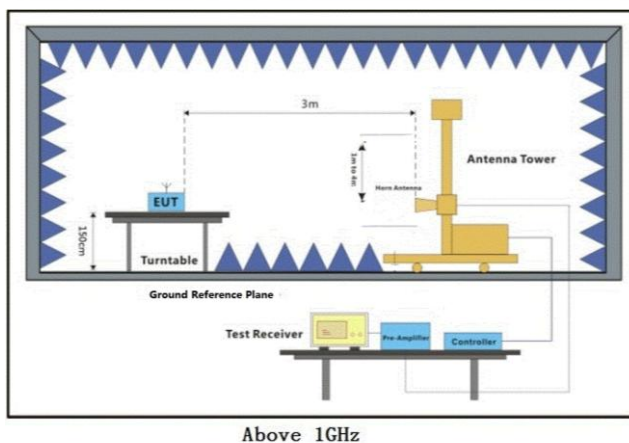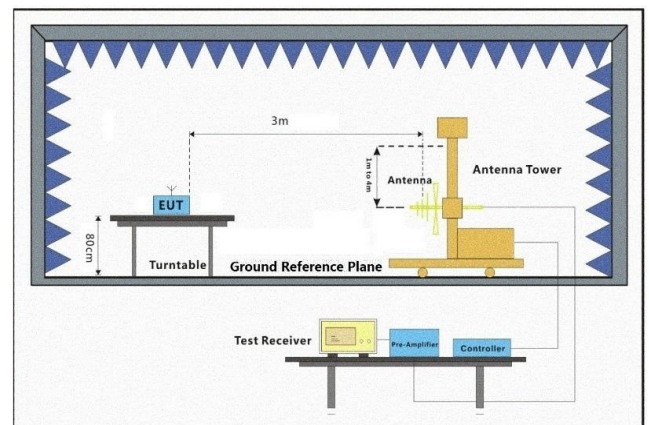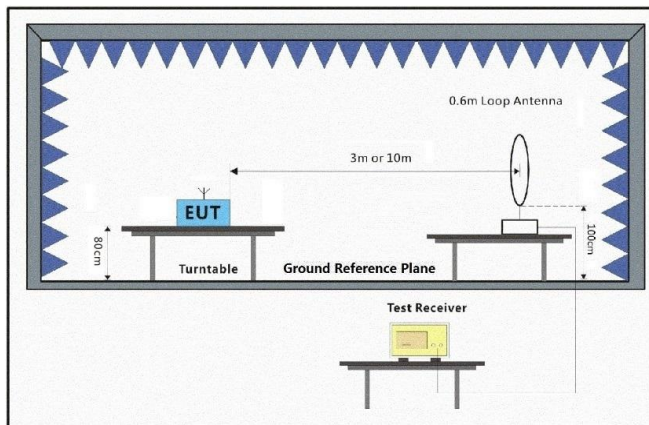

Above 1GHz




7.8.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - i. Repeat above procedures until all frequencies measured was complete.
-
- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - i. Repeat above procedures until all frequencies measured was complete.



Spurious Emissions Below 1GHz
CT-3000W


Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

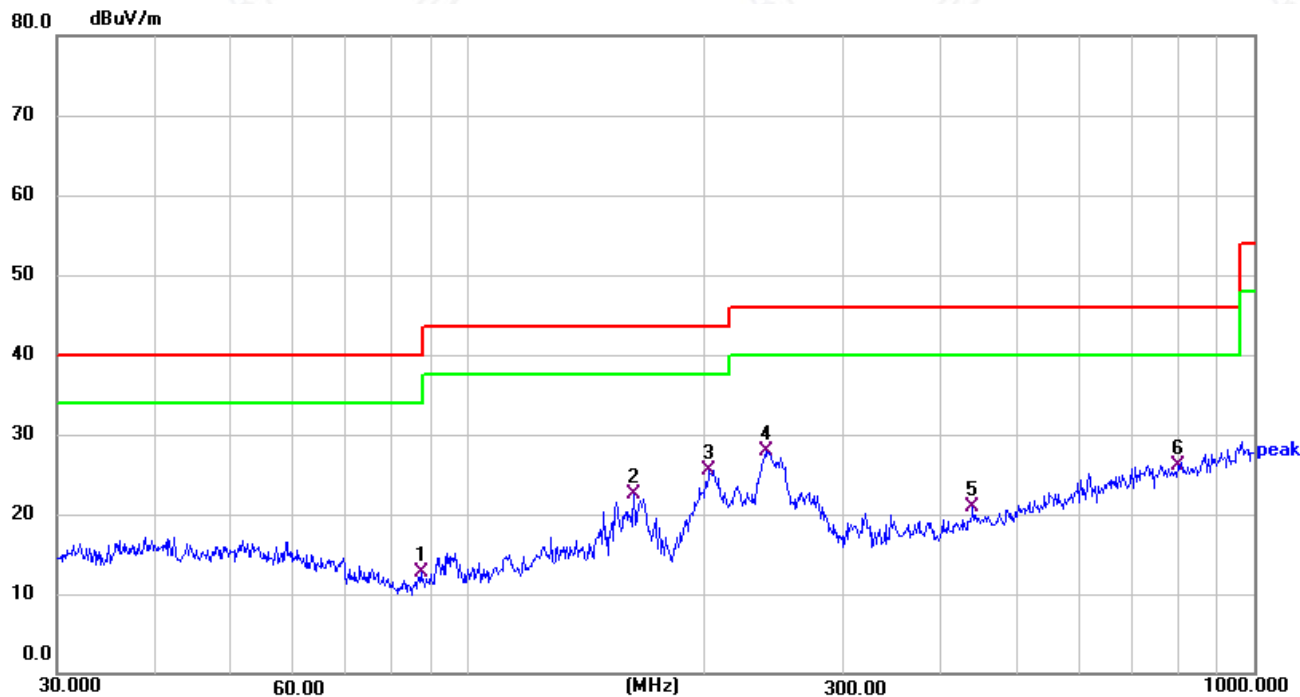

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	87.1117	28.00	-15.23	12.77	40.00	-27.23	QP	100	0	P	
2	162.6106	33.71	-11.12	22.59	43.50	-20.91	QP	100	0	P	
3 *	202.8104	39.62	-14.08	25.54	43.50	-17.96	QP	100	0	P	
4	239.9874	41.39	-13.56	27.83	46.00	-18.17	QP	100	0	P	
5	438.6554	29.17	-8.31	20.86	46.00	-25.14	QP	100	0	P	
6	798.9797	29.25	-3.06	26.19	46.00	-19.81	QP	100	0	P	



Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

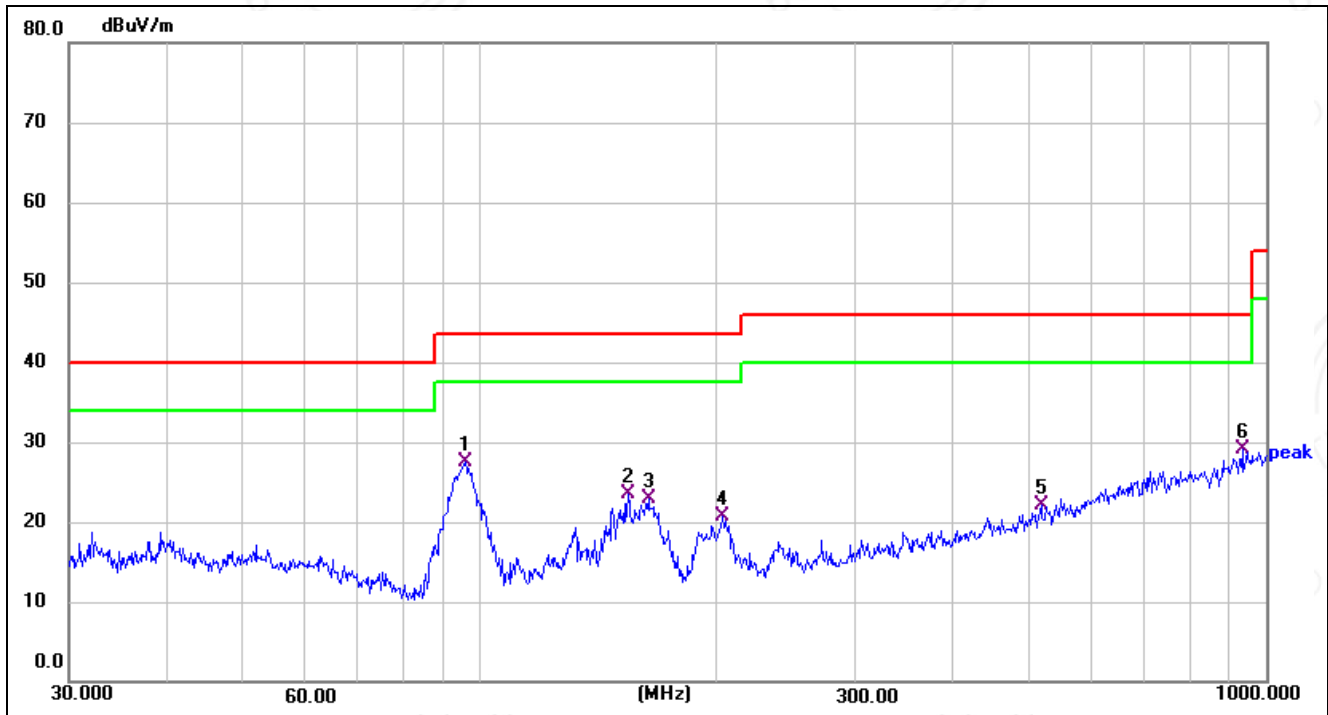


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	95.7622	42.65	-15.24	27.41	43.50	-16.09	QP	100	360	P	
2	154.2786	34.61	-11.13	23.48	43.50	-20.02	QP	100	360	P	
3	163.7550	33.79	-10.86	22.93	43.50	-20.57	QP	100	360	P	
4	203.5228	34.61	-13.84	20.77	43.50	-22.73	QP	100	360	P	
5	517.2480	29.56	-7.54	22.02	46.00	-23.98	QP	100	360	P	
6	932.2715	31.19	-2.11	29.08	46.00	-16.92	QP	100	360	P	



CT-1500B


Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

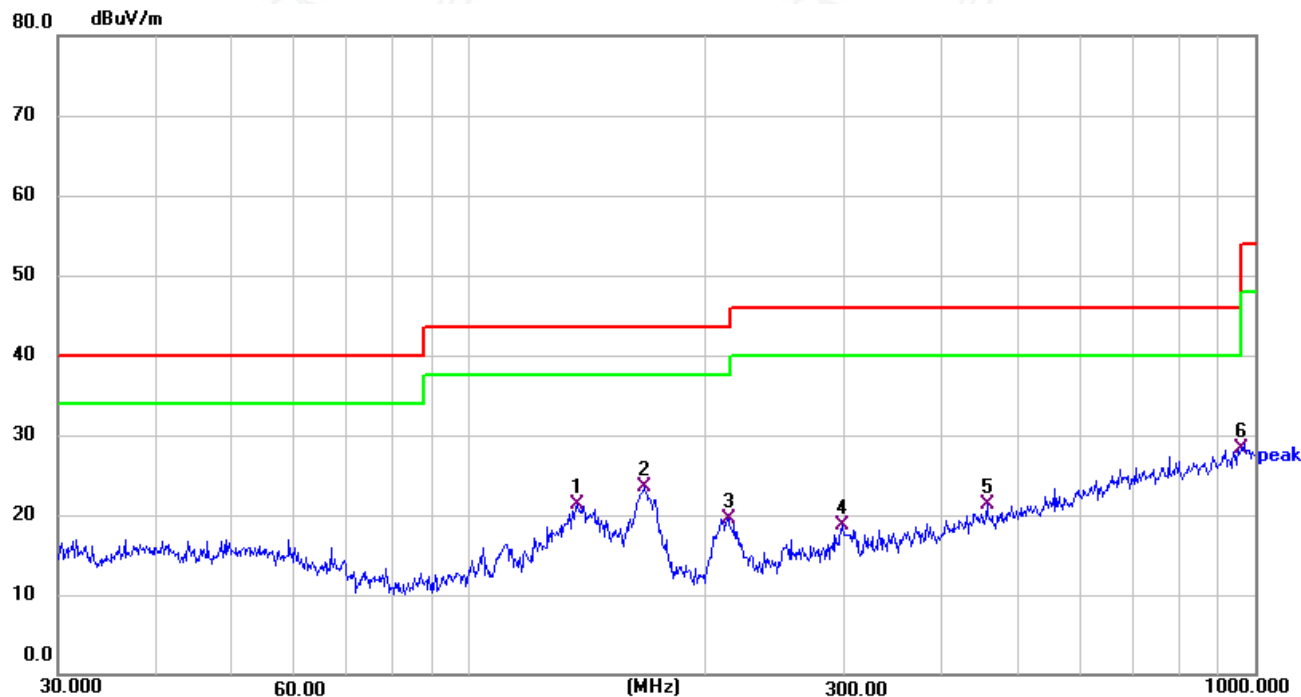

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	137.4202	33.20	-11.81	21.39	43.50	-22.11	QP	100	0	P	
2	167.2368	34.56	-11.12	23.44	43.50	-20.06	QP	100	0	P	
3	213.7634	33.98	-14.43	19.55	43.50	-23.95	QP	100	0	P	
4	298.2681	30.72	-12.04	18.68	46.00	-27.32	QP	100	0	P	
5	455.9058	29.91	-8.66	21.25	46.00	-24.75	QP	100	0	P	
6 *	958.7943	29.04	-0.64	28.40	46.00	-17.60	QP	100	0	P	



Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

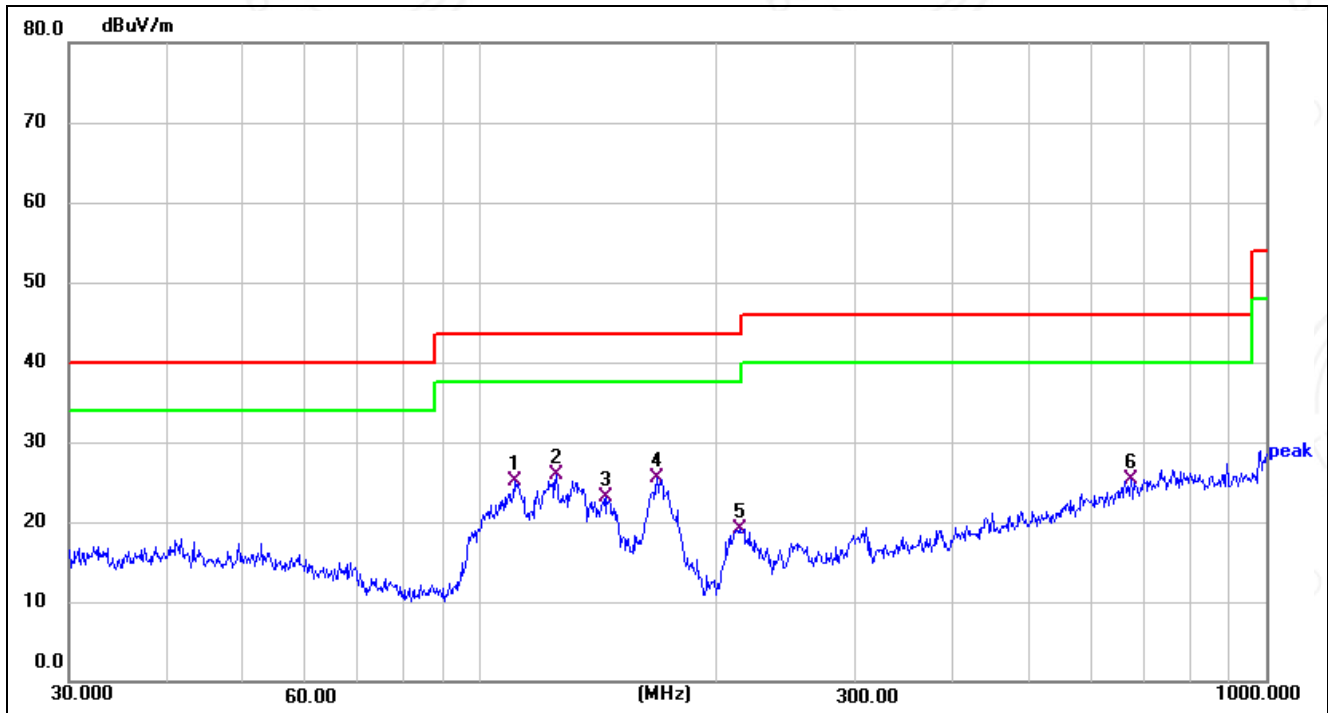

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	110.5687	38.21	-13.02	25.19	43.50	-18.31	QP	100	360	P	
2 *	125.0066	37.35	-11.51	25.84	43.50	-17.66	QP	100	360	P	
3	144.8418	35.09	-11.90	23.19	43.50	-20.31	QP	100	360	P	
4	167.8243	37.22	-11.77	25.45	43.50	-18.05	QP	100	360	P	
5	213.7634	33.63	-14.43	19.20	43.50	-24.30	QP	100	360	P	
6	672.8444	30.62	-5.34	25.28	46.00	-20.72	QP	100	360	P	

Remark:

1) Through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Reading Level + Factor, Margin= Level-Limit. Factor= Cabel loss +Antenna factor-Pre_amplifier gain.

3) Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Above 1GHz

Polarity: Horizontal; Modulation:GFSK; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4801.950	64.01	-15.60	48.41	74.00	-25.59	peak	P
2	7206.260	56.52	-10.97	45.55	74.00	-28.45	peak	P

Polarity: Vertical; Modulation:GFSK; Channel:Low

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4801.958	63.70	-15.60	48.10	74.00	-25.90	peak	P
2	7206.000	53.21	-10.97	42.24	74.00	-31.76	peak	P

Polarity: Horizontal; Modulation:GFSK; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4879.951	68.55	-15.60	52.95	74.00	-21.05	peak	P
2	7320.000	56.42	-10.97	45.45	74.00	-28.55	peak	P

Polarity: Vertical; Modulation:GFSK; Channel:middle

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4880.751	68.47	-15.60	52.87	74.00	-21.13	peak	P
2	7320.000	58.68	-10.97	47.71	74.00	-26.29	peak	P

Polarity: Horizontal; Modulation:GFSK; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4959.253	67.82	-15.60	52.22	74.00	-21.78	peak	P
2	7439.088	60.90	-10.97	49.93	74.00	-24.07	peak	P

Polarity: Vertical; Modulation:GFSK; Channel:High

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	4960.000	66.91	-15.60	51.31	74.00	-22.69	peak	P
2	7440.000	59.62	-10.97	48.65	74.00	-25.35	peak	P

Note:1. Testing is carried out with frequency rang 1GHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

2. If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

3. Final Test Level = Reading Level + Factor, Margin= Level-Limit. Factor= Cabel loss +Antenna factor-Pre_amplifier gain.



8 Test Setup Photo

Please refer to the Appendix Test Setup Photos

9 EUT Constructional Details (EUT Photos)

Please refer to the Appendix EUT Photos

- End of the Report -

