

**Description:** 3G Pentaband 824-2170MHz,  
Right angle

**PART NUMBER:** W1900/W1902/W1900-M



W1900/W1902

### Features:

- Small form factor monopole
- Antenna size W x L x H  
W1900/W1902 (18.4 x 8.0 x 49.5mm)  
W1900-M (22 x 11.4 x 50.5mm)
- Lead free materials
- RoHS Compliant Product
- Connector Type:  
W1900/W1900-M SMA (male)  
W1902 RP-SMA (male)



W1900-M

### Applications:

- Penta band EU/US GSM/WCDMA
- Frequency range:  
850 / 900 / 1800 / 1900/ 2100 MHz
- M2M Applications

All dimensions are in mm

Issue: 1715

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel: 1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Co, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



## ELECTRICAL SPECIFICATIONS

|                    |                                      |
|--------------------|--------------------------------------|
| Frequency          | 824-960MHz<br>1710-2170MHz           |
| Nominal Impedance  | 50Ω                                  |
| Return Loss        | -4dB 824-960MHz<br>-6dB 1710-2170MHz |
| Peak Gain          | 1dBi 824-960MHz<br>2dBi 1710-2170MHz |
| Efficiency         | 52%                                  |
| Radiation Pattern  | Omni                                 |
| Polarization:      | Linear                               |
| Power withstanding | 5W                                   |

### Issue: 1715

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

#### CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel: 1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Do, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



## MECHANICAL SPECIFICATIONS


|                          |                                               |
|--------------------------|-----------------------------------------------|
| Weight                   | W1900/W1902 11.07g<br>W1900-M 11.1g           |
| Antenna Color / Material | Black                                         |
| Connector type           | W1900/W1900-M SMA(Male)<br>W1902 RP-SMA(Male) |

## ENVIRONMENTAL SPECIFICATIONS

|                       |               |
|-----------------------|---------------|
| Operating Temperature | -30/+75 ° C   |
| Storage Temperature   | -30/+75 ° C   |
| Ingress Protection    | IP65(W1900-M) |
| Wind-loading          | 100km/h       |
| RoHS Compliant        | Yes           |

MECHANICAL DRAWING

W1900/W1902

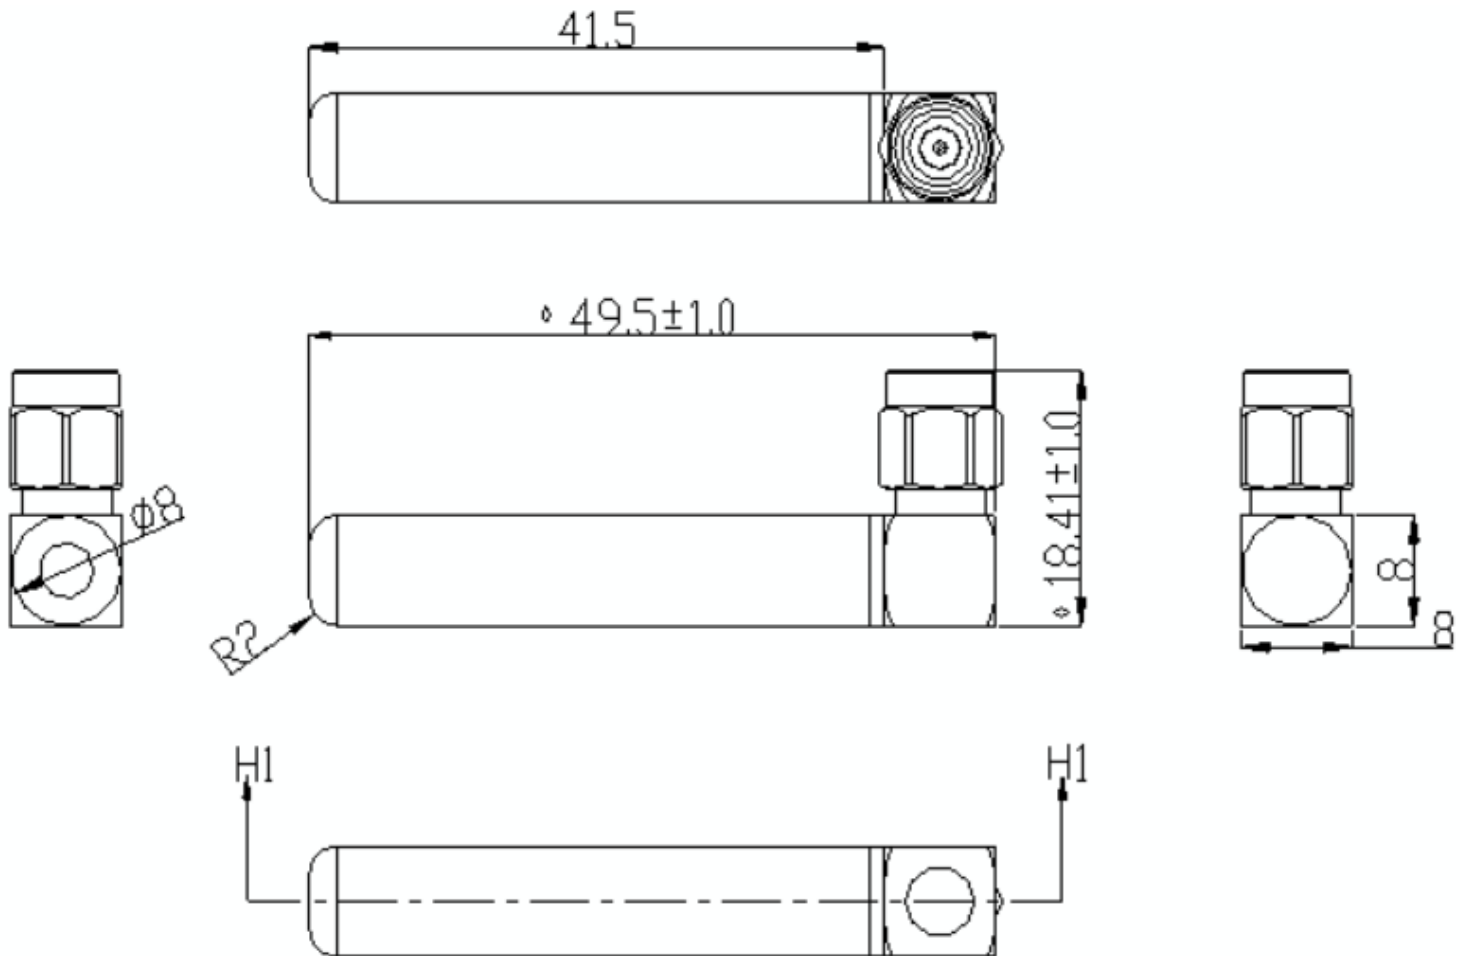

Issue: 1715


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

MECHANICAL DRAWING

W1900-M

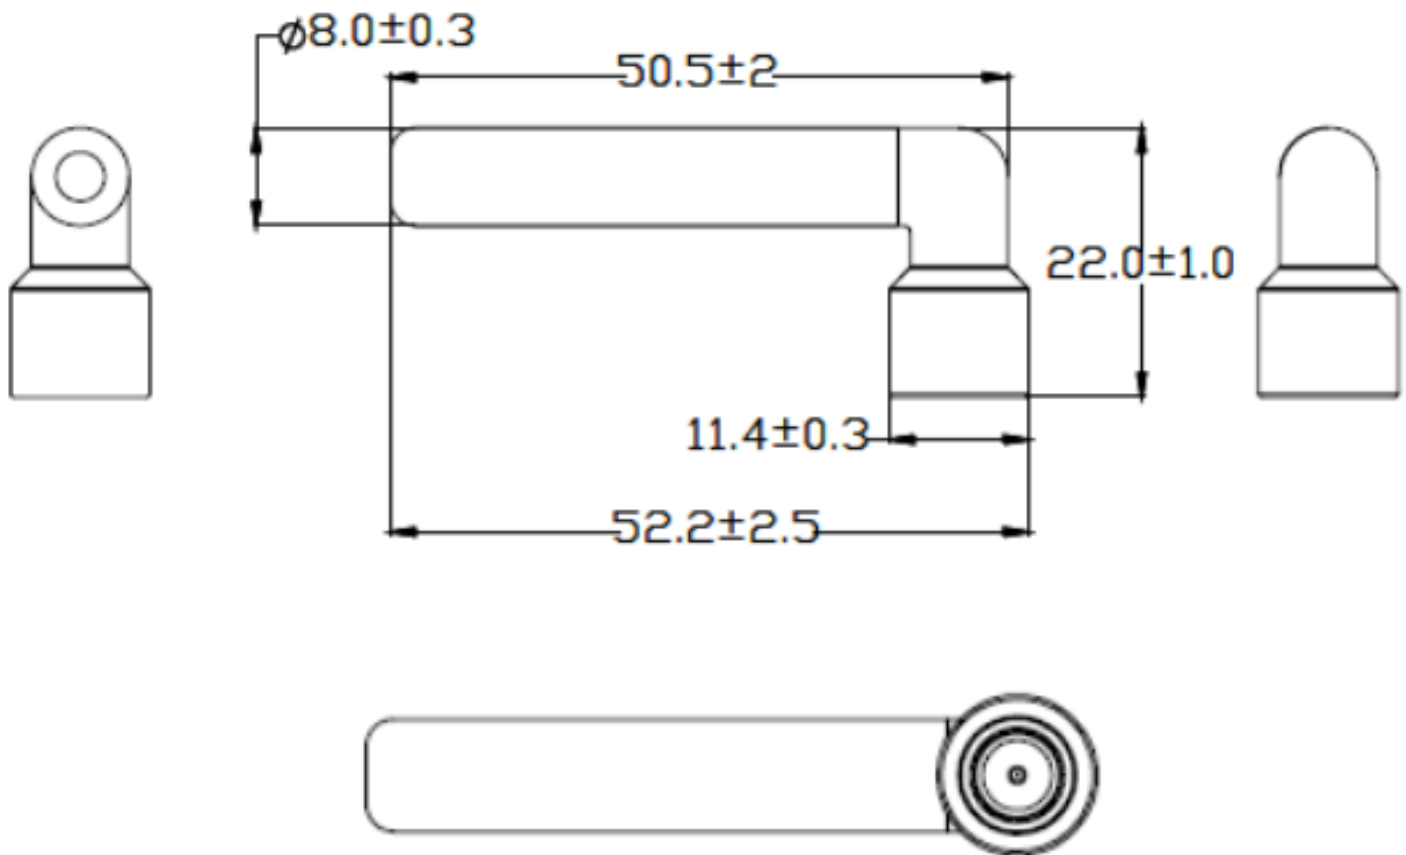

Issue: 1715


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## CHARTS

### Return Loss

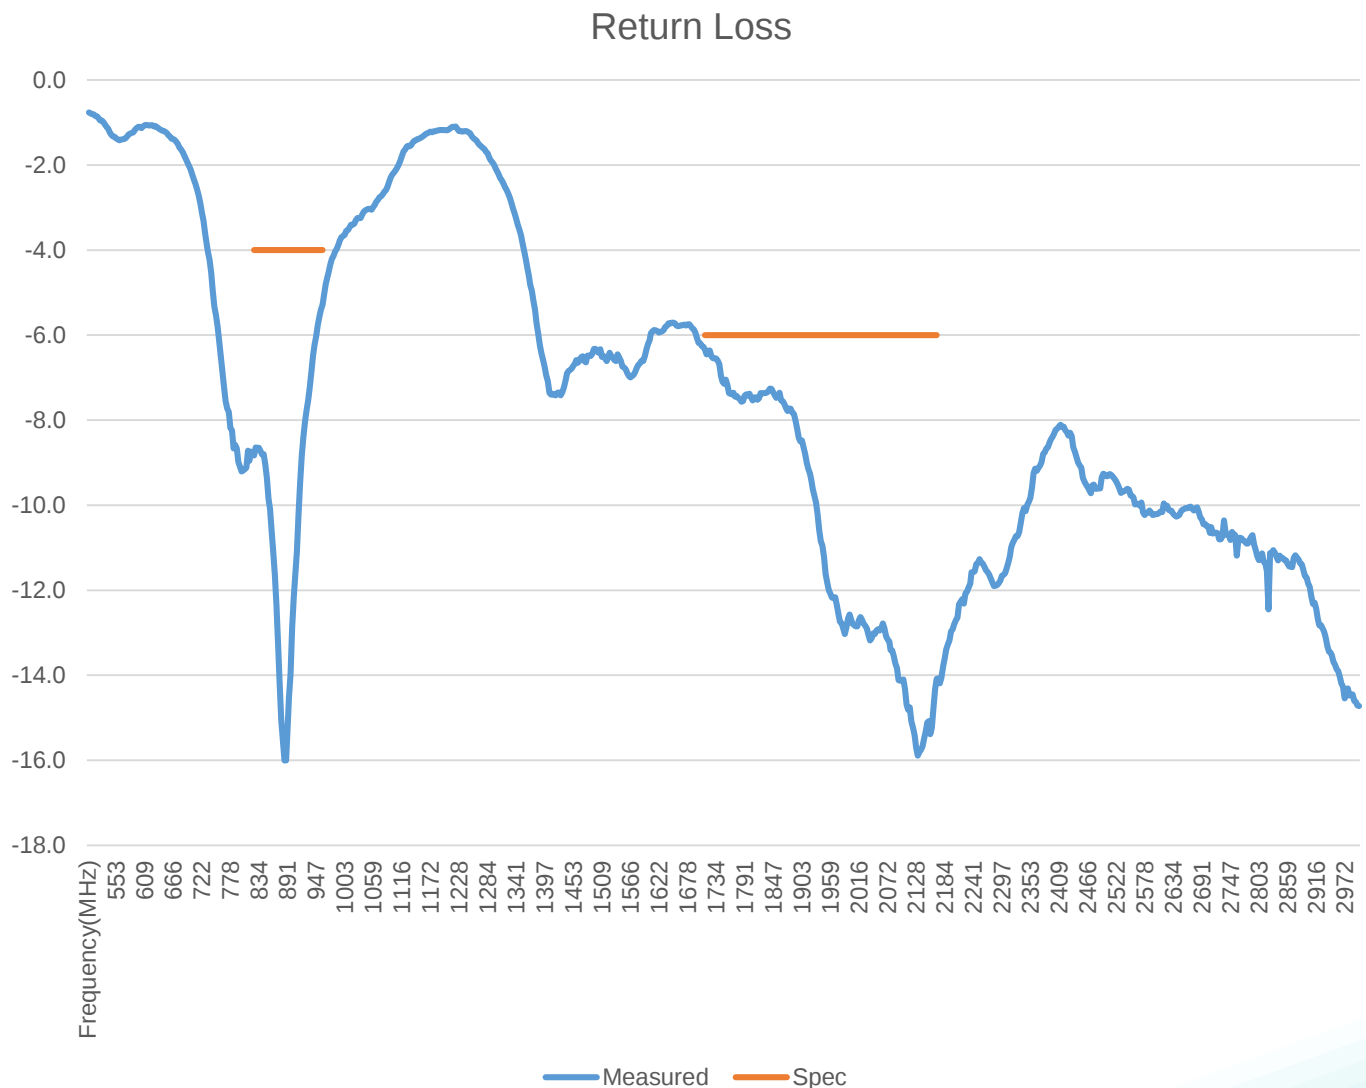

Issue: 1715


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


CHARTS

Efficiency(%)

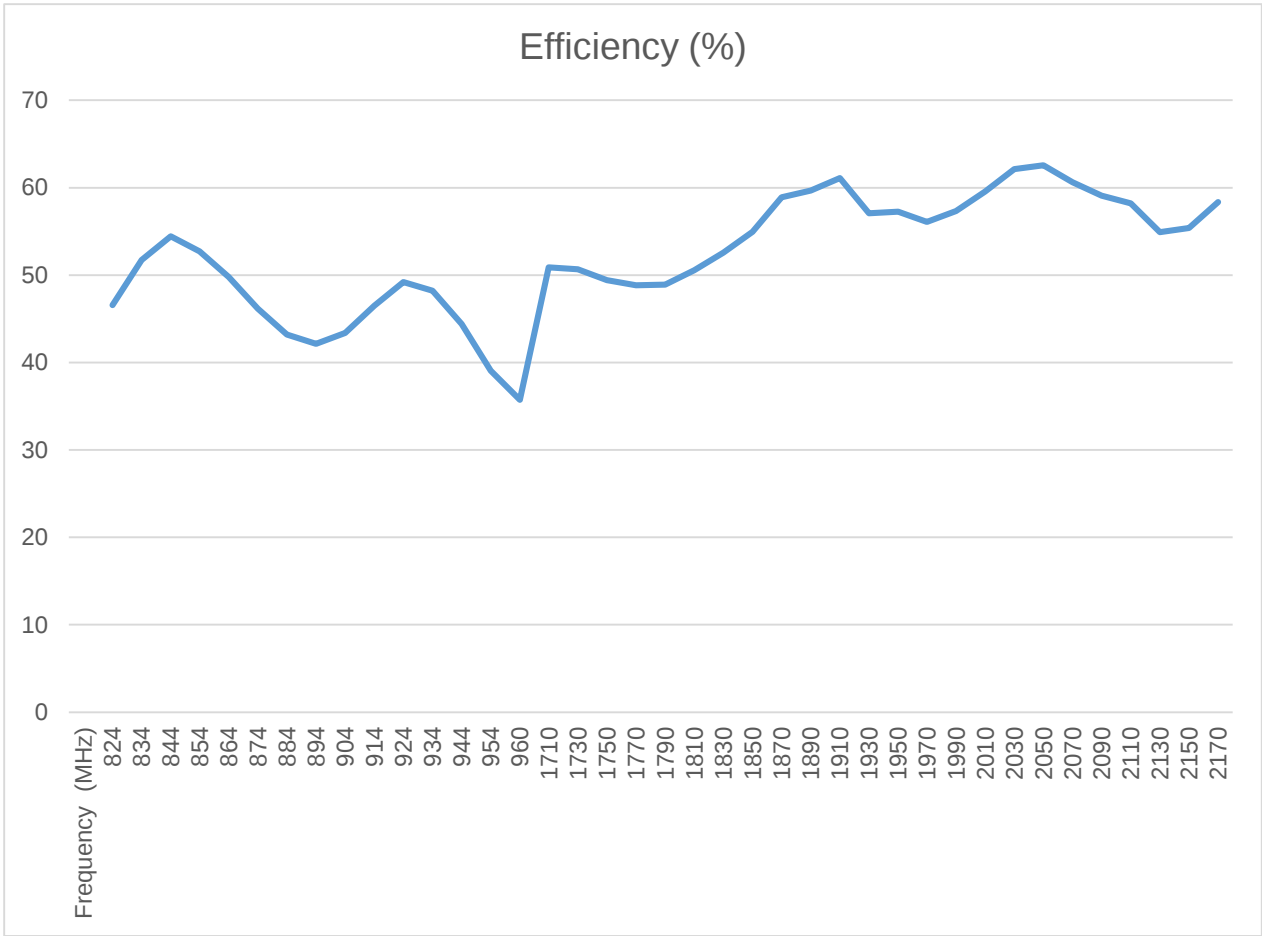

CHARTS


Peak Gain (dBi)

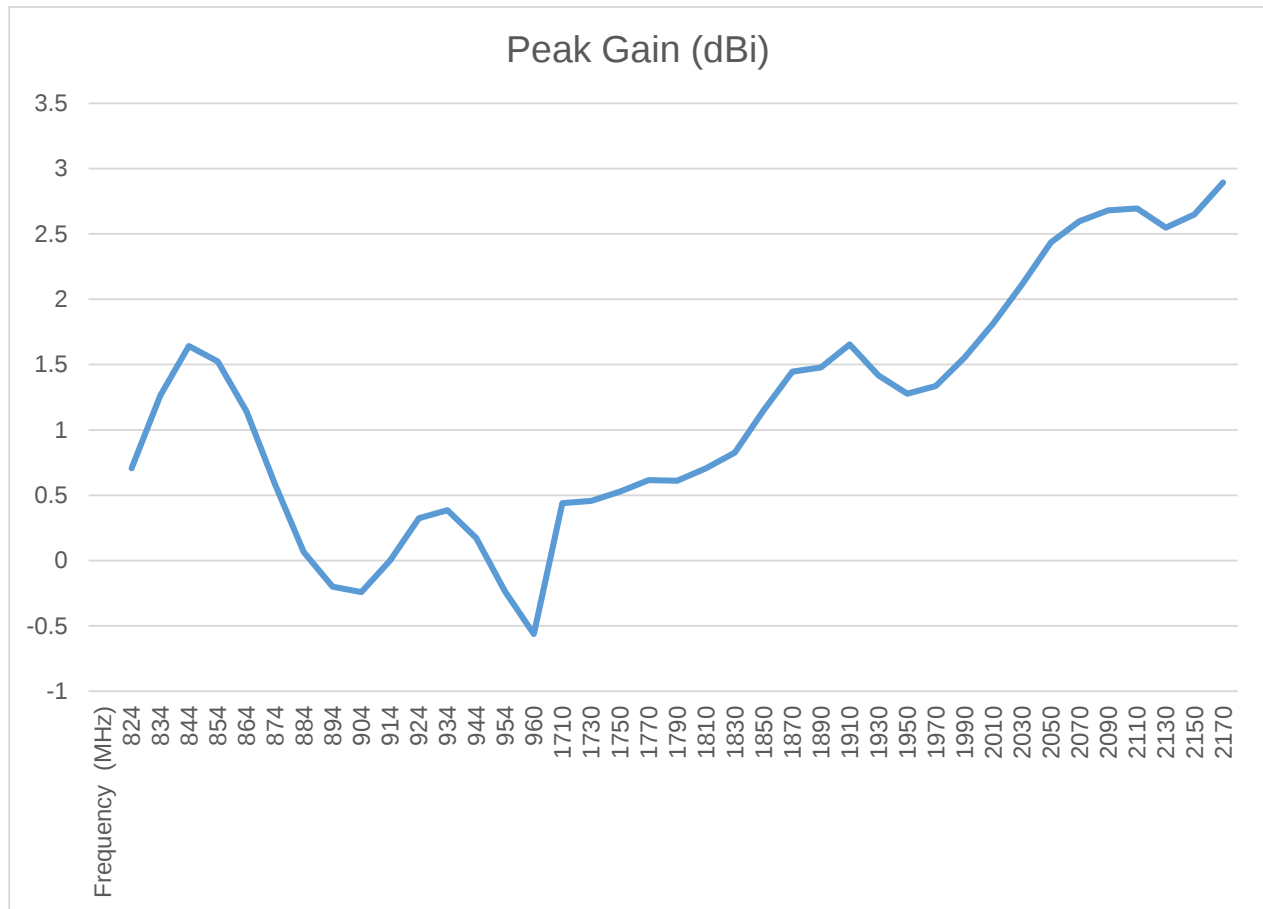


## CHARTS

### Free Space Radiation Pattern

#### Elevation Plane

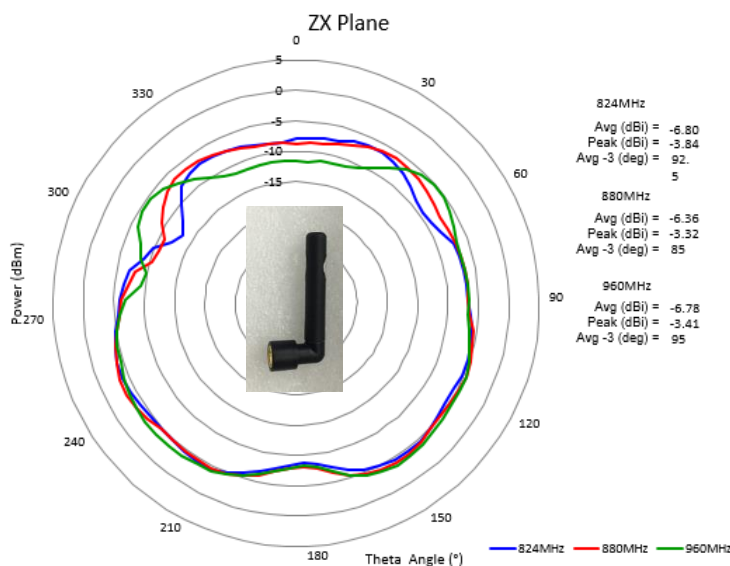


#### Horizontal Plane

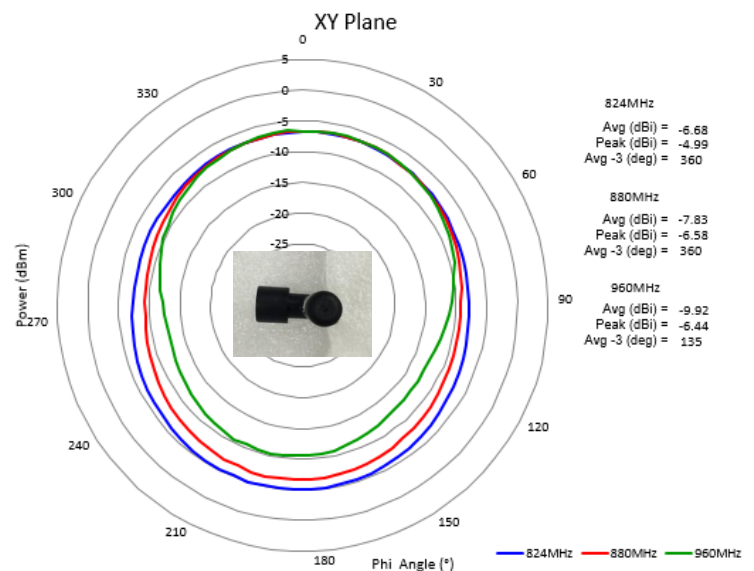


## CHARTS

### Free Space Radiation Pattern

#### Elevation Plane

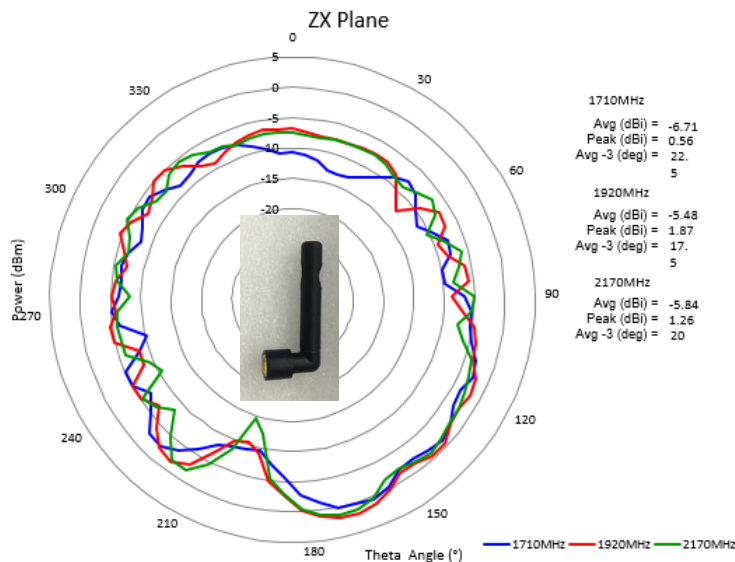

#### Horizontal Plane

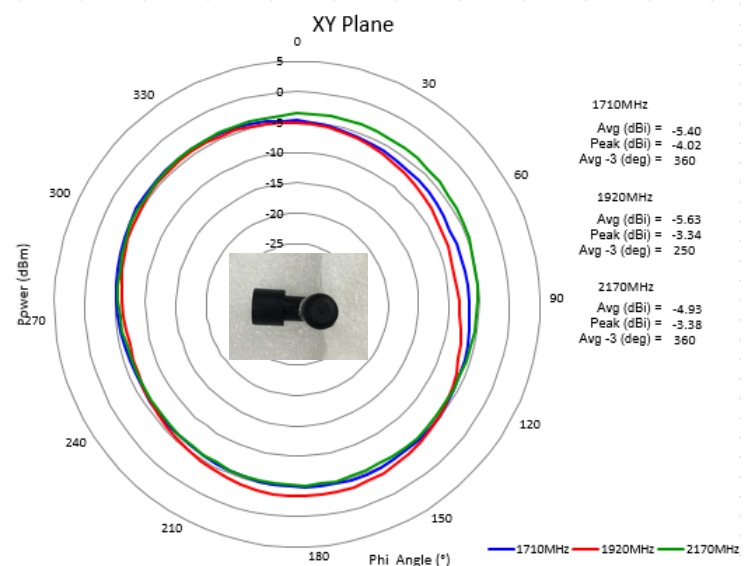

Issue: 1715

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## PACKAGING

1pcs antenna per PE bag

18pcs PE bags per tray

14pcs trays per package box ( 2pcs empty tray)

216pcs per package box

Package box: 460mm\*235mm\*140mm

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[W1900](#) [W1902](#)