

# FCC/ISED Test Report

**Report No.:** 2505P41486EA-A1

**Applicant:** Shenzhen Qianyan Technology LTD

**Address:** No.3301, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, China

**Product Name:** Smart Countertop Ice Maker 1s

**Product Model:** H717D

**Multiple Models:** N/A

**Trade Mark:** GoveeLife

**FCC ID:** 2A7VD-H717D

**IC:** 28789-H717D

**Standards:** FCC CFR Title 47 Part 15C (§15.247)  
RSS-247 Issue 3, August 2023

**Test Date:** 2025-01-15 to 2025-02-20

**Test Result:** Complied

**Report Date:** 2025-02-20

**Reviewed by:**

Abel Chen

**Approved by:**

Jacob Kong

Abel Chen  
Project Engineer

Jacob Kong  
Manager

**Prepared by:**

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

## Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
4. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

## Revision History

Version No.	Report No.	Issued Date	Description
00	RWAZ202300051A	2024-04-23	Original
01	2505P41486EA-A1	2025-02-20	CIIPC

## Contents

<b>1</b>	<b>General Information .....</b>	<b>4</b>
1.1	Client Information .....	4
1.2	Product Description of EUT .....	4
1.3	Antenna information .....	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty .....	5
1.6	Laboratory Location.....	6
1.7	Test Methodology .....	6
<b>2</b>	<b>Description of Measurement.....</b>	<b>7</b>
2.1	Test Configuration.....	7
2.2	Test Auxiliary Equipment .....	8
2.3	Test Setup.....	8
2.4	Test Procedure .....	10
2.5	Measurement Method.....	11
2.6	Measurement Equipment .....	13
<b>3</b>	<b>Test Results .....</b>	<b>14</b>
3.1	Test Summary.....	14
3.2	Limit .....	15
3.3	AC Line Conducted Emissions Test Data.....	16
3.4	Radiated emission Test Data.....	18
3.5	RF Conducted Test Data .....	58
3.5.1	Maximum Conducted Output Power .....	58
<b>4</b>	<b>Test Setup Photo.....</b>	<b>59</b>
<b>5</b>	<b>E.U.T Photo .....</b>	<b>60</b>

# 1 General Information

## 1.1 Client Information

Applicant:	Shenzhen Qianyan Technology LTD
Address:	No.3301, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen Qianyan Technology LTD
Address:	No.3301, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, China

## 1.2 Product Description of EUT

The EUT is Smart Countertop Ice Maker 1s that contains 2.4G WLAN and BLE radios, this report covers the full testing of the 2.4G WLAN radio.

HVIN	H717DA
Sample Serial Number	2XD4-2 for CE test, 2XD4-1 for RE& RF conducted test (assigned by WATC)
Sample Received Date	2025-01-13
Sample Status	Good Condition
Frequency Range	2412MHz - 2462MHz(802.11b, g, n-HT20) 2422MHz - 2452MHz(802.11n-HT40)
Maximum Conducted Peak Output Power	16.56dBm
Modulation Technology	DSSS, OFDM
Antenna Gain <sup>#</sup>	2.28dBi
Spatial Streams <sup>#</sup>	SISO (1TX, 1RX)
Power Supply	AC 120V/60Hz
Adapter Information	N/A
Modification	Sample No Modification by the test lab

## 1.3 Antenna information

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### RSS-GEN Clause 6.8 requirement:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

#### Device Antenna information:

The Wi-Fi antenna is an internal antenna which cannot replace by end-user. Please see product internal photos for details.

Antenna type	Antenna gain	Frequency Range	Input impedance
FPC	2.28dBi	2.4-2.5GHz	50Ω

## 1.4 Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s)

## 1.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions	±3.14dB
Emissions, Radiated	Below 30MHz
	±2.78dB
	Below 1GHz
	±4.84dB
Above 1GHz	±5.44dB
Emissions, Conducted	1.75dB
Conducted Power	0.74dB
Frequency Error	150Hz
Bandwidth	0.34%
Power Spectral Density	0.74dB

**Note:** The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

## 1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: [qa@wutc.com.cn](mailto:qa@wutc.com.cn)

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

## 1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

RSS-247 Issue 3, August 2023

RSS-Gen, Issue 5, Amendment 2 (February 2021)

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method

## 2 Description of Measurement

### 2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442	/	/
3	2422	8	2447	/	/
4	2427	9	2452	/	/
5	2432	10	2457	/	/

According to ANSI C63.10-2013 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

#### 802.11b, 802.11g, 802.11n-HT20

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462

#### 802.11n-HT40

Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	6	2437	9	2452

#### Test Mode:

Transmitting mode:	Keep the EUT in continuous transmitting with modulation			
Exercise software <sup>#</sup> :	EspRFTestTool_v3.6			
Mode	Worst-case Data rate	Power Level Setting <sup>#</sup>		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	36ATT	36ATT	36ATT
802.11g	6Mbps	50ATT	50ATT	50ATT
802.11n-HT20	6.5Mbps	56ATT	56ATT	56ATT
802.11n-HT40	13.5Mbps	56ATT	56ATT	56ATT

The exercise software and the maximum power setting that provided by manufacturer.

#### Worst-Case Configuration:


For AC power line conducted emission and radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.

## 2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

## 2.3 Test Setup


### 1) Conducted emission measurement:

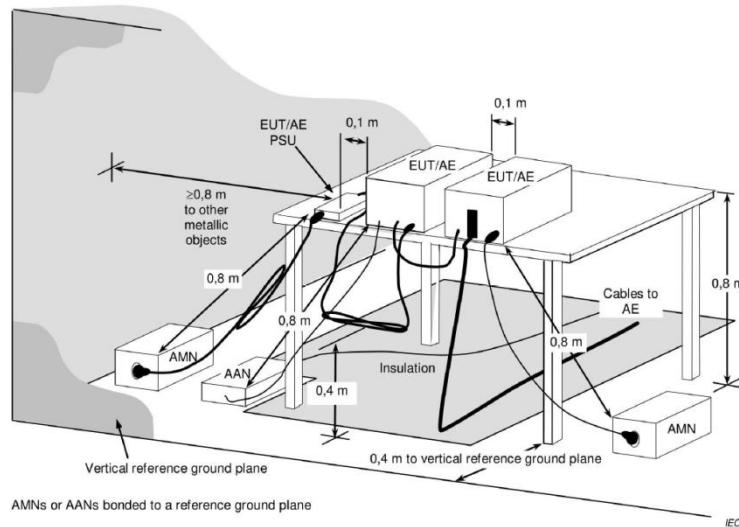


**Note:** The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.


### 2) Radiated emission measurement:

Below 30MHz (3m SAC)

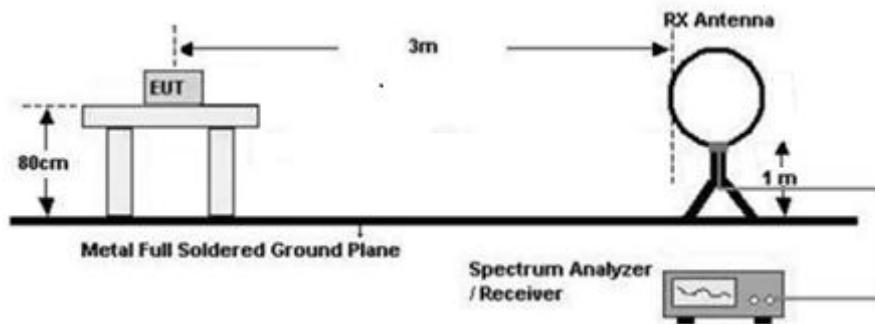

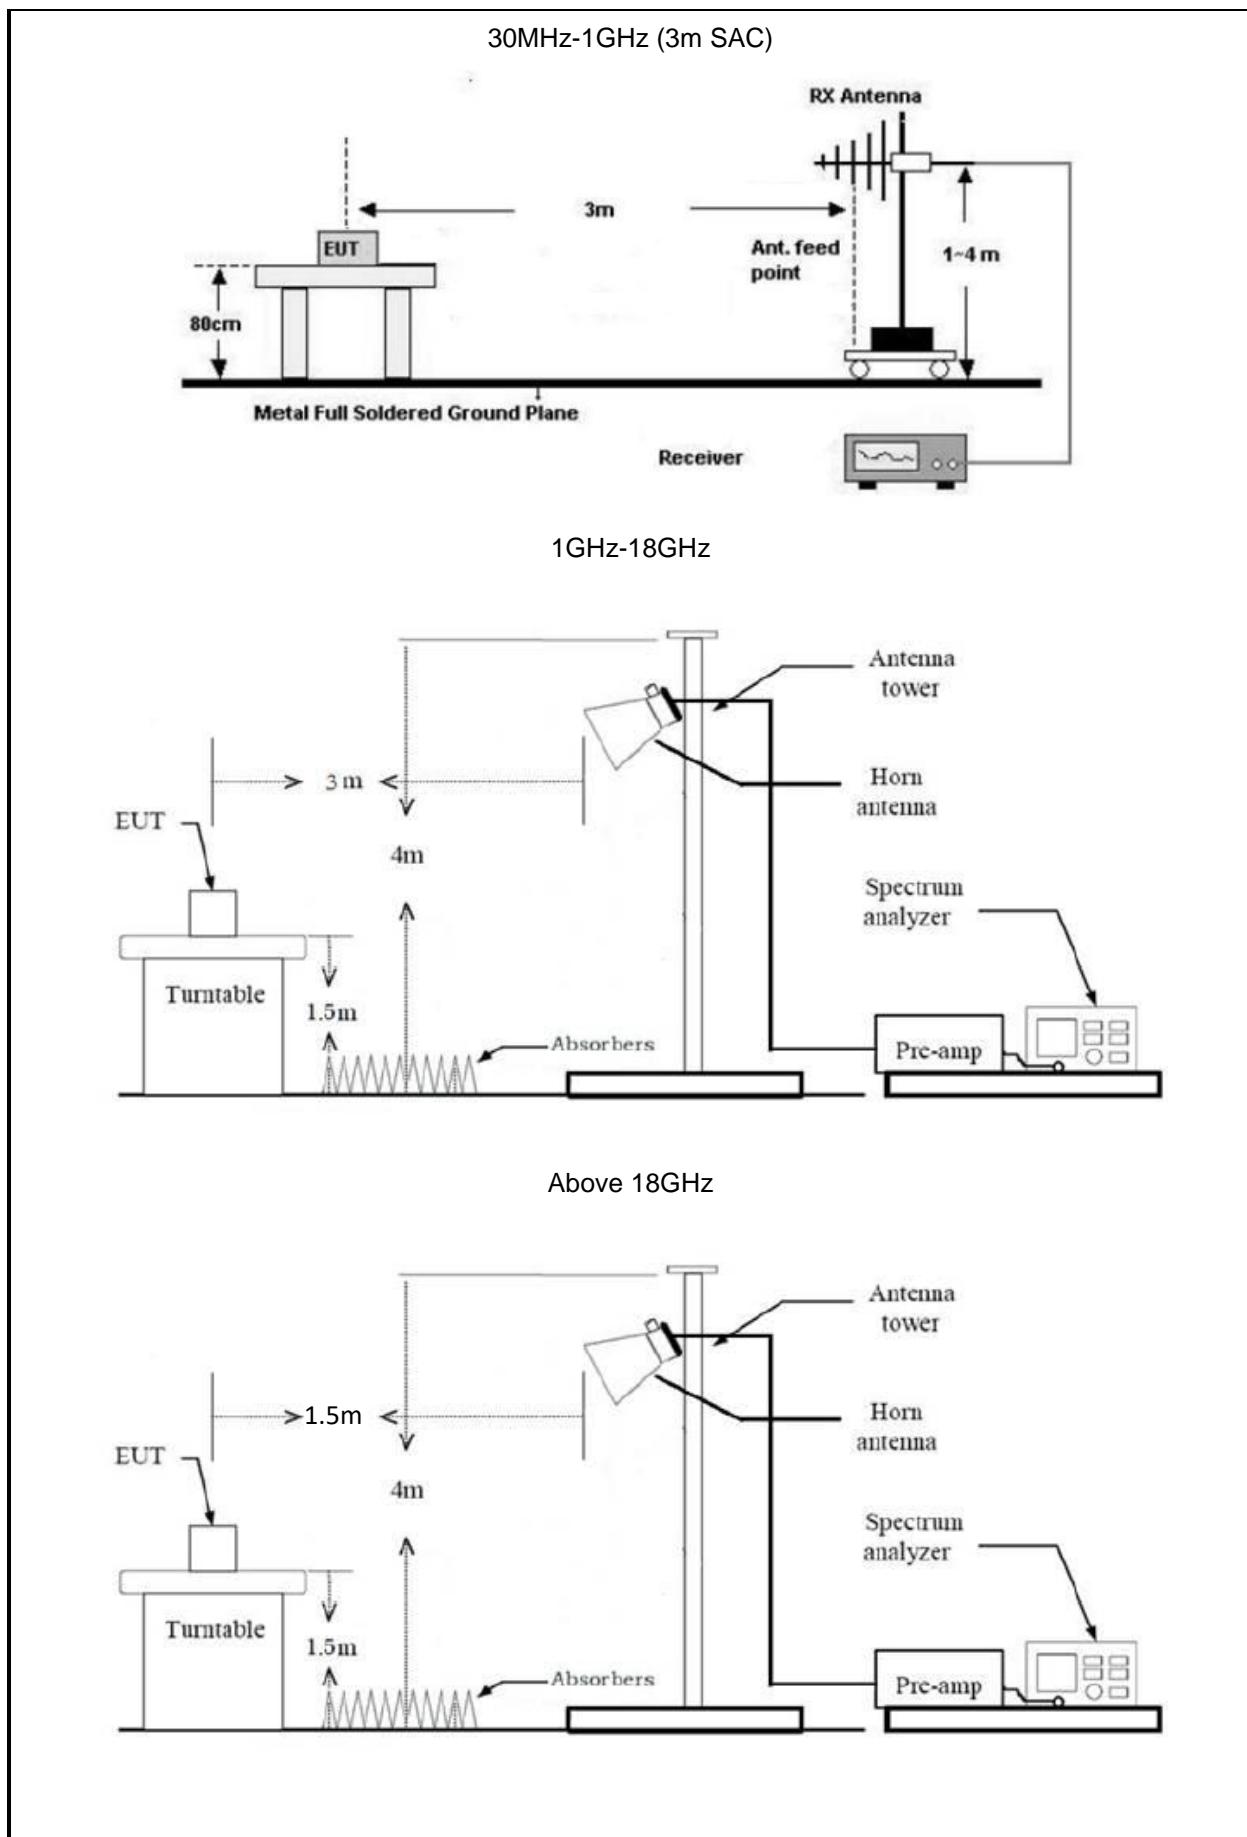

### 3) RF Conducted Test

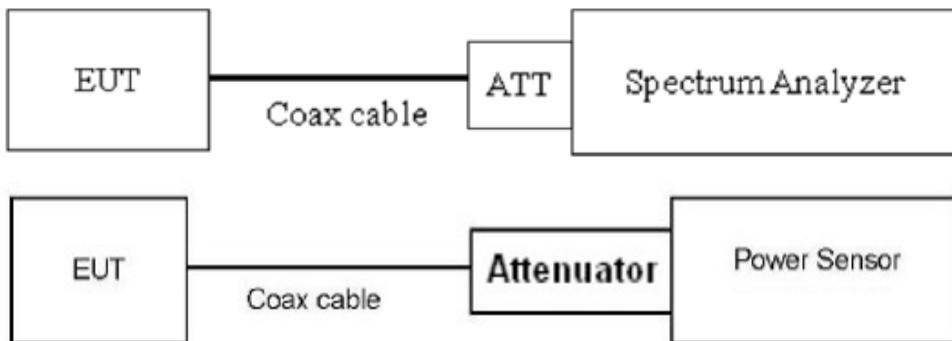

## 2.4 Test Procedure

### Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

### Radiated Emission Procedure:

#### a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were  $40 \cdot \log(\text{test distance} / \text{specification distance})$ .
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)
3. The RBW/VBW of receiver is set to 200Hz/1kHz for 9kHz to 150kHz range, to 9kHz/30kHz for 150kHz to 30MHz range for scan Peak emission, 200Hz/9kHz IF BW was used for final measurement in the Quasi-peak or average detection mode for frequency range 9~150kHz/150kHz~30MHz respectively.
4. If the Peak emission complies with the QP limit, then perform final measurement is optional.

#### b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

3. The RBW/VBW of receiver is set to 100kHz/300kHz for scan Peak emission, 120kHz IF BW was used for final measurement in the Quasi-peak detection mode.
4. If the Peak emission complies with the QP limit, then perform final measurement is optional.

**c) For above 1GHz:**

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above 18GHz).
2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. The RBW/VBW of spectrum analyzer is set to 1MHz/3MHz for scan Peak emission, for measured average emission, reduce the VBW to 10Hz(for duty cycle $\geq$ 98%), or  $\geq 1/T$ (for duty cycle $<$ 98%). T is minimum transmission duration. (Note: a high VBW (for example 1kHz, not less than 1/T) may be used to scan average emissions to avoid long sweep time.)
4. If the Peak emission complies with the Average limit, then perform average measurement is optional.
5. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
6. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

**RF Conducted Test:**

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or Spectrum analyzer) through Attenuator and RF cable.
2. The cable assembly insertion loss of 8.0dB (including 6.0 dB Attenuator and 2.0 dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 2.0dB was assumed as worst case. This was later verified to be true by laboratory. ( if the RF cable provided by client, the cable loss declared by client)
3. The EUT is kept in continuous transmission mode and tested in all modulation modes.

## 2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2013 Section 6.2
Maximum Conducted Output Power	ANSI C63.10-2013 Section 11.9.1.2 PKPM1 Peak power meter method or ANSI C63.10-2013 Section 11.9.2.3.2 Method AVGPM-G
Power Spectral Density	ANSI C63.10-2013 Section 11.10.2 Method PKPSD (peak PSD)

6 dB Emission Bandwidth	ANSI C63.10-2013 Section 11.8.1
99% Occupied Bandwidth	ANSI C63.10-2013 Section 6.9.3
100kHz Bandwidth of Frequency Band Edge	ANSI C63.10-2013 Section 6.10
Radiated emission	ANSI C63.10-2013 Section 11.11&11.12
Duty Cycle	ANSI C63.10-2013 Section 11.6

## 2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE& SCHWARZ	EMI TEST RECEIVER	ESR	101817	2024/6/4	2025/6/3
R&S	LISN	ENV216	101748	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.12	N/A	2024/6/4	2025/6/3
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2024/6/4	2025/6/3
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2024/6/4	2025/6/3
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2024/6/4	2025/6/3
A.H. Systems	PREAMPLIFIER	PAM-0118P	531	2024/6/4	2025/6/3
COM-POWER	Amplifier	PAM-840A	461306	2024/8/7	2025/8/6
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2026/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2026/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2026/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2024/6/4	2025/6/3
Unknown	6.7G High Pass Filter	Unknown	6.7G	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.9	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.13	N/A	2024/8/7	2025/8/6
N/A	Coaxial Cable	NO.15	N/A	2024/6/4	2025/6/3
RF Conducted Test					
ANRITSU	USB Power Sensor	MA24418A	12620	2024/6/4	2025/6/3
narda	6dB attenuator	603-06-1	N/A	2024/6/4	2025/6/3

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

## 3 Test Results

### 3.1 Test Summary

FCC/ISEDC Rules	Description of Test	Result	Remark
§15.203 RSS-GEN §6.8	Antenna Requirement	Compliance	/
§15.207 (a) RSS-GEN §8.8	AC Line Conducted Emissions	Compliance	/
§15.247(b)(3) RSS-247 §5.4 d)	Maximum Conducted Output Power	Compliance	/
§15.247(e) RSS-247 §5.2 b)	Power Spectral Density	Compliance	See note
§15.247 (a)(2) RSS-247 §5.2 a)	6 dB Emission Bandwidth	Compliance	See note
RSS-GEN §6.7	99% Occupied Bandwidth	Report only	See note
§15.247(d) RSS-247 §5.5	100kHz Bandwidth of Frequency Band Edge	Compliance	See note
§15.205, §15.209, §15.247(d) RSS-247 §5.5 RSS-GEN §8.9&§8.10	Radiated emission	Compliance	/
-	Duty Cycle	Report only	See note

Note:

This is a Class II Permissive Change test report. The applicant declared the difference<sup>#</sup> between EUT and original device (Granted on 2024/05/20) as below:

1. Add alternative components supplier:

Evaporator	Shenzhen Qianyan Technology LTD
Solenoid valve	Anhui Tianhao Refrigerating Equipment Co Ltd (MH47312)
Relay	SHENZHEN YUANZE ELECTRICCO LTD(E341498)
PCB	HUIZHOU KEDISHENG TECHNOLOGY CO LTD (E312490)
Water pump	Changzhou Duling Controller Co.,Ltd

2. Software update the WiFi parameter(reduce 802.11b mode output power, other mode changed power level but output power not change) to compliance related regulation.
3. Change the product name
4. Change the HVIN


Base on above difference, the output power of Wi-Fi was checked, the changes not affect those items so those items please refer the original report.

### 3.2 Limit

Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)/ RSS-GEN §8.8
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
Spurious Emissions, 100kHz Bandwidth of Frequency Band Edge	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a)/RSS-GEN §8.9 is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) /RSS-GEN §8.10, must also comply with the radiated emission limits specified in §15.209(a) /RSS-GEN §8.9 (see §15.205(c)).

### 3.3 AC Line Conducted Emissions Test Data

Test Date:	2025-01-15	Test By:	Ryan Zhang
Environment condition:	Temperature: 21.8°C; Relative Humidity:43%; ATM Pressure: 100.7kPa		

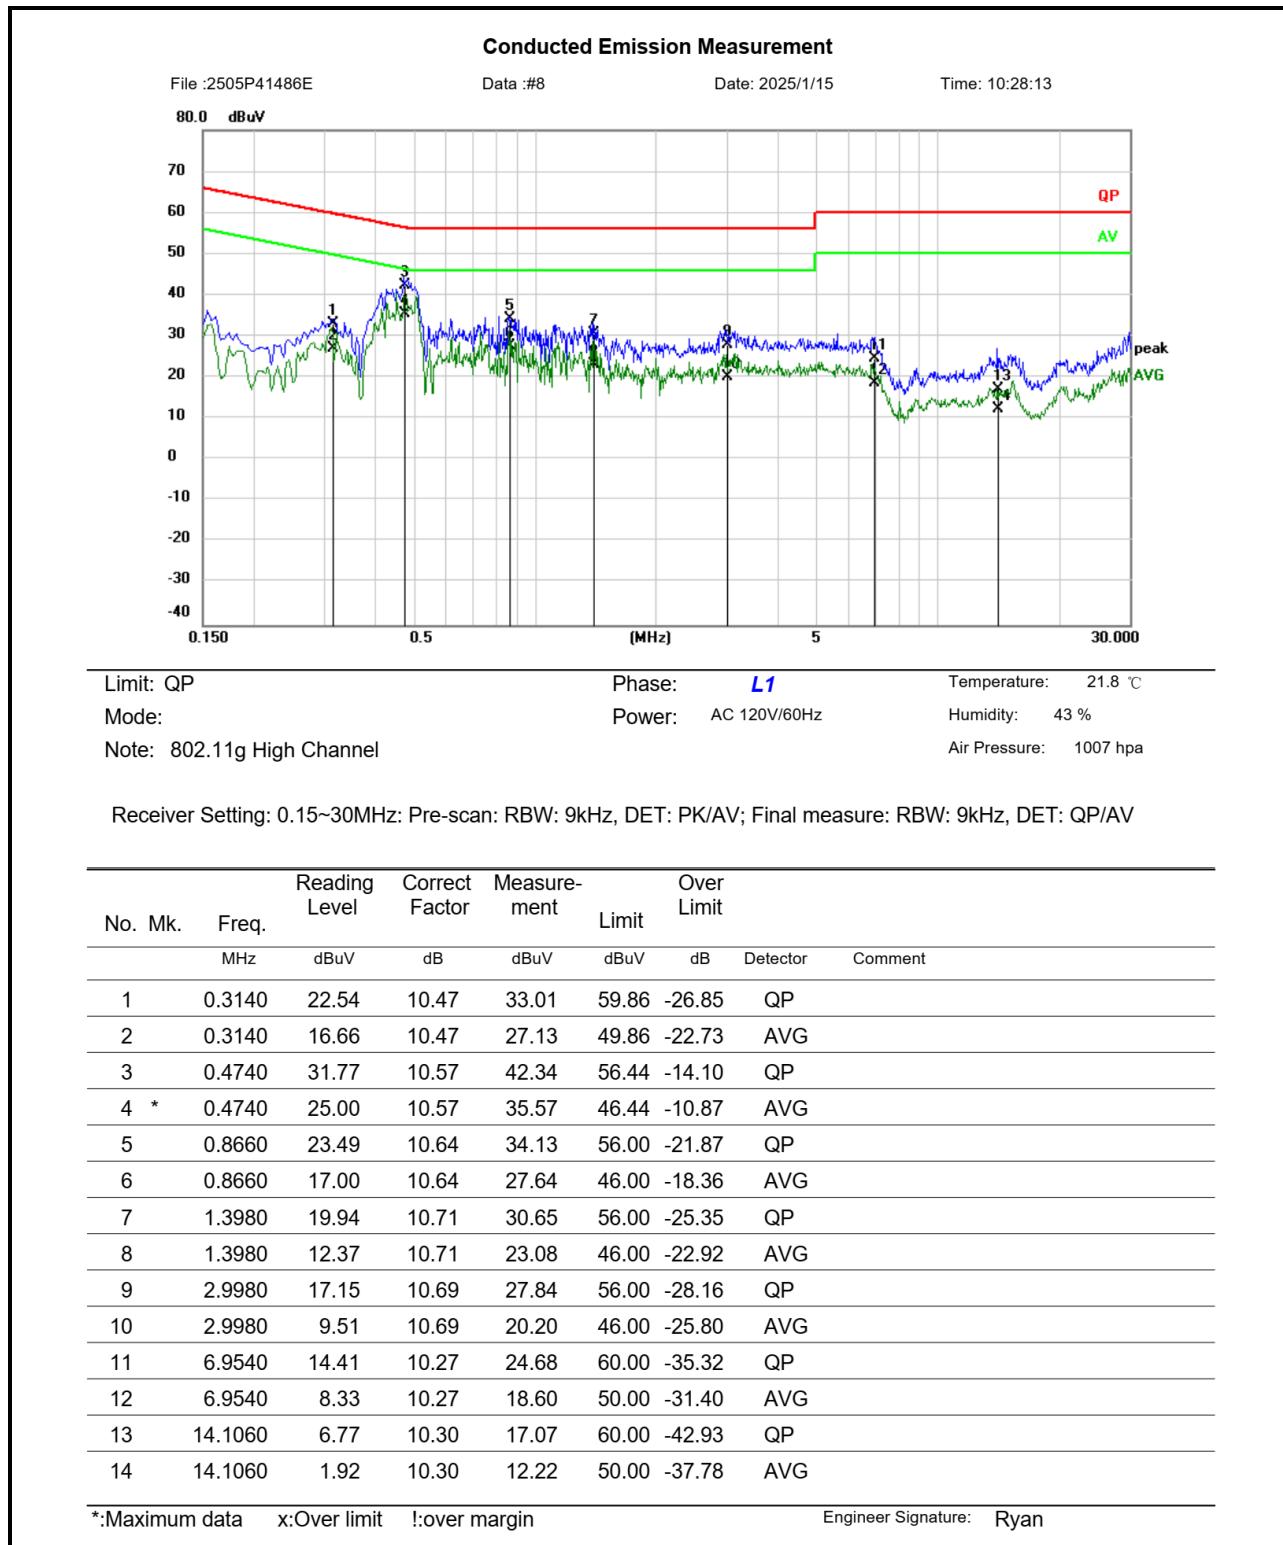


### Conducted Emission Measurement

File :2505P41486E

Data :#7

Date: 2025/1/15

Time: 10:25:50

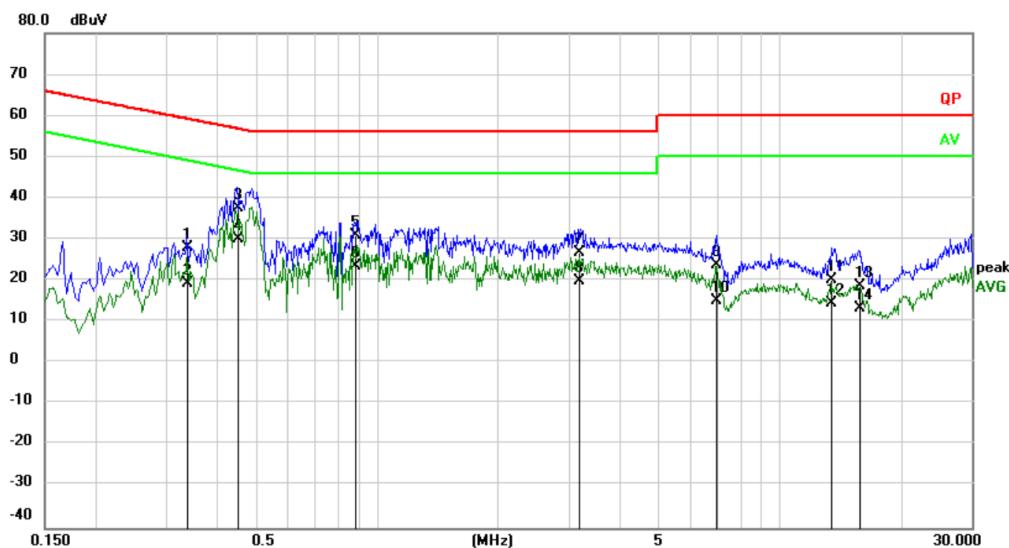

Limit: QP

Phase: **N**

Temperature: 21.8 °C

Mode:

Power: AC 120V/60Hz

Humidity: 43 %

Note: 802.11g High Channel

Air Pressure: 1007 hpa

Receiver Setting: 0.15~30MHz; Pre-scan: RBW: 9kHz, DET: PK/AV; Final measure: RBW: 9kHz, DET: QP/AV

No.	Mk.	Freq.	Reading	Correct	Measure-	Over	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1	0.3379	17.33	10.48	27.81	59.25	-31.44	QP	
2	0.3379	8.91	10.48	19.39	49.25	-29.86	AVG	
3	0.4500	27.04	10.55	37.59	56.88	-19.29	QP	
4 *	0.4500	19.41	10.55	29.96	46.88	-16.92	AVG	
5	0.8820	20.46	10.54	31.00	56.00	-25.00	QP	
6	0.8820	13.03	10.54	23.57	46.00	-22.43	AVG	
7	3.1580	16.36	10.52	26.88	56.00	-29.12	QP	
8	3.1580	9.37	10.52	19.89	46.00	-26.11	AVG	
9	6.9540	13.25	10.37	23.62	60.00	-36.38	QP	
10	6.9540	4.76	10.37	15.13	50.00	-34.87	AVG	
11	13.4300	9.73	10.38	20.11	60.00	-39.89	QP	
12	13.4300	4.08	10.38	14.46	50.00	-35.54	AVG	
13	15.7660	8.27	10.36	18.63	60.00	-41.37	QP	
14	15.7660	2.76	10.36	13.12	50.00	-36.88	AVG	

\*:Maximum data x:Over limit !:over margin

Engineer Signature: Ryan

#### Remark:

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)


Correct Factor (dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)


Over Limit= Measurement – Limit

### 3.4 Radiated emission Test Data

9 kHz-30MHz:

Test Date:	2025-01-17	Test By:	Bard Huang
Environment condition:	Temperature: 22.5°C; Relative Humidity:32%; ATM Pressure: 101.3kPa		

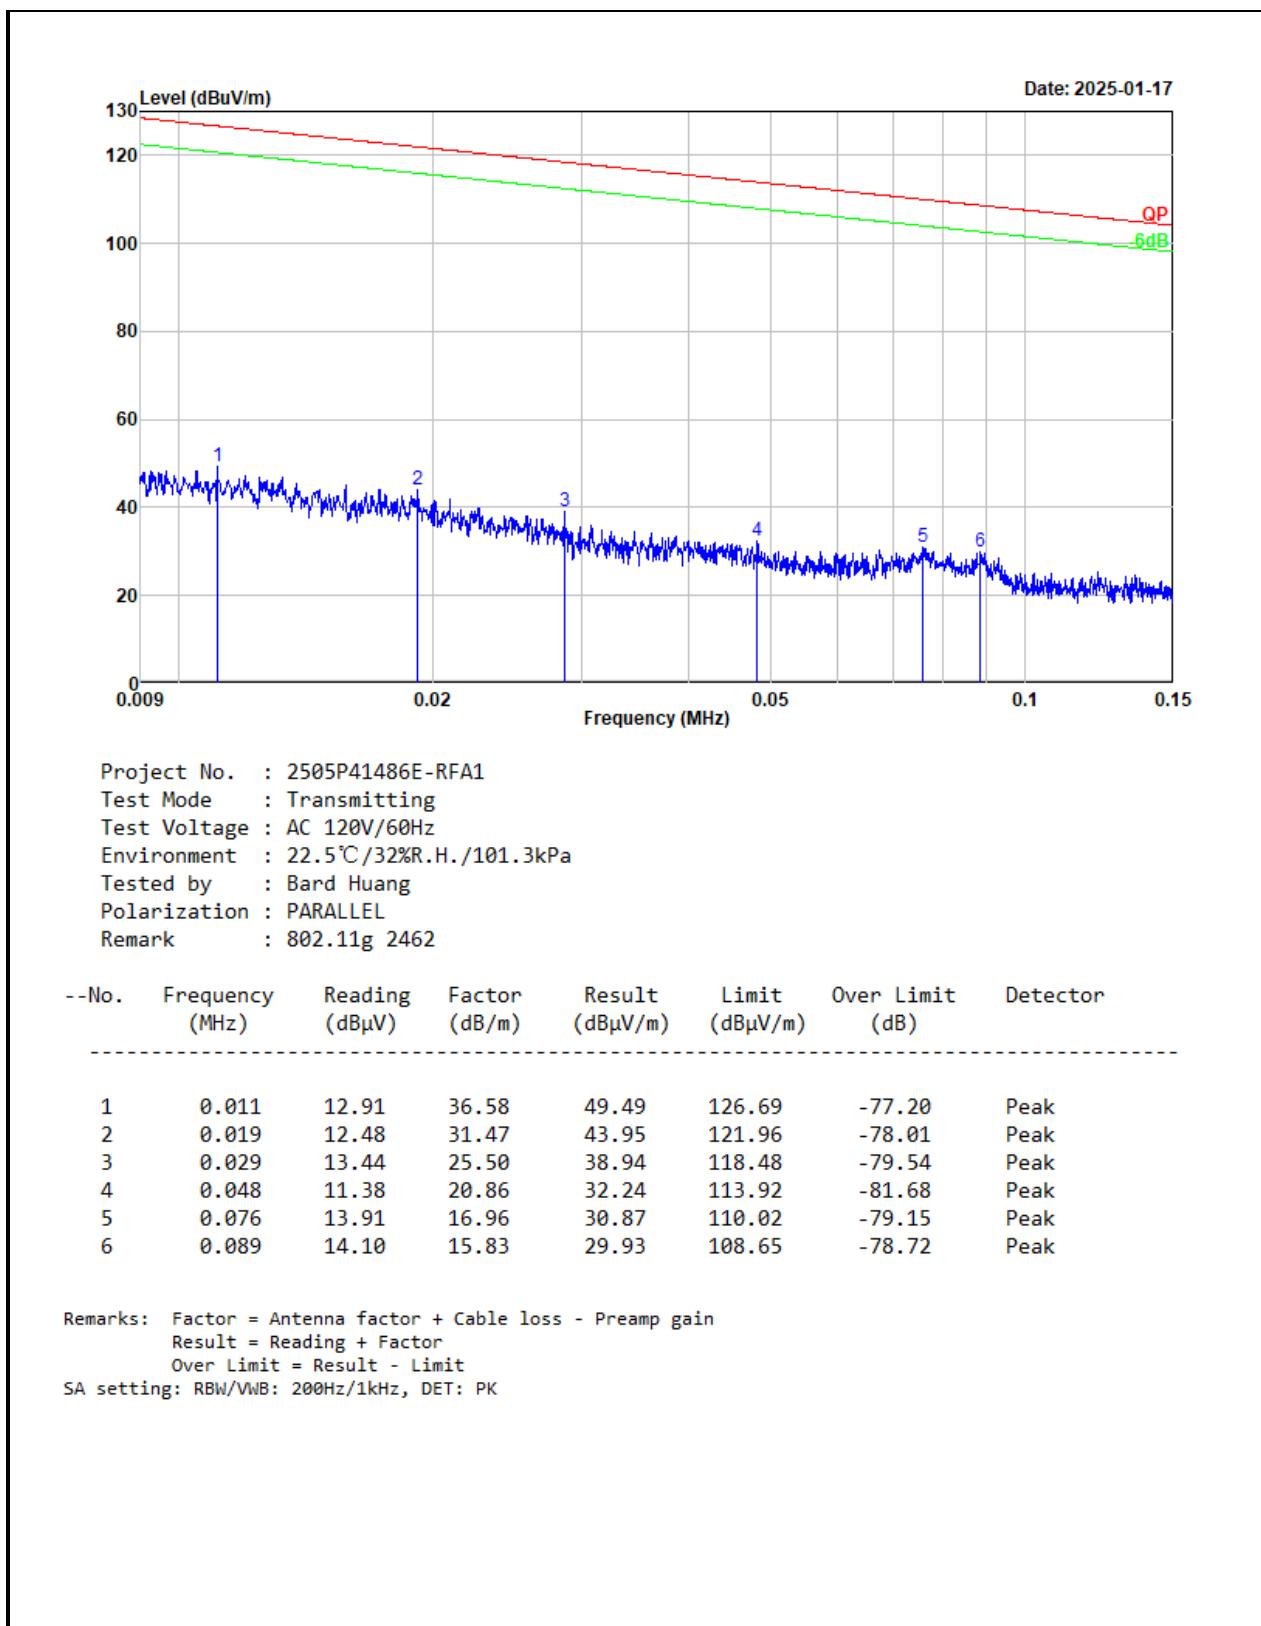

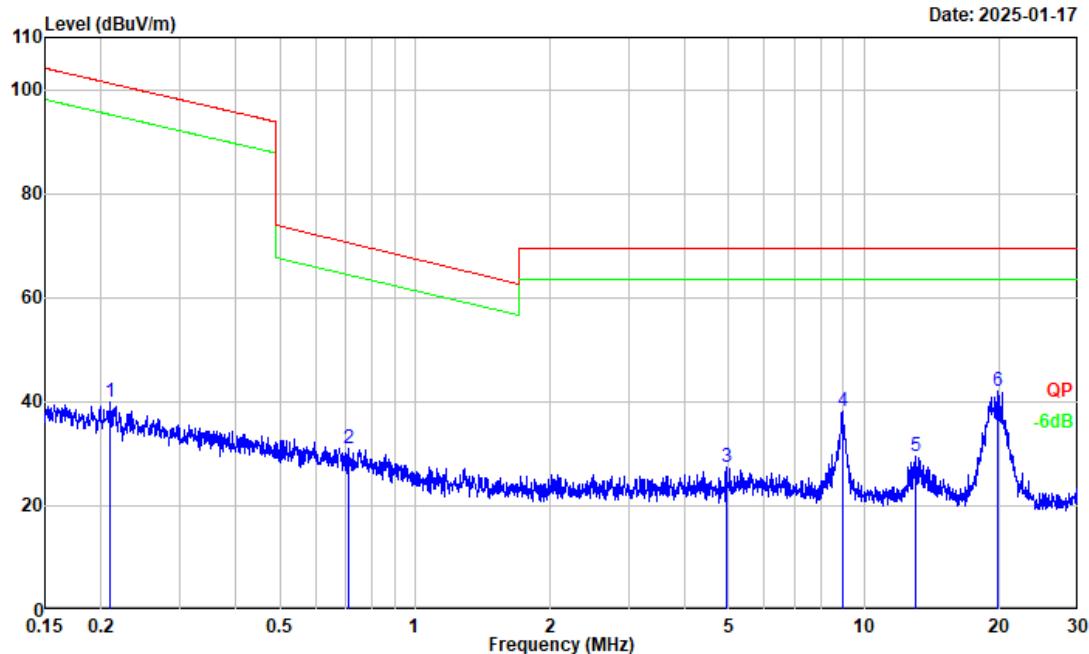

Project No. : 2505P41486E-RFA1  
 Test Mode : Transmitting  
 Test Voltage : AC 120V/60Hz  
 Environment : 22.5°C/32%R.H./101.3kPa  
 Tested by : Bard Huang  
 Polarization : PARALLEL  
 Remark : 802.11g 2462


--No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Detector
1	0.209	28.06	11.91	39.97	101.20	-61.23	Peak
2	0.711	27.79	3.35	31.14	70.49	-39.35	Peak
3	4.931	31.30	-3.94	27.36	69.54	-42.18	Peak
4	8.944	41.92	-3.68	38.24	69.54	-31.30	Peak
5	13.031	33.04	-3.45	29.59	69.54	-39.95	Peak
6	19.877	45.16	-3.15	42.01	69.54	-27.53	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit  
 SA setting: RBW/VWB: 9kHz/30kHz, DET: PK

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:


Test Date:	2025-01-17	Test By:	Bard Huang
Environment condition:	Temperature: 22.5°C; Relative Humidity:32%; ATM Pressure: 101.3kPa		

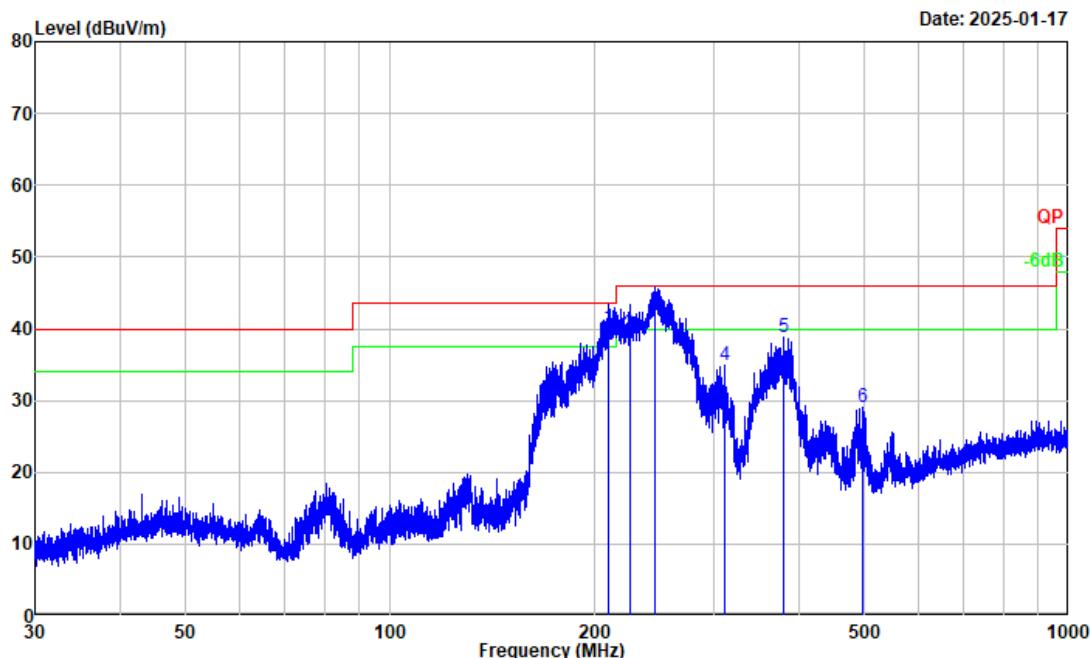

Project No. : 2505P41486E-RFA1  
 Test Mode : Transmitting  
 Test Voltage : AC 120V/60Hz  
 Environment : 22.5°C/32%R.H./101.3kPa  
 Tested by : Bard Huang  
 Polarization : horizontal  
 Remark : 802.11g 2462

--No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Detector
1	210.232	53.90	-13.82	40.08	43.50	-3.42	QP
2	225.308	52.49	-13.21	39.28	46.00	-6.72	QP
3	245.628	54.90	-12.45	42.45	46.00	-3.55	QP
4	310.678	45.91	-11.04	34.87	46.00	-11.13	Peak
5	379.581	48.01	-9.19	38.82	46.00	-7.18	Peak
6	496.805	36.35	-7.30	29.05	46.00	-16.95	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor  
 Over Limit = Result - Limit  
 SA setting: Pre-scan: RBW/VWB: 100kHz/300kHz, DET: PK  
 Final measure: RBW: 120kHz, DET: QP

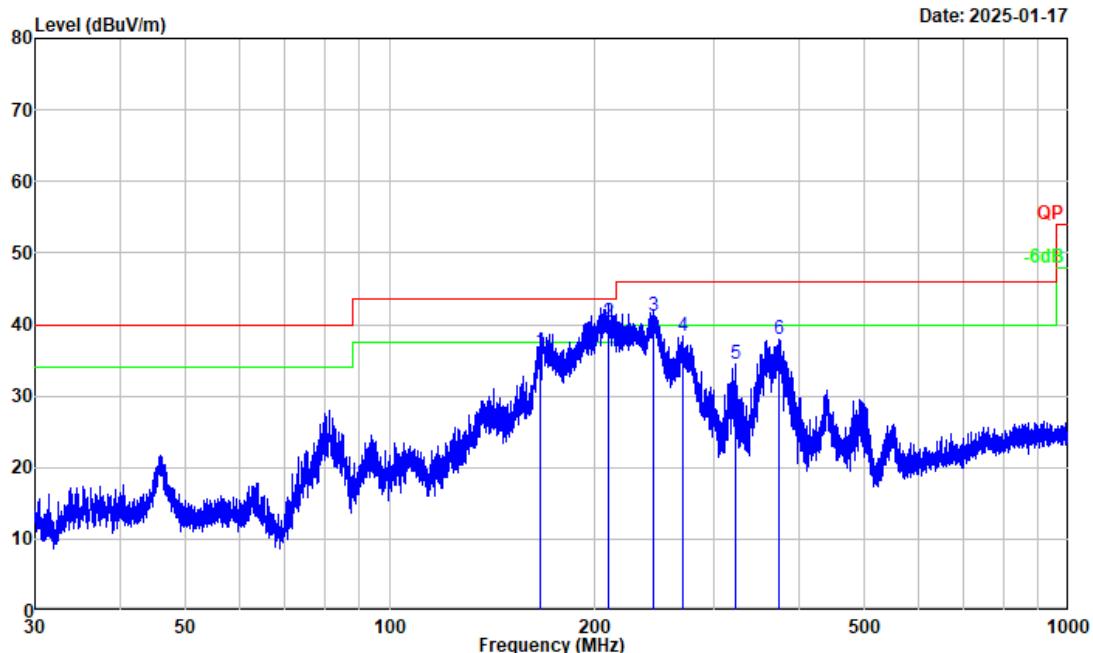

Project No. : 2505P41486E-RFA1  
 Test Mode : Transmitting  
 Test Voltage : AC 120V/60Hz  
 Environment : 22.5°C/32%R.H./101.3kPa  
 Tested by : Bard Huang  
 Polarization : vertical  
 Remark : 802.11g 2462

--No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Over Limit (dB)	Detector
<hr/>							
1	166.871	52.50	-16.36	36.14	43.50	-7.36	QP
2	209.864	54.11	-13.83	40.28	43.50	-3.22	QP
3	243.911	53.80	-12.50	41.30	46.00	-4.70	QP
4	270.020	50.28	-11.93	38.35	46.00	-7.65	Peak
5	322.189	45.20	-10.73	34.47	46.00	-11.53	Peak
6	374.623	47.18	-9.32	37.86	46.00	-8.14	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain  
 Result = Reading + Factor

Over Limit = Result - Limit

SA setting: Pre-scan: RBW/VMR: 100kHz/300kHz, DET: PK  
 Final measure: RBW: 120kHz, DET: QP

**Above 1GHz:**

<b>Test Date:</b>	2025-01-24~2025-02-14	<b>Test By:</b>	Bard Huang
<b>Environment condition:</b>	Temperature: 22.3~23.6°C; Relative Humidity:55~58%; ATM Pressure: 101.1~101.5kPa		

Frequency (MHz)	Reading level (dB $\mu$ V)	Polar (H/V)	Corrected Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Remark
802.11b							
Low Channel							
4824.000	51.47	horizontal	-2.29	49.18	74.00	-24.82	Peak
4824.000	49.70	vertical	-2.29	47.41	74.00	-26.59	Peak
Middle Channel							
4874.000	49.19	horizontal	-1.92	47.27	74.00	-26.73	Peak
4874.000	51.28	vertical	-1.92	49.36	74.00	-24.64	Peak
High Channel							
4924.000	49.32	horizontal	-1.70	47.62	74.00	-26.38	Peak
4924.000	52.14	vertical	-1.70	50.44	74.00	-23.56	Peak
802.11g							
Low Channel							
4824.000	47.64	horizontal	-2.29	45.35	74.00	-28.65	Peak
4824.000	47.04	vertical	-2.29	44.75	74.00	-29.25	Peak
Middle Channel							
4874.000	48.72	horizontal	-1.92	46.80	74.00	-27.20	Peak
4874.000	46.83	vertical	-1.92	44.91	74.00	-29.09	Peak
High Channel							
4924.000	46.36	horizontal	-1.70	44.66	74.00	-29.34	Peak
4924.000	47.39	vertical	-1.70	45.69	74.00	-28.31	Peak
802.11n20							
Low Channel							
4824.000	47.20	horizontal	-2.29	44.91	74.00	-29.09	Peak
4824.000	46.54	vertical	-2.29	44.25	74.00	-29.75	Peak
Middle Channel							
4874.000	47.34	horizontal	-1.92	45.42	74.00	-28.58	Peak
4874.000	47.86	vertical	-1.92	45.94	74.00	-28.06	Peak
High Channel							
4924.000	48.00	horizontal	-1.70	46.30	74.00	-27.70	Peak
4924.000	47.48	vertical	-1.70	45.78	74.00	-28.22	Peak

802.11n40							
Low Channel							
4844.000	47.36	horizontal	-2.17	45.19	74.00	-28.81	Peak
4844.000	46.80	vertical	-2.17	44.63	74.00	-29.37	Peak
Middle Channel							
4874.000	46.72	horizontal	-1.92	44.80	74.00	-29.20	Peak
4874.000	47.60	vertical	-1.92	45.68	74.00	-28.32	Peak
High Channel							
4904.000	46.03	horizontal	-1.71	44.32	74.00	-29.68	Peak
4904.000	46.34	vertical	-1.71	44.63	74.00	-29.37	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit


For the test result of Peak below the Peak limit more than 20dB, which can compliance with the average limit, just the Peak level was recorded.


The emission levels of other frequencies that were lower than the limit 20dB not show in test report.


For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.


Test plot for example as below:

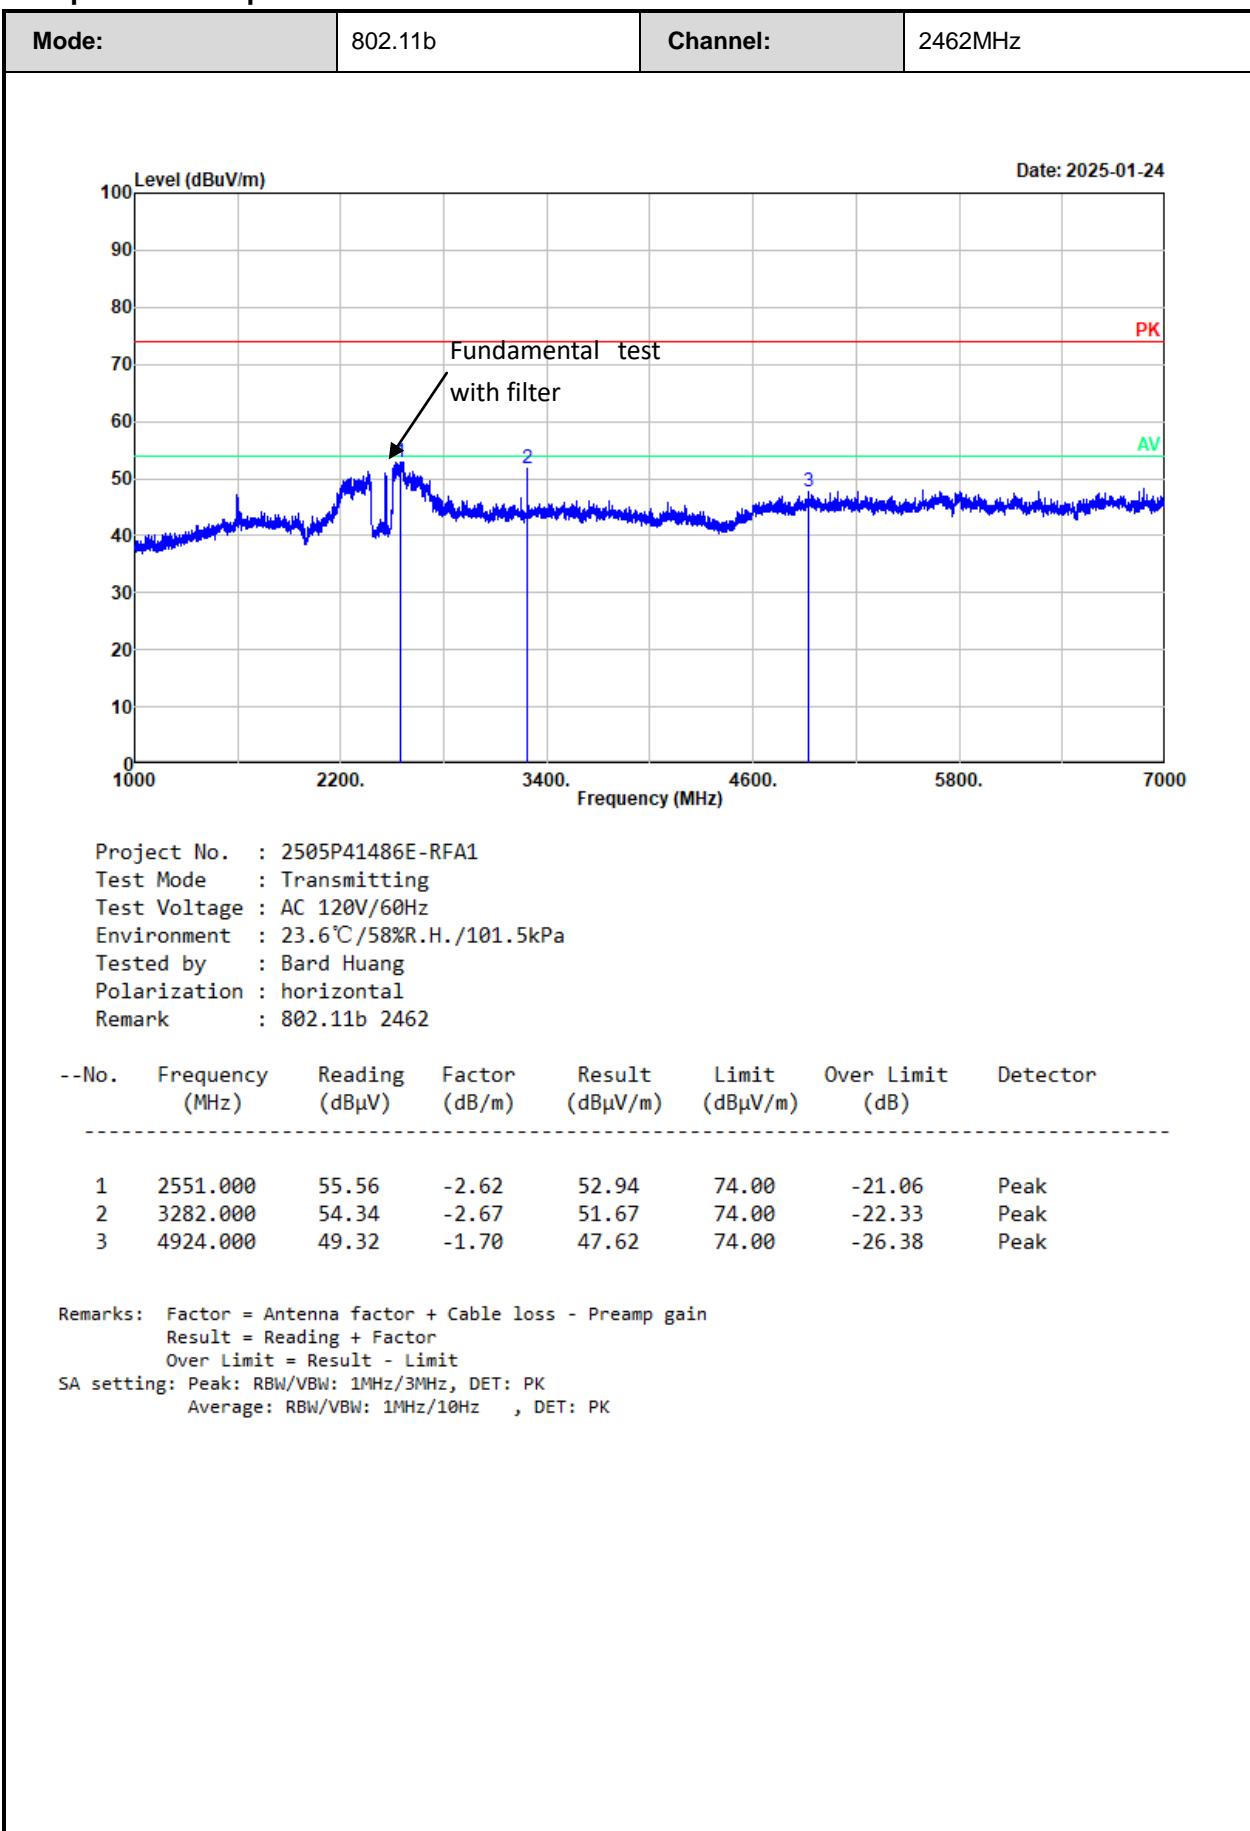


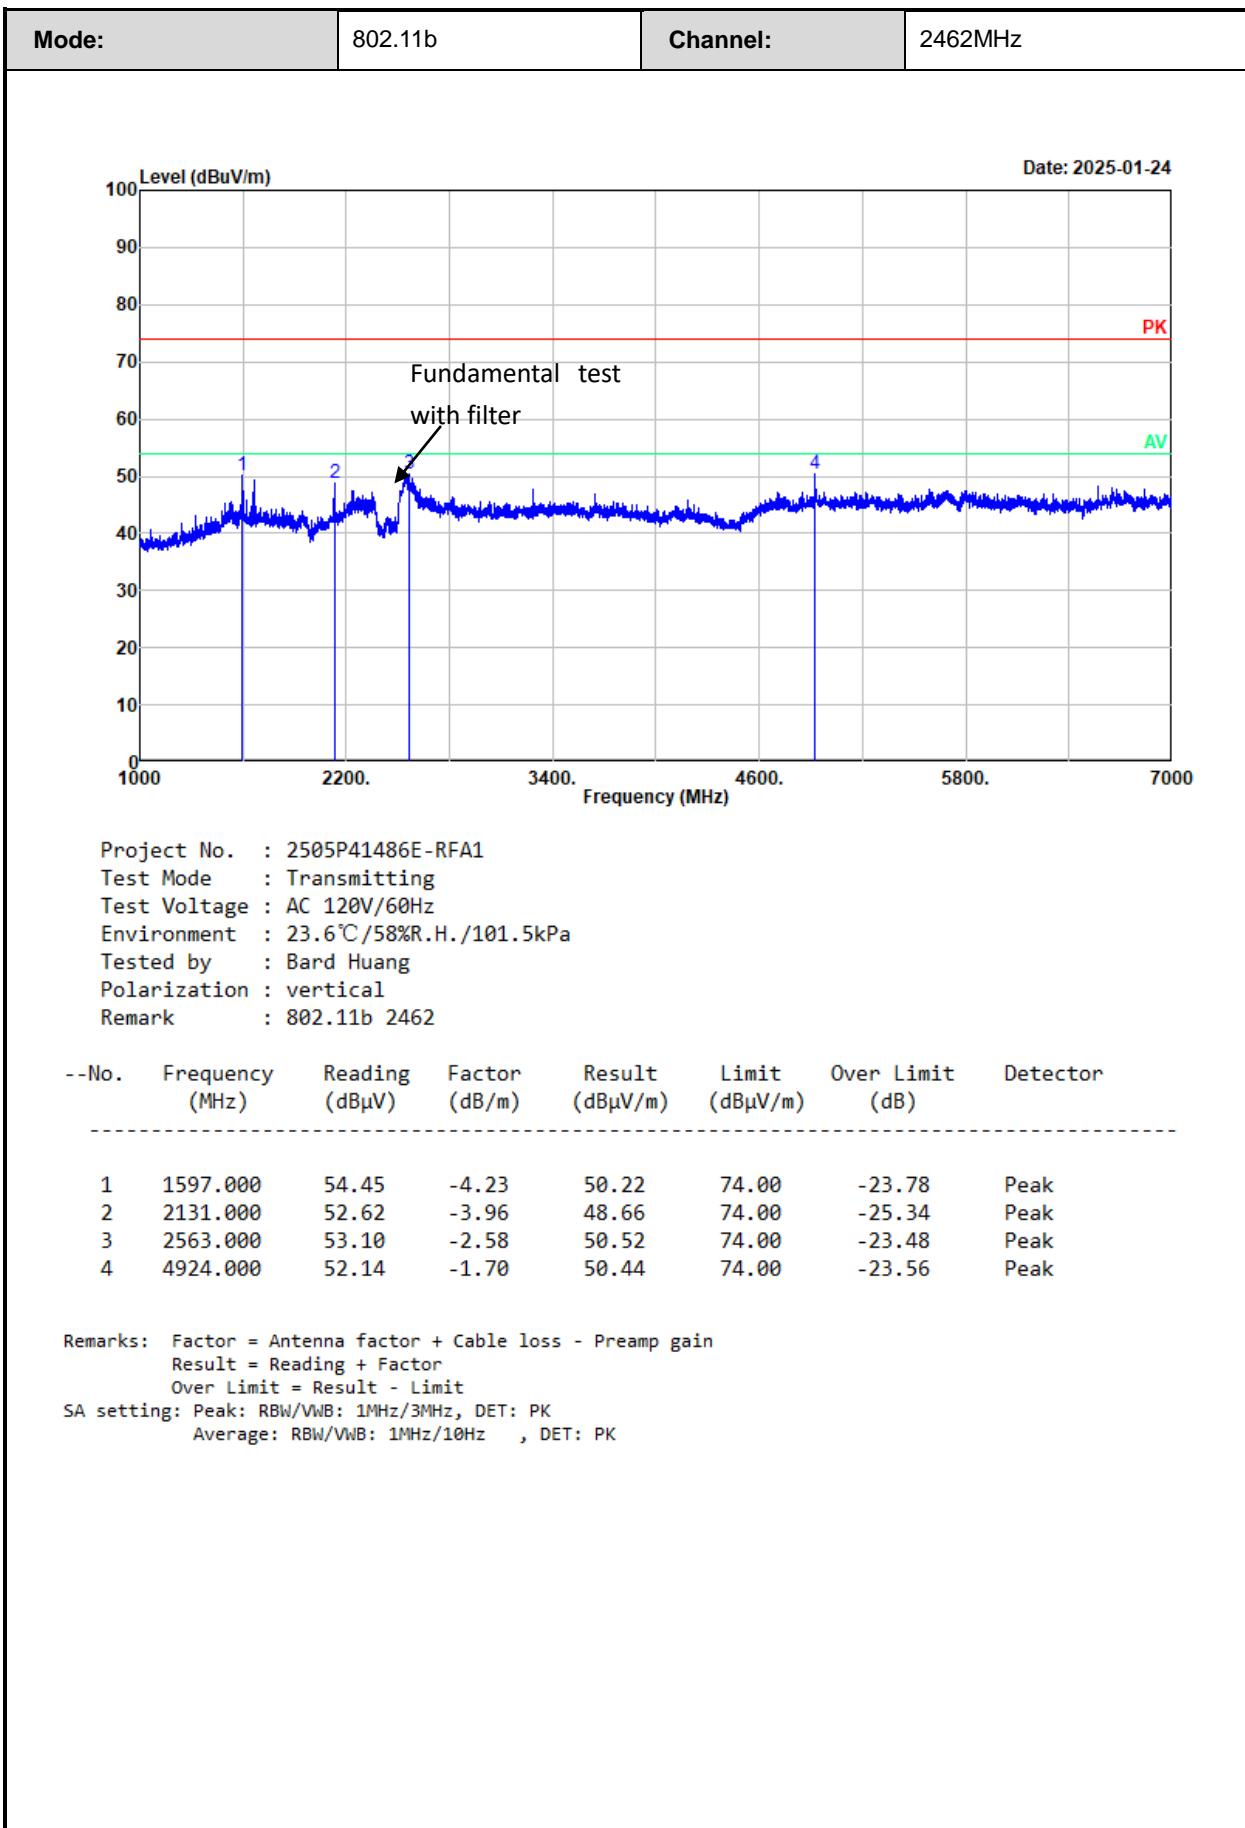


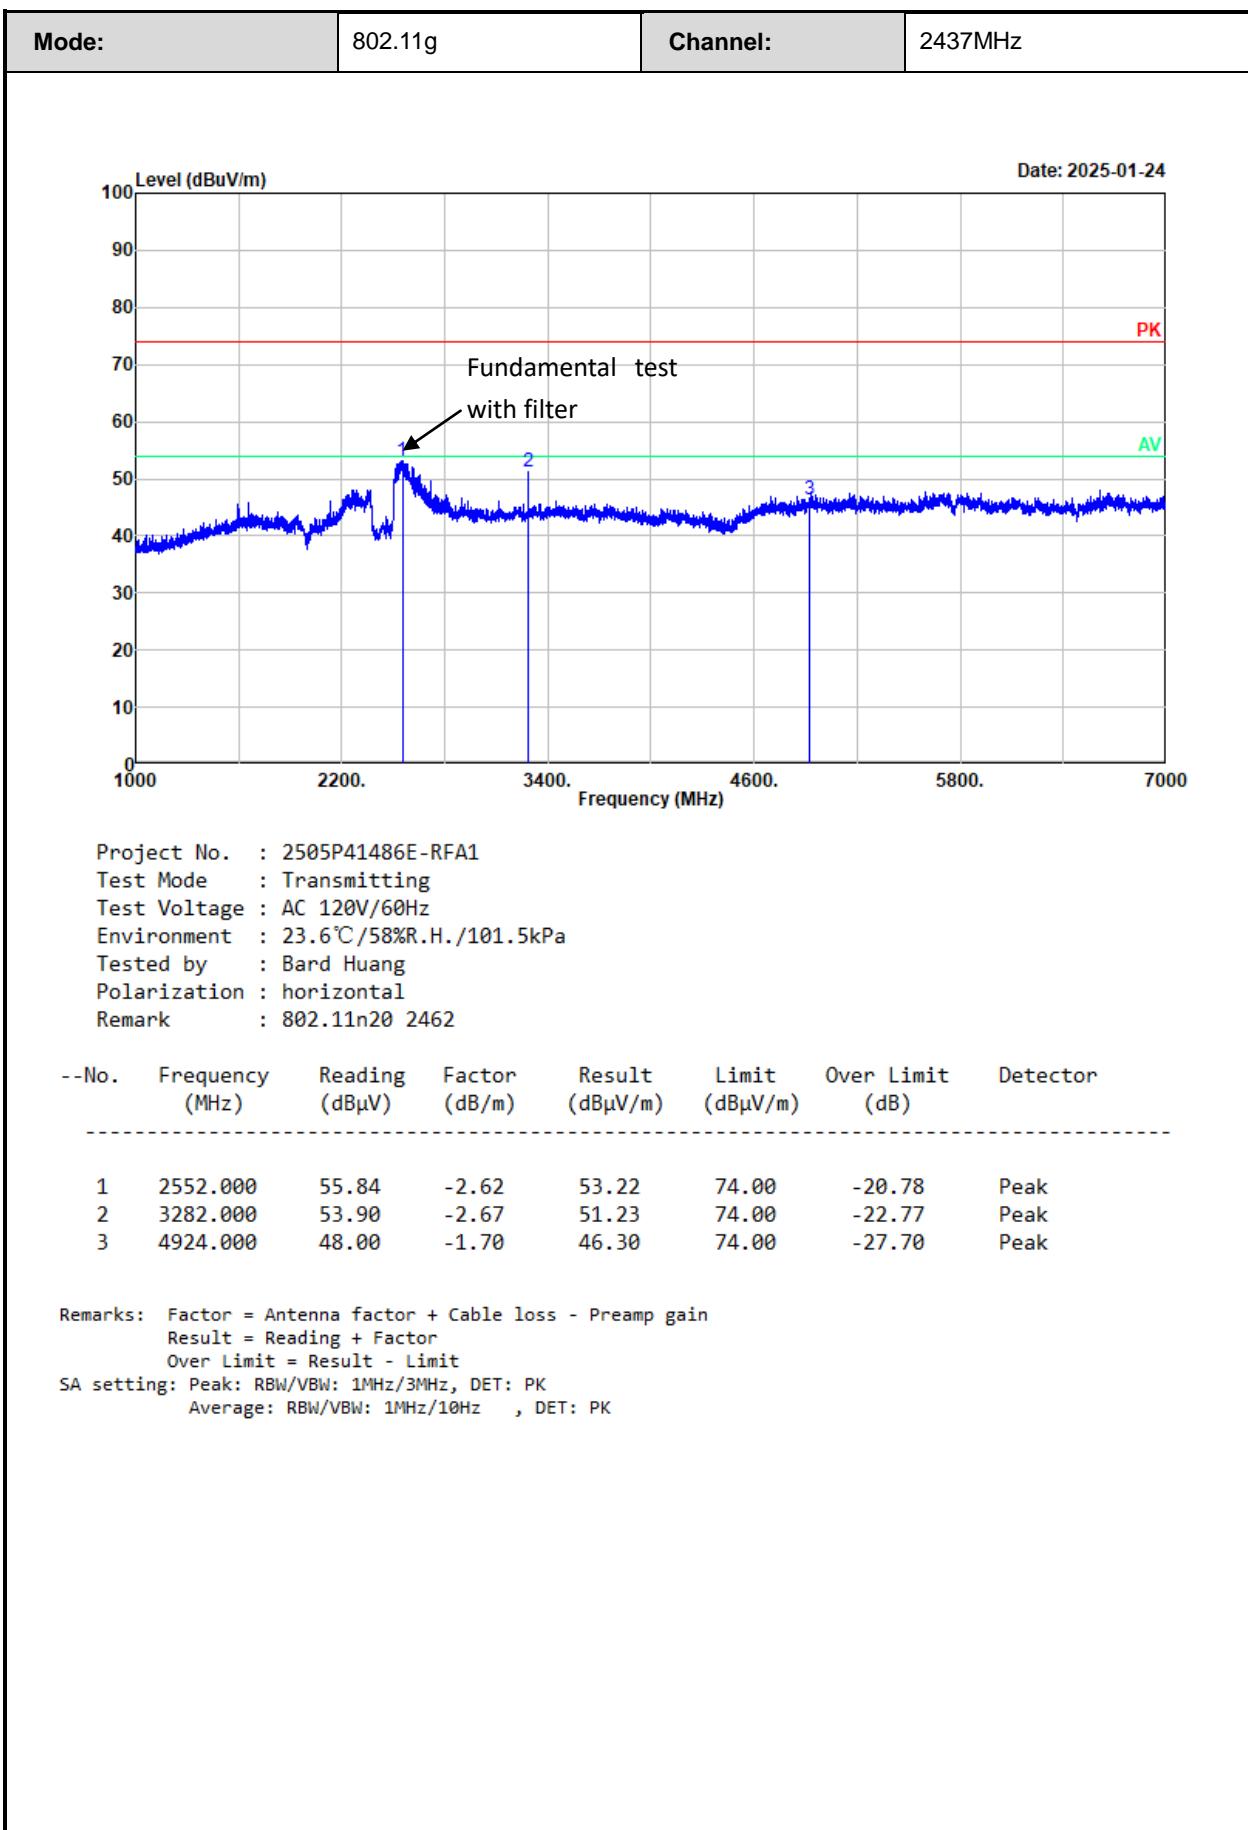


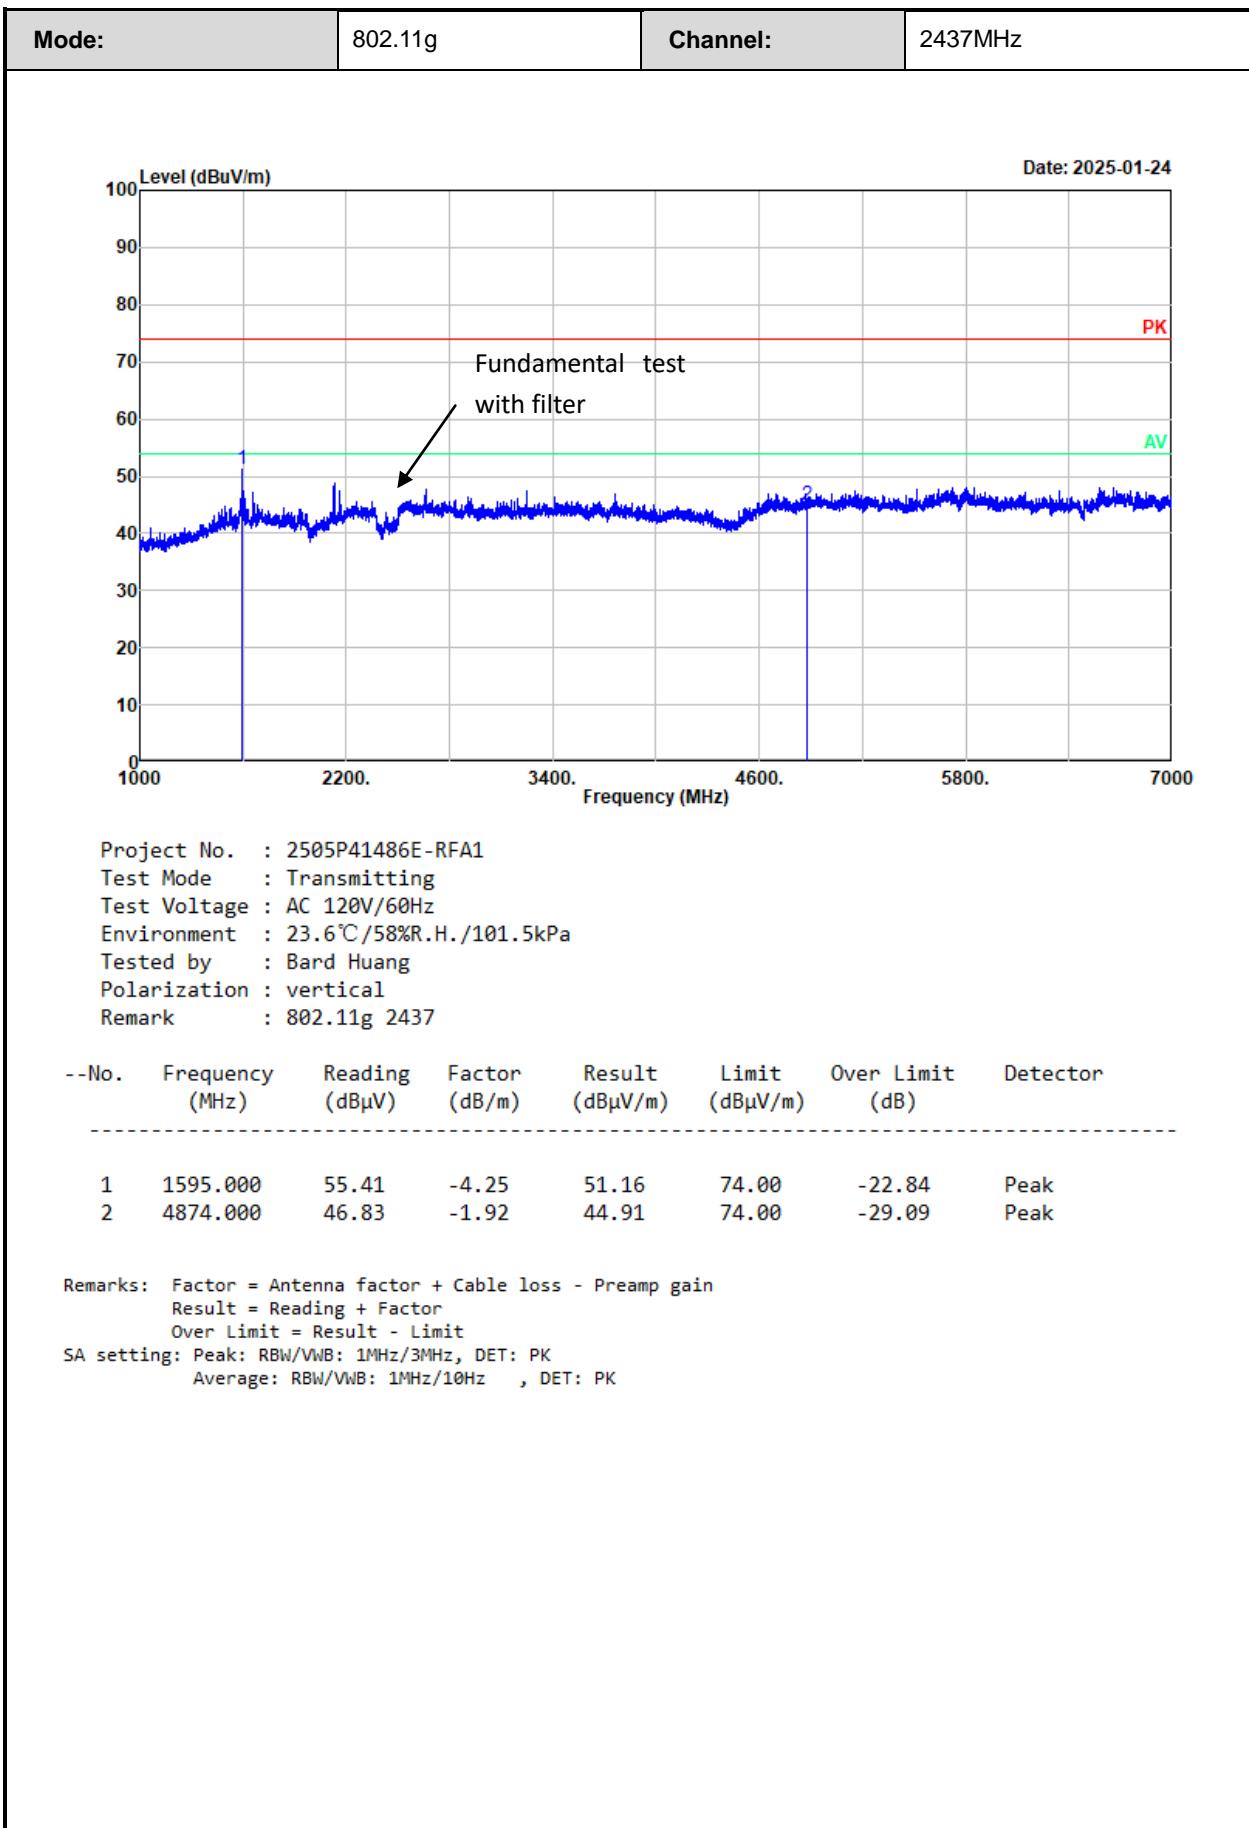


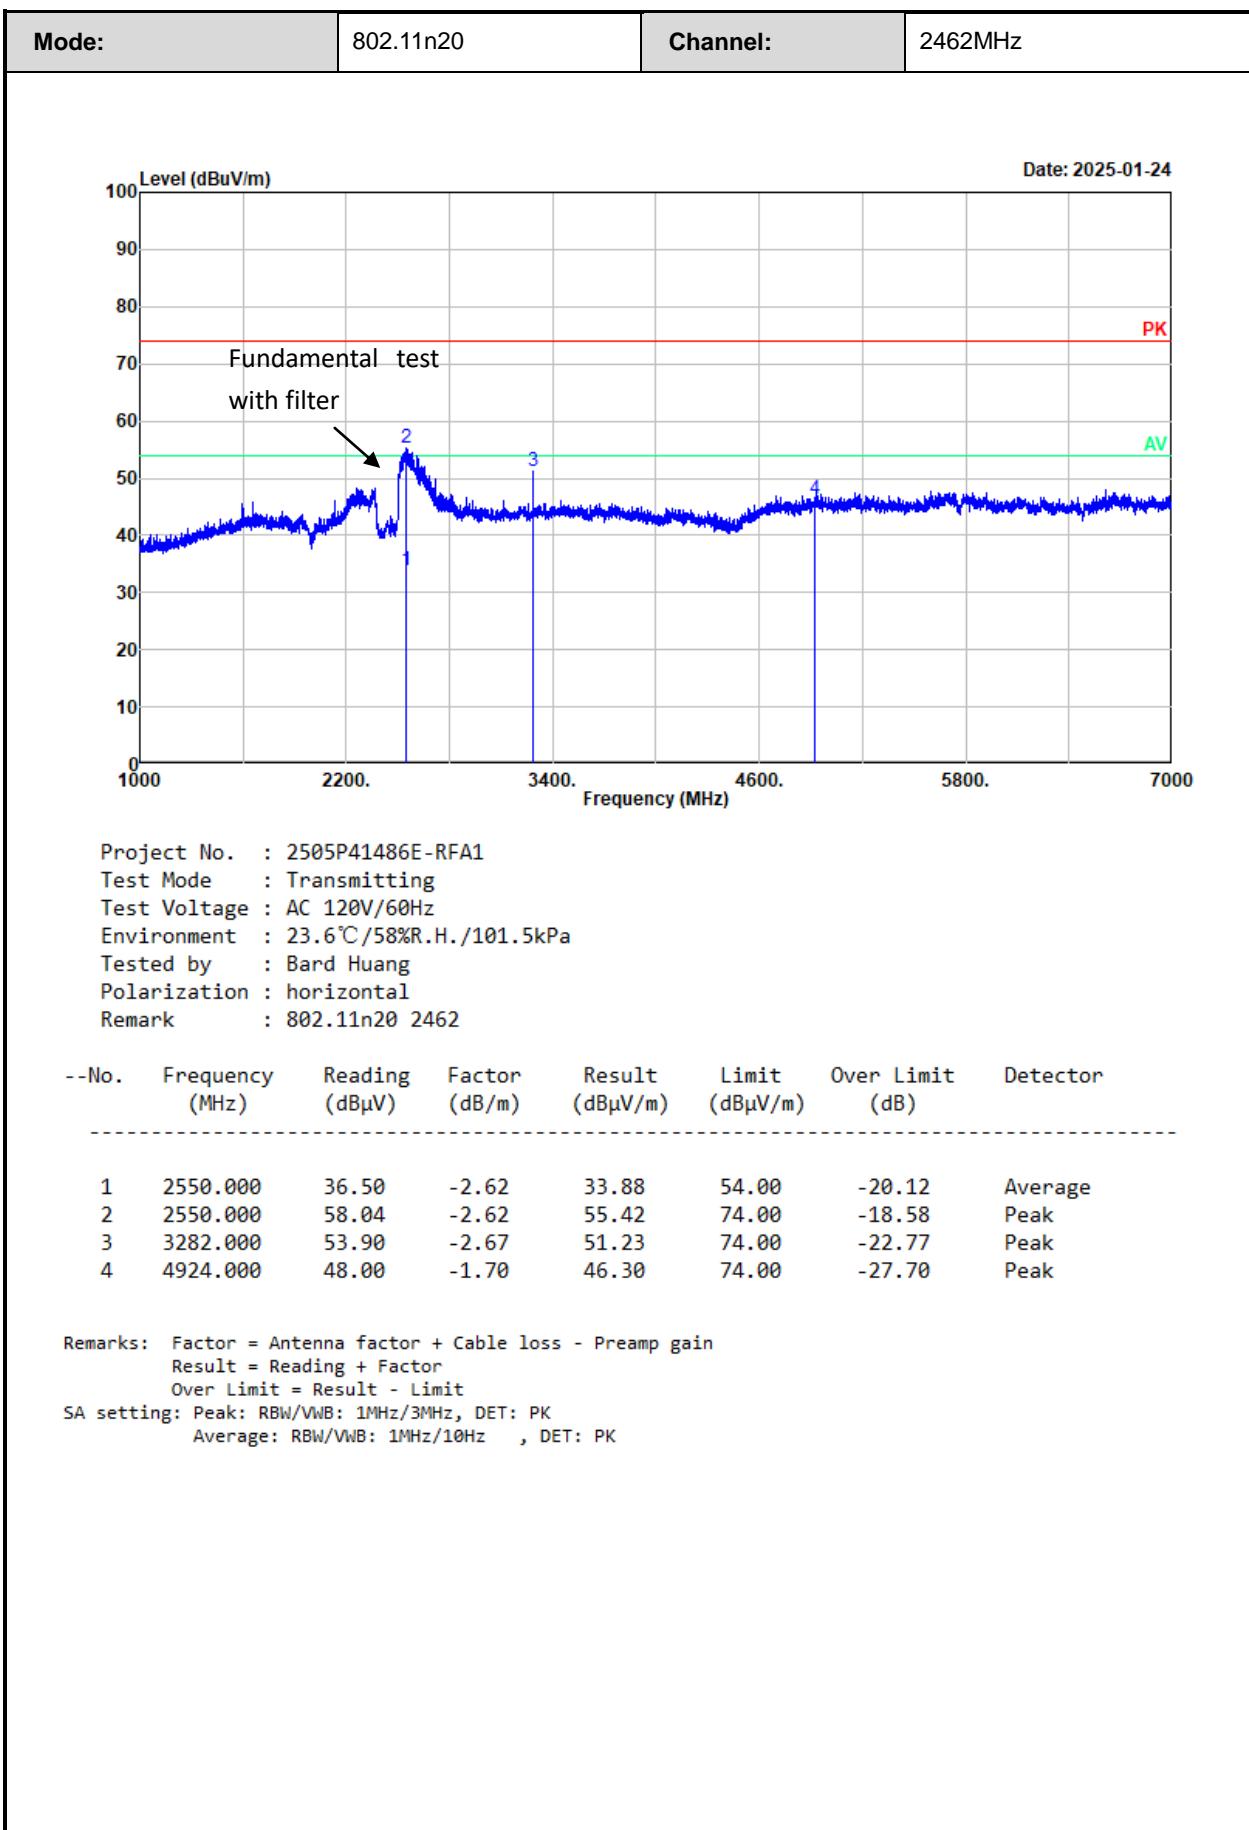


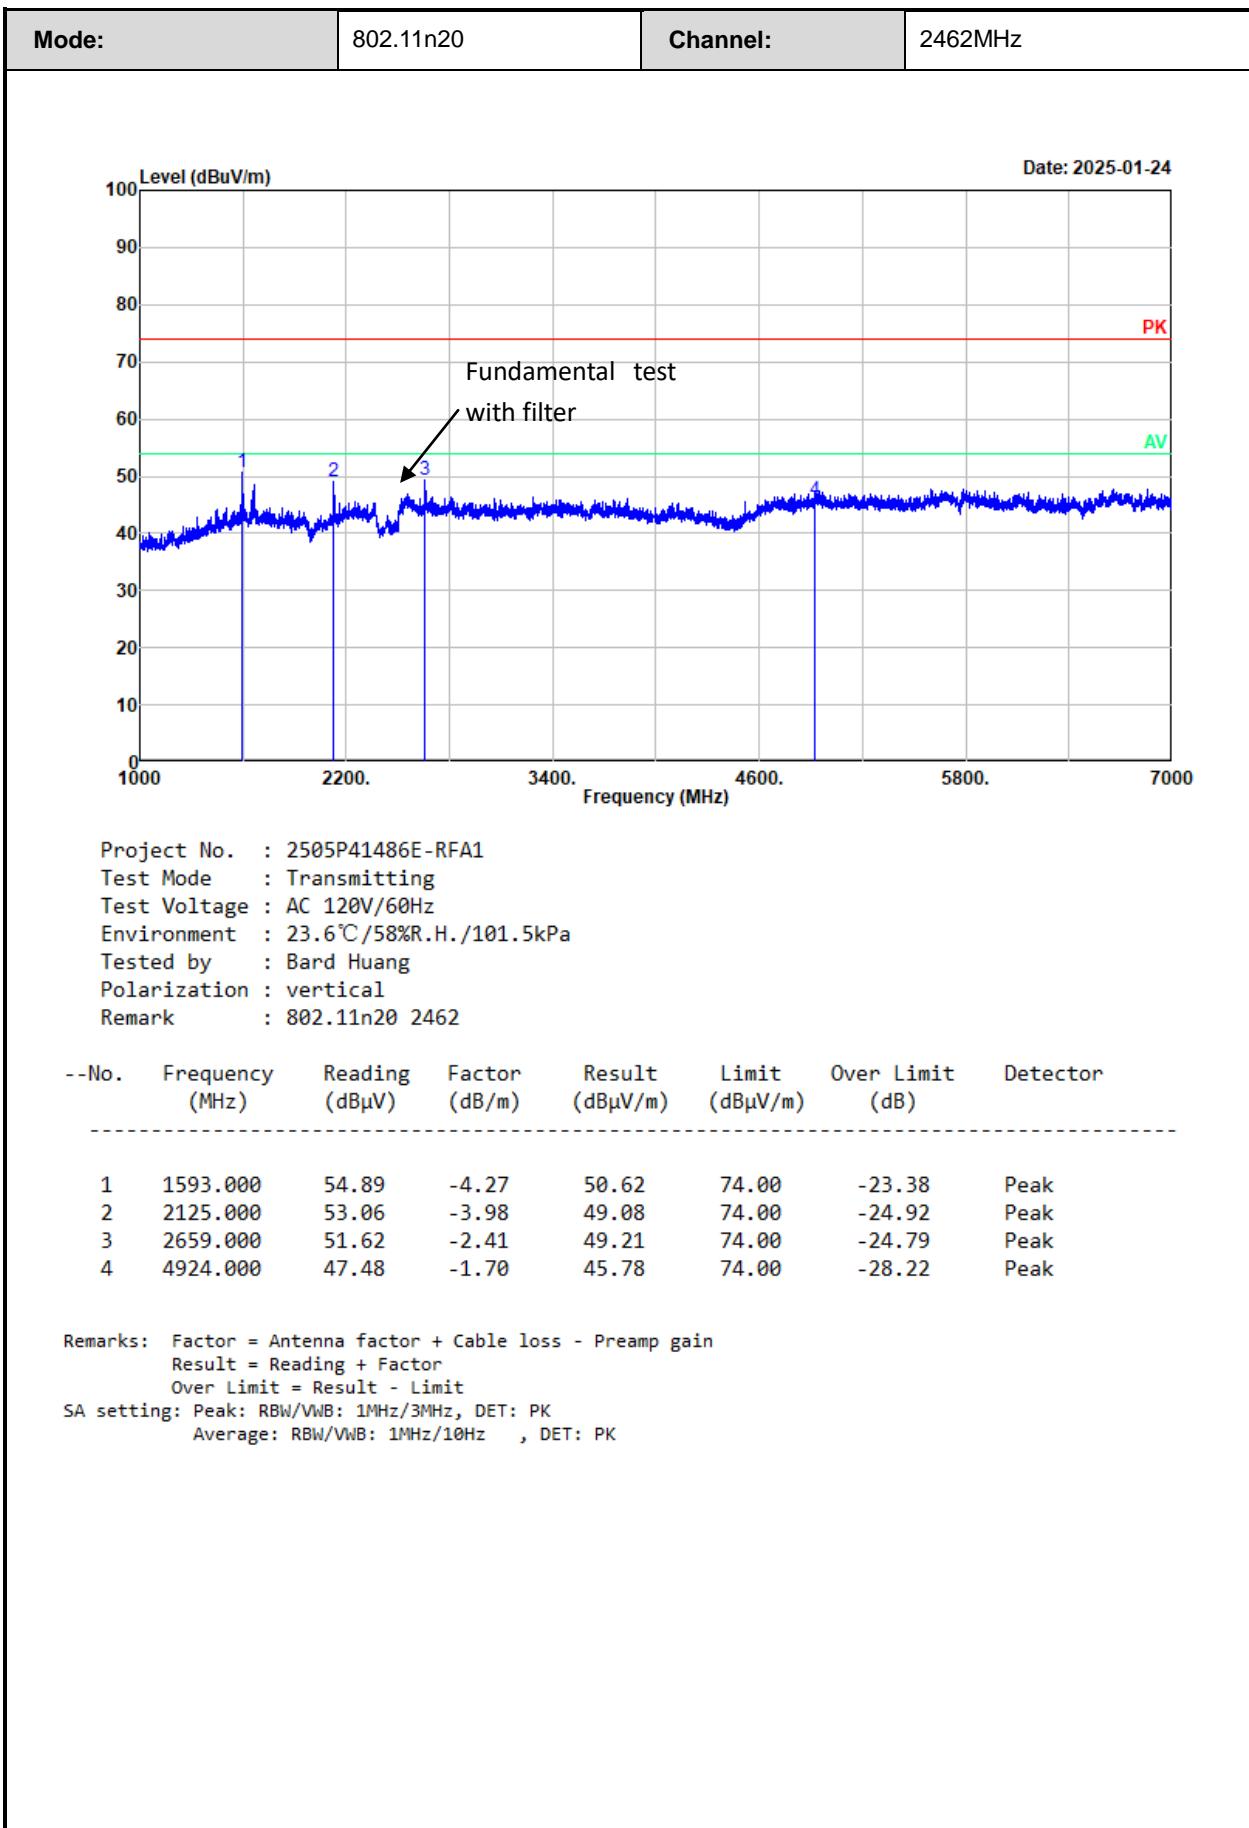


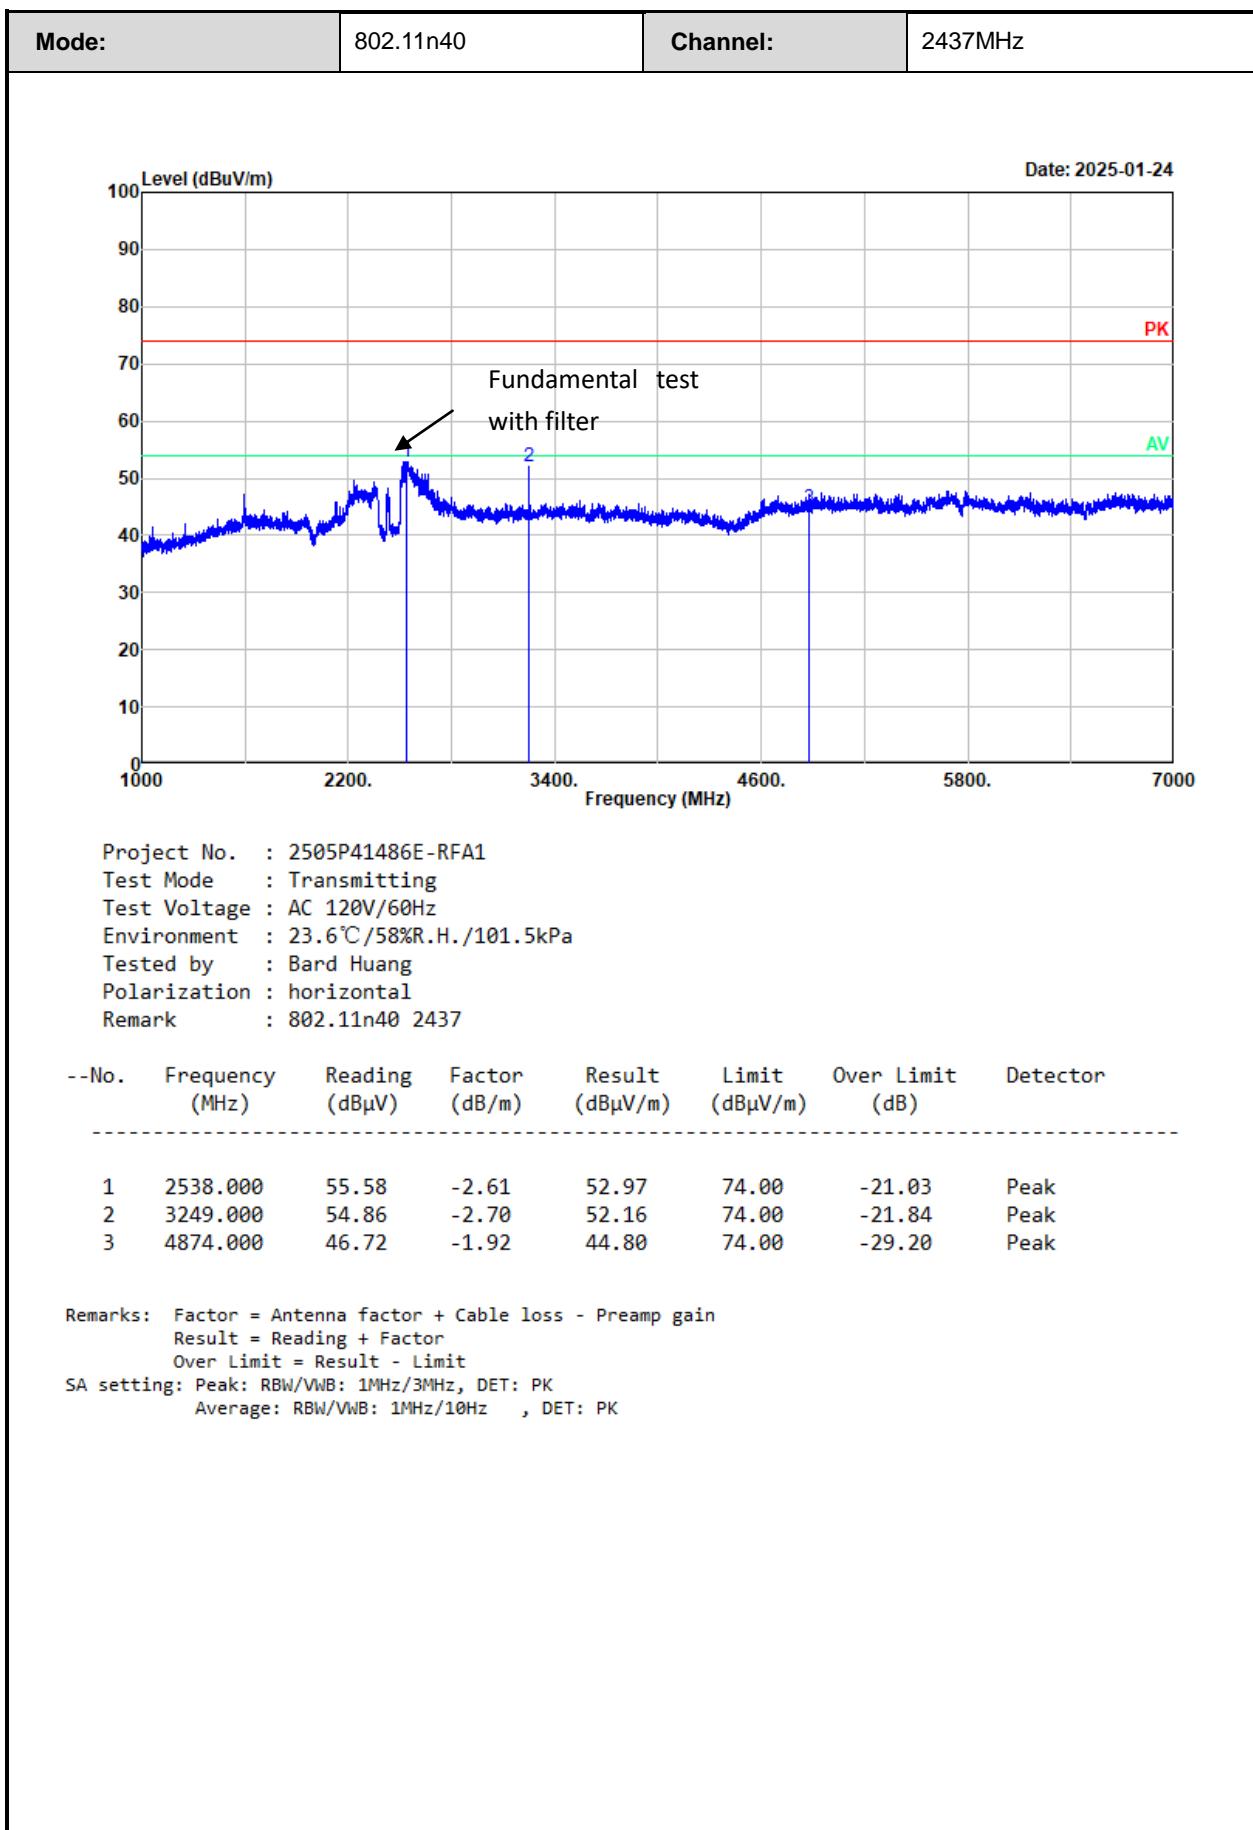


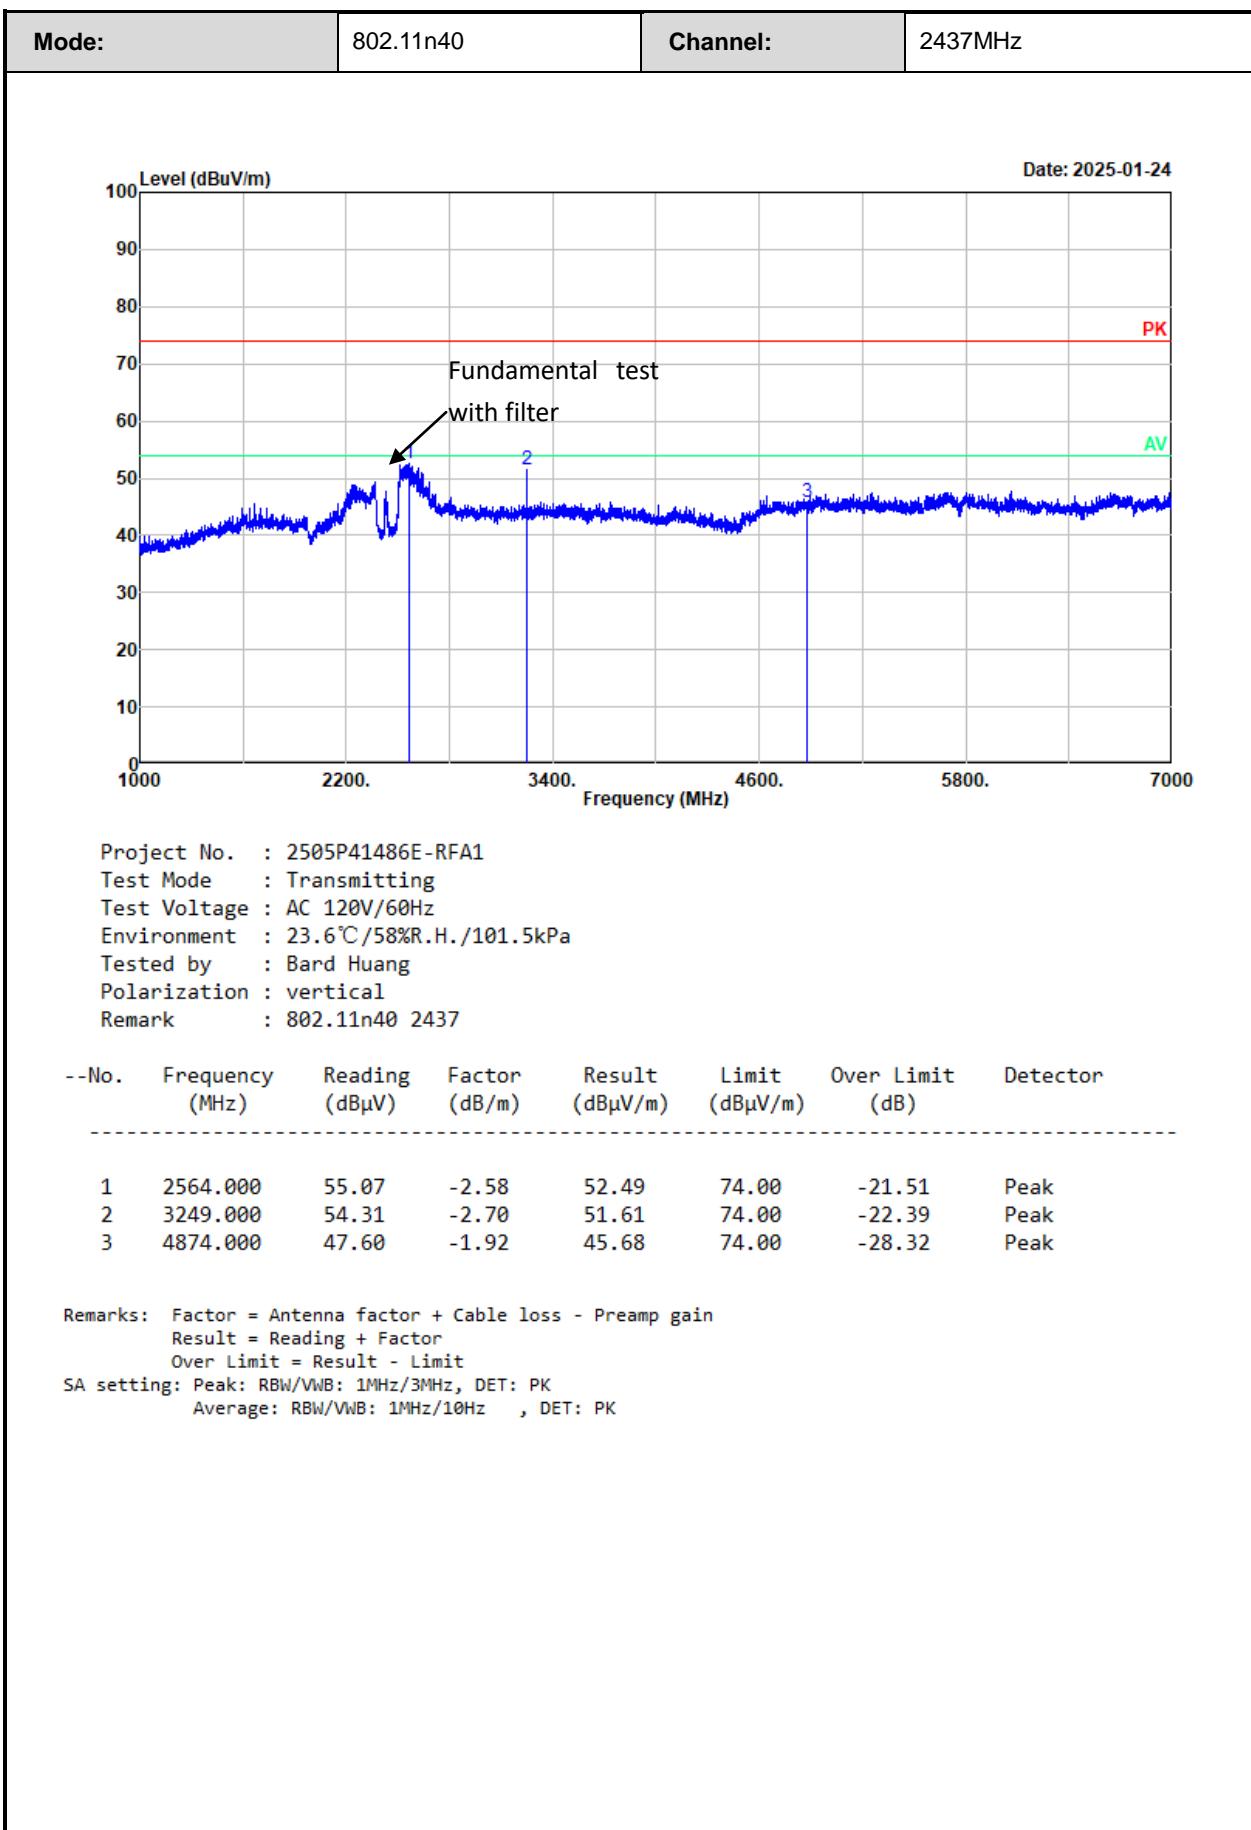


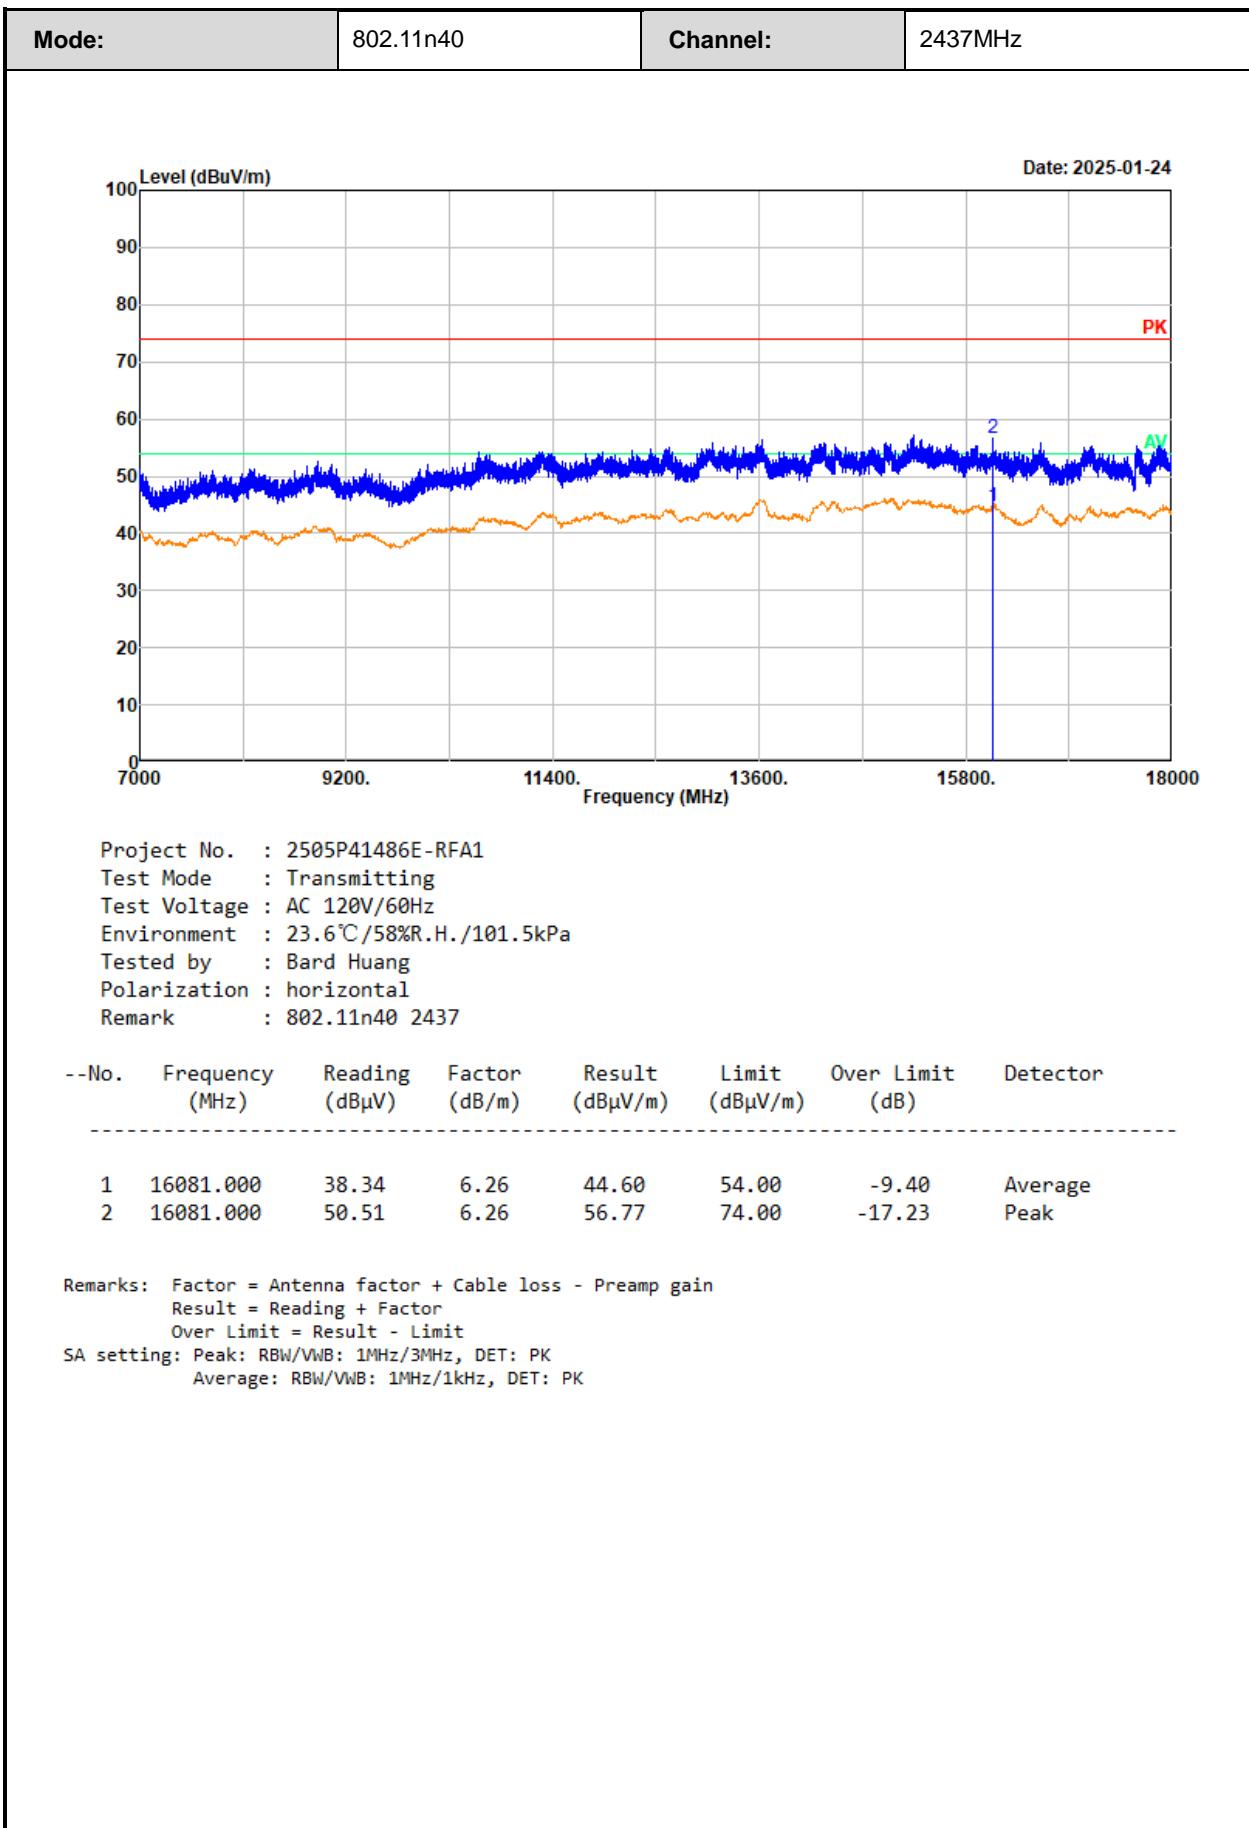


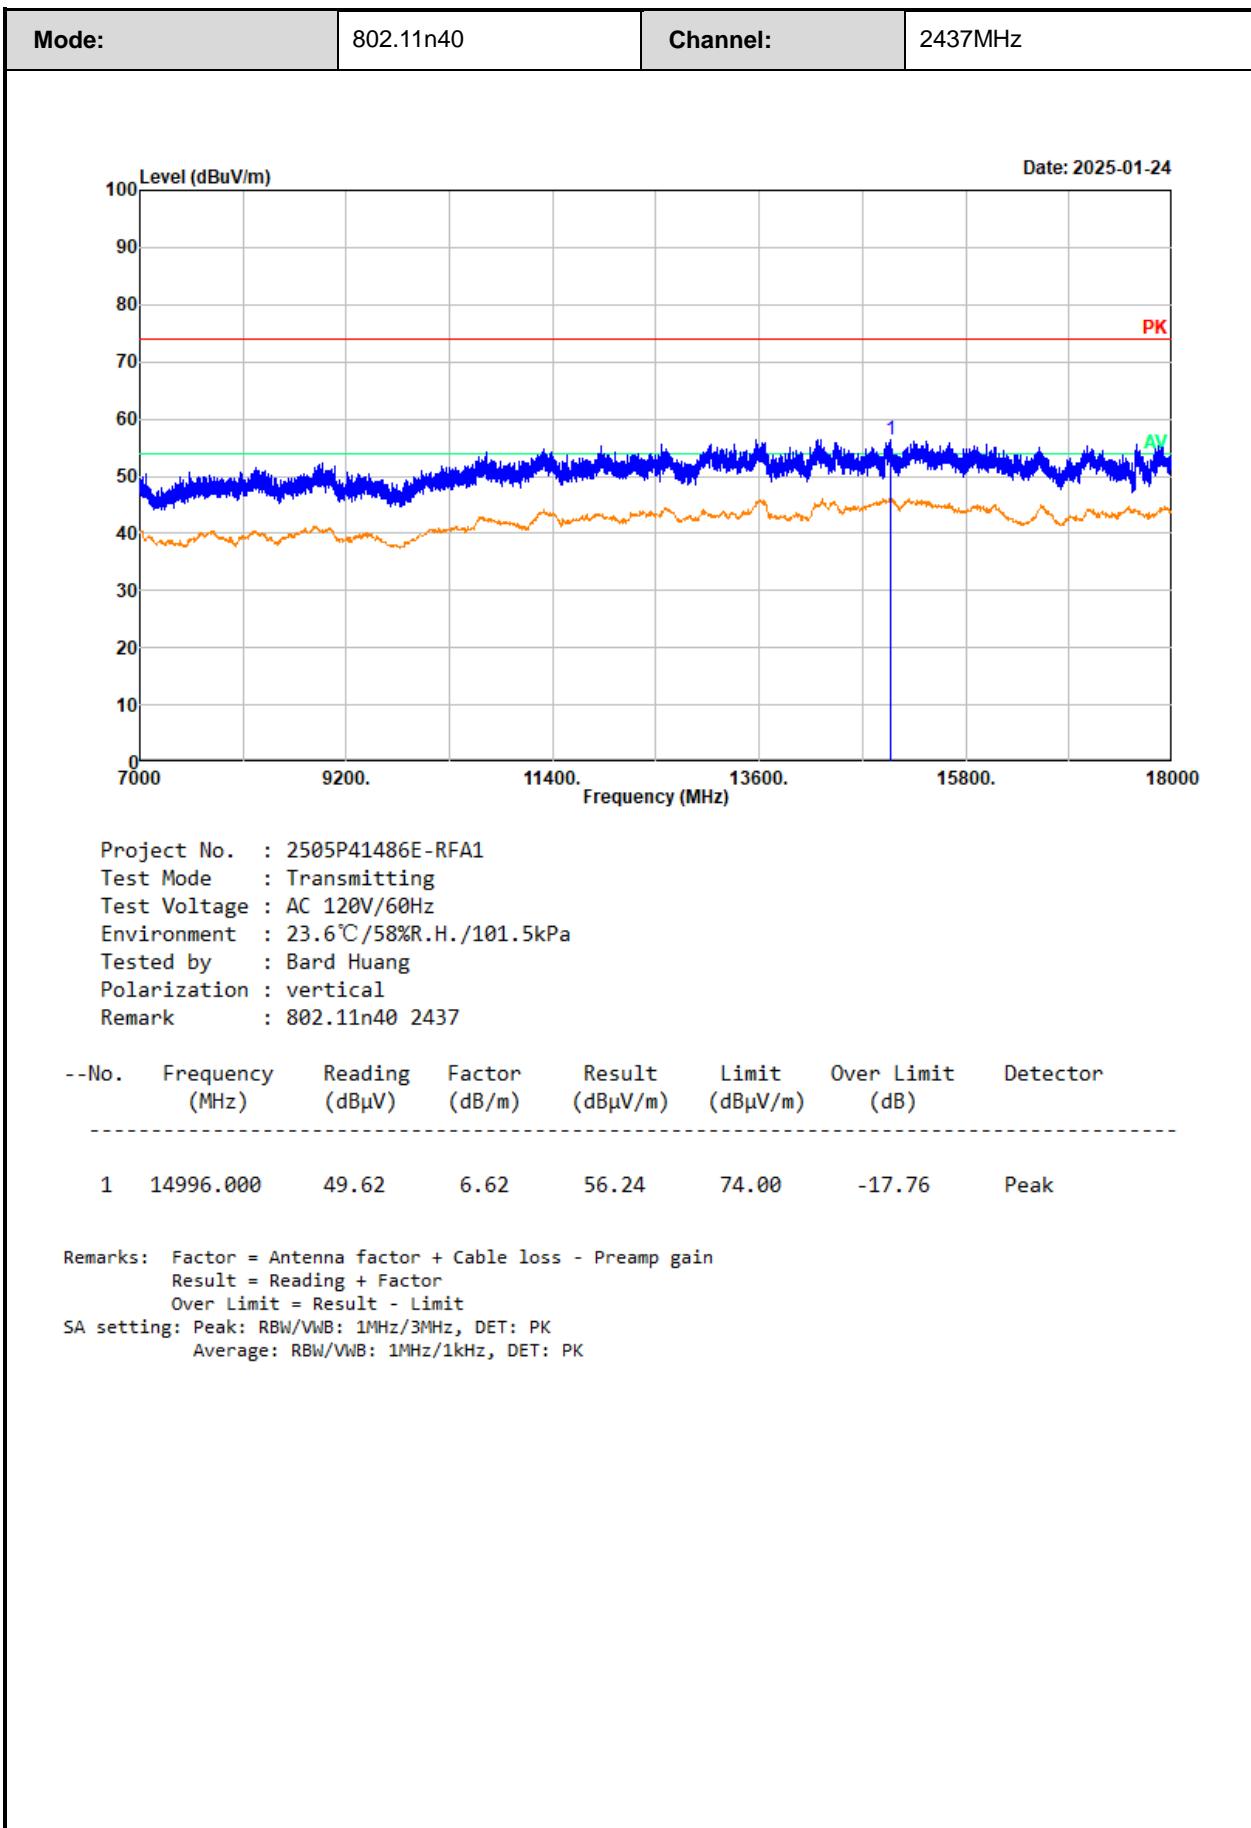


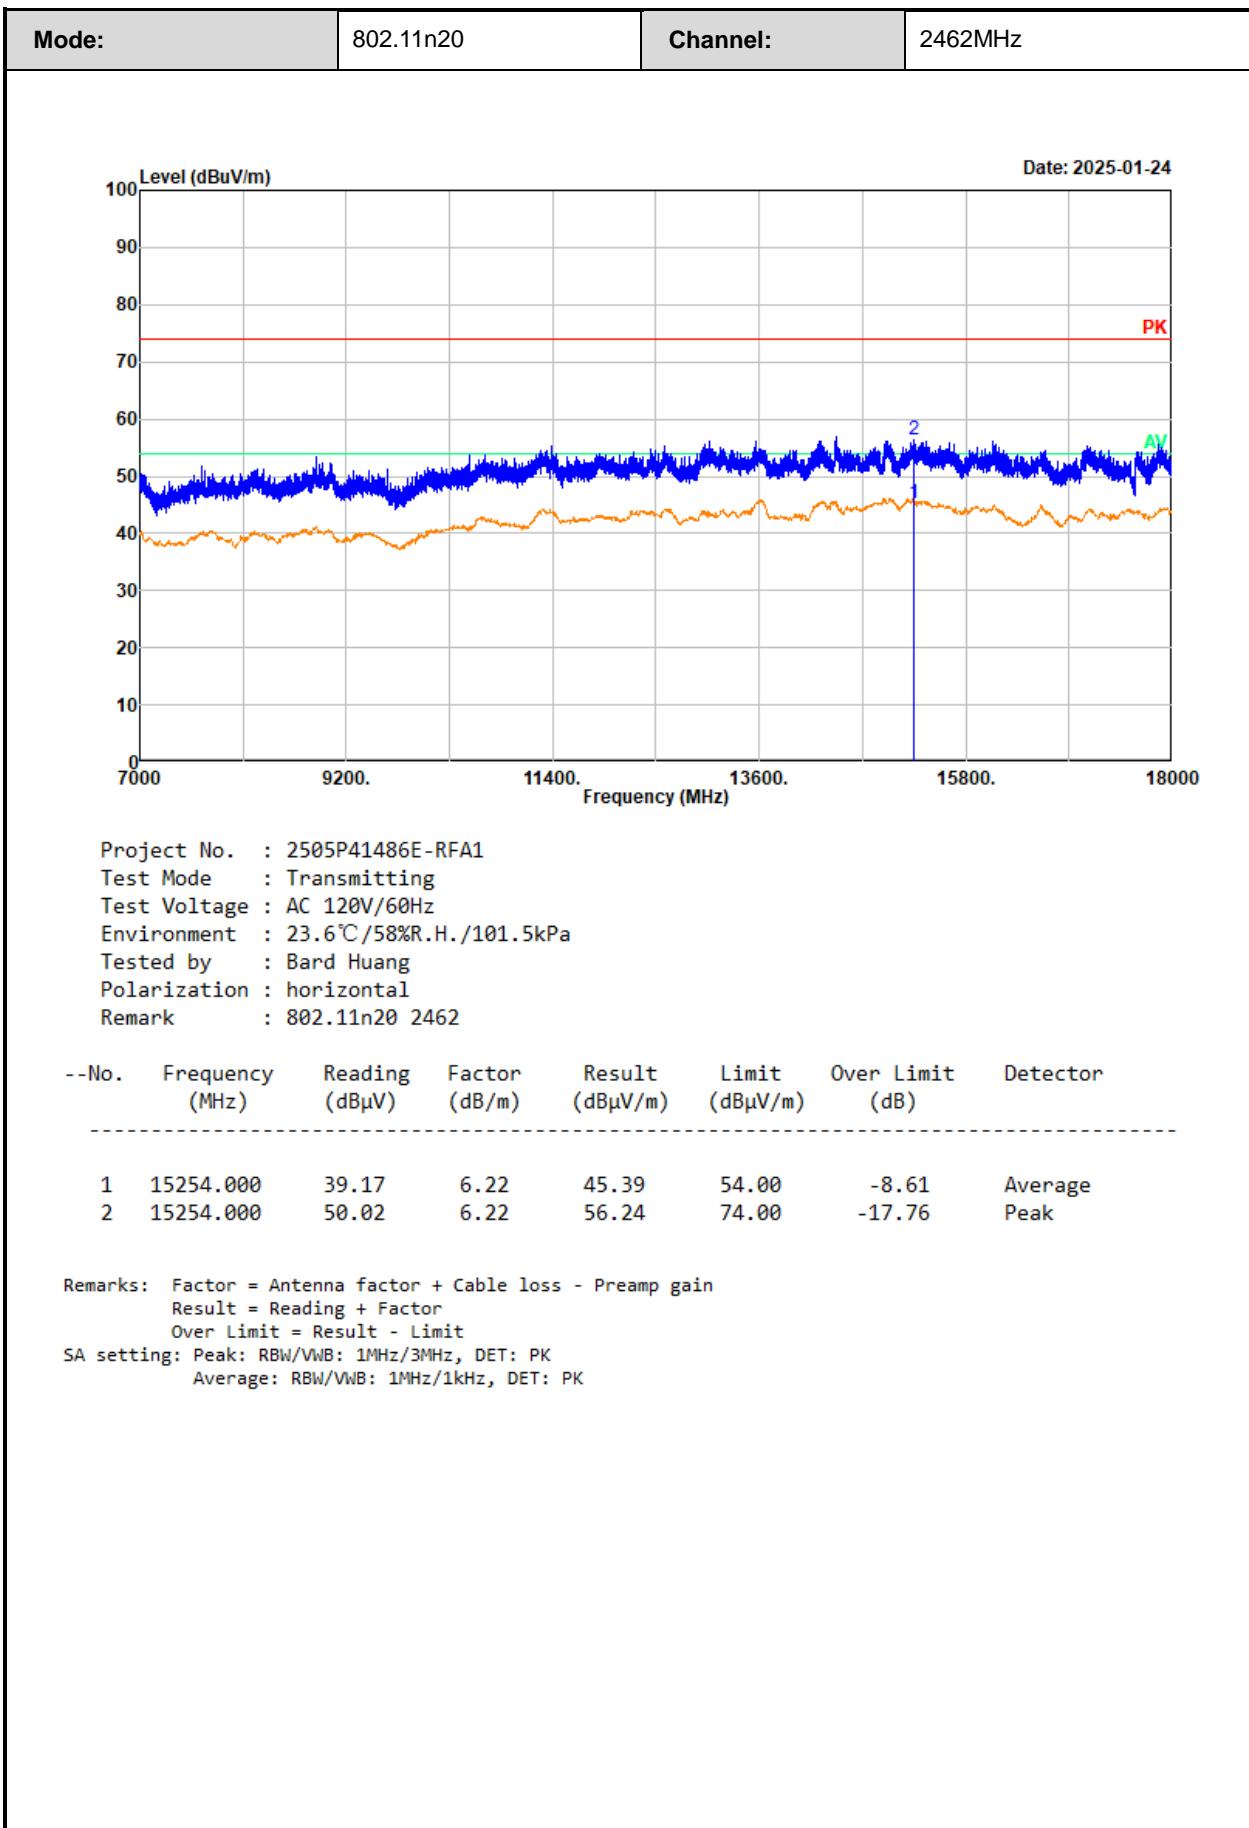


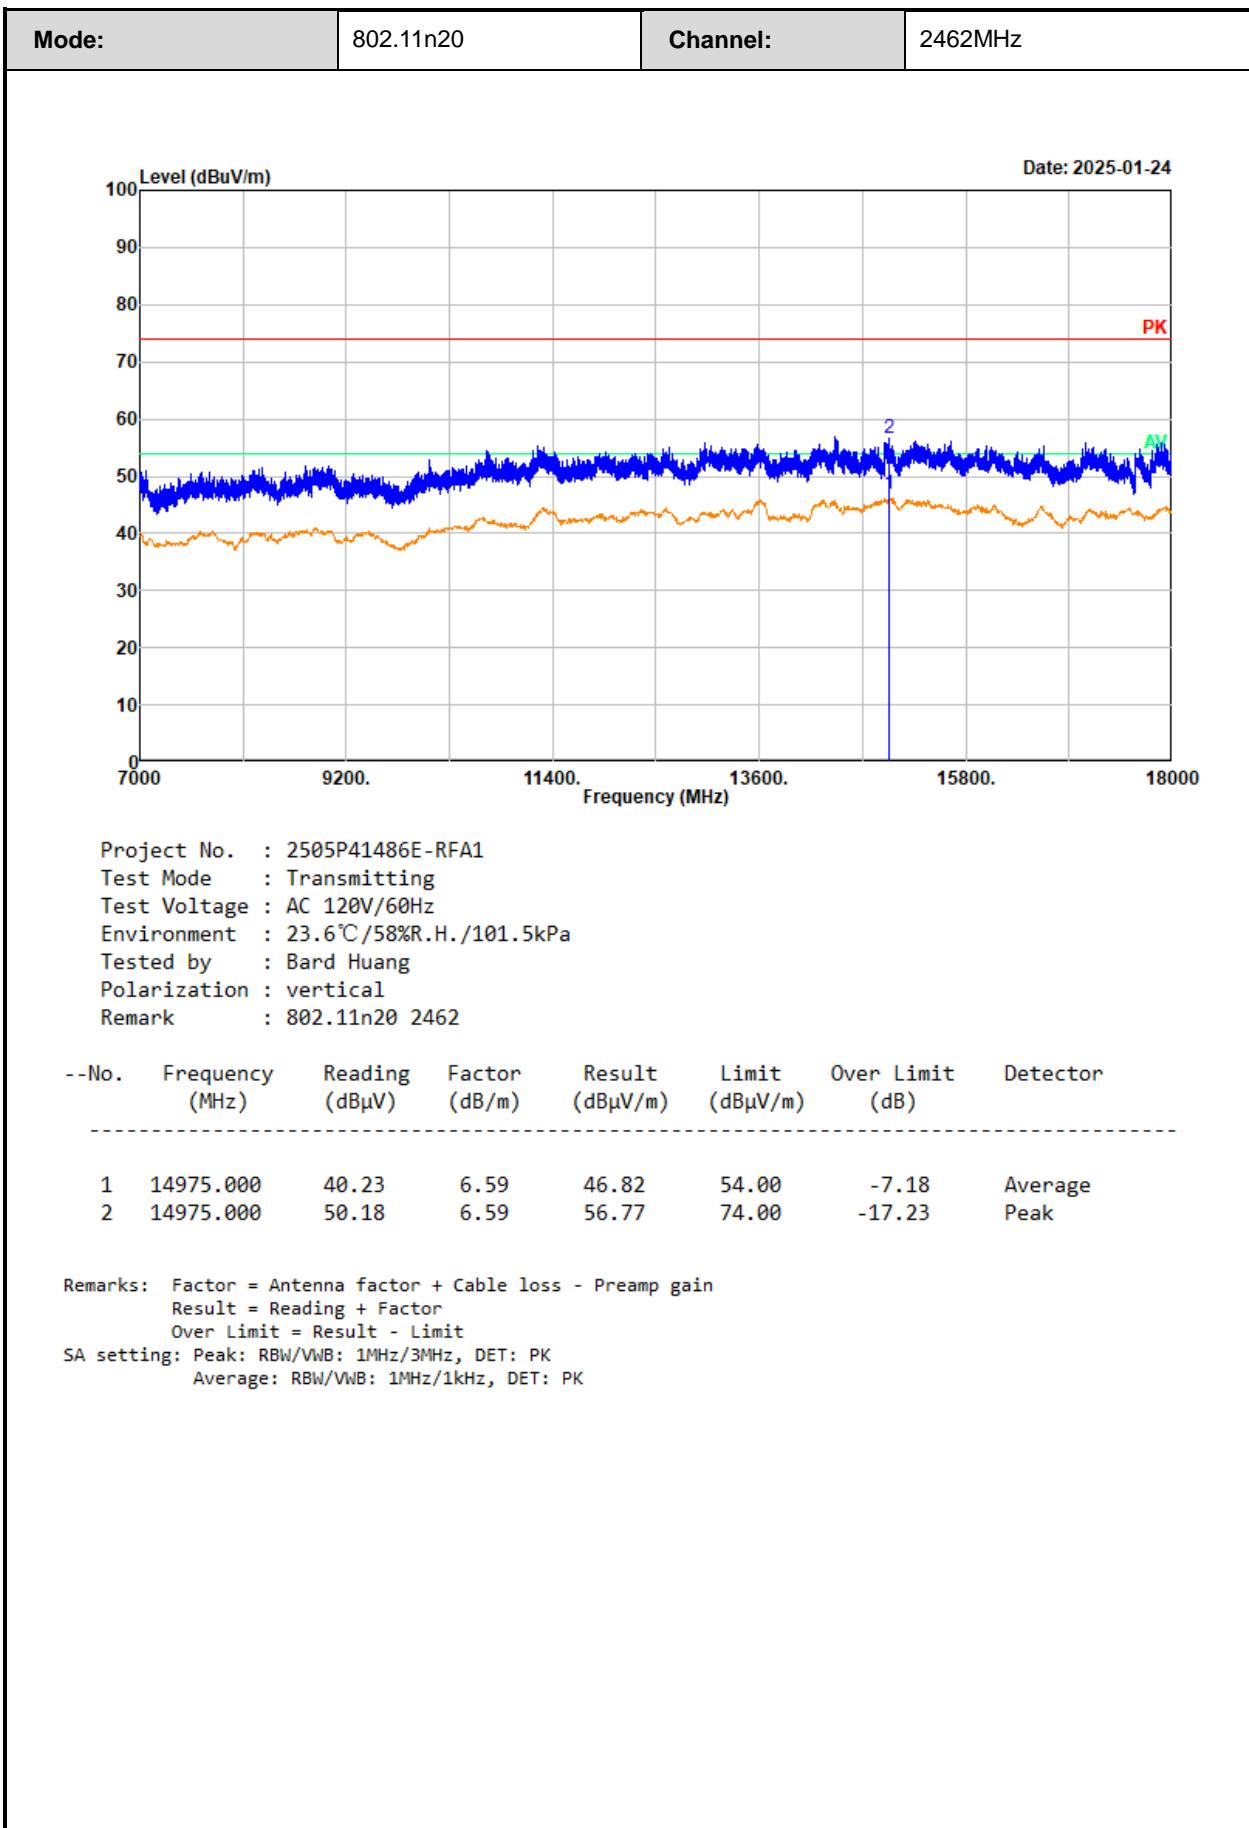


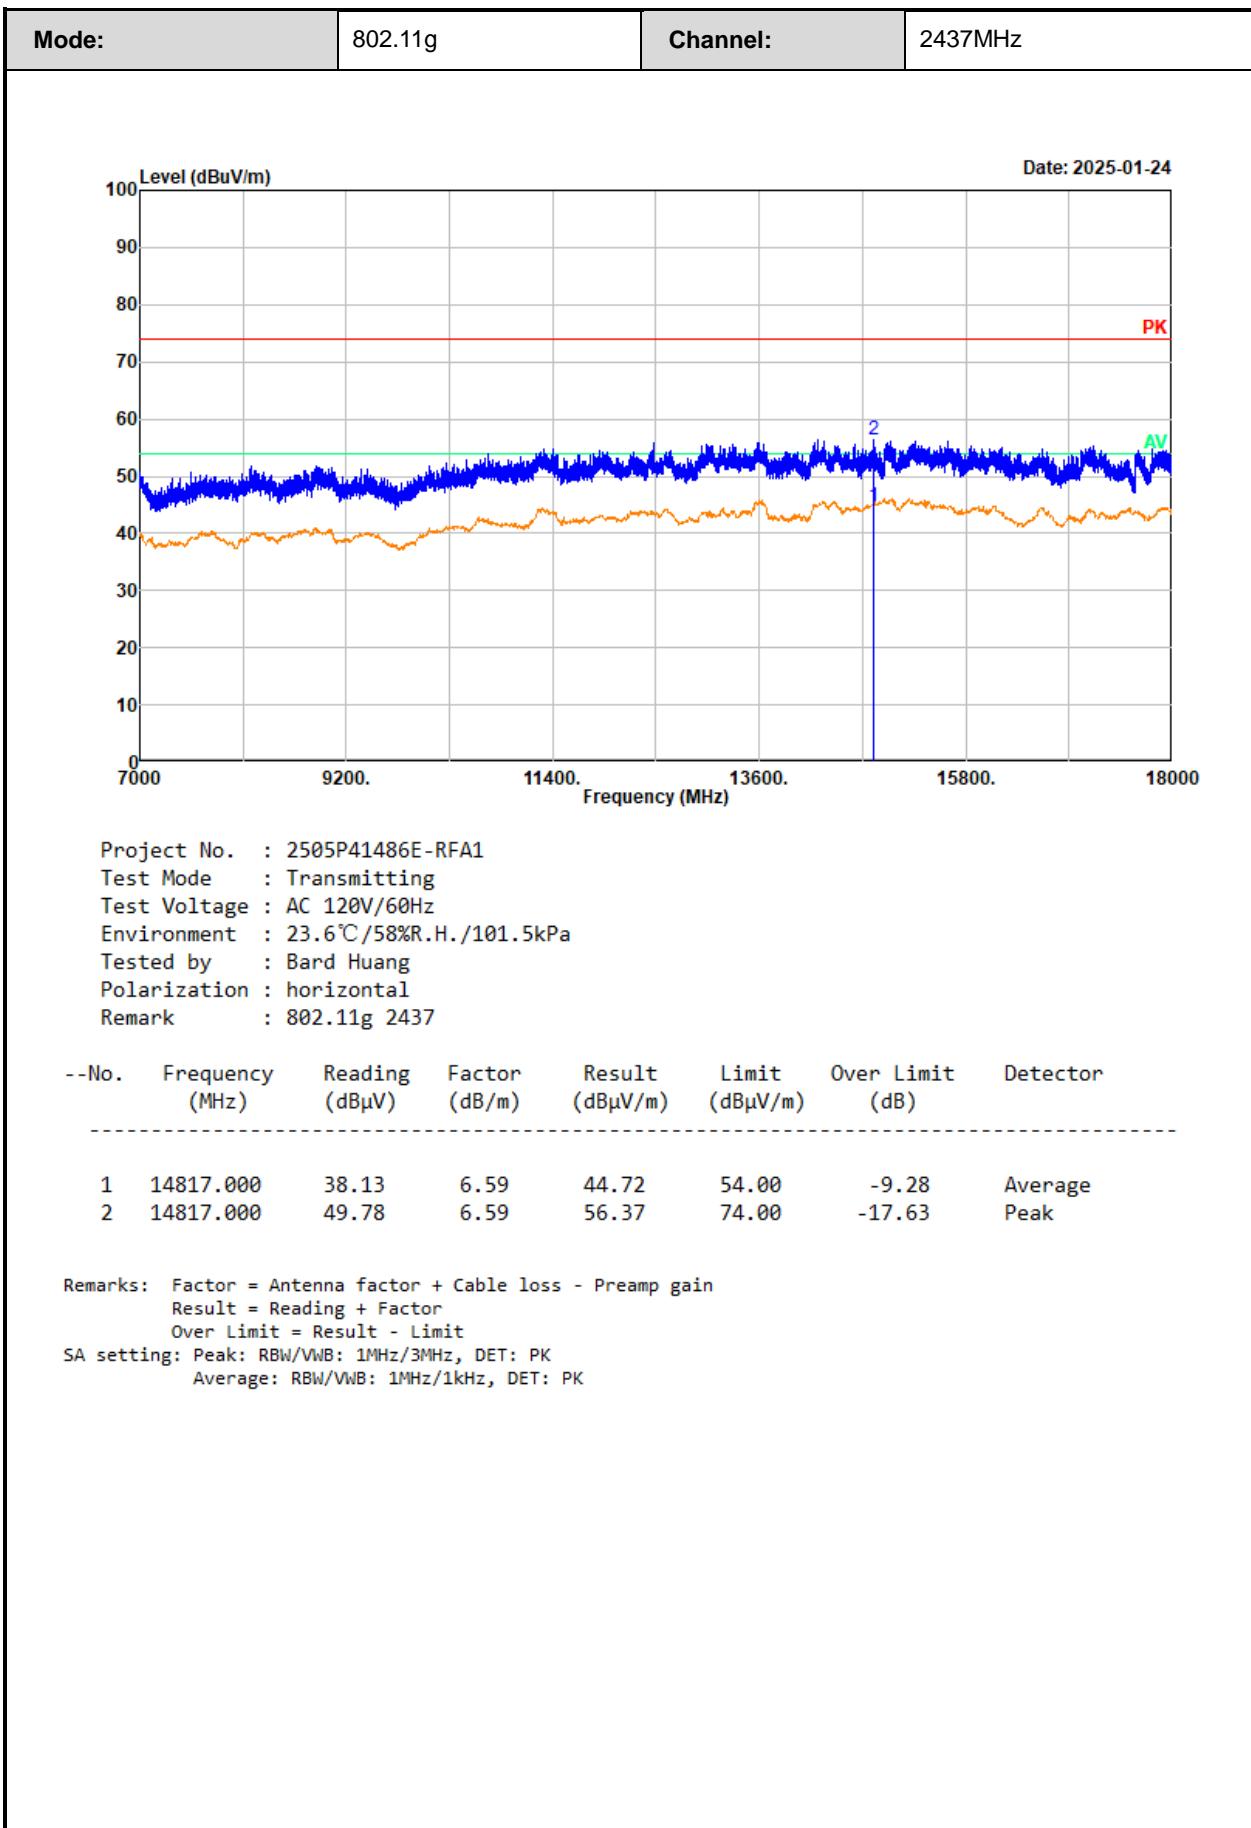


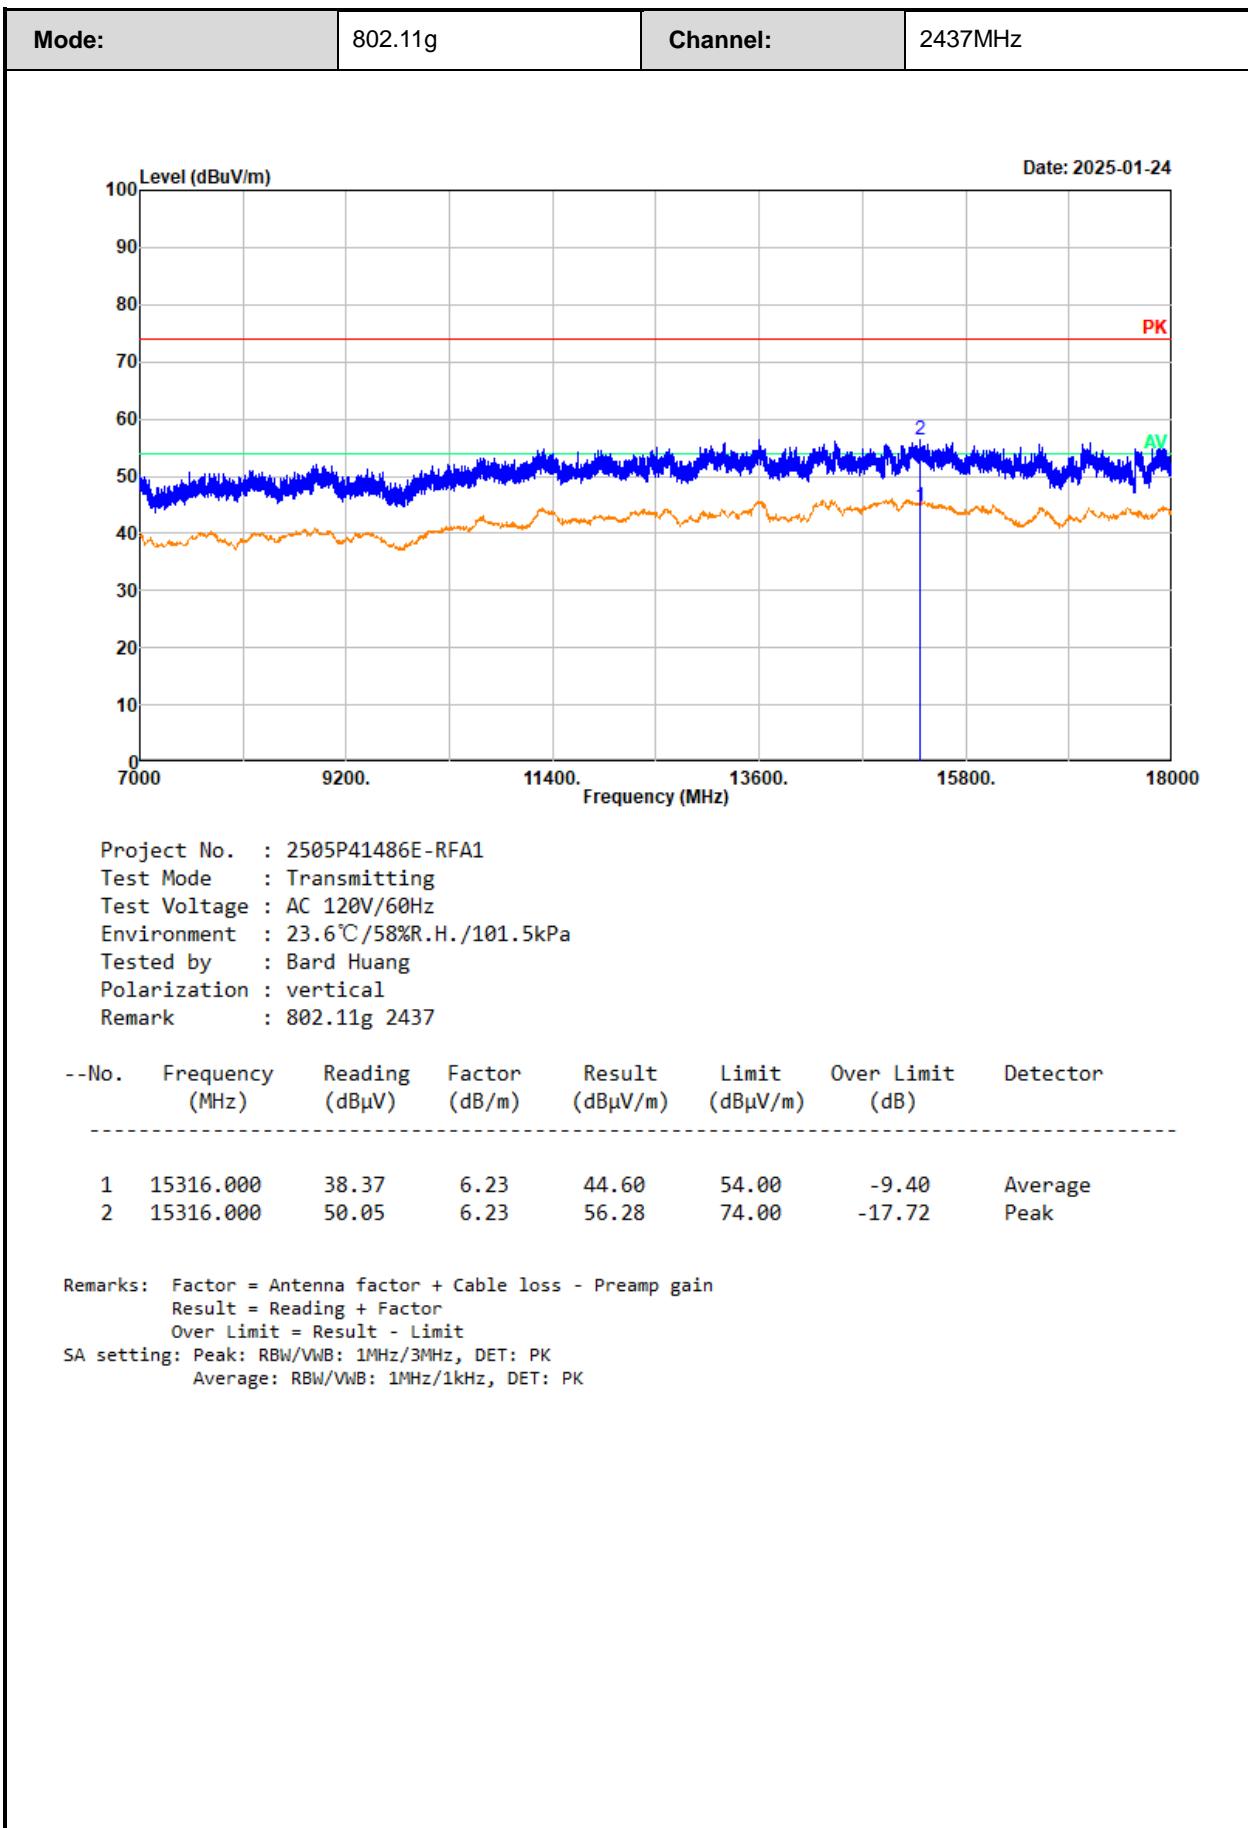

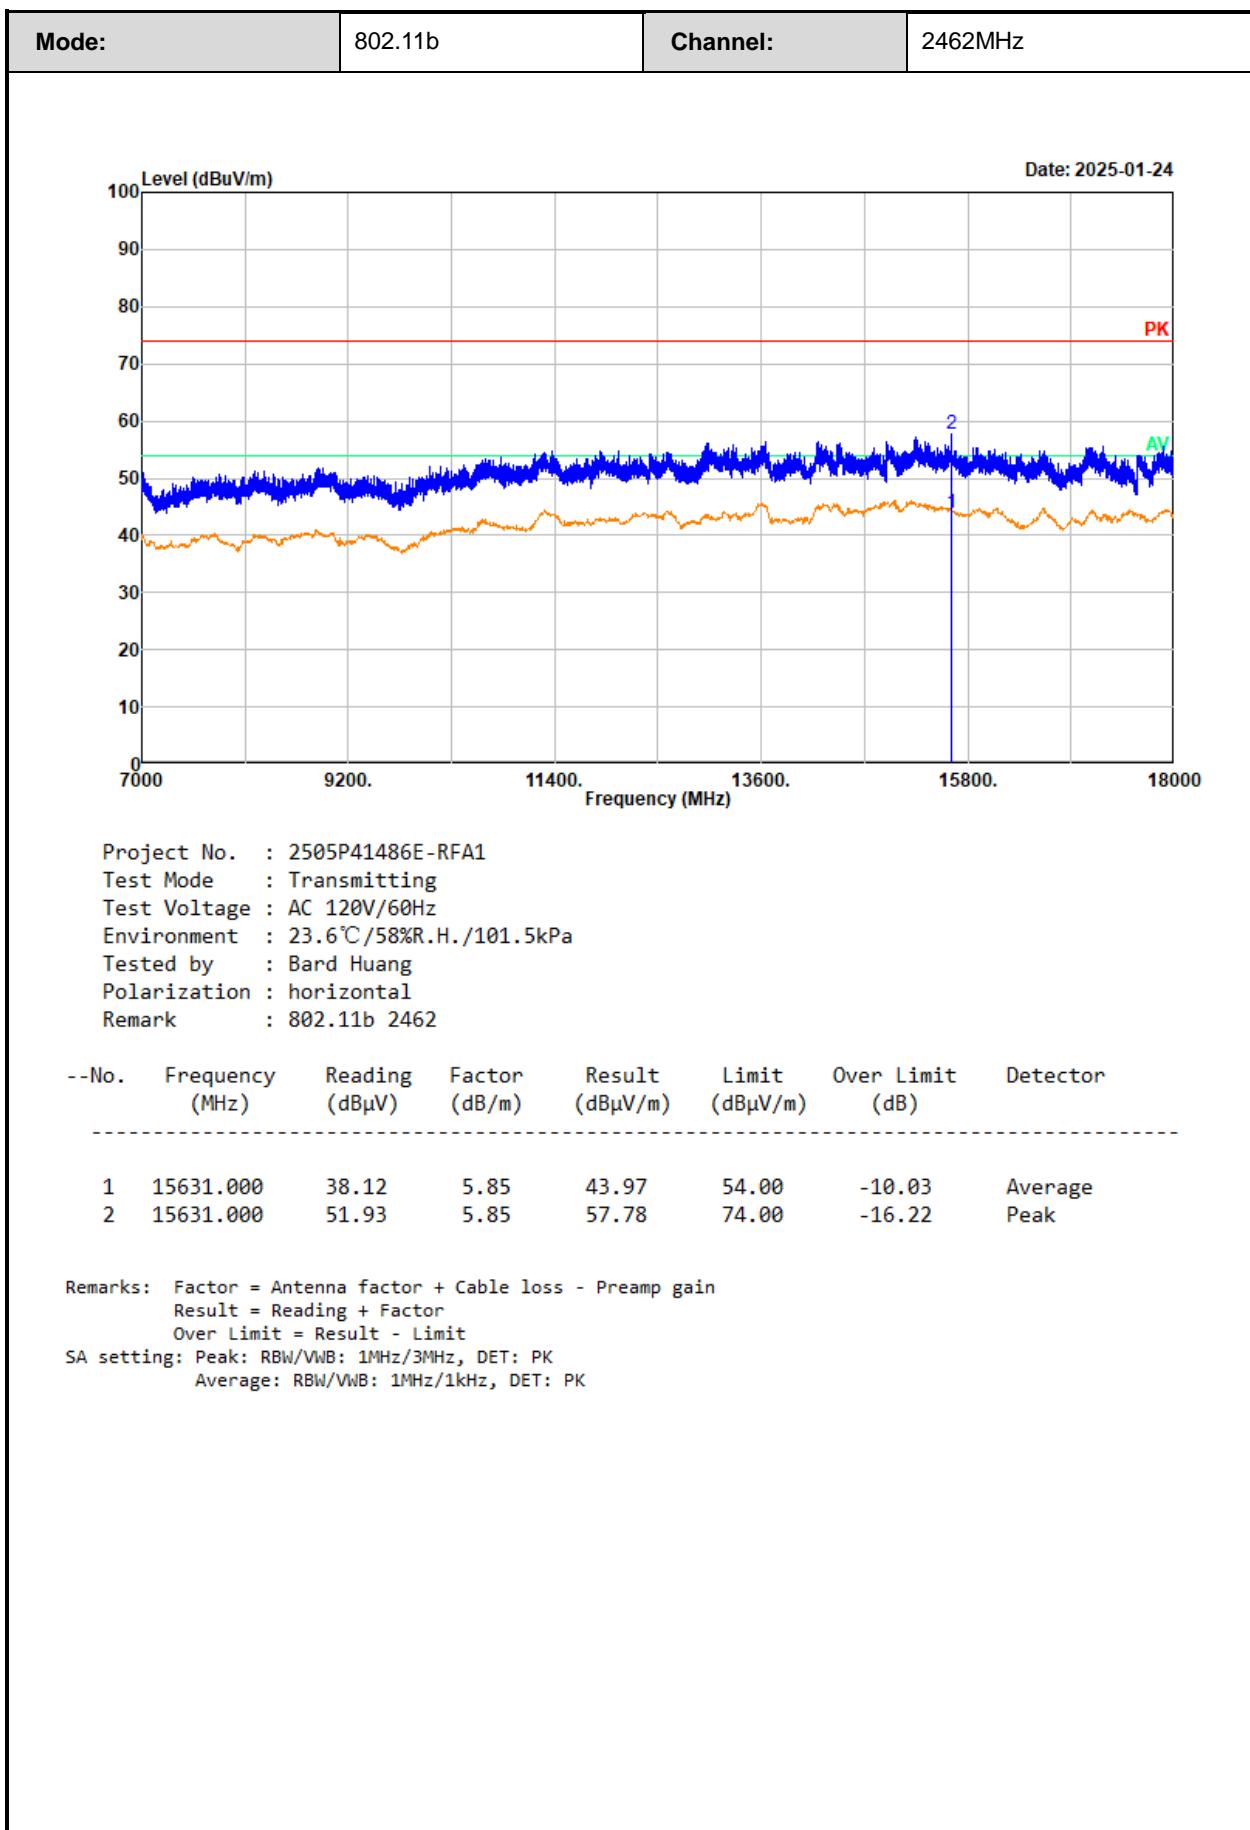


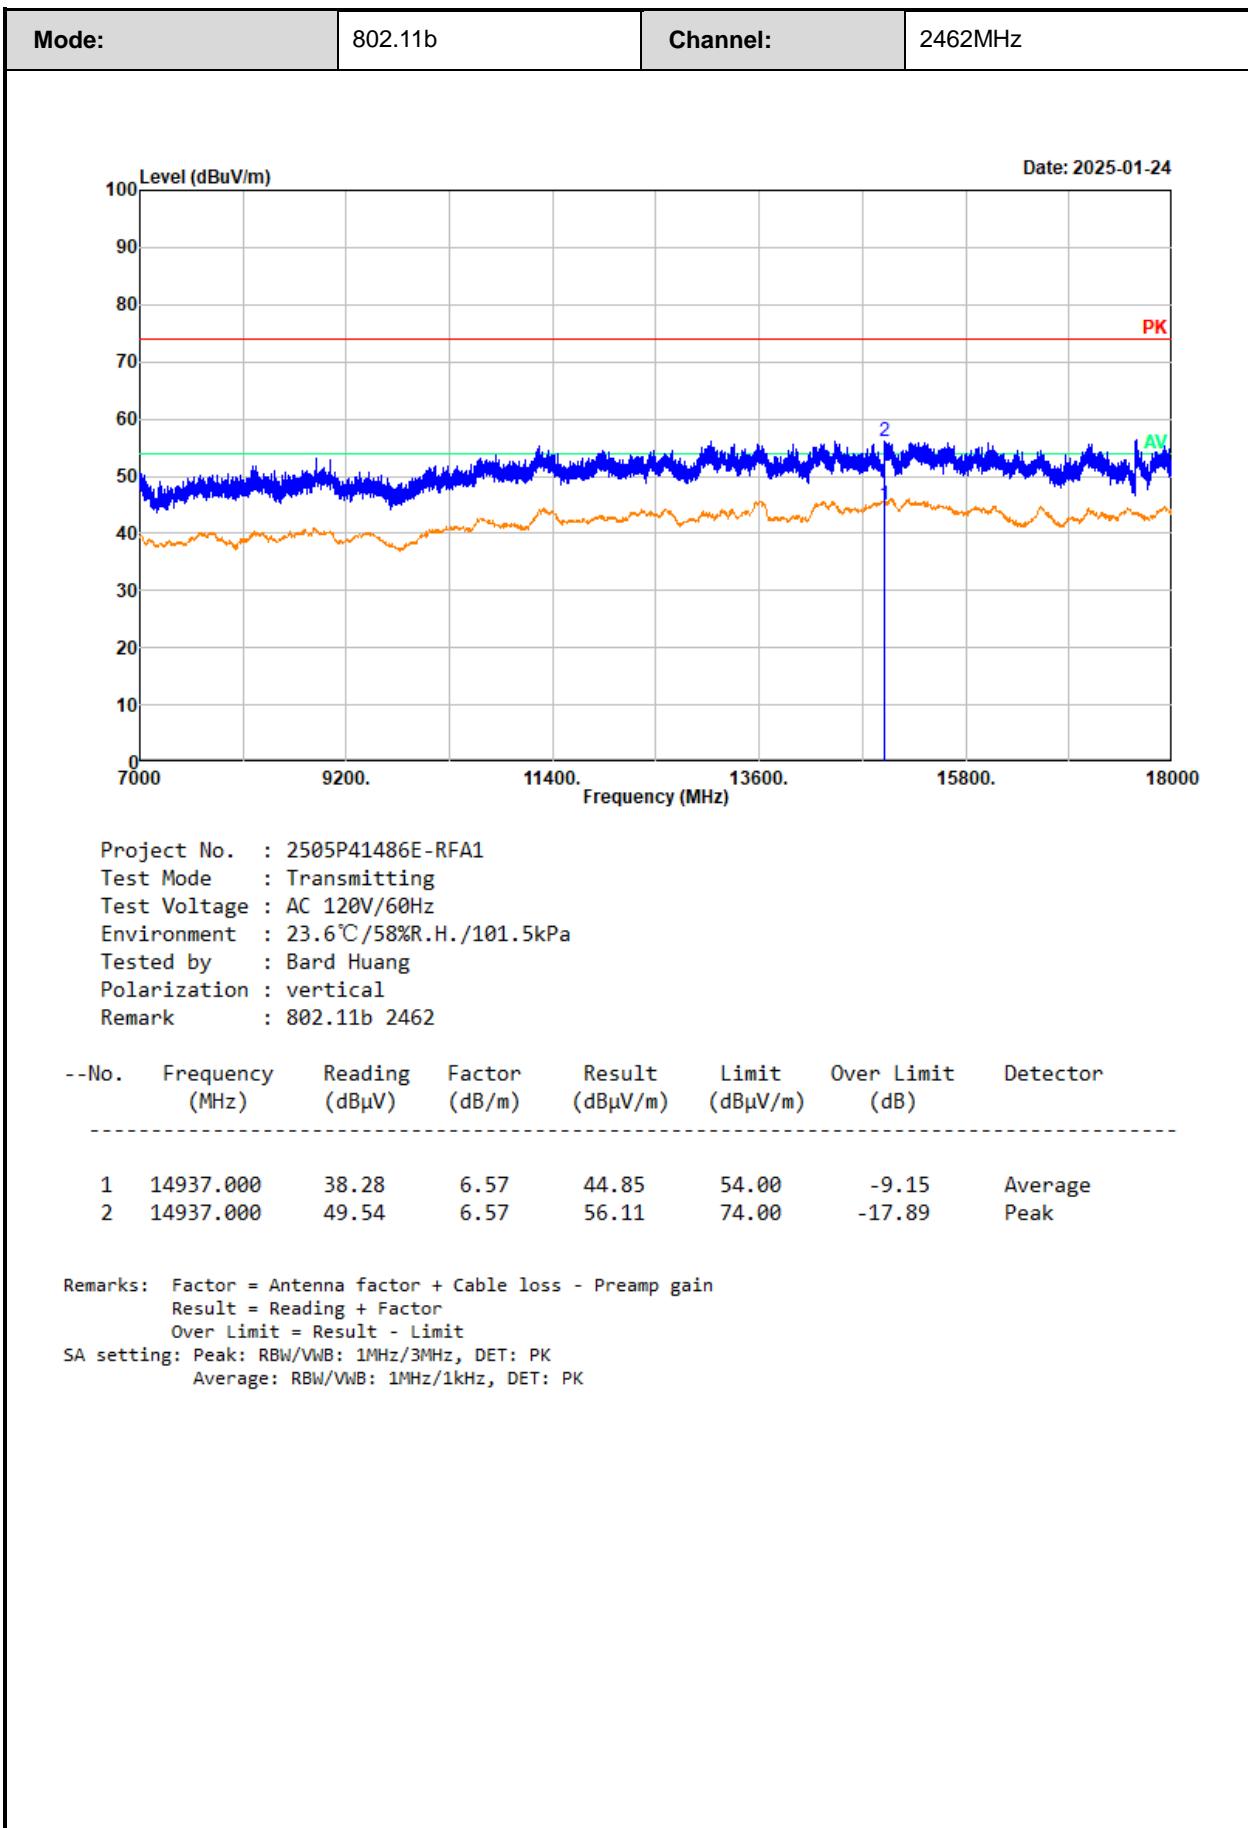


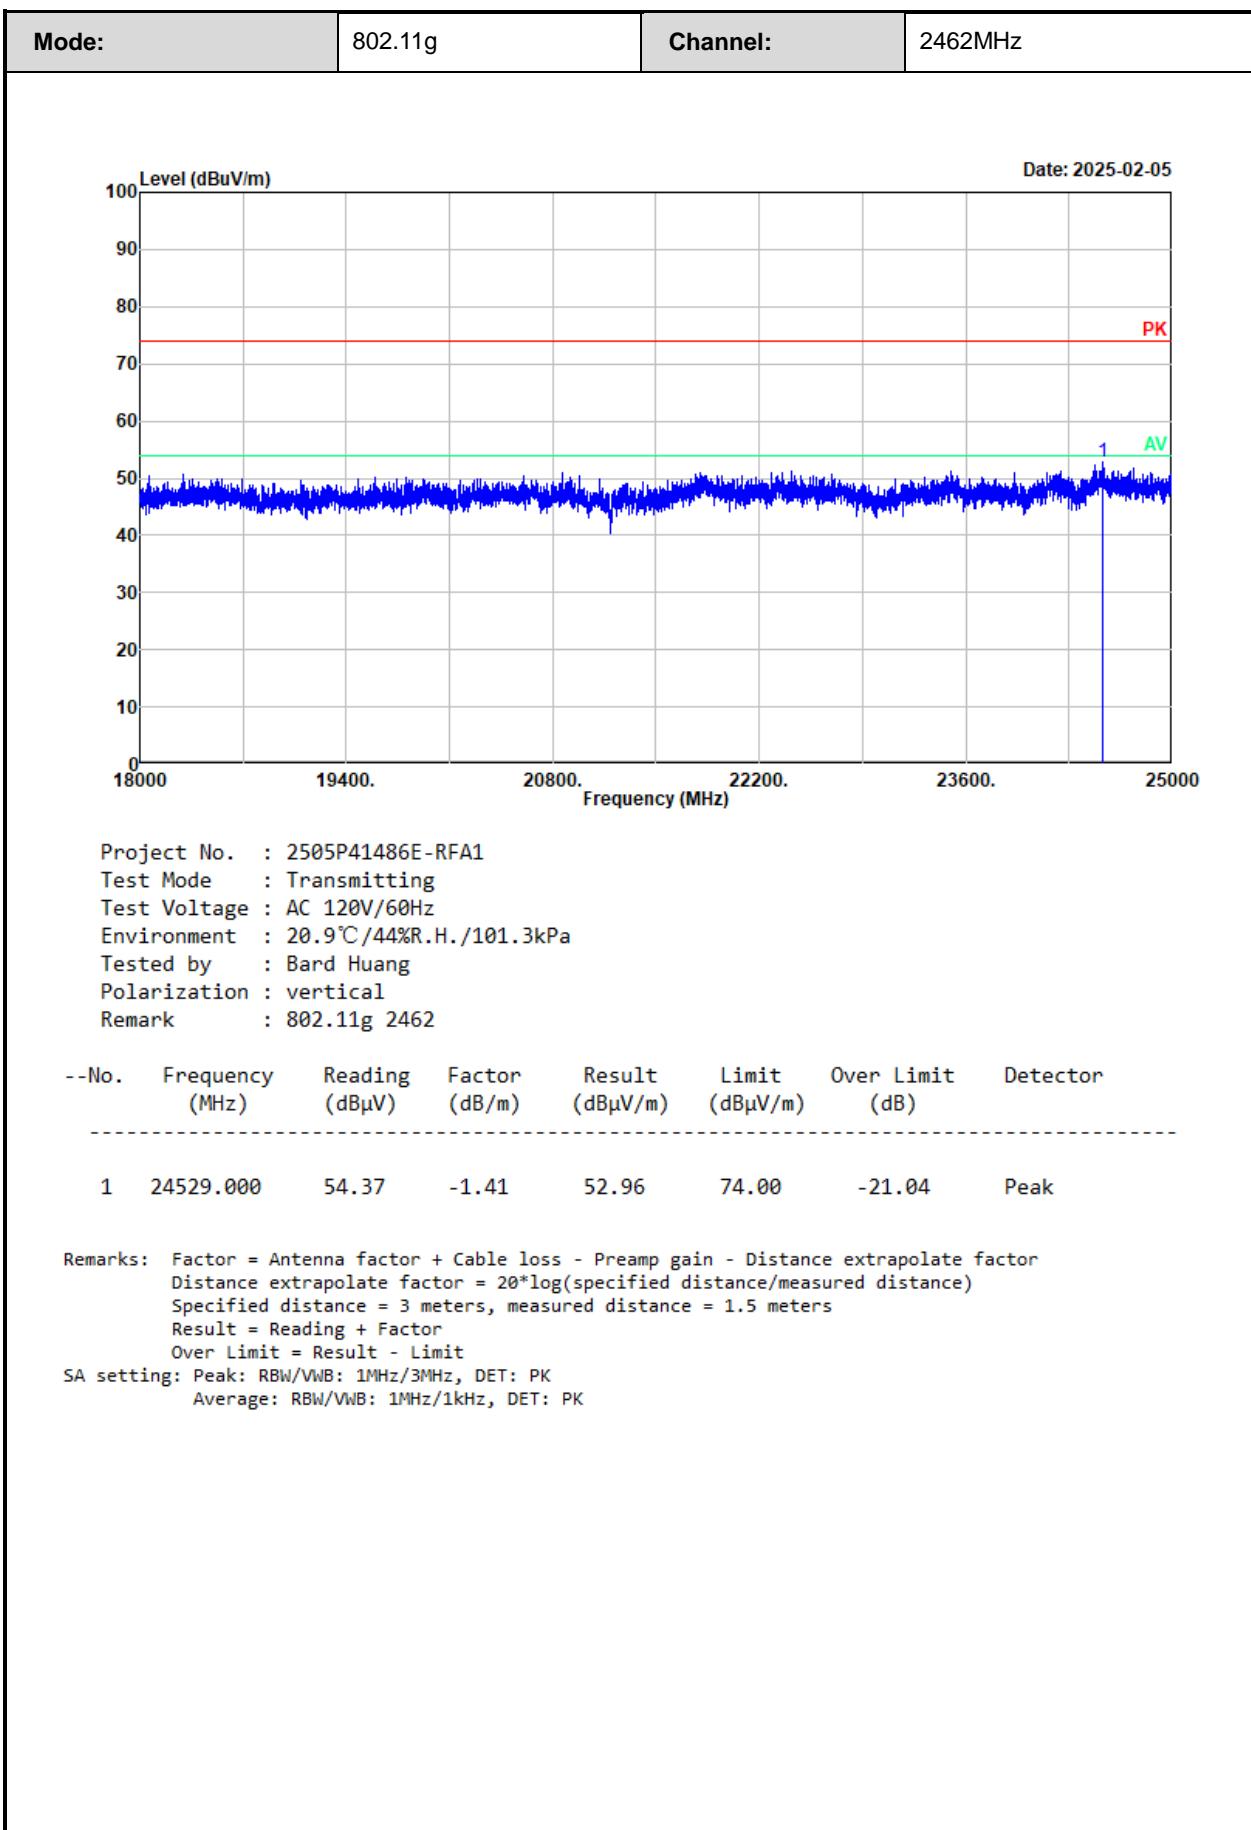


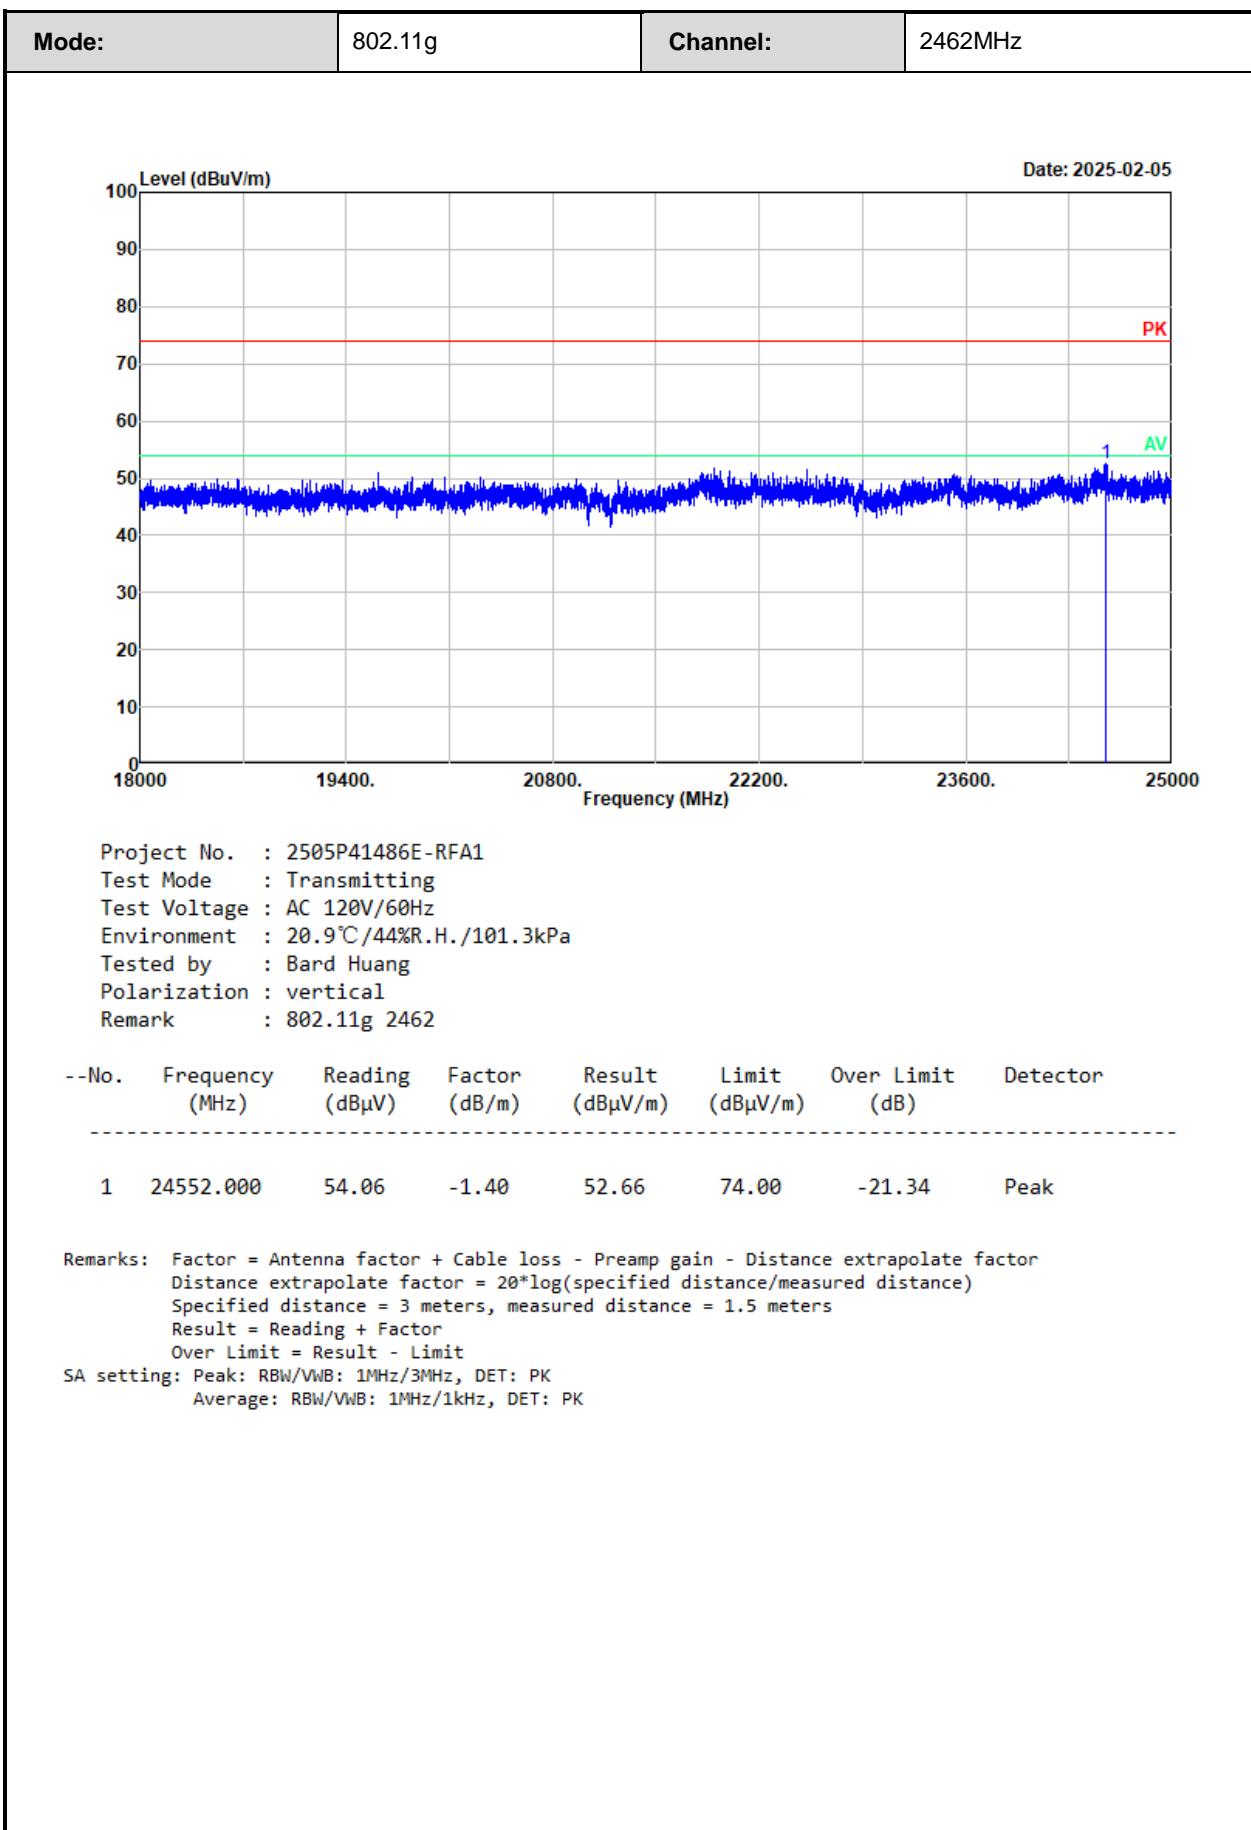



Radiated Band edge:

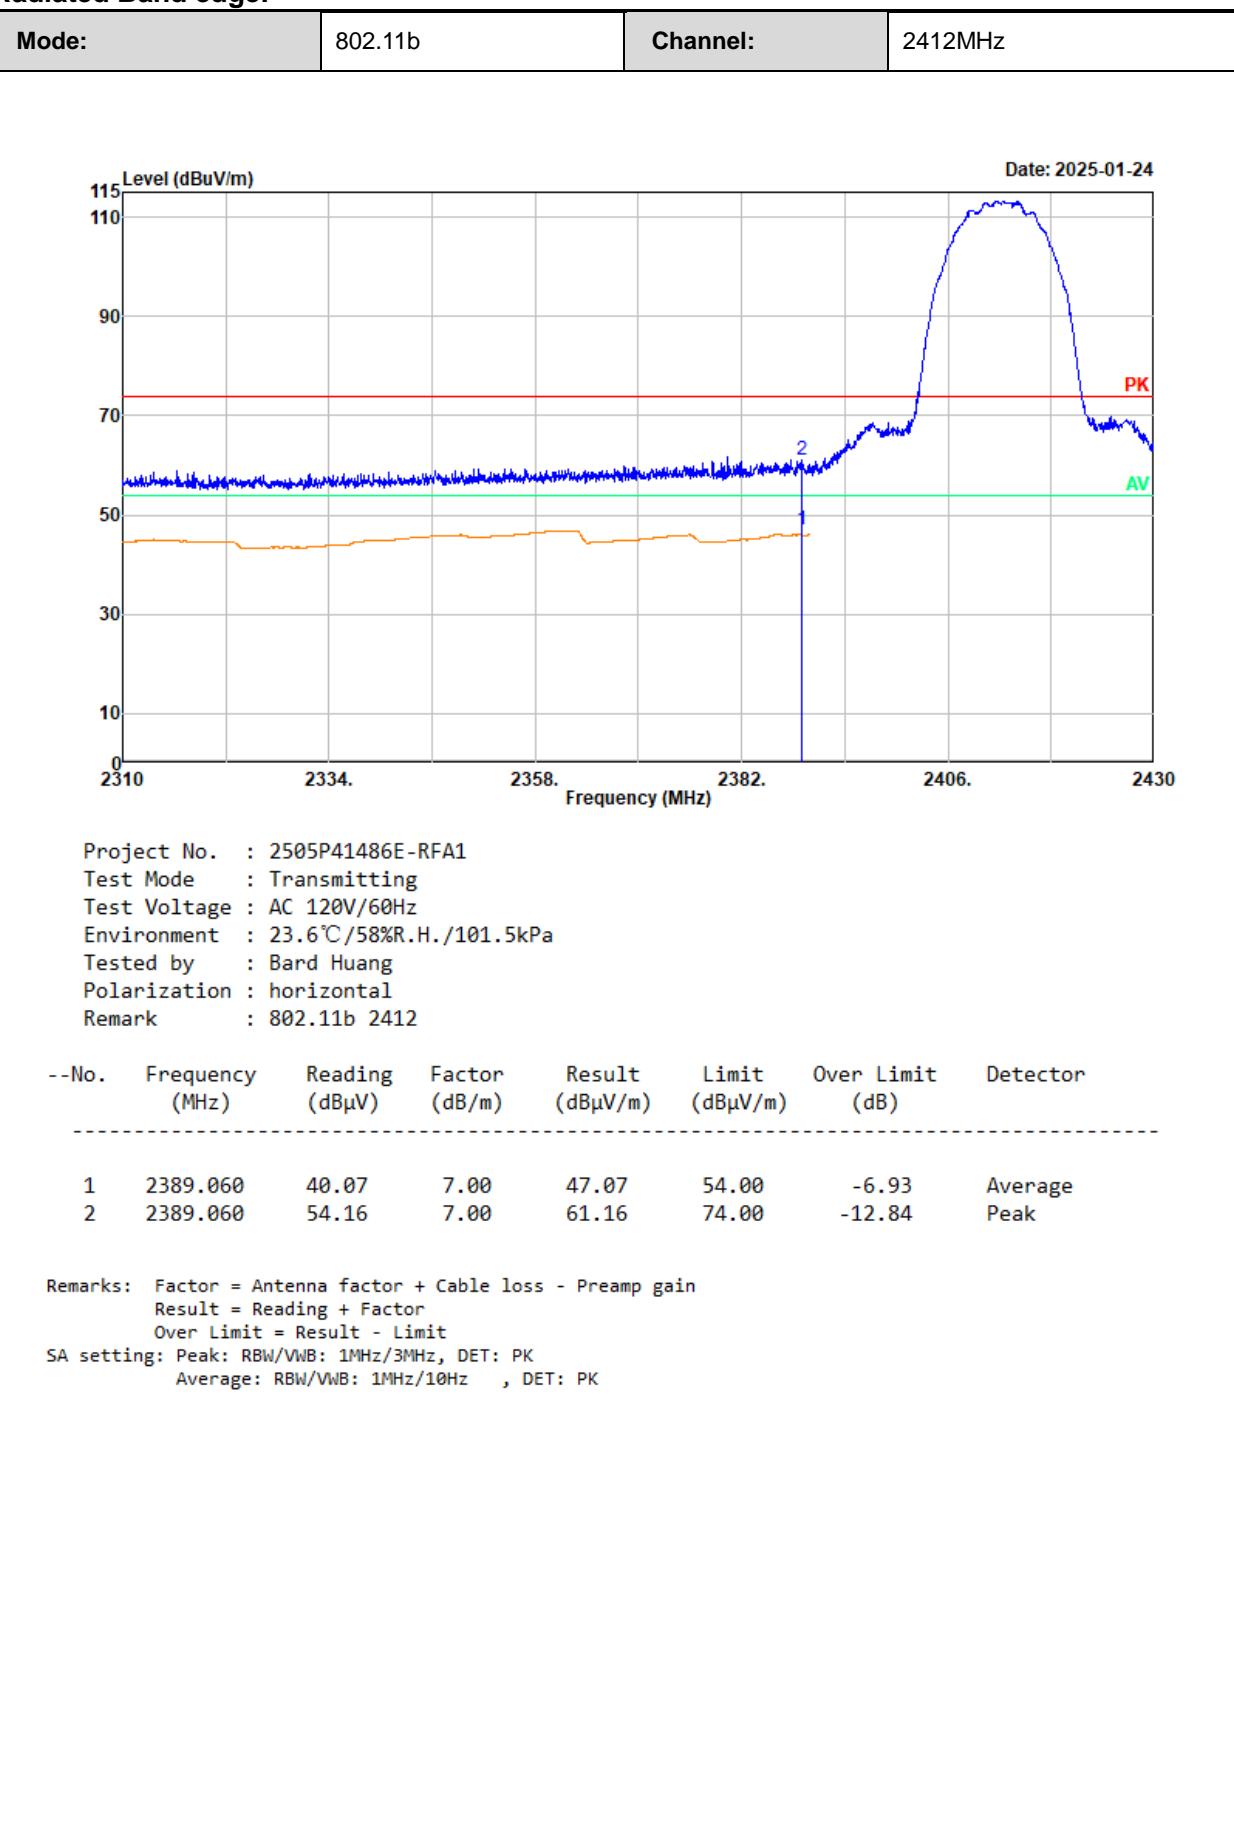


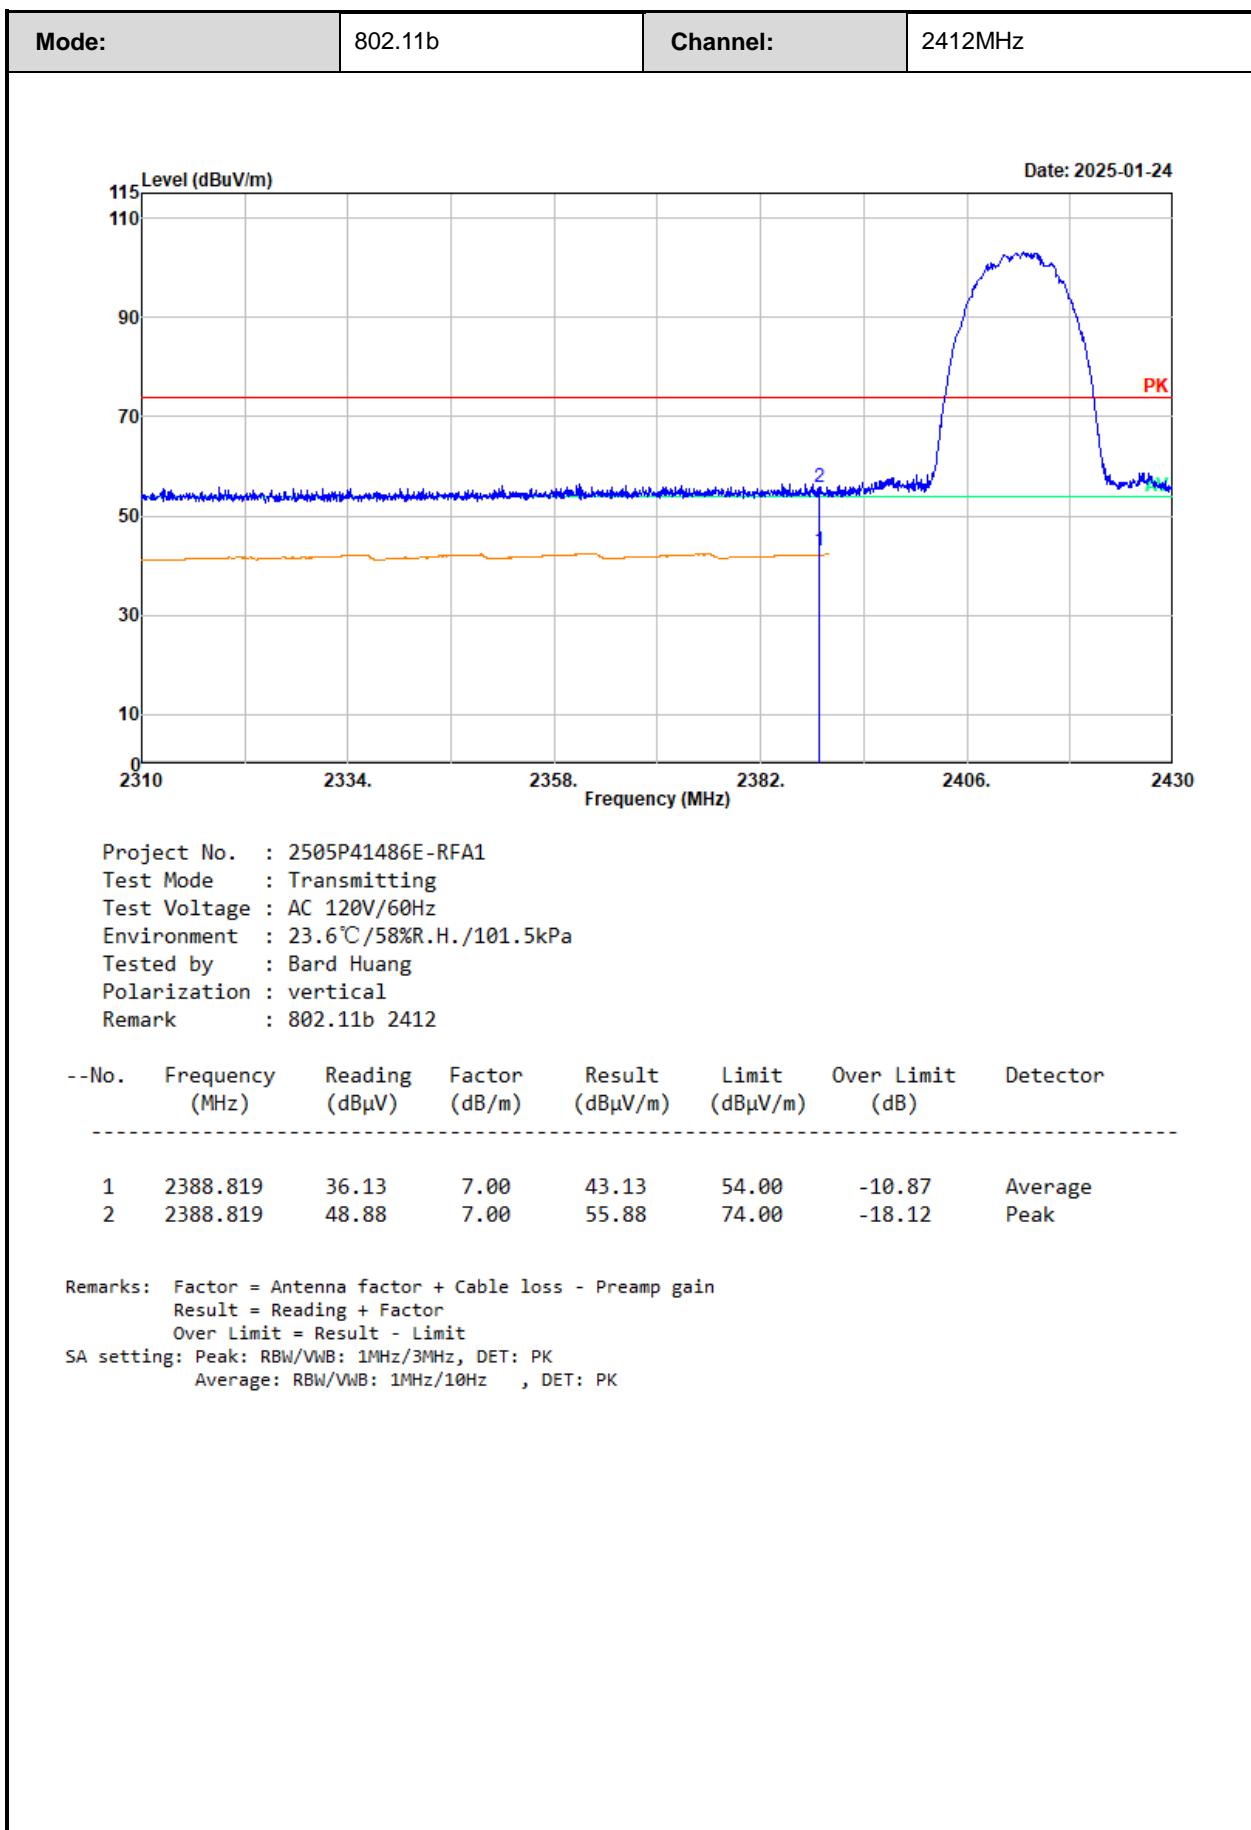


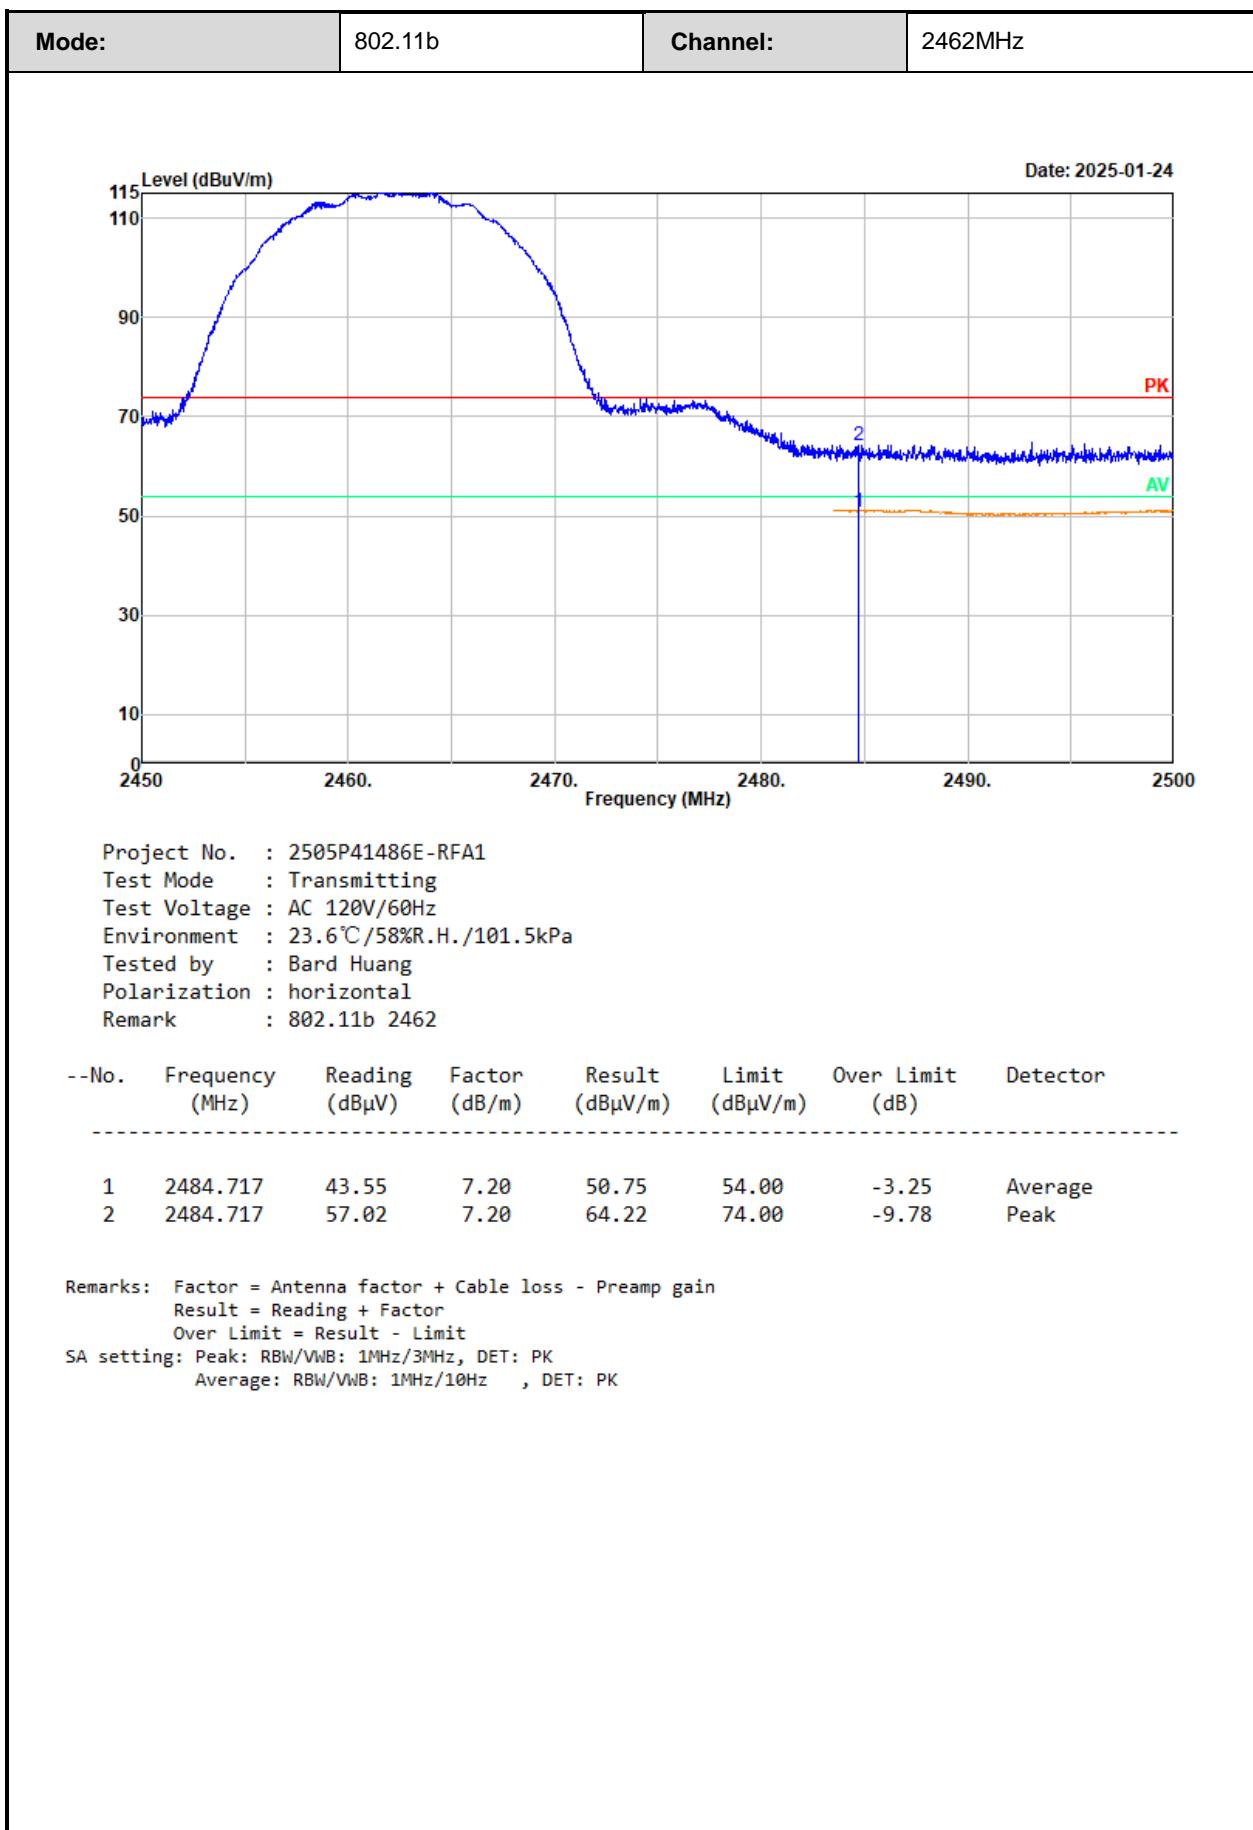


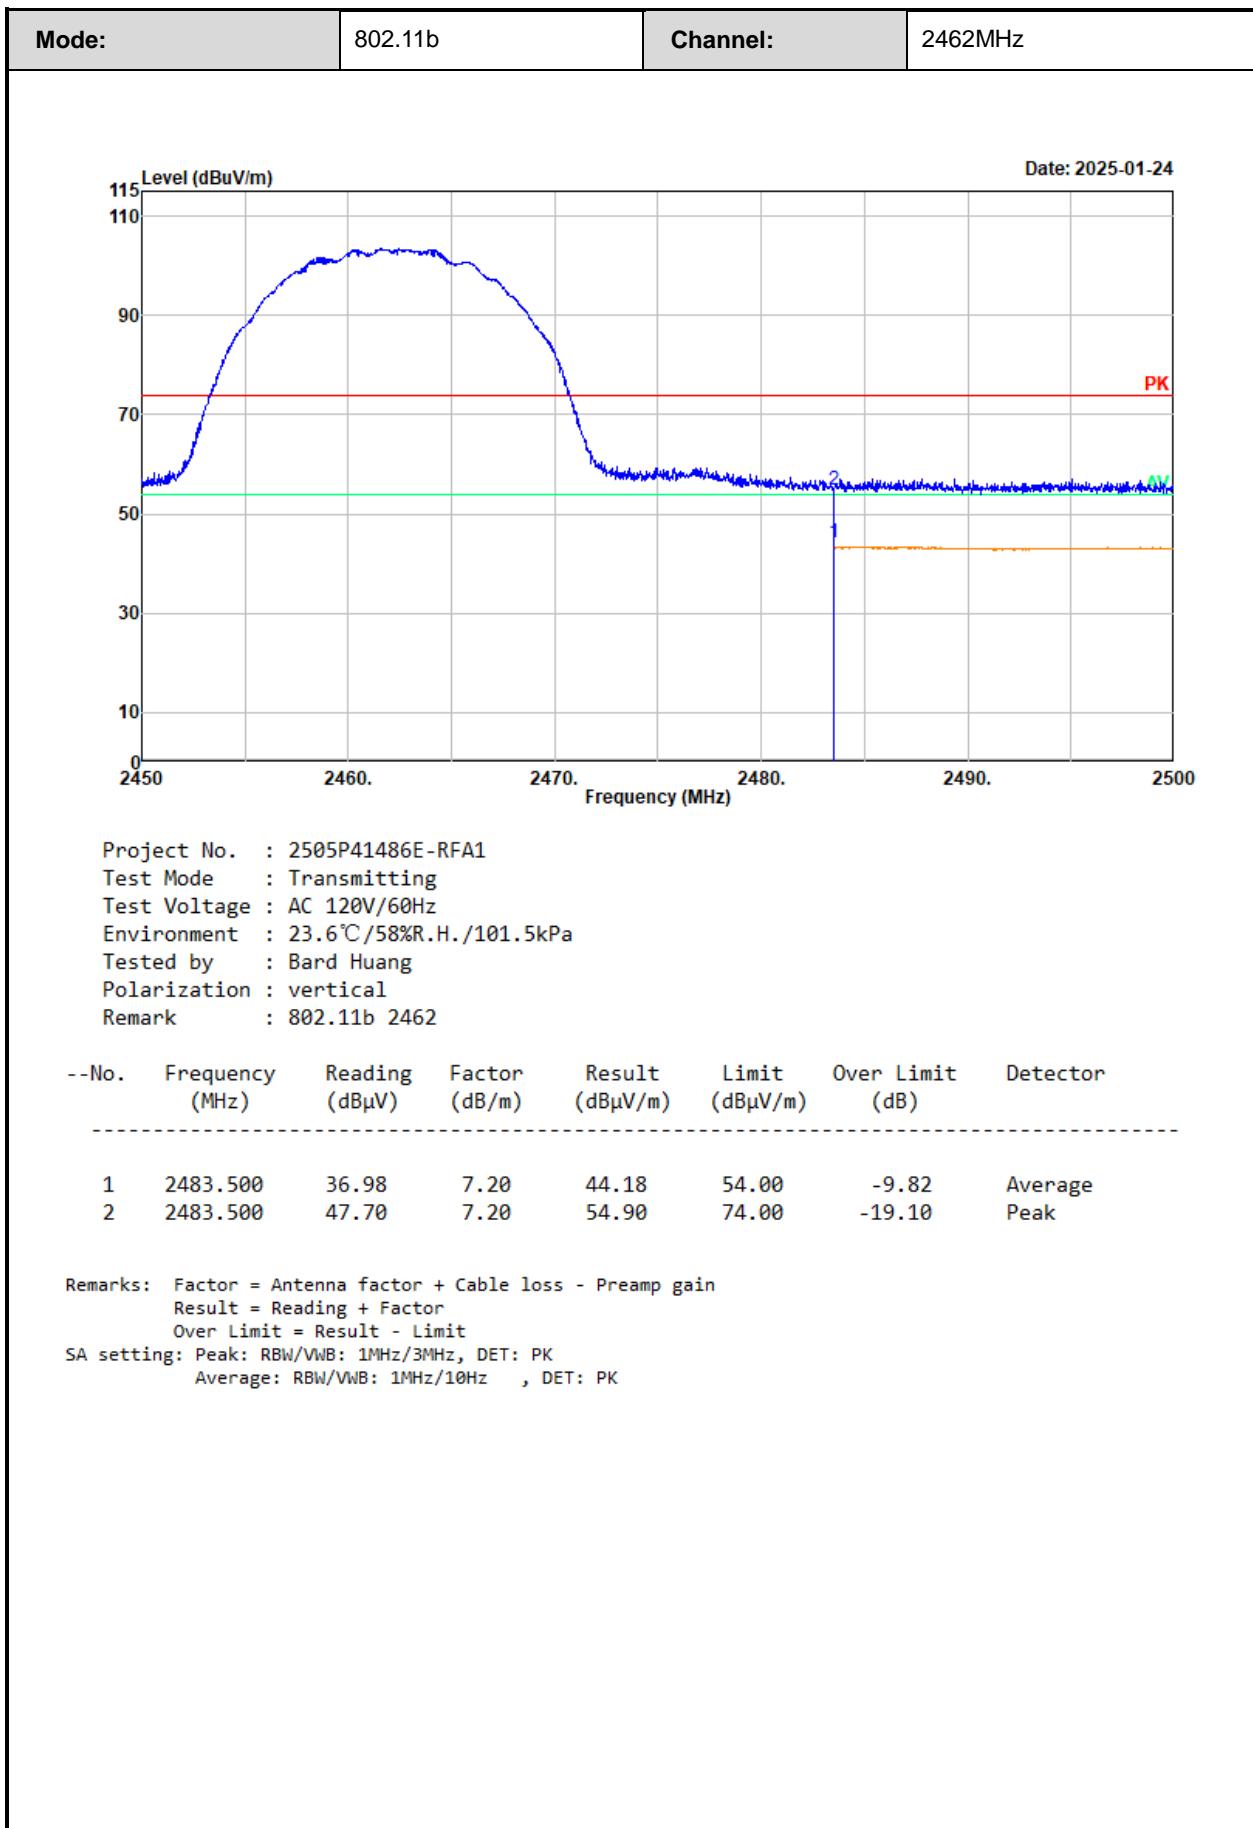


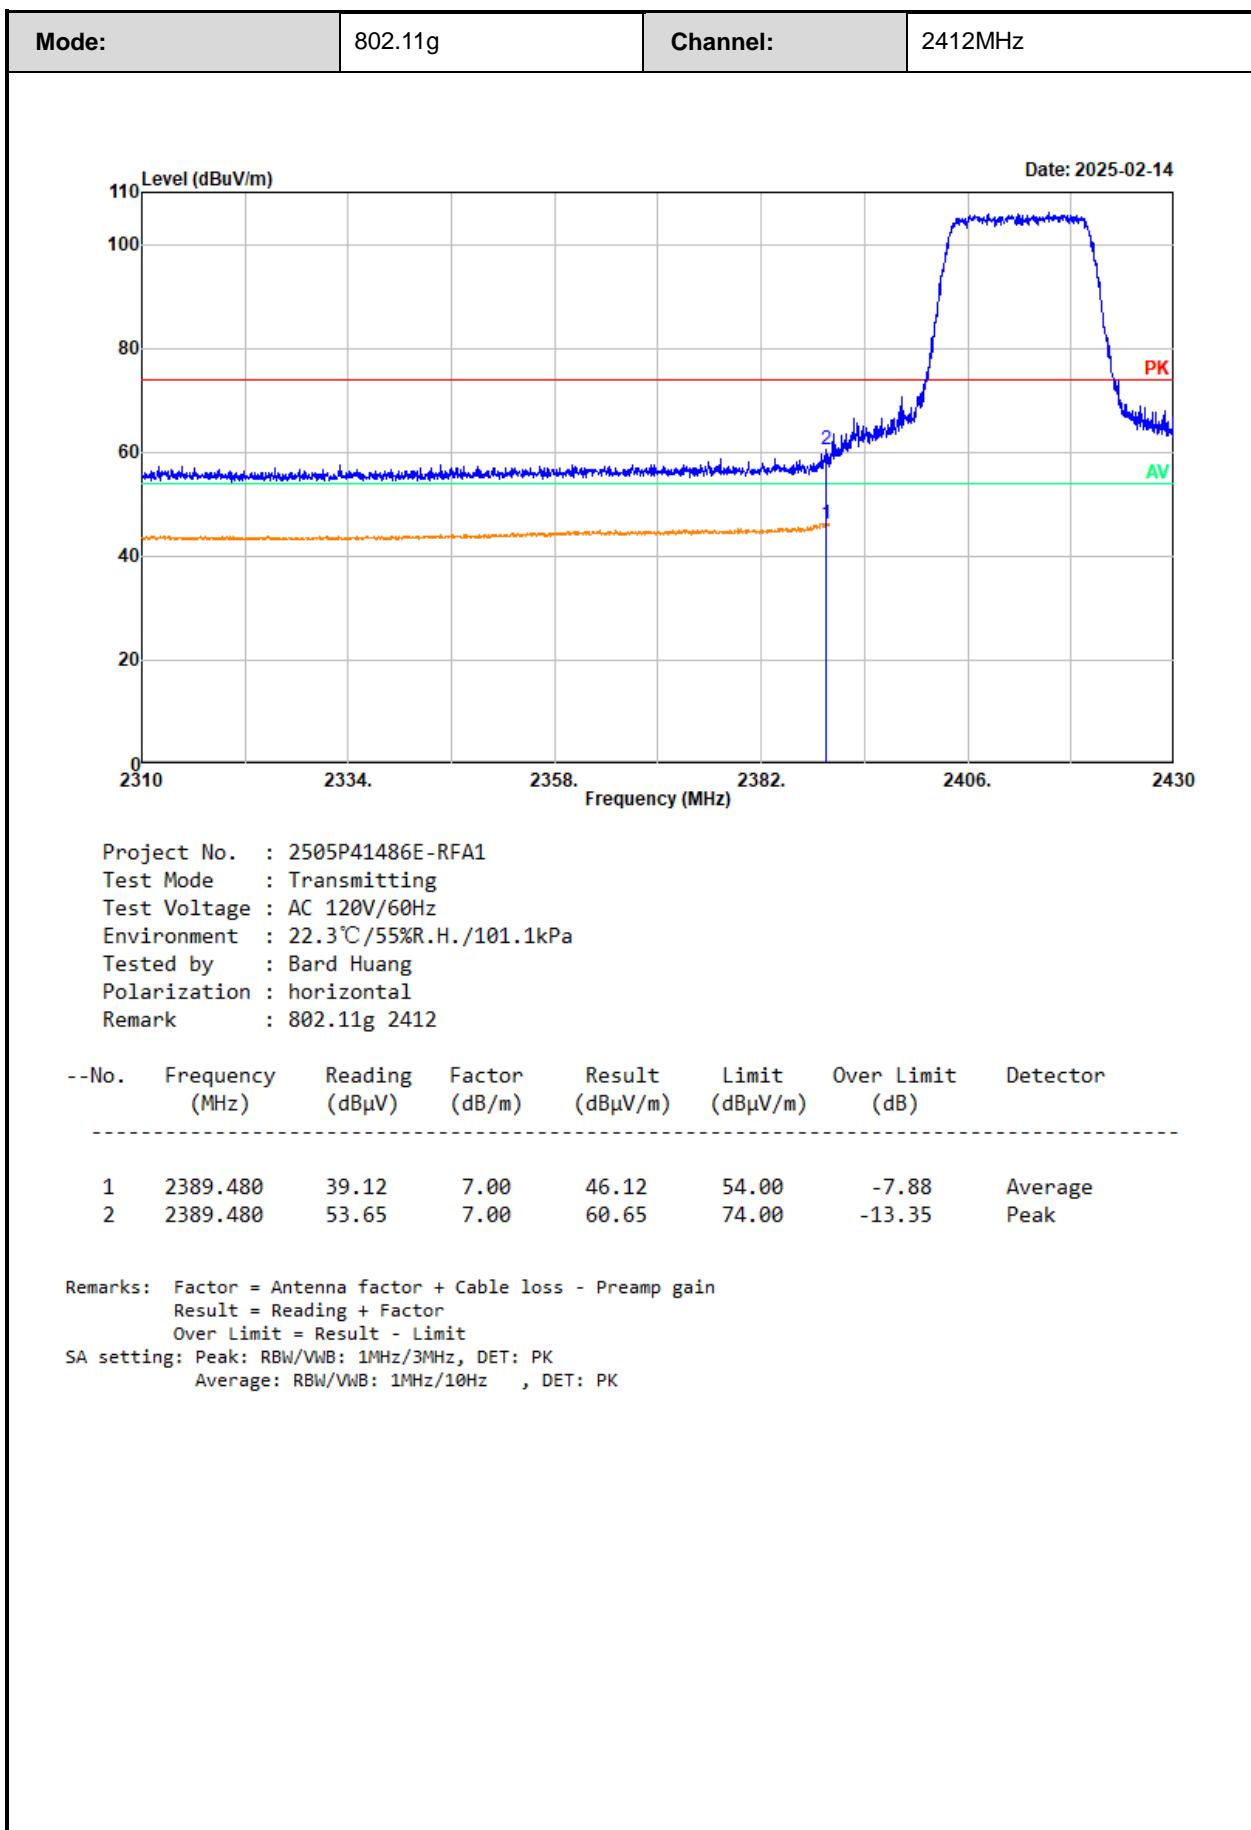


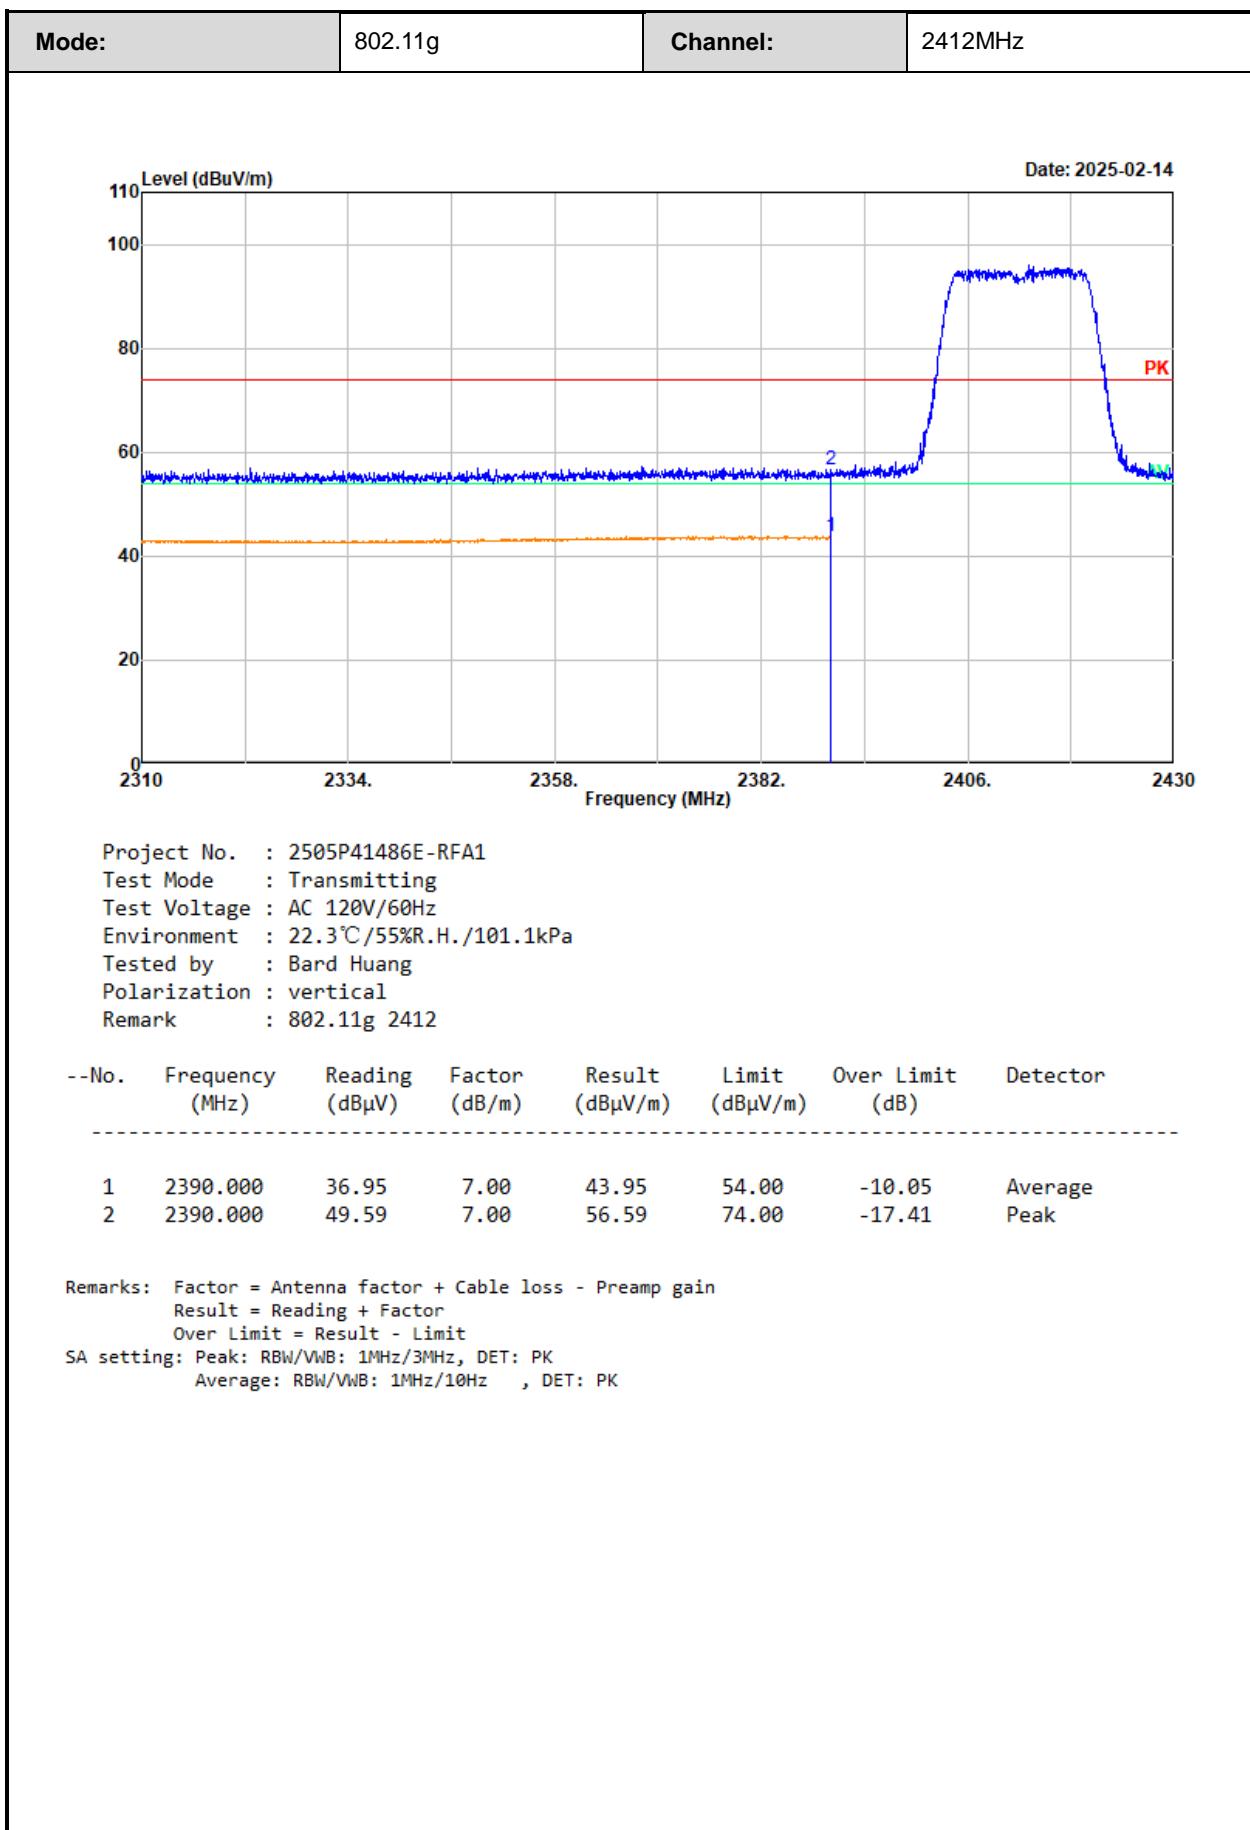


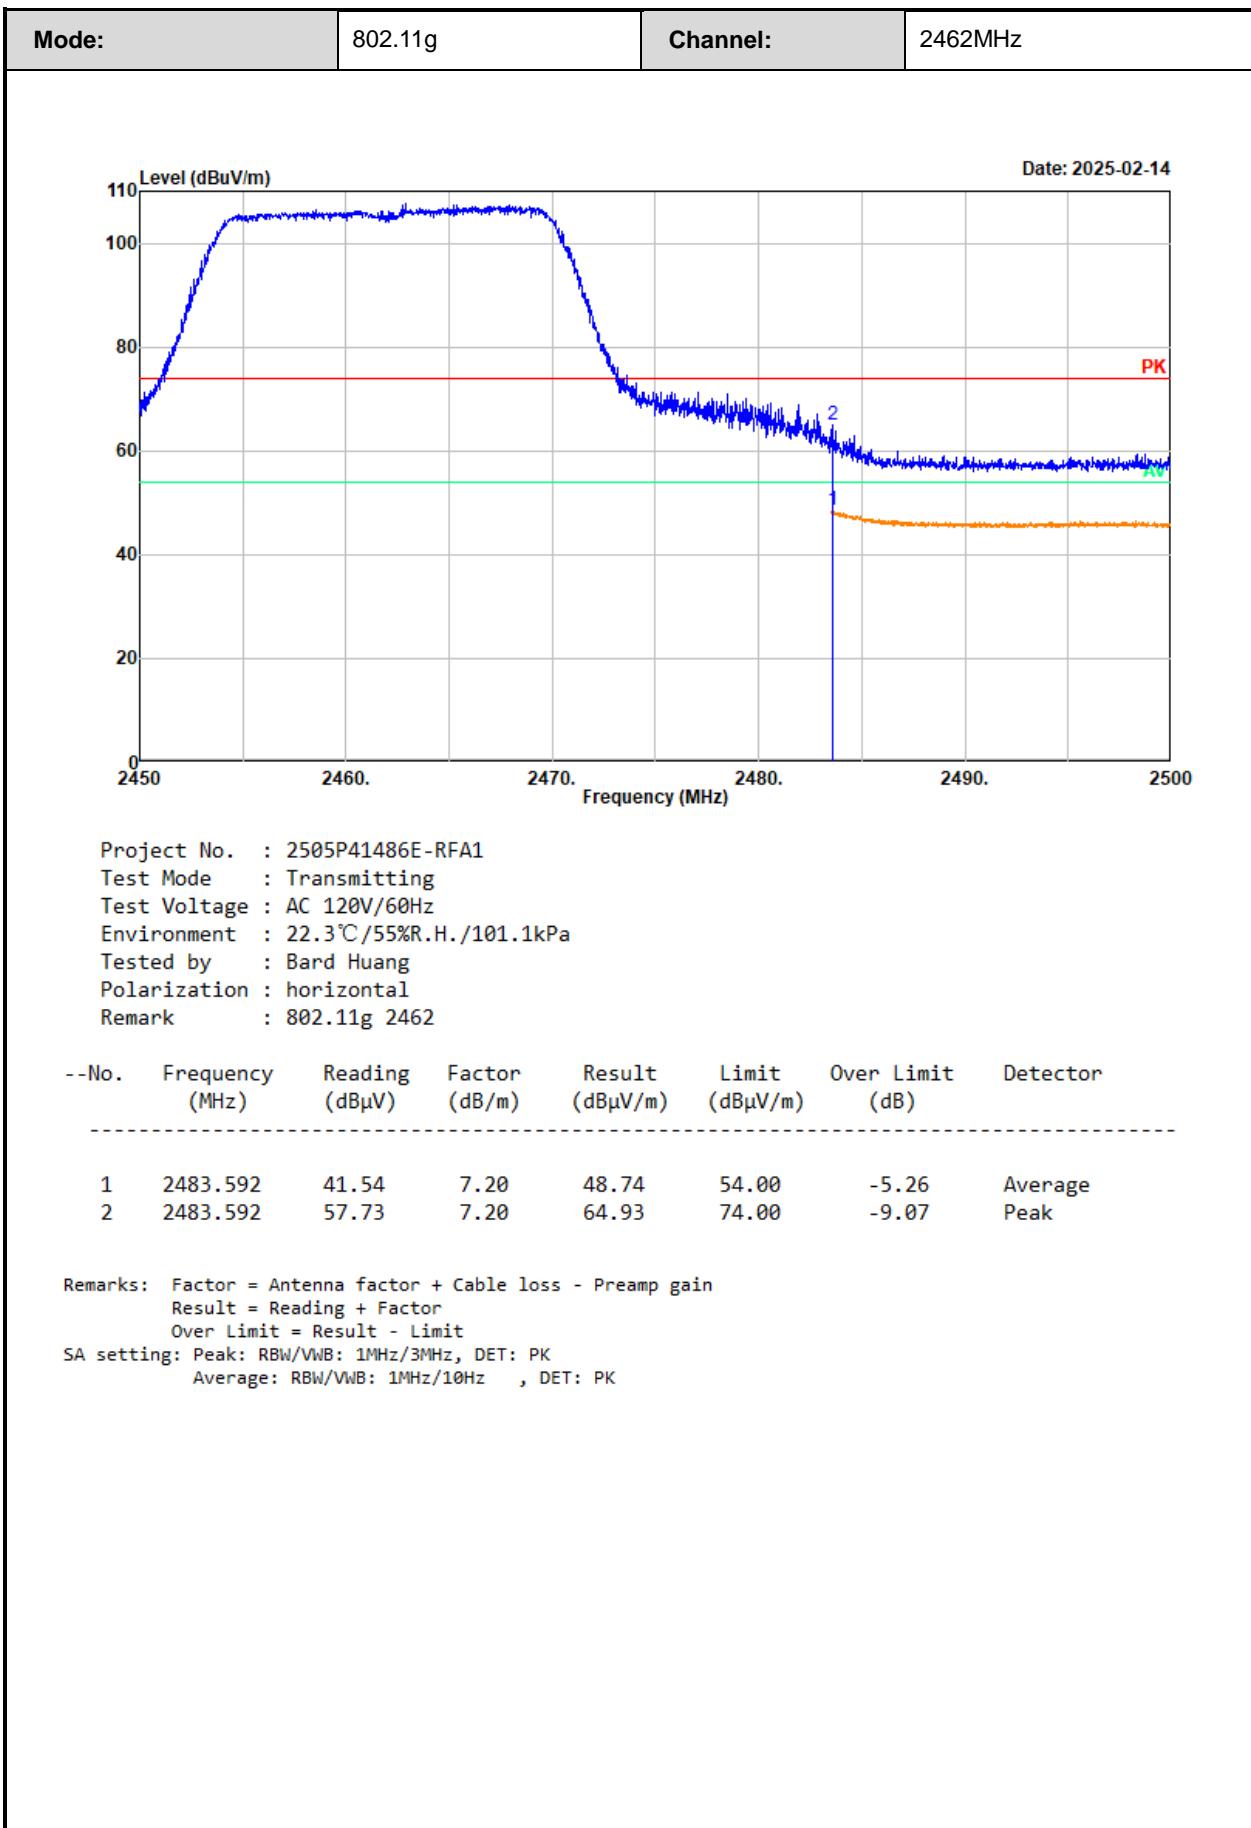


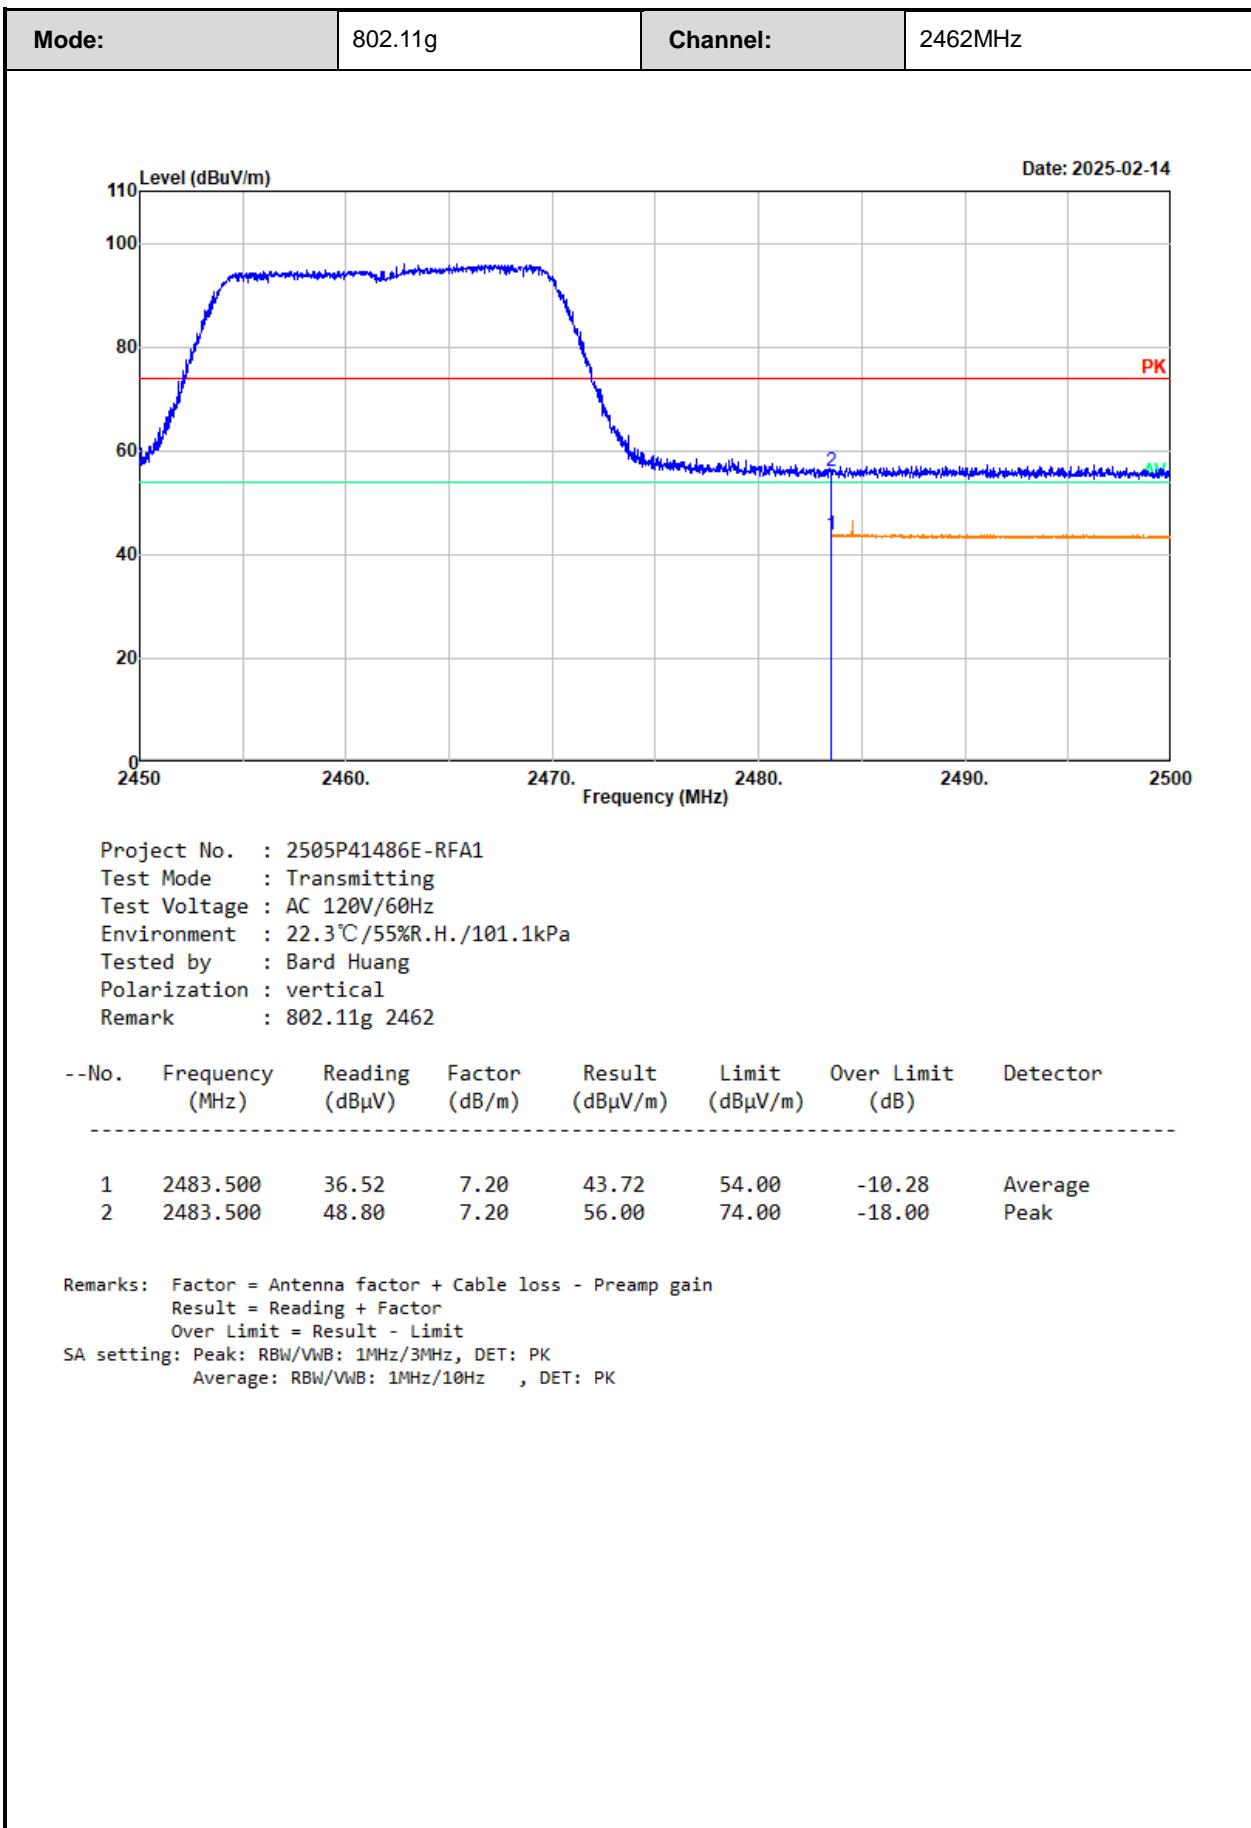


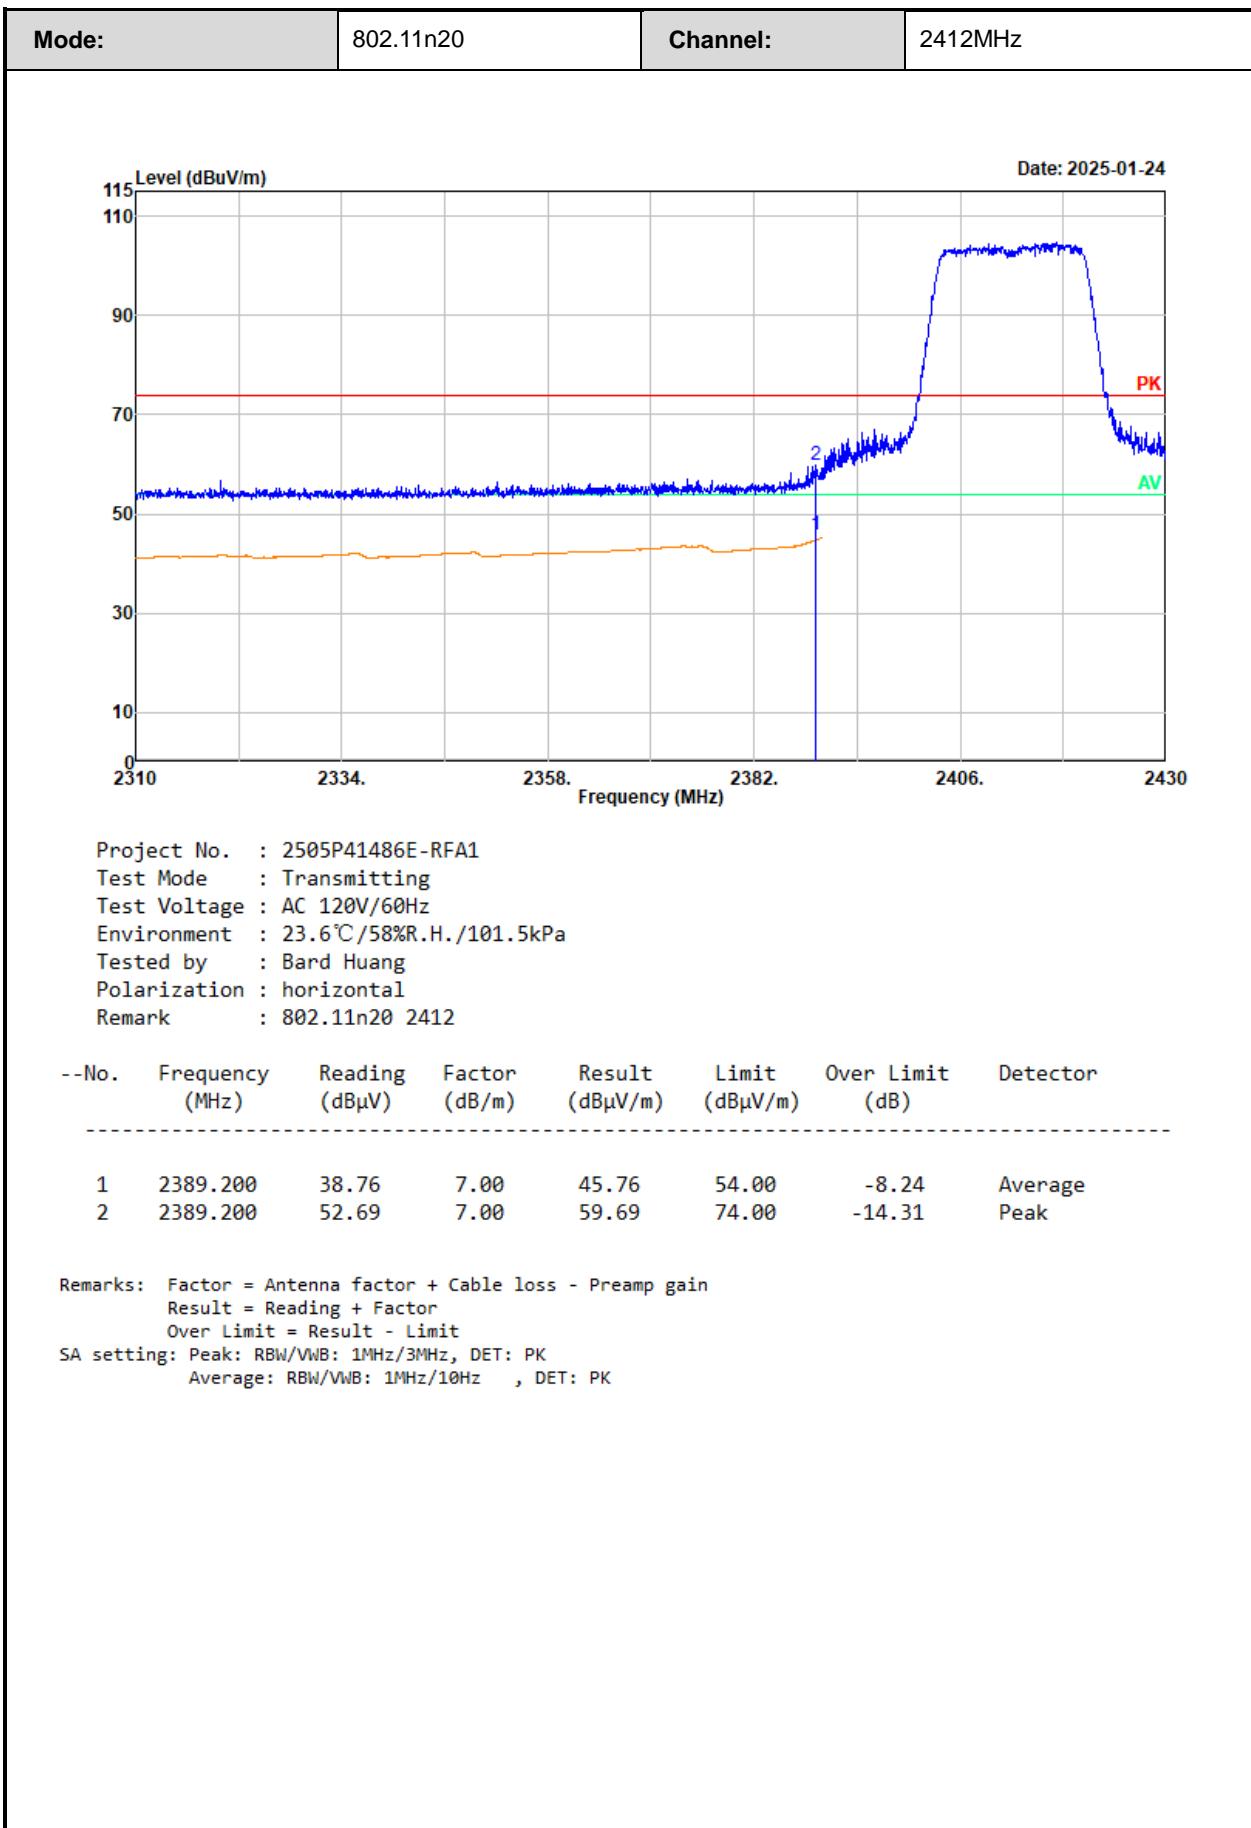


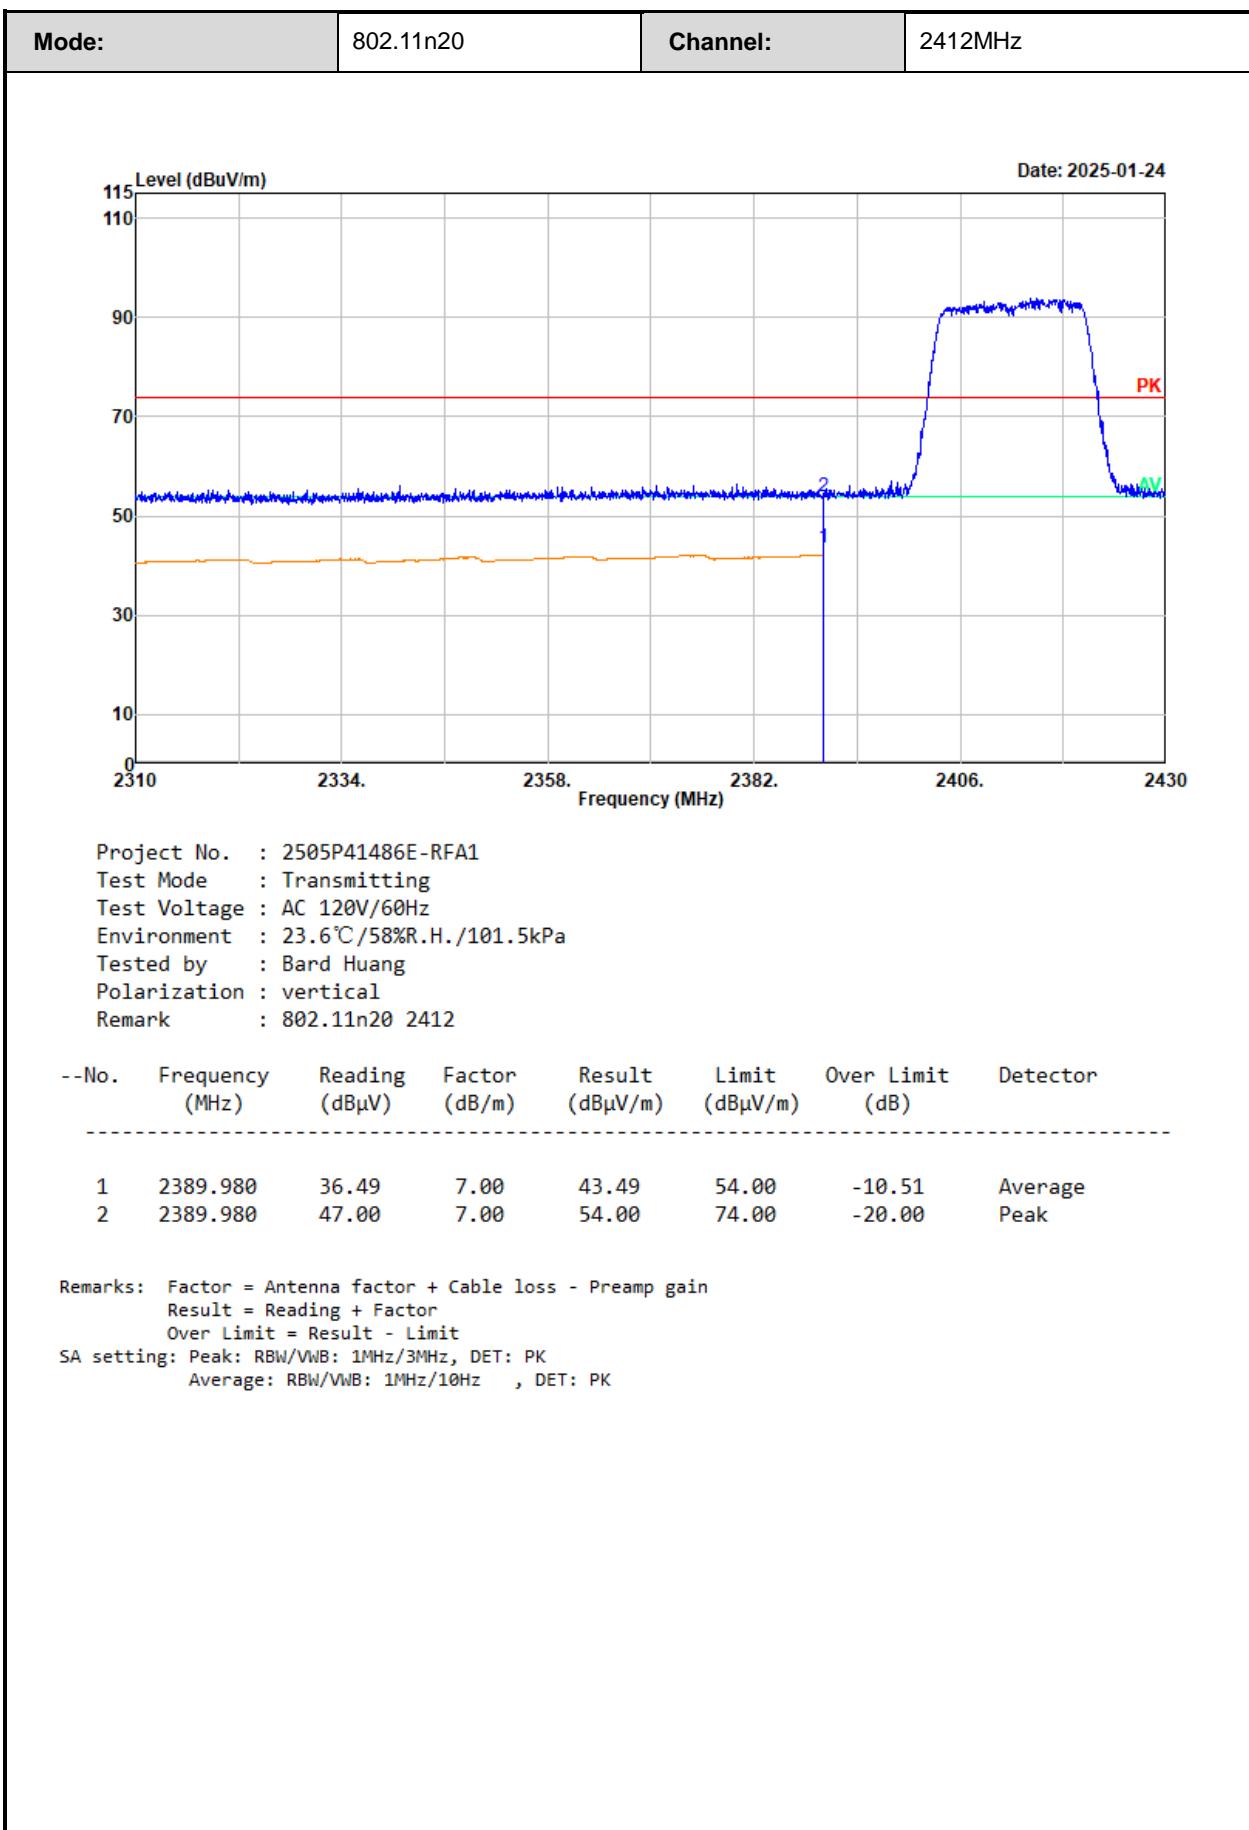


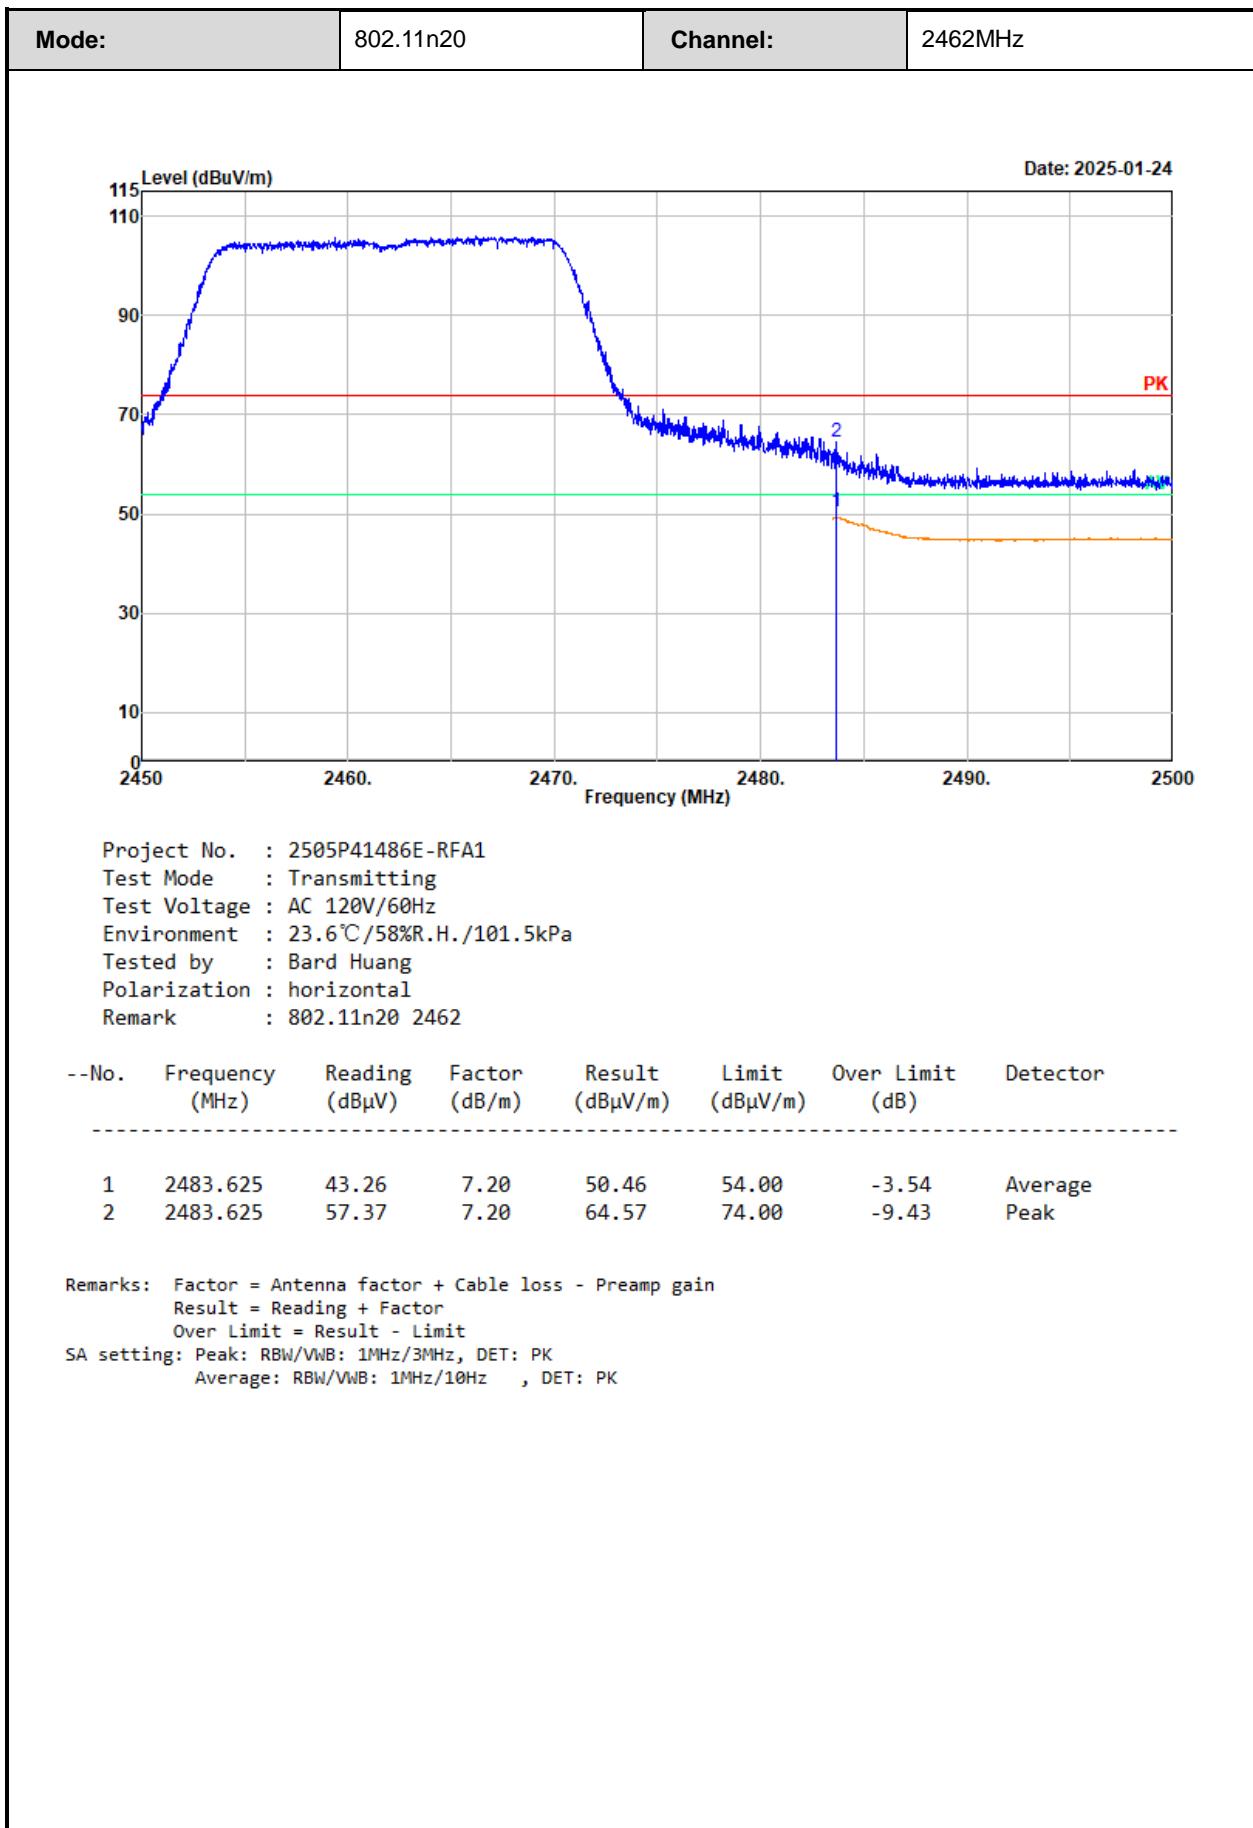


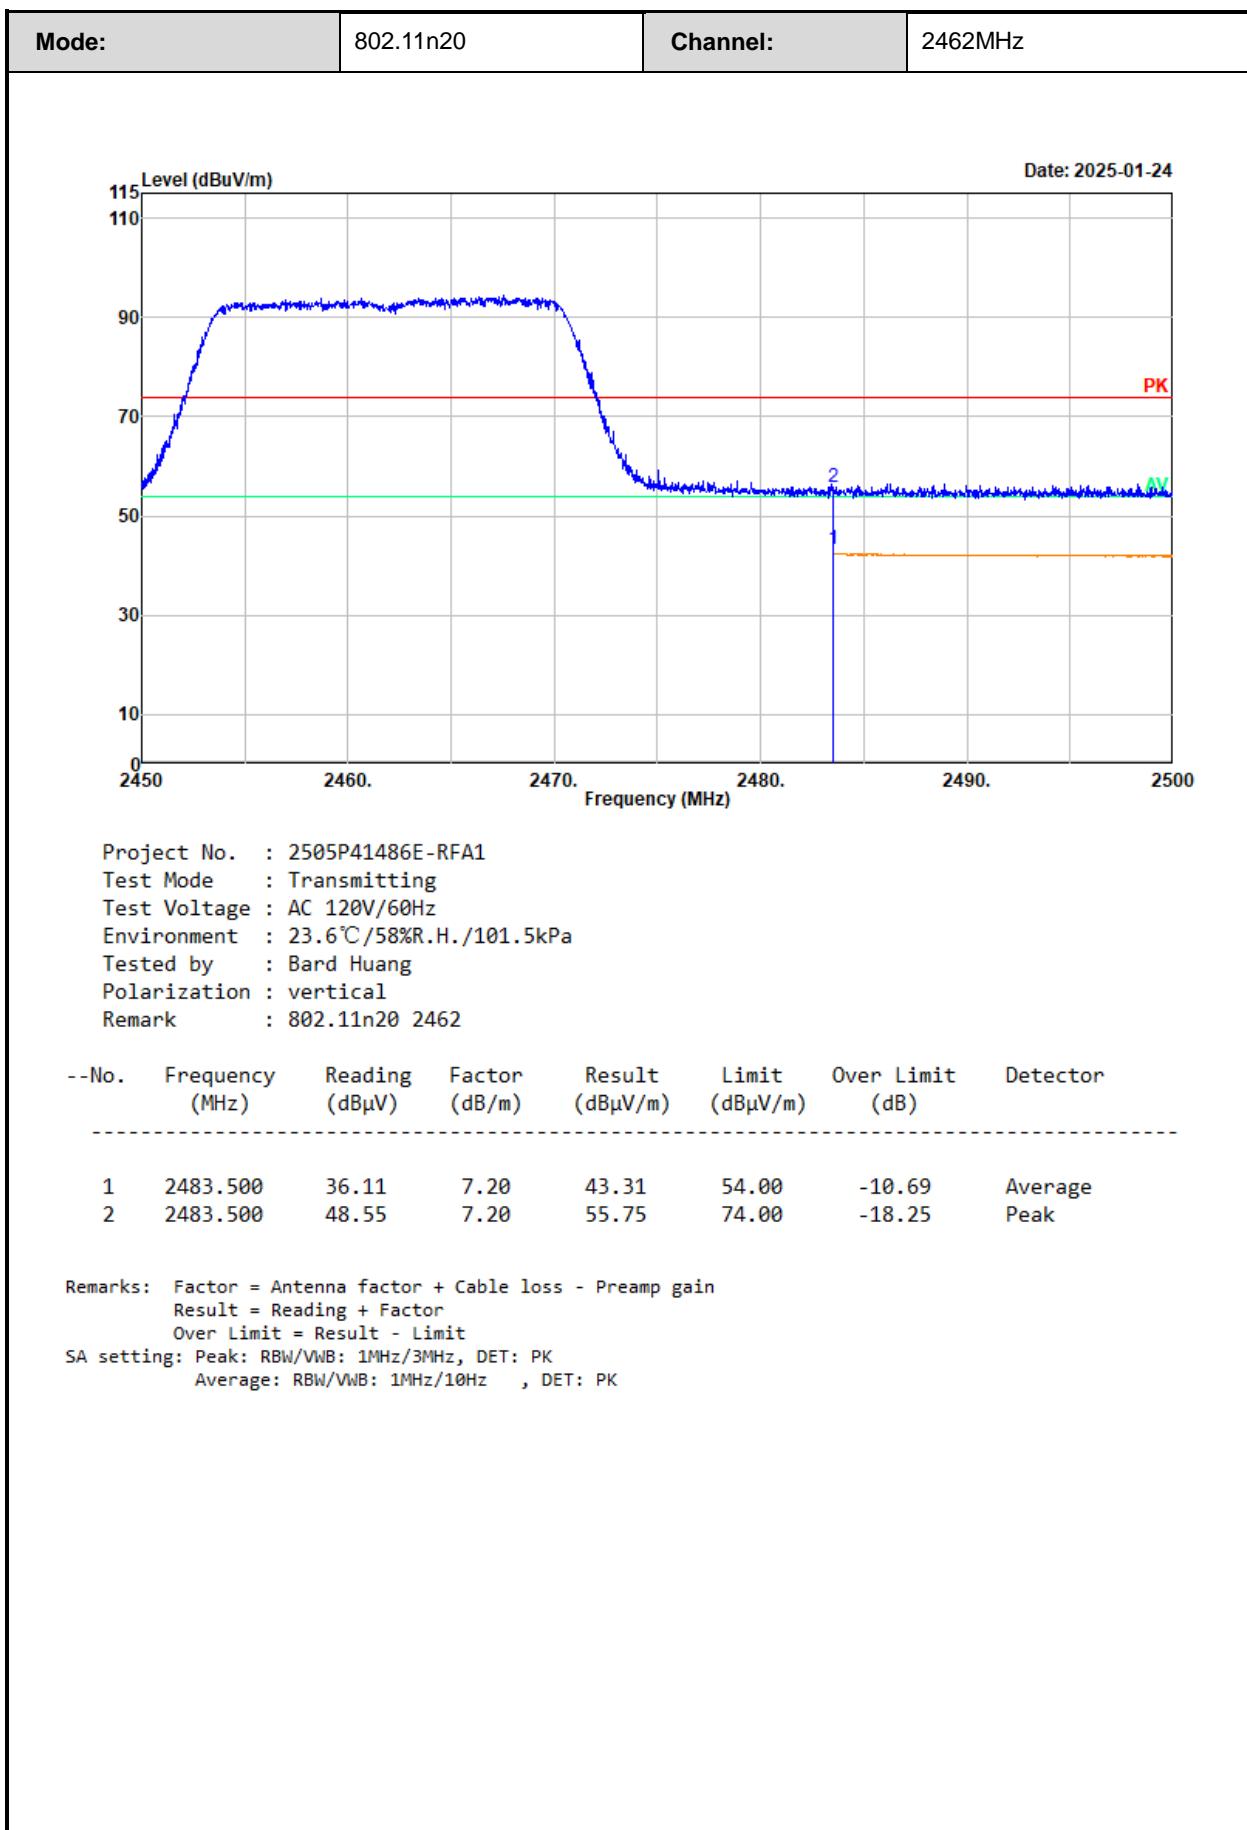

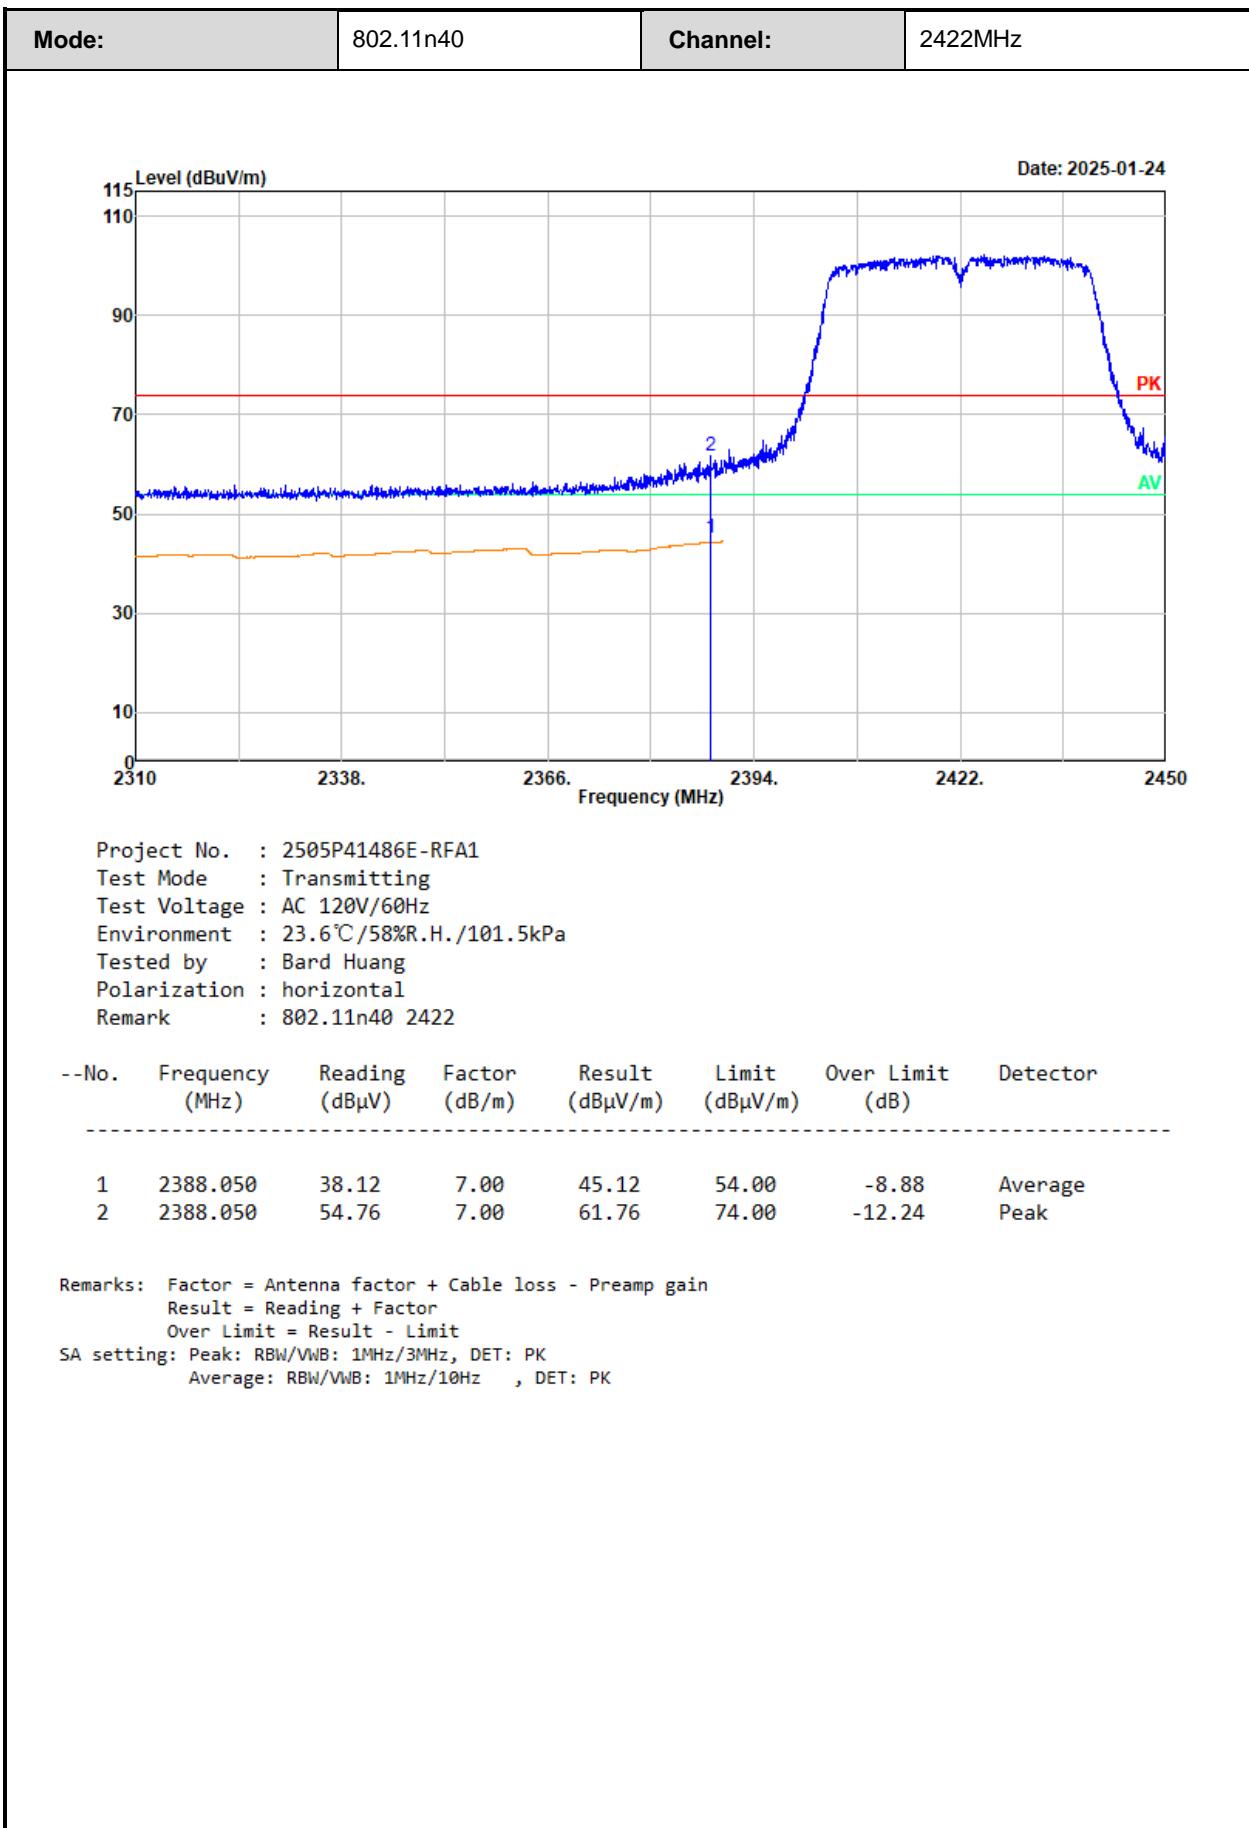

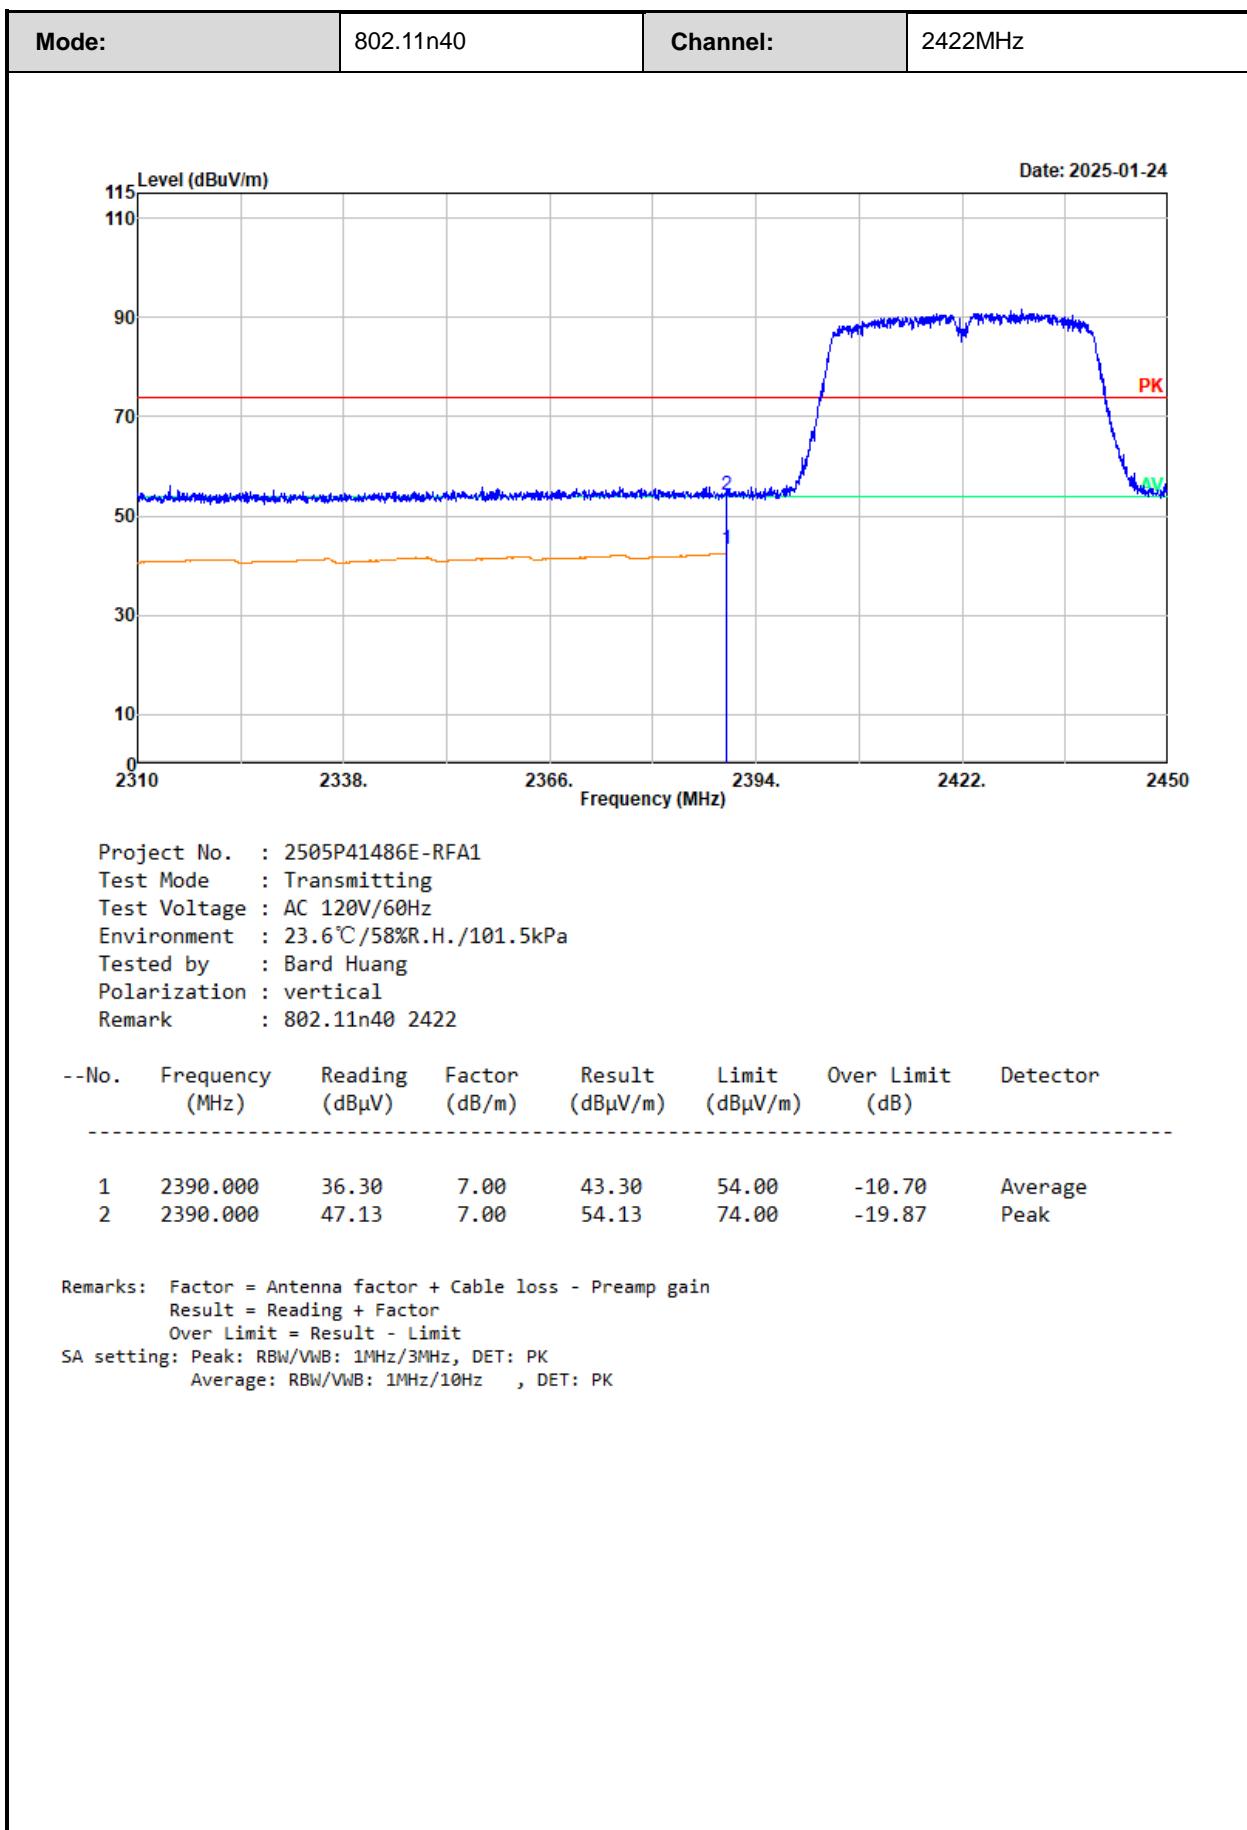

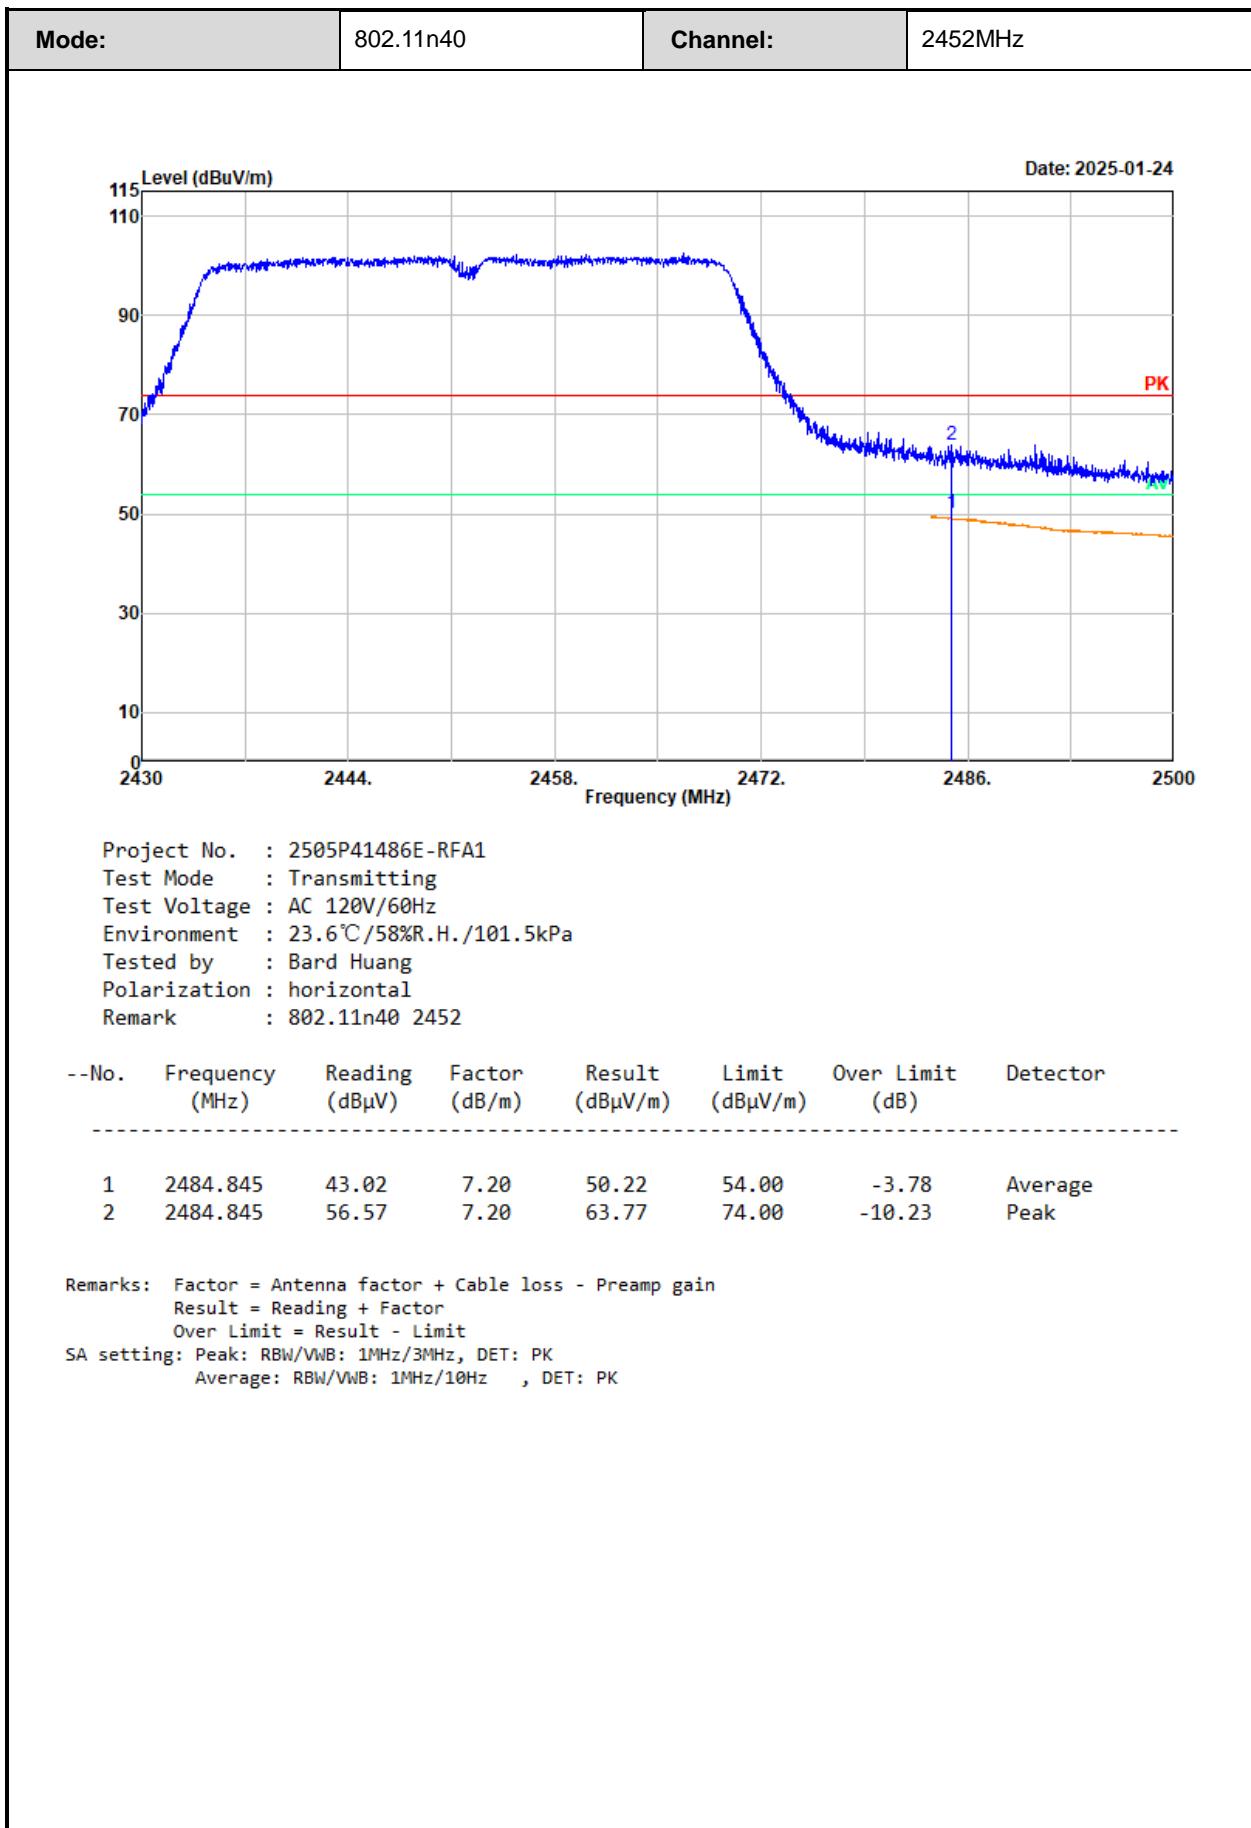

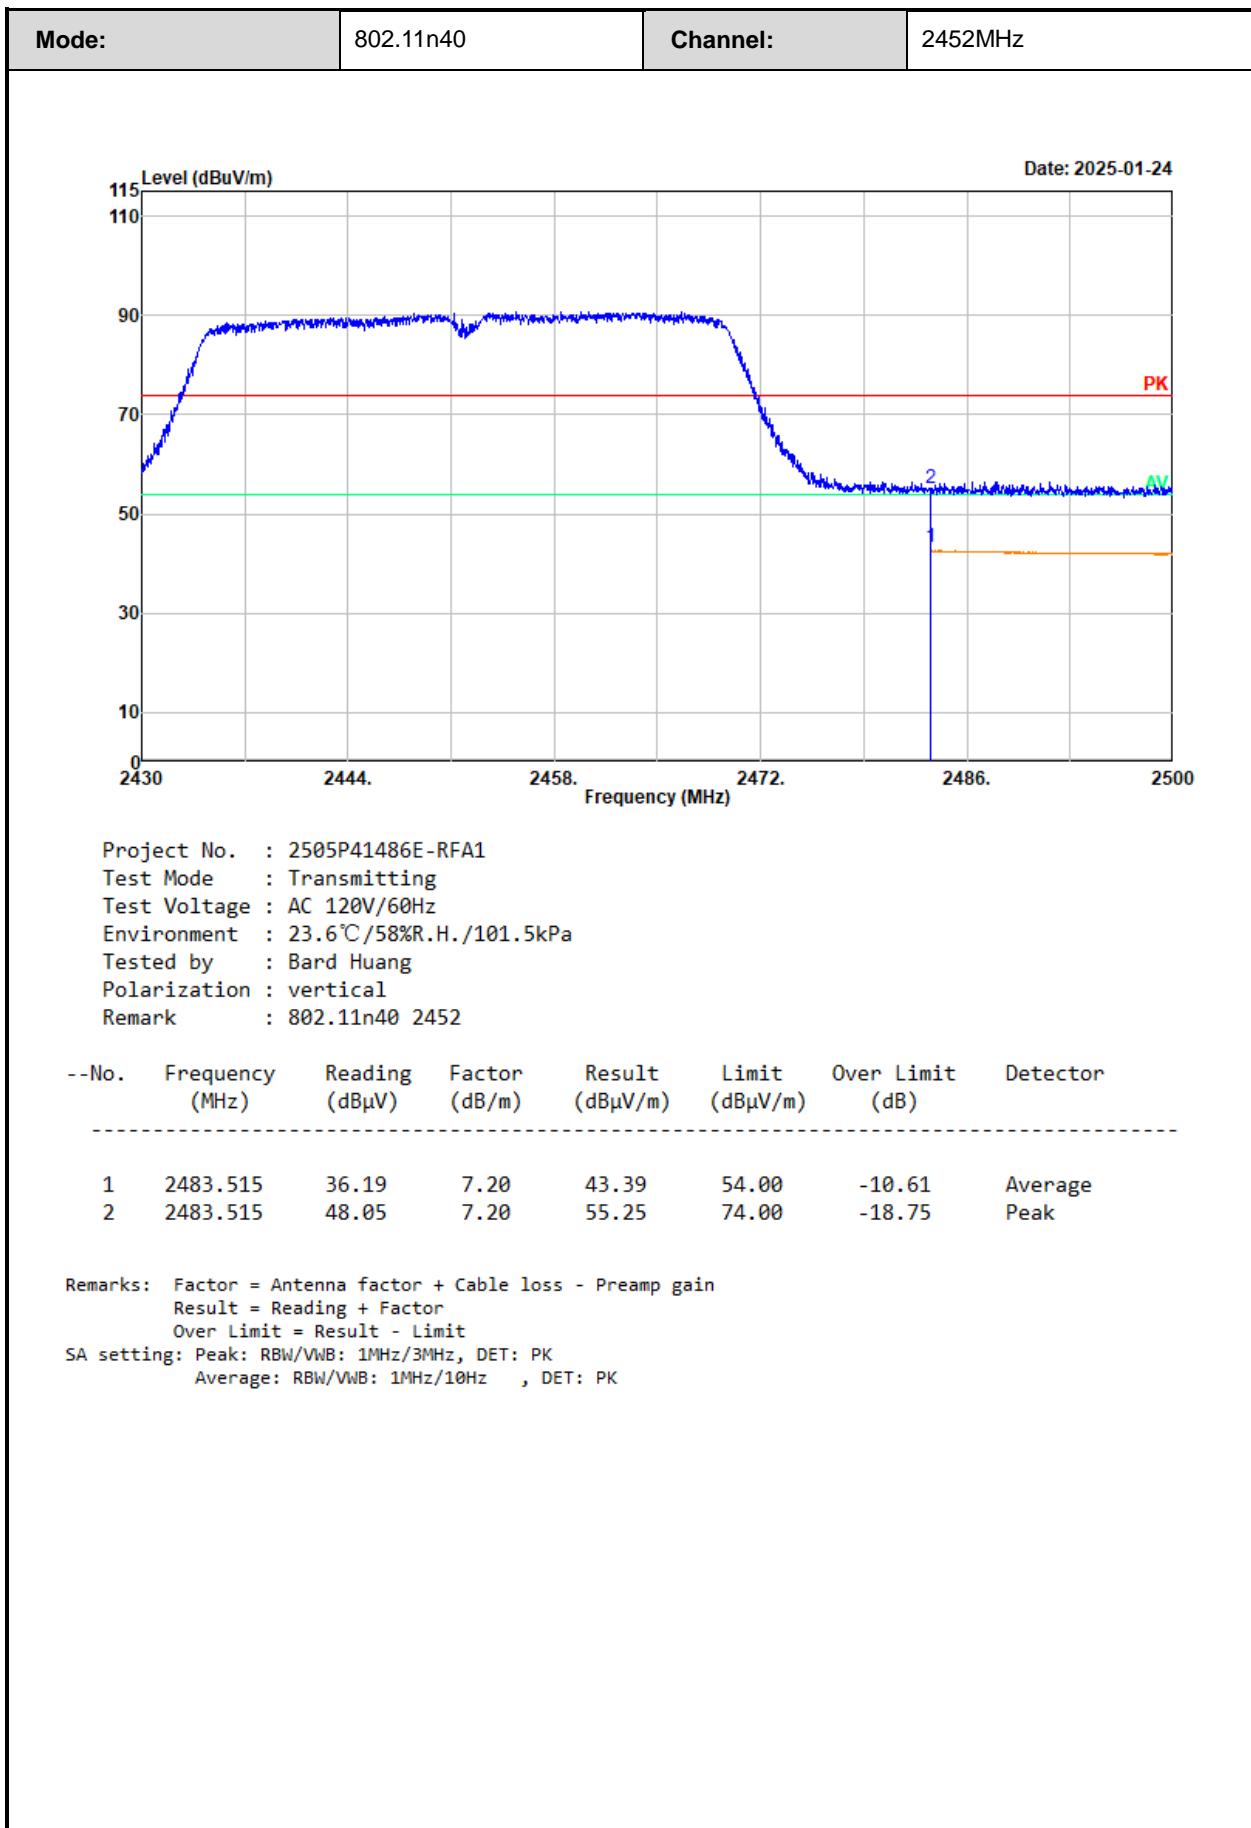

### 3.5 RF Conducted Test Data

<b>Test Date:</b>	2025-02-07~2025-02-20	<b>Test By:</b>	Ryan Zhang
<b>Environment condition:</b>	Temperature: 23.1~23.6°C; Relative Humidity:55~61%; ATM Pressure: 100.5~100.9kPa		

#### 3.5.1 Maximum Conducted Output Power

Mode	Test Frequency (MHz)	Peak Output Power(dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
802.11b	2412	14.04	30	16.32	36	Pass
	2437	14.50	30	16.78	36	Pass
	2462	15.03	30	17.31	36	Pass
802.11g	2412	16.08	30	18.36	36	Pass
	2437	16.43	30	18.84	36	Pass
	2462	16.56	30	19.39	36	Pass
802.11n20	2412	13.95	30	16.23	36	Pass
	2437	14.40	30	16.68	36	Pass
	2462	14.99	30	17.27	36	Pass
802.11n40	2422	14.10	30	16.38	36	Pass
	2437	14.22	30	16.50	36	Pass
	2452	14.42	30	16.70	36	Pass

## 4 Test Setup Photo

Please refer to the attachment 2505P41486E-A1Test Setup photo.

## 5 E.U.T Photo

Please refer to the attachment 2505P41486E-A1 External photo and 2505P41486E-A1 Internal photo.

**---End of Report---**