

Product Specifications sheet



Specification No.	20250905001
Effective date	2025/9/5

Customer Name:	艾小电 (ai xiao dian)
Product Model	Transparent - Type Coil
DZ Part No.	TX-DZ43.505.3008-K6.5-L35 (double-slotted)
Customer item No	AWIR0038

【 New issue , version revision 】

【 This specification includes contents and 4 pages in total 】 【 RoHS Compliant Parts 】

organize	Check	Approval
李平辉 Li ping hui	/	马湘平 Ma xiangping

Guang Dong Top Wiser Electronic Technology Co., Ltd

Factory address: Address; 1F, 1231 Yingbin Avenue, Longmen County
, Huizhou City, Guangdong Province

Tel: 13147097490

【 Within 30 days after the customer receives this acknowledgement, please return it with your signature and seal. If it is overdue, it will be deemed that the production will be carried out according to the standards of this acknowledgement 】.

【 customer approval 】

Date:

Recognition status: full recognition conditional recognition refusal

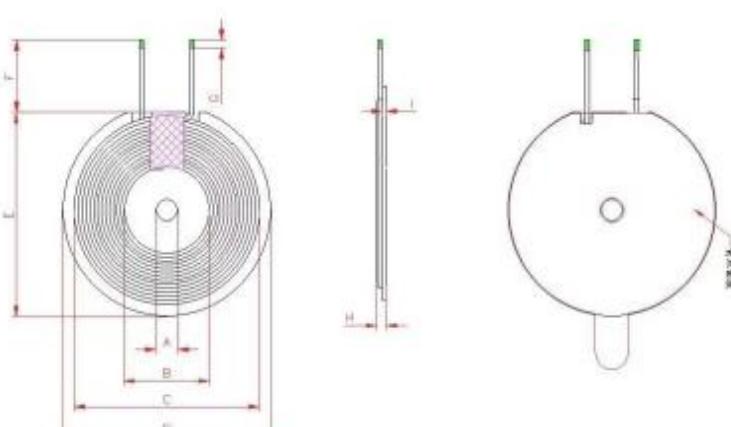
Approval	Review	Recheck	Check

remark:

Product Specifications sheet

Customer Name:	艾小电 (ai xiao dian)	item	A36-01303-47
DZ Part No.	TX-DZ43.505.3008-K6.5-L35	Specification No.	20250905001
Issue/Revision History			
Version	Effective date	Change content / reason	Approval
01	2025/9/5	New specification release	马湘平 Ma XiangPing
organize	check	approval	
李平辉 Li ping hui	/	马湘平 Ma XiangPing	

Product Specifications sheet

Customer Name:	艾小电 (ai xiao dian)		Customer item No	AWIR0038																				
DZ Part No	TX-DZ43.505.3008-K6.5-L35		Specification No	20250905001	Version	01																		
◆ Overall dimensions						(unit: mm)																		
						<table border="1"> <tr> <td>A</td><td>5.3 ±0.5</td></tr> <tr> <td>B</td><td>20.5 ±1.0</td></tr> <tr> <td>C</td><td>39.0 ±1.0</td></tr> <tr> <td>D</td><td>43.5 ±0.5</td></tr> <tr> <td>E</td><td>43.5 ±1.0</td></tr> <tr> <td>F</td><td>35.0 ±3.0</td></tr> <tr> <td>G</td><td>3.0 ±2.0</td></tr> <tr> <td>H</td><td>1.8 ±0.3</td></tr> <tr> <td>I</td><td>0.80 ±0.2 (Magnetic sheet thickness)</td></tr> </table>	A	5.3 ±0.5	B	20.5 ±1.0	C	39.0 ±1.0	D	43.5 ±0.5	E	43.5 ±1.0	F	35.0 ±3.0	G	3.0 ±2.0	H	1.8 ±0.3	I	0.80 ±0.2 (Magnetic sheet thickness)
A	5.3 ±0.5																							
B	20.5 ±1.0																							
C	39.0 ±1.0																							
D	43.5 ±0.5																							
E	43.5 ±1.0																							
F	35.0 ±3.0																							
G	3.0 ±2.0																							
H	1.8 ±0.3																							
I	0.80 ±0.2 (Magnetic sheet thickness)																							
(1) Wire diameter: 0.08 * 24P*2P enameled wire (2) Number of windings: 10TS (3) Whether the starting and ending lines cross: Yes (4) Not packaged with high - temperature adhesive (5) Apply a white adhesive with a 40- round large hole on the coil surface.																								
◆ Electrical characteristics::																								
parameter	specification		Test conditions	Test instrument																				
L0	6.5 ±10% μ H		100KHz/1V	■TH1816B																				
Q	>30 min		100KHz/1V	■TH1816B																				
DCR	<60 mΩ		@ 25°C	■CH-502BC																				
◆ Temperature class:																								
Operating temperature	-40°C ~ 125°C																							
◆ list of materials:																								
Item	Product Name	Material specification	Supplier	Remark																				
1	Magnetic sheet	43.5*5.3*0.8T开双槽 (double-slotted)		PC40																				
2	Copper wire	0.08*24*2P		enameled wire																				
3	tin	107H		ROHS																				
4	Double-sided tape	40White adhesive with a large round hole		ROHS																				
organize		check			approval																			
李平辉		/			马湘平 Ma Xiangping																			