



UHF TEST REPORT
FCC ID: 2A7ZC-SG20U

On Behalf of
GEOMATE POSITIONING PTE. LTD.
Geodetic GNSS Receiver
Model No.: SG20AR

Prepared for : GEOMATE POSITIONING PTE. LTD.
Address : 13 Tampines Lane #09-53 Singapore 528479

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2503163-C12-R04
Date of Receipt : April 10, 2025
Date of Test : April 10, 2025 – June 20, 2025
Date of Report : June 21, 2025
Version Number : V0
Result **Pass**

TABLE OF CONTENTS

Description	Page
1. Summary of Standards and Results -----	5
1.1. Description of Standards and Results -----	5
2. General Information -----	6
2.1. Description of Device (EUT) -----	6
2.2. Accessories of Device (EUT) -----	7
2.3. Tested Supporting System Details-----	7
2.4. Block Diagram of Connection between EUT and Simulators -----	7
2.5. Test Mode -----	8
2.6. Test Conditions-----	9
2.7. Test Facility-----	9
2.8. Measurement Uncertainty -----	10
2.9. Test Equipment List -----	11
3. Test Results and Measurement Data -----	15
3.1. Transmitter Power (Conducted)-----	15
3.2. Occupied Bandwidth and Emission Mask -----	21
3.3. Spurious Emissions(conducted) -----	31
3.4. Radiated Spurious Emission -----	34
3.5. Transient Frequency Behavior -----	40
3.6. Behavior Frequency Stability -----	42
3.7. Modulation Characteristic-----	45
3.8. Adjacent Channel Power -----	46
4. Test Setup Photo -----	49
4.1. Photos of Radiated Emission -----	49

TEST REPORT DECLARATION

Applicant : GEOMATE POSITIONING PTE. LTD.
Address : 13 Tampines Lane #09-53 Singapore 528479
Manufacturer : GEOMATE POSITIONING PTE. LTD.
Address : 13 Tampines Lane #09-53 Singapore 528479
EUT Description : Geodetic GNSS Receiver
(A) Model No. : SG20AR
(B) Trademark : 

Measurement Standard Used:

FCC CFR Title 47 Part 90, FCC CFR Title 47 Part 2

ANSI TIA-603-E:2016

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 2, Part 90 limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Jack Xu
Project Manager



Date of issue.....: June 21, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	June 21, 2025	Initial released Issue	Yannis Wen

1. Summary of Standards and Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Test Requirement	Standards Paragraph	Result
Transmitter Power(Conducted)	FCC PART 90	§ 90.205,	P
Occupied Bandwidth & Emission Mask	FCC PART 90	§ 90.209, § 90.210	P
Spurious Emissions(conducted)	FCC PART 90	§ 90.210,	P
Spurious Emissions(Radiated)	FCC PART 90	§ 90.210,	P
Transient Frequency Behavior	FCC PART 90	§ 90.214,	P
Frequency Stability	FCC PART 90	§ 90.213,	P
Modulation Characteristics - Audio Frequency Response	FCC PART 2 FCC PART 90	§ 2.1047(a), § 90.207	N/A
Modulation Characteristics - Modulation Limiting	FCC PART 2 FCC PART 90	§ 2.1047(b), § 90.207	N/A
Adjacent channel power	FCC PART 90	§90.221	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.			

2. General Information

2.1. Description of Device (EUT)

Description	: Geodetic GNSS Receiver
Model Number	: SG20AR
DIFF.	: N/A
Test Voltage	: DC 7.2V from battery and DC 5V form adapter

UHF

Operation frequency	: 410MHz-470MHz
Conducted Power	: 0.5W(26.99±1dBm), 1W(30.00±1dBm)
Channel spacing	: 12.5KHz, 25KHz
Modulation type	: GMSK
Antenna Type	: Whip Antenna, Maximum Gain is 2dBi. (Antenna information is provided by applicant.)
Software version	: V1.0
Hardware version	: V1.3.0
Intend use environment	: Residential, commercial and light industrial environment

Note: All Conducted Power have been tested, and recorded the worst case 1W(30.00±1dBm) results in this report.


2.2. Accessories of Device (EUT)

Accessories	:	AC Adapter
Manufacturer	:	Yisheng Electronics Co., LTD
Model	:	EA1012AVRU-050
Ratings	:	AC Input: 100-240Vac, 1.0A, 50~60Hz DC Output: 5.0V=2.4A 12.0W

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Notebook PC	Lenovo	ThinkPad L14	/	/

2.4. Block Diagram of Connection between EUT and Simulators



The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

2.5. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Item	Description of operation mode	Note
1	GMSK+CS12.5KHz+TX	at maximum rated power for transmitter
2	GMSK+CS25KHz+TX	at maximum rated power for transmitter

Note: The worst case modes for all test are the item 1 and item 2.

Description Operation Frequency

GMSK		
Test Channel	Channel spacing (KHz)	Frequency(MHz)
Low	12.5	410.050
	25	410.050
Mid	12.5	440.000
	25	440.000
High	12.5	469.950
	25	469.950

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293631

July 15, 2019 Certificated by IC
Registration Number: 12135A

SHENZHEN STS TEST SERVICES CO., LTD

101, Building B, Zhouke Science Park, No. 190 Chongqing Road, Zhancheng Shequ, Fuhai Sub-District,
Ban'an District, Shenzhen, Guangdong, China

FCC Registration No.: 625569; A2LA Certificate No.:4338.01.

Note: Except for the Transient Frequency Behavior projects that were completed in SHENZHEN STS TEST SERVICES CO., LTD, all other projects were completed in Shenzhen Alpha Product Testing Co., Ltd

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Shenzhen Alpha Product Testing Co., Ltd

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	4Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	4Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2024.07.15	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

SHENZHEN STS TEST SERVICES CO., LTD

RF Radiation Test Equipment						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
1	Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
2	Wireless Communications Test Set	R&S	CMW 500	117239	2024.09.23	2025.09.22
3	Pre-Amplifier(0.1 M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
4	Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018 G-45	SK2018080901	2024.09.23	2025.09.22
5	Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
6	Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
7	Switch Control Box	N/A	N/A	N/A	N/A	N/A
8	Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
9	Video Controller	SKET	FCS C-3	N/A	N/A	N/A
10	Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
11	Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2024.09.25	2025.09.24
12	Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
13	Turn Table	MF	N/A	N/A	N/A	N/A
14	AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
15	DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
16	Test SW	EMC Test Software	15.2.0.339			

SHENZHEN STS TEST SERVICES CO., LTD


RF Connected Test Equipment						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
1	Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
2	Universal Radio Communication Tester	R&S	CMU200	119907	2025.02.22	2026.02.21
3	MXG Vector Signal Generator	Keysight	N5182B	MY57301448	2024.09.23	2025.09.22
4	Signal Analyzer	Keysight	N9020A	MY52440124	2025.02.22	2026.02.21
5	Intercom comprehensive tester	HP	8920A	348A05658	2025.02.22	2026.02.21
6	Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
7	Attenuator	HP	8494B	DC-18G	2025.02.25	2026.02.24
8	AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
9	DC Power Supply	Agilent	E3642A	MY40002025	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	farad	Alpha-3A1
CE	EZ-EMC	farad	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Test Results and Measurement Data

3.1. Transmitter Power (Conducted)

3.1.1. Test Specification

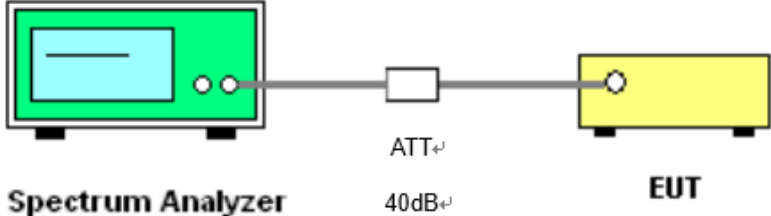Test Requirement:	Part 90.205
Test Method:	FCC part 2.1046
Limits:	Please refer section FCC Part 90.205
Test Setup:	 The diagram illustrates the test setup. On the left is a green Spectrum Analyzer with a blue screen. A cable connects its output to a white rectangular block labeled 'ATT' (Attenuator) with '40dB' below it. Another cable connects the attenuator to a yellow rectangular block labeled 'EUT' (Equipment Under Test).
Test Procedure:	a) Connect the equipment as illustrated. b) Turn on the Spectrum Analyzer c) Record value
Test Result:	PASS

3.1.2. Test Results

GMSK mode (0.5W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	27.735	27.585	28.00	26.99±1	PASS
25	410.050	27.505	27.355	28.00	26.99±1	PASS
12.5	440.000	27.933	27.783	28.00	26.99±1	PASS
25	440.000	27.928	27.778	28.00	26.99±1	PASS
12.5	469.950	27.472	27.322	28.00	26.99±1	PASS
25	469.950	27.236	27.086	28.00	26.99±1	PASS

Note: 1. Maximum ERP= Maximum Conducted Output Power(Peak) + Antenna Gain – 2.15dB


GMSK mode (1W):						
Channel spacing (KHz)	Frequency (MHz)	Maximum Conducted Output Power(Peak) (dBm)	Maximum ERP (dBm)	Stated ERP Power (dBm)	Conducted Output Power Limit (dBm)	Result
12.5	410.050	30.513	30.363	31.00	30±1	PASS
25	410.050	30.431	30.281	31.00	30±1	PASS
12.5	440.000	30.164	30.014	31.00	30±1	PASS
25	440.000	30.012	29.862	31.00	30±1	PASS
12.5	469.950	30.540	30.390	31.00	30±1	PASS
25	469.950	30.485	30.335	31.00	30±1	PASS

Note: 1. Maximum ERP= Maximum Conducted Output Power(Peak) + Antenna Gain – 2.15dB


Test plots as follows:

GMSK 0.5W 12.5KHz Channel Spacing: Transmitter Power


Low: 410.050MHz

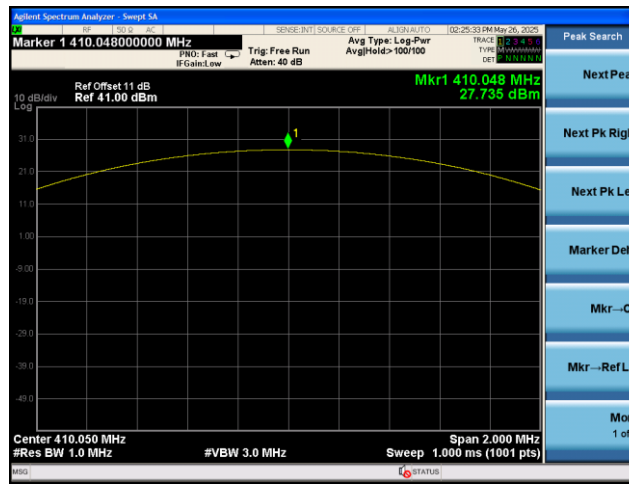

Mid: 440.000MHz

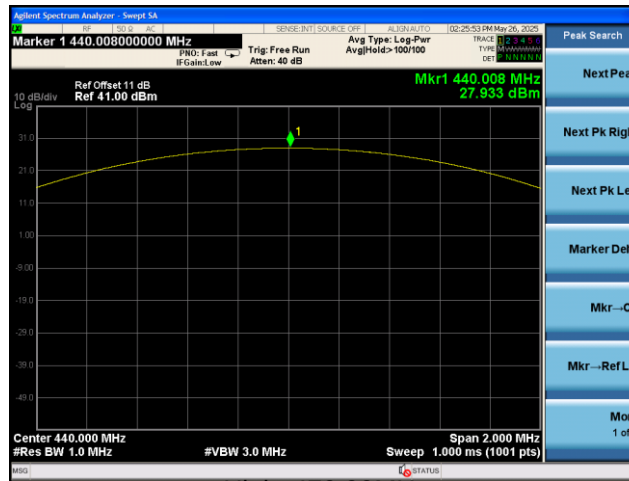


High: 470.00MHz

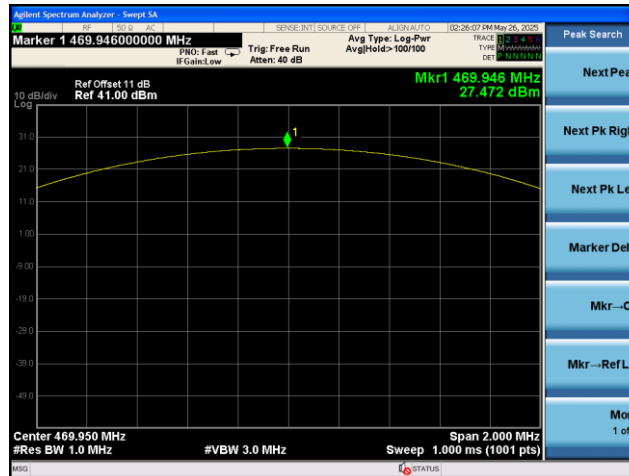


GMSK 0.5W 25KHz Channel Spacing: Transmitter Power


Low: 410.050MHz

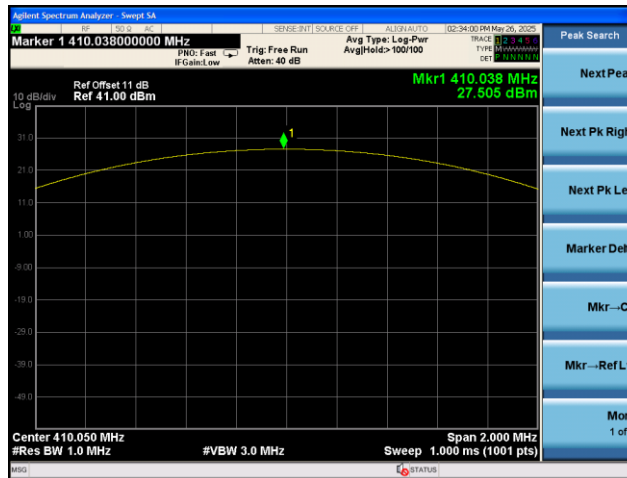

Mid: 440.000MHz

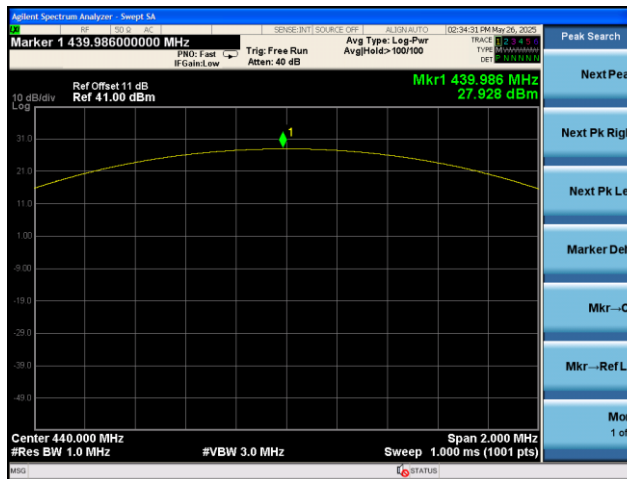


High: 470.00MHz

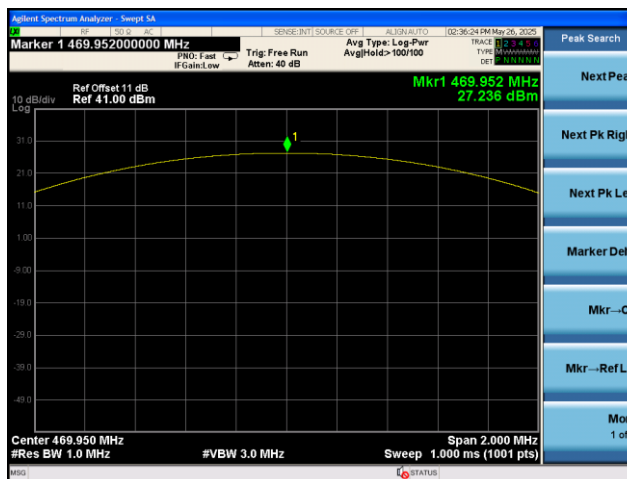


GMSK 1W 12.5KHz Channel Spacing: Transmitter Power


Low: 410.050MHz

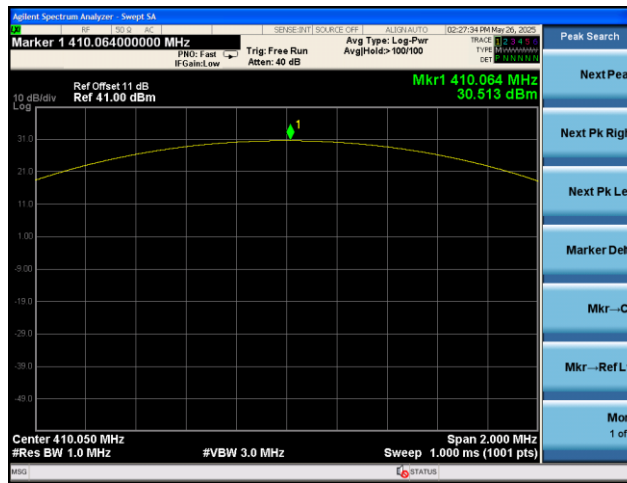

Mid: 440.000MHz

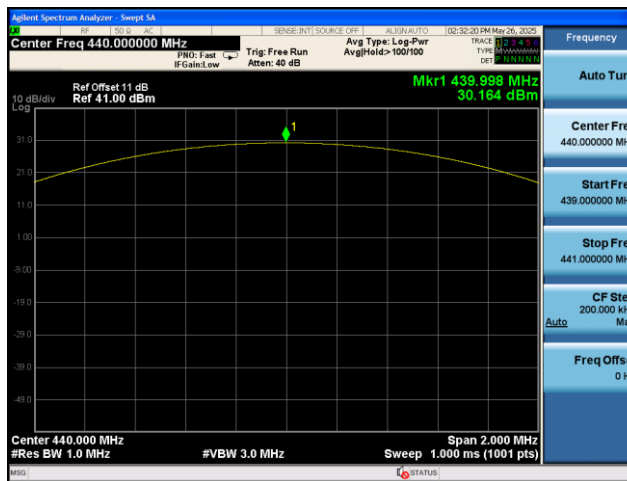


High: 470.00MHz

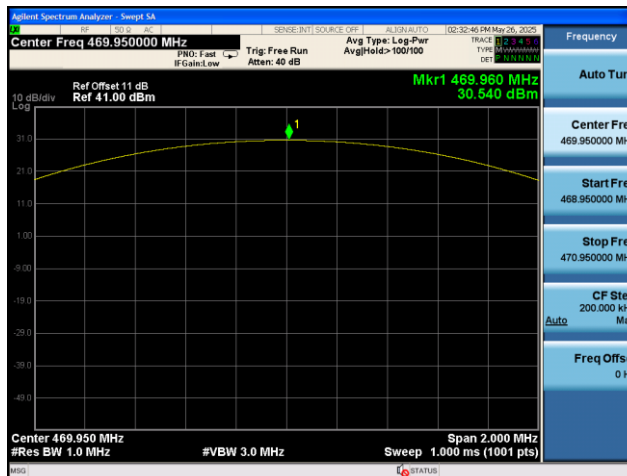


GMSK 1W 25KHz Channel Spacing: Transmitter Power


Low: 410.050MHz

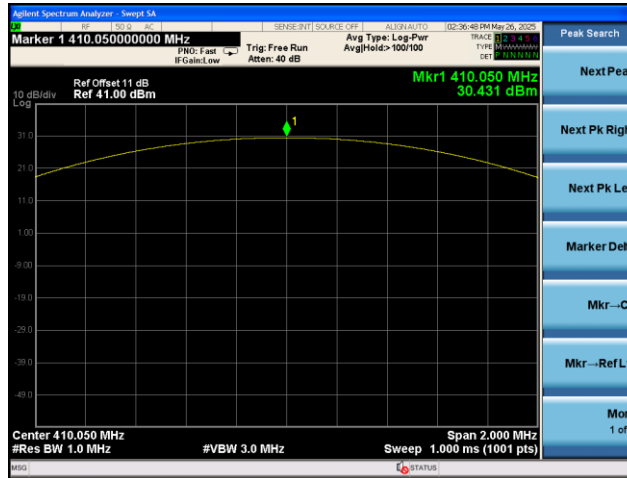

Mid: 440.000MHz

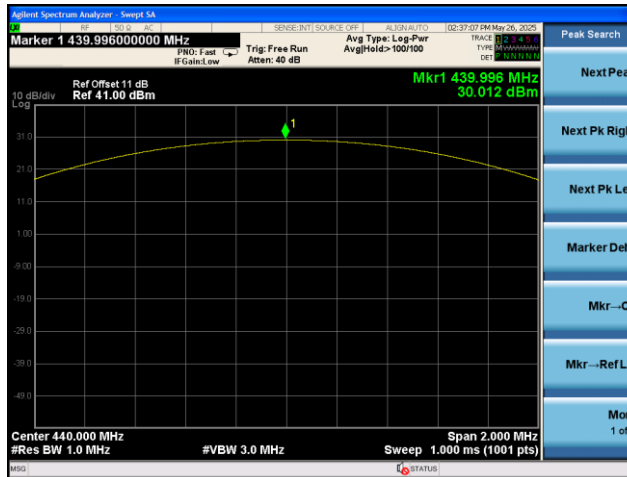


High: 470.00MHz

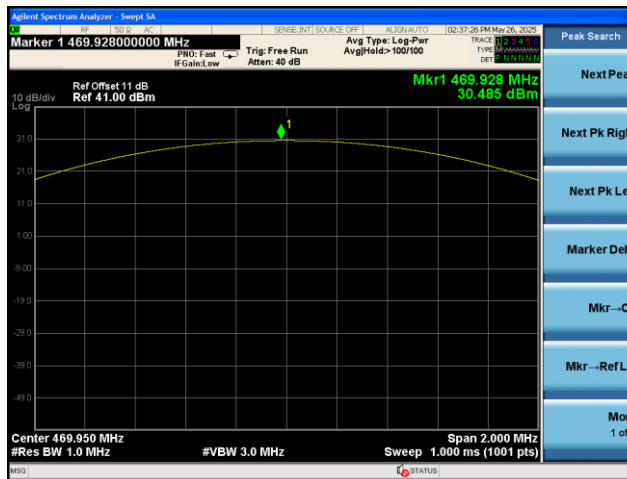

3.2. Occupied Bandwidth and Emission Mask

3.2.1. Test Specification

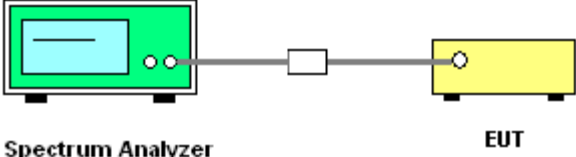Test Requirement:	FCC Part 90.209, FCC Part 90.210
Test Setup:	 The diagram illustrates the test setup. On the left is a green rectangular box representing the Spectrum Analyzer, with a blue screen and two small circles representing ports. A grey cable connects this box to a small white square, which then connects to a yellow rectangular box on the right representing the EUT (Equipment Under Test). Below the green box is the label 'Spectrum Analyzer' and below the yellow box is the label 'EUT'.
Test Procedure:	The resolution bandwidth of the spectrum analyzer was set at 300 Hz and the spectrum was recorded in the Frequency band $\pm 50\text{KHz}$ from the carrier frequency for Occupied Bandwidth, the resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the Frequency band $\pm 100\text{KHz}$ from the carrier frequency for Emission Mask.
Test Result:	PASS

3.2.2. Test Data

Occupied Bandwidth:

GMSK mode (0.5W) 12.5KHz Channel Spacing:

Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	7.233	5.934	11.25	PASS
Mid	440.000	6.474	5.969	11.25	PASS
High	469.950	6.406	5.955	11.25	PASS

GMSK mode (0.5W) 25KHz Channel Spacing:

Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	12.07	11.206	20	PASS
Mid	440.000	11.97	11.241	20	PASS
High	469.950	11.91	11.164	20	PASS

GMSK mode (1W) 12.5KHz Channel Spacing:

Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	6.540	5.953	11.25	PASS
Mid	440.000	6.782	5.983	11.25	PASS
High	469.950	6.400	5.946	11.25	PASS

GMSK mode (1W) 25KHz Channel Spacing:

Channel	Frequency (MHz)	26dB Bandwidth (KHz)	99% Occupied Bandwidth (KHz)	99% Occupied Bandwidth Limit (KHz)	Result
Low	410.050	11.99	11.233	20	PASS
Mid	440.000	11.96	11.255	20	PASS
High	469.950	12.00	11.217	20	PASS

Emission Mask:

GMSK mode (1W) 12.5KHz Channel Spacing:				
Channel	Frequency (MHz)	Applicable Mask	RBW	Result
Low	410.050	D	100Hz	PASS
Mid	440.000	D	100Hz	PASS
High	469.950	D	100Hz	PASS

GMSK mode (1W) 25KHz Channel Spacing:				
Channel	Frequency (MHz)	Applicable Mask	RBW	Result
Low	410.050	C	300Hz	PASS
Mid	440.000	C	300Hz	PASS
High	469.950	C	300Hz	PASS


Test plots as follows:

GMSK mode (0.5W) 12.5KHz Channel Spacing: Occupied Bandwidth

Low: 410.050MHz



Mid: 440.000MHz

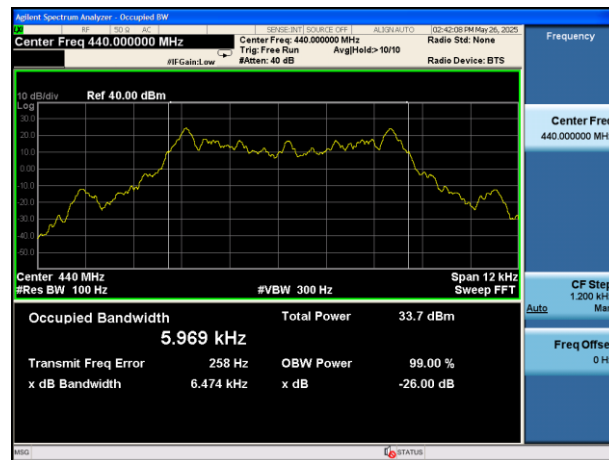


High: 470.00MHz




GMSK mode (0.5W) 25KHz Channel Spacing: Occupied Bandwidth


Low: 410.050MHz

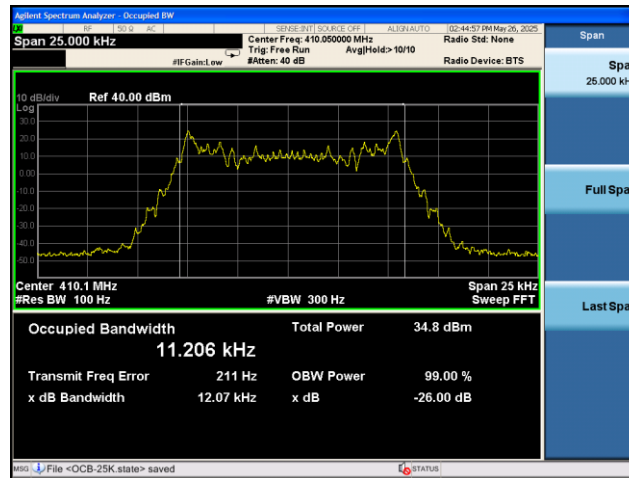

Mid: 440.000MHz

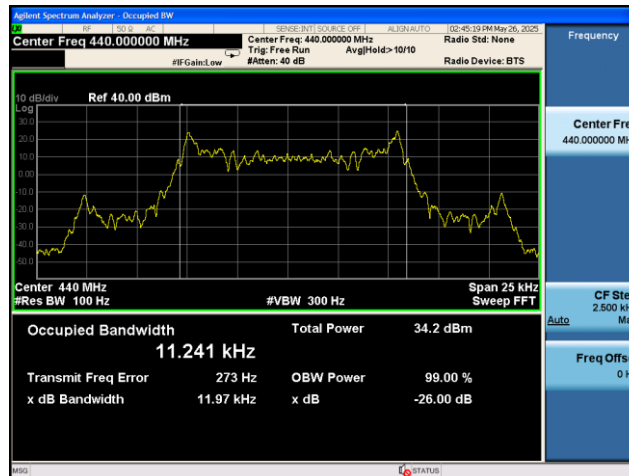

High: 469.850MHz

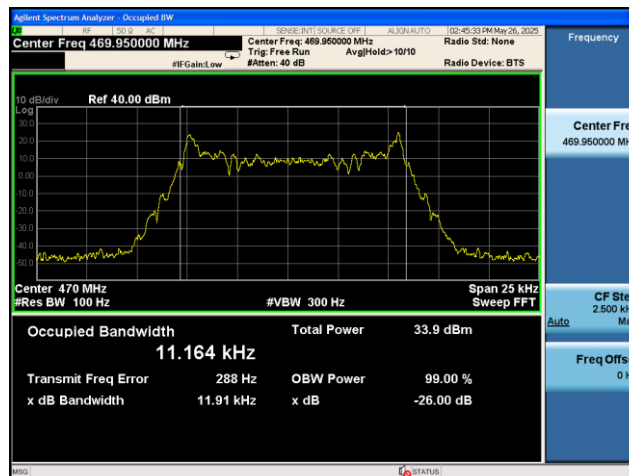


GMSK mode (1W) 12.5KHz Channel Spacing: Occupied Bandwidth

Low: 410.050MHz



Mid: 440.000MHz

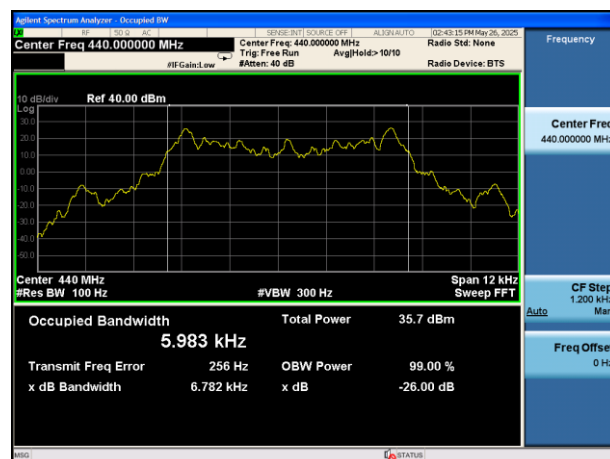


High: 470.00MHz




GMSK mode (1W) 25KHz Channel Spacing: Occupied Bandwidth


Low: 410.050MHz

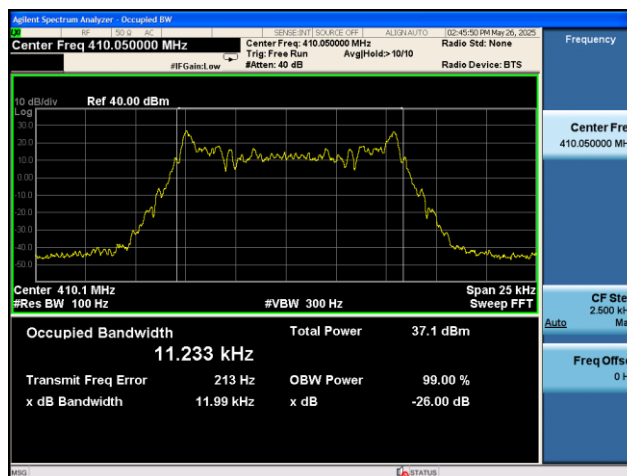

Mid: 440.000MHz

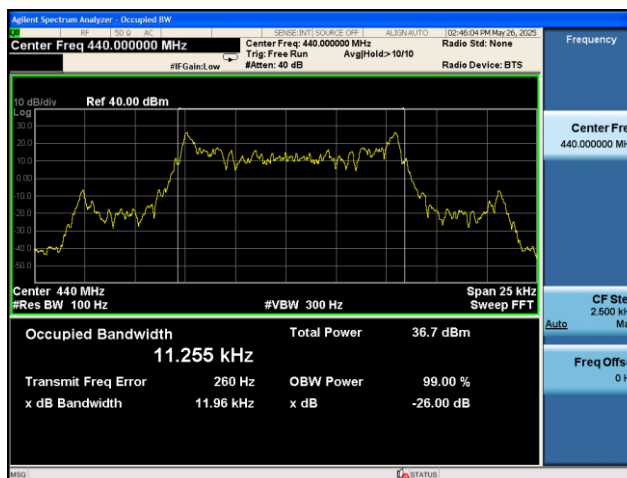


High: 469.850MHz

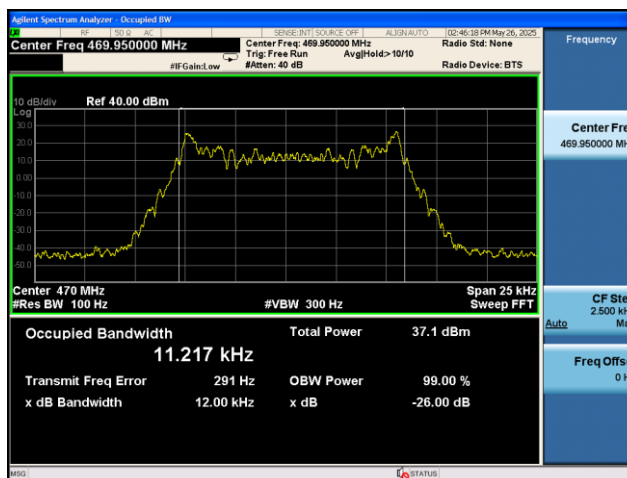


GMSK mode (1W) 12.5KHz Channel Spacing: Emission Mask


Low: 410.050MHz

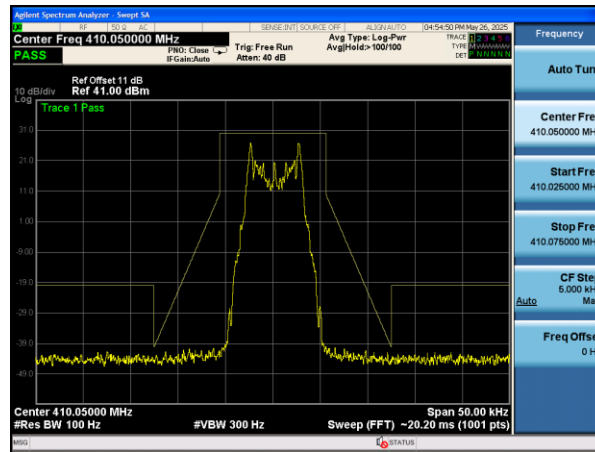

Mid: 440.000MHz

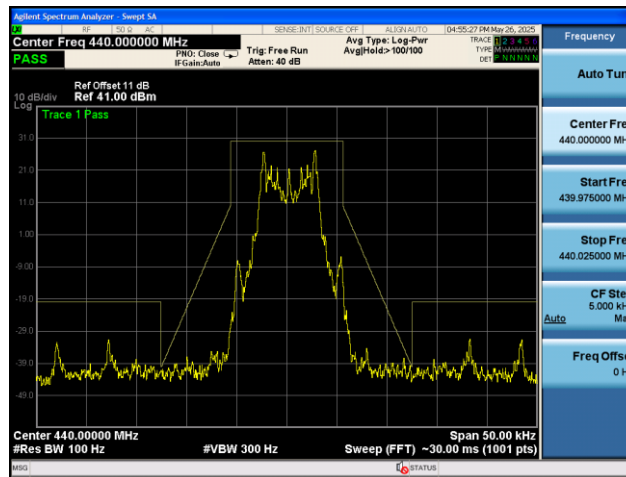


High: 469.950MHz

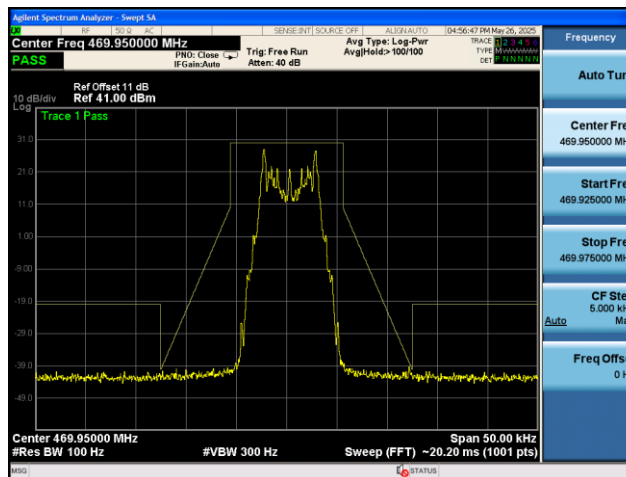


GMSK mode (1W) 25KHz Channel Spacing: Emission Mask


Low: 410.050MHz

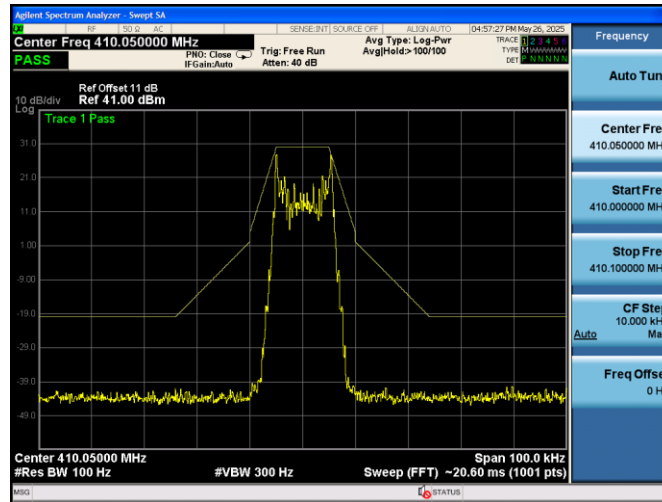

Mid: 440.000MHz

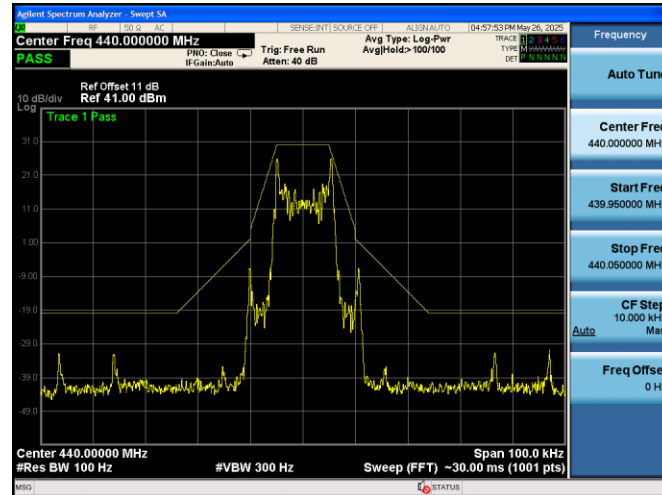


High: 469.950MHz

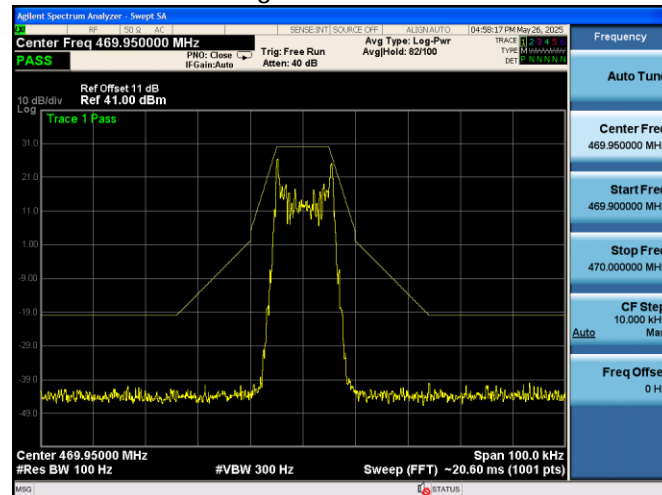

3.3. Spurious Emissions(conducted)

3.3.1. Test Specification


Test Requirement:	FCC Part 90.210
Test Setup:	 Spectrum Analyzer EUT
Test Limit:	Modulation Type: GMSK FCC Part 22.359, 74.462, 80.211 and 90.210: For 6.25 bandwidth: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 4.6 kHz at least: $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation. Calculation: Limit (dBm) = $EL - 55 - 10 \log_{10} (TP)$ Notes: EL is the emission level of the Output Power expressed in dBm, For 12.5 bandwidth: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least: $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation. $50 + 10 \log (P \text{ watts}) = 50 + 10 \log (2) = 50$ dB Note: In general, the worst case attenuation requirement shown above was applied. Calculation: Limit (dBm) = $EL - 50 - 10 \log_{10} (TP)$ Notes: EL is the emission level of the Output Power expressed in dBm, In this application, the EL is 30 dBm for High rated power. Limit (dBm) = $30 - 50 - 10 \log (2) = -20$ dBm For 25 kHz bandwidth: On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 62.5 kHz at least: $43 + 10 \log (P \text{ watts}) = 43 + 10 \log (2) = 43$ dB Note: In general, the worst case attenuation requirement shown above was applied. Calculation: Limit (dBm) = $EL - 43 - 10 \log_{10} (TP)$ In this application, the EL is 30 dBm for High rated power. Limit (dBm) = $30 - 43 - 10 \log (2) = -13$ dBm Note: 1. In general, the worst case attenuation requirement shown above was applied. For emission inside from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of channel spacing, emission mask limit should be compliant. 2. The measurement frequency range from 9 KHz to 5 GHz. 3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit. 4. ERP for below 1GHz and EIRP above 1GHz.
Test Result:	PASS

3.3.2. Test Data


Test plots as follows:

GMSK 12.5KHz Channel Spacing:


Low: 410.050MHz

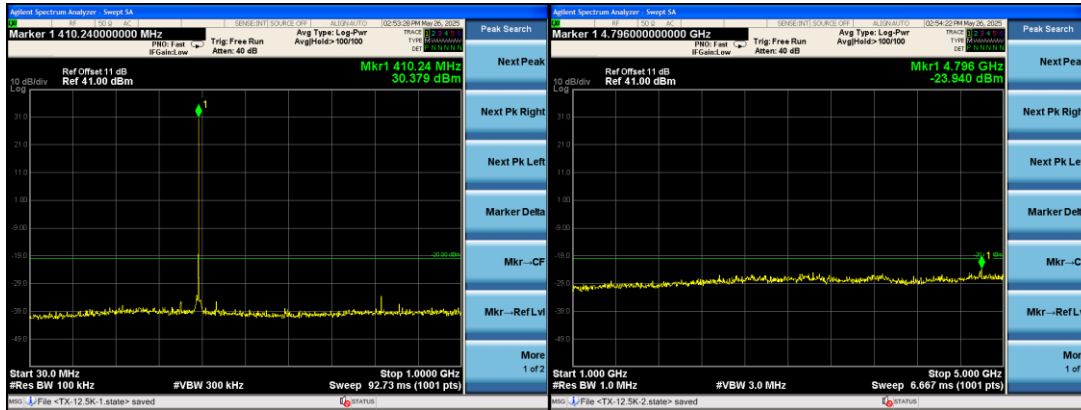

Mid: 440.000MHz

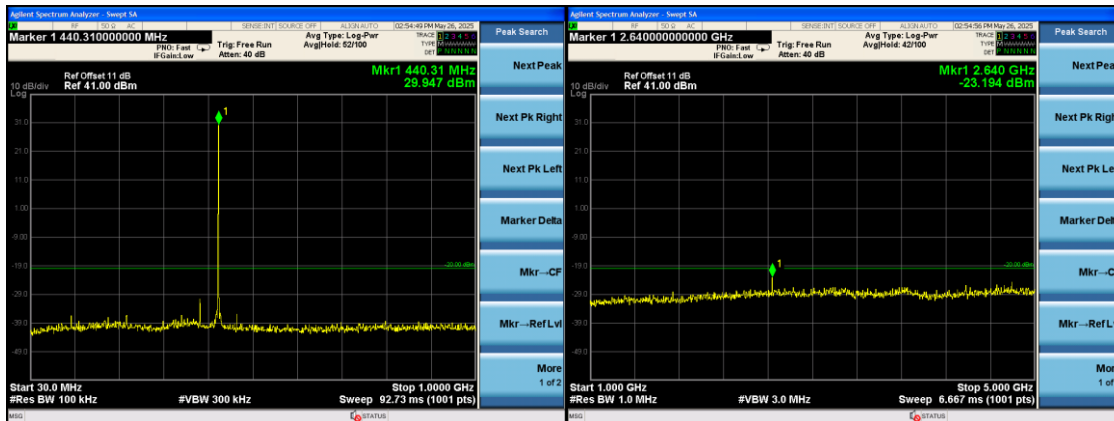


High: 469.950MHz

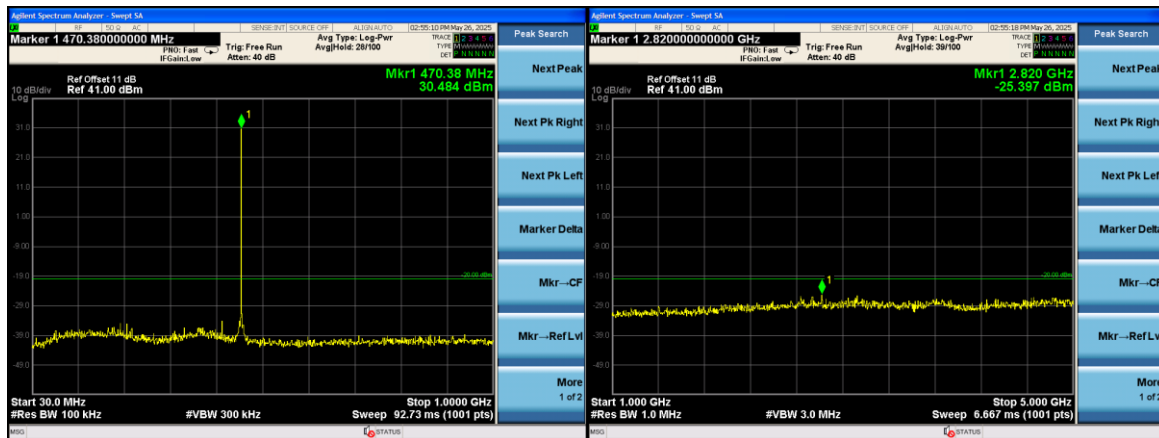


GMSK 25KHz Channel Spacing:


Low: 410.050MHz

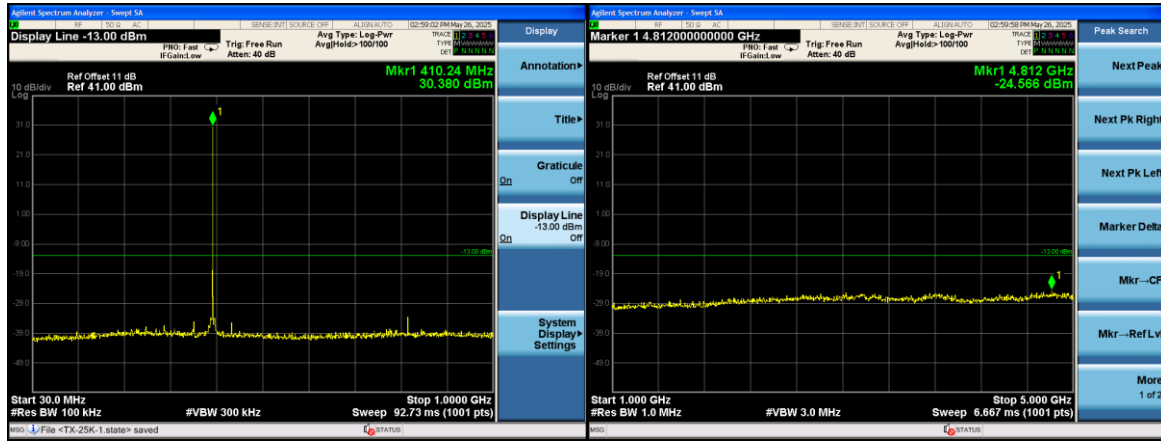

Mid: 440.000MHz

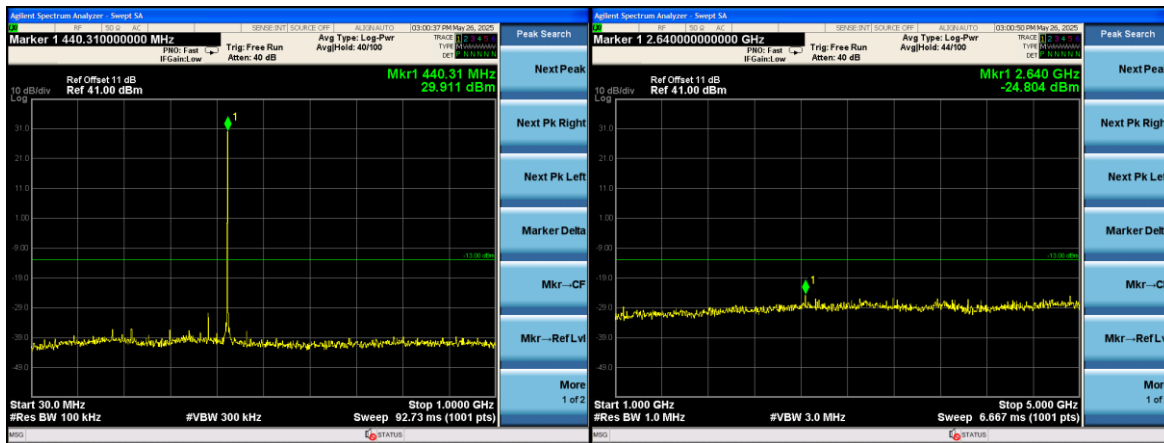


High: 469.950MHz

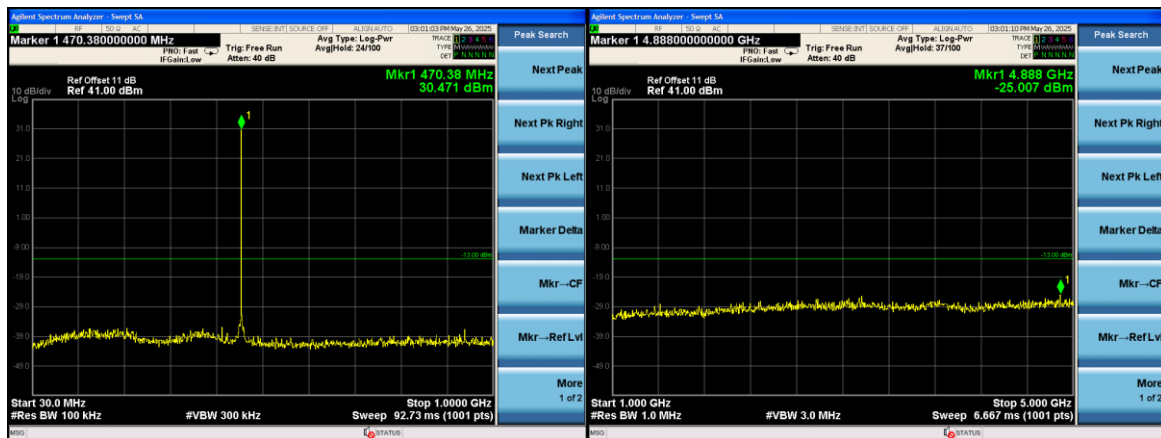

3.4. Radiated Spurious Emission

3.4.1. Test Specification

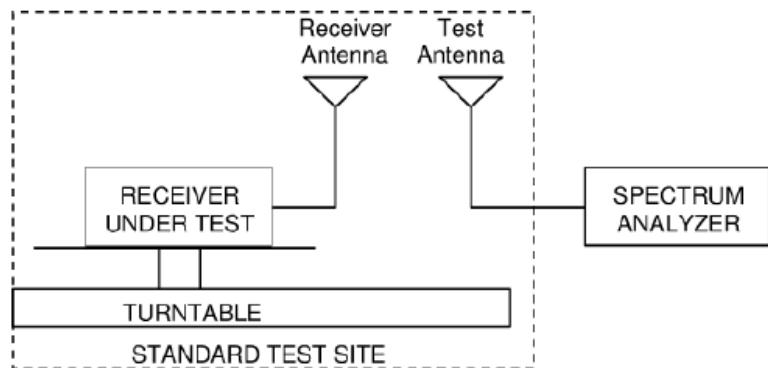Test Requirement:	FCC Part 90.210															
Test Method:	ANSI C63.26															
Measurement Distance:	3 m															
Antenna Polarization:	Horizontal & Vertical															
Operation mode:	Refer to item 4.1															
Receiver Setup:	<table><tr><td>Frequency</td><td>RBW</td><td>VBW</td></tr><tr><td>9kHz- 150kHz</td><td>200Hz</td><td>1kHz</td></tr><tr><td>150kHz- 30MHz</td><td>9kHz</td><td>30kHz</td></tr><tr><td>30MHz-1GHz</td><td>100KHz</td><td>300KHz</td></tr><tr><td>Above 1GHz</td><td>1MHz</td><td>3MHz</td></tr></table>	Frequency	RBW	VBW	9kHz- 150kHz	200Hz	1kHz	150kHz- 30MHz	9kHz	30kHz	30MHz-1GHz	100KHz	300KHz	Above 1GHz	1MHz	3MHz
Frequency	RBW	VBW														
9kHz- 150kHz	200Hz	1kHz														
150kHz- 30MHz	9kHz	30kHz														
30MHz-1GHz	100KHz	300KHz														
Above 1GHz	1MHz	3MHz														
Limit:	For equipment using 25 kHz channel spacing, on any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10\log (P)$ dB. For equipment using 12.5 kHz channel spacing, on any frequency removed from the center of The authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation. For equipment using 6.25 kHz channel spacing, On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.															
Test setup:	 The diagram illustrates the test setup within a 'STANDARD TEST SITE' (indicated by a dashed box). A 'RECEIVER UNDER TEST' is positioned on a 'TURNTABLE'. A 'Receiver Antenna' is connected to the receiver, and a 'Test Antenna' is connected to a 'SPECTRUM ANALYZER'. The receiver and antenna are connected by a line, and the test antenna is connected to the spectrum analyzer.															
Test Procedure:	The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT .The test was performed by placing the EUT on 3-orthogonal axis.															

	The frequency range up to teeth harmonic of the fundamental frequency was investigated. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Spurious emissions in dB =10, 1g (TXpwr in Watts/0.001)-the absolute level
Test results:	PASS

3.4.2. Test Data

GMSK:

Test Mode: Low: 410.050MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
152.730	-90.653	V	0.24	31.35	-59.543	-20	-39.543
360.181	-93.285	V	0.26	31.34	-62.205	-20	-42.205
675.117	-94.889	V	0.42	31.24	-64.069	-20	-44.069
818.583	-93.063	V	0.58	30.71	-62.933	-20	-42.933
1230.570	-85.273	V	1.23	26.38	-60.123	-20	-40.123
3866.042	-81.739	V	1.68	25.47	-57.949	-20	-37.949
284.167	-97.217	H	0.43	31.24	-66.407	-20	-46.407
397.059	-94.886	H	0.45	30.68	-64.656	-20	-44.656
675.439	-97.689	H	0.64	30.85	-67.479	-20	-47.479
821.683	-100.280	H	0.79	31.12	-69.950	-20	-49.950
1231.677	-83.533	H	1.29	26.12	-58.703	-20	-38.703
3259.872	-83.256	H	1.62	25.41	-59.466	-20	-39.466

Test Mode: Mid: 440.000MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
152.833	-96.069	V	0.24	31.35	-64.959	-20	-44.959
366.528	-94.397	V	0.26	31.34	-63.317	-20	-43.317
667.794	-101.319	V	0.42	31.24	-70.499	-20	-50.499
881.970	-93.086	V	0.58	30.71	-62.956	-20	-42.956
1320.357	-87.499	V	1.23	26.38	-62.349	-20	-42.349
3856.892	-78.860	V	1.68	25.47	-55.070	-20	-35.070
288.254	-96.152	H	0.43	31.24	-65.342	-20	-45.342
398.536	-94.960	H	0.45	30.68	-64.730	-20	-44.730
682.189	-97.484	H	0.64	30.85	-67.274	-20	-47.274
877.640	-99.997	H	0.79	31.12	-69.667	-20	-49.667
1321.772	-88.655	H	1.29	26.12	-63.825	-20	-43.825
3262.627	-83.390	H	1.62	25.41	-59.600	-20	-39.600

Test Mode: High: 469.950MHz, Channel Spacing 12.5KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
152.790	-92.797	V	0.24	31.35	-61.687	-20	-41.687
363.139	-95.917	V	0.26	31.34	-64.837	-20	-44.837
673.532	-99.229	V	0.42	31.24	-68.409	-20	-48.409
941.772	-97.464	V	0.58	30.71	-67.334	-20	-47.334
1412.748	-86.056	V	1.23	26.38	-60.906	-20	-40.906
3860.025	-80.217	V	1.68	25.47	-56.427	-20	-36.427
291.822	-95.744	H	0.43	31.24	-64.934	-20	-44.934
407.092	-92.643	H	0.45	30.68	-62.413	-20	-42.413
677.837	-97.408	H	0.64	30.85	-67.198	-20	-47.198
942.223	-99.394	H	0.79	31.12	-69.064	-20	-49.064
1412.006	-85.690	H	1.29	26.12	-60.860	-20	-40.860
3263.069	-81.445	H	1.62	25.41	-57.655	-20	-37.655

Test Mode: Low: 410.050MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
146.672	-95.309	V	0.24	31.35	-64.199	-13	-51.199
357.994	-93.879	V	0.26	31.34	-62.799	-13	-49.799
675.550	-94.365	V	0.42	31.24	-63.545	-13	-50.545
821.406	-94.191	V	0.58	30.71	-64.061	-13	-51.061
1233.258	-83.225	V	1.23	26.38	-58.075	-13	-45.075
3858.026	-81.810	V	1.68	25.47	-58.020	-13	-45.020
286.132	-91.201	H	0.43	31.24	-60.391	-13	-47.391
403.930	-98.665	H	0.45	30.68	-68.435	-13	-55.435
675.896	-93.110	H	0.64	30.85	-62.900	-13	-49.900
817.223	-92.432	H	0.79	31.12	-62.102	-13	-49.102
1227.915	-81.857	H	1.29	26.12	-57.027	-13	-44.027
3256.600	-81.543	H	1.62	25.41	-57.753	-13	-44.753

Test Mode; Mid: 440.000MHz, Channel Spacing 25KHz


Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
157.062	-96.010	V	0.24	31.35	-64.900	-13	-51.900
360.893	-93.593	V	0.26	31.34	-62.513	-13	-49.513
669.696	-95.923	V	0.42	31.24	-65.103	-13	-52.103
879.622	-95.596	V	0.58	30.71	-65.466	-13	-52.466
1319.797	-82.631	V	1.23	26.38	-57.481	-13	-44.481
3862.747	-82.302	V	1.68	25.47	-58.512	-13	-45.512
287.835	-97.829	H	0.43	31.24	-67.019	-13	-54.019
402.929	-98.274	H	0.45	30.68	-68.044	-13	-55.044
683.814	-95.616	H	0.64	30.85	-65.406	-13	-52.406
880.536	-93.740	H	0.79	31.12	-63.410	-13	-50.410
1321.719	-84.219	H	1.29	26.12	-59.389	-13	-46.389
3261.861	-80.449	H	1.62	25.41	-56.659	-13	-42.260

Test Mode: High: 469.950MHz, Channel Spacing 25KHz

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
152.720	-95.194	V	0.24	31.35	-64.084	-13	-51.084
361.152	-94.790	V	0.26	31.34	-63.710	-13	-50.710
668.535	-95.330	V	0.42	31.24	-64.510	-13	-51.510
939.935	-96.784	V	0.58	30.71	-66.654	-13	-53.654
1406.468	-82.554	V	1.23	26.38	-57.404	-13	-44.404
3856.114	-80.253	V	1.68	25.47	-56.463	-13	-43.463
288.760	-97.285	H	0.43	31.24	-66.475	-13	-53.475
396.268	-100.527	H	0.45	30.68	-70.297	-13	-57.297
677.634	-95.294	H	0.64	30.85	-65.084	-13	-52.084
935.941	-96.887	H	0.79	31.12	-66.557	-13	-53.557
1407.896	-83.769	H	1.29	26.12	-58.939	-13	-45.939
3264.666	-76.225	H	1.62	25.41	-52.435	-13	-39.435


3.5. Transient Frequency Behavior

3.5.1. Test Specification

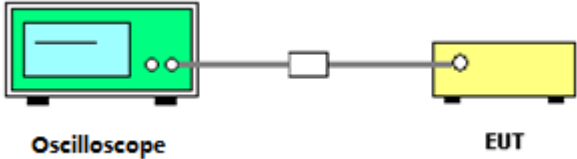
Test Requirement:	FCC Part 90.214				
Test Setup:	 Oscilloscope EUT				
Test Limit	Channel Bandwidth (kHz)	Time Intervals (Notes 1, 2)	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)	
				138-174 MHz	406.1-512 MHz
	25	t ₁	±25	5	10
		t ₂	±12.5	20	25
		t ₃	±25	5	10
	12.5	t ₁	±12.5	5	10
		t ₂	±6.25	20	25
		t ₃	±12.5	5	10
	6.25	t ₁	±6.25	5	10
		t ₂	±3.125	20	25
		t ₃	±6.25	5	10
Test Procedure:	The EUT was set in the climate chamber and connected to an external DC power supply and AC power supply. The RF output was directly connected to Oscilloscope. The coupling loss of the additional cables was recorded and taken in account for all the measurements. The result was recorded.				
Test Result:	PASS				

3.5.2. Test Data

Test Plots for channel spacing 25KHz, EUT power setting: Maximum.
Power On

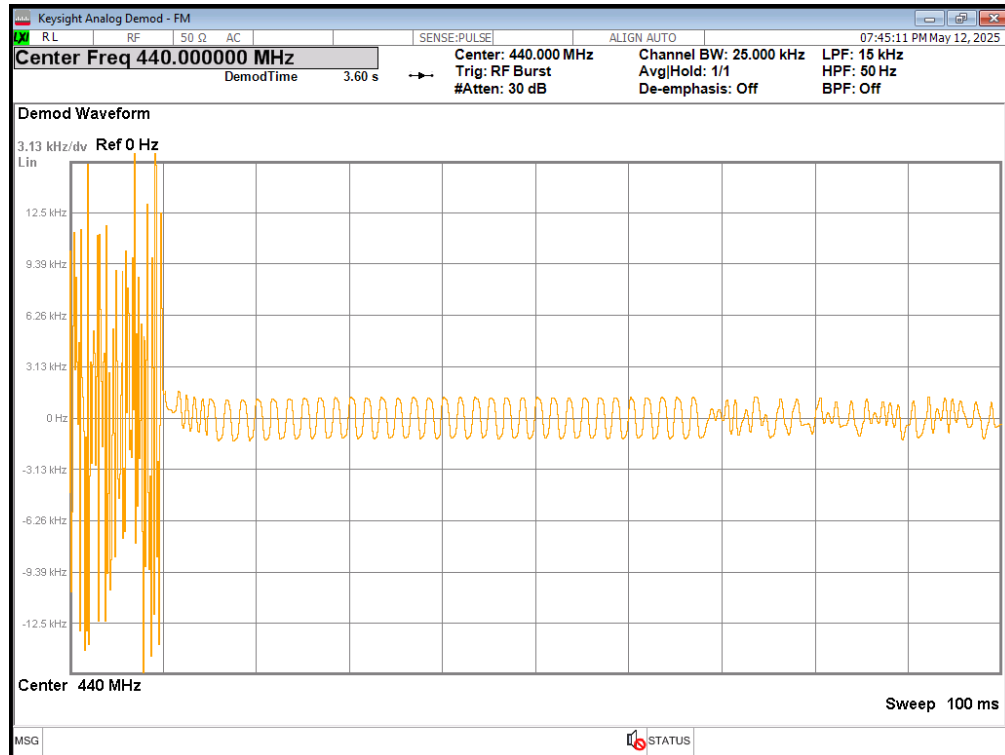

Power Off

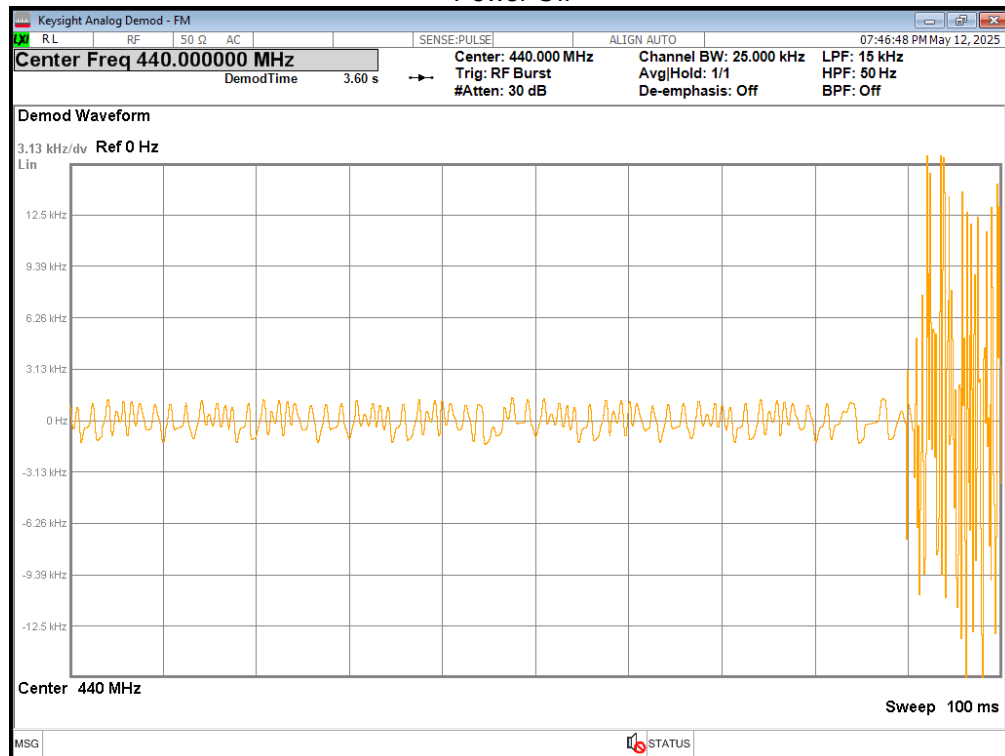

Remark: Only list the worst data for channel spacing 25KHz, modulation GMSK.

3.6. Behavior Frequency Stability

3.6.1. Test Specification

Test Requirement:	FCC Part 90.213
Test Method:	ANSI C63.26
Test Setup:	<pre> graph LR Laptop[Laptop] --- EUT[Equipment Under Test] EUT --- ACDC[AC/DC Adapter] EUT --- Att[Attenuator(s)] Att --- MC[Mini-Circuit Combiner] MC --- RFCT[RF Communication Test Set] MC --- MA[Modulation Analyzer] MA --- RF[RF Detector] RF --- HPO[Hewlett Packard Infinium Digitizing Oscilloscope] </pre>
Test Procedure:	Method of Measurement: After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply or AC power supply and the voltage was adjusted in the required ranges.
Test Result:	PASS

3.6.2. Test Data

Conclusion: PASS			
Mode	Voltage (V)	Frequency error (Hz)	frequency error (ppm)
Middle Channel 12.5KHz Channel Spacing	5	20.00	0.045
	6	-4.38	-0.010
	7	25.70	0.058
	8	-9.61	-0.022
	9	4.82	0.011
	10	7.96	0.018
Limit	2.5ppm		
Middle Channel 25KHz Channel Spacing	5	22.65	0.051
	6	-8.37	-0.019
	7	7.79	0.018
	8	9.08	0.021
	9	-0.31	-0.001
	10	12.98	0.030
Limit	5ppm		

Mode	Temperature (°C)	Frequency error (Hz)	frequency error (ppm)
Middle Channel 12.5KHz Channel Spacing	-20	-2.04	-0.005
	-10	19.78	0.045
	0	2.08	0.005
	10	1.49	0.003
	20	15.13	0.034
	30	12.10	0.028
	40	11.92	0.027
	50	21.10	0.048
Limit	2.5ppm		
Middle Channel 25KHz Channel Spacing	-20	-8.52	-0.019
	-10	25.44	0.058
	0	16.40	0.037
	10	13.36	0.030
	20	19.29	0.044
	30	-8.24	-0.019
	40	20.71	0.047
	50	27.01	0.061
Limit	5ppm		

3.7. Modulation Characteristic

Test Requirement:	FCC Part 90.207
Test Result:	According to FCC § 2.1047(d), Part 22, 74, 90 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


3.8. Adjacent Channel Power


Test Requirement:	FCC Part 90.221												
Test Setup:	 Spectrum AnalyzerEUT												
Test Limit:	Maximum adjacent power levels for frequencies in the 450–470 MHz band, no need compliance with below -36dBm: <table><tr><th>Frequency offset</th><th>Maximum ACP (dBc) for devices 1 watt and less</th><th>Maximum ACP (dBc) for devices above 1 watt</th></tr><tr><td>25 kHz</td><td>– 55 dBc</td><td>– 60 dBc</td></tr><tr><td>50 kHz</td><td>– 70 dBc</td><td>– 70 dBc</td></tr><tr><td>75 kHz</td><td>– 70 dBc</td><td>– 70 dBc</td></tr></table>	Frequency offset	Maximum ACP (dBc) for devices 1 watt and less	Maximum ACP (dBc) for devices above 1 watt	25 kHz	– 55 dBc	– 60 dBc	50 kHz	– 70 dBc	– 70 dBc	75 kHz	– 70 dBc	– 70 dBc
Frequency offset	Maximum ACP (dBc) for devices 1 watt and less	Maximum ACP (dBc) for devices above 1 watt											
25 kHz	– 55 dBc	– 60 dBc											
50 kHz	– 70 dBc	– 70 dBc											
75 kHz	– 70 dBc	– 70 dBc											
Test method:	The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the Frequency band 0Kz from the wanted frequency												
Test result:	Pass.												

GMSK 25KHz spacing 450MHz-470MHz

Carrier frequency (MHz)	Test Frequency (MHz)	Test Value (dBm)	Limit (dBm)	Result
450.000	449.925	-40.661	44-70=-26	PASS
	449.95	-41.280	44-70=-26	PASS
	449.975	-39.049	44-60=-16	PASS
	450.025	-41.417	44-60=-16	PASS
	450.05	-41.069	44-70=-26	PASS
	450.075	-40.882	44-70=-26	PASS
469.950	469.875	-43.097	44-70=-26	PASS
	469.900	-40.475	44-70=-26	PASS
	469.925	-42.006	44-60=-16	PASS
	469.975	-42.870	44-60=-16	PASS
	470.000	-41.595	44-70=-26	PASS
	470.025	-42.968	44-70=-26	PASS


GMSK 25KHz spacing 450MHz-470MHz

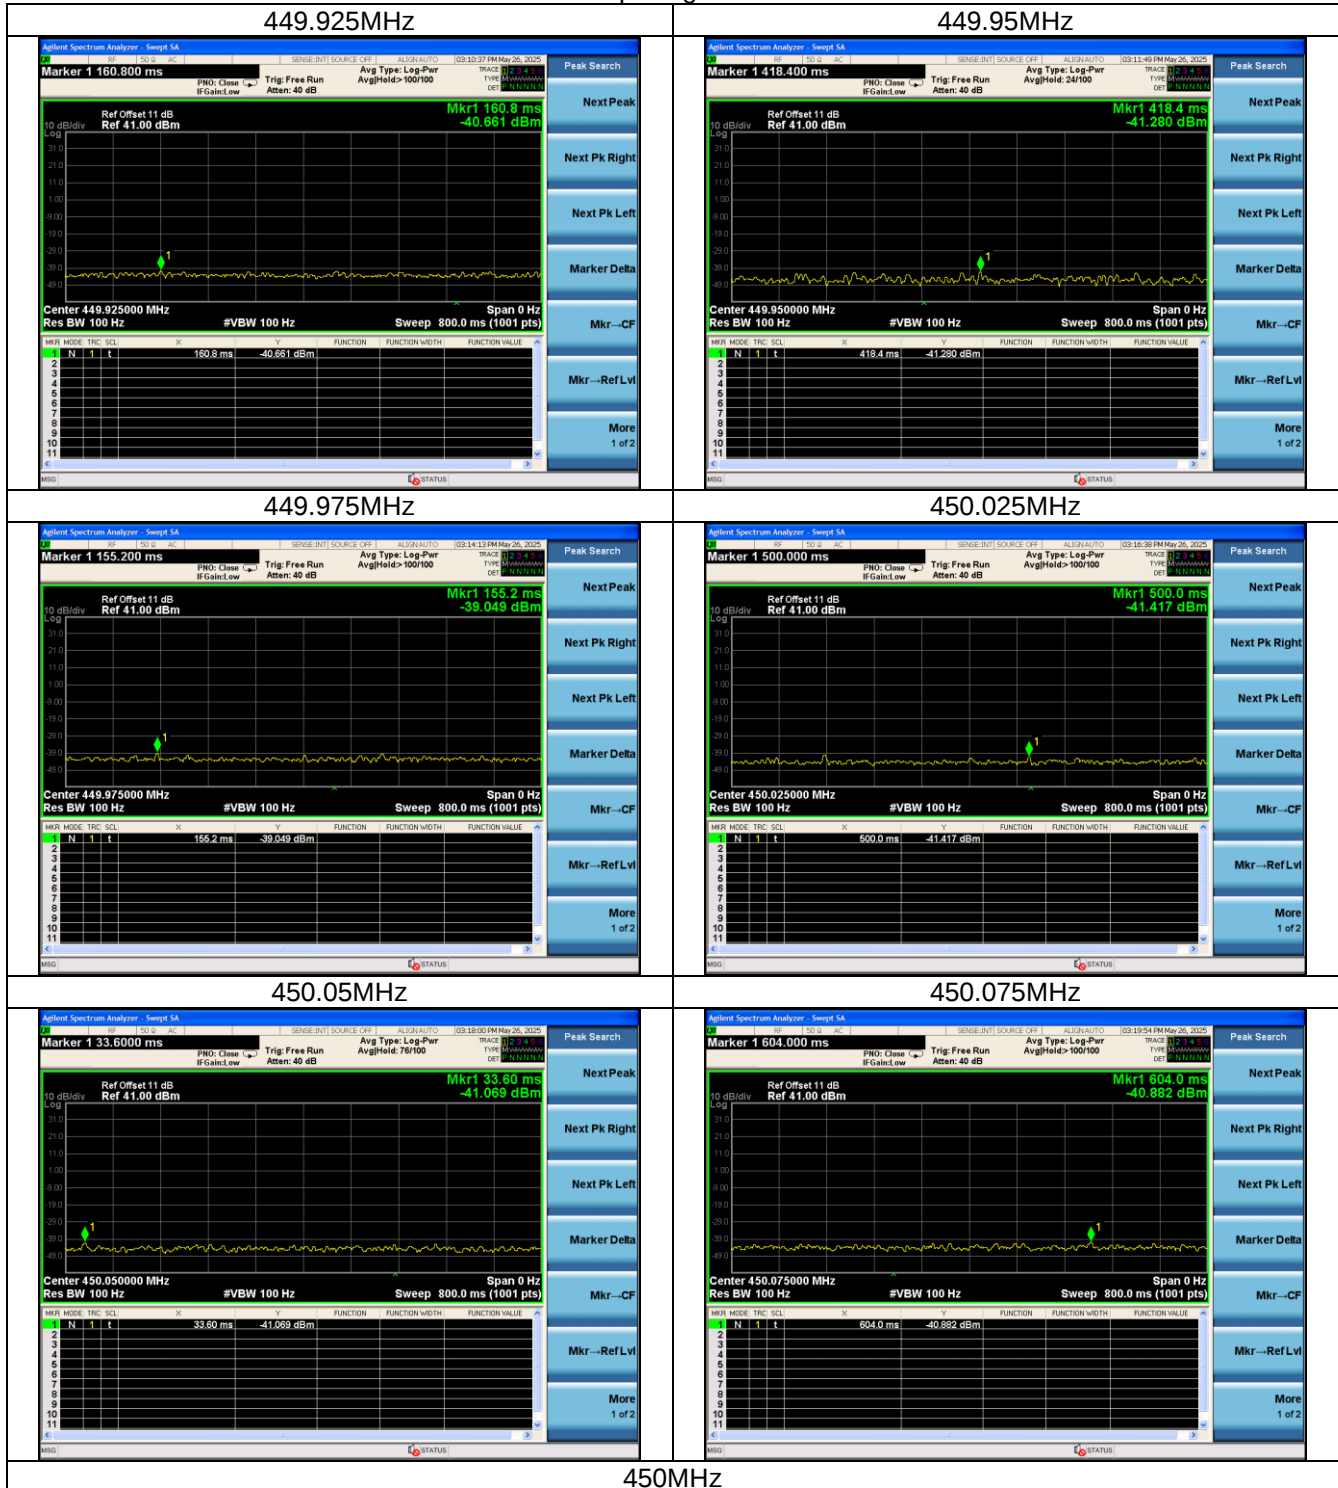

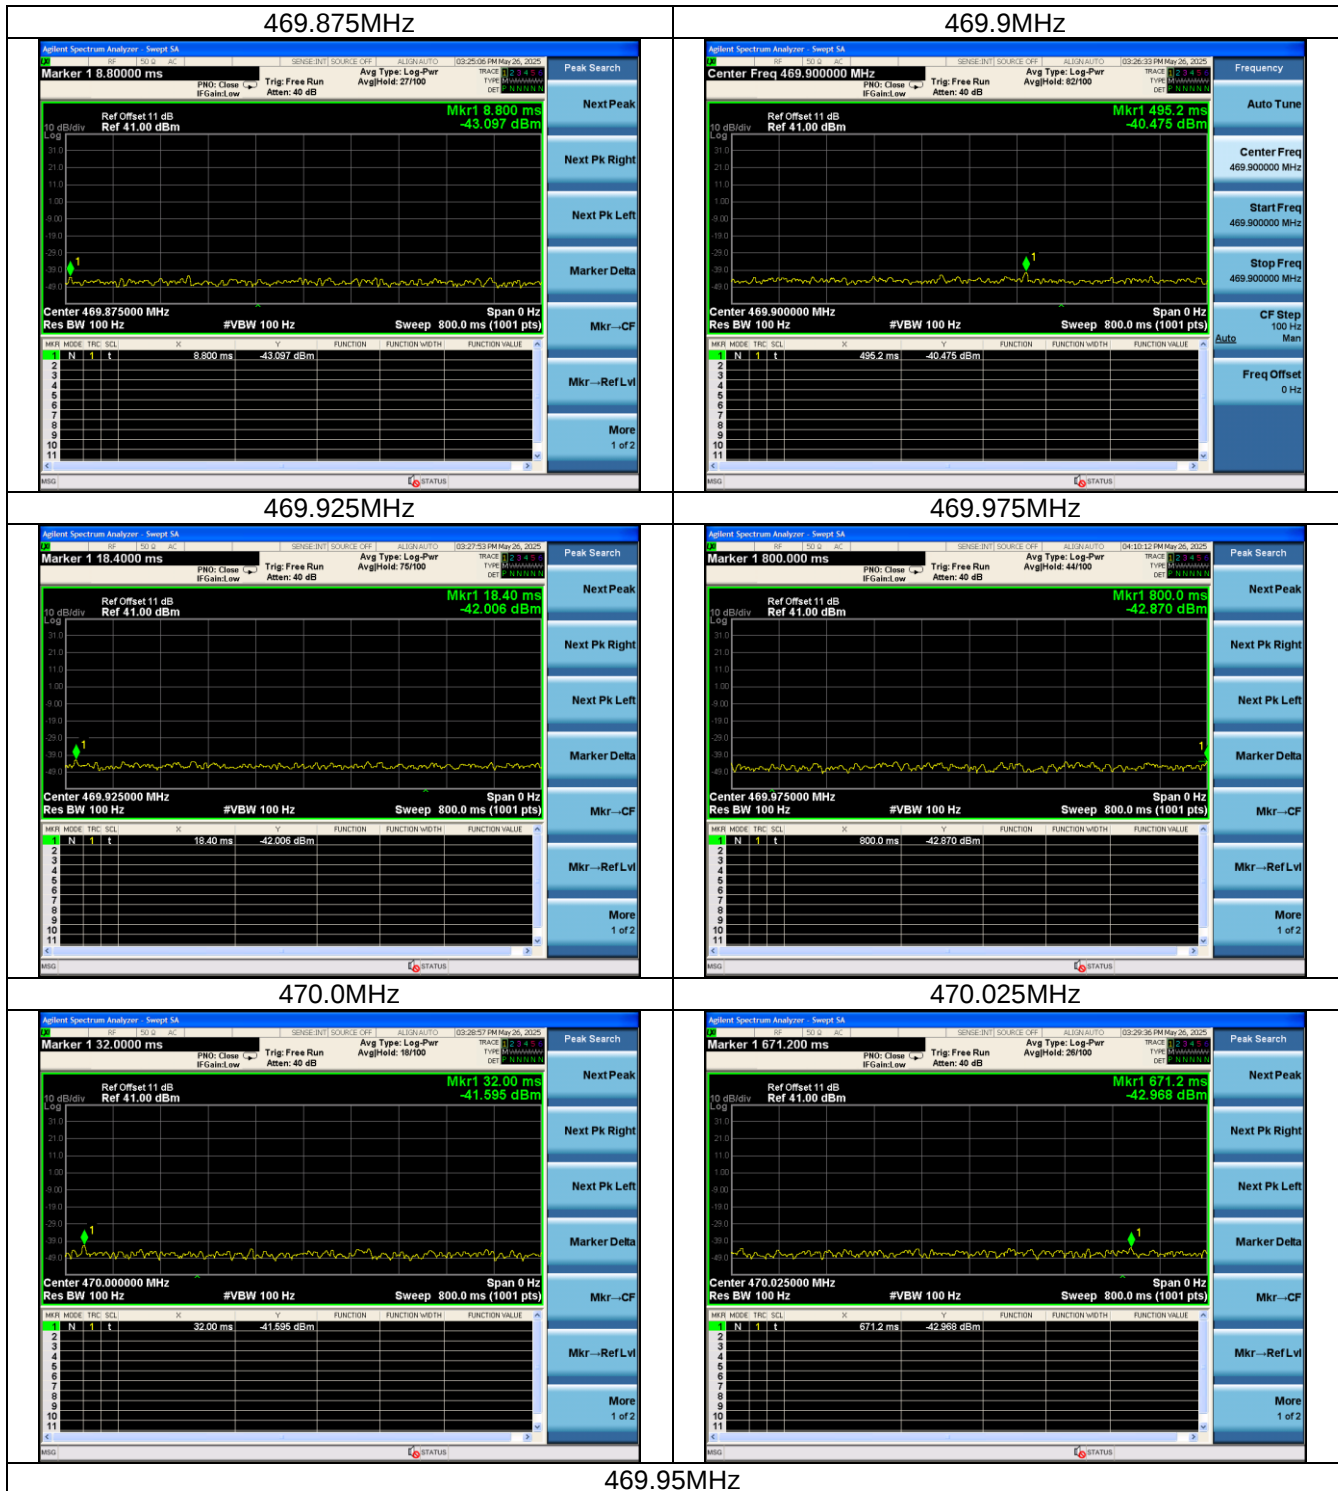

4. Test Setup Photo

4.1. Photos of Radiated Emission

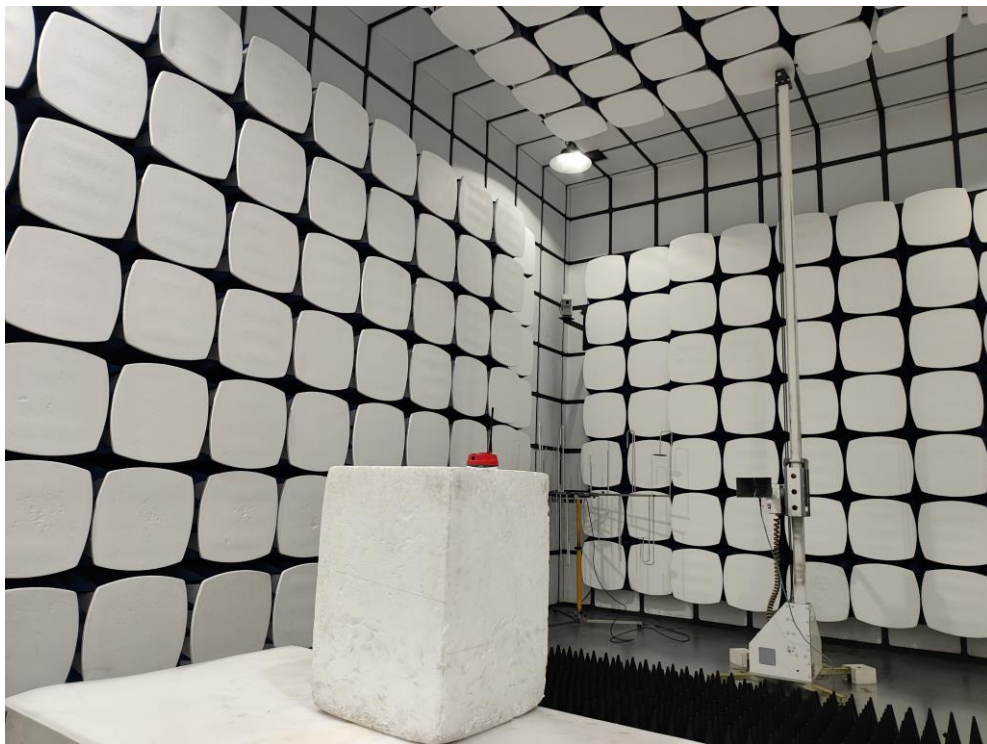

----- END OF REPORT-----