



FCC TEST REPORT

FCC ID: 2A7ZC-SG6

On Behalf of

GEOMATE POSITIONING PTE. LTD.

Geodetic GNSS Receiver

Model No.: SG6

Prepared for : GEOMATE POSITIONING PTE. LTD.
Address : 808 FRENCH ROAD #04-167 KITCHENER COMPLEX
SINGAPORE(200808)

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2406033-C01-R04
Date of Receipt : June 18, 2024
Date of Test : June 18, 2024 – July 22, 2024
Date of Report : July 24, 2024
Version Number : V0
Result : **Pass**

TABLE OF CONTENTS

Description	Page
1 TEST SUMMARY	5
1.1 MEASUREMENT UNCERTAINTY.....	5
2 GENERAL INFORMATION.....	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 TEST MODE	7
2.3 TEST FACILITY.....	7
2.4 DESCRIPTION OF SUPPORT UNITS	7
2.5 DEVIATION FROM STANDARDS	7
2.6 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
2.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
2.8 ADDITIONAL INSTRUCTIONS	7
3 TEST INSTRUMENTS LIST	8
4 TEST RESULTS AND MEASUREMENT DATA.....	9
4.1 ANTENNA REQUIREMENT:.....	9
4.2 CONDUCTED EMISSIONS	10
4.3 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	13
4.4 PEAK TRANSMIT POWER	16
4.5 POWER SPECTRAL DENSITY.....	18
4.6 BAND EDGE.....	20
4.7 RADIATED EMISSION.....	23
4.8 FREQUENCY STABILITY.....	27

TEST REPORT DECLARATION

Applicant : GEOMATE POSITIONING PTE. LTD.
Address : 808 FRENCH ROAD #04-167 KITCHENER COMPLEX SINGAPORE(200808)
Manufacturer : GEOMATE POSITIONING PTE. LTD.
Address : 808 FRENCH ROAD #04-167 KITCHENER COMPLEX SINGAPORE(200808)
EUT Description : Geodetic GNSS Receiver
(A) Model No. : SG6
(B) Trademark : 

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSI C63.4:2014, ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer



Approved by (name + signature).....:

Jack Xu
Project Manager



Date of issue.....:

July 24, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 24, 2024	Initial released Issue	Yannis Wen

1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	Section 15.203 Section 7.1.4	PASS
AC Power Line Conducted Emission	Section 15.207 Section 7.2.4 ANSI C63.10	PASS
Peak Transmit Power	Section 15.407(a)	PASS
Power Spectral Density	Section 15.407(a)	PASS
Undesirable Emission	Section 15.407(b)	PASS
26dB/6dB&99% Bandwidth	Section 15.407	PASS
Radiated Emission	Section 15.407(b)&15.209 Section 5.5 ANSI C63.10	PASS
Band Edge	15.205, ANSI C63.10	PASS
Frequency Stability	15.407(f)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

1.1 Measurement Uncertainty

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V) 3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V) 3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2 General Information

2.1 General Description of EUT

EUT Name : Geodetic GNSS Receiver
Model No. : SG6
DIFF. : N/A
Power supply : DC 5V from Type-C port, DC 7.2V from battery.

Radio Technology	: 5G WIFI
Operation Frequency	: 802.11ac(HT80): 5210MHz
Channel separation	: 80MHz for 802.11ac80
Modulation technology:	: IEEE 802.11ac: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: PCB antenna, max gain 0dBi (Antenna information is provided by applicant.)
Coaxial cable loss	: Max. coaxial cable loss:0.5dB (Cable lossvalue is provided by applicant.)
Software version	: 1.1.6.7
Hardware version	: V1.2.0
Intend use environment	: Residential, commercial and light industrial environment

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.
 EUT was test with 99% duty cycle at its maximum power control level.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen Alpha Product Testing Co., Ltd
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
 Registration Number: 293961

July 25, 2017 Certificated by IC
 Registration Number: 12135A

2.4 Description of Support Units

Accessories	:	AC Adapter
Manufacturer	:	Yisheng Electronics Co., LTD
Model	:	EA1012AVRU-050
INPUT	:	100-240Vac, 1.0A, 50-60Hz
OUTPUT	:	5.0V-2.4A 12.0W
Accessories	:	Type-C charging cable
Manufacturer	:	/
Model	:	/
Accessories	:	UHF Antenna
Manufacturer	:	/
Model	:	/

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

Channel	Power level
Lowest	Default
Middle	Default
Highest	Default

3 Test Instruments list

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

4 Test results and Measurement Data

4.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
E.U.T Antenna:	
The antenna is internal antenna. The best case gain of the antenna is 0dBi, for 5210MHz	

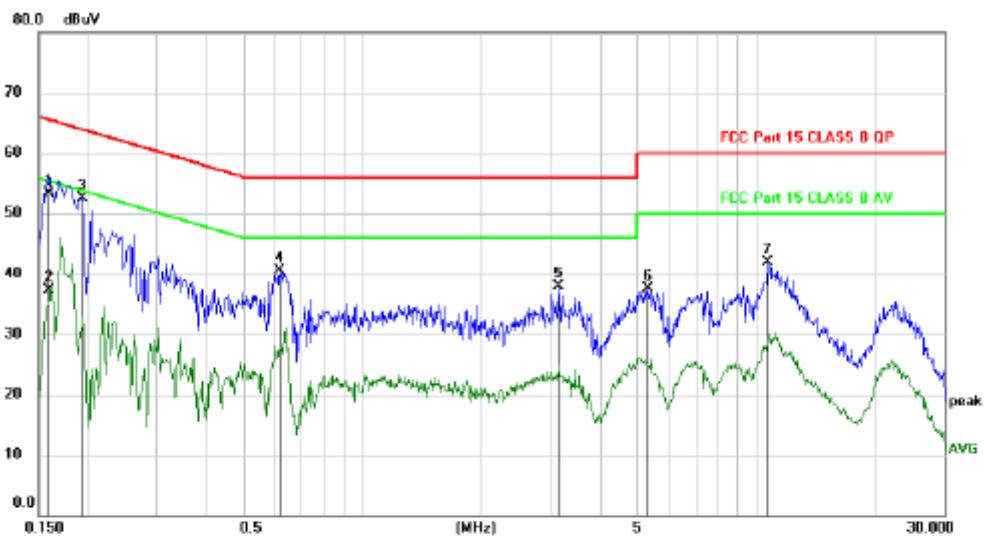
4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class Severity:	Class B																
Class B																	
Receiver setup:	RBW=9KHz, VBW=30KHz																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
* Decreases with the logarithm of the frequency.																	
Test procedure	<p>The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</p>																
Test setup:	<p>Reference Plane</p> <p><i>Remark</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test Instruments:	Refer to section 3 for details																
Test mode:	Refer to section 2.2 for details																
Test results:	Pass																

Measurement Data

An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

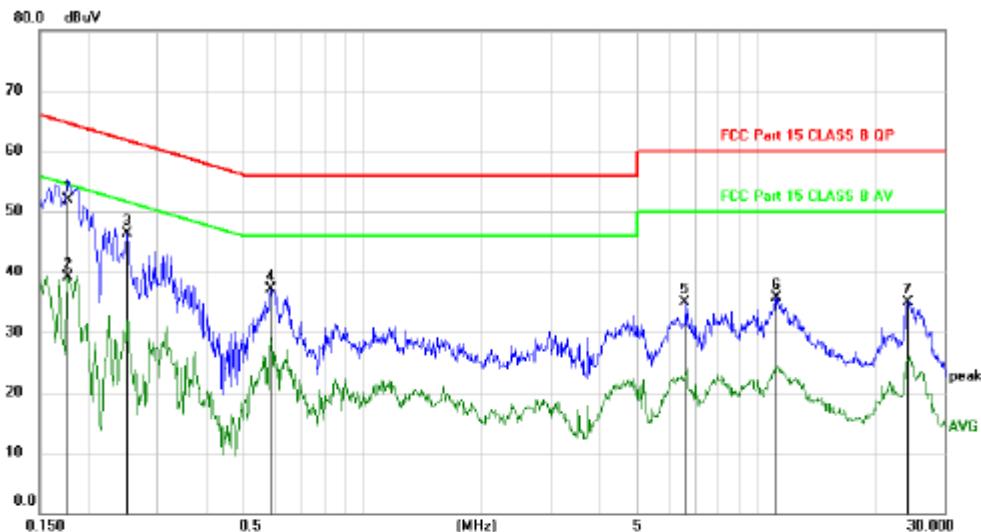


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			MHz	dBuV	dB				
1		0.1500	43.36	9.94	53.30	65.52	-12.22	QP	
2		0.1500	27.27	9.94	37.21	55.52	-18.31	AVG	
3	*	0.1949	42.68	9.92	52.60	63.83	-11.23	peak	
4		0.6150	30.55	9.92	40.47	56.00	-15.53	peak	
5		3.1560	28.00	9.96	37.96	56.00	-18.04	peak	
6		5.2770	27.51	10.05	37.56	60.00	-22.44	peak	
7		10.6280	31.69	10.22	41.91	60.00	-18.09	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Neutral:

No. Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dB	Margin dB	Detector	Comment
		Level dBuV	Factor dB	ment dBuV				
1 *	0.1770	41.92	9.93	51.85	64.63	-12.78	QP	
2	0.1770	29.16	9.93	39.09	54.63	-15.54	AVG	
3	0.2519	36.27	9.97	46.24	61.69	-15.45	peak	
4	0.5820	27.12	9.93	37.05	56.00	-18.95	peak	
5	6.5730	24.83	10.10	34.93	60.00	-25.07	peak	
6	11.2440	25.48	10.24	35.72	60.00	-24.28	peak	
7	24.2580	24.52	10.44	34.96	60.00	-25.04	peak	

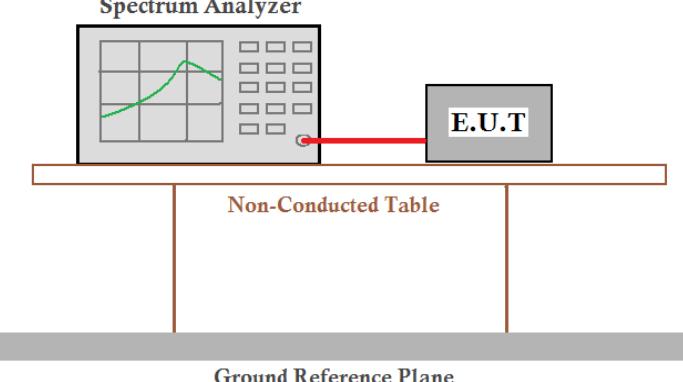
*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the ac80 5210MHz mode with the worst data is listed.

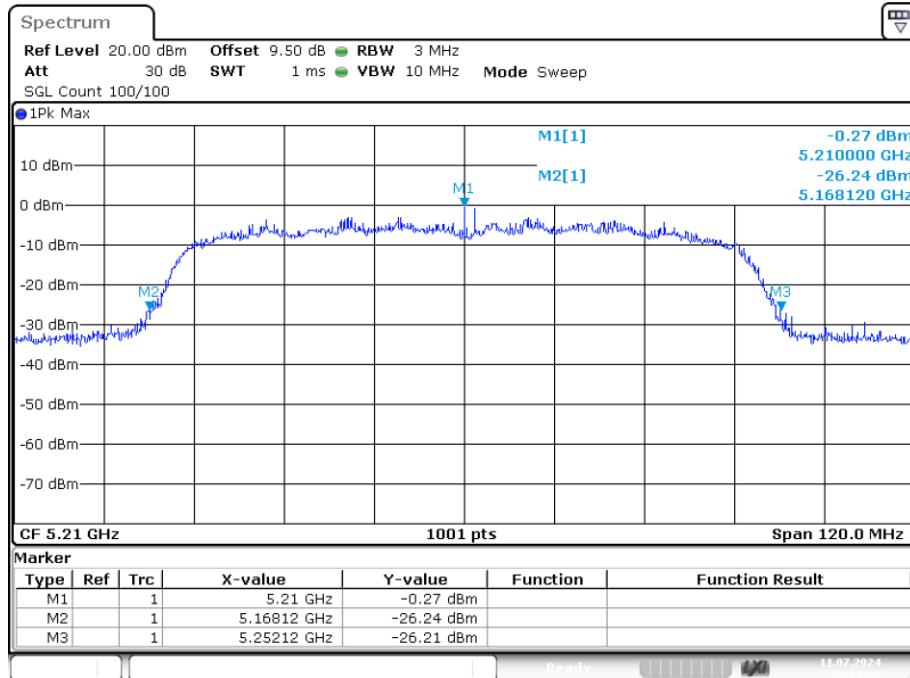
4.3 Emission Bandwidth and 99% Occupied Bandwidth

Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	>500kHz for 6 dB bandwidth
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:**Band 1 (5150-5250 MHz):****-26dB Bandwidth**

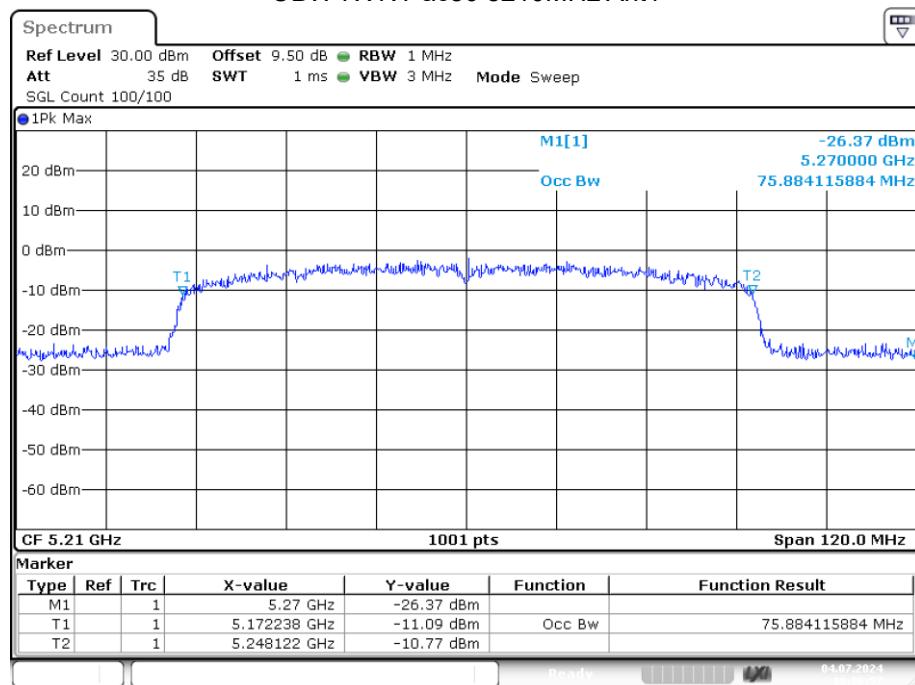
Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	ac80	5210	Ant1	84

-26dB Bandwidth NVNT ac80 5210MHz Ant1



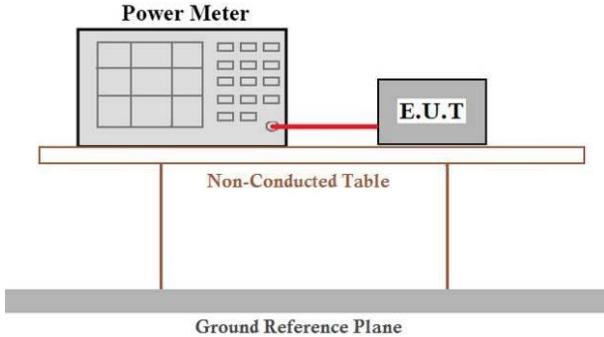
Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ac80	5210	Ant1	75.884

OBW NVNT ac80 5210MHz Ant1

Date: 4.JUL.2024 18:06:57

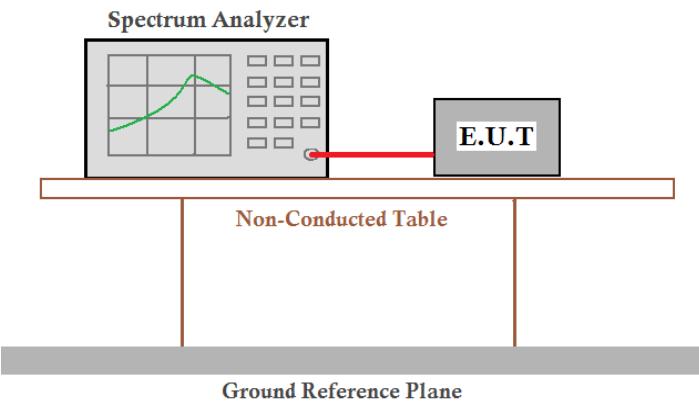
4.4 Peak Transmit Power

Test Requirement:	FCC Part15 E Section 15.407																									
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01																									
Limit:	<p>FCC: For the band 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725GHz, The maximum conducted output power over the frequency bands of operation shall not exceed 250mW.</p> <p>For the band 5.725-5.85GHz, the maximum conducted output power over the frequency bands of operation shall not exceed 1W.</p> <p>IC:</p>																									
	<table border="1"> <thead> <tr> <th>Section</th><th>Test Item</th><th>Limit</th><th>Frequency Range (MHz)</th><th>Result</th></tr> </thead> <tbody> <tr> <td>6.2.1.1</td><td rowspan="3">Peak Output Power</td><td>200 mW or $10 + 10 \log_{10} B$ dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.</td><td>5150-5250</td><td rowspan="3">PASS</td></tr> <tr> <td>6.2.2.1</td><td>The lesser of 250 mW or $11 + 10 \log_{10} (26 \text{ dB emission bandwidth})$ dBm + 10 log (26 dB emission bandwidth)</td><td>5250-5350</td></tr> <tr> <td>6.2.3.1</td><td>1 watt</td><td>5470-5725</td></tr> <tr> <td>6.2.4.1</td><td></td><td></td><td>5725-5825</td><td></td></tr> </tbody> </table>					Section	Test Item	Limit	Frequency Range (MHz)	Result	6.2.1.1	Peak Output Power	200 mW or $10 + 10 \log_{10} B$ dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.	5150-5250	PASS	6.2.2.1	The lesser of 250 mW or $11 + 10 \log_{10} (26 \text{ dB emission bandwidth})$ dBm + 10 log (26 dB emission bandwidth)	5250-5350	6.2.3.1	1 watt	5470-5725	6.2.4.1			5725-5825	
Section	Test Item	Limit	Frequency Range (MHz)	Result																						
6.2.1.1	Peak Output Power	200 mW or $10 + 10 \log_{10} B$ dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.	5150-5250	PASS																						
6.2.2.1		The lesser of 250 mW or $11 + 10 \log_{10} (26 \text{ dB emission bandwidth})$ dBm + 10 log (26 dB emission bandwidth)	5250-5350																							
6.2.3.1		1 watt	5470-5725																							
6.2.4.1			5725-5825																							
Test setup:																										
Test procedure:	<p>Measurement using an RF average power meter</p> <p>(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied</p> <ol style="list-style-type: none"> The EUT is configured to transmit continuously or to transmit with a constant duty cycle. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. <p>(ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B).</p> <p>(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.</p> <p>(iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).</p>																									
Test Instruments:	Refer to section 3 for details																									
Test mode:	Refer to section 2.2 for details																									
Test results:	Pass																									

Measurement Data**Band 1 (5150-5250 MHz)**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	EIRP (dBm)	FCC Limit (dBm)	Verdict
NVNT	ac80	5210	Ant1	14.479	14.479	24	Pass

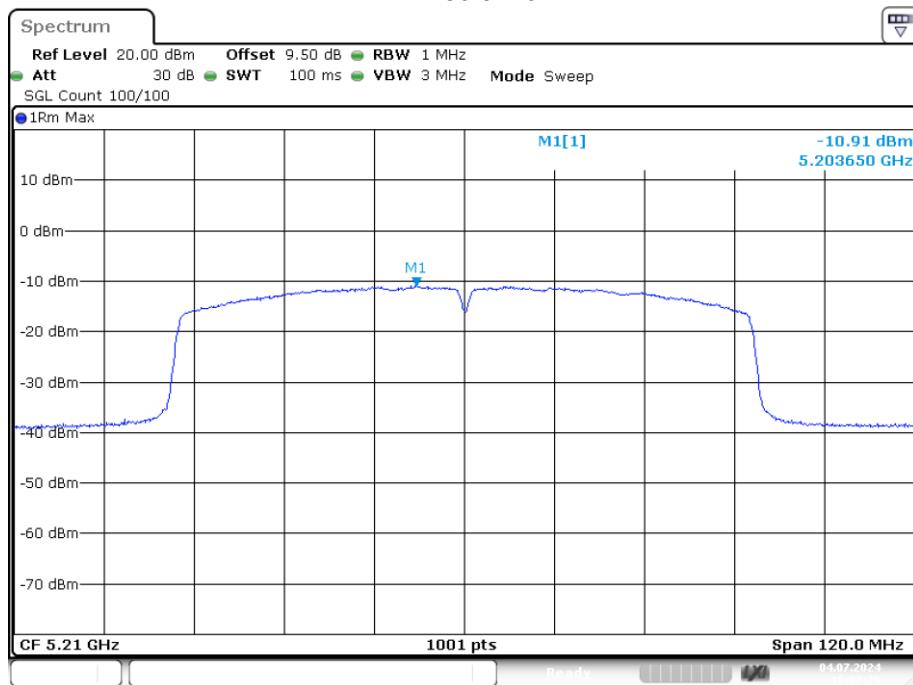
4.5 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	<p>FCC: $1 \leq 11.00 \text{ dBm/MHz}$ for 5150MHz-5250MHz, 5250-5350MHz and 5470-5725 MHz</p> <p>$2 \leq 30.00 \text{ dBm/500KHz}$ for 5725MHz-5850MHz</p> <p>IC: 1. For the 5.15-5.25 GHz, The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.</p> <p>2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.</p>
Test setup:	
Test procedure:	<ol style="list-style-type: none"> 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power....". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: <ol style="list-style-type: none"> a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD. 5) 1. Antenna assembly gain G in dBi of the individual antenna. 2. EIRP PSD=Max PSD+G (When testing, the line loss has already been added to the antenna gain, so the test result is EIRP PSD)
Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data**Band 1 (5150-5250 MHz)**

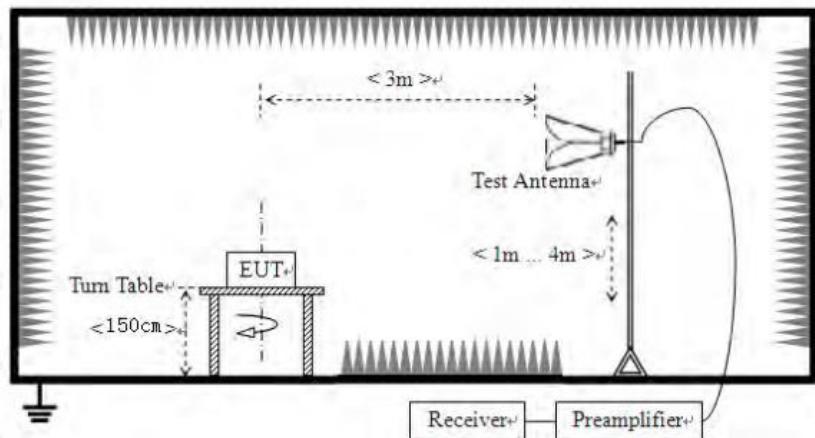
Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	EIRP PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac80	5210	Ant1	-10.908	-10.908	11	Pass

PSD NVNT ac80 5210MHz Ant1



4.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205																								
Test Method:	ANSI C63.10:2013																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td>68.2</td><td>Peak Value</td></tr> </tbody> </table> <p>Undesirable emission limits:</p> <ol style="list-style-type: none"> (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. 					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	<ol style="list-style-type: none"> a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																								
Test setup:	Above 1GHz																								



Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark:

According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2,$$

For example, if EIRP = -27dBm

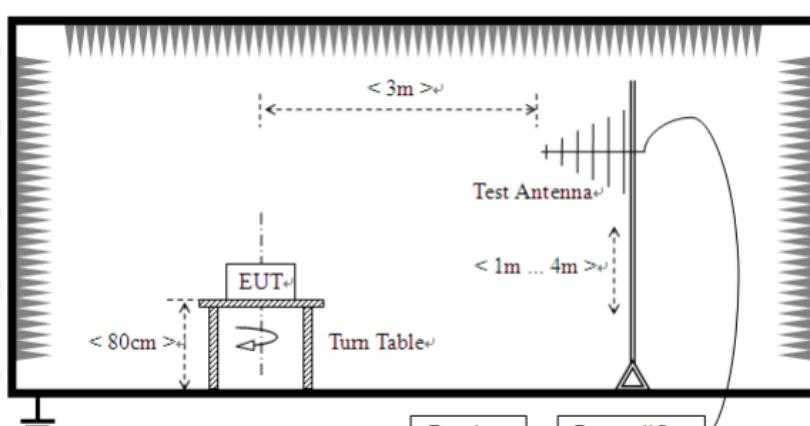
$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2 \text{dBuV/m.}$$

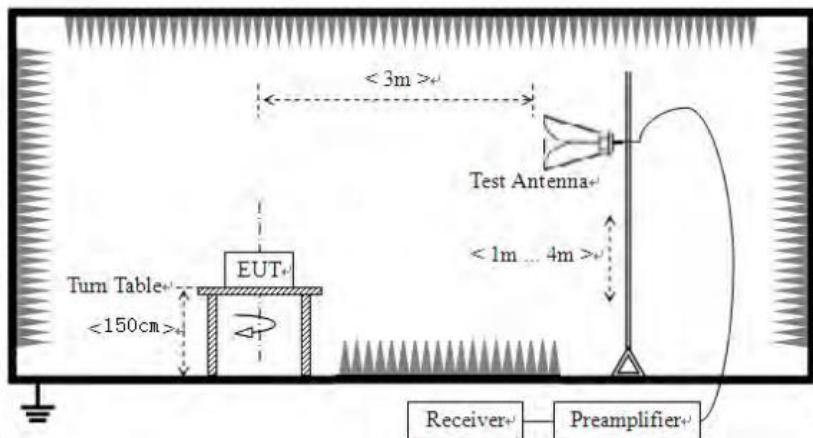
Measurement Data:**Band1**

Mode:		802.11ac80		Frequency:		5210MHz	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
H	5150.00	34.72	17.18	51.90	74.00	-22.10	PK
V	5150.00	35.97	17.18	53.15	74.00	-20.85	PK

4.7 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:	AV	1MHz	3MHz		Average Value
	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
Test Procedure:	Above 1GHz		74.0	Peak Value	
			54.0	Average Value	
<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1>.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>2>.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 					

	<p>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</p> <p>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</p> <p>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</p> <p>6. Remove the transmitter and replace it with a substitution antenna</p> <p>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</p> <p>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</p> <p>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:</p> $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ <p>where:</p> <p>Pg is the generator output power into the substitution antenna.</p>
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>



Test Instruments:	Refer to section 3 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:

Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
34.01	47.61	11.25	0.59	30.08	29.37	40	-10.63	Vertical
54.71	40.75	11.93	0.81	29.96	23.53	40	-16.47	Vertical
120.47	46.50	9.4	1.36	29.57	27.69	43.5	-15.81	Vertical
173.02	43.36	8.5	1.7	29.31	24.25	43.5	-19.25	Vertical
443.00	37.43	16.29	3.05	29.41	27.36	46	-18.64	Vertical
861.47	32.94	21.83	4.69	29.14	30.32	46	-15.68	Vertical
64.90	35.59	8.73	0.9	29.89	15.33	40	-24.67	Horizontal
103.34	33.92	11.73	1.19	29.7	17.14	43.5	-26.36	Horizontal
268.60	45.54	12.53	2.22	29.79	30.50	46	-15.50	Horizontal
352.27	36.91	14.5	2.62	29.73	24.30	46	-21.70	Horizontal
626.86	35.77	19.43	3.83	29.27	29.76	46	-16.24	Horizontal
957.39	40.73	22.54	5.06	29.1	39.23	46	-6.77	Horizontal

Above 1GHz:**802.11ac80 5210MHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360.20	27.11	16.29	14.62	32.65	25.37	74.00	-48.63	Vertical
15540.23	29.36	21.83	17.66	34.46	34.39	74.00	-39.61	Vertical
10360.25	32.18	8.73	14.62	32.65	22.88	74.00	-51.12	Horizontal
15540.10	34.35	11.73	17.66	34.46	29.28	74.00	-44.72	Horizontal

Note:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. This Report only show the test plots of the worst case (U-NII-1).

4.8 Frequency stability

Test Standard	15.407(f)
Test limit	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Test results:	Pass

Measurement Data:

Mode	Voltage (V)	Frequency (5210MHz)	Deviation (KHz)
Band 1 (5210 MHz)	DC 6.48V	5209.982	18
	DC 7.2V	5209.978	22
	DC 7.92V	5209.977	23

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)
Band 1 (5210MHz)	0°C	5209.988	12
	+10°C	5209.990	10
	+20°C	5209.995	5
	+30°C	5209.990	10
	+40°C	5209.992	8
	+50°C	5209.988	12
	+60°C	5209.990	10
	+70°C	5209.991	9

-----END OF REPORT-----