



FCC PART 15.247 TEST REPORT

For

Shanghai Loostone Information Technology Co., Ltd.

Room 601, Building 9, No. 351, Sizhuan Road, Sijing Town, Songjiang District, Shanghai, China

FCC ID: 2A7ZR-MX1PROMIC

Report Type: Original Report	Product Name: Wireless Karaoke Microphone
Report Number:	RSHA241128001-00B
Report Date:	2025-04-08
Reviewed By:	Bard Liu 
Approved By:	Oscar Ye 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
TEST EQUIPMENT LIST	11
SUMMARY OF TEST RESULTS	12
FCC §1.1310 & §2.1093 - RF EXPOSURE.....	13
APPLICABLE STANDARD	13
MEASUREMENT RESULT	13
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
TEST SYSTEM SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	16
TEST RESULTS SUMMARY	16
TEST DATA: SEE APPENDIX	16
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
TEST SYSTEM SETUP.....	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
TEST RESULTS SUMMARY	19
TEST DATA: SEE APPENDIX	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST DATA: SEE APPENDIX	20
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA: SEE APPENDIX	21

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA: SEE APPENDIX	22
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA: SEE APPENDIX	23
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA: SEE APPENDIX	24
FCC §15.247(d) - BAND EDGES TESTING	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA: SEE APPENDIX	25
EUT PHOTOGRAPHS	26
TEST SETUP PHOTOGRAPHS	27
APPENDIX - TEST DATA.....	28
ENVIRONMENTAL CONDITIONS & TEST INFORMATION	28
AC LINE CONDUCTED EMISSIONS	29
RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS	31
CHANNEL SEPARATION TEST	41
20 dB BANDWIDTH TEST	42
QUANTITY OF HOPPING CHANNEL TEST	43
TIME OF OCCUPANCY (DWELL TIME)	44
PEAK OUTPUT POWER MEASUREMENT.....	45
BAND EDGES.....	46

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RSHA241128001-00B	R1V1	2025-04-08	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Shanghai Loostone Information Technology Co., Ltd.
Product Name:	Wireless Karaoke Microphone
Tested Model:	Puremic MX1-PRO
Series Model:	Karafun MX1-PRO, WeSing MX1-PRO
Model Difference:	Model name and trade mark
Power Supply:	DC 3.7V from battery or DC 5V from USB port
RF Function:	2.4G SRD
Operating Band/Frequency:	2402-2480 MHz
Maximum Output Power:	2.79 dBm
Channel Number:	40
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
★Maximum Antenna Gain:	4.4 dBi

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RSHA241128001-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-11-28.)

Objective

This test report is prepared for *Shanghai Loostone Information Technology Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)
1	2402
2	2404
...	...
20	2440
21	2442
...	...
39	2478
40	2480

EUT was tested with Channel 1, 20 and 40.

EUT Exercise Software

RF Test Tool: Frequency Tool_v0.3.2.exe

Mode	Frequency (MHz)	★Power level:
SRD	2402	Default
	2440	Default
	2480	Default

Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Power on Tools Co.,Ltd.	Adapter	DA-00052000UL001	/

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Power Cable 1	1.5	LISN/AC Source	Adapter
Power Cable 2	1.0	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emissions:

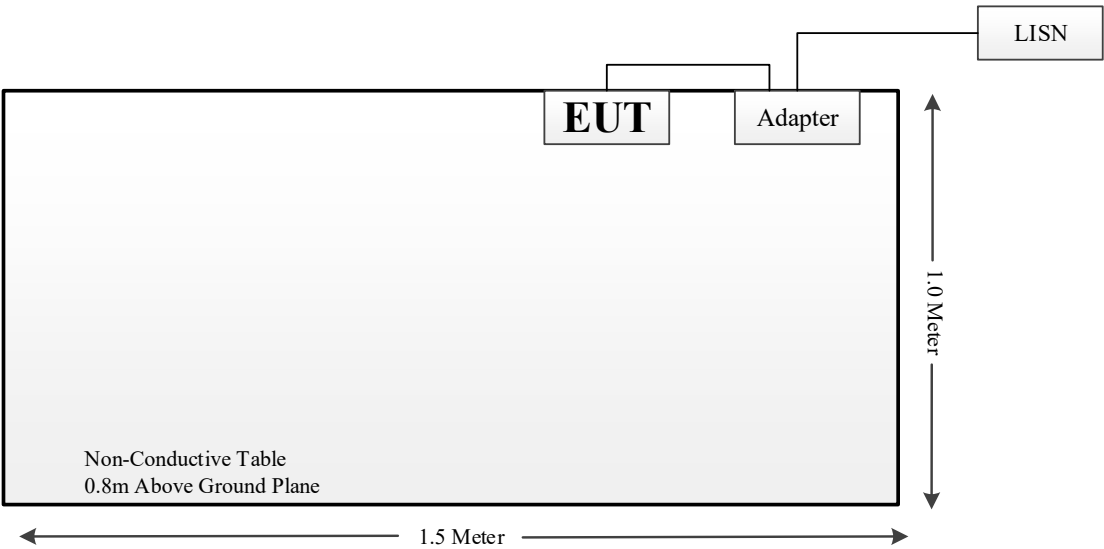

For Radiated Emissions(Below 1GHz):

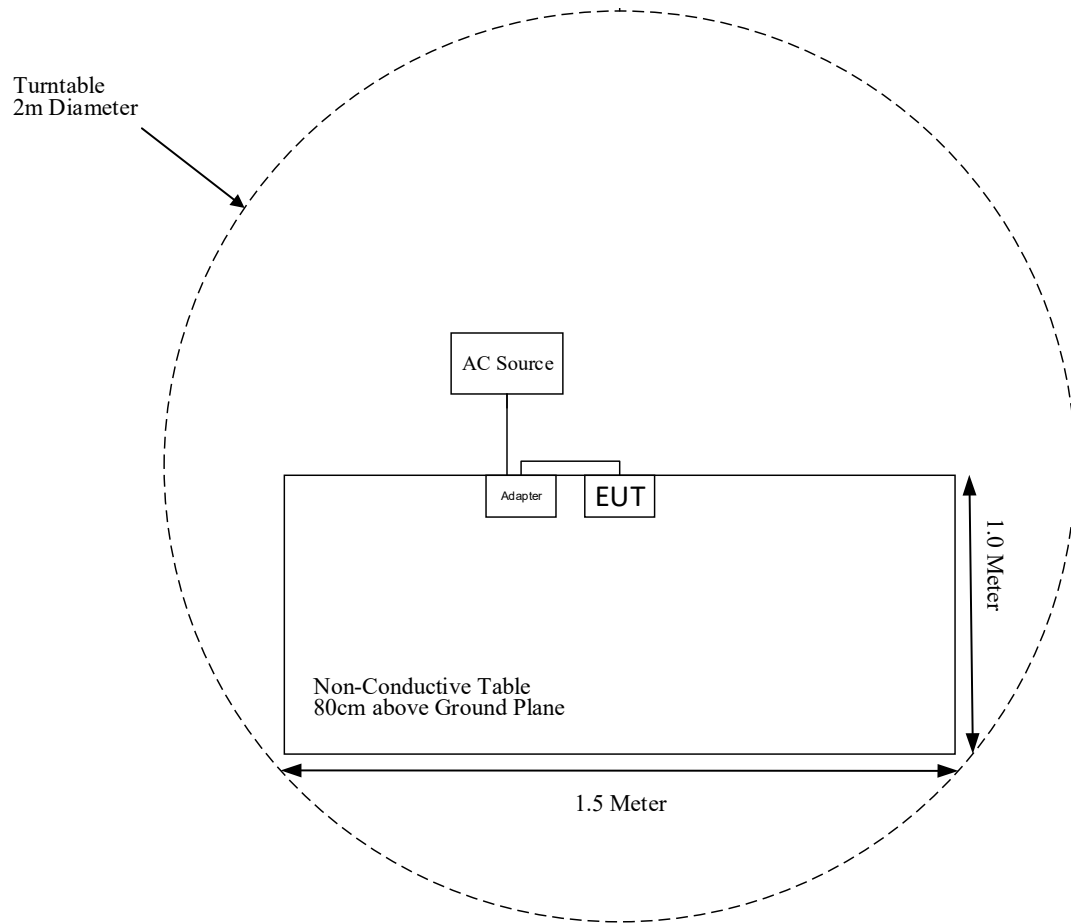

For Radiated Emissions (Above 1 GHz):

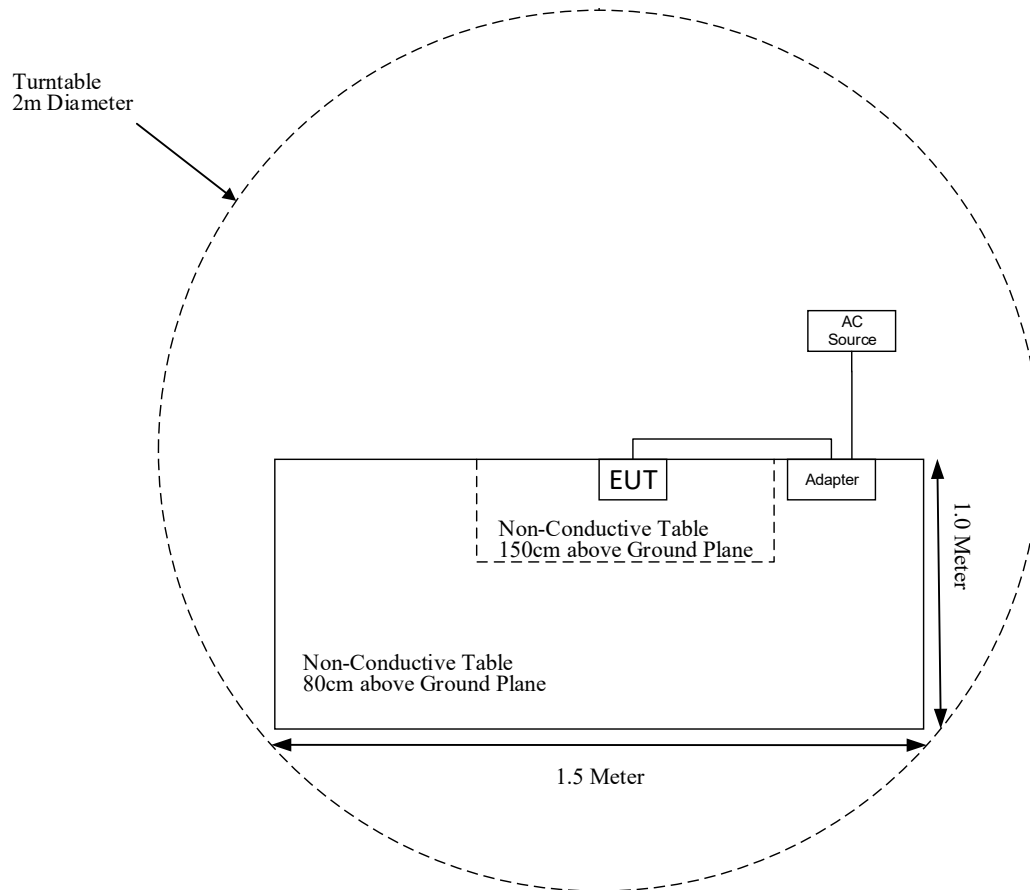

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2024-04-23	2025-04-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-11-08	2027-11-07
ETS-LINDGREN	Loop Antenna	6512	108100	2024-11-03	2027-11-02
Sonoma Instrument	Pre-amplifier	310N	171205	2024-04-23	2025-04-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2024-04-23	2025-04-22
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2024-04-25	2025-04-24
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2024-04-25	2025-04-24
SELECTOR	Amplifier	EM18G40G	060726	2024-04-25	2025-04-24
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2024-04-25	2025-04-24
Narda	Attenuator	10dB	010	2024-04-25	2025-04-24
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-11	011	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-12	012	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-13	013	2024-04-23	2025-04-22
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2024-04-24	2025-04-23
Narda	Attenuator	10dB	010	2024-04-23	2025-04-22
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	101746	2024-04-23	2025-04-22
Rohde & Schwarz	LISN	ENV216	101115	2024-04-23	2025-04-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	0357.8810.54	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2024-04-23	2025-04-22

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

FCC §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

According to §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz})] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. f (GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
SRD	2402-2480	3.0	2	5	0.6	3.0	Yes

Result: No SAR test is required.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna for SRD which permanently attached to EUT, and the antenna gain is 4.4 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup

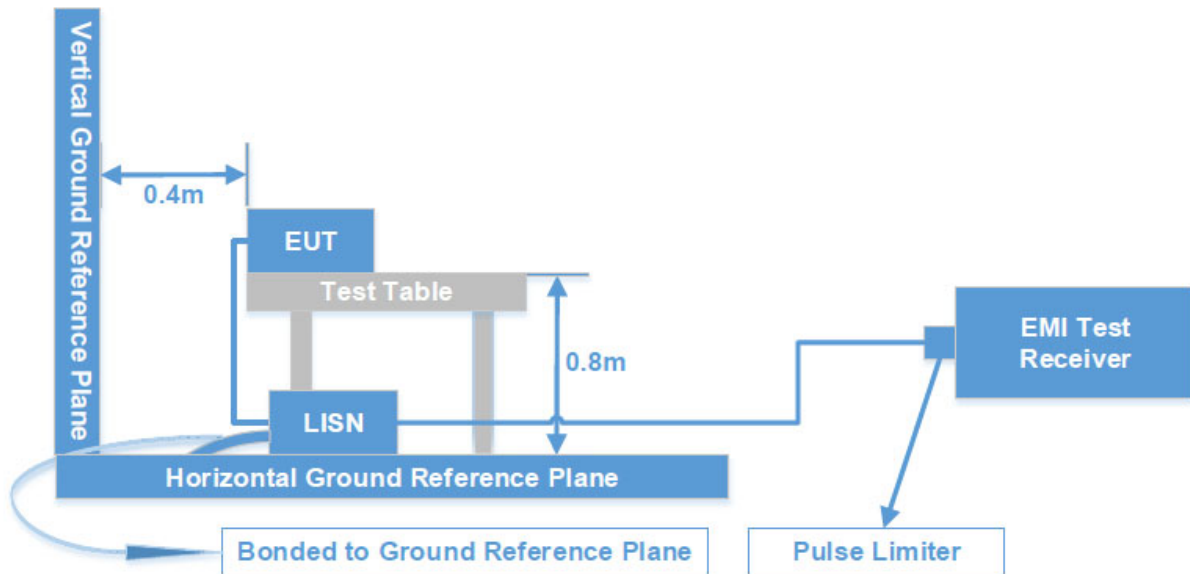

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the EUT or adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Level (dBμV) = Read level (dBμV) + Factor (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Level (dBμV) - Limit (dBμV)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)


Test System Setup

9kHz - 30MHz:

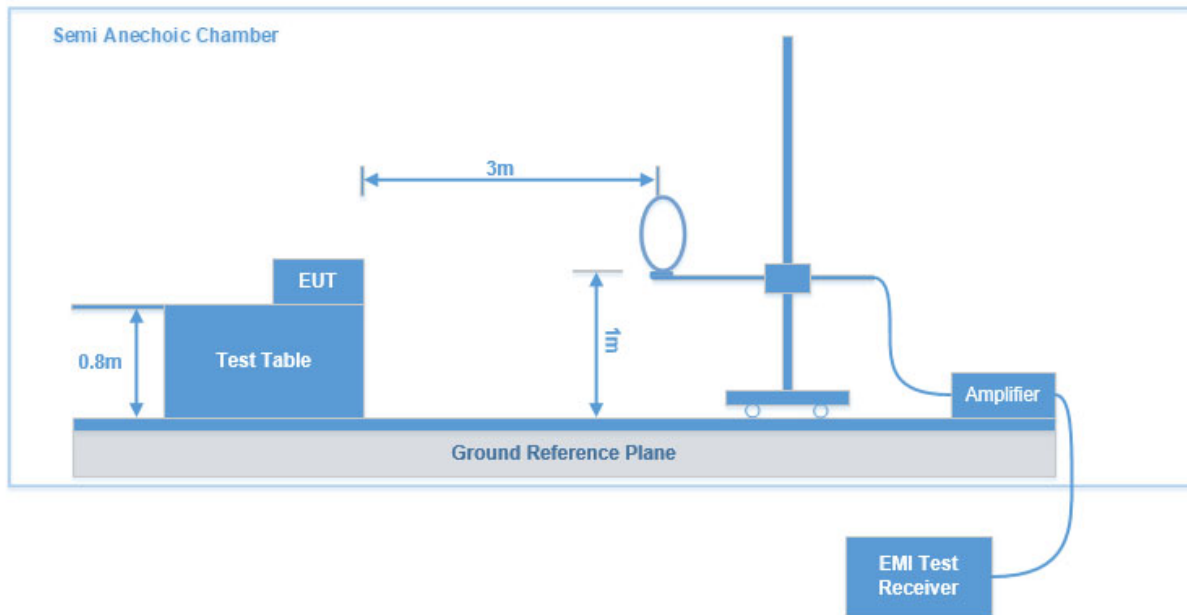

30 MHz - 1 GHz:

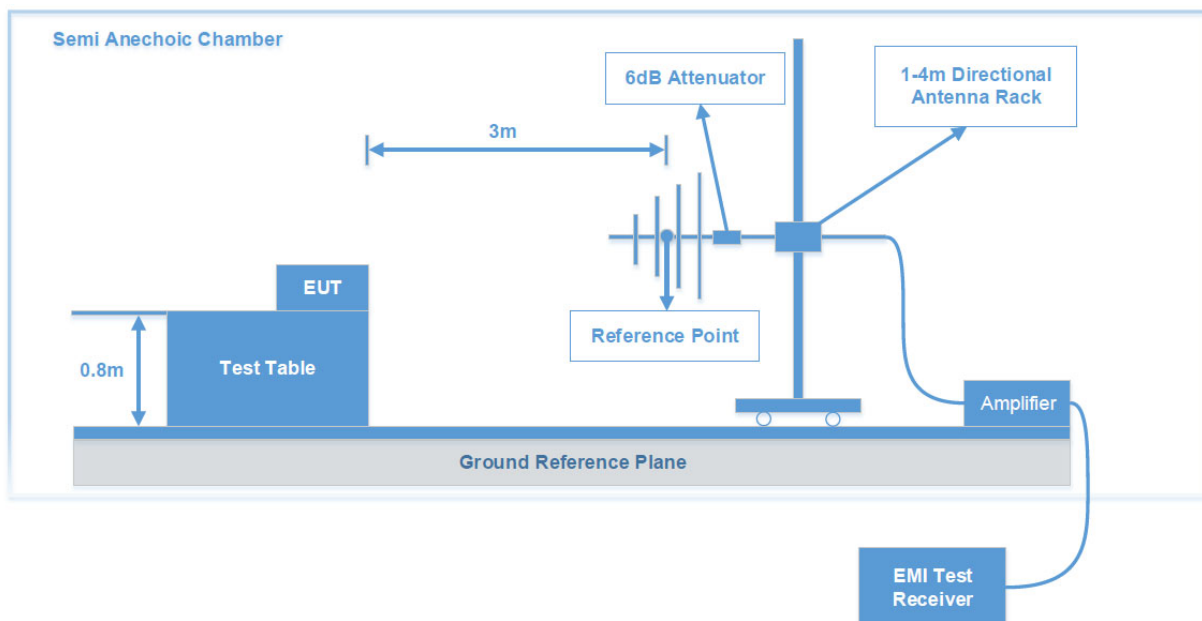

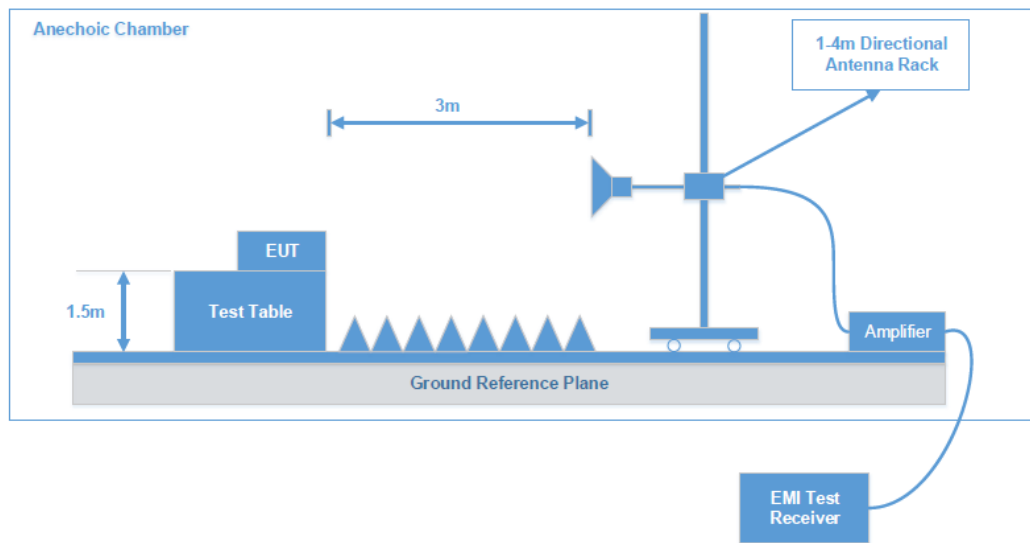Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Note: The QuasiPeak (dBμV/m), MaxPeak (dBμV/m), Average (dBμV/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



Note: Offset (10.5dB) = Attenuator (10dB) + cable loss (0.5dB)

Test Data: See Appendix


FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Note: Offset (10.5dB) = Attenuator (10dB) + cable loss (0.5dB)

Test Data: See Appendix

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.



Note: Offset (10.5dB) = Attenuator (10dB) + cable loss (0.5dB)

Test Data: See Appendix


FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.



Note: Offset (10.5dB) = Attenuator (10dB) + cable loss (0.5dB)

Test Data: See Appendix


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.



Note: Offset (10.5dB) = Attenuator (10dB) + cable loss (0.5dB)

Test Data: See Appendix


FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Note: Offset (10.5dB) = Attenuator (10dB)+cable loss (0.5dB)

Test Data: See Appendix

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A-EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B-EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS


Please refer to the attachment EXHIBIT C-TEST SETUP PHOTOGRAPHS.

APPENDIX - TEST DATA

Environmental Conditions & Test Information

Test Item:	AC LINE CONDUCTED EMISSIONS	RADIATED EMISSIONS			CHANNEL SEPARATION TEST
		9kHz - 1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz	
Test Date:	2024-12-23	2024-12-16	2024-12-18	2024-12-18	2025-01-14
Temperature:	17.6 °C	15.4 °C	16.4 °C	16.4 °C	22.3 °C
Relative Humidity:	39 %	40 %	43 %	43 %	45 %
ATM Pressure:	103.1 kPa	102.4 kPa	103.4kPa	103.4kPa	101.8 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Myles Miao	Jerry Yan	Klein Zhu	Hugh Wu	Neil Zhou


Test Item:	20 DB BANDWIDTH TEST	Quantity Of Hopping Channel Test	Time Of Occupancy (Dwell Time)	PEAK OUTPUT POWER MEASUREMENT	BAND EDGES TESTING
Test Date:	2025-01-14 to 2025-03-31	2025-01-14	2025-01-14 to 2025-01-17	2025-01-14 to 2025-01-17	2025-01-14 to 205-03-31
Temperature:	17.1-18.6 °C	17.1 °C	16.8-17.1 °C	16.8-17.1 °C	16.8-18.6 °C
Relative Humidity:	48 %-52 %	52 %	47%-52 %	47%-52 %	47% - 48 %
ATM Pressure:	101.8-102.4 kPa	102.4 kPa	102.4-103.2 kPa	102.4-103.2 kPa	101.8-102.4 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou	Neil Zhou	Neil Zhou	Neil Zhou

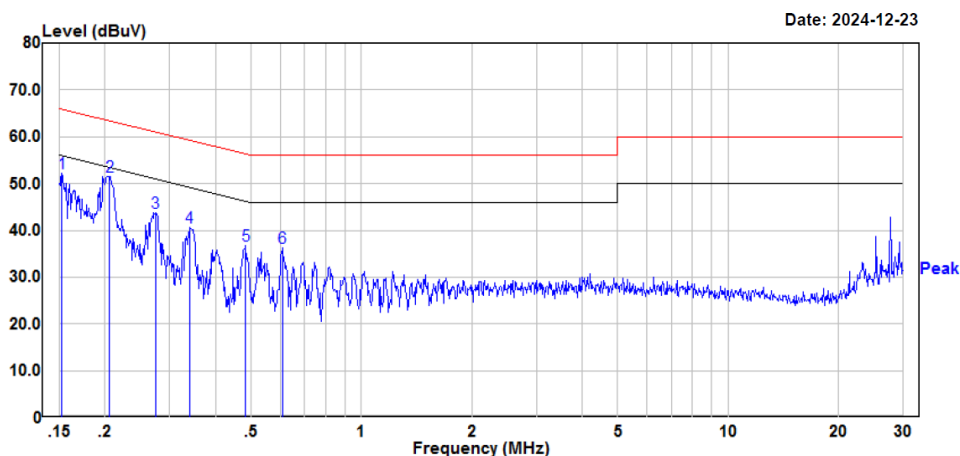AC LINE CONDUCTED EMISSIONS*EUT operation mode: Transmitting in SRD Mode low channel (maximum output power mode)***AC 120V/60 Hz, Line**

Site : CE
Condition : limit\FCC PART 15.207
: DET:Peak
Project No. : RSHA241128001
Model : Puremic MX1-PRO
Phase : L
Voltage : 120V/60Hz
Mode : Transmitting
Test Equipment : ENV216,ESR
Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
Temperature : 17.6°C
Humidity : 39%
Atmospheric pressure: 103.1kPa
Test Engineer : Myles Miao



	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.152	31.99	20.12	52.11	65.88	-13.77 Peak
2	0.205	31.47	20.11	51.58	63.39	-11.81 Peak
3	0.274	23.58	20.15	43.73	60.99	-17.26 Peak
4	0.340	20.46	20.19	40.65	59.21	-18.56 Peak
5	0.484	16.67	20.16	36.83	56.27	-19.44 Peak
6	0.609	16.22	20.09	36.31	56.00	-19.69 Peak

AC 120V/60 Hz, Neutral

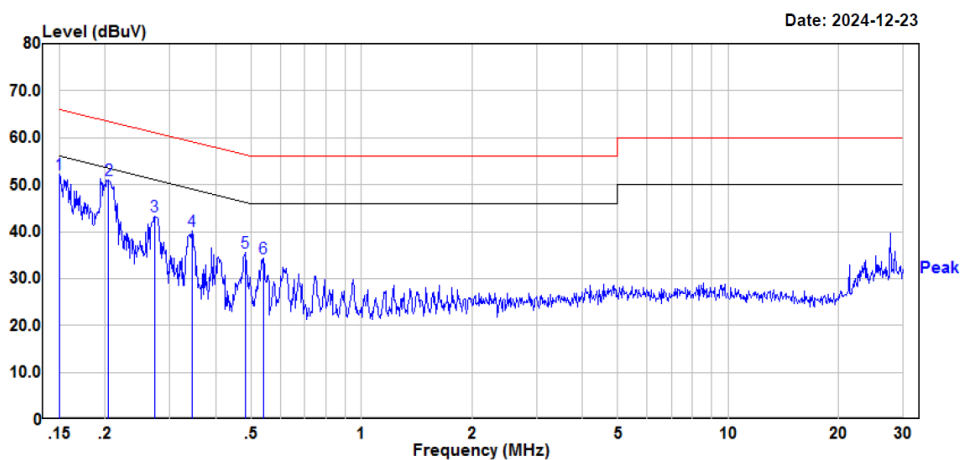

Site : CE
Condition : limit\FCC PART 15.207
: DET:Peak
Project No. : RSHA241128001
Model : Puremic MX1-PRO
Phase : N
Voltage : 120V/60Hz
Mode : Transmitting
Test Equipment : ENV216,ESR
Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
Temperature : 17.6°C
Humidity : 39%
Atmospheric pressure: 103.1kPa
Test Engineer : Myles Miao

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dB	dBuV	dB	
1	0.150	32.09	20.12	52.21	66.00	-13.79	Peak
2	0.204	30.88	20.11	50.99	63.43	-12.44	Peak
3	0.273	23.10	20.15	43.25	61.03	-17.78	Peak
4	0.345	19.87	20.19	40.06	59.09	-19.03	Peak
5	0.482	15.49	20.16	35.65	56.31	-20.66	Peak
6	0.540	14.11	20.12	34.23	56.00	-21.77	Peak

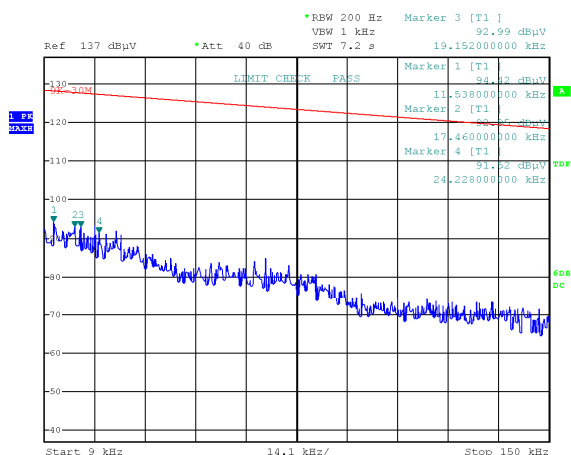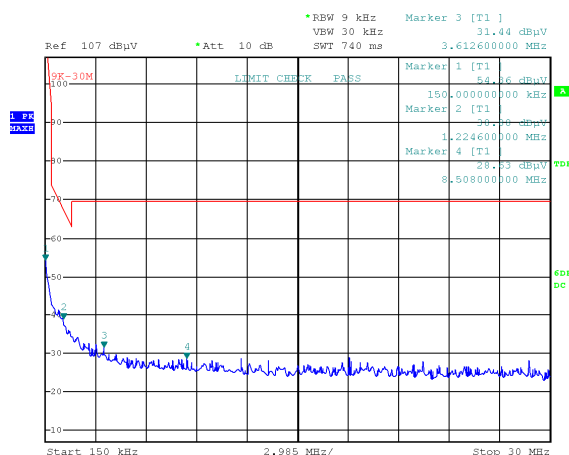RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS*EUT operation mode: Transmitting**After pre-scan in the X, Y and Z axes of orientation, the worst case is below:***9 kHz-30 MHz: (Transmitting in maximum output power SRD mode low channel)****Parallel(worst case)****9kHz-150kHz****150kHz-30MHz**Project No.RSHA241128001
Date: 16.DEC.2024 15:15:24

Tester:Jerry Yan

Project No.RSHA241128001
Date: 16.DEC.2024 15:20:10

Tester:Jerry Yan

9kHz-150kHz


Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.011538	94.42	PK	55.39	126.36	31.94
0.01746	92.95	PK	51.62	122.76	29.81
0.019152	92.99	PK	50.54	121.96	28.97
0.024228	91.52	PK	48.82	119.92	28.40

150kHz-30MHz

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m) @3m	Margin (dB)
0.15000	54.36	PK	50.90	104.08	49.72
1.22460	38.88	PK	4.32	65.84	26.96
3.61260	31.44	PK	15.59	69.54	38.10
8.50800	28.63	PK	6.40	69.54	40.91

30 MHz - 1 GHz:**Low Channel: 2402 MHz****Common Information**


Project No:	RSHA241128001
EUT Model:	Puremic MX1-PRO
Test Mode:	Transmitting in SRD mode Low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW:100 kHz; VBW: 300 kHz; Sweep Time: Auto
Temperature:	15.4°C
Humidity:	40%
Barometric Pressure:	102.4 kPa
Test Engineer:	Jerry Yan
Test Date:	2024/12/16

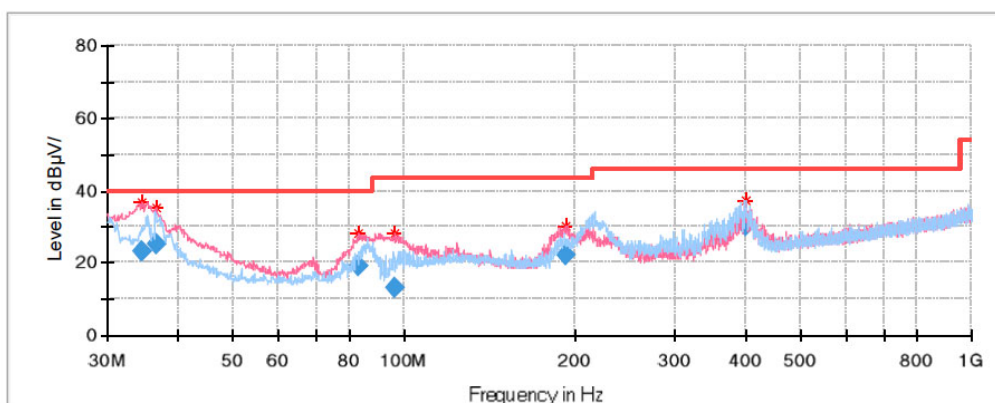**Final Result**

Frequency (MHz)	QuasiPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
34.608946	23.25	40.00	16.75	V	-8.0
36.545911	25.07	40.00	14.93	V	-8.4
83.352103	18.93	40.00	21.07	V	-17.1
96.207250	12.90	43.50	30.60	V	-15.3
192.239468	22.21	43.50	21.29	V	-12.3
401.413500	30.23	46.00	15.77	H	-8.0

Middle Channel: 2440 MHz**Common Information**


Project No: RSHA241128001
EUT Model: Puremic MX1-PRO
Test Mode: Transmitting in SRD mode middle channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW: 100 kHz; VBW: 300 kHz; Sweep Time: Auto
Temperature: 15.4°C
Humidity: 40%
Barometric Pressure: 102.4 kPa
Test Engineer: Jerry Yan
Test Date: 2024/12/16

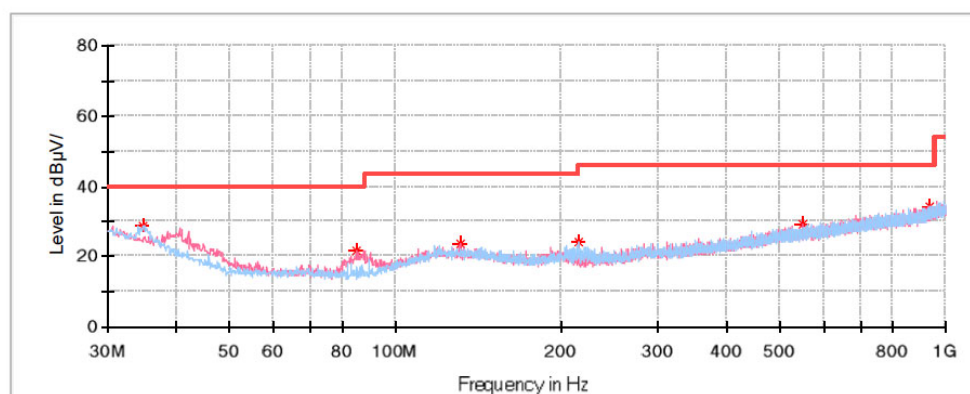**Critical_Freqs**

Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
34.850000	28.75	40.00	11.25	H	-7.9
85.047500	21.78	40.00	18.22	V	-17.0
130.880000	23.87	43.50	19.63	V	-11.1
214.663750	24.12	43.50	19.38	H	-13.0
551.132500	28.94	46.00	17.06	V	-4.6
936.707500	34.27	46.00	11.73	H	1.1

High Channel:2480 MHz**Common Information**

Project No: RSHA241128001
EUT Model: Puremic MX1-PRO
Test Mode: Transmitting in SRD mode high channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW:100 kHz; VBW: 300 kHz; Sweep Time: Auto
Temperature: 15.4℃
Humidity: 40%
Barometric Pressure: 102.4 kPa
Test Engineer: Jerry Yan
Test Date: 2024/12/16

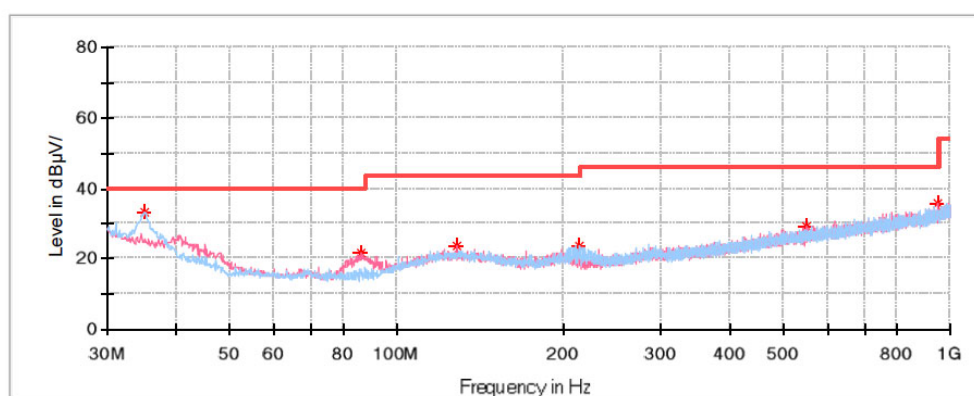**Critical_Freqs**


Frequency (MHz)	MaxPeak (dBμ V/m)	Limit (dBμ V/m)	Margin (dB)	Pol	Corr. (dB/m)
35.092500	33.35	40.00	6.65	H	-8.1
86.138750	21.63	40.00	18.37	V	-17.0
128.333750	23.55	43.50	19.95	V	-11.0
214.300000	23.71	43.50	19.79	H	-13.0
549.313750	29.03	46.00	16.97	V	-4.7
951.985000	35.55	46.00	10.45	V	1.5

1 GHz - 18 GHz:

Low Channel: 2402 MHz

Common Information


Project No.: RSHA241128001
 Test Mode: Transmitting
 Standard: FCC Part 15.247 & FCC Part 15.205 FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

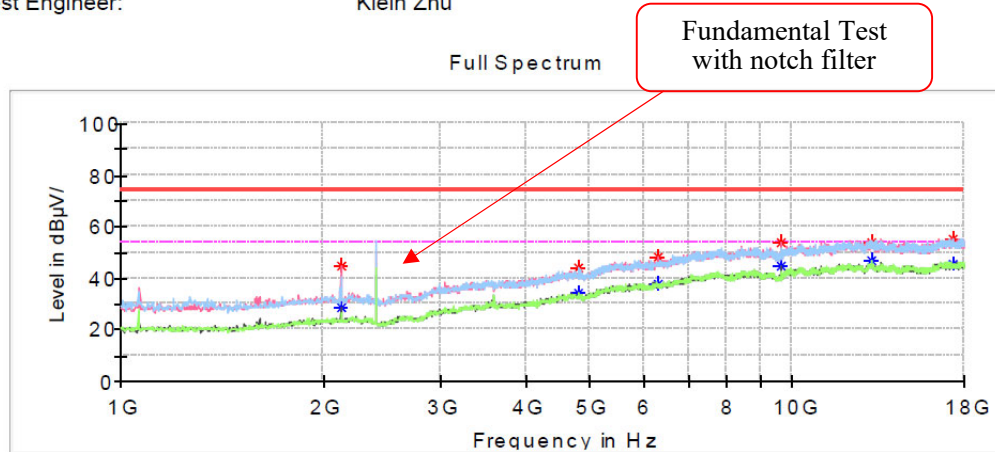**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
2125.400000	---	28.47	54.00	25.53	V	-11.3
2125.400000	44.41	---	74.00	29.59	V	-11.3
4804.600000	---	34.33	54.00	19.67	V	-3.2
4804.600000	44.36	---	74.00	29.64	V	-3.2
6304.000000	---	37.43	54.00	16.57	V	0.3
6304.000000	47.96	---	74.00	26.04	V	0.3
9608.800000	---	44.77	54.00	9.23	V	5.8
9608.800000	54.04	---	74.00	19.96	V	5.8
13093.800000	---	46.54	54.00	7.46	H	9.7
13093.800000	53.71	---	74.00	20.29	H	9.7
17381.200000	---	45.33	54.00	8.67	H	11.7
17381.200000	55.52	---	74.00	18.48	H	11.7

Middle Channel: 2440 MHz**Common Information**


Project No.: RSHA241128001
 Test Mode: Transmitting
 Standard: FCC Part 15.247 & FCC Part 15.205 FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

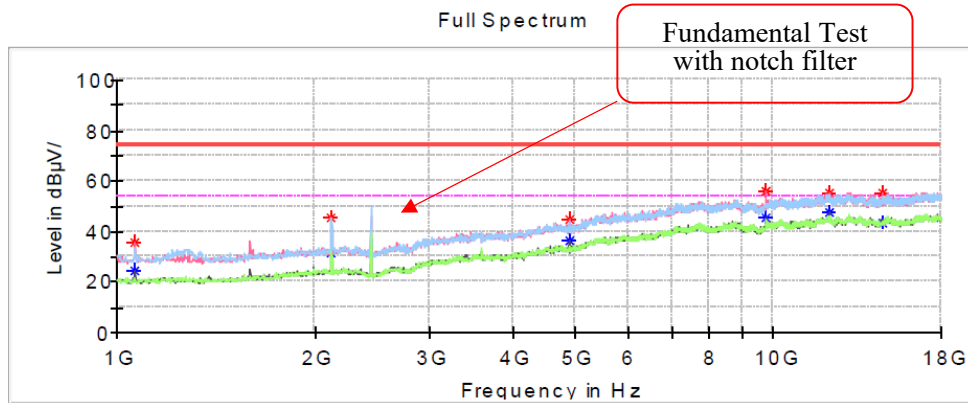**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	24.48	54.00	29.52	V	-15.4
1064.600000	35.37	---	74.00	38.63	V	-15.4
2122.000000	---	31.72	54.00	22.28	V	-11.4
2122.000000	45.56	---	74.00	28.44	V	-11.4
4879.400000	---	36.64	54.00	17.36	V	-2.9
4879.400000	44.47	---	74.00	29.53	V	-2.9
9758.400000	56.08	---	74.00	17.92	V	6.3
9758.400000	---	45.61	54.00	8.39	V	6.3
12199.600000	54.96	---	74.00	19.04	V	9.2
12199.600000	---	47.74	54.00	6.26	V	9.2
14698.600000	---	43.53	54.00	10.47	H	9.4
14698.600000	55.14	---	74.00	18.86	H	9.4

High Channel: 2480 MHz**Common Information**


Project No.: RSHA241128001
 Test Mode: Transmitting
 Standard: FCC Part 15.247 & FCC Part 15.205 FCC Part 15.209
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Test Engineer: Klein Zhu

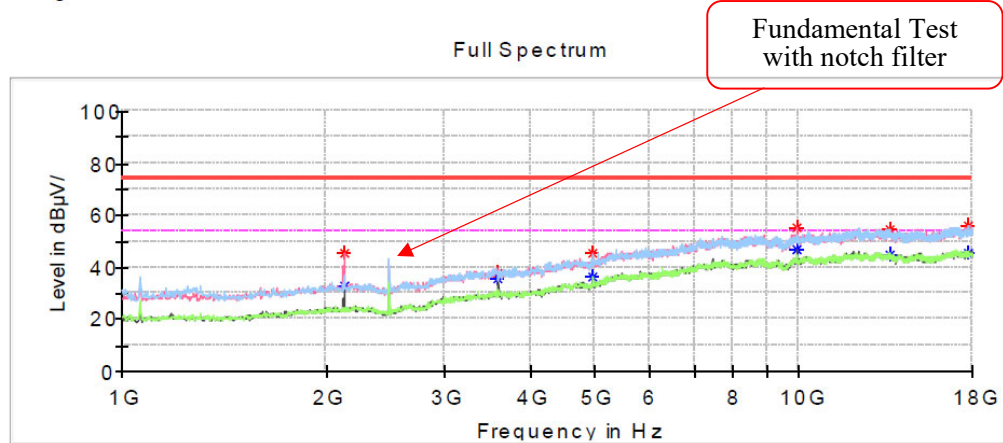**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2128.800000	45.66	---	74.00	28.34	V	-11.3
2128.800000	---	33.10	54.00	20.90	V	-11.3
3597.600000	37.60	---	74.00	36.40	V	-6.3
3597.600000	---	35.56	54.00	18.44	V	-6.3
4957.600000	---	36.57	54.00	17.43	V	-2.6
4957.600000	45.41	---	74.00	28.59	V	-2.6
9921.600000	---	46.91	54.00	7.09	V	6.9
9921.600000	55.18	---	74.00	18.82	V	6.9
13576.600000	---	44.93	54.00	9.07	H	9.6
13576.600000	54.80	---	74.00	19.20	H	9.6
17789.200000	---	45.29	54.00	8.71	H	11.8
17789.200000	55.75	---	74.00	18.25	H	11.8

Band Edge:**Left Side****Common Information**

Project No.:	RSHA241128001
Test Mode:	Transmitting
Standard:	FCC Part 15.247& FCC Part 15.205 FCC Part 15.209
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer:	Klein Zhu

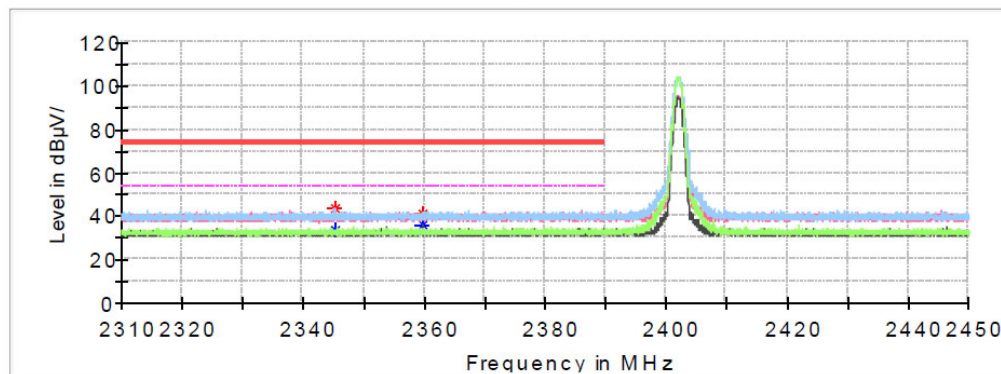Full Spectrum**Critical Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2345.294000	43.81	---	74.00	30.19	H	-4.7
2345.294000	---	33.23	54.00	20.77	H	-4.7
2359.826000	41.23	---	74.00	32.77	V	-4.7
2359.826000	---	35.73	54.00	18.27	V	-4.7

Right Side

Common Information

Project No.: RSHA241128001
Test Mode: Transmitting
Standard: FCC Part 15.247& FCC Part 15.205 FCC Part 15.209
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Test Engineer: Klein Zhu



Full Spectrum

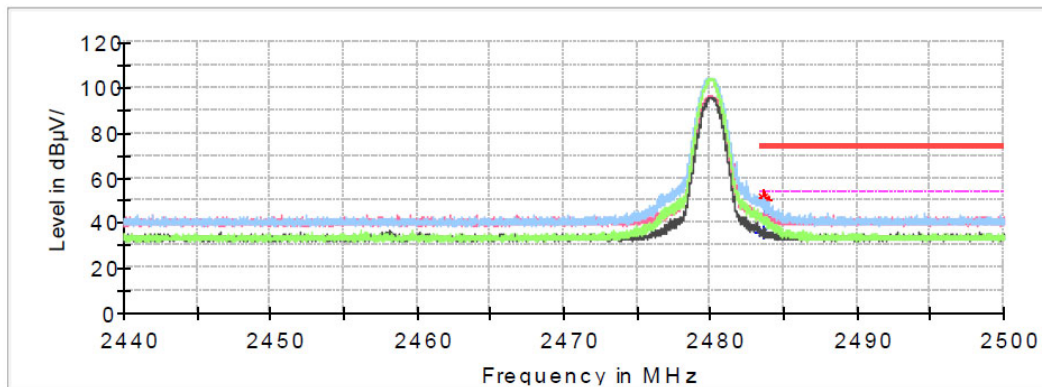

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.566000	50.86	---	74.00	23.14	V	-4.3
2483.566000	---	36.19	54.00	17.81	V	-4.3
2483.704000	50.21	---	74.00	23.79	H	-4.3
2483.704000	---	42.70	54.00	11.30	H	-4.3

18 GHz - 25 GHz (Transmitting in maximum output power low channel):

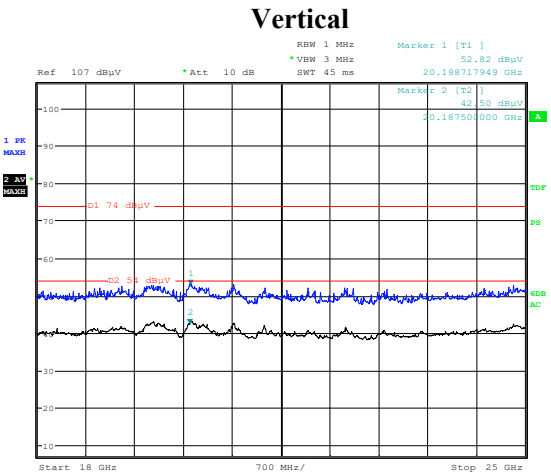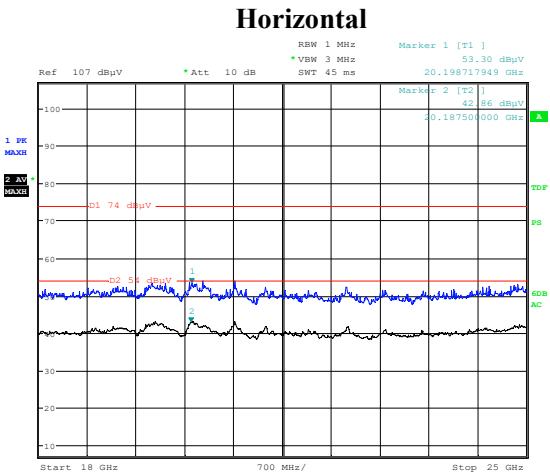

Project No :RSHA241128001 Tester :Hugh Wu
Date: 18.DEC.2024 17:22:38

Project No :RSHA241128001 Tester :Hugh Wu
Date: 18.DEC.2024 17:38:50

Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
20187.50	---	42.5	54	11.5	V	12.45
20198.72	52.82	---	74	21.18	V	12.46
20187.50	---	42.86	54	11.14	H	12.45
20198.72	53.3	---	74	20.7	H	12.46

CHANNEL SEPARATION TEST

EUT operation mode: Transmitting

Test Mode	Channel	Result (MHz)	Limit (MHz)	Verdict
SRD	Middle	2	≥1.168	PASS

Note: Limit = 20 dB bandwidth

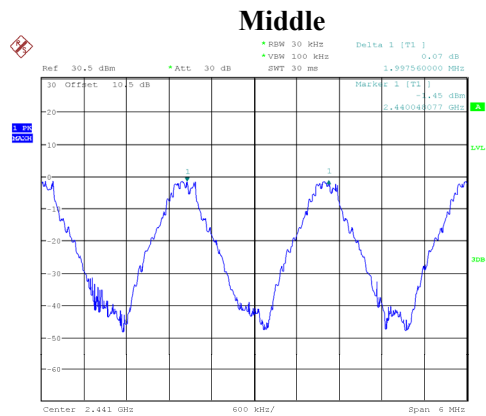


ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 17:28:24


20 dB BANDWIDTH TEST

EUT operation mode: Transmitting


Test Mode	Channel	20db EBW (MHz)
SRD	Low	1.168
	Middle	1.139
	High	1.139

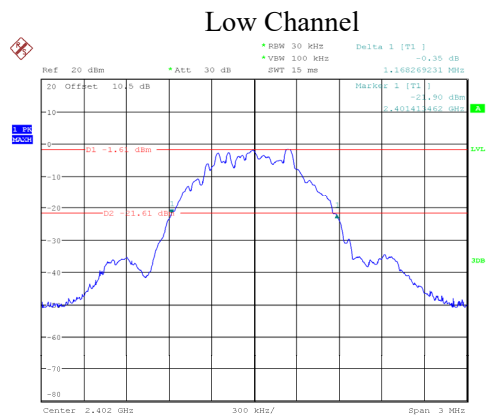

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 19:05:40

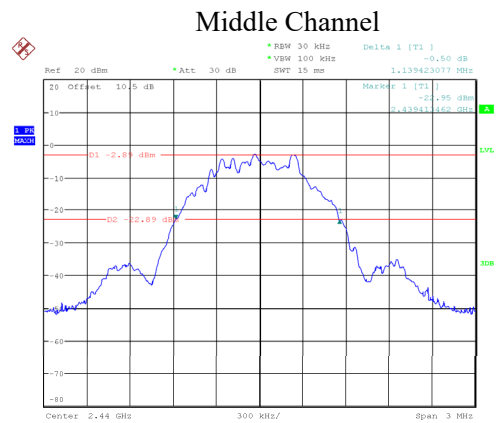

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 31.MAR.2025 15:27:56

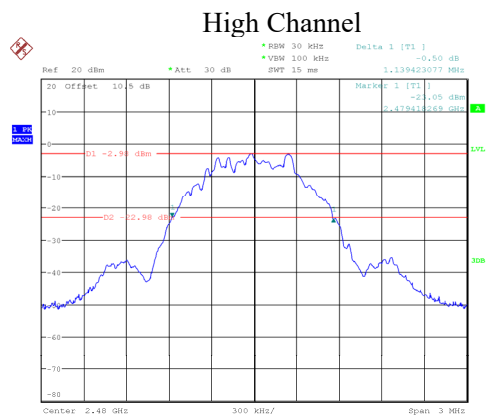


ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 19:02:19

QUANTITY OF HOPPING CHANNEL TEST

EUT operation mode: Hopping

Test Mode	Channel	Result (Num)	Limit (Num)	Verdict
SRD	Hop	40	≥15	PASS

Number of Hopping Channels

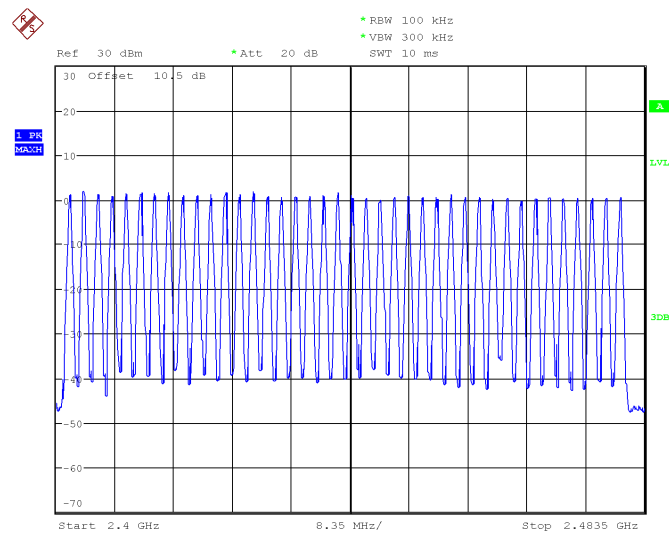


ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 16:46:26

TIME OF OCCUPANCY (DWELL TIME)


EUT operation mode: Hopping

Test Mode	Channel	BurstWidth (ms)	TotalHops (Num)	Result (s)	Limit (s)	Verdict
SRD	Hop	1.69	19	0.03	≤0.4	PASS

Note: Result= BurstWidth* TotalHops

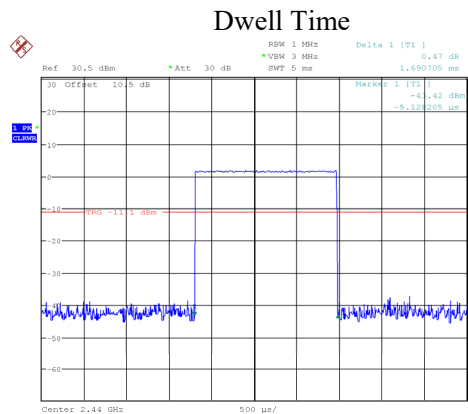

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 18:00:23

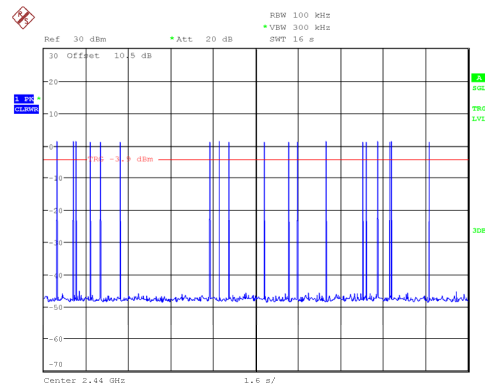


ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 17.JAN.2025 09:22:15


PEAK OUTPUT POWER MEASUREMENT

EUT operation mode: Transmitting


Mode	Channel	Result (dBm)	Limit (dBm)
SRD	Low	2.79	30
	Middle	1.93	
	High	1.50	

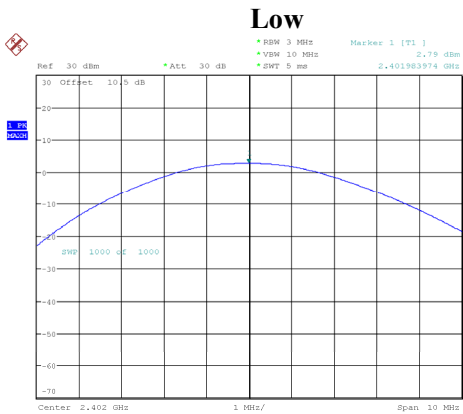

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 19:38:55

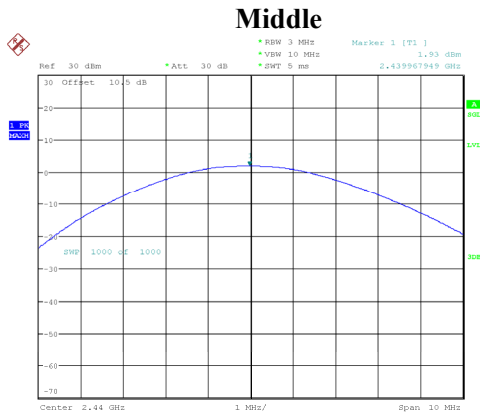


ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 19:37:44

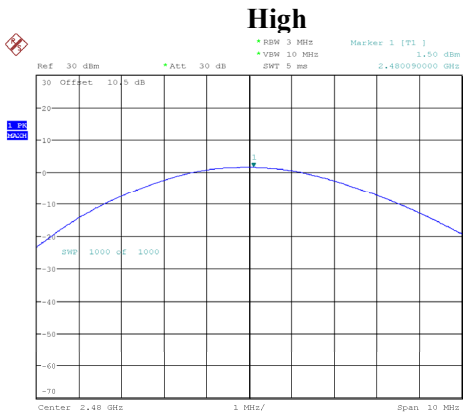

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 17.JAN.2025 09:27:43

EUT operation mode: Transmitting & Hopping
Test Result: Compliant.

Left Side - Transmitting



ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 31.MAR.2025 16:04:18

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 17:47:49

ProjectNo.:RSHA241128001 Tester:Neil Zhou
Date: 14.JAN.2025 17:42:25

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******