



FCC/ISED Test Setup Photos

For:
Praesidium Inc.

Model Name:
2001BIO1

Product Description:
Contactless vital sign detection sensor

FCC ID: 2A7ZX2001BIO1
IC ID: 28837-2001BIO1

Applied Rules and Standards:
47 CFR Part 15.255
RSS-210 Issue 10

Addition to REPORT #: EMC_PRAES-001-22001_15.255

DATE: 2023-02-09


CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.


Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecom.com ♦ <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

Radiated Measurements

9 KHz to 30 MHz

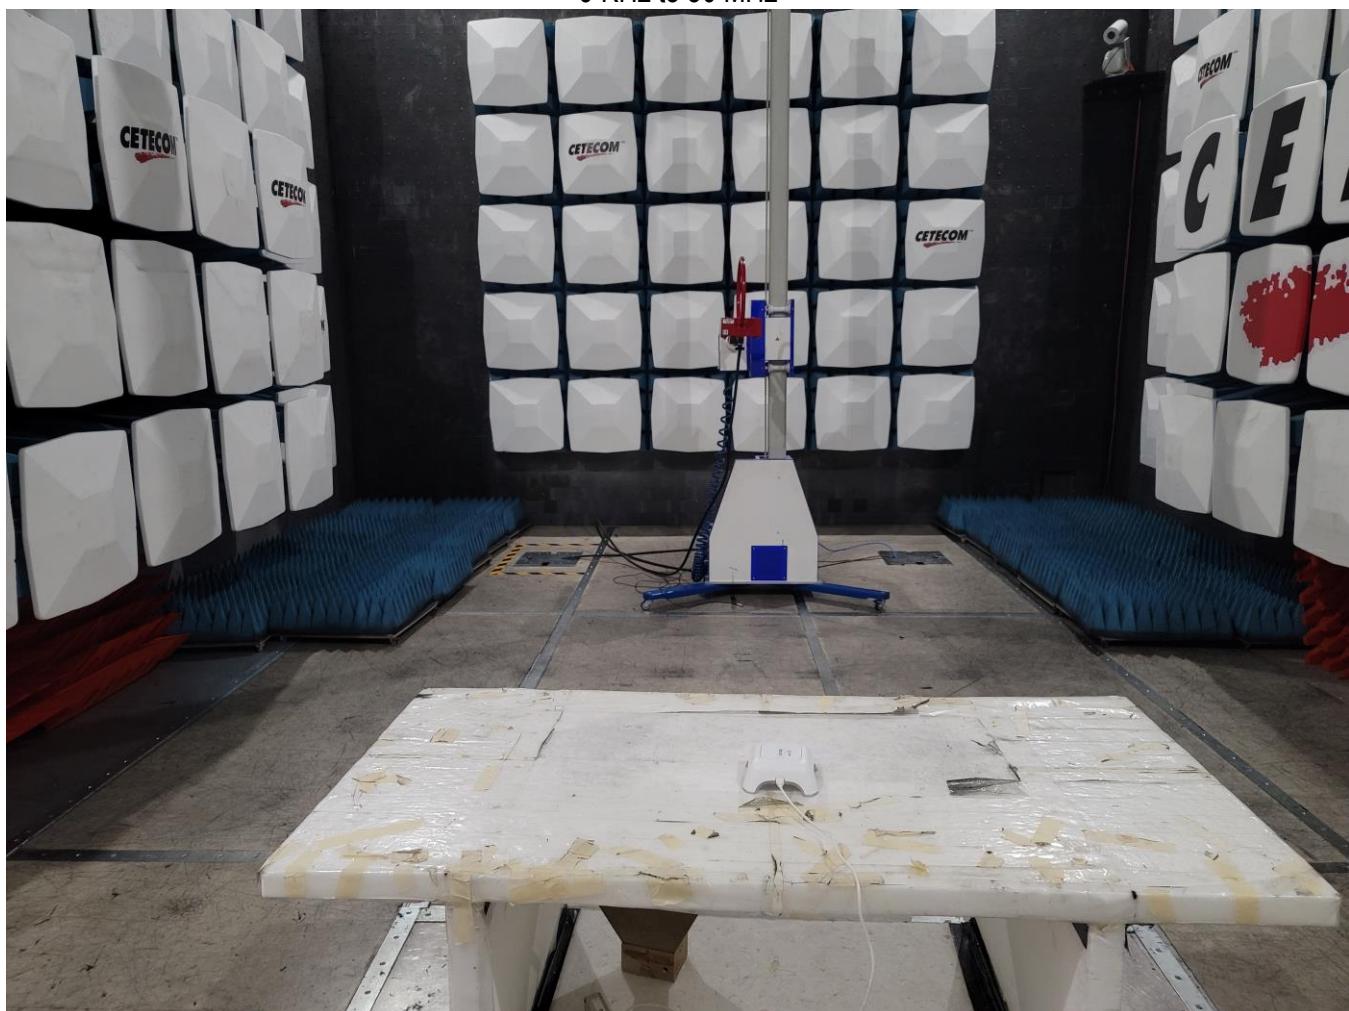

30 MHz to 1 GHz

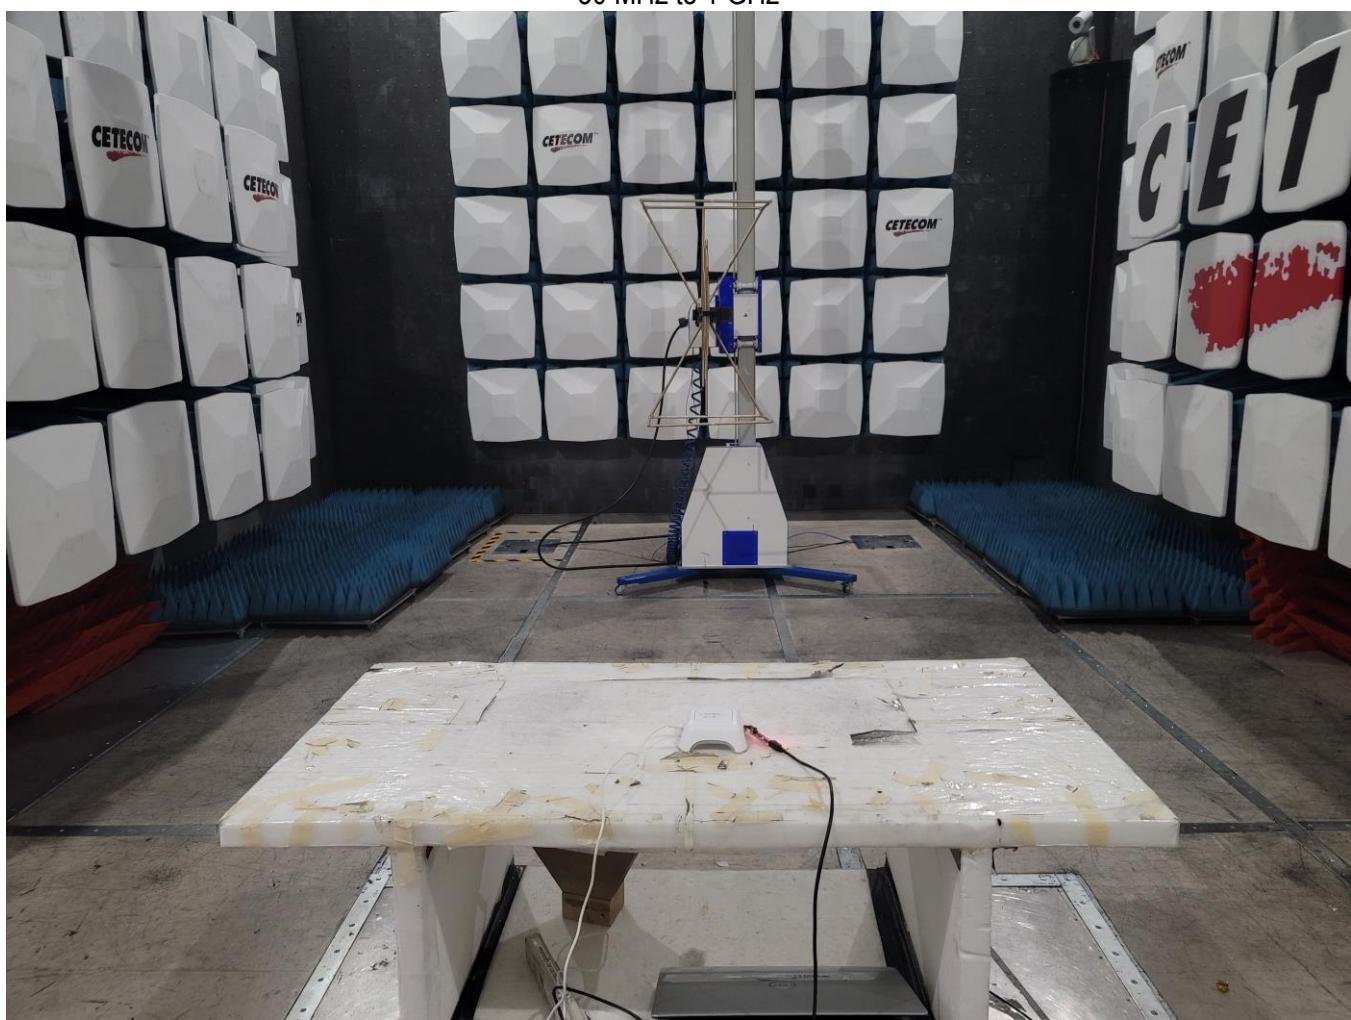

1 GHz to 3GHz



3 GHz to 18GHz



18 GHz to 40 GHz




40 GHz to 220 GHz




EIRP and conducted output power measurement


Step 1: measuring the main beam of the EUT with RF detector and DSO.

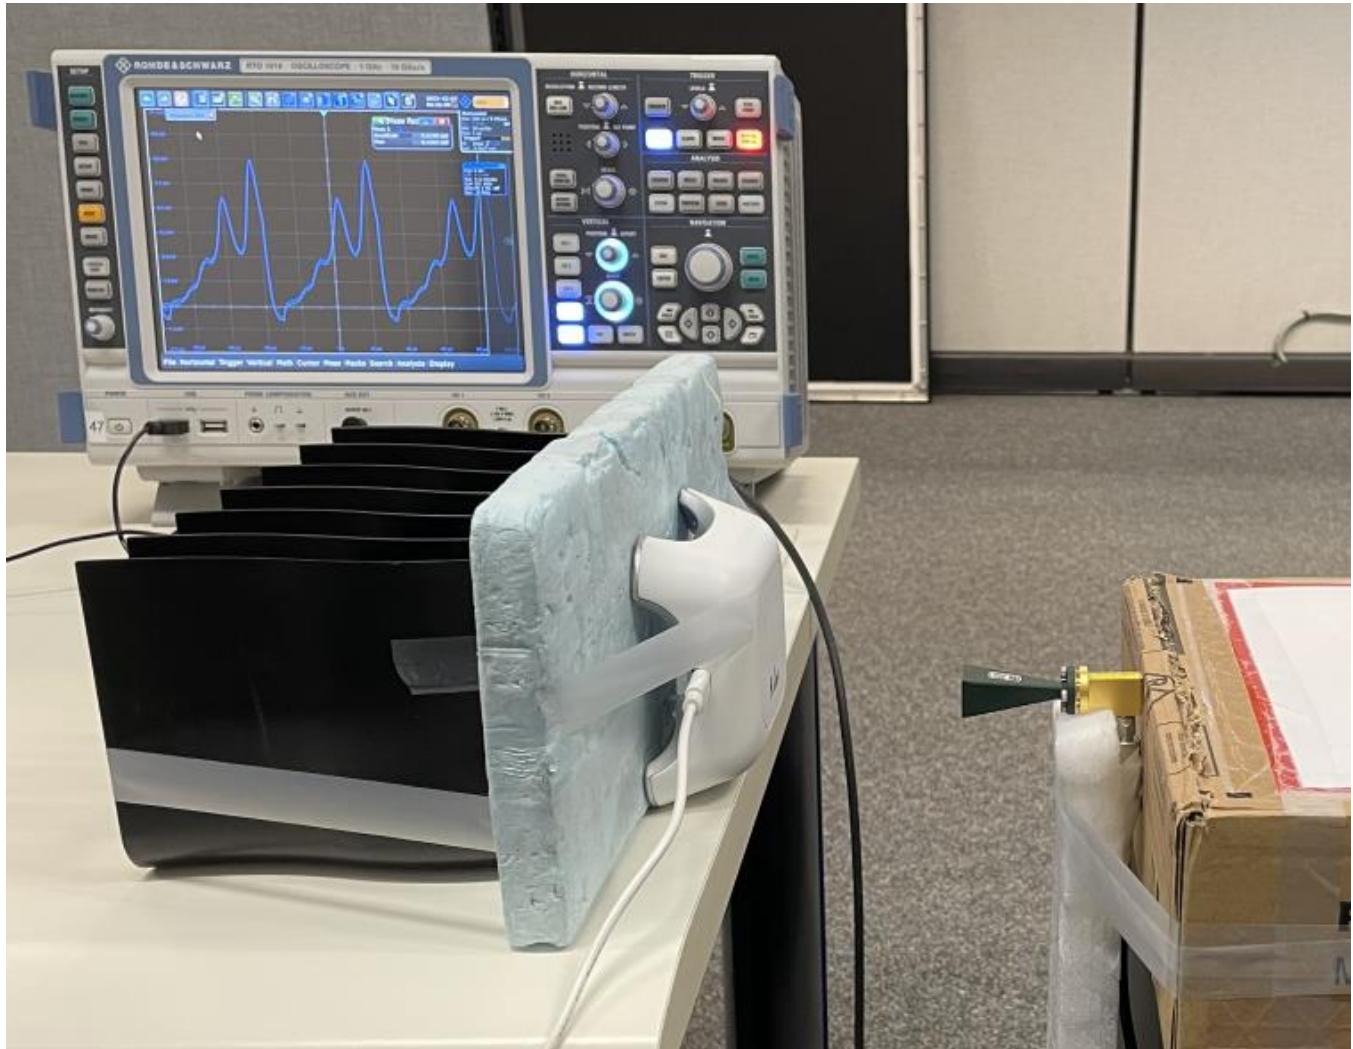

Step 2: substitute the EUT with a known signal source including signal generator, frequency multiplier, variable attenuator and horn antenna. The output level is adjusted to the same level measured at the EUT in step 1.

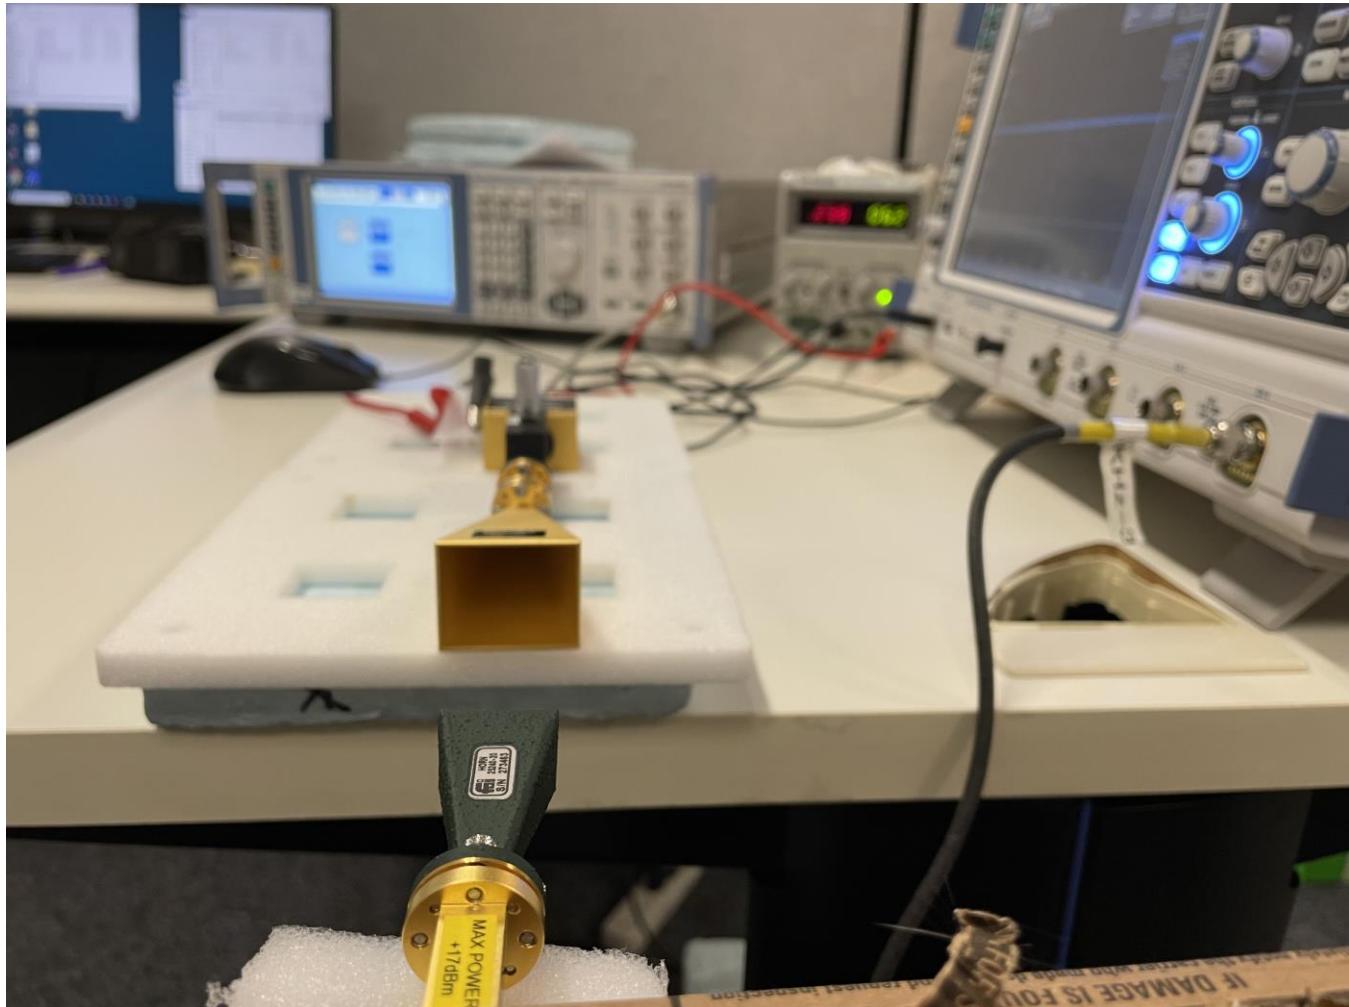


Step 3: Measure the output level of the known signal source without any change. The measurement is done in the conducted way with a power meter with a thermocouple detector.

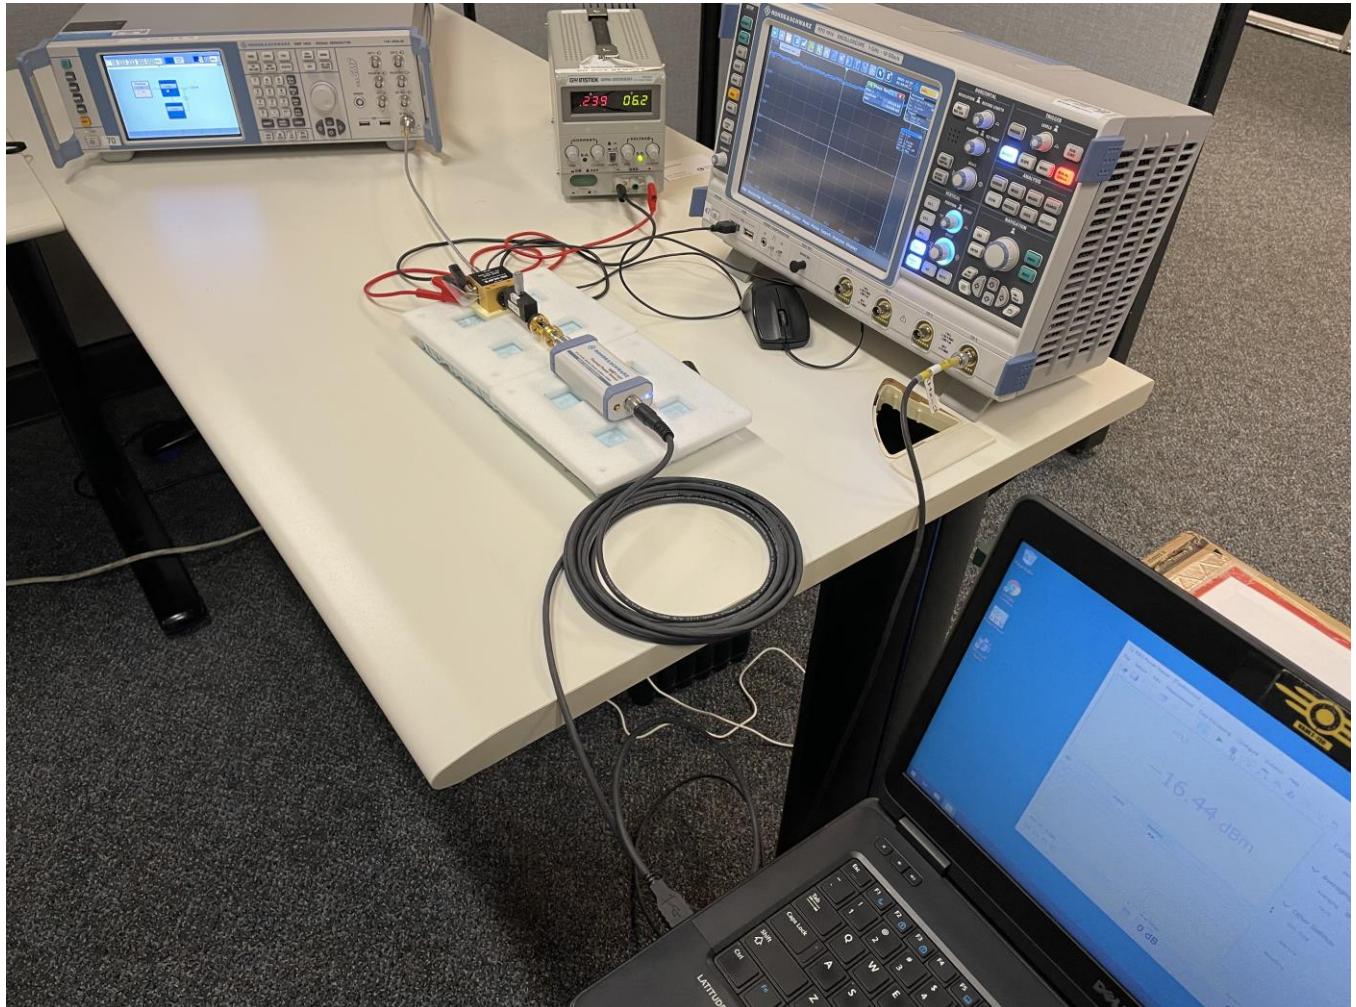


AC line conducted emission

150 KHz to 30 MHz with charger

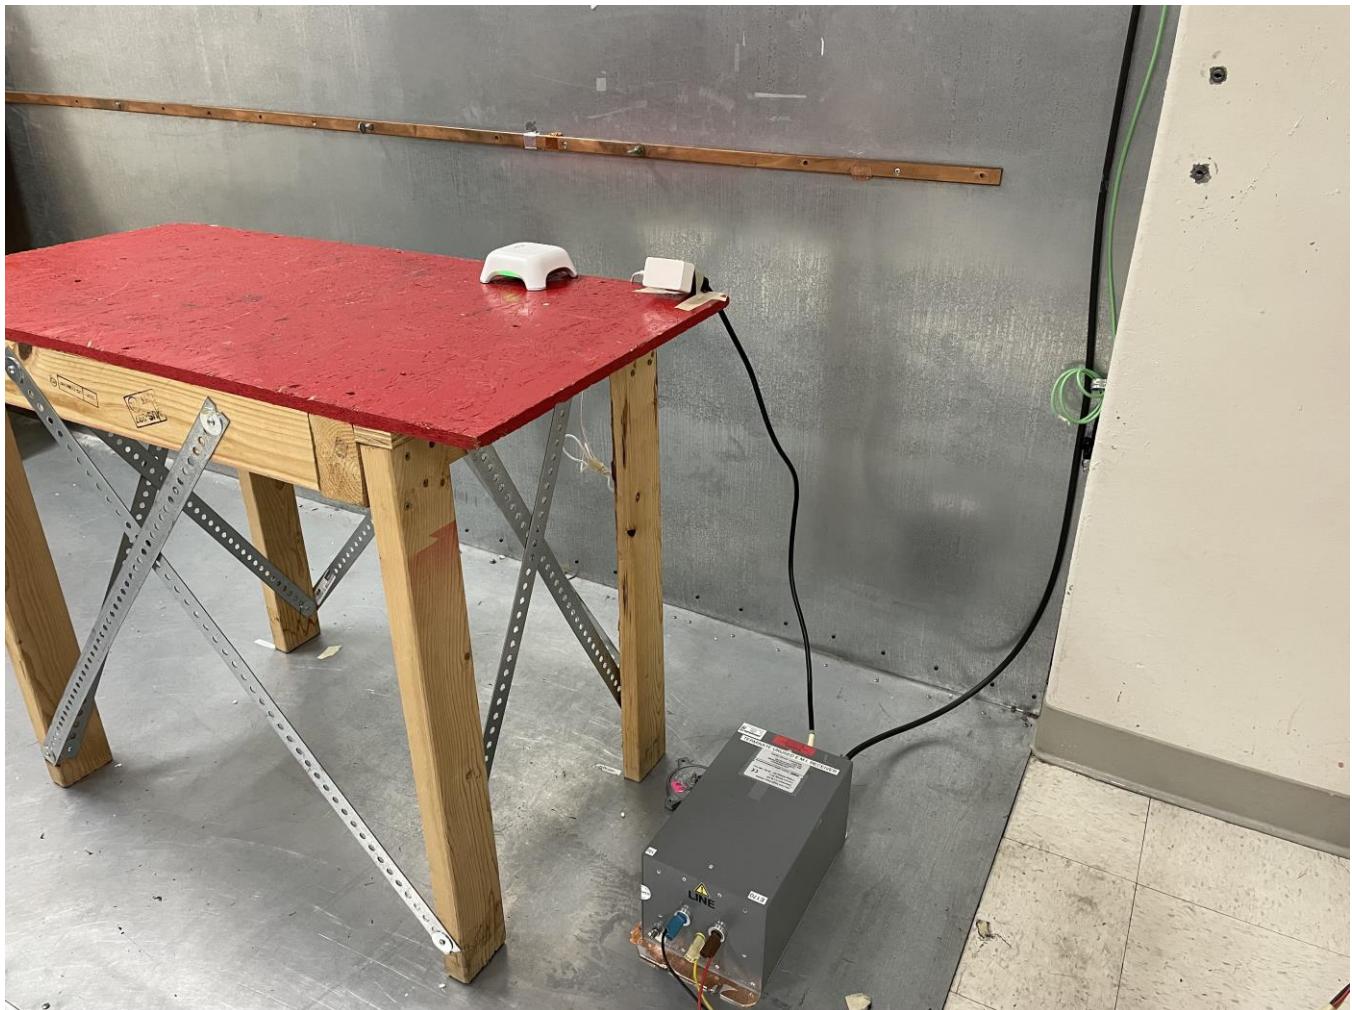

Frequency stability test under extreme conditions

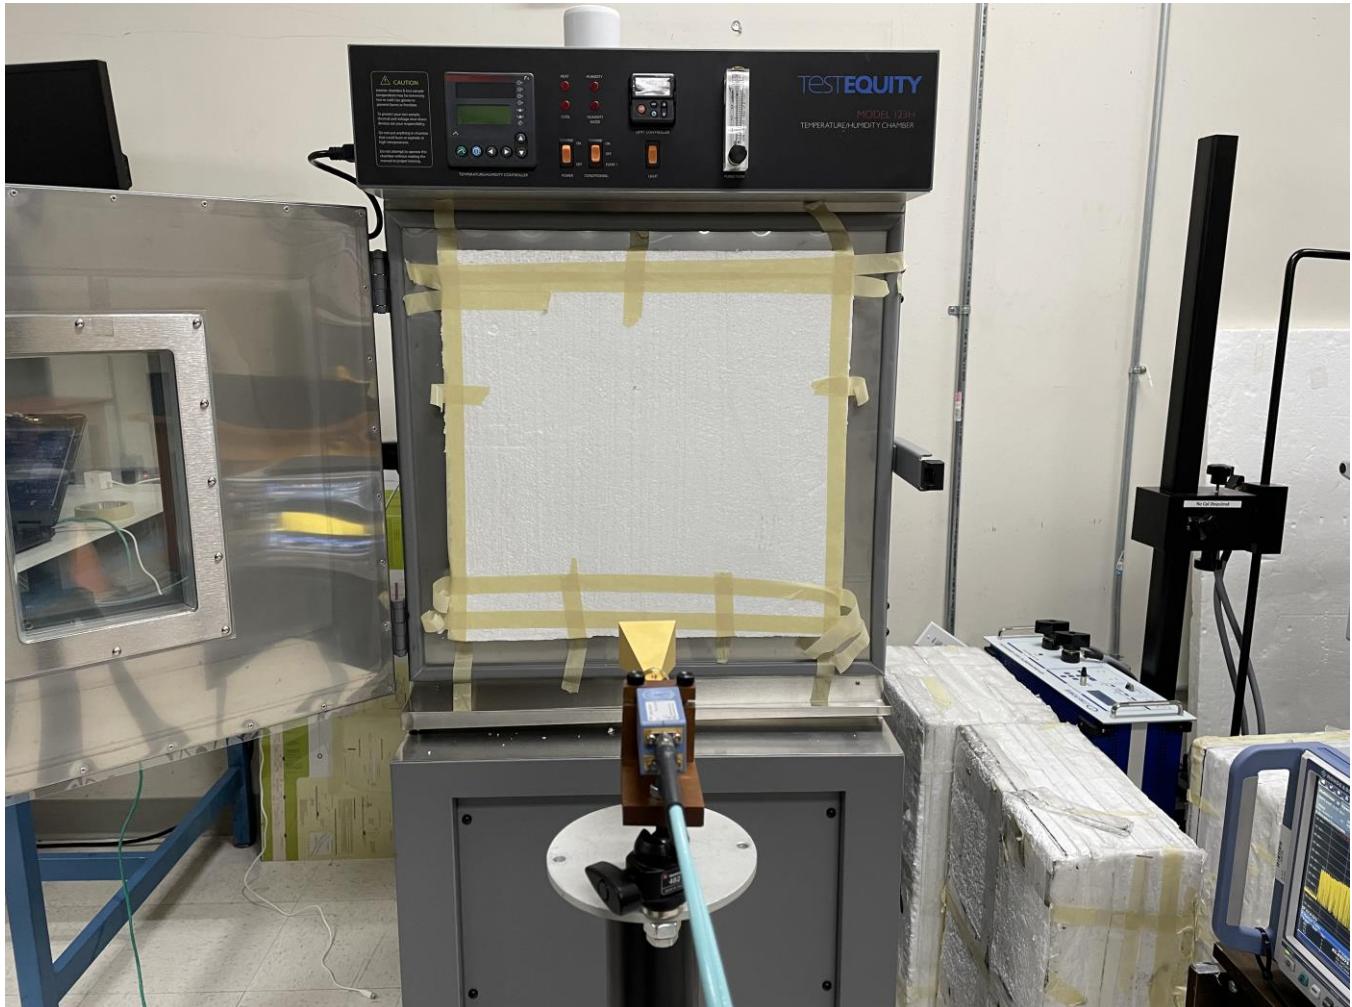

EUT Photos

EUT Top View



EUT Front View



EUT Left View




EUT Right View



EUT Back View



EUT Bottom View

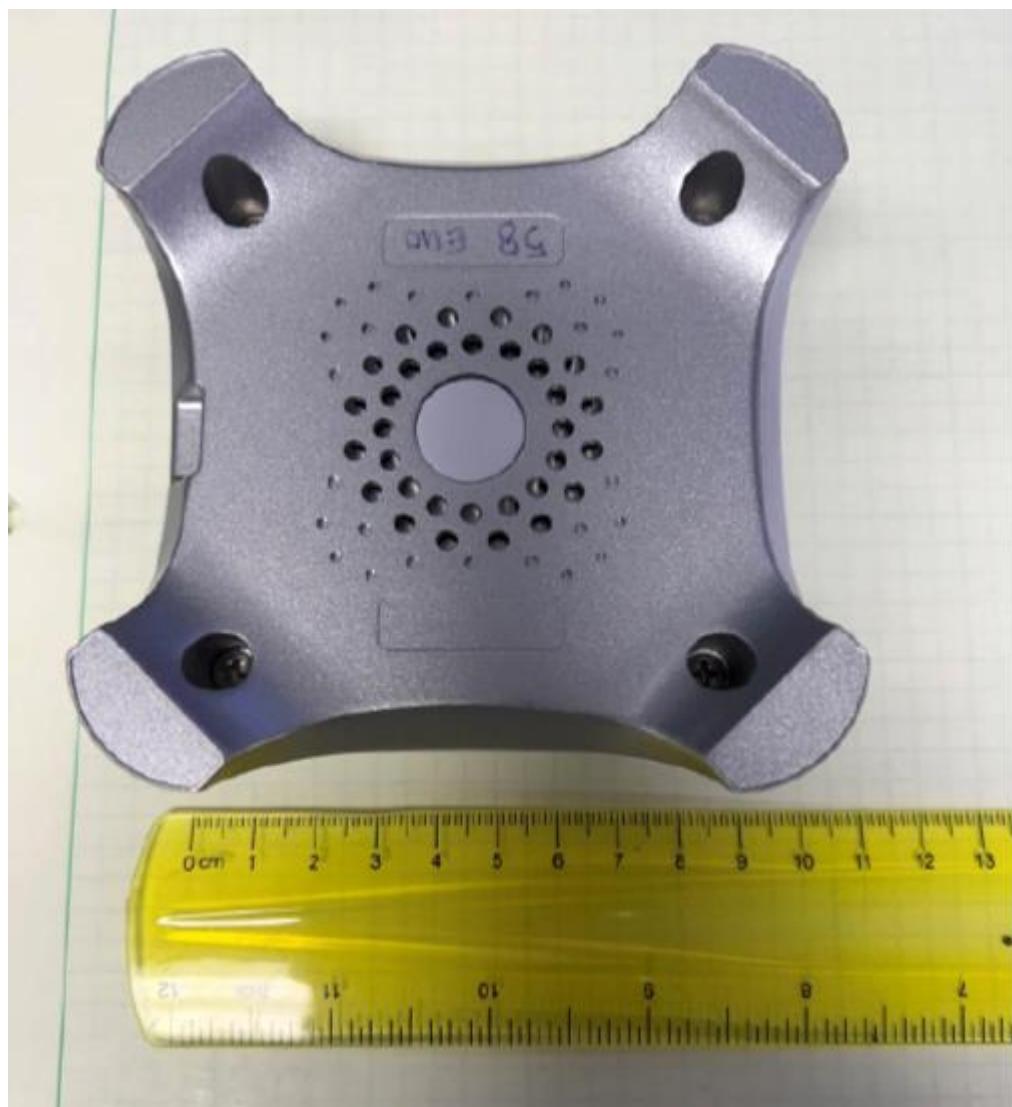

Date	Template Revision	Changes to report	Prepared by	Approved by

<<< The End >>>