

RF Exposure Evaluation

FCC ID: 2A825-PB147ACW

1. Client Information

Applicant	:	Shen Zhen South Fortune Technology Co., Ltd.
Address	:	4th Floor, Building C, Ganghua High-tech park, Nanwan Street, Buji Town, Longgang District, Shenzhen, China
Manufacturer	:	Shen Zhen South Fortune Technology Co., Ltd.
Address	:	4th Floor, Building C, Ganghua High-tech park, Nanwan Street, Buji Town, Longgang District, Shenzhen, China

2. General Description of EUT

EUT Name	:	WIRELESS CHARDING POWER BANK	
Model(s)	:	PB147ACW, HIT#2896BLK, HIT#2896WHT, #2756Chi-Charge Plus	
Product Description	:	Operation Frequency:	110KHz-205KHz
		Modulation Type:	ASK
		Antenna:	Coil Antenna
Power Supply	:	AC Input:110-240V~ 0.15A 50/60Hz Micro USB Input: 5V $\rightarrow$ 2A (Max) USB Output: 5V $\rightarrow$ 2.1A (Max) Cable Output1: 5V $\rightarrow$ 2.1A (Max) Cable Output2: 5V $\rightarrow$ 2.1A (Max) Cable Output3: 5V $\rightarrow$ 2.1A (Max) Wireless Output: 5V $\rightarrow$ 1A Max Output:5V $\rightarrow$ 2.1A (shared) Wireless Charging: 5W(Max) DC 3.7V by 5000mAh Rechargeable Li-ion battery	
Software Version	:	----	
Hardware Version	:	----	
Connecting I/O Port(S)	:	Please refer to the User's Manual	
Accessories	:	HUAWEI Mate 40 PRO	

Note: More test information about the EUT please refer the RF Test Report.

RF Exposure Considerations

1. Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging App v03.

2. Requirements

According to the item 5.2 of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation:

- (1) Power transfer frequency is less than 1 MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.


Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).


3. Test Setup

Ac Mode

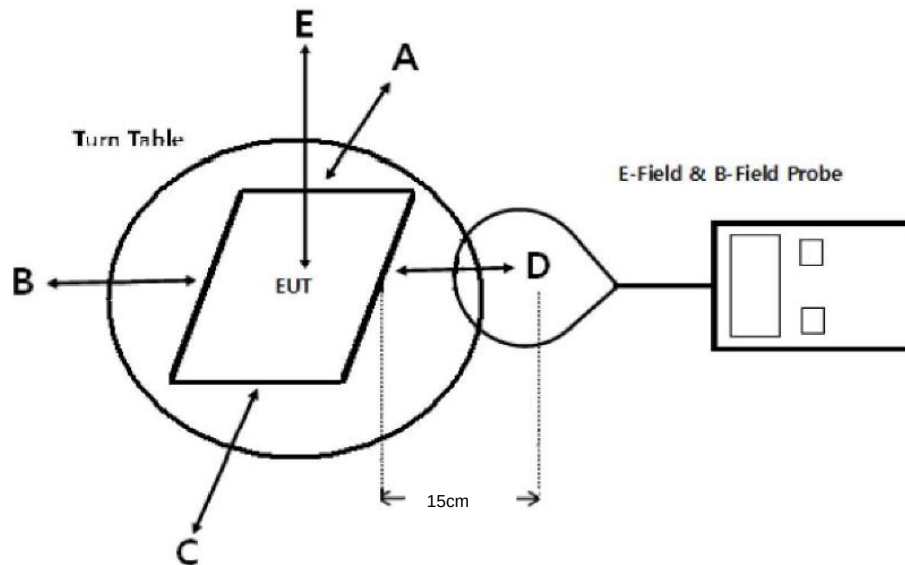

Note: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface.

Battery Mode

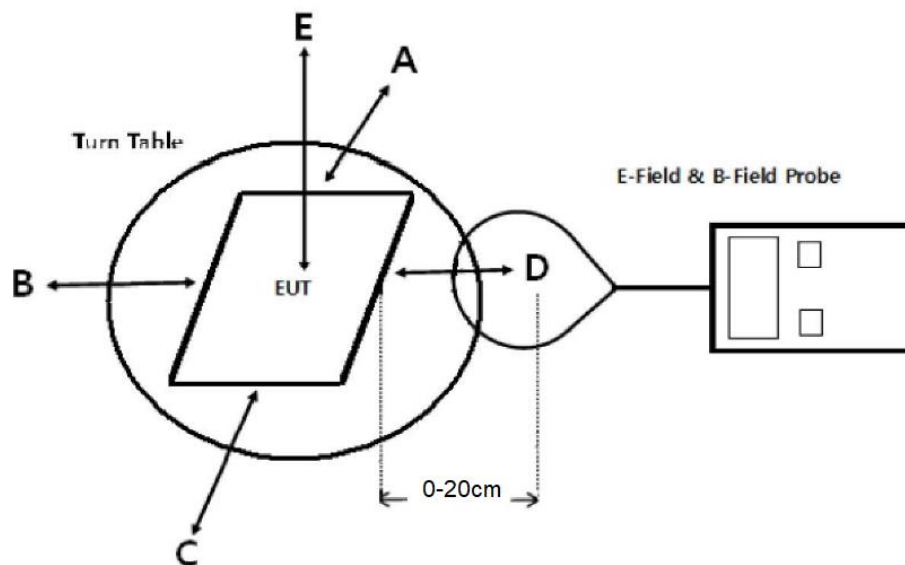

Note: The aggregate H-field strengths at 0-20 cm surrounding the device and 0-20 cm above the top surface.

4. Test Procedure

For Mobile RF Exposure:

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

Remark:

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

For Portable RF Exposure:

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (from 0 cm to 20cm, in 2 cm maximum increment) which is between the edge of the charger and the geometric center of probe.
- c) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- d) The EUT were measured according to the dictates of KDB 680106 D01v03r01

5. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v03 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 110.0 KHz - 205 KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power of the primary coil is 15W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes only single coil.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	portable exposure conditions and mobile exposure conditions (Specific reference TCB Workshop Wireless Power Transfer Updates)
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

In all other cases, unless excluded above, an RF exposure evaluation report must be reviewed and accepted through a KDB or PBA inquiry to enable authorization of the equipment. When evaluation is required to show compliance; for example, using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation

6. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Magnetic field meter	NARDA	ELT-400	EE030	Sep. 09, 2022	Sep. 08, 2023

7. Deviation From Test Standard

No deviation

8. Mode of operation during the test / Test peripherals used

Test Modes:		
TM1	AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%)	record
TM2	AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%)	record
TM3	AC/DC Adapter + EUT + Mobile Phone (Battery Status: <99%)	record
TM4	Battery mode: EUT+Load (Battery Status: <1%)	record
TM5	Battery mode: EUT+Load (Battery Status: <50%)	record
TM6	Battery mode: EUT+Load (Battery Status: 99%)	record

9. Test Result

E-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Charging Battery Level	Frequency Range (MHz)	Measured E-Field Strength Values (V/m)					E-Field Strength 50% Limits (V/m)	E-Field Strength Limits (V/m)
		Test Position						
		A	B	C	D	E		
1%	0.135	42.601	49.387	56.927	42.978	49.387	307.0	614.0
50%	0.135	49.764	42.978	49.387	45.994	43.355	307.0	614.0
99%	0.135	60.697	50.141	43.732	36.192	43.732	307.0	614.0

Note: V/m= A/m *377

H-Filed Strength at 15 cm from the edges surrounding the EUT and 15 cm above the top surface

Charging Battery Level	unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)					H-Field Strength 50% Limits (A/m)	H-Field Strength Limits (A/m)
			Test Position						
			A	B	C	D	E		
1%	uT	0.135	0.141	0.164	0.189	0.143	0.164	--	--
1%	A/m	0.135	0.113	0.131	0.151	0.114	0.131	0.815	1.63
50%	uT	0.135	0.165	0.143	0.164	0.153	0.144	--	--
50%	A/m	0.135	0.132	0.114	0.131	0.122	0.115	0.815	1.63
99%	uT	0.135	0.201	0.166	0.145	0.120	0.145	--	--
99%	A/m	0.135	0.161	0.133	0.116	0.096	0.116	0.815	1.63

H-Field Strength at 0cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.176	--	--
1%	A/m	0.135	0.141	0.815	1.63
50%	uT	0.135	0.136	--	--
50%	A/m	0.135	0.109	0.815	1.63
99%	uT	0.135	0.103	--	--
99%	A/m	0.135	0.082	0.815	1.63

Note: A/m=uT/1.25

H-Field Strength at 2cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.151	--	--
1%	A/m	0.135	0.121	0.815	1.63
50%	uT	0.135	0.126	--	--
50%	A/m	0.135	0.101	0.815	1.63
99%	uT	0.135	0.094	--	--
99%	A/m	0.135	0.075	0.815	1.63

H-Field Strength at 4cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.176	--	--
1%	A/m	0.135	0.141	0.815	1.63
50%	uT	0.135	0.134	--	--
50%	A/m	0.135	0.107	0.815	1.63
99%	uT	0.135	0.096	--	--
99%	A/m	0.135	0.077	0.815	1.63

H-Field Strength at 6cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.1373	--	--
1%	A/m	0.135	0.11	0.815	1.63
50%	uT	0.135	0.1371	--	--
50%	A/m	0.135	0.13	0.815	1.63
99%	uT	0.135	0.1213	--	--
99%	A/m	0.135	0.085	0.815	1.63

H-Field Strength at 8cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.171	--	--
1%	A/m	0.135	0.137	0.815	1.63
50%	uT	0.135	0.131	--	--
50%	A/m	0.135	0.105	0.815	1.63
99%	uT	0.135	0.938	--	--
99%	A/m	0.135	0.75	0.815	1.63

H-Field Strength at 10cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.1331	--	--
1%	A/m	0.135	0.103	0.815	1.63
50%	uT	0.135	0.1372	--	--
50%	A/m	0.135	0.13	0.815	1.63
99%	uT	0.135	0.094	--	--
99%	A/m	0.135	0.1372	0.815	1.63

H-Field Strength at 12cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.141	--	--
1%	A/m	0.135	0.113	0.815	1.63
50%	uT	0.135	0.131	--	--
50%	A/m	0.135	0.105	0.815	1.63
99%	uT	0.135	0.104	--	--
99%	A/m	0.135	0.083	0.815	1.63

H-Field Strength at 14cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.141	--	--
1%	A/m	0.135	0.113	0.815	1.63
50%	uT	0.135	0.128	--	--
50%	A/m	0.135	0.102	0.815	1.63
99%	uT	0.135	0.111	--	--
99%	A/m	0.135	0.089	0.815	1.63

H-Field Strength at 16cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.165	--	--
1%	A/m	0.135	0.132	0.815	1.63
50%	uT	0.135	0.128	--	--
50%	A/m	0.135	0.102	0.815	1.63
99%	uT	0.135	0.925	--	--
99%	A/m	0.135	0.74	0.815	1.63

H-Field Strength at 18cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.143	--	--
1%	A/m	0.135	0.114	0.815	1.63
50%	uT	0.135	0.140	--	--
50%	A/m	0.135	0.112	0.815	1.63
99%	uT	0.135	0.110	--	--
99%	A/m	0.135	0.088	0.815	1.63

H-Field Strength at 20cm from the top surface of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position E		
1%	uT	0.135	0.139	--	--
1%	A/m	0.135	0.111	0.815	1.63
50%	uT	0.135	0.143	--	--
50%	A/m	0.135	0.114	0.815	1.63
99%	uT	0.135	0.111	--	--
99%	A/m	0.135	0.089	0.815	1.63

H-Field Strength at 0cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.141	--	--
1%	A/m	0.135	0.113	0.815	1.63
50%	uT	0.135	0.151	--	--
50%	A/m	0.135	0.121	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 2cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.151	--	--
1%	A/m	0.135	0.121	0.815	1.63
50%	uT	0.135	0.126	--	--
50%	A/m	0.135	0.101	0.815	1.63
99%	uT	0.135	0.096	--	--
99%	A/m	0.135	0.077	0.815	1.63

H-Field Strength at 4cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.154	--	--
1%	A/m	0.135	0.123	0.815	1.63
50%	uT	0.135	0.129	--	--
50%	A/m	0.135	0.103	0.815	1.63
99%	uT	0.135	0.938	--	--
99%	A/m	0.135	0.75	0.815	1.63

H-Field Strength at 6cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.1330	--	--
1%	A/m	0.135	0.101	0.815	1.63
50%	uT	0.135	0.1371	--	--
50%	A/m	0.135	0.11	0.815	1.63
99%	uT	0.135	0.119	--	--
99%	A/m	0.135	0.095	0.815	1.63

H-Field Strength at 8cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.128	--	--
1%	A/m	0.135	0.102	0.815	1.63
50%	uT	0.135	0.129	--	--
50%	A/m	0.135	0.103	0.815	1.63
99%	uT	0.135	0.925	--	--
99%	A/m	0.135	0.74	0.815	1.63

H-Field Strength at 10cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.143	--	--
1%	A/m	0.135	0.114	0.815	1.63
50%	uT	0.135	0.160	--	--
50%	A/m	0.135	0.128	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 12cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.145	--	--
1%	A/m	0.135	0.116	0.815	1.63
50%	uT	0.135	0.160	--	--
50%	A/m	0.135	0.128	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 14cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.146	--	--
1%	A/m	0.135	0.117	0.815	1.63
50%	uT	0.135	0.156	--	--
50%	A/m	0.135	0.125	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 16cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.118	--	--
1%	A/m	0.135	0.094	0.815	1.63
50%	uT	0.135	0.165	--	--
50%	A/m	0.135	0.132	0.815	1.63
99%	uT	0.135	0.121	--	--
99%	A/m	0.135	0.097	0.815	1.63

H-Field Strength at 18cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.135	--	--
1%	A/m	0.135	0.108	0.815	1.63
50%	uT	0.135	0.166	--	--
50%	A/m	0.135	0.133	0.815	1.63
99%	uT	0.135	0.118	--	--
99%	A/m	0.135	0.094	0.815	1.63

H-Field Strength at 20cm from the side edge surface-Rear of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position A		
1%	uT	0.135	0.140	--	--
1%	A/m	0.135	0.112	0.815	1.63
50%	uT	0.135	0.161	--	--
50%	A/m	0.135	0.129	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 0cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.166	--	--
1%	A/m	0.135	0.133	0.815	1.63
50%	uT	0.135	0.153	--	--
50%	A/m	0.135	0.122	0.815	1.63
99%	uT	0.135	0.121	--	--
99%	A/m	0.135	0.097	0.815	1.63

H-Field Strength at 2cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.201	--	--
1%	A/m	0.135	0.161	0.815	1.63
50%	uT	0.135	0.129	--	--
50%	A/m	0.135	0.103	0.815	1.63
99%	uT	0.135	0.888	--	--
99%	A/m	0.135	0.71	0.815	1.63

H-Field Strength at 4cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.138	--	--
1%	A/m	0.135	0.11	0.815	1.63
50%	uT	0.135	0.128	--	--
50%	A/m	0.135	0.102	0.815	1.63
99%	uT	0.135	0.888	--	--
99%	A/m	0.135	0.71	0.815	1.63

H-Field Strength at 6cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.146	--	--
1%	A/m	0.135	0.117	0.815	1.63
50%	uT	0.135	0.153	--	--
50%	A/m	0.135	0.122	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 8cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.140	--	--
1%	A/m	0.135	0.112	0.815	1.63
50%	uT	0.135	0.129	--	--
50%	A/m	0.135	0.103	0.815	1.63
99%	uT	0.135	0.900	--	--
99%	A/m	0.135	0.72	0.815	1.63

H-Field Strength at 10cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.168	--	--
1%	A/m	0.135	0.134	0.815	1.63
50%	uT	0.135	0.155	--	--
50%	A/m	0.135	0.124	0.815	1.63
99%	uT	0.135	0.105	--	--
99%	A/m	0.135	0.084	0.815	1.63

H-Field Strength at 12cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.155	--	--
1%	A/m	0.135	0.124	0.815	1.63
50%	uT	0.135	0.153	--	--
50%	A/m	0.135	0.122	0.815	1.63
99%	uT	0.135	0.105	--	--
99%	A/m	0.135	0.084	0.815	1.63

H-Field Strength at 14cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.145	--	--
1%	A/m	0.135	0.116	0.815	1.63
50%	uT	0.135	0.154	--	--
50%	A/m	0.135	0.123	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 16cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.139	--	--
1%	A/m	0.135	0.111	0.815	1.63
50%	uT	0.135	0.128	--	--
50%	A/m	0.135	0.102	0.815	1.63
99%	uT	0.135	0.938	--	--
99%	A/m	0.135	0.75	0.815	1.63

H-Field Strength at 18cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.168	--	--
1%	A/m	0.135	0.134	0.815	1.63
50%	uT	0.135	0.105	--	--
50%	A/m	0.135	0.084	0.815	1.63
99%	uT	0.135	0.111	--	--
99%	A/m	0.135	0.089	0.815	1.63

H-Field Strength at 20cm from the side edge surface-Left of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position B		
1%	uT	0.135	0.106	--	--
1%	A/m	0.135	0.085	0.815	1.63
50%	uT	0.135	0.155	--	--
50%	A/m	0.135	0.124	0.815	1.63
99%	uT	0.135	0.170	--	--
99%	A/m	0.135	0.136	0.815	1.63

H-Field Strength at 0cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.146	--	--
1%	A/m	0.135	0.117	0.815	1.63
50%	uT	0.135	0.156	--	--
50%	A/m	0.135	0.125	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 2cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.171	--	--
1%	A/m	0.135	0.137	0.815	1.63
50%	uT	0.135	0.178	--	--
50%	A/m	0.135	0.142	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 4cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.114	--	--
1%	A/m	0.135	0.091	0.815	1.63
50%	uT	0.135	0.148	--	--
50%	A/m	0.135	0.118	0.815	1.63
99%	uT	0.135	0.171	--	--
99%	A/m	0.135	0.137	0.815	1.63

H-Field Strength at 6cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.140	--	--
1%	A/m	0.135	0.112	0.815	1.63
50%	uT	0.135	0.129	--	--
50%	A/m	0.135	0.103	0.815	1.63
99%	uT	0.135	0.963	--	--
99%	A/m	0.135	0.77	0.815	1.63

H-Field Strength at 8cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.164	--	--
1%	A/m	0.135	0.131	0.815	1.63
50%	uT	0.135	0.145	--	--
50%	A/m	0.135	0.116	0.815	1.63
99%	uT	0.135	0.119	--	--
99%	A/m	0.135	0.095	0.815	1.63

H-Field Strength at 10cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.151	--	--
1%	A/m	0.135	0.121	0.815	1.63
50%	uT	0.135	0.148	--	--
50%	A/m	0.135	0.118	0.815	1.63
99%	uT	0.135	0.114	--	--
99%	A/m	0.135	0.091	0.815	1.63

H-Field Strength at 12cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.165	--	--
1%	A/m	0.135	0.132	0.815	1.63
50%	uT	0.135	0.154	--	--
50%	A/m	0.135	0.123	0.815	1.63
99%	uT	0.135	0.114	--	--
99%	A/m	0.135	0.091	0.815	1.63

H-Field Strength at 14cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.140	--	--
1%	A/m	0.135	0.112	0.815	1.63
50%	uT	0.135	0.129	--	--
50%	A/m	0.135	0.103	0.815	1.63
99%	uT	0.135	0.963	--	--
99%	A/m	0.135	0.77	0.815	1.63

H-Field Strength at 16cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.140	--	--
1%	A/m	0.135	0.112	0.815	1.63
50%	uT	0.135	0.155	--	--
50%	A/m	0.135	0.124	0.815	1.63
99%	uT	0.135	0.106	--	--
99%	A/m	0.135	0.085	0.815	1.63

H-Field Strength at 18cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.141	--	--
1%	A/m	0.135	0.113	0.815	1.63
50%	uT	0.135	0.131	--	--
50%	A/m	0.135	0.105	0.815	1.63
99%	uT	0.135	0.888	--	--
99%	A/m	0.135	0.71	0.815	1.63

H-Field Strength at 20cm from the side edge surface-Front of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position C		
1%	uT	0.135	0.103	--	--
1%	A/m	0.135	0.082	0.815	1.63
50%	uT	0.135	0.159	--	--
50%	A/m	0.135	0.127	0.815	1.63
99%	uT	0.135	0.119	--	--
99%	A/m	0.135	0.095	0.815	1.63

H-Field Strength at 0cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.144	--	--
1%	A/m	0.135	0.115	0.815	1.63
50%	uT	0.135	0.128	--	--
50%	A/m	0.135	0.102	0.815	1.63
99%	uT	0.135	0.938	--	--
99%	A/m	0.135	0.75	0.815	1.63

H-Field Strength at 2cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.194	--	--
1%	A/m	0.135	0.155	0.815	1.63
50%	uT	0.135	0.140	--	--
50%	A/m	0.135	0.112	0.815	1.63
99%	uT	0.135	1.013	--	--
99%	A/m	0.135	0.81	0.815	1.63

H-Field Strength at 4cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.160	--	--
1%	A/m	0.135	0.128	0.815	1.63
50%	uT	0.135	0.108	--	--
50%	A/m	0.135	0.086	0.815	1.63
99%	uT	0.135	0.109	--	--
99%	A/m	0.135	0.087	0.815	1.63

H-Field Strength at 6cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.160	--	--
1%	A/m	0.135	0.128	0.815	1.63
50%	uT	0.135	0.164	--	--
50%	A/m	0.135	0.131	0.815	1.63
99%	uT	0.135	0.108	--	--
99%	A/m	0.135	0.086	0.815	1.63

H-Field Strength at 8cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.184	--	--
1%	A/m	0.135	0.147	0.815	1.63
50%	uT	0.135	0.131	--	--
50%	A/m	0.135	0.105	0.815	1.63
99%	uT	0.135	1.063	--	--
99%	A/m	0.135	0.85	0.815	1.63

H-Field Strength at 10cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.143	--	--
1%	A/m	0.135	0.114	0.815	1.63
50%	uT	0.135	0.154	--	--
50%	A/m	0.135	0.123	0.815	1.63
99%	uT	0.135	0.106	--	--
99%	A/m	0.135	0.085	0.815	1.63

H-Field Strength at 12cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.171	--	--
1%	A/m	0.135	0.137	0.815	1.63
50%	uT	0.135	0.131	--	--
50%	A/m	0.135	0.105	0.815	1.63
99%	uT	0.135	0.925	--	--
99%	A/m	0.135	0.74	0.815	1.63

H-Field Strength at 14cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test PositionD		
1%	uT	0.135	0.165	--	--
1%	A/m	0.135	0.132	0.815	1.63
50%	uT	0.135	0.128	--	--
50%	A/m	0.135	0.102	0.815	1.63
99%	uT	0.135	0.900	--	--
99%	A/m	0.135	0.72	0.815	1.63

H-Field Strength at 16cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.159	--	--
1%	A/m	0.135	0.127	0.815	1.63
50%	uT	0.135	0.131	--	--
50%	A/m	0.135	0.105	0.815	1.63
99%	uT	0.135	0.975	--	--
99%	A/m	0.135	0.78	0.815	1.63

H-Field Strength at 18cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.145	--	--
1%	A/m	0.135	0.116	0.815	1.63
50%	uT	0.135	0.156	--	--
50%	A/m	0.135	0.125	0.815	1.63
99%	uT	0.135	0.111	--	--
99%	A/m	0.135	0.089	0.815	1.63


H-Field Strength at 20cm from the side edge surface-Right of the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
			Test Position D		
1%	uT	0.135	0.146	--	--
1%	A/m	0.135	0.117	0.815	1.63
50%	uT	0.135	0.153	--	--
50%	A/m	0.135	0.122	0.815	1.63
99%	uT	0.135	0.124	--	--
99%	A/m	0.135	0.099	0.815	1.63

10. Test Set-up Photo


H-Field Strength-15cm

Test Position E - Exposure photo from top surface

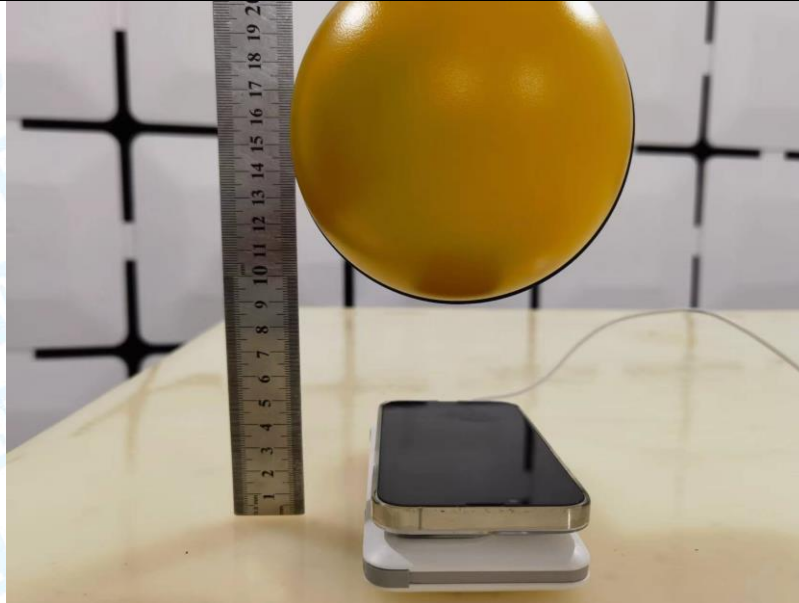


H-Field Strength-15cm

Test Position A - Exposure photo from side edge surface-Rear

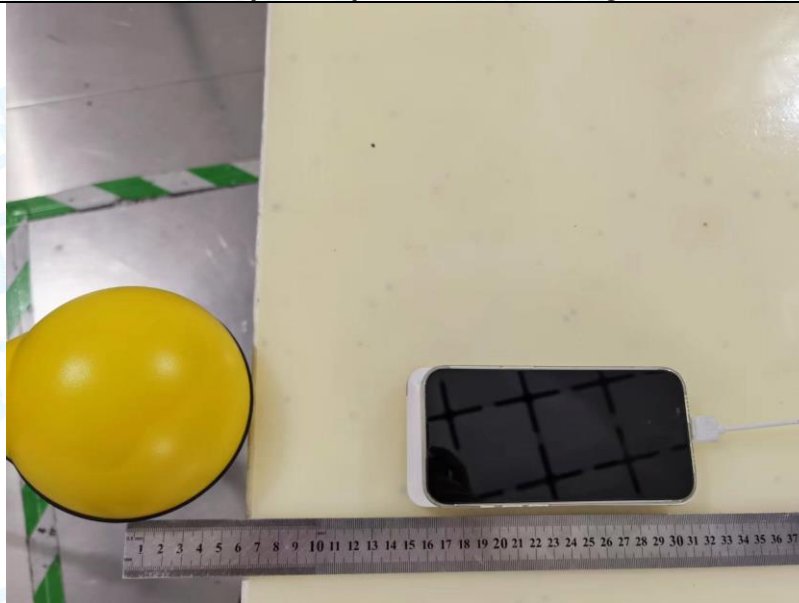


H-Field Strength-15cm

Test Position B - Exposure photo from side edge surface-Left

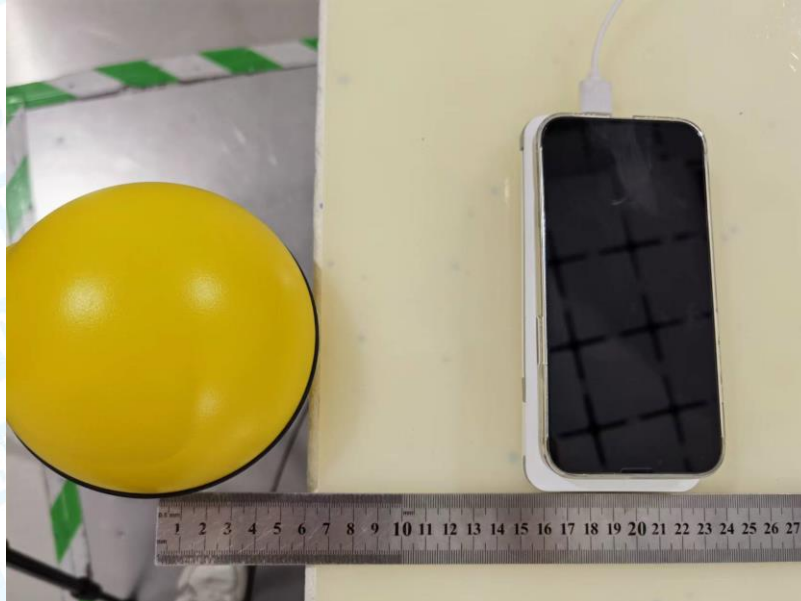

H-Field Strength-15cm

Test Position C - Exposure photo from side edge surface-Front


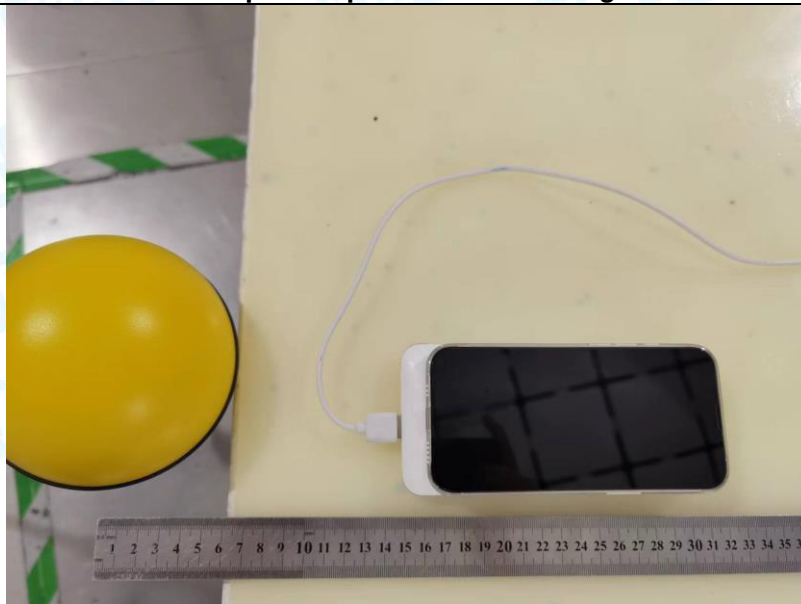



H-Field Strength-15cm**Test Position D - Exposure photo from side edge surface-Right**

H-Field Strength-0 cm to 20 cm

Test Position E - Exposure photo from top surface

from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device

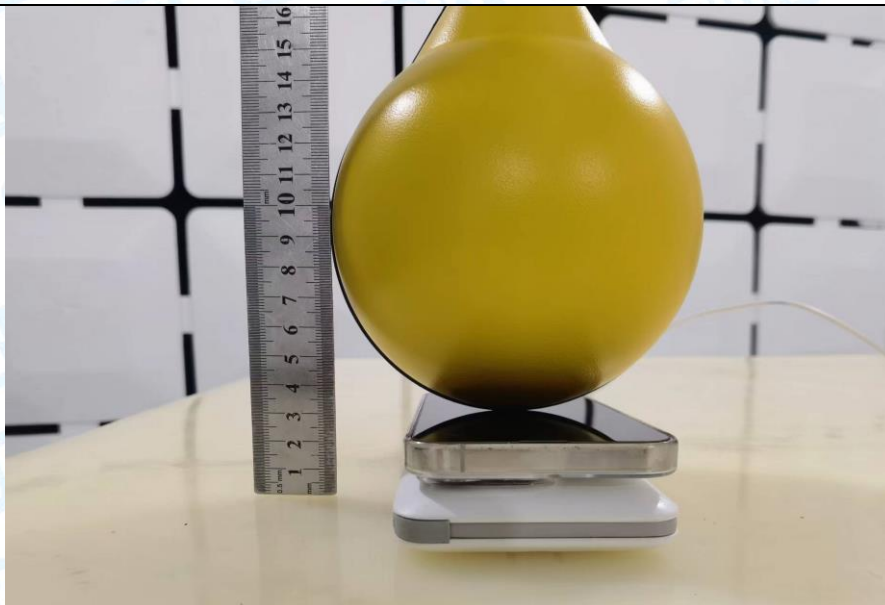
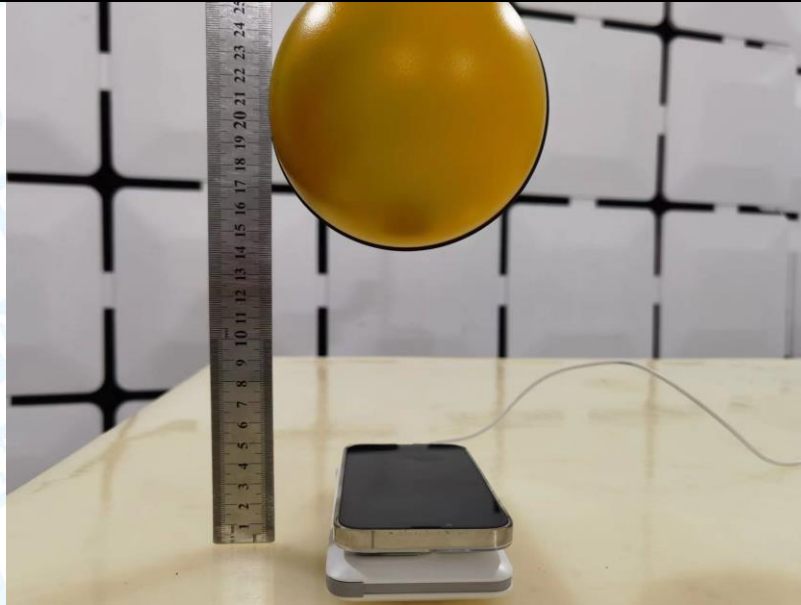


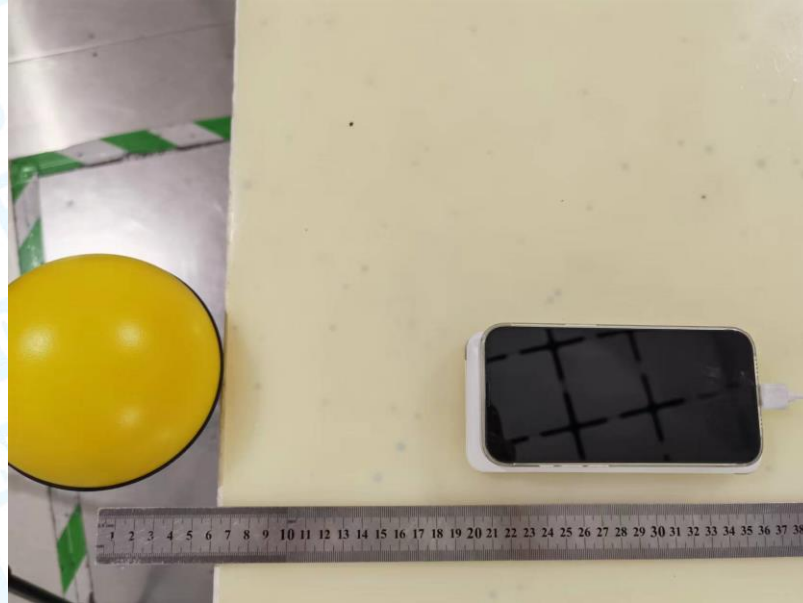H-Field Strength-0 cm to 20 cm**Test Position A - Exposure photo from side edge surface-Rear
from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device**

H-Field Strength-0 cm to 20 cm

Test Position B - Exposure photo from side edge surface-Left
from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device

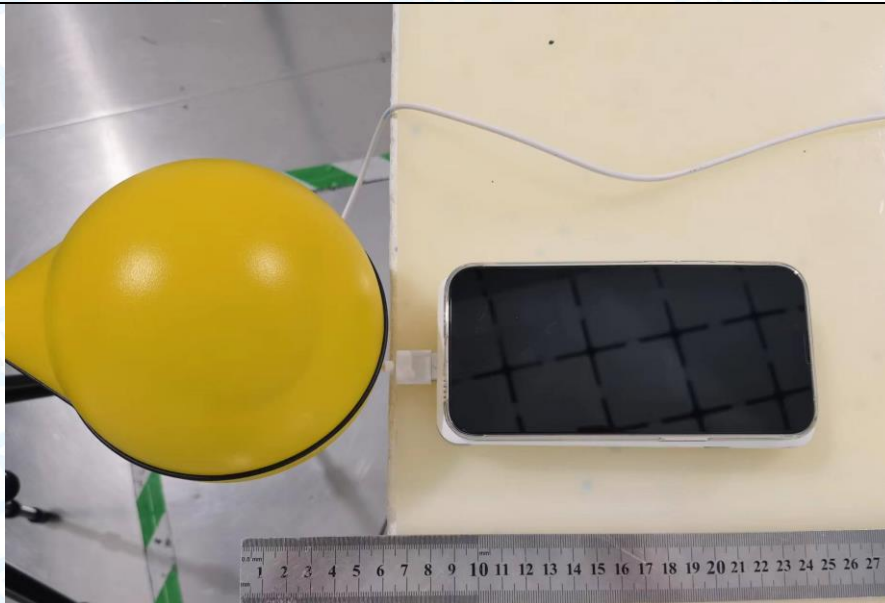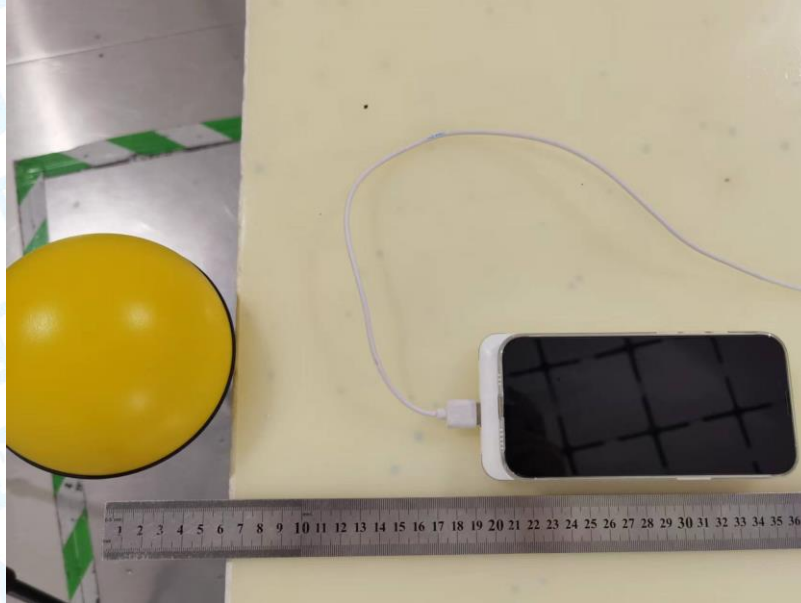

H-Field Strength-0 cm to 20 cm**Test Position C - Exposure photo from side edge surface-Front****from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device**

H-Field Strength-0 cm to 20 cm**Test Position D - Exposure photo from side edge surface-Right****from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device****-----END OF REPORT-----**