

## Appendix C for KSCR220900165201

## Calibration Certificate

Object	Apply	No	Model	SN	Calibration Date
Dipole	<input type="checkbox"/>	1	CLA150	4025	2021/04/26
	<input type="checkbox"/>	2	D450V3	1103	2021/04/21
	<input checked="" type="checkbox"/>	3	D750V3	1188	2022/03/29
	<input checked="" type="checkbox"/>	4	D835V2	4d114	2022/03/31
	<input type="checkbox"/>	5	D900V2	1d079	2022/06/07
	<input checked="" type="checkbox"/>	6	D1800V2	2d170	2022/03/31
	<input checked="" type="checkbox"/>	7	D1900V2	5d136	2022/06/07
	<input type="checkbox"/>	8	D2000V2	1041	2022/06/06
	<input type="checkbox"/>	9	D2300V2	1096	2022/03/31
	<input type="checkbox"/>	10	D2450V2	817	2022/04/01
	<input checked="" type="checkbox"/>	11	D2600V2	1158	2022/03/31
	<input type="checkbox"/>	12	D5GHzV2	1095	2022/06/01
DAE	<input checked="" type="checkbox"/>	13	DAE4	1245	2022/05/30
Probe	<input checked="" type="checkbox"/>	14	EX3DV4	7346	2022/03/30

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

# 1 Dipole

## 1.1 CLA150 - SN 4025

<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zürcherstrasse 45, 8001 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: SGS-CN (Auden) Certificate No: CLA150-4025_Apr21</p> <p><b>CALIBRATION CERTIFICATE</b></p> <table border="1"> <tr> <td>Object</td> <td>CLA150 - SN: 4025</td> </tr> <tr> <td>Calibration procedure</td> <td>QA CAL-15.v9 Calibration Procedure for SAR Validation Sources below 700 MHz</td> </tr> <tr> <td>Calibration date</td> <td>April 26, 2021</td> </tr> <tr> <td colspan="2">This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</td> </tr> <tr> <td colspan="2">All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity &lt; 70%.</td> </tr> <tr> <td colspan="2">Calibration Equipment used (NOTE: critical for calibration)</td> </tr> <tr> <td colspan="2"> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>SN: 104/78</td> <td>09-Apr-21 (No. 217-03291/03292)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP 291</td> <td>SN: 103/44</td> <td>09-Apr-21 (No. 217-03291)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor E4419B</td> <td>SN: 104/60</td> <td>09-Apr-21 (No. 217-03291)</td> <td>Apr-22</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: C23662 (20)</td> <td>09-Apr-21 (No. 217-03293)</td> <td>Apr-22</td> </tr> <tr> <td>Type-N mismatch compensation</td> <td>SN: 310982 / 00377</td> <td>09-Apr-21 (No. 217-03294)</td> <td>Apr-22</td> </tr> <tr> <td>Reference Probe EX03W4</td> <td>SN: 3877</td> <td>30-Dec-20 (No. EX3-0277, Dec-20)</td> <td>Dec-21</td> </tr> <tr> <td>D414</td> <td>SN: 654</td> <td>26-Jun-20 (No. D44-654, Jun-20)</td> <td>Jun-21</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="2"> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>SN: GB41209874</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4419B</td> <td>SN: MY41490607</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4419A</td> <td>SN: 104/10</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>EUT generator HP 8548C</td> <td>SN: US26420-001700</td> <td>31-Aug-08 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Network Analyzer Agilent E8380A</td> <td>EN: US41600-0477</td> <td>31-Mar-14 (in house check Oct-20)</td> <td>In house check: Oct-21</td> </tr> </tbody> </table> </td> </tr> <tr> <td colspan="2"> <p>Calibrated by: Name: Jeffrey Katzman Function: Laboratory Technician Signature: </p> <p>Approved by: Name: Katica Polovic Function: Technical Manager Signature: </p> <p>Issued: April 26, 2021</p> </td> </tr> </table> <p>Certificate No: CLA150-4025_Apr21 Page 1 of 6</p>		Object	CLA150 - SN: 4025	Calibration procedure	QA CAL-15.v9 Calibration Procedure for SAR Validation Sources below 700 MHz	Calibration date	April 26, 2021	This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.		All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.		Calibration Equipment used (NOTE: critical for calibration)		<table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>SN: 104/78</td> <td>09-Apr-21 (No. 217-03291/03292)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP 291</td> <td>SN: 103/44</td> <td>09-Apr-21 (No. 217-03291)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor E4419B</td> <td>SN: 104/60</td> <td>09-Apr-21 (No. 217-03291)</td> <td>Apr-22</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: C23662 (20)</td> <td>09-Apr-21 (No. 217-03293)</td> <td>Apr-22</td> </tr> <tr> <td>Type-N mismatch compensation</td> <td>SN: 310982 / 00377</td> <td>09-Apr-21 (No. 217-03294)</td> <td>Apr-22</td> </tr> <tr> <td>Reference Probe EX03W4</td> <td>SN: 3877</td> <td>30-Dec-20 (No. EX3-0277, Dec-20)</td> <td>Dec-21</td> </tr> <tr> <td>D414</td> <td>SN: 654</td> <td>26-Jun-20 (No. D44-654, Jun-20)</td> <td>Jun-21</td> </tr> </tbody> </table>		Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter E4419B	SN: 104/78	09-Apr-21 (No. 217-03291/03292)	Apr-22	Power sensor NRP 291	SN: 103/44	09-Apr-21 (No. 217-03291)	Apr-22	Power sensor E4419B	SN: 104/60	09-Apr-21 (No. 217-03291)	Apr-22	Reference 20 dB Attenuator	SN: C23662 (20)	09-Apr-21 (No. 217-03293)	Apr-22	Type-N mismatch compensation	SN: 310982 / 00377	09-Apr-21 (No. 217-03294)	Apr-22	Reference Probe EX03W4	SN: 3877	30-Dec-20 (No. EX3-0277, Dec-20)	Dec-21	D414	SN: 654	26-Jun-20 (No. D44-654, Jun-20)	Jun-21	<table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>SN: GB41209874</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4419B</td> <td>SN: MY41490607</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4419A</td> <td>SN: 104/10</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>EUT generator HP 8548C</td> <td>SN: US26420-001700</td> <td>31-Aug-08 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Network Analyzer Agilent E8380A</td> <td>EN: US41600-0477</td> <td>31-Mar-14 (in house check Oct-20)</td> <td>In house check: Oct-21</td> </tr> </tbody> </table>		Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power meter E4419B	SN: GB41209874	09-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power sensor E4419B	SN: MY41490607	09-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power sensor E4419A	SN: 104/10	09-Apr-10 (in house check Jun-20)	In house check: Jun-22	EUT generator HP 8548C	SN: US26420-001700	31-Aug-08 (in house check Jun-20)	In house check: Jun-22	Network Analyzer Agilent E8380A	EN: US41600-0477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21	<p>Calibrated by: Name: Jeffrey Katzman Function: Laboratory Technician Signature: </p> <p>Approved by: Name: Katica Polovic Function: Technical Manager Signature: </p> <p>Issued: April 26, 2021</p>		<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zürcherstrasse 45, 8001 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p><b>Glossary:</b></p> <p>TSL tissue simulating liquid Conv/F sensitivity in TSL / NORM x,y,z N/A not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEEE Std 2002-2005, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013 b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016 c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 300 MHz to 6 GHz)", March 2010 d) KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p><b>Additional Documentation:</b></p> <p>e) DASY4/5 System Handbook</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li><b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li><b>Antenna Parameters with TSL:</b> The source is mounted in a touch configuration below the center marking of the flat phantom.</li> <li><b>Return Loss:</b> This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.</li> <li><b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li><b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li><b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: CLA150-4025_Apr21 Page 2 of 6</p>	
Object	CLA150 - SN: 4025																																																																												
Calibration procedure	QA CAL-15.v9 Calibration Procedure for SAR Validation Sources below 700 MHz																																																																												
Calibration date	April 26, 2021																																																																												
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																																																																													
All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.																																																																													
Calibration Equipment used (NOTE: critical for calibration)																																																																													
<table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>SN: 104/78</td> <td>09-Apr-21 (No. 217-03291/03292)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP 291</td> <td>SN: 103/44</td> <td>09-Apr-21 (No. 217-03291)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor E4419B</td> <td>SN: 104/60</td> <td>09-Apr-21 (No. 217-03291)</td> <td>Apr-22</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: C23662 (20)</td> <td>09-Apr-21 (No. 217-03293)</td> <td>Apr-22</td> </tr> <tr> <td>Type-N mismatch compensation</td> <td>SN: 310982 / 00377</td> <td>09-Apr-21 (No. 217-03294)</td> <td>Apr-22</td> </tr> <tr> <td>Reference Probe EX03W4</td> <td>SN: 3877</td> <td>30-Dec-20 (No. EX3-0277, Dec-20)</td> <td>Dec-21</td> </tr> <tr> <td>D414</td> <td>SN: 654</td> <td>26-Jun-20 (No. D44-654, Jun-20)</td> <td>Jun-21</td> </tr> </tbody> </table>		Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter E4419B	SN: 104/78	09-Apr-21 (No. 217-03291/03292)	Apr-22	Power sensor NRP 291	SN: 103/44	09-Apr-21 (No. 217-03291)	Apr-22	Power sensor E4419B	SN: 104/60	09-Apr-21 (No. 217-03291)	Apr-22	Reference 20 dB Attenuator	SN: C23662 (20)	09-Apr-21 (No. 217-03293)	Apr-22	Type-N mismatch compensation	SN: 310982 / 00377	09-Apr-21 (No. 217-03294)	Apr-22	Reference Probe EX03W4	SN: 3877	30-Dec-20 (No. EX3-0277, Dec-20)	Dec-21	D414	SN: 654	26-Jun-20 (No. D44-654, Jun-20)	Jun-21																																												
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																																										
Power meter E4419B	SN: 104/78	09-Apr-21 (No. 217-03291/03292)	Apr-22																																																																										
Power sensor NRP 291	SN: 103/44	09-Apr-21 (No. 217-03291)	Apr-22																																																																										
Power sensor E4419B	SN: 104/60	09-Apr-21 (No. 217-03291)	Apr-22																																																																										
Reference 20 dB Attenuator	SN: C23662 (20)	09-Apr-21 (No. 217-03293)	Apr-22																																																																										
Type-N mismatch compensation	SN: 310982 / 00377	09-Apr-21 (No. 217-03294)	Apr-22																																																																										
Reference Probe EX03W4	SN: 3877	30-Dec-20 (No. EX3-0277, Dec-20)	Dec-21																																																																										
D414	SN: 654	26-Jun-20 (No. D44-654, Jun-20)	Jun-21																																																																										
<table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>SN: GB41209874</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4419B</td> <td>SN: MY41490607</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4419A</td> <td>SN: 104/10</td> <td>09-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>EUT generator HP 8548C</td> <td>SN: US26420-001700</td> <td>31-Aug-08 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Network Analyzer Agilent E8380A</td> <td>EN: US41600-0477</td> <td>31-Mar-14 (in house check Oct-20)</td> <td>In house check: Oct-21</td> </tr> </tbody> </table>		Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power meter E4419B	SN: GB41209874	09-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power sensor E4419B	SN: MY41490607	09-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power sensor E4419A	SN: 104/10	09-Apr-10 (in house check Jun-20)	In house check: Jun-22	EUT generator HP 8548C	SN: US26420-001700	31-Aug-08 (in house check Jun-20)	In house check: Jun-22	Network Analyzer Agilent E8380A	EN: US41600-0477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21																																																				
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																																										
Power meter E4419B	SN: GB41209874	09-Apr-10 (in house check Jun-20)	In house check: Jun-22																																																																										
Power sensor E4419B	SN: MY41490607	09-Apr-10 (in house check Jun-20)	In house check: Jun-22																																																																										
Power sensor E4419A	SN: 104/10	09-Apr-10 (in house check Jun-20)	In house check: Jun-22																																																																										
EUT generator HP 8548C	SN: US26420-001700	31-Aug-08 (in house check Jun-20)	In house check: Jun-22																																																																										
Network Analyzer Agilent E8380A	EN: US41600-0477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21																																																																										
<p>Calibrated by: Name: Jeffrey Katzman Function: Laboratory Technician Signature: </p> <p>Approved by: Name: Katica Polovic Function: Technical Manager Signature: </p> <p>Issued: April 26, 2021</p>																																																																													
<p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <tr> <td>DASY Version</td> <td>DASY5</td> <td>V32.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>EL44 Flat Phantom</td> <td>Shell thickness: 2 ± 0.2 mm</td> </tr> <tr> <td>EUT Positioning</td> <td>Touch Position</td> <td></td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy = 4.0 mm, dz = 1.4 mm</td> <td>Grated Ratio = 1.4 (Z direction)</td> </tr> <tr> <td>Frequency</td> <td>150 MHz ± 1 MHz</td> <td></td> </tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <tr> <td>Nominal Head TSL parameters</td> <td>Temperature</td> <td>Permittivity</td> <td>Conductivity</td> </tr> <tr> <td>22.0 °C</td> <td>62.3</td> <td>0.78 mho/m</td> <td></td> </tr> <tr> <td>(22.0 ± 0.2) °C</td> <td>51.1 ± 6 %</td> <td>0.75 mho/m ± 6 %</td> <td></td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt; 0.5 °C</td> <td>---</td> <td>---</td> </tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <tr> <td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>1 W input power</td> <td>3.90 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>3.88 W/kg ± 18.4 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>1 W input power</td> <td>2.60 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>2.59 W/kg ± 18.0 % (k=2)</td> </tr> </table> <p>Certificate No: CLA150-4025_Apr21 Page 3 of 6</p>		DASY Version	DASY5	V32.10.4	Extrapolation	Advanced Extrapolation		Phantom	EL44 Flat Phantom	Shell thickness: 2 ± 0.2 mm	EUT Positioning	Touch Position		Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Grated Ratio = 1.4 (Z direction)	Frequency	150 MHz ± 1 MHz		Nominal Head TSL parameters	Temperature	Permittivity	Conductivity	22.0 °C	62.3	0.78 mho/m		(22.0 ± 0.2) °C	51.1 ± 6 %	0.75 mho/m ± 6 %		Head TSL temperature change during test	< 0.5 °C	---	---	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	1 W input power	3.90 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	3.88 W/kg ± 18.4 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	1 W input power	2.60 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	2.59 W/kg ± 18.0 % (k=2)	<p><b>Appendix (Additional assessments outside the scope of SCS 0108)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <tr> <td>Impedance, transformed to feed point:</td> <td>47.8 Ω ± 1.5 jΩ</td> </tr> <tr> <td>Return Loss:</td> <td>-31.4 dB</td> </tr> </table> <p><b>Additional EUT Data</b></p> <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table> <p>Certificate No: CLA150-4025_Apr21 Page 4 of 6</p>		Impedance, transformed to feed point:	47.8 Ω ± 1.5 jΩ	Return Loss:	-31.4 dB	Manufactured by	SPEAG																
DASY Version	DASY5	V32.10.4																																																																											
Extrapolation	Advanced Extrapolation																																																																												
Phantom	EL44 Flat Phantom	Shell thickness: 2 ± 0.2 mm																																																																											
EUT Positioning	Touch Position																																																																												
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Grated Ratio = 1.4 (Z direction)																																																																											
Frequency	150 MHz ± 1 MHz																																																																												
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity																																																																										
22.0 °C	62.3	0.78 mho/m																																																																											
(22.0 ± 0.2) °C	51.1 ± 6 %	0.75 mho/m ± 6 %																																																																											
Head TSL temperature change during test	< 0.5 °C	---	---																																																																										
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																																												
SAR measured	1 W input power	3.90 W/kg																																																																											
SAR for nominal Head TSL parameters	normalized to 1W	3.88 W/kg ± 18.4 % (k=2)																																																																											
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																												
SAR measured	1 W input power	2.60 W/kg																																																																											
SAR for nominal Head TSL parameters	normalized to 1W	2.59 W/kg ± 18.0 % (k=2)																																																																											
Impedance, transformed to feed point:	47.8 Ω ± 1.5 jΩ																																																																												
Return Loss:	-31.4 dB																																																																												
Manufactured by	SPEAG																																																																												

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



<p><b>DASY5 Validation Report for Head TSL</b></p> <p>Date: 26.04.2021</p> <p>Test Laboratory: SPEAG, Zurich, Switzerland</p> <p>DUT: CLA150; Type: CLA150; Serial: CLA150 - SN: 4025</p> <p>Communication System: UUD 0 - CW; Frequency: 150 MHz</p> <p>Medium parameters used: <math>\epsilon_r = 1.0</math>; <math>\sigma = 0.76 \text{ S/m}</math>; <math>\epsilon_0 = 51.1</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)</p> <p>DASY52 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3877; ConvF(12.51, 12.51, 12.51) @ 150 MHz; Calibrated: 30.12.2020</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAB4 Suf654; Calibrated: 26.06.2020</li> <li>Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003</li> <li>DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)</li> </ul> <p><b>CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan, dist=1.4mm (8x10x8) /Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</b></p> <p>Reference Value = 85.93 V/m; Power Drift = -0.02 dB</p> <p>Peak SAR (extrapolated) = 7.36 W/kg</p> <p>SAR(1 g) = 3.90 W/kg; SAR(10 g) = 2.00 W/kg</p> <p>Small distances tend to measurements 3 dB below; Larger than measurement grid (&gt;30mm)</p> <p>Ratio of SAR at M2 to SAR at M1 = 80.4%</p> <p>Maximum value of SAR (measured) = 5.48 W/kg</p> <p>0 dB = 5.48 W/kg = 7.39 dBW/kg</p> <p></p> <p>Certificates No: CLA150-4025_Apr21 Page 5 of 6</p>	<p>150.000000 MHz 47.894°C 1.5593 nH 1.4696 Ω</p> <p>Ch 1 Avg = 20 Ch 1 Start 180.000 MHz Ch 1 Stop 200.000 MHz</p> <p>CH 1: 511 C1*1-Pot Avg=20 LCL</p> <p>22.00 21.00 20.00 19.00 18.00 17.00 16.00 15.00 14.00 13.00 12.00 11.00 10.00 9.00 8.00 7.00 6.00 5.00 4.00 3.00 2.00 1.00 0.00</p> <p>22.00 21.00 20.00 19.00 18.00 17.00 16.00 15.00 14.00 13.00 12.00 11.00 10.00 9.00 8.00 7.00 6.00 5.00 4.00 3.00 2.00 1.00 0.00</p> <p>Ch 1 Avg = 20 Ch 1 Start 180.000 MHz Ch 1 Stop 200.000 MHz</p> <p>CH 1: 511 C1*1-Pot Avg=20 LCL</p> <p>Certificate No: CLA150-4025_Apr21 Page 6 of 6</p>
---	--



## 1.2 D450V3 - SN 1103

<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zughestrasse 43, 8004 Zurich, Switzerland</p> <p> </p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: SGS-CN (Auden) Certificate No: D450V3-1103_Apr21</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D450V3 - SN:1103</p> <p>Calibration procedure(s): QA CAL-15.v9 Calibration Procedure for SAR Validation Sources below 700 MHz</p> <p>Calibration date: April 21, 2021</p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurement (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (<math>20 \pm 3^\circ\text{C}</math>) and humidity <math>\approx 75\%</math>.</p> <p>Calibration Equipment used (M/TE critical for calibration):</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power meter NIP-291</td> <td>SN: 100778</td> <td>09-Apr-21 (No. 217-0201/0320)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NIP-291</td> <td>SN: 100284</td> <td>09-Apr-21 (No. 217-0201)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NIP-291</td> <td>SN: 103219</td> <td>09-Apr-21 (No. 217-0201)</td> <td>Apr-22</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: CCG562 (200)</td> <td>09-Apr-21 (No. 217-0343)</td> <td>Apr-22</td> </tr> <tr> <td>Type-N min-max combination</td> <td>SN: 310982 / 06327</td> <td>09-Apr-21 (No. 217-0344)</td> <td>Apr-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN: 3877</td> <td>30-Dec-20 (No. EX3-3077, Dec-20)</td> <td>Dec-21</td> </tr> <tr> <td>DAE4</td> <td>SN: 954</td> <td>28-Jun-20 (No. DAE4-954, Jun-20)</td> <td>Jun-21</td> </tr> </table> <p>Secondary Standards</p> <table border="1"> <tr> <td>Name</td> <td>Function</td> <td>Signature</td> </tr> <tr> <td>Claudio Leutler</td> <td>Laboratory Technician</td> <td></td> </tr> </table> <p>Approved by:</p> <table border="1"> <tr> <td>Name</td> <td>Function</td> <td>Signature</td> </tr> <tr> <td>Katja Povacic</td> <td>Technical Manager</td> <td></td> </tr> </table> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Issued: April 23, 2021</p> <p>Certificate No: D450V3-1103_Apr21 Page 1 of 6</p>	Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter NIP-291	SN: 100778	09-Apr-21 (No. 217-0201/0320)	Apr-22	Power sensor NIP-291	SN: 100284	09-Apr-21 (No. 217-0201)	Apr-22	Power sensor NIP-291	SN: 103219	09-Apr-21 (No. 217-0201)	Apr-22	Reference 20 dB Attenuator	SN: CCG562 (200)	09-Apr-21 (No. 217-0343)	Apr-22	Type-N min-max combination	SN: 310982 / 06327	09-Apr-21 (No. 217-0344)	Apr-22	Reference Probe EX3DV4	SN: 3877	30-Dec-20 (No. EX3-3077, Dec-20)	Dec-21	DAE4	SN: 954	28-Jun-20 (No. DAE4-954, Jun-20)	Jun-21	Name	Function	Signature	Claudio Leutler	Laboratory Technician		Name	Function	Signature	Katja Povacic	Technical Manager		<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zughestrasse 43, 8004 Zurich, Switzerland</p> <p> </p> <p>Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p><b>Glossary:</b></p> <ul style="list-style-type: none"> <li><b>TSL:</b> tissue simulating liquid</li> <li><b>ConvF:</b> sensitivity in TSL / NORM x,y,z</li> <li><b>N/A:</b> not applicable or not measured</li> </ul> <p><b>Calibration is Performed According to the Following Standards:</b></p> <ul style="list-style-type: none"> <li>a) IEEE Std 1628-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013</li> <li>b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016</li> <li>c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010</li> <li>d) KDB 605864, "SAR Measurement Requirements for 100 MHz to 6 GHz"</li> </ul> <p><b>Additional Documentation:</b></p> <ul style="list-style-type: none"> <li>e) DASY4/5 System Handbook</li> </ul> <p><b>Method Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li><b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li><b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li><b>Peak Power Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li><b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li><b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li><b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li><b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: D450V3-1103_Apr21 Page 2 of 6</p>
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																										
Power meter NIP-291	SN: 100778	09-Apr-21 (No. 217-0201/0320)	Apr-22																																										
Power sensor NIP-291	SN: 100284	09-Apr-21 (No. 217-0201)	Apr-22																																										
Power sensor NIP-291	SN: 103219	09-Apr-21 (No. 217-0201)	Apr-22																																										
Reference 20 dB Attenuator	SN: CCG562 (200)	09-Apr-21 (No. 217-0343)	Apr-22																																										
Type-N min-max combination	SN: 310982 / 06327	09-Apr-21 (No. 217-0344)	Apr-22																																										
Reference Probe EX3DV4	SN: 3877	30-Dec-20 (No. EX3-3077, Dec-20)	Dec-21																																										
DAE4	SN: 954	28-Jun-20 (No. DAE4-954, Jun-20)	Jun-21																																										
Name	Function	Signature																																											
Claudio Leutler	Laboratory Technician																																												
Name	Function	Signature																																											
Katja Povacic	Technical Manager																																												

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

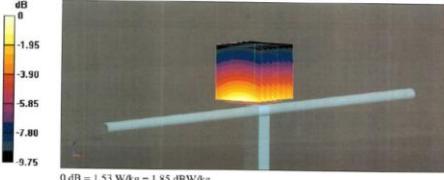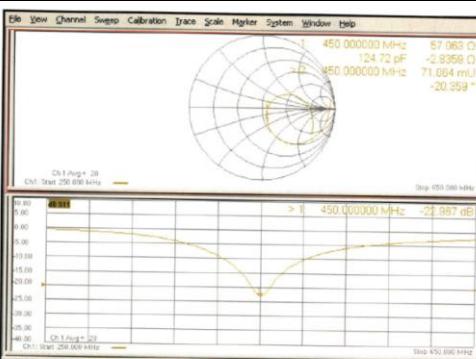



<b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1. <table border="1"> <tr><td>DASY Version</td><td>DASY5</td><td>V62.10.4</td></tr> <tr><td>Extrapolation</td><td colspan="2">Advanced Extrapolation</td></tr> <tr><td>Phantom</td><td>ELI Flat Phantom</td><td>Shell thickness: 2 ± 0.2 mm</td></tr> <tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td><math>\Delta x, \Delta y, \Delta z = 6 \text{ mm}</math></td><td></td></tr> <tr><td>Frequency</td><td>450 MHz ± 1 MHz</td><td></td></tr> </table>		DASY Version	DASY5	V62.10.4	Extrapolation	Advanced Extrapolation		Phantom	ELI Flat Phantom	Shell thickness: 2 ± 0.2 mm	Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	$\Delta x, \Delta y, \Delta z = 6 \text{ mm}$		Frequency	450 MHz ± 1 MHz		<b>Appendix (Additional assessments outside the scope of SCS 0108)</b> <b>Antenna Parameters with Head TSL</b> <table border="1"> <tr><td>Impedance, transformed to feed point</td><td>57.1 Ω - 2.8 jΩ</td></tr> <tr><td>Return Loss</td><td>-23.0 dB</td></tr> </table> <b>General Antenna Parameters and Design</b> <table border="1"> <tr><td>Electrical Delay (one direction)</td><td>1.346 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured. The dipole is made of standard semi-glossed copper cable. The outer conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the arms, the small end caps are added to the dipole arms in order to improve matching when loaded according to the test and explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.</p>		Impedance, transformed to feed point	57.1 Ω - 2.8 jΩ	Return Loss	-23.0 dB	Electrical Delay (one direction)	1.346 ns
DASY Version	DASY5	V62.10.4																									
Extrapolation	Advanced Extrapolation																										
Phantom	ELI Flat Phantom	Shell thickness: 2 ± 0.2 mm																									
Distance Dipole Center - TSL	15 mm	with Spacer																									
Zoom Scan Resolution	$\Delta x, \Delta y, \Delta z = 6 \text{ mm}$																										
Frequency	450 MHz ± 1 MHz																										
Impedance, transformed to feed point	57.1 Ω - 2.8 jΩ																										
Return Loss	-23.0 dB																										
Electrical Delay (one direction)	1.346 ns																										
<b>Head TSL parameters</b> The following parameters and calculations were applied. <table border="1"> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>43.5</td><td>0.57 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2 °C)</td><td>43.1 ± 6 %</td><td>0.67 mho/m ± 8 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt; 0.5 °C</td><td>----</td><td>-----</td></tr> </table>		Nominal Head TSL parameters	22.0 °C	43.5	0.57 mho/m	Measured Head TSL parameters	(22.0 ± 0.2 °C)	43.1 ± 6 %	0.67 mho/m ± 8 %	Head TSL temperature change during test	< 0.5 °C	----	-----	<b>Additional EUT Data</b> <table border="1"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table>		Manufactured by	SPEAG										
Nominal Head TSL parameters	22.0 °C	43.5	0.57 mho/m																								
Measured Head TSL parameters	(22.0 ± 0.2 °C)	43.1 ± 6 %	0.67 mho/m ± 8 %																								
Head TSL temperature change during test	< 0.5 °C	----	-----																								
Manufactured by	SPEAG																										
<b>SAR result with Head TSL</b> <table border="1"> <tr><td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>1.14 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>4.86 W/kg ± 18.1 % (Ko2)</td></tr> </table> <table border="1"> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>0.757 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>3.06 W/kg ± 17.6 % (Ko2)</td></tr> </table>		SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power	1.14 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	4.86 W/kg ± 18.1 % (Ko2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power	0.757 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	3.06 W/kg ± 17.6 % (Ko2)	Certificate No: D450V3-1103_Apr21 Page 3 of 6									
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																										
SAR measured	250 mW input power	1.14 W/kg																									
SAR for nominal Head TSL parameters	normalized to 1W	4.86 W/kg ± 18.1 % (Ko2)																									
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																										
SAR measured	250 mW input power	0.757 W/kg																									
SAR for nominal Head TSL parameters	normalized to 1W	3.06 W/kg ± 17.6 % (Ko2)																									
<b>DASY5 Validation Report for Head TSL</b> Test Laboratory: SPEAG, Zurich, Switzerland DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1103 Communication System: UID 0 - CW; Frequency: 450 MHz Medium parameters used: $\epsilon' = 450 \text{ MHz}$ ; $\sigma = 0.87 \text{ S/m}$ ; $\epsilon_r = 43.1$ ; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011) <b>DASY52 Configuration:</b> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3877; ConvF(10.64, 10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn654; Calibrated: 26.06.2020</li> <li>Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003</li> <li>DASY52.52.10.4(1527); SEMCAD X 14.6.14(7483)</li> </ul> <b>Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7) /Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 39.18 W/kg; Power Drift = -0.08 dB Peak SAR (extrapolated) = 1.76 W/kg SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.767 W/kg Smallest distance from peaks to all points 3 dB below: Larger than measurement grid Ratio of SAR at M2 to SAR at M1 = 64.9% Maximum value of SAR (measured) = 1.53 W/kg		Certificate No: D450V3-1103_Apr21 Page 4 of 6 																									
Certificate No: D450V3-1103_Apr21 Page 5 of 6		Certificate No: D450V3-1103_Apr21 Page 6 of 6 																									

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



## 1.3 D750V3 - SN 1188

    <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191 Tel: +86-10-62305112 Fax: +86-10-62304633-2504 E-mail: cttf@chinaitt.com http://www.chinaitt.com</p> <p>Client: SGS-CN Certificate No: Z22-60103</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D750V3 - SN: 1188</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 29, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibration have been conducted in the closed laboratory facility: environment temperature (22±3)°C; and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Power Meter NRP2</td> <td>105277</td> <td>24-Sep-21 (CTTL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP8S</td> <td>104291</td> <td>24-Sep-21 (CTTL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4 DAE4</td> <td>SN 7307 SN 1556</td> <td>26-May-21 (SPEAG No EX3-7307, May21) 12-Jan-22 (CTTL-SPEAG, No.Z22-60007)</td> <td>May-22 Jan-23</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL, No.J22X04049)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CTTL, No.J22X04046)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Zhao Jing Reviewed by: Lin Hao Approved by: Qi Dianyuan</p> <p>Issued: April 3, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22	Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22	Reference Probe EX3DV4 DAE4	SN 7307 SN 1556	26-May-21 (SPEAG No EX3-7307, May21) 12-Jan-22 (CTTL-SPEAG, No.Z22-60007)	May-22 Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X04049)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X04046)	Jan-23	  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: cttf@chinaitt.com http://www.chinaitt.com</p> <p><b>Glossary:</b> TSL tissue simulating liquid ConvF sensitivity in TSL / NORMx,y,z N/A not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b> a) IEC/IEEE 62209-1528, "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices - Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 b) KDB 655864, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p><b>Additional Documentation:</b> c) DASY4/S System Handbook</p> <p><b>Methods Applied and Interpretation of Parameters:</b> • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis. • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measured value at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required. • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required. • <b>SAR measured:</b> SAR measured at the stated antenna input power. • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector. • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.</p>																																
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																											
Power Meter NRP2	105277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22																																																											
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22																																																											
Reference Probe EX3DV4 DAE4	SN 7307 SN 1556	26-May-21 (SPEAG No EX3-7307, May21) 12-Jan-22 (CTTL-SPEAG, No.Z22-60007)	May-22 Jan-23																																																											
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																											
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X04049)	Jan-23																																																											
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X04046)	Jan-23																																																											
<p>Certificate No: Z22-60103 Page 1 of 6</p> <p>  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: cttf@chinaitt.com http://www.chinaitt.com</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <tr> <td>DASY Version</td> <td>DASY2</td> <td>VS2.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>15 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz = 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>750 MHz ± 1 MHz</td> <td></td> </tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <tr> <td></td> <td>Temperature</td> <td>Permittivity</td> <td>Conductivity</td> </tr> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>42.0</td> <td>0.90 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>41.4 ± 6 %</td> <td>0.89 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>---</td> <td>---</td> </tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <tr> <td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW Input power</td> <td>2.07 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>8.27 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW Input power</td> <td>1.37 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>5.48 W/kg ± 18.7 % (k=2)</td> </tr> </table> </p>		DASY Version	DASY2	VS2.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	750 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	42.0	0.90 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	41.4 ± 6 %	0.89 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	---	---	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	250 mW Input power	2.07 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	8.27 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	250 mW Input power	1.37 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	5.48 W/kg ± 18.7 % (k=2)	<p>Certificate No: Z22-60103 Page 2 of 6</p> <p>  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: cttf@chinaitt.com http://www.chinaitt.com</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <tr> <td>Impedance, transformed to feed point</td> <td>53.6Ω-1.13jΩ</td> </tr> <tr> <td>Return Loss</td> <td>-28.7dB</td> </tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <tr> <td>Electrical Delay (one direction)</td> <td>0.947 ns</td> </tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by the use of end caps, as long as the dipole is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table> </p>	Impedance, transformed to feed point	53.6Ω-1.13jΩ	Return Loss	-28.7dB	Electrical Delay (one direction)	0.947 ns	Manufactured by	SPEAG
DASY Version	DASY2	VS2.10.4																																																												
Extrapolation	Advanced Extrapolation																																																													
Phantom	Triple Flat Phantom 5.1C																																																													
Distance Dipole Center - TSL	15 mm	with Spacer																																																												
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																													
Frequency	750 MHz ± 1 MHz																																																													
	Temperature	Permittivity	Conductivity																																																											
Nominal Head TSL parameters	22.0 °C	42.0	0.90 mho/m																																																											
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.4 ± 6 %	0.89 mho/m ± 6 %																																																											
Head TSL temperature change during test	<1.0 °C	---	---																																																											
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																													
SAR measured	250 mW Input power	2.07 W/kg																																																												
SAR for nominal Head TSL parameters	normalized to 1W	8.27 W/kg ± 18.8 % (k=2)																																																												
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																													
SAR measured	250 mW Input power	1.37 W/kg																																																												
SAR for nominal Head TSL parameters	normalized to 1W	5.48 W/kg ± 18.7 % (k=2)																																																												
Impedance, transformed to feed point	53.6Ω-1.13jΩ																																																													
Return Loss	-28.7dB																																																													
Electrical Delay (one direction)	0.947 ns																																																													
Manufactured by	SPEAG																																																													
<p>Certificate No: Z22-60103 Page 3 of 6</p> <p>  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: cttf@chinaitt.com http://www.chinaitt.com</p> <p>Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.</p> <p>Attention is drawn to the authenticity of testing /inspection report &amp; certificate, please contact us at telephone: (86-755) 8307 1443, or email: <a href="mailto:CN.DocCheck@sgs.com">CN.DocCheck@sgs.com</a></p> <p>Compliance Certification Services (Kunshan) Inc. EMC Laboratory 中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300</p> </p>		<p>Certificate No: Z22-60103 Page 4 of 6</p> <p>  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: cttf@chinaitt.com http://www.chinaitt.com</p> <p>Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.</p> <p>Attention is drawn to the authenticity of testing /inspection report &amp; certificate, please contact us at telephone: (86-755) 8307 1443, or email: <a href="mailto:CN.DocCheck@sgs.com">CN.DocCheck@sgs.com</a></p> <p>Compliance Certification Services (Kunshan) Inc. EMC Laboratory 中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300</p> </p>																																																												



**TTL** in Collaboration with **sp e a g**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: [cttl@jgjmail.com](mailto:cttl@jgjmail.com) <http://www.cttl.net.cn>


**CAICT**

**CAICT**

**DASYS1 Report for Head TSL**  
Test Laboratory: CTTL, Beijing, China  
**DUT: 750 MHz Type: DT750V3; Serial: D750V3 - SN: 1188**  
Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 41.36$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS1 (IEEE/IEC/ANSI C63.19-2007)  
DASYS1 Configuration:


- Probe: EX3DV4 - SN7307; ConvF(10.31, 10.31, 10.31) @ 750 MHz; Calibrated: 2021-05-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2022-01-12
- Phantom: MFP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASYS2 52.10.4(1.535); SEMCAD X 14.6.14(200)

**Dipole Calibration - Zoom Scan (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**  
Peak SAR value = 55.06 V/m; Power Drift = 0.00 dB  
Peak SAR (measured) = 3.07 W/kg  
SAR(1 g) = 2.07 W/kg SAR(10 g) = 1.37 W/kg  
Smallest distance from phantom to all points 3 dB below = 18.9 mm  
Ratio of SAR at M2 to SAR at M1 = 67.1%  
Maximum value of SAR (measured) = 2.74 W/kg

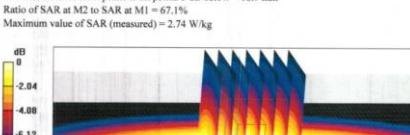

0 dB = 2.74 W/kg = 4.38 dBW/kg

**Impedance Measurement Plot for Head TSL**

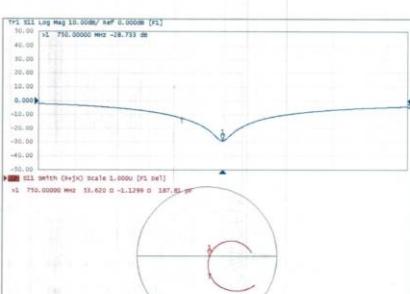

1.4 D835V2 - SN 4d114



  			
<p>In Collaboration with  <b>TTL</b> <b>speag</b>  CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191  Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2594  E-mail: cttl@chinatell.com.cn <a href="http://www.chinatell.cn">http://www.chinatell.cn</a></p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2594  E-mail: cttl@chinatell.com.cn <a href="http://www.chinatell.cn">http://www.chinatell.cn</a></p>			
<p>SGS-CN</p> <p>Client: SGS-CN</p> <p>Calibration Certificate No: 22Z60104</p>		<p>Calibration Certificate No: 22Z60104</p>	
<h3>CALIBRATION CERTIFICATE</h3>			
Object	D83V2 - SN: 4d114		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date	March 31, 2022		
<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity &lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No. J21X08326)	Sep-22
Power sensor NRP85	104291	24-Sep-21 (CTTL, No. J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG, No. EX3-7307_ May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL, SPEAG, No. Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No. J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No. J22X00406)	Jan-23
Calibrated by:	Name	Function	Signature
Zhao Jing	SAR Test Engineer		
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	
Issued: April 6, 2022			
<p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>			
<p>Calibration Certificate No: 22Z60104</p>		<p>Page 1 of 6</p>	
<p>Calibration Certificate No: 22Z60104</p>		<p>Page 2 of 6</p>	
<p><b>Glossary:</b></p> <p>TSL: tissue simulating liquid  ConfF: sensitivity in TSL / NORMLx,y,z  N/A: not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEC/IEEE 62209-1528, "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices, Part 1528: Human Models, Documentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020</p> <p>b) KDB 8656564, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p><b>Additional Documentation:</b></p> <p>c) DAS454 System Handbook</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li><b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li><b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to point its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li><b>Feed Point Position and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li><b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li><b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li><b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li><b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.</p>			

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-eDocument.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced or given, without the prior written permission of the Company. Any unauthorized attempt to alter, copy or otherwise copy or reproduce the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

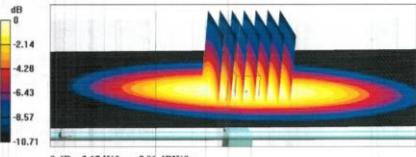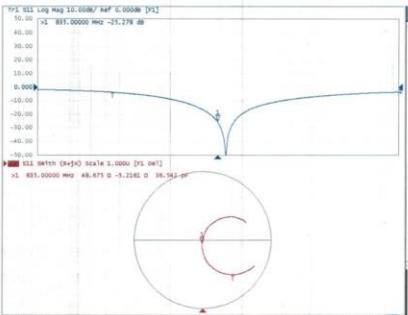
<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctitl@chinaitl.com http://www.chinaitl.cn</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASY Version</td><td>DASY52</td><td>V52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr> <tr><td>Frequency</td><td>835 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>41.5</td><td>0.90 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>41.0 ± 6 %</td><td>0.91 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td><td>250 mW input power</td></tr> <tr><td>SAR measured</td><td>2.37 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td></td><td>1.54 W/kg</td></tr> <tr><td></td><td>6.12 W/kg ± 18.7 % (n=2)</td></tr> </table> </div>	DASY Version	DASY52	V52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	835 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	41.0 ± 6 %	0.91 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—		Condition	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	250 mW input power	SAR measured	2.37 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power	SAR for nominal Head TSL parameters	normalized to 1W		1.54 W/kg		6.12 W/kg ± 18.7 % (n=2)	<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctitl@chinaitl.com http://www.chinaitl.cn</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>48.7Ω - 5.22jΩ</td></tr> <tr><td>Return Loss</td><td>-25.3dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Electrical Delay (one direction)</td><td>1.307 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semi-rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the standard. The antenna is not loaded according to the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table> </div>	Impedance, transformed to feed point	48.7Ω - 5.22jΩ	Return Loss	-25.3dB	Electrical Delay (one direction)	1.307 ns	Manufactured by	SPEAG
DASY Version	DASY52	V52.10.4																																																											
Extrapolation	Advanced Extrapolation																																																												
Phantom	Triple Flat Phantom 5.1C																																																												
Distance Dipole Center - TSL	15 mm	with Spacer																																																											
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																												
Frequency	835 MHz ± 1 MHz																																																												
	Temperature	Permittivity	Conductivity																																																										
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m																																																										
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.0 ± 6 %	0.91 mho/m ± 6 %																																																										
Head TSL temperature change during test	<1.0 °C	—	—																																																										
	Condition																																																												
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	250 mW input power																																																												
SAR measured	2.37 W/kg																																																												
SAR for nominal Head TSL parameters	normalized to 1W																																																												
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																												
SAR measured	250 mW input power																																																												
SAR for nominal Head TSL parameters	normalized to 1W																																																												
	1.54 W/kg																																																												
	6.12 W/kg ± 18.7 % (n=2)																																																												
Impedance, transformed to feed point	48.7Ω - 5.22jΩ																																																												
Return Loss	-25.3dB																																																												
Electrical Delay (one direction)	1.307 ns																																																												
Manufactured by	SPEAG																																																												
Certificate No: Z22-60104 Page 2 of 6																																																													
Certificate No: Z22-60104 Date: 2022-03-31																																																													
DASY5's Variations Report for Head TSL Test Laboratory: CAICT, Beijing China DUT: Dipole 835 MHz; Type: DR35V2; Serial: 4d114 Communication System: UID 0; CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used: $\epsilon' = 835 \text{ MHz}$ ; $\sigma = 0.907 \text{ S/m}$ ; $\tau_s = 40.98$ ; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration: <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN7307; ConvF(10.13, 10.13, 10.13) @ 835 MHz; Calibrated: 2021-05-26</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4-Sn1556; Calibrated: 2022-01-12</li> <li>• Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li> <li>• DASY52 S2.10.4(1535); SEMICAD X 14.6.14(7501)</li> </ul> <p><b>Diagrams Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm</b> Reference Value = 57.88 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg Smallest distance from peaks to all points 3 dB below = 15.8 mm Ratio of SAR at M2 to SAR at M1 = 66.2% Maximum value of SAR (measured) = 3.17 W/kg   </p>																																																													
Certificate No: Z22-60104 Page 5 of 6																																																													
 <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctitl@chinaitl.com http://www.chinaitl.cn</p> <p><b>Impedance Measurement Plot for Head TSL</b></p> 																																																													
Certificate No: Z22-60104 Page 6 of 6																																																													

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



## 1.5 D900V2 - SN 1d079

   <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191 Tel: +86-10-62794531-2117 E-mail: off@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p>Client: SGS-CN Certificate No: Z22-60184</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D900V2 - SN: 1d079</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: June 7, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±5°C) and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power Meter: NRP2</td> <td>10277</td> <td>24-Jan-21 (CTTL, No. J22X00260)</td> <td>Sept-22</td> </tr> <tr> <td>Power sensor: NRP8</td> <td>10491</td> <td>24-Sep-21 (CTTL, No. J21X03262)</td> <td>Sept-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7464</td> <td>26-Jan-22(SPEAG No EX3-7464, Jan22)</td> <td>Jan-23</td> </tr> <tr> <td>DAE4</td> <td>SN 1558</td> <td>12-Jan-22(CTTL-SPEAG No Z22-80007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL, No.J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CTTL, No.J22X00406)</td> <td>Jan-23</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Name</th> <th>Function</th> <th>Signature</th> </tr> </thead> <tbody> <tr> <td>Zhao Jing</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Lin Hao</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Qi Dianyuan</td> <td>SAR Project Leader</td> <td></td> </tr> </tbody> </table> <p>Issued: June 13, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: Z22-60184 Page 1 of 6</p>	Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter: NRP2	10277	24-Jan-21 (CTTL, No. J22X00260)	Sept-22	Power sensor: NRP8	10491	24-Sep-21 (CTTL, No. J21X03262)	Sept-22	Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23	DAE4	SN 1558	12-Jan-22(CTTL-SPEAG No Z22-80007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23	Name	Function	Signature	Zhao Jing	SAR Test Engineer		Lin Hao	SAR Test Engineer		Qi Dianyuan	SAR Project Leader		  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62794531-3217 E-mail: off@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Glossary:</b></p> <p>TSL: tissue simulating liquid ConvF: sensitivity in TSL / NORMxyz N/A: not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEC/IEEE 62209-1528, "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 b) KDB 895994, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p><b>Additional Documentation:</b></p> <p>o DASY4.5 System Handbook</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>• <b>Antenna Configuration:</b> Further details are available from the Validation Report at the end of the certificate. All parameters in the certificate are valid at the frequency indicated.</li> <li>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li>• <b>Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance value is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>• <b>SAR measured:</b> One day delay between the SMA connector and the antenna feed point.</li> <li>• <b>No uncertainty required:</b> No uncertainty required.</li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: Z22-60184 Page 2 of 6</p>																
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																										
Power Meter: NRP2	10277	24-Jan-21 (CTTL, No. J22X00260)	Sept-22																																																										
Power sensor: NRP8	10491	24-Sep-21 (CTTL, No. J21X03262)	Sept-22																																																										
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23																																																										
DAE4	SN 1558	12-Jan-22(CTTL-SPEAG No Z22-80007)	Jan-23																																																										
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																										
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23																																																										
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23																																																										
Name	Function	Signature																																																											
Zhao Jing	SAR Test Engineer																																																												
Lin Hao	SAR Test Engineer																																																												
Qi Dianyuan	SAR Project Leader																																																												
  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62794531-2117 E-mail: off@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Measurement System Configuration:</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <thead> <tr> <th>DASY Version</th> <th>DASY92</th> <th>52.10.4</th> </tr> </thead> <tbody> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>15 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz = 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>900 MHz ± 1 MHz</td> <td></td> </tr> </tbody> </table> <p><b>Head TSL parameters:</b> The following parameters and calculations were applied.</p> <table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>41.5</td> <td>0.97 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>42.1 ± 6 %</td> <td>0.98 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p><b>SAR result with Head TSL:</b></p> <table border="1"> <thead> <tr> <th>SAR measured over 1 cm<sup>3</sup> (1 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>2.76 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>11.0 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <th>SAR measured over 10 cm<sup>3</sup> (10 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>1.78 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>7.09 W/kg ± 18.7 % (k=2)</td> </tr> </tbody> </table> <p>Certificate No: Z22-60184 Page 3 of 6</p>	DASY Version	DASY92	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple flat Phantom 5.1C		Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	900 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	---	---	SAR measured over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	250 mW input power	2.76 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)	SAR measured over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	250 mW input power	1.78 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)	  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62794531-3217 E-mail: off@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL:</b></p> <table border="1"> <thead> <tr> <th>Impedance, transformed to feed point</th> <th>48.10 ± 8.49Ω</th> </tr> </thead> <tbody> <tr> <td>Return Loss</td> <td>-23.3 dB</td> </tr> </tbody> </table> <p><b>General Antenna Parameters and Design:</b></p> <table border="1"> <thead> <tr> <th>Electrical (one direction)</th> <th>1.312 ns</th> </tr> </thead> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard enrigid coaxial cable. The center conductor of the testing line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded with the liquid phantom explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The dipole impedance is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data:</b></p> <table border="1"> <thead> <tr> <th>Manufactured by</th> <th>SPEAG</th> </tr> </thead> </table> <p>Certificate No: Z22-60184 Page 4 of 6</p>	Impedance, transformed to feed point	48.10 ± 8.49Ω	Return Loss	-23.3 dB	Electrical (one direction)	1.312 ns	Manufactured by	SPEAG
DASY Version	DASY92	52.10.4																																																											
Extrapolation	Advanced Extrapolation																																																												
Phantom	Triple flat Phantom 5.1C																																																												
Distance Dipole Center - TSL	15 mm	with Spacer																																																											
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																												
Frequency	900 MHz ± 1 MHz																																																												
	Temperature	Permittivity	Conductivity																																																										
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m																																																										
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 mho/m ± 6 %																																																										
Head TSL temperature change during test	<1.0 °C	---	---																																																										
SAR measured over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																												
SAR measured	250 mW input power	2.76 W/kg																																																											
SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)																																																											
SAR measured over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																												
SAR measured	250 mW input power	1.78 W/kg																																																											
SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)																																																											
Impedance, transformed to feed point	48.10 ± 8.49Ω																																																												
Return Loss	-23.3 dB																																																												
Electrical (one direction)	1.312 ns																																																												
Manufactured by	SPEAG																																																												


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



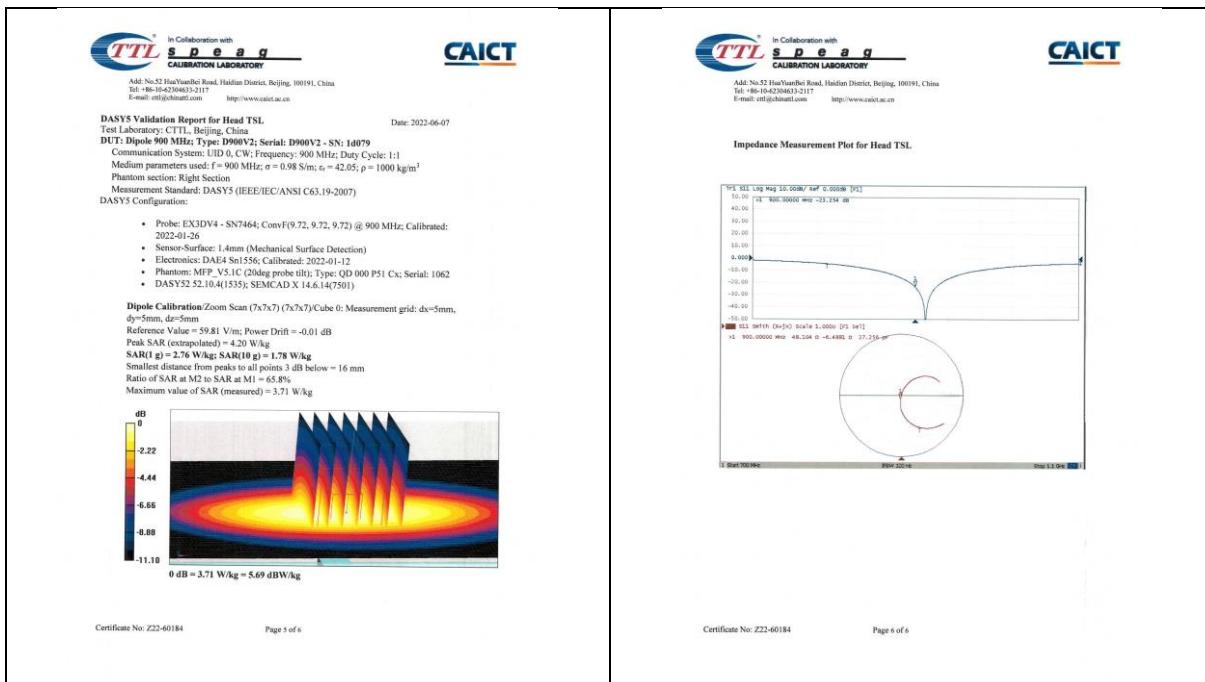

## 1.6 D1800V2 - SN 2d170

<p><b>Client:</b> SGS-CN <b>Certificate No:</b> Z22-60105</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D1800V2 - SN: 2d170</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 31, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity &gt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Power Meter NRP2</td> <td>106277</td> <td>24-Sep-21 (C TTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (C TTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7307</td> <td>26-May-22 (SPEAG No. EX-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (C TTL, SPEAG No. Z22-60007)</td> <td>Jan-23</td> </tr> </table> <table border="1"> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (C TTL, No. J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY48110673</td> <td>14-Jan-22 (C TTL, No. J22X00406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Zhao Jing Reviewed by: Lin Hao Approved by: Qi Dianyuan</p> <p>Issued: April 6, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: Z22-60105 Page 1 of 6</p>	Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	106277	24-Sep-21 (C TTL, No. J21X08326)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (C TTL, No. J21X08326)	Sep-22	Reference Probe EX3DV4	SN 7307	26-May-22 (SPEAG No. EX-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (C TTL, SPEAG No. Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (C TTL, No. J22X00409)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (C TTL, No. J22X00406)	Jan-23	<p><b>Client:</b> SGS-CN <b>Certificate No:</b> Z22-60105</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D1800V2 - SN: 2d170</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 31, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity &gt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Power Meter NRP2</td> <td>106277</td> <td>24-Sep-21 (C TTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (C TTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7307</td> <td>26-May-22 (SPEAG No. EX-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (C TTL, SPEAG No. Z22-60007)</td> <td>Jan-23</td> </tr> </table> <table border="1"> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (C TTL, No. J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY48110673</td> <td>14-Jan-22 (C TTL, No. J22X00406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Zhao Jing Reviewed by: Lin Hao Approved by: Qi Dianyuan</p> <p>Issued: April 6, 2022</p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: Z22-60105 Page 2 of 6</p>	Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	106277	24-Sep-21 (C TTL, No. J21X08326)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (C TTL, No. J21X08326)	Sep-22	Reference Probe EX3DV4	SN 7307	26-May-22 (SPEAG No. EX-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (C TTL, SPEAG No. Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (C TTL, No. J22X00409)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (C TTL, No. J22X00406)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Power Meter NRP2	106277	24-Sep-21 (C TTL, No. J21X08326)	Sep-22																																																														
Power sensor NRP85	104291	24-Sep-21 (C TTL, No. J21X08326)	Sep-22																																																														
Reference Probe EX3DV4	SN 7307	26-May-22 (SPEAG No. EX-7307, May21)	May-22																																																														
DAE4	SN 1556	12-Jan-22 (C TTL, SPEAG No. Z22-60007)	Jan-23																																																														
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Signal Generator E4438C	MY49071430	13-Jan-22 (C TTL, No. J22X00409)	Jan-23																																																														
Network Analyzer E5071C	MY48110673	14-Jan-22 (C TTL, No. J22X00406)	Jan-23																																																														
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Power Meter NRP2	106277	24-Sep-21 (C TTL, No. J21X08326)	Sep-22																																																														
Power sensor NRP85	104291	24-Sep-21 (C TTL, No. J21X08326)	Sep-22																																																														
Reference Probe EX3DV4	SN 7307	26-May-22 (SPEAG No. EX-7307, May21)	May-22																																																														
DAE4	SN 1556	12-Jan-22 (C TTL, SPEAG No. Z22-60007)	Jan-23																																																														
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Signal Generator E4438C	MY49071430	13-Jan-22 (C TTL, No. J22X00409)	Jan-23																																																														
Network Analyzer E5071C	MY48110673	14-Jan-22 (C TTL, No. J22X00406)	Jan-23																																																														





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)5735888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)5735888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)
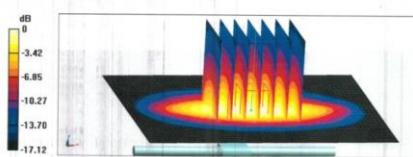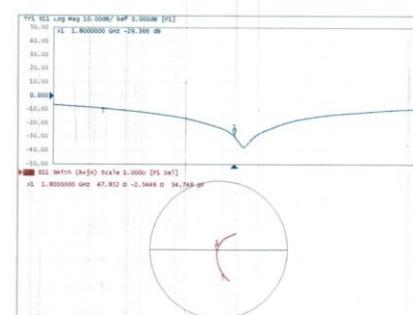
<p><b>TTL S P E A G CALIBRATION LABORATORY</b> Add: No.53 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctt@chinattl.com http://www.chinattl.cn</p> <p><b>Measurement Conditions</b> DASV5 system configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASV5 Version</td><td>DASV52</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr> <tr><td>Frequency</td><td>1800 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td></td><td>Temperature</td><td>Permittivity</td><td>Conductivity</td></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>40.0</td><td>1.40 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>40.6 ± 6 %</td><td>1.41 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>9.73 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>38.9 W/kg ± 18.8 % (k=2)</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>5.11 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>20.4 W/kg ± 18.7 % (k=2)</td></tr> </table>	DASV5 Version	DASV52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	1800 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	40.6 ± 6 %	1.41 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power	9.73 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	38.9 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power	5.11 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	20.4 W/kg ± 18.7 % (k=2)	<p><b>CAICT</b></p> <p><b>TTL S P E A G CALIBRATION LABORATORY</b> Add: No.53 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctt@chinattl.com http://www.chinattl.cn</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>47.90- 2.54jΩ</td></tr> <tr><td>Return Loss</td><td>-29.4dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Electrical Delay (one direction)</td><td>1.116 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the standard. The overall dipole length is still according to the Standard. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.</p> <p>No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table>	Impedance, transformed to feed point	47.90- 2.54jΩ	Return Loss	-29.4dB	Electrical Delay (one direction)	1.116 ns	Manufactured by	SPEAG
DASV5 Version	DASV52	52.10.4																																																									
Extrapolation	Advanced Extrapolation																																																										
Phantom	Triple Flat Phantom 5.1C																																																										
Distance Dipole Center - TSL	10 mm	with Spacer																																																									
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																										
Frequency	1800 MHz ± 1 MHz																																																										
	Temperature	Permittivity	Conductivity																																																								
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m																																																								
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.6 ± 6 %	1.41 mho/m ± 6 %																																																								
Head TSL temperature change during test	<1.0 °C	—	—																																																								
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																										
SAR measured	250 mW input power	9.73 W/kg																																																									
SAR for nominal Head TSL parameters	normalized to 1W	38.9 W/kg ± 18.8 % (k=2)																																																									
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																										
SAR measured	250 mW input power	5.11 W/kg																																																									
SAR for nominal Head TSL parameters	normalized to 1W	20.4 W/kg ± 18.7 % (k=2)																																																									
Impedance, transformed to feed point	47.90- 2.54jΩ																																																										
Return Loss	-29.4dB																																																										
Electrical Delay (one direction)	1.116 ns																																																										
Manufactured by	SPEAG																																																										
<p>Certificate No: Z22-60105 Page 3 of 6</p> <p><b>TTL S P E A G CALIBRATION LABORATORY</b> Add: No.53 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctt@chinattl.com http://www.chinattl.cn</p> <p><b>DASV5 Validation Report for Head TSL</b> Test Laboratory: CTTL, Beijing, China Date: 2022-03-31</p> <p><b>DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 2d170</b> Communication System: UUD 0; CW; Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: <math>\epsilon = 1800 \text{ MHz}</math>; <math>\sigma = 1.411 \text{ S/m}</math>; <math>\epsilon_r = 40.62</math>; <math>\rho = 1000 \text{ kg/m}^3</math> Phantom section: Right Section Measurement Standard: DASV5 (IEEE/IEC/ANSI C63.19-2007)</p> <p><b>DASV5 Configuration:</b></p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN7307; ConvF(8.34, 8.34, 8.34) @ 1800 MHz; Calibrated: 2021-05-26</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn1556; Calibrated: 2022-01-12</li> <li>• Phantom: MFP_V3.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li> <li>• DASV52 52.10.4(1535); SEMCAD X 14.6.14(7501)</li> </ul> <p><b>Probe Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm</b> Reference Value = 98.14 V/m; Power Drift = 0.03 dB Peak SAR = 18.2 W/kg SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.11 W/kg Smallest distance from peaks to all points 3 dB below = 10 mm Ratio of SAR at M2 to SAR at M1 = 54% Maximum value of SAR (measured) = 15.2 W/kg</p>  <p>0 dB = 15.2 W/kg = 11.82 dBW/kg</p>	<p>Certificate No: Z22-60105 Page 4 of 6</p> <p><b>CAICT</b></p> <p><b>TTL S P E A G CALIBRATION LABORATORY</b> Add: No.53 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctt@chinattl.com http://www.chinattl.cn</p> <p><b>Impedance Measurement Plot for Head TSL</b></p> 																																																										
<p>Certificate No: Z22-60105 Page 5 of 6</p>	<p>Certificate No: Z22-60105 Page 6 of 6</p>																																																										

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)



## 1.7 D1900V2 - SN 5d136

  <p>Object: D1900V2 - SN: 5d136</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: June 7, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±5)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE criteria for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power sensor NRP2</td> <td>102277</td> <td>24-Jan-22 (CTTL No.J22X00209)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (CTTL No.J21X00326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7464</td> <td>26-Jan-22(SPEAG No EX3-7464, Jan22)</td> <td>Jan-23</td> </tr> <tr> <td>DAEA</td> <td>SN 1558</td> <td>12-Jan-22(CTTL-SPEAG No 222-6007)</td> <td>Jan-23</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL No.J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY48110673</td> <td>14-Jan-22 (CTTL No.J22X00406)</td> <td>Jan-23</td> </tr> </tbody> </table> <p>Calibrated by: Zhao Jing SAR Test Engineer</p> <p>Reviewed by: Lin Hao SAR Test Engineer</p> <p>Approved by: Qi Danyuan SAR Project Leader</p> <p>Issued: June 13, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory</p>	Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power sensor NRP2	102277	24-Jan-22 (CTTL No.J22X00209)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CTTL No.J21X00326)	Sep-22	Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23	DAEA	SN 1558	12-Jan-22(CTTL-SPEAG No 222-6007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23	 <p>In Collaboration with TTL SPEAG CALIBRATION LABORATORY Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191 Tel: +86-10-62394632-2117 E-mail: cict@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p>Object: D1900V2 - SN: 5d136</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: June 7, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±5)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE criteria for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power sensor NRP2</td> <td>102277</td> <td>24-Jan-22 (CTTL No.J22X00209)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (CTTL No.J21X00326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7464</td> <td>26-Jan-22(SPEAG No EX3-7464, Jan22)</td> <td>Jan-23</td> </tr> <tr> <td>DAEA</td> <td>SN 1558</td> <td>12-Jan-22(CTTL-SPEAG No 222-6007)</td> <td>Jan-23</td> </tr> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL No.J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY48110673</td> <td>14-Jan-22 (CTTL No.J22X00406)</td> <td>Jan-23</td> </tr> </tbody> </table> <p>Calibration is Performed According to the Following Standards:</p> <ul style="list-style-type: none"> <li>a) IEC/IEEE 62209-1528, "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Personal Communication Devices- Part 1528: Human Models, Instrumentation and Procedure (Frequency range of 4 MHz to 10 GHz)", October 2020</li> <li>b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"</li> </ul> <p>Additional Documentation:</p> <ul style="list-style-type: none"> <li>c) DASY4.3 System Handbook</li> </ul> <p>Methods Applied and Interpretation of Parameters:</p> <ul style="list-style-type: none"> <li>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of this document. All figures and tables indicate are valid at the frequency indicated.</li> <li>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li>• <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transferred from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>• <b>Electrical Delay:</b> The electrical delay between the SMA connector and the antenna feed point.</li> <li>• <b>No uncertainty required.</b></li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p>	Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power sensor NRP2	102277	24-Jan-22 (CTTL No.J22X00209)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CTTL No.J21X00326)	Sep-22	Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23	DAEA	SN 1558	12-Jan-22(CTTL-SPEAG No 222-6007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Power sensor NRP2	102277	24-Jan-22 (CTTL No.J22X00209)	Sep-22																																																														
Power sensor NRP85	104291	24-Sep-21 (CTTL No.J21X00326)	Sep-22																																																														
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23																																																														
DAEA	SN 1558	12-Jan-22(CTTL-SPEAG No 222-6007)	Jan-23																																																														
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23																																																														
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23																																																														
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Power sensor NRP2	102277	24-Jan-22 (CTTL No.J22X00209)	Sep-22																																																														
Power sensor NRP85	104291	24-Sep-21 (CTTL No.J21X00326)	Sep-22																																																														
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23																																																														
DAEA	SN 1558	12-Jan-22(CTTL-SPEAG No 222-6007)	Jan-23																																																														
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																														
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23																																																														
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23																																																														
  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62394632-2117 E-mail: cict@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <thead> <tr> <th>DASY Version</th> <th>DASY2</th> <th>62.10.4</th> </tr> </thead> <tbody> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz = 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>1900 MHz ± 1 MHz</td> <td></td> </tr> </tbody> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>Nominal Head TSL parameters</td> <td>23.0 °C</td> <td>40.0</td> <td>1.40 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>39.9 ± 6 %</td> <td>1.39 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <thead> <tr> <th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>9.95 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>40.0 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <th>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>5.10 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>20.8 W/kg ± 18.7 % (k=2)</td> </tr> </tbody> </table>	DASY Version	DASY2	62.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	1900 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	23.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	39.9 ± 6 %	1.39 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	---	---	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	250 mW input power	9.95 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	250 mW input power	5.10 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg ± 18.7 % (k=2)	 <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62394632-2117 E-mail: cict@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <thead> <tr> <th>Impedance, Transformed to feed point</th> <th>51.20 ± 7.98 jΩ</th> </tr> </thead> <tbody> <tr> <td>Return Loss</td> <td>-22.4 dB</td> </tr> </tbody> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <thead> <tr> <th>Electrical Delay (one direction)</th> <th>1.109 ns</th> </tr> </thead> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semi rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-biasing. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded. The antenna is positioned as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by these changes, because the antenna length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <thead> <tr> <th>Manufactured by</th> <th>SPEAG</th> </tr> </thead> </table>	Impedance, Transformed to feed point	51.20 ± 7.98 jΩ	Return Loss	-22.4 dB	Electrical Delay (one direction)	1.109 ns	Manufactured by	SPEAG				
DASY Version	DASY2	62.10.4																																																															
Extrapolation	Advanced Extrapolation																																																																
Phantom	Triple Flat Phantom 5.1C																																																																
Distance Dipole Center - TSL	10 mm	with Spacer																																																															
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																																
Frequency	1900 MHz ± 1 MHz																																																																
	Temperature	Permittivity	Conductivity																																																														
Nominal Head TSL parameters	23.0 °C	40.0	1.40 mho/m																																																														
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.9 ± 6 %	1.39 mho/m ± 6 %																																																														
Head TSL temperature change during test	<1.0 °C	---	---																																																														
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																																
SAR measured	250 mW input power	9.95 W/kg																																																															
SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 18.8 % (k=2)																																																															
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																
SAR measured	250 mW input power	5.10 W/kg																																																															
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg ± 18.7 % (k=2)																																																															
Impedance, Transformed to feed point	51.20 ± 7.98 jΩ																																																																
Return Loss	-22.4 dB																																																																
Electrical Delay (one direction)	1.109 ns																																																																
Manufactured by	SPEAG																																																																


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)


No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



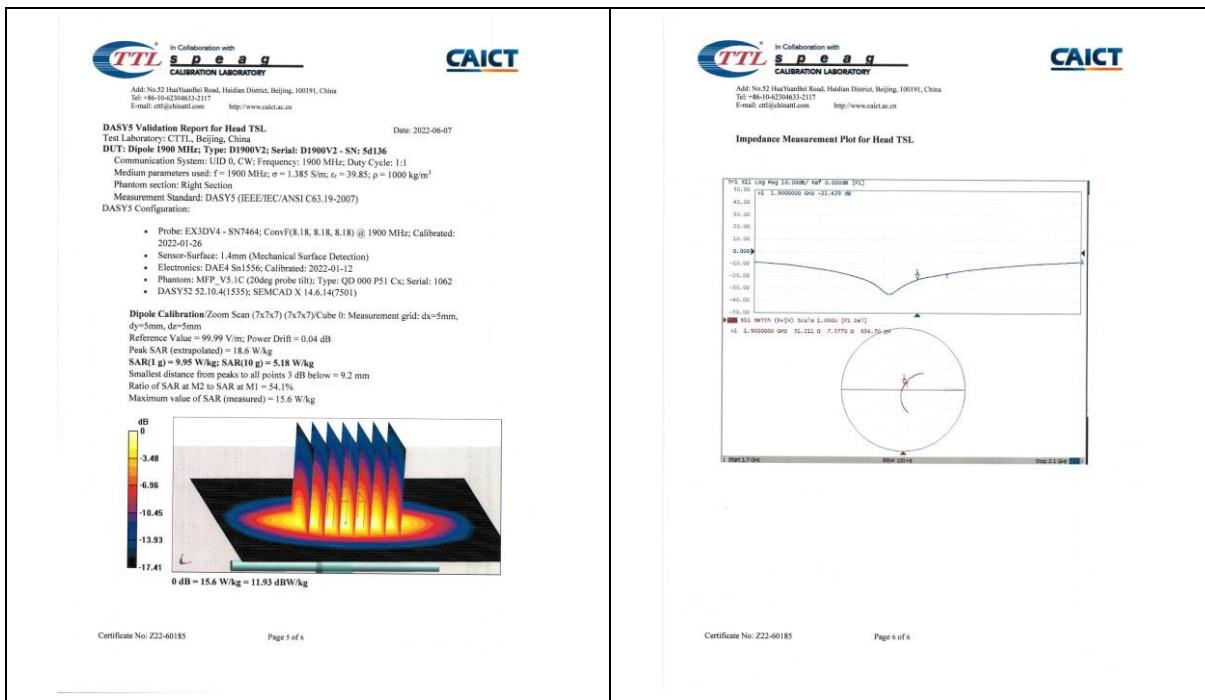

## 1.8 D2000V2 - SN 1041

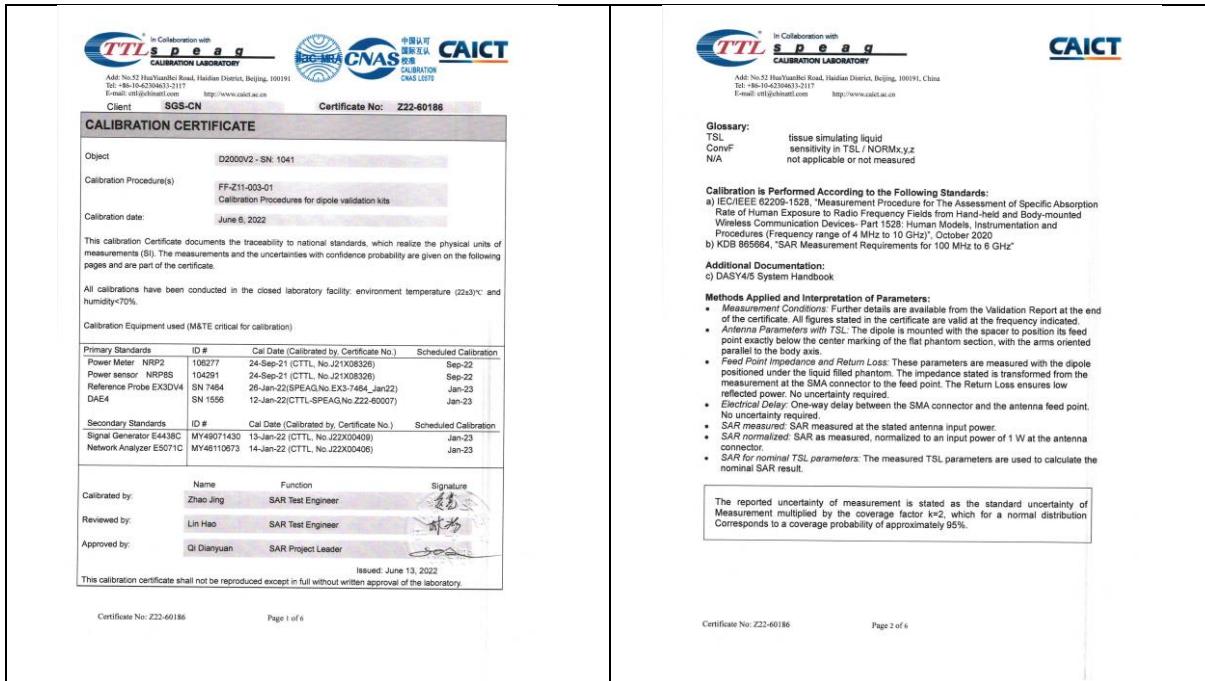


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN\\_DocCheck@sgs.com](mailto:CN_DocCheck@sgs.com)



No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)
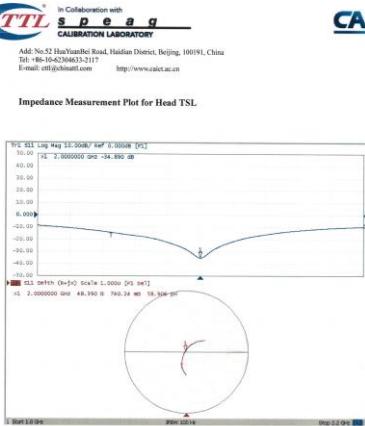
<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2117 E-mail: cttf@caict.ac.cn http://www.caict.ac.cn</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASY Version</td><td>DASY52</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr> <tr><td>Frequency</td><td>2000 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Temperature</td><td>Permittivity</td><td>Conductivity</td></tr> <tr><td>22.0 °C</td><td>40.0</td><td>1.40 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>40.2 ± 6 % 1.39 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>10.4 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>41.8 W/kg ± 18.8 % (n=2)</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>5.30 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>21.3 W/kg ± 18.7 % (n=2)</td></tr> </table> <p>Certificate No: Z22-60186 Page 3 of 6</p> </div>	DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	2000 MHz ± 1 MHz		Temperature	Permittivity	Conductivity	22.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 % 1.39 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power	10.4 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	41.8 W/kg ± 18.8 % (n=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power	5.30 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	21.3 W/kg ± 18.7 % (n=2)	<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2117 E-mail: cttf@caict.ac.cn http://www.caict.ac.cn</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed port</td><td>48.40 ± 0.74(j0)</td></tr> <tr><td>Return Loss</td><td>-34.9dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Electric Delay (one direction)</td><td>1.088 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the testing line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded with a phantom. Measurement conditions "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still adapted to the phantom.</p> <p>No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table> <p>Certificate No: Z22-60186 Page 4 of 6</p> </div>	Impedance, transformed to feed port	48.40 ± 0.74(j0)	Return Loss	-34.9dB	Electric Delay (one direction)	1.088 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																					
Extrapolation	Advanced Extrapolation																																																						
Phantom	Triple Flat Phantom 5.1C																																																						
Distance Dipole Center - TSL	10 mm	with Spacer																																																					
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																						
Frequency	2000 MHz ± 1 MHz																																																						
Temperature	Permittivity	Conductivity																																																					
22.0 °C	40.0	1.40 mho/m																																																					
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 % 1.39 mho/m ± 6 %																																																					
Head TSL temperature change during test	<1.0 °C	—																																																					
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																						
SAR measured	250 mW input power	10.4 W/kg																																																					
SAR for nominal Head TSL parameters	normalized to 1W	41.8 W/kg ± 18.8 % (n=2)																																																					
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																						
SAR measured	250 mW input power	5.30 W/kg																																																					
SAR for nominal Head TSL parameters	normalized to 1W	21.3 W/kg ± 18.7 % (n=2)																																																					
Impedance, transformed to feed port	48.40 ± 0.74(j0)																																																						
Return Loss	-34.9dB																																																						
Electric Delay (one direction)	1.088 ns																																																						
Manufactured by	SPEAG																																																						
<p><b>Impedance Measurement Plot for Head TSL</b></p>  <p>Impedance Measurement Plot for Head TSL. The plot shows a Smith Chart with a reflection coefficient of -0.00008 [j0]. The x-axis is Frequency (MHz) from 100 to 1000, and the y-axis is Impedance (Ω) from 10 to 50. The reflection coefficient is marked on the chart, and the corresponding normalized impedance is shown on the chart's scale.</p> <p>Certificate No: Z22-60186 Page 5 of 6</p> <p>Certificate No: Z22-60186 Page 6 of 6</p>																																																							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)5735888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)5735888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 1.9 D2300V2 - SN 1096

    <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191 Tel: +86-10-62304613-2512 Fax: +86-10-62304613-2504 E-mail: ctli@chinaitt.com <a href="http://www.chinaitt.cn">http://www.chinaitt.cn</a></p> <p>Client SGS-CN Certificate No: Z22-60106</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object D2300V2 - SN: 1096</p> <p>Calibration Procedure(s) FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 31, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power Meter NRP2</td> <td>106277</td> <td>24-Sep-21 (CTTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP8S</td> <td>104291</td> <td>24-Sep-21 (CTTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7307</td> <td>26-May-21 (SPEAG No. EX3-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CTTL-SPEAG No. 222-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL, No. J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CTTL, No. J22X00406)</td> <td>Jan-23</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Calibrated by:</th> <th>Name</th> <th>Function</th> <th>Signature</th> </tr> </thead> <tbody> <tr> <td>Zhao Jing</td> <td>SAR Test Engineer</td> <td></td> <td></td> </tr> <tr> <td>Reviewed by:</td> <td>Lin Hao</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Qi Dianyuan</td> <td>SAR Project Leader</td> <td></td> </tr> </tbody> </table> <p>Issued: April 6, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	106277	24-Sep-21 (CTTL, No. J21X08326)	Sep-22	Power sensor NRP8S	104291	24-Sep-21 (CTTL, No. J21X08326)	Sep-22	Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No. 222-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No. J22X00409)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No. J22X00406)	Jan-23	Calibrated by:	Name	Function	Signature	Zhao Jing	SAR Test Engineer			Reviewed by:	Lin Hao	SAR Test Engineer		Approved by:	Qi Dianyuan	SAR Project Leader		  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctli@chinaitt.com <a href="http://www.chinaitt.cn">http://www.chinaitt.cn</a></p> <p><b>Glossary:</b> TSL tissue simulating liquid ConvF sensitivity in TSL / NORMx,y,z N/A not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <ul style="list-style-type: none"> <li>a) IEC/IEEE 62209-1528, "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020</li> <li>b) KDB 656564, "SAR Measurement Requirements for 100 MHz to 6 GHz"</li> </ul> <p><b>Additional Documentation:</b></p> <ul style="list-style-type: none"> <li>c) DASY4/S System Handbook</li> </ul> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li>• <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measured value at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>• <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.</p>						
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																					
Power Meter NRP2	106277	24-Sep-21 (CTTL, No. J21X08326)	Sep-22																																																					
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No. J21X08326)	Sep-22																																																					
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22																																																					
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No. 222-60007)	Jan-23																																																					
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																					
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No. J22X00409)	Jan-23																																																					
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No. J22X00406)	Jan-23																																																					
Calibrated by:	Name	Function	Signature																																																					
Zhao Jing	SAR Test Engineer																																																							
Reviewed by:	Lin Hao	SAR Test Engineer																																																						
Approved by:	Qi Dianyuan	SAR Project Leader																																																						
<p>Certificate No: Z22-60106 Page 1 of 6</p> <p>  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctli@chinaitt.com <a href="http://www.chinaitt.cn">http://www.chinaitt.cn</a></p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1</p> <table border="1"> <thead> <tr> <th>DASY Version</th> <th>DASY52</th> <th>52.10.4</th> </tr> </thead> <tbody> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz &lt; 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>2300 MHz ± 1 MHz</td> <td></td> </tr> </tbody> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>39.5</td> <td>1.67 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>39.8 ± 6 %</td> <td>1.70 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </tbody> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <thead> <tr> <th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th> <th>Condition</th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>250 mW input power 12.4 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W 49.2 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <th>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</th> <th>Condition</th> </tr> <tr> <td>SAR measured</td> <td>250 mW input power 5.88 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W 23.4 W/kg ± 18.7 % (k=2)</td> </tr> </tbody> </table> </p>		DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz < 5 mm		Frequency	2300 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.70 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power 12.4 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 49.2 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power 5.88 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 23.4 W/kg ± 18.7 % (k=2)	<p>Certificate No: Z22-60106 Page 2 of 6</p> <p>  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304613-2079 Fax: +86-10-62304613-2504 E-mail: ctli@chinaitt.com <a href="http://www.chinaitt.cn">http://www.chinaitt.cn</a></p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <thead> <tr> <th>Impedance, transformed to feed point</th> <th>49.2Ω-4.56Ω</th> </tr> </thead> <tbody> <tr> <td>Return Loss</td> <td>-26.6dB</td> </tr> </tbody> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <thead> <tr> <th>Electrical Delay (one direction)</th> <th>1.083 ns</th> </tr> </thead> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the standard. The antenna is described in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <thead> <tr> <th>Manufactured by</th> <th>SPEAG</th> </tr> </thead> </table> </p>	Impedance, transformed to feed point	49.2Ω-4.56Ω	Return Loss	-26.6dB	Electrical Delay (one direction)	1.083 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																						
Extrapolation	Advanced Extrapolation																																																							
Phantom	Triple Flat Phantom 5.1C																																																							
Distance Dipole Center - TSL	10 mm	with Spacer																																																						
Zoom Scan Resolution	dx, dy, dz < 5 mm																																																							
Frequency	2300 MHz ± 1 MHz																																																							
	Temperature	Permittivity	Conductivity																																																					
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m																																																					
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.70 mho/m ± 6 %																																																					
Head TSL temperature change during test	<1.0 °C	—	—																																																					
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																							
SAR measured	250 mW input power 12.4 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W 49.2 W/kg ± 18.8 % (k=2)																																																							
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																							
SAR measured	250 mW input power 5.88 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W 23.4 W/kg ± 18.7 % (k=2)																																																							
Impedance, transformed to feed point	49.2Ω-4.56Ω																																																							
Return Loss	-26.6dB																																																							
Electrical Delay (one direction)	1.083 ns																																																							
Manufactured by	SPEAG																																																							

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



**TTL** In Collaboration with **speag**  
CALIBRATION LABORATORY

Add: No.52 HuYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ct@chisnl.com <http://www.chisnl.com>

**CAICT**

**CAICT**


In Collaboration with **TTL** **speag**  
CALIBRATION LABORATORY

Add: No.52 HuYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: ct@chisnl.com <http://www.chisnl.com>

**DASYS Validation Report for Head TSL**  
Test Laboratory: CTTL, Beijing, China  
**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1096**  
Communication System: UID: C, CW; Frequency: 2300 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.702$  S/m;  $\mu_r = 39.77$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)  
DASYS Configuration:


- Probe: EX3DV4 - SN7307; ConvF(8.01, 8.01, 8.01) @ 2300 MHz; Calibrated: 2021-05-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn556; Calibrated: 2022-01-12
- Phantom: MIP\_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 DASYS2 52.10.4(1535); SEMCAD X 14.6.14(750)

**Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm**  
RF Power: 102.2 V/m; Power Drift = 0.00 dB  
Peak SAR (extrapolated) = 24.8 W/kg  
SAR1 (g) = 12.4 W/kg; SAR10 (g) = 5.88 W/kg  
Smallest distance from peaks to all points 3 dB below = 9 mm  
Ratio of SAR at M2 to SAR at M1 = 50.4%  
Maximum value of SAR (measured) = 20.3 W/kg



0 dB = 20.3 W/kg = 13.07 dBW/kg

**Impedance Measurement Plot for Head TSL**

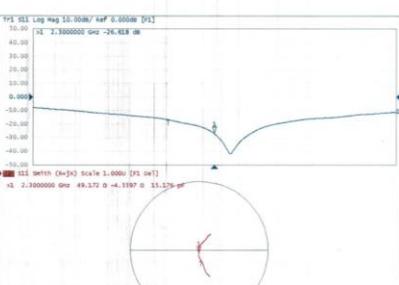

Y-axis: Impedance (MΩ) from 10.00 to 50.00. X-axis: Frequency (GHz) from 1.0000000 to 2.0000000. The plot shows a minimum impedance point marked with a red circle at approximately 1.3 GHz.



1.10 D2450V2 - SN 817

<p style="text-align: center;">   <b>CAICT</b> </p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191      Tel: +86-10-82304633-2512 Fax: +86-10-82304633-2504      E-mail: <a href="mailto:ctt@ctt.com.cn">ctt@ctt.com.cn</a> <a href="http://www.ctt.com.cn">http://www.ctt.com.cn</a></p> <p style="text-align: center;">Client <b>SGS-CN</b> Certificate No: <b>Z22-60107</b></p> <p style="text-align: center;"><b>CALIBRATION CERTIFICATE</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">Object</td> <td>ID2451V2 - SR_817</td> </tr> <tr> <td>Calibration Procedure(s)</td> <td>FF-Z11-003-01 Calibration Procedures for dipole validation kits</td> </tr> <tr> <td>Calibration date</td> <td>April 1, 2022</td> </tr> <tr> <td colspan="2"> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;T: critical for calibration)</p> </td> </tr> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>108277</td> <td>24-Sep-21 (CTTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (CTTL, No. J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3D04</td> <td>SN 7307</td> <td>25-May-21 (SPEAG, No. EX3-7307-May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CTTL, SPEAG, No. Z22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL, No. J22X00409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY48110673</td> <td>14-Jan-22 (CTTL, No. J22X00406)</td> <td>Jan-23</td> </tr> <tr> <td>Calibrated by:</td> <td>Name</td> <td>Function</td> <td>Signature</td> </tr> <tr> <td>Zhao Jing</td> <td>SAR Test Engineer</td> <td></td> <td></td> </tr> <tr> <td>Reviewed by:</td> <td>Lin Hao</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Qi Dianyuan</td> <td>SAR Project Leader</td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;">Issued: April 6, 2022</td> </tr> <tr> <td colspan="4"> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> </td> </tr> </table>	Object	ID2451V2 - SR_817	Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits	Calibration date	April 1, 2022	<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;T: critical for calibration)</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	108277	24-Sep-21 (CTTL, No. J21X08326)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CTTL, No. J21X08326)	Sep-22	Reference Probe EX3D04	SN 7307	25-May-21 (SPEAG, No. EX3-7307-May21)	May-22	DAE4	SN 1556	12-Jan-22 (CTTL, SPEAG, No. Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No. J22X00409)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL, No. J22X00406)	Jan-23	Calibrated by:	Name	Function	Signature	Zhao Jing	SAR Test Engineer			Reviewed by:	Lin Hao	SAR Test Engineer		Approved by:	Qi Dianyuan	SAR Project Leader		Issued: April 6, 2022				<p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>				<p style="text-align: center;">  <b>CAICT</b> </p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China      Tel: +86-10-82304633-2079 Fax: +86-10-82304633-2504      E-mail: <a href="mailto:ctt@ctt.com.cn">ctt@ctt.com.cn</a> <a href="http://www.ctt.com.cn">http://www.ctt.com.cn</a></p> <p style="text-align: center;"><b>Glossary:</b></p> <table border="0" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">TSL</td> <td>tissue simulating liquid</td> </tr> <tr> <td>ConvF</td> <td>sensitivity in TSL / NORMrx,y,z</td> </tr> <tr> <td>N/A</td> <td>not applicable or not measured</td> </tr> </table> <p style="text-align: center;"><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEC/IEEE 62205-1528, "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020</p> <p>b) KDB 8656/64, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p style="text-align: center;"><b>Additional Documentation:</b></p> <p>c) DASY4 System Handbook</p> <p style="text-align: center;"><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li>• <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>• <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p style="text-align: center; border: 1px solid black; padding: 10px;">         The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor <math>k=2</math>, which for a normal distribution Corresponds to a coverage probability of approximately 95%.     </p>	TSL	tissue simulating liquid	ConvF	sensitivity in TSL / NORMrx,y,z	N/A	not applicable or not measured
Object	ID2451V2 - SR_817																																																																						
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits																																																																						
Calibration date	April 1, 2022																																																																						
<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;T: critical for calibration)</p>																																																																							
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																				
Power Meter NRP2	108277	24-Sep-21 (CTTL, No. J21X08326)	Sep-22																																																																				
Power sensor NRP85	104291	24-Sep-21 (CTTL, No. J21X08326)	Sep-22																																																																				
Reference Probe EX3D04	SN 7307	25-May-21 (SPEAG, No. EX3-7307-May21)	May-22																																																																				
DAE4	SN 1556	12-Jan-22 (CTTL, SPEAG, No. Z22-60007)	Jan-23																																																																				
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																				
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No. J22X00409)	Jan-23																																																																				
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL, No. J22X00406)	Jan-23																																																																				
Calibrated by:	Name	Function	Signature																																																																				
Zhao Jing	SAR Test Engineer																																																																						
Reviewed by:	Lin Hao	SAR Test Engineer																																																																					
Approved by:	Qi Dianyuan	SAR Project Leader																																																																					
Issued: April 6, 2022																																																																							
<p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>																																																																							
TSL	tissue simulating liquid																																																																						
ConvF	sensitivity in TSL / NORMrx,y,z																																																																						
N/A	not applicable or not measured																																																																						

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced in whole or in part without the written permission of the Company. Any unauthorized reproduction, distribution or disclosure of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are held for 30 days unless otherwise stated.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com
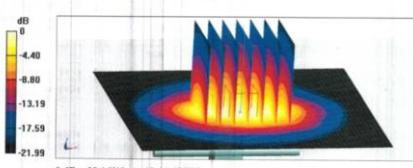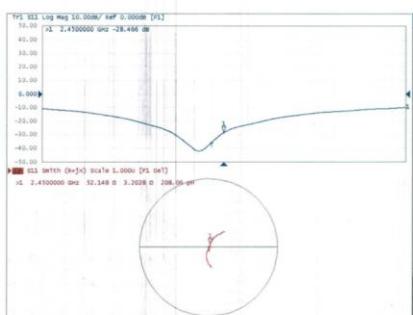
<div style="text-align: center;">  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctfl@chinattl.com http://www.chinattl.cn</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASY Version</td><td>DASY52</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr> <tr><td>Frequency</td><td>2450 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>39.2</td><td>1.80 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>39.5 ± 6 %</td><td>1.79 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td><td>Condition</td><td></td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>13.2 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>83.0 W/kg ± 18.8 % (k=2)</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td><td></td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>6.15 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>24.7 W/kg ± 18.7 % (k=2)</td></tr> </table> </div>	DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	2450 MHz ± 1 MHz		Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.79 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	250 mW input power	13.2 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	83.0 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	250 mW input power	6.15 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)	<div style="text-align: center;">  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctfl@chinattl.com http://www.chinattl.cn</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>52.10 ± 3.20Ω</td></tr> <tr><td>Return Loss</td><td>-28.5dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Electrical Delay (one direction)</td><td>1.066 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the standard. The overall dipole length is still according to the Standard. The SAR data are not affected by this change. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table> </div>	Impedance, transformed to feed point	52.10 ± 3.20Ω	Return Loss	-28.5dB	Electrical Delay (one direction)	1.066 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																							
Extrapolation	Advanced Extrapolation																																																								
Phantom	Triple Flat Phantom 5.1C																																																								
Distance Dipole Center - TSL	10 mm	with Spacer																																																							
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																								
Frequency	2450 MHz ± 1 MHz																																																								
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m																																																						
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.79 mho/m ± 6 %																																																						
Head TSL temperature change during test	<1.0 °C	—	—																																																						
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																								
SAR measured	250 mW input power	13.2 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	83.0 W/kg ± 18.8 % (k=2)																																																							
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																								
SAR measured	250 mW input power	6.15 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)																																																							
Impedance, transformed to feed point	52.10 ± 3.20Ω																																																								
Return Loss	-28.5dB																																																								
Electrical Delay (one direction)	1.066 ns																																																								
Manufactured by	SPEAG																																																								
Certificate No: Z22-60107 Page 3 of 6																																																									
<div style="text-align: center;">  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctfl@chinattl.com http://www.chinattl.cn</p> <p><b>DASY5 Validation Report for Head TSL</b> Test Laboratory: CTTL, Beijing China DUT: Dipole 2450 MHz; Type: D2450V2 - SN: 817 Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: <math>\epsilon' = 2450</math> MHz; <math>\sigma = 1.79</math> S/m; <math>\epsilon_r = 39.52</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY3 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN7307; ConvF(7.75, 7.75, 7.75) @ 2450 MHz; Calibrated: 2021-05-26</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn1556; Calibrated: 2022-01-12</li> <li>• Phantom: MFP_V5.1C (2ddeg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li> <li>• DASY52 52.10.4(535); SEMCAD X 14.6.14(550)</li> </ul> <p><b>Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)Cu6 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm</b> Reference Value = 104.6 V/m; Power Drift = -0.03 dB Peak SAR (1 g) = 13.2 W/kg; SAR(10 g) = 6.15 W/kg Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 49.2% Maximum value of SAR (measured) = 22.1 W/kg</p>  </div>	<div style="text-align: center;">  <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctfl@chinattl.com http://www.chinattl.cn</p> <p><b>Impedance Measurement Plot for Head TSL</b></p>  </div>																																																								
Certificate No: Z22-60107 Page 5 of 6																																																									
Certificate No: Z22-60107 Page 6 of 6																																																									

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)




## 1.11 D2600V2 - SN 1158

 <p>In Collaboration with <b>SGS</b> CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504 E-mail: ctli@chinatl.cn <a href="http://www.chinatl.cn">http://www.chinatl.cn</a></p> <p>Client: SGS-CN Certificate No: Z22-60108</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D2600V2 - SN: 1158</p> <p>Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 31, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power Meter NRP2</td> <td>106277</td> <td>24-Sep-21 (CTTL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP8S</td> <td>104291</td> <td>24-Sep-21 (CTTL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7307</td> <td>26-May-21 (SPEAG No. EX3-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CTTL-SPEAG No. Z22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL, No.J22X04049)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CTTL, No.J22X04046)</td> <td>Jan-23</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Calibrated by:</th> <th>Name</th> <th>Function</th> <th>Signature</th> </tr> </thead> <tbody> <tr> <td>Zhao Jing</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Reviewed by:</td> <td>Lin Hao</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Qi Dianyuan</td> <td>SAR Project Leader</td> <td></td> </tr> </tbody> </table> <p>Issued: April 6, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>	Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22	Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22	Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No. Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X04049)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X04046)	Jan-23	Calibrated by:	Name	Function	Signature	Zhao Jing	SAR Test Engineer		Reviewed by:	Lin Hao	SAR Test Engineer		Approved by:	Qi Dianyuan	SAR Project Leader		 <p>In Collaboration with <b>CAICT</b> CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504 E-mail: ctli@chinatl.cn <a href="http://www.chinatl.cn">http://www.chinatl.cn</a></p> <p><b>Glossary:</b></p> <p>TSL tissue simulating liquid ConvF sensitivity in TSL / NORMx,y,z N/A not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <ul style="list-style-type: none"> <li>a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices - Part 1528: Human Models, Instrumentation and Procedure (Frequency range of 4 MHz to 10 GHz)", October 2020</li> <li>b) KDB 655664, "SAR Measurement Requirements for 100 MHz to 6 GHz"</li> </ul> <p><b>Additional Documentation:</b></p> <ul style="list-style-type: none"> <li>c) DASY4/S System Handbook</li> </ul> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the fat phantom section, with the arms oriented parallel to the body axis.</li> <li>• <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measured at the SMA connector to the feed point. The Return Loss ensures low reflected power. No absorption required.</li> <li>• <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.</p>							
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																				
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22																																																				
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22																																																				
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22																																																				
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No. Z22-60007)	Jan-23																																																				
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																				
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X04049)	Jan-23																																																				
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X04046)	Jan-23																																																				
Calibrated by:	Name	Function	Signature																																																				
Zhao Jing	SAR Test Engineer																																																						
Reviewed by:	Lin Hao	SAR Test Engineer																																																					
Approved by:	Qi Dianyuan	SAR Project Leader																																																					
<p>Certificate No: Z22-60108 Page 1 of 6</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <thead> <tr> <th>DASY Version</th> <th>DASY52</th> <th>52.10.4</th> </tr> </thead> <tbody> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz &lt; 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>2600 MHz ± 1 MHz</td> <td></td> </tr> </tbody> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied:</p> <table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>39.0</td> <td>1.96 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>38.7 ± 6 %</td> <td>1.96 mho/m ± 8 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </tbody> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <thead> <tr> <th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th> <th>Condition</th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>250 mW input power 13.7 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W 54.8 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <th>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</th> <th>Condition</th> </tr> <tr> <td>SAR measured</td> <td>250 mW input power 6.12 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W 24.5 W/kg ± 18.7 % (k=2)</td> </tr> </tbody> </table> <p>Certificate No: Z22-60108 Page 2 of 6</p>	DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz < 5 mm		Frequency	2600 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	38.7 ± 6 %	1.96 mho/m ± 8 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power 13.7 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 54.8 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power 6.12 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 24.5 W/kg ± 18.7 % (k=2)	<p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <thead> <tr> <th>Impedance, transformed to feed point</th> <th>49.9Ω-6.4Ω</th> </tr> </thead> <tbody> <tr> <td>Return Loss</td> <td>-23.8dB</td> </tr> </tbody> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <thead> <tr> <th>Electrical Delay (one direction)</th> <th>1.053 ns</th> </tr> </thead> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the standard. The antenna is mounted in the "Measurement Conditions" paragraph. The SAR data are not affected by the change. The overall dipole is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <thead> <tr> <th>Manufactured by</th> <th>SPEAG</th> </tr> </thead> </table> <p>Certificate No: Z22-60108 Page 4 of 6</p>	Impedance, transformed to feed point	49.9Ω-6.4Ω	Return Loss	-23.8dB	Electrical Delay (one direction)	1.053 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																					
Extrapolation	Advanced Extrapolation																																																						
Phantom	Triple Flat Phantom 5.1C																																																						
Distance Dipole Center - TSL	10 mm	with Spacer																																																					
Zoom Scan Resolution	dx, dy, dz < 5 mm																																																						
Frequency	2600 MHz ± 1 MHz																																																						
	Temperature	Permittivity	Conductivity																																																				
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m																																																				
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.7 ± 6 %	1.96 mho/m ± 8 %																																																				
Head TSL temperature change during test	<1.0 °C	—	—																																																				
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																						
SAR measured	250 mW input power 13.7 W/kg																																																						
SAR for nominal Head TSL parameters	normalized to 1W 54.8 W/kg ± 18.8 % (k=2)																																																						
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																						
SAR measured	250 mW input power 6.12 W/kg																																																						
SAR for nominal Head TSL parameters	normalized to 1W 24.5 W/kg ± 18.7 % (k=2)																																																						
Impedance, transformed to feed point	49.9Ω-6.4Ω																																																						
Return Loss	-23.8dB																																																						
Electrical Delay (one direction)	1.053 ns																																																						
Manufactured by	SPEAG																																																						


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)



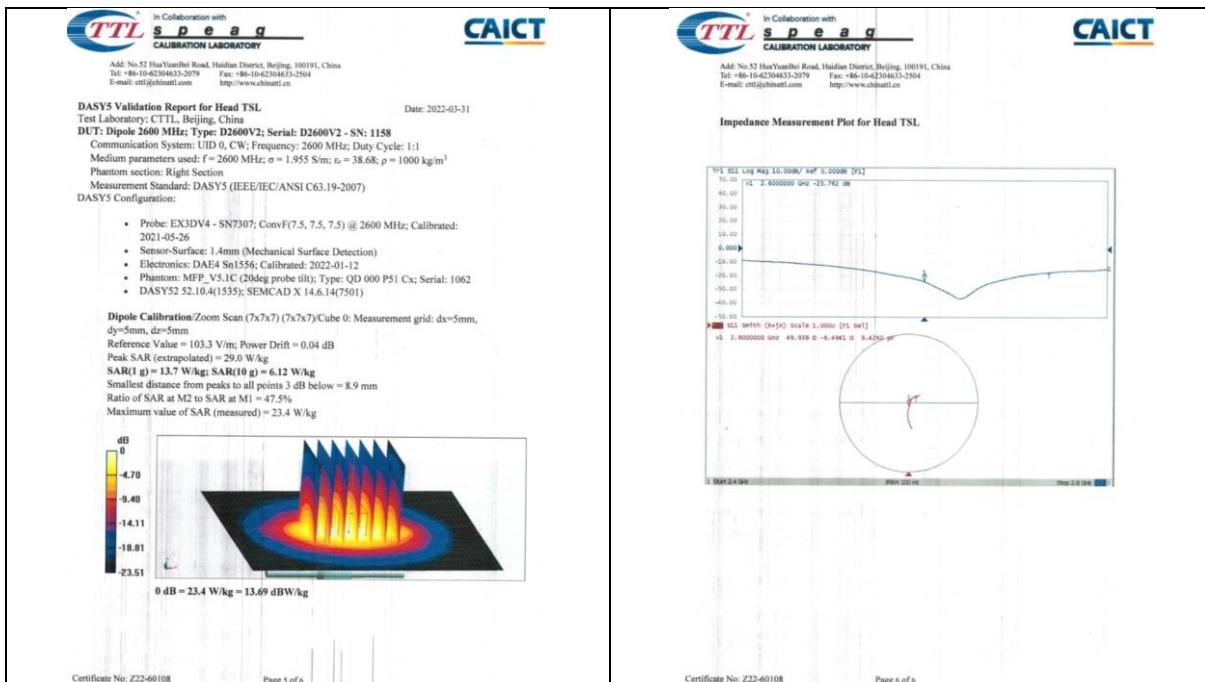

## 1.12 D5GHzV2 - SN 1095

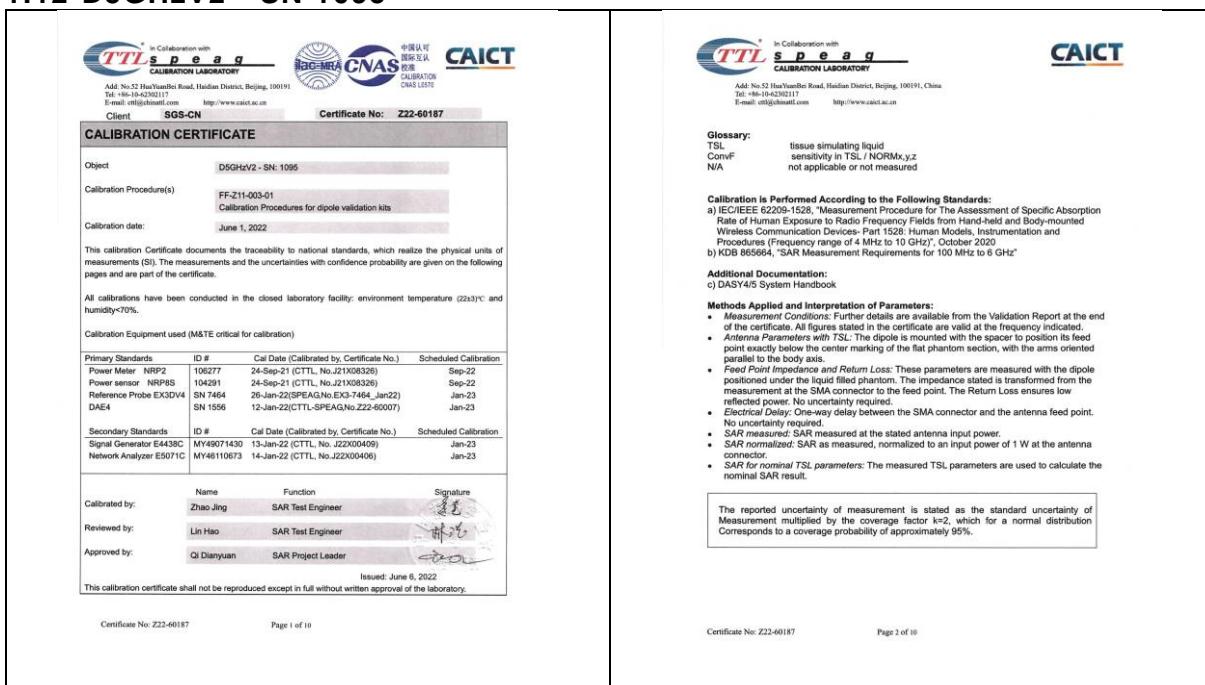

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



<div style="text-align: center;">  <p>In Collaboration with TTL s p e a g CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, HuaLian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cta@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASY Version</td><td>DASY32</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy = 4 mm, dz = 1.4 mm</td><td>Graded Ratio = 1.4 (Z direction)</td></tr> <tr><td>Frequency</td><td>4000 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters at 5200MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>36.0</td><td>4.66 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>35.4 ± 6 %</td><td>4.62 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL at 5200MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>250 mW input power</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> <p><b>SAR result with Head TSL at 5200MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>7.79 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>2.22 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> </div>	DASY Version	DASY32	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)	Frequency	4000 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.62 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—		Condition	SAR measured	250 mW input power	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power	SAR for nominal Head TSL parameters	normalized to 1W		Condition	SAR measured	7.79 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	2.22 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	<div style="text-align: center;">  <p>CAICT</p> <p>In Collaboration with TTL s p e a g CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, HuaLian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cta@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Head TSL parameters at 5300MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 ± 0.2) °C</td><td>35.9</td><td>4.76 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>35.2 ± 6 %</td><td>4.73 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL at 5300MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>100 mW input power</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>100 mW input power</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> <p><b>SAR result with Head TSL at 5300MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>7.94 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>2.27 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> <p><b>Head TSL parameters at 5500MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>35.6</td><td>4.96 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>34.8 ± 6 %</td><td>4.94 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL at 5500MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>8.25 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>2.34 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> </div>		Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 ± 0.2) °C	35.9	4.76 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—		Condition	SAR measured	100 mW input power	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	100 mW input power	SAR for nominal Head TSL parameters	normalized to 1W		Condition	SAR measured	7.94 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	2.27 W/kg	SAR for nominal Head TSL parameters	normalized to 1W		Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—		Condition	SAR measured	8.25 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	2.34 W/kg	SAR for nominal Head TSL parameters	normalized to 1W
DASY Version	DASY32	52.10.4																																																																																																																													
Extrapolation	Advanced Extrapolation																																																																																																																														
Phantom	Triple Flat Phantom 5.1C																																																																																																																														
Distance Dipole Center - TSL	10 mm	with Spacer																																																																																																																													
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)																																																																																																																													
Frequency	4000 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz																																																																																																																														
	Temperature	Permittivity	Conductivity																																																																																																																												
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m																																																																																																																												
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.62 mho/m ± 6 %																																																																																																																												
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																												
	Condition																																																																																																																														
SAR measured	250 mW input power																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	250 mW input power																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
	Condition																																																																																																																														
SAR measured	7.79 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	2.22 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
	Temperature	Permittivity	Conductivity																																																																																																																												
Nominal Head TSL parameters	22.0 ± 0.2) °C	35.9	4.76 mho/m																																																																																																																												
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %																																																																																																																												
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																												
	Condition																																																																																																																														
SAR measured	100 mW input power																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	100 mW input power																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
	Condition																																																																																																																														
SAR measured	7.94 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	2.27 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
	Temperature	Permittivity	Conductivity																																																																																																																												
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m																																																																																																																												
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %																																																																																																																												
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																												
	Condition																																																																																																																														
SAR measured	8.25 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	2.34 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
<p>Certificate No: Z22-60187 Page 3 of 10</p> <p>Certificate No: Z22-60187 Page 4 of 10</p>																																																																																																																															
<div style="text-align: center;">  <p>In Collaboration with TTL s p e a g CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, HuaLian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cta@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Head TSL parameters at 5600MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>35.5</td><td>5.07 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>34.7 ± 6 %</td><td>5.05 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL at 5600MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>8.12 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>2.30 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> <p><b>Head TSL parameters at 5800MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>35.3</td><td>5.27 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>34.4 ± 6 %</td><td>5.25 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL at 5800MHz</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Condition</th></tr> <tr><td>SAR measured</td><td>7.71 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>2.16 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> </div>		Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	5.05 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—		Condition	SAR measured	8.12 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	2.30 W/kg	SAR for nominal Head TSL parameters	normalized to 1W		Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.25 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—		Condition	SAR measured	7.71 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	2.16 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	<div style="text-align: center;">  <p>CAICT</p> <p>In Collaboration with TTL s p e a g CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, HuaLian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cta@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL at 5200MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>46.10- 5.03jΩ</td></tr> <tr><td>Return Loss</td><td>-23.8dB</td></tr> </table> <p><b>Antenna Parameters with Head TSL at 5300MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>47.80- 2.42jΩ</td></tr> <tr><td>Return Loss</td><td>-29.5dB</td></tr> </table> <p><b>Antenna Parameters with Head TSL at 5500MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>50.30- 4.26jΩ</td></tr> <tr><td>Return Loss</td><td>-27.4dB</td></tr> </table> <p><b>Antenna Parameters with Head TSL at 5600MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>54.50- 4.80jΩ</td></tr> <tr><td>Return Loss</td><td>-24.0dB</td></tr> </table> <p><b>Antenna Parameters with Head TSL at 5800MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>51.50- 5.61jΩ</td></tr> <tr><td>Return Loss</td><td>-24.9dB</td></tr> </table> </div>	Impedance, transformed to feed point	46.10- 5.03jΩ	Return Loss	-23.8dB	Impedance, transformed to feed point	47.80- 2.42jΩ	Return Loss	-29.5dB	Impedance, transformed to feed point	50.30- 4.26jΩ	Return Loss	-27.4dB	Impedance, transformed to feed point	54.50- 4.80jΩ	Return Loss	-24.0dB	Impedance, transformed to feed point	51.50- 5.61jΩ	Return Loss	-24.9dB																																																		
	Temperature	Permittivity	Conductivity																																																																																																																												
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m																																																																																																																												
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	5.05 mho/m ± 6 %																																																																																																																												
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																												
	Condition																																																																																																																														
SAR measured	8.12 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	2.30 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
	Temperature	Permittivity	Conductivity																																																																																																																												
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m																																																																																																																												
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.25 mho/m ± 6 %																																																																																																																												
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																												
	Condition																																																																																																																														
SAR measured	7.71 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																																																																																														
SAR measured	2.16 W/kg																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W																																																																																																																														
Impedance, transformed to feed point	46.10- 5.03jΩ																																																																																																																														
Return Loss	-23.8dB																																																																																																																														
Impedance, transformed to feed point	47.80- 2.42jΩ																																																																																																																														
Return Loss	-29.5dB																																																																																																																														
Impedance, transformed to feed point	50.30- 4.26jΩ																																																																																																																														
Return Loss	-27.4dB																																																																																																																														
Impedance, transformed to feed point	54.50- 4.80jΩ																																																																																																																														
Return Loss	-24.0dB																																																																																																																														
Impedance, transformed to feed point	51.50- 5.61jΩ																																																																																																																														
Return Loss	-24.9dB																																																																																																																														
<p>Certificate No: Z22-60187 Page 5 of 10</p> <p>Certificate No: Z22-60187 Page 6 of 10</p>																																																																																																																															


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)5735888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)5735888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



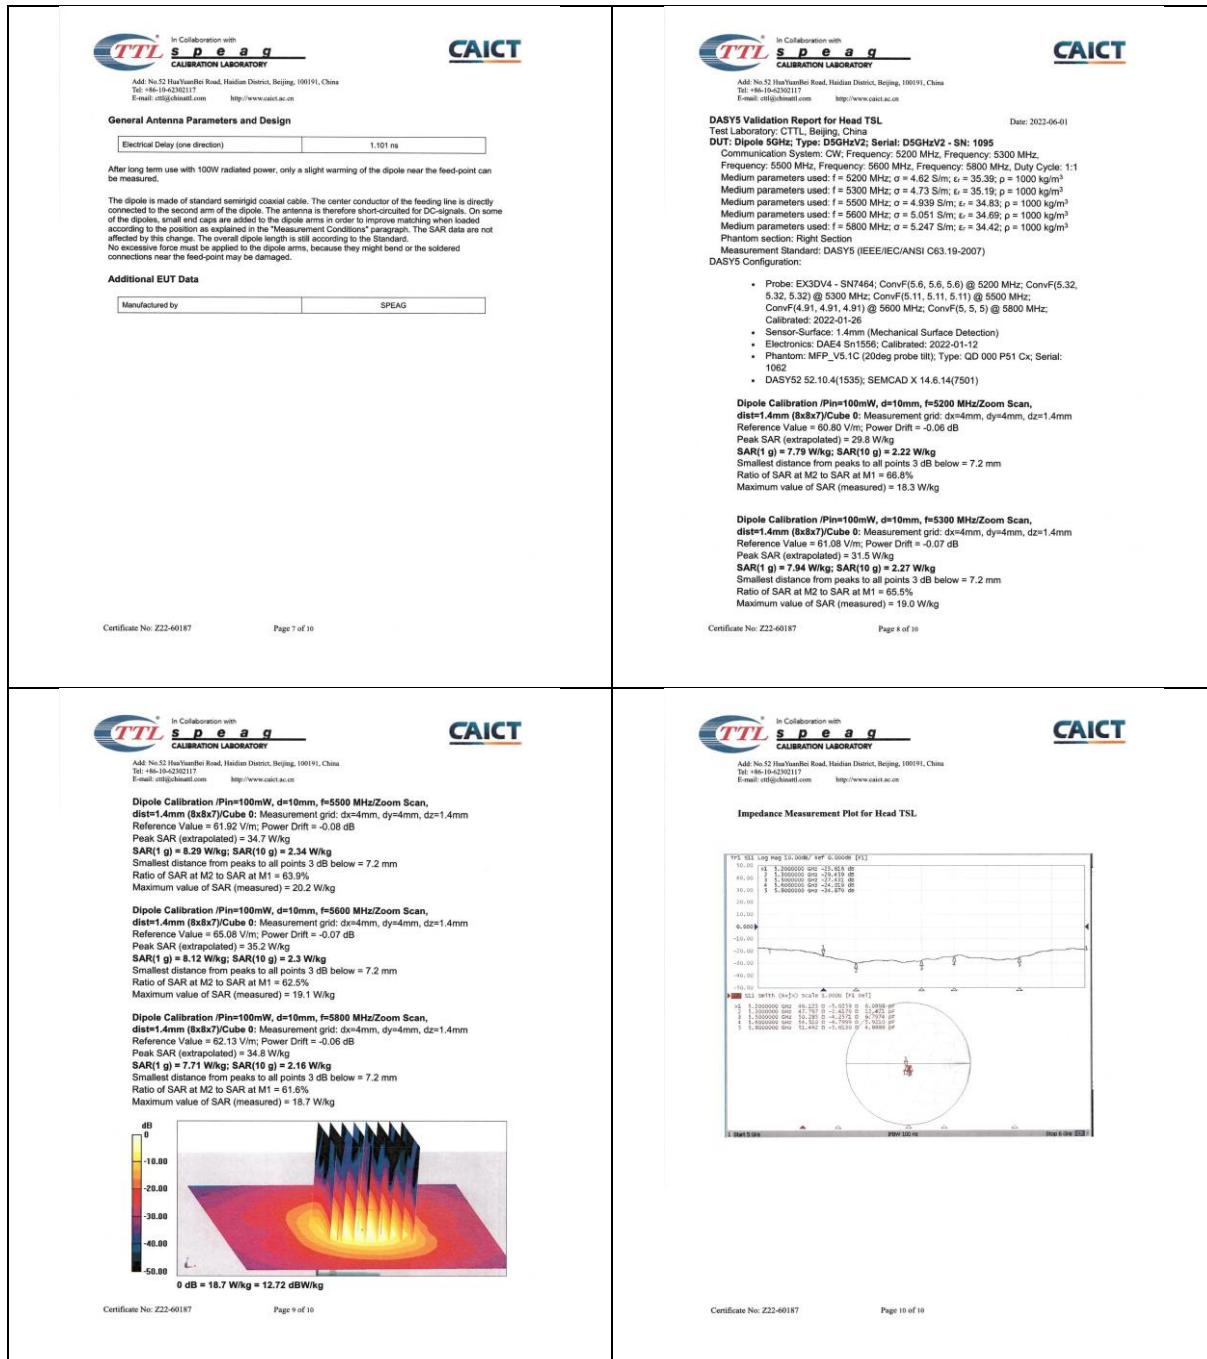

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



## 2 DAE4 - SN 1245

<div style="border: 1px solid black; padding: 10px;"> <p><b>IMPORTANT NOTICE</b></p> <p><b>USAGE OF THE DAE4</b></p> <p>The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:</p> <p><b>Battery Exchange:</b> The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.</p> <p><b>Shipping of the DAE:</b> Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an appropriate bag. The acoustic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.</p> <p><b>E-Stop Failures:</b> Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulation on the E-stop. Therefore, the probe shall always mount the probe to the DAE carefully and never touch the DAE unit in a non-dust-free environment. It is not recommended to use the E-stop for safety purposes.</p> <p><b>Repair:</b> Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.</p> <p><b>DASY Configuration Files:</b> Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.</p> <p><b>Important Note:</b> Warranty and calibration is valid if the DAE unit is disassembled partly or fully by the Customer.</p> <p><b>Important Note:</b> Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.</p> <p><b>Important Note:</b> To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.</p> <p>TN_EH190306AE DAE4.docx 07.03.2019</p> </div>	<div style="border: 1px solid black; padding: 10px;"> <p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779 www.speag.ch, info@speag.ch</p> <p><b>Accredited by:</b> The Swiss Accreditation Service (SCS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p><b>Client:</b> SGS-CN (Auden) <b>Certificate No:</b> DAE4-1245_May22</p> <p><b>CALIBRATION CERTIFICATE</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Object</td> <td colspan="3">DAE4 - SD 000 D04 BM - SN: 1245</td> </tr> <tr> <td>Calibration procedure(s)</td> <td colspan="3">QA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE)</td> </tr> <tr> <td>Calibration date:</td> <td colspan="3">May 30, 2022</td> </tr> <tr> <td colspan="4">This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</td> </tr> <tr> <td colspan="4">All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity &lt; 70%.</td> </tr> <tr> <td colspan="4">Calibration Equipment used (M&amp;TE criteria for calibration)</td> </tr> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Keithley Multimeter Type 2301</td> <td>SN: 9810276</td> <td>31-Aug-21 (No.31368)</td> <td>Aug-22</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Check Date (in house)</td> <td>Scheduled Check</td> </tr> <tr> <td>Auto DAE Calibration Unit</td> <td>SE UMS 050 AA 1001</td> <td>24-Jan-22 (in house check)</td> <td>In house check: Jan-23</td> </tr> <tr> <td>Calibrator Box V2.1</td> <td>SE UMS 006 AA 1002</td> <td>24-Jan-22 (in house check)</td> <td>In house check: Jan-23</td> </tr> <tr> <td>Calibrated by:</td> <td>Name</td> <td>Function</td> <td>Signature</td> </tr> <tr> <td></td> <td>Dominique Steffen</td> <td>Laboratory Technician</td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Sven Kohn</td> <td>Technical Manager</td> <td></td> </tr> <tr> <td colspan="4">Issued: May 30, 2022</td> </tr> </table> <p><b>DC Voltage Measurement</b> AD - Converter Resolution nominal - High Range: 1LSB = 6.15V, full range = -100...+300 mV - Low Range: 1LSB = 615mV, full range = -1...+3mV DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Calibration Factors</td> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>High Range</td> <td>405.265 ± 0.02% (k=2)</td> <td>403.974 ± 0.02% (k=2)</td> <td>405.092 ± 0.02% (k=2)</td> </tr> <tr> <td>Low Range</td> <td>3.99594 ± 1.50% (k=2)</td> <td>3.99508 ± 1.50% (k=2)</td> <td>4.01015 ± 1.50% (k=2)</td> </tr> </table> <p><b>Connector Angle</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Connector Angle to be used in DASY system</td> <td>30.0 ° ± 1 °</td> </tr> </table> </div>	Object	DAE4 - SD 000 D04 BM - SN: 1245			Calibration procedure(s)	QA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE)			Calibration date:	May 30, 2022			This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.				All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.				Calibration Equipment used (M&TE criteria for calibration)				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Keithley Multimeter Type 2301	SN: 9810276	31-Aug-21 (No.31368)	Aug-22	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Auto DAE Calibration Unit	SE UMS 050 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23	Calibrator Box V2.1	SE UMS 006 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23	Calibrated by:	Name	Function	Signature		Dominique Steffen	Laboratory Technician		Approved by:	Sven Kohn	Technical Manager		Issued: May 30, 2022				Calibration Factors	X	Y	Z	High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	405.092 ± 0.02% (k=2)	Low Range	3.99594 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)	Connector Angle to be used in DASY system	30.0 ° ± 1 °
Object	DAE4 - SD 000 D04 BM - SN: 1245																																																																										
Calibration procedure(s)	QA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE)																																																																										
Calibration date:	May 30, 2022																																																																										
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																																																																											
All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.																																																																											
Calibration Equipment used (M&TE criteria for calibration)																																																																											
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																																								
Keithley Multimeter Type 2301	SN: 9810276	31-Aug-21 (No.31368)	Aug-22																																																																								
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																																								
Auto DAE Calibration Unit	SE UMS 050 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23																																																																								
Calibrator Box V2.1	SE UMS 006 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23																																																																								
Calibrated by:	Name	Function	Signature																																																																								
	Dominique Steffen	Laboratory Technician																																																																									
Approved by:	Sven Kohn	Technical Manager																																																																									
Issued: May 30, 2022																																																																											
Calibration Factors	X	Y	Z																																																																								
High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	405.092 ± 0.02% (k=2)																																																																								
Low Range	3.99594 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)																																																																								
Connector Angle to be used in DASY system	30.0 ° ± 1 °																																																																										

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)

t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



<b>Appendix (Additional assessments outside the scope of SCS0108)</b>																																																																					
<b>1. DC Voltage Linearity</b>																																																																					
<table border="1"> <thead> <tr> <th>High Range</th> <th>Reading (µV)</th> <th>Difference (µV)</th> <th>Error (%)</th> </tr> </thead> <tbody> <tr><td>Channel X + Input</td><td>199994.45</td><td>1.82</td><td>0.00</td></tr> <tr><td>Channel X - Input</td><td>20004.58</td><td>2.22</td><td>0.01</td></tr> <tr><td>Channel X + Input</td><td>-20000.14</td><td>1.12</td><td>-0.01</td></tr> <tr><td>Channel Y + Input</td><td>199994.72</td><td>1.98</td><td>0.00</td></tr> <tr><td>Channel Y - Input</td><td>20001.22</td><td>-1.00</td><td>-0.00</td></tr> <tr><td>Channel Y + Input</td><td>-20003.05</td><td>-1.67</td><td>0.01</td></tr> <tr><td>Channel Z + Input</td><td>199992.64</td><td>0.19</td><td>0.00</td></tr> <tr><td>Channel Z - Input</td><td>20003.09</td><td>0.98</td><td>0.00</td></tr> <tr><td>Channel Z + Input</td><td>-20001.73</td><td>-0.27</td><td>0.00</td></tr> </tbody> </table>		High Range	Reading (µV)	Difference (µV)	Error (%)	Channel X + Input	199994.45	1.82	0.00	Channel X - Input	20004.58	2.22	0.01	Channel X + Input	-20000.14	1.12	-0.01	Channel Y + Input	199994.72	1.98	0.00	Channel Y - Input	20001.22	-1.00	-0.00	Channel Y + Input	-20003.05	-1.67	0.01	Channel Z + Input	199992.64	0.19	0.00	Channel Z - Input	20003.09	0.98	0.00	Channel Z + Input	-20001.73	-0.27	0.00																												
High Range	Reading (µV)	Difference (µV)	Error (%)																																																																		
Channel X + Input	199994.45	1.82	0.00																																																																		
Channel X - Input	20004.58	2.22	0.01																																																																		
Channel X + Input	-20000.14	1.12	-0.01																																																																		
Channel Y + Input	199994.72	1.98	0.00																																																																		
Channel Y - Input	20001.22	-1.00	-0.00																																																																		
Channel Y + Input	-20003.05	-1.67	0.01																																																																		
Channel Z + Input	199992.64	0.19	0.00																																																																		
Channel Z - Input	20003.09	0.98	0.00																																																																		
Channel Z + Input	-20001.73	-0.27	0.00																																																																		
<table border="1"> <thead> <tr> <th>Low Range</th> <th>Reading (µV)</th> <th>Difference (µV)</th> <th>Error (%)</th> </tr> </thead> <tbody> <tr><td>Channel X + Input</td><td>2001.91</td><td>0.41</td><td>0.02</td></tr> <tr><td>Channel X - Input</td><td>202.54</td><td>0.65</td><td>0.32</td></tr> <tr><td>Channel X + Input</td><td>-197.88</td><td>0.07</td><td>-0.04</td></tr> <tr><td>Channel Y + Input</td><td>2002.65</td><td>0.58</td><td>0.03</td></tr> <tr><td>Channel Y - Input</td><td>201.27</td><td>-0.57</td><td>-0.28</td></tr> <tr><td>Channel Y + Input</td><td>-184.23</td><td>0.06</td><td>0.03</td></tr> <tr><td>Channel Z + Input</td><td>2001.36</td><td>0.08</td><td>0.00</td></tr> <tr><td>Channel Z - Input</td><td>200.69</td><td>-1.53</td><td>-0.76</td></tr> <tr><td>Channel Z + Input</td><td>-199.85</td><td>-1.87</td><td>0.79</td></tr> </tbody> </table>		Low Range	Reading (µV)	Difference (µV)	Error (%)	Channel X + Input	2001.91	0.41	0.02	Channel X - Input	202.54	0.65	0.32	Channel X + Input	-197.88	0.07	-0.04	Channel Y + Input	2002.65	0.58	0.03	Channel Y - Input	201.27	-0.57	-0.28	Channel Y + Input	-184.23	0.06	0.03	Channel Z + Input	2001.36	0.08	0.00	Channel Z - Input	200.69	-1.53	-0.76	Channel Z + Input	-199.85	-1.87	0.79																												
Low Range	Reading (µV)	Difference (µV)	Error (%)																																																																		
Channel X + Input	2001.91	0.41	0.02																																																																		
Channel X - Input	202.54	0.65	0.32																																																																		
Channel X + Input	-197.88	0.07	-0.04																																																																		
Channel Y + Input	2002.65	0.58	0.03																																																																		
Channel Y - Input	201.27	-0.57	-0.28																																																																		
Channel Y + Input	-184.23	0.06	0.03																																																																		
Channel Z + Input	2001.36	0.08	0.00																																																																		
Channel Z - Input	200.69	-1.53	-0.76																																																																		
Channel Z + Input	-199.85	-1.87	0.79																																																																		
<b>2. Common mode sensitivity</b>																																																																					
<table border="1"> <thead> <tr> <th>Common mode Input Voltage (mV)</th> <th>High Range Average Reading (µV)</th> <th>Low Range Average Reading (µV)</th> </tr> </thead> <tbody> <tr><td>-200</td><td>-8.87</td><td>-7.89</td></tr> <tr><td>200</td><td>9.12</td><td>7.79</td></tr> <tr><td>Channel Y</td><td>-8.69</td><td>-9.28</td></tr> <tr><td>-200</td><td>8.52</td><td>6.96</td></tr> <tr><td>200</td><td>-5.36</td><td>-5.80</td></tr> <tr><td>-300</td><td>3.68</td><td>3.08</td></tr> </tbody> </table>		Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)	-200	-8.87	-7.89	200	9.12	7.79	Channel Y	-8.69	-9.28	-200	8.52	6.96	200	-5.36	-5.80	-300	3.68	3.08																																															
Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)																																																																			
-200	-8.87	-7.89																																																																			
200	9.12	7.79																																																																			
Channel Y	-8.69	-9.28																																																																			
-200	8.52	6.96																																																																			
200	-5.36	-5.80																																																																			
-300	3.68	3.08																																																																			
<b>3. Channel separation</b>																																																																					
<table border="1"> <thead> <tr> <th>Input Voltage (mV)</th> <th>Channel X (µV)</th> <th>Channel Y (µV)</th> <th>Channel Z (µV)</th> </tr> </thead> <tbody> <tr><td>200</td><td>-</td><td>4.07</td><td>-3.14</td></tr> <tr><td>Channel Y</td><td>200</td><td>9.36</td><td>-</td><td>4.27</td></tr> <tr><td>200</td><td>10.11</td><td>7.14</td><td>-</td></tr> </tbody> </table>		Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)	200	-	4.07	-3.14	Channel Y	200	9.36	-	4.27	200	10.11	7.14	-																																																			
Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)																																																																		
200	-	4.07	-3.14																																																																		
Channel Y	200	9.36	-	4.27																																																																	
200	10.11	7.14	-																																																																		
<p>Certificate No: DAE4-1245, May22</p> <p>Page 4 of 5</p>																																																																					
<p>4. AD-Converter Values with inputs shorted</p> <p>DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</p> <table border="1"> <thead> <tr> <th></th> <th>High Range (LSB)</th> <th>Low Range (LSB)</th> </tr> </thead> <tbody> <tr><td>Channel X</td><td>15984</td><td>17040</td></tr> <tr><td>Channel Y</td><td>16562</td><td>15768</td></tr> <tr><td>Channel Z</td><td>18035</td><td>15958</td></tr> </tbody> </table> <p>5. Input Offset Measurement</p> <p>DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</p> <table border="1"> <thead> <tr> <th></th> <th>Average (µV)</th> <th>min. Offset (µV)</th> <th>max. Offset (µV)</th> <th>Std. Deviation (µV)</th> </tr> </thead> <tbody> <tr><td>Channel X</td><td>1.00</td><td>-0.15</td><td>1.93</td><td>0.46</td></tr> <tr><td>Channel Y</td><td>-0.18</td><td>-1.28</td><td>0.94</td><td>0.45</td></tr> <tr><td>Channel Z</td><td>-0.58</td><td>-2.81</td><td>0.58</td><td>0.60</td></tr> </tbody> </table> <p>6. Input Offset Current</p> <p>Nominal Input circuitry offset current on all channels: &lt;25nA</p> <p>7. Input Resistance (Typical values for information)</p> <table border="1"> <thead> <tr> <th></th> <th>Zerling (kΩm)</th> <th>Measuring (MΩm)</th> </tr> </thead> <tbody> <tr><td>Channel X</td><td>200</td><td>200</td></tr> <tr><td>Channel Y</td><td>200</td><td>200</td></tr> <tr><td>Channel Z</td><td>200</td><td>200</td></tr> </tbody> </table> <p>8. Low Battery Alarm Voltage (Typical values for information)</p> <table border="1"> <thead> <tr> <th></th> <th>Typical values</th> <th>Alarm Level (VDC)</th> </tr> </thead> <tbody> <tr><td>Supply (+ Vcc)</td><td>-</td><td>+7.9</td></tr> <tr><td>Supply (- Vcc)</td><td>-</td><td>-7.6</td></tr> </tbody> </table> <p>9. Power Consumption (Typical values for information)</p> <table border="1"> <thead> <tr> <th></th> <th>Typical values</th> <th>Switched off (mA)</th> <th>Stand by (mA)</th> <th>Transmitting (mA)</th> </tr> </thead> <tbody> <tr><td>Supply (+ Vcc)</td><td>-</td><td>+0.01</td><td>+6</td><td>+14</td></tr> <tr><td>Supply (- Vcc)</td><td>-</td><td>-0.01</td><td>-8</td><td>-9</td></tr> </tbody> </table>			High Range (LSB)	Low Range (LSB)	Channel X	15984	17040	Channel Y	16562	15768	Channel Z	18035	15958		Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)	Channel X	1.00	-0.15	1.93	0.46	Channel Y	-0.18	-1.28	0.94	0.45	Channel Z	-0.58	-2.81	0.58	0.60		Zerling (kΩm)	Measuring (MΩm)	Channel X	200	200	Channel Y	200	200	Channel Z	200	200		Typical values	Alarm Level (VDC)	Supply (+ Vcc)	-	+7.9	Supply (- Vcc)	-	-7.6		Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)	Supply (+ Vcc)	-	+0.01	+6	+14	Supply (- Vcc)	-	-0.01	-8	-9
	High Range (LSB)	Low Range (LSB)																																																																			
Channel X	15984	17040																																																																			
Channel Y	16562	15768																																																																			
Channel Z	18035	15958																																																																			
	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)																																																																	
Channel X	1.00	-0.15	1.93	0.46																																																																	
Channel Y	-0.18	-1.28	0.94	0.45																																																																	
Channel Z	-0.58	-2.81	0.58	0.60																																																																	
	Zerling (kΩm)	Measuring (MΩm)																																																																			
Channel X	200	200																																																																			
Channel Y	200	200																																																																			
Channel Z	200	200																																																																			
	Typical values	Alarm Level (VDC)																																																																			
Supply (+ Vcc)	-	+7.9																																																																			
Supply (- Vcc)	-	-7.6																																																																			
	Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)																																																																	
Supply (+ Vcc)	-	+0.01	+6	+14																																																																	
Supply (- Vcc)	-	-0.01	-8	-9																																																																	
<p>Certificate No: DAE4-1245, May22</p> <p>Page 5 of 5</p>																																																																					

### 3 EX3DV4 - SN 7346

<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zürcherstrasse 41, 8044 Zürich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)</p> <p>The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: Auden</p> <p>Certificate No: EX3-7346_Mar22</p>																													
<p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: EX3DV4 - SN:7346</p> <p>Calibration procedure(s): QA CAL-01 v09, QA CAL-14 v5, QA CAL-23 v5, QA CAL-25 v7</p> <p>Calibration date: March 30, 2022</p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurement (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closest laboratory facility; environment temperature (22 ± 3°C) and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;T: critical for calibration)</p>																													
<table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr><td>Power meter NRP</td><td>Sn: 104778</td><td>09-Apr-21 (No. 217-03291/03292)</td><td>Apr-22</td></tr> <tr><td>Power sensor NRP-ZH</td><td>Sn: 103244</td><td>09-Apr-21 (No. 217-03291)</td><td>Apr-22</td></tr> <tr><td>Dipole probe NRP-ZH</td><td>Sn: 103245</td><td>09-Apr-21 (No. 217-03291)</td><td>Apr-22</td></tr> <tr><td>Reference 20 dB Attenuator</td><td>Sn: C22532 (01a)</td><td>09-Apr-21 (No. 217-03243)</td><td>Apr-22</td></tr> <tr><td>DAE4</td><td>Sn: 460</td><td>13-Oct-21 (No. DAE4-060, D0121)</td><td>Oct-22</td></tr> <tr><td>Reference Probe ES302V</td><td>Sn: 3013</td><td>27-Dec-21 (No. ES3-013, D0211)</td><td>Dec-22</td></tr> </tbody> </table>		Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration	Power meter NRP	Sn: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22	Power sensor NRP-ZH	Sn: 103244	09-Apr-21 (No. 217-03291)	Apr-22	Dipole probe NRP-ZH	Sn: 103245	09-Apr-21 (No. 217-03291)	Apr-22	Reference 20 dB Attenuator	Sn: C22532 (01a)	09-Apr-21 (No. 217-03243)	Apr-22	DAE4	Sn: 460	13-Oct-21 (No. DAE4-060, D0121)	Oct-22	Reference Probe ES302V	Sn: 3013	27-Dec-21 (No. ES3-013, D0211)	Dec-22
Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration																										
Power meter NRP	Sn: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22																										
Power sensor NRP-ZH	Sn: 103244	09-Apr-21 (No. 217-03291)	Apr-22																										
Dipole probe NRP-ZH	Sn: 103245	09-Apr-21 (No. 217-03291)	Apr-22																										
Reference 20 dB Attenuator	Sn: C22532 (01a)	09-Apr-21 (No. 217-03243)	Apr-22																										
DAE4	Sn: 460	13-Oct-21 (No. DAE4-060, D0121)	Oct-22																										
Reference Probe ES302V	Sn: 3013	27-Dec-21 (No. ES3-013, D0211)	Dec-22																										
<table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>Name</th> <th>Function</th> <th>Signature</th> </tr> </thead> <tbody> <tr><td>Calibrated by</td><td>Jean Rostaing</td><td>Laboratory Technician</td><td></td></tr> <tr><td>Approved by</td><td>Evan Kuhn</td><td>Deputy Manager</td><td></td></tr> </tbody> </table> <p>Issued: March 31, 2022</p>		Secondary Standards	Name	Function	Signature	Calibrated by	Jean Rostaing	Laboratory Technician		Approved by	Evan Kuhn	Deputy Manager																	
Secondary Standards	Name	Function	Signature																										
Calibrated by	Jean Rostaing	Laboratory Technician																											
Approved by	Evan Kuhn	Deputy Manager																											
<p>Certificate No: EX3-7346_Mar22</p> <p>Page 1 of 24</p>																													
<p>Certificate No: EX3-7346_Mar22</p> <p>Page 2 of 24</p>																													

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)




<p>EX3DV4 - SN:7346</p> <p><b>DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346</b></p> <p><b>Basic Calibration Parameters</b></p> <table border="1"> <thead> <tr> <th></th> <th>Sensor X</th> <th>Sensor Y</th> <th>Sensor Z</th> <th>Unc (k=2)</th> </tr> </thead> <tbody> <tr> <td>Norm (μV/Vm)<sup>1</sup></td> <td>0.49</td> <td>0.47</td> <td>0.61</td> <td>± 10.1%</td> </tr> <tr> <td>DOP (mV)</td> <td>101.4</td> <td>106.0</td> <td>106.9</td> <td></td> </tr> </tbody> </table> <p><b>Calibration Results for Modulation Response</b></p> <table border="1"> <thead> <tr> <th>UID</th> <th>Communication System Name</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>VR</th> <th>Max dev.</th> <th>Max Unc (k=2)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>CW</td> <td>X: 0.00</td> <td>0.00</td> <td>1.00</td> <td>0.00</td> <td>143.5</td> <td>± 3.0 %</td> <td>± 8.4 %</td> </tr> <tr> <td>10332-AAA</td> <td>Pulse Waveform (200Hz, 10%)</td> <td>X: 3.33</td> <td>68.92</td> <td>11.66</td> <td>10.00</td> <td>60.0</td> <td>± 3.8 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10333-AAA</td> <td>Pulse Waveform (200Hz, 20%)</td> <td>X: 6.63</td> <td>61.92</td> <td>6.76</td> <td>6.00</td> <td>60.0</td> <td>± 2.4 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10334-AAA</td> <td>Pulse Waveform (200Hz, 40%)</td> <td>X: 7.41</td> <td>78.92</td> <td>12.51</td> <td>3.98</td> <td>60.0</td> <td>± 2.7 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10335-AAA</td> <td>Pulse Waveform (200Hz, 60%)</td> <td>X: 2.27</td> <td>72.13</td> <td>9.62</td> <td>2.22</td> <td>120.0</td> <td>± 1.7 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10387-AAA</td> <td>QPSK Waveform, 1 MHz</td> <td>X: 4.47</td> <td>64.88</td> <td>13.62</td> <td>1.00</td> <td>150.0</td> <td>± 4.2 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10388-AAA</td> <td>QPSK Waveform, 10 MHz</td> <td>X: 0.45</td> <td>61.86</td> <td>11.05</td> <td>15.0</td> <td>150.0</td> <td>± 1.1 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10396-AAA</td> <td>64-QAM Waveform, 100 Hz</td> <td>X: 2.21</td> <td>64.75</td> <td>15.18</td> <td>3.01</td> <td>150.0</td> <td>± 1.0 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10399-AAA</td> <td>64-QAM Waveform, 40 MHz</td> <td>X: 3.34</td> <td>66.39</td> <td>15.25</td> <td>0.00</td> <td>150.0</td> <td>± 2.0 %</td> <td>± 9.6 %</td> </tr> <tr> <td>10414-AAA</td> <td>WLAN CCDF, 64-QAM, 40MHz</td> <td>X: 4.71</td> <td>65.35</td> <td>15.27</td> <td>0.00</td> <td>150.0</td> <td>± 3.6 %</td> <td>± 9.6 %</td> </tr> <tr> <td></td> <td></td> <td>X: 3.83</td> <td>66.15</td> <td>15.28</td> <td>0.00</td> <td>150.0</td> <td></td> <td></td> </tr> </tbody> </table> <p>Note: For details on UID parameters see Appendix</p> <p><small>1 The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</small></p> <p><small>2 The uncertainties of Norm X, Y, Z do not affect the E' and D' field uncertainty inside TSL (see Pages 5 and 6).</small></p> <p><small>3 Uncertainty of calibration parameters: uncertainty not reported.</small></p> <p><small>4 Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.</small></p>		Sensor X	Sensor Y	Sensor Z	Unc (k=2)	Norm (μV/Vm) <sup>1</sup>	0.49	0.47	0.61	± 10.1%	DOP (mV)	101.4	106.0	106.9		UID	Communication System Name	A	B	C	D	VR	Max dev.	Max Unc (k=2)	0	CW	X: 0.00	0.00	1.00	0.00	143.5	± 3.0 %	± 8.4 %	10332-AAA	Pulse Waveform (200Hz, 10%)	X: 3.33	68.92	11.66	10.00	60.0	± 3.8 %	± 9.6 %	10333-AAA	Pulse Waveform (200Hz, 20%)	X: 6.63	61.92	6.76	6.00	60.0	± 2.4 %	± 9.6 %	10334-AAA	Pulse Waveform (200Hz, 40%)	X: 7.41	78.92	12.51	3.98	60.0	± 2.7 %	± 9.6 %	10335-AAA	Pulse Waveform (200Hz, 60%)	X: 2.27	72.13	9.62	2.22	120.0	± 1.7 %	± 9.6 %	10387-AAA	QPSK Waveform, 1 MHz	X: 4.47	64.88	13.62	1.00	150.0	± 4.2 %	± 9.6 %	10388-AAA	QPSK Waveform, 10 MHz	X: 0.45	61.86	11.05	15.0	150.0	± 1.1 %	± 9.6 %	10396-AAA	64-QAM Waveform, 100 Hz	X: 2.21	64.75	15.18	3.01	150.0	± 1.0 %	± 9.6 %	10399-AAA	64-QAM Waveform, 40 MHz	X: 3.34	66.39	15.25	0.00	150.0	± 2.0 %	± 9.6 %	10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X: 4.71	65.35	15.27	0.00	150.0	± 3.6 %	± 9.6 %			X: 3.83	66.15	15.28	0.00	150.0			<p>EX3DV4 - SN:7346</p> <p><b>DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346</b></p> <p><b>Sensor Model Parameters</b></p> <table border="1"> <thead> <tr> <th>C1</th> <th>C2</th> <th><math>\alpha</math></th> <th><math>V^1</math></th> <th>ms.<math>V^1</math></th> <th>T1</th> <th>T2</th> <th>T3</th> <th>T4</th> <th>T5</th> <th>T6</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>39.3</td> <td>29.80</td> <td>36.0</td> <td>5.65</td> <td>0.00</td> <td>3.02</td> <td>4.42</td> <td>2.12</td> <td>1.51</td> <td></td> </tr> <tr> <td>Y</td> <td>37.1</td> <td>270.84</td> <td>34.12</td> <td>0.00</td> <td>0.00</td> <td>5.01</td> <td>1.52</td> <td>0.00</td> <td>1.91</td> <td></td> </tr> <tr> <td>Z</td> <td>9.7</td> <td>69.74</td> <td>33.37</td> <td>4.96</td> <td>0.00</td> <td>4.94</td> <td>0.61</td> <td>0.00</td> <td>1.91</td> <td></td> </tr> </tbody> </table> <p><b>Other Probe Parameters</b></p> <table border="1"> <thead> <tr> <th>Sensor Arrangement</th> <th>Triangular</th> </tr> </thead> <tbody> <tr> <td>Connector Angle (°)</td> <td>-166.1</td> </tr> <tr> <td>Mechanical Surface Detection Mode</td> <td>enabled</td> </tr> <tr> <td>Optical Surface Detection Mode</td> <td>disabled</td> </tr> <tr> <td>Probe Overall Length</td> <td>337 mm</td> </tr> <tr> <td>Probe Body Diameter</td> <td>10 mm</td> </tr> <tr> <td>Tip Length</td> <td>9 mm</td> </tr> <tr> <td>Tip Diameter</td> <td>2.5 mm</td> </tr> <tr> <td>Probe Top to Sensor X Calibration Point</td> <td>1 mm</td> </tr> <tr> <td>Probe Top to Sensor Y Calibration Point</td> <td>1 mm</td> </tr> <tr> <td>Probe Top to Sensor Z Calibration Point</td> <td>1 mm</td> </tr> <tr> <td>Recommended Measurement Distance from Surface</td> <td>1.4 mm</td> </tr> </tbody> </table> <p><small>Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.</small></p>	C1	C2	$\alpha$	$V^1$	ms. $V^1$	T1	T2	T3	T4	T5	T6	X	39.3	29.80	36.0	5.65	0.00	3.02	4.42	2.12	1.51		Y	37.1	270.84	34.12	0.00	0.00	5.01	1.52	0.00	1.91		Z	9.7	69.74	33.37	4.96	0.00	4.94	0.61	0.00	1.91		Sensor Arrangement	Triangular	Connector Angle (°)	-166.1	Mechanical Surface Detection Mode	enabled	Optical Surface Detection Mode	disabled	Probe Overall Length	337 mm	Probe Body Diameter	10 mm	Tip Length	9 mm	Tip Diameter	2.5 mm	Probe Top to Sensor X Calibration Point	1 mm	Probe Top to Sensor Y Calibration Point	1 mm	Probe Top to Sensor Z Calibration Point	1 mm	Recommended Measurement Distance from Surface	1.4 mm																																																													
	Sensor X	Sensor Y	Sensor Z	Unc (k=2)																																																																																																																																																																																																																																																									
Norm (μV/Vm) <sup>1</sup>	0.49	0.47	0.61	± 10.1%																																																																																																																																																																																																																																																									
DOP (mV)	101.4	106.0	106.9																																																																																																																																																																																																																																																										
UID	Communication System Name	A	B	C	D	VR	Max dev.	Max Unc (k=2)																																																																																																																																																																																																																																																					
0	CW	X: 0.00	0.00	1.00	0.00	143.5	± 3.0 %	± 8.4 %																																																																																																																																																																																																																																																					
10332-AAA	Pulse Waveform (200Hz, 10%)	X: 3.33	68.92	11.66	10.00	60.0	± 3.8 %	± 9.6 %																																																																																																																																																																																																																																																					
10333-AAA	Pulse Waveform (200Hz, 20%)	X: 6.63	61.92	6.76	6.00	60.0	± 2.4 %	± 9.6 %																																																																																																																																																																																																																																																					
10334-AAA	Pulse Waveform (200Hz, 40%)	X: 7.41	78.92	12.51	3.98	60.0	± 2.7 %	± 9.6 %																																																																																																																																																																																																																																																					
10335-AAA	Pulse Waveform (200Hz, 60%)	X: 2.27	72.13	9.62	2.22	120.0	± 1.7 %	± 9.6 %																																																																																																																																																																																																																																																					
10387-AAA	QPSK Waveform, 1 MHz	X: 4.47	64.88	13.62	1.00	150.0	± 4.2 %	± 9.6 %																																																																																																																																																																																																																																																					
10388-AAA	QPSK Waveform, 10 MHz	X: 0.45	61.86	11.05	15.0	150.0	± 1.1 %	± 9.6 %																																																																																																																																																																																																																																																					
10396-AAA	64-QAM Waveform, 100 Hz	X: 2.21	64.75	15.18	3.01	150.0	± 1.0 %	± 9.6 %																																																																																																																																																																																																																																																					
10399-AAA	64-QAM Waveform, 40 MHz	X: 3.34	66.39	15.25	0.00	150.0	± 2.0 %	± 9.6 %																																																																																																																																																																																																																																																					
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X: 4.71	65.35	15.27	0.00	150.0	± 3.6 %	± 9.6 %																																																																																																																																																																																																																																																					
		X: 3.83	66.15	15.28	0.00	150.0																																																																																																																																																																																																																																																							
C1	C2	$\alpha$	$V^1$	ms. $V^1$	T1	T2	T3	T4	T5	T6																																																																																																																																																																																																																																																			
X	39.3	29.80	36.0	5.65	0.00	3.02	4.42	2.12	1.51																																																																																																																																																																																																																																																				
Y	37.1	270.84	34.12	0.00	0.00	5.01	1.52	0.00	1.91																																																																																																																																																																																																																																																				
Z	9.7	69.74	33.37	4.96	0.00	4.94	0.61	0.00	1.91																																																																																																																																																																																																																																																				
Sensor Arrangement	Triangular																																																																																																																																																																																																																																																												
Connector Angle (°)	-166.1																																																																																																																																																																																																																																																												
Mechanical Surface Detection Mode	enabled																																																																																																																																																																																																																																																												
Optical Surface Detection Mode	disabled																																																																																																																																																																																																																																																												
Probe Overall Length	337 mm																																																																																																																																																																																																																																																												
Probe Body Diameter	10 mm																																																																																																																																																																																																																																																												
Tip Length	9 mm																																																																																																																																																																																																																																																												
Tip Diameter	2.5 mm																																																																																																																																																																																																																																																												
Probe Top to Sensor X Calibration Point	1 mm																																																																																																																																																																																																																																																												
Probe Top to Sensor Y Calibration Point	1 mm																																																																																																																																																																																																																																																												
Probe Top to Sensor Z Calibration Point	1 mm																																																																																																																																																																																																																																																												
Recommended Measurement Distance from Surface	1.4 mm																																																																																																																																																																																																																																																												
<p>Certificate No: EX3-7346_Mar22</p> <p>Page 3 of 24</p>	<p>Certificate No: EX3-7346_Mar22</p> <p>Page 4 of 24</p>																																																																																																																																																																																																																																																												
<p>EX3DV4 - SN:7346</p> <p><b>DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346</b></p> <p><b>Calibration Parameter Determined in Head Tissue Simulating Media</b></p> <table border="1"> <thead> <tr> <th>f (MHz)<sup>1</sup></th> <th>Relative Permittivity<sup>2</sup></th> <th>Conductivity<sup>3</sup> (S/m)<sup>4</sup></th> <th>ConvF X</th> <th>ConvF Y</th> <th>ConvF Z</th> <th>Alpha<sup>5</sup></th> <th>Depth<sup>6</sup> (mm)</th> <th>Unc (k=2)</th> </tr> </thead> <tbody> <tr> <td>750</td> <td>41.9</td> <td>0.89</td> <td>10.56</td> <td>10.56</td> <td>0.55</td> <td>0.55</td> <td>± 12.9 %</td> <td></td> </tr> <tr> <td>835</td> <td>41.5</td> <td>0.90</td> <td>10.12</td> <td>10.12</td> <td>0.42</td> <td>0.96</td> <td>± 12.9 %</td> <td></td> </tr> <tr> <td>900</td> <td>41.5</td> <td>0.97</td> <td>10.10</td> <td>10.10</td> <td>0.53</td> <td>0.80</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>1450</td> <td>40.5</td> <td>1.20</td> <td>9.26</td> <td>9.26</td> <td>0.50</td> <td>0.80</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>1750</td> <td>40.1</td> <td>1.37</td> <td>8.83</td> <td>8.83</td> <td>0.34</td> <td>0.86</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>1900</td> <td>40.0</td> <td>1.40</td> <td>8.48</td> <td>8.48</td> <td>0.35</td> <td>0.86</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>2000</td> <td>40.0</td> <td>1.40</td> <td>8.35</td> <td>8.35</td> <td>0.30</td> <td>0.34</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>2200</td> <td>39.5</td> <td>1.37</td> <td>7.86</td> <td>7.86</td> <td>0.39</td> <td>0.86</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>2450</td> <td>39.2</td> <td>1.99</td> <td>7.63</td> <td>7.63</td> <td>0.30</td> <td>0.60</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>2650</td> <td>39.0</td> <td>1.98</td> <td>7.29</td> <td>7.33</td> <td>0.44</td> <td>0.90</td> <td>± 12.0 %</td> <td></td> </tr> <tr> <td>3350</td> <td>38.2</td> <td>2.71</td> <td>7.15</td> <td>7.15</td> <td>0.30</td> <td>1.35</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>3650</td> <td>37.9</td> <td>2.91</td> <td>7.14</td> <td>7.14</td> <td>0.30</td> <td>1.35</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>3700</td> <td>37.7</td> <td>3.12</td> <td>6.85</td> <td>6.85</td> <td>0.30</td> <td>1.35</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>3900</td> <td>37.5</td> <td>3.32</td> <td>6.71</td> <td>6.71</td> <td>0.40</td> <td>1.60</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>4100</td> <td>37.2</td> <td>3.53</td> <td>6.58</td> <td>6.58</td> <td>0.40</td> <td>1.60</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>4200</td> <td>37.1</td> <td>3.63</td> <td>6.30</td> <td>6.30</td> <td>0.40</td> <td>1.70</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>4400</td> <td>36.9</td> <td>3.84</td> <td>6.24</td> <td>6.24</td> <td>0.40</td> <td>1.70</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>4600</td> <td>36.7</td> <td>4.04</td> <td>6.11</td> <td>6.11</td> <td>0.40</td> <td>1.70</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>4800</td> <td>36.4</td> <td>4.25</td> <td>6.08</td> <td>6.08</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>4950</td> <td>36.3</td> <td>4.40</td> <td>5.84</td> <td>5.84</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>5200</td> <td>36.0</td> <td>4.66</td> <td>5.25</td> <td>5.25</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>5300</td> <td>35.9</td> <td>4.78</td> <td>5.12</td> <td>5.12</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>5500</td> <td>35.6</td> <td>4.96</td> <td>4.85</td> <td>4.85</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>5600</td> <td>35.5</td> <td>5.07</td> <td>4.70</td> <td>4.70</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> <tr> <td>5800</td> <td>35.3</td> <td>5.27</td> <td>4.75</td> <td>4.75</td> <td>0.40</td> <td>1.80</td> <td>± 13.1 %</td> <td></td> </tr> </tbody> </table> <p><small>1 Frequency validity above 300 MHz or 100 MHz only applies for DASY3 and higher types of probe, else it is restricted to 10 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency have a 10% difference.</small></p> <p><small>2 At frequencies 8-10 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured S parameters. The uncertainty of the S parameters is increased by 10%.</small></p> <p><small>3 Alpha/Depth is determined during calibration. SPEAD warns that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.</small></p>	f (MHz) <sup>1</sup>	Relative Permittivity <sup>2</sup>	Conductivity <sup>3</sup> (S/m) <sup>4</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>5</sup>	Depth <sup>6</sup> (mm)	Unc (k=2)	750	41.9	0.89	10.56	10.56	0.55	0.55	± 12.9 %		835	41.5	0.90	10.12	10.12	0.42	0.96	± 12.9 %		900	41.5	0.97	10.10	10.10	0.53	0.80	± 12.0 %		1450	40.5	1.20	9.26	9.26	0.50	0.80	± 12.0 %		1750	40.1	1.37	8.83	8.83	0.34	0.86	± 12.0 %		1900	40.0	1.40	8.48	8.48	0.35	0.86	± 12.0 %		2000	40.0	1.40	8.35	8.35	0.30	0.34	± 12.0 %		2200	39.5	1.37	7.86	7.86	0.39	0.86	± 12.0 %		2450	39.2	1.99	7.63	7.63	0.30	0.60	± 12.0 %		2650	39.0	1.98	7.29	7.33	0.44	0.90	± 12.0 %		3350	38.2	2.71	7.15	7.15	0.30	1.35	± 13.1 %		3650	37.9	2.91	7.14	7.14	0.30	1.35	± 13.1 %		3700	37.7	3.12	6.85	6.85	0.30	1.35	± 13.1 %		3900	37.5	3.32	6.71	6.71	0.40	1.60	± 13.1 %		4100	37.2	3.53	6.58	6.58	0.40	1.60	± 13.1 %		4200	37.1	3.63	6.30	6.30	0.40	1.70	± 13.1 %		4400	36.9	3.84	6.24	6.24	0.40	1.70	± 13.1 %		4600	36.7	4.04	6.11	6.11	0.40	1.70	± 13.1 %		4800	36.4	4.25	6.08	6.08	0.40	1.80	± 13.1 %		4950	36.3	4.40	5.84	5.84	0.40	1.80	± 13.1 %		5200	36.0	4.66	5.25	5.25	0.40	1.80	± 13.1 %		5300	35.9	4.78	5.12	5.12	0.40	1.80	± 13.1 %		5500	35.6	4.96	4.85	4.85	0.40	1.80	± 13.1 %		5600	35.5	5.07	4.70	4.70	0.40	1.80	± 13.1 %		5800	35.3	5.27	4.75	4.75	0.40	1.80	± 13.1 %		<p>EX3DV4 - SN:7346</p> <p><b>DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346</b></p> <p><b>Calibration Parameter Determined in Head Tissue Simulating Media</b></p> <table border="1"> <thead> <tr> <th>f (MHz)<sup>1</sup></th> <th>Relative Permittivity<sup>2</sup></th> <th>Conductivity<sup>3</sup> (S/m)<sup>4</sup></th> <th>ConvF X</th> <th>ConvF Y</th> <th>ConvF Z</th> <th>Alpha<sup>5</sup></th> <th>Depth<sup>6</sup> (mm)</th> <th>Unc (k=2)</th> </tr> </thead> <tbody> <tr> <td>6500</td> <td>34.5</td> <td>6.07</td> <td>5.30</td> <td>5.30</td> <td>0.20</td> <td>2.50</td> <td></td> <td>± 18.6 %</td> </tr> </tbody> </table> <p><small>1 Frequency validity above 300 MHz or 100 MHz only applies for DASY3 and higher types of probe, else it is restricted to 10 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency have a 10% difference.</small></p> <p><small>2 At frequencies 8-10 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured S parameters. The uncertainty of the S parameters is increased by 10%.</small></p> <p><small>3 Alpha/Depth is determined during calibration. SPEAD warns that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.</small></p>	f (MHz) <sup>1</sup>	Relative Permittivity <sup>2</sup>	Conductivity <sup>3</sup> (S/m) <sup>4</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>5</sup>	Depth <sup>6</sup> (mm)	Unc (k=2)	6500	34.5	6.07	5.30	5.30	0.20	2.50		± 18.6 %
f (MHz) <sup>1</sup>	Relative Permittivity <sup>2</sup>	Conductivity <sup>3</sup> (S/m) <sup>4</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>5</sup>	Depth <sup>6</sup> (mm)	Unc (k=2)																																																																																																																																																																																																																																																					
750	41.9	0.89	10.56	10.56	0.55	0.55	± 12.9 %																																																																																																																																																																																																																																																						
835	41.5	0.90	10.12	10.12	0.42	0.96	± 12.9 %																																																																																																																																																																																																																																																						
900	41.5	0.97	10.10	10.10	0.53	0.80	± 12.0 %																																																																																																																																																																																																																																																						
1450	40.5	1.20	9.26	9.26	0.50	0.80	± 12.0 %																																																																																																																																																																																																																																																						
1750	40.1	1.37	8.83	8.83	0.34	0.86	± 12.0 %																																																																																																																																																																																																																																																						
1900	40.0	1.40	8.48	8.48	0.35	0.86	± 12.0 %																																																																																																																																																																																																																																																						
2000	40.0	1.40	8.35	8.35	0.30	0.34	± 12.0 %																																																																																																																																																																																																																																																						
2200	39.5	1.37	7.86	7.86	0.39	0.86	± 12.0 %																																																																																																																																																																																																																																																						
2450	39.2	1.99	7.63	7.63	0.30	0.60	± 12.0 %																																																																																																																																																																																																																																																						
2650	39.0	1.98	7.29	7.33	0.44	0.90	± 12.0 %																																																																																																																																																																																																																																																						
3350	38.2	2.71	7.15	7.15	0.30	1.35	± 13.1 %																																																																																																																																																																																																																																																						
3650	37.9	2.91	7.14	7.14	0.30	1.35	± 13.1 %																																																																																																																																																																																																																																																						
3700	37.7	3.12	6.85	6.85	0.30	1.35	± 13.1 %																																																																																																																																																																																																																																																						
3900	37.5	3.32	6.71	6.71	0.40	1.60	± 13.1 %																																																																																																																																																																																																																																																						
4100	37.2	3.53	6.58	6.58	0.40	1.60	± 13.1 %																																																																																																																																																																																																																																																						
4200	37.1	3.63	6.30	6.30	0.40	1.70	± 13.1 %																																																																																																																																																																																																																																																						
4400	36.9	3.84	6.24	6.24	0.40	1.70	± 13.1 %																																																																																																																																																																																																																																																						
4600	36.7	4.04	6.11	6.11	0.40	1.70	± 13.1 %																																																																																																																																																																																																																																																						
4800	36.4	4.25	6.08	6.08	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
4950	36.3	4.40	5.84	5.84	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
5200	36.0	4.66	5.25	5.25	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
5300	35.9	4.78	5.12	5.12	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
5500	35.6	4.96	4.85	4.85	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
5600	35.5	5.07	4.70	4.70	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
5800	35.3	5.27	4.75	4.75	0.40	1.80	± 13.1 %																																																																																																																																																																																																																																																						
f (MHz) <sup>1</sup>	Relative Permittivity <sup>2</sup>	Conductivity <sup>3</sup> (S/m) <sup>4</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>5</sup>	Depth <sup>6</sup> (mm)	Unc (k=2)																																																																																																																																																																																																																																																					
6500	34.5	6.07	5.30	5.30	0.20	2.50		± 18.6 %																																																																																																																																																																																																																																																					
<p>Certificate No: EX3-7346_Mar22</p> <p>Page 5 of 24</p>	<p>Certificate No: EX3-7346_Mar22</p> <p>Page 6 of 24</p>																																																																																																																																																																																																																																																												

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300



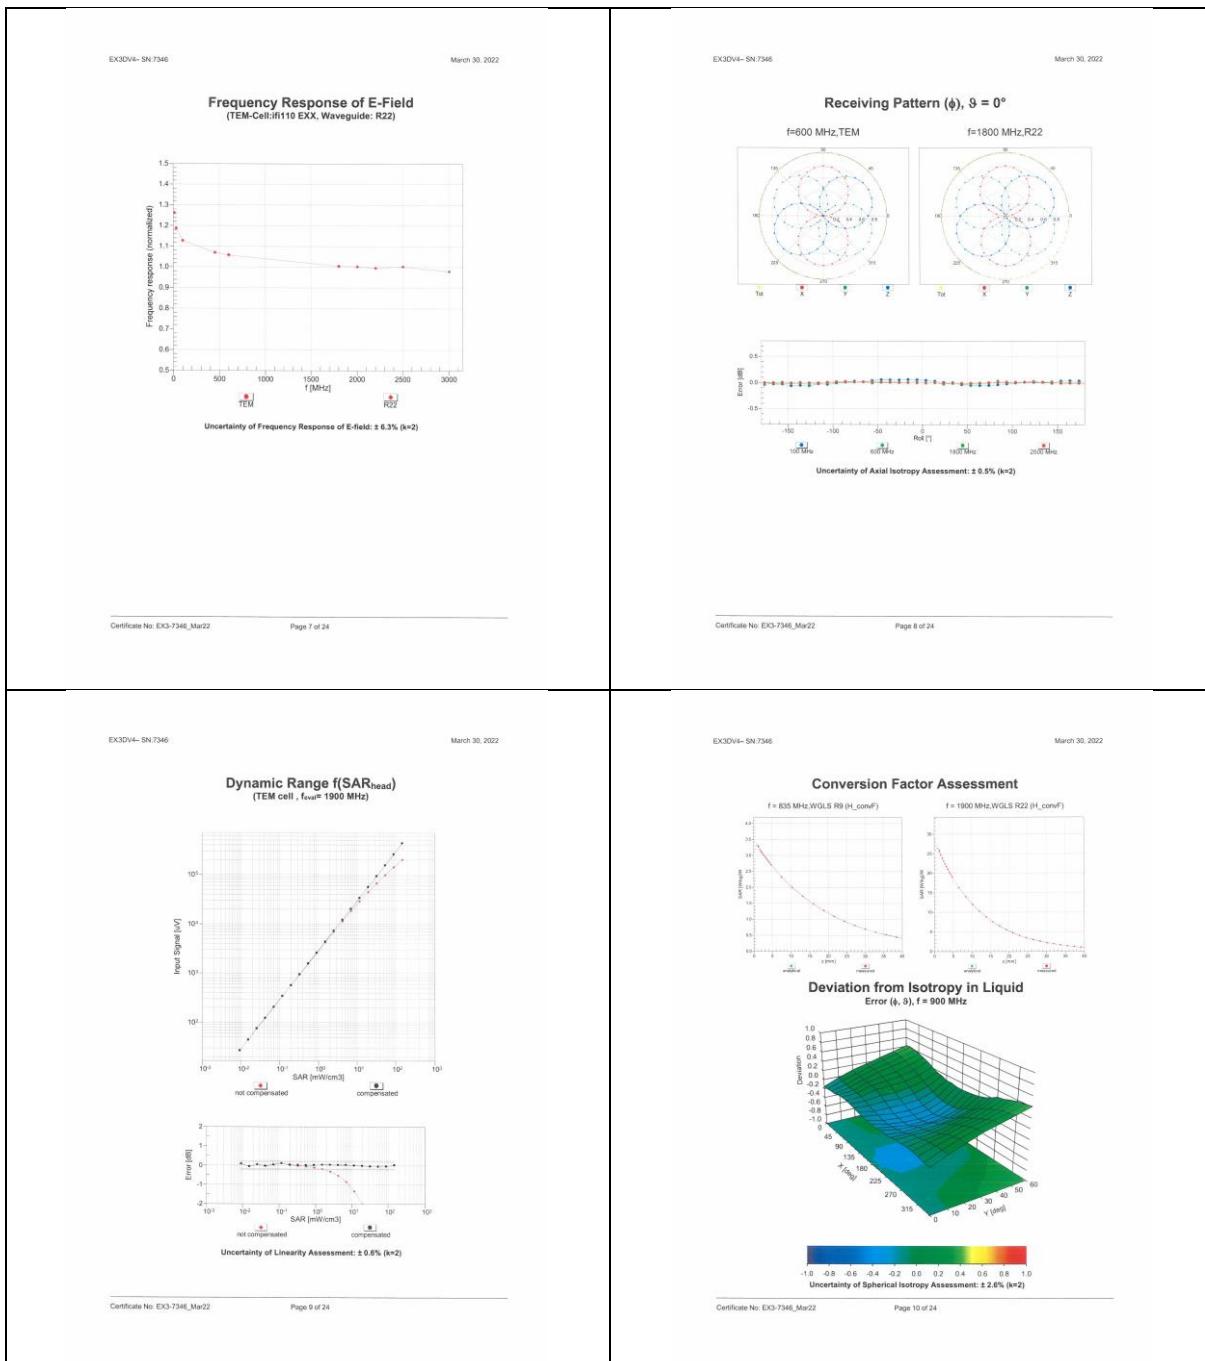

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888   f(86-512)57370818   [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888   f(86-512)57370818   [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



EX3D4-SN 7346

March 30, 2022

## Appendix: Modulation Calibration Parameters

Unit	Per	Communication System Name	Group	PAB (dB)	Unc(%)
E	CAE	CW	CW	0.00	± 0.0%
10015 CAB	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 0.0%	
10015 CAB	IEEE 802.11n (2.4GHz, 5GHz, 1Mbps)	WCDMA	2.91	± 0.0%	
10015 CAB	IEEE 802.11n (2.4GHz, 5GHz, 6Mbps)	WCDMA	1.87	± 0.0%	
10015 CAB	IEEE 802.11n (2.4GHz, 5GHz, 1Mbps)	WLAN	9.46	± 0.0%	
10021 CAD	GSM-FDD (TOMA, GM8K)	GSM	9.39	± 0.0%	
10022 CAD	GPRS-FDD (TOMA, GM8K, Th-0)	GSM	9.37	± 0.0%	
10023 CAD	EDGE-FDD (TOMA, GM8K, Th-0.1)	GSM	9.56	± 0.0%	
10023 CAD	EDGE-FDD (TOMA, GM8K, Th-0)	GSM	12.62	± 0.0%	
10006 CAD	EDGE-FDD (TOMA, GM8K, Th-0.1)	GSM	9.55	± 0.0%	
10006 CAD	EDGE-FDD (TOMA, GM8K, Th-0.2)	GSM	9.49	± 0.0%	
10008 CAD	GPRS-FDD (TOMA, GM8K, Th-0.2-3)	GSM	3.95	± 0.0%	
10009 CAD	EDGE-FDD (TOMA, GM8K, Th-0.2-3)	GSM	7.78	± 0.0%	
10009 CAD	EDGE-FDD (TOMA, GM8K, Th-0.2-3)	Bluetooth	3.20	± 0.0%	
10031 CAD	IEEE 802.11n (2.4GHz, 5GHz, 6Mbps)	Bluetooth	1.87	± 0.0%	
10032 CAD	IEEE 802.11n (Bluetooth, GM8K)	Bluetooth	1.00	± 0.0%	
10032 CAD	IEEE 802.11n (Bluetooth, GM8K)	Bluetooth	7.82	± 0.0%	
10034 CAD	IEEE 802.11n (Bluetooth, GM8K, Th-0)	Bluetooth	4.53	± 0.0%	
10034 CAD	IEEE 802.11n (Bluetooth, GM8K, Th-0)	Bluetooth	9.83	± 0.0%	
10035 CAD	IEEE 802.11n (Bluetooth, GM8K, Th-0)	Bluetooth	10.00	± 0.0%	
10037 CAD	IEEE 802.11n (Bluetooth, GM8K, Th-0)	Bluetooth	4.77	± 0.0%	
10038 CAD	IEEE 802.11n (Bluetooth, GM8K, Th-0)	Bluetooth	9.00	± 0.0%	
10042 CAD	IS-54-1 (8.1-16 FDD) (TOMA/OFDM, P14-QPSK, Halfrate)	AMPS	7.78	± 0.0%	
10044 CAD	IS-95/IS-136 (8.1-16 FDD) (TOMA/OFDM, GM8K, FM)	AMPS	0.00	± 0.0%	
10045 CAD	IS-95/IS-136 (8.1-16 FDD) (TOMA/OFDM, GM8K, FM)	AMPS	1.93	± 0.0%	
10048 CAD	IS-95/IS-136 (8.1-16 FDD) (TOMA/OFDM, GM8K, FM)	AMPS	10.79	± 0.0%	
10054 CAD	UMTS-TDD (TD-SCDMA, 1.28 Mbps)	TD-SCDMA	11.01	± 0.0%	
10055 CAD	UMTS-TDD (TD-SCDMA, 1.28 Mbps)	TD-SCDMA	9.82	± 0.0%	
10059 CAD	IEEE 802.11n (2.4GHz, 5GHz, 2Mbps)	WLAN	2.12	± 0.0%	
10068 CAB	IEEE 802.11n (2.4GHz, 5GHz, 5.5Mbps)	WLAN	2.83	± 0.0%	
10069 CAB	IEEE 802.11n (2.4GHz, 5GHz, 11Mbps)	WLAN	4.66	± 0.0%	
10070 CAB	IEEE 802.11n (2.4GHz, 5GHz, 15Mbps)	WLAN	6.89	± 0.0%	
10081 CAD	IEEE 802.11n (WIFI) (GM8K, 6Mbps)	WLAN	8.63	± 0.0%	
10083 CAD	IEEE 802.11n (WIFI) (GM8K, 9Mbps)	WLAN	8.63	± 0.0%	
10084 CAD	IEEE 802.11n (WIFI) (GM8K, 12Mbps)	WLAN	10.94	± 0.0%	
10085 CAD	IEEE 802.11n (WIFI) (GM8K, 15Mbps)	WLAN	10.94	± 0.0%	
10086 CAD	IEEE 802.11n (WIFI) (GM8K, 24Mbps)	WLAN	9.38	± 0.0%	
10087 CAD	IEEE 802.11n (WIFI) (GM8K, 36Mbps)	WLAN	10.12	± 0.0%	
10088 CAD	IEEE 802.11n (WIFI) (GM8K, 48Mbps)	WLAN	10.23	± 0.0%	
10089 CAD	IEEE 802.11n (WIFI) (GM8K, 54Mbps)	WLAN	10.56	± 0.0%	
10071 CAD	IEEE 802.11n (WIFI) (GM8K, 54Mbps)	WLAN	10.56	± 0.0%	
10072 CAD	IEEE 802.11n (WIFI) (GM8K, 64Mbps)	WLAN	10.56	± 0.0%	
10073 CAD	IEEE 802.11n (WIFI) (GM8K, 15Mbps)	WLAN	9.94	± 0.0%	
10074 CAD	IEEE 802.11n (WIFI) (GM8K, 24Mbps)	WLAN	10.00	± 0.0%	
10075 CAD	IEEE 802.11n (WIFI) (GM8K, 48Mbps)	WLAN	10.17	± 0.0%	
10076 CAD	IEEE 802.11n (WIFI) (GM8K, 48Mbps)	WLAN	10.94	± 0.0%	
10077 CAD	IEEE 802.11n (WIFI) (GM8K, 48Mbps)	WLAN	11.00	± 0.0%	
10080 CAD	IEEE 802.11n (WIFI) (GM8K, 48Mbps)	WLAN	11.00	± 0.0%	
10083 CAD	IS-54-1 (8.1-16 FDD) (TOMA/OFDM, P14-QPSK, Fullrate)	AMPS	4.77	± 0.0%	
10090 CAD	GPRS-FDD (TOMA, GM8K, Th-0)	GSM	6.56	± 0.0%	
10090 CAD	UMTS-FDD (HSUPA, Subset 2)	WCDMA	3.98	± 0.0%	
10090 CAD	EDGE-FDD (TOMA, GM8K, Th-0)	GSM	9.55	± 0.0%	

Certificate No: EX3-7346\_Mar22

Page 11 of 24

EX3D4-SN 7346

March 30, 2022

10182 CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.52	± 0.0%
10183 AAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 0.0%
10184 AAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.50	± 0.0%
10185 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.51	± 0.0%
10186 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.96	± 0.0%
10187 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.97	± 0.0%
10188 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.52	± 0.0%
10189 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 0.0%
10190 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 0.0%
10191 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 0.0%
10192 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 0.0%
10193 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.09	± 0.0%
10194 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.09	± 0.0%
10195 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.09	± 0.0%
10196 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	8.10	± 0.0%
10197 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	8.10	± 0.0%
10198 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	10.27	± 0.0%
10199 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10200 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10201 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10202 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10203 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10204 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10205 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10206 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10207 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10208 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10209 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10210 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10211 CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	9.19	± 0.0%
10222 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	8.27	± 0.0%
10223 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	8.06	± 0.0%
10224 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	8.06	± 0.0%
10225 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	8.06	± 0.0%
10226 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	8.06	± 0.0%
10227 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	10.26	± 0.0%
10228 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10229 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10230 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10231 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10232 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10233 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10234 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10235 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10236 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10237 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10238 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10239 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10240 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10241 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10242 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10243 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10244 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10245 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10246 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10247 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10248 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10249 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10250 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10251 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10252 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10253 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10254 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10255 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10256 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10257 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.22	± 0.0%
10258 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.24	± 0.0%
10259 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.34	± 0.0%
10260 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.98	± 0.0%
10261 CAD	IEEE 802.11n (WIFI) (GM8K)	WLAN	9.97	± 0.0%

Certificate No: EX3-7346\_Mar22

Page 13 of 24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



EX3D4-SN 7346

March 30, 2022

10192 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	5.87	± 0.0%
10192 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	6.42	± 0.0%
10192 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 80-QPSK)	LTE-TDD	6.60	± 0.0%
10193 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 0.0%
10193 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	9.30	± 0.0%
10193 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 80-QPSK)	LTE-TDD	9.30	± 0.0%
10194 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	10.01	± 0.0%
10194 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 0.0%
10194 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 80-QPSK)	LTE-TDD	10.01	± 0.0%
10195 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	5.75	± 0.0%
10195 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	6.44	± 0.0%
10195 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 80-QPSK)	LTE-TDD	6.44	± 0.0%
10196 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	5.75	± 0.0%
10196 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	6.35	± 0.0%
10196 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 80-QPSK)	LTE-TDD	6.35	± 0.0%
10197 CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	5.79	± 0.0%

---

Certificate No: EX3-7346 Mar22

Page 15 of 24

---

Certificate No: EX3-7346 Mar22

Page 16 of 24

EX30V4- SN348		March 20, 2023		
10542	AAE IEEE 802.11n WiFi (80MHz) MCS_90pc (80)	WLAN	8.49	9.8%
10548	AAE IEEE 802.11n WiFi (80MHz) MCS_99pc (80)	WLAN	8.37	9.9%
10549	AAE IEEE 802.11n WiFi (80MHz) MCS_99pc (80)	WLAN	8.39	9.9%
10550	AAE IEEE 802.11n WiFi (80MHz) MCS_99pc (80)	WLAN	8.41	9.9%
10552	AAE IEEE 802.11n WiFi (80MHz) MCS_99pc (80)	WLAN	8.42	9.9%
10553	AAE IEEE 802.11n WiFi (80MHz) MCS_99pc (80)	WLAN	8.45	9.9%
10554	AAE IEEE 802.11n WiFi (80MHz) MCS_99pc (80)	WLAN	8.46	9.9%
10555	AAE IEEE 802.11n WiFi (160MHz) MCS1_99pc (80)	WLAN	8.47	9.9%
10556	AAE IEEE 802.11n WiFi (160MHz) MCS2_99pc (80)	WLAN	8.50	9.9%
10557	AAE IEEE 802.11n WiFi (160MHz) MCS3_99pc (80)	WLAN	8.51	9.9%
10558	AAE IEEE 802.11n WiFi (160MHz) MCS4_99pc (80)	WLAN	8.53	9.9%
10559	AAE IEEE 802.11n WiFi (160MHz) MCS5_99pc (80)	WLAN	8.73	9.9%
10560	AAE IEEE 802.11n WiFi (160MHz) MCS6_99pc (80)	WLAN	8.56	9.9%
10562	AAE IEEE 802.11n WiFi (160MHz) MCS7_99pc (80)	WLAN	8.57	9.9%
10563	AAE IEEE 802.11n WiFi (160MHz) MCS8_99pc (80)	WLAN	8.77	9.9%
10564	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_4 Mips, 90pc) (80)	WLAN	8.25	9.9%
10565	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_4 Mips, 99pc) (80)	WLAN	8.26	9.9%
10566	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_14 Mips, 90pc) (80)	WLAN	8.13	9.9%
10567	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_14 Mips, 99pc) (80)	WLAN	8.00	9.9%
10568	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_24 Mips, 90pc) (80)	WLAN	8.14	9.9%
10569	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_24 Mips, 99pc) (80)	WLAN	8.10	9.9%
10570	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_44 Mips, 90pc) (80)	WLAN	8.30	9.9%
10571	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS-QFHM_44 Mips, 99pc) (80)	WLAN	8.31	9.9%
10572	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS_2.5 Mips, 90pc) (80)	WLAN	1.99	9.9%
10573	AAE IEEE 802.11n WiFi 2.4 GHz (DSSS_2.5 Mips, 99pc) (80)	WLAN	1.98	9.9%
10574	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_12 Mips, 90pc) (80)	WLAN	1.98	9.9%
10575	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_12 Mips, 99pc) (80)	WLAN	1.99	9.9%
10576	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_4 Mips, 90pc) (80)	WLAN	8.60	9.9%
10577	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_4 Mips, 99pc) (80)	WLAN	8.61	9.9%
10578	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_18 Mips, 90pc) (80)	WLAN	8.49	9.9%
10579	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_18 Mips, 99pc) (80)	WLAN	8.50	9.9%
10580	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_24 Mips, 90pc) (80)	WLAN	8.36	9.9%
10581	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_24 Mips, 99pc) (80)	WLAN	8.37	9.9%
10582	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_40 Mips, 90pc) (80)	WLAN	8.35	9.9%
10583	AAE IEEE 802.11n WiFi 2.4 GHz (OFDM_40 Mips, 99pc) (80)	WLAN	8.36	9.9%
10584	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_9 Mips, 90pc) (80)	WLAN	8.67	9.9%
10585	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_9 Mips, 99pc) (80)	WLAN	8.68	9.9%
10586	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_12 Mips, 90pc) (80)	WLAN	8.69	9.9%
10587	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_12 Mips, 99pc) (80)	WLAN	8.70	9.9%
10588	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_16 Mips, 90pc) (80)	WLAN	8.71	9.9%
10589	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_16 Mips, 99pc) (80)	WLAN	8.72	9.9%
10590	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_24 Mips, 90pc) (80)	WLAN	8.73	9.9%
10591	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_24 Mips, 99pc) (80)	WLAN	8.74	9.9%
10592	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_36 Mips, 90pc) (80)	WLAN	8.75	9.9%
10593	AAE IEEE 802.11n WiFi 2.4 GHz (QPSK_36 Mips, 99pc) (80)	WLAN	8.76	9.9%
10594	AAE IEEE 802.11n WiFi 2.4GHz (MCS_90pc) (80)	WLAN	8.74	9.9%
10595	AAE IEEE 802.11n WiFi 2.4GHz (MCS_99pc) (80)	WLAN	8.75	9.9%
10596	AAE IEEE 802.11n WiFi 2.4GHz (MCS1_90pc) (80)	WLAN	8.77	9.9%
10597	AAE IEEE 802.11n WiFi 2.4GHz (MCS1_99pc) (80)	WLAN	8.78	9.9%
10598	AAE IEEE 802.11n WiFi 2.4GHz (MCS2_90pc) (80)	WLAN	8.79	9.9%
10599	AAE IEEE 802.11n WiFi 2.4GHz (MCS2_99pc) (80)	WLAN	8.80	9.9%
10600	AAE IEEE 802.11n WiFi 2.4GHz (MCS3_90pc) (80)	WLAN	8.81	9.9%
10601	AAE IEEE 802.11n WiFi 2.4GHz (MCS3_99pc) (80)	WLAN	8.82	9.9%
10602	AAE IEEE 802.11n WiFi 2.4GHz (MCS4_90pc) (80)	WLAN	8.84	9.9%
10603	AAE IEEE 802.11n WiFi 2.4GHz (MCS4_99pc) (80)	WLAN	8.93	9.9%
10604	AAE IEEE 802.11n WiFi 2.4GHz (MCS5_90pc) (80)	WLAN	8.76	9.9%

Certificate No: EX3-7346\_Mar22

Page 17 of 24

EX3DVA-SN 7348		March 30, 2023	
10653	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS8, 90pc(s)	WLAN	8.97 ± 9.8%
10598	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS7, 90pc(s)	WLAN	8.92 ± 9.6%
10677	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS6, 90pc(s)	WLAN	8.64 ± 9.6%
10678	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS5, 90pc(s)	WLAN	8.57 ± 9.6%
10679	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS4, 90pc(s)	WLAN	8.78 ± 9.6%
10680	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS3, 90pc(s)	WLAN	8.77 ± 9.6%
10612	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS2, 90pc(s)	WLAN	8.77 ± 9.6%
10613	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS1, 90pc(s)	WLAN	8.77 ± 9.6%
10614	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS0, 90pc(s)	WLAN	8.97 ± 9.6%
10615	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS7, 90pc(s)	WLAN	8.92 ± 9.6%
10616	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS6, 90pc(s)	WLAN	8.92 ± 9.6%
10617	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS5, 90pc(s)	WLAN	8.89 ± 9.6%
10618	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS4, 90pc(s)	WLAN	8.89 ± 9.6%
10619	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS3, 90pc(s)	WLAN	8.86 ± 9.6%
10620	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS2, 90pc(s)	WLAN	8.87 ± 9.6%
10621	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS1, 90pc(s)	WLAN	8.87 ± 9.6%
10622	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS0, 90pc(s)	WLAN	8.68 ± 9.6%
10633	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS7, 90pc(s)	WLAN	8.62 ± 9.6%
10634	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS6, 90pc(s)	WLAN	8.62 ± 9.6%
10635	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS5, 90pc(s)	WLAN	8.61 ± 9.6%
10636	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS4, 90pc(s)	WLAN	8.61 ± 9.6%
10637	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS3, 90pc(s)	WLAN	8.79 ± 9.6%
10638	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS2, 90pc(s)	WLAN	8.86 ± 9.6%
10639	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS1, 90pc(s)	WLAN	8.81 ± 9.6%
10640	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS0, 90pc(s)	WLAN	8.95 ± 9.6%
10641	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS7, 90pc(s)	WLAN	9.06 ± 9.6%
10642	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS6, 90pc(s)	WLAN	9.03 ± 9.6%
10643	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS5, 90pc(s)	WLAN	8.89 ± 9.6%
10644	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS4, 90pc(s)	WLAN	9.05 ± 9.6%
10645	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS3, 90pc(s)	WLAN	9.03 ± 9.6%
10646	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS2, 90pc(s)	WLAN	9.03 ± 9.6%
10647	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS1, 90pc(s)	WLAN	9.03 ± 9.6%
10648	AAC IEEE 802.11ac (11) Mixed, 40MHz, MCS0, 90pc(s)	WLAN	9.03 ± 9.6%
10649	AAC LTE-TDD (SC-FDMA, 1800 MHz, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96 ± 9.6%
10647	AAC LTE-TDD (SC-FDMA, 1800 MHz, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96 ± 9.6%
10650	AAC LTE-TDD (SC-FDMA, 1800 MHz, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	12.00 ± 9.6%
10651	AAC LTE-TDD (OFDMA, 19 MHz, 20 MHz, 3.1, Clipping 44%)	LTE-TDD	12.74 ± 9.5%
10652	AAC LTE-TDD (OFDMA, 19 MHz, 20 MHz, 3.1, Clipping 44%)	LTE-TDD	12.74 ± 9.5%
10653	AAC LTE-TDD (OFDMA, 19 MHz, 20 MHz, 3.1, Clipping 44%)	LTE-TDD	12.74 ± 9.5%
10654	AAC LTE-TDD (OFDMA, 19 MHz, 20 MHz, 3.1, Clipping 44%)	LTE-TDD	12.71 ± 9.6%
10655	AAC LTE-TDD (OFDMA, 19 MHz, 20 MHz, 3.1, Clipping 44%)	LTE-TDD	12.71 ± 9.6%
10656	AAC Pulse Waveform(200Hz, 10%)	Test	10.00 ± 9.6%
10657	AAC Pulse Waveform(200Hz, 40%)	Test	3.00 ± 9.6%
10658	AAC Pulse Waveform(200Hz, 60%)	Test	3.00 ± 9.6%
10659	AAC Pulse Waveform(200Hz, 80%)	Test	1.00 ± 9.6%
10660	AAC Pulse Waveform(200Hz, 100%)	Test	1.00 ± 9.6%
10661	AAC Pulse Waveform(200Hz, 60%)	Test	2.22 ± 9.5%
10662	AAC Pulse Waveform(200Hz, 80%)	Test	1.00 ± 9.6%
10663	AAC Pulse Waveform(200Hz, 100%)	Test	1.00 ± 9.6%
10678	AAC Bluebeam Low Energy	Bluetooth	2.19 ± 9.6%
10671	AAC IEEE 802.11a (20MHz, MCS7, 90pc(s))	WLAN	9.09 ± 9.5%
10672	AAC IEEE 802.11a (20MHz, MCS8, 90pc(s))	WLAN	8.97 ± 9.6%

Certificate No: EX3-7346\_Mar22

Page 18 of 24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or signature of this document is illegal and offenders will be pursued to the full extent of the law. Unless otherwise advised, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention:** To check the authenticity of testing, inspection report & certificate, please contact us at telephone: (85-755) 8307 1443.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
u(86-512)57365500 sgs\_china@sgs.com

1(86-512)57355888 1(86-512)57370818 sgs.china@sgs.com



## 4 Impedance and return loss

Dipole CLA150 SN 4025				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/4/26	-31.4	/	47.8	/
Dipole D450V3 SN 1103				
Head Liquid				
Date of Measurement	Return Loss(dB)	$\Delta$ %	Impedance ( $\Omega$ )	$\Delta\Omega$
2021/4/21	-23	/	57.1	/

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overhead, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-Document.aspx>. All work is done to the Client's specification and intervention and is the Client's responsibility. Any action of the Client or its Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (0673207442)

appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report or email: CN.Doccheck@sgs.com  
No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

For more information, please contact us at telephone: (86-755) 8307 1443,  
t(86-512) 57355588 f(86-512) 57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512) 57355588 f(86-512) 57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)