



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT :mm)

2. S C

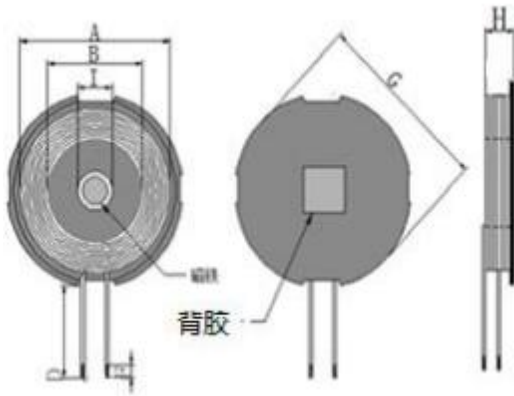

A	B	D	E	G	H	I			
21±1.0	13.5±3	35±3	3±1.5	28MAX	2.8MAX	7.8±0.05			

3.WINDING :

ST E P	START -FINISH	WIRE TYPE	TURNS	TAP E	R E M A R K
N 1	S -F	Ø 0.08 * 24mm 2UEW	14TS (Ref)		

4. ELECTRICAL SPECIFICATION :

ITE M	L	D CR	L	Q price	HI -POT
TE S T C O N	The coil was added with a magnetic sheet	S -F			
	100KHz , 0.25V	AT 25℃			
SPEC	.56uH ±10%	107m Ω Max			

5.BILF OF MATERIAL :

NO	ITEM	MATERIAL SPECIFICATION	M A NUFACTURER	SGS NO.
1	copper line	0.08*24P	NANJINGJINNINGCO ,LTD	
2	No lead tin strip	No lead tin strip	QIAODO	
3	magnetic sheet	U 52 soft magnetic	TAIYI CO.,LTD	
4	glue	Yellow gum is 9999	LIANCHENG CO.,LTD	
5	magnet	7.8 * 2 / 2800-3000 Gauss N 45		
6	gum	Ø 22*0.1	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TIT LE	Watch coil + back glue lead line is 35mm long
DRAWN BY	CHECKED BY		APPROVED BY