



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT :mm)

2. S C

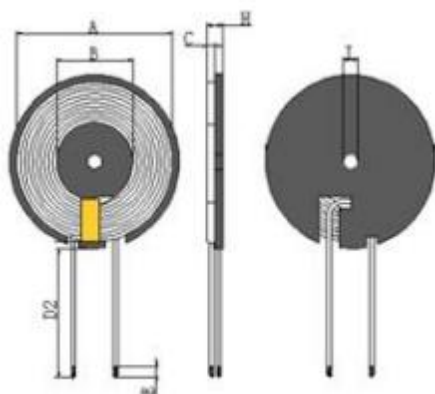

A	B	C	D 2	E	I	H
44±1.0	20.5±0.5	0.8±0.05	215±5	4±2	5.0±0.5	2.8MAX

3.WINDING :

ST E P	START -FINISH	WIRE TYPE	TURNS	TAP E	R E M A R K
N 1	S -F	Ø 0.08*105mm 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION :

ITE M	L	D CR	I DC	Q price	HI -POT
TE S	S -F	S -F	S -F		
T C ON	100KHz , 0.25V	AT 25°C	AT 25°C		
SPEC	.36uH ±10%	60m Ω Max	5A		

5.BILF OF MATERIAL :

NO	ITEM	MATERIAL SPECIFICATION	M A NUFACTURER	SGS NO.
1	CORE	G 44L 0.8H N 40	NANJINGJINNINGCO ,LTD	
2	gum	43.5/*0.1	NANJINGJINNINGCO ,LTD	
3	WIR E	Ø 0.08mm 105 2UEW	TAIYI CO ,LTD	
4	EPOX Y	9999	CUDAK CO ,LTD	

HRSW ELECTRONICS CO ,LTD	PART NO	
	TIT LE	G 44 slotted L + back glue 215mm