



Shenzhen HTT Technology Co., Ltd.

Report No.: HTT202210146F01

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No. : HTT202210146F01

FCC ID. : 2A884-RMRF10TP

Compiled by

(position+printed name+signature) .: File administrators Kevin Liu

Ervin Xu

Supervised by

(position+printed name+signature) .: Project Engineer Kevin Liu

Bruce Zhu

Approved by

(position+printed name+signature) .: RF Manager Eric Wang

Kevin Yang

Date of issue : Oct.24,2022

Testing Laboratory Name..... : Shenzhen HTT Technology Co.,Ltd.

Address : 1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : Nanjing Ningyuan Intelligent Instrument Co., Ltd

Address : Building 6, Jima Industrial Park, No. 669 Jiangjun Avenue, Jiangning District, Nanjing China

Test specification :

Standard..... : FCC Part 15.247

Shenzhen HTT Technology Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HTT Technology Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HTT Technology Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : LORA RF module

Trade Mark..... : N/A

Manufacturer : Nanjing Ningyuan Intelligent Instrument Co., Ltd

Model/Type reference : RM-RF10TP-1278(PI)

Listed Models : RM-RF10TP-1278(N), RM-RF10TP-1278(E), RM-RF10TP-1278(C)

Frequency : 903.0MHz-927.0MHz

Ratings : DC 5.0V

Result : PASS



TEST REPORT

Equipment under Test : LORA RF module

Model /Type : RM-RF10TP-1278(PI)

Listed Models : RM-RF10TP-1278(N), RM-RF10TP-1278(E),
RM-RF10TP-1278(C)

Applicant : Nanjing Ningyuan Intelligent Instrument Co., Ltd

Address : Building 6, Jima Industrial Park, No. 669 Jiangjun Avenue,
Jiangning District, Nanjing China

Manufacturer : Nanjing Ningyuan Intelligent Instrument Co., Ltd

Address : Building 6, Jima Industrial Park, No. 669 Jiangjun Avenue,
Jiangning District, Nanjing China

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

| | | |
|----------|-----------------------------------------------------|----|
| <u>1</u> | <u>TEST STANDARDS</u> | 4 |
| <u>2</u> | <u>SUMMARY</u> | 5 |
| 2.1 | General Remarks | 5 |
| 2.2 | Product Description | 5 |
| 2.3 | Equipment Under Test | 5 |
| 2.4 | Short description of the Equipment under Test (EUT) | 5 |
| 2.5 | EUT operation mode | 6 |
| 2.6 | Block Diagram of Test Setup | 6 |
| 2.7 | Related Submittal(s) / Grant (s) | 6 |
| 2.8 | Modifications | 6 |
| <u>3</u> | <u>TEST ENVIRONMENT</u> | 7 |
| 3.1 | Address of the test laboratory | 7 |
| 3.2 | Test Facility | 7 |
| 3.3 | Environmental conditions | 7 |
| 3.4 | Summary of measurement results | 8 |
| 3.5 | Statement of the measurement uncertainty | 8 |
| 3.6 | Equipments Used during the Test | 9 |
| <u>4</u> | <u>TEST CONDITIONS AND RESULTS</u> | 10 |
| 4.1 | AC Power Conducted Emission | 10 |
| 4.2 | Radiated Emissions and Band Edge | 14 |
| 4.3 | Maximum Peak Output Power | 21 |
| 4.4 | Power Spectral Density | 22 |
| 4.5 | 6dB Bandwidth | 25 |
| 4.6 | Out-of-band Emissions | 28 |
| 4.7 | Antenna Requirement | 32 |
| <u>5</u> | <u>TEST SETUP PHOTOS OF THE EUT</u> | 33 |
| <u>6</u> | <u>PHOTOS OF THE EUT</u> | 33 |



1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247



2 SUMMARY

2.1 General Remarks

| | | |
|--------------------------------|---|-------------|
| Date of receipt of test sample | : | Oct.18,2022 |
| Testing commenced on | : | Oct.18,2022 |
| Testing concluded on | : | Oct.24,2022 |

2.2 Product Description

| | | |
|------------------------|-----------------------------------------------------------------------|--|
| Product Description: | LORA RF module | |
| Model/Type reference: | RM-RF10TP-1278(PI) | |
| Power supply: | DC 5.0V | |
| Testing sample ID: | HTT202210146-1# (Engineer sample), HTT202210146-2# (Normal sample) | |
| Lora | | |
| Modulation Technology: | Hybrid system | |
| Operation frequency: | 903.0MHz-927.0MHz | |
| Channel number: | 25 | |
| Antenna type: | External antenna | |
| Antenna gain: | -1.71dBi | |

2.3 Equipment Under Test

Power supply system utilised

| | | | | | |
|----------------------|---|----------------------------------|----------------------------------|-----------------------|-------------|
| Power supply voltage | : | <input type="radio"/> | 230V / 50 Hz | <input type="radio"/> | 120V / 60Hz |
| | | <input type="radio"/> | 12 V DC | <input type="radio"/> | 24 V DC |
| | | <input checked="" type="radio"/> | Other (specified in blank below) | | |

DC 5.0V

2.4 Short description of the Equipment under Test (EUT)

This is a LORA RF module.

For more details, refer to the user's manual of the EUT.


2.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 24 channels provided to the EUT and Channel 00/12/24 were selected to test.

Operation Frequency:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 00 | 903.0 | 13 | 916.0 |
| 01 | 904.0 | 14 | 917.0 |
| 02 | 905.0 | 15 | 918.0 |
| 03 | 906.0 | 16 | 919.0 |
| 04 | 907.0 | 17 | 920.0 |
| 05 | 908.0 | 18 | 921.0 |
| 06 | 909.0 | 19 | 922.0 |
| 07 | 910.0 | 20 | 923.0 |
| 08 | 911.0 | 21 | 924.0 |
| 09 | 912.0 | 22 | 925.0 |
| 10 | 913.0 | 23 | 926.0 |
| 11 | 914.0 | 24 | 927.0 |
| 12 | 915.0 | | |

2.6 Block Diagram of Test Setup

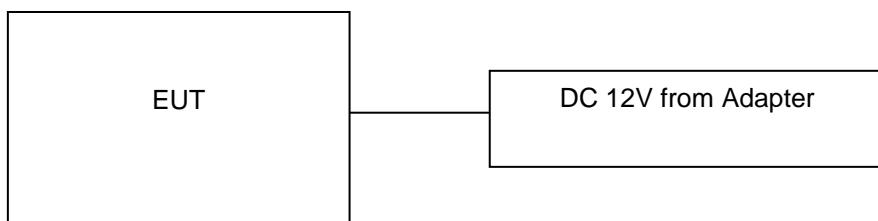

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.



3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen HTT Technology Co.,Ltd.

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 779513 Designation Number: CN1319

Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6435.01

Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

| | |
|-----------------------|--------------|
| Temperature: | 25 ° C |
| | |
| Humidity: | 45 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

AC Main Conducted testing:

| | |
|-----------------------|--------------|
| Temperature: | 24 ° C |
| | |
| Humidity: | 47 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

| | |
|-----------------------|--------------|
| Temperature: | 24 ° C |
| | |
| Humidity: | 46 % |
| | |
| Atmospheric pressure: | 950-1050mbar |



3.4 Summary of measurement results

| Test Specification clause | Test case | Test Mode | Test Channel | Recorded In Report | | Test result |
|---------------------------|-------------------------------------------|---------------|-------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------|-------------|
| §15.247(e) | Power spectral density | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | complies |
| §15.247(a)(2) | Spectrum bandwidth – 6 dB bandwidth | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | complies |
| §15.247(b)(3) | Maximum output Peak power | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | complies |
| §15.247(d) | Band edge compliance conducted | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | complies |
| §15.205 | Band edge compliance radiated | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | complies |
| §15.247(d) | TX spurious emissions conducted | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | complies |
| §15.247(d) | TX spurious emissions radiated | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | Hybrid system | <input type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input type="checkbox"/> Highest | complies |
| §15.209(a) | TX spurious Emissions radiated Below 1GHz | Hybrid system | -/- | Hybrid system | -/- | complies |
| §15.107(a) §15.207 | Conducted Emissions < 30 MHz | Hybrid system | -/- | Hybrid system | -/- | complies |

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen HTT Technology Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HTT Technology Co.,Ltd. :

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission | 30~1000MHz | 4.10 dB | (1) |
| Radiated Emission | 1~18GHz | 4.32 dB | (1) |
| Radiated Emission | 18~40GHz | 5.54 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.




3.6 Equipments Used during the Test

| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
|------|----------------------------------|-------------------------------------|--------------------|---------------|---------------------|-------------------------|
| 1 | 3m Semi- Anechoic Chamber | Shenzhen C.R.T technology co., LTD | 9*6*6 | HTT-E028 | Aug. 10 2020 | Aug. 09 2024 |
| 2 | Control Room | Shenzhen C.R.T technology co., LTD | 4.8*3.5*3.0 | HTT-E030 | Aug. 10 2020 | Aug. 09 2024 |
| 3 | EMI Test Receiver | Rohde&Schwarz | ESCI7 | HTT-E022 | May 23 2022 | May 23 2023 |
| 4 | Spectrum Analyzer | Rohde&Schwarz | FSP | HTT-E037 | May 23 2022 | May 23 2023 |
| 5 | Coaxial Cable | ZDecl | ZT26-NJ-NJ-0.6M | HTT-E018 | May 23 2022 | May 23 2023 |
| 6 | Coaxial Cable | ZDecl | ZT26-NJ-SMAJ-2M | HTT-E019 | May 23 2022 | May 23 2023 |
| 7 | Coaxial Cable | ZDecl | ZT26-NJ-SMAJ-0.6M | HTT-E020 | May 23 2022 | May 23 2023 |
| 8 | Coaxial Cable | ZDecl | ZT26-NJ-SMAJ-8.5M | HTT-E021 | May 23 2022 | May 23 2023 |
| 9 | Composite logarithmic antenna | Schwarzbeck | VULB 9168 | HTT-E017 | May 23 2022 | May 23 2023 |
| 10 | Horn Antenna | Schwarzbeck | BBHA9120D | HTT-E016 | May 23 2022 | May 23 2023 |
| 11 | Loop Antenna | Zhinan | ZN30900C | HTT-E039 | May 23 2022 | May 23 2023 |
| 12 | Horn Antenna | Beijing Hangwei Dayang | OBH100400 | HTT-E040 | May 23 2022 | May 23 2023 |
| 13 | low frequency Amplifier | Sonoma Instrument | 310 | HTT-E015 | May 23 2022 | May 23 2023 |
| 14 | high-frequency Amplifier | HP | 8449B | HTT-E014 | May 23 2022 | May 23 2023 |
| 15 | Variable frequency power supply | Shenzhen Anbiao Instrument Co., Ltd | ANB-10VA | HTT-082 | May 23 2022 | May 23 2023 |
| 16 | EMI Test Receiver | Rohde & Schwarz | ESCS30 | HTT-E004 | May 23 2022 | May 23 2023 |
| 17 | Artificial Mains | Rohde & Schwarz | ESH3-Z5 | HTT-E006 | May 23 2022 | May 23 2023 |
| 18 | Artificial Mains | Rohde & Schwarz | ENV-216 | HTT-E038 | May 23 2022 | May 23 2023 |
| 19 | Cable Line | Robinson | Z302S-NJ-BNCJ-1.5M | HTT-E001 | May 23 2022 | May 23 2023 |
| 20 | Attenuator | Robinson | 6810.17A | HTT-E007 | May 23 2022 | May 23 2023 |
| 21 | Variable frequency power supply | Shenzhen Yanghong Electric Co., Ltd | YF-650 (5KVA) | HTT-E032 | May 23 2022 | May 23 2023 |
| 22 | Control Room | Shenzhen C.R.T technology co., LTD | 8*4*3.5 | HTT-E029 | May 23 2022 | May 23 2023 |
| 23 | DC power supply | Agilent | E3632A | HTT-E023 | May 23 2022 | May 23 2023 |
| 24 | EMI Test Receiver | Agilent | N9020A | HTT-E024 | May 23 2022 | May 23 2023 |
| 25 | Analog signal generator | Agilent | N5181A | HTT-E025 | May 23 2022 | May 23 2023 |
| 26 | Vector signal generator | Agilent | N5182A | HTT-E026 | May 23 2022 | May 23 2023 |
| 27 | Power sensor | Keysight | U2021XA | HTT-E027 | May 23 2022 | May 23 2023 |
| 28 | Temperature and humidity meter | Shenzhen Anbiao Instrument Co., Ltd | TH10R | HTT-074 | May 23 2022 | May 23 2023 |
| 29 | Radiated Emission Test Software | Farad | EZ-EMC | N/A | N/A | N/A |
| 30 | Conducted Emission Test Software | Farad | EZ-EMC | N/A | N/A | N/A |
| 31 | RF Test Software | panshanrf | TST | N/A | N/A | N/A |

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

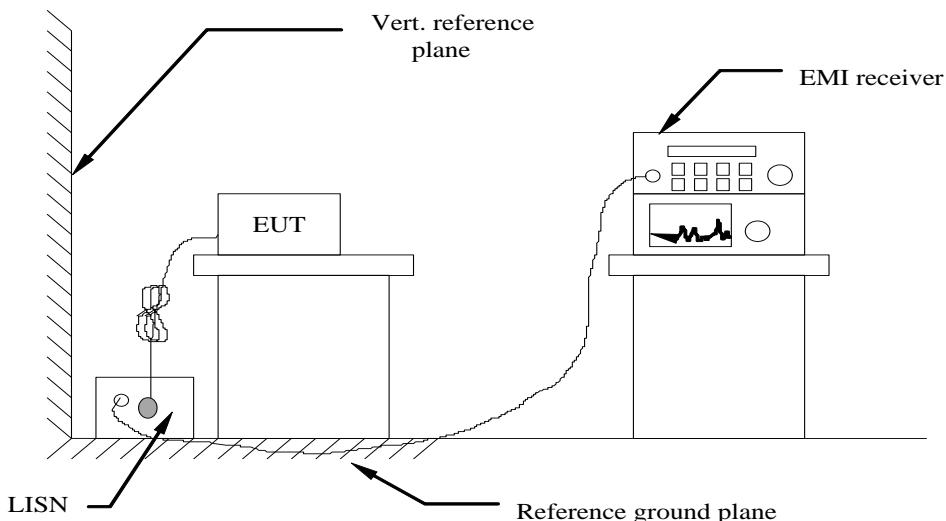

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.





Report No.: HTT202210146F01

TEST RESULTS

Remark:

1. Lora was tested at Low, Middle, and High channel; only the worst result of Lora High channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

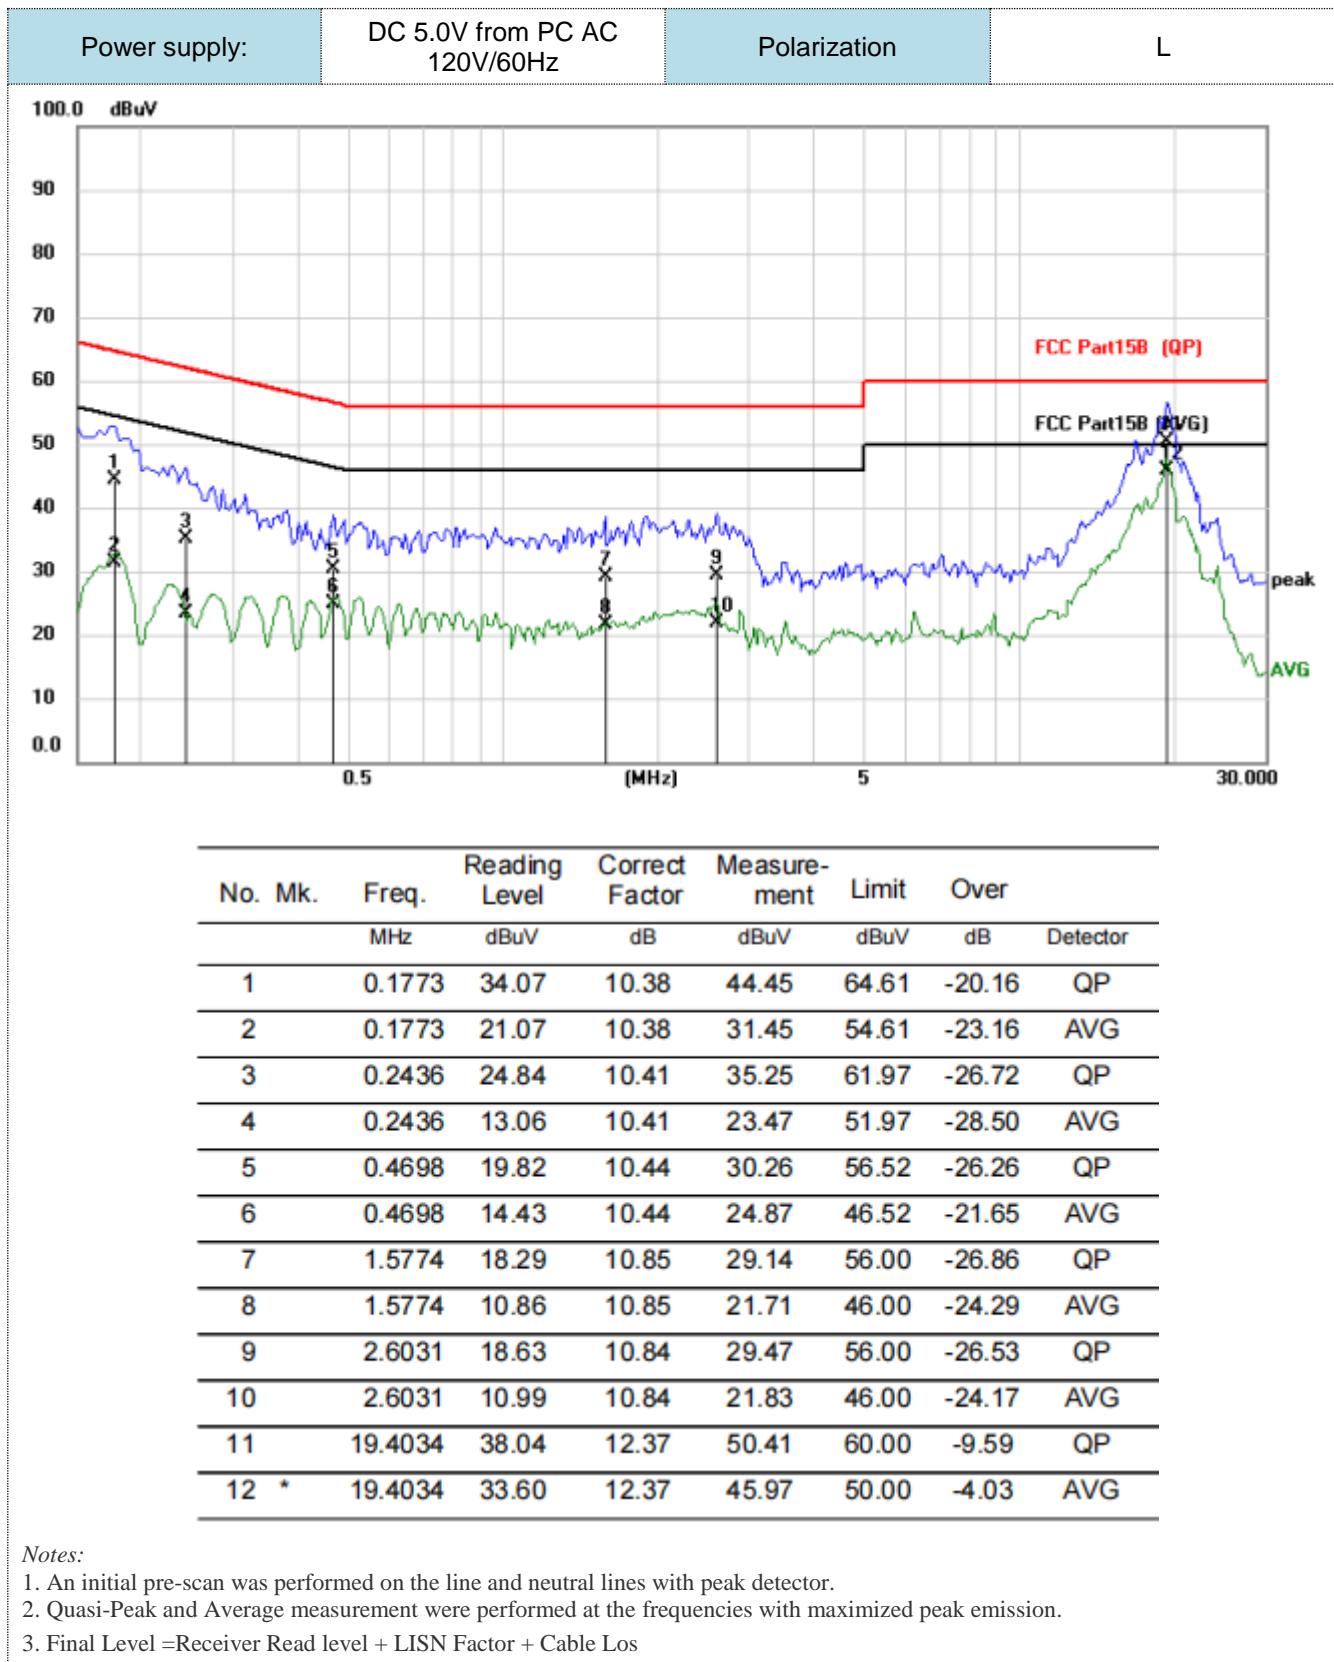


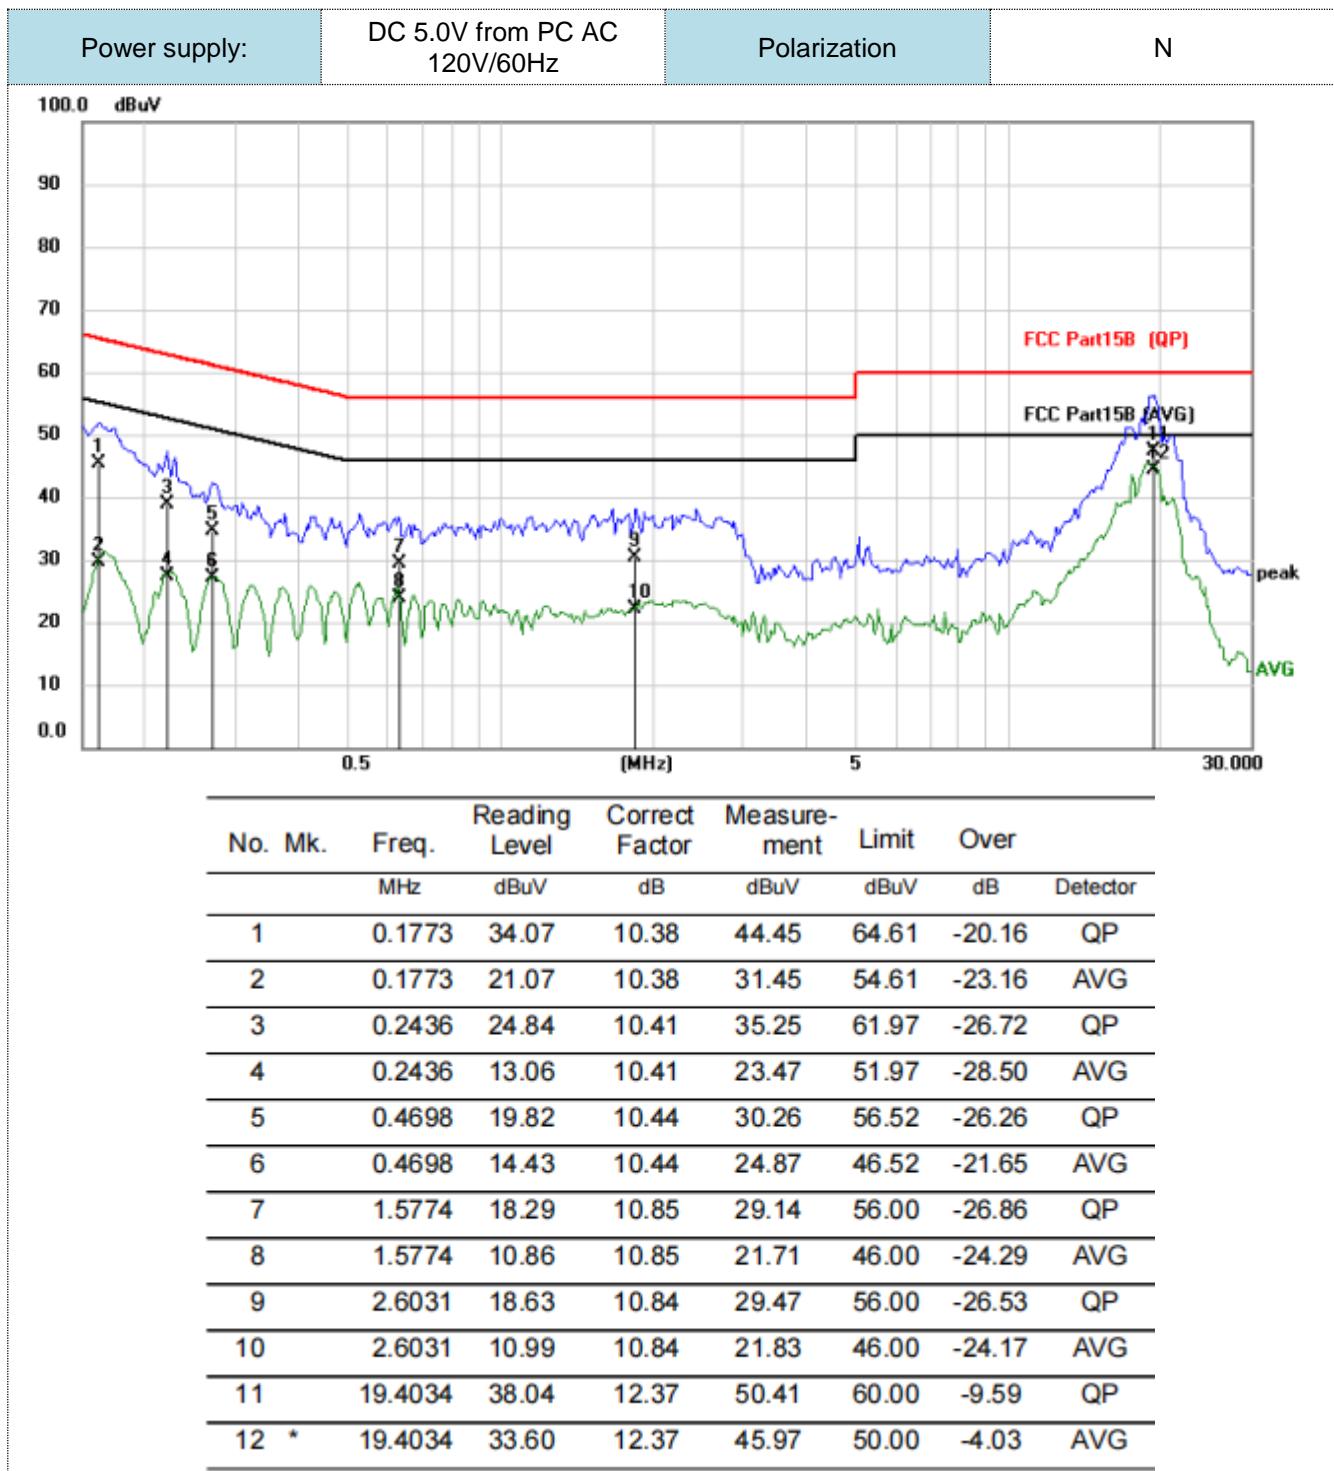


4.2 Radiated Emissions and Band Edge

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

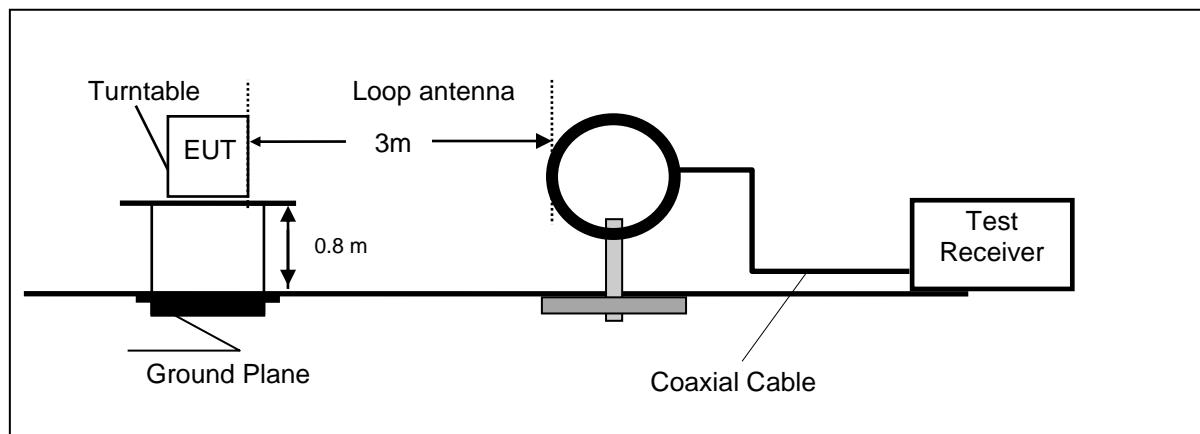

Frequency range 30MHz – 1000MHz

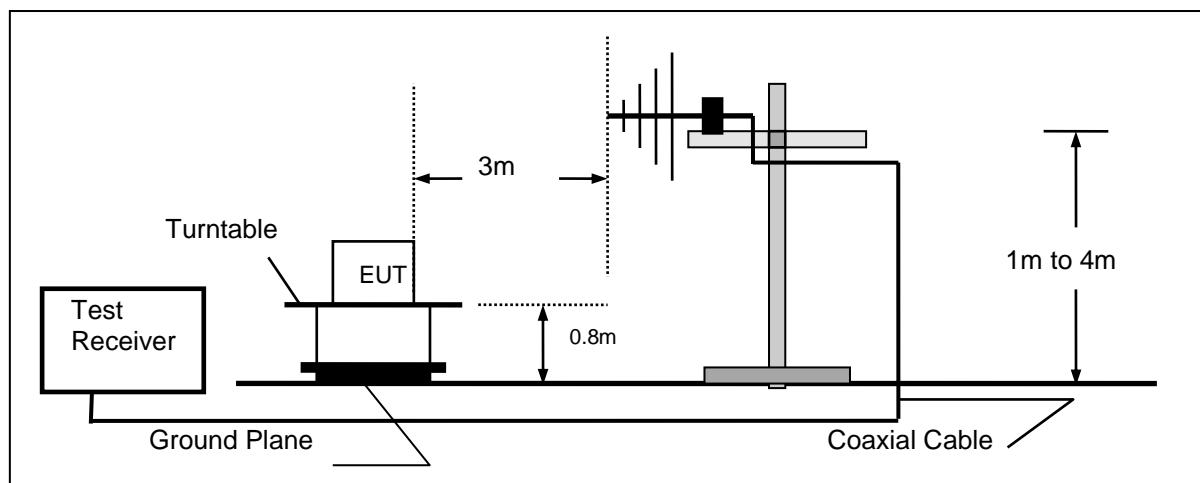

Frequency range above 1GHz-25GHz

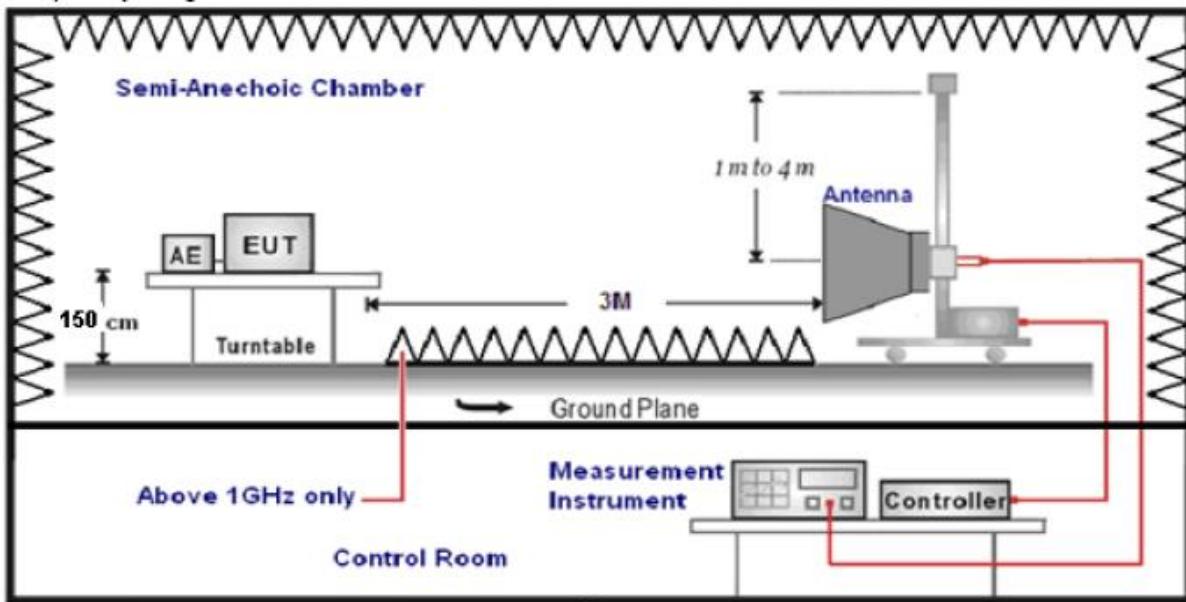

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz; the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz. so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Ultra-Broadband Antenna | 3 |
| 1GHz-18GHz | Double Ridged Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 1 |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz,Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz,Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz,Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | Peak |

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:



$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--------------------------------------------|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

$$Transd = AF + CL - AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


| Frequency (MHz) | Distance (Meters) | Radiated (dB μ V/m) | Radiated (μ V/m) |
|-----------------|-------------------|----------------------------------|-----------------------|
| 0.009-0.49 | 3 | 20log(2400/F(KHz))+40log(300/3) | 2400/F(KHz) |
| 0.49-1.705 | 3 | 20log(24000/F(KHz))+ 40log(30/3) | 24000/F(KHz) |
| 1.705-30 | 3 | 20log(30)+ 40log(30/3) | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |


TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. Lora were tested From 30MHz to 1GHz at Low, Middle, and High channel and recorded worst mode at High channel
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

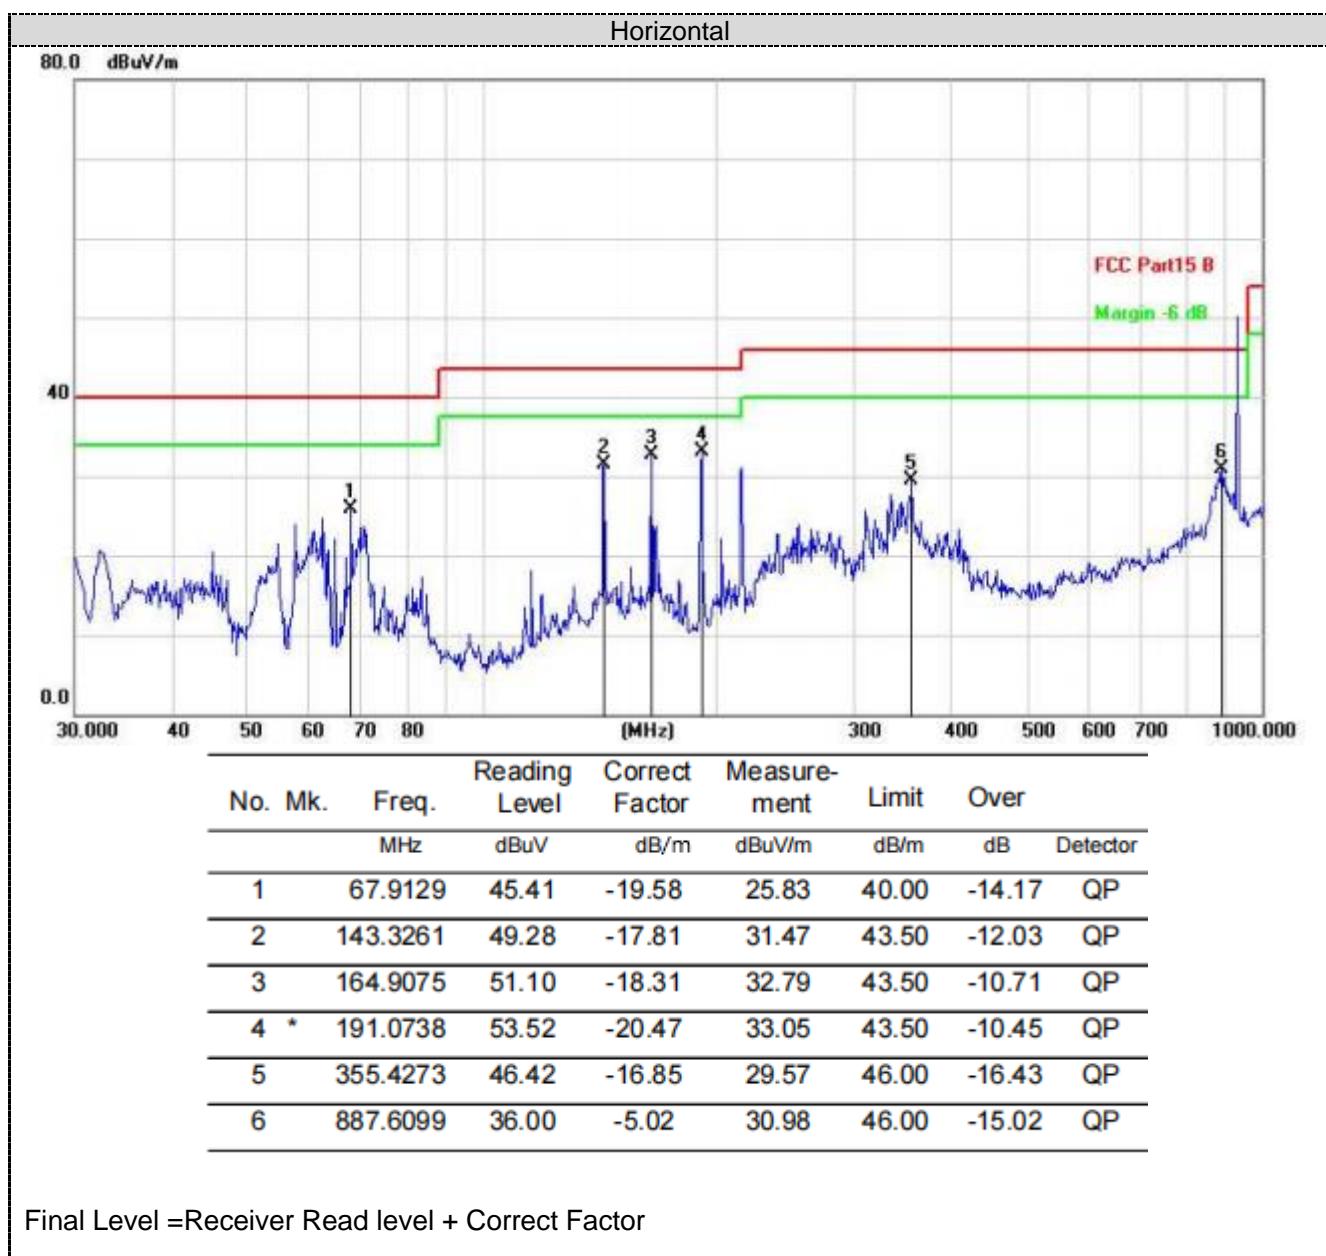

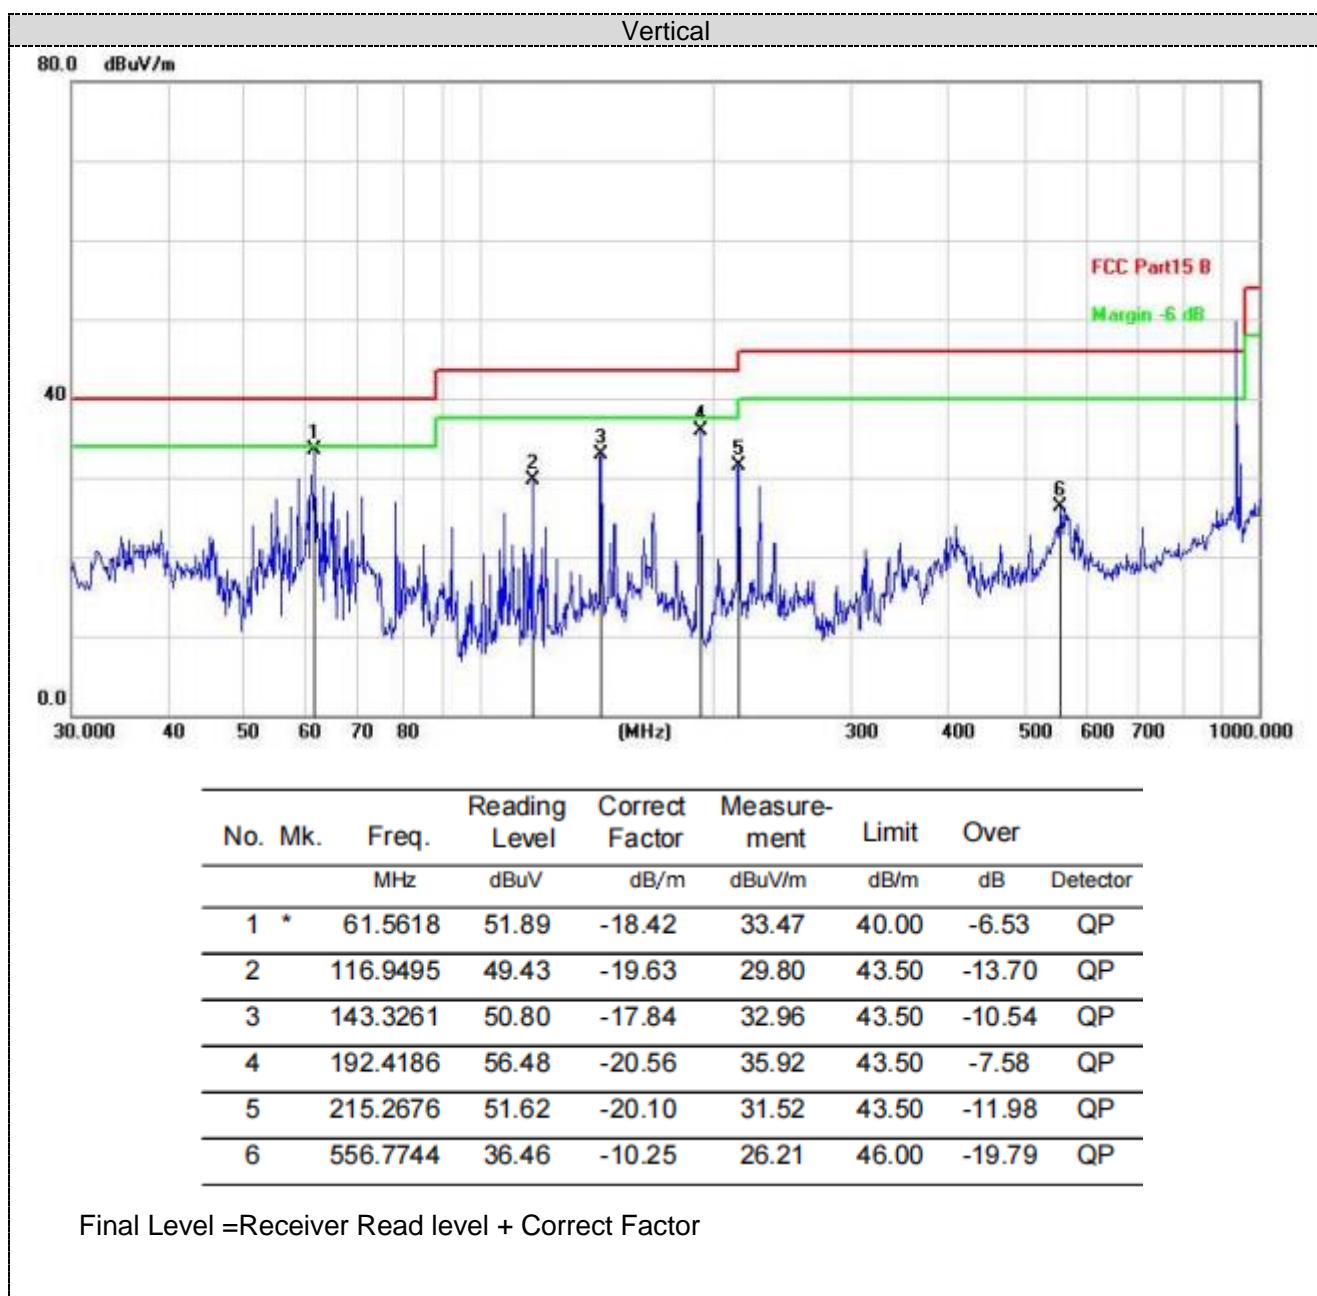



Report No.: HTT202210146F01

For 1GHz to 25GHz

| Frequency(MHz): | | 903.0 | | Polarity: | | HORIZONTAL | | |
|-----------------|-------------------------|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1806.0 | 57.41 | PK | 74 | 16.59 | 64.49 | 23.15 | 3.28 | 33.51 |
| 1806.0 | 45.38 | AV | 54 | 8.62 | 52.46 | 23.15 | 3.28 | 33.51 |
| 2709.0 | 51.39 | PK | 74 | 22.61 | 54.52 | 27.56 | 4.59 | 35.28 |
| 2709.0 | 42.67 | AV | 54 | 11.33 | 45.80 | 27.56 | 4.59 | 35.28 |

| Frequency(MHz): | | 903.0 | | Polarity: | | VERTICAL | | |
|-----------------|-------------------------|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1806.0 | 58.34 | PK | 74 | 15.66 | 65.42 | 23.15 | 3.28 | 33.51 |
| 1806.0 | 42.15 | AV | 54 | 11.85 | 49.23 | 23.15 | 3.28 | 33.51 |
| 2709.0 | 55.97 | PK | 74 | 18.03 | 59.10 | 27.56 | 4.59 | 35.28 |
| 2709.0 | 40.56 | AV | 54 | 13.44 | 43.69 | 27.56 | 4.59 | 35.28 |

| Frequency(MHz): | | 915 | | Polarity: | | HORIZONTAL | | |
|-----------------|-------------------------|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1830 | 56.28 | PK | 74 | 17.72 | 63.36 | 23.15 | 3.28 | 33.51 |
| 1830 | 40.61 | AV | 54 | 13.39 | 47.69 | 23.15 | 3.28 | 33.51 |
| 2745 | 48.67 | PK | 74 | 25.33 | 51.80 | 27.56 | 4.59 | 35.28 |
| 2745 | 39.77 | AV | 54 | 14.23 | 42.90 | 27.56 | 4.59 | 35.28 |

| Frequency(MHz): | | 915 | | Polarity: | | VERTICAL | | |
|-----------------|-------------------------|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1830 | 58.36 | PK | 74 | 15.64 | 65.44 | 23.15 | 3.28 | 33.51 |
| 1830 | 42.53 | AV | 54 | 11.47 | 49.61 | 23.15 | 3.28 | 33.51 |
| 2745 | 51.81 | PK | 74 | 22.19 | 54.94 | 27.56 | 4.59 | 35.28 |
| 2745 | 43.60 | AV | 54 | 10.40 | 46.73 | 27.56 | 4.59 | 35.28 |

| Frequency(MHz): | | 927 | | Polarity: | | HORIZONTAL | | |
|-----------------|-------------------------|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1854 | 59.17 | PK | 74 | 14.83 | 66.29 | 23.34 | 3.41 | 33.87 |
| 1854 | 43.15 | AV | 54 | 10.85 | 50.27 | 23.34 | 3.41 | 33.87 |
| 2781 | 51.96 | PK | 74 | 22.04 | 54.93 | 27.80 | 4.82 | 35.59 |
| 2781 | 42.15 | PK | 54 | 11.85 | 45.12 | 27.80 | 4.82 | 35.59 |



| Frequency(MHz): | | 927 | | Polarity: | | VERTICAL | | | |
|-----------------|-------------------------|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|-------|
| Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) | |
| 1854 | 58.47 | PK | 74 | 15.53 | 65.59 | 23.34 | 3.41 | 33.87 | -7.12 |
| 1854 | 41.69 | AV | 54 | 12.31 | 48.81 | 23.34 | 3.41 | 33.87 | -7.12 |
| 2781 | 50.78 | PK | 74 | 23.22 | 53.75 | 27.80 | 4.82 | 35.59 | -2.97 |
| 2781 | 43.04 | PK | 54 | 10.96 | 46.01 | 27.80 | 4.82 | 35.59 | -2.97 |

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.



4.3 Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration

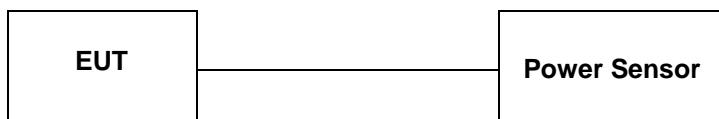

Test Results

| Channel | Output power (dBm) | Limit (dBm) | Result |
|---------|--------------------|-------------|--------|
| 00 | -8.773 | 30.00 | Pass |
| 12 | -8.433 | 30.00 | Pass |
| 24 | -8.501 | 30.00 | Pass |

Note: 1.The test results including the cable lose.

4.4 Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW \geq 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.


Test Configuration

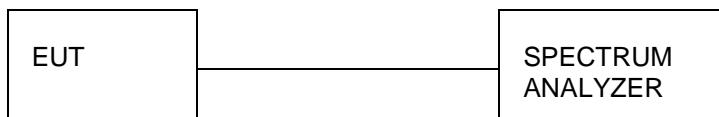

Test Results

| Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|---------|-----------------------------------|------------------|--------|
| 00 | -17.234 | 8.00 | Pass |
| 12 | -15.340 | 8.00 | Pass |
| 24 | -16.526 | 8.00 | Pass |

Test plot as follows:

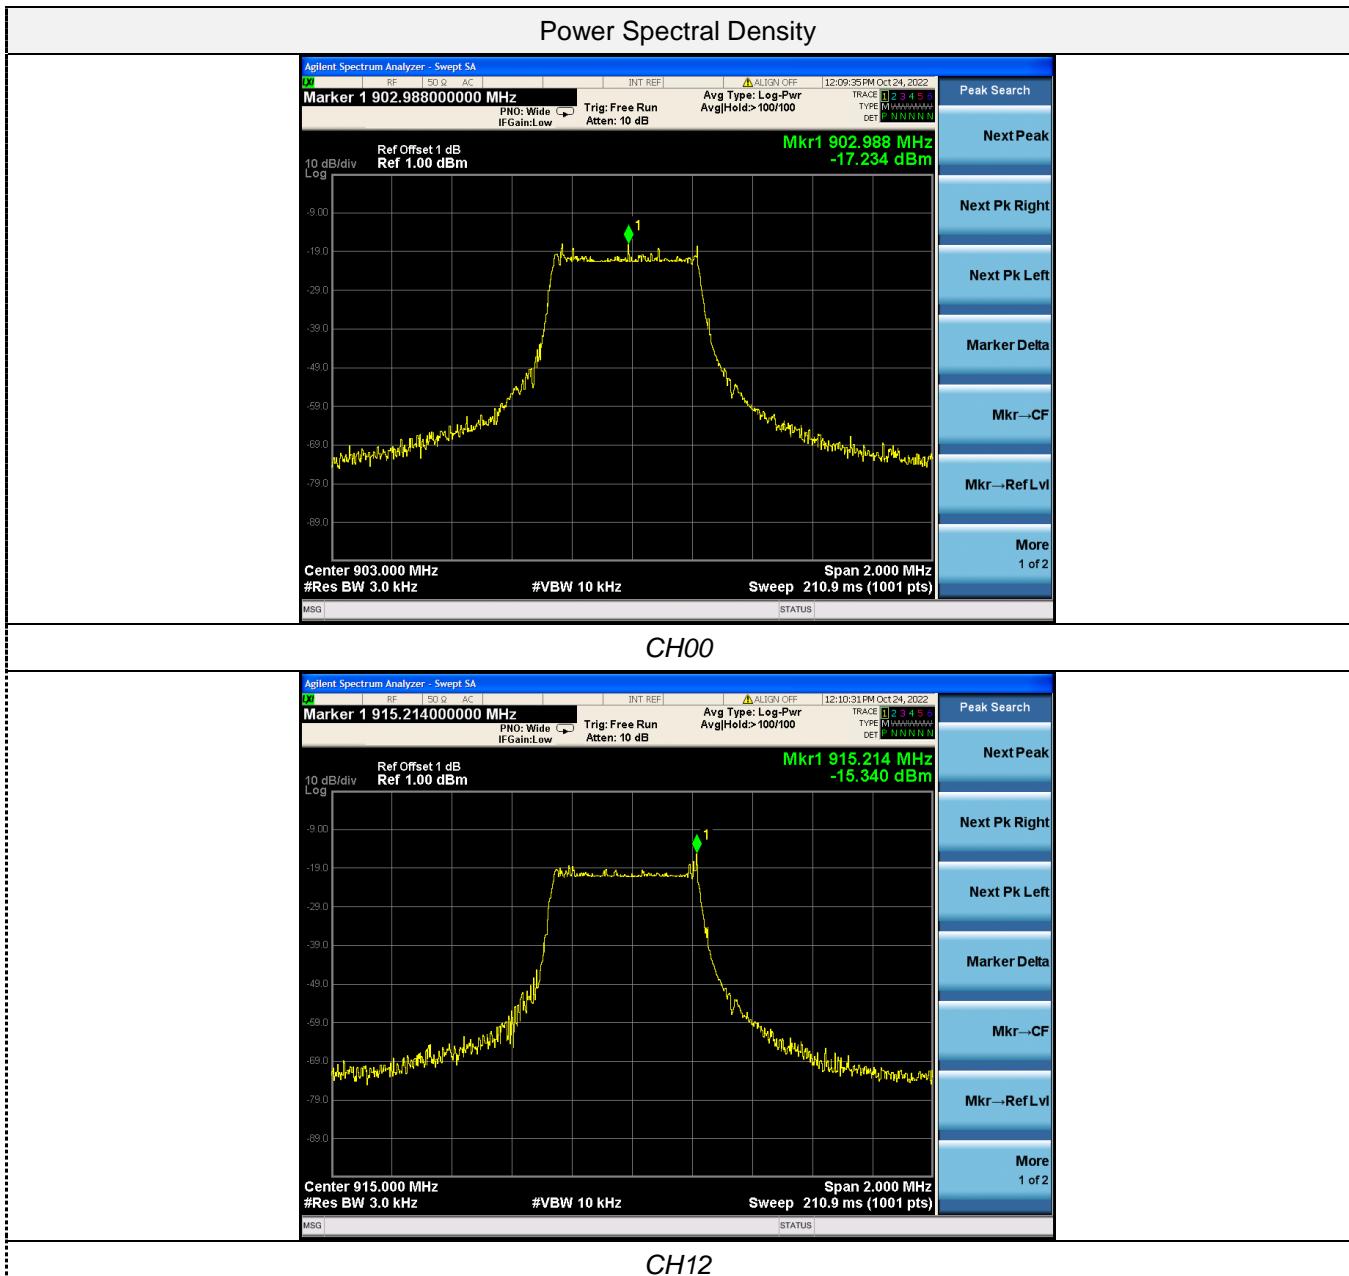



Report No.: HTT202210146F01



4.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


Test Configuration

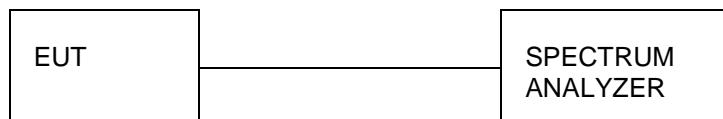

Test Results


| Channel | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|---------|---------------------|-------------|--------|
| 00 | 0.6351 | ≥500 | Pass |
| 12 | 0.6333 | ≥500 | Pass |
| 24 | 0.6365 | ≥500 | Pass |

Test plot as follows:

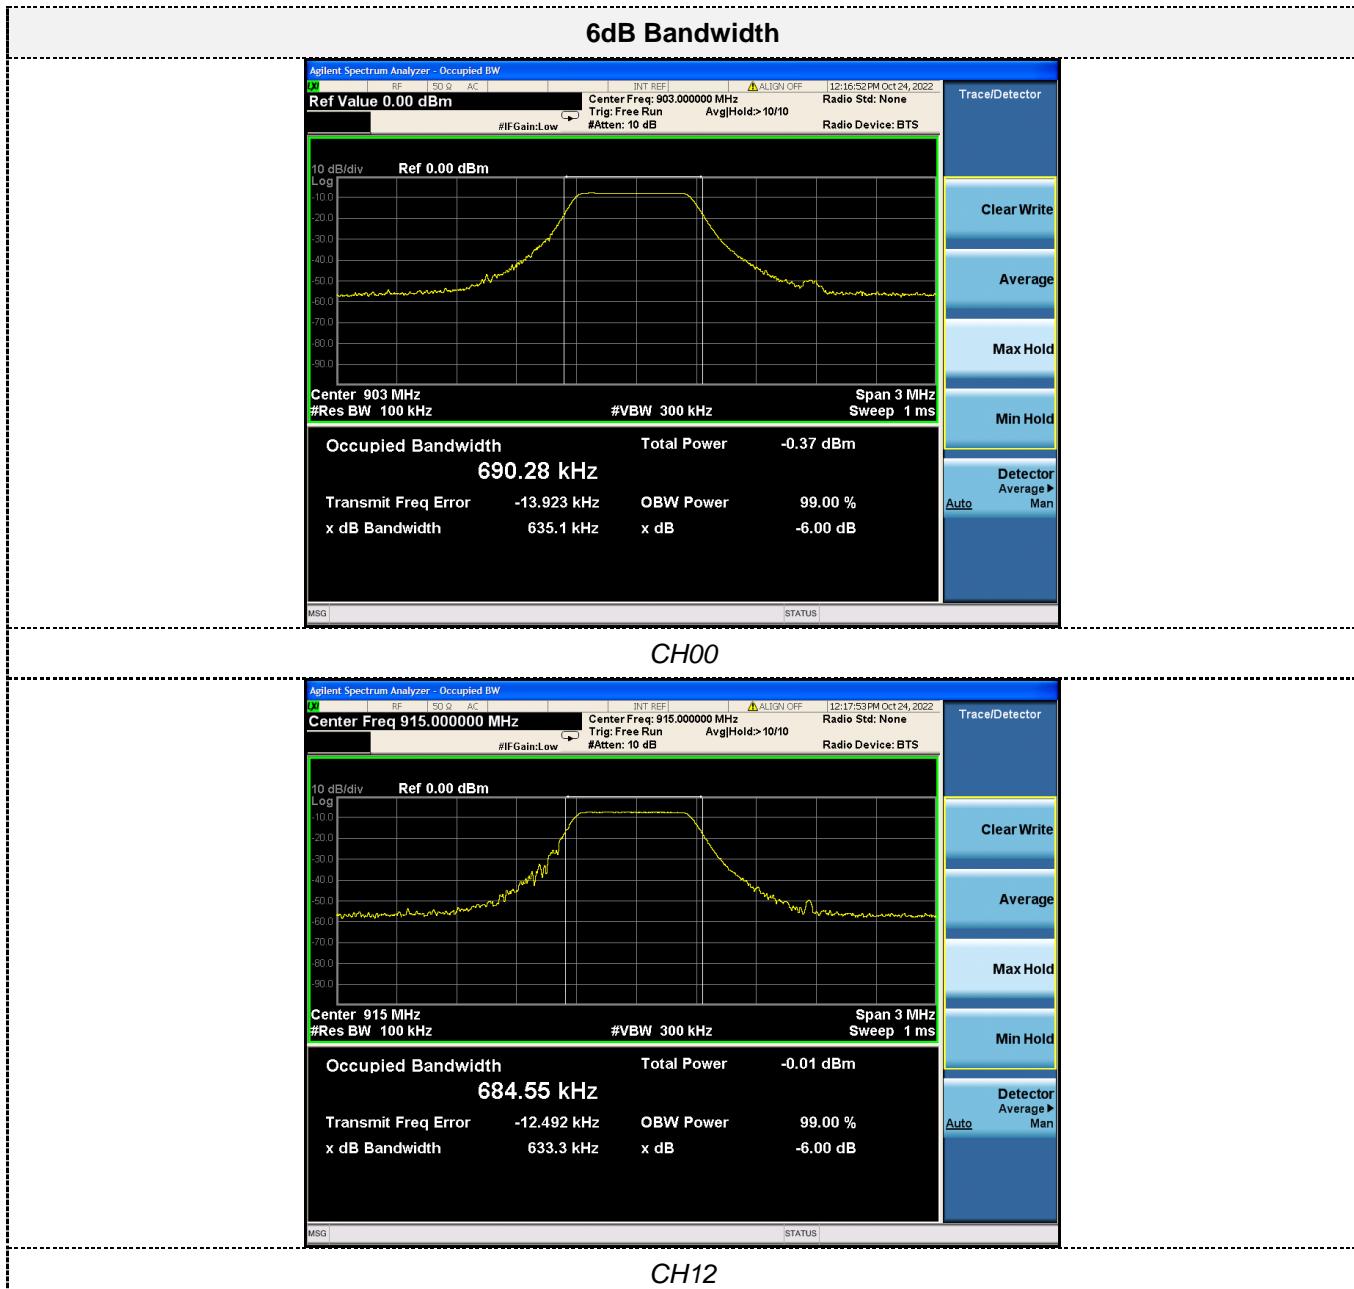



Report No.: HTT202210146F01

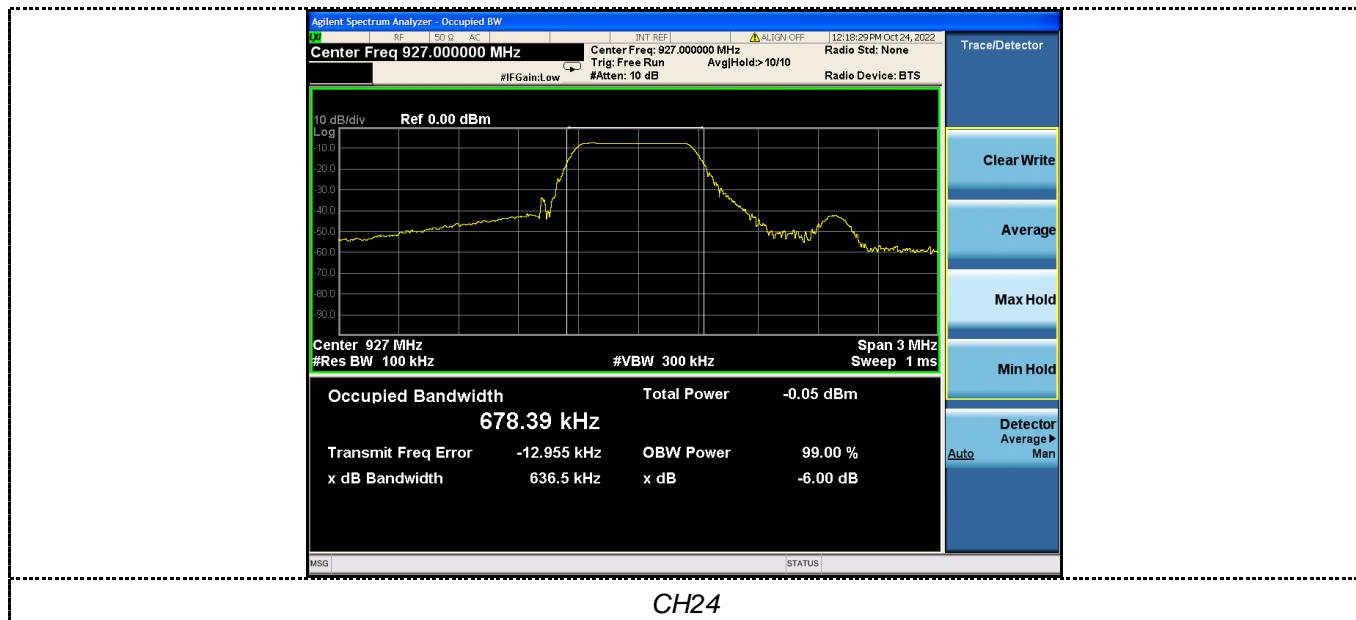

4.6 Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.


Test Configuration

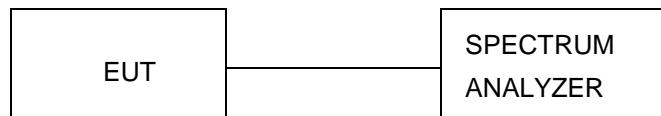


Test Results


Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

Test plot as follows:

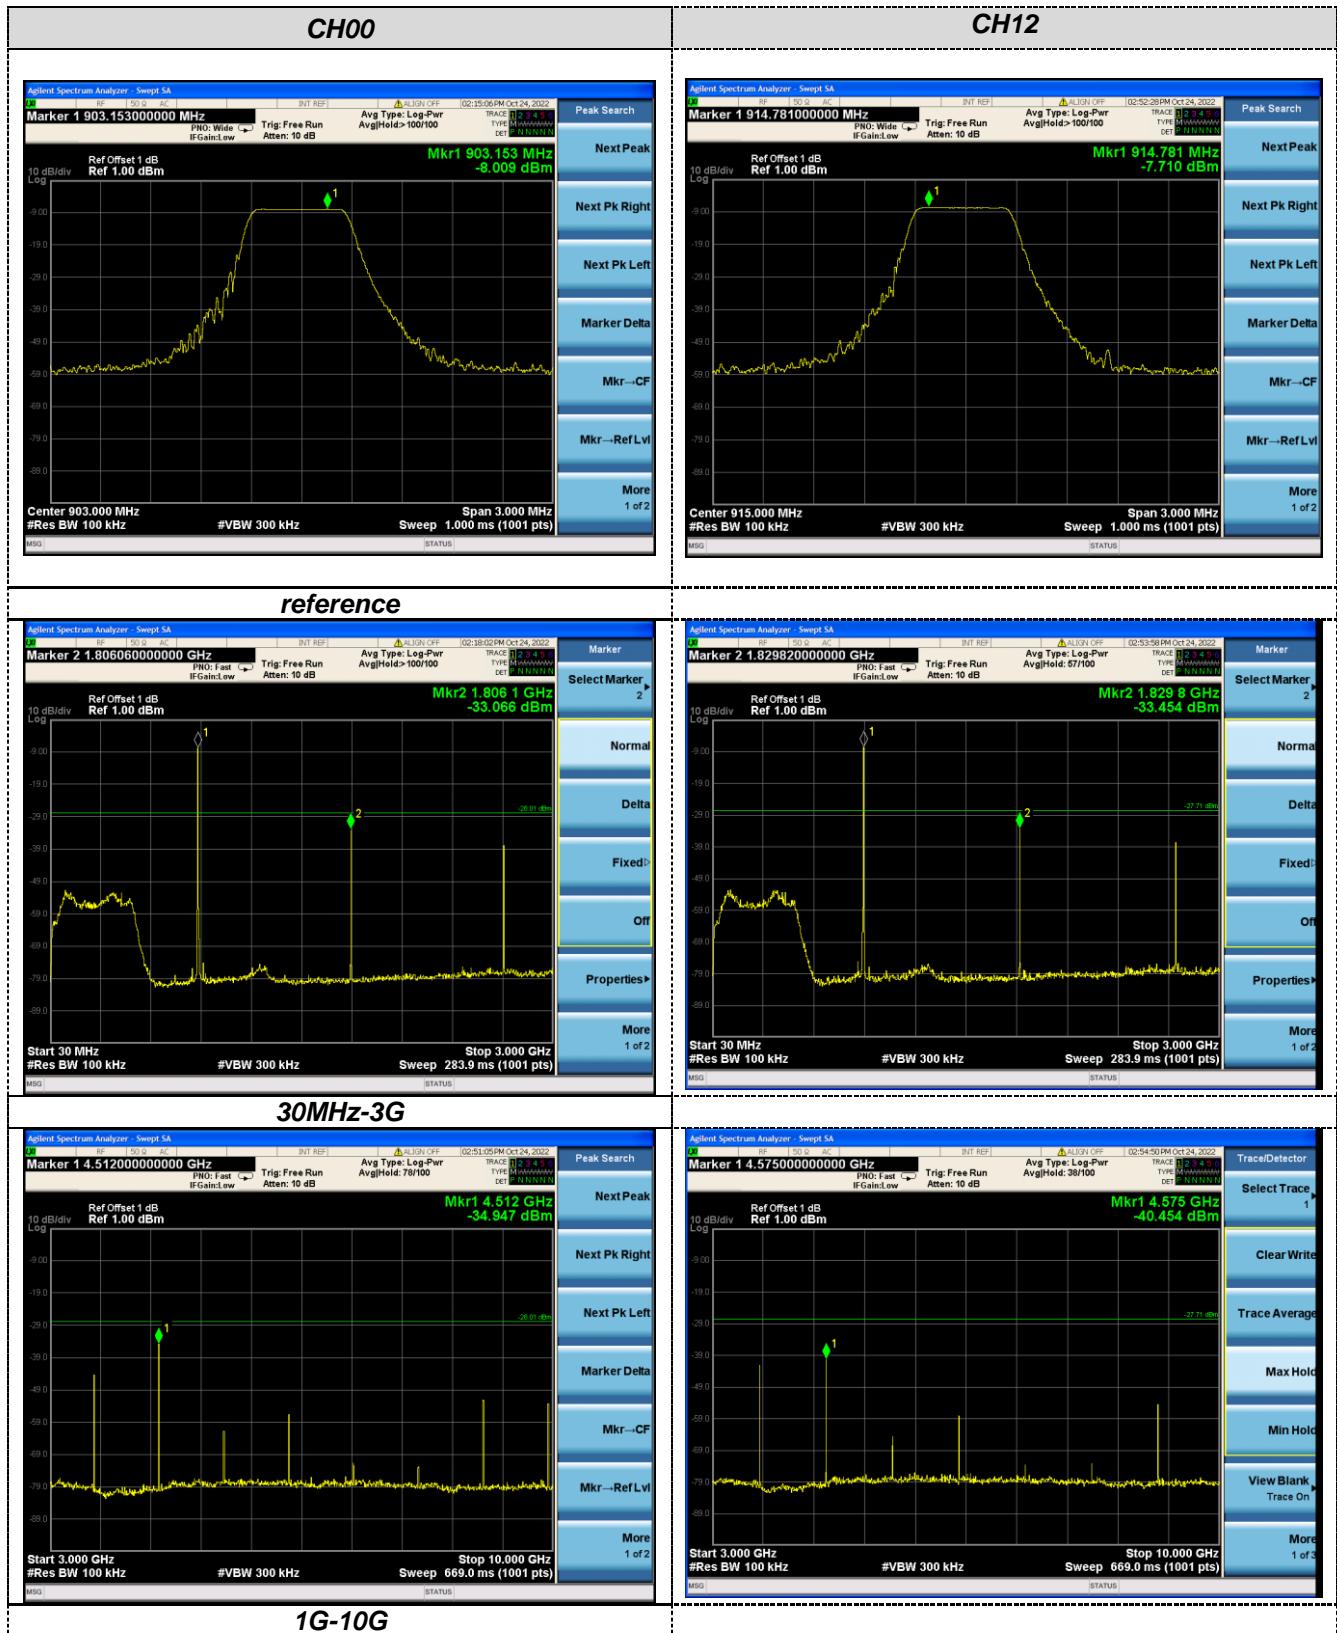

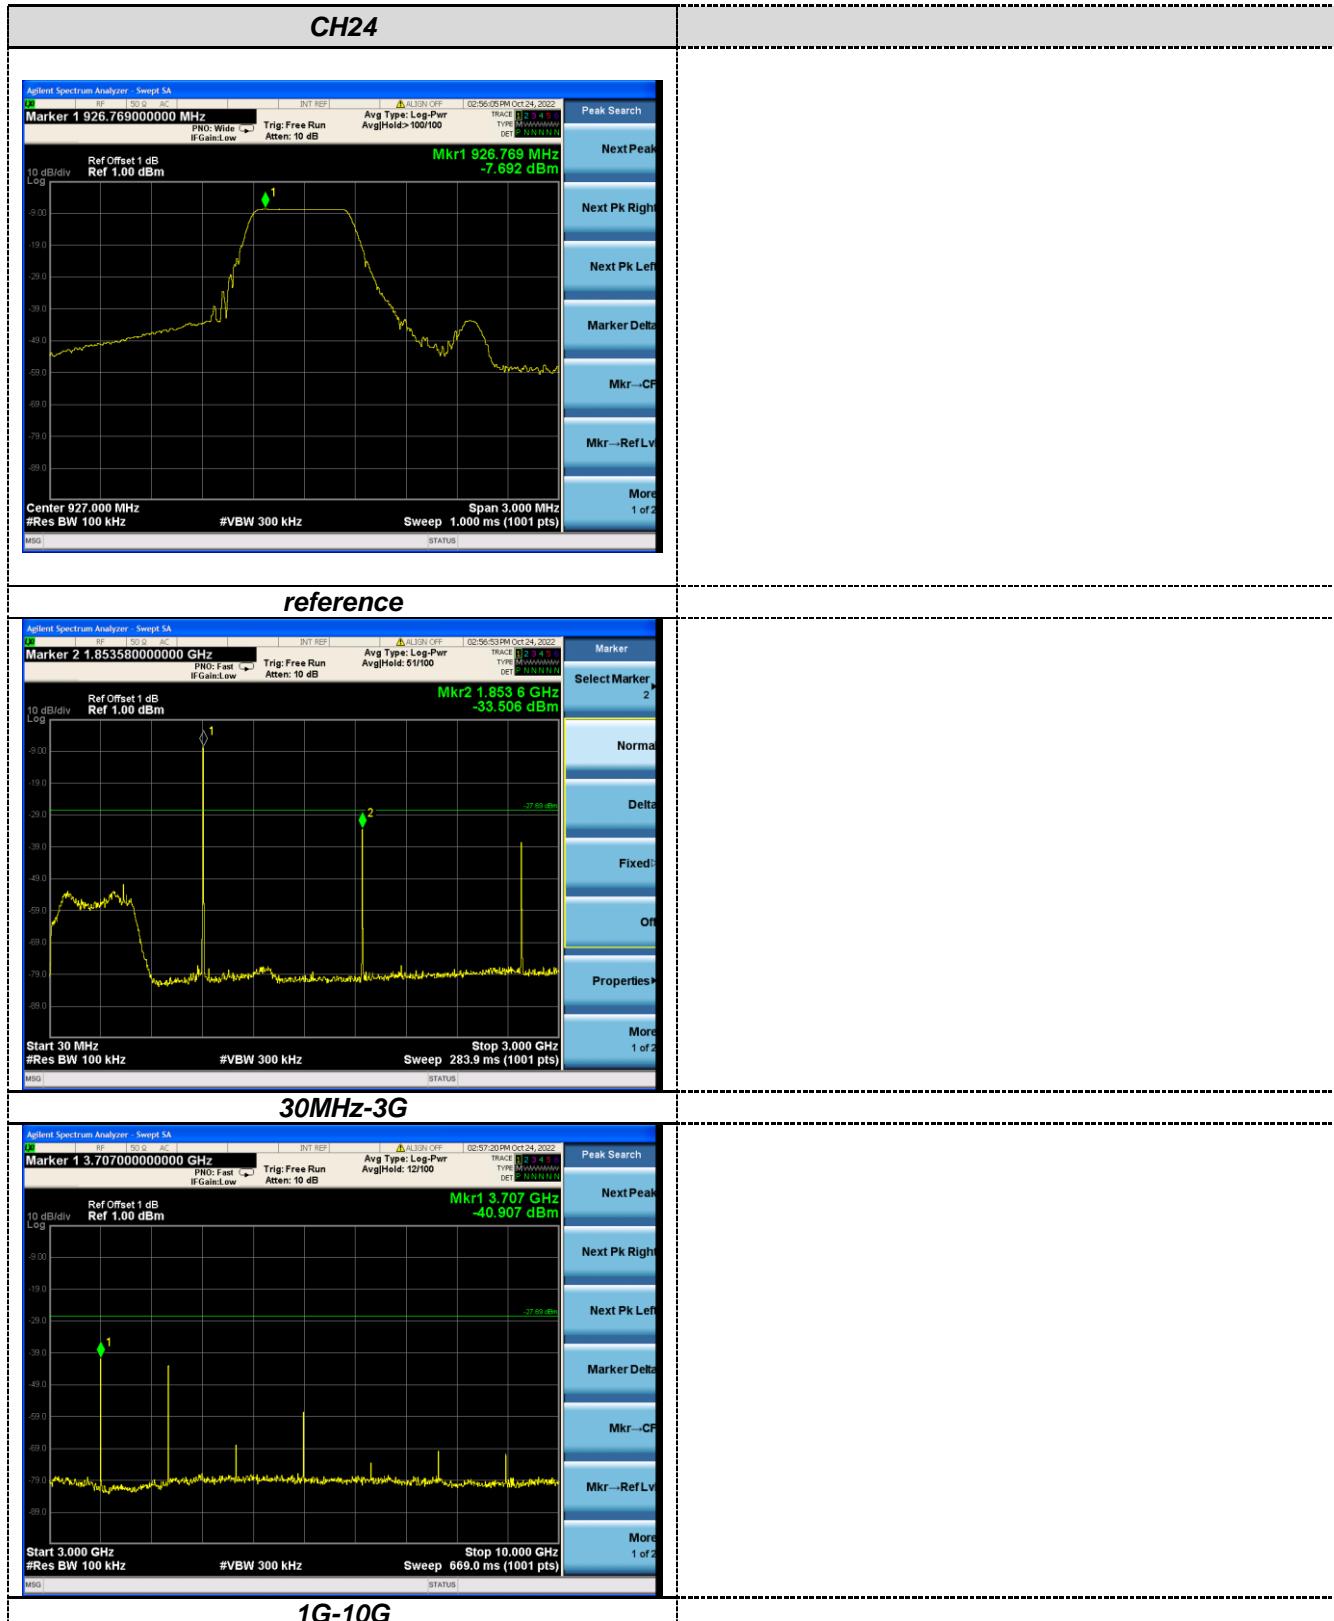

Band-edge Measurements for RF Conducted Emissions:

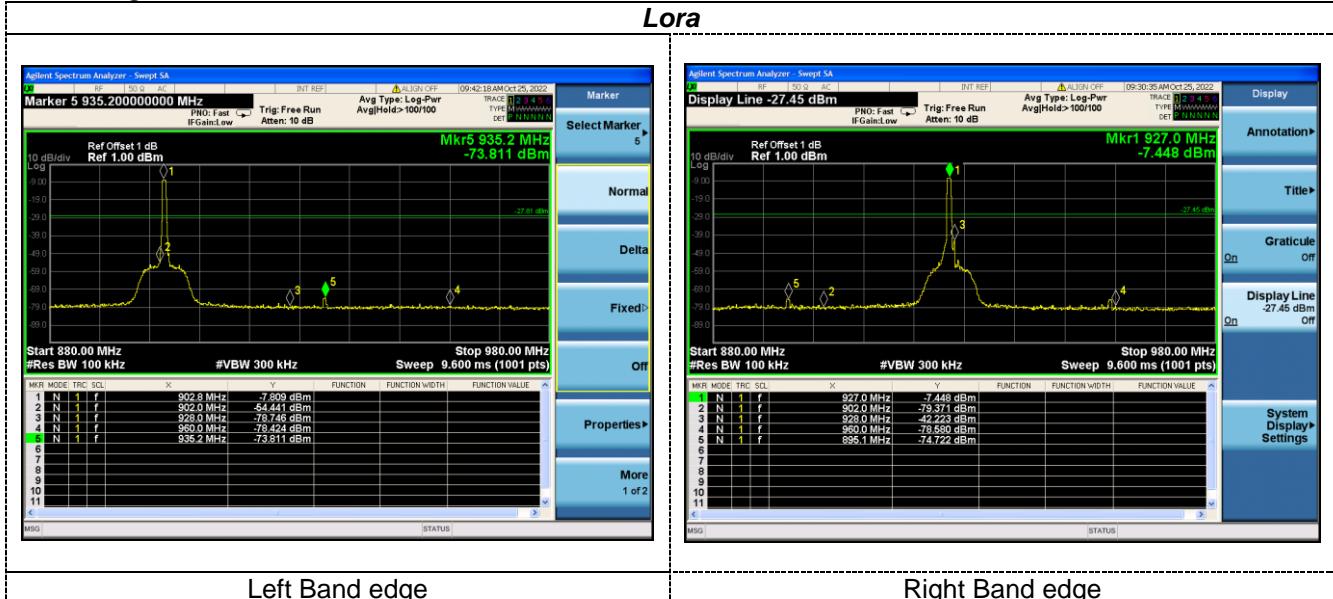



4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was -1.71dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen HTT Technology Co.,Ltd. does not assume any responsibility.



Report No.: HTT202210146F01

5 Test Setup Photos of the EUT

Reference to the **appendix I** for details

6 Photos of the EUT

Reference to the **appendix II** for details.

***** **End of Report** *****