


MEASUREMENT REPORT

FCC ID : 2A887-Xt12
IC : 29653-Xt12
APPLICANT : Easy-Laser AB

Application Type : Certification
Product : Rugged Tablet
Model No. : XT12
Brand Name : Easy-Laser
FCC Classification : Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s) : Part 15 Subpart E (Section 15.407)
ISED Standard : RSS-247 Issue 2
Test Procedure(s) : ANSI C63.10-2013
Received Date : August 30, 2022
Test Date : September 28~October 6 ,2022

Tested By : 
(Peter Syu)

Reviewed By : 
(Paddy Chen)

Approved By : 
(Chenz Ker)



The test results only relate to the tested samples.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2208TW7403-U3	1.0	Original Report	2022-11-25	

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Operation Frequencies and Channel List	8
2.3. Test Mode	11
2.4. Test Software	11
2.5. Device Capabilities	12
2.6. Test Configuration	12
2.7. EMI Suppression Device(s)/Modifications	12
2.8. Labeling Requirements	12
3. DESCRIPTION OF TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions	14
4. ANTENNA REQUIREMENTS	15
5. TEST EQUIPMENT CALIBRATION DATE	16
6. MEASUREMENT UNCERTAINTY	17
7. TEST RESULT	18
7.1. Summary	18
7.2. 26dB Bandwidth Measurement	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used	20
7.2.3. Test Setting	20
7.2.4. Test Setup	20
7.2.5. Test Result	21
7.3. 6dB Bandwidth Measurement	32
7.3.1. Test Limit	32
7.3.2. Test Procedure used	32
7.3.3. Test Setting	32

7.3.4.	Test Setup	32
7.3.5.	Test Result	33
7.4.	Output Power Measurement.....	37
7.4.1.	Test Limit.....	37
7.4.2.	Test Procedure Used.....	38
7.4.3.	Test Setting	39
7.4.4.	Test Setup	39
7.4.5.	Test Result	40
7.5.	Transmit Power Control.....	45
7.5.1.	Test Limit.....	45
7.5.2.	Test Procedure Used.....	45
7.5.3.	Test Setting	45
7.5.4.	Test Setup	45
7.5.5.	Test Result	46
7.6.	Power Spectral Density Measurement.....	47
7.6.1.	Test Limit.....	47
7.6.2.	Test Procedure Used.....	47
7.6.3.	Test Setting	48
7.6.4.	Test Setup	48
7.6.5.	Test Result	49
7.7.	Radiated Spurious Emission Measurement.....	65
7.7.1.	Test Limit.....	65
7.7.2.	Test Procedure Used.....	65
7.7.3.	Test Setting	65
7.7.4.	Test Setup	67
7.7.5.	Test Result	69
7.8.	Radiated Restricted Band Edge Measurement.....	159
7.8.1.	Test Limit.....	159
7.8.2.	Test Result	162
7.9.	AC Conducted Emissions Measurement	227
7.9.1.	Test Limit.....	227
7.9.2.	Test Procedure	227
7.9.3.	Test Setup	228
7.9.4.	Test Result	229
8.	CONCLUSION	233

§2.1033 General Information

Applicant	Easy-Laser AB
Applicant Address	Alfagatan 6, 43149 Mölndal Sweden
Manufacturer	Easy-Laser AB
Manufacturer Address	Alfagatan 6, 43149 Mölndal Sweden
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15 Subpart E (Section 15.407)
ISED Standard:	RSS-247 Issue 2
Test Device Serial No.	#1-1 ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

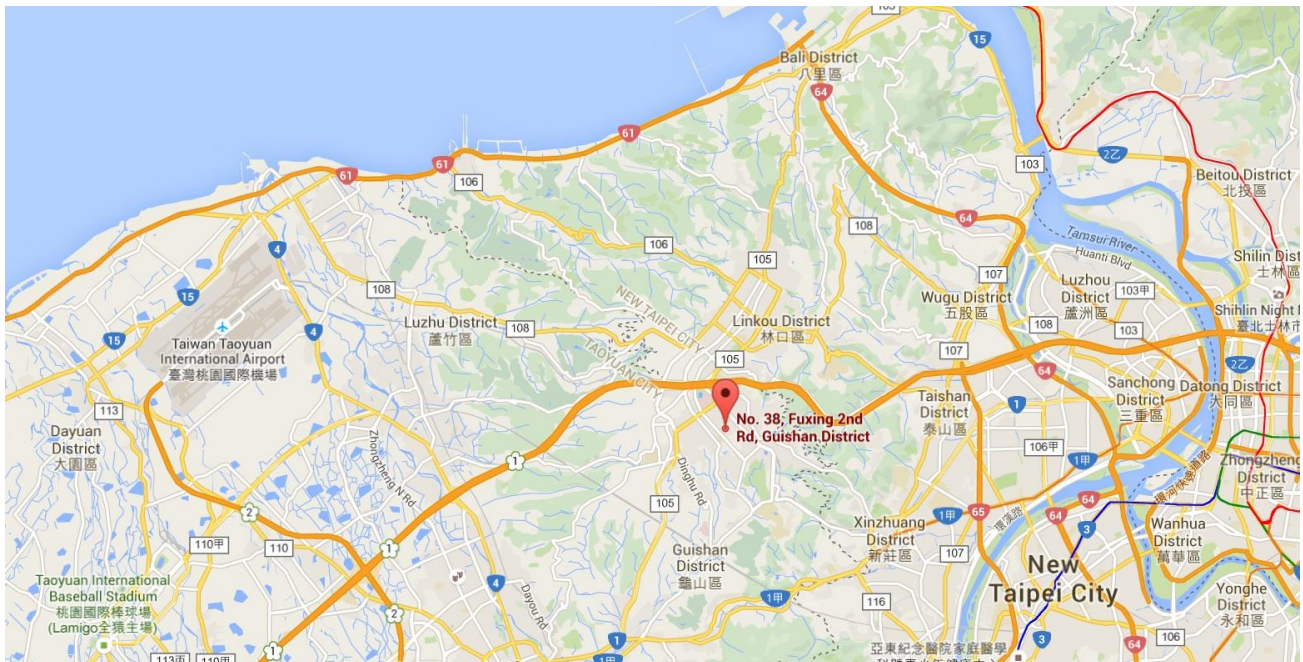

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Rugged Tablet
Model No.	XT12
Brand Name	Easy-Laser
Supports Radios Spec.	WPAN: Bluetooth Single Mode (BLE): V5.2 WLAN: 2.4G: 802.11b/g/n-20 5G: 802.11a/n-20/ac-20/n-40/ac-40/ac-80, Band 1~4
Frequency Range	For 802.11a/n-HT20/ac-VHT-20: 5180~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ ac-VHT40: 5190~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Maximum Output Power	802.11a: 16.63dBm 802.11n-HT20: 15.80dBm, 802.11n-HT40: 17.20dBm, 802.11ac-VHT20: 15.34dBm, 802.11ac-VHT40: 16.79dBm, 802.11ac-VHT80: 15.22dBm
Modulation Type	802.11a/n-20/ac-20/n-40/ac-40/ac-80: OFDM (BPSK, QPSK, 16QAM, 64QAM,256QAM)
Accessory	
Power Adapter	Brand Name: EDACPOWER Model: EA10682N-150 Input: AC 100-240V~2.0A, 50-60Hz Output: DC 15.0V-4.0A DC Cable Out Non-Shielding, 1.5m with 1 core

2.2. Operation Frequencies and Channel List

802.11 a/n-HT20/ ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11 n-HT40/ ac-VHT40


Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

Duty Cycle

Test Mode	Duty Cycle
802.11a	100.00%
802.11 n-HT20	100.00%
802.11 n-HT40	100.00%
802.11ac-VHT20	100.00%
802.11ac-VHT40	100.00%
802.11ac-VHT80	100.00%

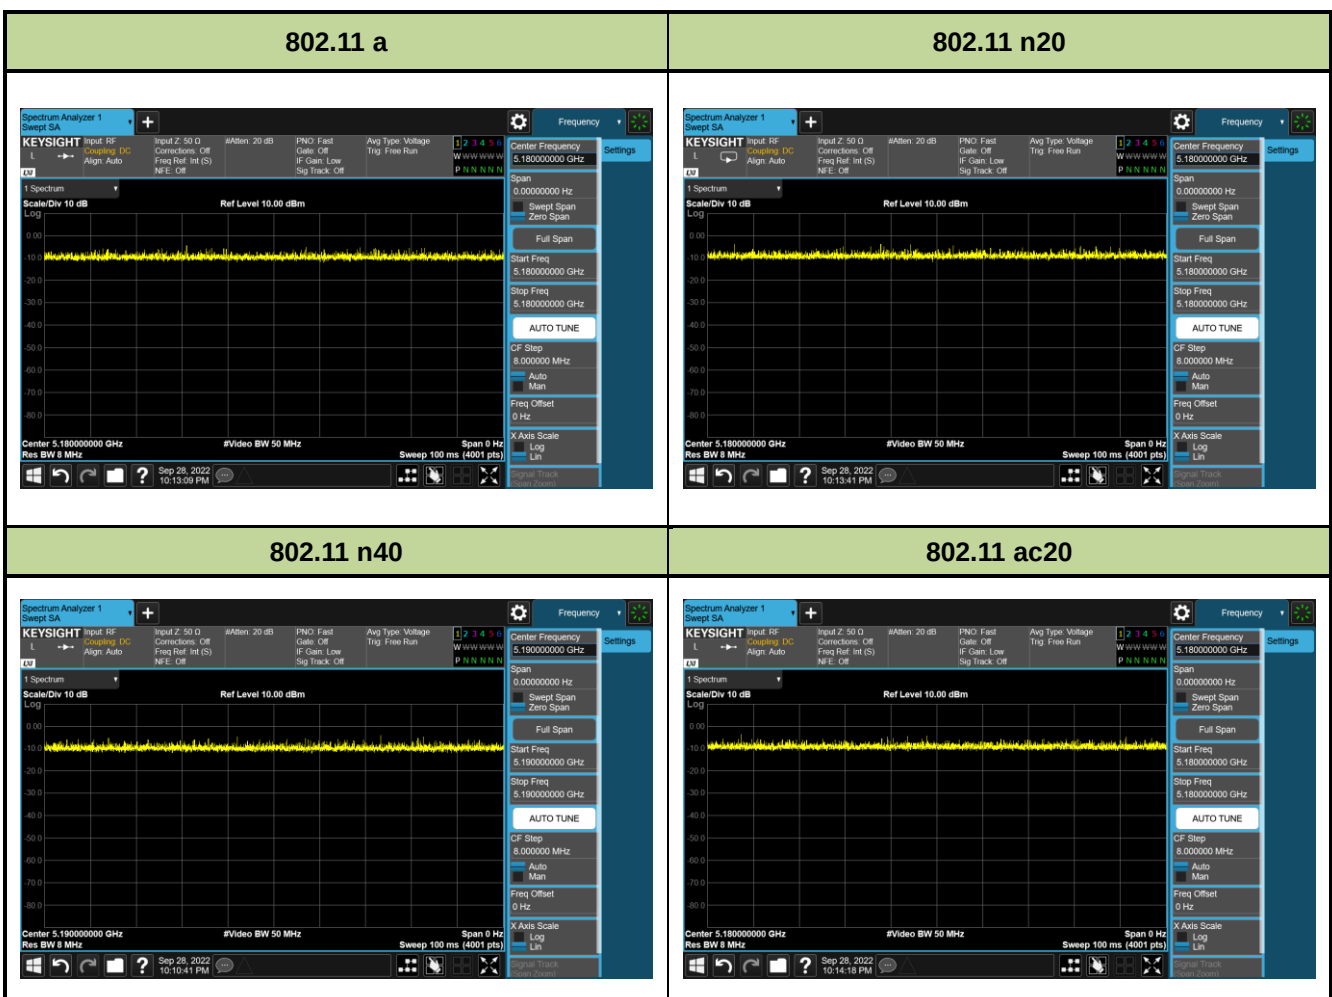



2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11a
	Mode 2: Transmit by 802.11n-HT20
	Mode 3: Transmit by 802.11n-HT40
	Mode 4: Transmit by 802.11ac-VHT20
	Mode 5: Transmit by 802.11ac-VHT40
	Mode 6: Transmit by 802.11ac-VHT80

2.4. Test Software

The test utility software used during testing was “MTK Engineer Mode”.

2.5. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (NII).

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v02r01. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100.

2.6. Test Configuration

This device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Rugged Tablet**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	AWAN	ALP6P-100002	Dipole	2.91dBi

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions – SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2023/3/7
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2023/6/19
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9

Radiated Emissions – AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2022/12/4
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2023/3/9
Active Loop Antenna	Schwarzbeck	FMZB 1519B	MRTTWA00002	1 year	2023/5/24
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2023/3/30
Breitband Hornantenna	Schwarzbeck	BBHA 9170	MRTTWA00004	1 year	2023/3/29
Broadband Amplifier	Schwarzbeck	BBV 9721	MRTTWA00006	1 year	2023/3/30
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2023/3/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2023/5/23
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2023/6/19

Conducted Test Equipment – SR5

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2023/10/5
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2023/7/19
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2023/3/16

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Company Name: Rugged Tablet
FCC Classification: Unlicensed National Information Infrastructure (UNII)
Data Rate(s) Tested: 6Mbps ~ 54Mbps (a);
6.5/7.2Mbps ~ 130/144.4Mbps (n-HT20);
13.5/15.0Mbps ~ 270/300Mbps (n-HT40);
6.5/7.2Mbps ~ 156/173.3Mbps (ac-VHT20MHz);
13.5/15.0Mbps ~ 360/400Mbps (ac-VHT40MHz);
29.3/32.5Mbps ~ 780/866.7Mbps (ac-VHT80MHz)

FCC Section(s)	IC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	RSS-247 §6.2.1	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	RSS-247 §6.2.4	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(i), (2), (3)	RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Maximum Conducted Output Power	Refer to Section 7.5		Pass	Section 7.5
15.407(h)(1)	RSS-247 §6.2.2, §6.2.3	Transmit Power Control	≤ 24 dBm		N/A	Section 7.6
15.407(a)(1)(i), (2), (3), (5)	RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Power Spectral Density	Refer to Section 7.7		Pass	Section 7.7
15.407(b)(1), (4)	RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	Undesirable Emissions	≤ -27dBm/MHz EIRP ≤ -17dBm/MHz EIRP	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	RSS-247 §6.2.1, §6.2.2, §6.2.3, §6.2.4	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	RSS-Gen 8.8	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1 / ANSI C63.10 6.9.3 / RSS-Gen 6.7

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

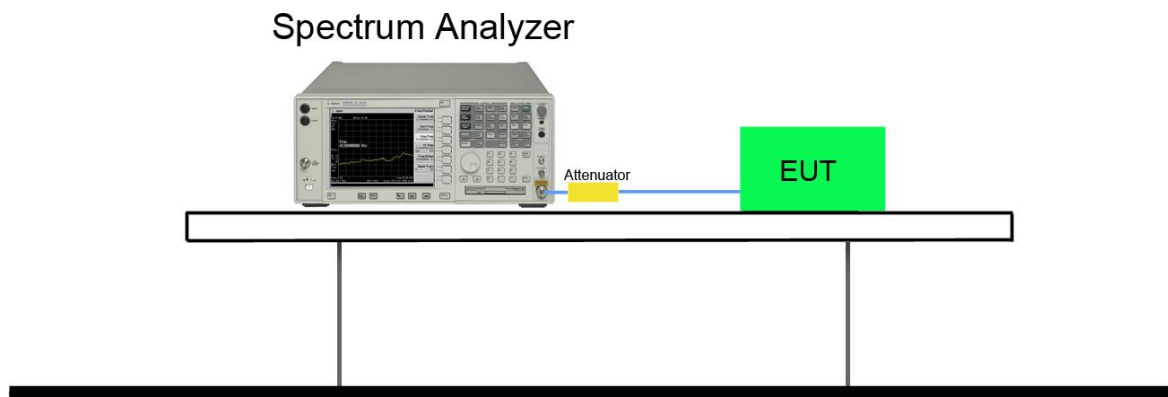

7.2.5. Test Result


Product	Rugged Tablet	Test Engineer	Peter
Test Site	SR5	Test Date	2022/10/4
Test Item	26dB Bandwidth & 99% Bandwidth		

Test Mode	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Antenna 0				
802.11a	36	5180	19.540	16.361
802.11a	44	5220	19.650	16.371
802.11a	48	5240	19.400	16.332
802.11a	52	5260	19.610	16.367
802.11a	60	5300	19.560	16.421
802.11a	64	5320	19.500	16.383
802.11a	100	5500	19.600	16.404
802.11a	116	5580	19.230	16.339
802.11a	140	5700	19.540	16.376
802.11a	144	5720	19.940	16.376
802.11a	149	5745	19.920	16.380
802.11a	157	5785	19.450	16.380
802.11a	165	5825	19.760	16.416
802.11n-HT20	36	5180	20.090	17.549
802.11n-HT20	44	5220	19.720	17.546
802.11n-HT20	48	5240	20.200	17.536
802.11n-HT20	52	5260	19.950	17.514
802.11n-HT20	60	5300	19.920	17.538
802.11n-HT20	64	5320	19.780	17.541
802.11n-HT20	100	5500	20.060	17.527
802.11n-HT20	116	5580	19.990	17.515
802.11n-HT20	140	5700	19.910	17.545
802.11n-HT20	144	5720	20.090	17.520
802.11n-HT20	149	5745	19.980	17.541
802.11n-HT20	157	5785	20.040	17.524
802.11n-HT20	165	5825	20.030	17.536


Test Mode	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11n-HT40	38	5190	39.520	36.004
802.11n-HT40	46	5230	38.870	35.883
802.11n-HT40	54	5270	40.120	35.908
802.11n-HT40	62	5310	39.980	35.913
802.11n-HT40	102	5510	39.470	35.811
802.11n-HT40	110	5550	40.220	35.872
802.11n-HT40	134	5670	40.220	35.913
802.11n-HT40	142	5710	39.580	35.905
802.11n-HT40	151	5755	41.260	35.972
802.11n-HT40	159	5795	39.730	36.072
802.11ac-VHT80	42	5210	80.480	75.665
802.11ac-VHT80	58	5290	80.780	75.627
802.11ac-VHT80	106	5530	81.030	75.708
802.11ac-VHT80	122	5610	80.720	75.682
802.11ac-VHT80	138	5690	80.290	75.690
802.11ac-VHT80	155	5775	80.630	75.708

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 36 (5180MHz)

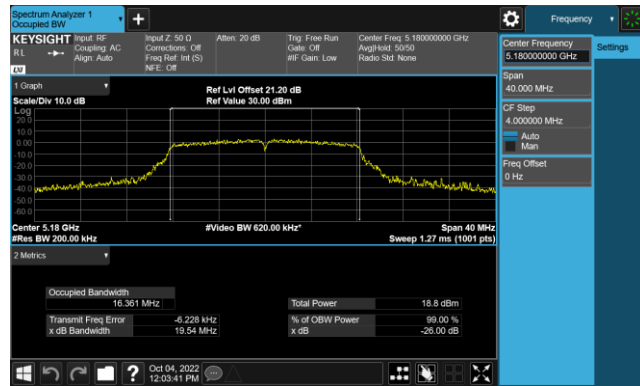


Channel 44 (5220MHz)

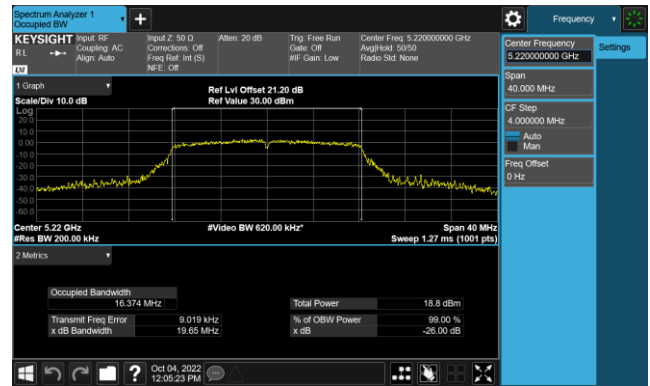


Channel 48 (5240MHz)

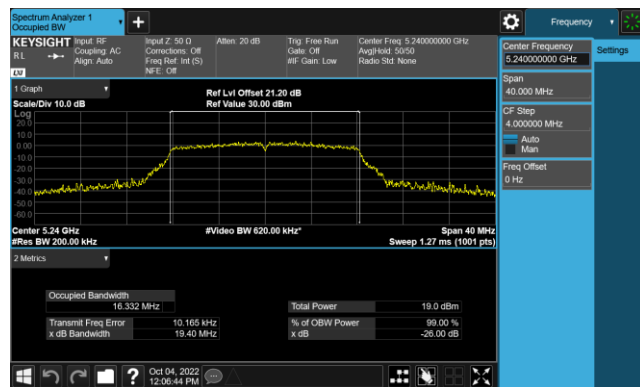

Channel 52 (5260MHz)

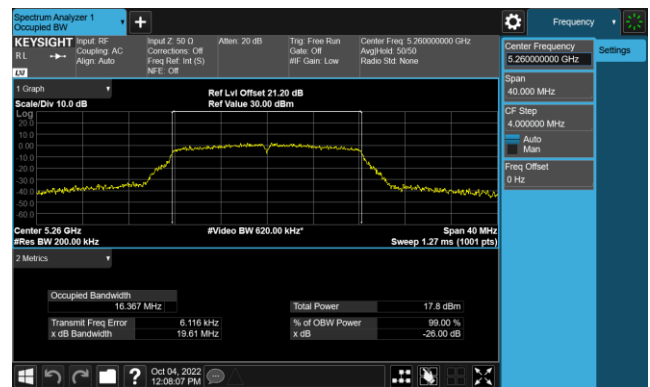


Channel 60 (5300MHz)

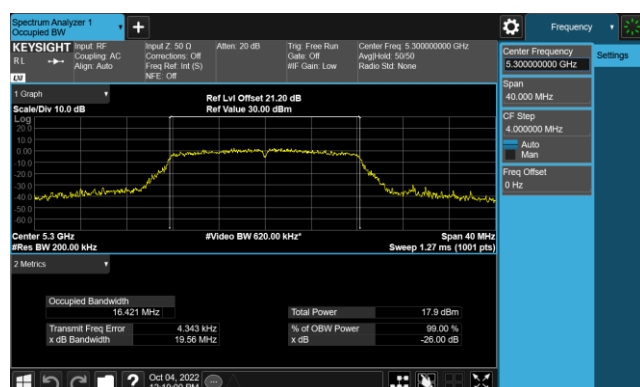


Channel 64 (5320MHz)




Channel 100 (5500MHz)

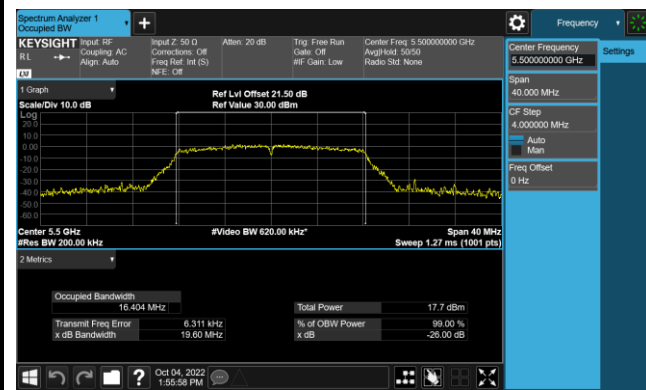


Channel 116 (5580MHz)

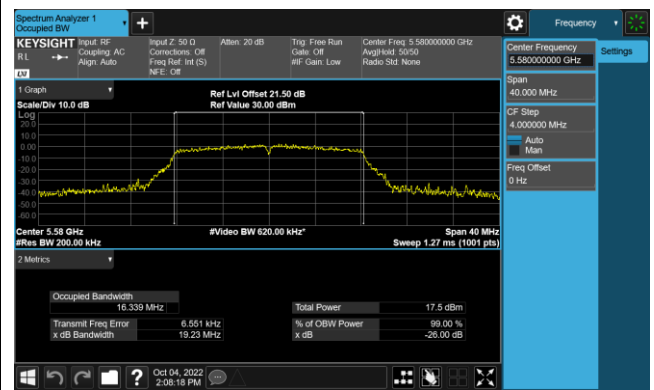


Channel 140 (5700MHz)

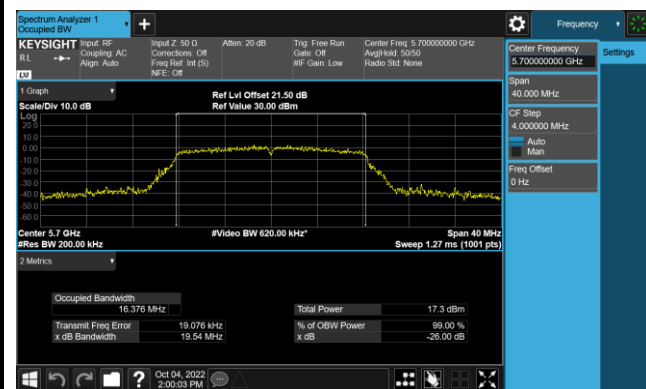


Channel 144 (5720MHz)

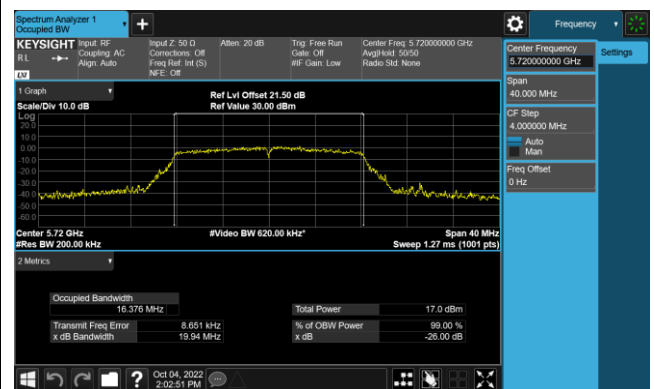


Channel 149 (5745MHz)

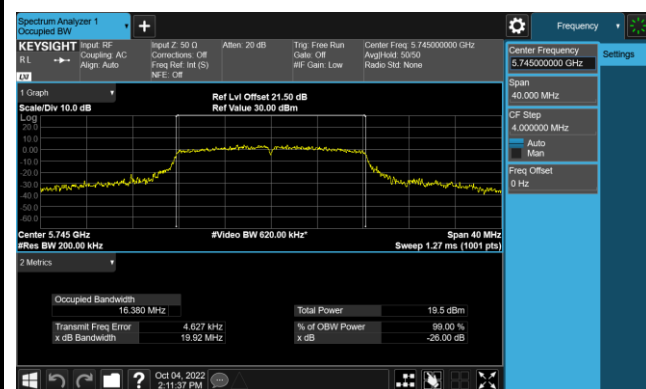


Channel 157 (5785MHz)

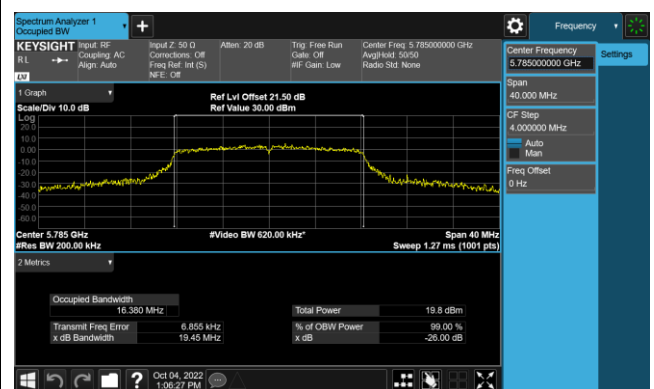

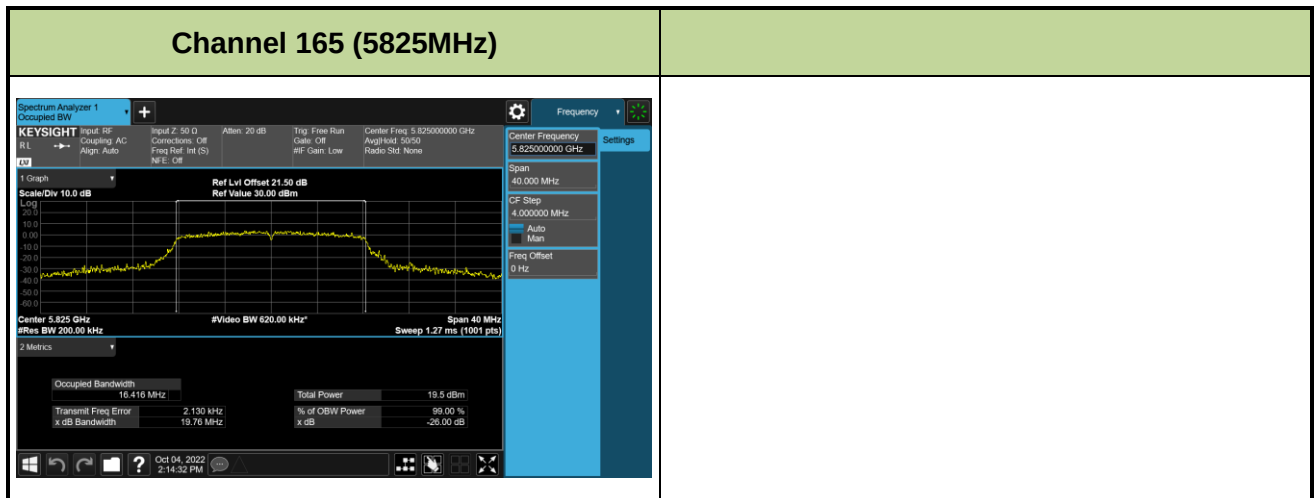


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 36 (5180MHz)

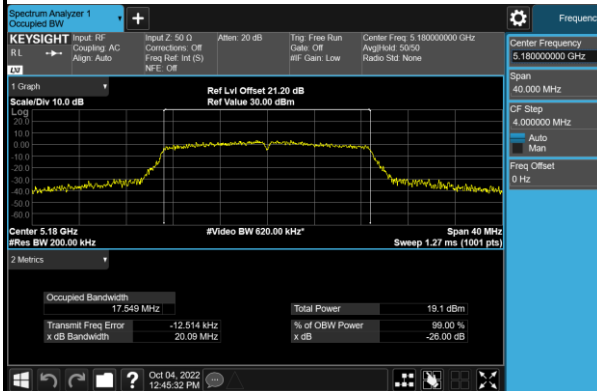


Channel 44 (5220MHz)

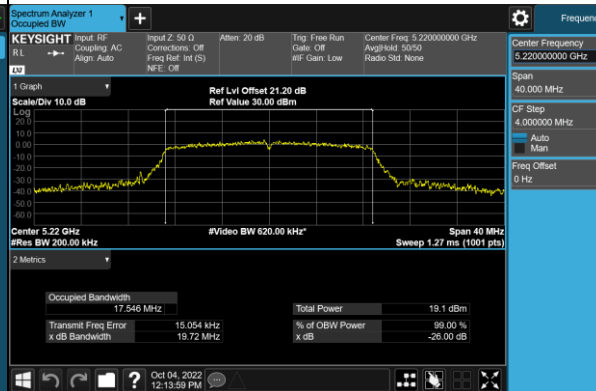


Channel 48 (5240MHz)

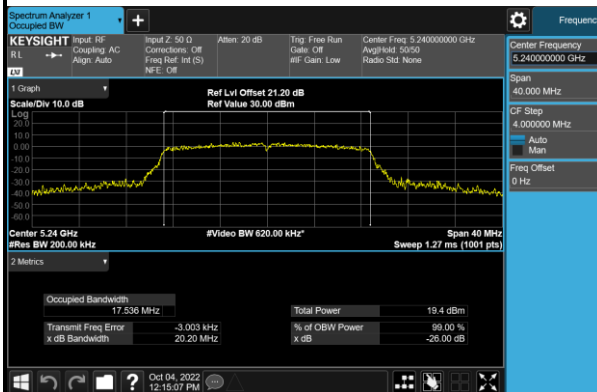


Channel 52 (5260MHz)

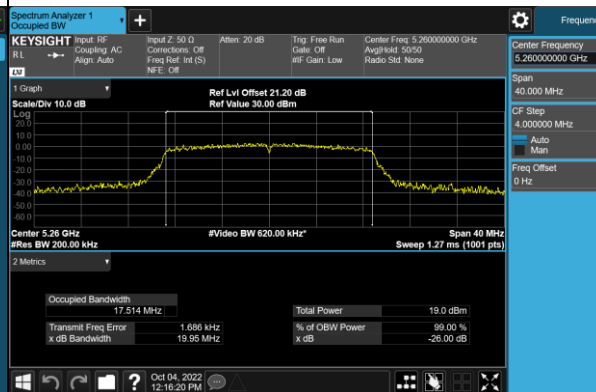



Channel 60 (5300MHz)

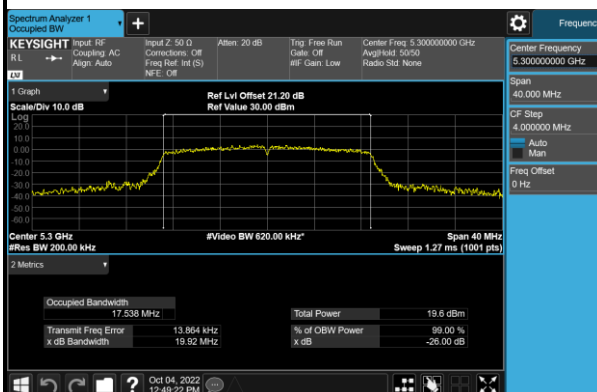

Channel 64 (5320MHz)

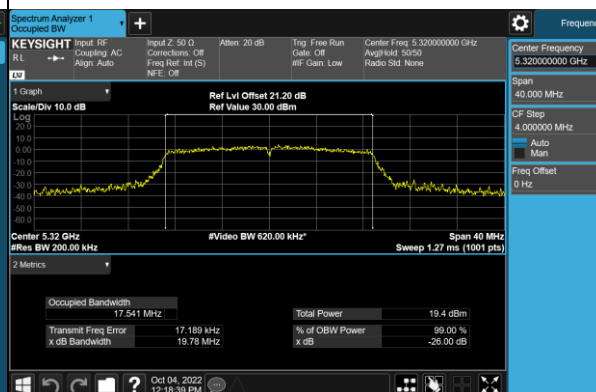


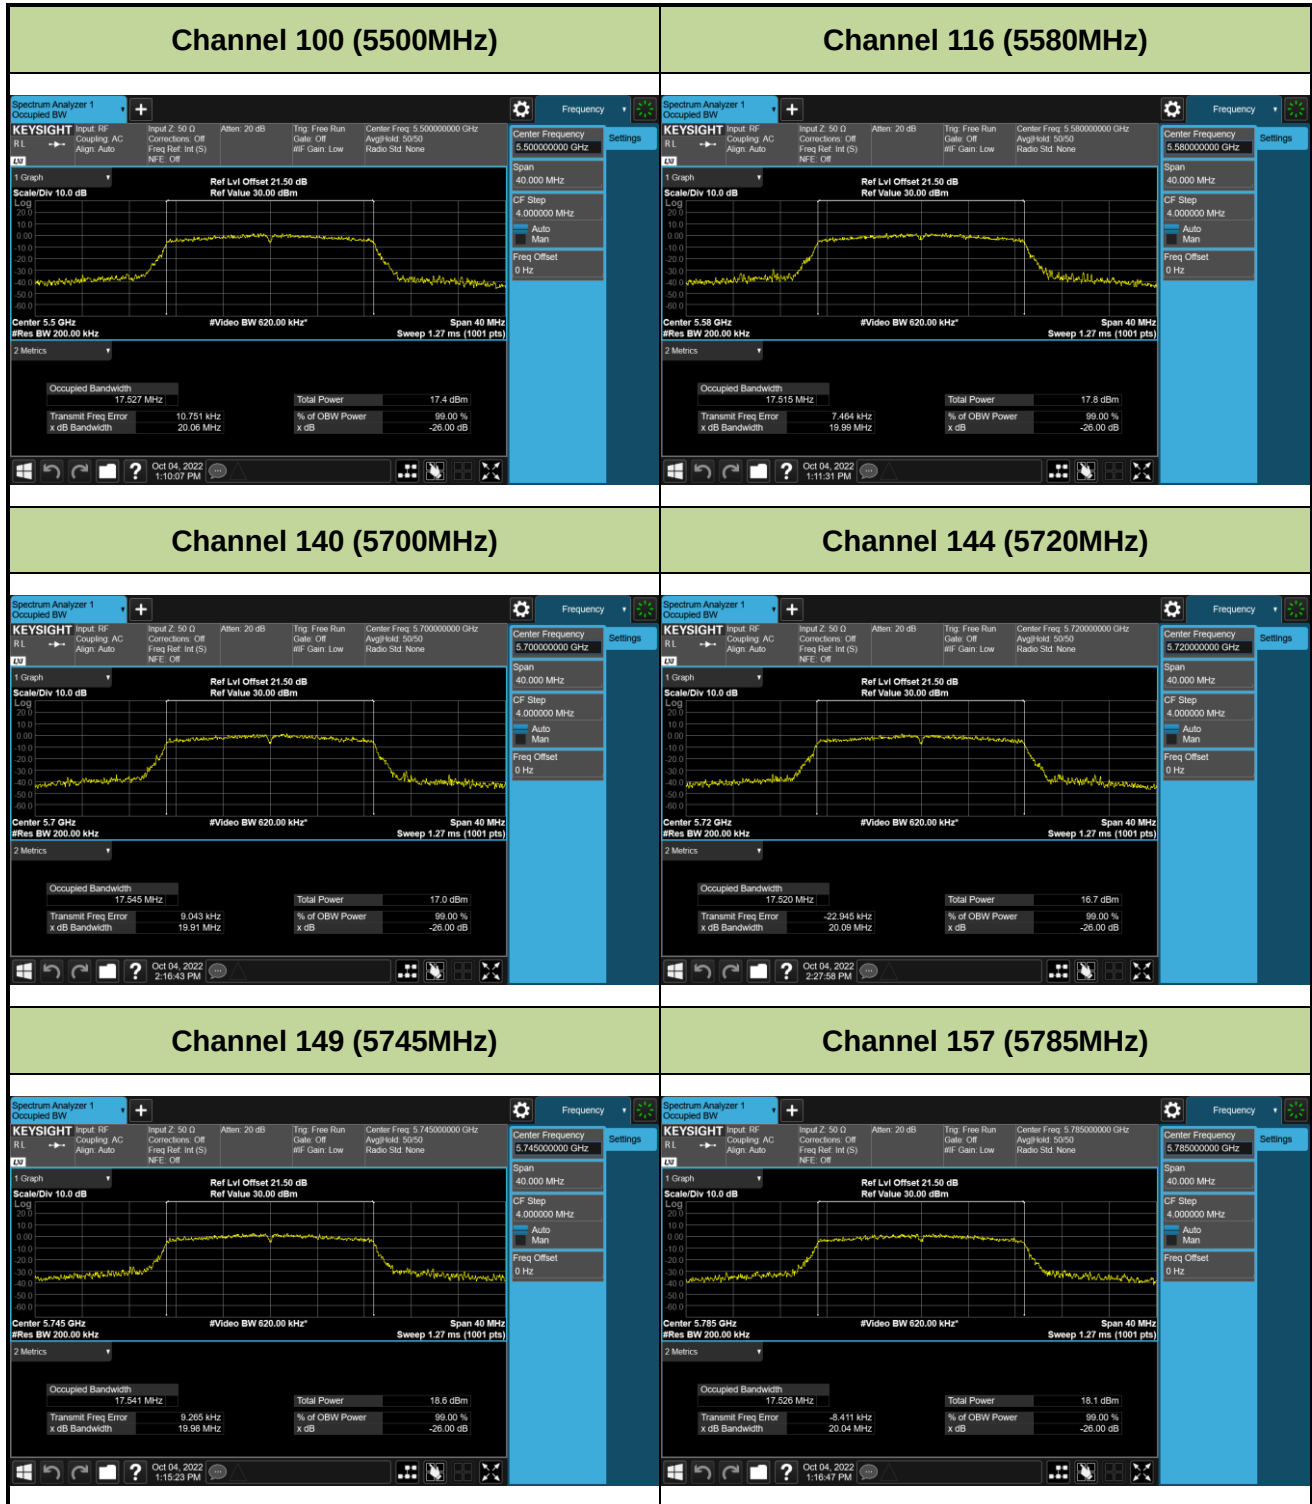

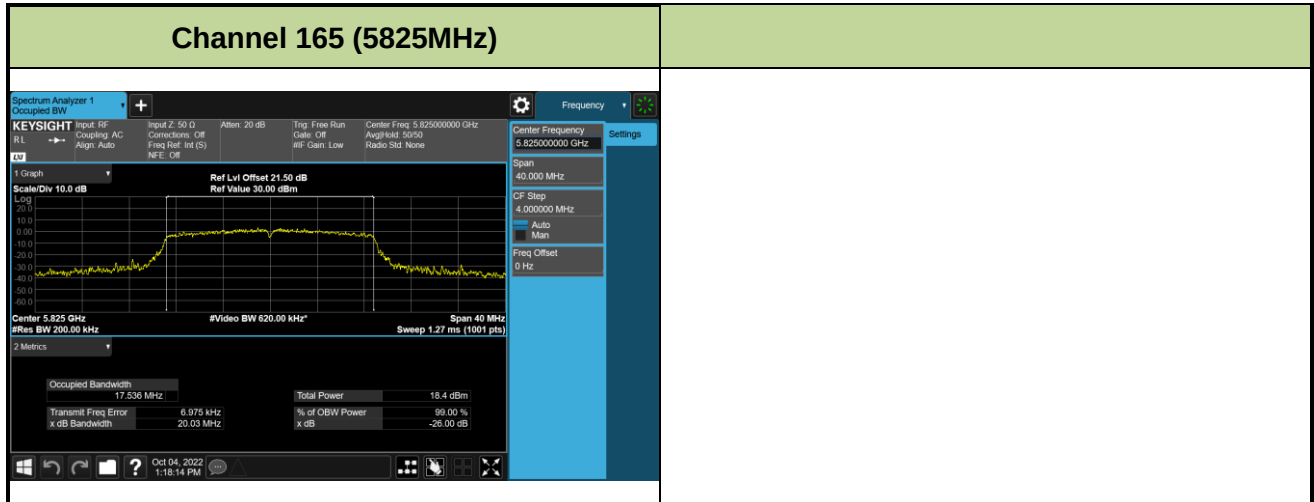


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 38 (5190MHz)

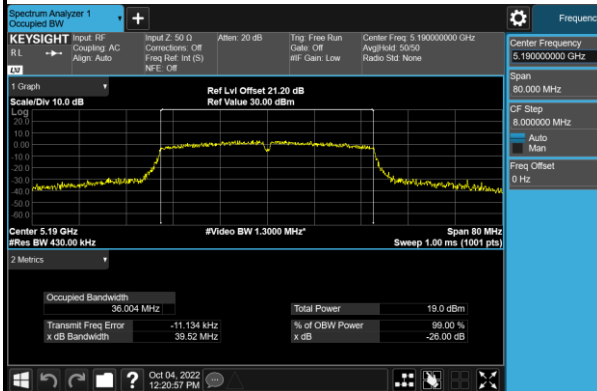


Channel 46 (5230MHz)

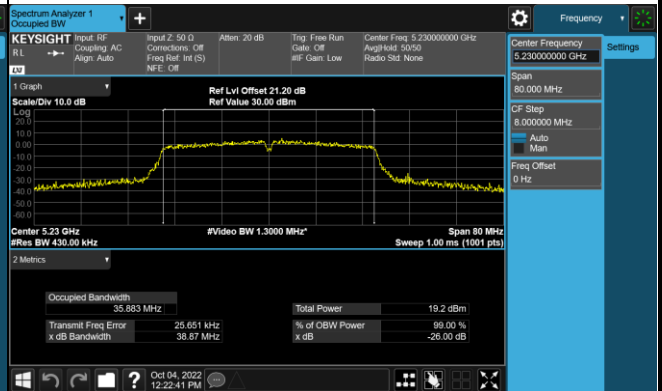


Channel 54 (5270MHz)

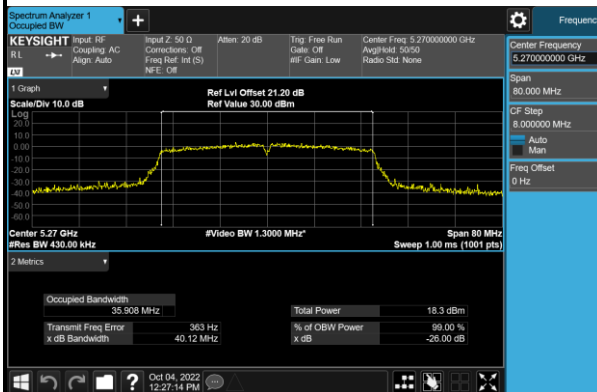


Channel 62 (5310MHz)

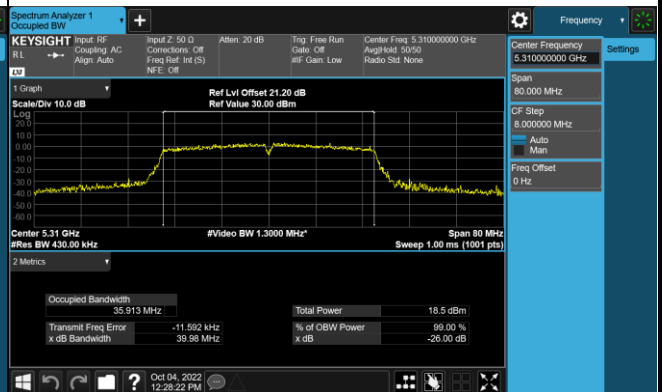


Channel 102 (5510MHz)

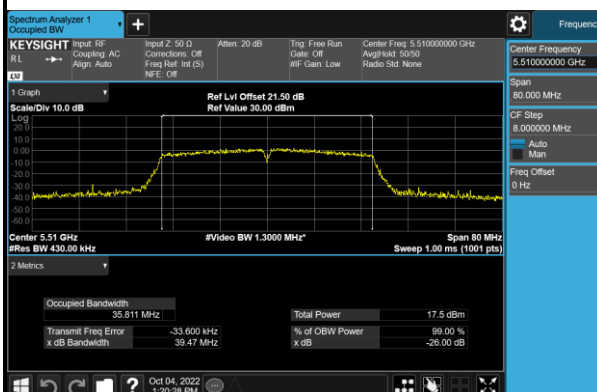


Channel 110 (5550MHz)

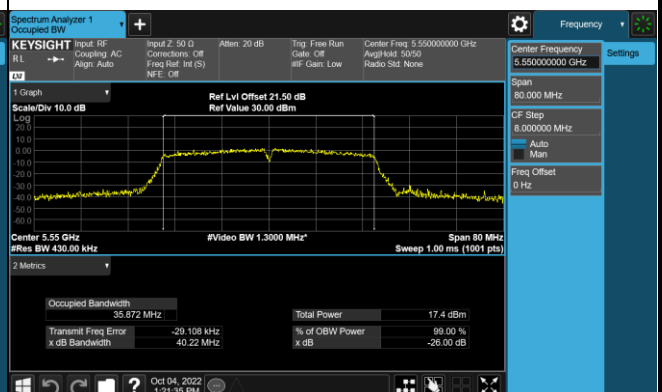

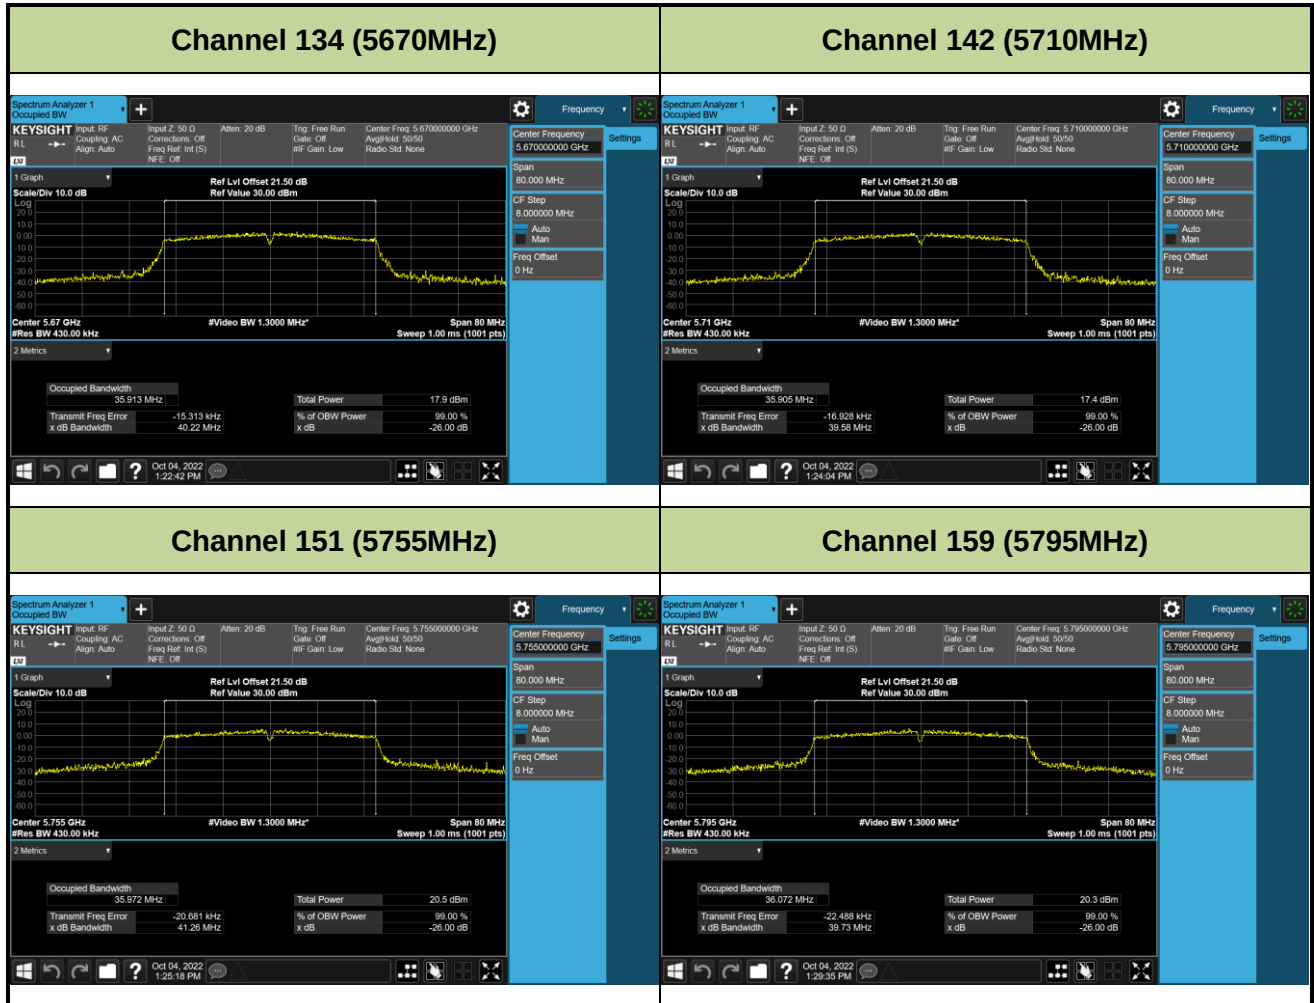


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 0


Channel 42 (5210MHz)

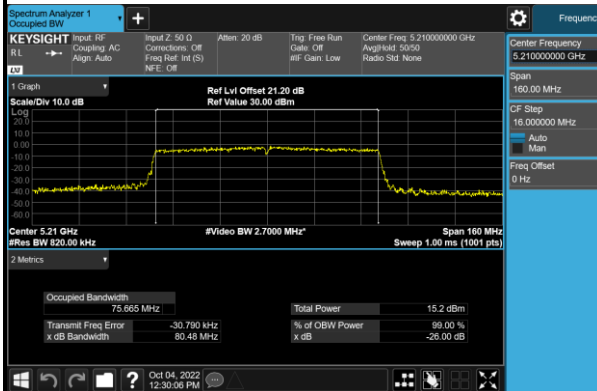


Channel 58 (5290MHz)

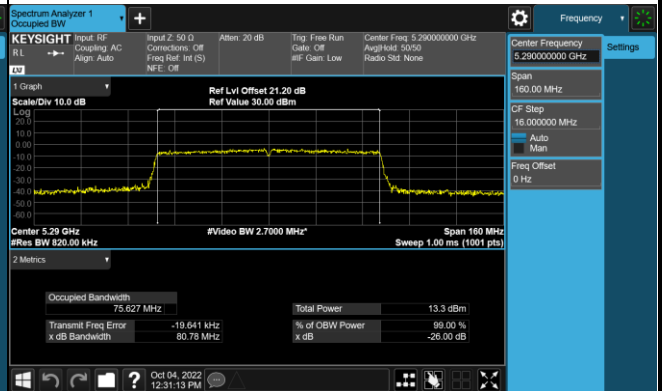


Channel 106 (5530MHz)

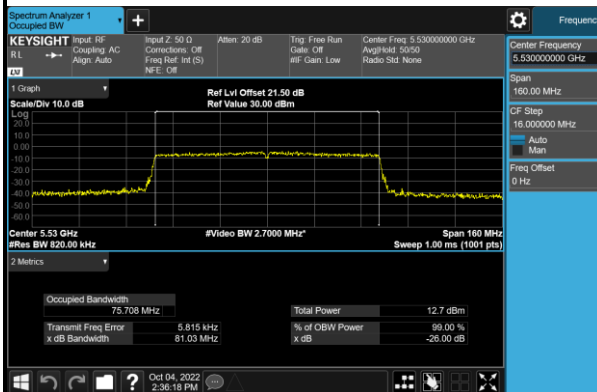


Channel 122 (5610MHz)

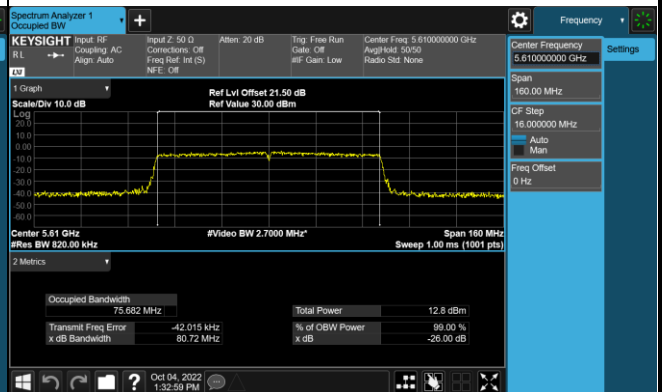

Channel 138 (5690MHz)

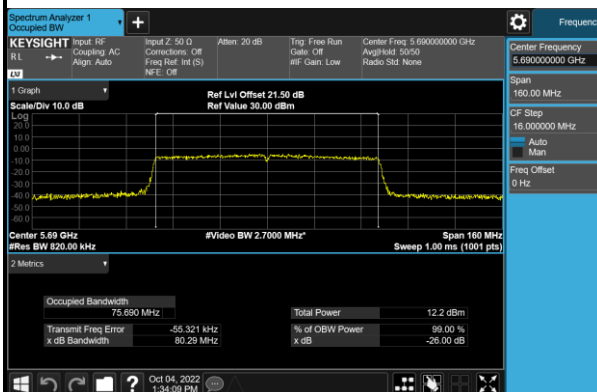

Channel 155 (5775MHz)

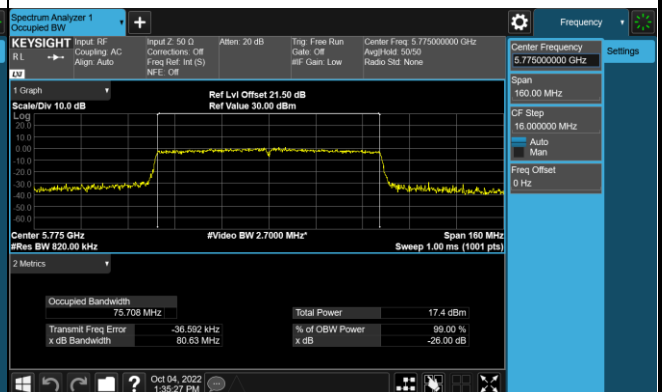

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

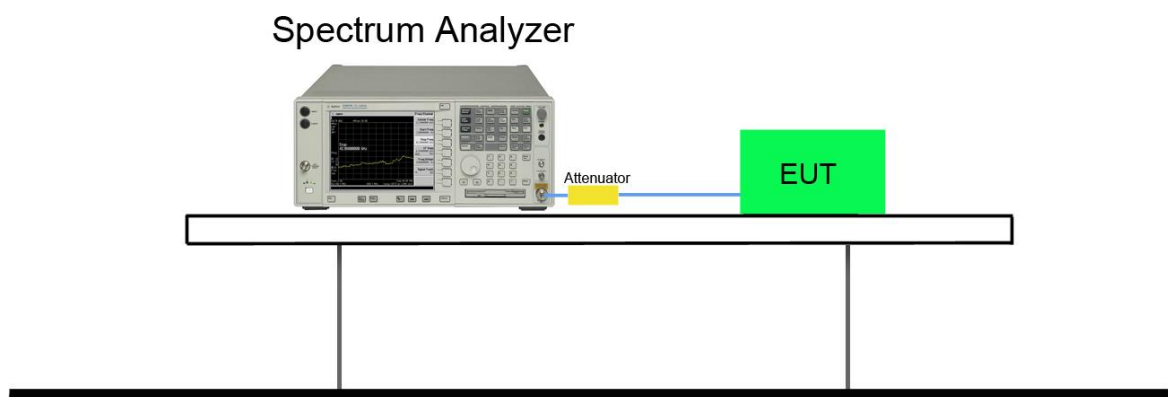


7.3.5. Test Result

Product	Rugged Tablet	Test Engineer	Peter
Test Site	SR5	Test Date	2022/10/4
Test Item	6dB Bandwidth		


Test Mode	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Antenna 0					
802.11a	149	5745	15.940	≥ 0.5	Pass
802.11a	157	5785	16.270	≥ 0.5	Pass
802.11a	165	5825	16.310	≥ 0.5	Pass
802.11n-HT20	149	5745	17.530	≥ 0.5	Pass
802.11n-HT20	157	5785	17.550	≥ 0.5	Pass
802.11n-HT20	165	5825	17.560	≥ 0.5	Pass
802.11n-HT40	151	5755	35.780	≥ 0.5	Pass
802.11n-HT40	159	5795	35.830	≥ 0.5	Pass
802.11ac-VHT80	155	5775	76.520	≥ 0.5	Pass

802.11a 6dB Bandwidth - Ant 0


Channel 149 (5745MHz)

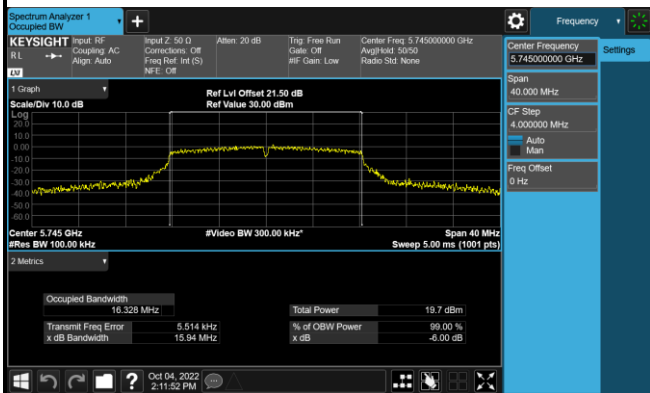

Channel 157 (5785MHz)

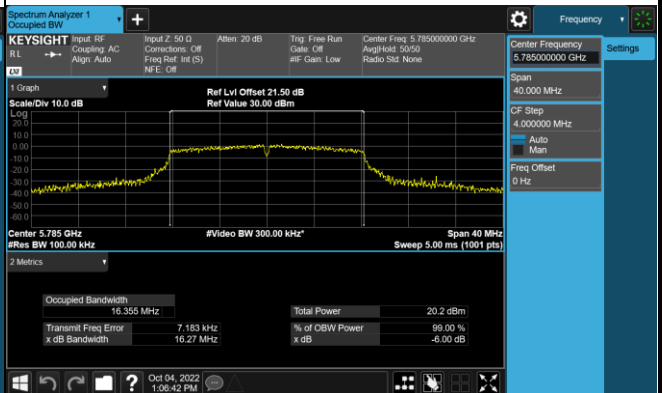


Channel 165 (5825MHz)

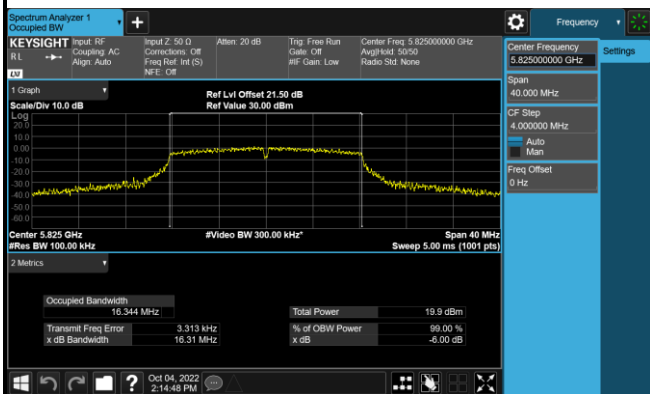


802.11n-HT20 6dB Bandwidth - Ant 0


Channel 149 (5745MHz)

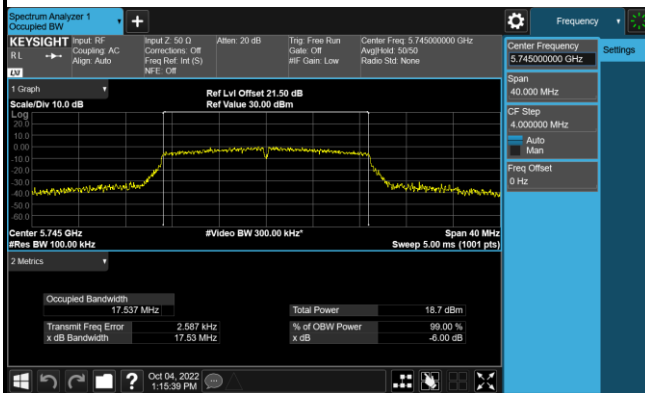

Channel 157 (5785MHz)

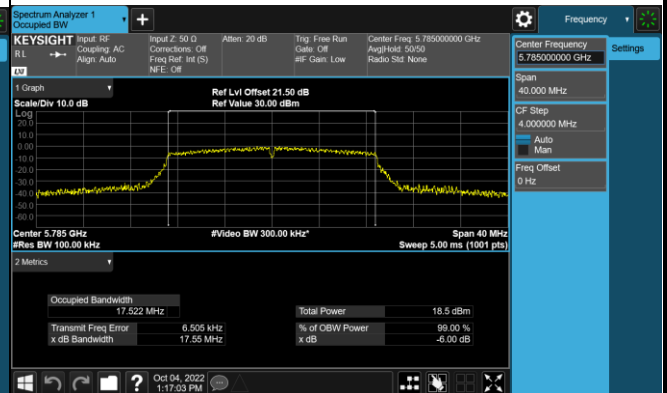


Channel 165 (5825MHz)

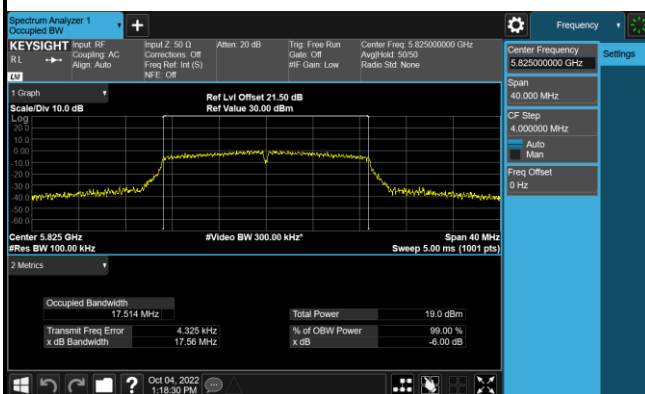



802.11n-HT40 6dB Bandwidth - Ant 1

Channel 151 (5755MHz)

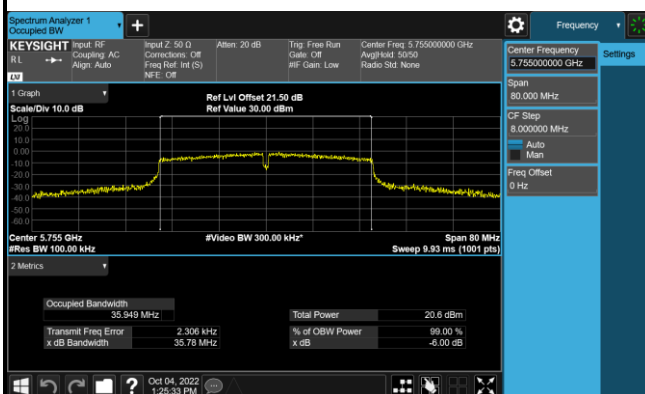

Channel 159 (5795MHz)

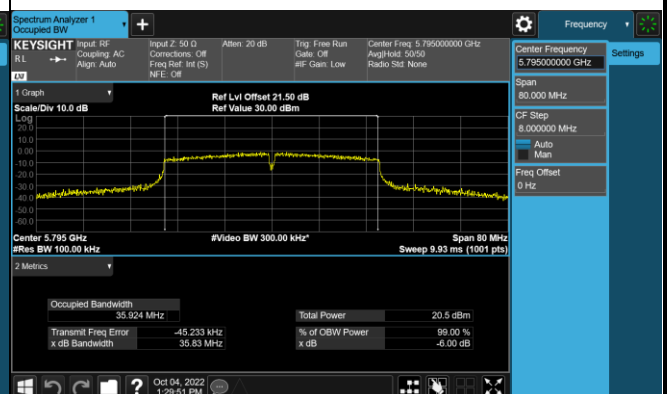

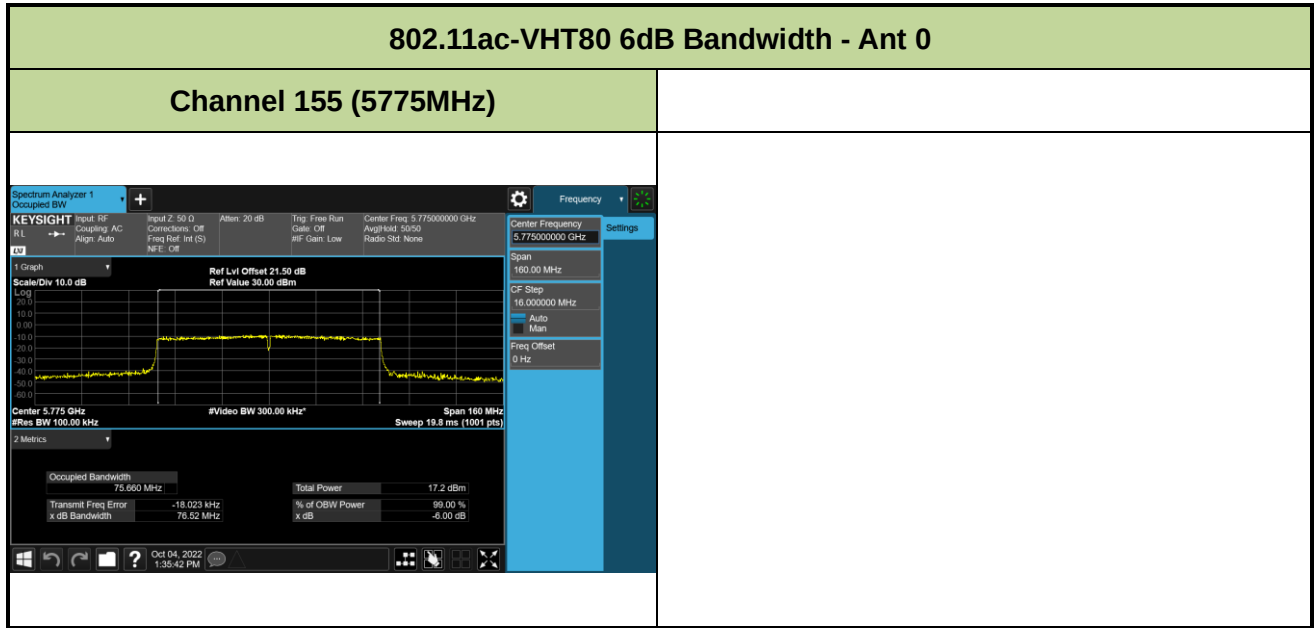

7.4. Output Power Measurement

7.4.1. Test Limit

For FCC Power Measurement Limit

For client operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250mW.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.98dBm) or $11\text{dBm} + 10 \log(26\text{dB BW})$.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For IC Power Measurement Limit

For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW (23.01dBm) or $10 + 10 \cdot \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power shall not exceed 250 mW (23.98dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W (30dBm) or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.725-5.85 GHz band, the maximum conducted output power shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.4.4. Test Setup

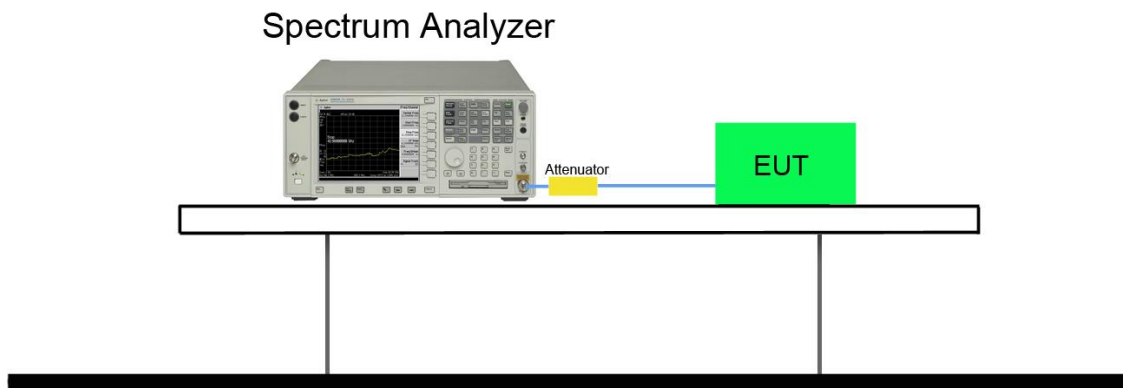

7.4.5. Test Result

Product	Rugged Tablet	Test Engineer	Peter
Test Site	SR5	Test Date	2022/10/4
Test Item	Output Power		

FCC Power:

Model	Rate	Ch.	Freq. (MHz)	Ant 0 Power (dBm)	Power Limit (dBm)
802.11a Band1	6M	36	5180	16.63	23.98
	6M	44	5220	16.25	23.98
	6M	48	5240	16.27	23.98
802.11a Band2	6M	52	5260	16.37	23.98
	6M	60	5300	16.41	23.98
	6M	64	5320	16.20	23.98
802.11a Band3	6M	100	5500	13.51	23.98
	6M	116	5580	13.66	23.98
	6M	140	5700	13.72	23.98
	6M	144	5720	13.60	22.75
802.11a Band4	6M	149	5745	15.97	30.00
	6M	157	5785	15.92	30.00
	6M	165	5825	16.03	30.00
n-HT20 Band1	MCS0	36	5180	15.63	23.98
	MCS0	44	5220	15.71	23.98
	MCS0	48	5240	15.72	23.98
n-HT20 Band2	MCS0	52	5260	15.76	23.98
	MCS0	60	5300	15.80	23.98
	MCS0	64	5320	15.60	23.98
n-HT20 Band3	MCS0	100	5500	13.85	23.98
	MCS0	116	5600	13.58	23.98
	MCS0	140	5700	13.61	23.98
	MCS0	144	5720	13.47	22.77
n-HT20 Band4	MCS0	149	5745	14.96	30.00
	MCS0	157	5785	15.15	30.00
	MCS0	165	5825	15.02	30.00
ac-VHT20 Band1	MCS0	36	5180	15.12	23.98
	MCS0	44	5220	15.19	23.98

	MCS0	48	5240	15.25	23.98
ac-VHT20 Band2	MCS0	52	5260	15.28	23.98
	MCS0	60	5300	15.32	23.98
	MCS0	64	5320	15.34	23.98
	MCS0	64	5320	15.34	23.98
ac-VHT20 Band3	MCS0	100	5500	13.37	23.98
	MCS0	116	5580	13.11	23.98
	MCS0	140	5700	13.19	23.98
	MCS0	144	5720	13.06	22.77
ac-VHT20 Band4	MCS0	149	5745	14.74	30.00
	MCS0	157	5785	14.69	30.00
	MCS0	165	5825	14.55	30.00
n-HT40 Band1	MCS0	38	5190	15.73	23.98
	MCS0	46	5230	15.81	23.98
n-HT40 Band2	MCS0	54	5270	14.75	23.98
	MCS0	62	5310	14.79	23.98
n-HT40 Band3	MCS0	102	5510	14.31	23.98
	MCS0	110	5550	14.13	23.98
	MCS0	134	5670	14.41	23.98
	MCS0	142	5710	14.21	23.98
n-HT40 Band4	MCS0	151	5755	17.20	30.00
	MCS0	159	5795	16.92	30.00
ac-VHT40 Band1	MCS0	38	5190	15.26	23.98
	MCS0	46	5230	15.37	23.98
ac-VHT40 Band2	MCS0	54	5270	14.27	23.98
	MCS0	62	5310	14.30	23.98
ac-VHT40 Band3	MCS0	102	5510	13.82	23.98
	MCS0	110	5550	13.65	23.98
	MCS0	134	5670	13.97	23.98
	MCS0	142	5710	13.74	23.98
ac-VHT40 Band4	MCS0	151	5755	16.79	30.00
	MCS0	159	5795	16.50	30.00
ac-VHT80 Band1	MCS0	42	5210	13.19	23.98
ac-VHT80 Band2	MCS0	58	5290	11.80	23.98
ac-VHT80 Band3	MCS0	106	5530	9.98	23.98
	MCS0	122	5610	9.97	23.98

	MCS0	138	5690	9.90	23.98
ac-VHT80 Band4	MCS0	155	5775	15.22	30.00

IC Power:

Model	Rate	Ch.	Freq. (MHz)	Ant 0 AV Power (dBm)	Power Limit (dBm)	Ant Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
802.11a Band1	6M	36	5180	16.63	N/A	2.91	19.54	22.14
	6M	44	5220	16.25	N/A	2.91	19.16	22.14
	6M	48	5240	16.27	N/A	2.91	19.18	22.14
802.11a Band2	6M	52	5260	16.37	23.14	2.91	19.28	29.14
	6M	60	5300	16.41	23.14	2.91	19.32	29.14
	6M	64	5320	16.20	23.14	2.91	19.11	29.14
802.11a Band3	6M	100	5500	13.51	23.15	2.91	16.42	29.15
	6M	116	5580	13.75	23.15	2.91	16.66	29.15
	6M	140	5700	13.72	23.15	2.91	16.63	29.15
	6M	144	5720	13.60	22.75	2.91	16.51	28.75
802.11a Band4	6M	149	5745	15.97	30.00	N/A	N/A	N/A
	6M	157	5785	15.92	30.00	N/A	N/A	N/A
	6M	165	5825	16.03	30.00	N/A	N/A	N/A
n-HT20 Band1	MCS0	36	5180	15.63	N/A	2.91	18.54	22.44
	MCS0	44	5220	15.71	N/A	2.91	18.62	22.44
	MCS0	48	5240	15.72	N/A	2.91	18.63	22.44
n-HT20 Band2	MCS0	52	5260	15.76	23.44	2.91	18.67	29.44
	MCS0	60	5300	15.80	23.44	2.91	18.71	29.44
	MCS0	64	5320	15.60	23.44	2.91	18.51	29.44
n-HT20 Band3	MCS0	100	5500	13.85	23.44	2.91	16.76	29.44
	MCS0	116	5580	13.61	23.44	2.91	16.52	29.44
	MCS0	140	5700	13.61	23.44	2.91	16.52	29.44
	MCS0	144	5720	13.47	22.77	2.91	16.38	28.77
n-HT20 Band4	MCS0	149	5745	14.96	30.00	N/A	N/A	N/A
	MCS0	157	5785	15.15	30.00	N/A	N/A	N/A
	MCS0	165	5825	15.02	30.00	N/A	N/A	N/A
ac-VHT20 Band1	MCS0	36	5180	15.12	N/A	2.91	18.03	29.44
	MCS0	44	5220	15.19	N/A	2.91	18.10	29.44
	MCS0	48	5240	15.25	N/A	2.91	18.16	29.44
ac-VHT20 Band2	MCS0	52	5260	15.28	23.44	2.91	18.19	29.44
	MCS0	60	5300	15.32	23.44	2.91	18.23	29.44

	MCS0	64	5320	15.34	23.44	2.91	18.25	29.44
ac-VHT20 Band3	MCS0	100	5500	13.37	23.44	2.91	16.28	29.44
	MCS0	116	5580	13.15	23.44	2.91	16.06	29.44
	MCS0	140	5700	13.19	23.44	2.91	16.10	29.44
	MCS0	144	5720	13.06	22.38	2.91	15.97	28.38
ac-VHT20 Band4	MCS0	149	5745	14.74	30.00	N/A	N/A	N/A
	MCS0	157	5785	14.69	30.00	N/A	N/A	N/A
	MCS0	165	5825	14.55	30.00	N/A	N/A	N/A
n-HT40 Band1	MCS0	38	5190	15.73	N/A	2.91	18.64	23.01
	MCS0	46	5230	15.81	N/A	2.91	18.72	23.01
n-HT40 Band2	MCS0	54	5270	14.75	23.98	2.91	17.66	29.98
	MCS0	62	5310	14.79	23.98	2.91	17.70	29.98
n-HT40 Band3	MCS0	102	5510	14.31	23.98	2.91	17.22	29.98
	MCS0	110	5550	14.19	23.98	2.91	17.10	29.98
	MCS0	134	5670	14.41	23.98	2.91	17.32	29.98
	MCS0	142	5710	14.21	23.98	2.91	17.12	29.98
n-HT40 Band4	MCS0	151	5755	17.20	30.00	N/A	N/A	N/A
	MCS0	159	5795	16.92	30.00	N/A	N/A	N/A
ac-VHT40 Band1	MCS0	38	5190	15.26	N/A	2.91	18.17	23.01
	MCS0	46	5230	15.37	N/A	2.91	18.28	23.01
ac-VHT40 Band2	MCS0	54	5270	14.27	23.98	2.91	17.18	29.98
	MCS0	62	5310	14.30	23.98	2.91	17.21	29.98
ac-VHT40 Band3	MCS0	102	5510	13.82	23.98	2.91	16.73	29.98
	MCS0	110	5550	13.73	23.98	2.91	16.64	29.98
	MCS0	134	5670	13.97	23.98	2.91	16.88	29.98
	MCS0	142	5710	13.74	23.98	2.91	16.65	29.98
ac-VHT40 Band4	MCS0	151	5755	16.79	30.00	N/A	N/A	N/A
	MCS0	159	5795	16.50	30.00	N/A	N/A	N/A
ac-VHT80 Band1	MCS0	42	5210	13.19	N/A	2.91	16.10	23.01
ac-VHT80 Band2	MCS0	58	5290	11.80	23.98	2.91	14.71	29.98
ac-VHT80 Band3	MCS0	106	5530	9.98	23.98	2.91	12.89	29.98
	MCS0	122	5610	9.97	23.98	2.91	12.88	29.98
	MCS0	138	5690	9.90	23.98	2.91	12.81	29.98
ac-VHT80 Band4	MCS0	155	5775	15.22	30.00	N/A	N/A	N/A

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

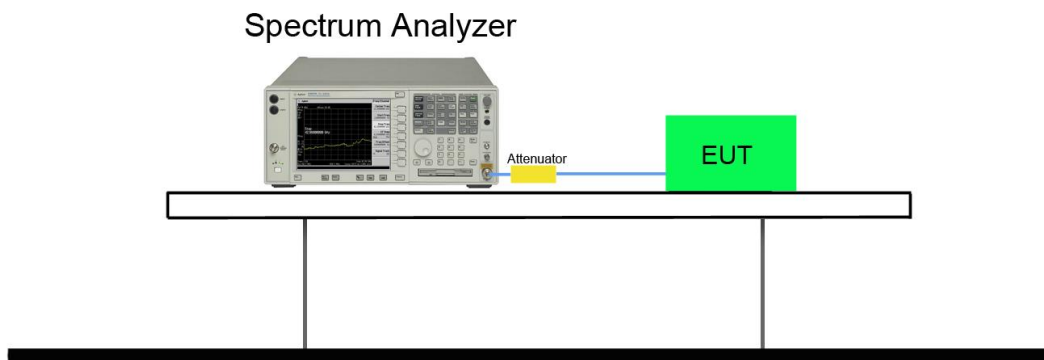

7.5.5. Test Result

Note: TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For FCC Power Spectral Density Limit

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For IC Power Spectral Density Limit

For the band 5.15-5.25 GHz, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the 5.725-5.85 GHz band, the power spectral density shall not exceed 30 dBm in any 500 kHz band.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
4. RBW = 100 kHz
5. VBW = 3MHz
6. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
7. Detector = power averaging (Average)
8. Sweep time = auto
9. Trigger = free run
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.
12. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 7 \text{ dB}$ to the measured result

7.6.4. Test Setup

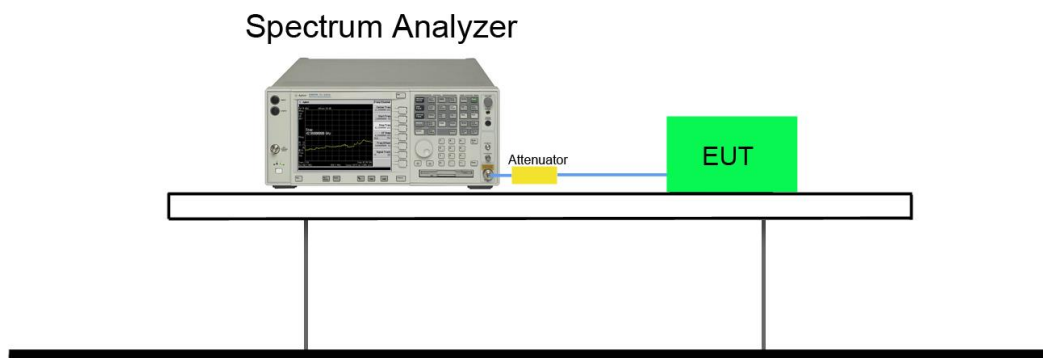

7.6.5. Test Result

Product	Rugged Tablet	Test Engineer	Peter
Test Site	SR2	Test Date	2022/10/4
Test Item	Power Spectral Density		

FCC : U-NII-1

FCC & IC: U-NII-2A & U-NII-2C

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/MHz) Ant0	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6	36	5180	4.372	100.00%	4.372	≤ 10	Pass
11a	6	44	5220	4.429	100.00%	4.429	≤ 10	Pass
11a	6	48	5240	4.656	100.00%	4.656	≤ 10	Pass
11a	6	52	5260	3.446	100.00%	3.446	≤ 11	Pass
11a	6	60	5300	3.841	100.00%	3.841	≤ 11	Pass
11a	6	64	5320	4.017	100.00%	4.017	≤ 11	Pass
11a	6	100	5500	3.387	100.00%	3.387	≤ 11	Pass
11a	6	120	5600	3.189	100.00%	3.189	≤ 11	Pass
11a	6	140	5700	3.247	100.00%	3.247	≤ 11	Pass
11a	6	144	5720	2.734	100.00%	2.734	≤ 11	Pass
11n-HT20	6.5	36	5180	4.426	100.00%	4.426	≤ 10	Pass
11n-HT20	6.5	44	5220	4.529	100.00%	4.529	≤ 10	Pass
11n-HT20	6.5	48	5240	5.015	100.00%	5.015	≤ 10	Pass
11n-HT20	6.5	52	5260	4.617	100.00%	4.617	≤ 11	Pass
11n-HT20	6.5	60	5300	5.577	100.00%	5.577	≤ 11	Pass
11n-HT20	6.5	64	5320	5.222	100.00%	5.222	≤ 11	Pass
11n-HT20	6.5	100	5500	2.855	100.00%	2.855	≤ 11	Pass
11n-HT20	6.5	120	5600	3.641	100.00%	3.641	≤ 11	Pass
11n-HT20	6.5	140	5700	2.530	100.00%	2.530	≤ 11	Pass
11n-HT20	6.5	144	5720	2.433	100.00%	2.433	≤ 11	Pass

Note: Total PSD (dBm/MHz) = PSD (dBm/MHz) + 10*log(1/duty cycle).

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/MHz) Ant0	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11n-HT40	13.5	38	5190	1.924	100.00%	1.924	≤ 10	Pass
11n-HT40	13.5	46	5230	2.009	100.00%	2.009	≤ 10	Pass
11n-HT40	13.5	54	5270	1.215	100.00%	1.215	≤ 11	Pass
11n-HT40	13.5	62	5310	1.439	100.00%	1.439	≤ 11	Pass
11n-HT40	13.5	102	5510	0.428	100.00%	0.428	≤ 11	Pass
11n-HT40	13.5	110	5550	0.185	100.00%	0.185	≤ 11	Pass
11n-HT40	13.5	134	5670	0.603	100.00%	0.603	≤ 11	Pass
11n-HT40	13.5	142	5710	0.160	100.00%	0.160	≤ 11	Pass
11ac-VHT80	29.3	42	5210	-5.646	100.00%	-5.646	≤ 10	Pass
11ac-VHT80	29.3	58	5290	-7.475	100.00%	-7.475	≤ 11	Pass
11ac-VHT80	29.3	106	5530	-8.013	100.00%	-8.013	≤ 11	Pass
11ac-VHT80	29.3	122	5610	-7.861	100.00%	-7.861	≤ 11	Pass
11ac-VHT80	29.3	138	5690	-8.572	100.00%	-8.572	≤ 11	Pass

Note: Total PSD (dBm/MHz) = PSD (dBm/MHz) + 10*log(1/duty cycle).

FCC & IC: U-NII-3

Test Mode	Data Rate (Mbps)	Channel No.	Freq. (MHz)	PSD (dBm/500kHz) Ant0	Duty Cycle (%)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Result
11a	6	149	5745	2.252	100.00%	2.252	≤ 30	Pass
11a	6	157	5785	2.605	100.00%	2.605	≤ 30	Pass
11a	6	165	5825	2.495	100.00%	2.495	≤ 30	Pass
11n-HT20	6.5	149	5745	1.168	100.00%	1.168	≤ 30	Pass
11n-HT20	6.5	157	5785	0.806	100.00%	0.806	≤ 30	Pass
11n-HT20	6.5	165	5825	1.286	100.00%	1.286	≤ 30	Pass
11n-HT40	13.5	151	5755	0.429	100.00%	0.429	≤ 30	Pass
11n-HT40	13.5	159	5795	0.144	100.00%	0.144	≤ 30	Pass
11ac-VHT80	29.3	155	5775	-6.253	100.00%	-6.253	≤ 30	Pass

Note: Total PSD (dBm/500kHz) = PSD (dBm/500kHz) + 10*log(1/duty cycle).

IC: U-NII-1

Test Mode	Channel No.	Freq. (MHz)	PSD (Ant0) (dBm/MHz)	Duty Cycles (%)	Total PSD (dBm/MHz)	Directional Ant Gain (dBi)	E.I.R.P PSD (dBm/MHz)	E.I.R.P Limit (dBm/MHz)
11a	36	5180	4.372	100.00%	4.372	2.91	7.28	10.00
	44	5220	4.429	100.00%	4.429	2.91	7.34	10.00
	48	5240	4.656	100.00%	4.656	2.91	7.57	10.00
11n-HT20	36	5180	4.426	100.00%	4.426	2.91	7.34	10.00
	44	5220	4.529	100.00%	4.529	2.91	7.44	10.00
	48	5240	5.015	100.00%	5.015	2.91	7.93	10.00
11n-HT40	38	5190	1.924	100.00%	1.924	2.91	4.83	10.00
	46	5230	2.009	100.00%	2.009	2.91	4.92	10.00
11ac-VHT80	42	5210	-5.646	100.00%	-5.646	2.91	-2.74	10.00

Note: E.I.R.P PSD (dBm/MHz) = PSD (dBm/MHz) + 10*log(1/duty cycle) + Directional Antenna Gain (dBi).