


EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

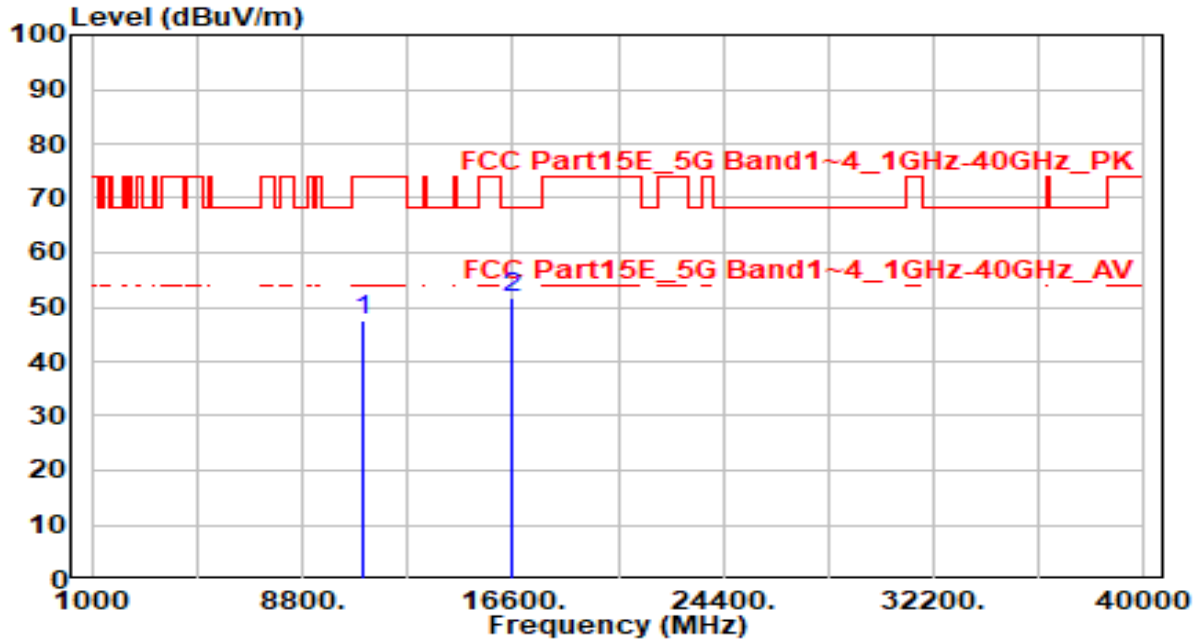


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	41.94	5.58	47.52	-26.48	74.00	150	360	Peak
2	* 16530.000	44.23	7.39	51.62	-16.58	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 110_ANT 0	Test Voltage	AC 120V/60Hz

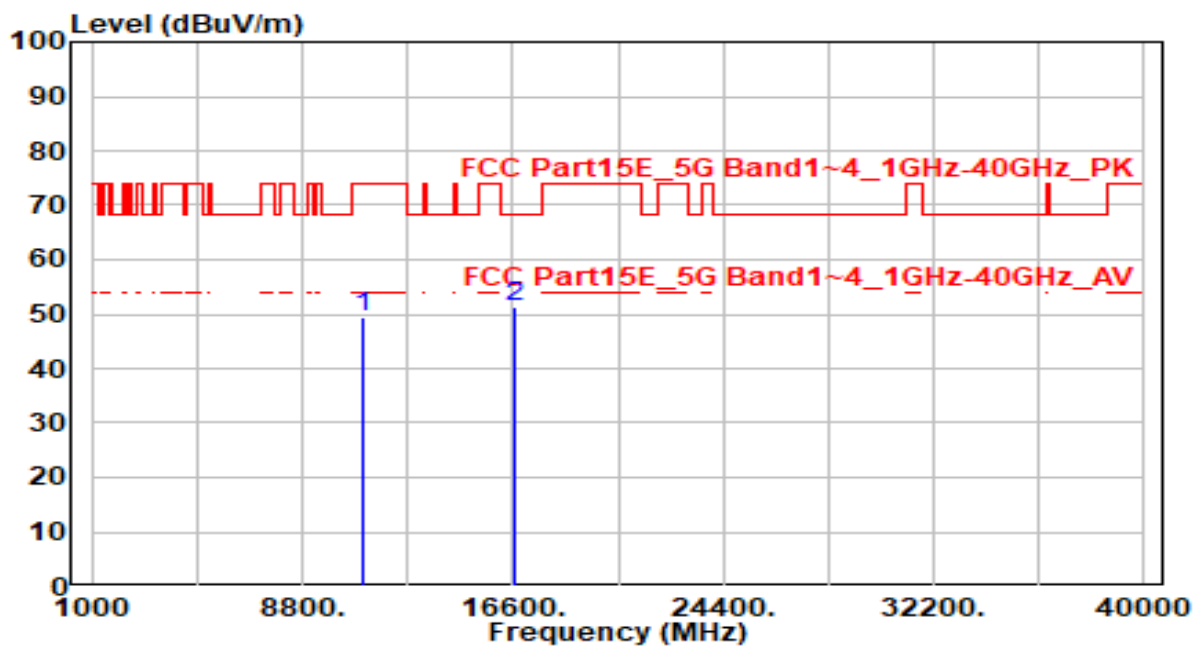


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.86	5.67	49.53	-24.47	74.00	150	360	Peak
2	* 16650.000	43.79	7.58	51.36	-16.84	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 110_ANT 0	Test Voltage	AC 120V/60Hz

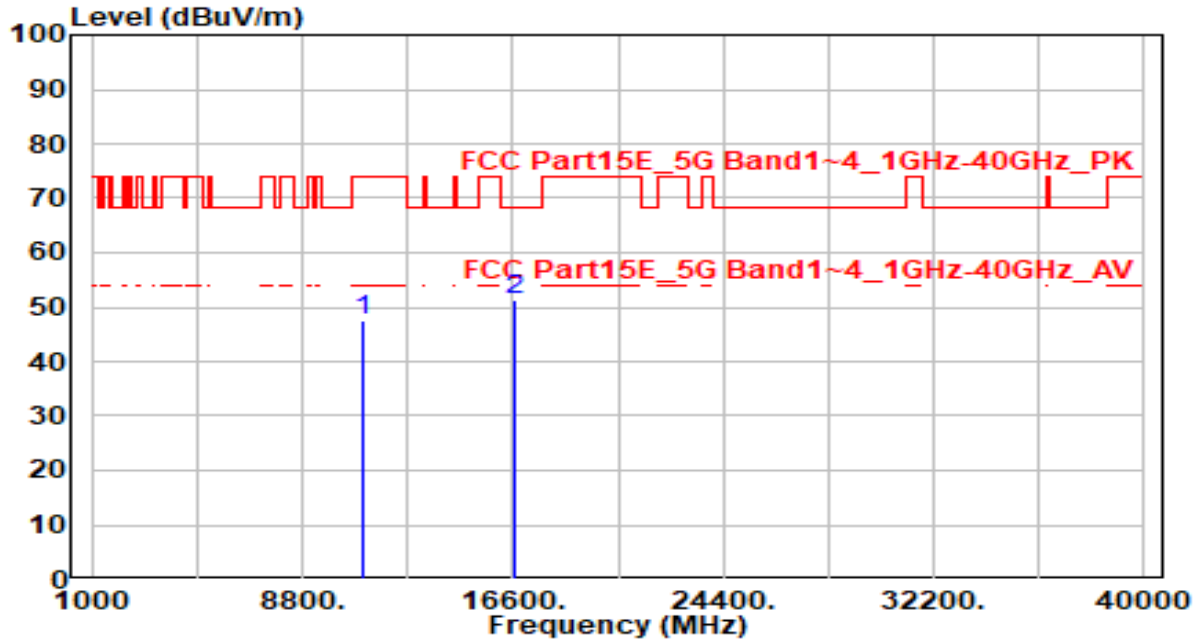


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	41.95	5.67	47.61	-26.39	74.00	150	360	Peak
2	* 16650.000	43.70	7.58	51.27	-16.93	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

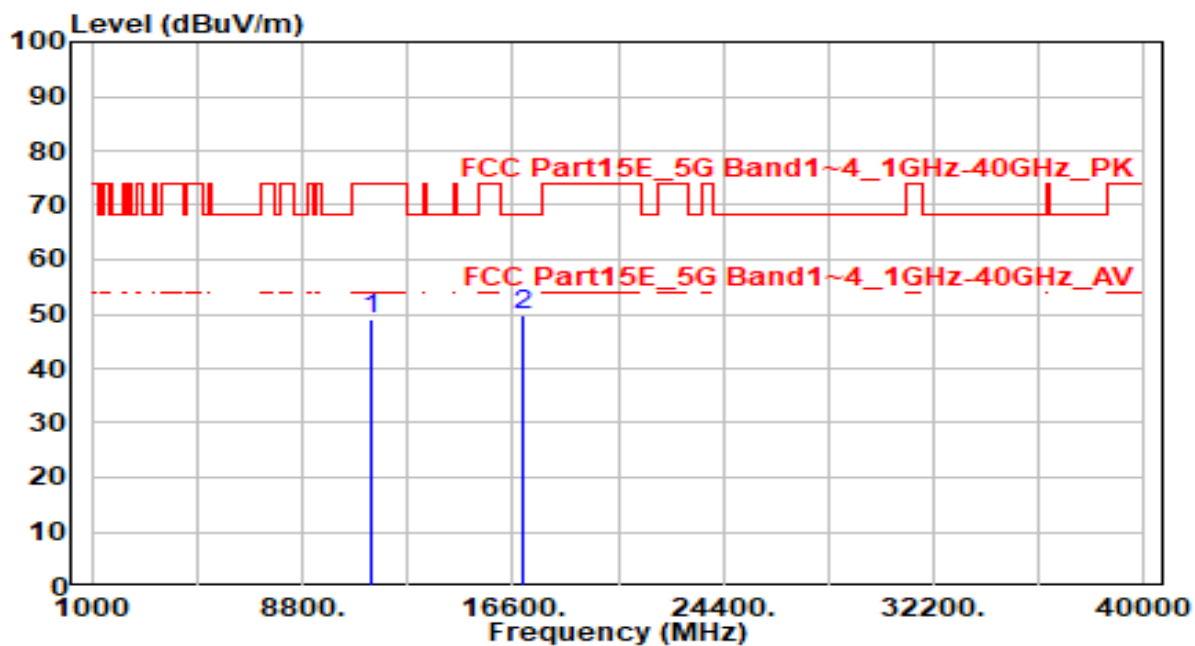


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	43.14	5.92	49.06	-24.94	74.00	150	360	Peak
2	* 17010.000	43.33	6.44	49.77	-18.43	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

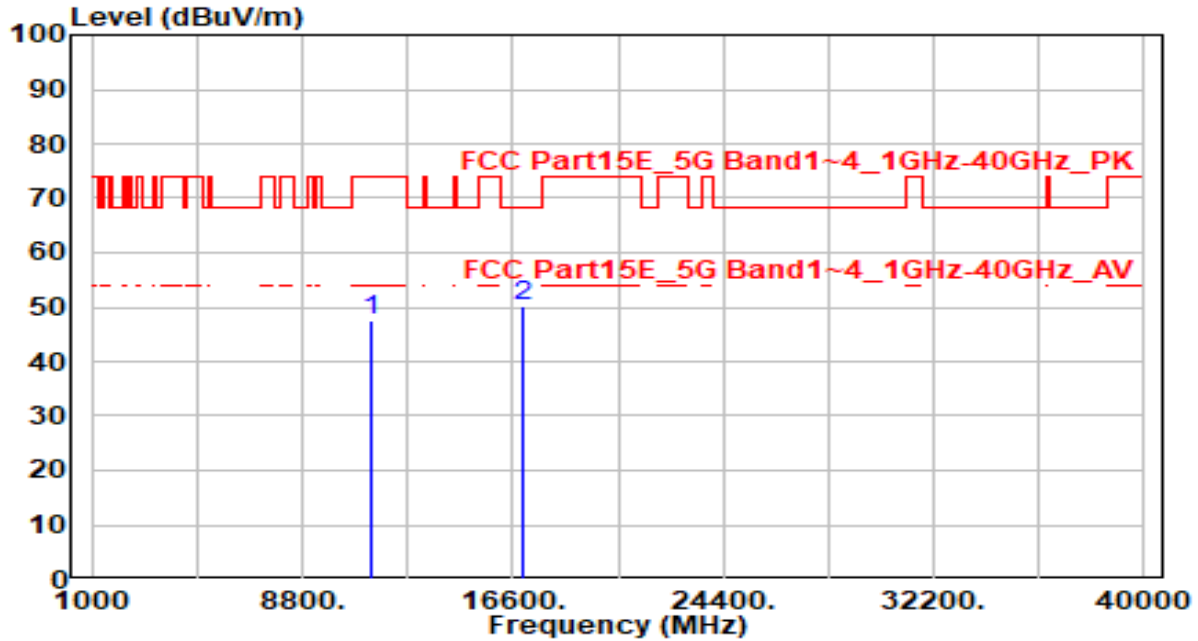


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.74	5.92	47.66	-26.34	74.00	150	360	Peak
2	* 17010.000	43.62	6.44	50.06	-18.14	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 142_ANT 0	Test Voltage	AC 120V/60Hz

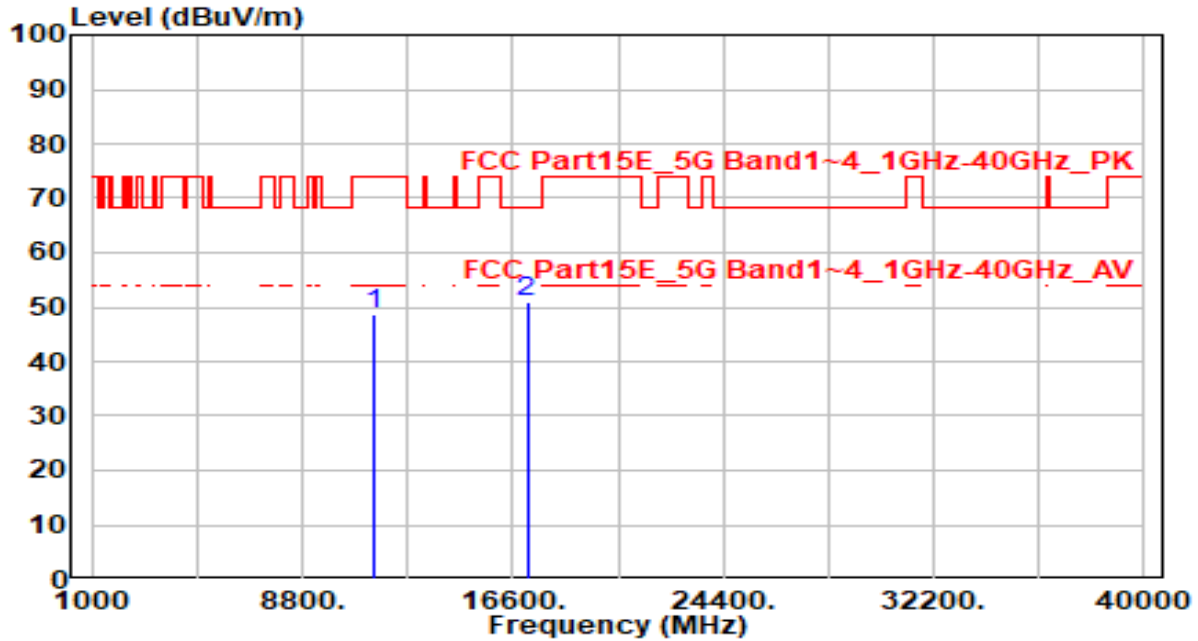


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.65	5.98	48.63	-25.37	74.00	150	360	Peak
2	* 17130.000	44.83	6.07	50.90	-17.30	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 142_ANT 0	Test Voltage	AC 120V/60Hz

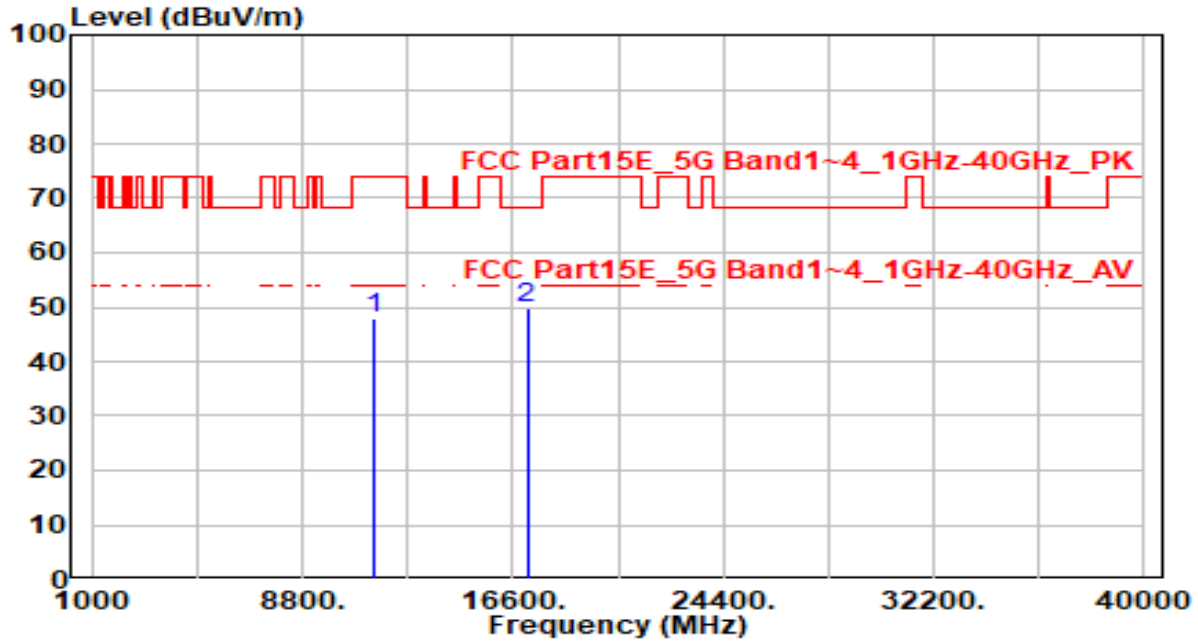


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	41.99	5.98	47.96	-26.04	74.00	150	360	Peak
2	* 17130.000	43.71	6.07	49.78	-18.42	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

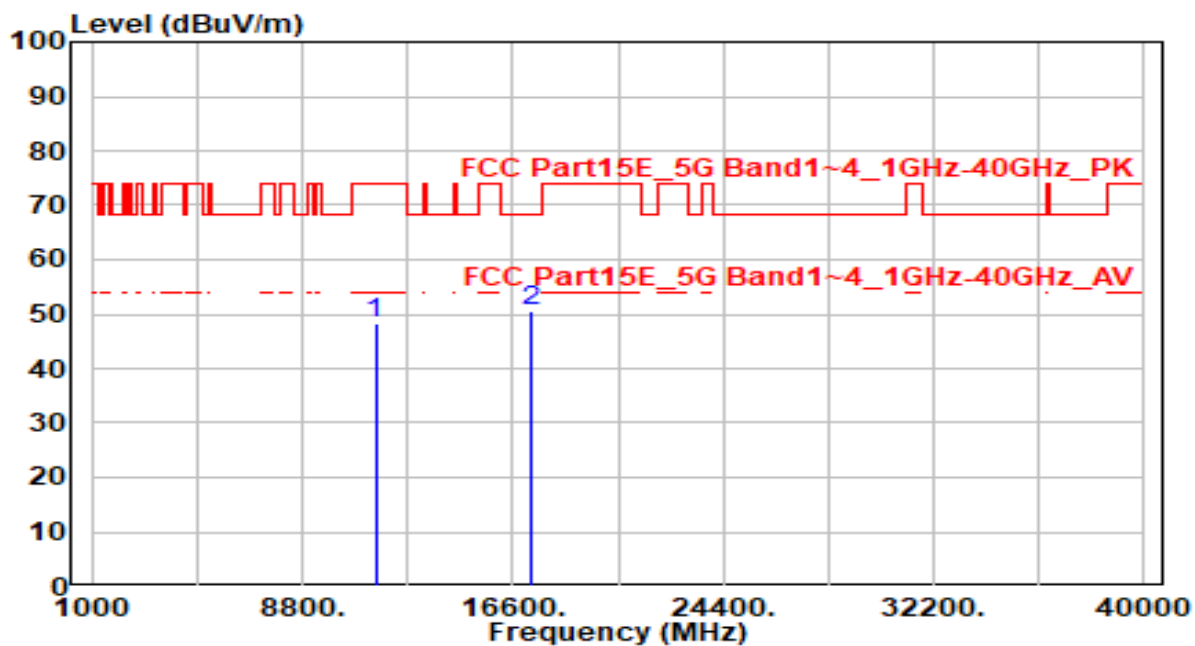


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	42.30	5.94	48.23	-25.77	74.00	150	360	Peak
2	* 17265.000	44.67	5.72	50.39	-17.81	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

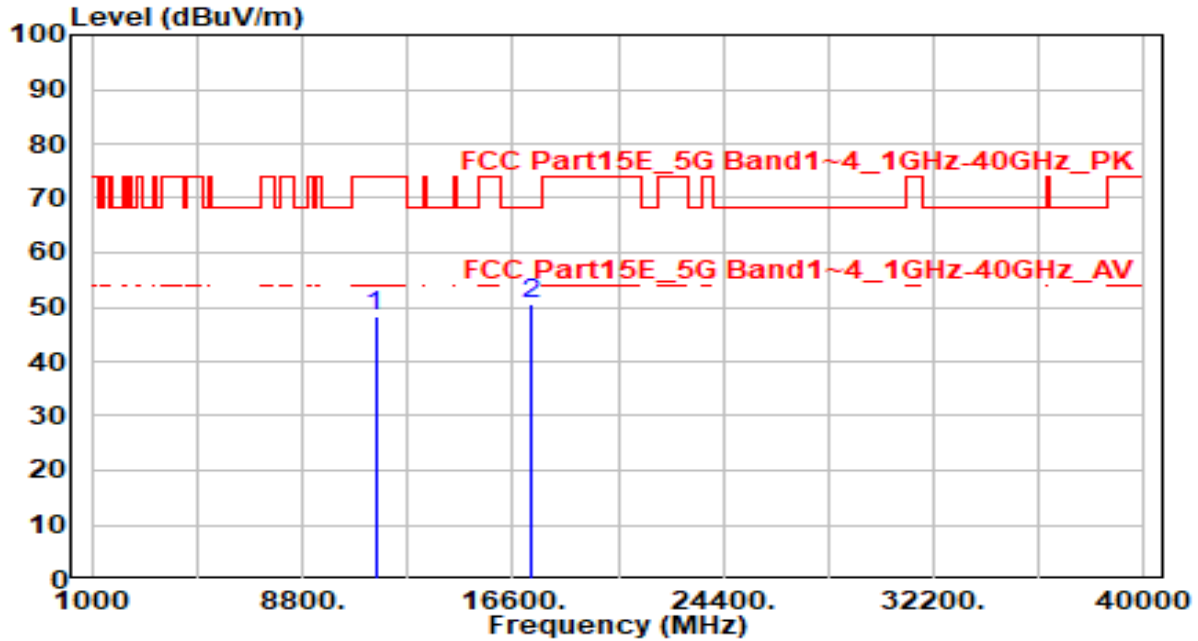


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	42.40	5.94	48.34	-25.66	74.00	150	360	Peak
2	* 17265.000	44.79	5.72	50.51	-17.69	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

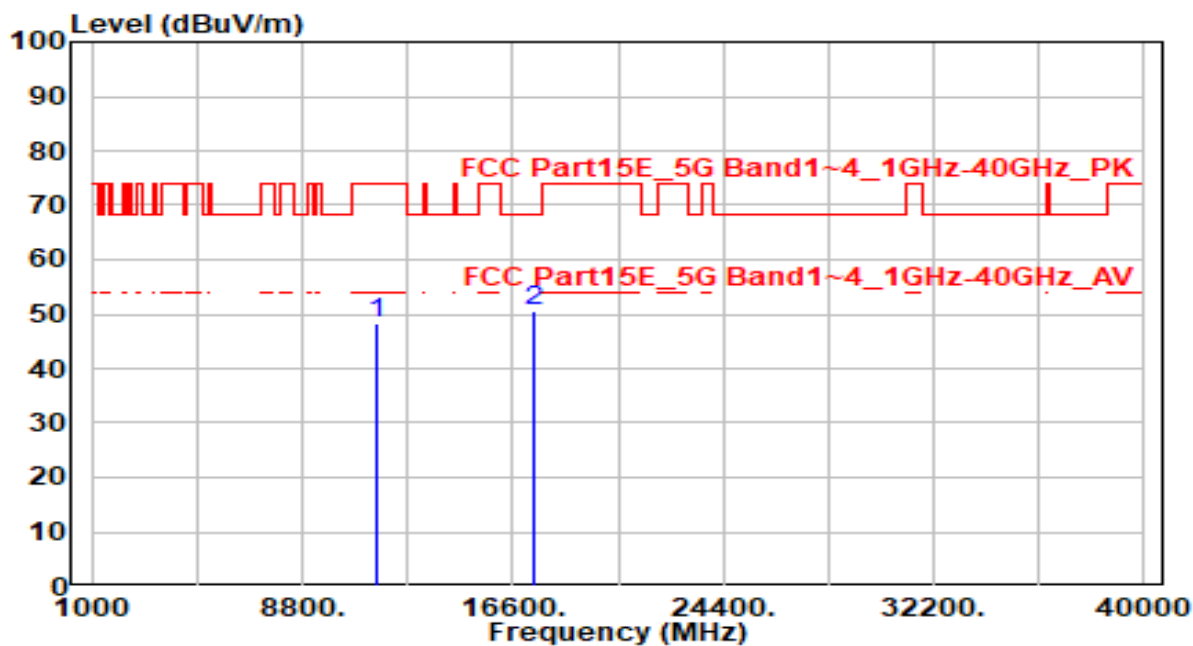


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.46	5.90	48.36	-25.64	74.00	150	360	Peak
2	* 17385.000	44.96	5.47	50.43	-17.77	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

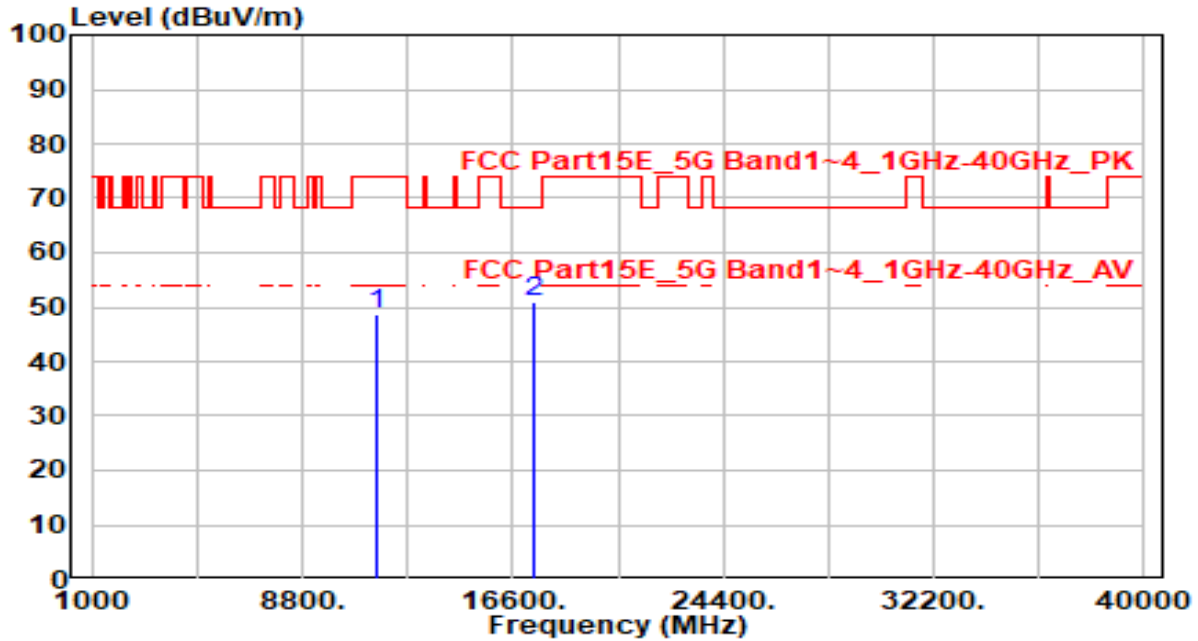


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	42.66	5.90	48.56	-25.44	74.00	150	360	Peak
2	* 17385.000	45.49	5.47	50.96	-17.24	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 120V/60Hz

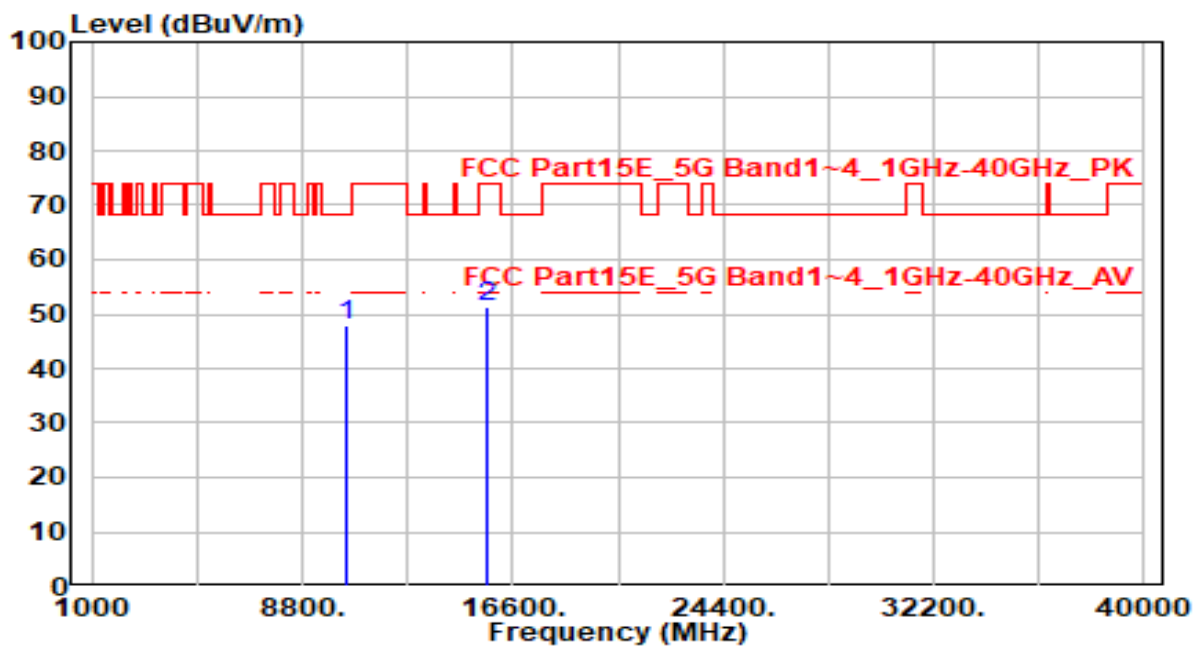


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10420.000	42.67	5.29	47.96	-20.24	68.20	150	360	Peak
2	15630.000	44.84	6.49	51.33	-22.67	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 120V/60Hz

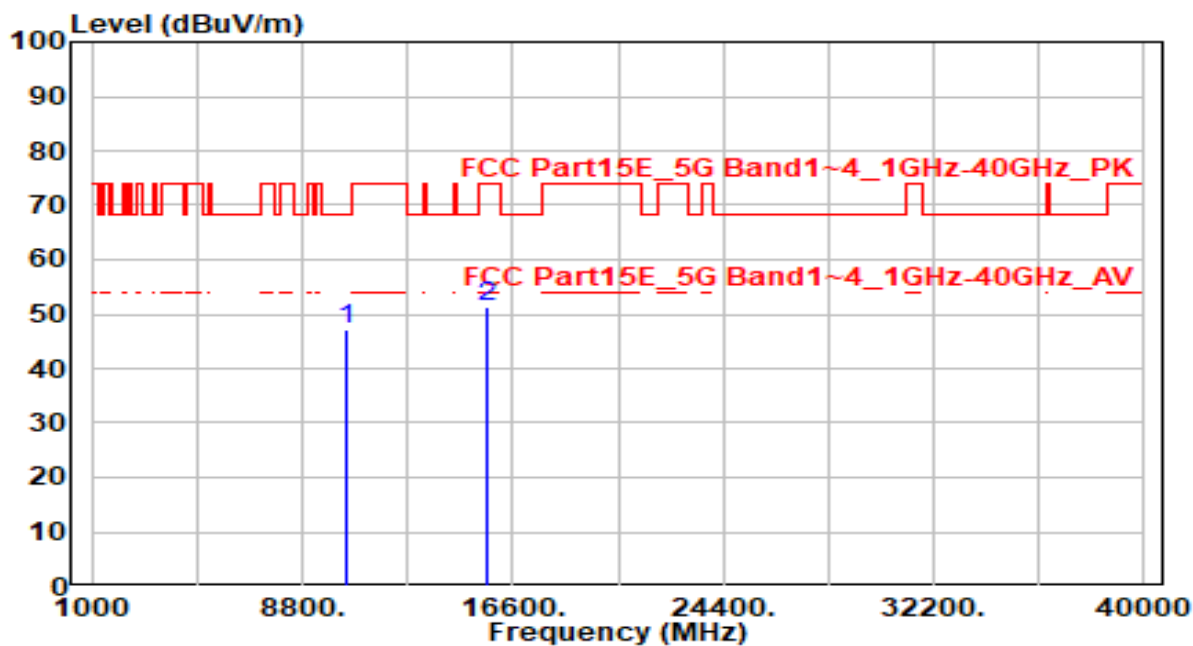


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	41.96	5.29	47.24	-20.96	68.20	150	360	Peak
2		15630.000	45.00	6.49	51.49	-22.51	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0	Test Voltage	AC 120V/60Hz

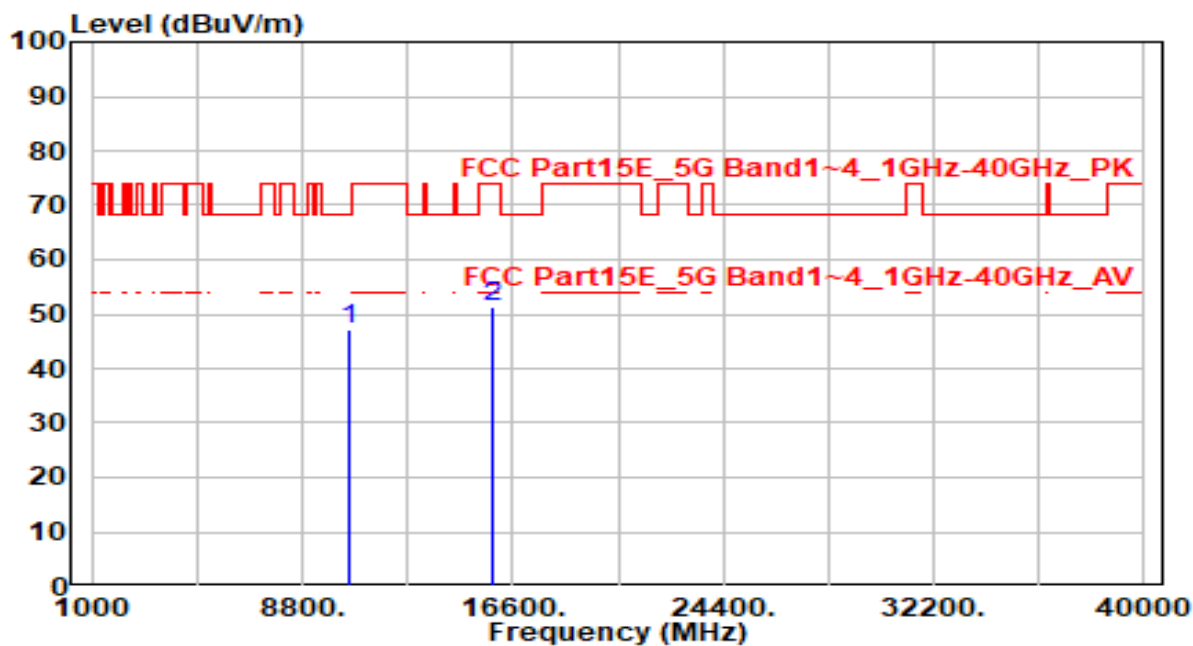


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10580.000	41.74	5.25	46.99	-21.21	68.20	150	360	Peak
2	15870.000	44.43	6.93	51.36	-22.64	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0	Test Voltage	AC 120V/60Hz

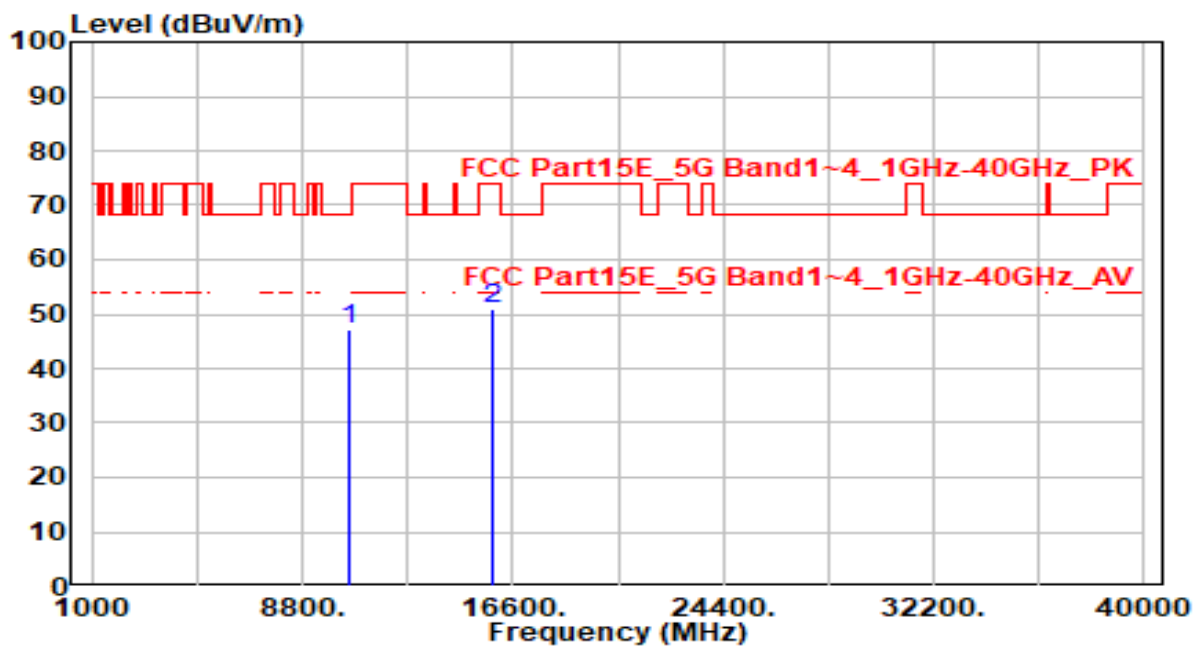


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.02	5.25	47.27	-20.93	68.20	150	360	Peak
2		15870.000	44.03	6.93	50.96	-23.04	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

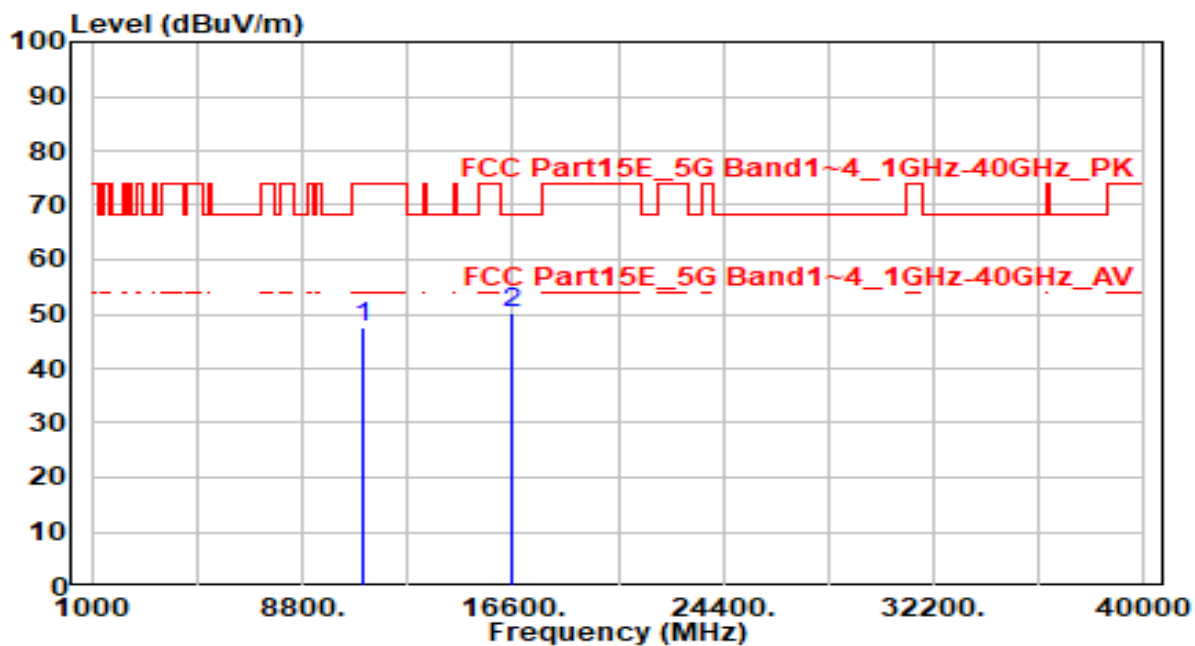


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.87	5.62	47.49	-26.51	74.00	150	360	Peak
2	* 16590.000	42.70	7.48	50.18	-18.02	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

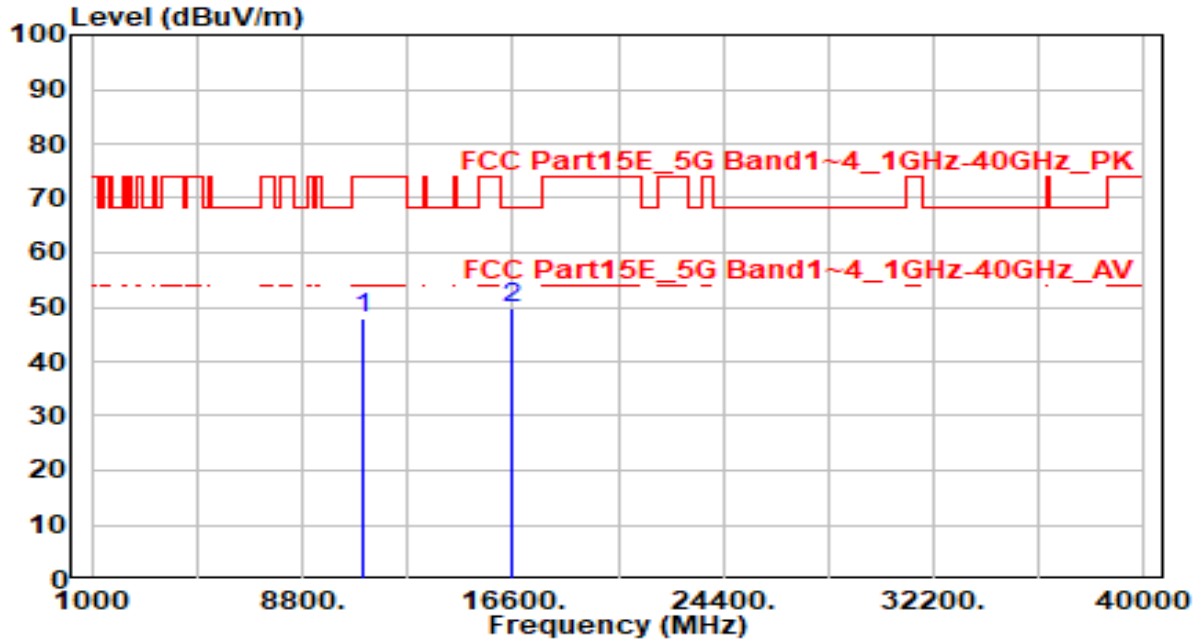


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	42.24	5.62	47.86	-26.14	74.00	150	360	Peak
2	* 16590.000	42.45	7.48	49.94	-18.26	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0	Test Voltage	AC 120V/60Hz

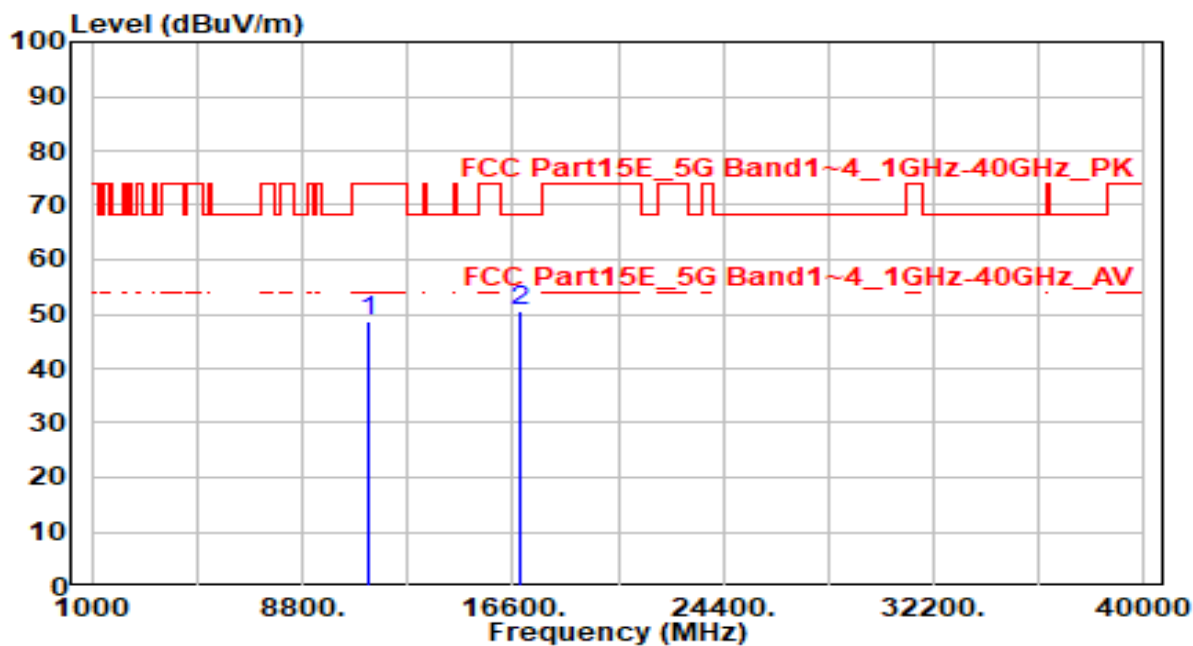


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.73	5.79	48.53	-25.47	74.00	150	360	Peak
2	* 16830.000	43.29	7.17	50.46	-17.74	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0	Test Voltage	AC 120V/60Hz

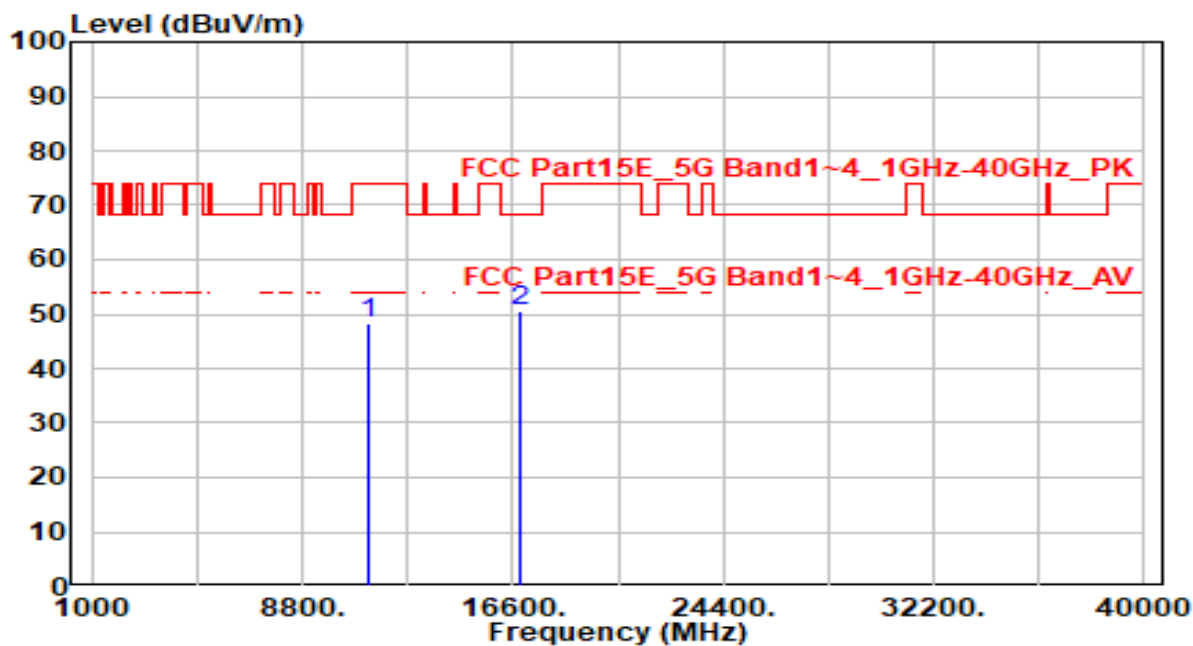


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	42.67	5.79	48.47	-25.53	74.00	150	360	Peak
2	* 16830.000	43.23	7.17	50.41	-17.79	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0	Test Voltage	AC 120V/60Hz

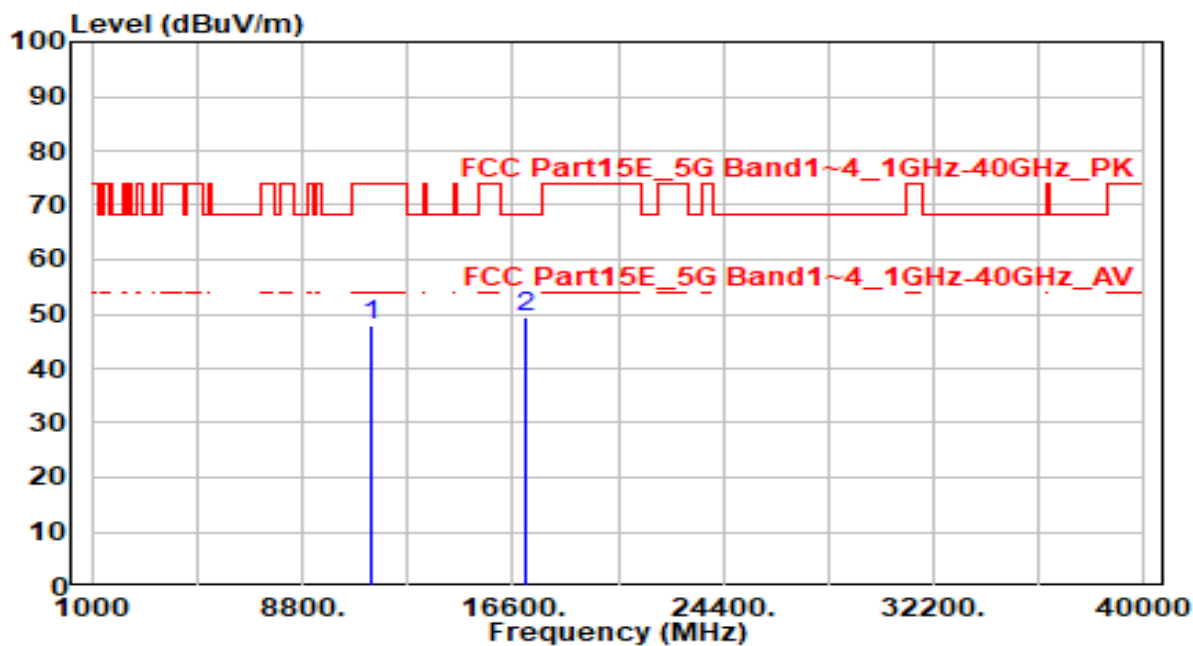


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	41.80	5.96	47.76	-26.24	74.00	150	360	Peak
2	* 17070.000	43.11	6.26	49.36	-18.84	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0	Test Voltage	AC 120V/60Hz

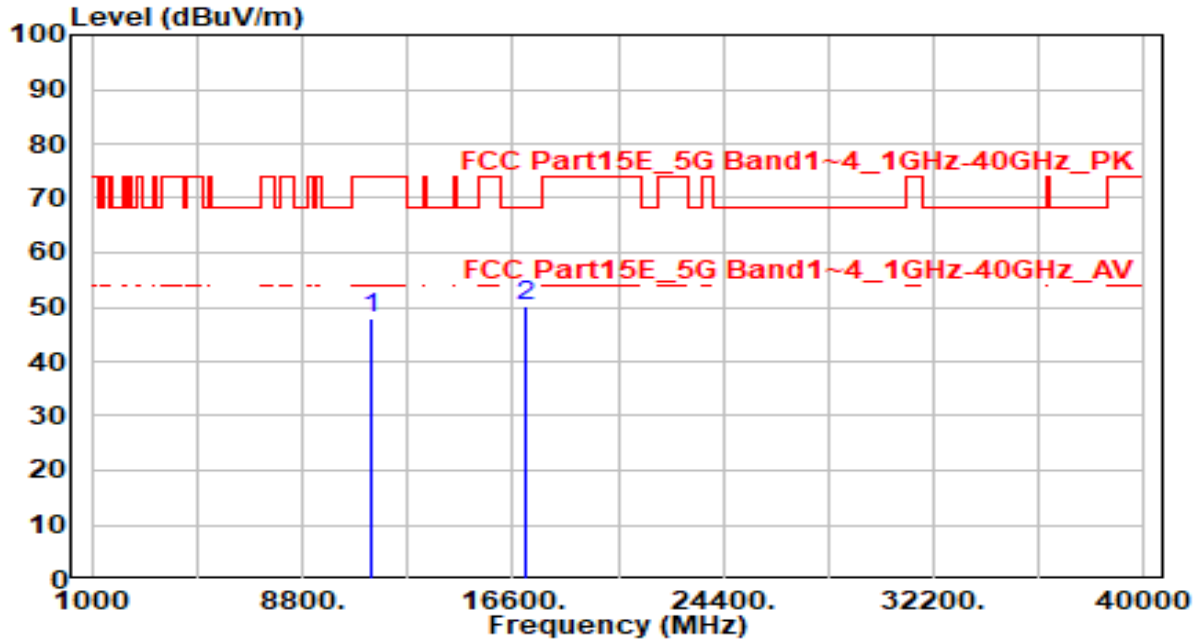


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.02	5.96	47.98	-26.02	74.00	150	360	Peak
2	* 17070.000	43.84	6.26	50.10	-18.10	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

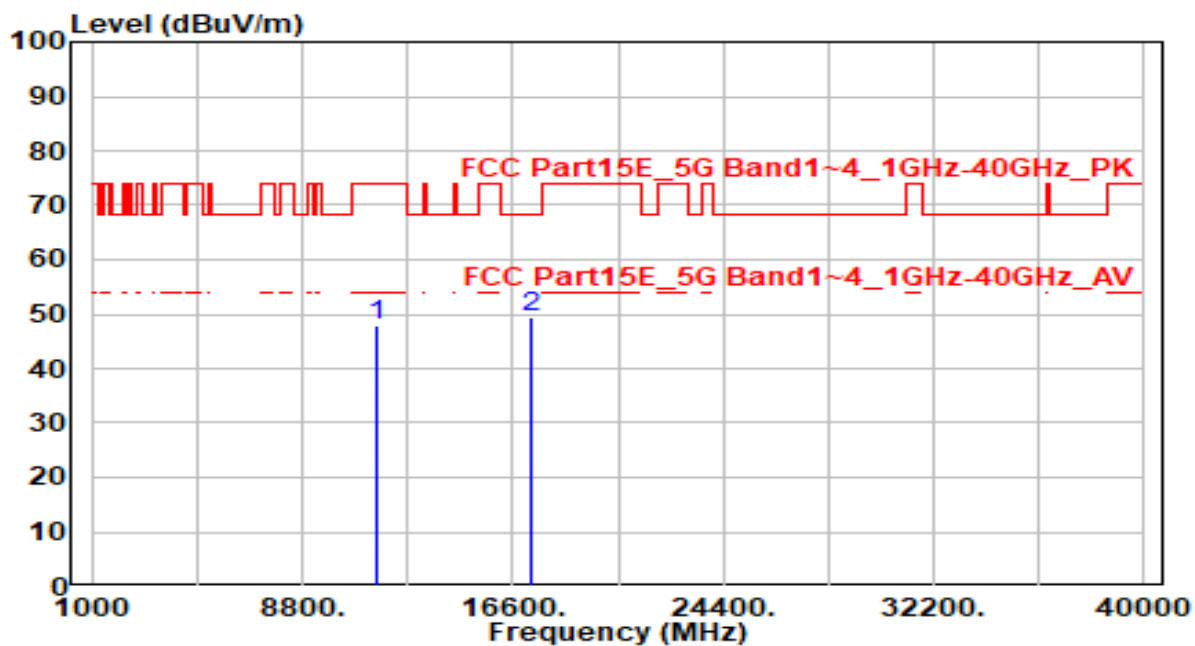


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	41.85	5.92	47.77	-26.23	74.00	150	360	Peak
2	* 17325.000	44.02	5.60	49.62	-18.58	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

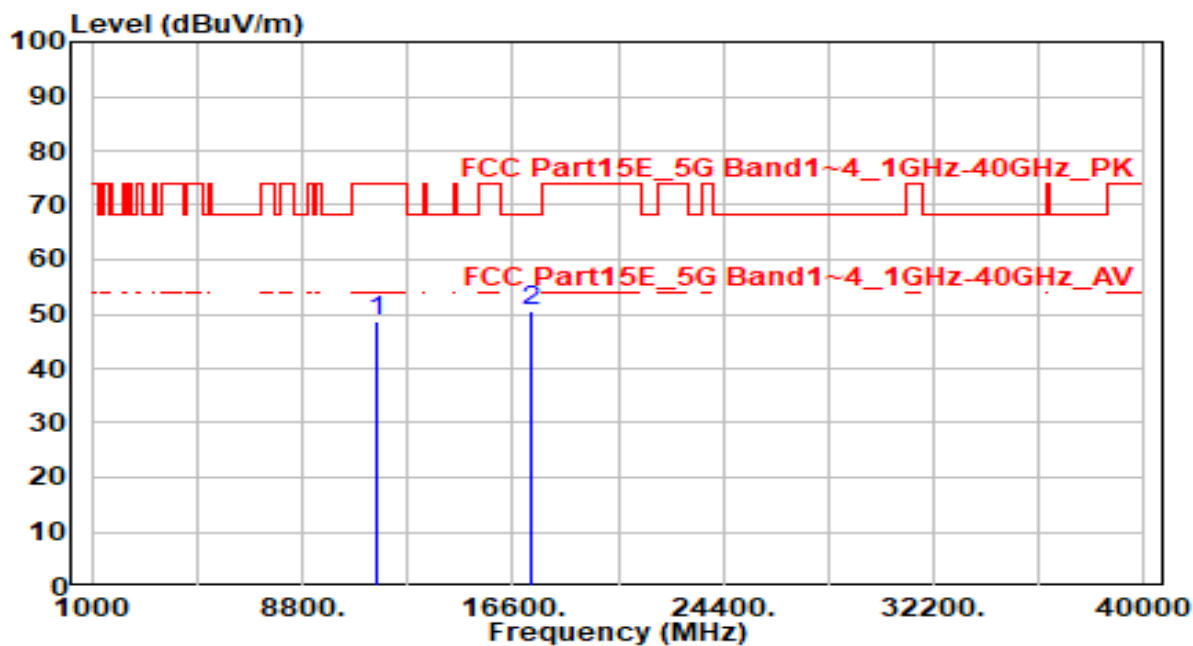


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.61	5.92	48.53	-25.47	74.00	150	360	Peak
2	* 17325.000	44.98	5.60	50.58	-17.62	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_RX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

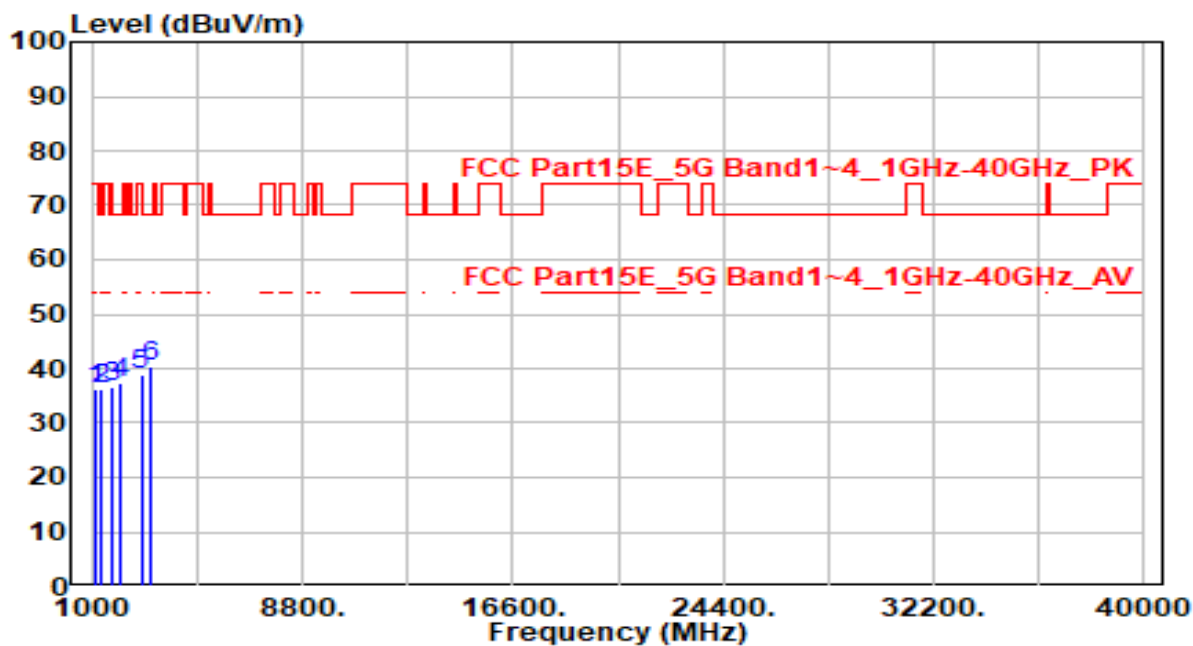


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1161.000	43.72	-7.47	36.25	-37.75	74.00	150	360	Peak
2	1366.000	43.12	-6.98	36.14	-37.86	74.00	150	360	Peak
3	1795.000	43.39	-6.92	36.47	-31.73	68.20	150	360	Peak
4	2028.000	42.96	-5.58	37.38	-30.82	68.20	150	360	Peak
5	2826.000	42.27	-3.48	38.79	-35.21	74.00	150	360	Peak
6	* 3149.000	43.34	-3.07	40.27	-27.93	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_RX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

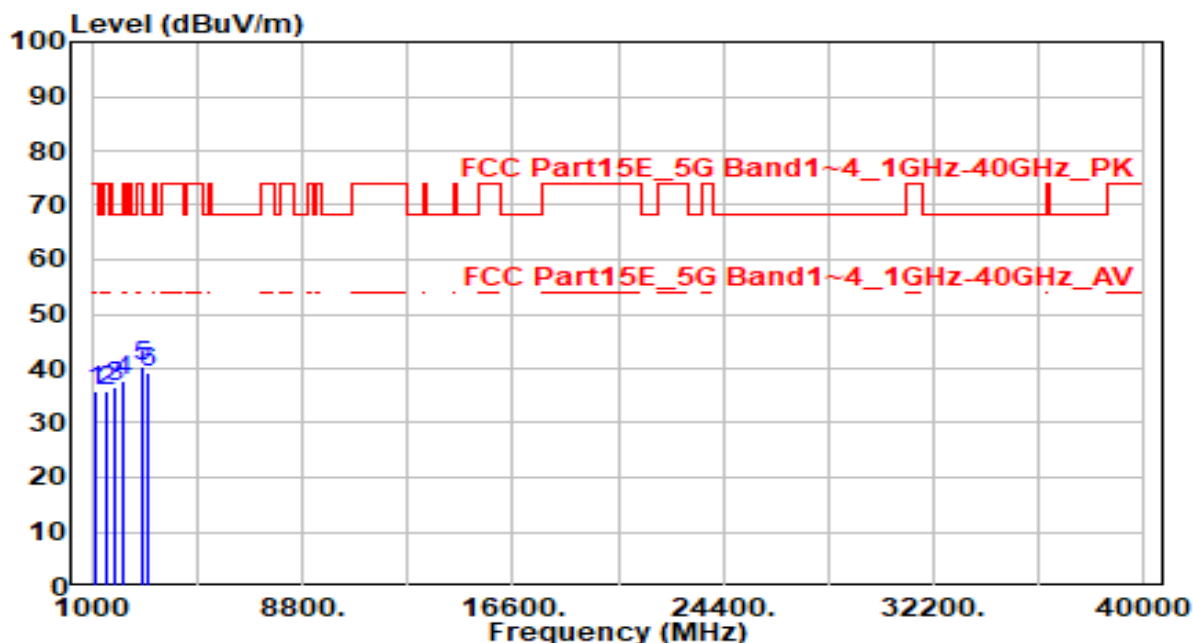

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	1161.000	43.44	-7.47	35.97	-38.03	74.00	150	360	Peak
2	1514.000	42.81	-7.02	35.79	-38.21	74.00	150	360	Peak
3	1868.000	43.16	-6.49	36.67	-31.53	68.20	150	360	Peak
4	2121.000	43.14	-5.31	37.84	-30.36	68.20	150	360	Peak
5	2887.000	43.76	-3.34	40.42	-33.58	74.00	150	360	Peak
6	* 3114.000	42.24	-3.07	39.17	-29.03	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

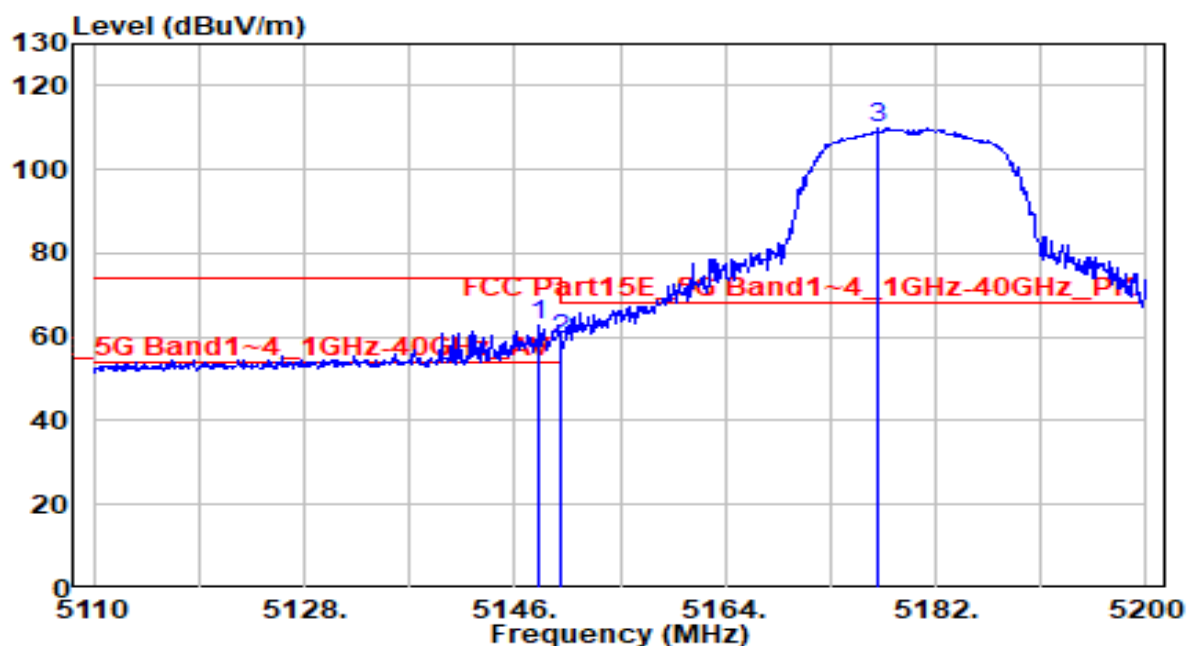


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.070	61.94	0.79	62.73	-11.27	74.00	215	155	Peak
2		5150.000	58.61	0.80	59.40	-14.60	74.00	215	155	Peak
3		5177.140	109.30	0.83	110.13	N/A	N/A	215	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

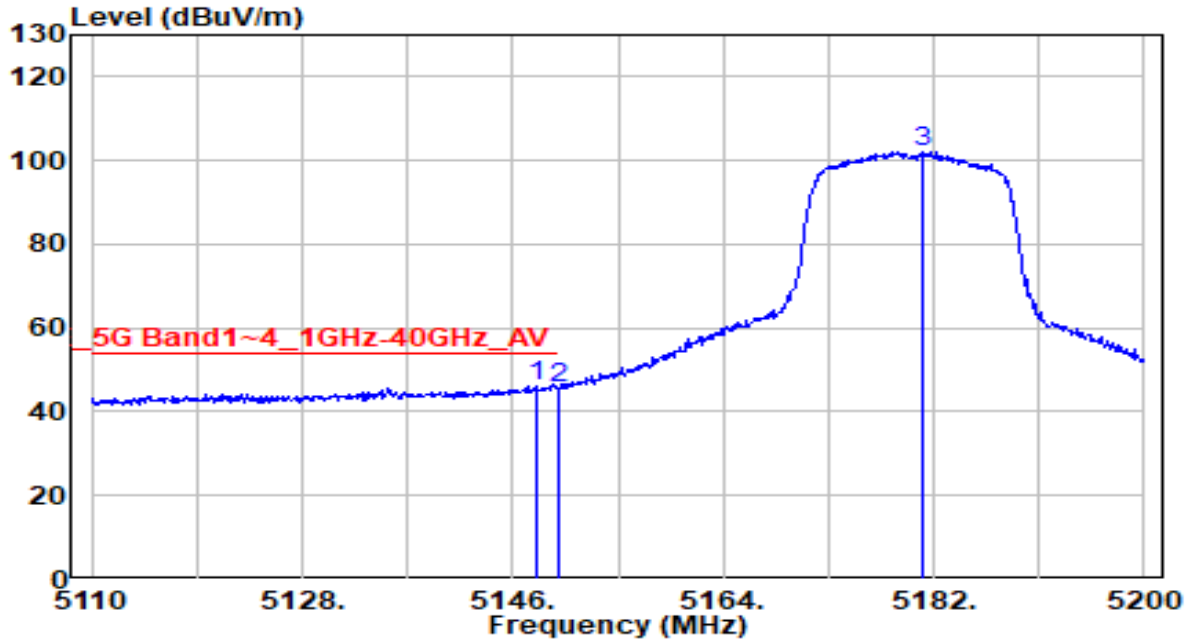


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.160	45.13	0.79	45.93	-8.07	54.00	215	155	Average
2		5150.000	44.63	0.80	45.43	-8.57	54.00	215	155	Average
3		5181.010	101.24	0.83	102.07	N/A	N/A	215	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

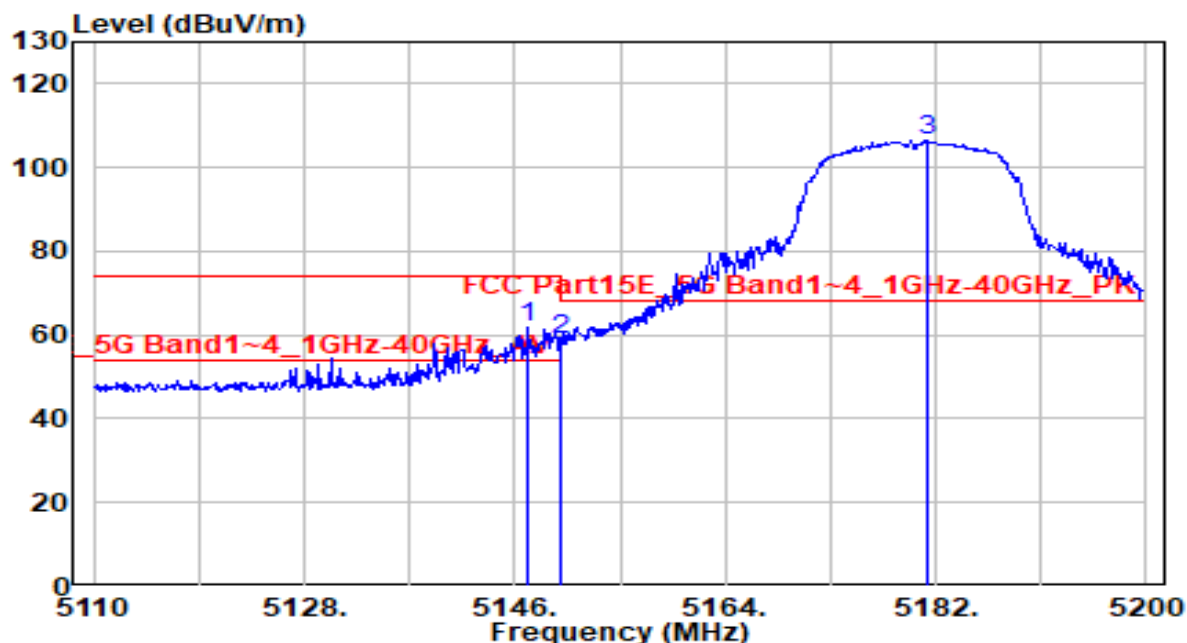


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.170	60.94	0.79	61.73	-12.27	74.00	200	10	Peak
2		5150.000	58.00	0.80	58.80	-15.20	74.00	200	10	Peak
3		5181.190	105.57	0.83	106.41	N/A	N/A	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

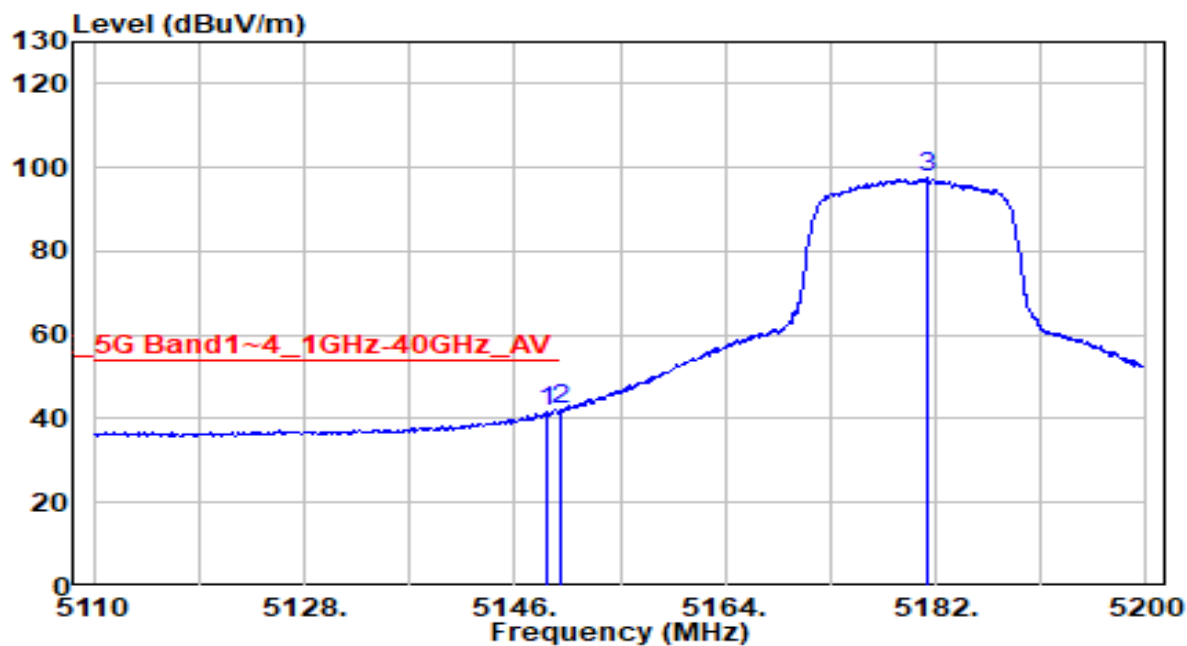


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.700	40.70	0.79	41.49	-12.51	54.00	200	10	Average
2	* 5150.000	41.18	0.80	41.98	-12.02	54.00	200	10	Average
3	5181.190	96.66	0.83	97.50	N/A	N/A	200	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

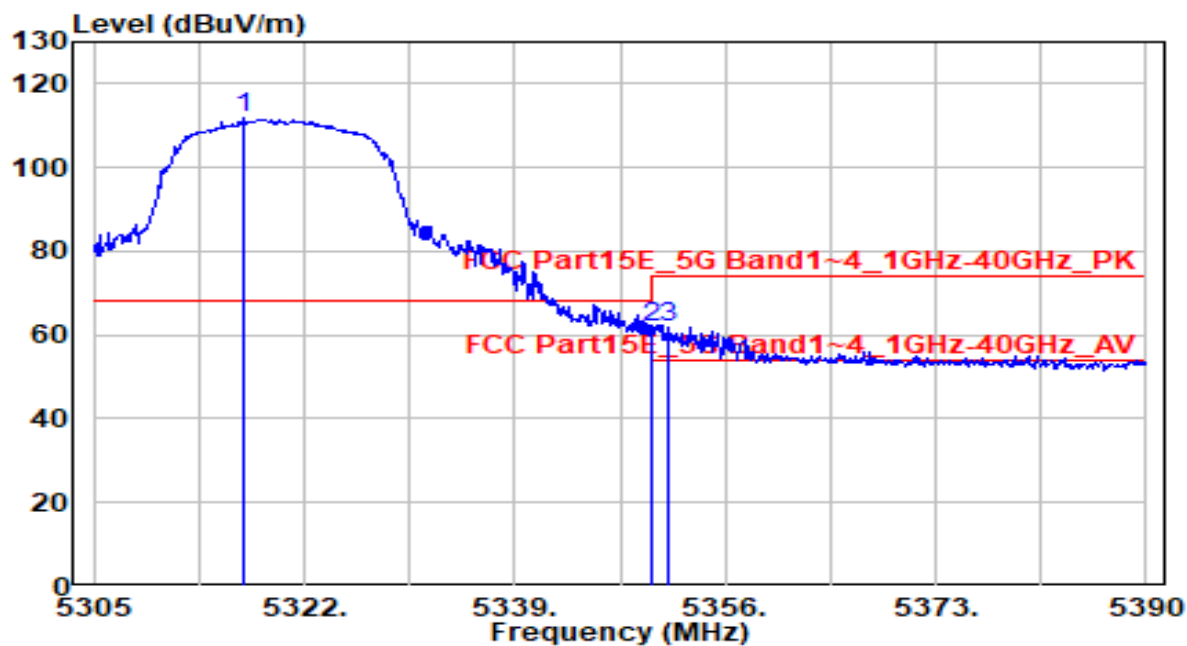


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.070	111.08	0.65	111.73	N/A	N/A	175	160	Peak
2	5350.000	61.25	0.59	61.85	-12.15	74.00	175	160	Peak
3	* 5351.410	61.42	0.59	62.01	-11.99	74.00	175	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

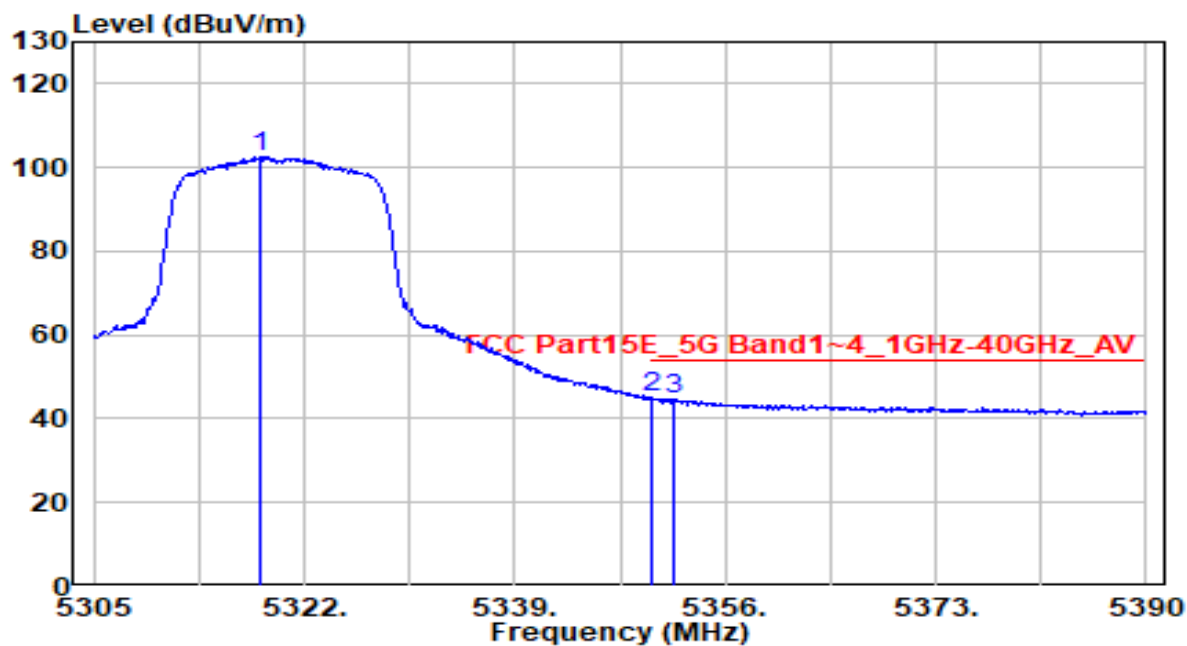


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	101.86	0.65	102.51	N/A	N/A	175	160	Average
2	* 5350.000	44.37	0.59	44.96	-9.04	54.00	175	160	Average
3	5351.920	44.14	0.59	44.73	-9.27	54.00	175	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

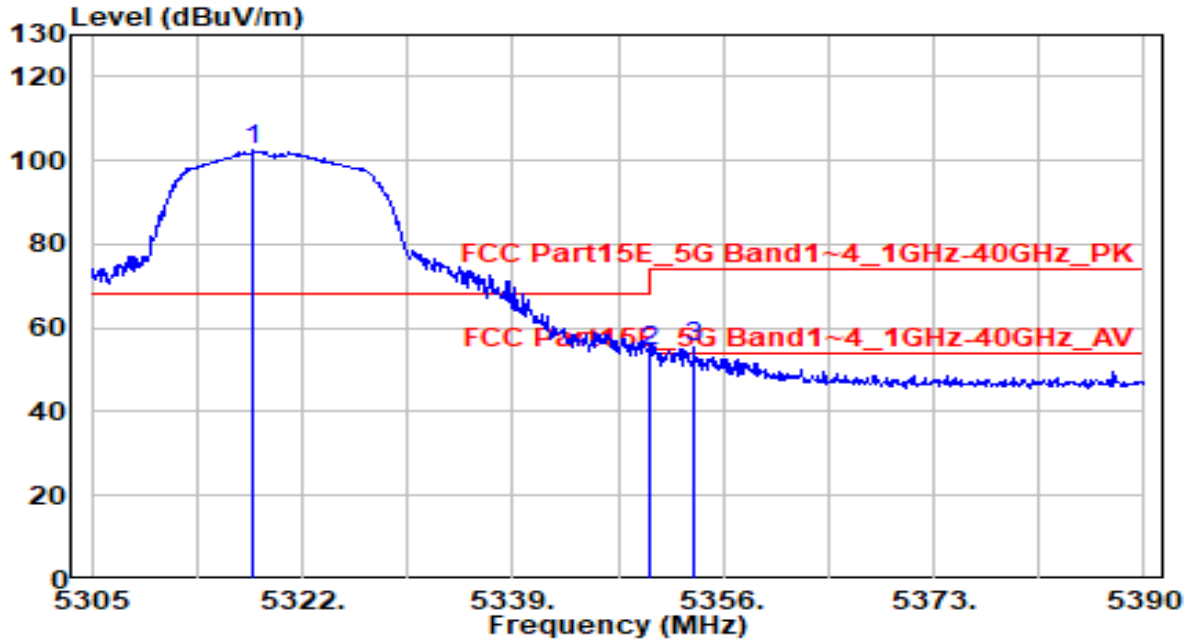


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.005	101.64	0.65	102.29	N/A	N/A	150	315	Peak
2	5350.000	53.90	0.59	54.49	-19.51	74.00	150	315	Peak
3	* 5353.620	54.67	0.59	55.26	-18.74	74.00	150	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

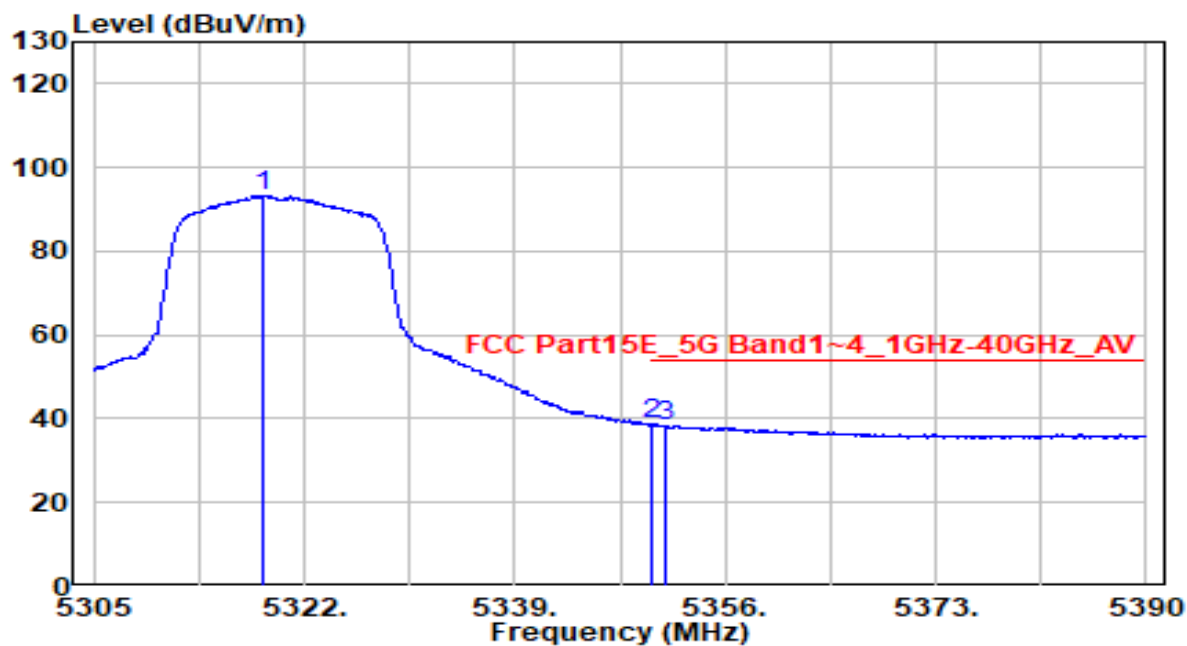


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.685	92.63	0.65	93.28	N/A	N/A	150	315	Average
2	* 5350.000	37.97	0.59	38.57	-15.43	54.00	150	315	Average
3	5351.240	37.80	0.59	38.39	-15.61	54.00	150	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

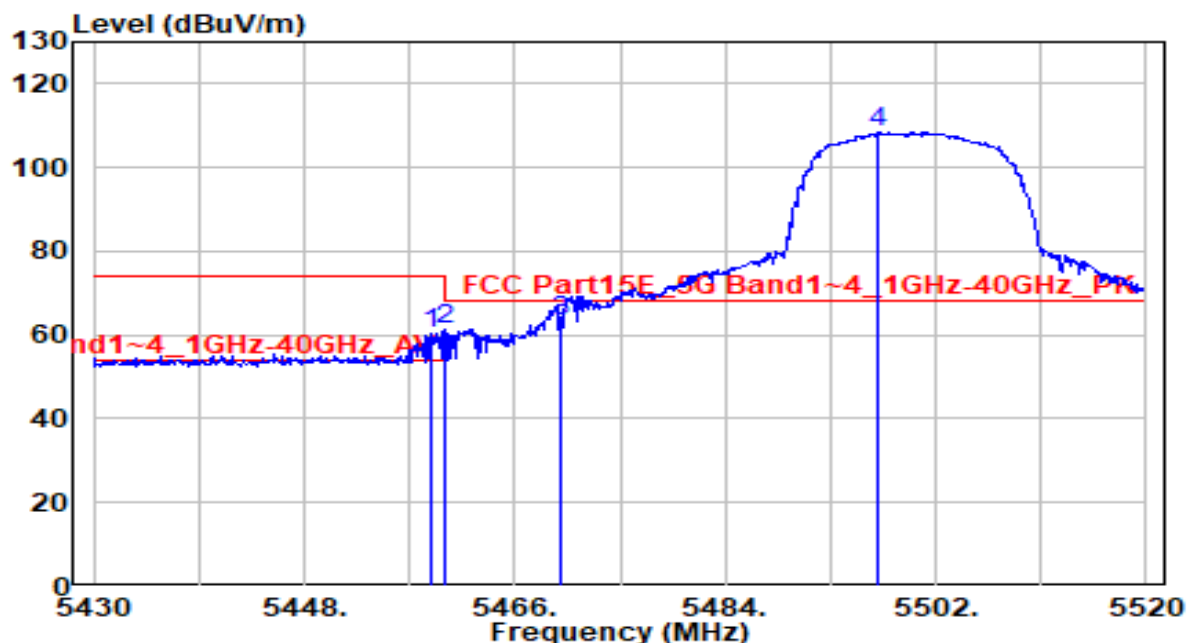


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.890	59.40	0.76	60.15	-13.85	74.00	210	160	Peak
2	5460.000	60.32	0.76	61.08	-12.92	74.00	210	160	Peak
3	* 5470.000	62.31	0.80	63.12	-5.08	68.20	210	160	Peak
4	5497.140	107.69	0.92	108.61	N/A	N/A	210	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

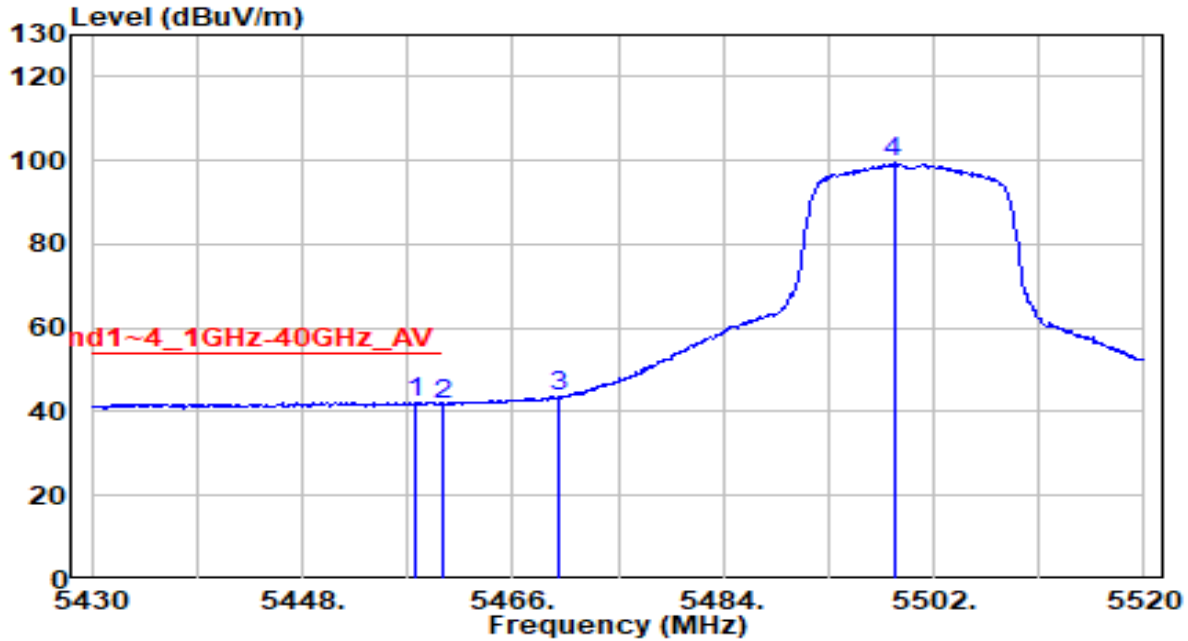


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.630	41.55	0.75	42.30	-11.70	54.00	210	160	Average
2		5460.000	41.04	0.76	41.80	-12.20	54.00	210	160	Average
3		5470.000	42.82	0.80	43.62	N/A	N/A	210	160	Average
4		5498.580	98.42	0.92	99.34	N/A	N/A	210	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

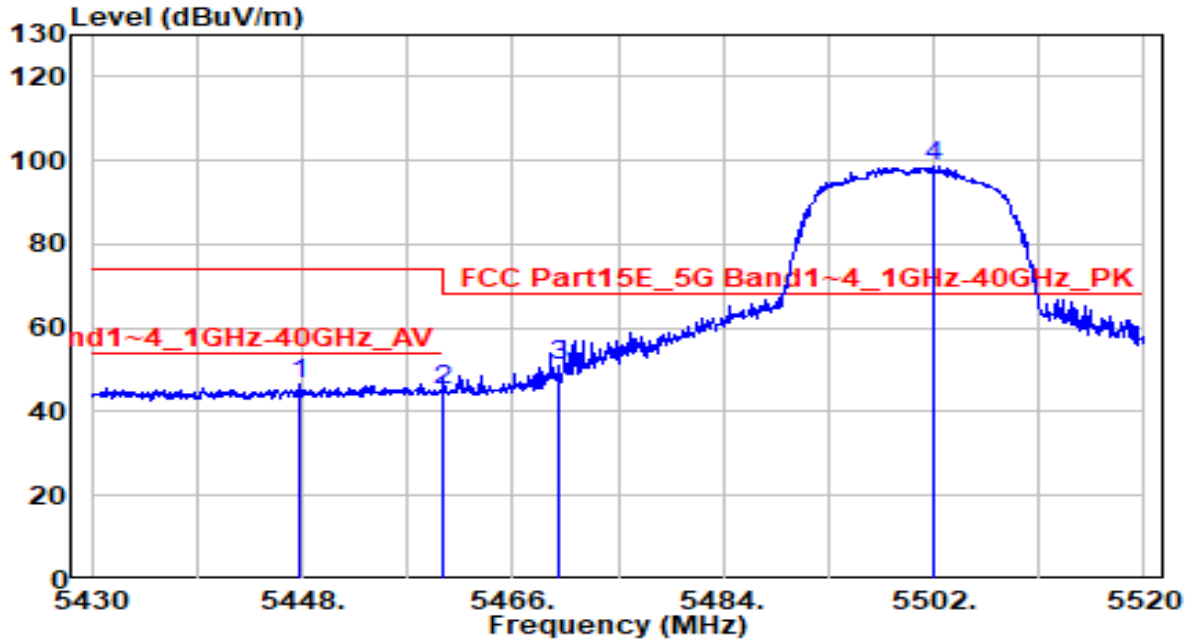


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.730	45.94	0.71	46.64	-27.36	74.00	135	175	Peak
2	5460.000	44.26	0.76	45.02	-28.98	74.00	135	175	Peak
3	* 5470.000	50.33	0.80	51.13	-17.07	68.20	135	175	Peak
4	5501.910	97.64	0.94	98.57	N/A	N/A	135	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

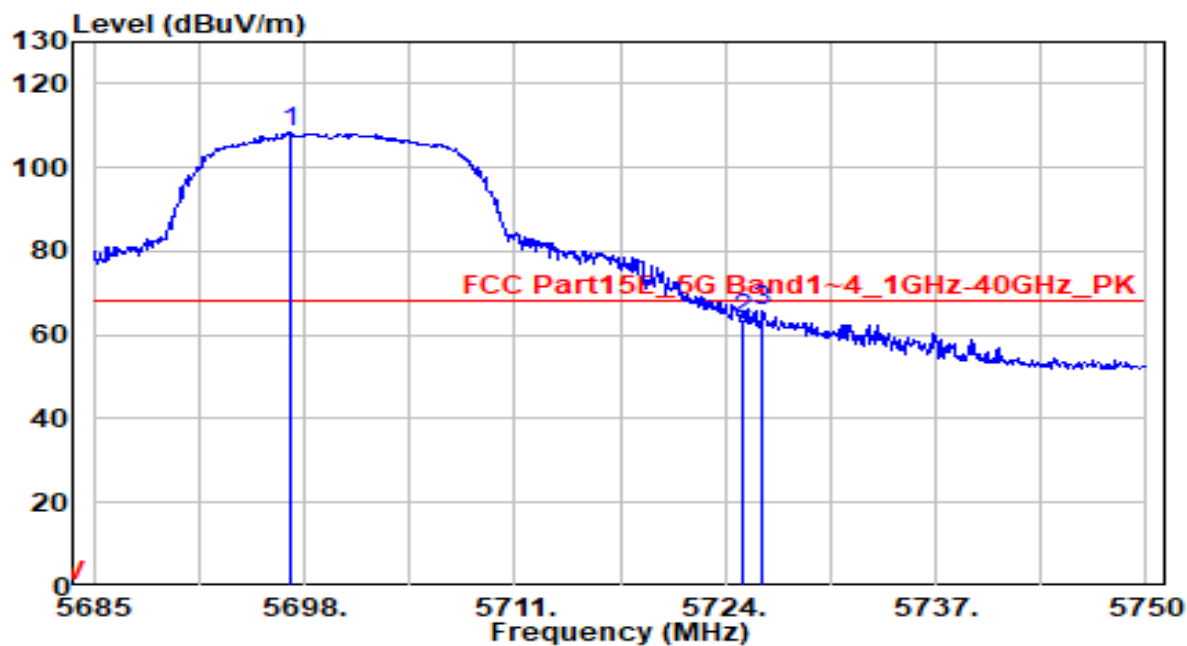


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.090	106.60	1.78	108.38	N/A	N/A	235	165	Peak
2	5725.000	61.69	1.89	63.57	-4.63	68.20	235	165	Peak
3	* 5726.275	64.03	1.89	65.92	-2.28	68.20	235	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

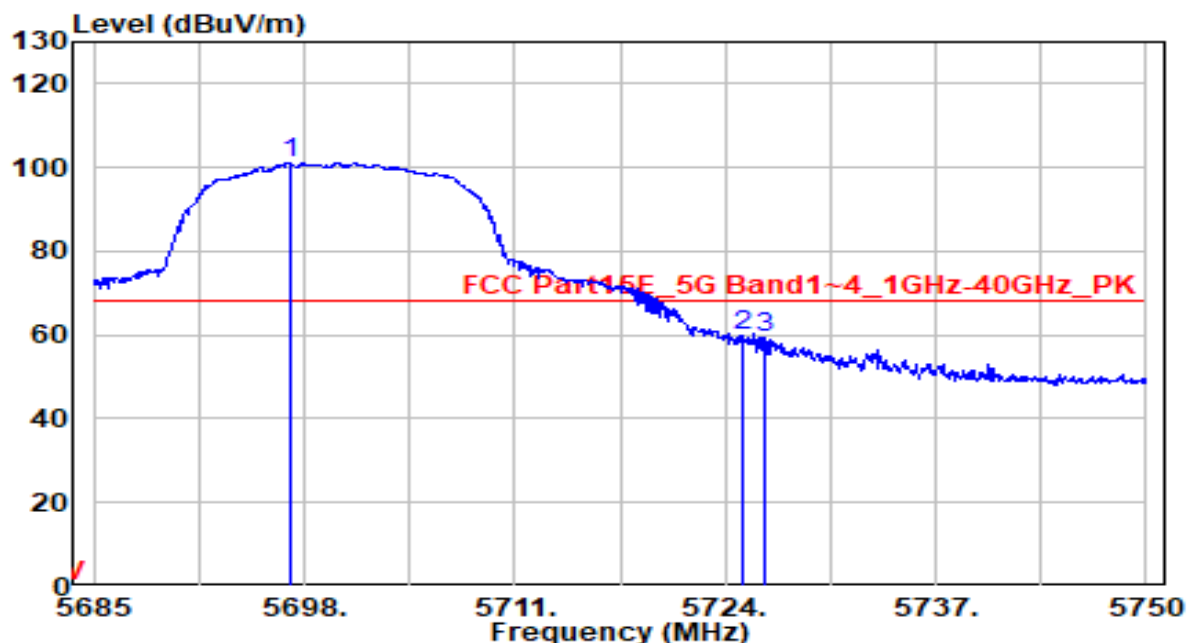


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.090	99.31	1.78	101.09	N/A	N/A	140	355	Peak
2	* 5725.000	57.99	1.89	59.88	-8.32	68.20	140	355	Peak
3	5726.470	57.57	1.89	59.47	-8.73	68.20	140	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

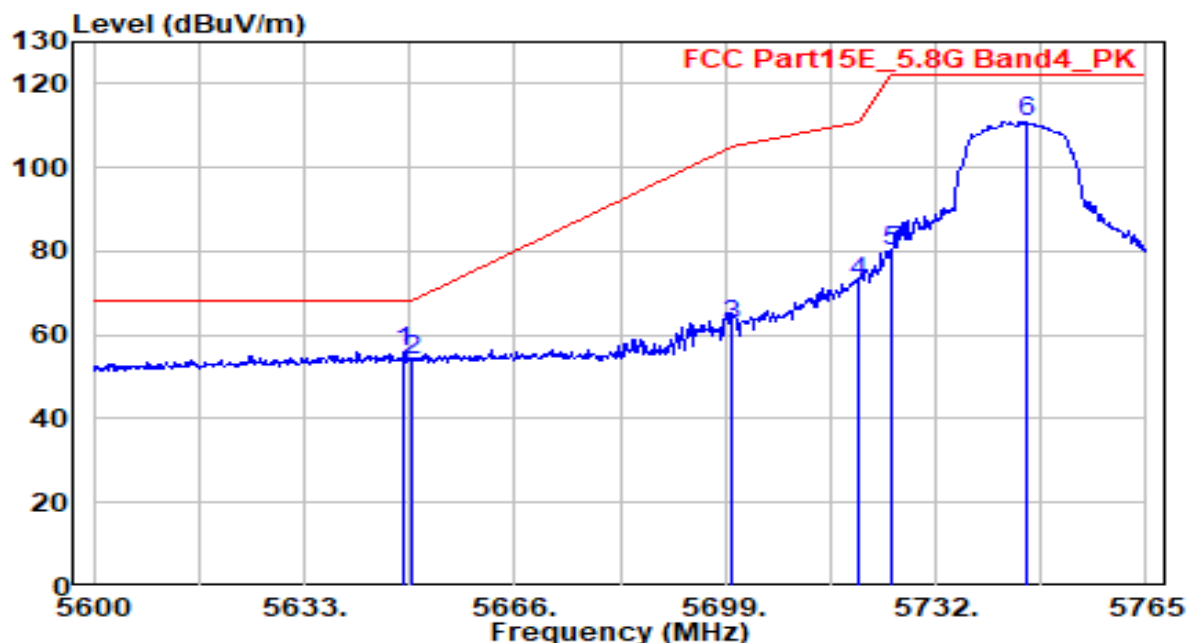


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.675	54.38	1.58	55.96	-12.24	68.20	190	160	Peak
2	5650.000	52.45	1.59	54.04	-14.16	68.20	190	160	Peak
3	5700.000	60.38	1.79	62.17	-43.03	105.20	190	160	Peak
4	5720.000	70.59	1.87	72.46	-38.34	110.80	190	160	Peak
5	5725.000	78.19	1.89	80.08	-42.12	122.20	190	160	Peak
6	5746.190	109.00	1.97	110.97	N/A	N/A	190	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

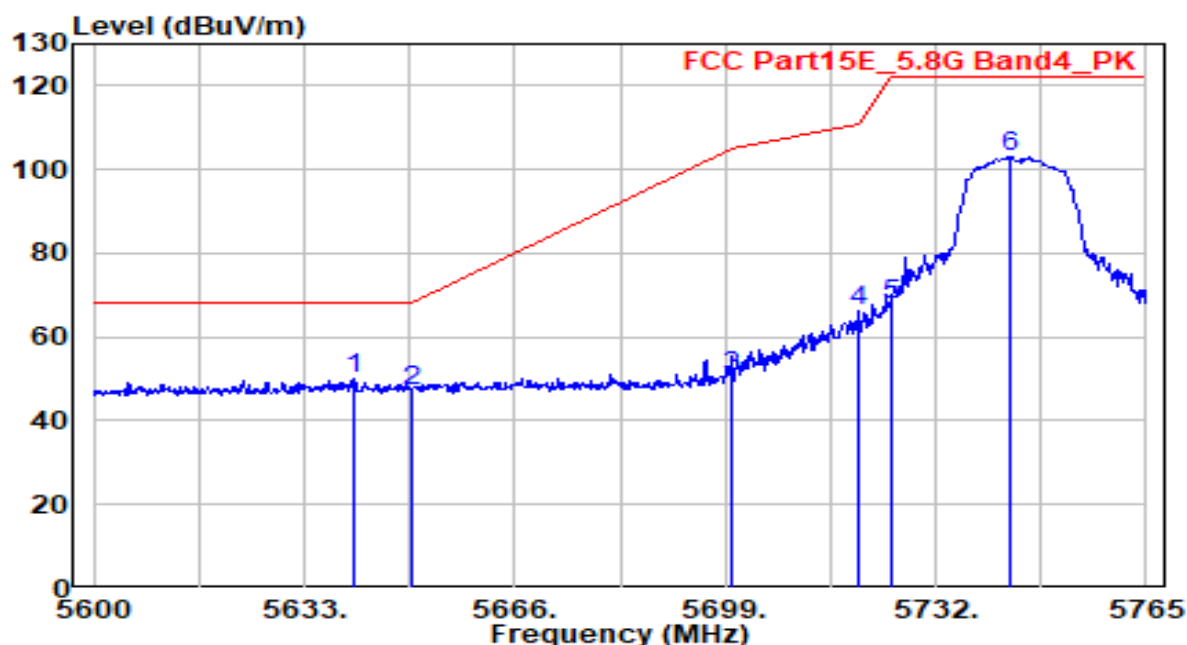


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5640.920	48.34	1.55	49.89	-18.31	68.20	155	355	Peak
2		5650.000	45.48	1.59	47.06	-21.14	68.20	155	355	Peak
3		5700.000	48.90	1.79	50.69	-54.51	105.20	155	355	Peak
4		5720.000	64.54	1.87	66.41	-44.39	110.80	155	355	Peak
5		5725.000	65.90	1.89	67.79	-54.41	122.20	155	355	Peak
6		5743.715	101.12	1.96	103.08	N/A	N/A	155	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

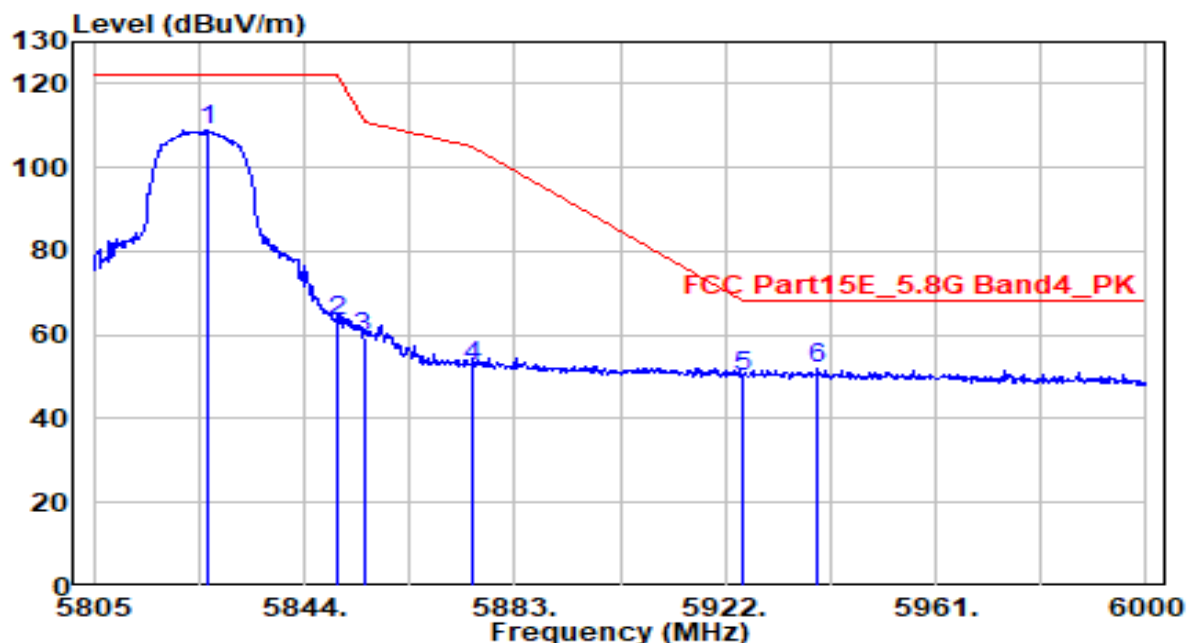


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.060	106.74	2.23	108.97	N/A	N/A	180	160	Peak
2	5850.000	61.05	2.27	63.32	-58.88	122.20	180	160	Peak
3	5855.000	57.19	2.28	59.47	-51.33	110.80	180	160	Peak
4	5875.000	50.13	2.31	52.44	-52.76	105.20	180	160	Peak
5	5925.000	47.76	2.38	50.14	-18.06	68.20	180	160	Peak
6	* 5939.160	49.66	2.41	52.07	-16.13	68.20	180	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

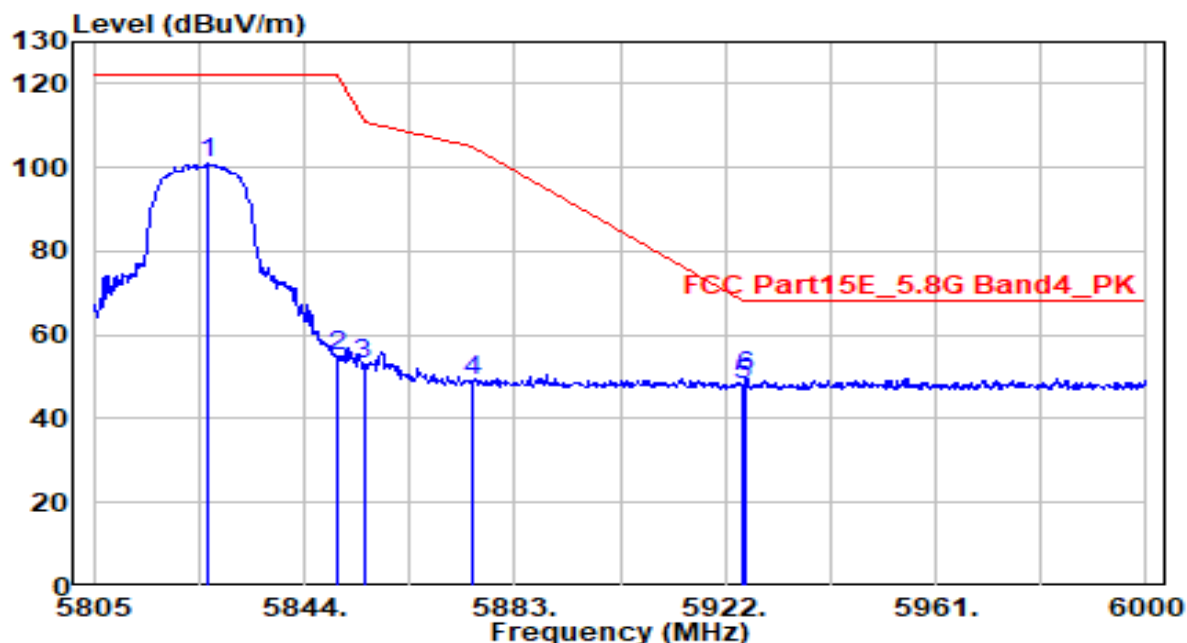


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.060	98.60	2.23	100.83	N/A	N/A	170	345	Peak
2	5850.000	52.76	2.27	55.02	-67.18	122.20	170	345	Peak
3	5855.000	50.75	2.28	53.03	-57.77	110.80	170	345	Peak
4	5875.000	46.84	2.31	49.15	-56.05	105.20	170	345	Peak
5	5925.000	45.56	2.38	47.95	-20.25	68.20	170	345	Peak
6	* 5925.900	47.46	2.39	49.84	-18.36	68.20	170	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

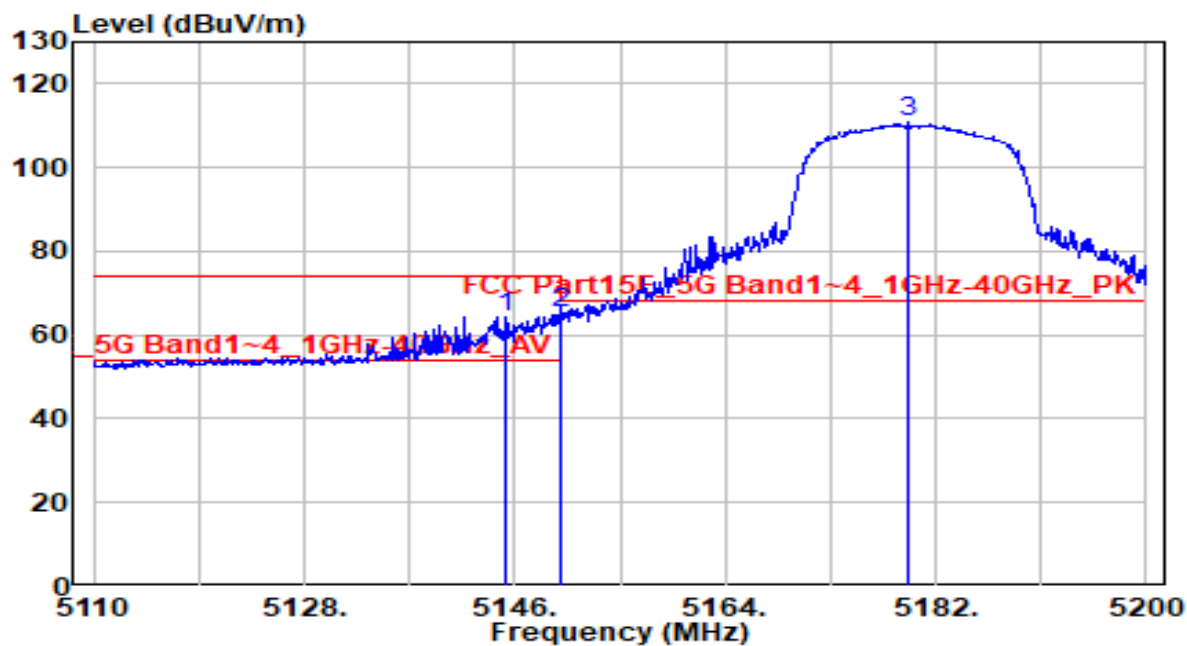


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5145.190	63.62	0.79	64.41	-9.59	74.00	215	155	Peak
2	* 5150.000	64.24	0.80	65.04	-8.96	74.00	215	155	Peak
3	5179.570	110.17	0.83	111.00	N/A	N/A	215	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

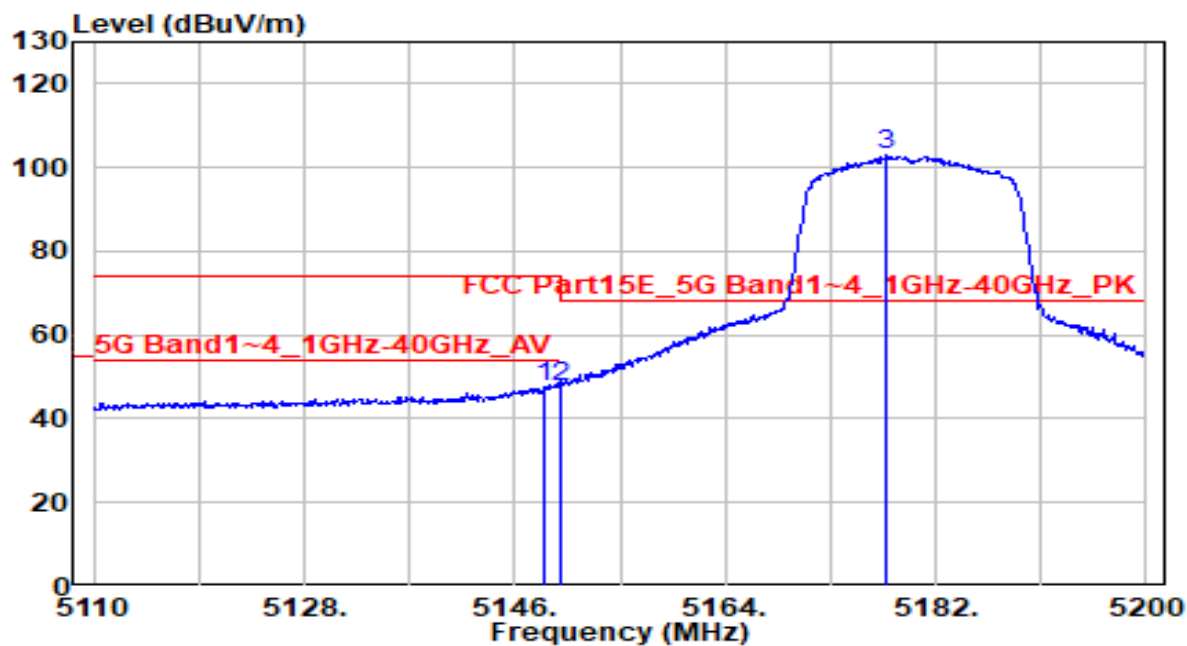


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	46.99	0.79	47.79	-6.21	54.00	215	155	Average
2		5150.000	46.83	0.80	47.63	-6.37	54.00	215	155	Average
3		5177.770	102.01	0.83	102.84	N/A	N/A	215	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

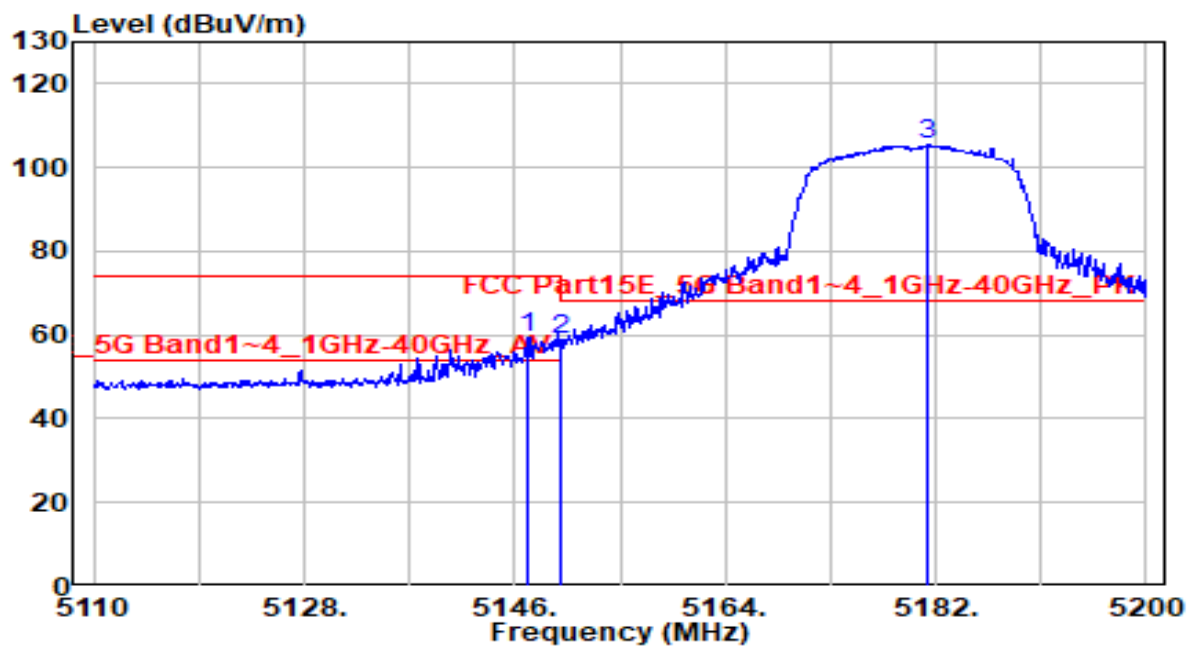


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.170	58.56	0.79	59.35	-14.65	74.00	200	10	Peak
2		5150.000	58.15	0.80	58.94	-15.06	74.00	200	10	Peak
3		5181.190	104.57	0.83	105.40	N/A	N/A	200	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

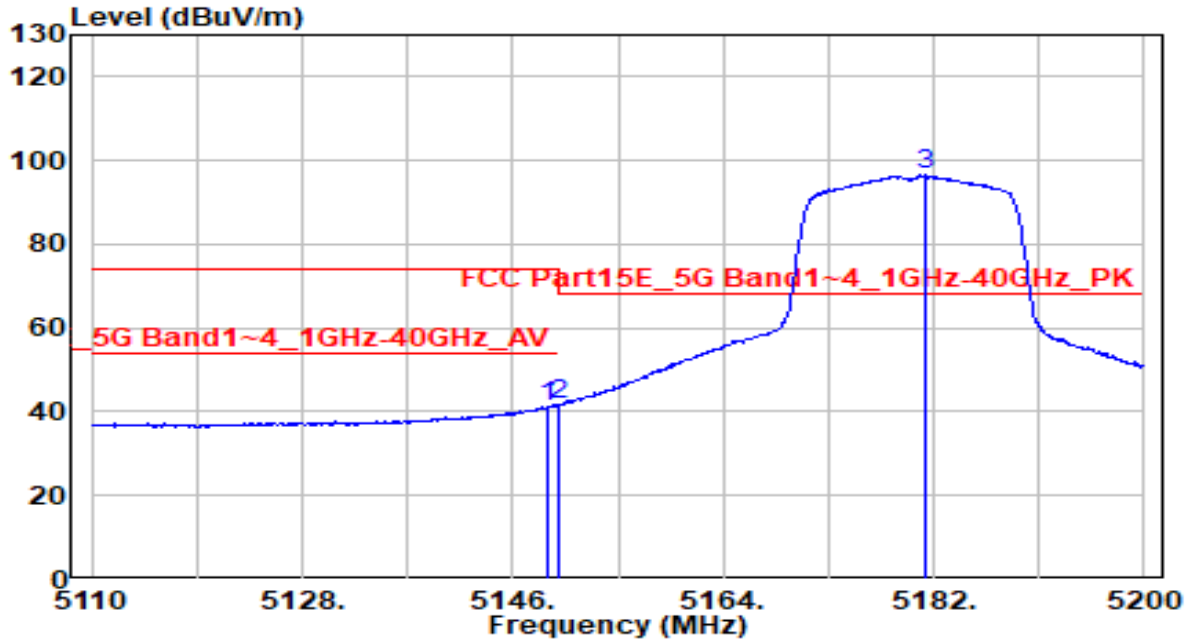


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.970	40.47	0.79	41.27	-12.73	54.00	200	10	Average
2	* 5150.000	40.88	0.80	41.68	-12.32	54.00	200	10	Average
3	5181.280	95.68	0.83	96.52	N/A	N/A	200	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

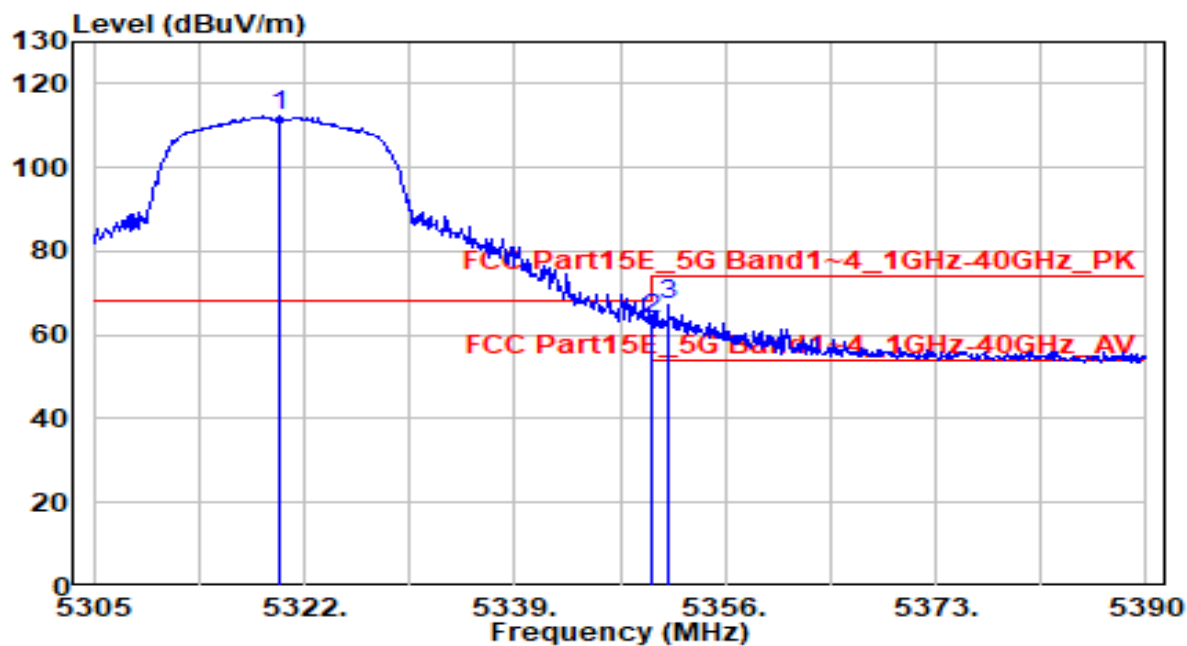


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.045	111.82	0.65	112.47	N/A	N/A	175	160	Peak
2	5350.000	62.94	0.59	63.53	-10.47	74.00	175	160	Peak
3	* 5351.410	66.38	0.59	66.97	-7.03	74.00	175	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

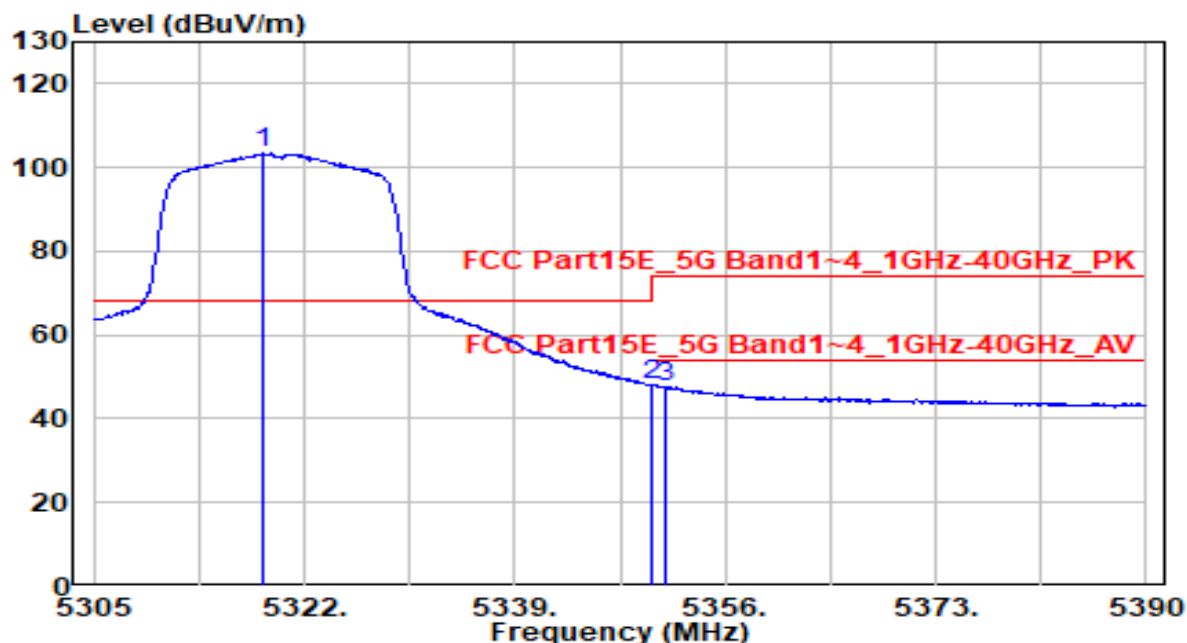


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.685	102.67	0.65	103.32	N/A	N/A	175	160	Average
2	* 5350.000	47.40	0.59	48.00	-6.00	54.00	175	160	Average
3	5351.155	47.20	0.59	47.80	-6.20	54.00	175	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

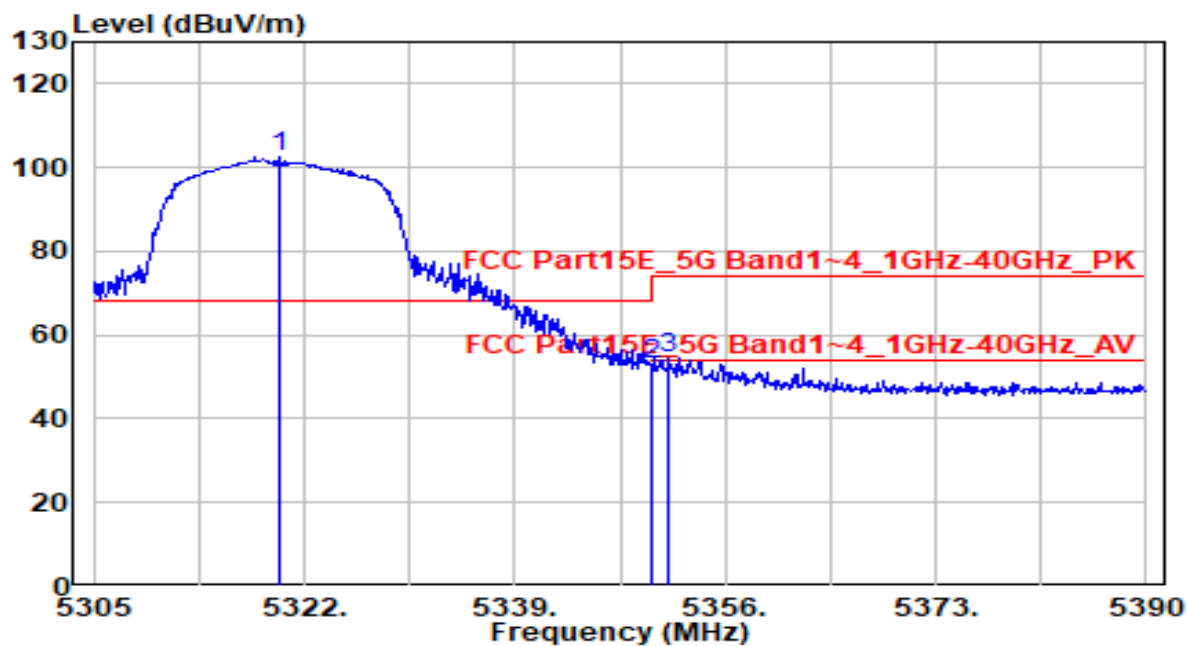


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.960	101.95	0.65	102.59	N/A	N/A	150	315	Peak
2	5350.000	52.52	0.59	53.11	-20.89	74.00	150	315	Peak
3	* 5351.495	53.85	0.59	54.44	-19.56	74.00	150	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

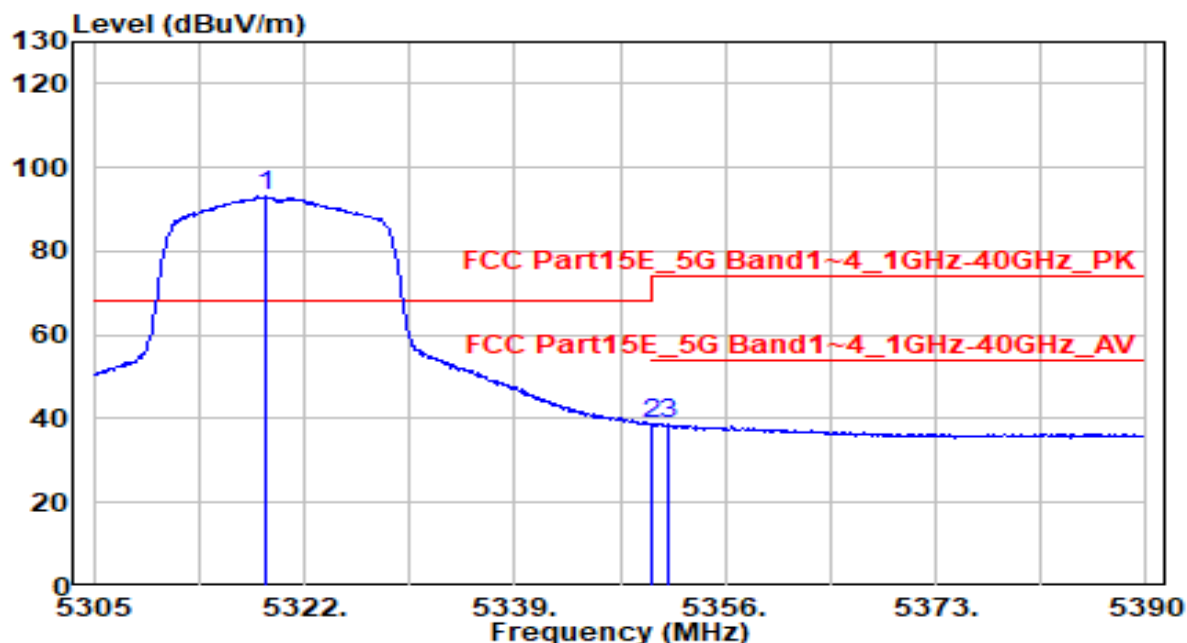


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	92.42	0.65	93.07	N/A	N/A	150	315	Average
2	5350.000	38.05	0.59	38.64	-15.36	54.00	150	315	Average
3	* 5351.410	38.08	0.59	38.68	-15.32	54.00	150	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

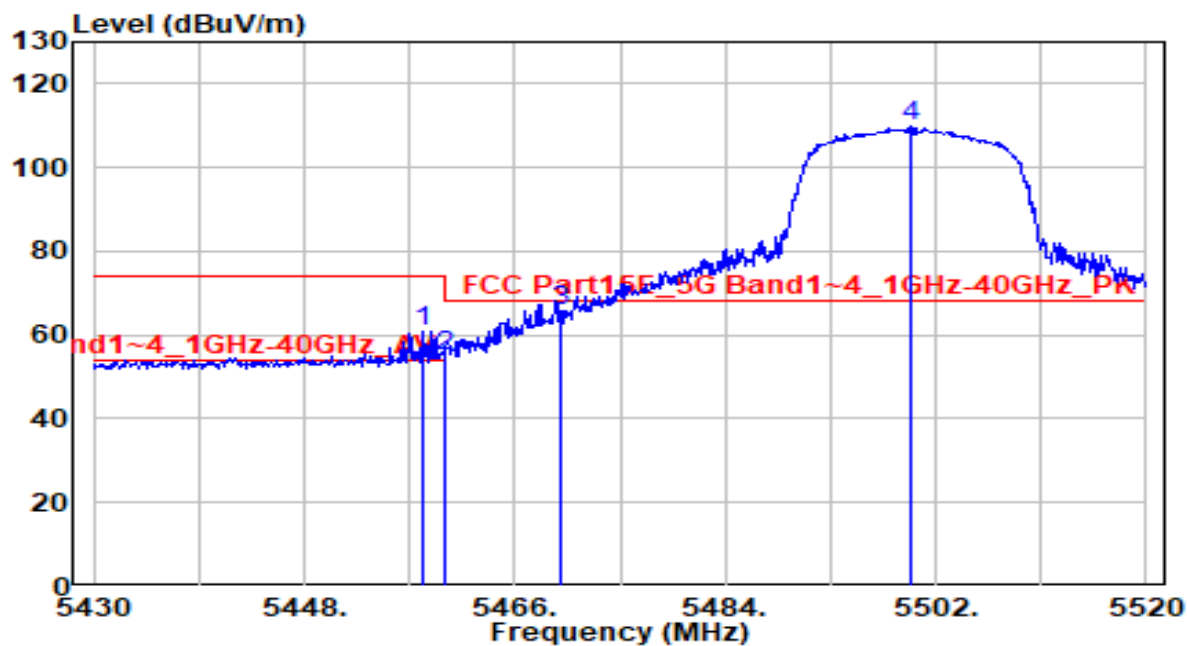


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.260	60.06	0.75	60.81	-13.19	74.00	210	160	Peak
2	5460.000	54.37	0.76	55.13	-18.87	74.00	210	160	Peak
3	* 5470.000	64.89	0.80	65.70	-2.50	68.20	210	160	Peak
4	5499.930	108.84	0.93	109.77	N/A	N/A	210	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

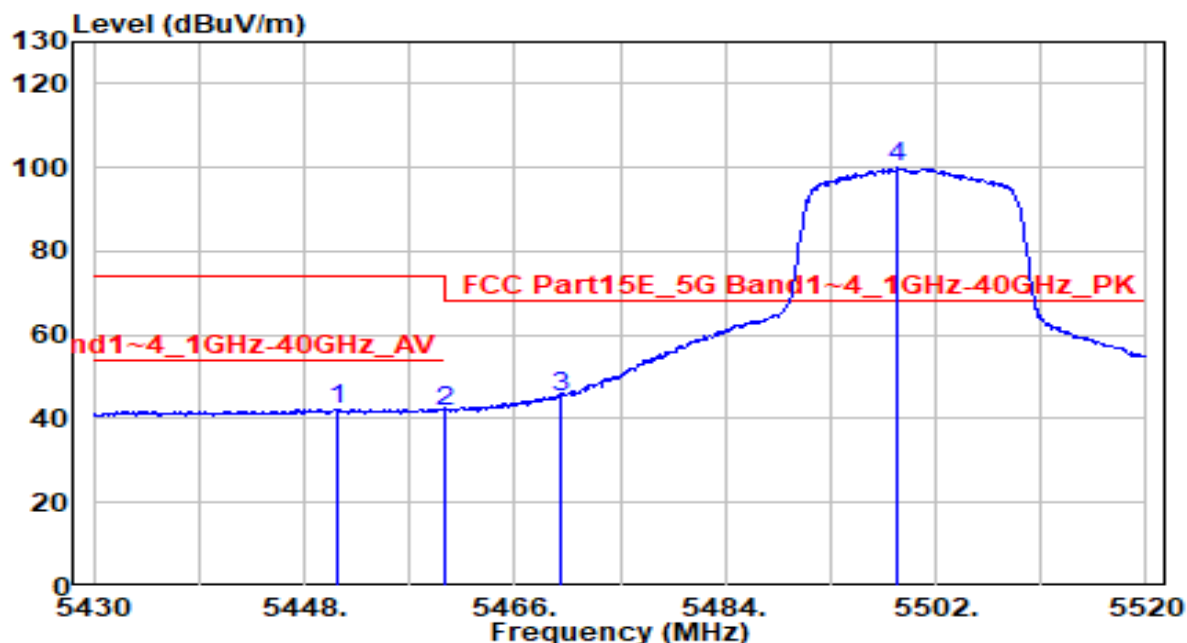


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.790	41.58	0.72	42.30	-11.70	54.00	210	160	Average
2		5460.000	41.14	0.76	41.90	-12.10	54.00	210	160	Average
3		5470.000	44.57	0.80	45.38	N/A	N/A	210	160	Average
4		5498.760	98.93	0.92	99.85	N/A	N/A	210	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

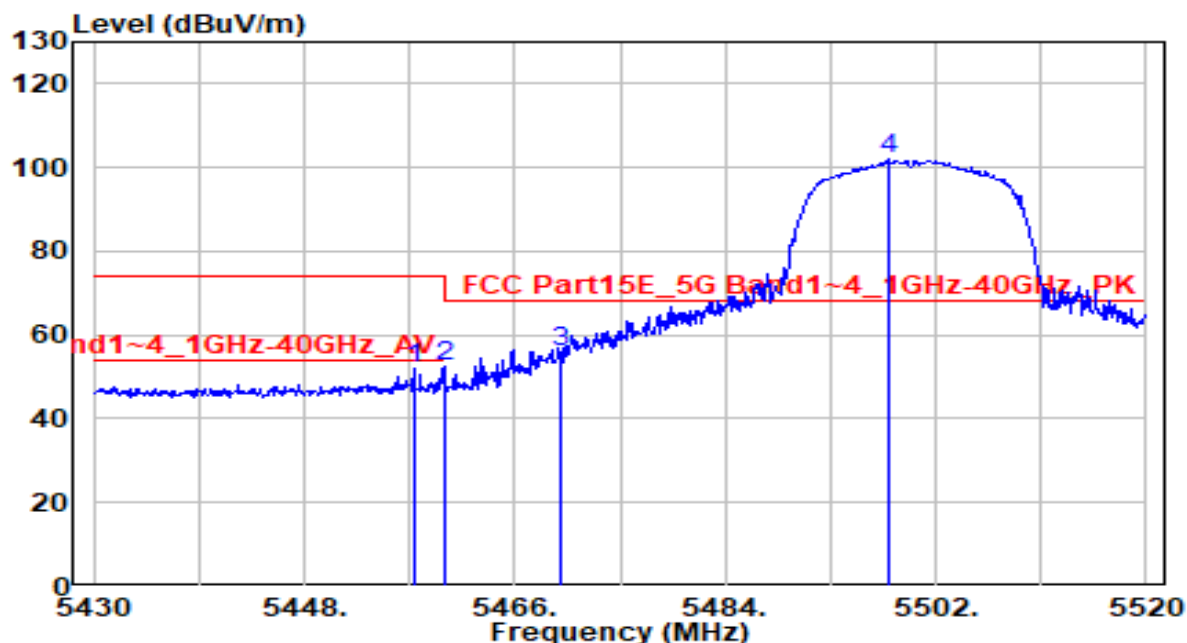


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.360	51.23	0.75	51.98	-22.02	74.00	135	175	Peak
2	5460.000	51.56	0.76	52.32	-21.68	74.00	135	175	Peak
3	* 5470.000	55.35	0.80	56.15	-12.05	68.20	135	175	Peak
4	5497.950	101.04	0.92	101.96	N/A	N/A	135	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

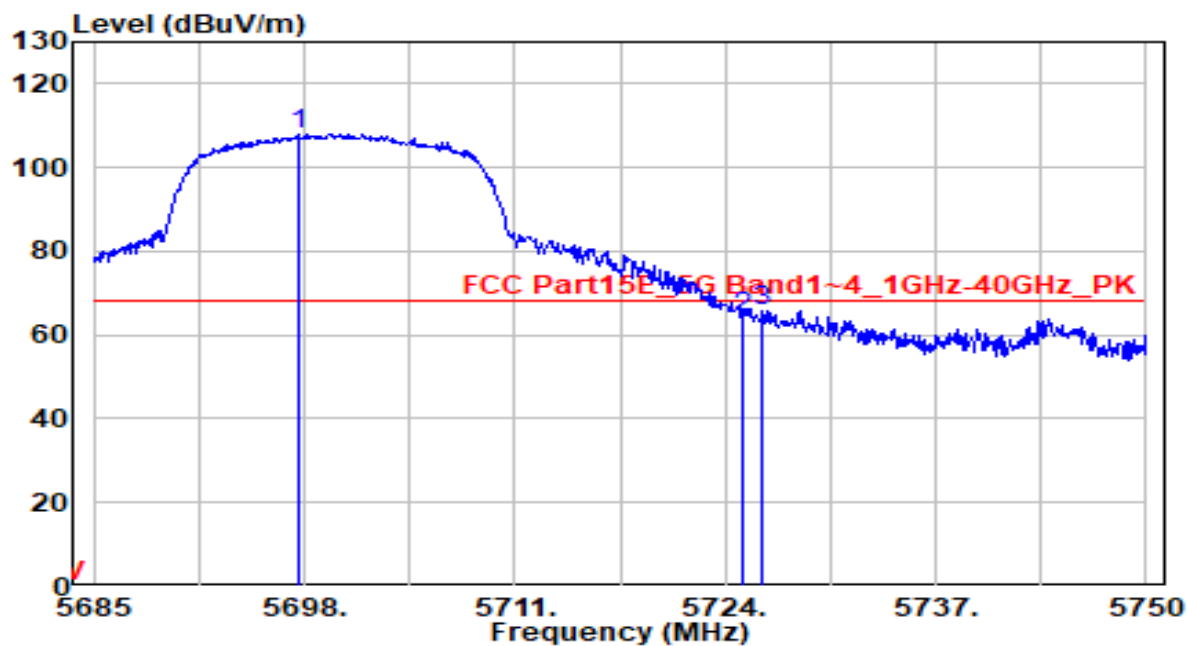


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.610	106.29	1.78	108.07	N/A	N/A	235	165	Peak
2	5725.000	62.30	1.89	64.19	-4.01	68.20	235	165	Peak
3	* 5726.340	63.88	1.89	65.77	-2.43	68.20	235	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

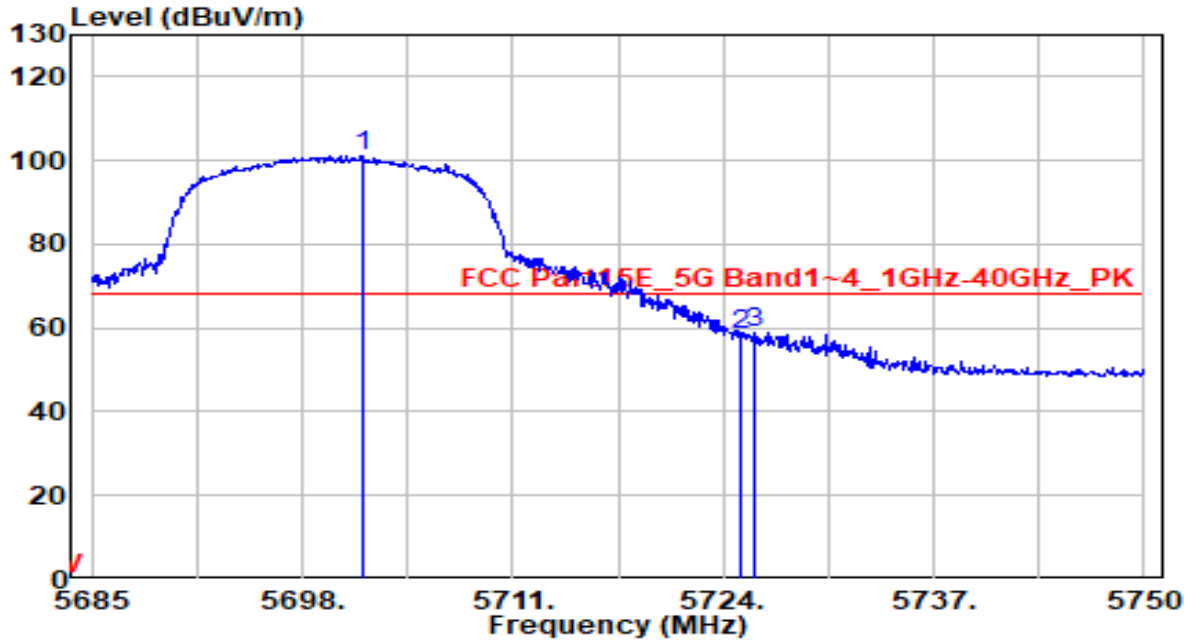


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.705	99.32	1.79	101.11	N/A	N/A	140	355	Peak
2	5725.000	56.47	1.89	58.36	-9.84	68.20	140	355	Peak
3	* 5725.950	56.92	1.89	58.81	-9.39	68.20	140	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

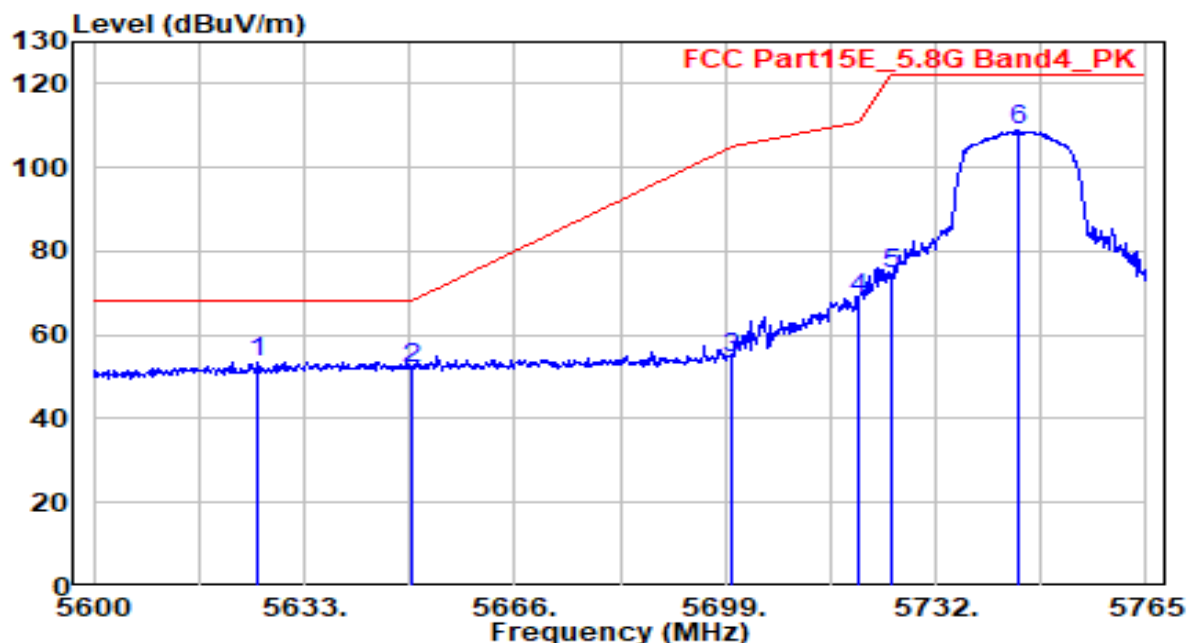


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.740	52.14	1.49	53.63	-14.57	68.20	190	160	Peak
2		5650.000	50.37	1.59	51.95	-16.25	68.20	190	160	Peak
3		5700.000	52.75	1.79	54.53	-50.67	105.20	190	160	Peak
4		5720.000	66.83	1.87	68.70	-42.10	110.80	190	160	Peak
5		5725.000	72.65	1.89	74.54	-47.66	122.20	190	160	Peak
6		5744.870	106.85	1.97	108.82	N/A	N/A	190	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

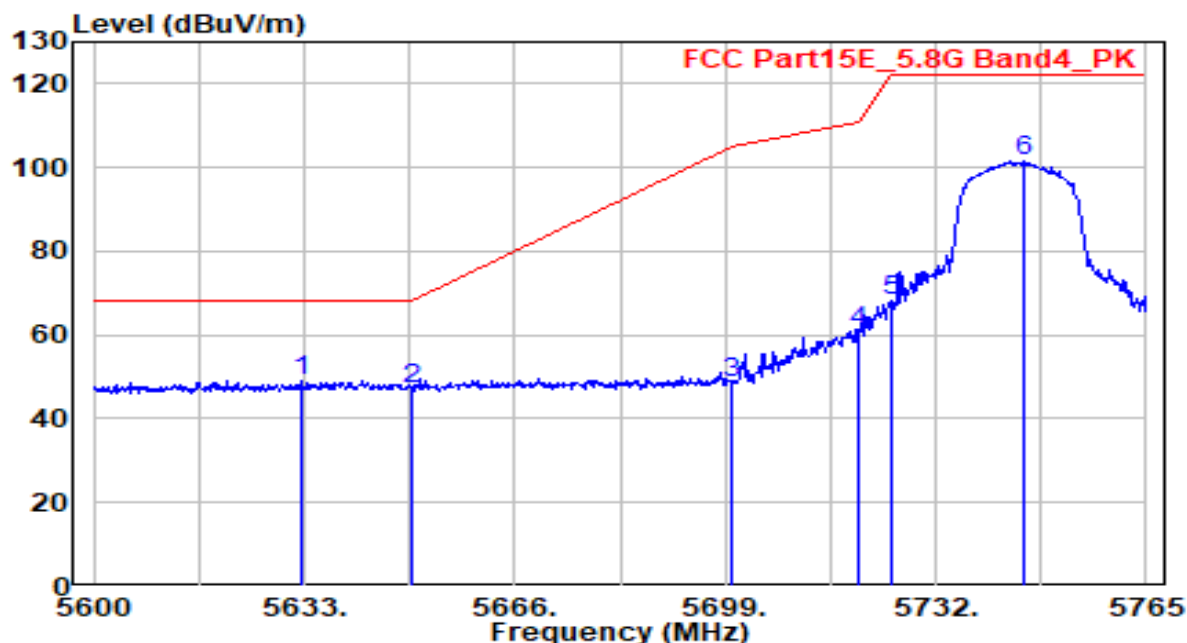


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5632.505	47.48	1.52	48.99	-19.21	68.20	155	355	Peak
2	5650.000	45.62	1.59	47.21	-20.99	68.20	155	355	Peak
3	5700.000	46.54	1.79	48.33	-56.87	105.20	155	355	Peak
4	5720.000	58.88	1.87	60.75	-50.05	110.80	155	355	Peak
5	5725.000	66.18	1.89	68.07	-54.13	122.20	155	355	Peak
6	5745.695	99.76	1.97	101.74	N/A	N/A	155	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

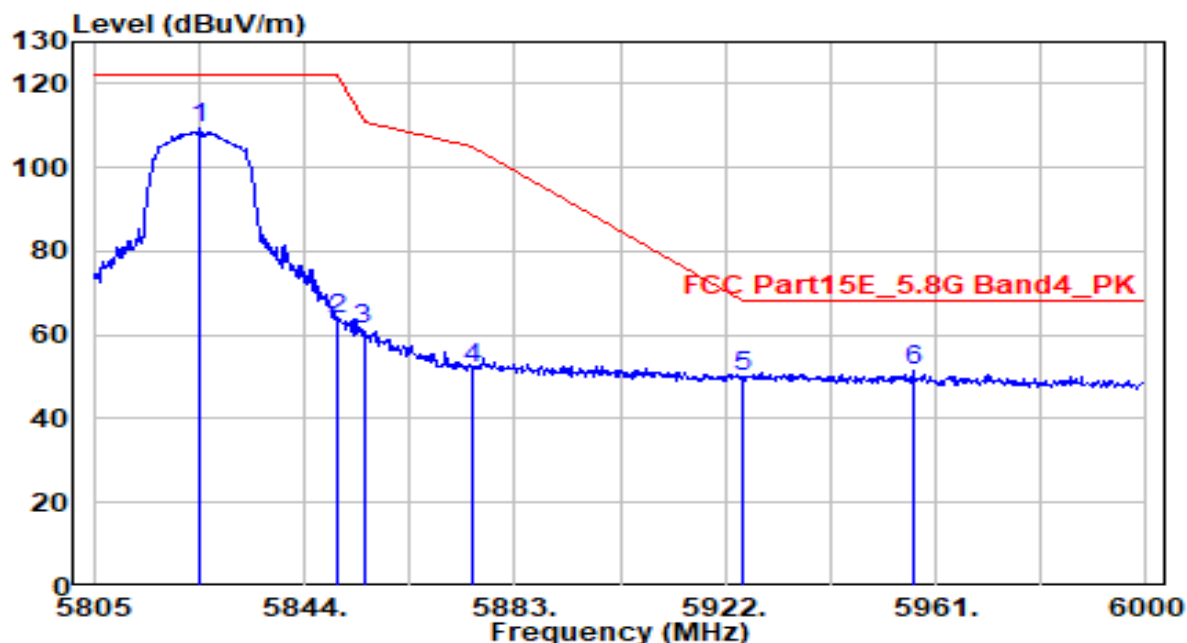


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.695	107.18	2.23	109.41	N/A	N/A	180	160	Peak
2	5850.000	61.66	2.27	63.93	-58.27	122.20	180	160	Peak
3	5855.000	58.82	2.28	61.10	-49.70	110.80	180	160	Peak
4	5875.000	49.74	2.31	52.05	-53.15	105.20	180	160	Peak
5	5925.000	47.67	2.38	50.05	-18.15	68.20	180	160	Peak
6	* 5956.905	48.84	2.43	51.27	-16.93	68.20	180	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

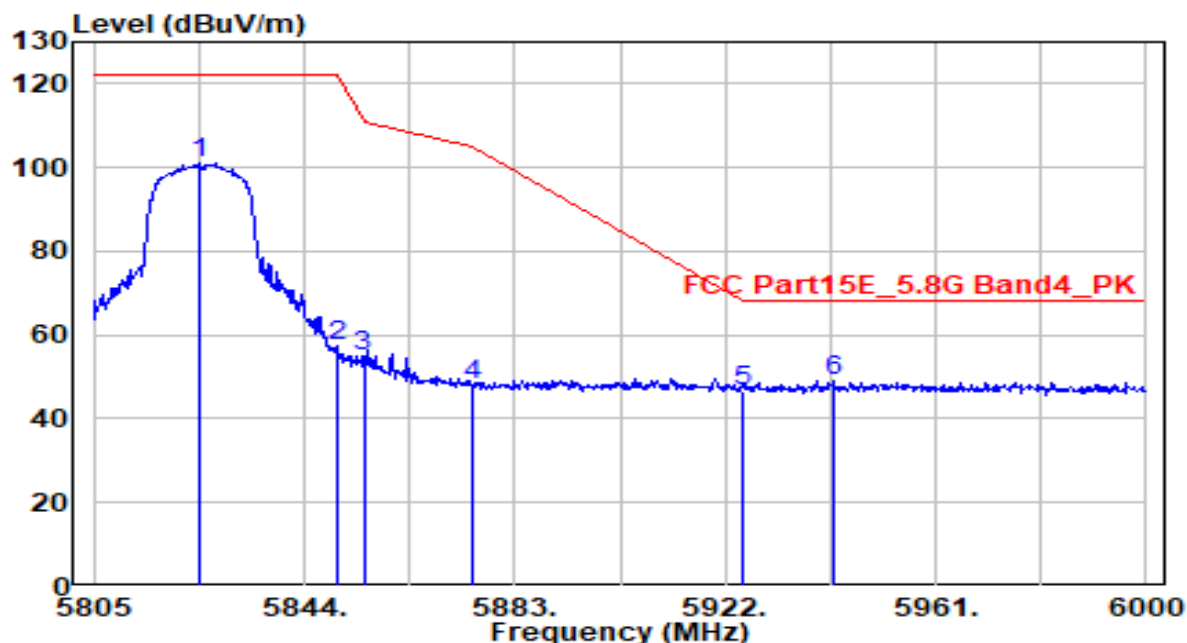


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5824.500	98.91	2.23	101.14	N/A	N/A	170	345	Peak
2	5850.000	55.00	2.27	57.27	-64.93	122.20	170	345	Peak
3	5855.000	52.77	2.28	55.04	-55.76	110.80	170	345	Peak
4	5875.000	45.70	2.31	48.01	-57.19	105.20	170	345	Peak
5	5925.000	44.25	2.38	46.64	-21.56	68.20	170	345	Peak
6	* 5942.085	46.45	2.41	48.86	-19.34	68.20	170	345	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

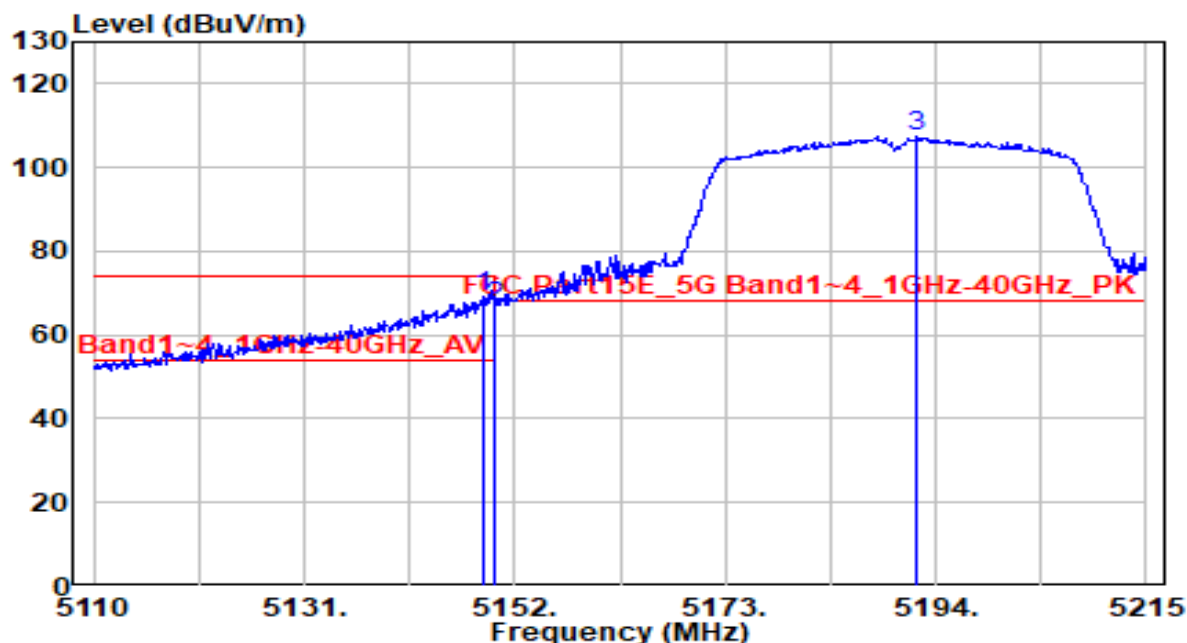


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	68.49	0.79	69.29	-4.71	74.00	235	155	Peak
2		5150.000	66.04	0.80	66.83	-7.17	74.00	235	155	Peak
3		5192.110	106.56	0.85	107.41	N/A	N/A	235	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

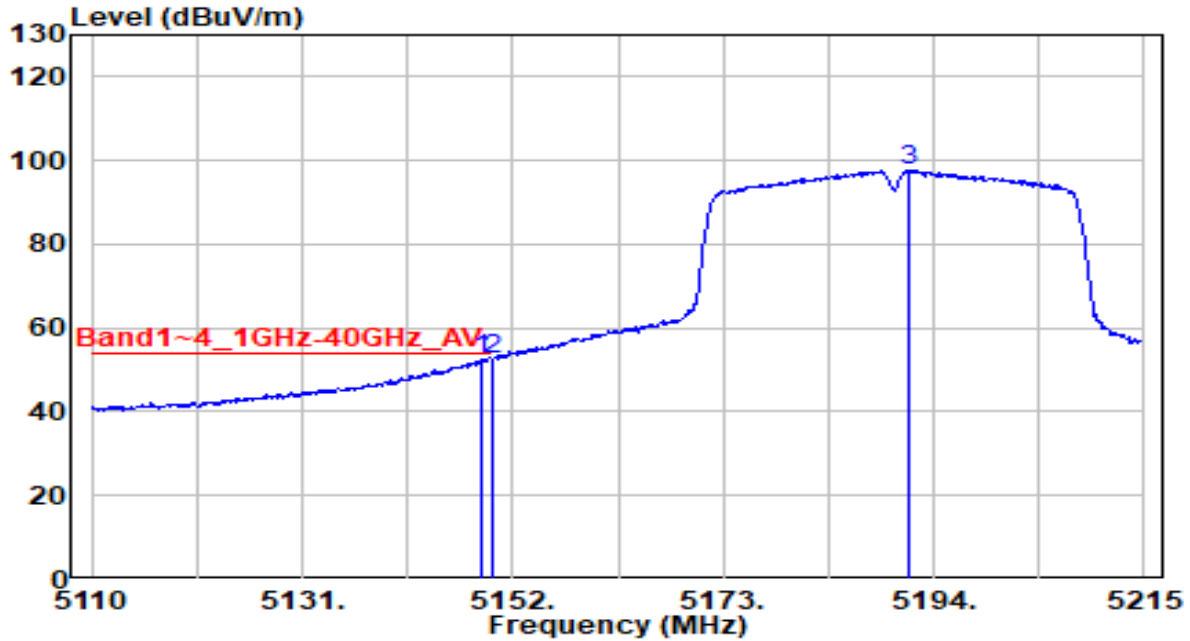


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	51.73	0.79	52.53	-1.47	54.00	235	155	Average
2		5150.000	51.68	0.80	52.48	-1.52	54.00	235	155	Average
3		5191.480	97.01	0.85	97.85	N/A	N/A	235	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

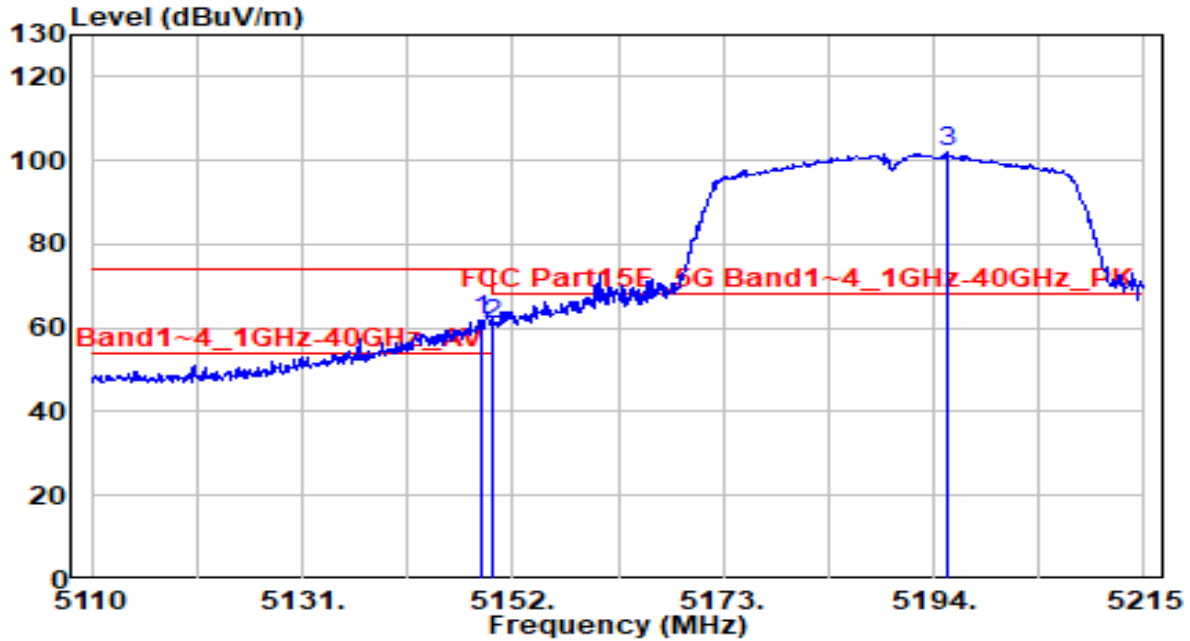


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	61.13	0.79	61.93	-12.07	74.00	195	10	Peak
2		5150.000	59.90	0.80	60.70	-13.30	74.00	195	10	Peak
3		5195.260	100.94	0.85	101.79	N/A	N/A	195	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

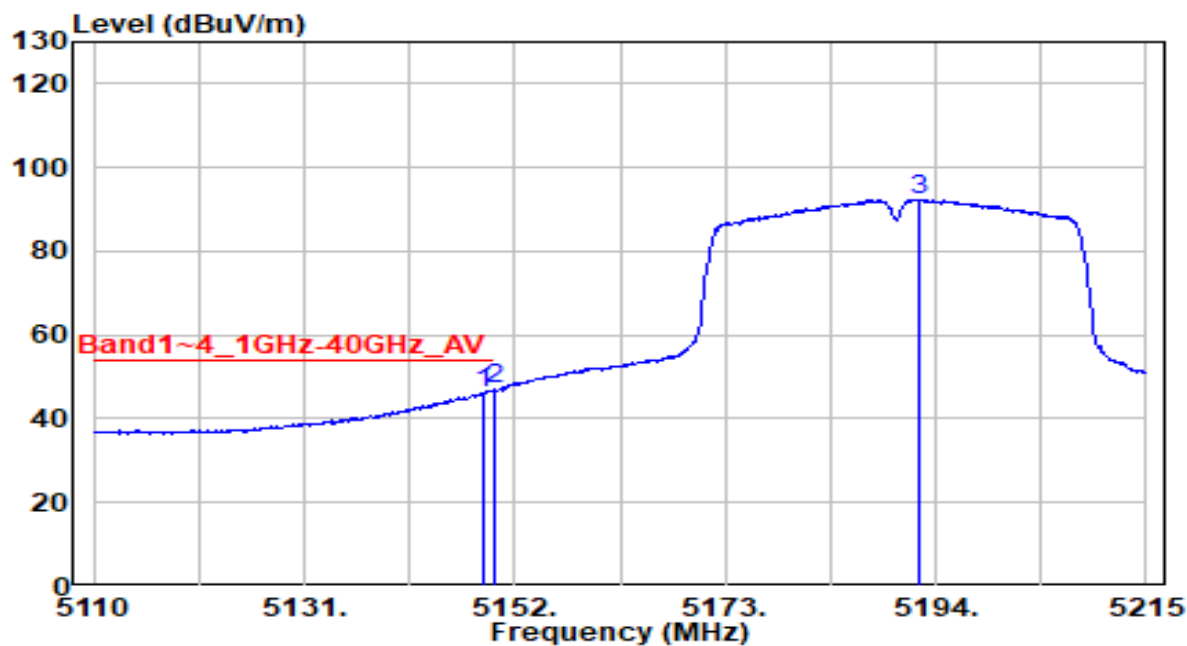


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.955	45.30	0.79	46.09	-7.91	54.00	195	10	Average
2	* 5150.000	46.09	0.80	46.88	-7.12	54.00	195	10	Average
3	5192.320	91.54	0.85	92.39	N/A	N/A	195	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

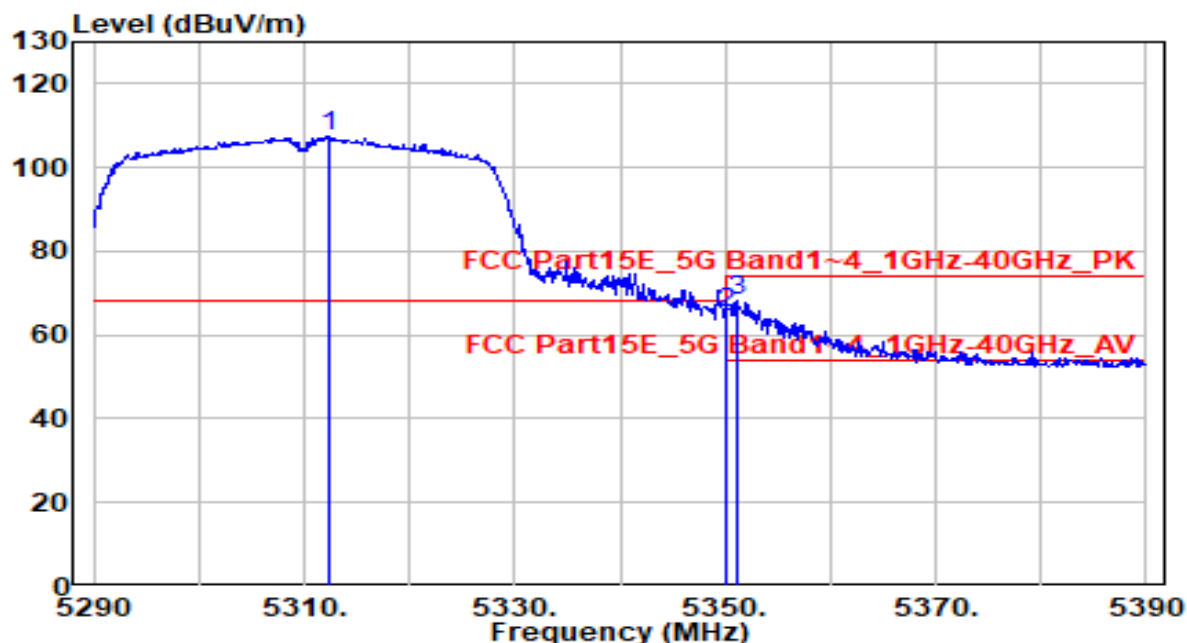


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.300	106.80	0.66	107.46	N/A	N/A	195	155	Peak
2	5350.000	64.52	0.59	65.12	-8.88	74.00	195	155	Peak
3	* 5351.200	67.41	0.59	68.00	-6.00	74.00	195	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

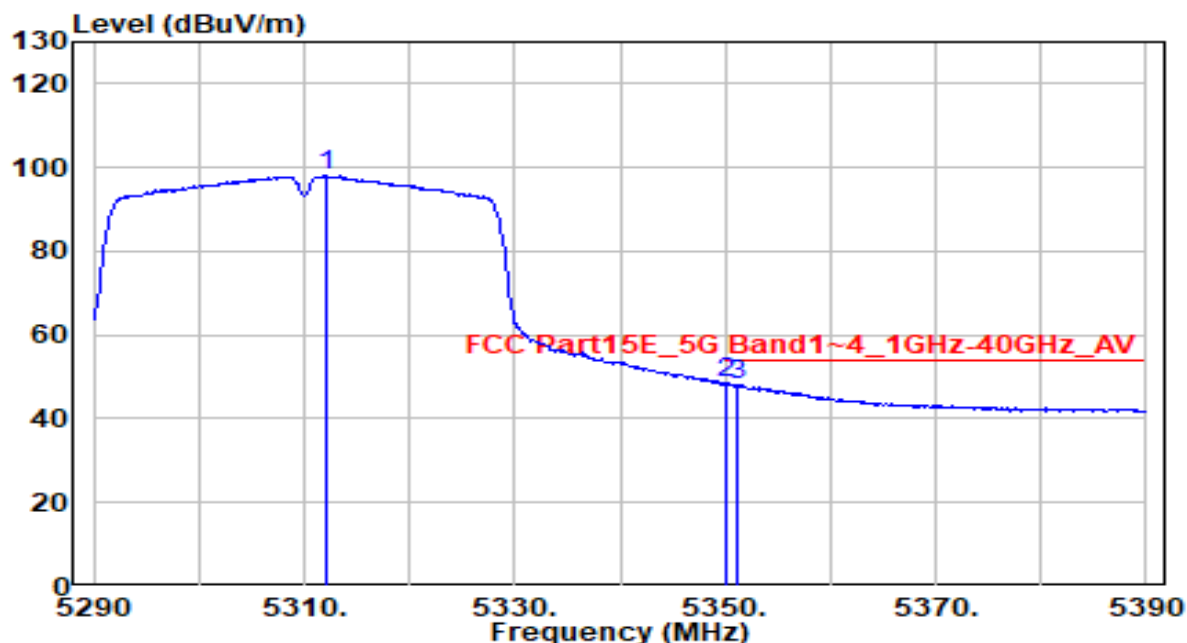


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.200	97.34	0.66	98.00	N/A	N/A	195	155	Average
2	* 5350.000	47.91	0.59	48.51	-5.49	54.00	195	155	Average
3	5351.100	47.62	0.59	48.21	-5.79	54.00	195	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

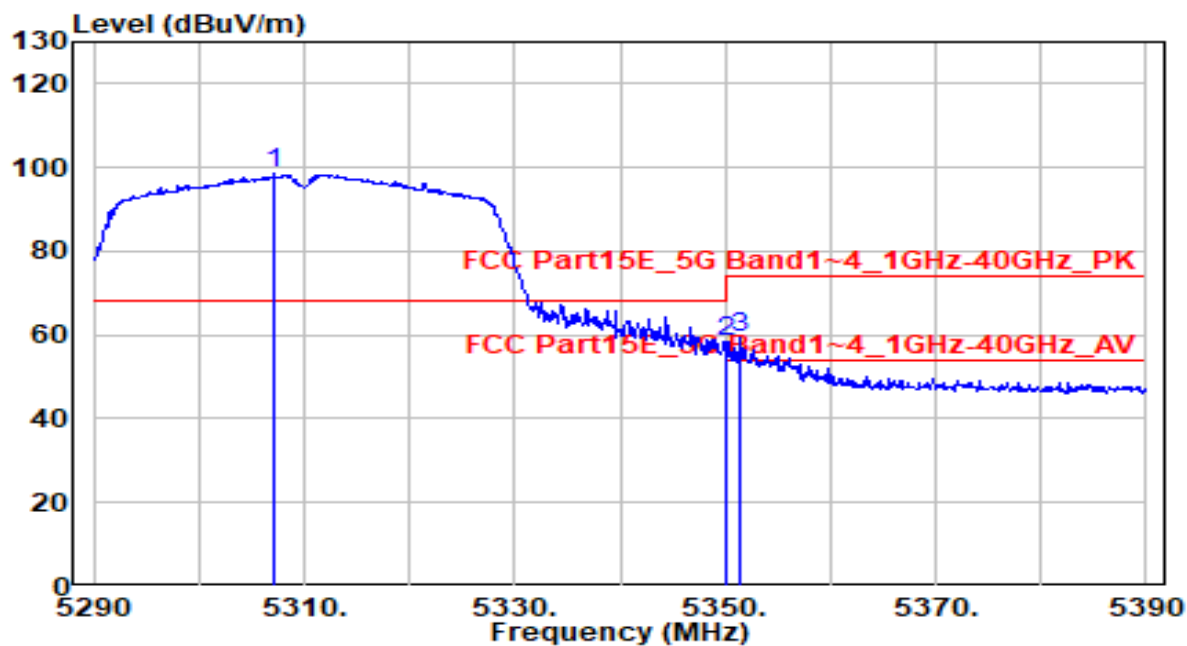


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.200	97.81	0.67	98.48	N/A	N/A	140	325	Peak
2	5350.000	57.75	0.59	58.34	-15.66	74.00	140	325	Peak
3	* 5351.500	58.87	0.59	59.46	-14.54	74.00	140	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

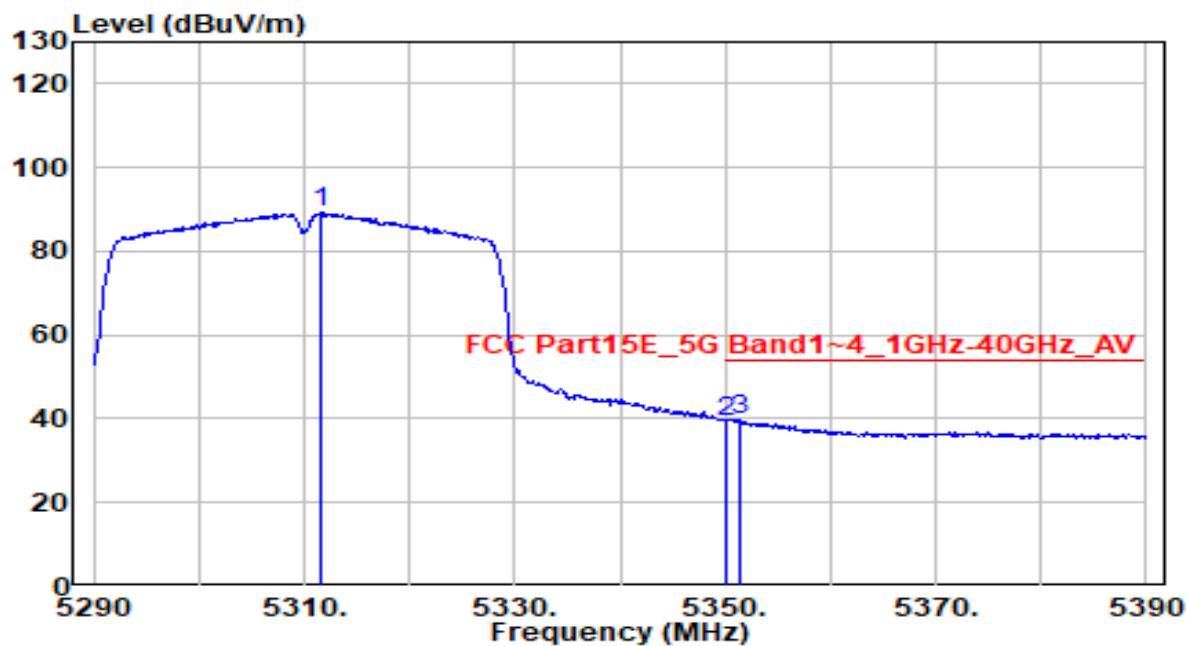


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.500	88.59	0.66	89.25	N/A	N/A	140	325	Average
2	5350.000	38.41	0.59	39.00	-15.00	54.00	140	325	Average
3	* 5351.300	39.19	0.59	39.78	-14.22	54.00	140	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

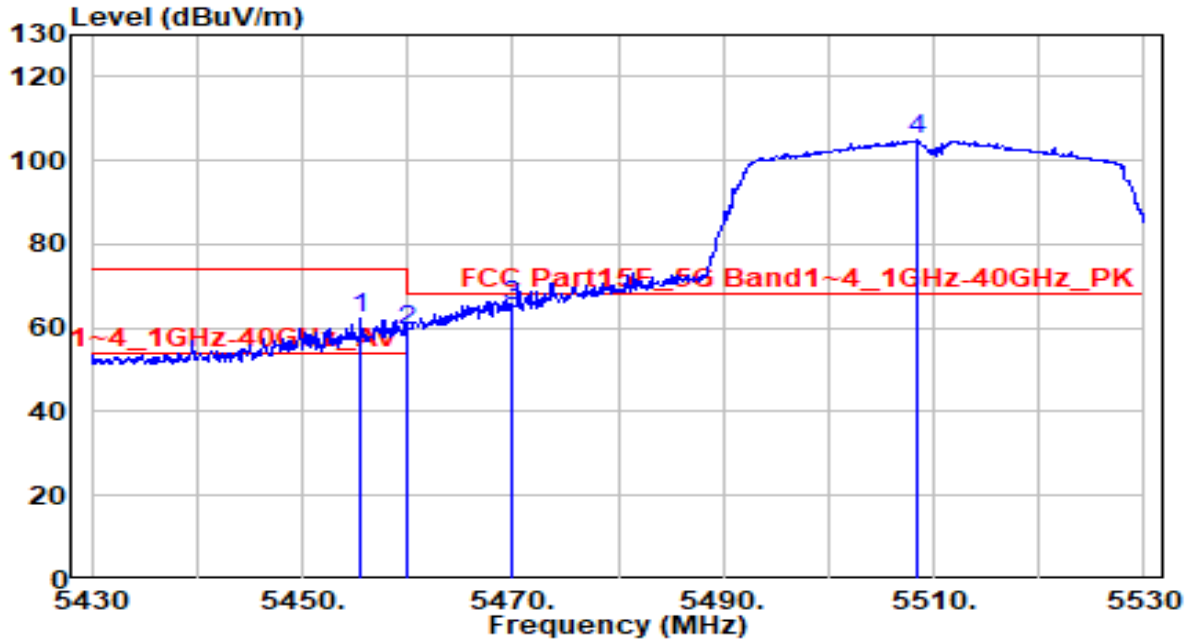


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.600	61.36	0.74	62.10	-11.90	74.00	175	160	Peak
2	5460.000	58.53	0.76	59.29	-14.71	74.00	175	160	Peak
3	* 5470.000	64.63	0.80	65.43	-2.77	68.20	175	160	Peak
4	5508.500	103.84	0.97	104.81	N/A	N/A	175	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

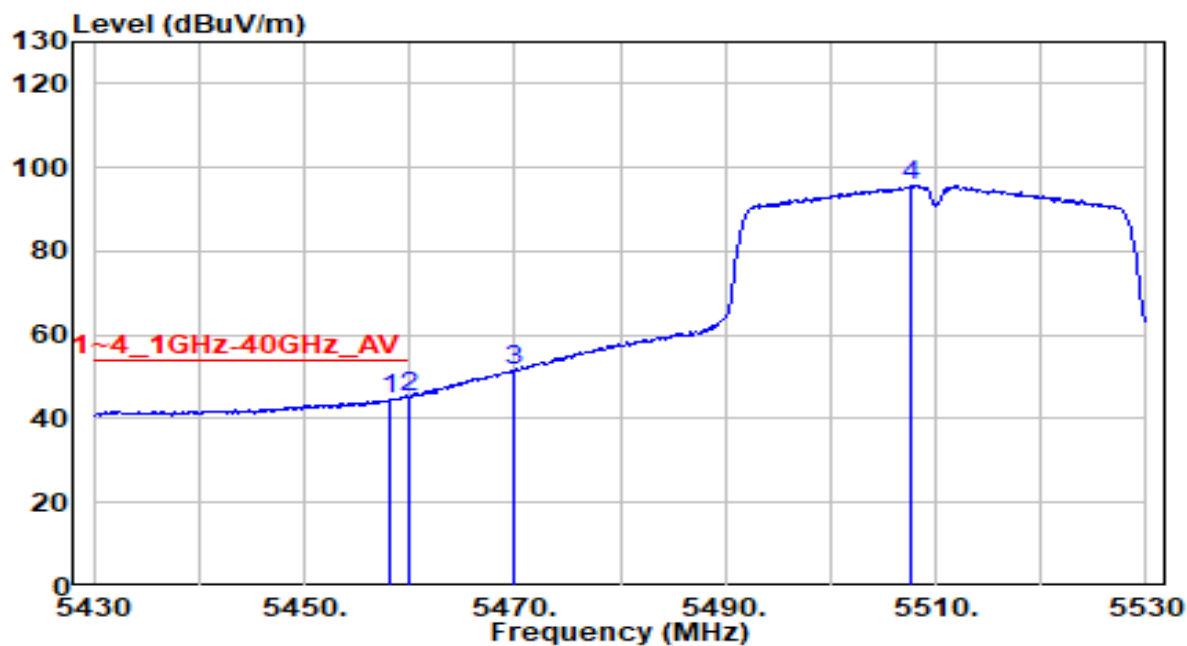


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	44.11	0.75	44.86	-9.14	54.00	175	160	Average
2	* 5460.000	44.53	0.76	45.29	-8.71	54.00	175	160	Average
3	5470.000	50.90	0.80	51.70	N/A	N/A	175	160	Average
4	5507.600	94.82	0.96	95.78	N/A	N/A	175	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

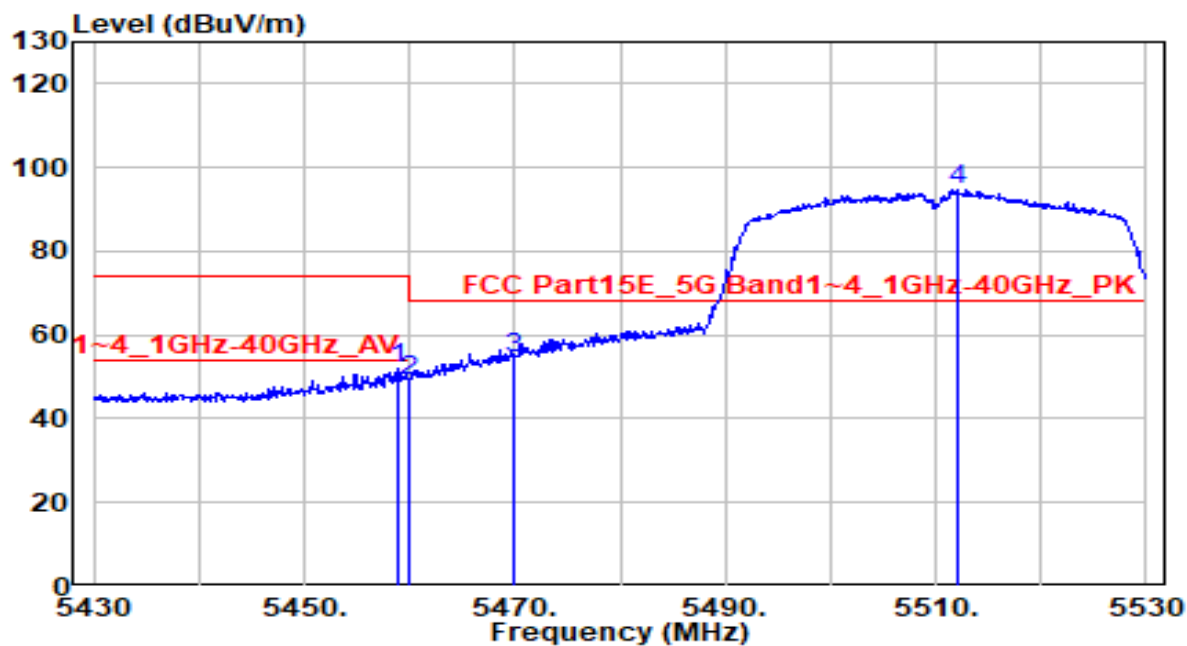


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.800	51.41	0.76	52.16	-21.84	74.00	235	155	Peak
2	5460.000	48.42	0.76	49.18	-24.82	74.00	235	155	Peak
3	* 5470.000	53.59	0.80	54.39	-13.81	68.20	235	155	Peak
4	5512.000	93.83	0.98	94.81	N/A	N/A	235	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

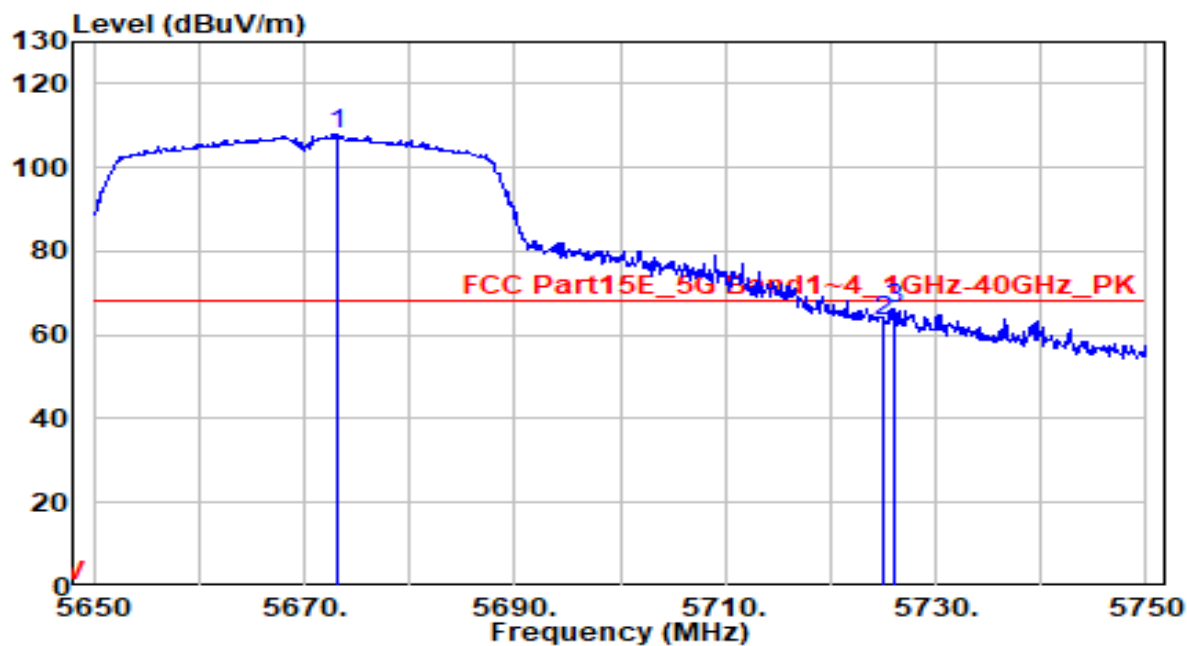


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.100	106.20	1.68	107.88	N/A	N/A	145	160	Peak
2	5725.000	61.58	1.89	63.47	-4.73	68.20	145	160	Peak
3	* 5726.000	64.31	1.89	66.20	-2.00	68.20	145	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 134_ANT 0	Test Voltage	AC 120V/60Hz

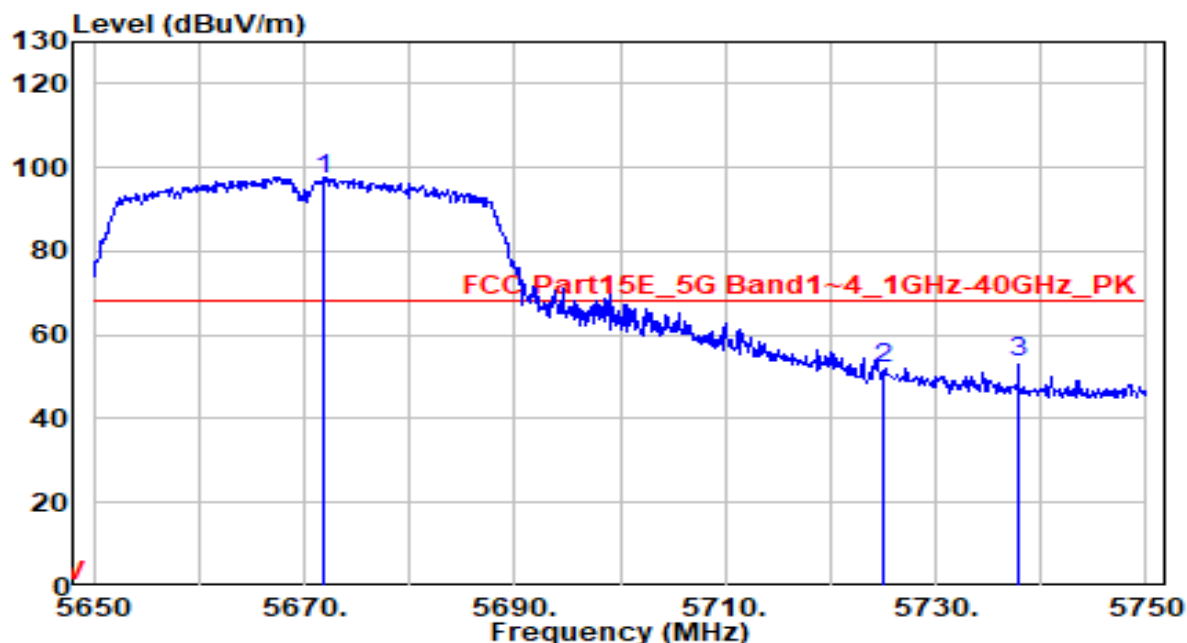


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.900	95.42	1.67	97.09	N/A	N/A	100	190	Peak
2	5725.000	49.91	1.89	51.80	-16.40	68.20	100	190	Peak
3	* 5737.800	51.64	1.94	53.58	-14.62	68.20	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

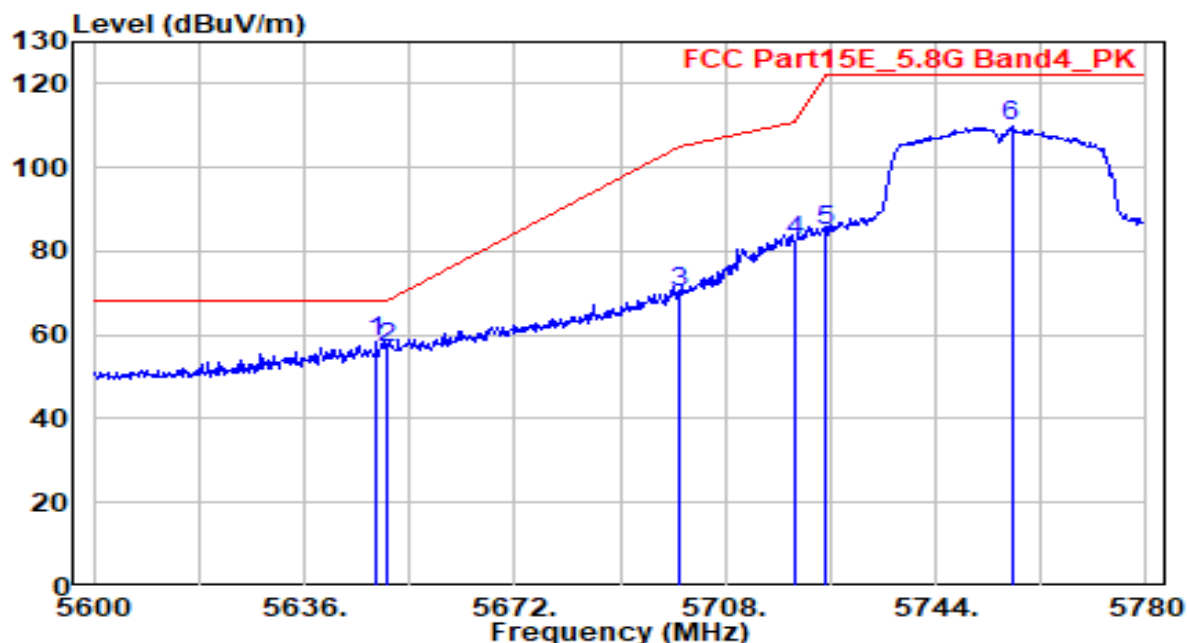


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.420	56.57	1.58	58.15	-10.05	68.20	155	165	Peak
2	5650.000	55.24	1.59	56.83	-11.37	68.20	155	165	Peak
3	5700.000	68.32	1.79	70.11	-35.09	105.20	155	165	Peak
4	5720.000	80.76	1.87	82.63	-28.17	110.80	155	165	Peak
5	5725.000	83.09	1.89	84.98	-37.22	122.20	155	165	Peak
6	5756.960	107.81	2.02	109.83	N/A	N/A	155	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 151_ANT 0	Test Voltage	AC 120V/60Hz

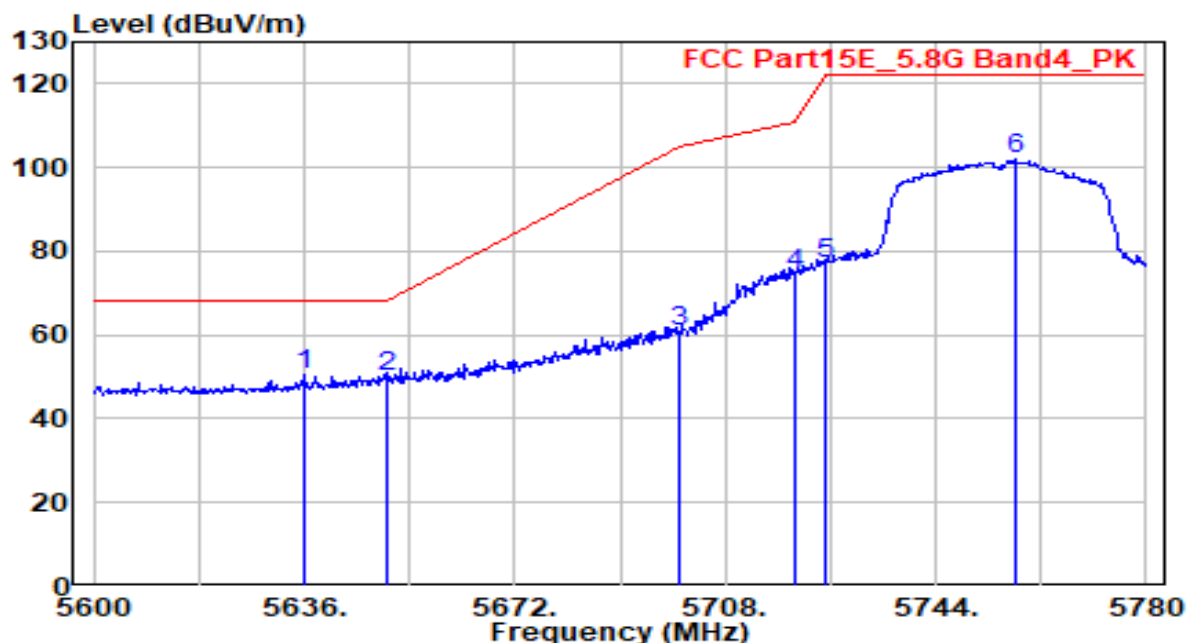


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.820	48.79	1.53	50.32	-17.88	68.20	140	70	Peak
2		5650.000	48.40	1.59	49.99	-18.21	68.20	140	70	Peak
3		5700.000	59.11	1.79	60.90	-44.30	105.20	140	70	Peak
4		5720.000	72.89	1.87	74.76	-36.04	110.80	140	70	Peak
5		5725.000	74.90	1.89	76.79	-45.41	122.20	140	70	Peak
6		5757.680	99.98	2.02	102.01	N/A	N/A	140	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

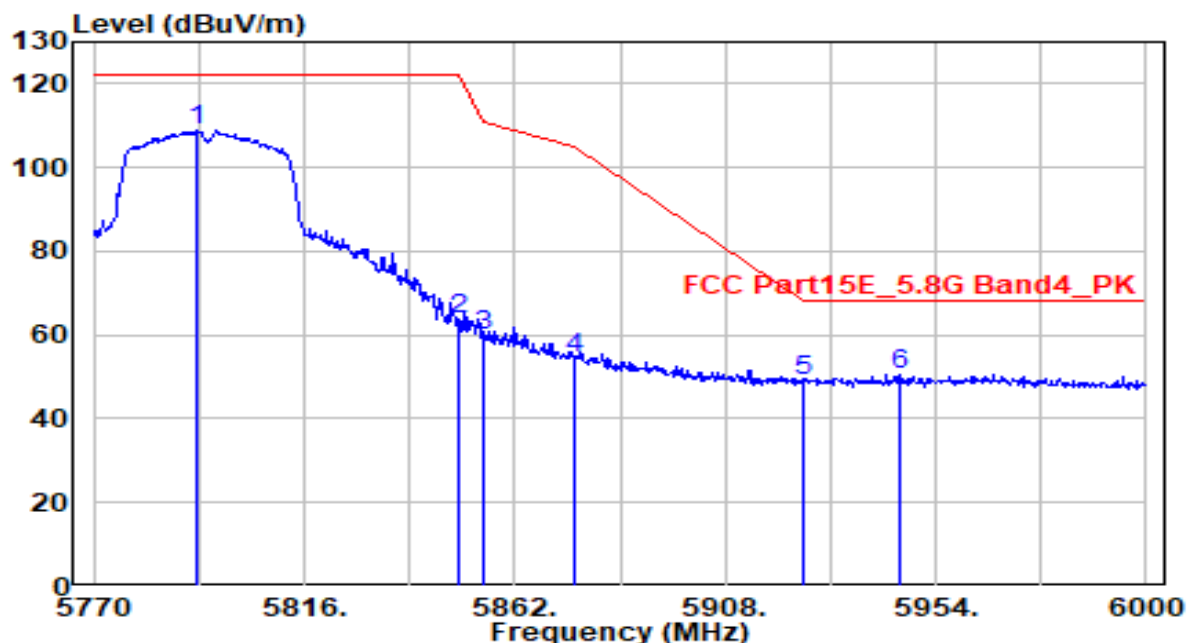


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.310	106.76	2.16	108.92	N/A	N/A	180	165	Peak
2	5850.000	61.27	2.27	63.54	-58.66	122.20	180	165	Peak
3	5855.000	57.37	2.28	59.65	-51.15	110.80	180	165	Peak
4	5875.000	52.02	2.31	54.33	-50.87	105.20	180	165	Peak
5	5925.000	46.91	2.38	49.29	-18.91	68.20	180	165	Peak
6	* 5946.180	48.15	2.42	50.57	-17.63	68.20	180	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band4_CH 159_ANT 0	Test Voltage	AC 120V/60Hz

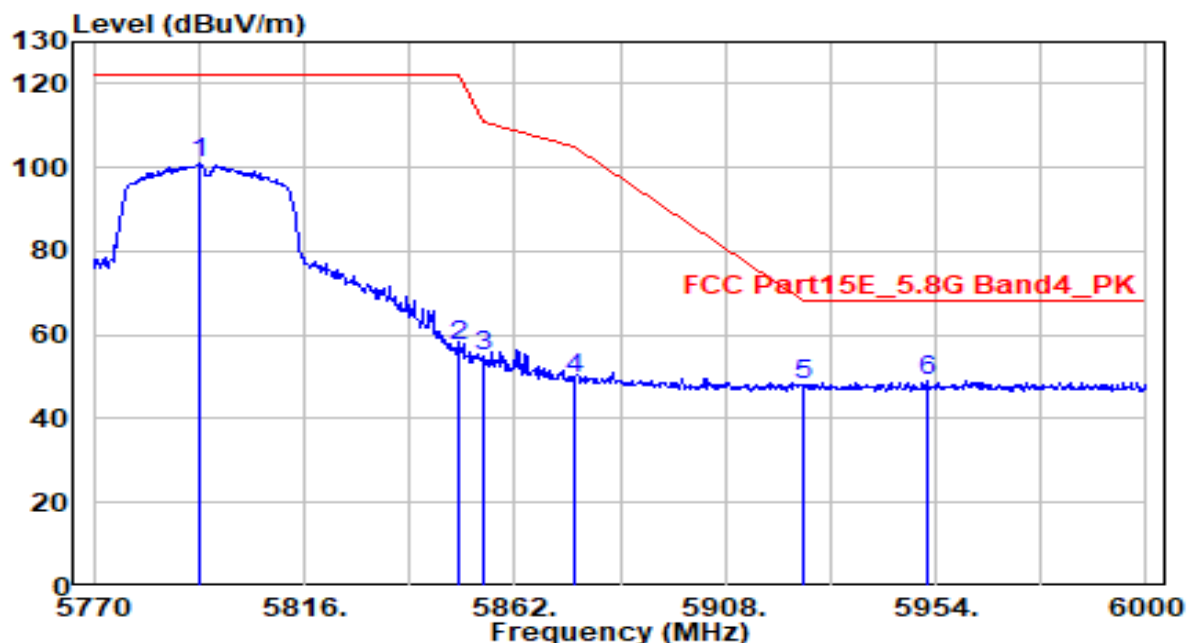


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.000	98.67	2.16	100.83	N/A	N/A	195	350	Peak
2	5850.000	55.01	2.27	57.28	-64.92	122.20	195	350	Peak
3	5855.000	52.53	2.28	54.81	-55.99	110.80	195	350	Peak
4	5875.000	47.24	2.31	49.54	-55.66	105.20	195	350	Peak
5	5925.000	45.47	2.38	47.86	-20.34	68.20	195	350	Peak
6	* 5951.930	46.67	2.43	49.09	-19.11	68.20	195	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 110V/60Hz

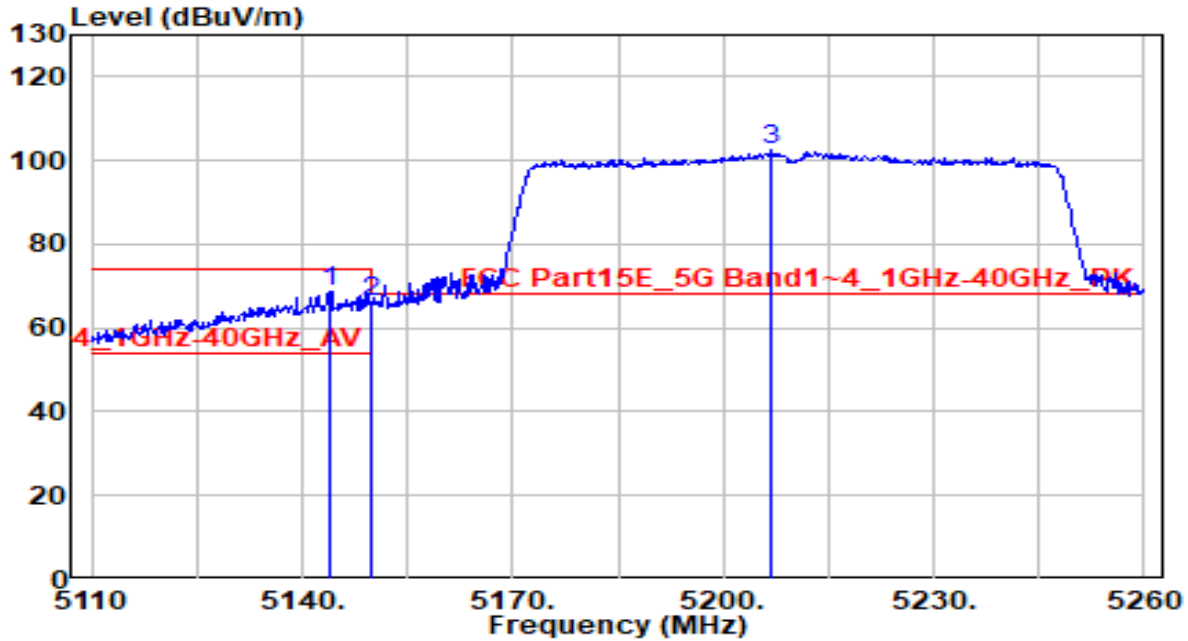


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.050	68.71	-0.08	68.63	-5.37	74.00	225	165	Peak
2		5150.000	66.30	-0.07	66.23	-7.77	74.00	225	165	Peak
3		5206.900	102.37	0.01	102.38	N/A	N/A	225	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 110V/60Hz

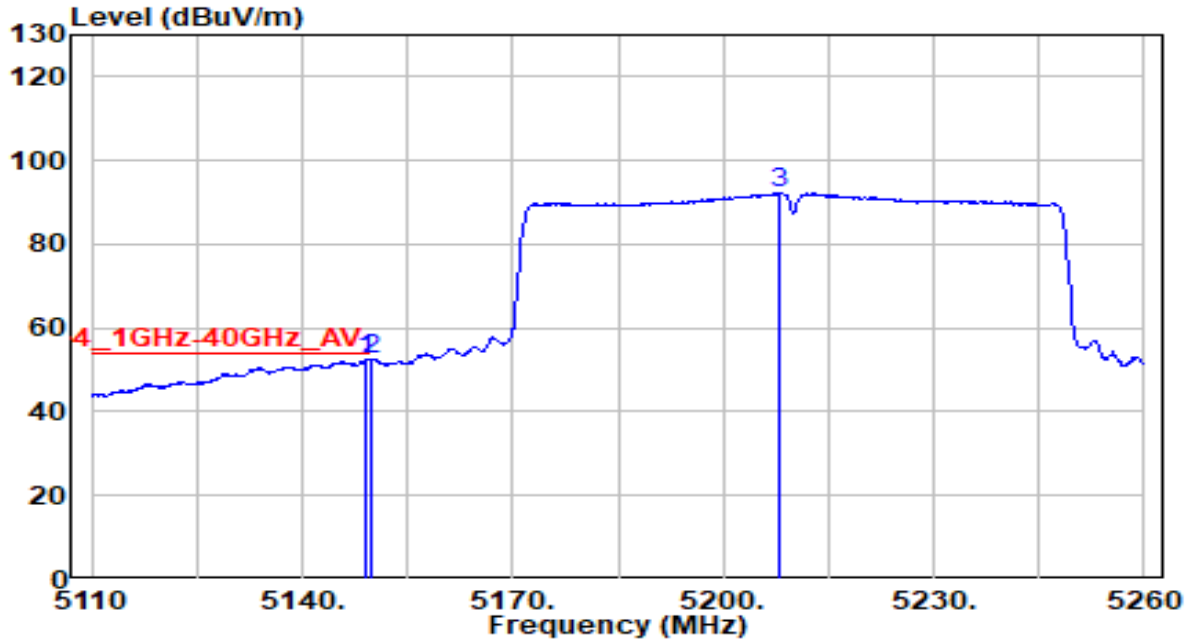


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.000	52.35	-0.08	52.28	-1.72	54.00	225	165	Average
2	* 5150.000	52.36	-0.07	52.29	-1.71	54.00	225	165	Average
3	5207.950	92.30	0.01	92.31	N/A	N/A	225	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 110V/60Hz

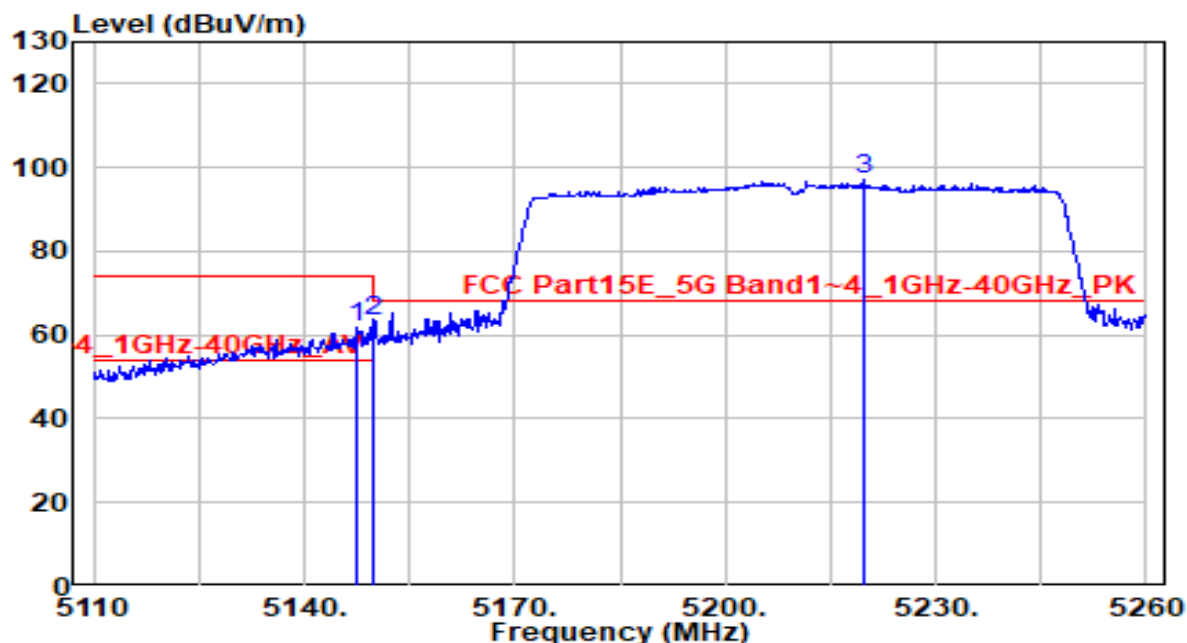


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5147.650	61.78	-0.08	61.71	-12.29	74.00	160	205	Peak
2	* 5150.000	63.52	-0.07	63.44	-10.56	74.00	160	205	Peak
3	5219.800	97.17	0.03	97.20	N/A	N/A	160	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0	Test Voltage	AC 110V/60Hz

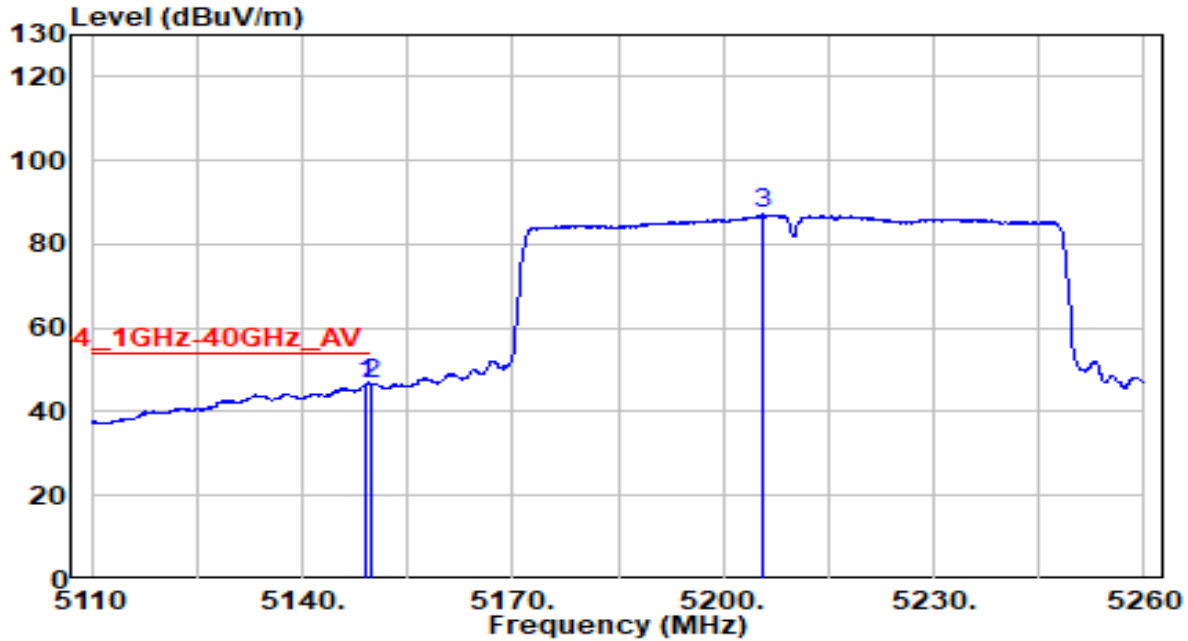


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.000	46.70	-0.08	46.62	-7.38	54.00	160	205	Average
2	* 5150.000	46.71	-0.07	46.64	-7.36	54.00	160	205	Average
3	5205.550	87.16	0.01	87.17	N/A	N/A	160	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0	Test Voltage	AC 120V/60Hz

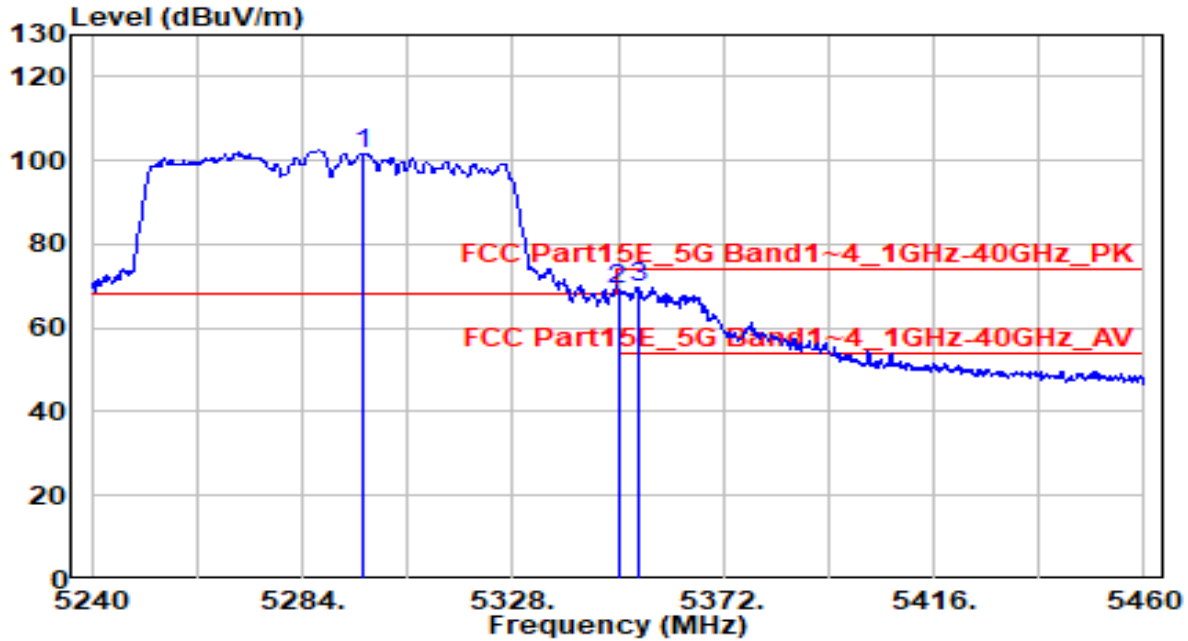


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.760	101.32	0.14	101.46	N/A	N/A	175	150	Peak
2	5350.000	68.86	0.21	69.08	-4.92	74.00	175	150	Peak
3	* 5354.400	69.39	0.22	69.61	-4.39	74.00	175	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0	Test Voltage	AC 120V/60Hz

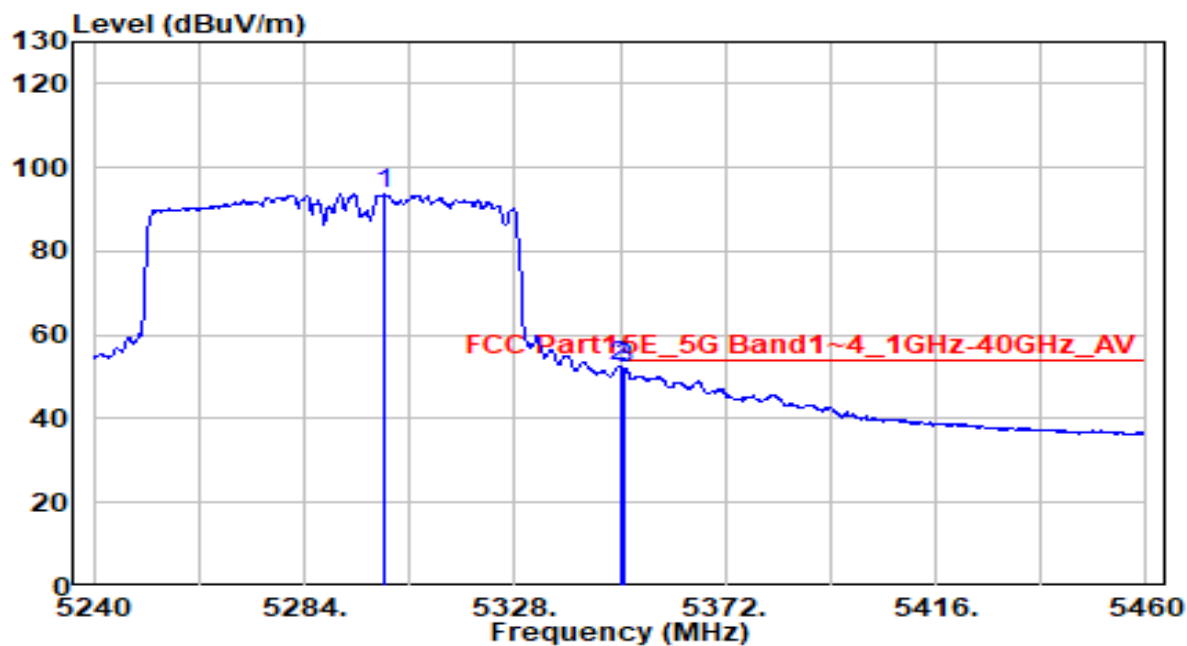


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.720	93.46	0.14	93.60	N/A	N/A	175	150	Average
2	* 5350.000	52.24	0.21	52.46	-1.54	54.00	175	150	Average
3	5350.880	51.92	0.22	52.14	-1.86	54.00	175	150	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0	Test Voltage	AC 120V/60Hz

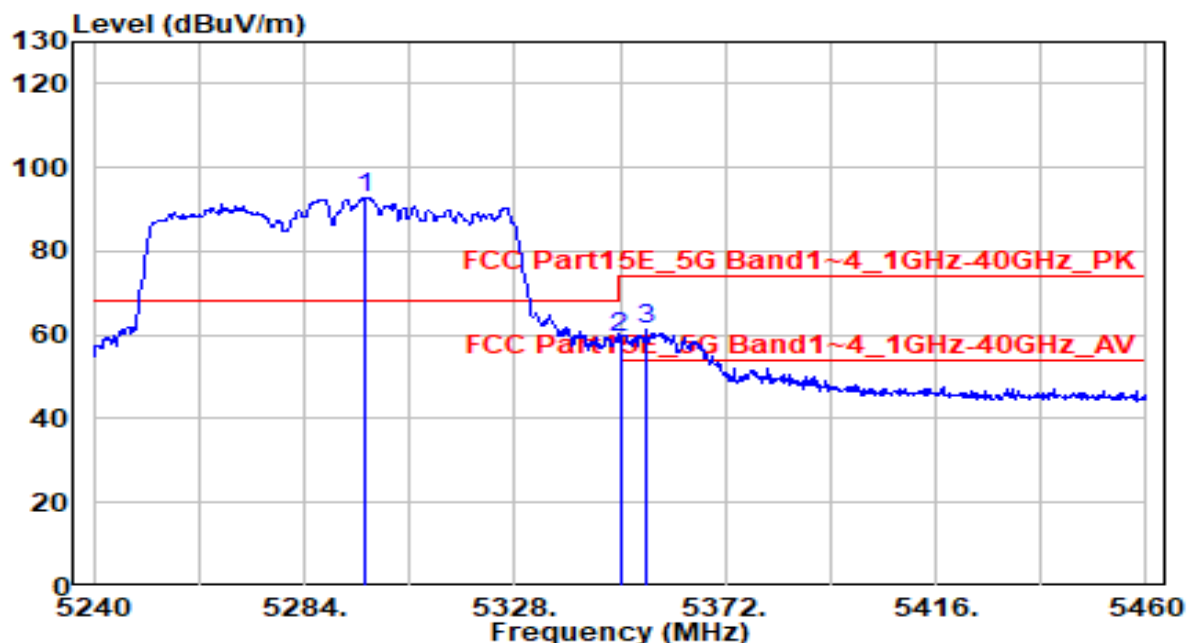


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5296.760	92.49	0.14	92.63	N/A	N/A	180	325	Peak
2	5350.000	59.23	0.21	59.44	-14.56	74.00	180	325	Peak
3	* 5355.720	61.29	0.22	61.52	-12.48	74.00	180	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0	Test Voltage	AC 120V/60Hz

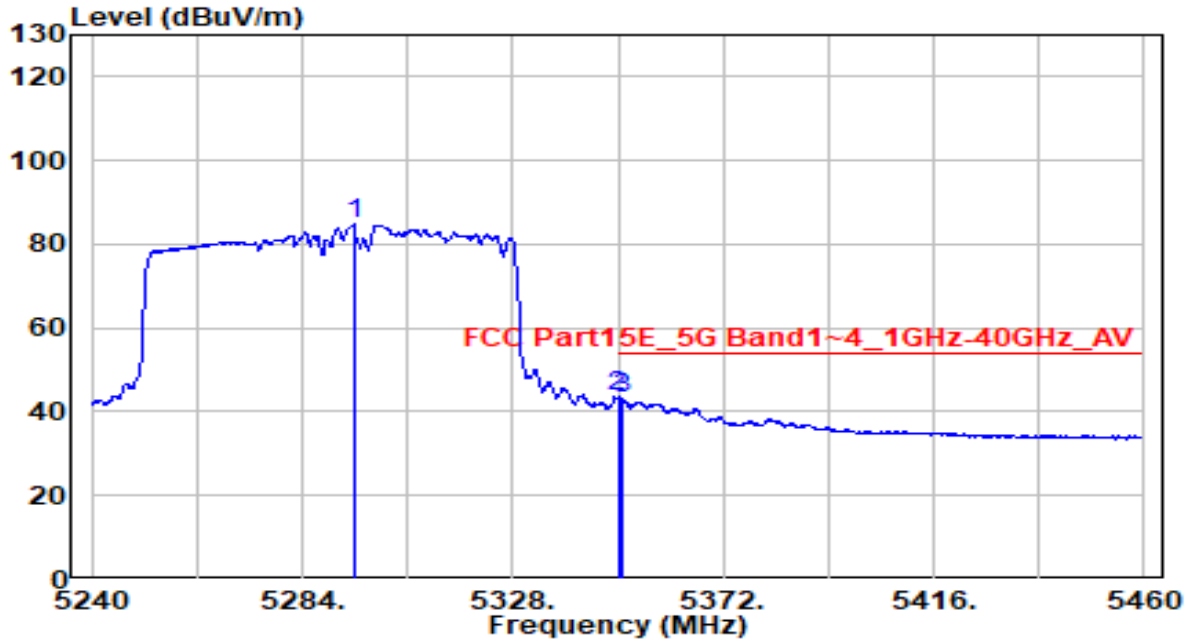


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.780	84.61	0.13	84.74	N/A	N/A	180	325	Average
2	* 5350.000	43.44	0.21	43.65	-10.35	54.00	180	325	Average
3	5350.880	43.11	0.22	43.33	-10.67	54.00	180	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

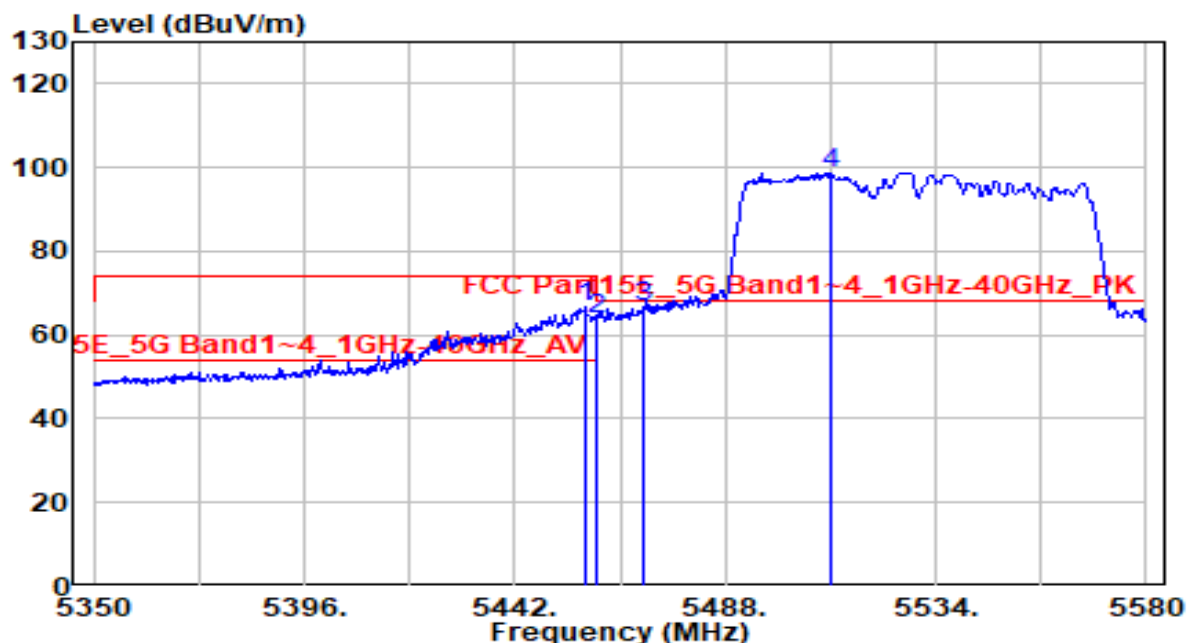


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.410	66.52	0.37	66.89	-7.11	74.00	155	160	Peak
2	5460.000	63.54	0.37	63.91	-10.09	74.00	155	160	Peak
3	* 5470.000	66.45	0.39	66.83	-1.37	68.20	155	160	Peak
4	5511.000	98.34	0.45	98.79	N/A	N/A	155	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

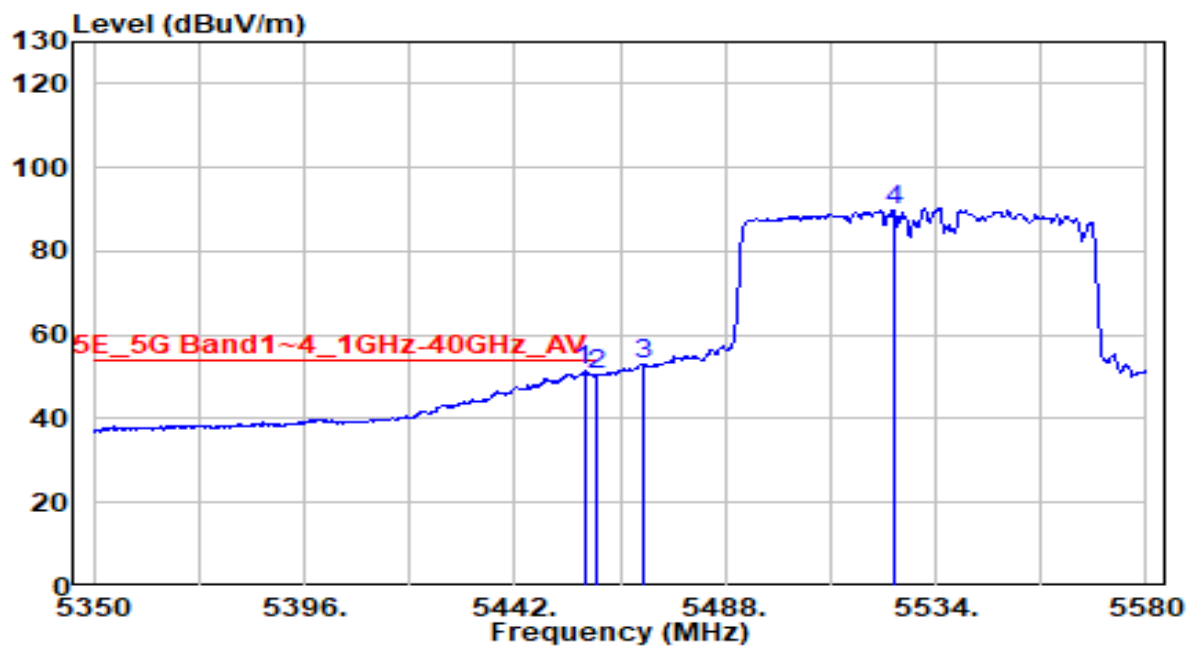


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5457.180	51.00	0.37	51.37	-2.63	54.00	155	160	Average
2	5460.000	50.23	0.37	50.60	-3.40	54.00	155	160	Average
3	5470.000	52.80	0.39	53.19	N/A	N/A	155	160	Average
4	5524.800	89.13	0.47	89.60	N/A	N/A	155	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

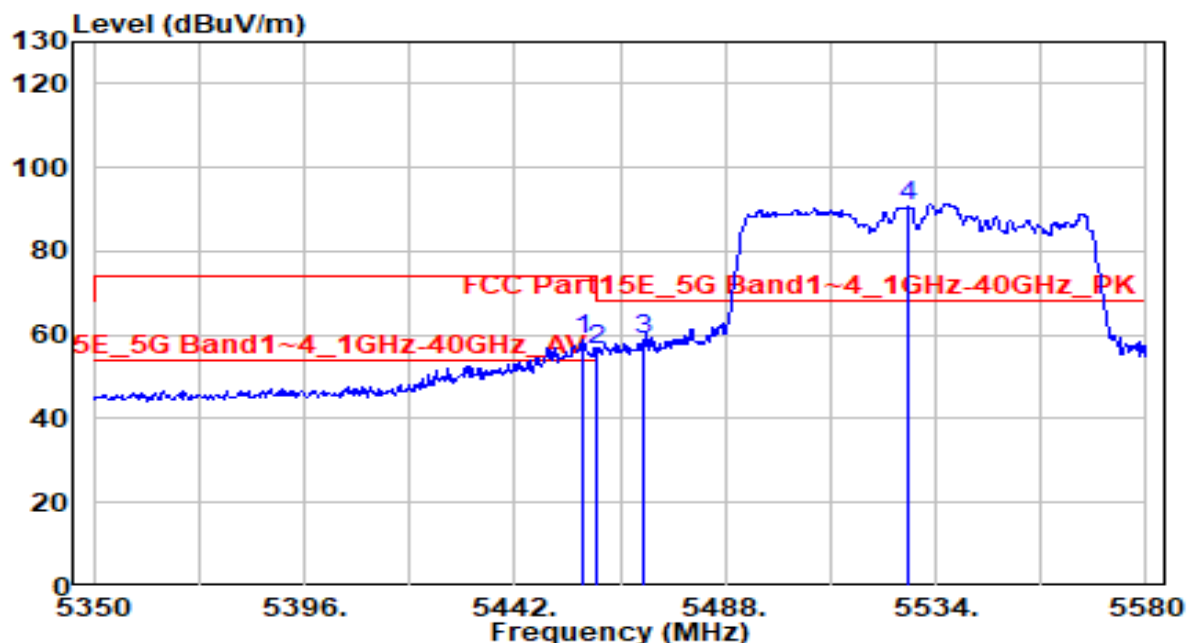


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.720	58.39	0.37	58.76	-15.24	74.00	110	325	Peak
2	5460.000	56.02	0.37	56.39	-17.61	74.00	110	325	Peak
3	* 5470.000	58.52	0.39	58.91	-9.29	68.20	110	325	Peak
4	5528.020	90.04	0.47	90.52	N/A	N/A	110	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0	Test Voltage	AC 120V/60Hz

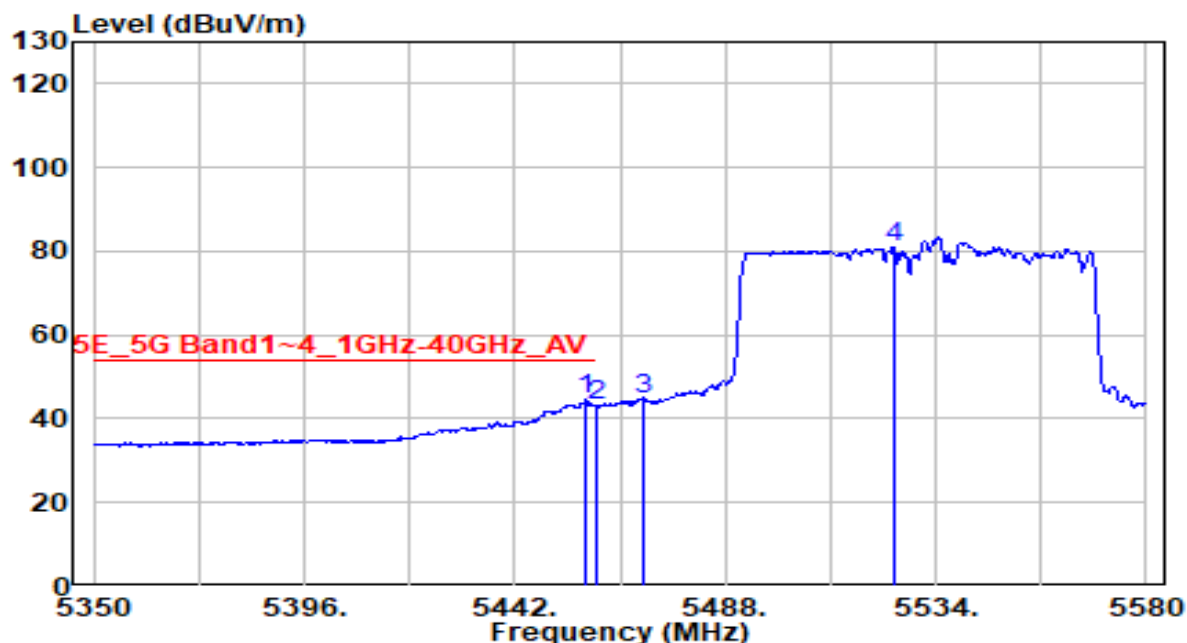


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.410	44.16	0.37	44.52	-9.48	54.00	110	325	Average
2		5460.000	42.77	0.37	43.14	-10.86	54.00	110	325	Average
3		5470.000	44.46	0.39	44.85	N/A	N/A	110	325	Average
4		5524.800	80.48	0.47	80.95	N/A	N/A	110	325	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

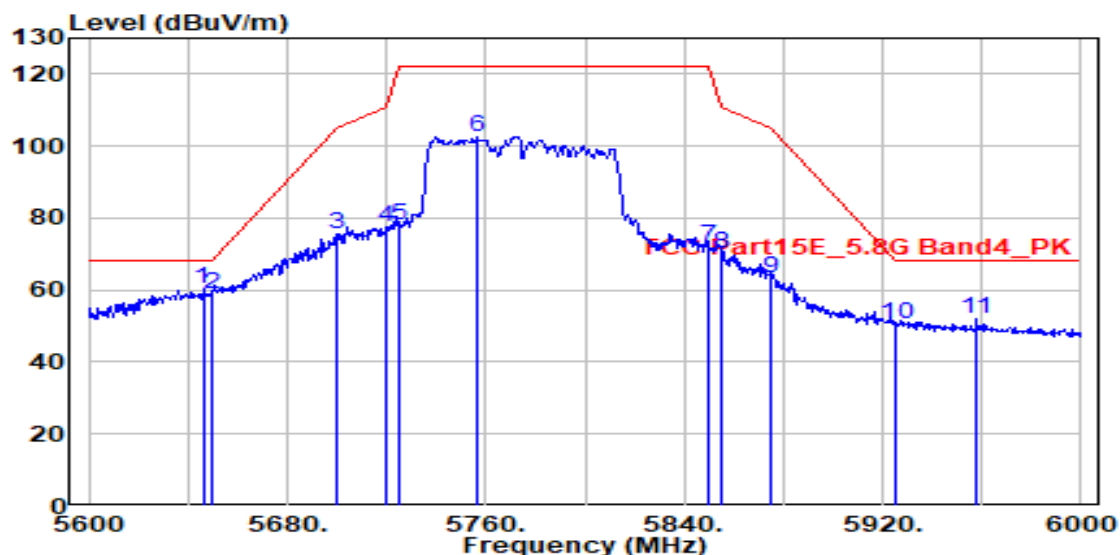


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.000	58.54	1.57	60.11	-8.09	68.20	160	165	Peak
2		5650.000	57.45	1.59	59.03	-9.17	68.20	160	165	Peak
3		5700.000	73.65	1.79	75.44	-29.76	105.20	160	165	Peak
4		5720.000	75.46	1.87	77.33	-33.47	110.80	160	165	Peak
5		5725.000	76.03	1.89	77.91	-44.29	122.20	160	165	Peak
6		5756.400	100.67	2.02	102.69	N/A	N/A	160	165	Peak
7		5850.000	69.96	2.27	72.23	-49.97	122.20	160	165	Peak
8		5855.000	67.77	2.28	70.05	-40.75	110.80	160	165	Peak
9		5875.000	60.90	2.31	63.21	-41.99	105.20	160	165	Peak
10		5925.000	48.11	2.38	50.49	-17.71	68.20	160	165	Peak
11		5957.600	49.48	2.43	51.91	-16.29	68.20	160	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0	Test Voltage	AC 120V/60Hz

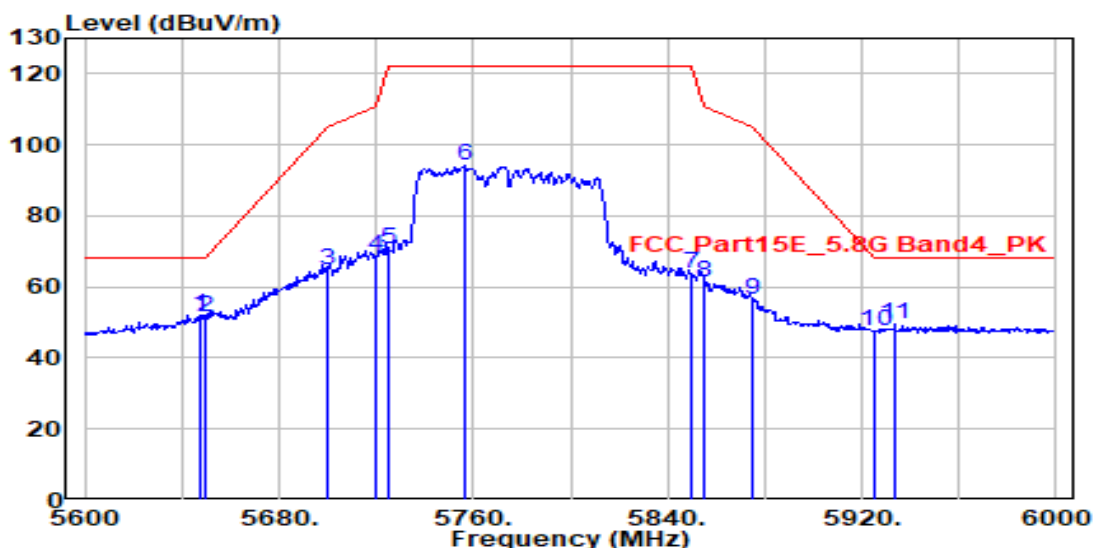

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5648.000	50.37	1.58	51.95	-16.25	68.20	155	75	Peak
2	5650.000	50.13	1.59	51.71	-16.49	68.20	155	75	Peak
3	5700.000	62.80	1.79	64.59	-40.61	105.20	155	75	Peak
4	5720.000	66.80	1.87	68.67	-42.13	110.80	155	75	Peak
5	5725.000	68.81	1.89	70.70	-51.50	122.20	155	75	Peak
6	5756.400	92.26	2.02	94.27	N/A	N/A	155	75	Peak
7	5850.000	61.69	2.27	63.96	-58.24	122.20	155	75	Peak
8	5855.000	59.22	2.28	61.50	-49.30	110.80	155	75	Peak
9	5875.000	54.16	2.31	56.47	-48.73	105.20	155	75	Peak
10	5925.000	45.04	2.38	47.43	-20.77	68.20	155	75	Peak
11	5933.600	47.20	2.40	49.59	-18.61	68.20	155	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

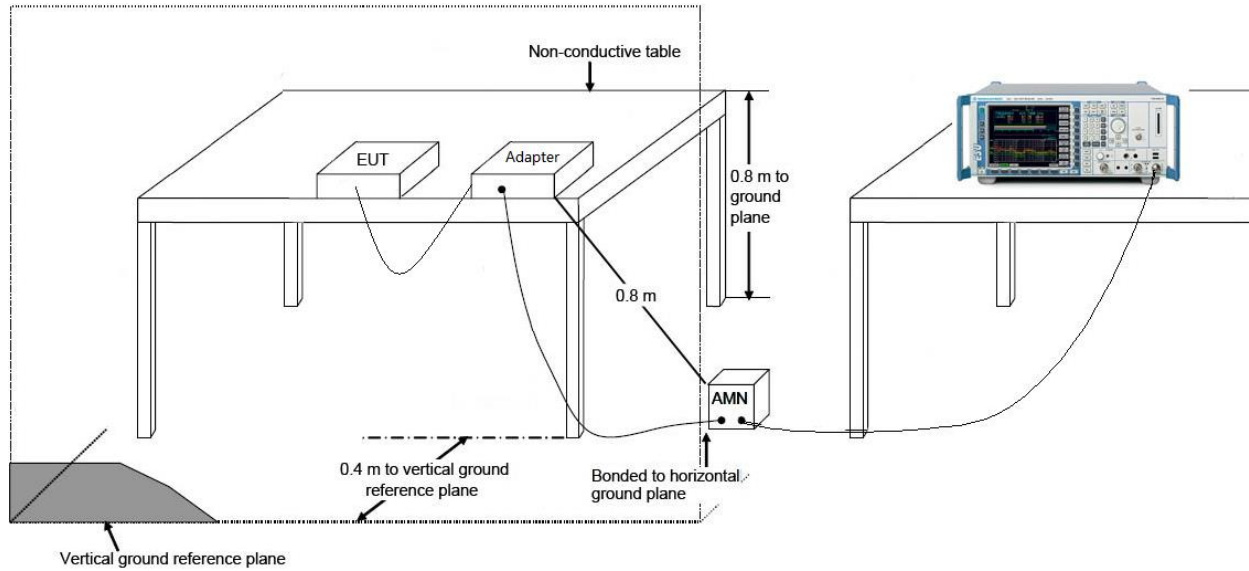

7.9.4. Test Result

EUT	Rugged Tablet	Date of Test	2022-10-05
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.2°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

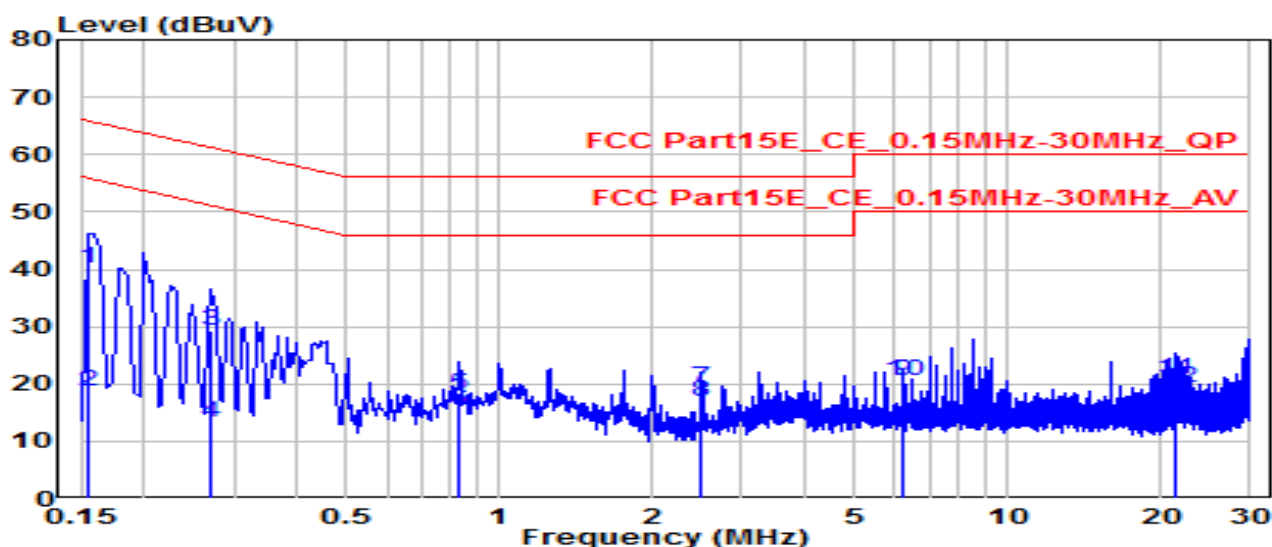


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.154	30.62	9.62	40.24	-25.52	65.75	QP
2	*	0.154	9.15	9.62	18.77	-36.99	55.75	Average
3		0.271	19.78	9.63	29.40	-31.67	61.07	QP
4		0.271	3.58	9.63	13.20	-37.87	51.07	Average
5		0.834	8.56	9.66	18.22	-37.78	56.00	QP
6		0.834	5.59	9.66	15.26	-30.74	46.00	Average
7		2.503	9.76	9.70	19.46	-36.54	56.00	QP
8		2.503	7.21	9.70	16.91	-29.09	46.00	Average
9		6.256	10.64	9.77	20.41	-39.59	60.00	QP
10		6.256	10.83	9.77	20.60	-29.40	50.00	Average
11		21.271	10.84	9.92	20.76	-39.24	60.00	QP
12		21.271	9.38	9.92	19.31	-30.69	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Rugged Tablet	Date of Test	2022-10-05
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.2°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

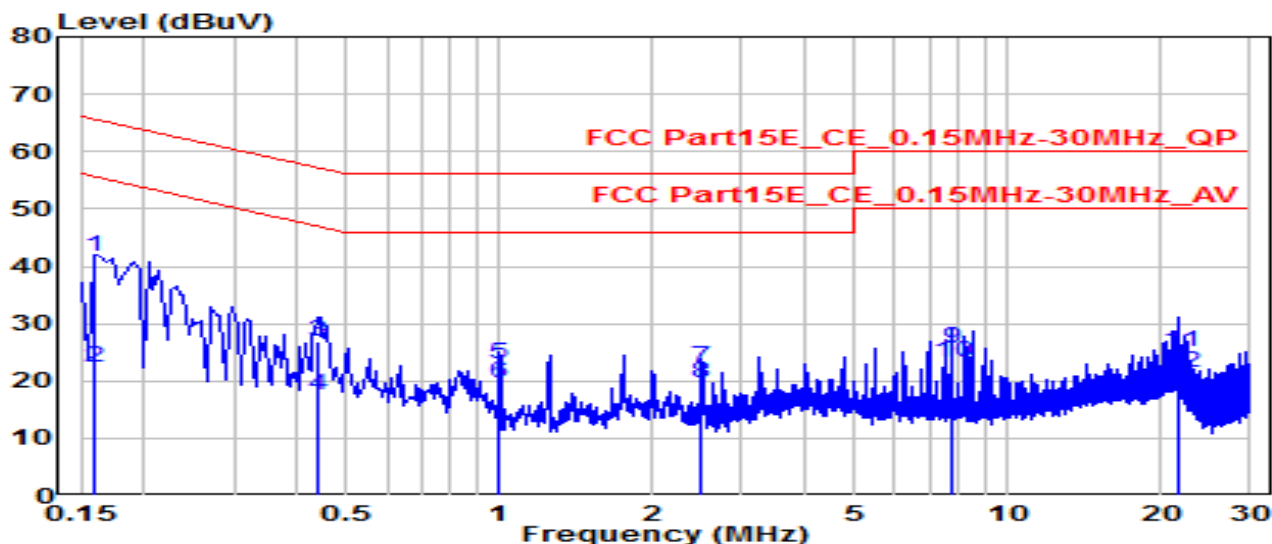


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.159	32.14	9.62	41.76	-23.76	65.52	QP
2	*	0.159	12.64	9.62	22.27	-33.25	55.52	Average
3		0.438	17.18	9.64	26.81	-30.29	57.10	QP
4		0.438	7.83	9.64	17.47	-29.63	47.10	Average
5		1.000	13.24	9.67	22.91	-33.09	56.00	QP
6		1.000	9.92	9.67	19.59	-26.41	46.00	Average
7		2.503	12.55	9.70	22.25	-33.75	56.00	QP
8		2.503	9.97	9.70	19.67	-26.33	46.00	Average
9		7.759	15.92	9.81	25.73	-34.27	60.00	QP
10		7.759	13.39	9.81	23.20	-26.80	50.00	Average
11		21.775	15.03	10.01	25.03	-34.97	60.00	QP
12		21.775	11.32	10.01	21.32	-28.68	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Rugged Tablet	Date of Test	2022-10-05
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	26.2°C /51%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 240V/60Hz

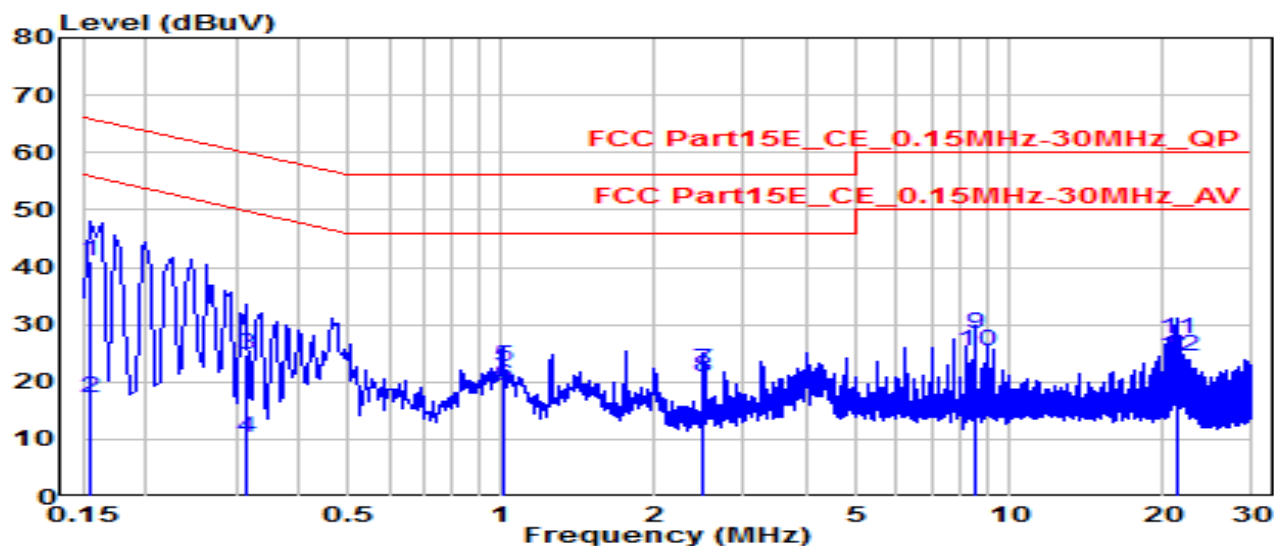


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.154	31.35	9.62	40.97	-24.79	65.75	QP
2		0.154	7.46	9.62	17.08	-38.68	55.75	Average
3		0.316	15.08	9.63	24.71	-35.09	59.80	QP
4		0.316	0.56	9.63	10.19	-39.61	49.80	Average
5		1.005	13.06	9.67	22.73	-33.27	56.00	QP
6		1.005	9.59	9.67	19.26	-26.74	46.00	Average
7		2.503	12.25	9.70	21.95	-34.05	56.00	QP
8		2.503	11.03	9.70	20.73	-25.27	46.00	Average
9	*	8.510	18.42	9.83	28.25	-31.75	60.00	QP
10	*	8.510	15.57	9.83	25.40	-24.60	50.00	Average
11		21.275	17.59	9.92	27.51	-32.49	60.00	QP
12		21.275	14.56	9.92	24.49	-25.51	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Rugged Tablet	Date of Test	2022-10-05
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	26.2°C /51%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0	Test Voltage	AC 240V/60Hz

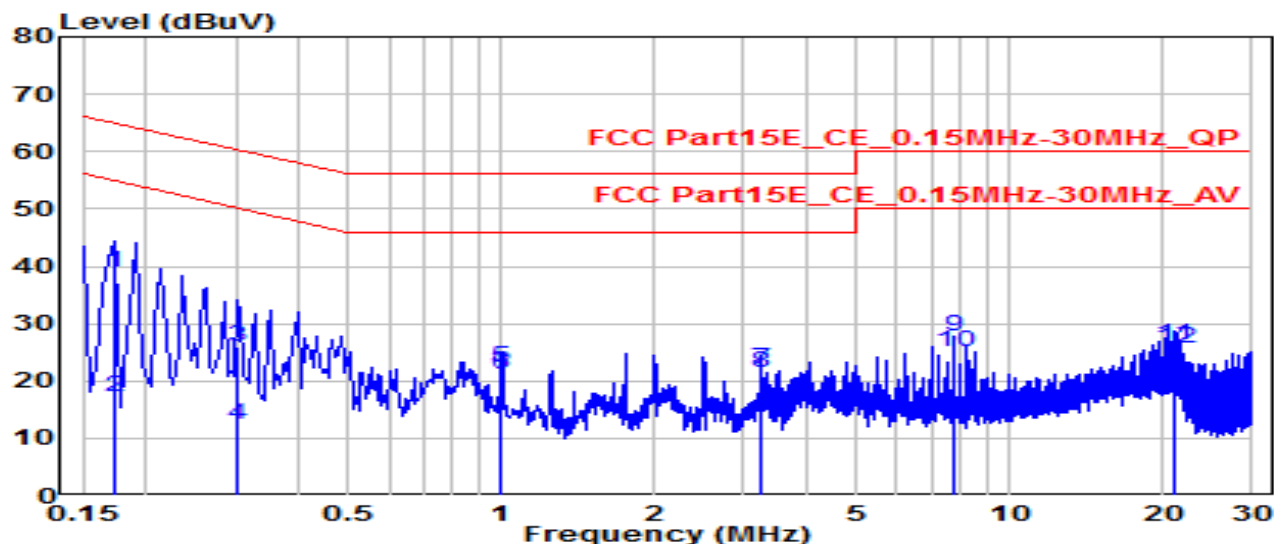

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	29.36	9.62	38.98	-25.85	64.84	QP
2	0.172	7.57	9.62	17.19	-37.65	54.84	Average
3	0.303	16.25	9.63	25.88	-34.28	60.16	QP
4	0.303	2.65	9.63	12.28	-37.88	50.16	Average
5	1.000	12.80	9.67	22.47	-33.53	56.00	QP
6	1.000	11.38	9.67	21.05	-24.95	46.00	Average
7	3.255	12.37	9.72	22.09	-33.91	56.00	QP
8	3.255	11.71	9.72	21.42	-24.58	46.00	Average
9	7.759	18.02	9.81	27.84	-32.16	60.00	QP
10	7.759	15.17	9.81	24.98	-25.02	50.00	Average
11	*	21.077	10.00	26.22	-33.78	60.00	QP
12	*	21.077	10.00	25.68	-24.32	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Rugged Tablet, Model Number: XT12** is in compliance with Part 15E & IC RSS-247 of the FCC & IC Rules.

_____ The End _____