

Shanghai Kong Intelligent Building Co., Ltd.

TEST REPORT

SCOPE OF WORK

EMC TESTING—SEE PAGE 2

REPORT NUMBER

240513079GZU-002

ISSUE DATE

[REVISED DATE]

13-April-2025

[—————]

PAGES

50

DOCUMENT CONTROL NUMBER

FCC BT 4.0

© 2017 INTERTEK



TEST REPORT

Room101/301/401/102/202/302/
402/502/602/702/802, No. 7-2,
Caipin Road, Huangpu District,
Guangzhou, Guangdong, China
Telephone: +86 20 8213 9688
Facsimile: +86 20 3205 7538
www.intertek.com.cn

Applicant Name & : Shanghai Kong Intelligent Building Co., Ltd.
Address : Room C, 14th floor, 309 Tanggu Road, Hongkou District, Shanghai,
P.R.C
Manufacturing Site : Guangdong Midea-siix Electronics Co., Ltd.
Building A, Industrial Avenue, Penglai Road, Beijiao Residential
Community, Beijiao Town, Shunde District, Foshan City, Guangdong
Province, P.R.China
Intertek Report No: 240513079GZU-002
FCC ID: 2A89R-MDG46

Test standards**47 CFR PART 15 Subpart C: 2023 section 15.247****Sample Description**

Product : KONG DDC M0 Network Engine
Model No. : MKG41-BTW23, MKG42-BTW23, MKG43-BTW23(1024),
MKG43-BTW23(2048), MKG43-BTW23(10000), MKG44-BTW23
Electrical Rating : AC/DC 24V
Serial No. : Not Labeled
Date Received : 13 May 2024
Date Test Conducted : 13 January 2025

Prepared and Checked By

Elena Lei

Project Engineer

Approved By:

Dean Liu

Sr. Project Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**CONTENT**

TEST REPORT	1
CONTENT	3
1.0 TEST RESULT SUMMARY	4
2.0 GENERAL DESCRIPTION	5
2.1 PRODUCT DESCRIPTION	5
2.2 RELATED SUBMITTAL(S) GRANTS	5
2.3 TEST METHODOLOGY	6
2.4 TEST FACILITY	6
3.0 SYSTEM TEST CONFIGURATION	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISING SOFTWARE	7
3.3 SPECIAL ACCESSORIES	7
3.4 MEASUREMENT UNCERTAINTY	7
3.5 EQUIPMENT MODIFICATION	8
3.6 SUPPORT EQUIPMENT LIST AND DESCRIPTION	8
4.0 MEASUREMENT RESULTS	10
4.1 ANTENNA REQUIREMENT	10
4.2 6 DB BANDWIDTH (DTS BANDWIDTH)	11
4.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER	14
4.4 PEAK POWER SPECTRAL DENSITY	17
4.5 OUT OF BAND CONDUCTED EMISSIONS	20
4.6 RADIATED EMISSIONS	23
4.7 BAND EDGES REQUIREMENT	42
4.8 CONDUCTED EMISSION TEST	45
5.0 TEST EQUIPMENT LIST	50

TEST REPORT
1.0 TEST RESULT SUMMARY

Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
6 dB Bandwidth (DTS bandwidth)	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10: Clause 11.8	PASS
Maximum Peak Conducted Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: Clause 11.9.1.2	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10: Clause 11.10.2	PASS
Out of Band Conducted Emissions	FCC PART 15 C section 15.209 & 15.247(d)	ANSI C63.10: Clause 11.11	PASS
Radiated Emission	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10: Clause 11.11, 11.12.1, 6.4, 6.5 and 6.6	PASS
Band Edges Measurement	FCC PART 15 C section 15.247 (d) & 15.205	ANSI C63.10: Clause 11.11 and 11.13	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS

Remark:

N/A: not applicable. Refer to the relative section for the details.

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.

All models are the same except the model name for marking requirements, MKG41- BTW23 was selected for fully testing.

TEST REPORT**2.0 General Description****2.1 Product Description**

Operating Frequency:	2405 MHz – 2480MHz
Type of Modulation:	O-QPSK
Number of Channels:	16 Channels
Channel Separation:	5 MHz
Antenna Type:	Monopole ante
Antenna Gain:	Antenna 1: -3.24 dBi Antenna 2: 3.52 dBi
Speciality:	ZigBee
Power Supply:	AC 24V/DC 24V

EUT modulation and data packet during test:

The EUT has been tested on the Modulation of O-QPSK with 250 Kbps data rate.

EUT channels and frequencies list:

Test frequencies are lowest channel 0: 2405 MHz, middle channel 7: 2440 MHz and highest channel 15: 2480 MHz.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2405	8	2445
1	2410	9	2450
2	2415	10	2455
3	2420	11	2460
4	2425	12	2465
5	2430	13	2470
6	2435	14	2475
7	2440	15	2480

2.2 Related Submittal(s) Grants

This is an application for certification of:

DTS- Part 15 Digital Transmission Systems (WIFI/BLE/ZigBee transmitter portion)

TEST REPORT

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans and final tests were performed in the semi-anechoic chamber to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise.

2.4 Test Facility

All tests were performed at:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Room102/104, No 203, KeZhu Road, Science City, GETDD Guangzhou, China

Except Conducted Emissions was performed at:

Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China

A2LA Certificate Number 0078.10

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch is accredited by A2LA and Listed in FCC website. FCC accredited test labs may perform both Certification testing under Parts 15 and 18 and Declaration of Conformity testing.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, AC power line was manipulated to produce worst case emissions. It was powered by AC 24V or DC 24V supply.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. The spurious emissions more than 20 dB below the permissible value are not reported.

TEST REPORT

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

3.2 EUT Exercising Software

Description	Manufacturer	Model No.	SN/Version	Supplied by
For fixing frequency	Client	SecureCRT	V8.7	Client

3.3 Special Accessories

No special accessories used.

3.4 Measurement Uncertainty

TEST REPORT

No.	Item	Measurement Uncertainty
1	20 dB Bandwidth	2.31%
	6dB Bandwidth	
	99% Bandwidth	
2	Carrier Frequencies Separated	2.31%
3	Dwell Time	1.19%
4	Maximum Peak Conducted Output Power	1.98 dB
5	Peak Power Spectral Density	1.98 dB
6	Out of Band Conducted Emissions	1.98 dB
7	Band edges measurement	1.98 dB
8	Radiated Emissions	3.64 dB (9 kHz-30 MHz)
		4.26 dB (30 MHz-1 GHz)
		4.96 dB (1 GHz-18 GHz)
		5.16 dB (18 GHz-40 GHz)
9	Conducted Emissions at Mains Terminals	2.23 dB
10	Temperature	0.81 °C
11	Humidity	1.73%
12	Time	1.19%

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty is calculated in accordance with ETSI TR 100 028-2001.

The measurement uncertainty is given with a confidence of 95%, k=2.

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value

3.5 Equipment Modification

Any modifications installed previous to testing by Shanghai Kong Intelligent Building Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

3.6 Support Equipment List and Description

This product was tested with corresponding support equipment as below:

TEST REPORT
Support Equipment

Description	Manufacturer	Model No.	SN/Version	Supplied by
NoteBook	HP	Compaq 6710b	SN:CNU8240LF9	Intertek
Control board	WIK	CNMDIP34	Version:3434	Client
Control box	Client	AC/DC 24V	-	Client
Switching Power supply	DELTA	DRL-24V75W1AZ 001	Input: AC 100-240V, 1.8A Output: DC 24V, 3.125A	Client
Switching Power supply	DELTA	DRL-24V75W1AZ 002	Input: AC 100-240V, 1.8A Output: DC 24V, 3.125A	Client
Switching Power supply	SIEMENS	HCT-01E0VV03299	Input: AC 120V Output: AC 24V	Client
Digital Output module	Client	MK10DO	Input: AC/DC 24V	Client

Cable

Description	Model No.	Connector type	Cable length/type	Supplied by
Antenna cable	RF-01	SMA	0.2 m(shielded)	Intertek
network cable	RJ45-01	RJ45	2 m(unshielded)	Intertek
network cable	RJ45-02	RJ45	2 m(unshielded) Client	Applicant
RS485 cord	RS485-01	RS485	0.5 m(unshielded)	Applicant
RS485 cord	RS485-02	RS485	0.5 m(unshielded)	Applicant
RS485 cord	RS485-03	RS485	0.5 m(unshielded)	Applicant
USB extension cord	USB-01	USB	1.0 m(unshielded)	Applicant

Remark:

After the frequency was fixed, Notebook and Fix board were removed out of the Chamber before test.

TEST REPORT

4.0 Measurement Results

4.1 Antenna Requirement

Standard requirement:

15.203 requirement:

For intentional device. According to 15.203 an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna uses a reverse SMA unique type of connector to attach to the EUT.

Antenna 1: antenna gain: -3.24dBi



Antenna 2: antenna gain: 3.52 dBi




TEST REPORT**4.2 6 dB Bandwidth (DTS bandwidth)**

Test Requirement: FCC Part 15 C section 15.247
(a)(2)Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method: ANSI C63.10: Clause 11.8

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

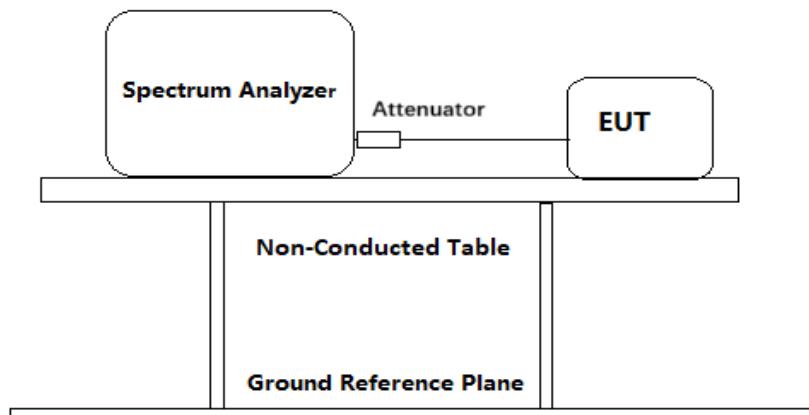**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss = 1 dB, with 10dB attenuator) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Set RBW = 100 kHz
 - b) Set the VBW $\geq [3 \times \text{RBW}]$
 - c) Detector = peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
 - h) Span=2*BW~5*BW
3. Repeat until all the test status is investigated.

TEST REPORT

4. Report the worst case.

Used Test Equipment List


Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

Channel No.	Frequency (MHz)	Measured 6dB bandwidth (MHz)	Limit (kHz)	Result
0	2405	1.673	≥ 500	Pass
7	2440	1.673		Pass
15	2480	1.690		Pass

Test result: The unit does meet the FCC requirements.


Result plot as follows:

Lowest Channel(2.405 GHz):

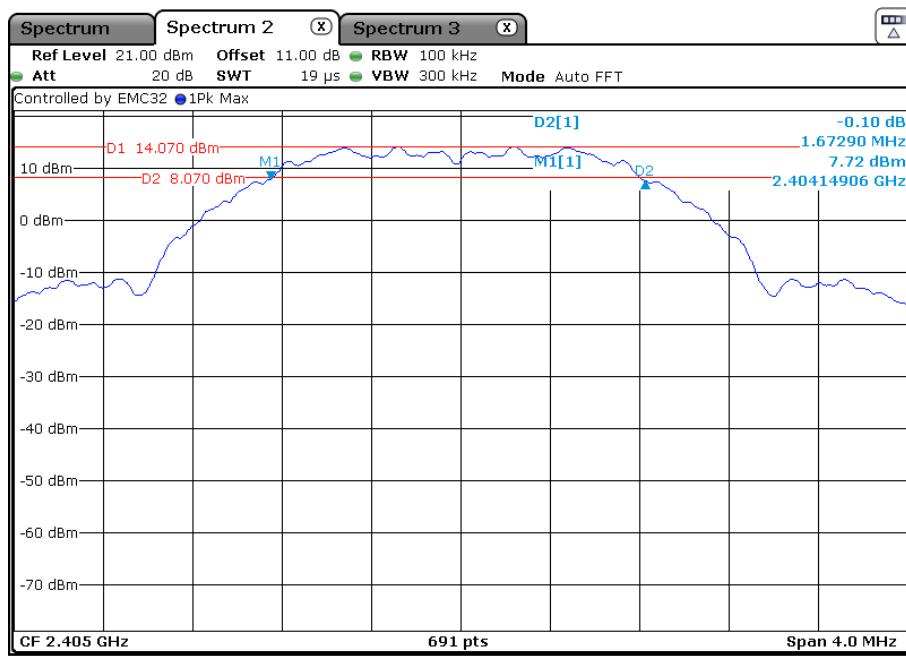


TEST REPORT

Middle Channel(2.440 GHz):

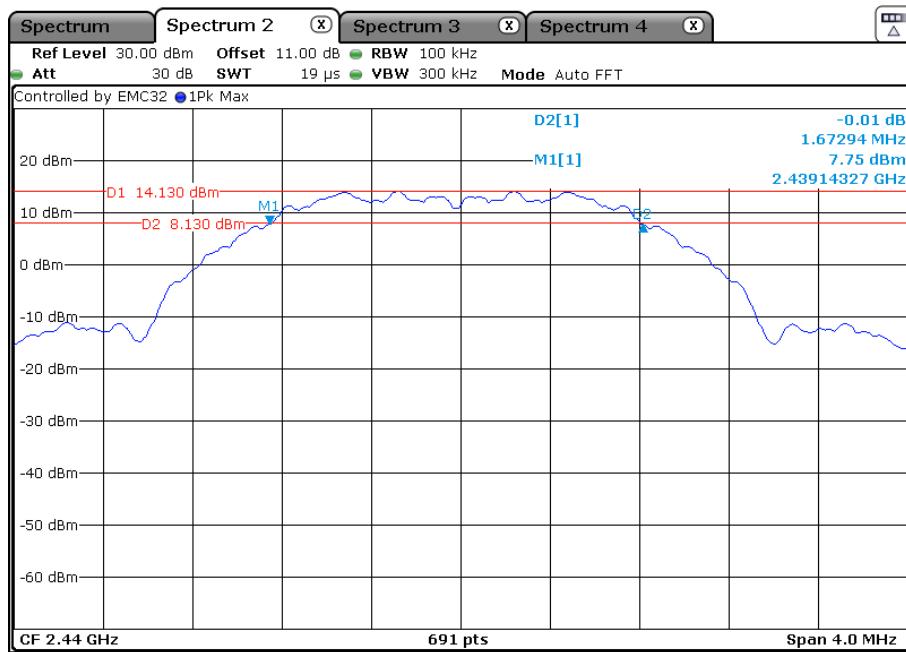


Highest Channel(2.480 GHz):

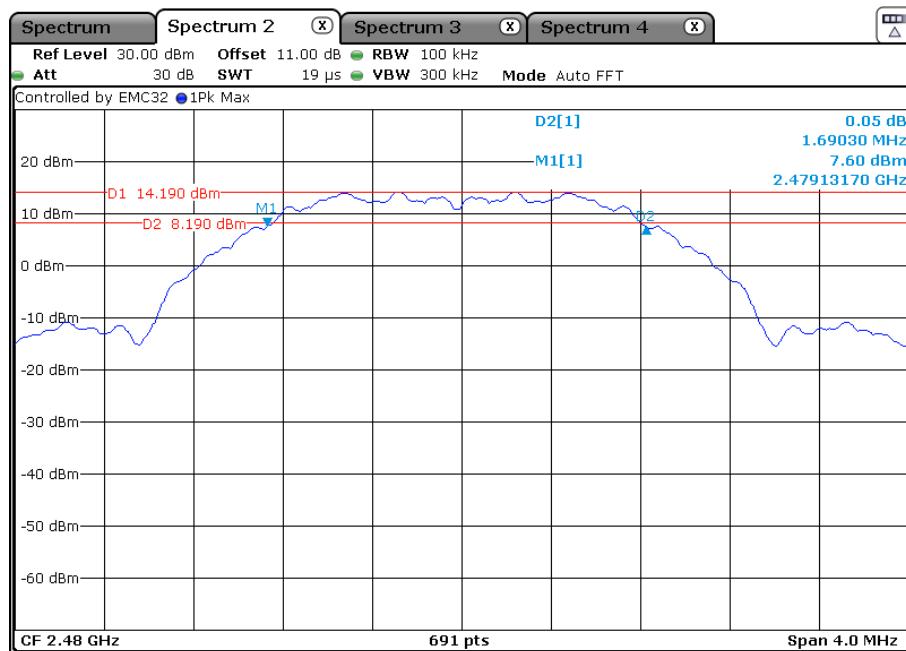

TEST REPORT

4.3 Maximum Peak Conducted Output Power

Test Requirement:	FCC Part 15 C section 15.247 (b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
Test Method:	ANSI C63.10: Clause 11.9.1.1($RBW \geq DTS$ bandwidth)
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	

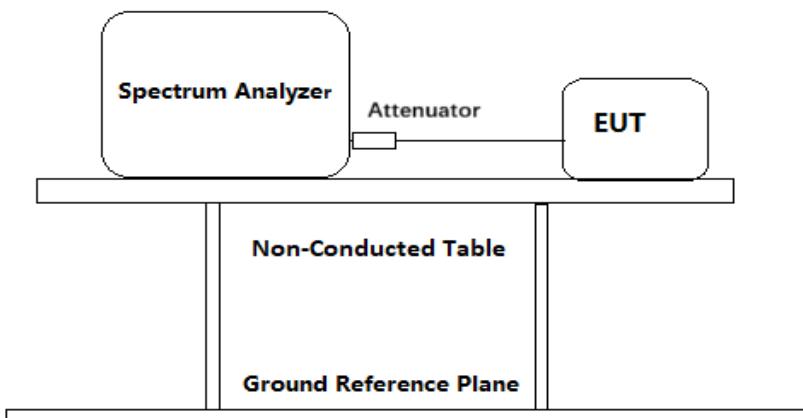

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1 dB, with 10dB attenuator) from the antenna port to the spectrum.
2. Set the spectrum analyzer:
 - a) Set the $RBW = 3$ MHz ($RBW \geq DTS$ bandwidth) .
 - b) Set the $VBW \geq [3 \times RBW]$.
 - c) Set the span ≥ 10 MHz [$3 \times RBW$].
 - d) Detector = peak.
 - e) Sweep time = auto couple.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use peak marker function to determine the peak amplitude level.
3. Repeat until all the test status is investigated.
4. Report the worst case.

TEST REPORT

Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.


Test result:

Channel No.	Frequency (MHz)	Measured channel Power (dBm)	Limit	Result
0	2405	17.98	1W (30 dBm)	Pass
7	2440	17.77		Pass
15	2480	17.83		Pass


Remark: Level = Read Level + Cable Loss

Result plot as follows:


Lowest channel (2.405 GHz):

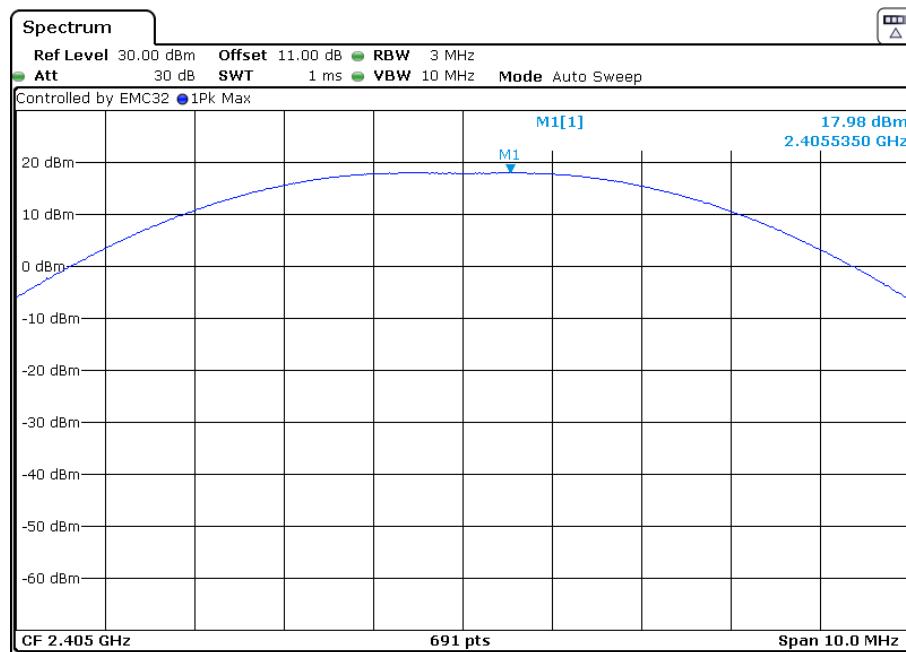

Middle Channel (2.440 GHz):

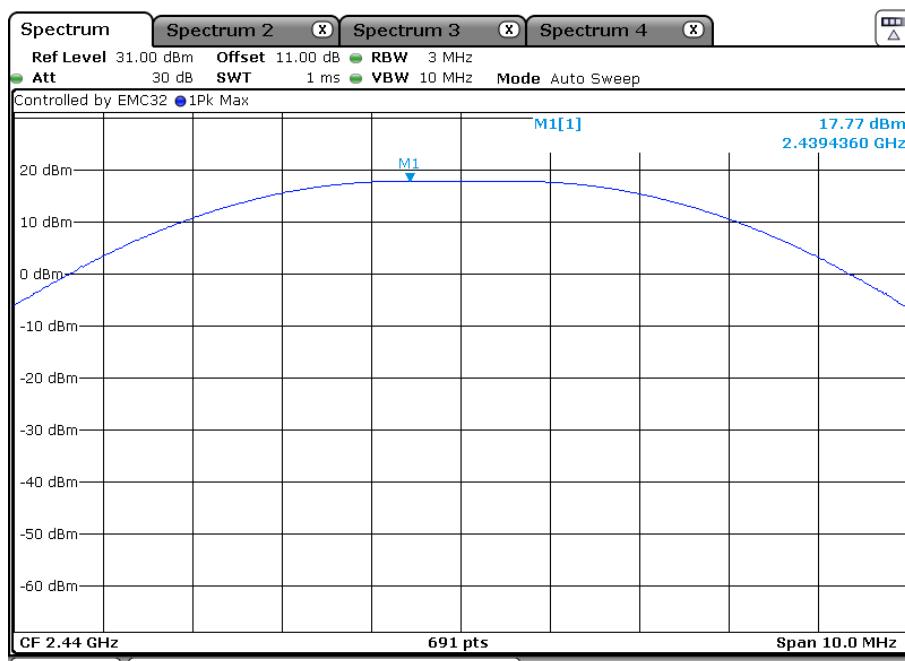TEST REPORT


Highest Channel (2.480 GHz):

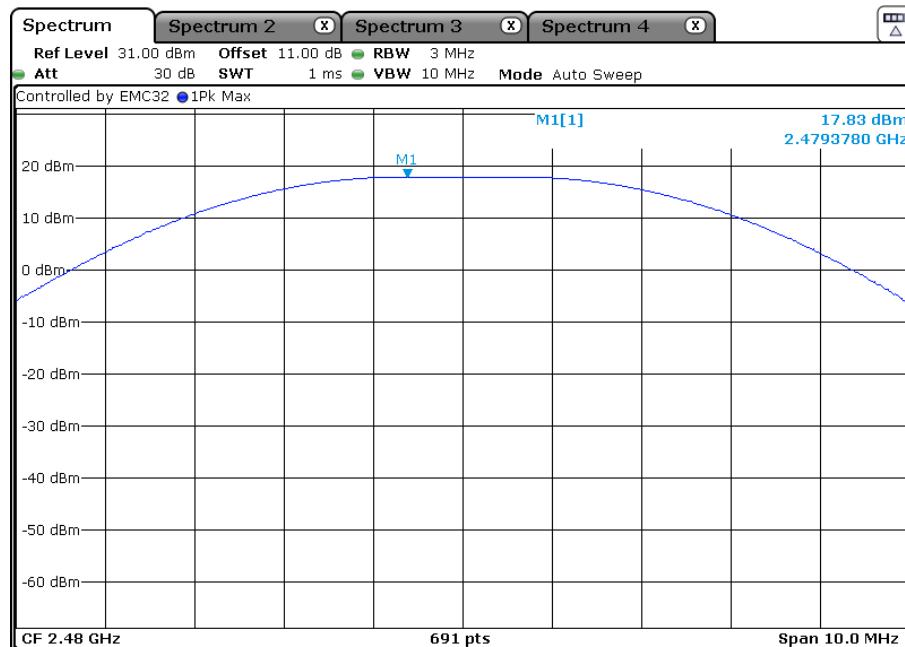

Test result: The unit does meet the FCC requirements.


TEST REPORT**4.4 Peak Power Spectral Density**

Test Requirement: FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Method: ANSI C63.10: Clause 11.10.2

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

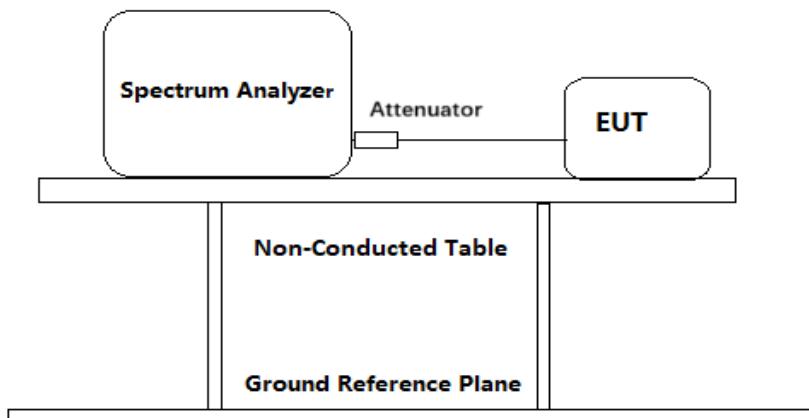**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable(cable loss =1 dB, with 10dB attenuator) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span= $1.5 \times$ DTS bandwidth.
 - c) Set the RBW to $3 \text{ kHz} \leqslant \text{RBW} \leqslant 100 \text{ kHz}$.
 - d) Set the VBW $\geqslant [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3

TEST REPORT

kHz) and repeat.

3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.


Test result:

Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3 kHz)	Limit	Result
0	2405	2.38	8 dBm/3kHz	Pass
7	2440	2.40		Pass
15	2480	2.42		Pass

Test result: Level = Read Level + Cable Loss.


Result plot as follows:

Lowest channel (2.405 GHz):

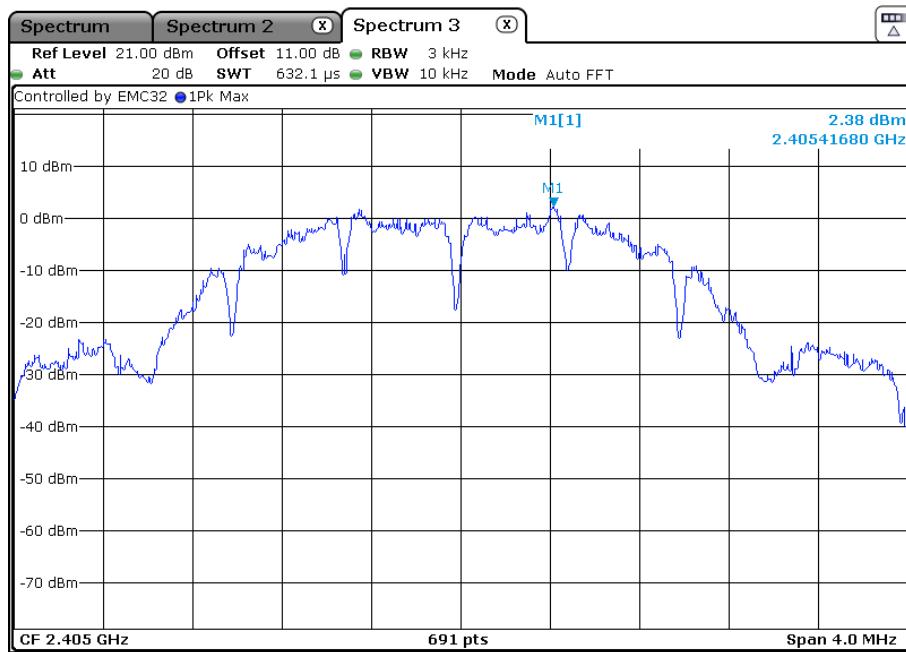


TEST REPORT

Middle Channel (2.440 GHz):

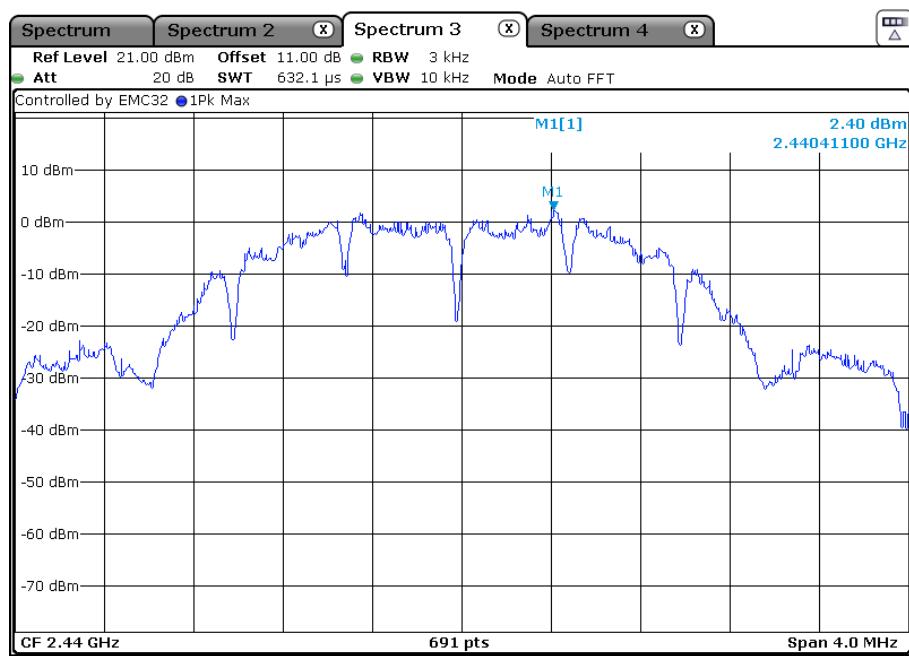

Highest Channel (2.480 GHz):

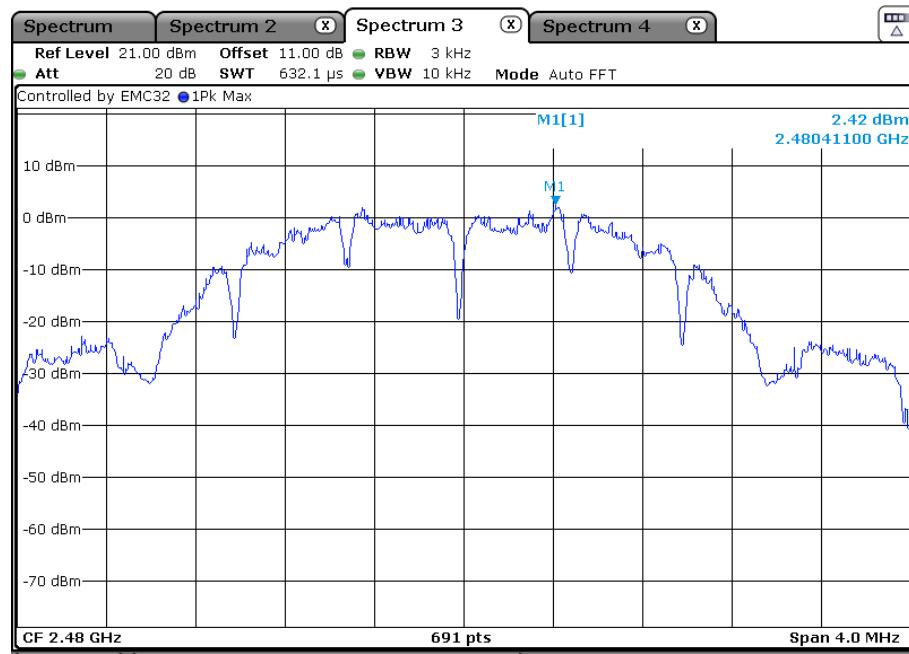

TEST REPORT**4.5 Out of Band Conducted Emissions**


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10: Clause 11.11

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

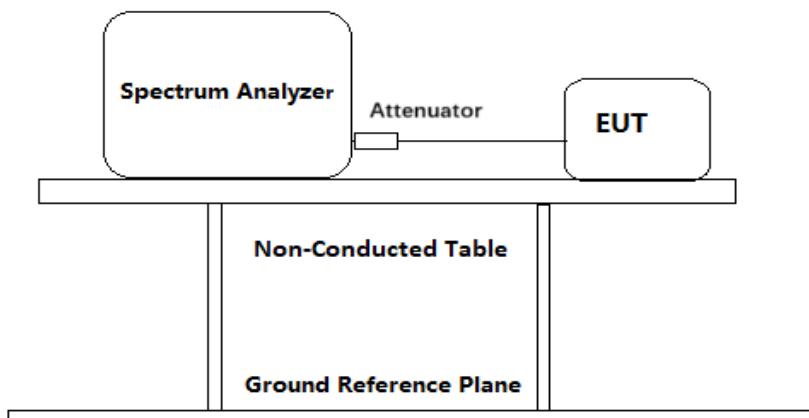

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable (cable loss =1 dB, with 10dB attenuator) from the antenna port to the spectrum analyzer or power meter.
2. Establish a reference level by using the following procedure:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to $\geq 1.5 \times$ DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.

TEST REPORT

Note that the channel found to contain the maximum PSD level can be used to establish the reference level

3. Emission level measurement
 - a) Set the center frequency and span to encompass frequency range to be measured.
 - b) Set the RBW = 100 kHz.
 - c) Set the VBW $\geq [3 \times \text{RBW}]$.
 - d) Detector = peak.
 - e) Sweep time = auto couple.
 - f) Trace mode = max hold.
 - g) Allow trace to fully stabilize.
 - h) Use the peak marker function to determine the maximum amplitude level.
4. Measure the Conducted unwanted Emissions of the test frequency with special test status.
5. Repeat until all the test status is investigated.
6. Report the worst case.


Used Test Equipment List

Spectrum Analyzer. Refer to Clause 5 Test Equipment List for details.

Result plot as follows:

Lowest channel (2.405 GHz):


9 kHz to 25 GHz

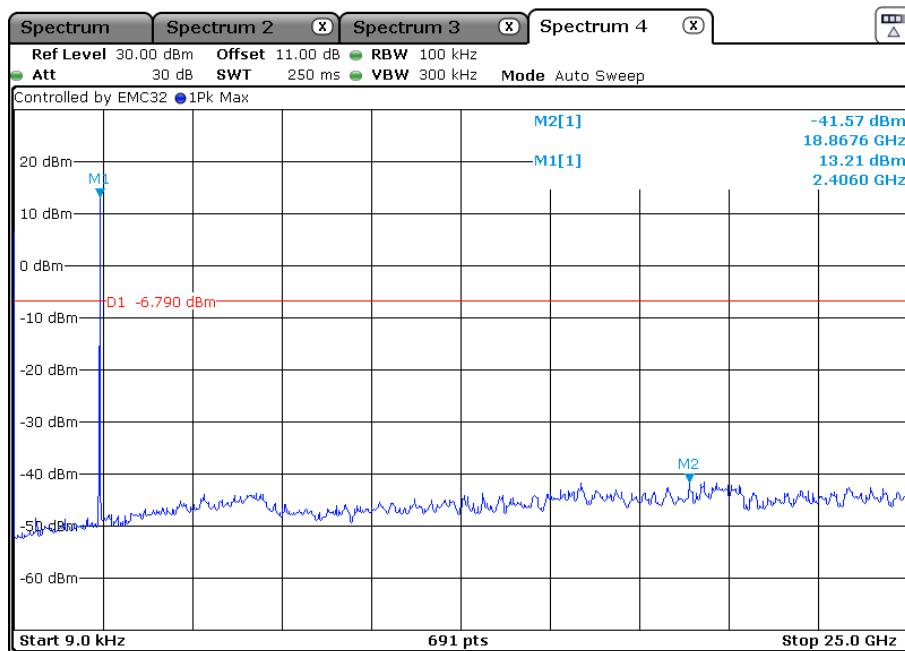

TEST REPORT


Middle Channel (2.440 GHz):

9 kHz to 25 GHz

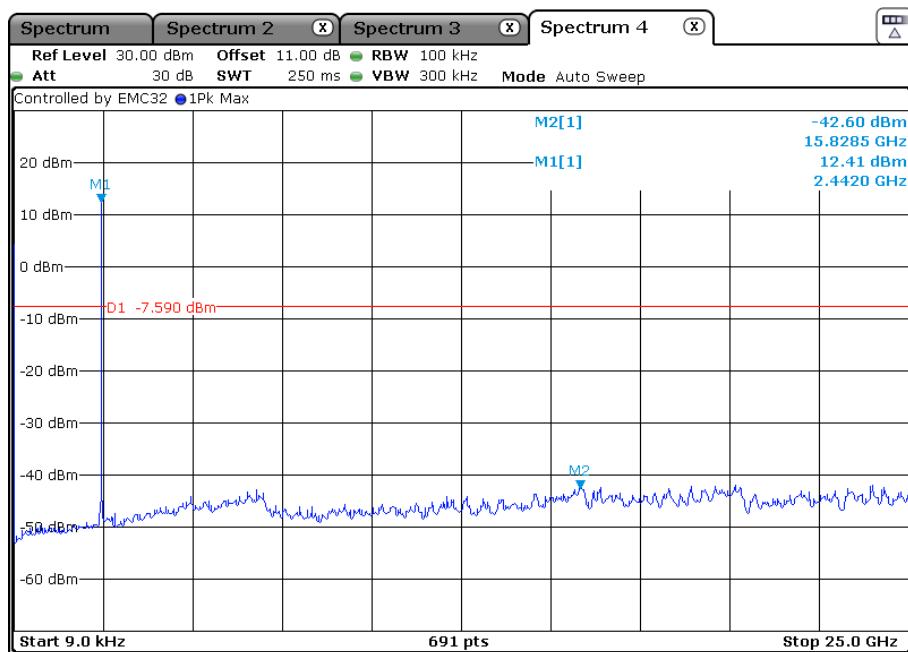

Highest Channel (2.480 GHz):

9 kHz to 25 GHz

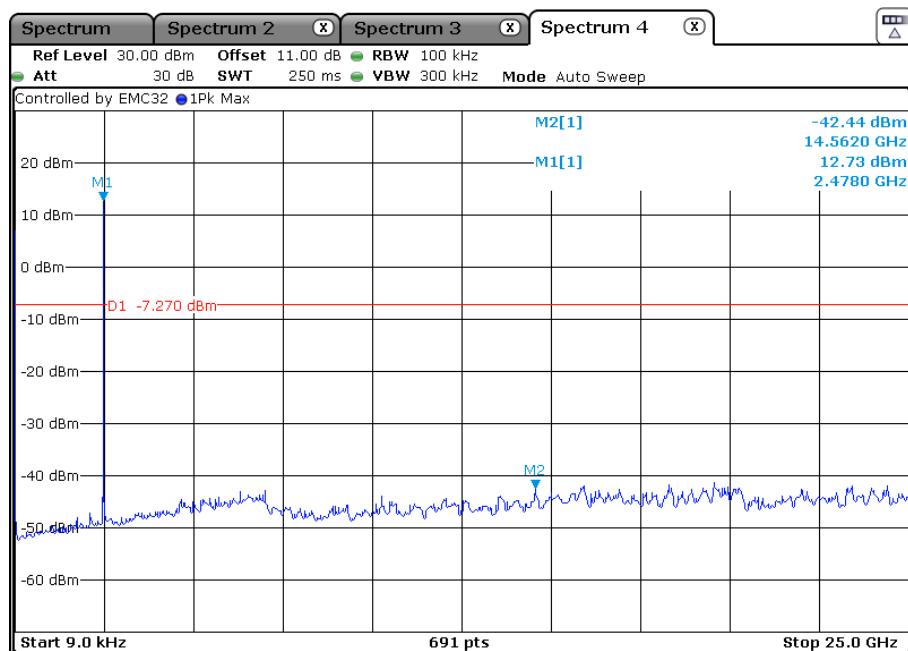

TEST REPORT**4.6 Radiated Emissions**

Test Requirement:	FCC Part 15 C section 15.247
	section 15.247: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).
Test Method:	ANSI C63.10: Clause 11.11, 11.12.1, 6.4, 6.5 and 6.6
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For Peak and Quasi-Peak value: RBW = 1 MHz for $f \geq 1$ GHz, 200 Hz for 9 kHz to 150 kHz 9 kHz for 150 kHz to 30 MHz 120 kHz for 30 MHz to 1GHz VBW \geq RBW Sweep = auto Detector function = peak for $f \geq 1$ GHz, QP for $f < 1$ GHz Trace = max hold
	For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW=10 Hz

TEST REPORT

Sweep = auto
Trace = max hold

Field Strength Calculation:

Where:

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below:

FS = RA + AF + CF - AG + PD + AV

FS = RA + Correct Factor + AV

FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

Correct Factor = AF + CF - AG + PD

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

FS = RA + AF + CF - AG + PD + AV

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m.

RA = 62.0 dB μ V

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0 dB

AV = -10 dB

Correct Factor = 7.4 + 1.6 - 29.0 + 0 = -20 dB

FS = 62 + (-20) + (-10) = 32 dB μ V/m


Section 15.205 Restricted bands of operation.


(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

TEST REPORT


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Configuration:

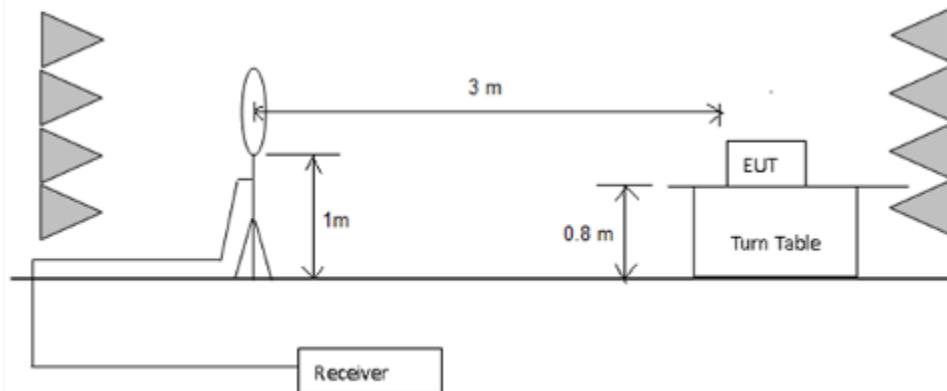 1) 9 kHz to 30 MHz emissions:

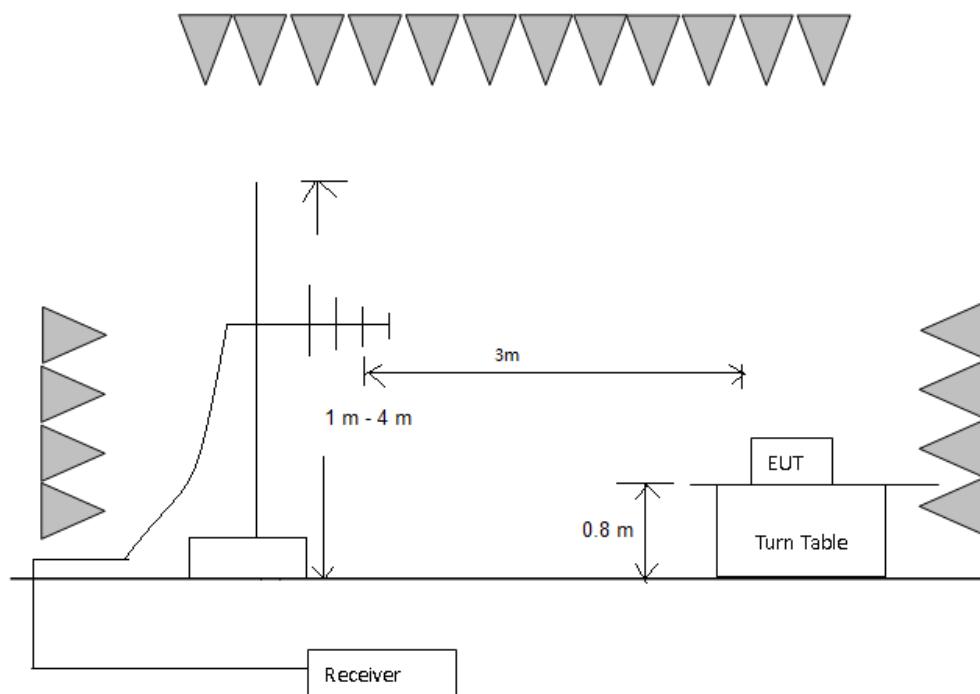 2) 30 MHz to 1 GHz emissions:

TEST REPORT

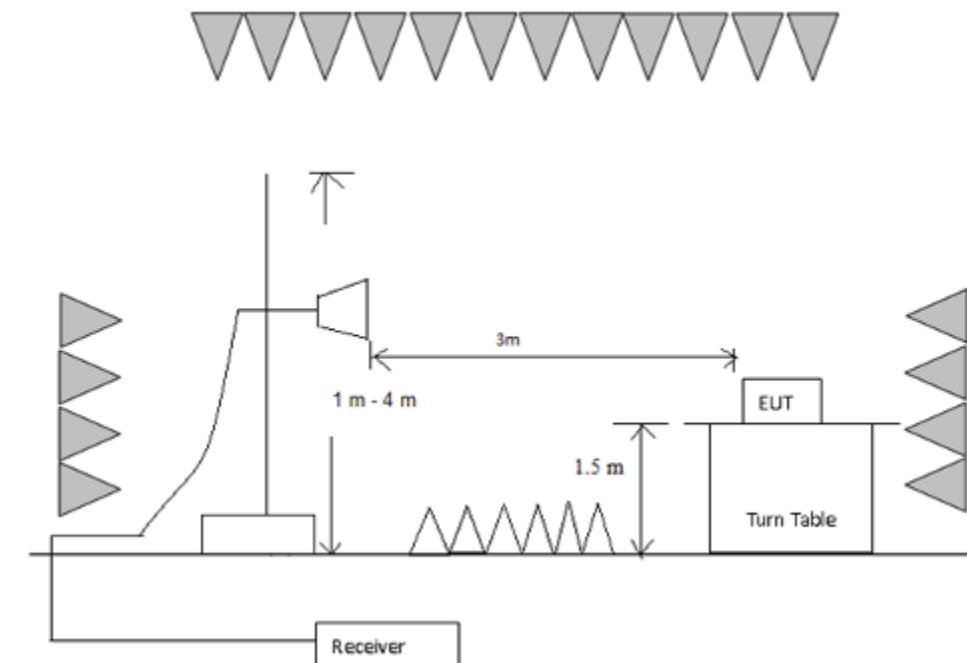
3) 1 GHz to 40 GHz emissions:


Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The lowest of the loop was positioned 1 m above the ground and positioned with its plane vertical at the special distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement was performed with the

TEST REPORT

EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

4) The receiver was scanned from 9 kHz to 25 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Used Test Equipment List:

3m Semi-Anechoic Chamber, EMI Test Receiver (9 kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz). TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX), Double-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX) and High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX). Refer to Clause 5 Test Equipment List for details.

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.


30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement, Pre-scan all modes and AC/DC24V, worst case as below:

Test at Channel 1 (2.405 GHz) in transmitting status, AC24V(worst case)

TEST REPORT


Antenna 1

Vertical:

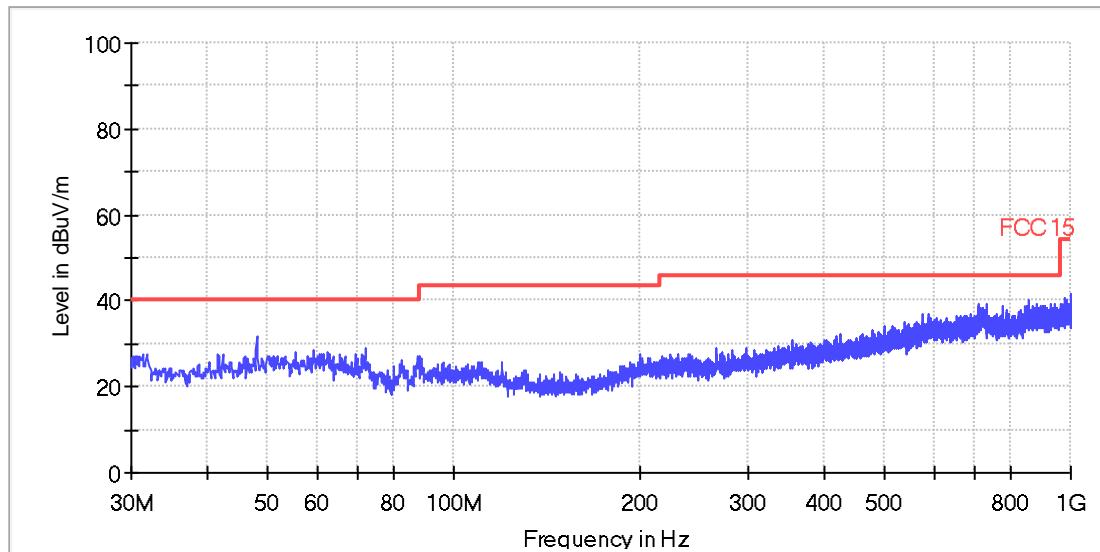

All emissions are more than 6dB below than the limit.

Horizontal:

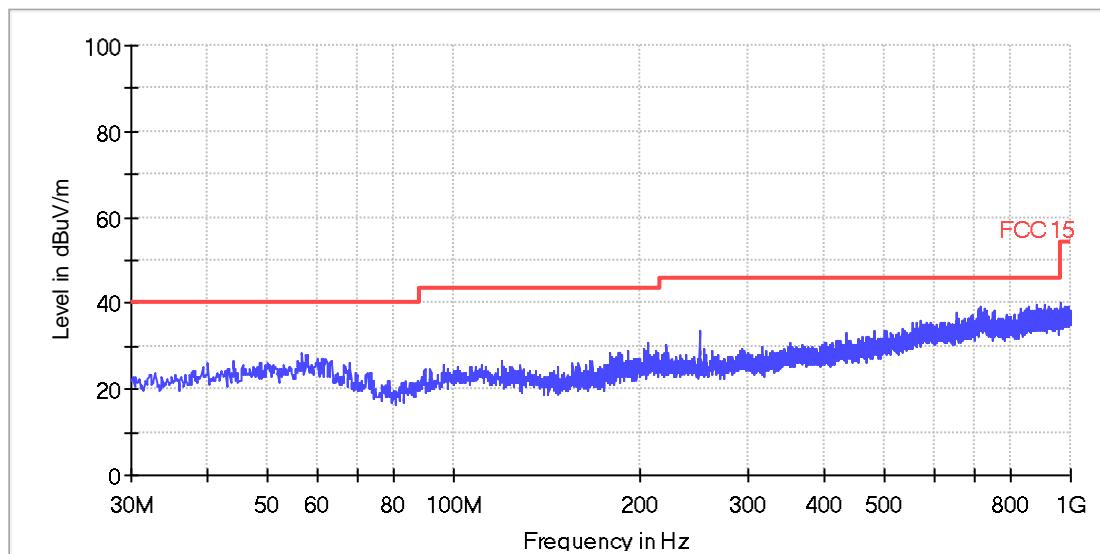


All emissions are more than 6dB below than the limit.

TEST REPORT


Antenna 2

Vertical:

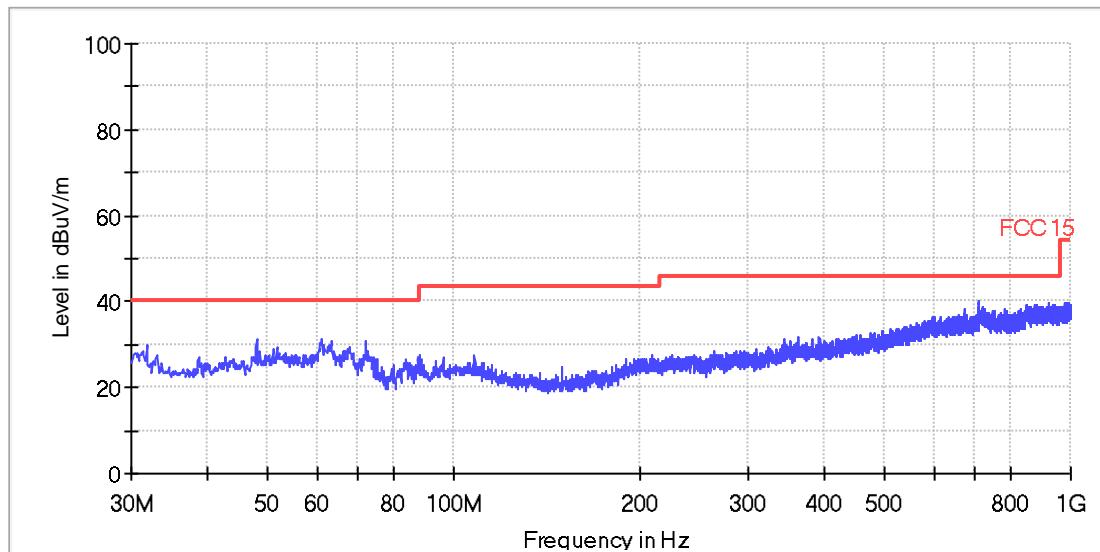

All emissions are more than 6dB below than the limit.

Horizontal:

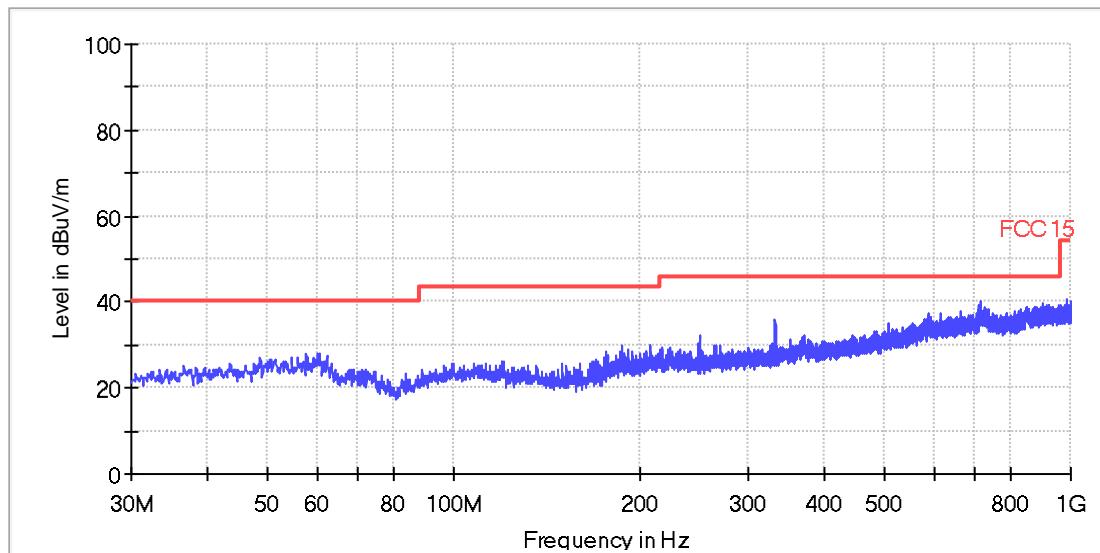

All emissions are more than 6dB below than the limit.

TEST REPORT

1~25 GHz Radiated Emissions. Peak & Average Measurement

Antenna 1

Test at Channel 0 (2.405 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
7213.5	54.6	2.3	56.9	74	V
7213.5	54.4	2.3	56.7	74	H

Average Measurement:


Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
7213.5	41.5	2.3	43.8	54	V
7213.5	44.1	2.3	46.4	54	H

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.


* Band Edges Emission

Vertical:

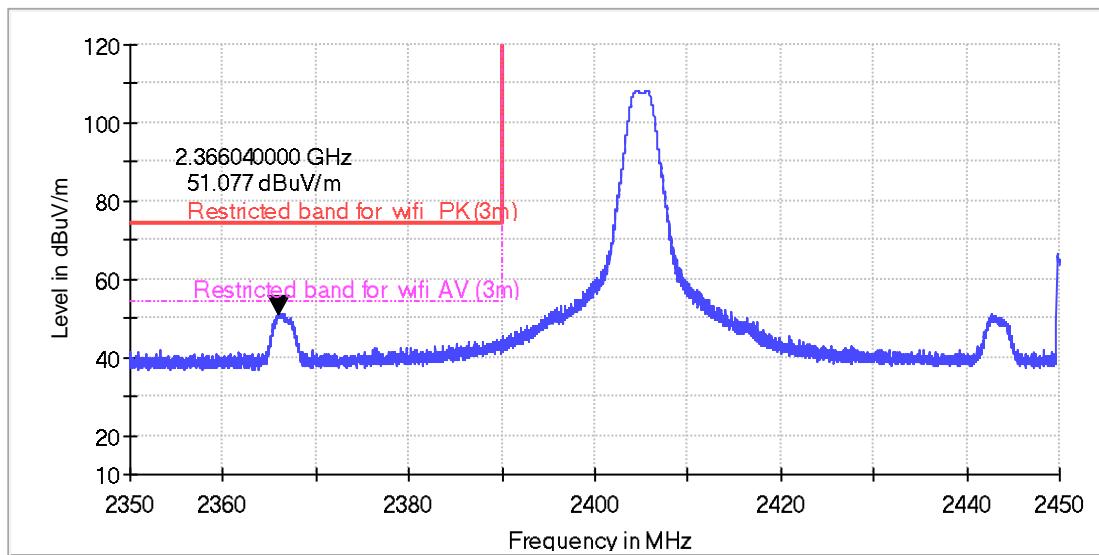

TEST REPORT

Horizontal:

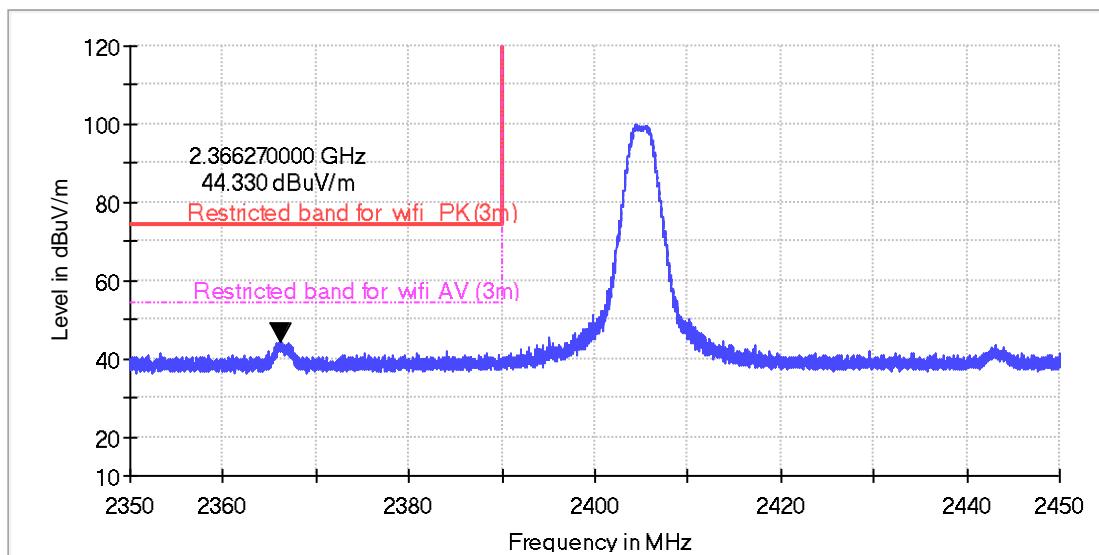

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2366.0	59.3	-8.2	51.1	74	H
2366.3	52.5	-8.2	44.3	74	V

Test at Channel 7 (2.440 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4878.1	52.9	-1.0	51.9	74	V
7321.9	55.0	2.4	57.4	74	V
4878.1	49.1	-1.0	48.1	74	H
7321.9	56.6	2.4	59.0	74	H

Average Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4878.1	/	-1.0	/	54	V
7321.9	40.5	2.4	42.9	54	V
4878.1	/	-1.0	/	54	H
7321.9	41.4	2.4	43.8	54	H

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.

TEST REPORT

Test at Channel 15 (2.480 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4958.9	52.7	-0.9	51.8	74	V
7438.8	50.0	2.6	52.6	74	V
4958.9	50.1	-0.9	49.2	74	H
7440.9	56.6	2.6	59.2	74	H

Average Measurement:


Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4958.9	/	-0.9	/	54	V
7438.8	/	2.6	/	54	V
4958.9	/	-0.9	/	54	H
7440.9	41.0	2.6	43.6	54	H

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.


* Band Edges Emission

Vertical:

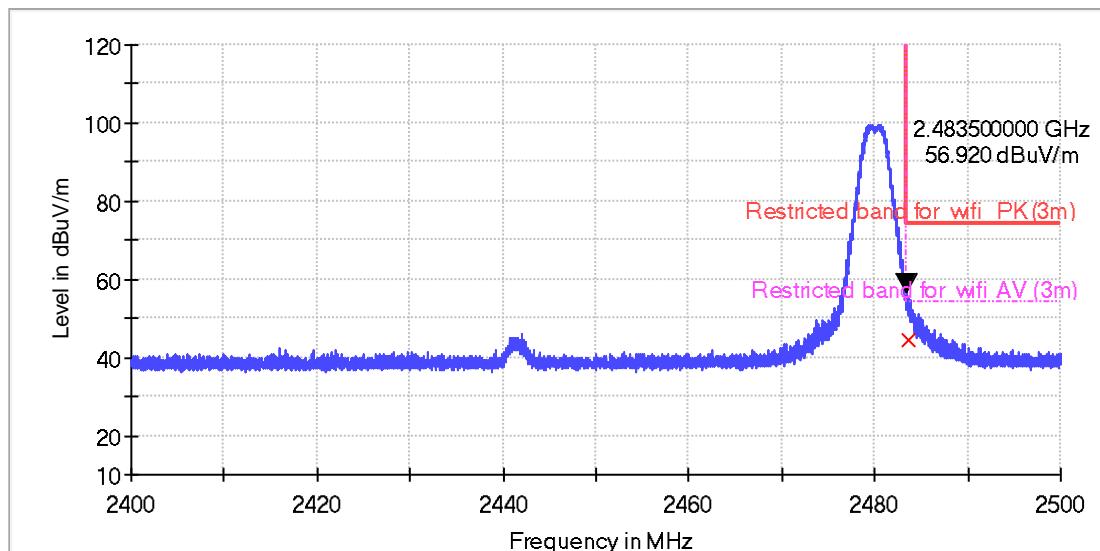

TEST REPORT

Horizontal:

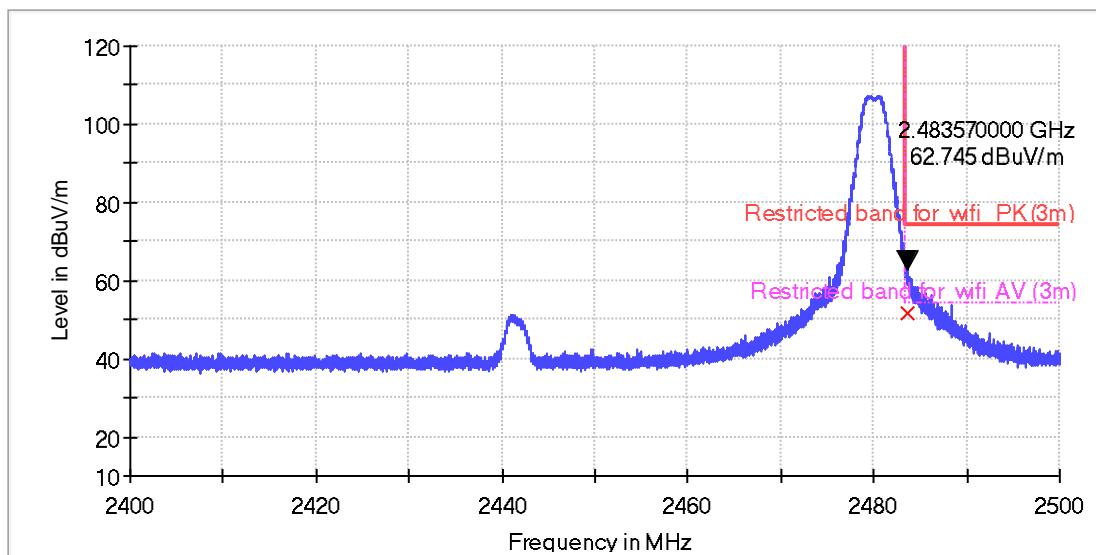

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2483.5	64.7	-7.8	56.9	74	V
2483.6	70.5	-7.8	62.7	74	H

Average Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2483.5	52.0	-7.8	44.2	54	V
2483.6	59.5	-7.8	51.7	54	H

TEST REPORT
Antenna 2

Test at Channel 0 (2.405 GHz) in transmitting status

Peak Measurement:


Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
7215.6	53.1	2.3	55.4	74	V
7213.5	54.9	2.3	57.2	74	H

Average Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
7215.6	42.6	2.3	44.9	54	V
7213.5	44.2	2.3	46.5	54	H


* Band Edges Emission

Vertical:

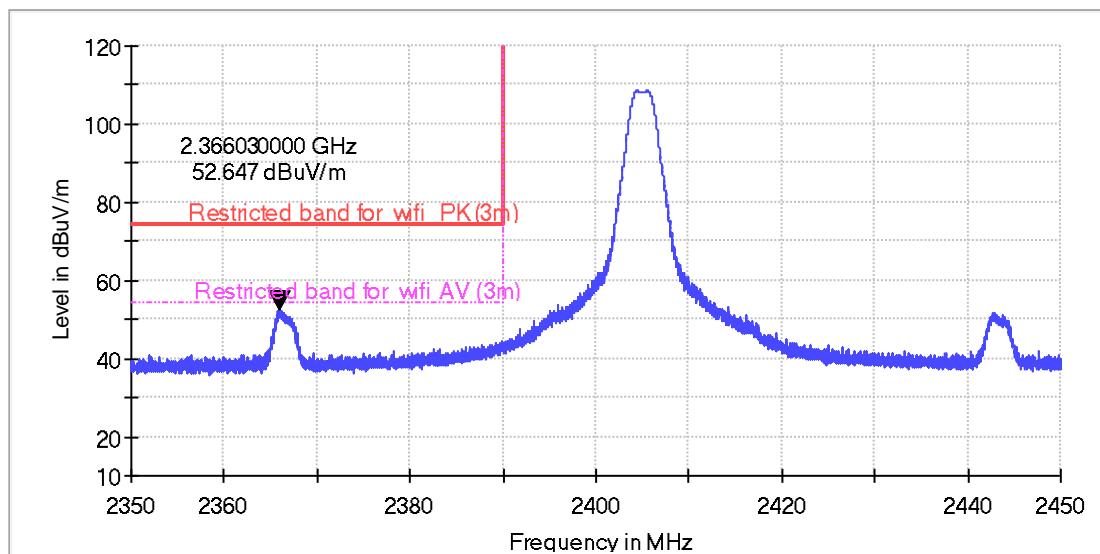

TEST REPORT

Horizontal:

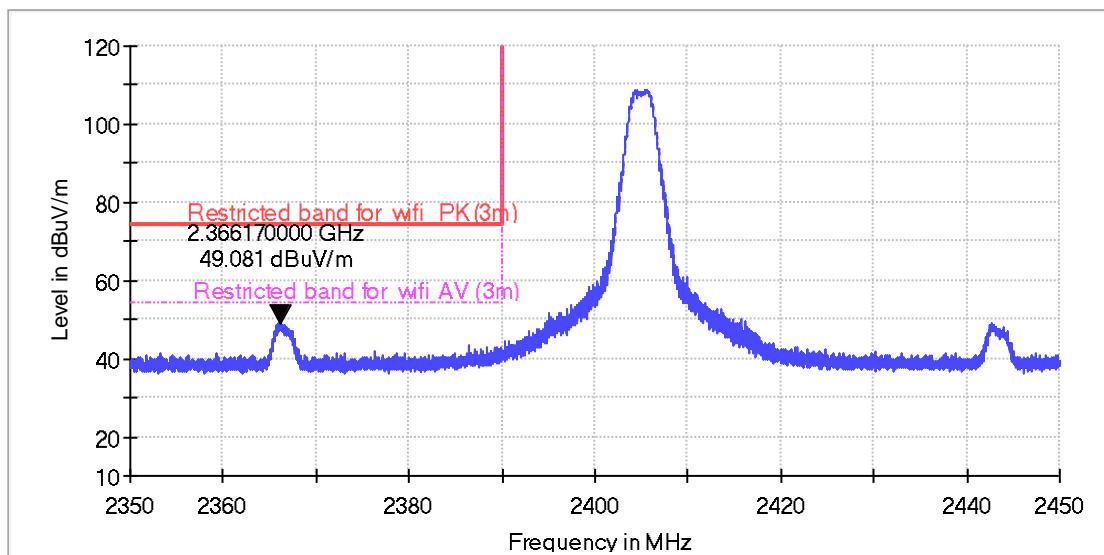

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2366.0	60.8	-8.2	52.6	74	H
2366.2	57.3	-8.2	49.1	74	V

Test at Channel 7 (2.440 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4880.3	57.5	-1.0	56.5	74	V
7317.6	54.6	2.4	57.0	74	V
4880.3	50.1	-1.0	49.1	74	H
7317.6	53.4	2.4	55.8	74	H

Average Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4880.3	47.8	-1.0	46.8	54	V
7317.6	40.5	2.4	42.9	54	V
4880.3	/	-1.0	/	54	H
7317.6	40.3	2.4	42.7	54	H

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.

TEST REPORT

Test at Channel 15 (2.480 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4961.0	59.2	-0.9	58.3	74	V
7440.9	57.4	2.6	60.0	74	V
4958.9	53.1	-0.9	52.2	74	H
7440.9	57.8	2.6	60.4	74	H

Average Measurement:


Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4961.0	49.9	-0.9	49.0	54	V
7440.9	42.3	2.6	44.9	54	V
4958.9	/	-0.9	/	54	H
7440.9	42.4	2.6	45.0	54	H

Remark:

When Peak emission level was below AV limit, the AV emission level did not be recorded.


* Band Edges Emission

Vertical:

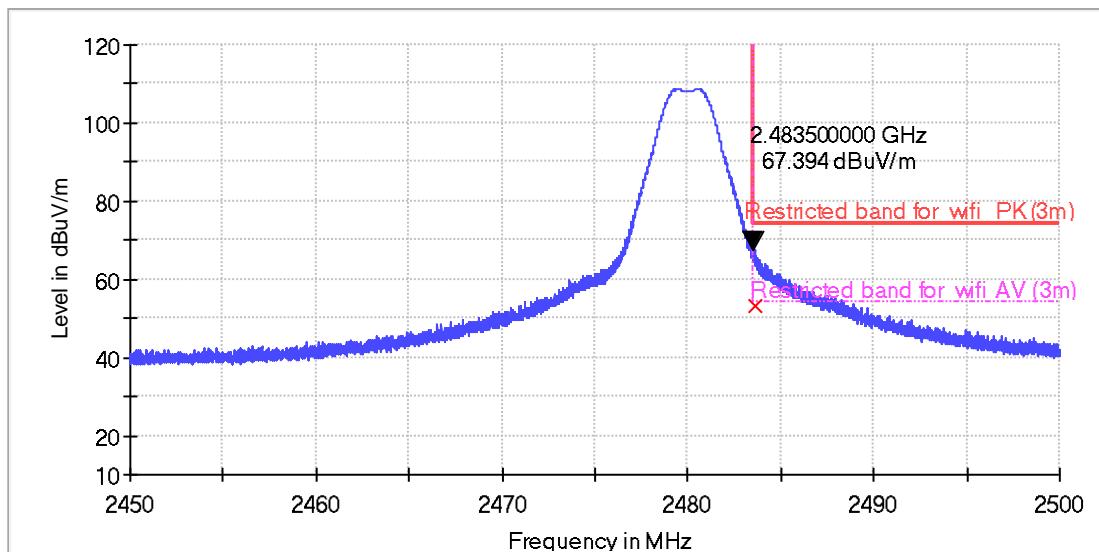

TEST REPORT

Horizontal:

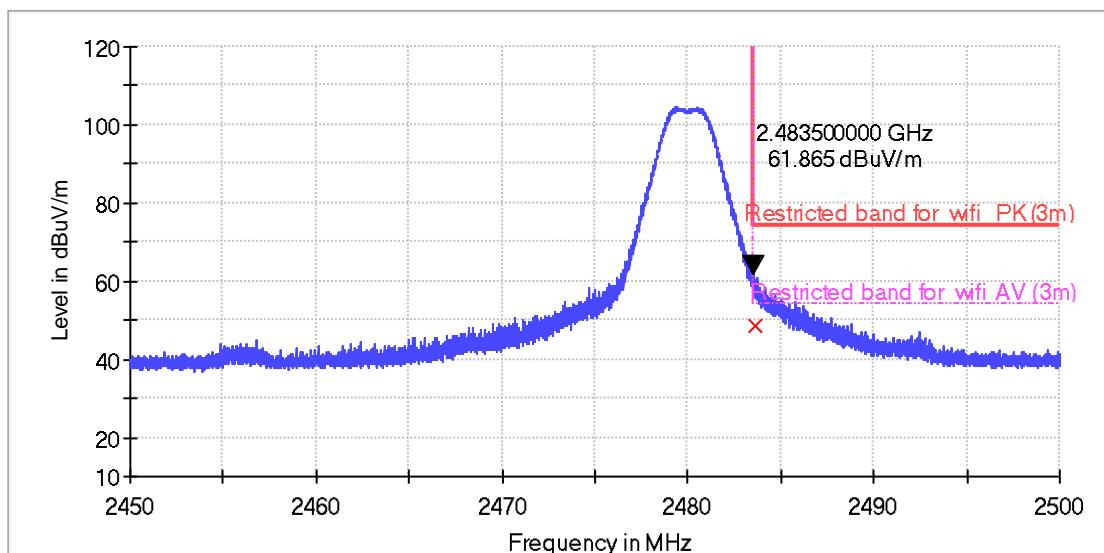

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2483.5	75.2	-7.8	67.4	74	V
2483.6	69.7	-7.8	61.9	74	H

Average Measurement:


Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
2483.5	61.0	-7.8	53.2	54	V
2483.6	56.6	-7.8	48.8	54	H

TEST REPORT

For Wi-Fi and ZigBee transmitting simultaneously, Antenna 2 + Antenna 2 is the worst case and AC24V is the worst case.


30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement, Pre-scan all modes worst case as below(2405MHz):

Vertical:

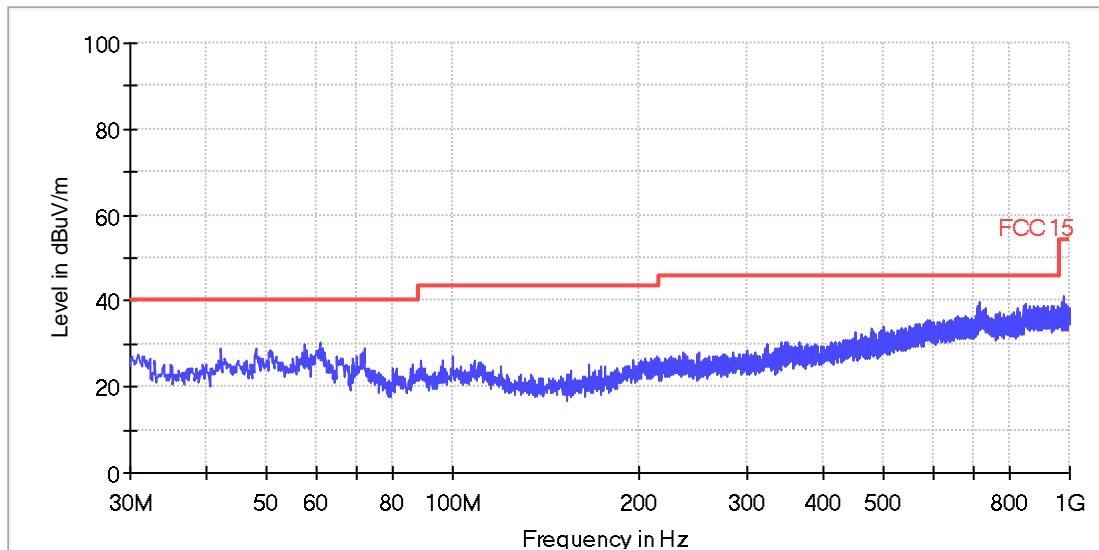

All emissions are more than 6dB below than the limit.

Horizontal:

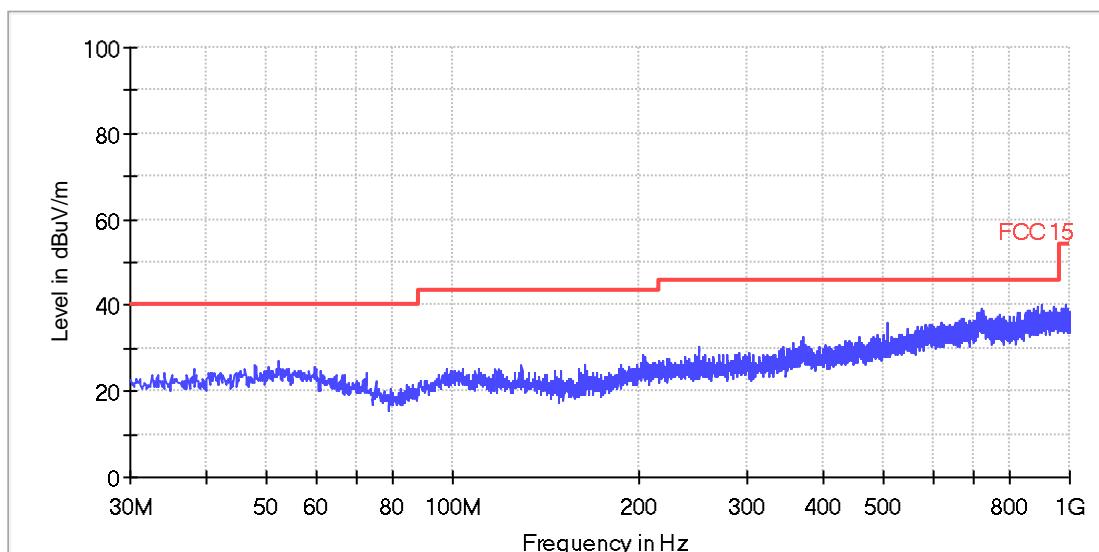

All emissions are more than 6dB below than the limit.

TEST REPORT

1~25 GHz Radiated Emissions. Peak & Average Measurement, Pre-scan all modes worst case as below:

Test at Channel 15 (2.480 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
7440.9	53.6	2.6	56.2	74	V
7440.9	56.4	2.6	59.0	74	H

Average Measurement:


Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
7440.9	39.6	2.6	42.2	54	V
7440.9	41.0	2.6	43.6	54	H

TEST REPORT

For BLE and ZigBee transmitting simultaneously, Antenna 2 + Antenna 2 is the worst case and AC24V is the worst case, the worst case data as below:


30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement, Pre-scan all modes worst case as below(2405MHz):

Vertical:

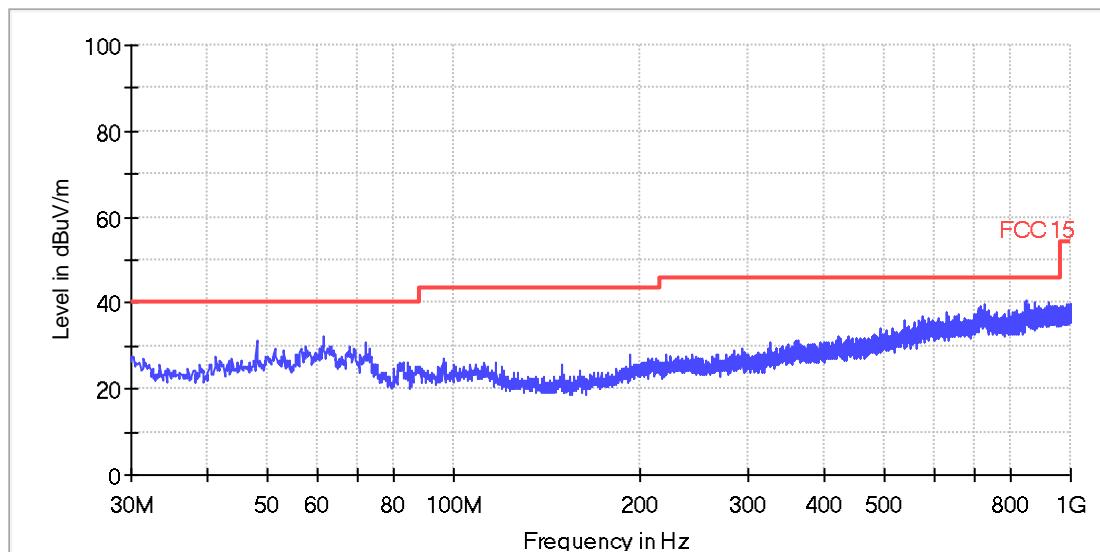

All emissions are more than 6dB below than the limit.

Horizontal:

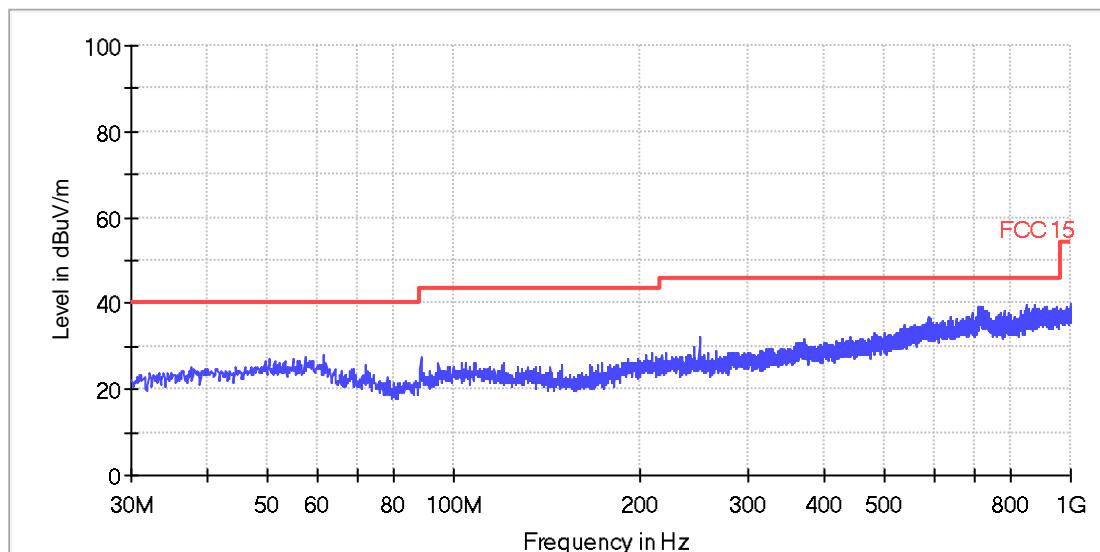

All emissions are more than 6dB below than the limit.

TEST REPORT

1~25 GHz Radiated Emissions. Peak & Average Measurement, Pre-scan all modes worst case as below:

Test at Channel 15 (2.480 GHz) in transmitting status

Peak Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4958.9	58.0	-0.9	57.1	74	V
7440.9	54.2	2.6	56.8	74	V
7438.8	56.3	2.6	58.9	74	H

Average Measurement:

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Antenna polarization
4958.9	44.7	-0.9	43.8	54	V
7440.9	43.3	2.6	45.9	54	V
7438.8	41.9	2.6	44.5	54	H

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

No any other emissions level which are attenuated less than 20dB below the limit.

TEST REPORT**4.7 Band Edges Requirement**

Test Requirement: FCC Part 15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Frequency Band: 2400 MHz to 2483.5 MHz

Test Method: ANSI C63.10: Clause 11.11 and 11.13

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration: For Band Edges Emission in Radiated mode, Please refer to clause 4.7

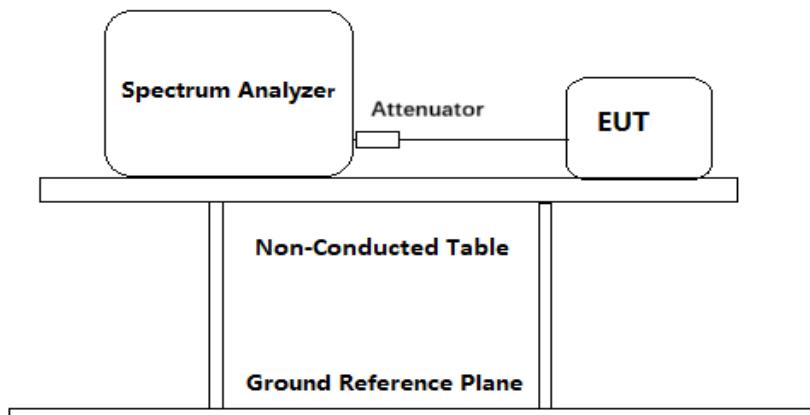**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low RF cable(cable loss =1 dB, with 10dB attenuator) from the antenna port to the spectrum analyzer.
 - a) Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).
 - b) Set the center frequency and span to encompass frequency range to be measured.
 - c) RBW = 100 kHz.
 - d) VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak.

TEST REPORT

- f) Sweep time = auto.
- g) Trace mode = max hold.
- h) Allow sweep to continue until the trace stabilizes (required measurement time may increase for low-duty-cycle applications).
- i) For radiated Band-edge emissions within a restricted band and within 2 MHz of an authorized band edge, integration method is considered.

2. Repeat until all the test status is investigated.
3. Report the worst case.

Used Test Equipment List:

3m Semi-Anechoic Chamber, EMI Test Receiver (9 kHz~7 GHz), Signal and Spectrum Analyzer (10 Hz~40 GHz), Loop antenna (9 kHz-30 MHz). TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX), Bouble-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX) and High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX). Refer to Clause 5 Test Equipment List for details.

Test result with plots as follows:


For conduct mode:

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

Channel 0: 2.405 GHz

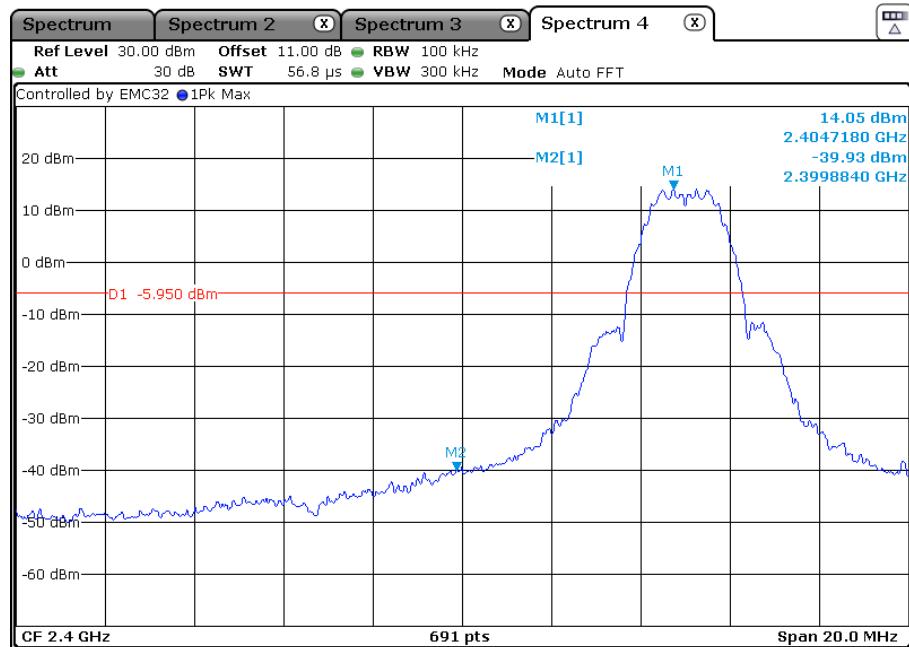

TEST REPORT

Channel 15: 2.480 GHz

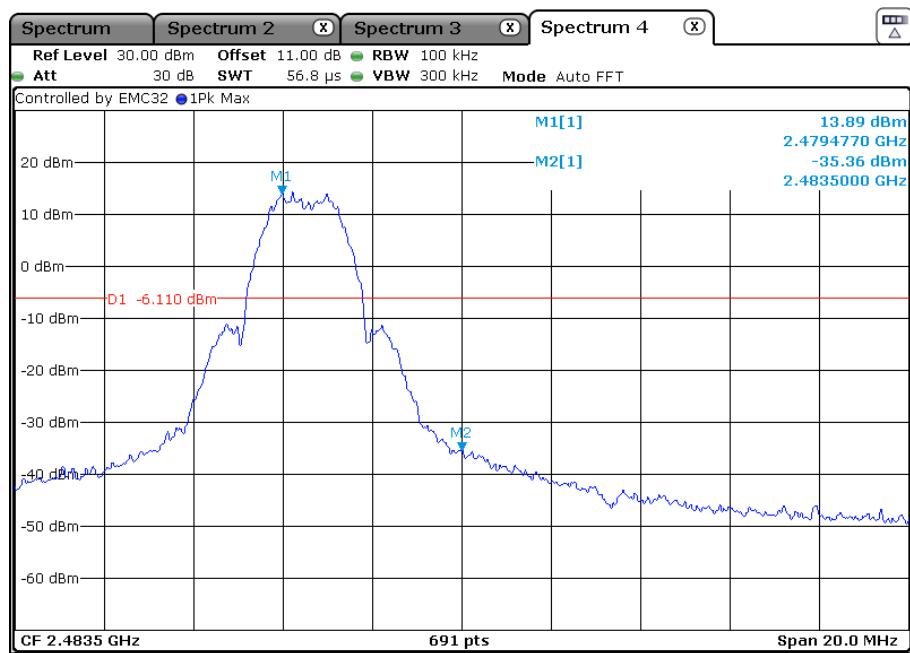


For radiated mode:

Please refer Clause 4.7 Radiated Emissions in Restricted Bands of this test report for more details. The resultant field strength in band edges meet the general radiated emission limit in section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

TEST REPORT

4.8 Conducted Emission Test

Test Configuration:

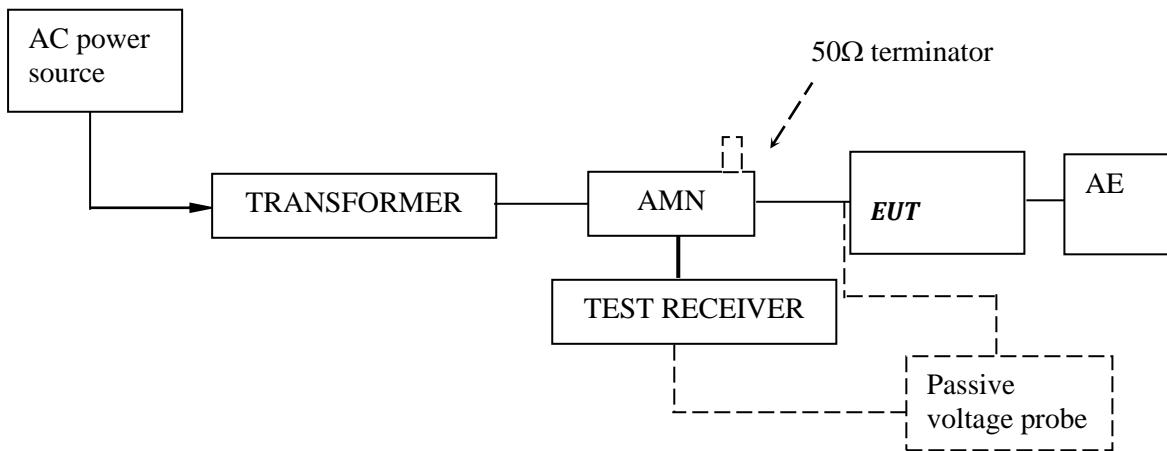

Test Setup and Procedure:

Test was performed according to ANSI C63.10 Clause 6.2. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.


TEST REPORT
Test Data and Curve

At main terminal: Pass

AC 24V

Tested Wire: Live

Operation Mode: Transmitting

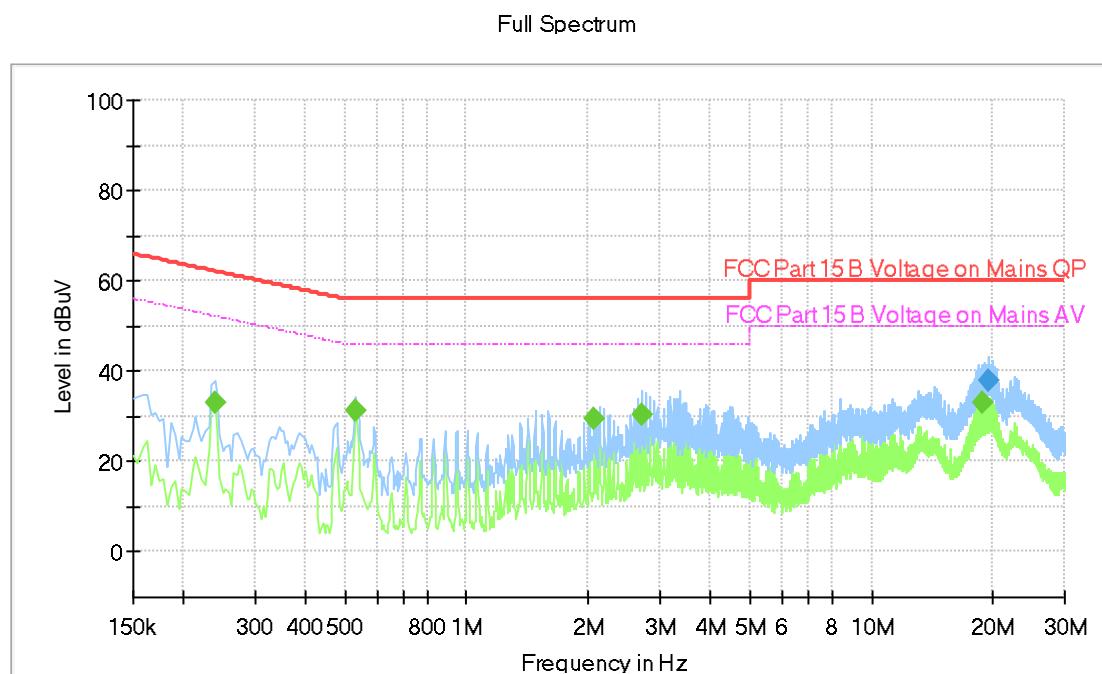
Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.238000	---	32.98	52.17	19.18	1000.0	9.000	L1	ON	9.6
0.534000	---	31.33	46.00	14.67	1000.0	9.000	L1	ON	9.6
2.066000	---	29.66	46.00	16.34	1000.0	9.000	L1	ON	9.7
2.718000	---	30.36	46.00	15.64	1000.0	9.000	L1	ON	9.7
18.810000	---	33.03	50.00	16.97	1000.0	9.000	L1	ON	10.0
19.390000	37.96	---	60.00	22.04	1000.0	9.000	L1	ON	10.0


Remark:

1. Corr. (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dB μ V) = Corr. (dB) + Read Level (dB μ V)
3. Margin (dB) = Limit (dB μ V) - Level (dB μ V)

TEST REPORT

Tested Wire: Neutral

Operation Mode: Transmitting

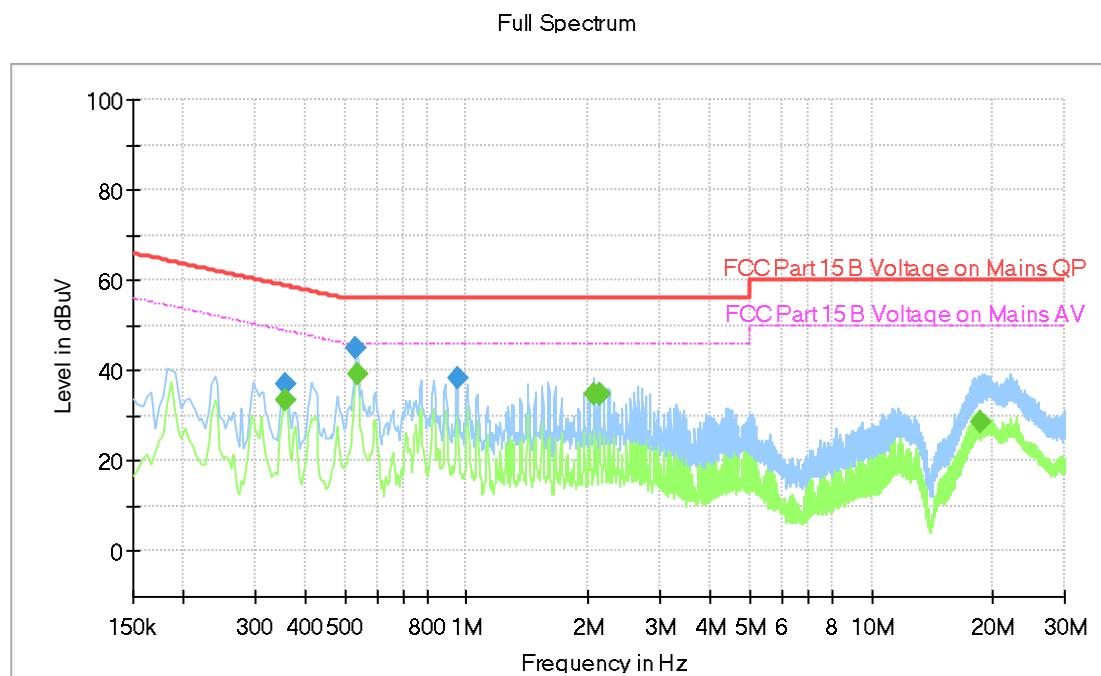
Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.358000	---	33.43	48.78	15.35	1000.0	9.000	N	ON	9.5
0.358000	36.93	---	58.78	21.85	1000.0	9.000	N	ON	9.5
0.534000	44.83	---	56.00	11.17	1000.0	9.000	N	ON	9.5
0.538000	---	39.14	46.00	6.86	1000.0	9.000	N	ON	9.5
0.946000	38.55	---	56.00	17.45	1000.0	9.000	N	ON	9.5
2.066000	---	35.01	46.00	10.99	1000.0	9.000	N	ON	9.5
2.126000	---	34.82	46.00	11.18	1000.0	9.000	N	ON	9.5
2.126000	34.80	---	56.00	21.20	1000.0	9.000	N	ON	9.5
18.578000	---	28.65	50.00	21.35	1000.0	9.000	N	ON	10.0

Remark:


1. Corr. (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dB μ V) = Corr. (dB) + Read Level (dB μ V)
3. Margin (dB) = Limit (dB μ V) - Level (dB μ V)

TEST REPORT

DC 24V

Tested Wire: Live

Operation Mode: Transmitting

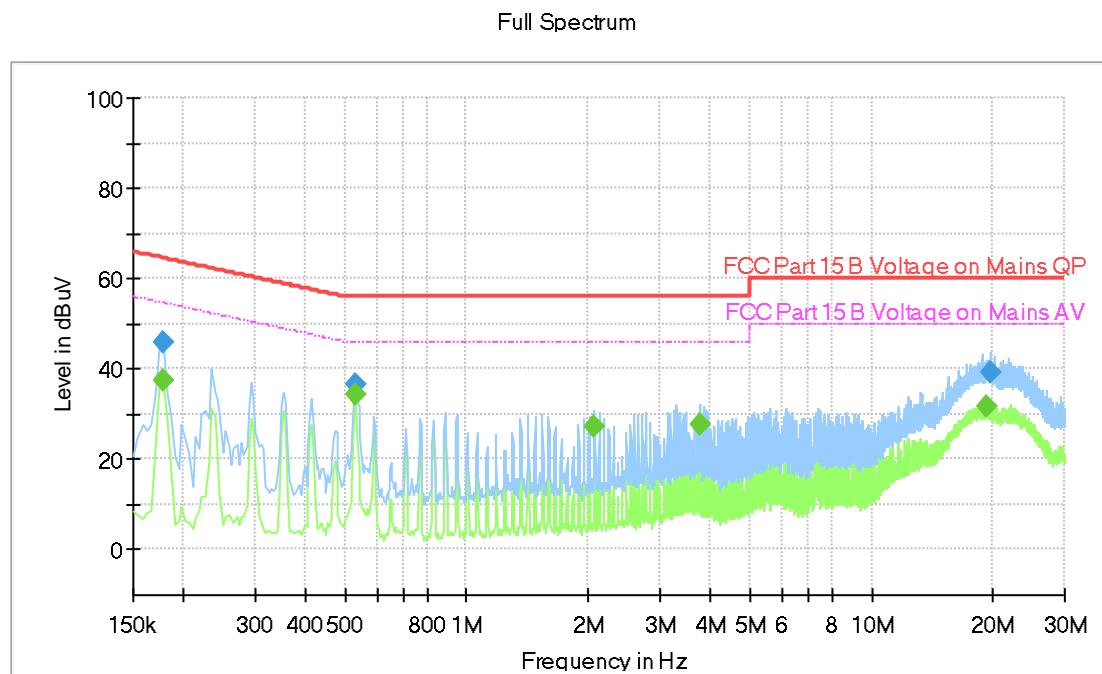
Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.178000	---	37.31	54.58	17.27	1000.0	9.000	L1	ON	9.6
0.178000	45.77	---	64.58	18.81	1000.0	9.000	L1	ON	9.6
0.530000	---	34.47	46.00	11.53	1000.0	9.000	L1	ON	9.6
0.530000	36.54	---	56.00	19.46	1000.0	9.000	L1	ON	9.6
2.066000	---	27.23	46.00	18.77	1000.0	9.000	L1	ON	9.7
3.778000	---	27.62	46.00	18.38	1000.0	9.000	L1	ON	9.7
19.342000	---	31.81	50.00	18.19	1000.0	9.000	L1	ON	10.0
19.786000	39.17	---	60.00	20.83	1000.0	9.000	L1	ON	10.0

Remark:


1. Corr. (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dB μ V) = Corr. (dB) + Read Level (dB μ V)
3. Margin (dB) = Limit (dB μ V) - Level (dB μ V)

TEST REPORT

Tested Wire: Neutral

Operation Mode: Transmitting

Full Spectrum

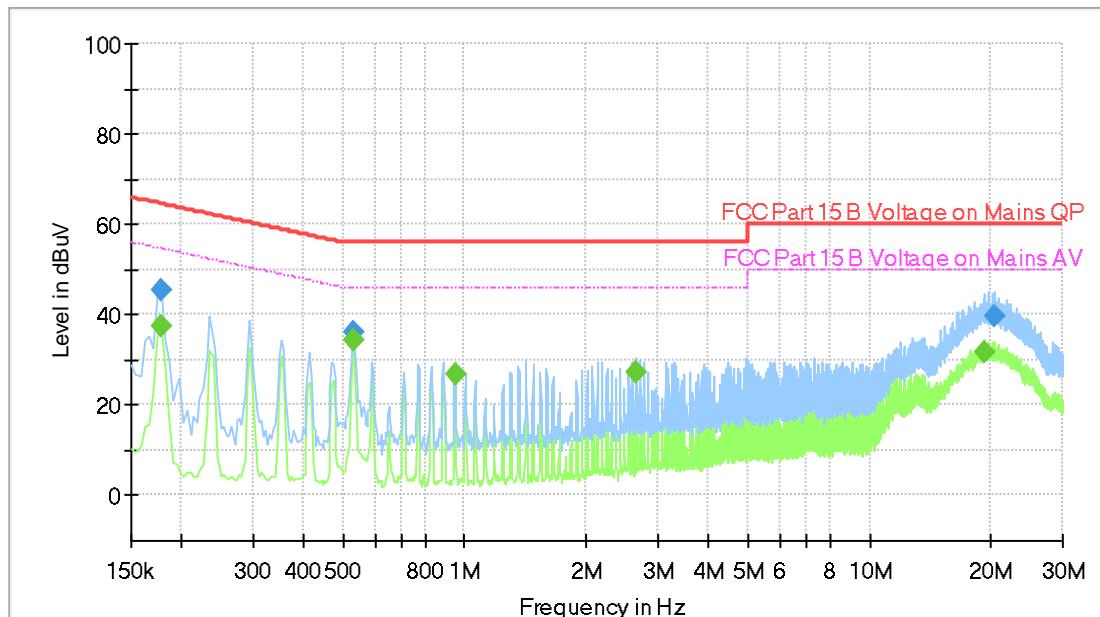
Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.178000	---	37.60	54.58	16.98	1000.0	9.000	N	ON	9.5
0.178000	45.40	---	64.58	19.17	1000.0	9.000	N	ON	9.5
0.530000	---	34.20	46.00	11.80	1000.0	9.000	N	ON	9.5
0.530000	36.32	---	56.00	19.68	1000.0	9.000	N	ON	9.5
0.946000	---	26.74	46.00	19.26	1000.0	9.000	N	ON	9.5
2.658000	---	27.31	46.00	18.69	1000.0	9.000	N	ON	9.5
19.142000	---	31.76	50.00	18.24	1000.0	9.000	N	ON	10.0
20.306000	39.80	---	60.00	20.20	1000.0	9.000	N	ON	10.0

Remark:

1. Corr. (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dB μ V) = Corr. (dB) + Read Level (dB μ V)
3. Margin (dB) = Limit (dB μ V) - Level (dB μ V)

TEST REPORT
5.0 Test Equipment List

Radiated Emission/Radio					
Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (YYYY-MM-DD)	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m ³	ETS• LINDGREN	2025-04-09	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2025-11-10	1Y
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2025-11-10	1Y
EM011-04	Loop antenna (9 kHz-30 MHz)	HFH2-Z2	R&S	2025-07-07	1Y
EM033-01	TRILOG Super Broadband test Antenna(30 MHz-3 GHz) (RX)	VULB 9163	SCHWARZBECK	2025-12-08	1Y
EM033-02	Double-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)(RX)	R&S HF907	R&S	2025-07-02	1Y
EM033-03	High Frequency Antenna & preamplifier(18 GHz~26.5 GHz) (RX)	R&S SCU-26	R&S	2025-04-22	1Y
EM033-04	High Frequency Antenna & preamplifier (26 GHz-40 GHz)	R&S SCU-40	R&S	2025-04-22	1Y
EM031-02-01	Coaxial cable(9 kHz-1 GHz)	N/A	R&S	2025-04-09	1Y
EM033-02-02	Coaxial cable(1 GHz-18 GHz)	N/A	R&S	2025-04-09	1Y
EM033-04-02	Coaxial cable(18 GHz~40 GHz)	N/A	R&S	2025-04-25	1Y
EM031-01	Signal Generator (9 kHz~6 GHz)	SMB100A	R&S	2025-03-17	1Y
EM040-01	Band Reject/Notch Filter	WRHFV	Wainwright	N/A	1Y
EM040-02	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM040-03	Band Reject/Notch Filter	WRCGV	Wainwright	N/A	1Y
EM022-03	2.45 GHz Filter	BRM50702	Micro-Tronics	2025-05-15	1Y
SA016-29	Climatic Test Chamber	MHU-80L	JIANQIAO	2026-01-05	1Y
EM046-05	Power meter	NPR6A	R&S	2025-04-22	1Y
EM046-06	Power meter	NPR6A	R&S	2025-05-09	1Y
EM031-04-01	EMC32	V10.01.00	R&S	N/A	N/A
EM045-01-10	10dB Attenuator	N/A	R&S	2025-12-24	1Y

Conducted Disturbance-Mains Terminal (2)					
Equipment No.	Equipment	Model	Manufacturer	Cal. Due date (DD-MM-YYYY)	Calibration Interval
EM031-04	EMI receiver	ESR3	R&S	05/01/2026	1Y
EM006-06	LISN	ENV216	R&S	01/09/2025	1Y
SA047-111	Digital Temperature-Humidity Recorder	RS210	YIJIE	20/10/2025	1Y
EM004-03	EMC shield Room	8m×4m×3m	Zhongyu	05/01/2026	1Y
EM031-04-01	EMC32	V10.01.00	R&S	N/A	1Y

****End of the test report*****