

1.5 Conducted RF output power

1.5.1 a-mode

RF output power

Mode	DUT Frequency	Gated RMS	Limit Max (dBm)	Gated EIRP	DutyCycle (%)	Result
a-mode [6Mbps]; 5180MHz	5180.0000	3.1	24.0	3.1	98.589	PASS
a-mode [6Mbps]; 5200MHz	5200.0000	3.2	24.0	3.2	98.593	PASS
a-mode [6Mbps]; 5240MHz	5240.0000	1.8	24.0	1.8	98.591	PASS
a-mode [6Mbps]; 5260MHz	5260.0000	2.0	24.0	2.0	98.593	PASS
a-mode [6Mbps]; 5280MHz	5280.0000	2.1	24.0	2.1	98.592	PASS
a-mode [6Mbps]; 5320MHz	5320.0000	0.7	24.0	0.7	98.594	PASS
a-mode [6Mbps]; 5500MHz	5500.0000	-0.9	24.0	-0.9	98.602	PASS
a-mode [6Mbps]; 5580MHz	5580.0000	-1.1	24.0	-1.1	98.602	PASS
a-mode [6Mbps]; 5700MHz	5700.0000	0.0	24.0	0.0	98.602	PASS
a-mode [6Mbps]; 5745MHz	5745.0000	-1.0	30.0	-1.0	98.606	PASS
a-mode [6Mbps]; 5785MHz	5785.0000	-0.2	30.0	-0.2	98.601	PASS
a-mode [6Mbps]; 5825MHz	5825.0000	-0.6	30.0	-0.6	98.603	PASS
a-mode [9Mbps]; 5180MHz	5180.0000	3.1	24.0	3.1	97.917	PASS
a-mode [9Mbps]; 5200MHz	5200.0000	3.3	24.0	3.3	97.919	PASS
a-mode [9Mbps]; 5240MHz	5240.0000	1.8	24.0	1.8	97.924	PASS
a-mode [9Mbps]; 5260MHz	5260.0000	2.0	24.0	2.0	97.918	PASS
a-mode [9Mbps]; 5280MHz	5280.0000	2.2	24.0	2.2	97.922	PASS
a-mode [9Mbps]; 5320MHz	5320.0000	0.7	24.0	0.7	97.926	PASS
a-mode [9Mbps]; 5500MHz	5500.0000	-0.8	24.0	-0.8	97.940	PASS
a-mode [9Mbps]; 5580MHz	5580.0000	-1.0	24.0	-1.0	97.933	PASS
a-mode [9Mbps]; 5700MHz	5700.0000	0.0	24.0	0.0	97.939	PASS
a-mode [9Mbps]; 5745MHz	5745.0000	-1.2	30.0	-1.2	97.941	PASS
a-mode [9Mbps]; 5785MHz	5785.0000	-0.2	30.0	-0.2	97.937	PASS
a-mode [9Mbps]; 5825MHz	5825.0000	-0.5	30.0	-0.5	97.940	PASS
a-mode [12Mbps]; 5180MHz	5180.0000	3.2	24.0	3.2	97.252	PASS
a-mode [12Mbps]; 5200MHz	5200.0000	3.3	24.0	3.3	97.254	PASS
a-mode [12Mbps]; 5240MHz	5240.0000	1.9	24.0	1.9	97.253	PASS
a-mode [12Mbps]; 5260MHz	5260.0000	2.1	24.0	2.1	97.253	PASS
a-mode [12Mbps]; 5280MHz	5280.0000	2.4	24.0	2.4	97.256	PASS
a-mode [12Mbps]; 5320MHz	5320.0000	0.7	24.0	0.7	97.262	PASS
a-mode [12Mbps]; 5500MHz	5500.0000	-0.8	24.0	-0.8	97.275	PASS
a-mode [12Mbps]; 5580MHz	5580.0000	-1.0	24.0	-1.0	97.273	PASS
a-mode [12Mbps]; 5700MHz	5700.0000	0.0	24.0	0.0	97.273	PASS
a-mode [12Mbps]; 5745MHz	5745.0000	-1.2	30.0	-1.2	97.274	PASS
a-mode [12Mbps]; 5785MHz	5785.0000	-0.4	30.0	-0.4	97.275	PASS
a-mode [12Mbps]; 5825MHz	5825.0000	-0.6	30.0	-0.6	97.276	PASS
a-mode [18Mbps]; 5180MHz	5180.0000	3.3	24.0	3.3	96.122	PASS
a-mode [18Mbps]; 5200MHz	5200.0000	3.3	24.0	3.3	96.119	PASS
a-mode [18Mbps]; 5240MHz	5240.0000	1.9	24.0	1.9	96.123	PASS
a-mode [18Mbps]; 5260MHz	5260.0000	2.0	24.0	2.0	96.128	PASS
a-mode [18Mbps]; 5280MHz	5280.0000	2.2	24.0	2.2	96.121	PASS
a-mode [18Mbps]; 5320MHz	5320.0000	0.7	24.0	0.7	96.129	PASS
a-mode [18Mbps]; 5500MHz	5500.0000	-0.7	24.0	-0.7	96.155	PASS
a-mode [18Mbps]; 5580MHz	5580.0000	-1.0	24.0	-1.0	96.150	PASS
a-mode [18Mbps]; 5700MHz	5700.0000	0.0	24.0	0.0	96.152	PASS
a-mode [18Mbps]; 5745MHz	5745.0000	-1.0	30.0	-1.0	96.157	PASS
a-mode [18Mbps]; 5785MHz	5785.0000	-0.2	30.0	-0.2	96.155	PASS
a-mode [18Mbps]; 5825MHz	5825.0000	-0.5	30.0	-0.5	96.158	PASS
a-mode [24Mbps]; 5180MHz	5180.0000	3.2	24.0	3.2	94.830	PASS


a-mode [24Mbps]; 5200MHz	5200.0000	3.2	24.0	3.2	94.830	PASS
a-mode [24Mbps]; 5240MHz	5240.0000	1.8	24.0	1.8	94.838	PASS
a-mode [24Mbps]; 5260MHz	5260.0000	2.2	24.0	2.2	94.835	PASS
a-mode [24Mbps]; 5280MHz	5280.0000	2.1	24.0	2.1	94.837	PASS
a-mode [24Mbps]; 5320MHz	5320.0000	0.6	24.0	0.6	94.846	PASS
a-mode [24Mbps]; 5500MHz	5500.0000	-0.8	24.0	-0.8	94.865	PASS
a-mode [24Mbps]; 5580MHz	5580.0000	-0.6	24.0	-0.6	94.873	PASS
a-mode [24Mbps]; 5700MHz	5700.0000	0.0	24.0	0.0	94.864	PASS
a-mode [24Mbps]; 5745MHz	5745.0000	-1.0	30.0	-1.0	94.871	PASS
a-mode [24Mbps]; 5785MHz	5785.0000	-0.3	30.0	-0.3	94.870	PASS
a-mode [24Mbps]; 5825MHz	5825.0000	-0.5	30.0	-0.5	94.867	PASS
a-mode [36Mbps]; 5180MHz	5180.0000	3.4	24.0	3.4	92.685	PASS
a-mode [36Mbps]; 5200MHz	5200.0000	3.2	24.0	3.2	92.687	PASS
a-mode [36Mbps]; 5240MHz	5240.0000	1.9	24.0	1.9	92.740	PASS
a-mode [36Mbps]; 5260MHz	5260.0000	2.1	24.0	2.1	92.701	PASS
a-mode [36Mbps]; 5280MHz	5280.0000	2.3	24.0	2.3	92.705	PASS
a-mode [36Mbps]; 5320MHz	5320.0000	0.9	24.0	0.9	92.710	PASS
a-mode [36Mbps]; 5500MHz	5500.0000	-0.8	24.0	-0.8	92.761	PASS
a-mode [36Mbps]; 5580MHz	5580.0000	-1.0	24.0	-1.0	92.752	PASS
a-mode [36Mbps]; 5700MHz	5700.0000	-0.1	24.0	-0.1	92.765	PASS
a-mode [36Mbps]; 5745MHz	5745.0000	-1.2	30.0	-1.2	92.784	PASS
a-mode [36Mbps]; 5785MHz	5785.0000	-0.2	30.0	-0.2	92.810	PASS
a-mode [36Mbps]; 5825MHz	5825.0000	-0.6	30.0	-0.6	92.818	PASS
a-mode [48Mbps]; 5180MHz	5180.0000	3.4	24.0	3.4	90.563	PASS
a-mode [48Mbps]; 5200MHz	5200.0000	3.2	24.0	3.2	90.567	PASS
a-mode [48Mbps]; 5240MHz	5240.0000	2.0	24.0	2.0	90.574	PASS
a-mode [48Mbps]; 5260MHz	5260.0000	2.2	24.0	2.2	90.576	PASS
a-mode [48Mbps]; 5280MHz	5280.0000	2.3	24.0	2.3	90.564	PASS
a-mode [48Mbps]; 5320MHz	5320.0000	0.8	24.0	0.8	90.586	PASS
a-mode [48Mbps]; 5500MHz	5500.0000	-0.8	24.0	-0.8	90.647	PASS
a-mode [48Mbps]; 5580MHz	5580.0000	-1.1	24.0	-1.1	90.634	PASS
a-mode [48Mbps]; 5700MHz	5700.0000	-0.7	24.0	-0.7	90.630	PASS
a-mode [48Mbps]; 5745MHz	5745.0000	-1.2	30.0	-1.2	90.663	PASS
a-mode [48Mbps]; 5785MHz	5785.0000	-0.3	30.0	-0.3	90.655	PASS
a-mode [48Mbps]; 5825MHz	5825.0000	-0.5	30.0	-0.5	90.642	PASS
a-mode [54Mbps]; 5180MHz	5180.0000	3.5	24.0	3.5	90.092	PASS
a-mode [54Mbps]; 5200MHz	5200.0000	3.2	24.0	3.2	90.069	PASS
a-mode [54Mbps]; 5240MHz	5240.0000	2.0	24.0	2.0	90.087	PASS
a-mode [54Mbps]; 5260MHz	5260.0000	2.2	24.0	2.2	90.075	PASS
a-mode [54Mbps]; 5280MHz	5280.0000	2.3	24.0	2.3	90.083	PASS
a-mode [54Mbps]; 5320MHz	5320.0000	0.8	24.0	0.8	90.103	PASS
a-mode [54Mbps]; 5500MHz	5500.0000	1.1	24.0	1.1	90.106	PASS
a-mode [54Mbps]; 5580MHz	5580.0000	-1.0	24.0	-1.0	90.166	PASS
a-mode [54Mbps]; 5700MHz	5700.0000	0.0	24.0	0.0	90.168	PASS
a-mode [54Mbps]; 5745MHz	5745.0000	-1.2	30.0	-1.2	90.186	PASS
a-mode [54Mbps]; 5785MHz	5785.0000	-0.4	30.0	-0.4	90.161	PASS
a-mode [54Mbps]; 5825MHz	5825.0000	-0.5	30.0	-0.5	90.178	PASS

RF output power (5180 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	98.589	PASS

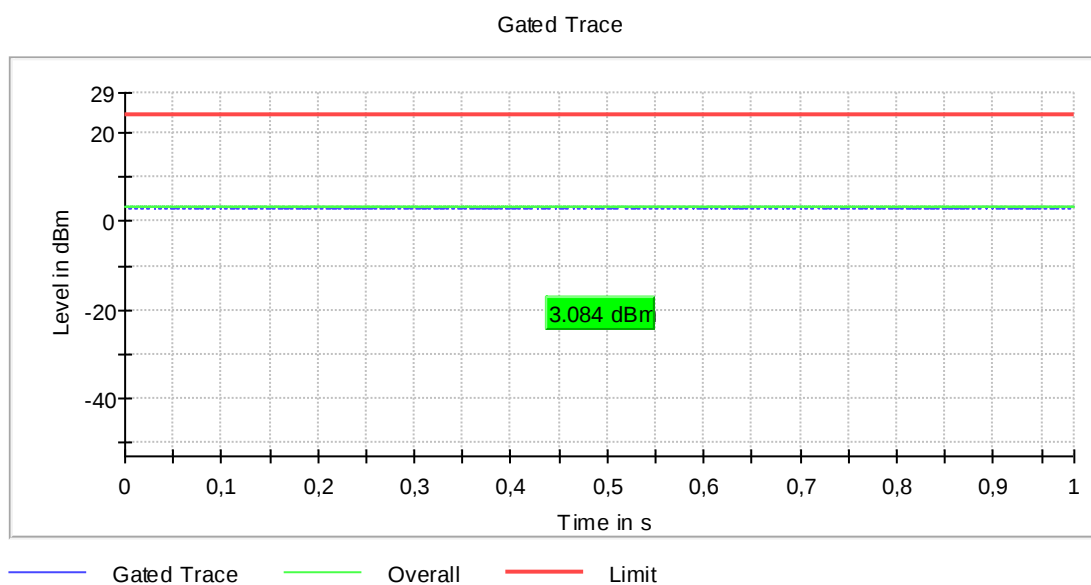


RF output power (5200 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	98.593	PASS

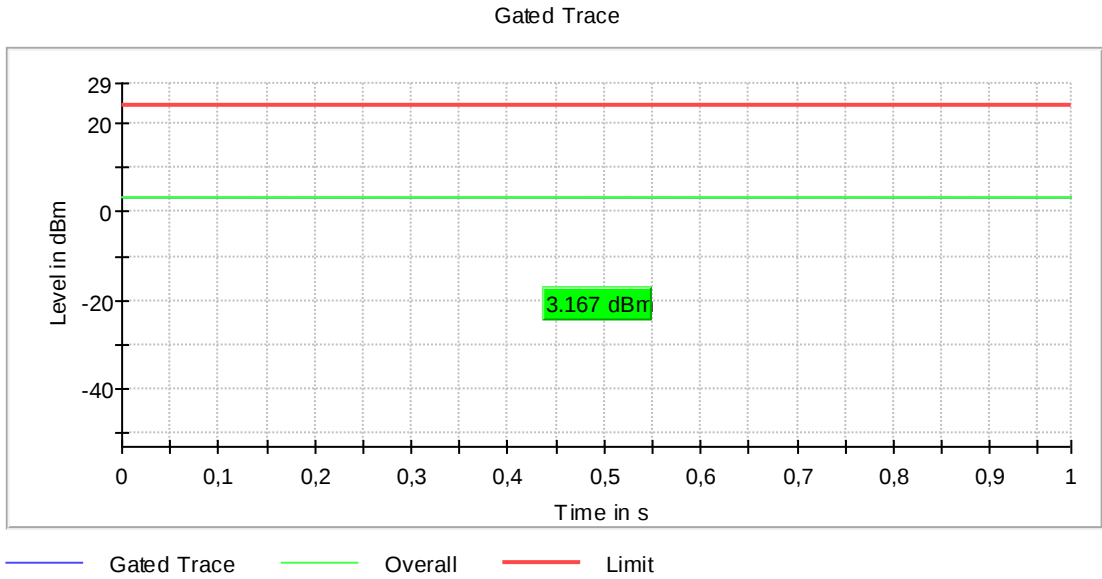

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μs	1.000 μs


RF output power (5240 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.8	24.0	1.8	98.591	PASS

Gated Trace

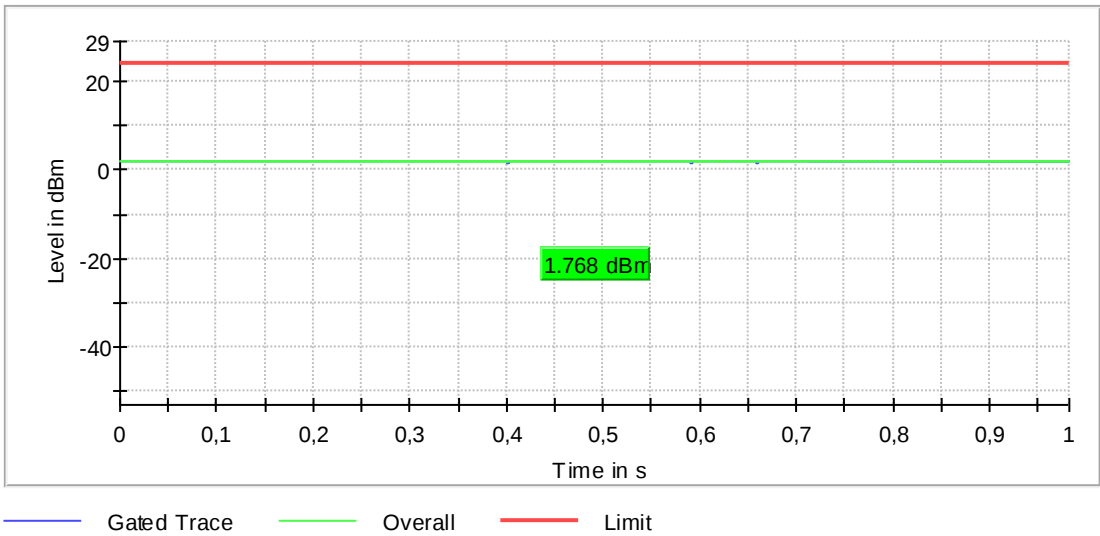

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.0	24.0	2.0	98.593	PASS

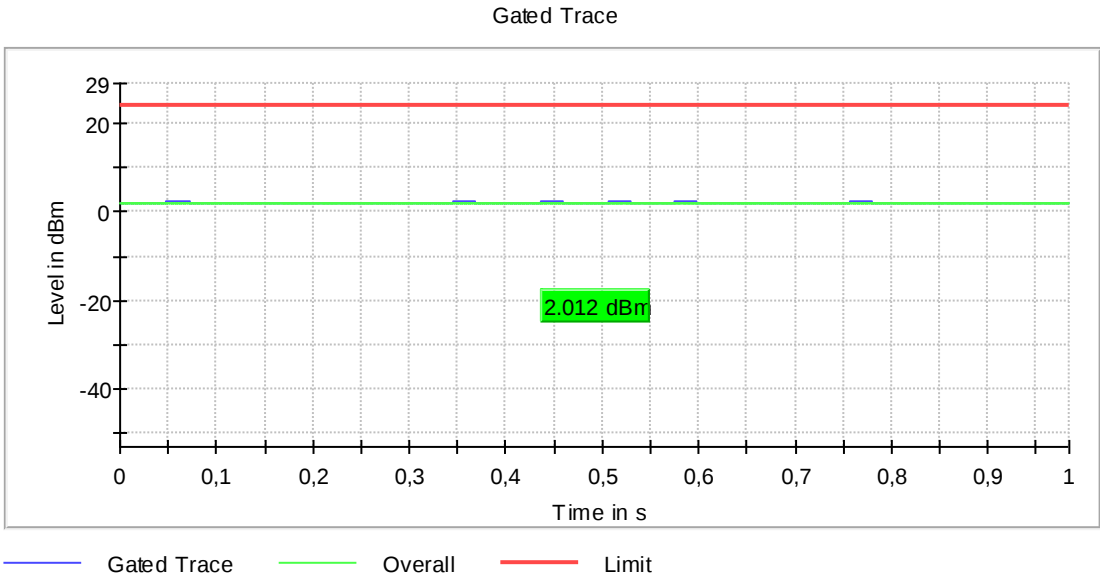

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.1	24.0	2.1	98.592	PASS

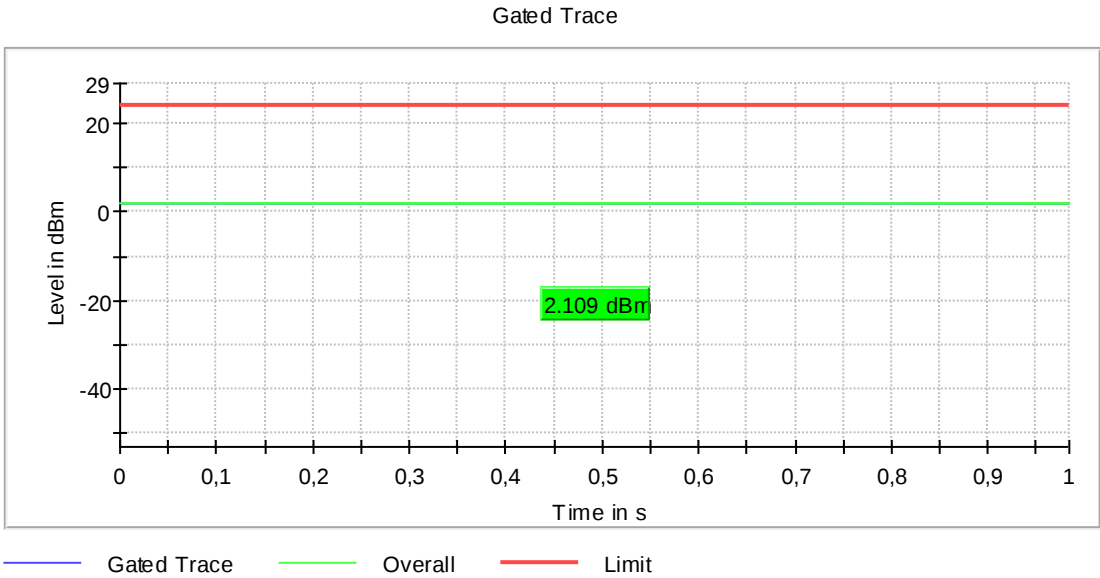

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.7	24.0	0.7	98.594	PASS

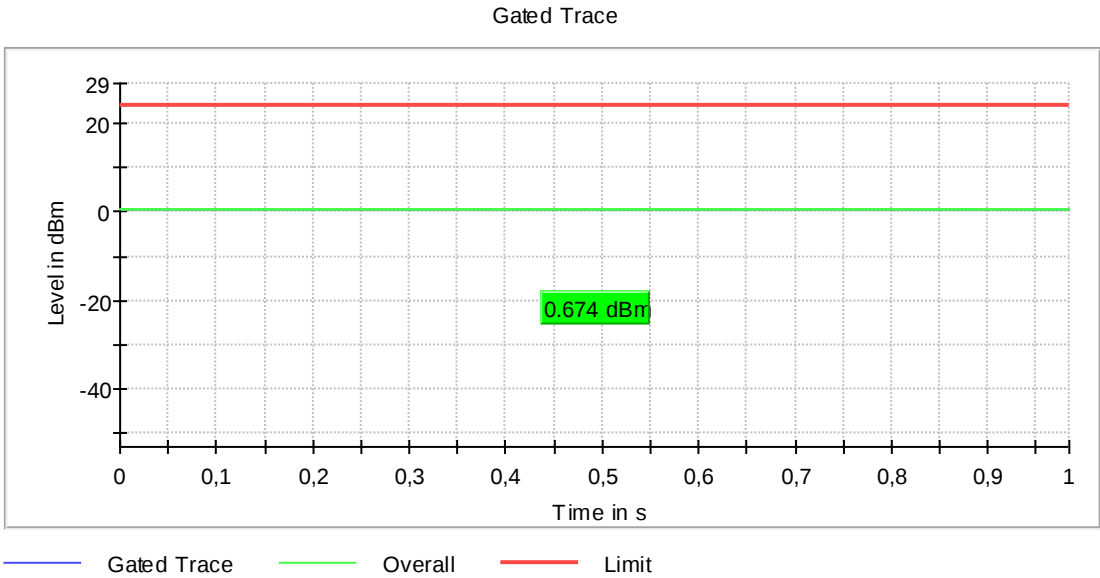

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.9	24.0	-0.9	98.602	PASS

Gated Trace

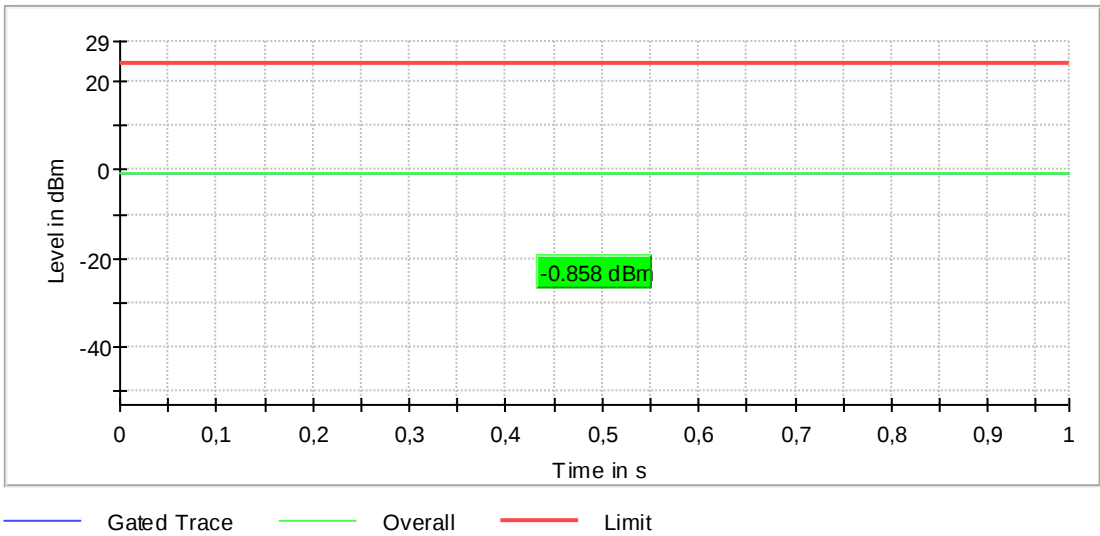

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.1	24.0	-1.1	98.602	PASS

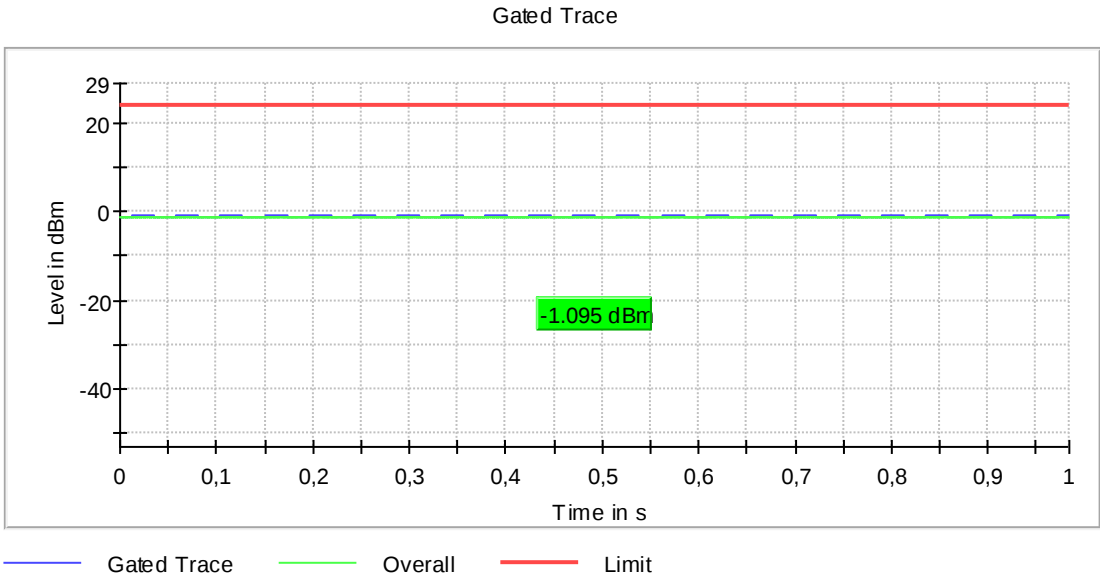

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.0	24.0	0.0	98.602	PASS

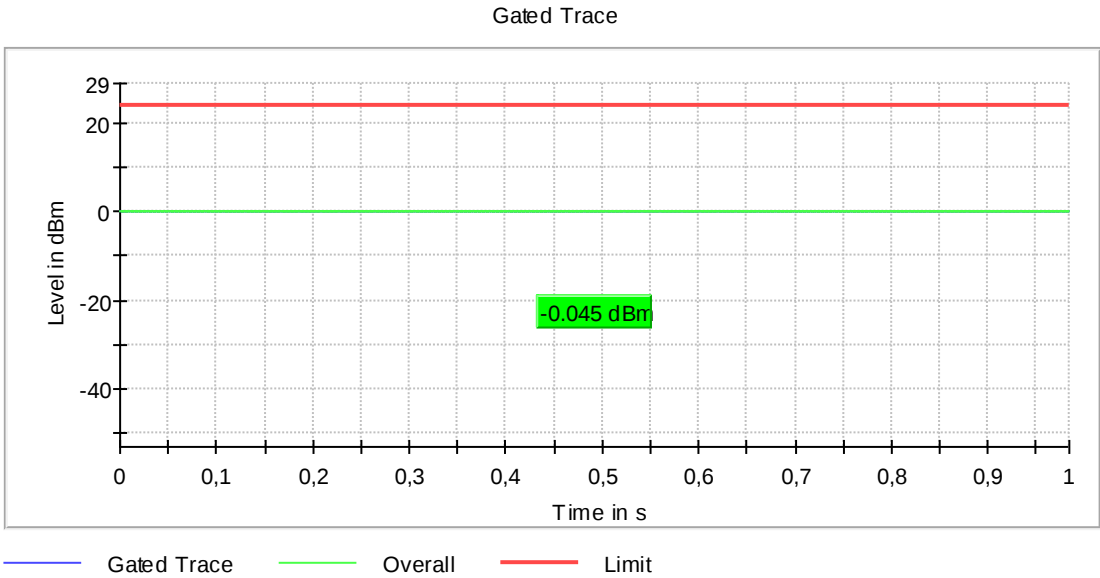

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.0	30.0	-1.0	98.606	PASS

Gated Trace

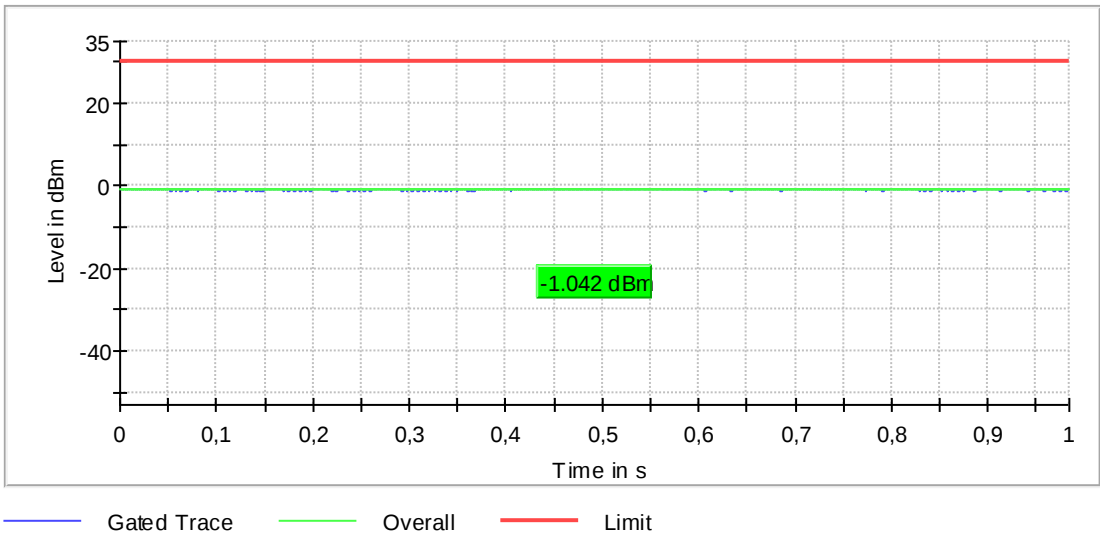

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	98.601	PASS

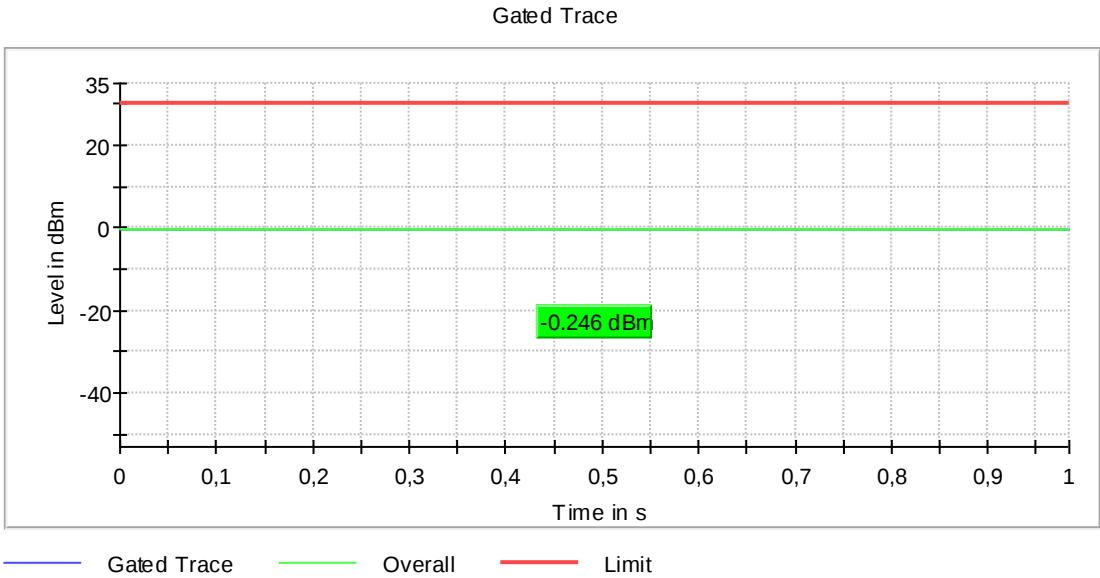

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5825 MHz; a-mode [6Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.6	30.0	-0.6	98.603	PASS

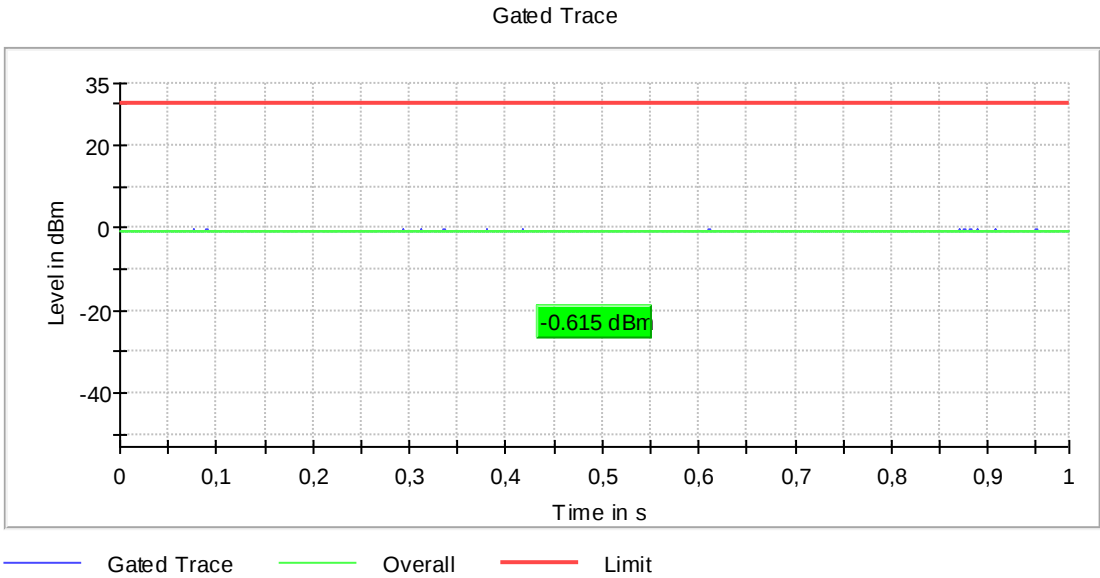

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	97.917	PASS



OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5200 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	97.919	PASS

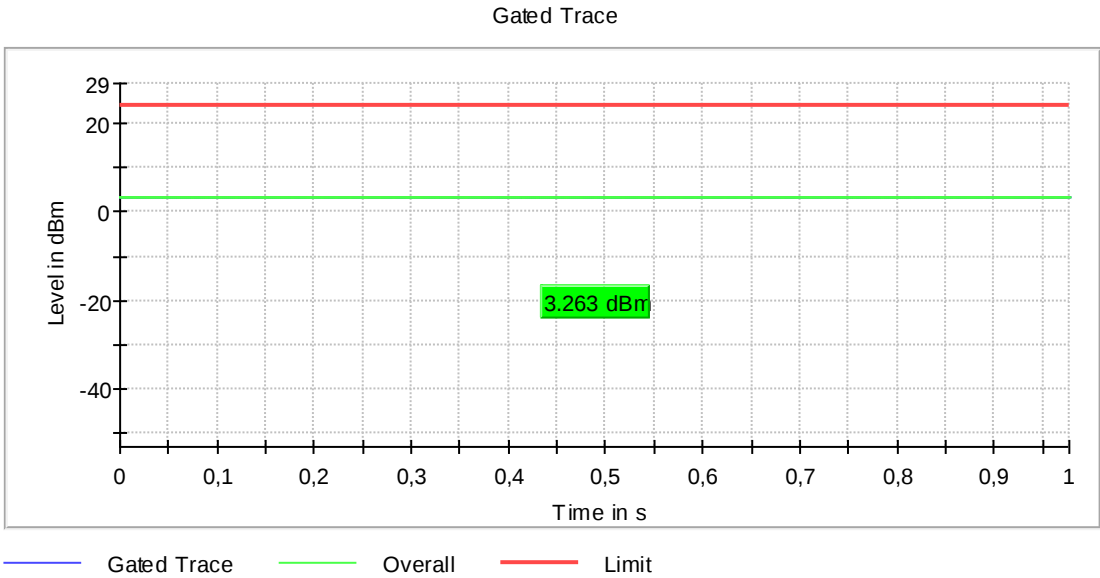

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.8	24.0	1.8	97.924	PASS

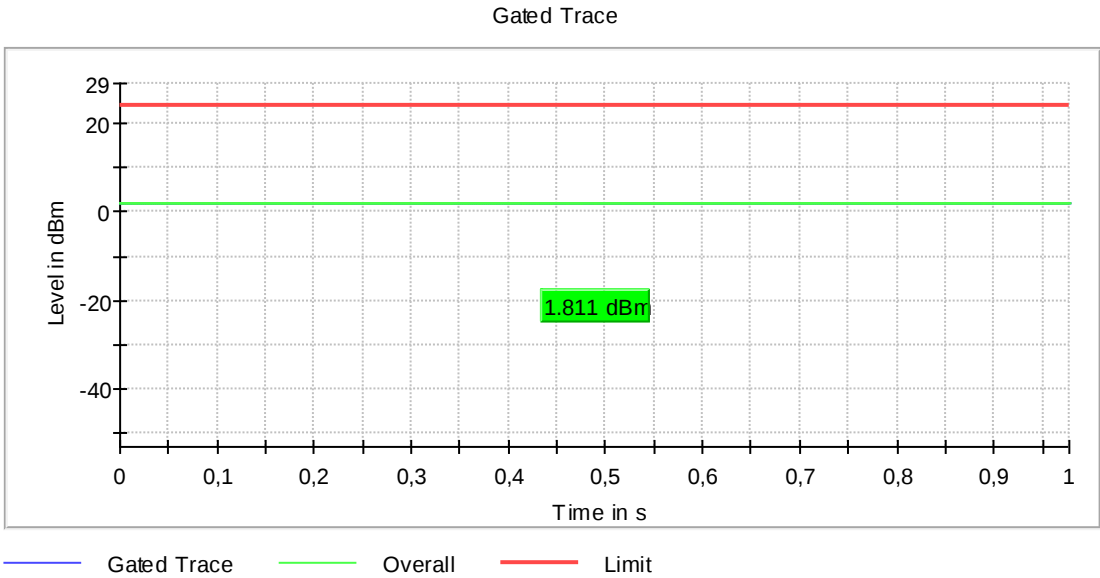

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.0	24.0	2.0	97.918	PASS

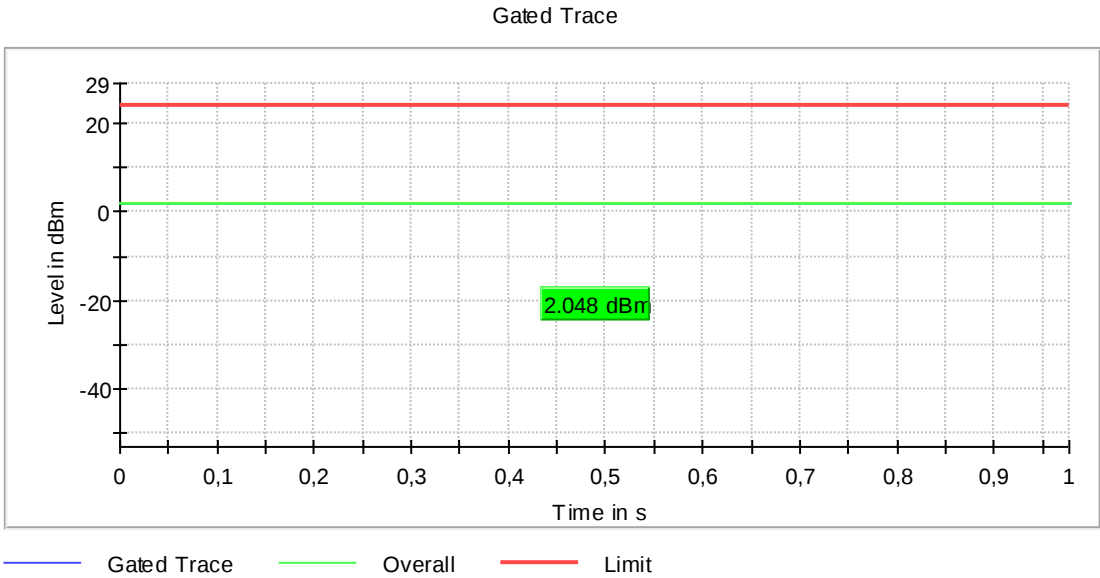

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.2	24.0	2.2	97.922	PASS

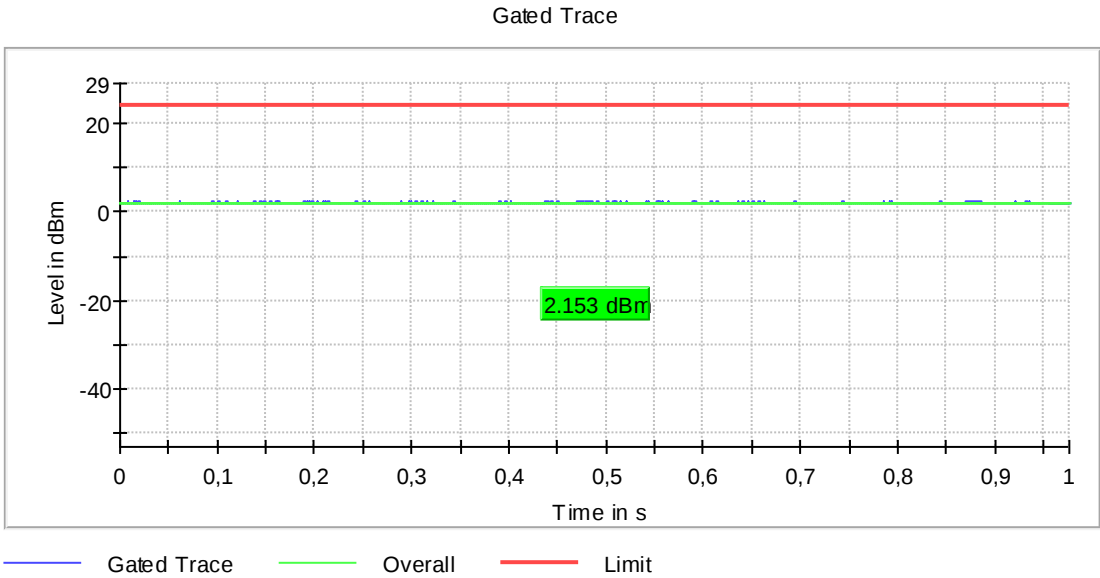

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.7	24.0	0.7	97.926	PASS

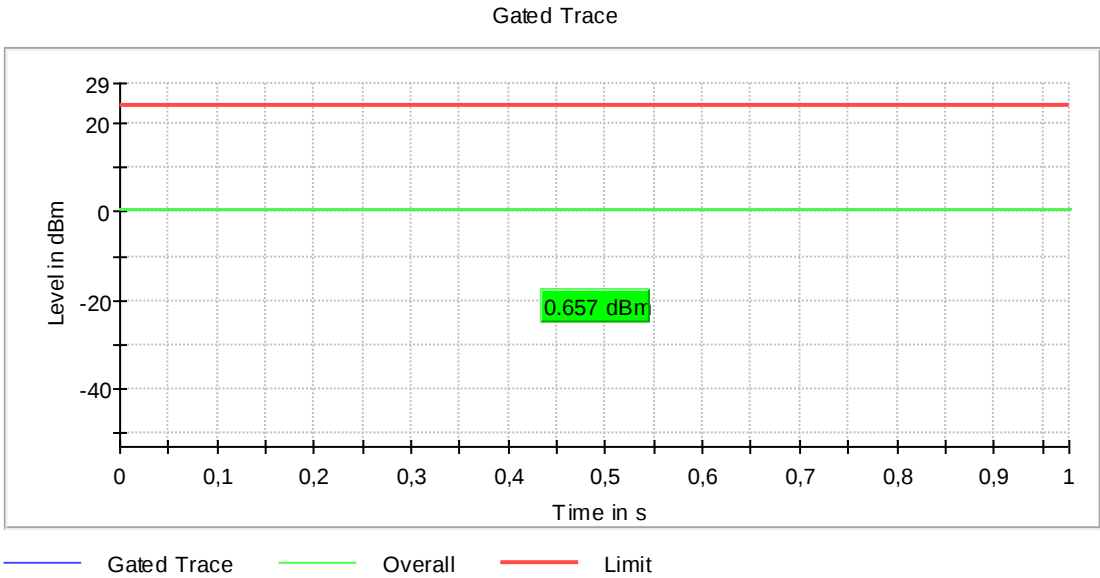

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.8	24.0	-0.8	97.940	PASS

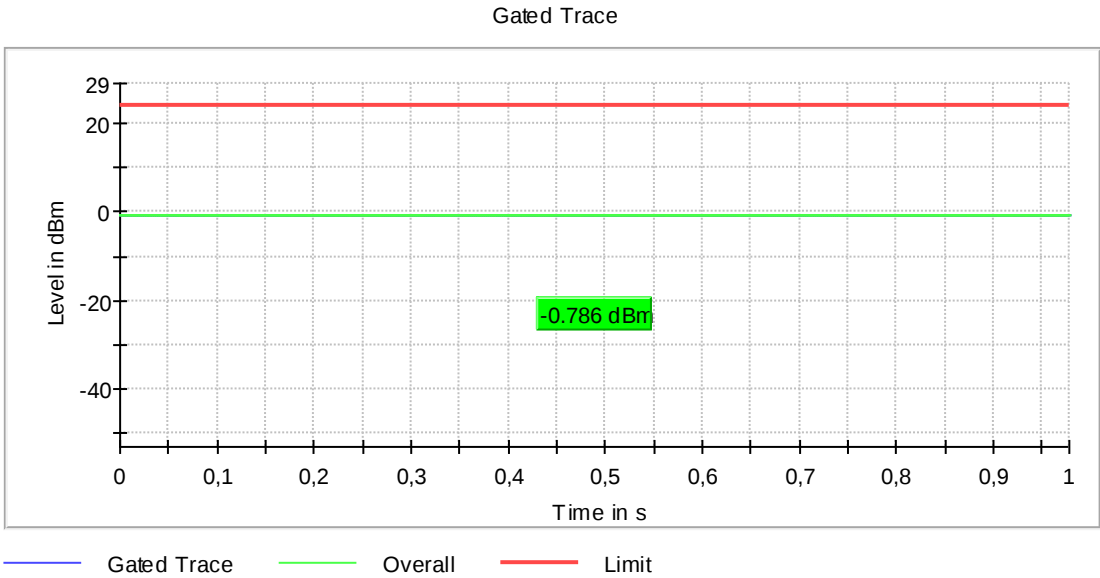

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5580 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	97.933	PASS

Gated Trace

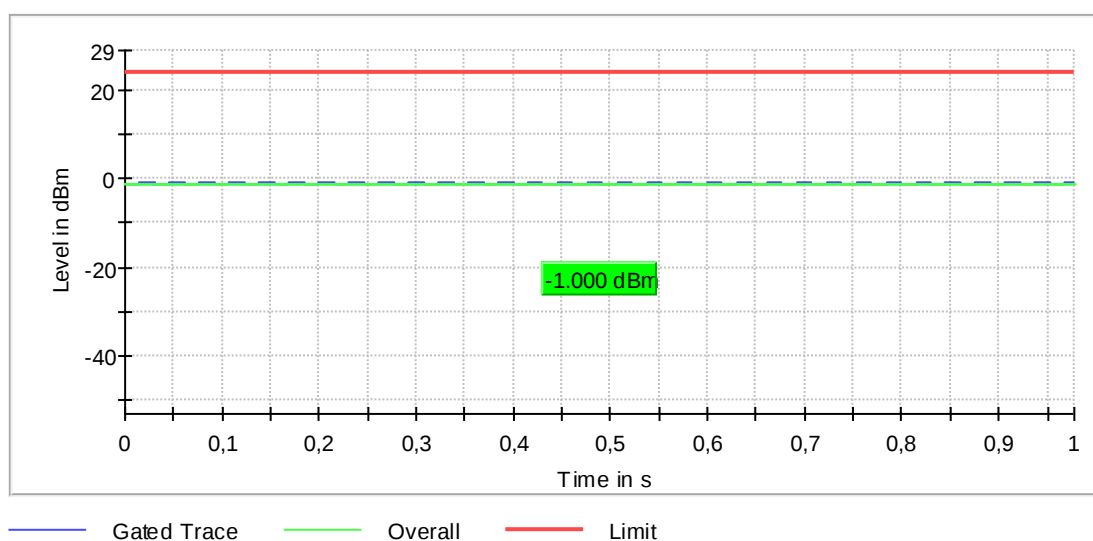

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5700 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.0	24.0	0.0	97.939	PASS

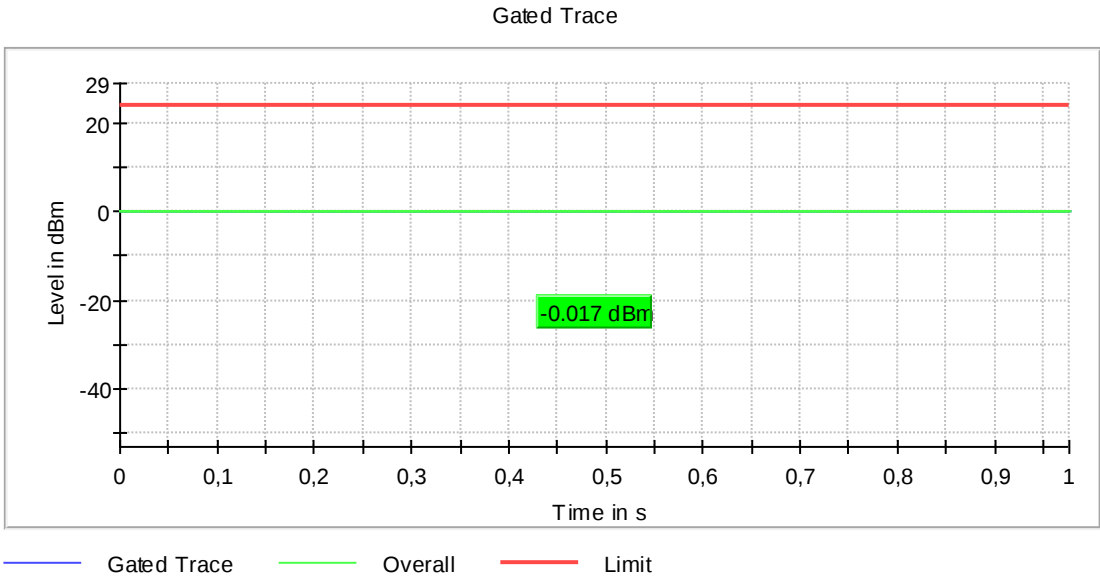

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.2	30.0	-1.2	97.941	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	97.937	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5825 MHz; a-mode [9Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	97.940	PASS



OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.2	24.0	3.2	97.252	PASS

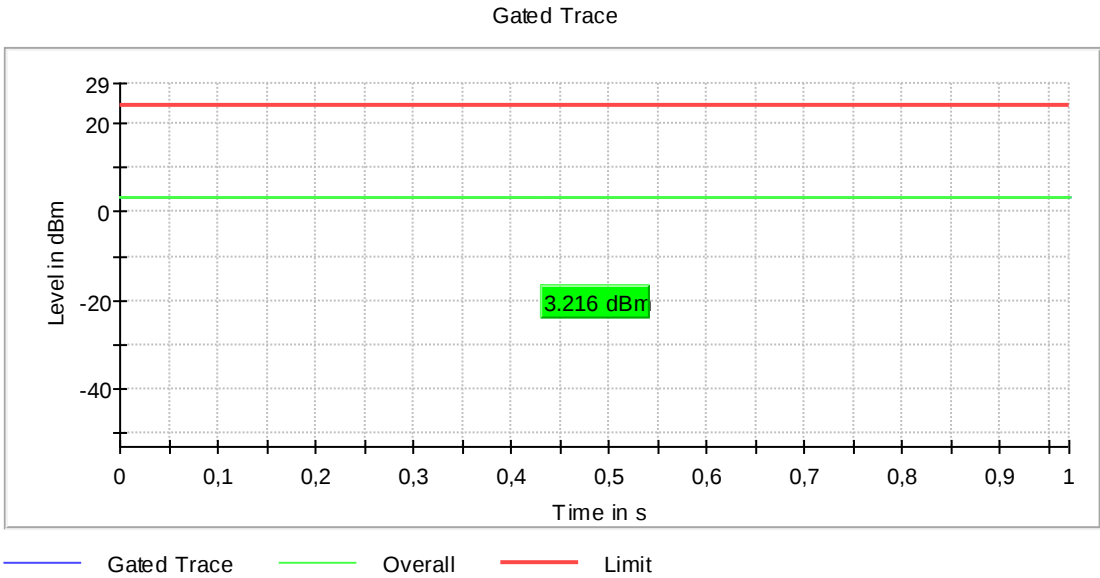

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	97.254	PASS

Gated Trace

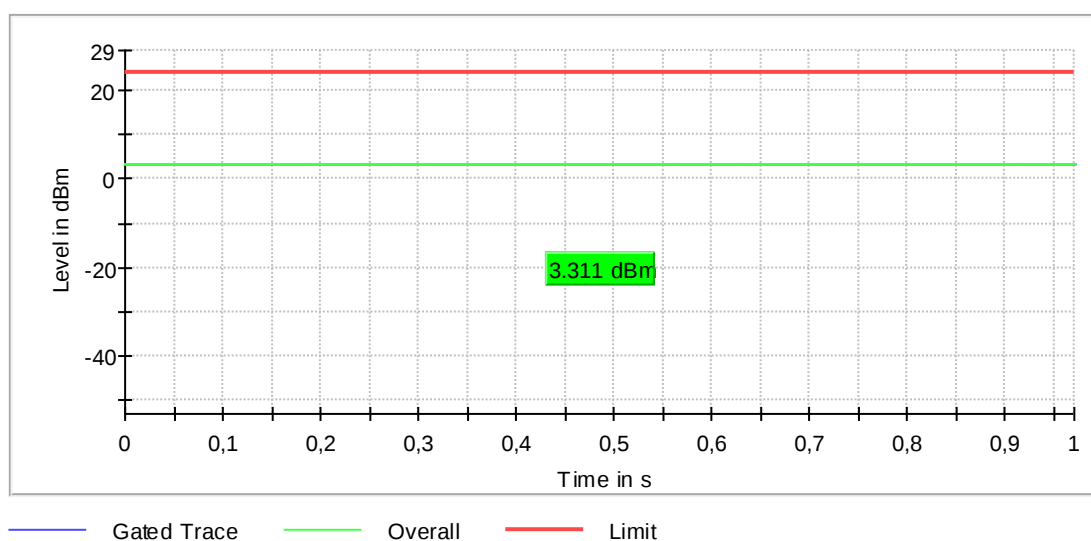

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.9	24.0	1.9	97.253	PASS

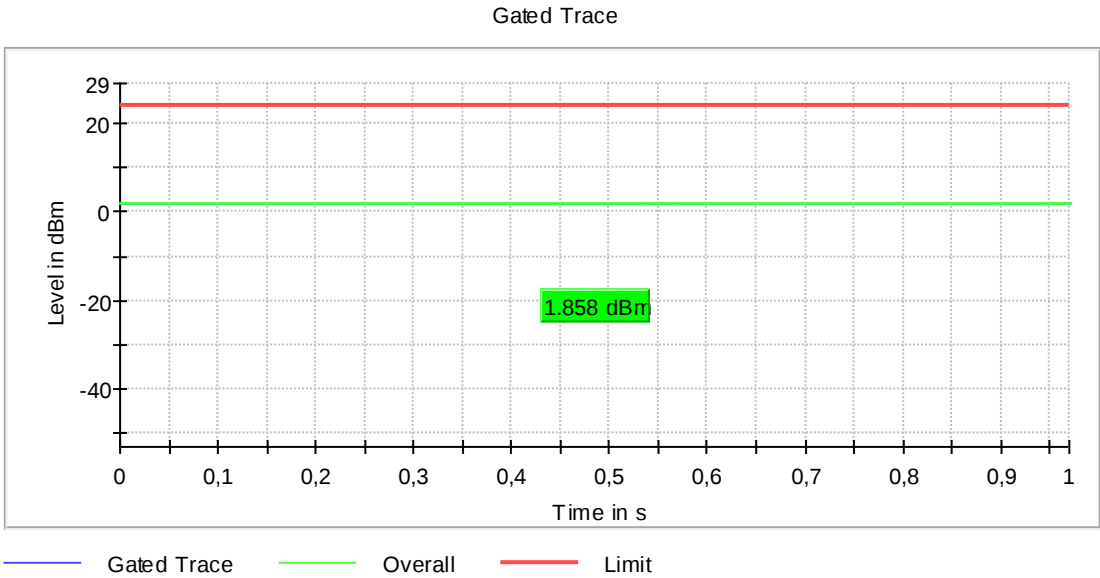

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.1	24.0	2.1	97.253	PASS

Gated Trace

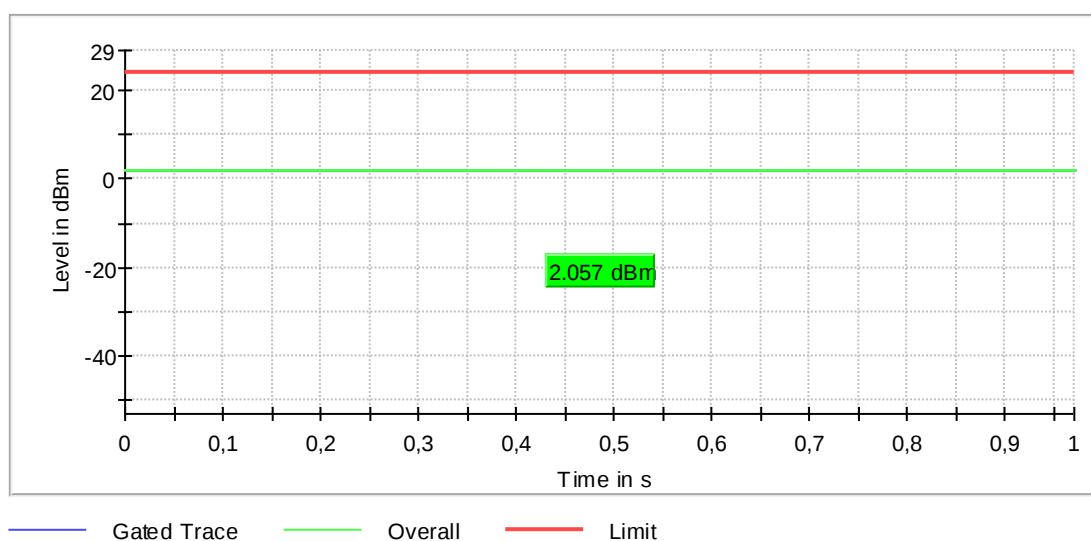

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.4	24.0	2.4	97.256	PASS

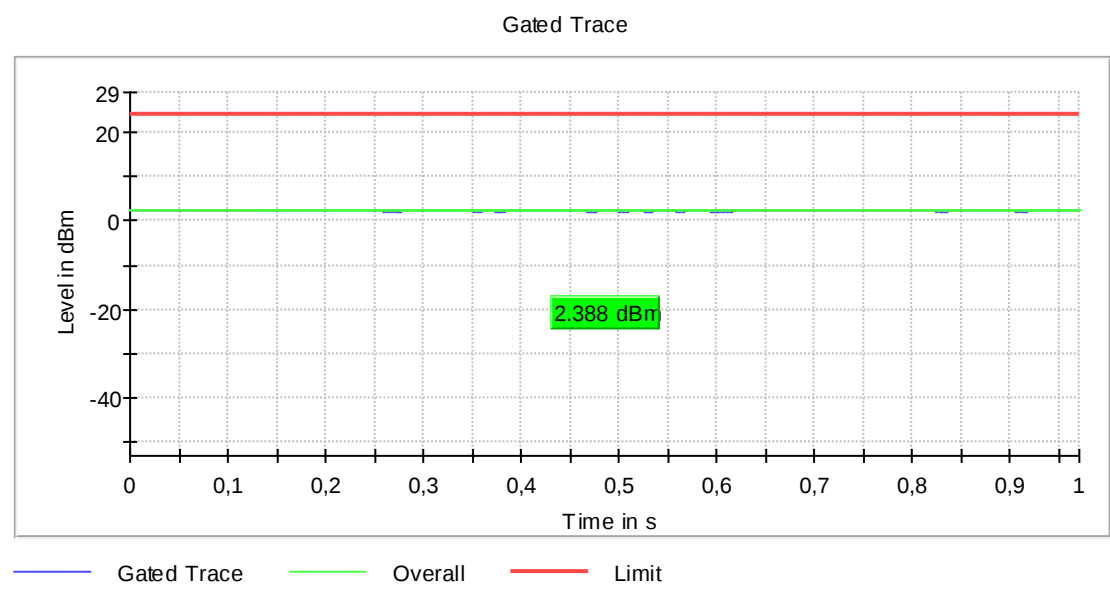

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μs	1.000 μs

RF output power (5320 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.7	24.0	0.7	97.262	PASS

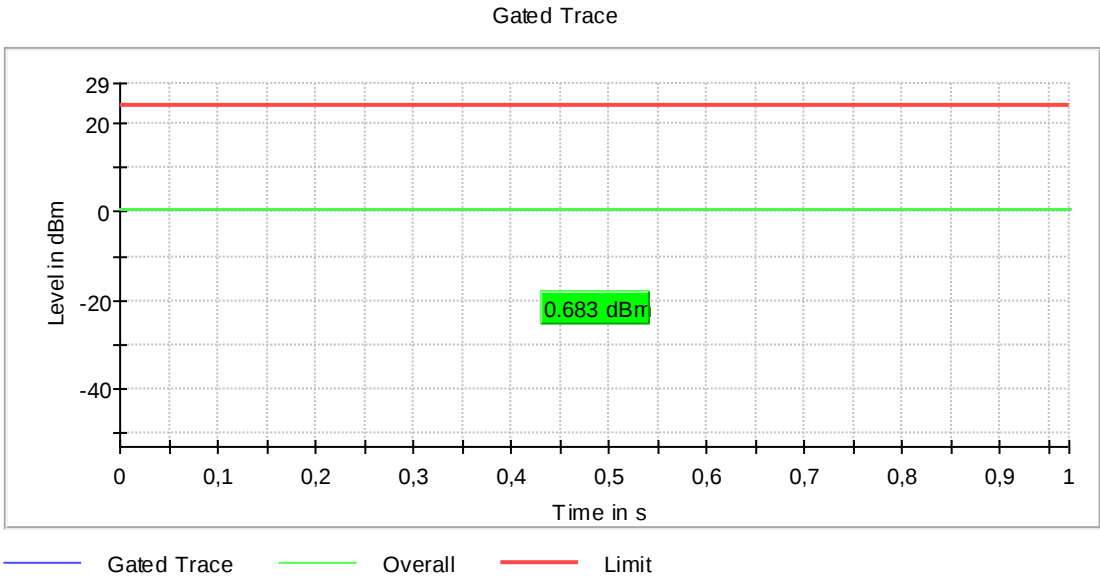

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.8	24.0	-0.8	97.275	PASS

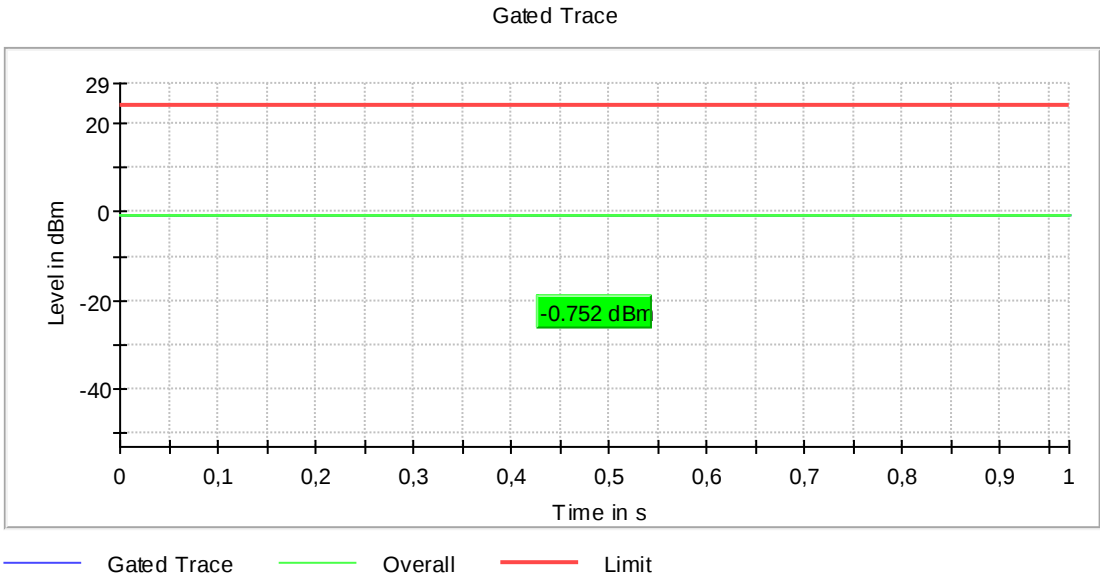

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	97.273	PASS

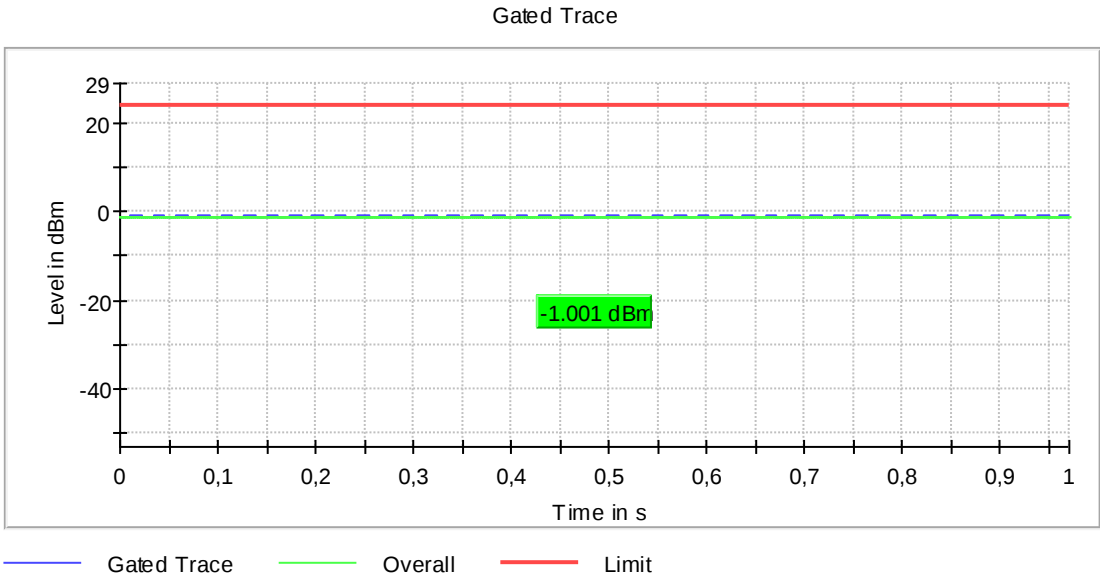

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.0	24.0	0.0	97.273	PASS

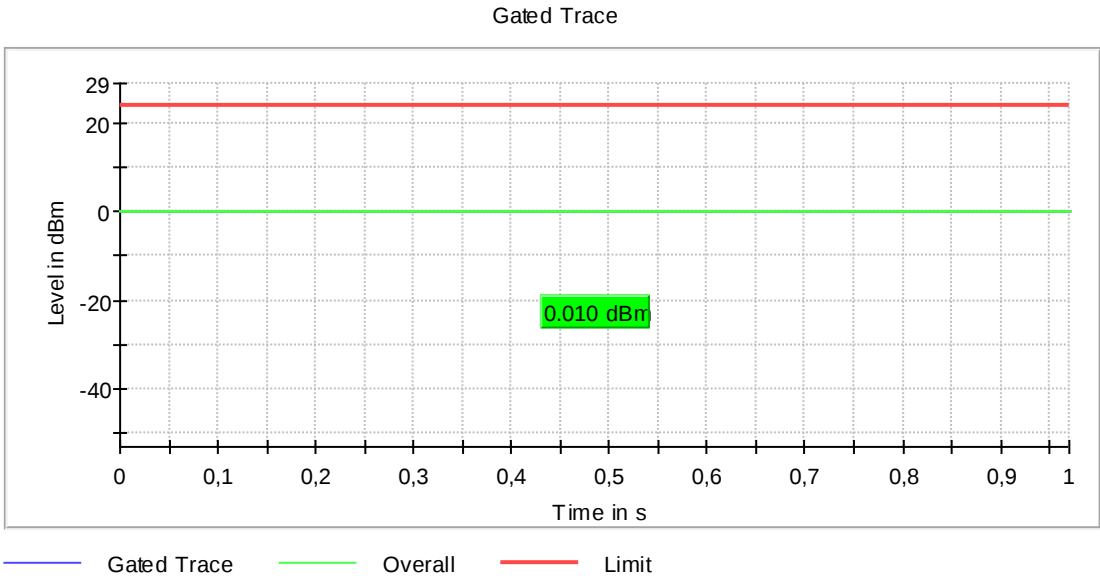

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.2	30.0	-1.2	97.274	PASS

Gated Trace

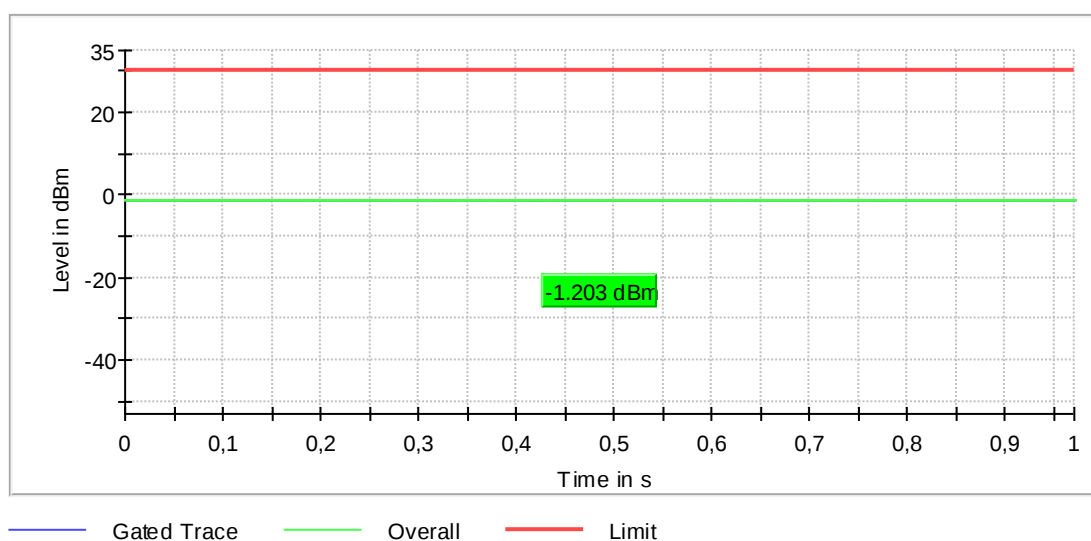

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5785 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.4	30.0	-0.4	97.275	PASS

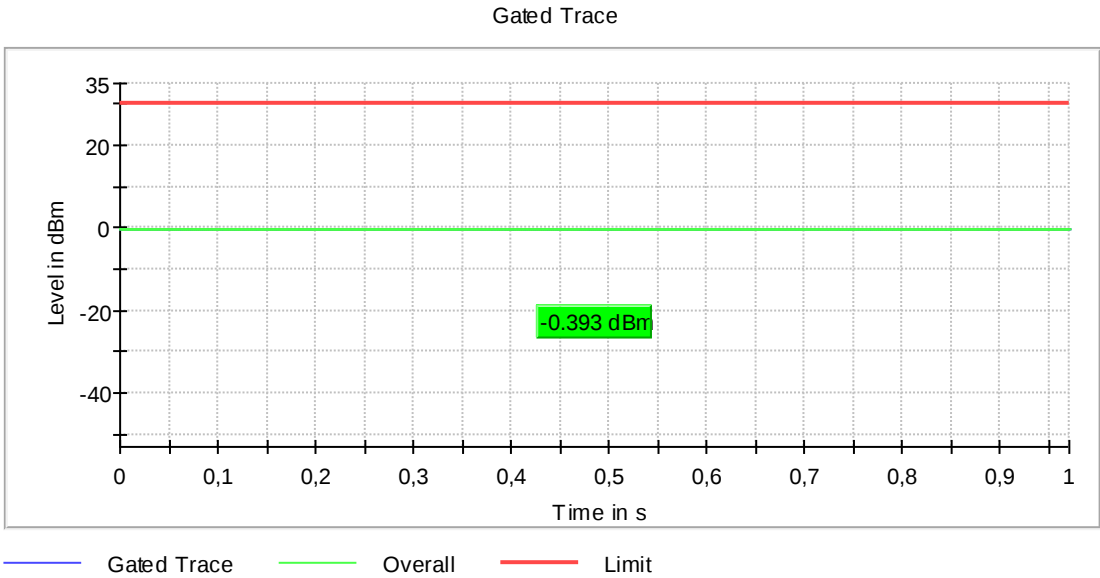

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; a-mode [12Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.6	30.0	-0.6	97.276	PASS

Gated Trace

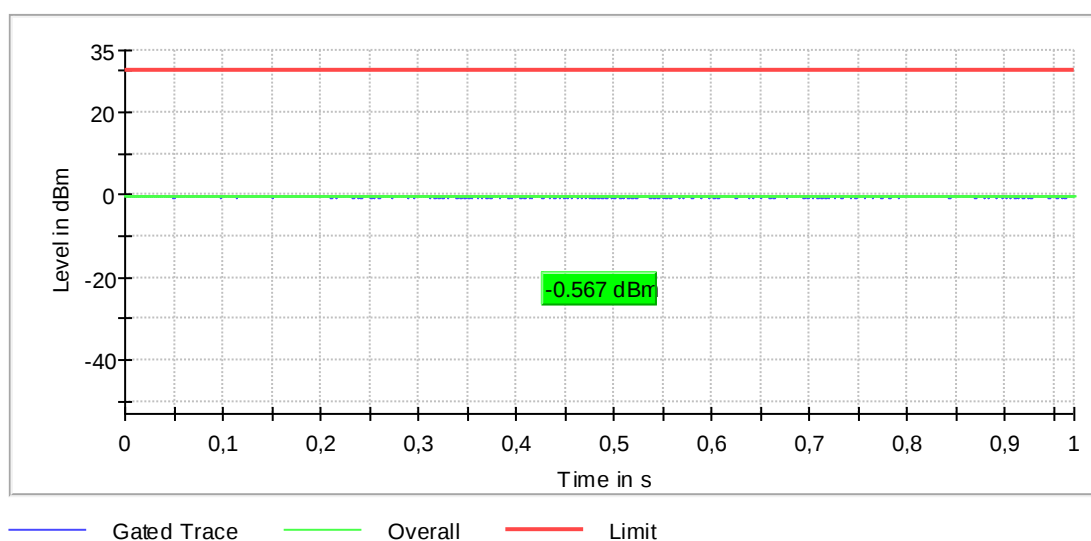

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.3	24.0	3.3	96.122	PASS

Gated Trace

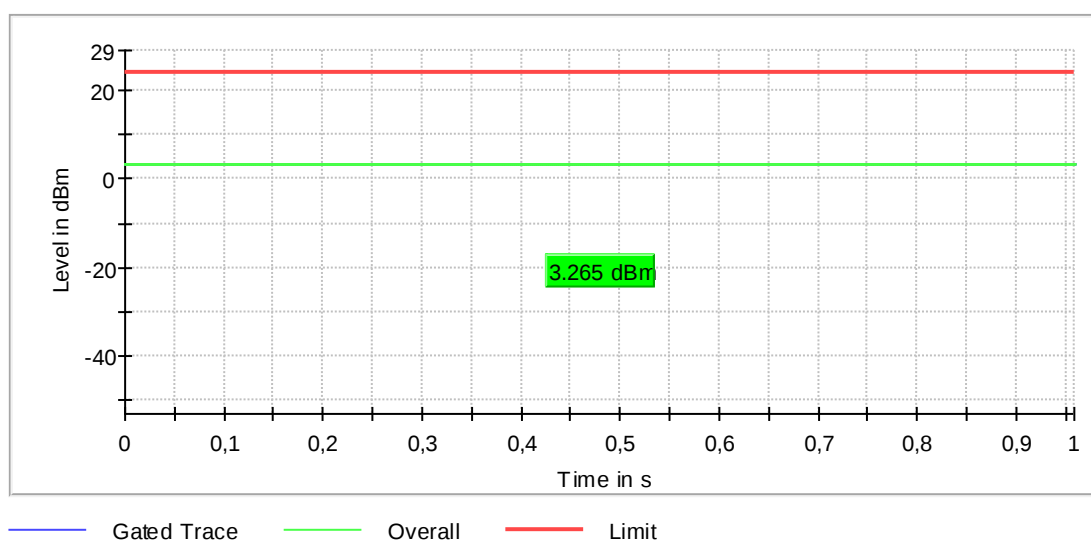

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5200 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	96.119	PASS

Gated Trace

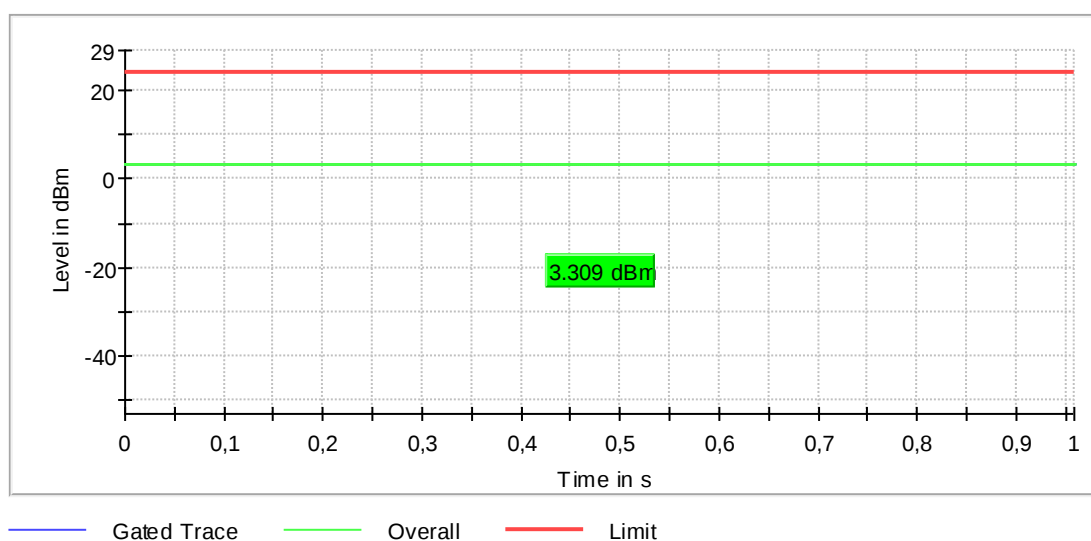

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.9	24.0	1.9	96.123	PASS

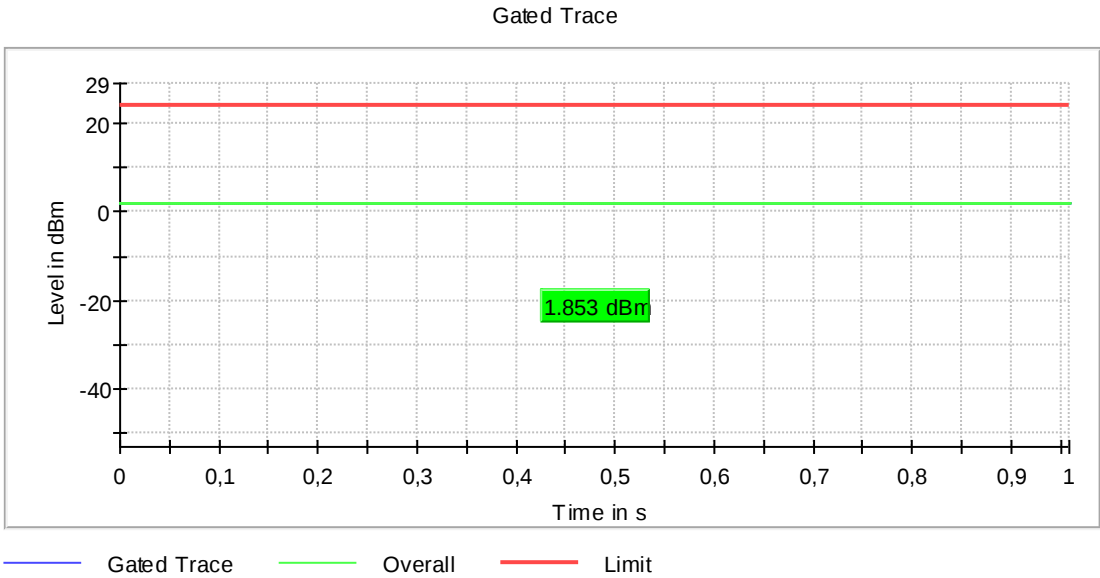

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.0	24.0	2.0	96.128	PASS

Gated Trace

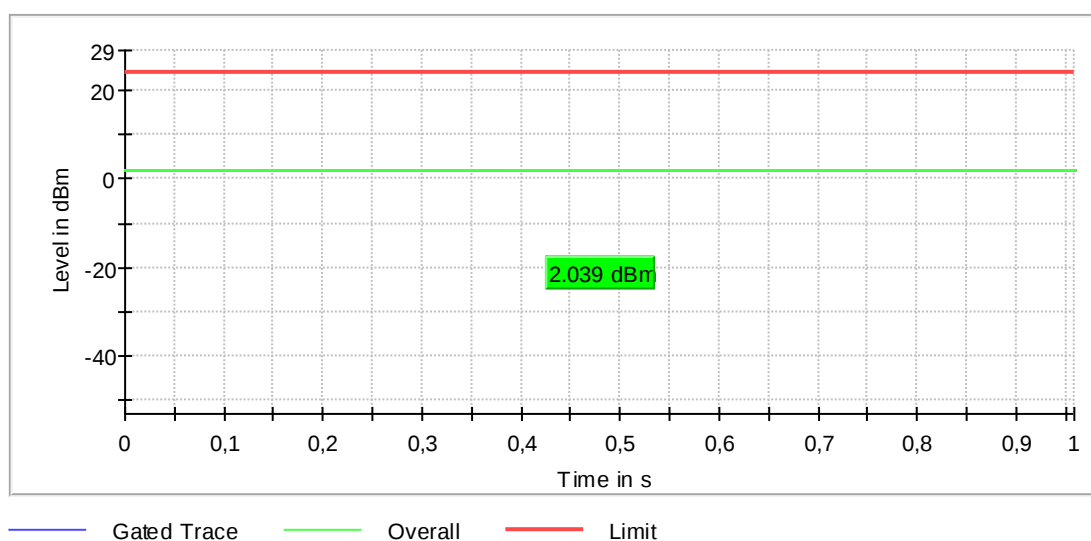

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5280 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.2	24.0	2.2	96.121	PASS

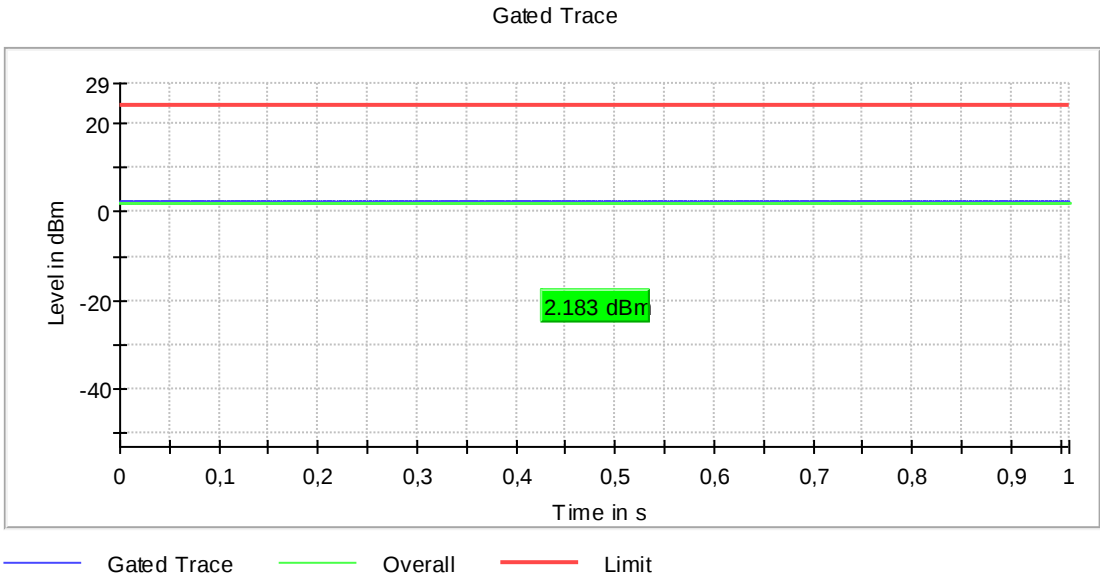

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.7	24.0	0.7	96.129	PASS

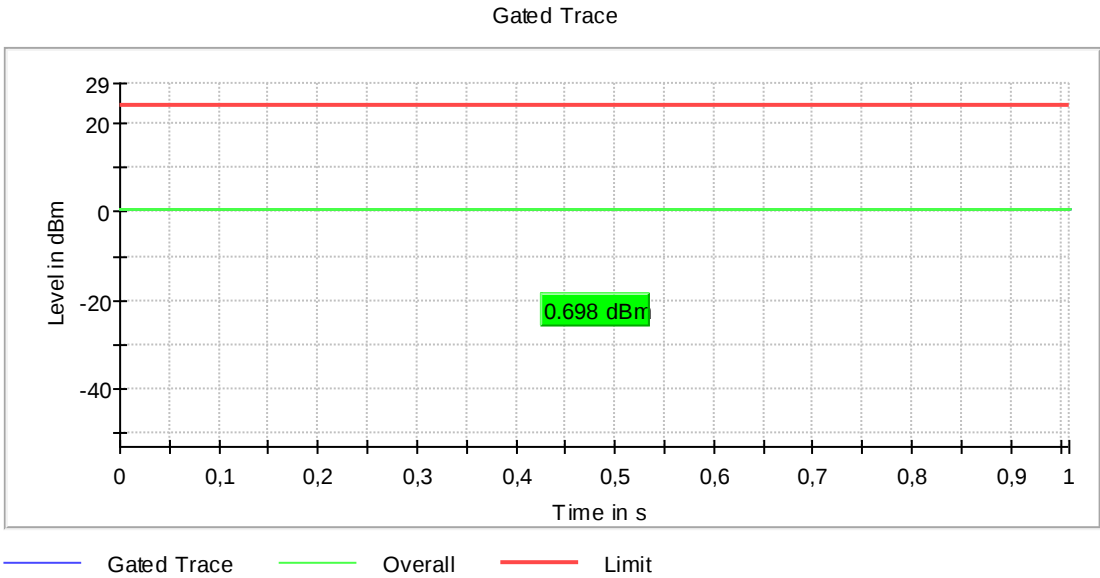

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.7	24.0	-0.7	96.155	PASS

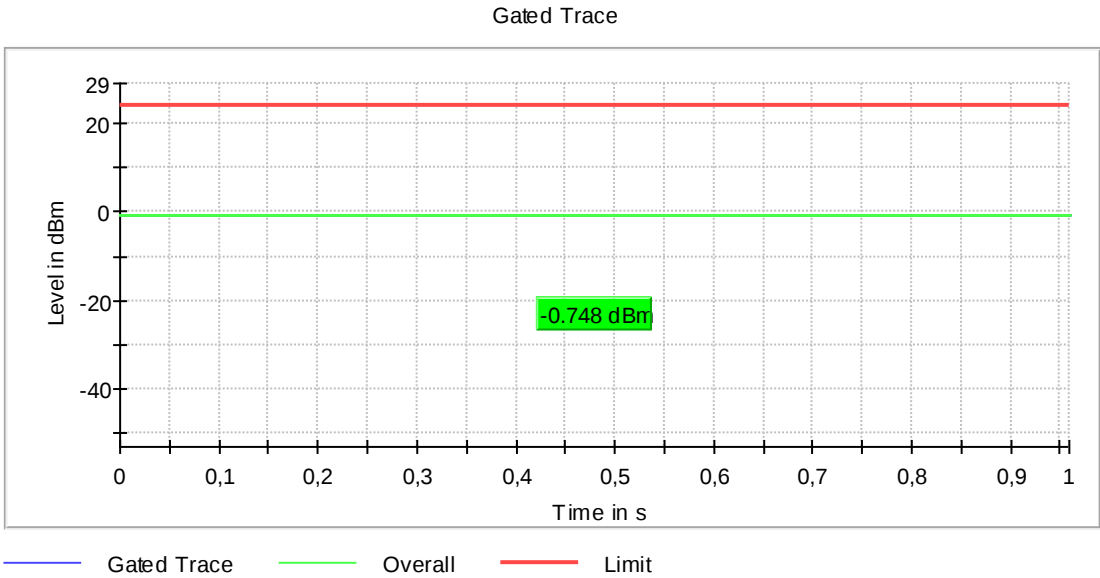

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	96.150	PASS

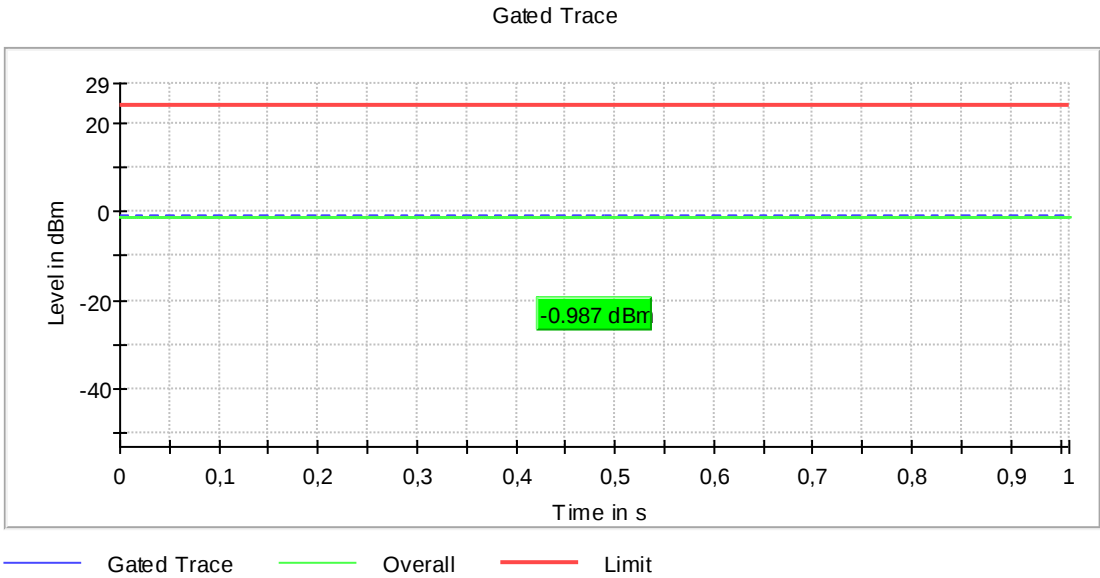

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.0	24.0	0.0	96.152	PASS

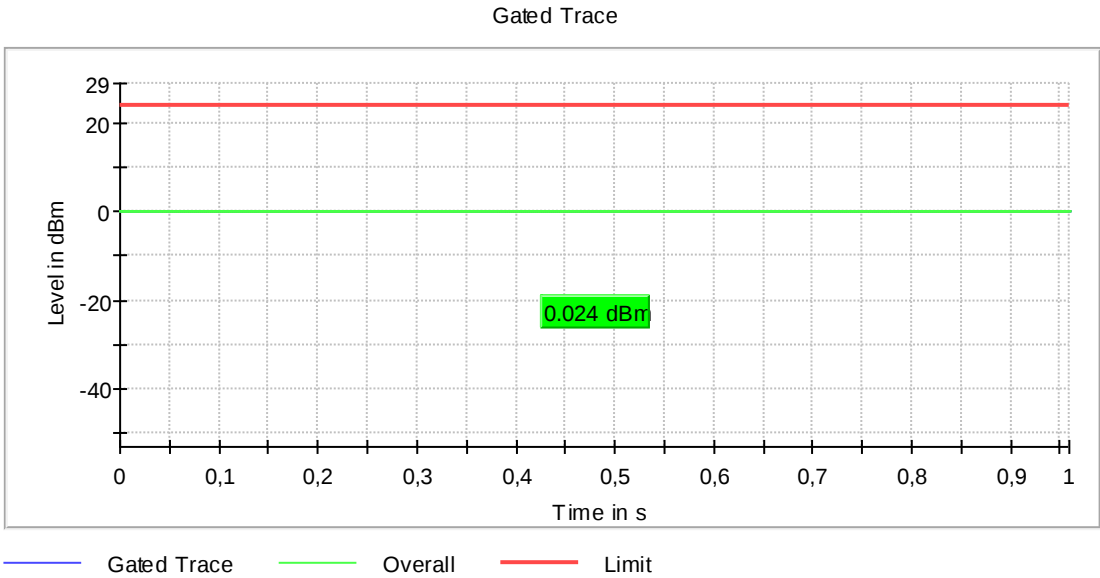

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.0	30.0	-1.0	96.157	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	96.155	PASS

Gated Trace

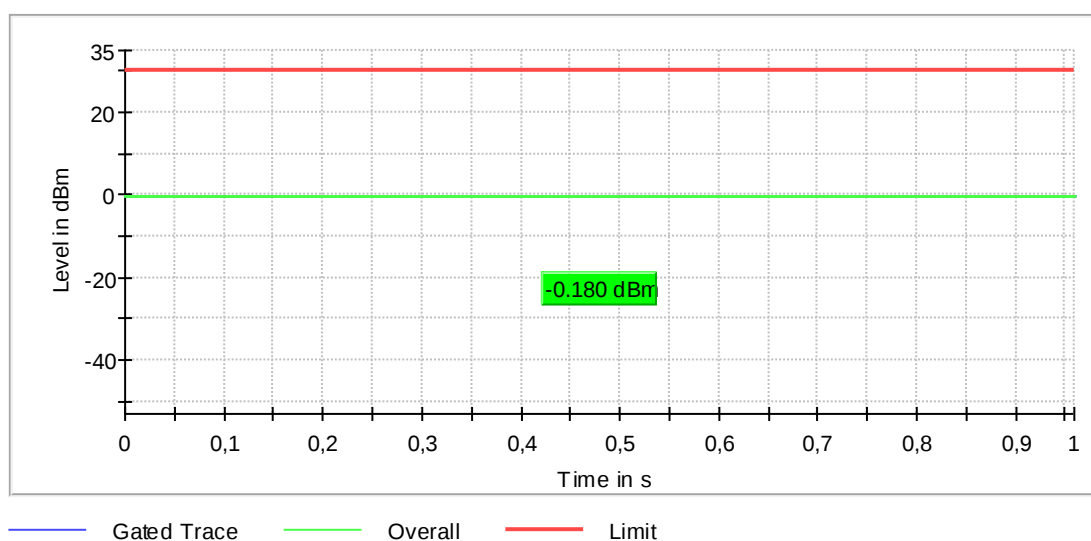

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5825 MHz; a-mode [18Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	96.158	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5180 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.2	24.0	3.2	94.830	PASS

Gated Trace

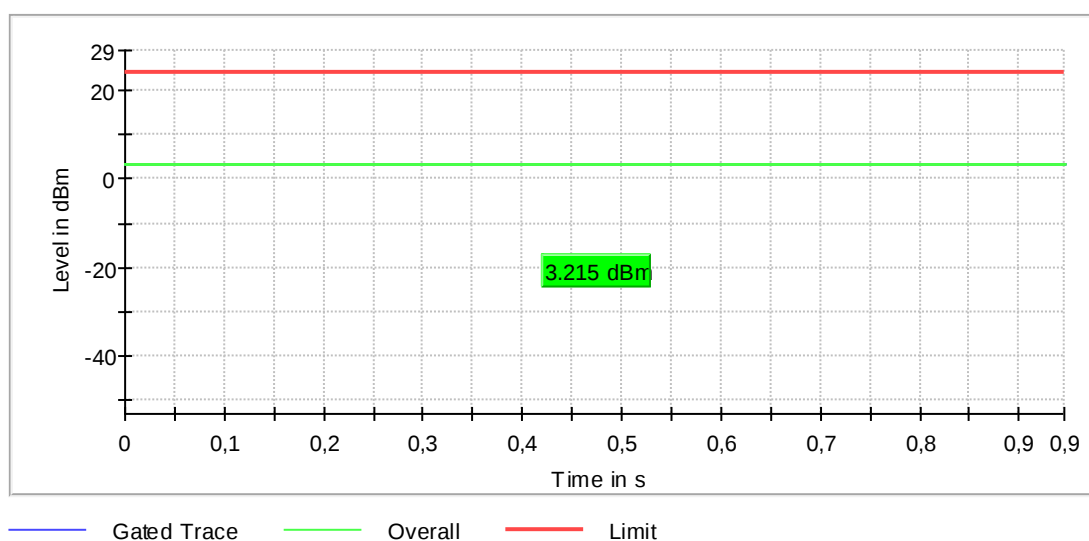

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	94.830	PASS

Gated Trace

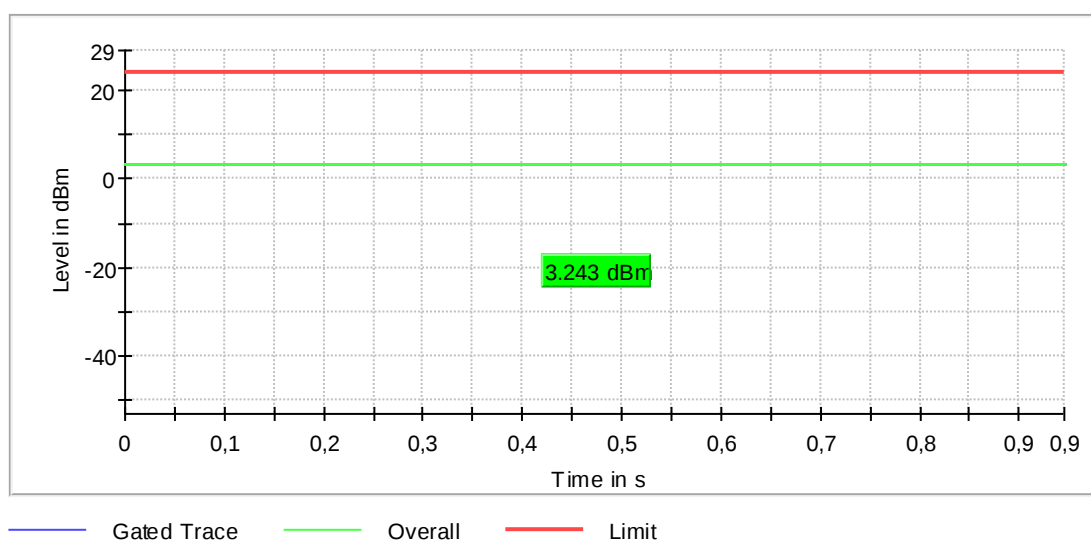

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5240 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.8	24.0	1.8	94.838	PASS

Gated Trace

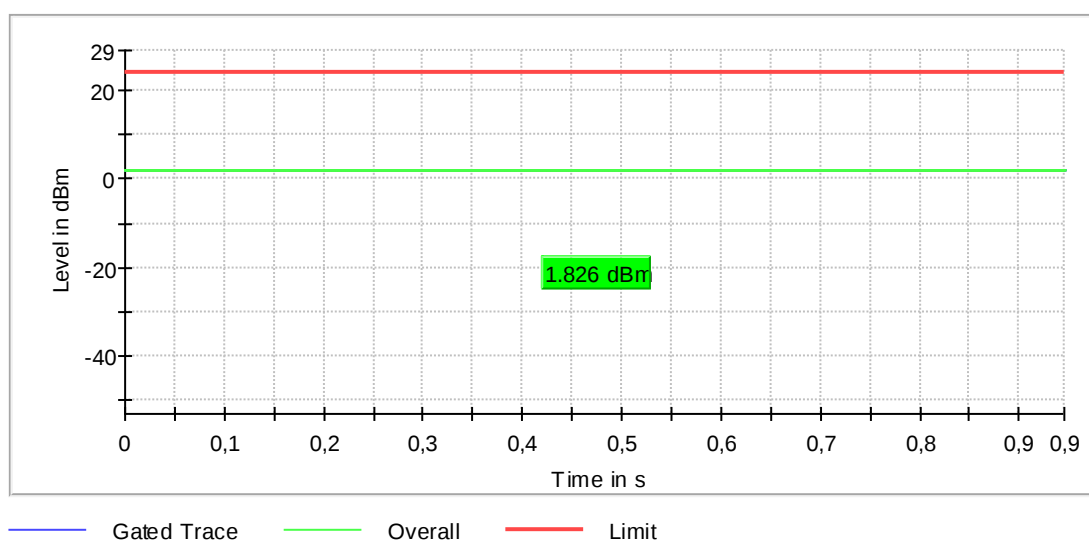

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5260 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	94.835	PASS

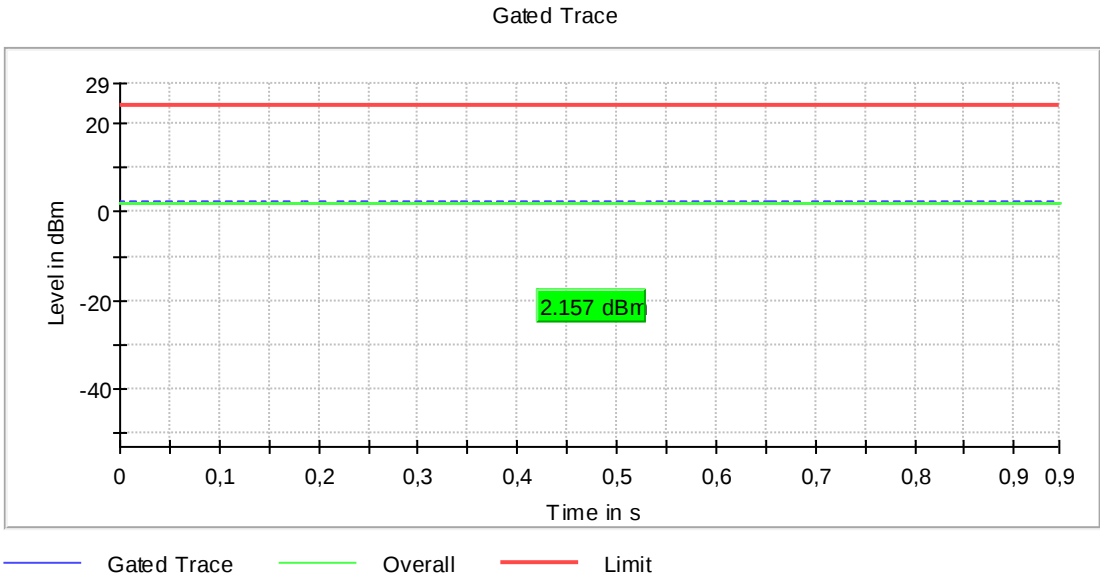

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.1	24.0	2.1	94.837	PASS

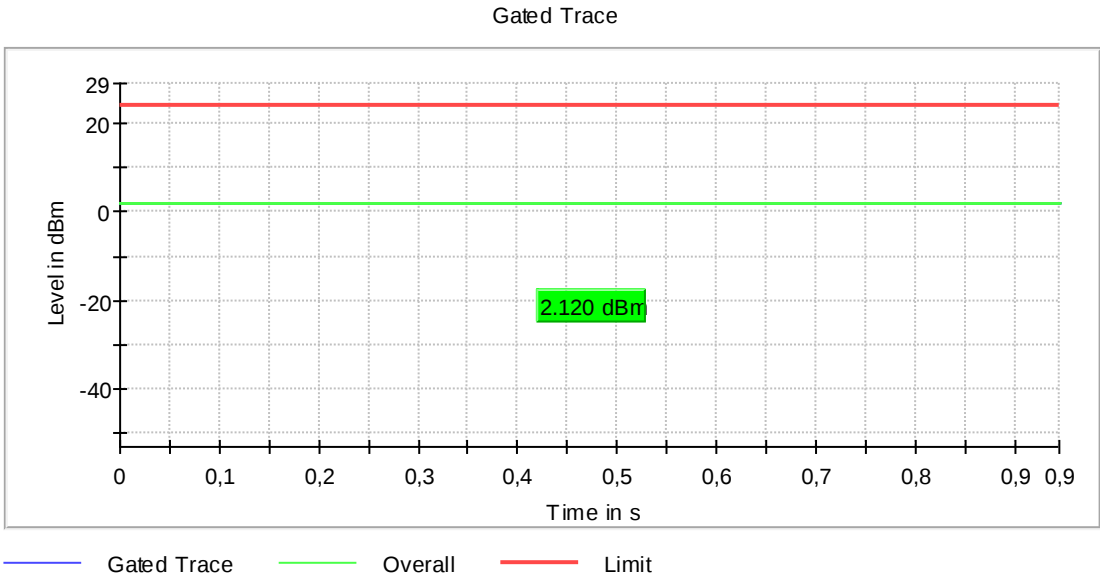

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.6	24.0	0.6	94.846	PASS

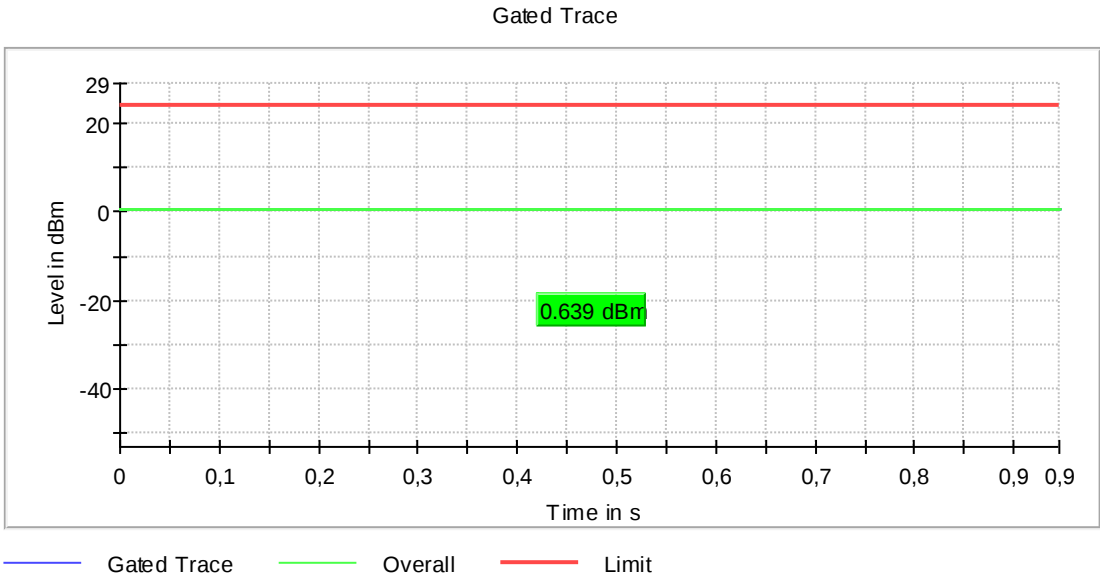

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.8	24.0	-0.8	94.865	PASS

Gated Trace

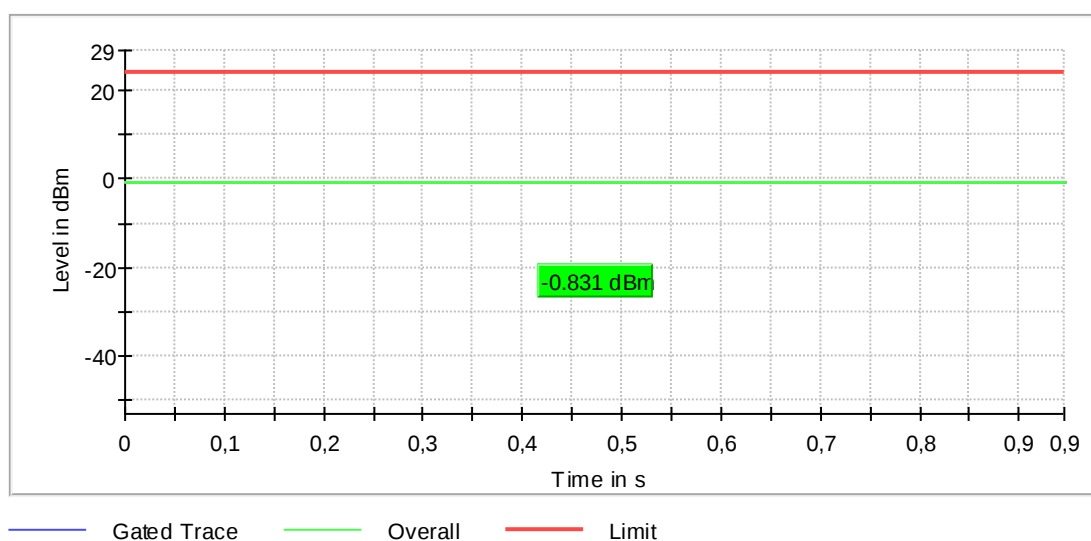

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-0.6	24.0	-0.6	94.873	PASS

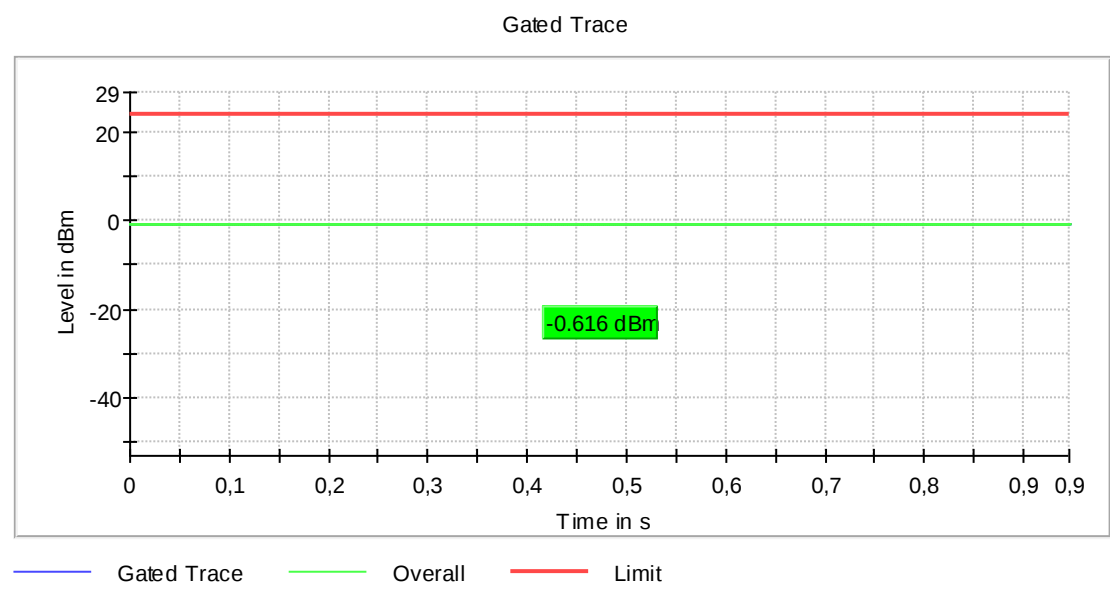

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μs	1.000 μs

RF output power (5700 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.0	24.0	0.0	94.864	PASS

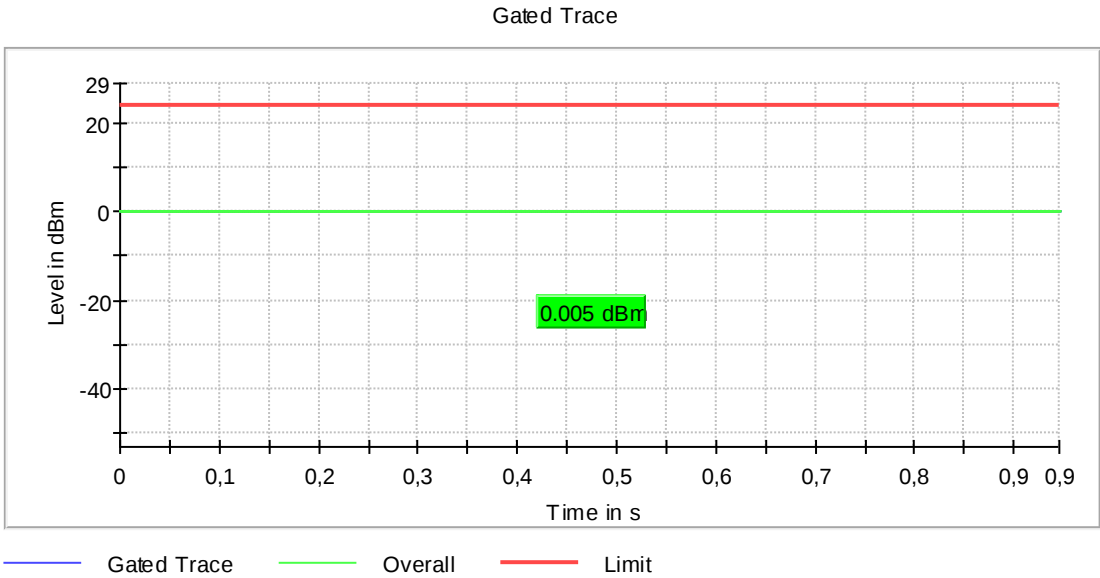

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.0	30.0	-1.0	94.871	PASS

Gated Trace

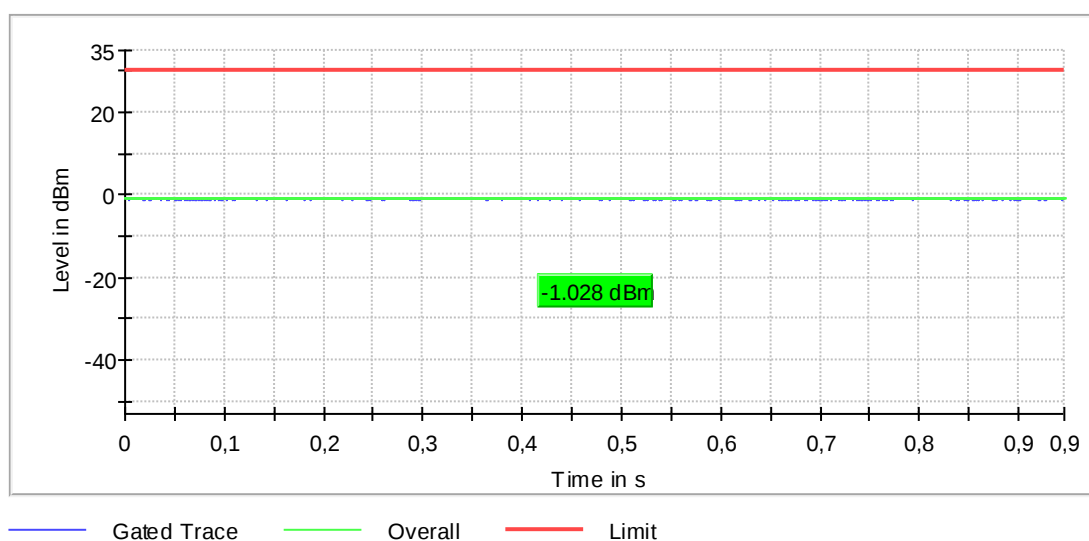

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5785 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.3	30.0	-0.3	94.870	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; a-mode [24Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	94.867	PASS

Gated Trace

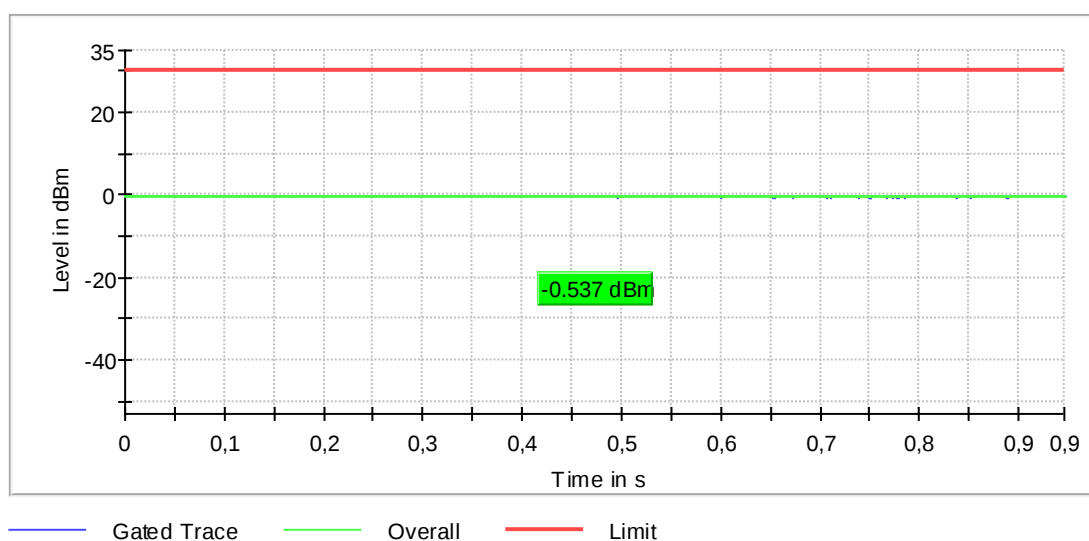

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.4	24.0	3.4	92.685	PASS

Gated Trace

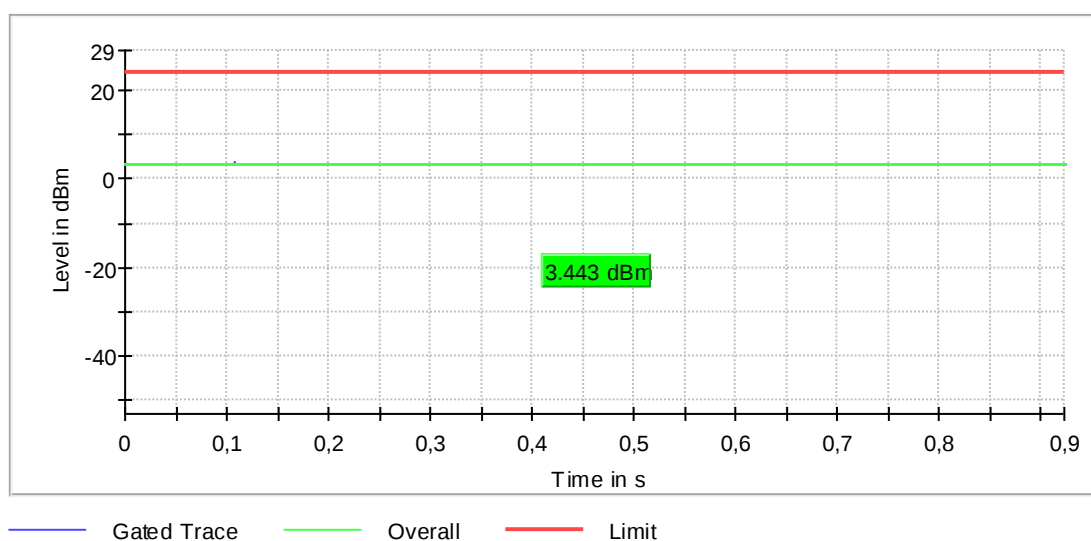

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5200 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	92.687	PASS

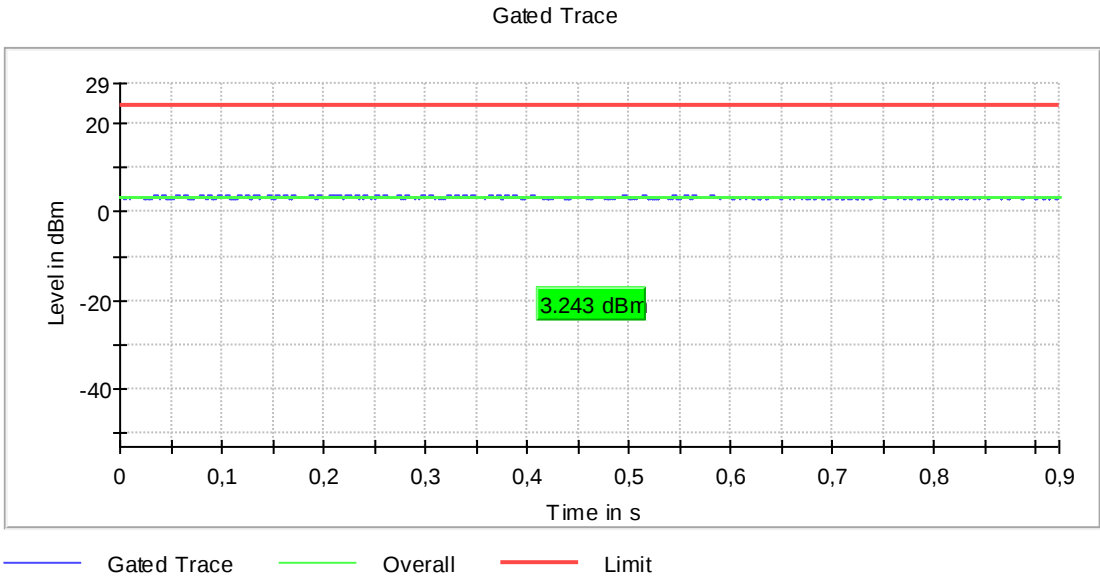

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5240 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.9	24.0	1.9	92.740	PASS

Gated Trace

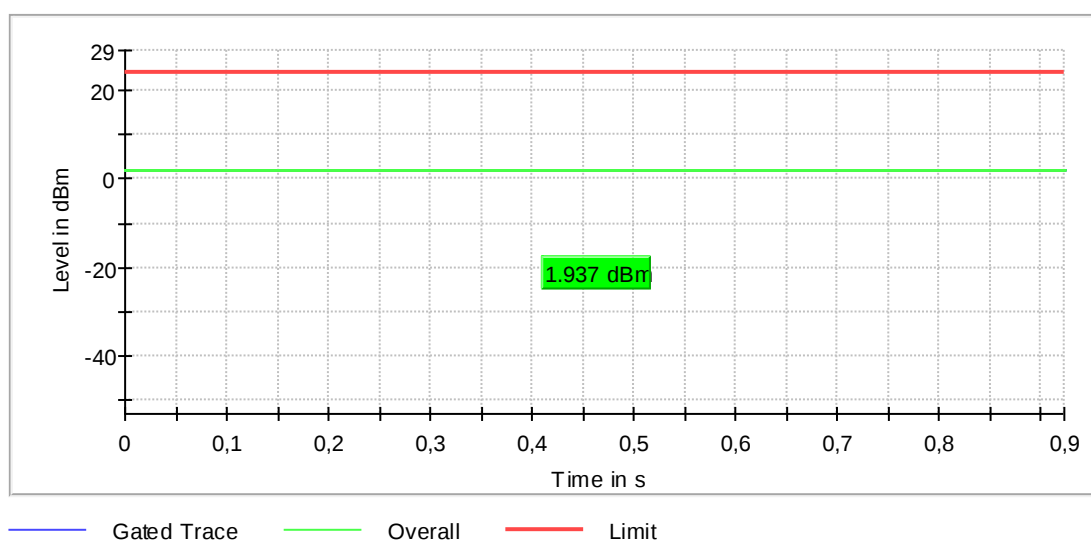

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5260 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.1	24.0	2.1	92.701	PASS

Gated Trace

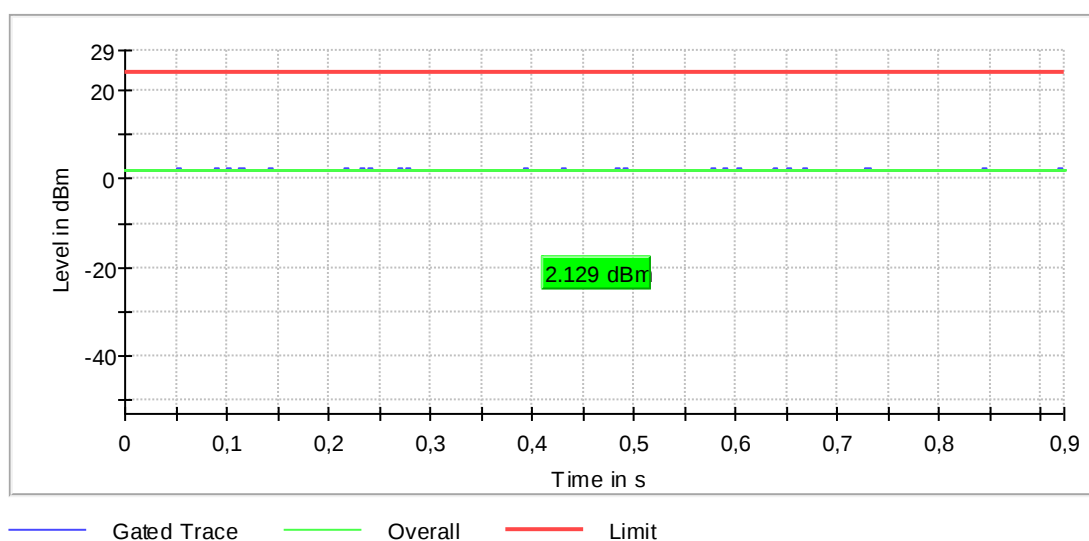

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5280 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.3	24.0	2.3	92.705	PASS

Gated Trace

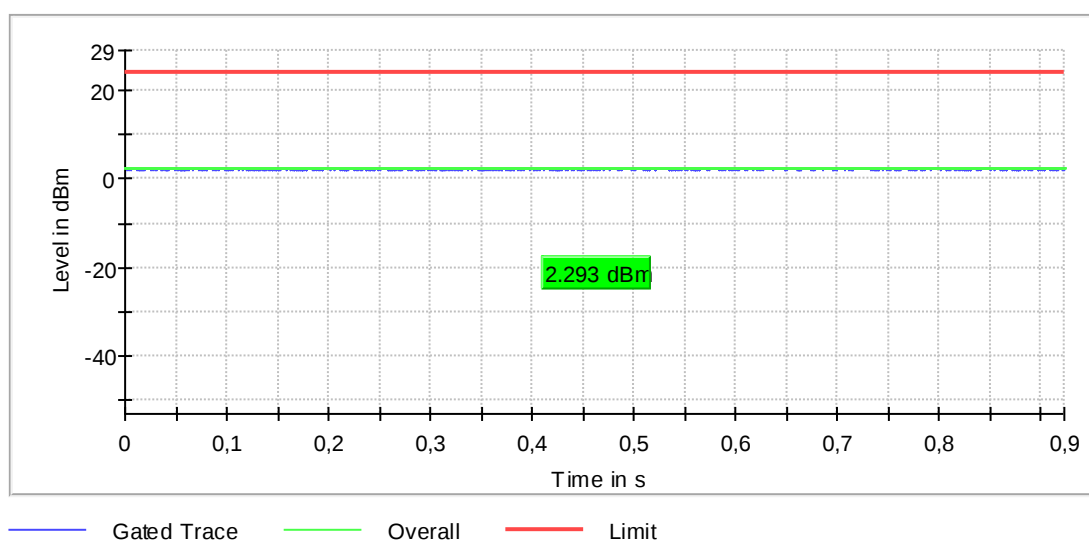

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5320 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	92.710	PASS

Gated Trace

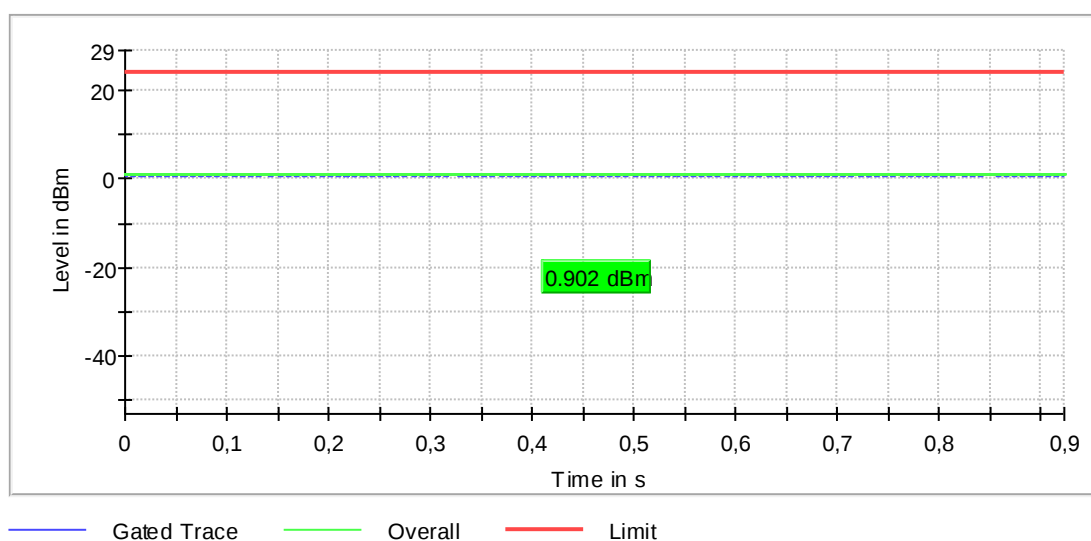

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5500 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.8	24.0	-0.8	92.761	PASS

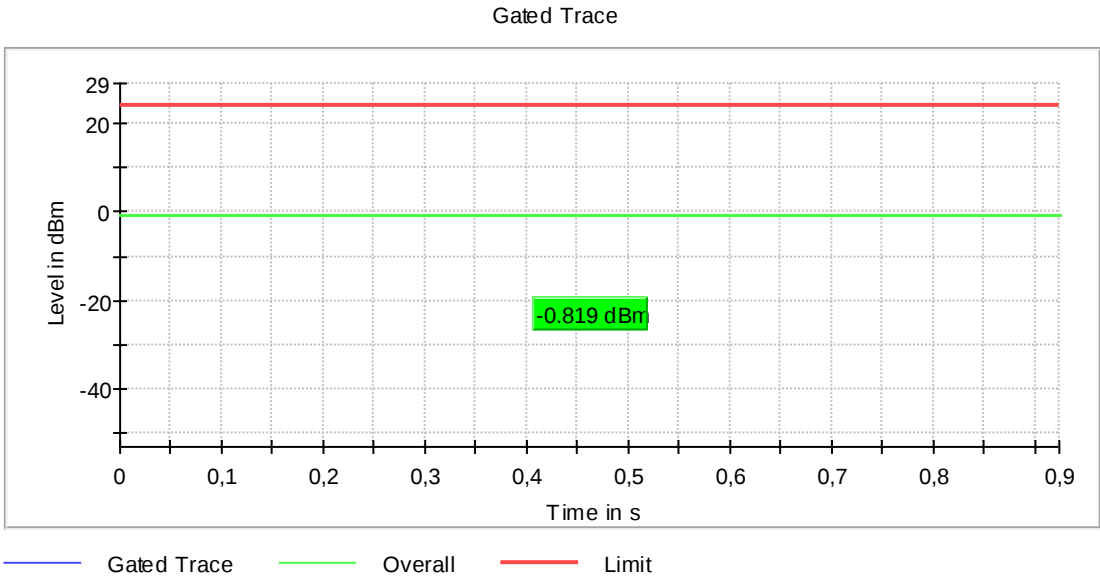

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5580 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	92.752	PASS

Gated Trace

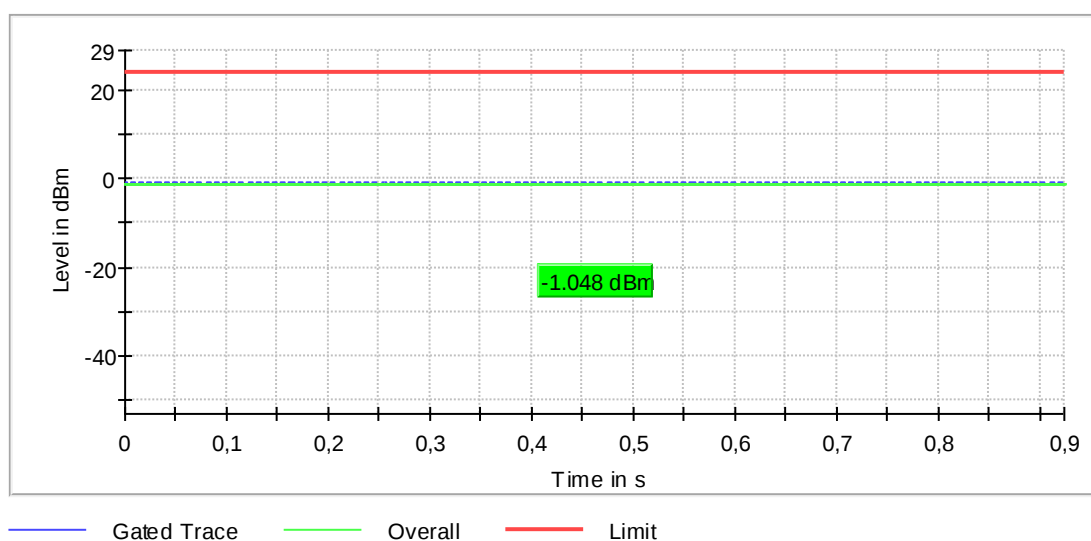

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5700 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	-0.1	24.0	-0.1	92.765	PASS

Gated Trace

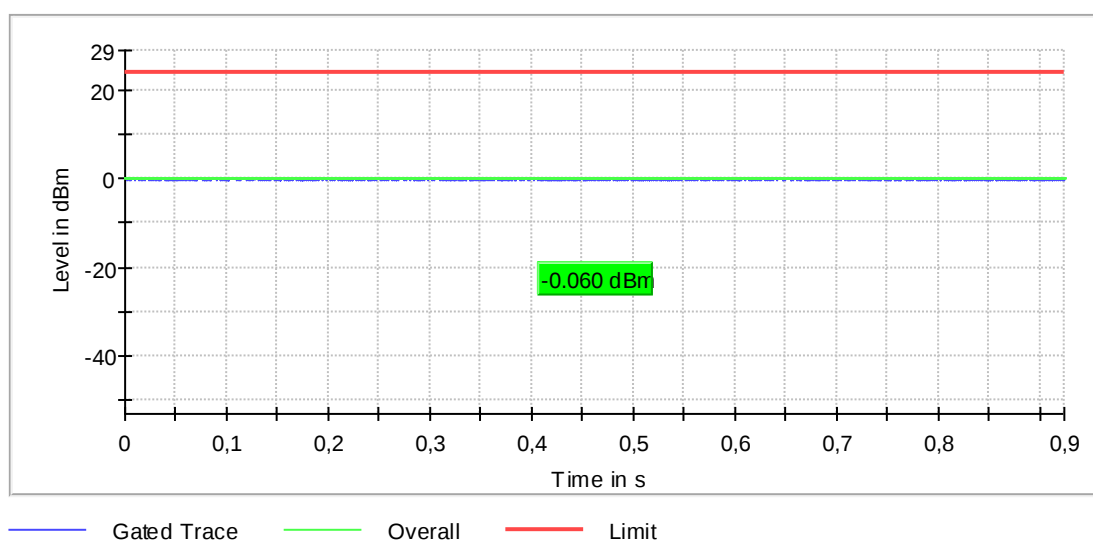

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5745 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.2	30.0	-1.2	92.784	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	92.810	PASS

Gated Trace

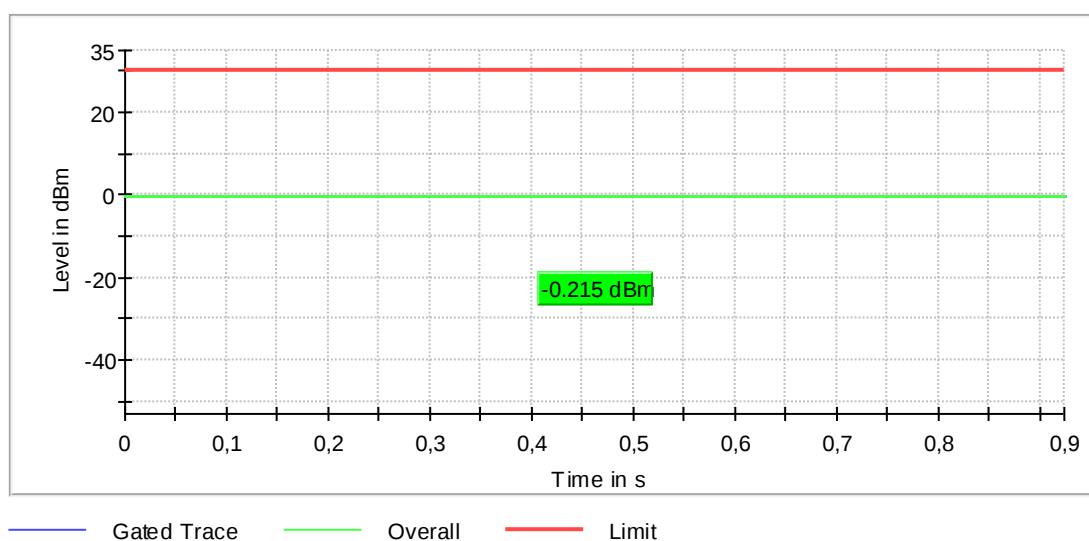

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5825 MHz; a-mode [36Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.6	30.0	-0.6	92.818	PASS

Gated Trace

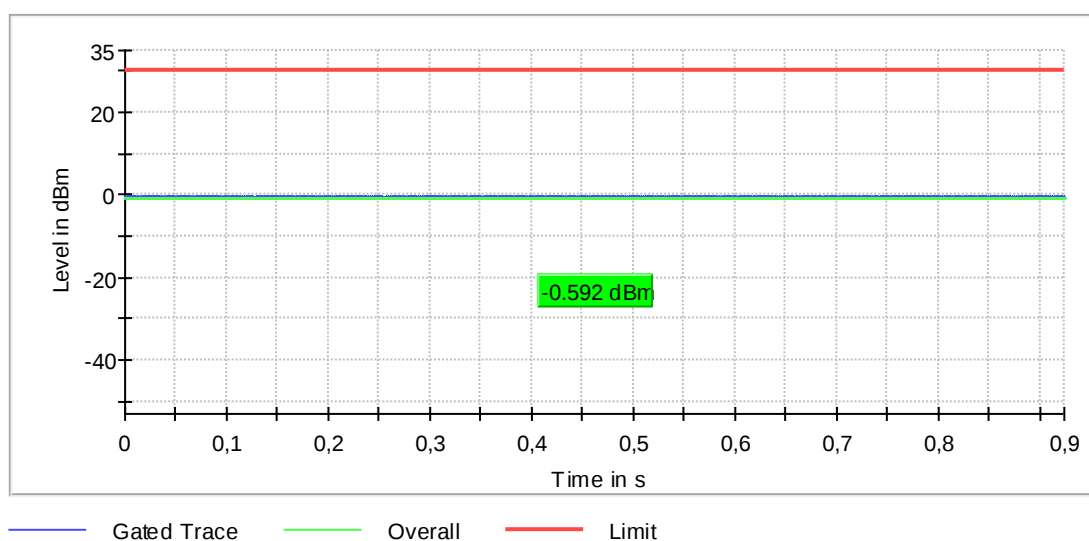

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.4	24.0	3.4	90.563	PASS

Gated Trace

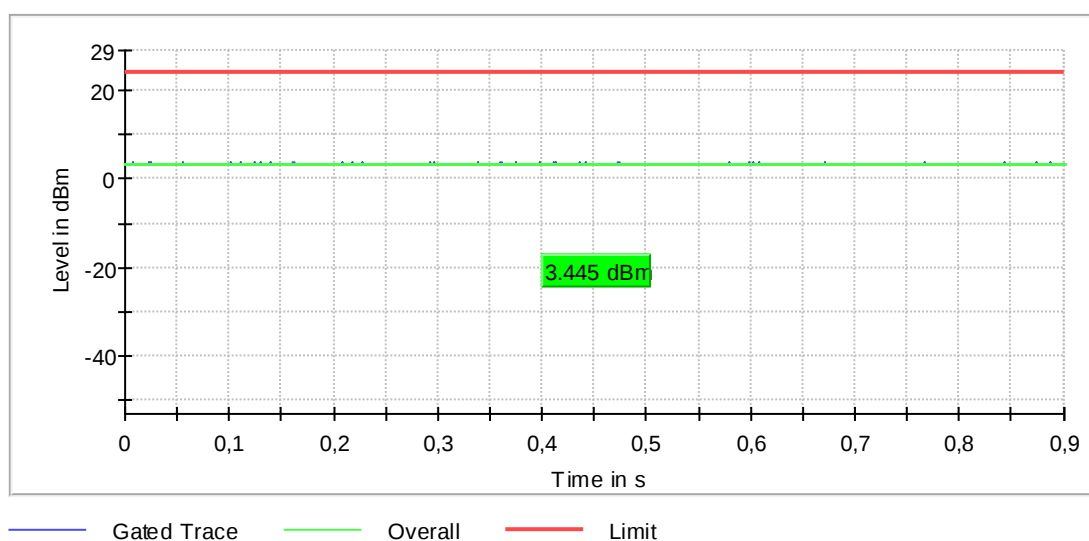

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	90.567	PASS

Gated Trace

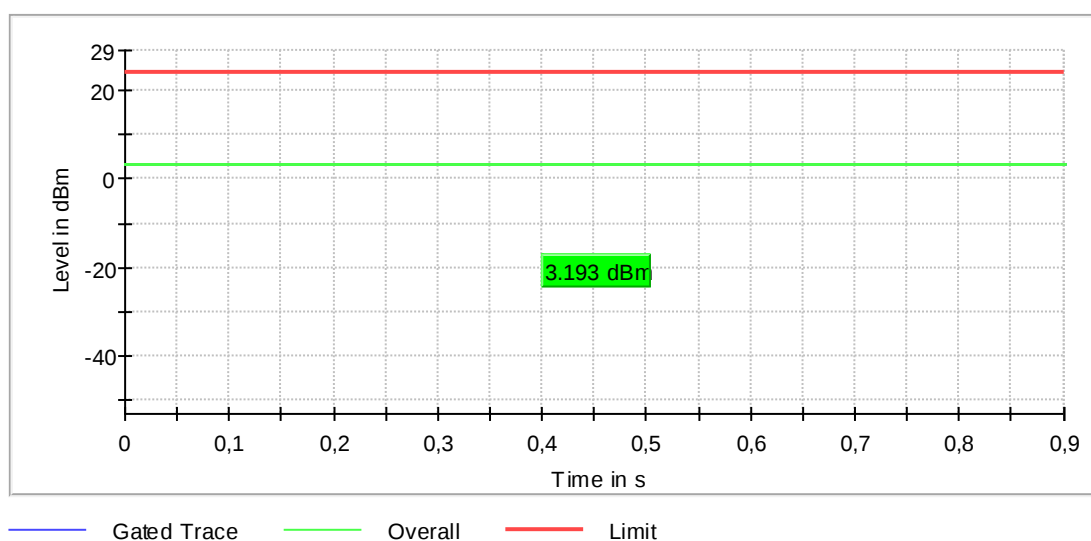

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5240 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.0	24.0	2.0	90.574	PASS

Gated Trace

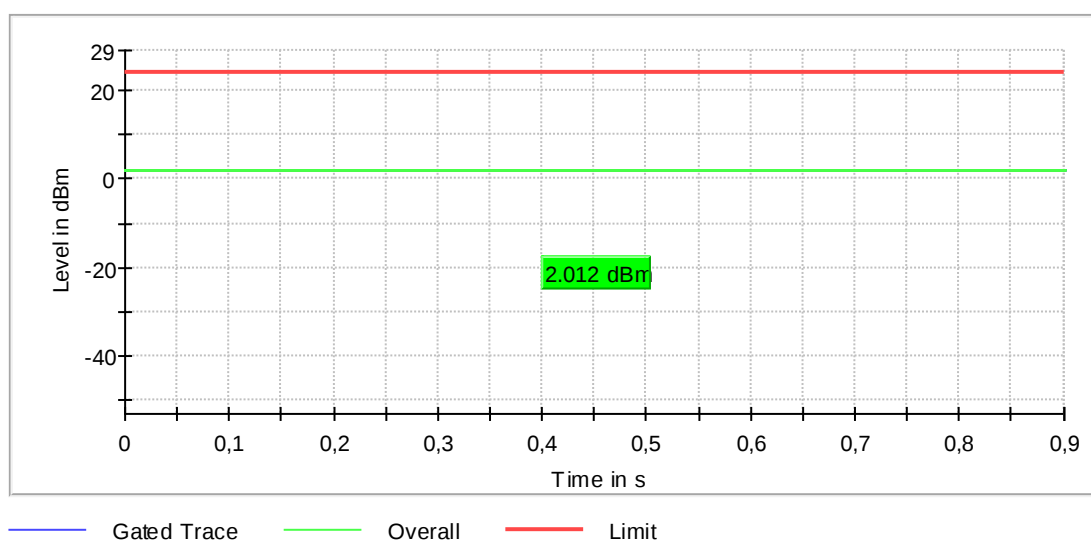

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5260 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	90.576	PASS

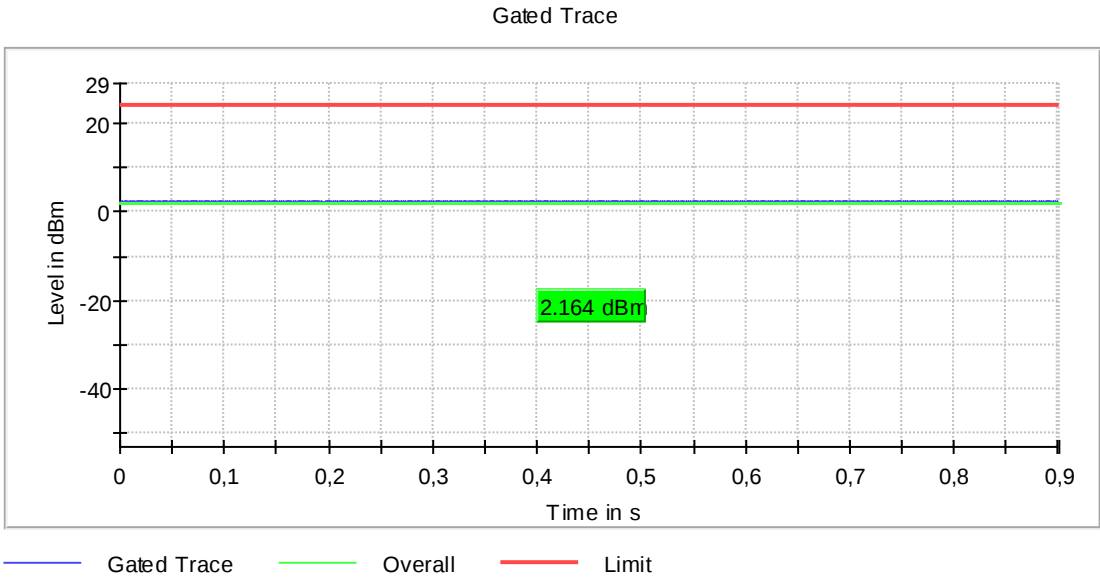

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.3	24.0	2.3	90.564	PASS

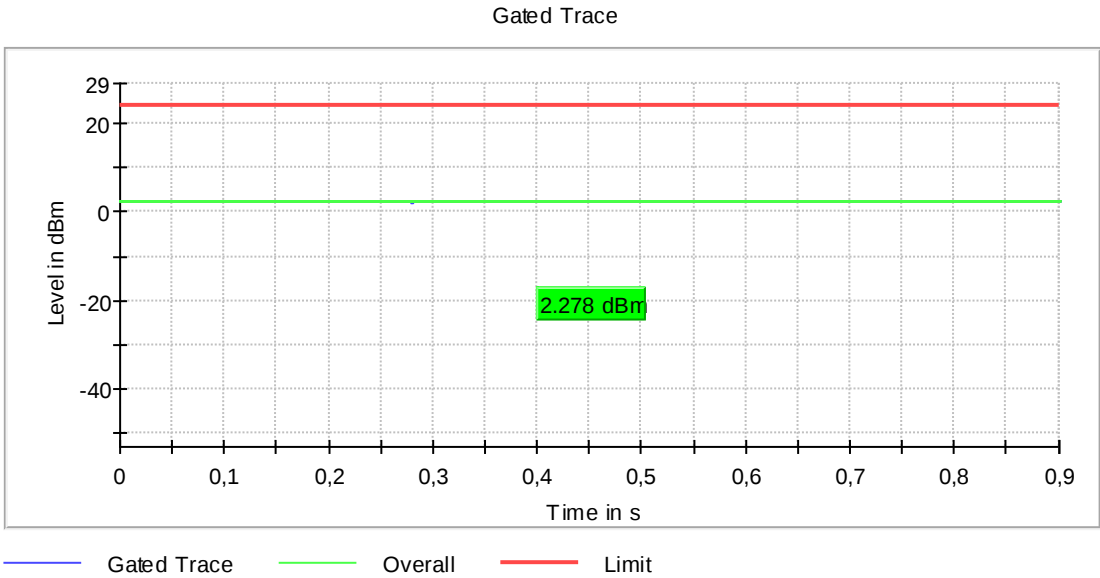

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.8	24.0	0.8	90.586	PASS

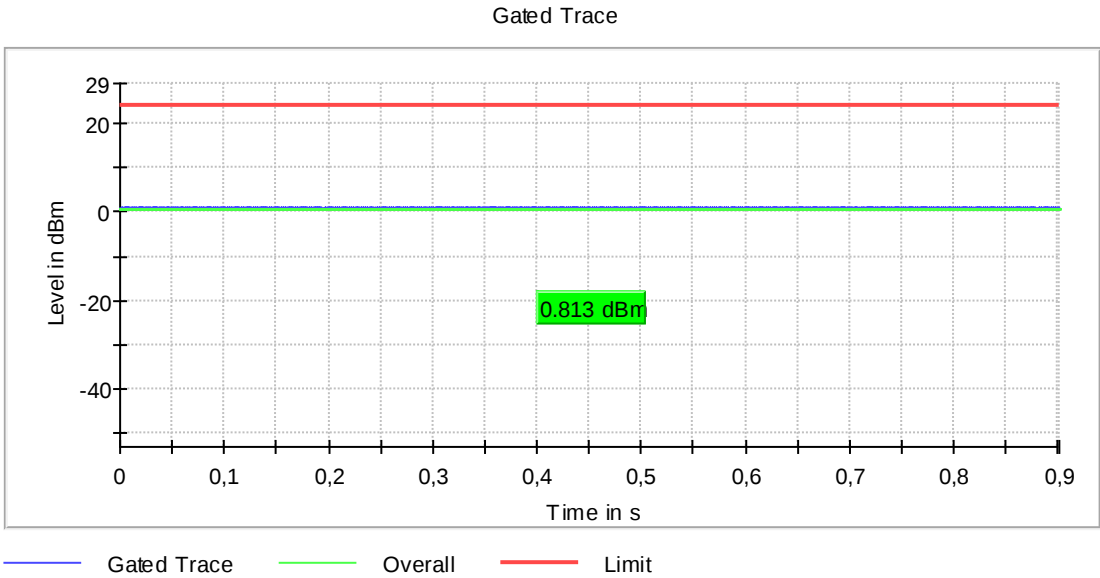

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-0.8	24.0	-0.8	90.647	PASS

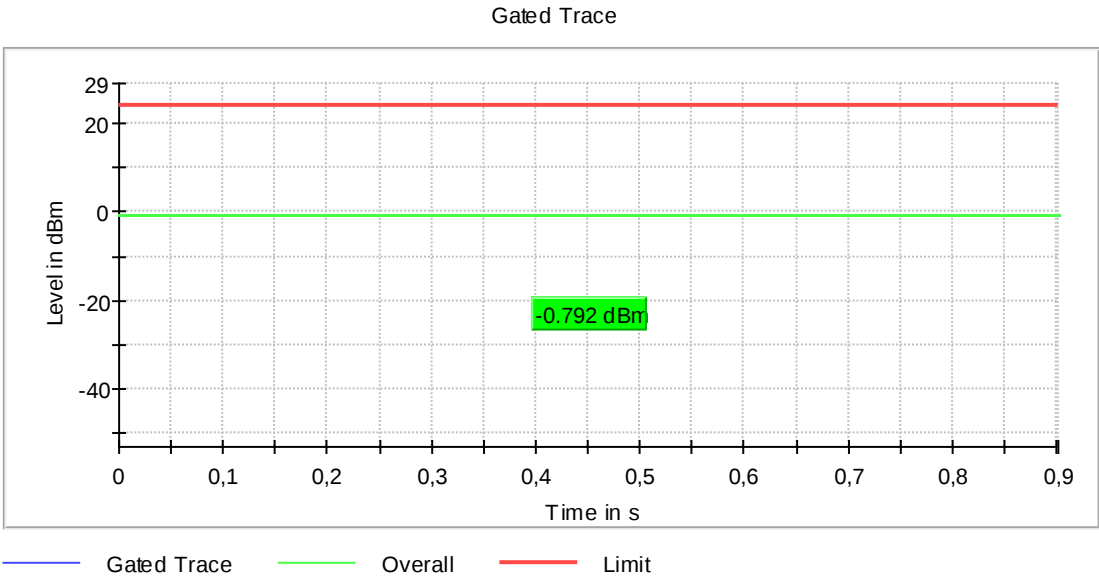

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.1	24.0	-1.1	90.634	PASS

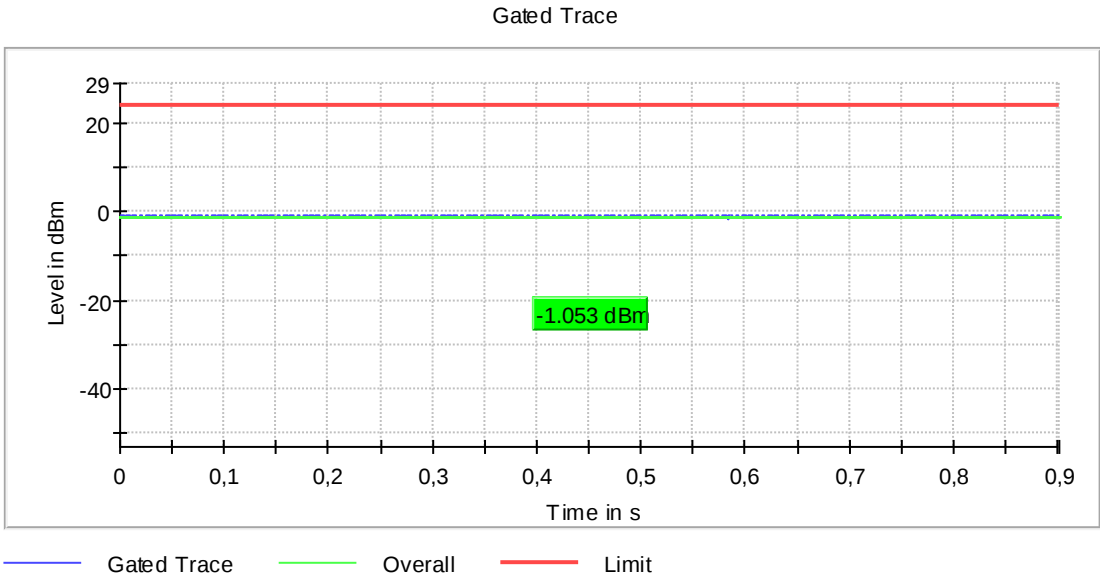

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	-0.7	24.0	-0.7	90.630	PASS

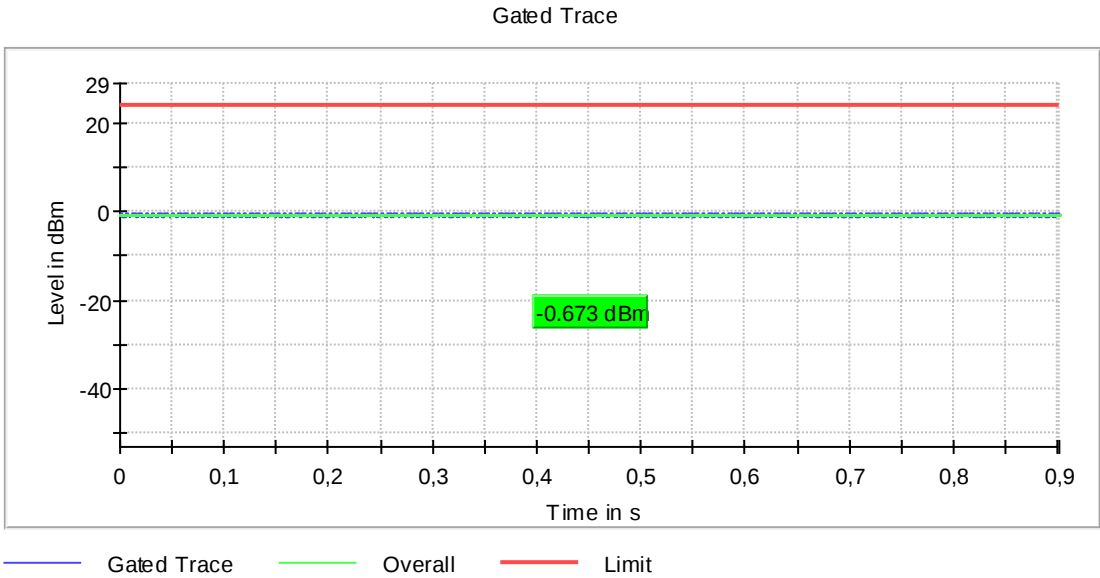

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.2	30.0	-1.2	90.663	PASS

Gated Trace

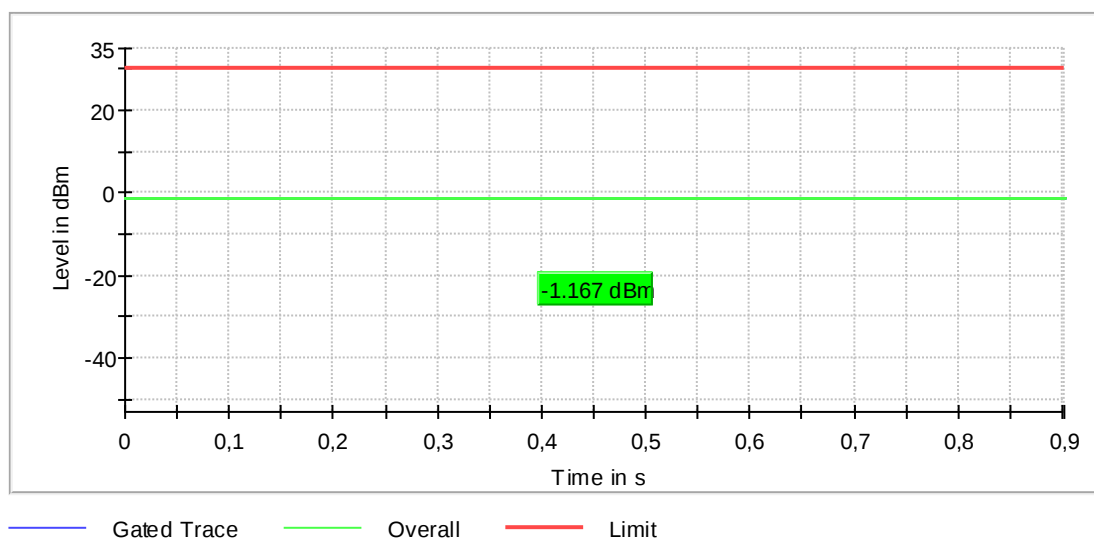

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5785 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.3	30.0	-0.3	90.655	PASS

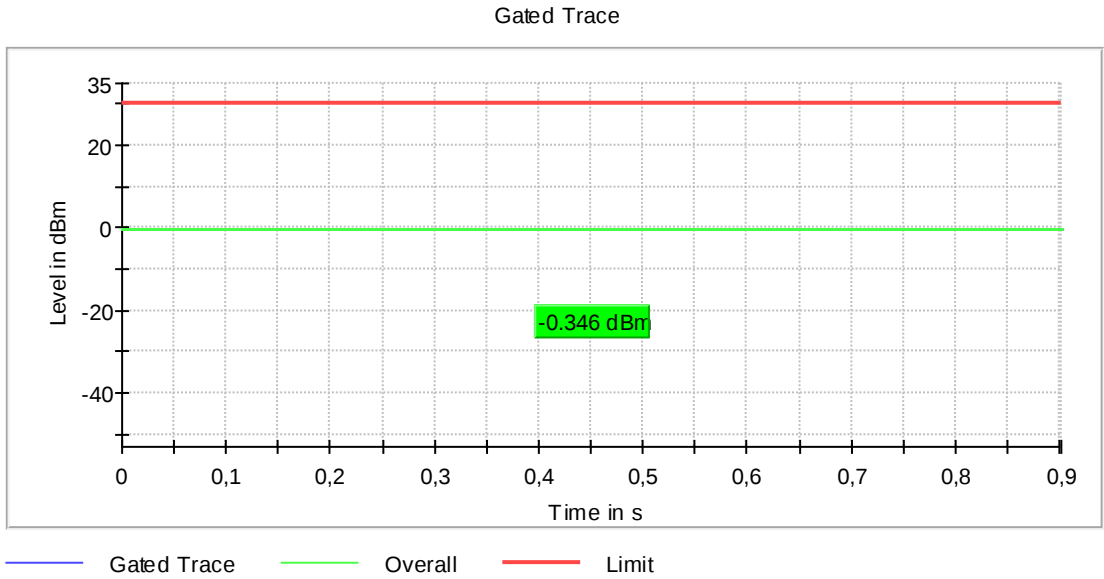

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μs	1.000 μs

RF output power (5825 MHz; a-mode [48Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	90.642	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.5	24.0	3.5	90.092	PASS



OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5200 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	90.069	PASS

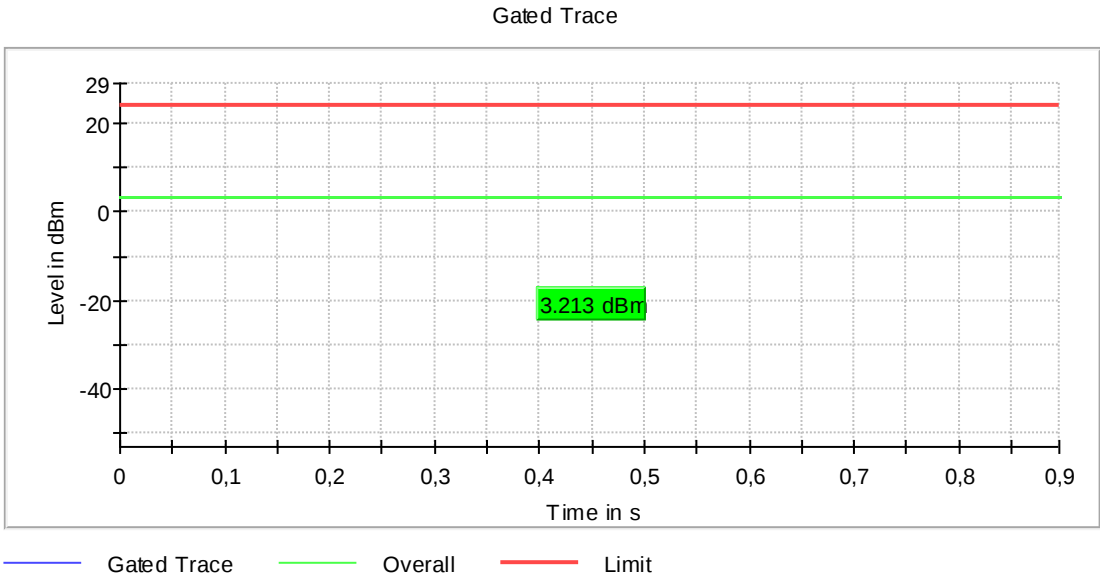

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.0	24.0	2.0	90.087	PASS

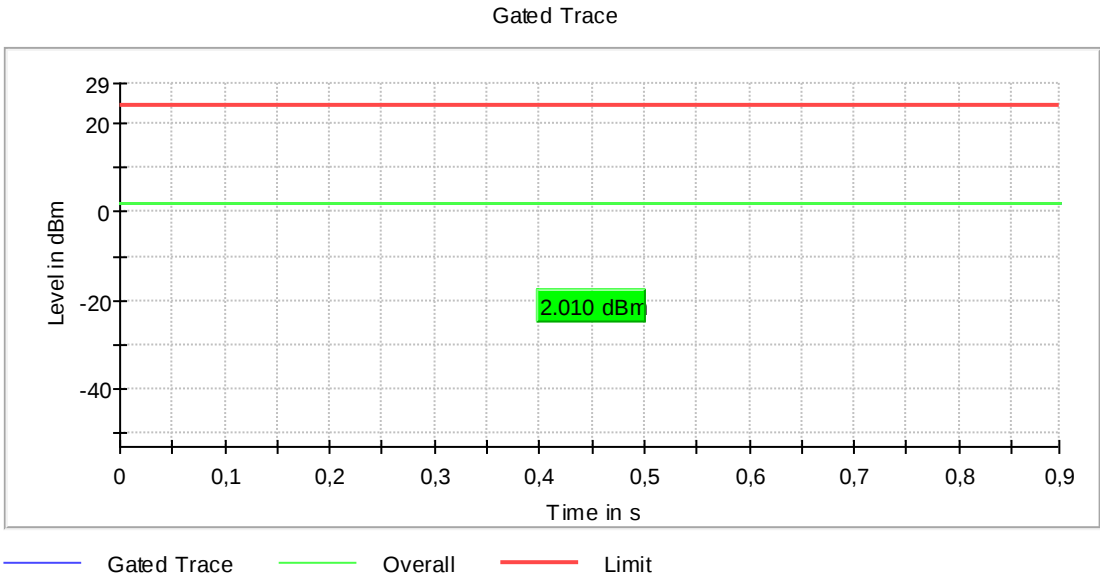

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	90.075	PASS

Gated Trace

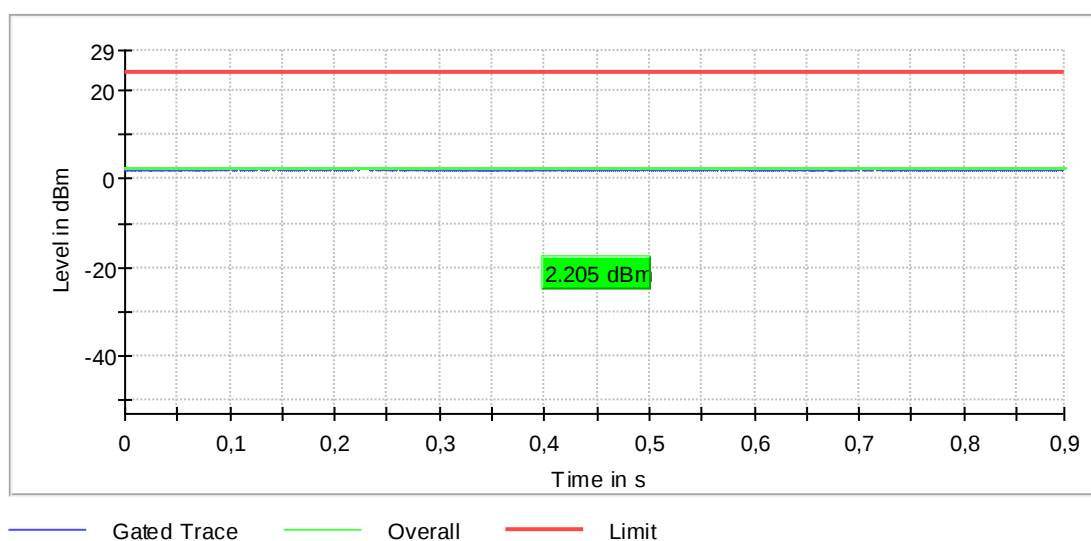

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5280 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.3	24.0	2.3	90.083	PASS

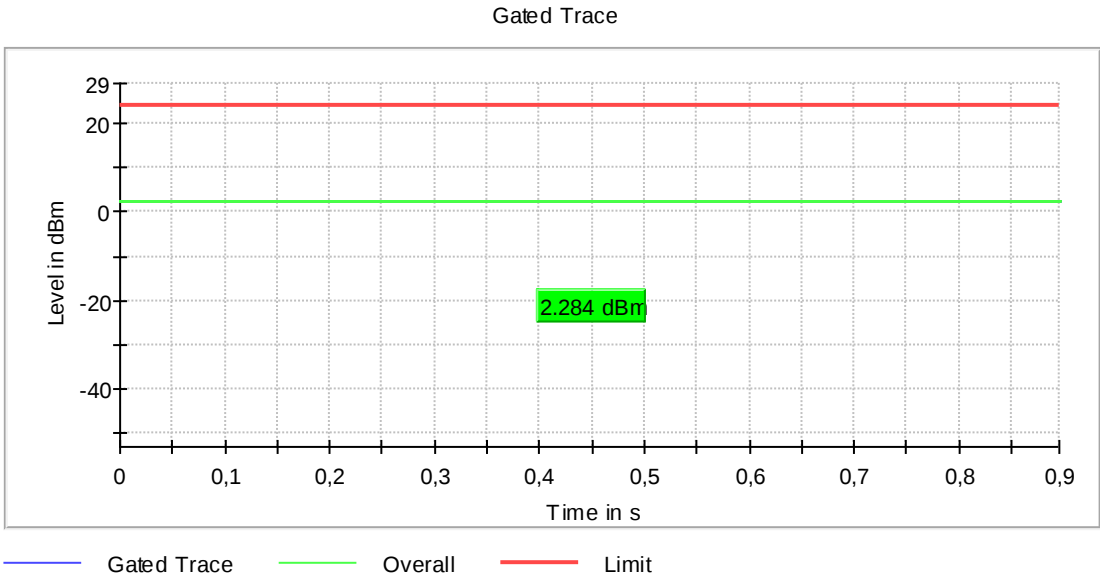

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.8	24.0	0.8	90.103	PASS

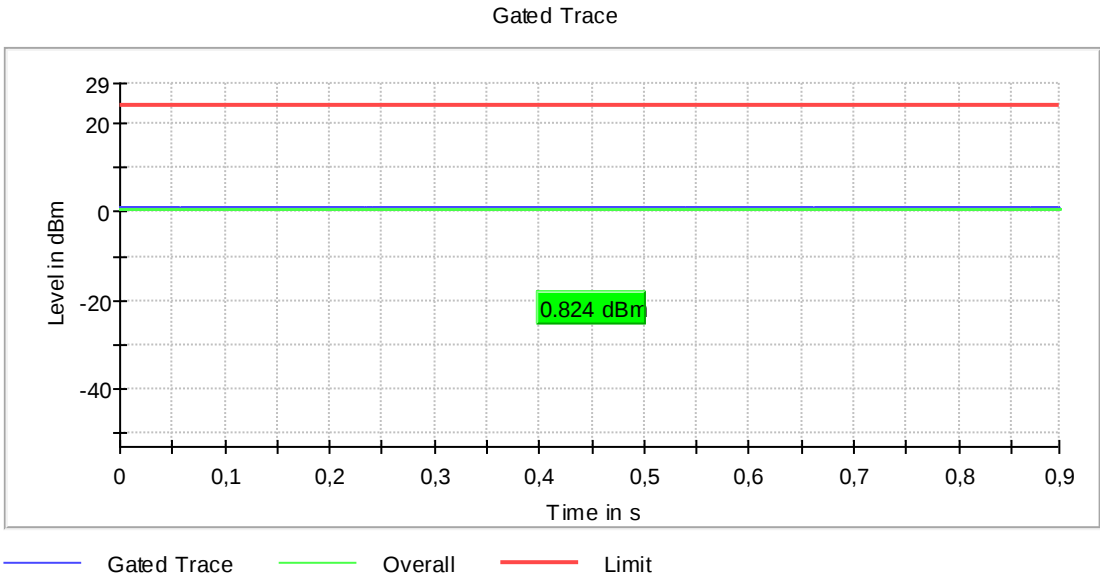

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	1.1	24.0	1.1	90.106	PASS

Gated Trace

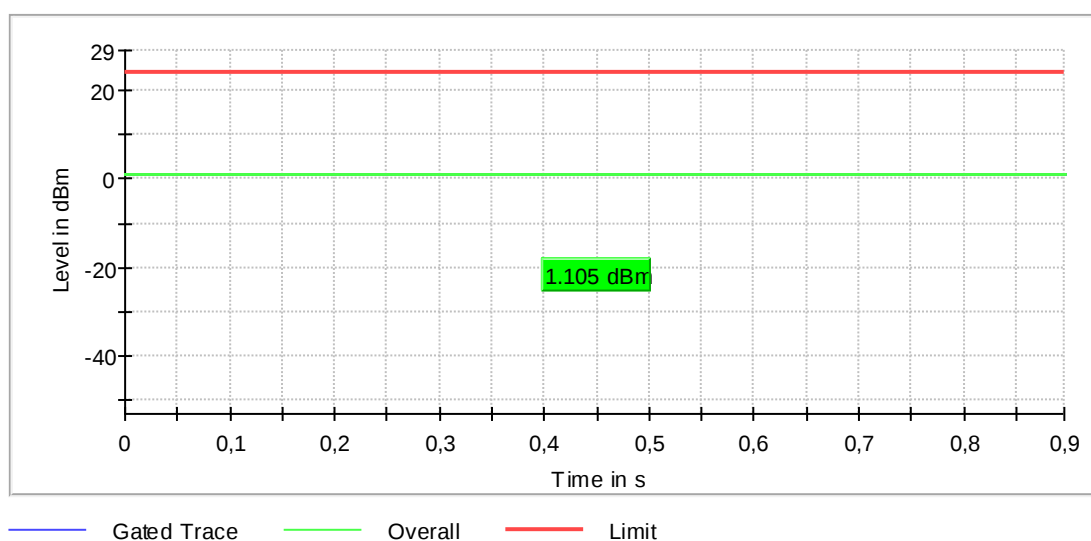

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5580 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	90.166	PASS

Gated Trace

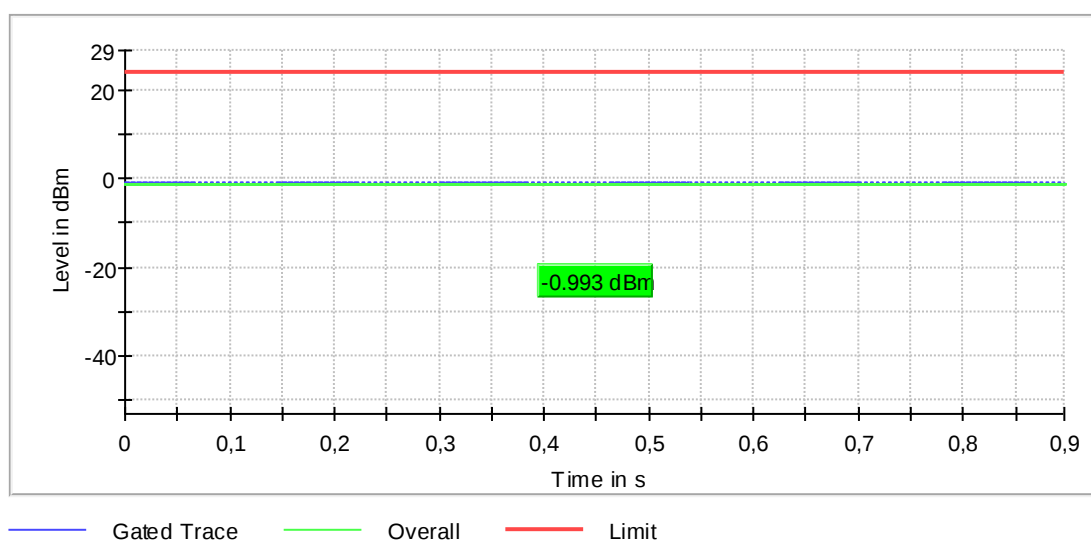

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5700 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.0	24.0	0.0	90.168	PASS

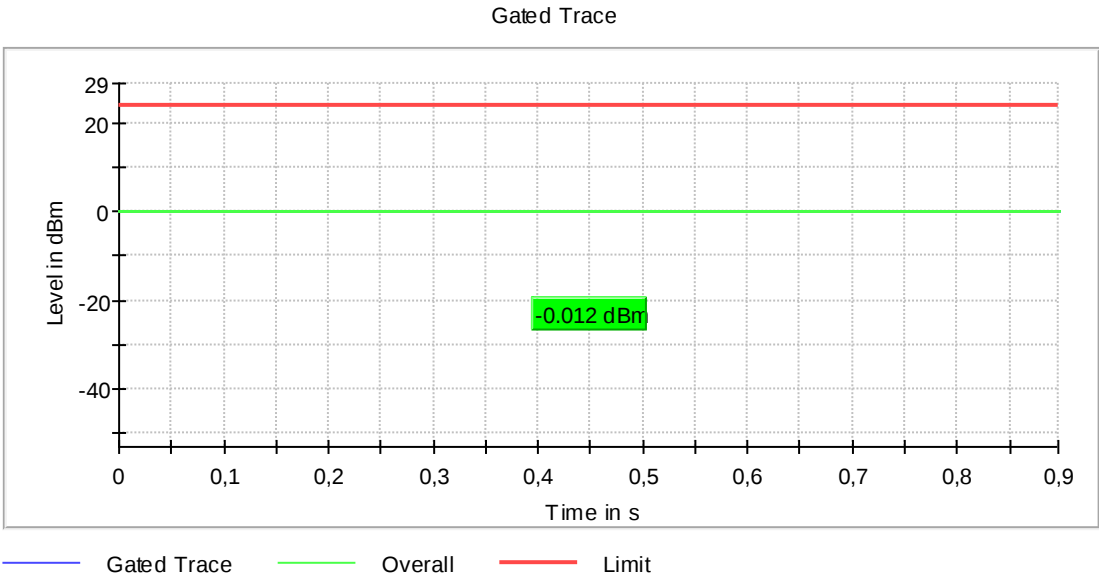

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-1.2	30.0	-1.2	90.186	PASS

Gated Trace

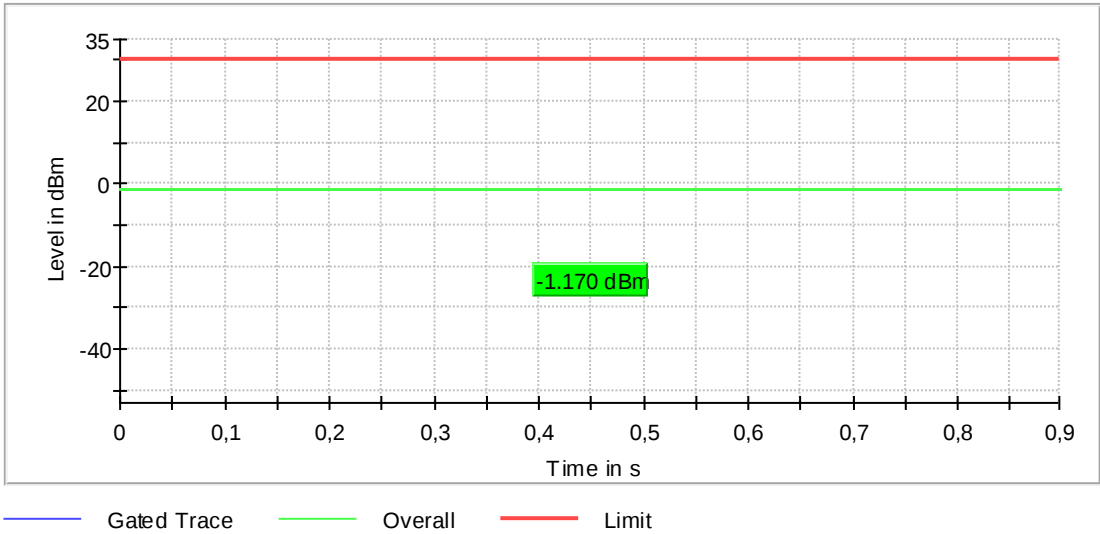

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.4	30.0	-0.4	90.161	PASS

Gated Trace

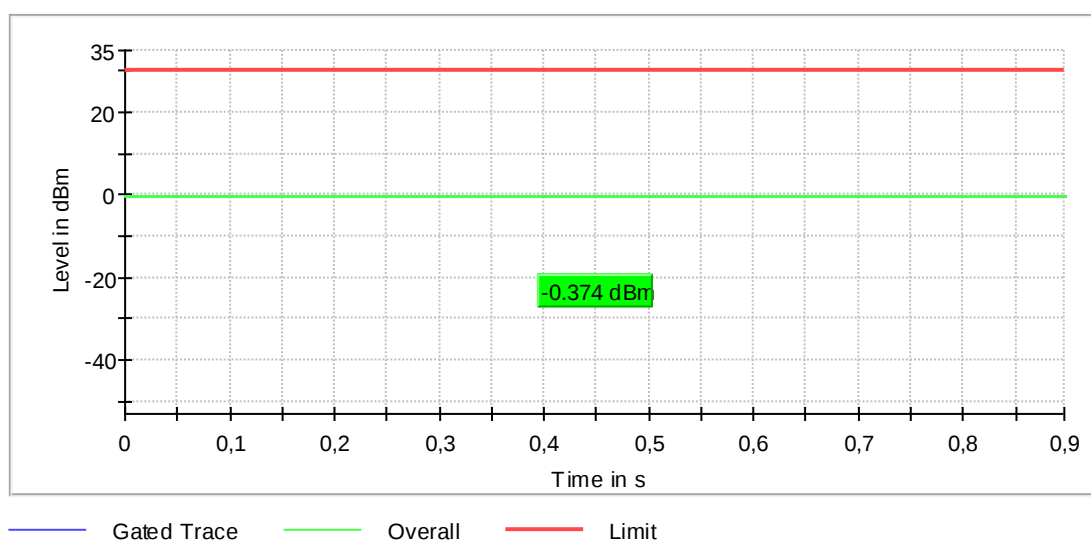

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5825 MHz; a-mode [54Mbps] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	90.178	PASS

Gated Trace

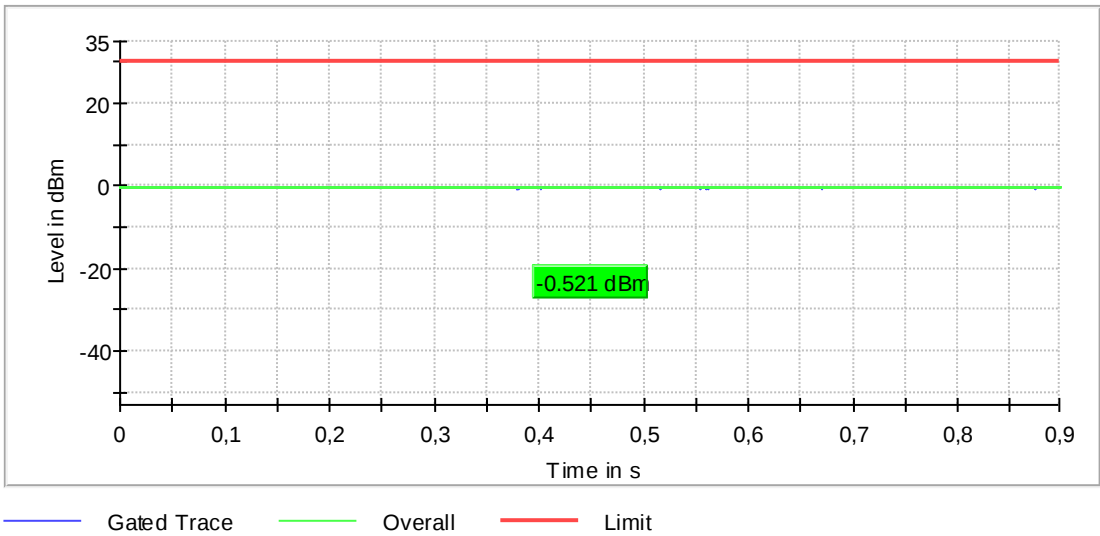

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

1.5.2 n-mode 20 MHz BW

RF output power

Mode	DUT Frequency	Gated RMS	Limit Max (dBm)	Gated EIRP	DutyCycle (%)	Result
n20-mode [MCS0]; 5180MHz	5180.0000	2.9	24.0	2.9	98.512	PASS
n20-mode [MCS0]; 5200MHz	5200.0000	3.3	24.0	3.3	98.511	PASS
n20-mode [MCS0]; 5240MHz	5240.0000	1.9	24.0	1.9	98.512	PASS
n20-mode [MCS0]; 5260MHz	5260.0000	2.2	24.0	2.2	98.512	PASS
n20-mode [MCS0]; 5280MHz	5280.0000	2.5	24.0	2.5	98.510	PASS
n20-mode [MCS0]; 5320MHz	5320.0000	1.0	24.0	1.0	98.511	PASS
n20-mode [MCS0]; 5500MHz	5500.0000	-1.3	24.0	-1.3	98.523	PASS
n20-mode [MCS0]; 5580MHz	5580.0000	-1.0	24.0	-1.0	98.520	PASS
n20-mode [MCS0]; 5700MHz	5700.0000	0.8	24.0	0.8	98.521	PASS
n20-mode [MCS0]; 5745MHz	5745.0000	-0.7	30.0	-0.7	98.524	PASS
n20-mode [MCS0]; 5785MHz	5785.0000	0.0	30.0	0.0	98.523	PASS
n20-mode [MCS0]; 5825MHz	5825.0000	-0.4	30.0	-0.4	98.524	PASS
n20-mode [MCS1]; 5180MHz	5180.0000	3.1	24.0	3.1	97.186	PASS
n20-mode [MCS1]; 5200MHz	5200.0000	3.2	24.0	3.2	97.189	PASS
n20-mode [MCS1]; 5240MHz	5240.0000	2.1	24.0	2.1	97.196	PASS
n20-mode [MCS1]; 5260MHz	5260.0000	2.2	24.0	2.2	97.192	PASS
n20-mode [MCS1]; 5280MHz	5280.0000	2.5	24.0	2.5	97.193	PASS
n20-mode [MCS1]; 5320MHz	5320.0000	0.9	24.0	0.9	97.198	PASS
n20-mode [MCS1]; 5500MHz	5500.0000	-1.1	24.0	-1.1	97.214	PASS
n20-mode [MCS1]; 5580MHz	5580.0000	-1.0	24.0	-1.0	97.212	PASS
n20-mode [MCS1]; 5700MHz	5700.0000	0.8	24.0	0.8	97.208	PASS
n20-mode [MCS1]; 5745MHz	5745.0000	-0.7	30.0	-0.7	97.216	PASS
n20-mode [MCS1]; 5785MHz	5785.0000	0.0	30.0	0.0	97.216	PASS
n20-mode [MCS1]; 5825MHz	5825.0000	-0.4	30.0	-0.4	97.213	PASS
n20-mode [MCS2]; 5180MHz	5180.0000	-2.3	24.0	-2.3	97.212	PASS
n20-mode [MCS2]; 5200MHz	5200.0000	3.2	24.0	3.2	95.960	PASS
n20-mode [MCS2]; 5240MHz	5240.0000	2.1	24.0	2.1	95.960	PASS
n20-mode [MCS2]; 5260MHz	5260.0000	2.2	24.0	2.2	95.964	PASS
n20-mode [MCS2]; 5280MHz	5280.0000	2.5	24.0	2.5	95.965	PASS
n20-mode [MCS2]; 5320MHz	5320.0000	0.9	24.0	0.9	95.970	PASS
n20-mode [MCS2]; 5500MHz	5500.0000	-1.2	24.0	-1.2	96.000	PASS
n20-mode [MCS2]; 5580MHz	5580.0000	-1.0	24.0	-1.0	95.992	PASS
n20-mode [MCS2]; 5700MHz	5700.0000	1.0	24.0	1.0	95.993	PASS
n20-mode [MCS2]; 5745MHz	5745.0000	-0.7	30.0	-0.7	96.001	PASS
n20-mode [MCS2]; 5785MHz	5785.0000	0.0	30.0	0.0	95.996	PASS
n20-mode [MCS2]; 5825MHz	5825.0000	-0.5	30.0	-0.5	95.998	PASS
n20-mode [MCS3]; 5180MHz	5180.0000	3.0	24.0	3.0	94.835	PASS
n20-mode [MCS3]; 5200MHz	5200.0000	1.9	24.0	1.9	94.830	PASS
n20-mode [MCS3]; 5240MHz	5240.0000	2.1	24.0	2.1	94.838	PASS
n20-mode [MCS3]; 5260MHz	5260.0000	2.1	24.0	2.1	94.827	PASS
n20-mode [MCS3]; 5280MHz	5280.0000	2.3	24.0	2.3	94.825	PASS
n20-mode [MCS3]; 5320MHz	5320.0000	0.9	24.0	0.9	94.835	PASS
n20-mode [MCS3]; 5500MHz	5500.0000	-1.1	24.0	-1.1	94.866	PASS
n20-mode [MCS3]; 5580MHz	5580.0000	-1.1	24.0	-1.1	94.876	PASS
n20-mode [MCS3]; 5700MHz	5700.0000	0.7	24.0	0.7	94.870	PASS
n20-mode [MCS3]; 5745MHz	5745.0000	-0.7	30.0	-0.7	94.879	PASS
n20-mode [MCS3]; 5785MHz	5785.0000	0.0	30.0	0.0	94.876	PASS
n20-mode [MCS3]; 5825MHz	5825.0000	-0.5	30.0	-0.5	94.880	PASS
n20-mode [MCS4]; 5180MHz	5180.0000	3.0	24.0	3.0	92.781	PASS
n20-mode [MCS4]; 5200MHz	5200.0000	3.1	24.0	3.1	92.818	PASS


n20-mode [MCS4]; 5240MHz	5240.0000	2.1	24.0	2.1	92.827	PASS
n20-mode [MCS4]; 5260MHz	5260.0000	2.2	24.0	2.2	92.832	PASS
n20-mode [MCS4]; 5280MHz	5280.0000	2.5	24.0	2.5	92.805	PASS
n20-mode [MCS4]; 5320MHz	5320.0000	0.9	24.0	0.9	92.828	PASS
n20-mode [MCS4]; 5500MHz	5500.0000	-1.1	24.0	-1.1	92.886	PASS
n20-mode [MCS4]; 5580MHz	5580.0000	-1.0	24.0	-1.0	92.857	PASS
n20-mode [MCS4]; 5700MHz	5700.0000	0.7	24.0	0.7	92.870	PASS
n20-mode [MCS4]; 5745MHz	5745.0000	-0.7	30.0	-0.7	92.898	PASS
n20-mode [MCS4]; 5785MHz	5785.0000	0.0	30.0	0.0	92.871	PASS
n20-mode [MCS4]; 5825MHz	5825.0000	-0.5	30.0	-0.5	92.895	PASS
n20-mode [MCS5]; 5180MHz	5180.0000	2.8	24.0	2.8	90.928	PASS
n20-mode [MCS5]; 5200MHz	5200.0000	3.2	24.0	3.2	90.908	PASS
n20-mode [MCS5]; 5240MHz	5240.0000	2.2	24.0	2.2	90.927	PASS
n20-mode [MCS5]; 5260MHz	5260.0000	2.3	24.0	2.3	90.927	PASS
n20-mode [MCS5]; 5280MHz	5280.0000	2.5	24.0	2.5	90.914	PASS
n20-mode [MCS5]; 5320MHz	5320.0000	1.1	24.0	1.1	90.931	PASS
n20-mode [MCS5]; 5500MHz	5500.0000	-1.1	24.0	-1.1	90.987	PASS
n20-mode [MCS5]; 5580MHz	5580.0000	-1.0	24.0	-1.0	90.981	PASS
n20-mode [MCS5]; 5700MHz	5700.0000	1.0	24.0	1.0	90.986	PASS
n20-mode [MCS5]; 5745MHz	5745.0000	-0.8	30.0	-0.8	91.005	PASS
n20-mode [MCS5]; 5785MHz	5785.0000	0.0	30.0	0.0	90.992	PASS
n20-mode [MCS5]; 5825MHz	5825.0000	-0.5	30.0	-0.5	90.996	PASS
n20-mode [MCS6]; 5180MHz	5180.0000	2.8	24.0	2.8	90.126	PASS
n20-mode [MCS6]; 5200MHz	5200.0000	3.3	24.0	3.3	90.119	PASS
n20-mode [MCS6]; 5240MHz	5240.0000	2.2	24.0	2.2	90.128	PASS
n20-mode [MCS6]; 5260MHz	5260.0000	2.3	24.0	2.3	90.131	PASS
n20-mode [MCS6]; 5280MHz	5280.0000	2.5	24.0	2.5	90.122	PASS
n20-mode [MCS6]; 5320MHz	5320.0000	1.0	24.0	1.0	90.155	PASS
n20-mode [MCS6]; 5500MHz	5500.0000	-1.1	24.0	-1.1	90.207	PASS
n20-mode [MCS6]; 5580MHz	5580.0000	-1.0	24.0	-1.0	90.213	PASS
n20-mode [MCS6]; 5700MHz	5700.0000	0.7	24.0	0.7	90.202	PASS
n20-mode [MCS6]; 5745MHz	5745.0000	-0.7	30.0	-0.7	90.220	PASS
n20-mode [MCS6]; 5785MHz	5785.0000	0.0	30.0	0.0	90.213	PASS
n20-mode [MCS6]; 5825MHz	5825.0000	-0.5	30.0	-0.5	90.226	PASS
n20-mode [MCS7]; 5180MHz	5180.0000	2.8	24.0	2.8	89.478	PASS
n20-mode [MCS7]; 5200MHz	5200.0000	3.2	24.0	3.2	89.472	PASS
n20-mode [MCS7]; 5240MHz	5240.0000	2.2	24.0	2.2	89.488	PASS
n20-mode [MCS7]; 5260MHz	5260.0000	2.2	24.0	2.2	89.487	PASS
n20-mode [MCS7]; 5280MHz	5280.0000	2.5	24.0	2.5	89.478	PASS
n20-mode [MCS7]; 5320MHz	5320.0000	0.9	24.0	0.9	89.510	PASS
n20-mode [MCS7]; 5500MHz	5500.0000	-1.3	24.0	-1.3	89.575	PASS
n20-mode [MCS7]; 5580MHz	5580.0000	-1.0	24.0	-1.0	89.561	PASS
n20-mode [MCS7]; 5700MHz	5700.0000	0.7	24.0	0.7	89.538	PASS
n20-mode [MCS7]; 5745MHz	5745.0000	-0.7	30.0	-0.7	89.574	PASS
n20-mode [MCS7]; 5785MHz	5785.0000	0.0	30.0	0.0	89.553	PASS
n20-mode [MCS7]; 5825MHz	5825.0000	-0.4	30.0	-0.4	89.546	PASS

RF output power (5180 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	2.9	24.0	2.9	98.512	PASS

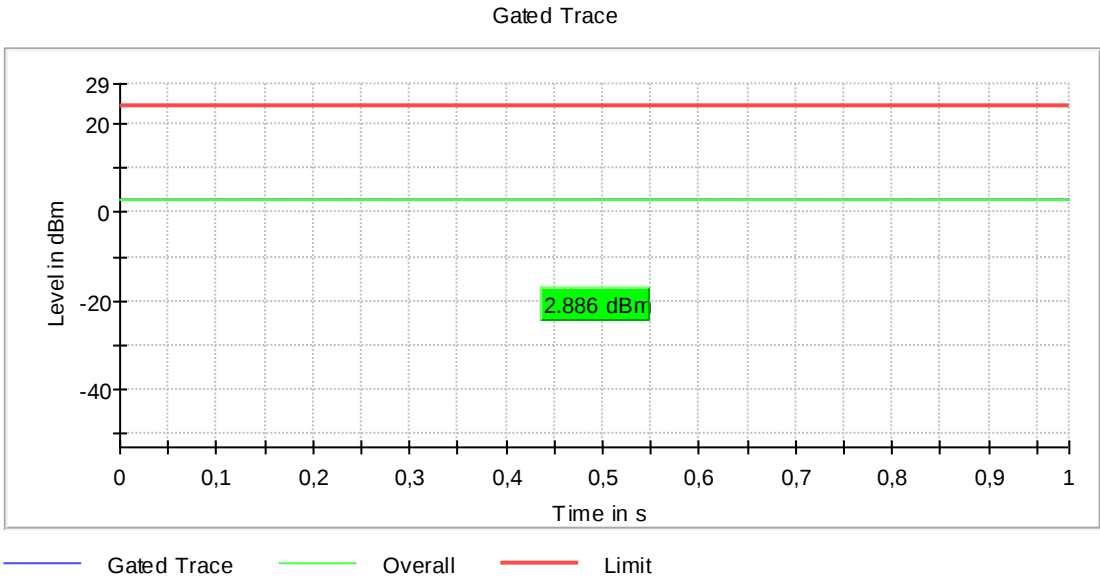

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	98.511	PASS

Gated Trace

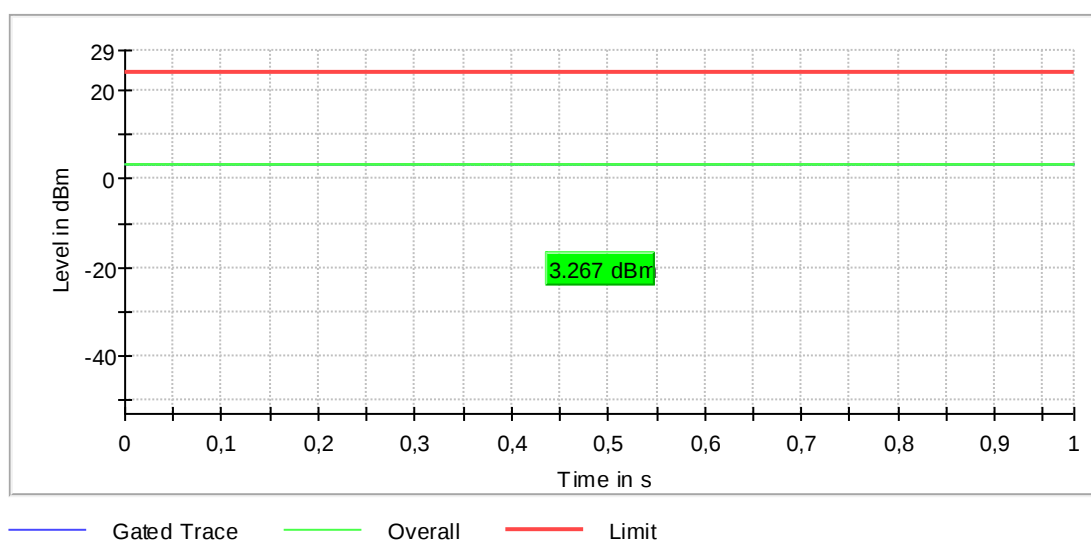

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	1.9	24.0	1.9	98.512	PASS

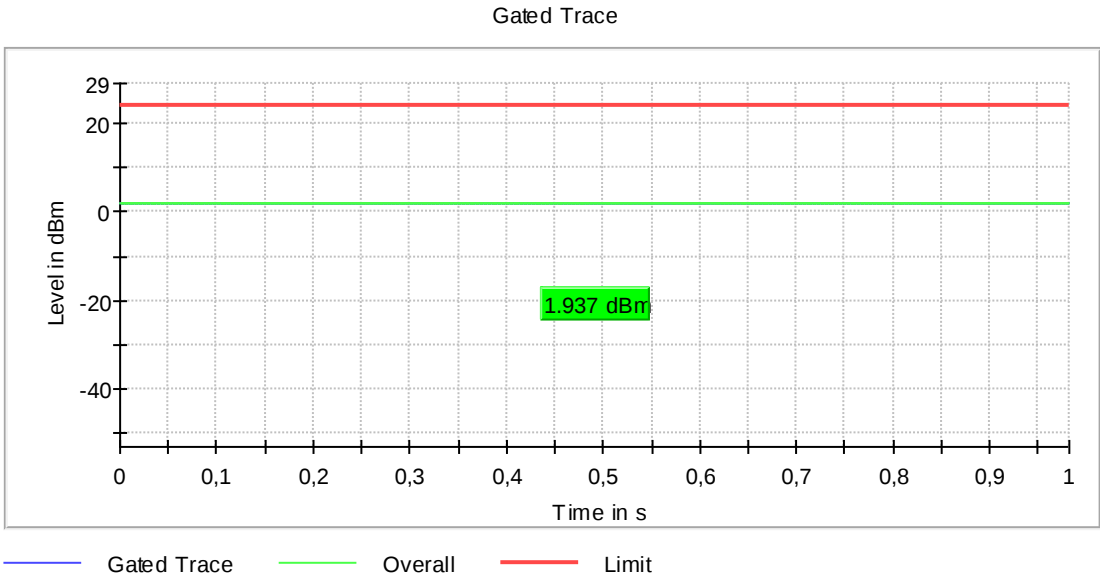

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	98.512	PASS

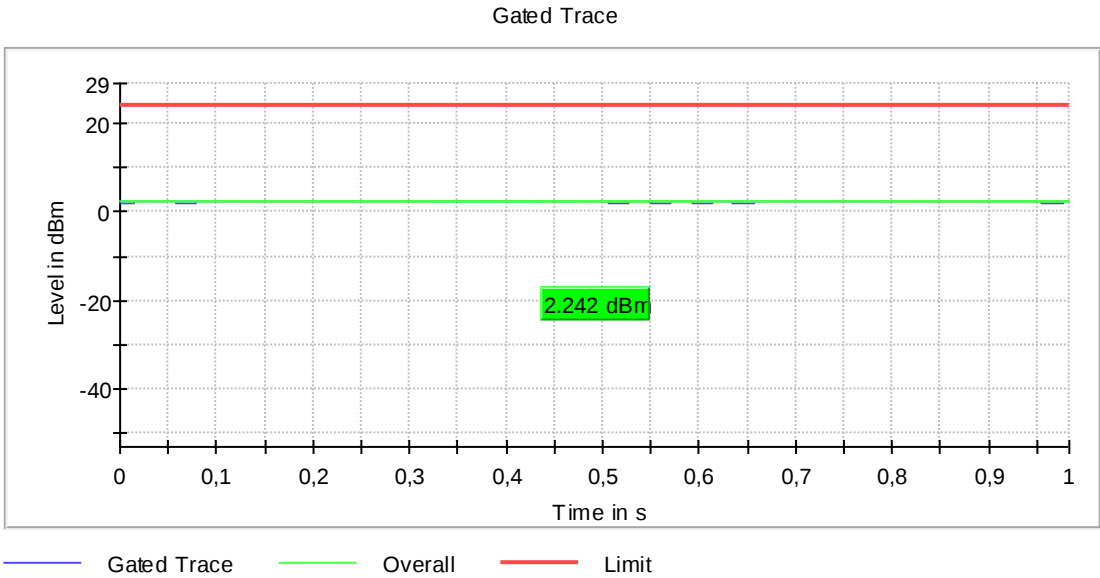

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5280 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	98.510	PASS

Gated Trace

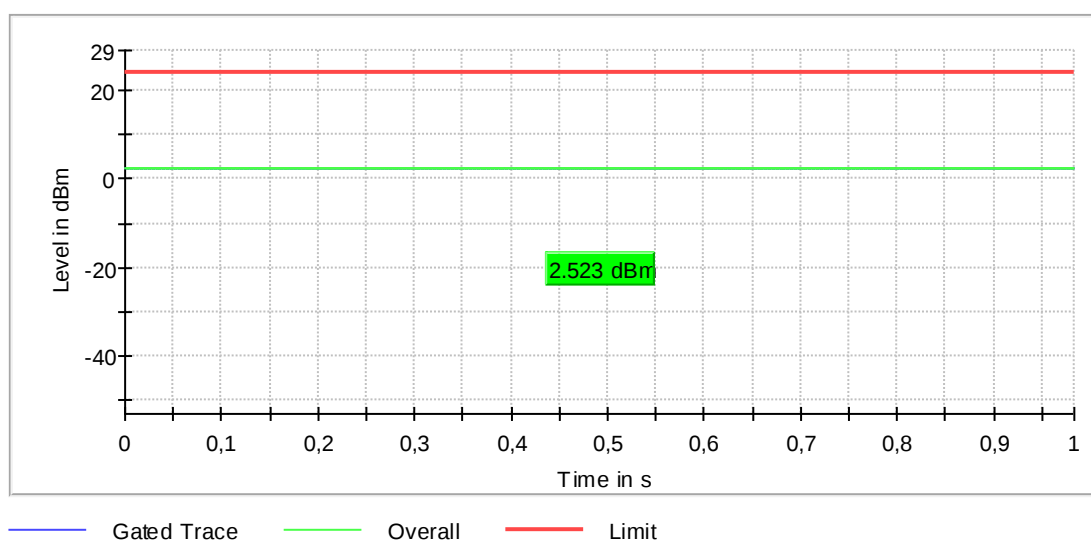

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.0	24.0	1.0	98.511	PASS

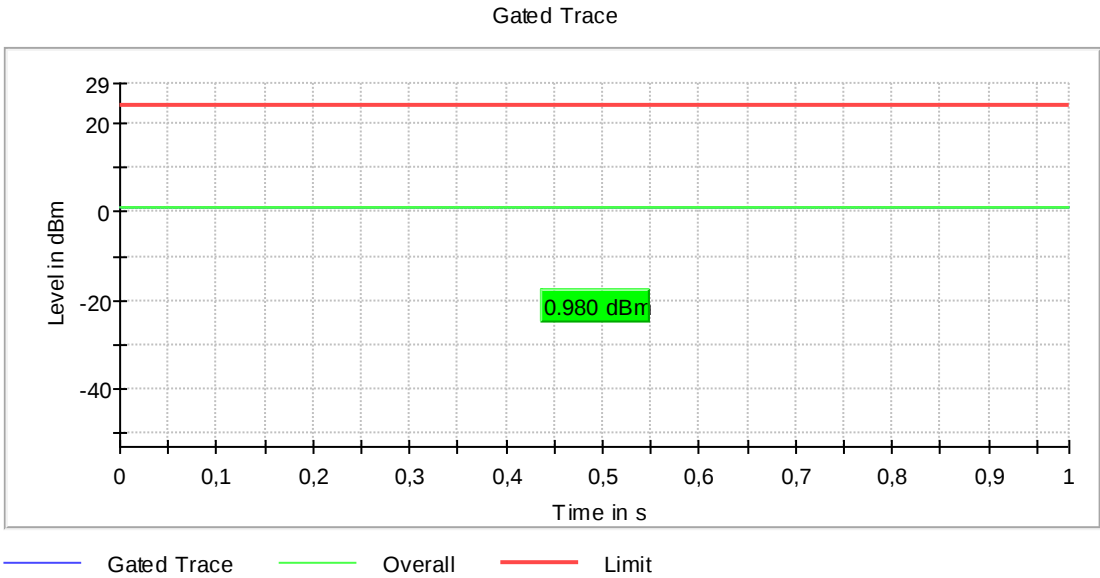

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.3	24.0	-1.3	98.523	PASS

Gated Trace

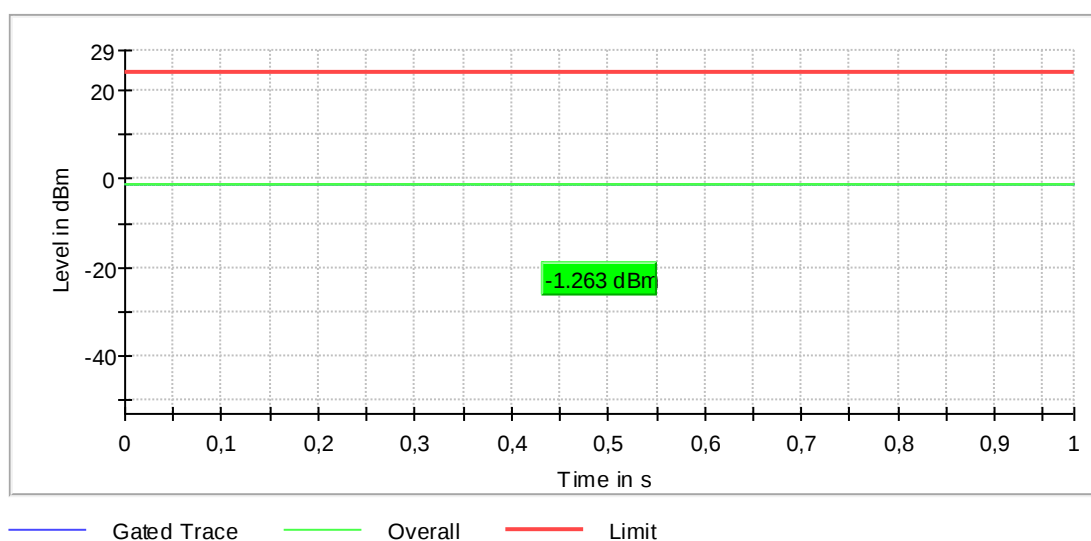

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5580 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	98.520	PASS

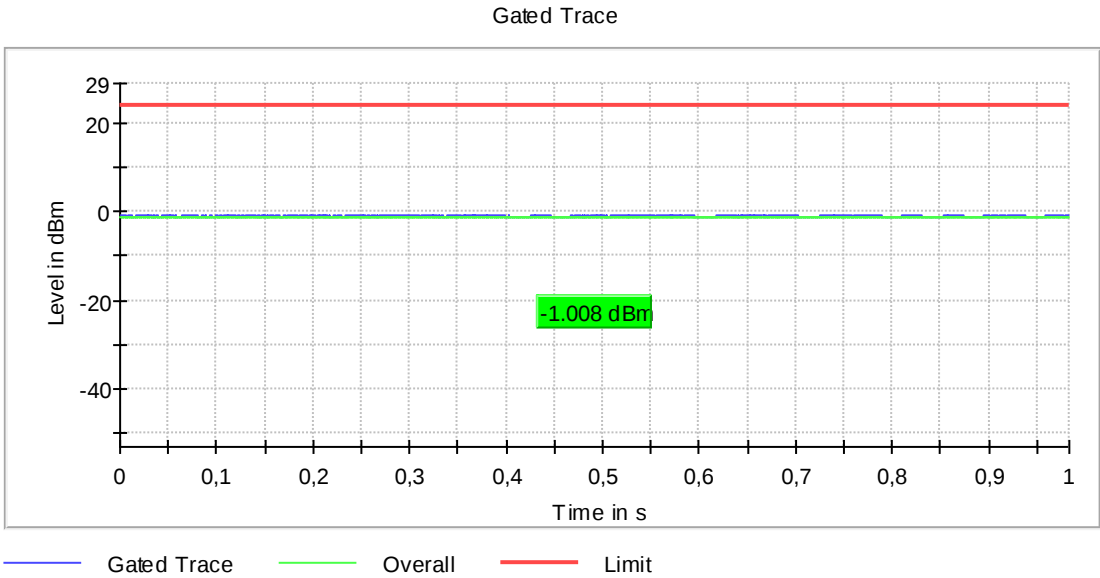

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5700 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.8	24.0	0.8	98.521	PASS

Gated Trace

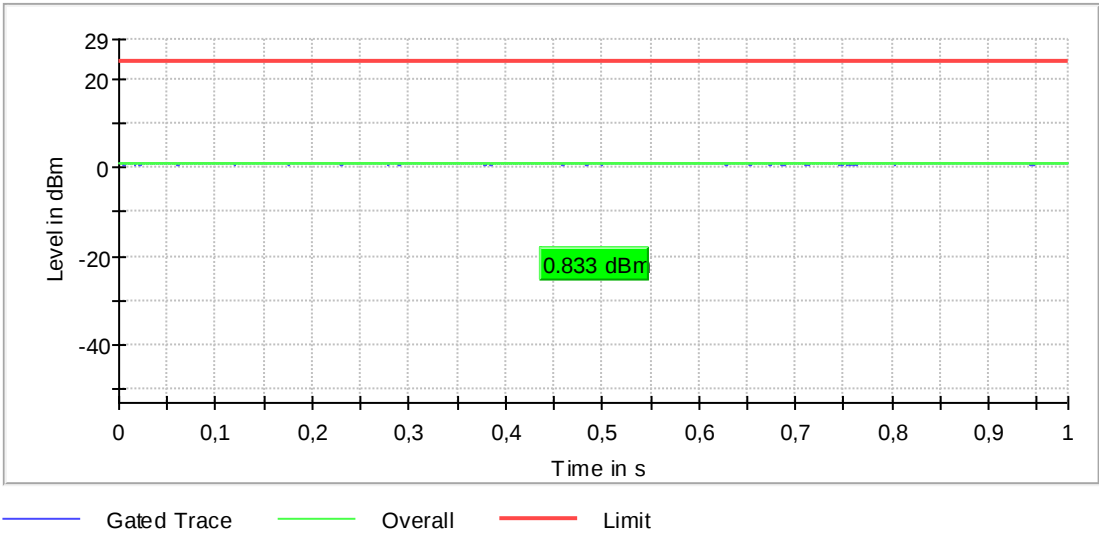

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	98.524	PASS

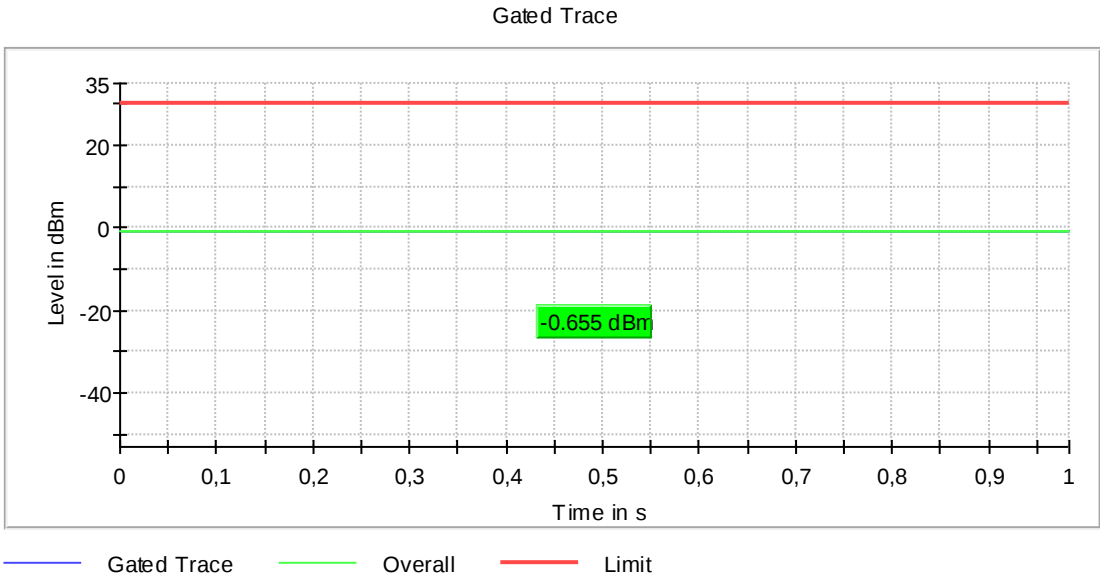

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	98.523	PASS

Gated Trace

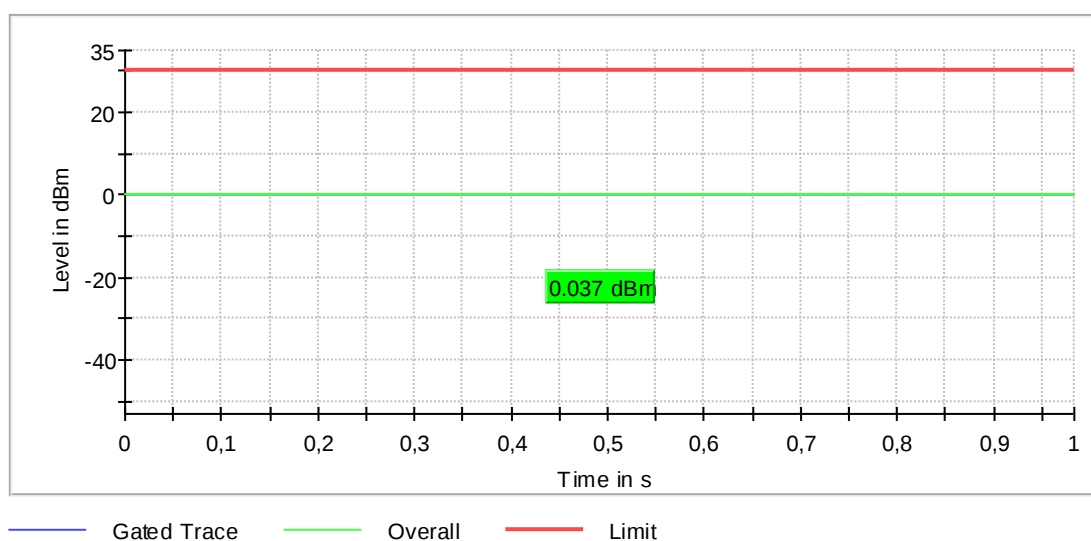

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5825 MHz; n20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.4	30.0	-0.4	98.524	PASS

Gated Trace

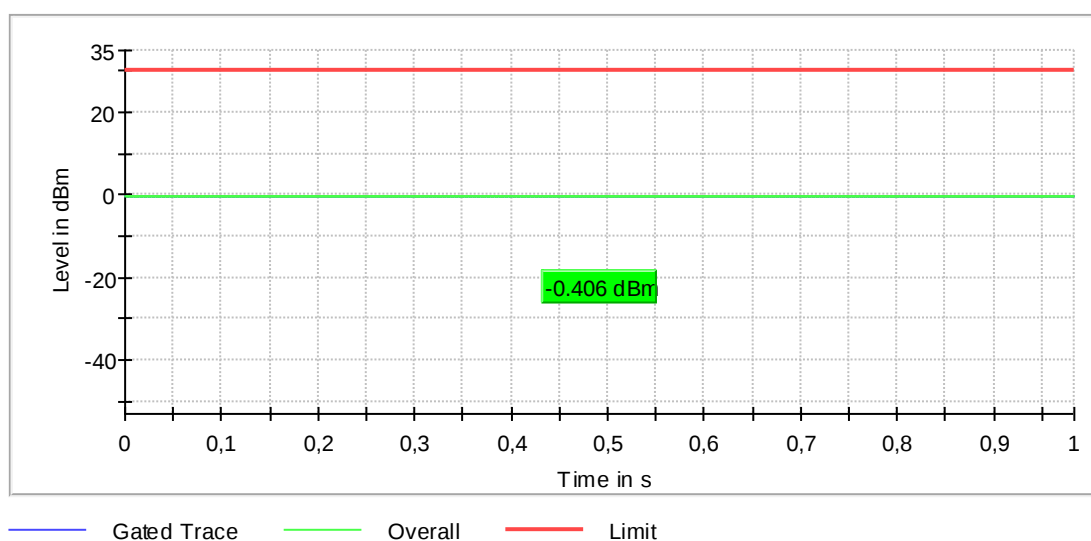

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5180 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	97.186	PASS

Gated Trace

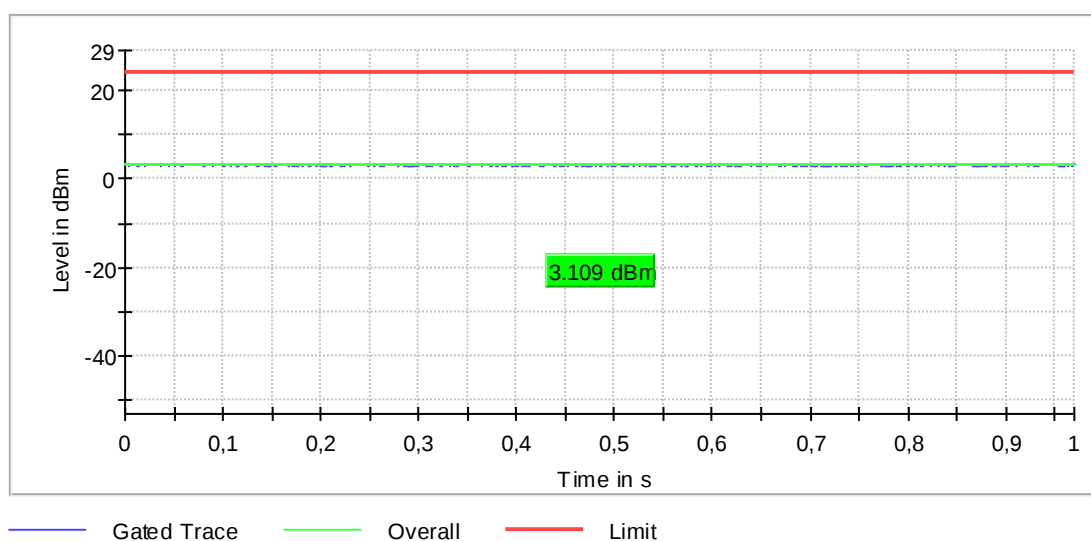

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5200 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	97.189	PASS

Gated Trace

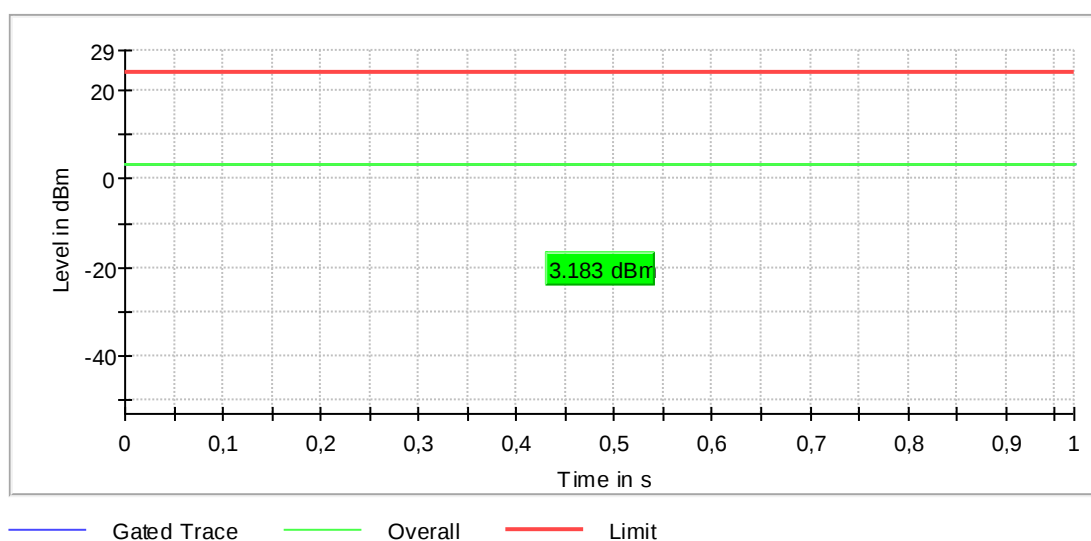

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	97.196	PASS

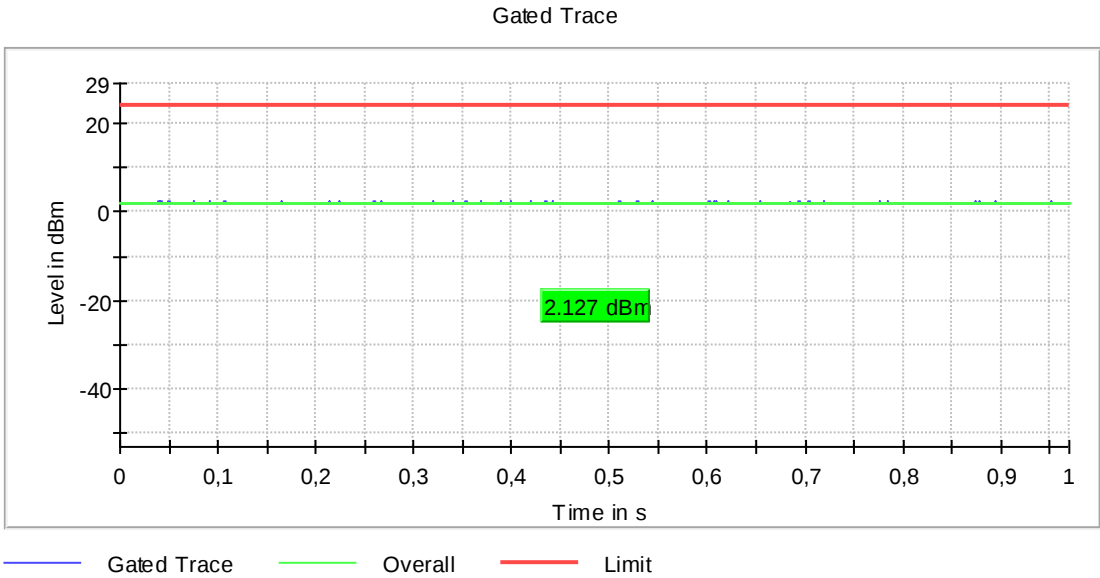

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	97.192	PASS

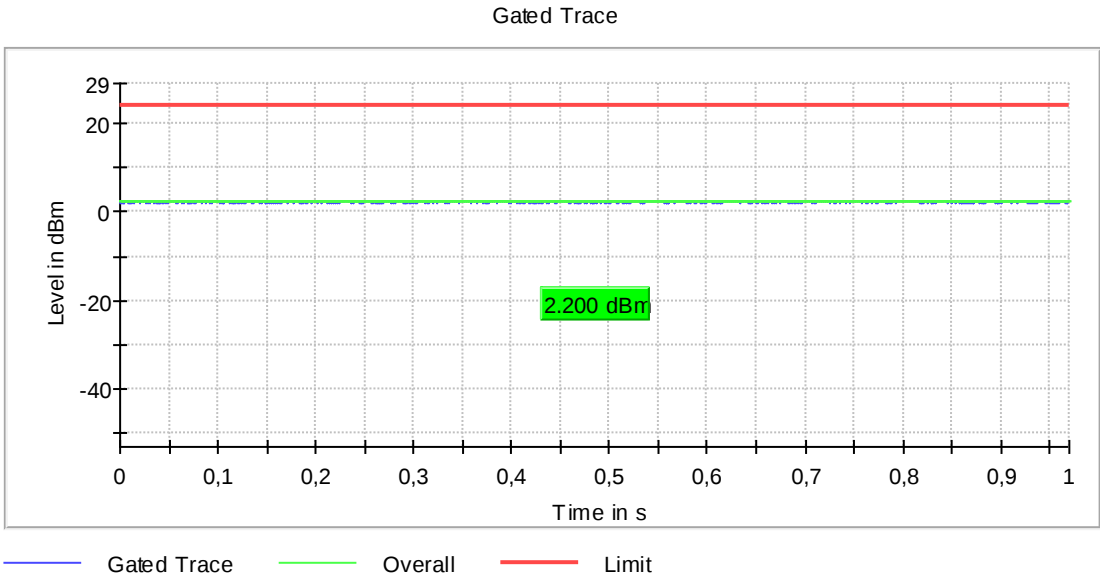

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	97.193	PASS

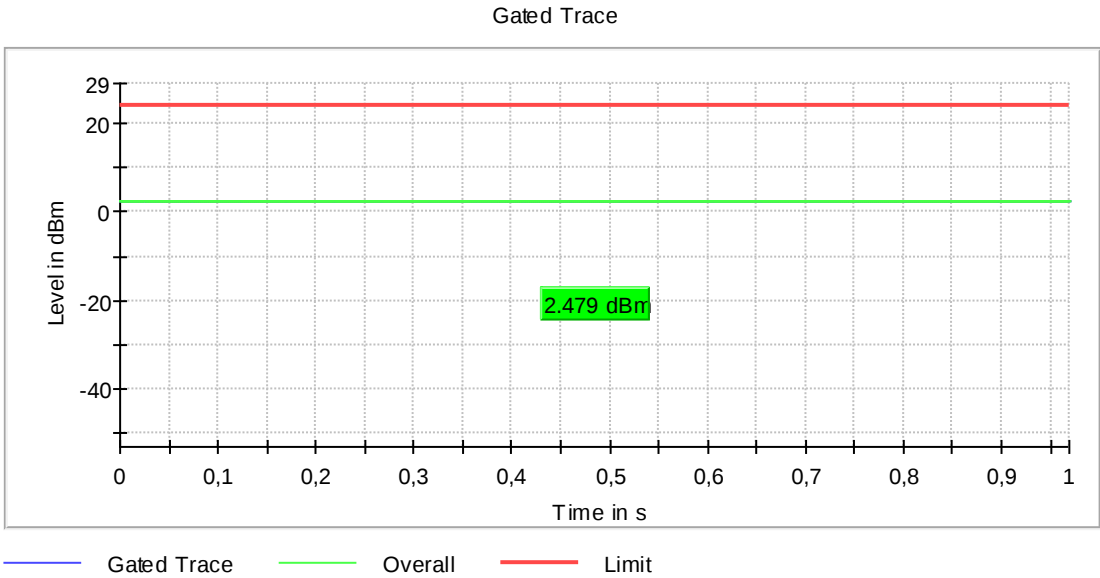

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	97.198	PASS

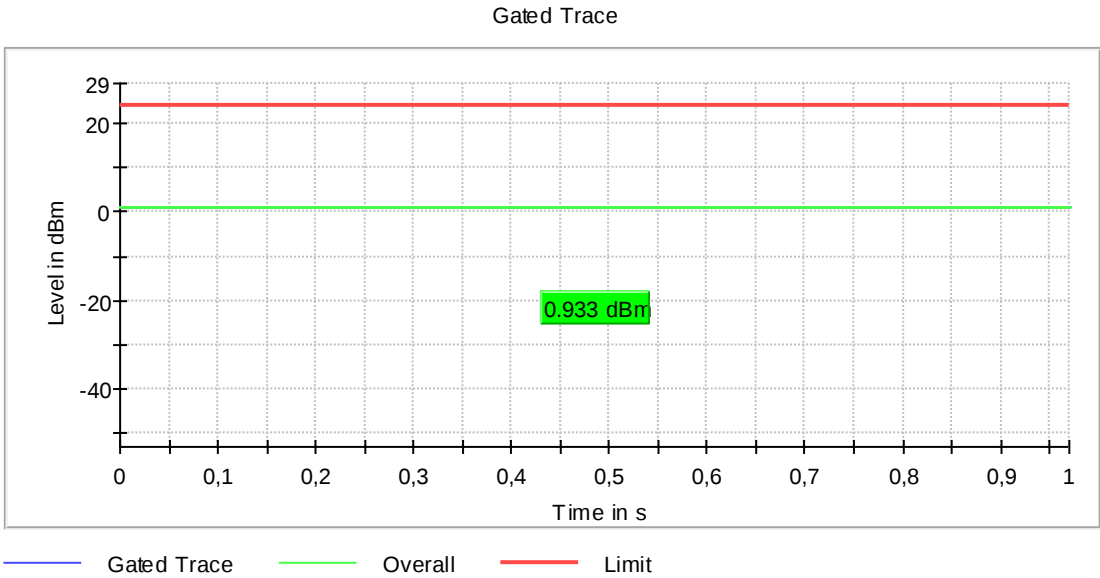

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.1	24.0	-1.1	97.214	PASS

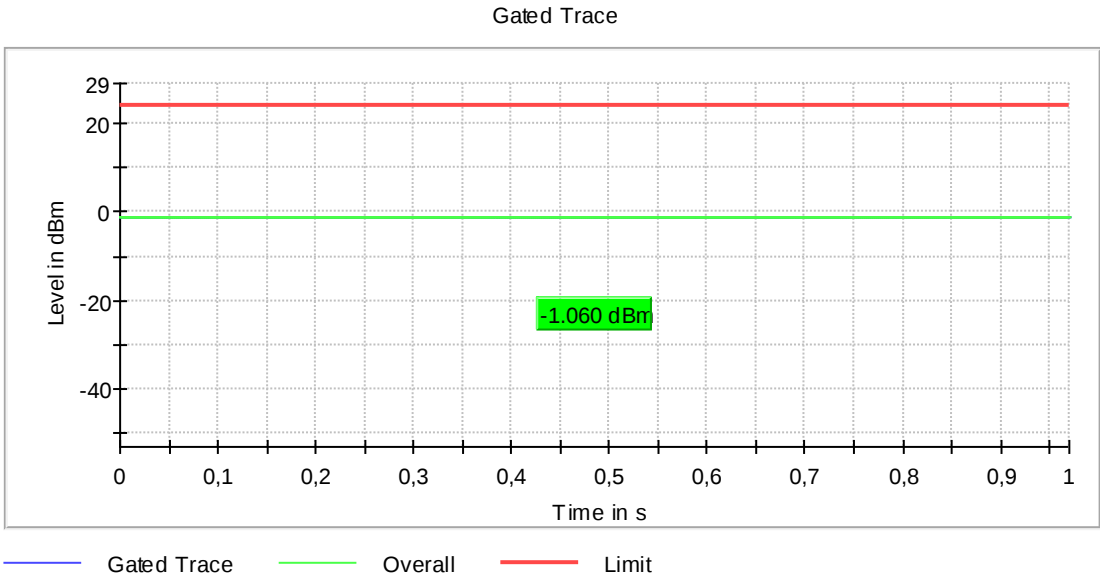

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5580 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	97.212	PASS

Gated Trace

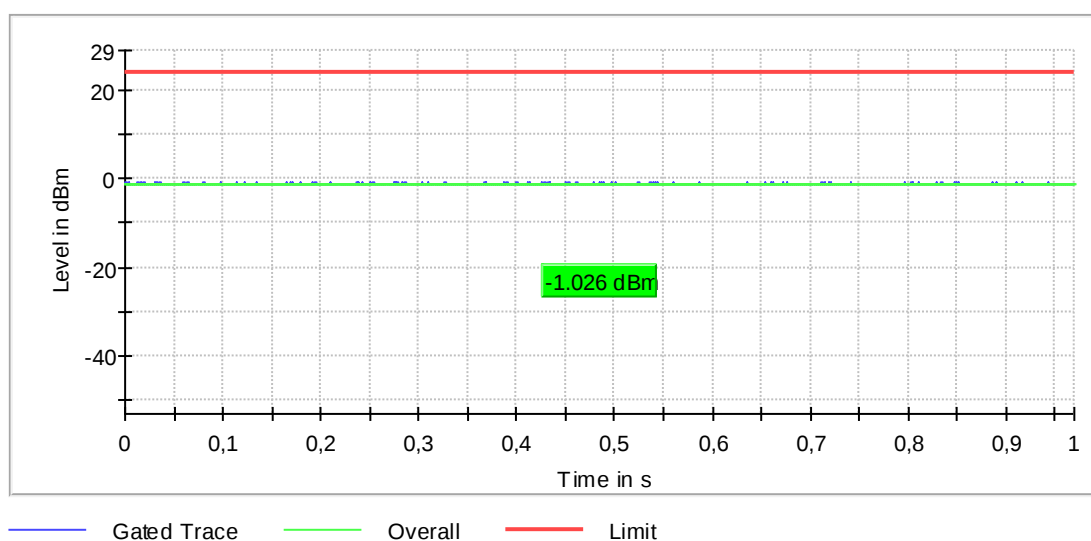

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5700 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.8	24.0	0.8	97.208	PASS

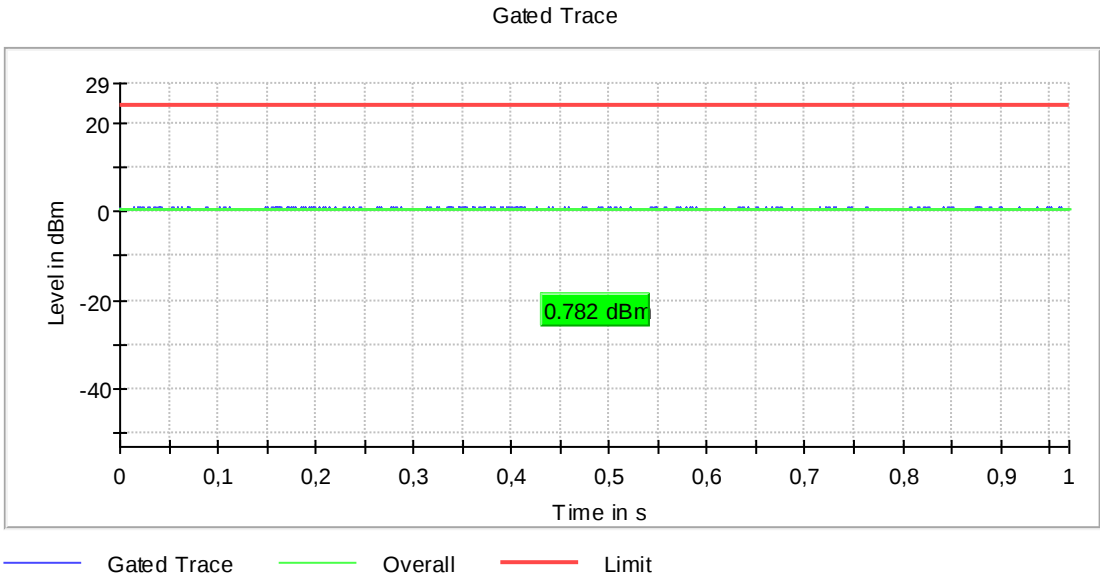

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	97.216	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	97.216	PASS

Gated Trace

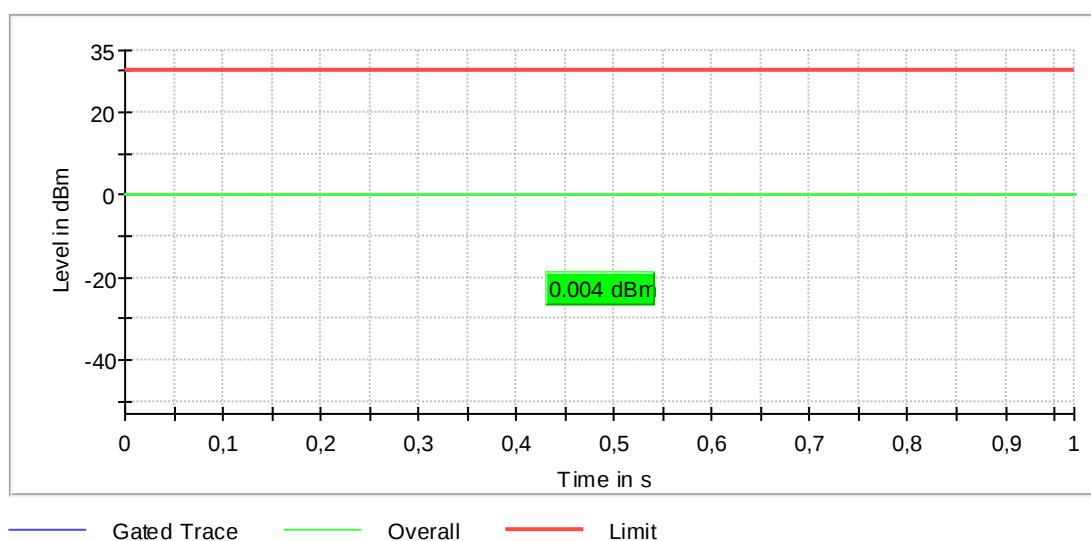

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5825 MHz; n20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.4	30.0	-0.4	97.213	PASS

Gated Trace

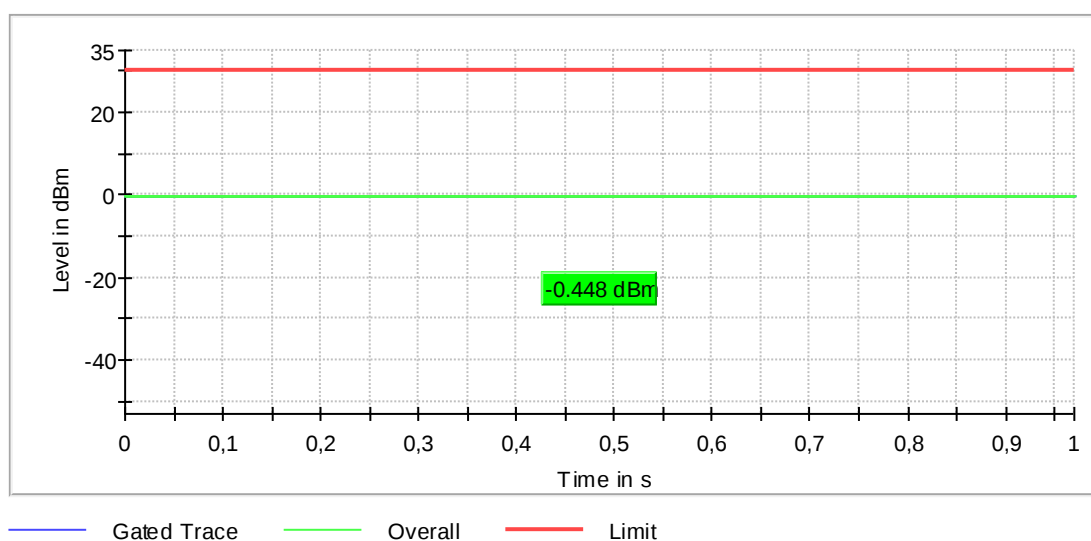

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5180 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	-2.3	24.0	-2.3	97.212	PASS

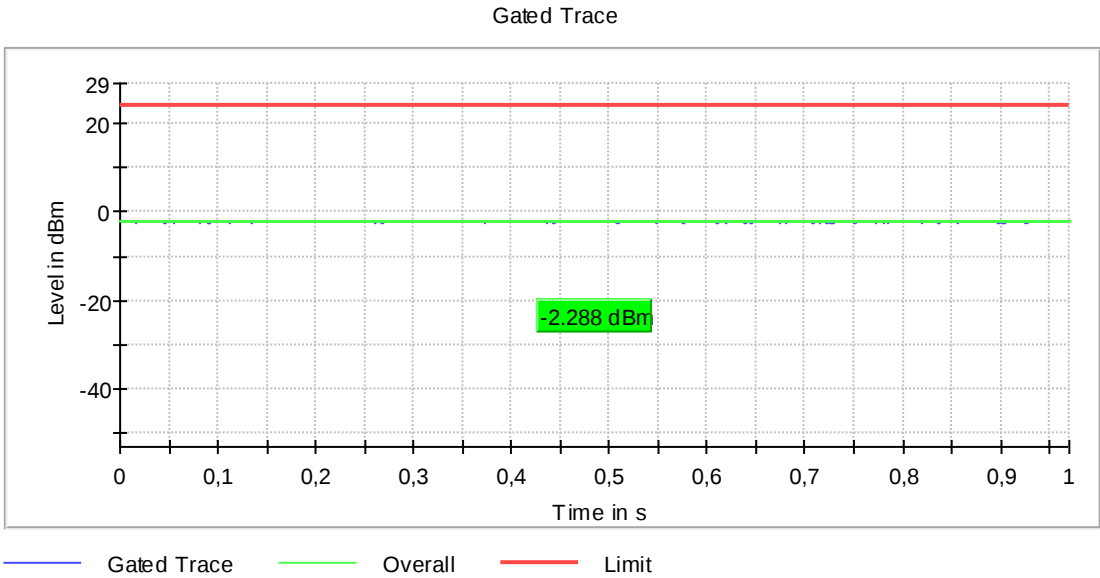

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	95.960	PASS

Gated Trace

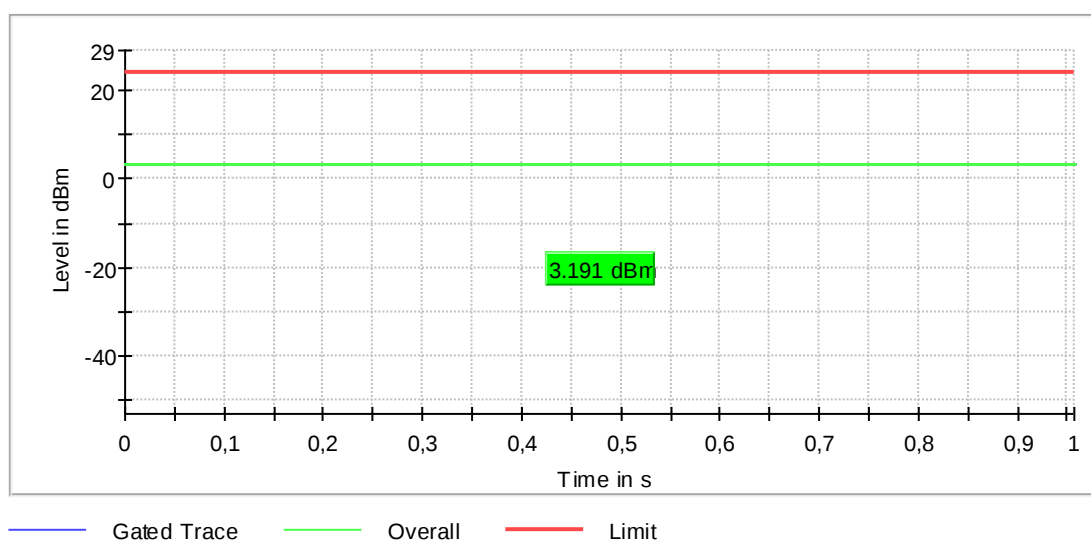

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	95.960	PASS

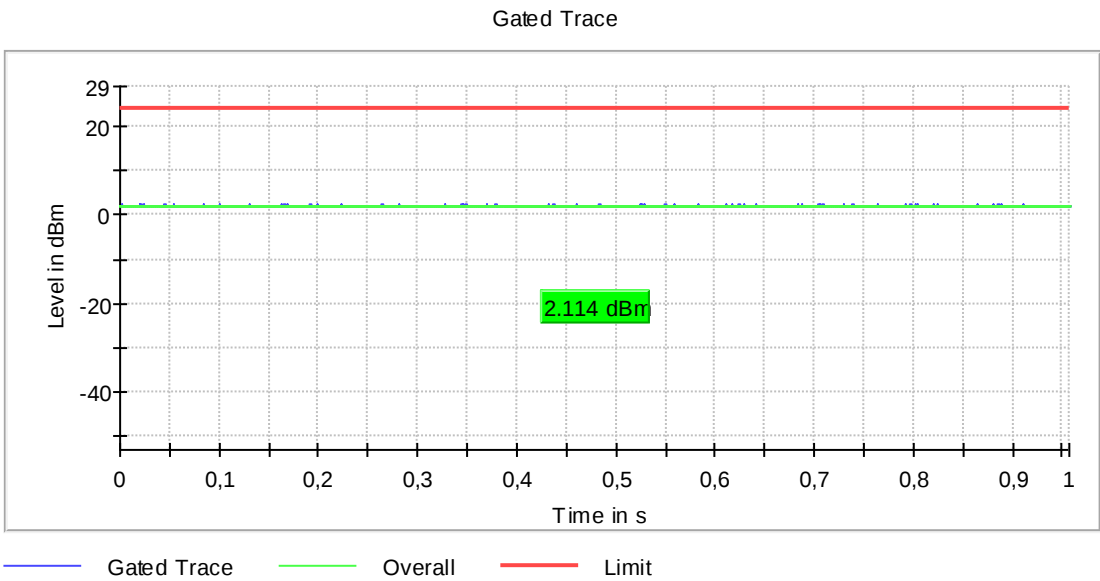

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	95.964	PASS

Gated Trace

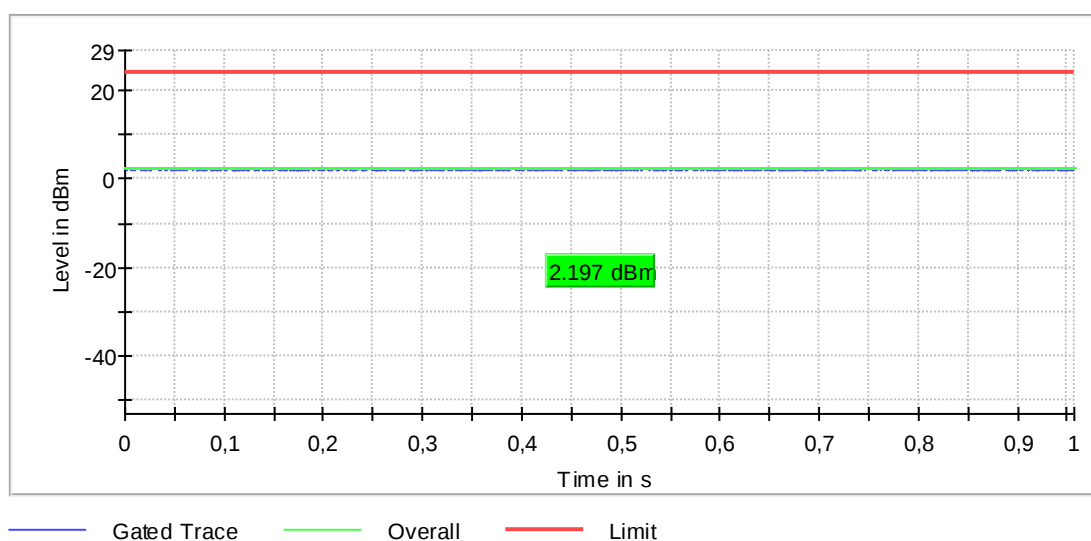

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5280 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	95.965	PASS

Gated Trace

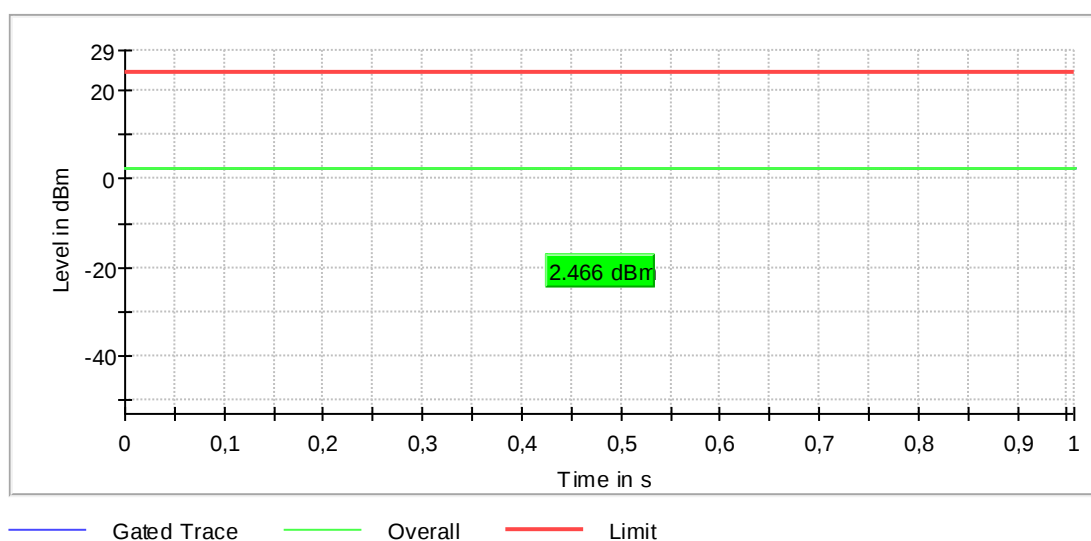

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5320 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	95.970	PASS

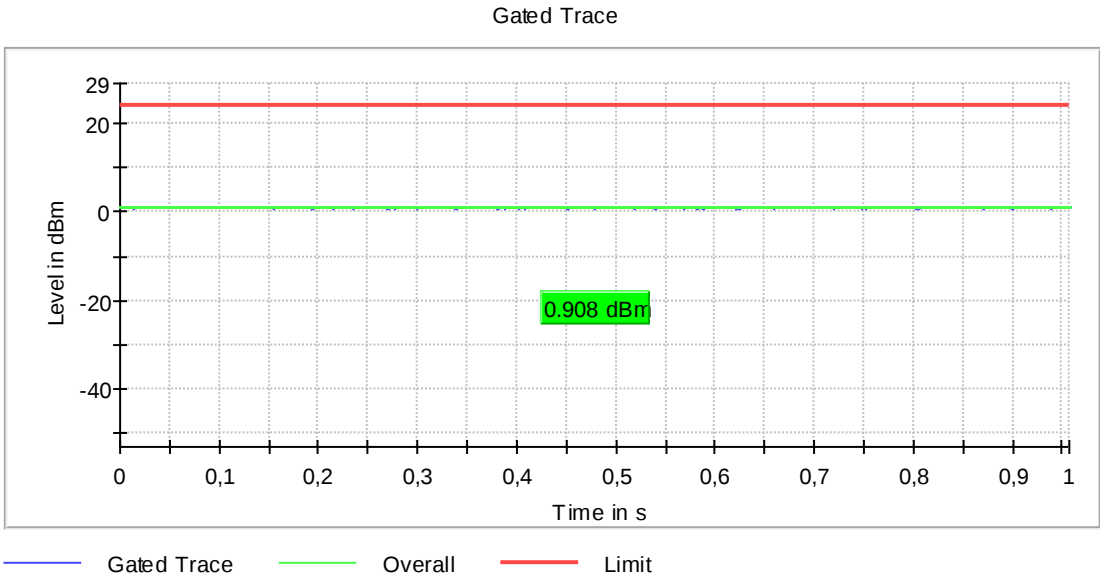

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	96.000	PASS

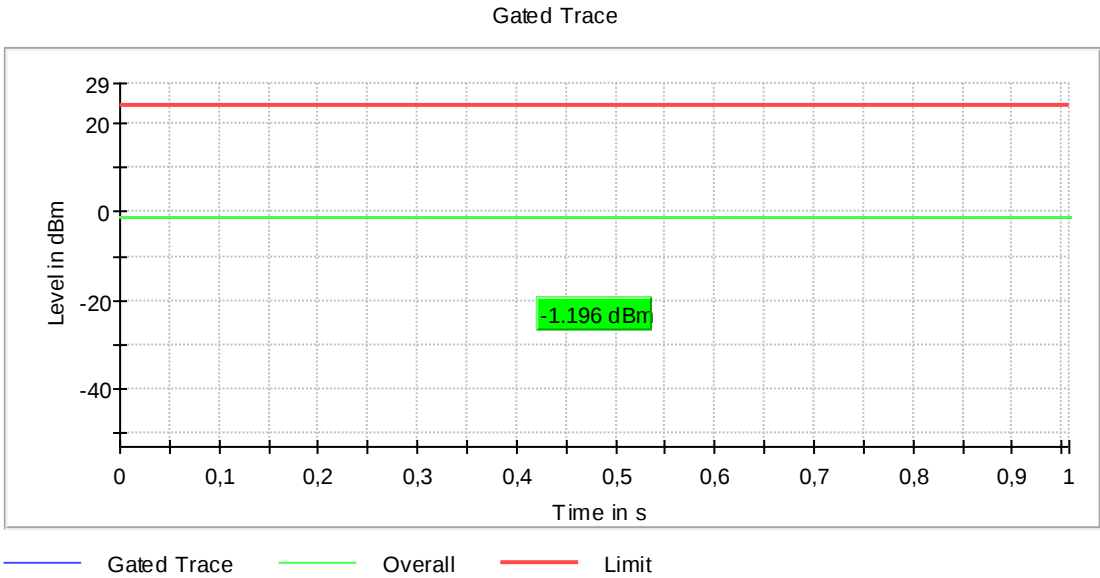

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5580 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	95.992	PASS

Gated Trace

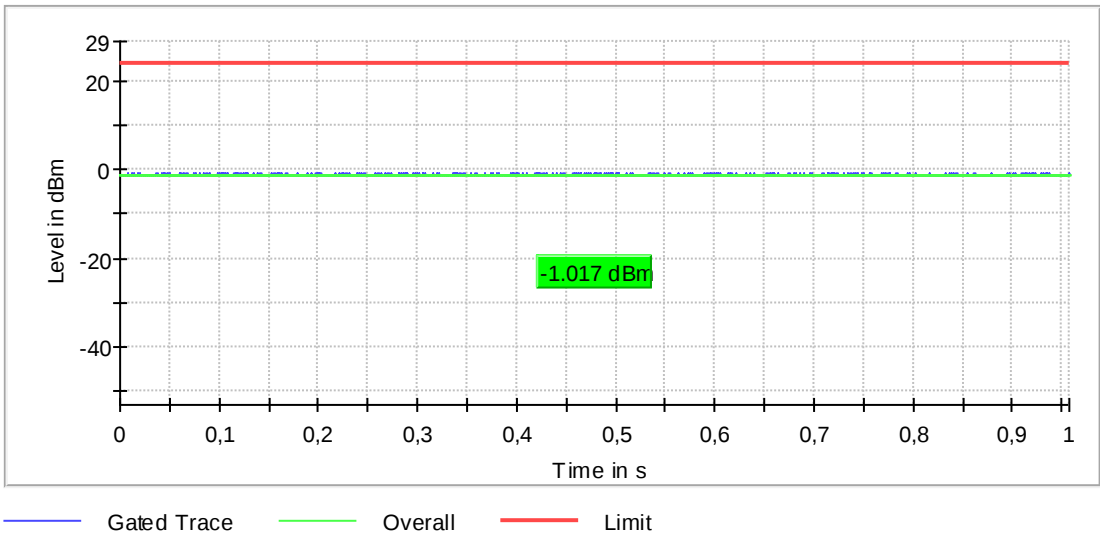

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	1.0	24.0	1.0	95.993	PASS

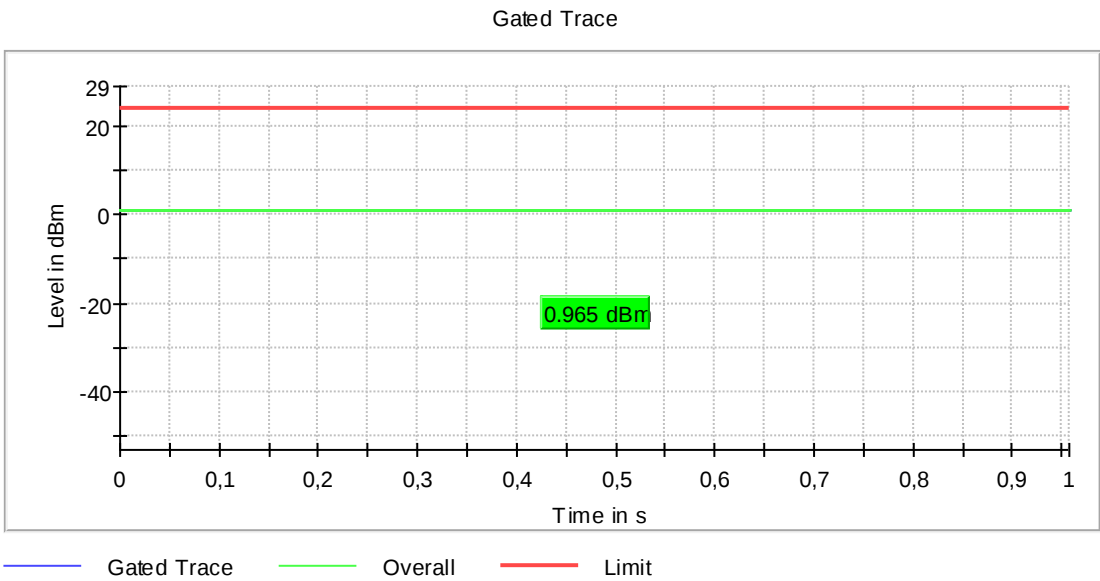

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	96.001	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	95.996	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; n20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	95.998	PASS

Gated Trace

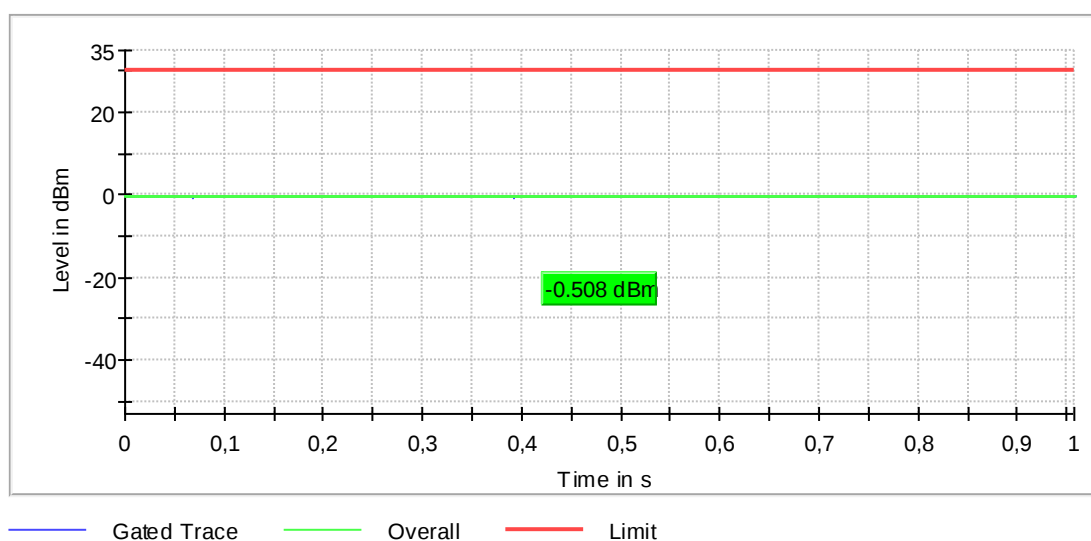

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.0	24.0	3.0	94.835	PASS

Gated Trace

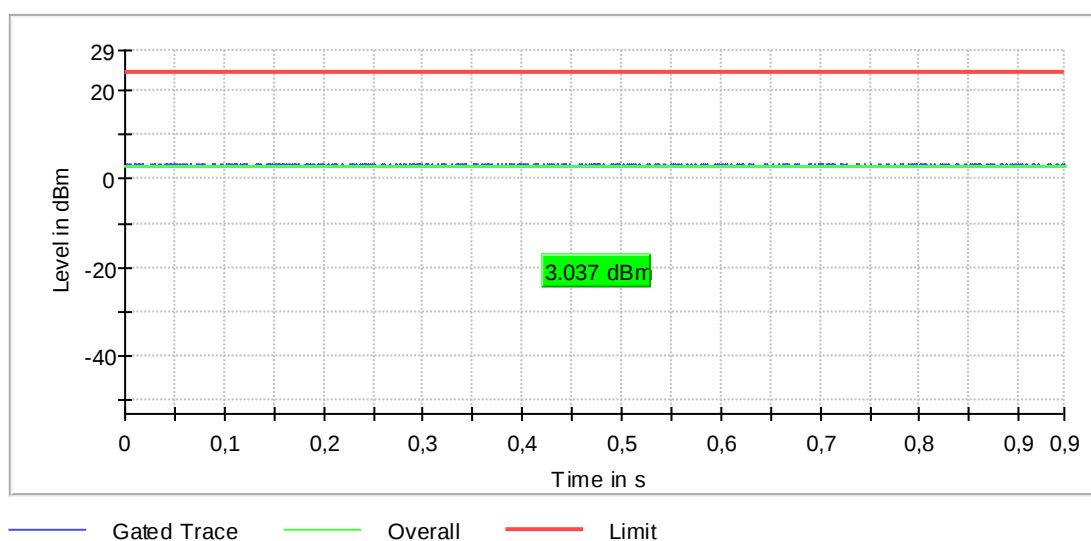

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5200 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	1.9	24.0	1.9	94.830	PASS

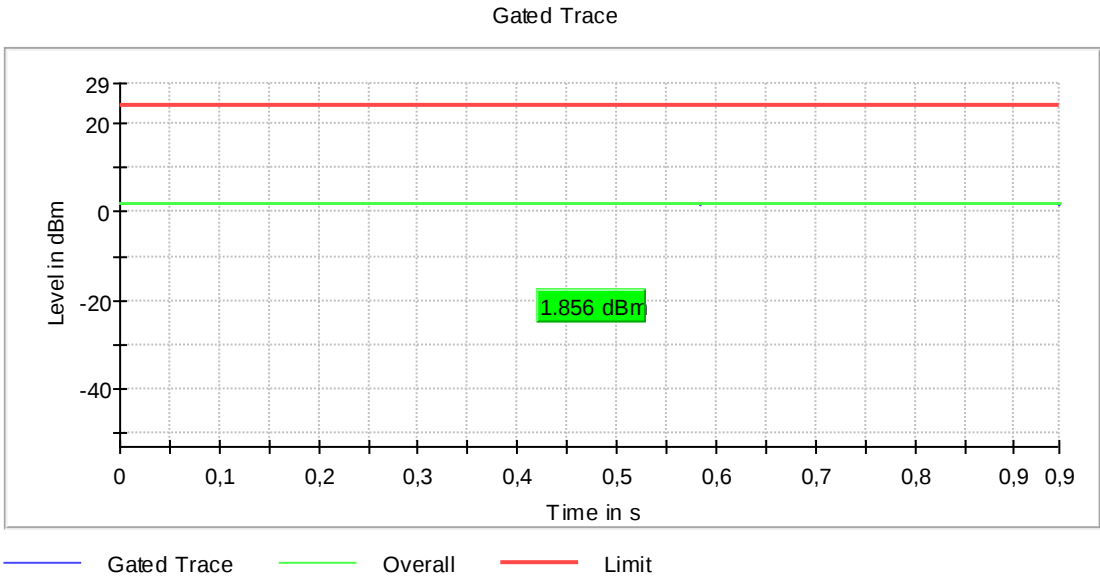

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5240 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	94.838	PASS

Gated Trace

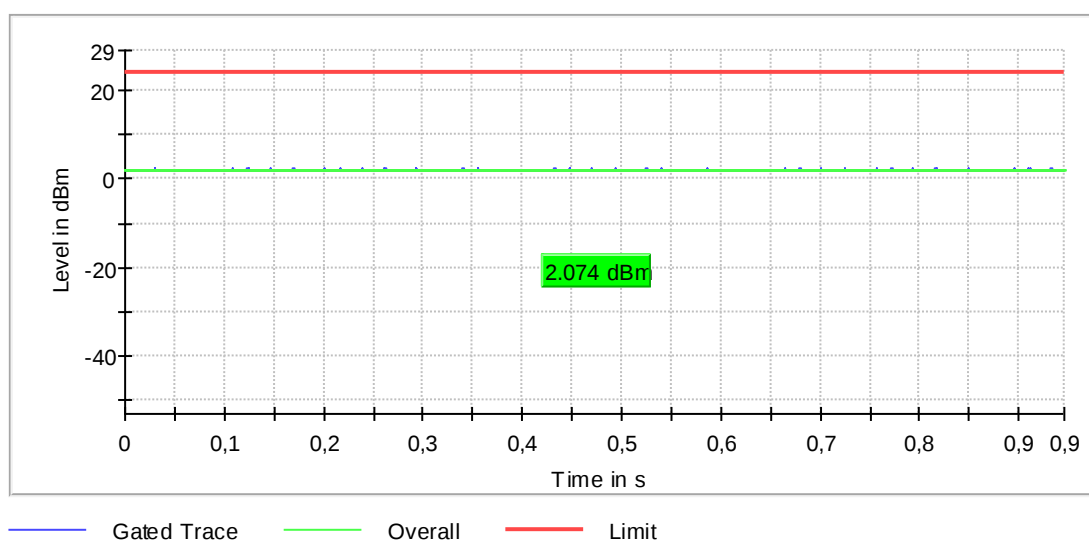

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5260 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.1	24.0	2.1	94.827	PASS

Gated Trace

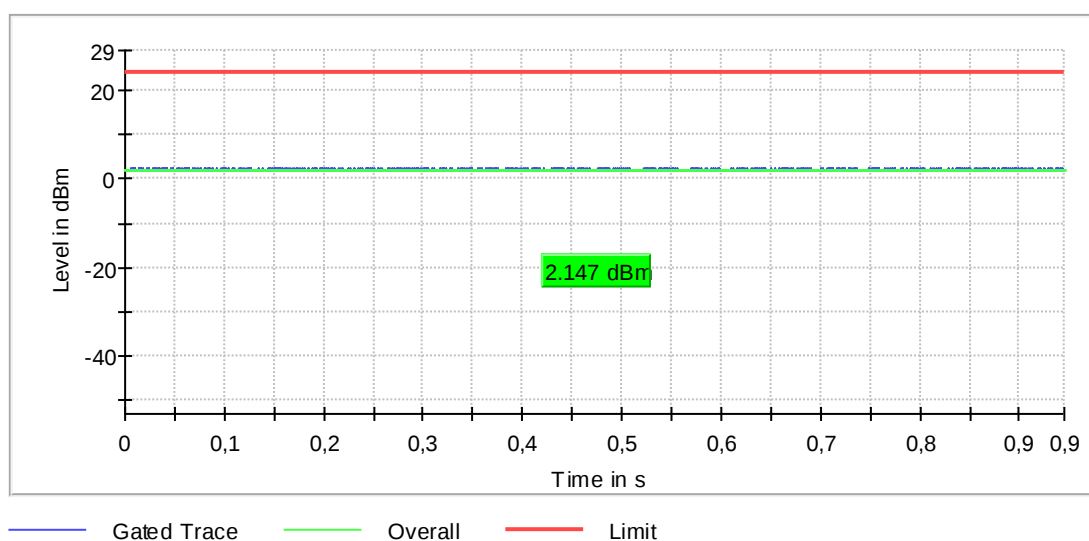

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5280 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.3	24.0	2.3	94.825	PASS

Gated Trace

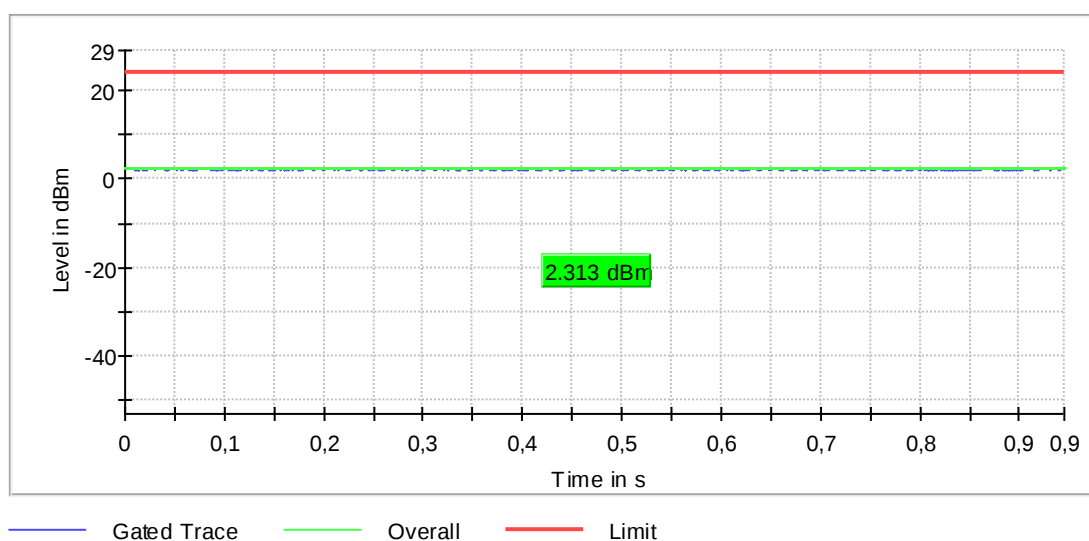

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	94.835	PASS

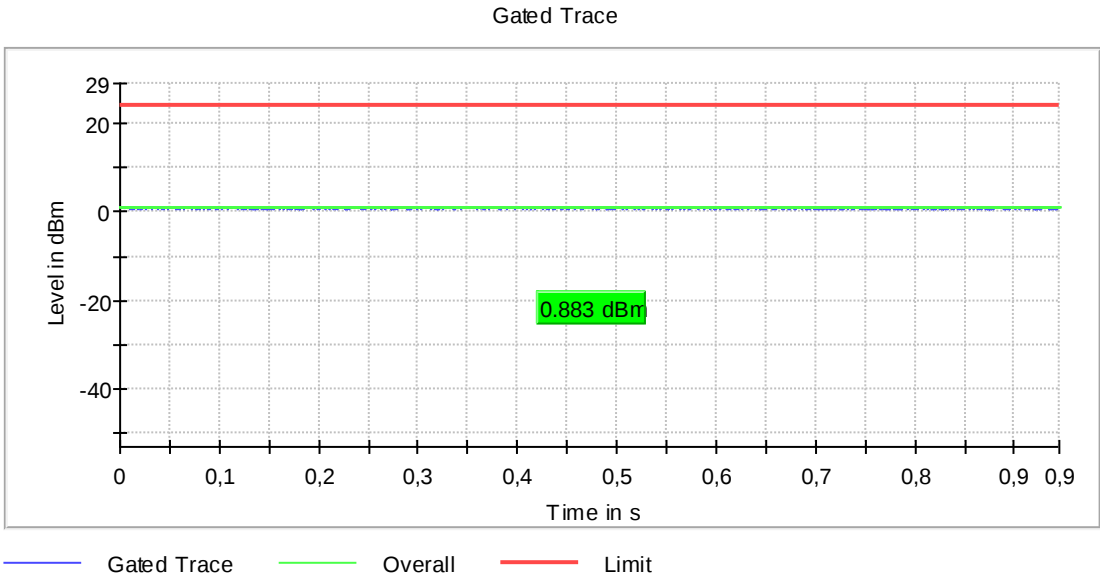

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.1	24.0	-1.1	94.866	PASS

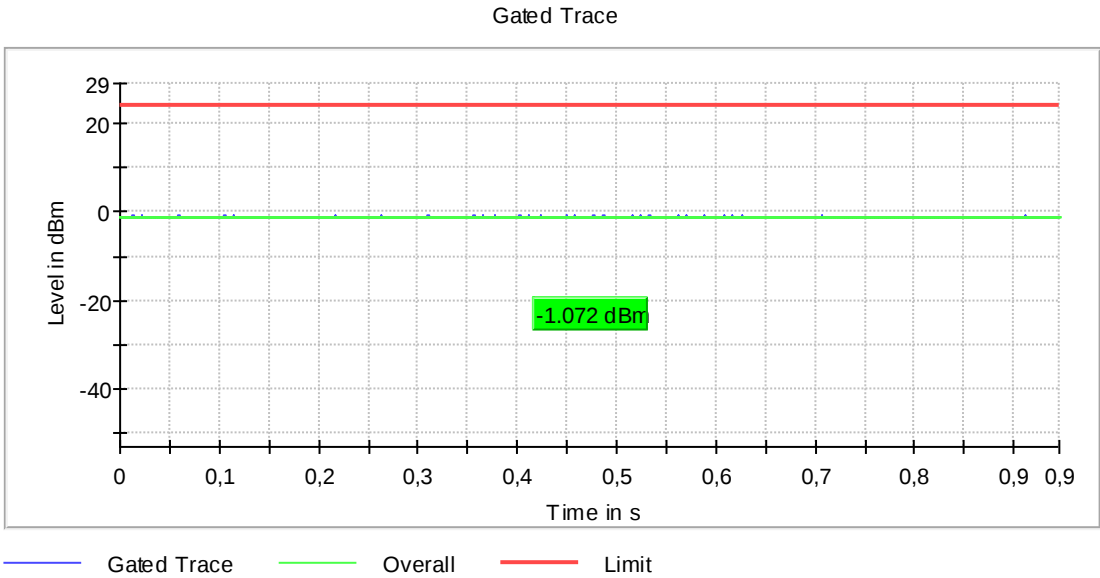

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.1	24.0	-1.1	94.876	PASS

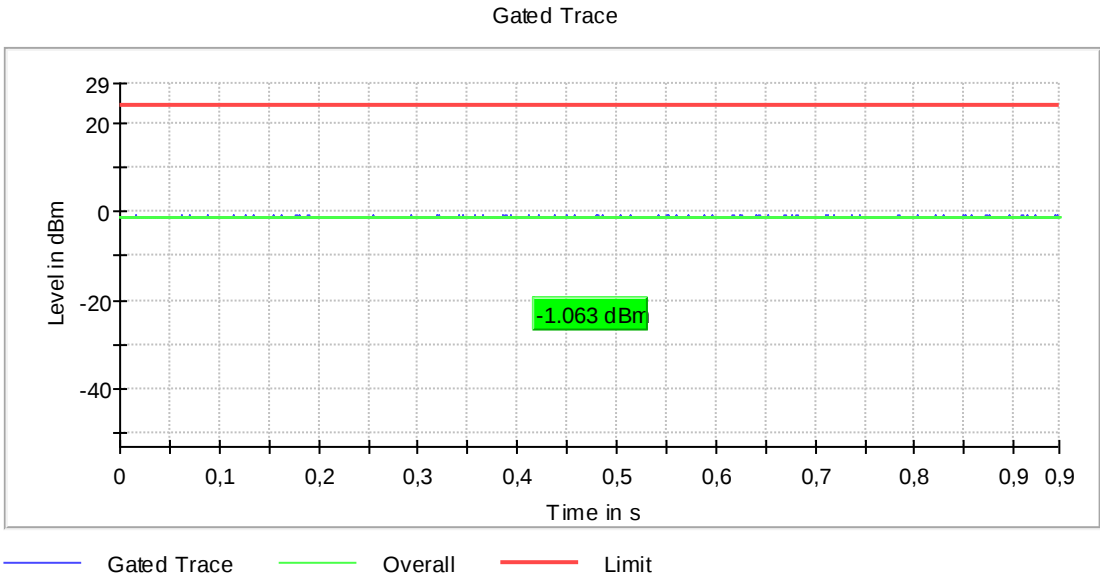

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	94.870	PASS

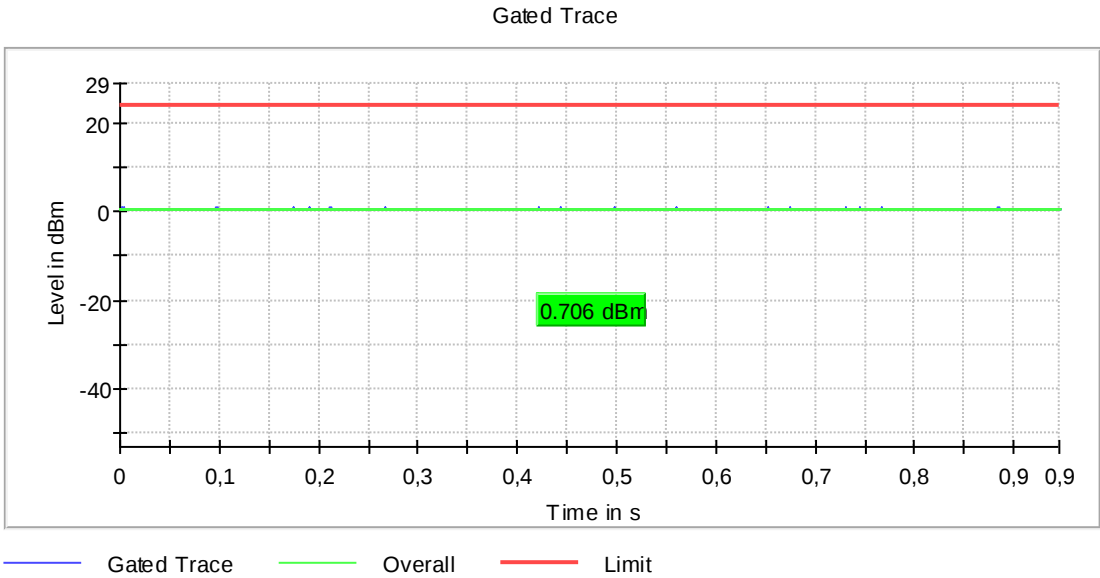

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	94.879	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	94.876	PASS

Gated Trace

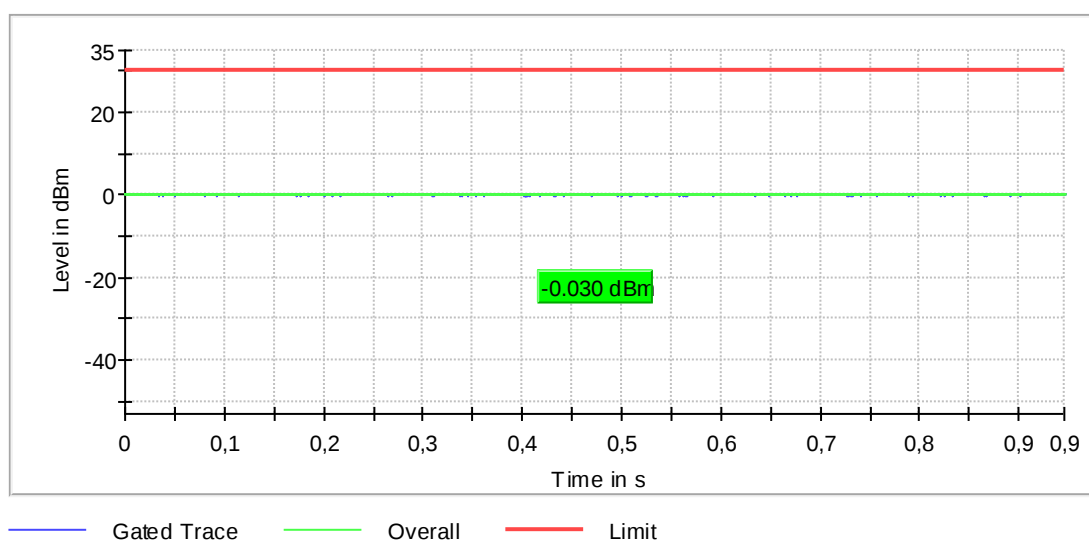

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; n20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	94.880	PASS

Gated Trace

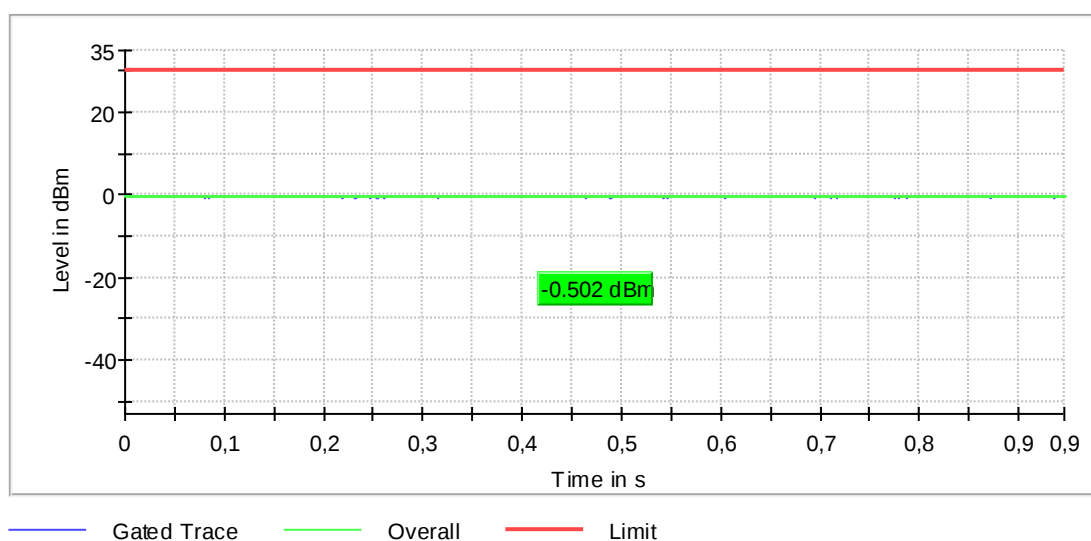

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.0	24.0	3.0	92.781	PASS

Gated Trace

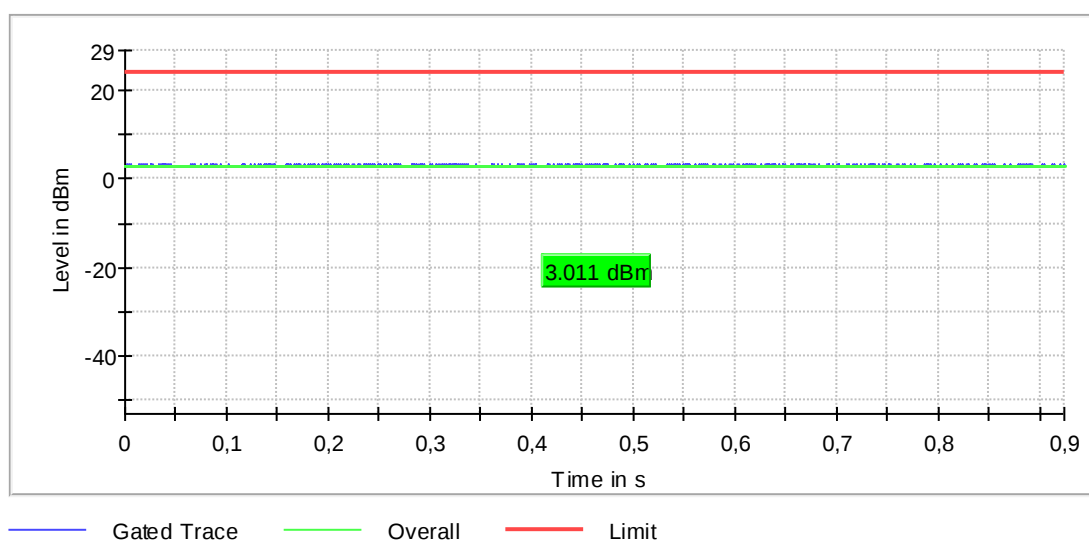

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5200 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.1	24.0	3.1	92.818	PASS

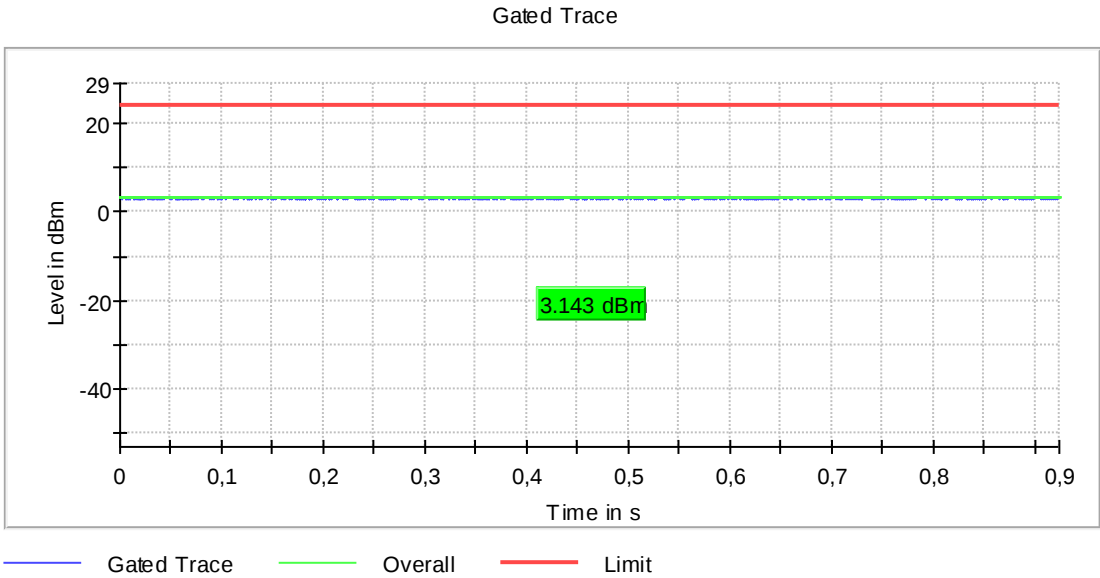

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5240 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	92.827	PASS

Gated Trace

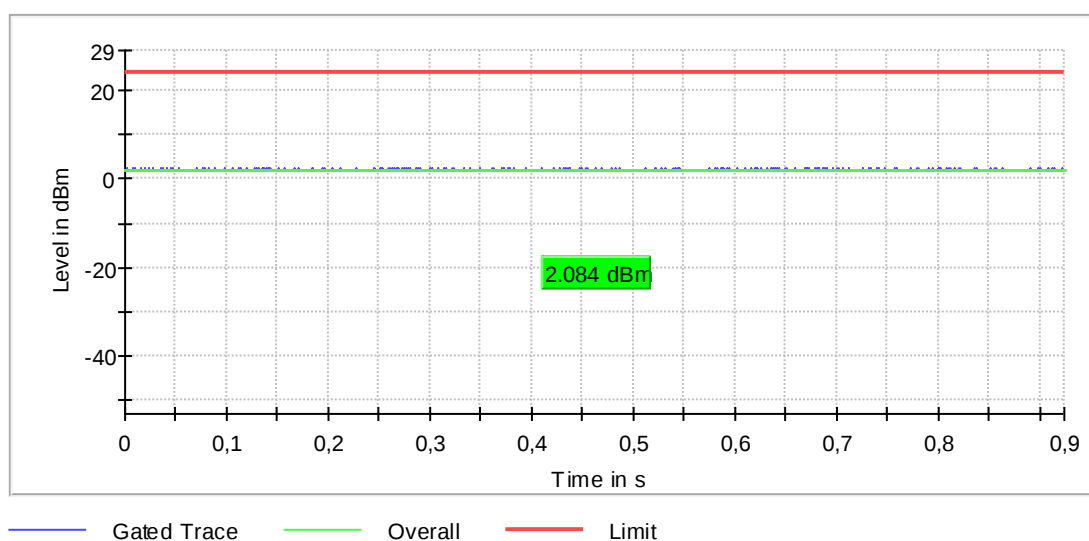

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5260 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	92.832	PASS

Gated Trace

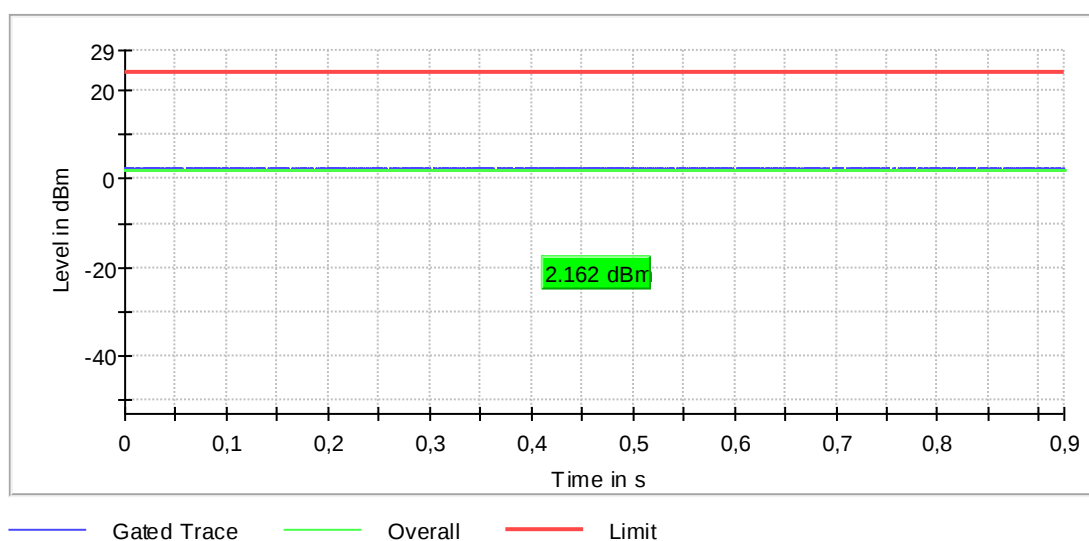

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5280 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	92.805	PASS

Gated Trace

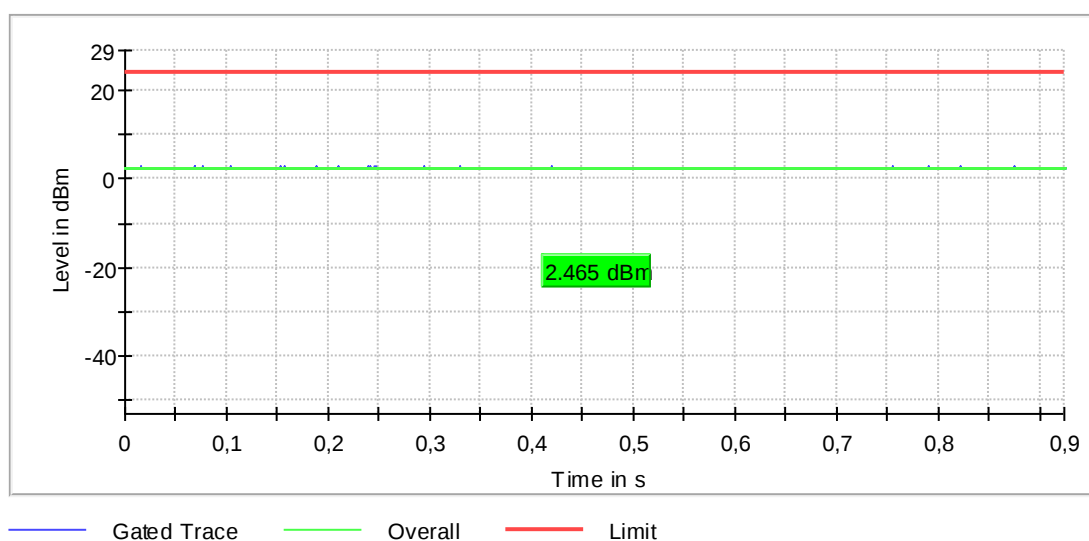

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5320 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	92.828	PASS

Gated Trace

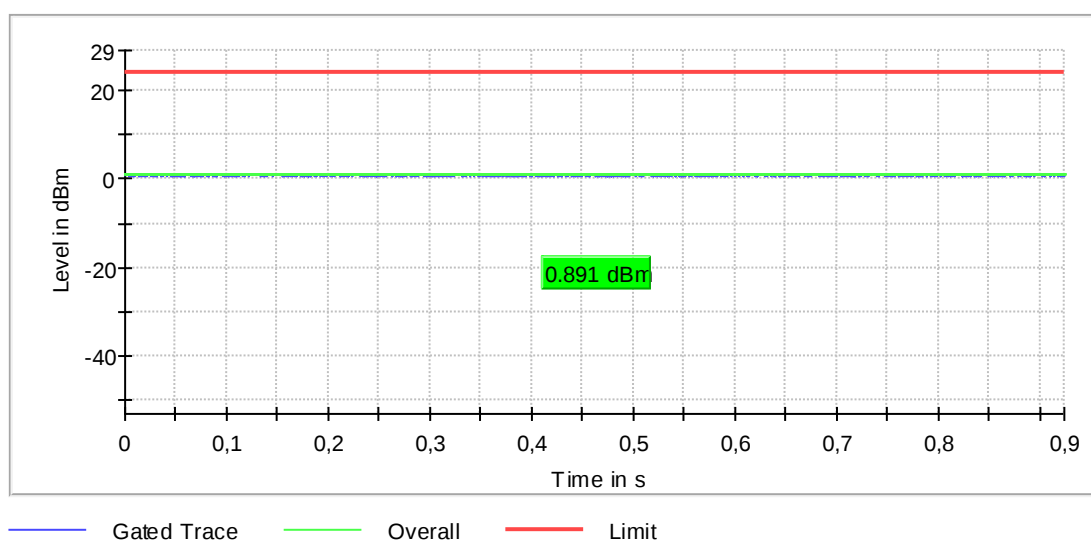

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5500 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.1	24.0	-1.1	92.886	PASS

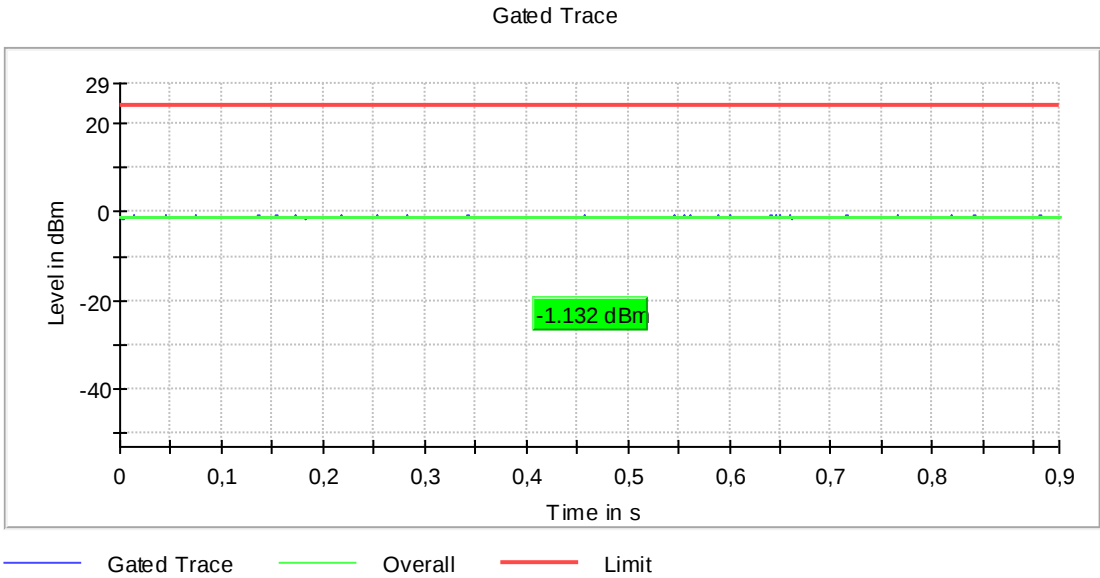

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	92.857	PASS

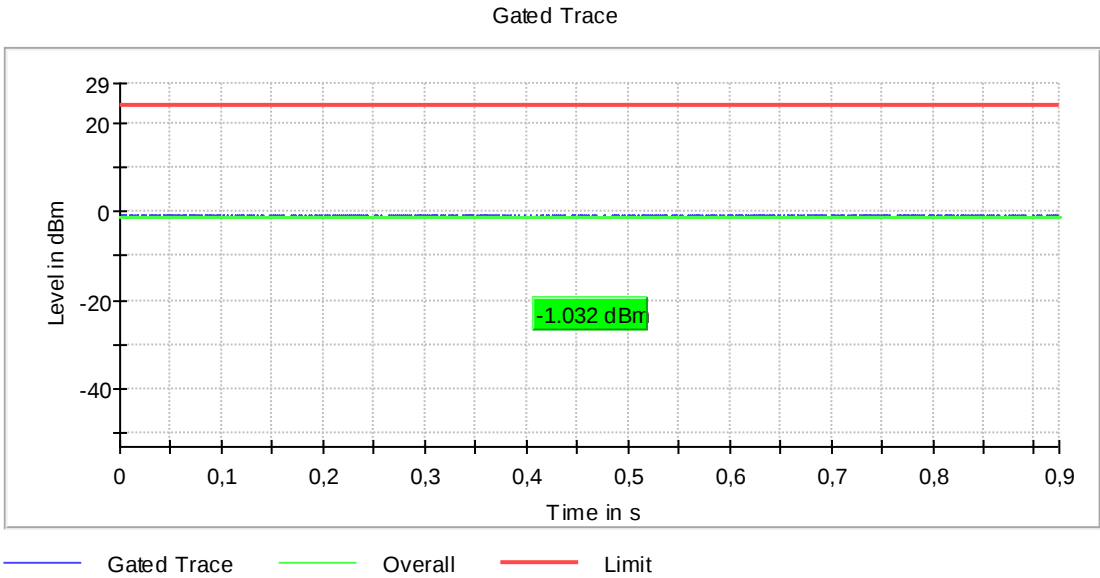

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5700 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	92.870	PASS

Gated Trace

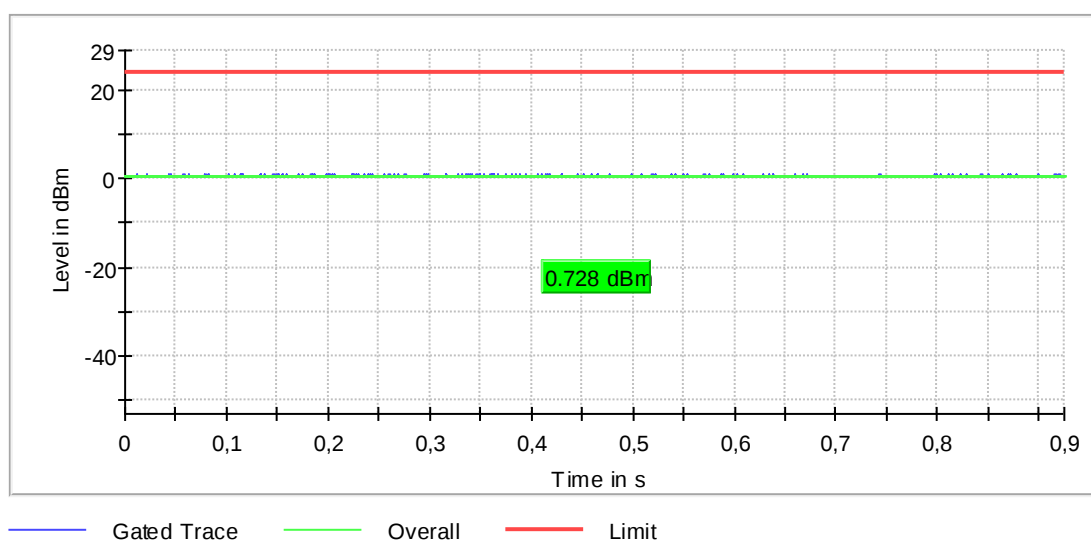

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5745 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	92.898	PASS

Gated Trace

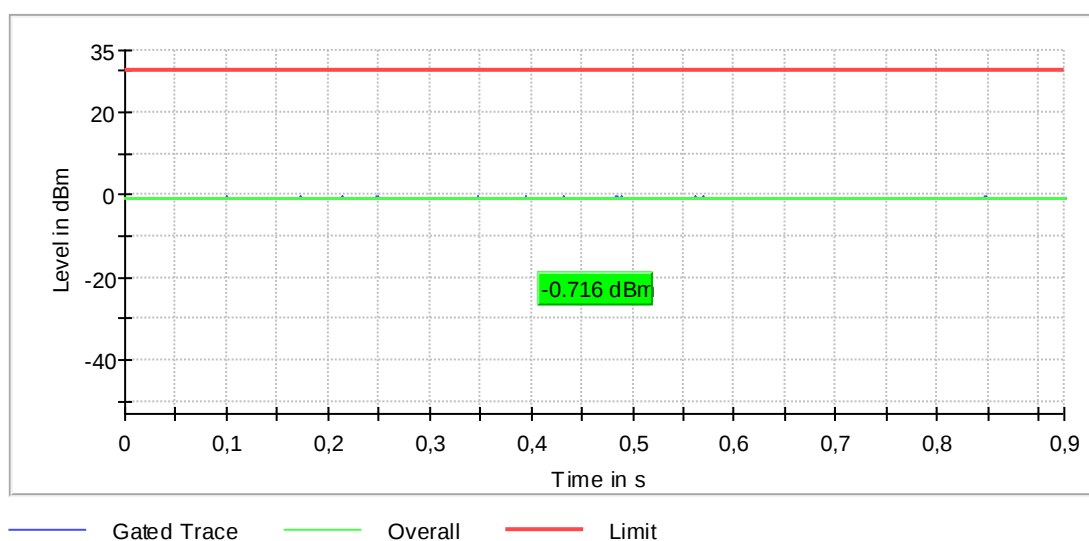

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5785 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	92.871	PASS

Gated Trace

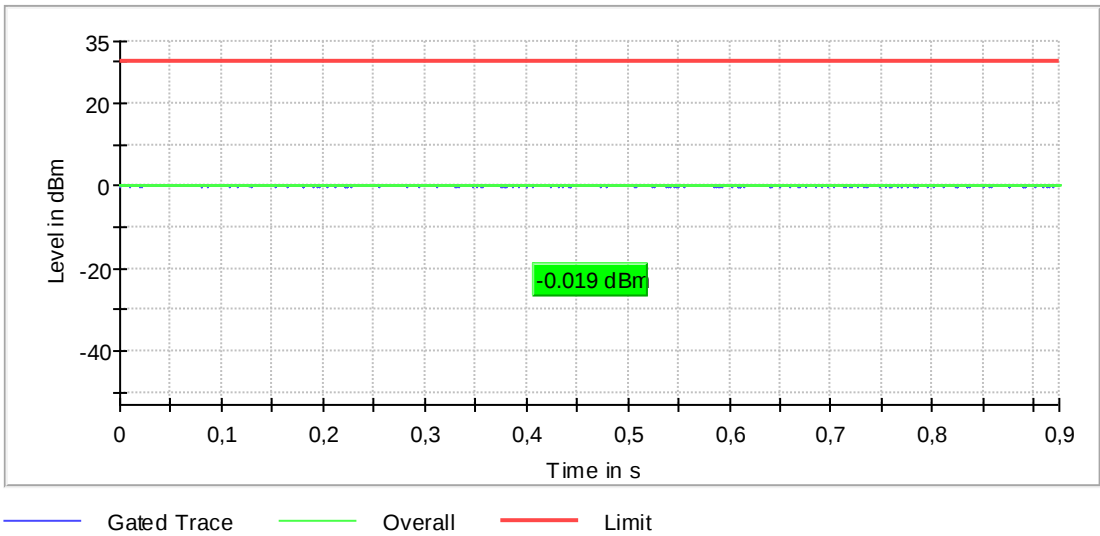

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; n20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	92.895	PASS

Gated Trace

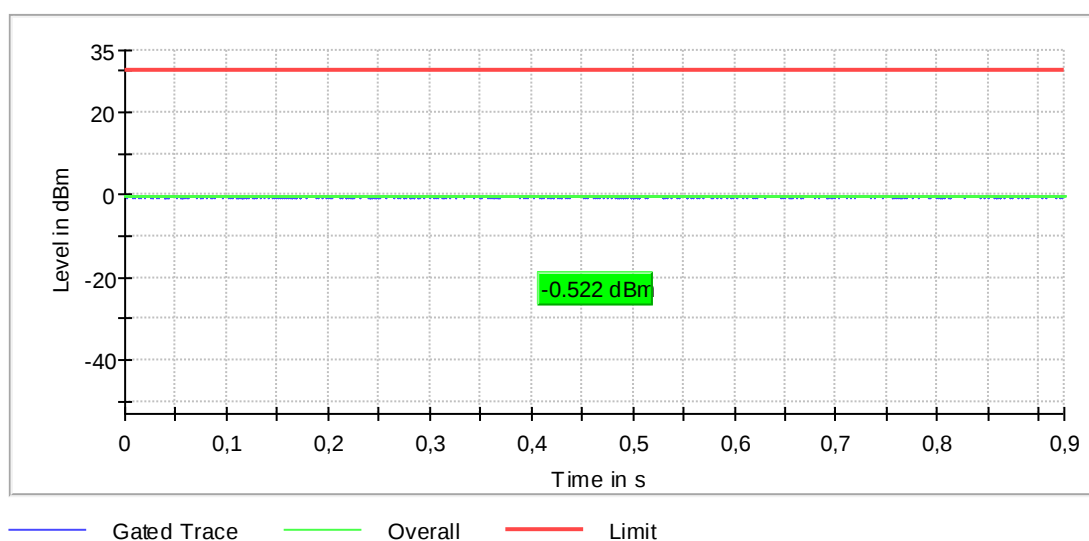

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	2.8	24.0	2.8	90.928	PASS

Gated Trace

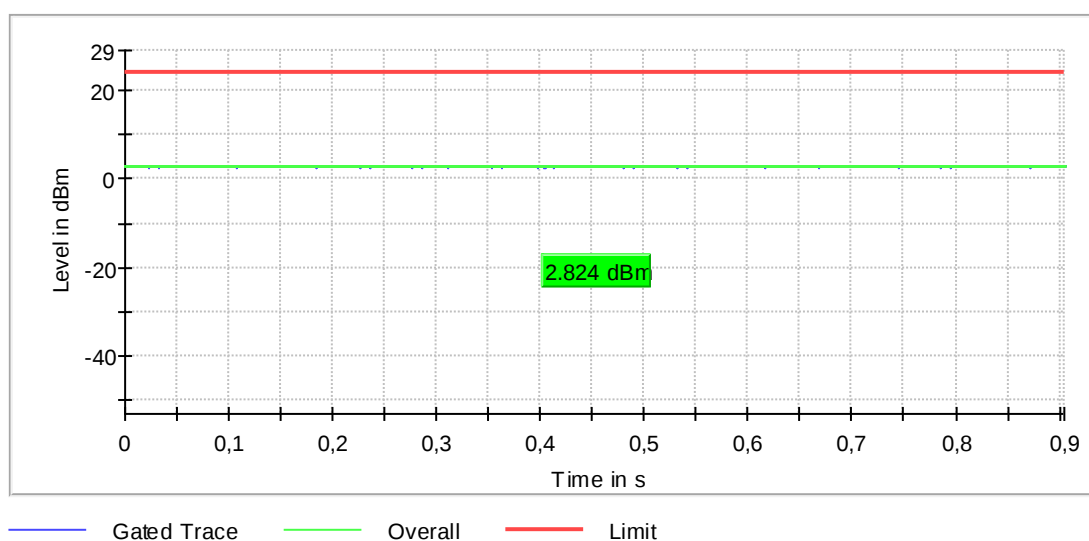

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	90.908	PASS

Gated Trace

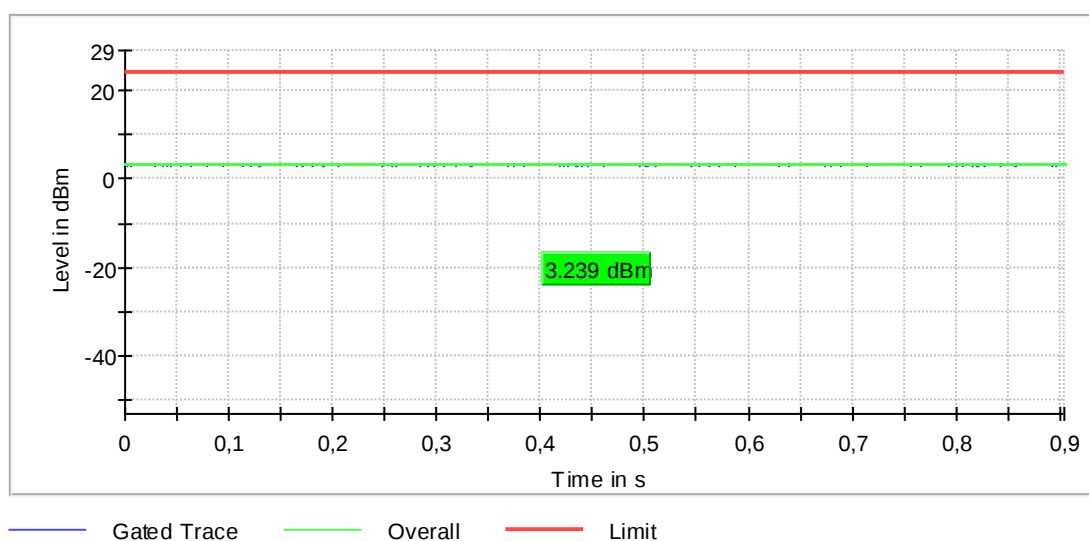

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.2	24.0	2.2	90.927	PASS

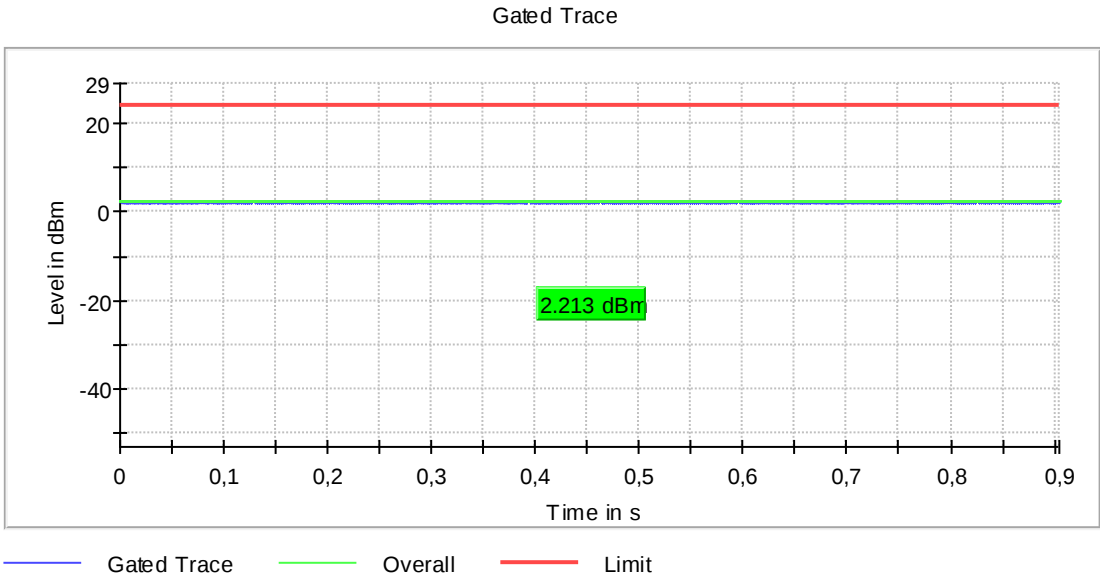

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.3	24.0	2.3	90.927	PASS

Gated Trace

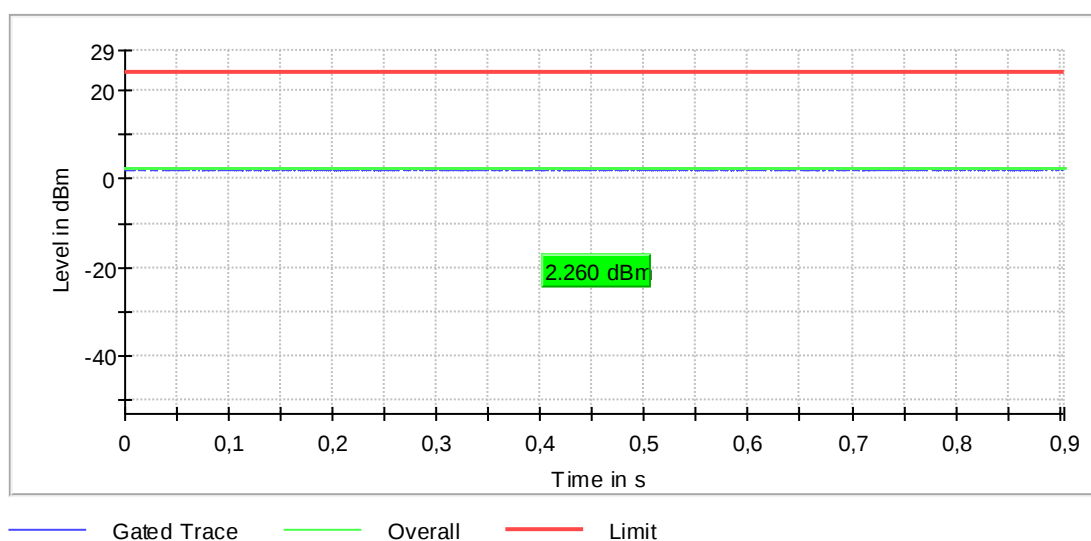

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	90.914	PASS

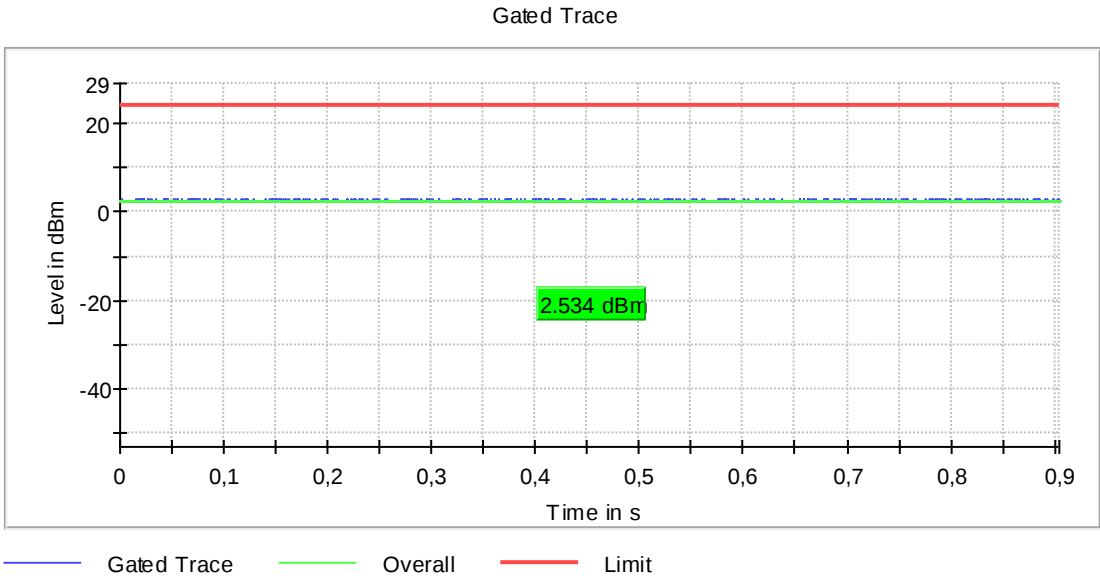

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.1	24.0	1.1	90.931	PASS

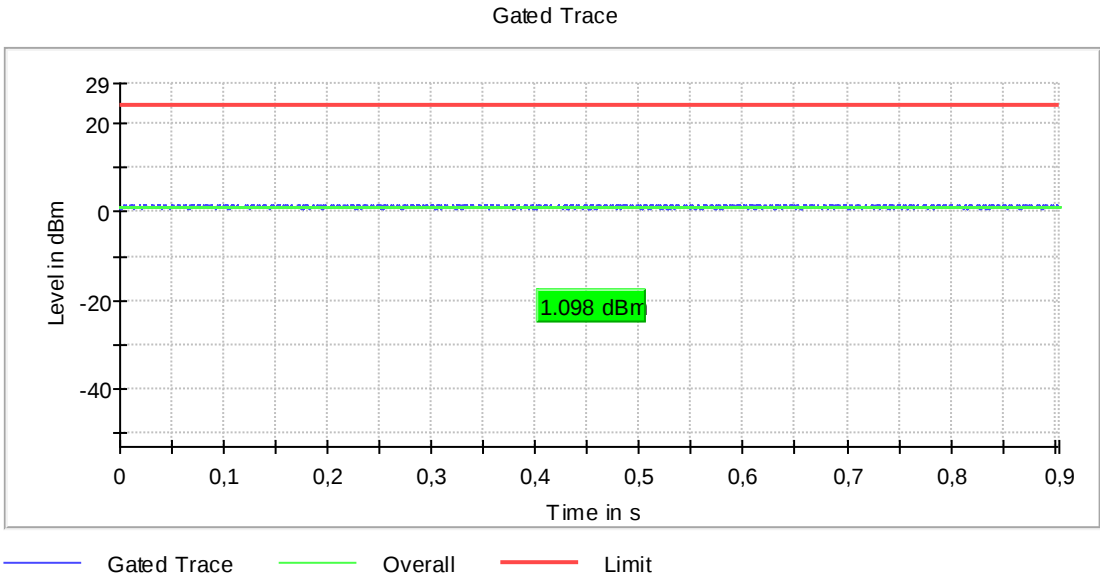

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.1	24.0	-1.1	90.987	PASS

Gated Trace

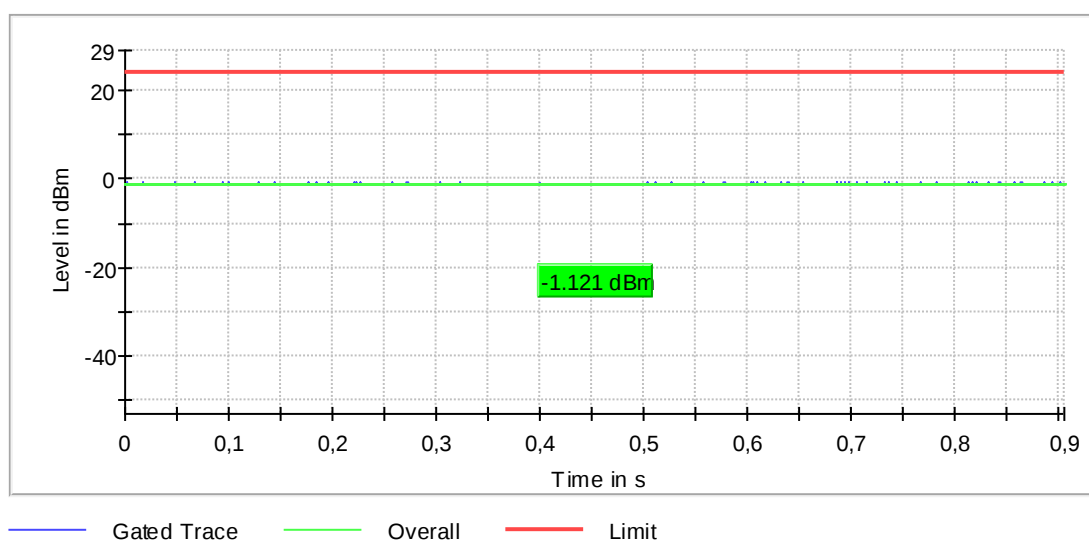

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	90.981	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5700 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	1.0	24.0	1.0	90.986	PASS

Gated Trace

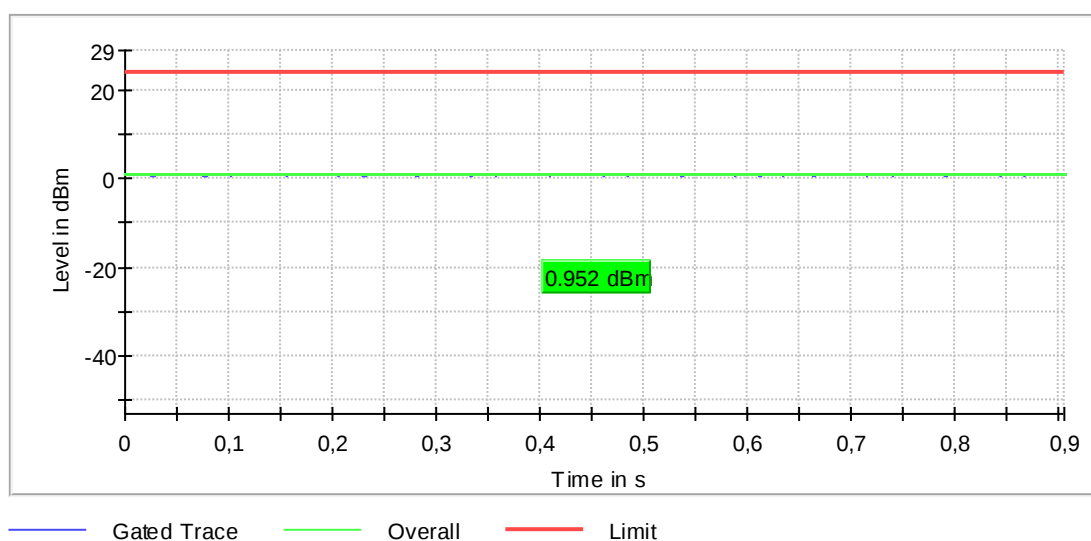

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.8	30.0	-0.8	91.005	PASS

Gated Trace

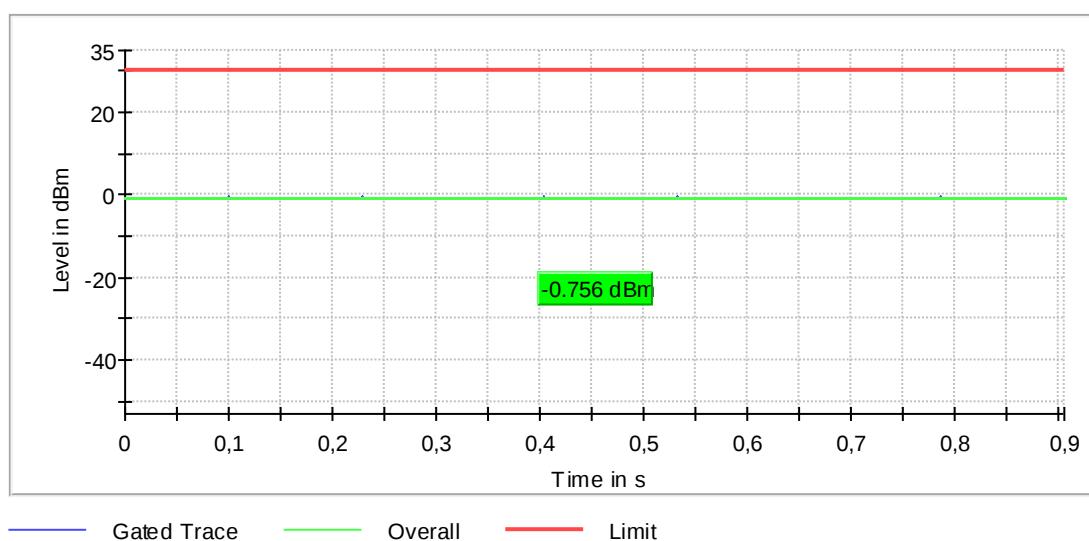

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	90.992	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; n20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	90.996	PASS

Gated Trace

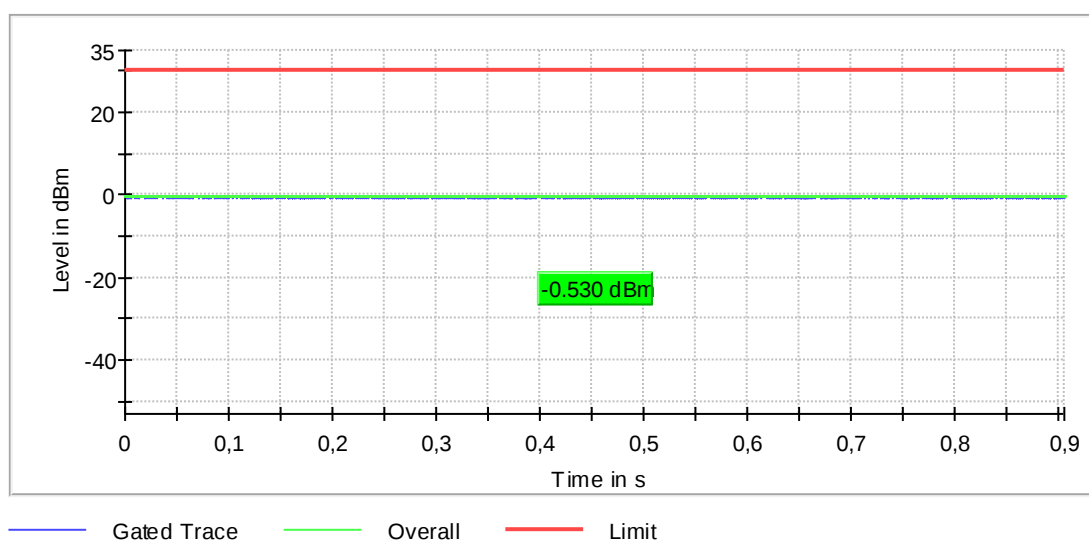

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	2.8	24.0	2.8	90.126	PASS

Gated Trace

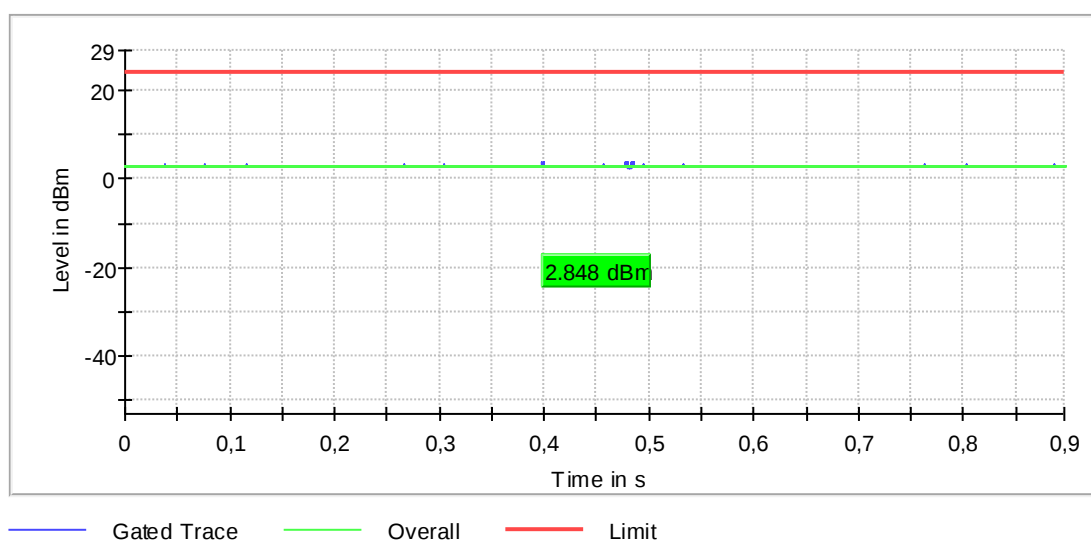

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5200 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	90.119	PASS

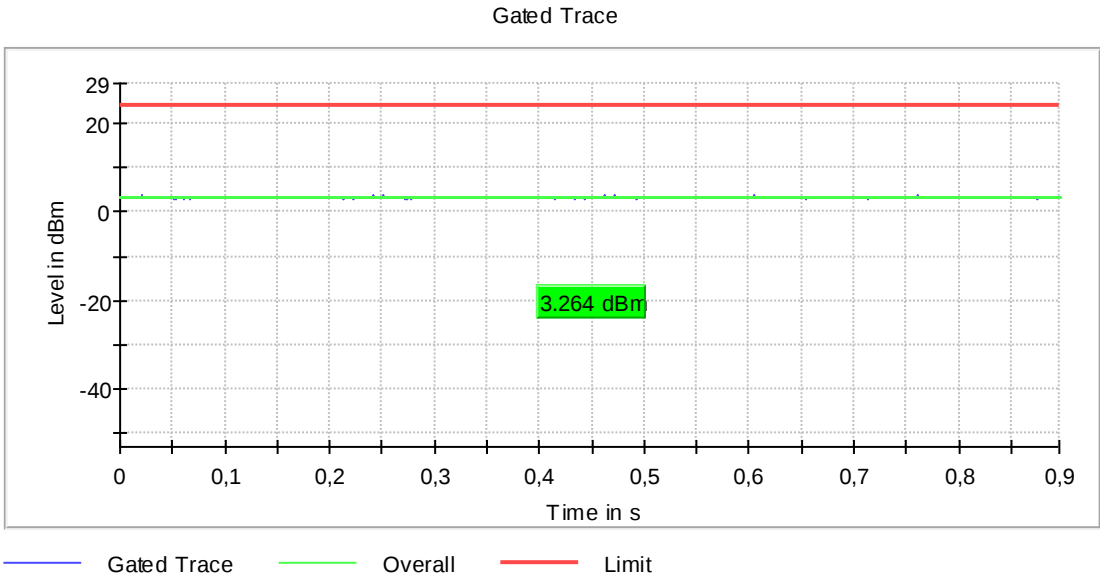

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.2	24.0	2.2	90.128	PASS

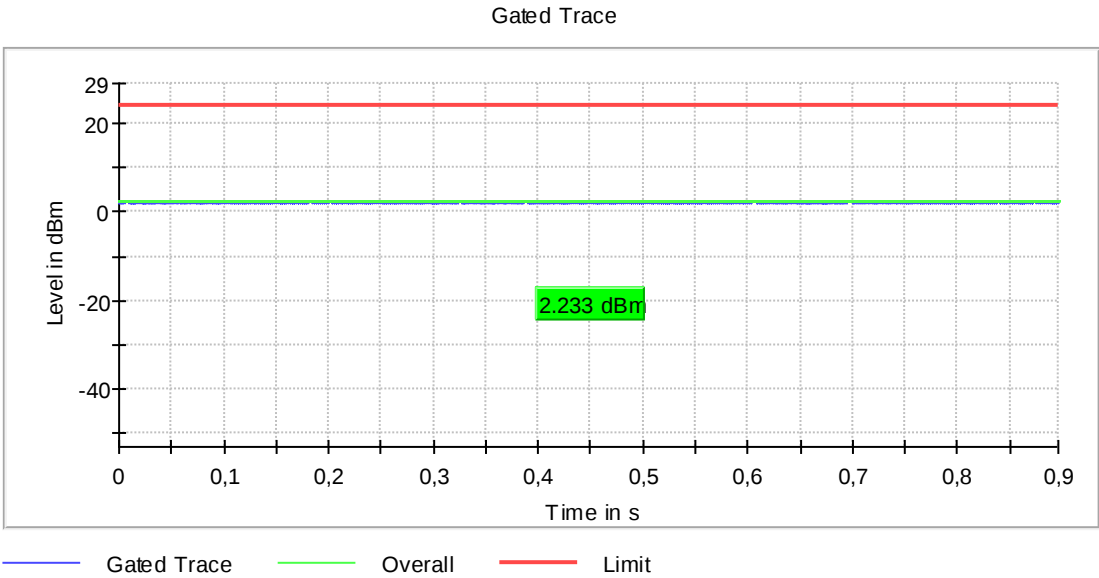

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.3	24.0	2.3	90.131	PASS

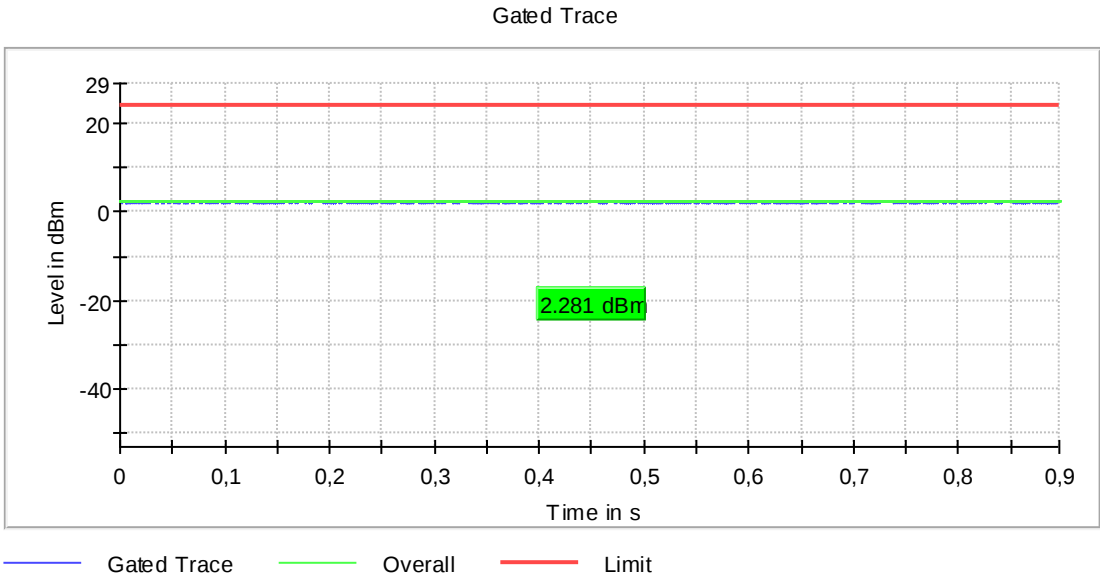

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	90.122	PASS

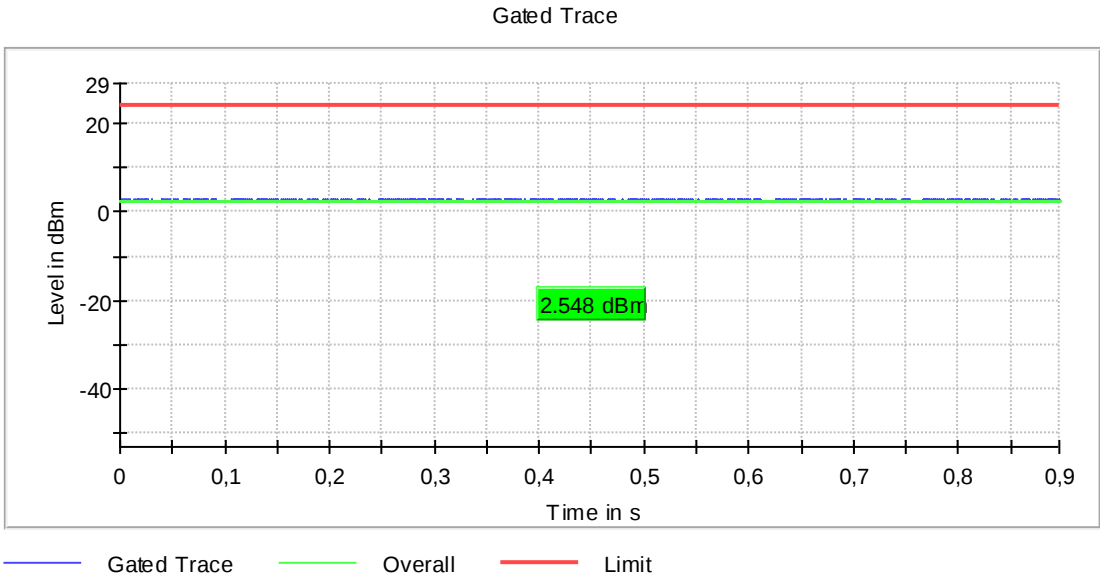

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5320 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.0	24.0	1.0	90.155	PASS

Gated Trace

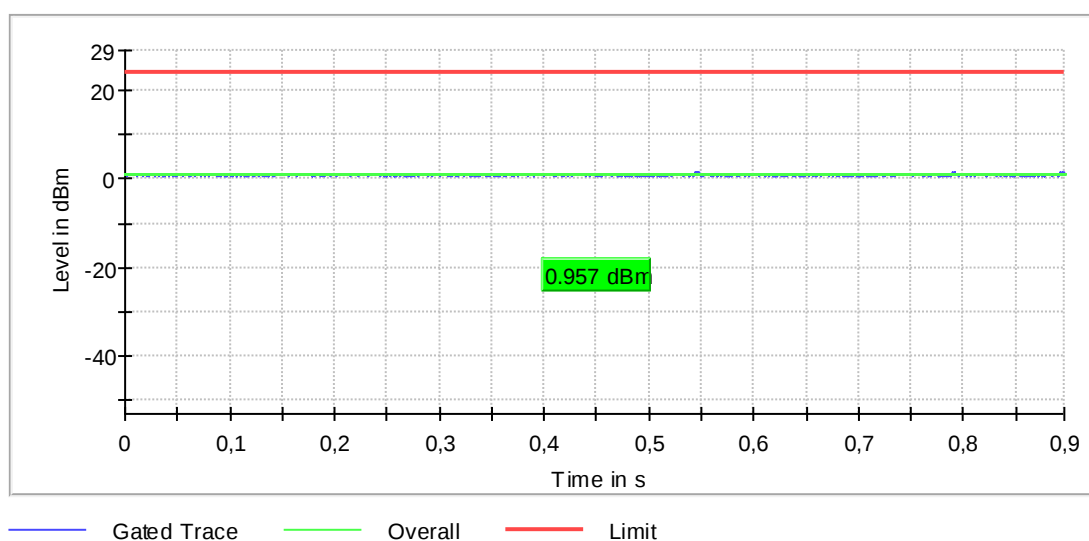

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5500 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.1	24.0	-1.1	90.207	PASS

Gated Trace

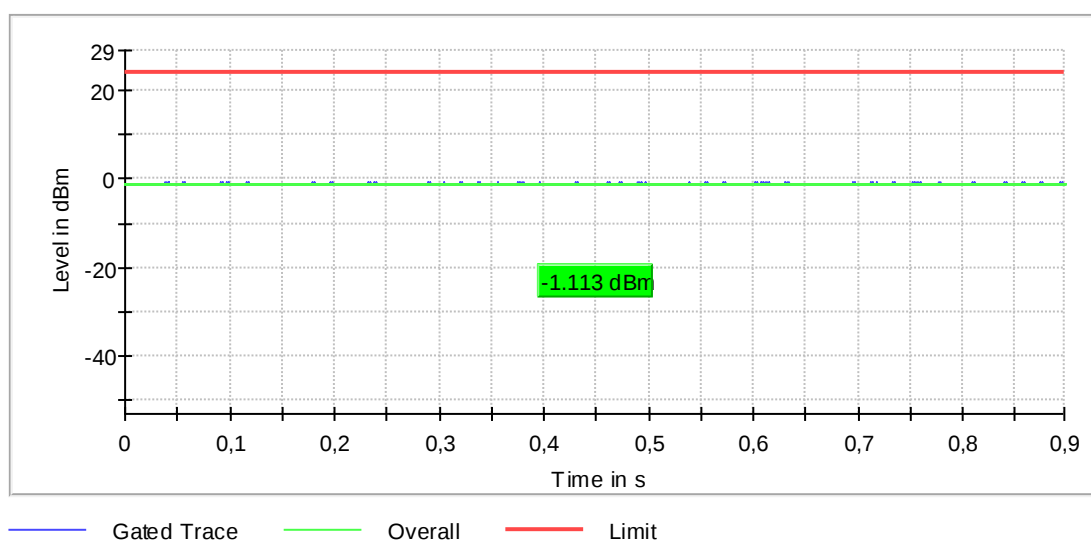

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5580 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	90.213	PASS

Gated Trace

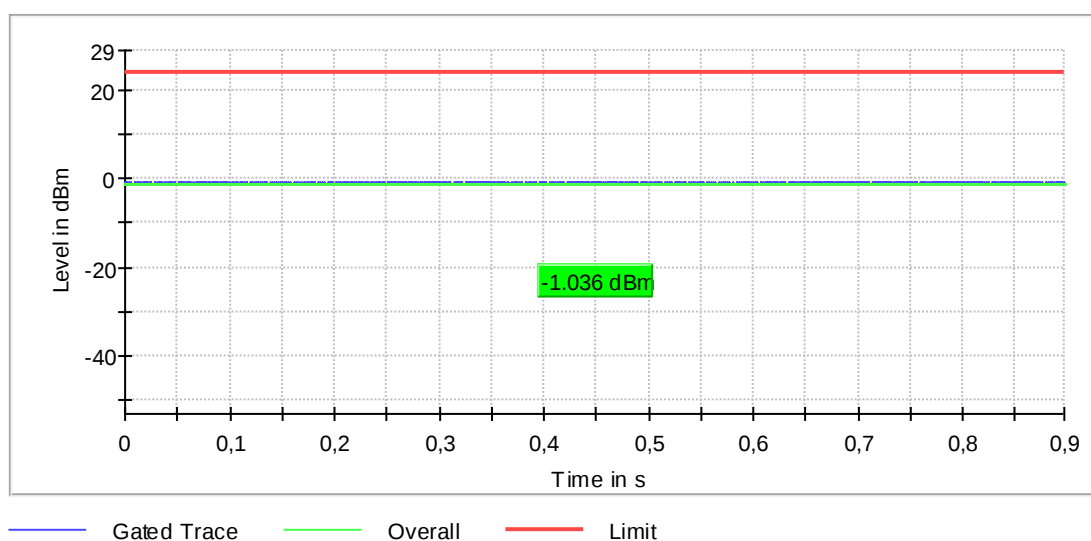

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	90.202	PASS

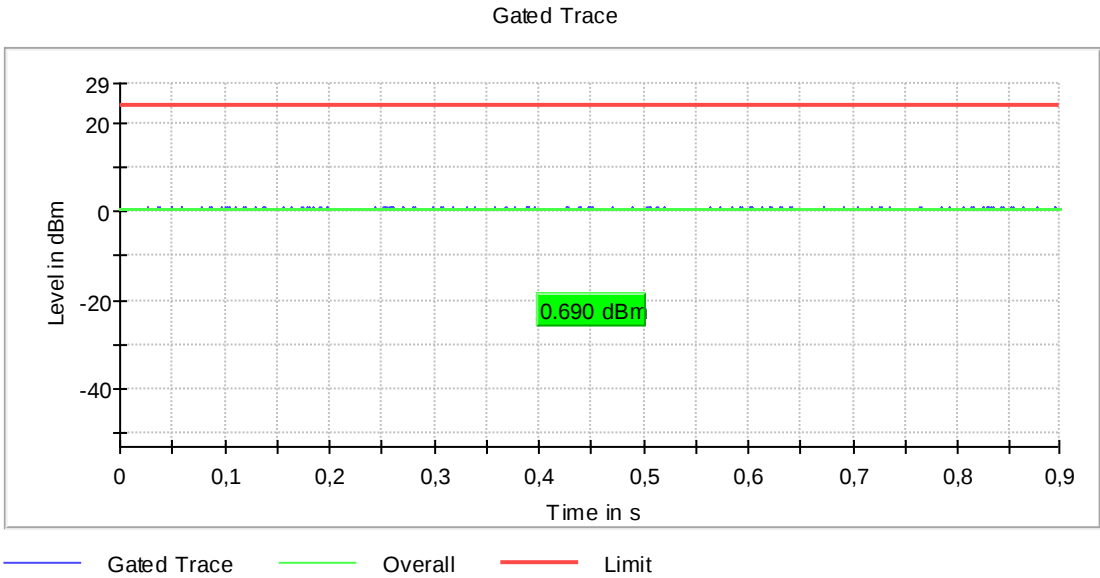

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	90.220	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	90.213	PASS

Gated Trace

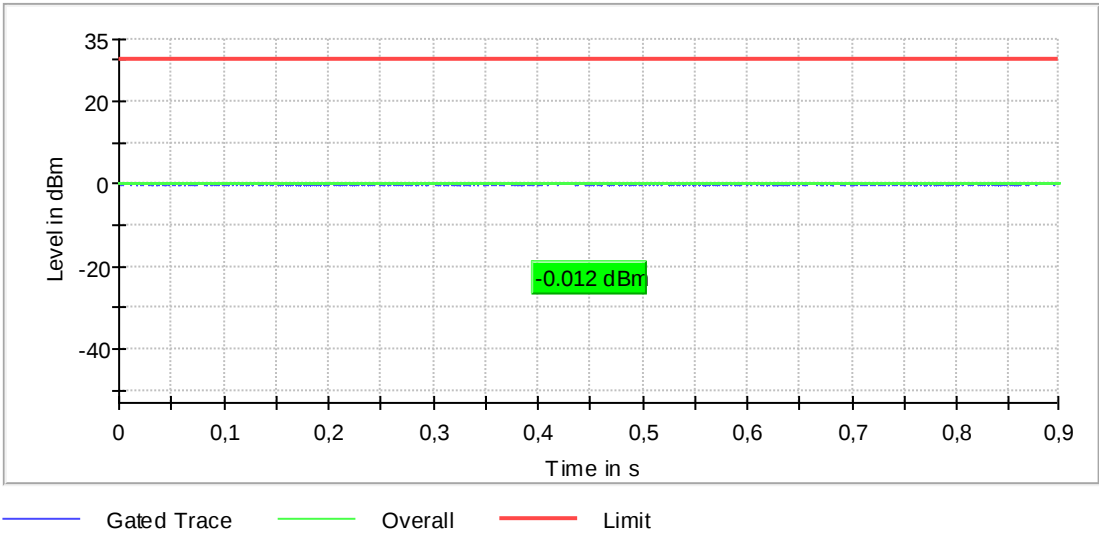

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; n20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.5	30.0	-0.5	90.226	PASS

Gated Trace

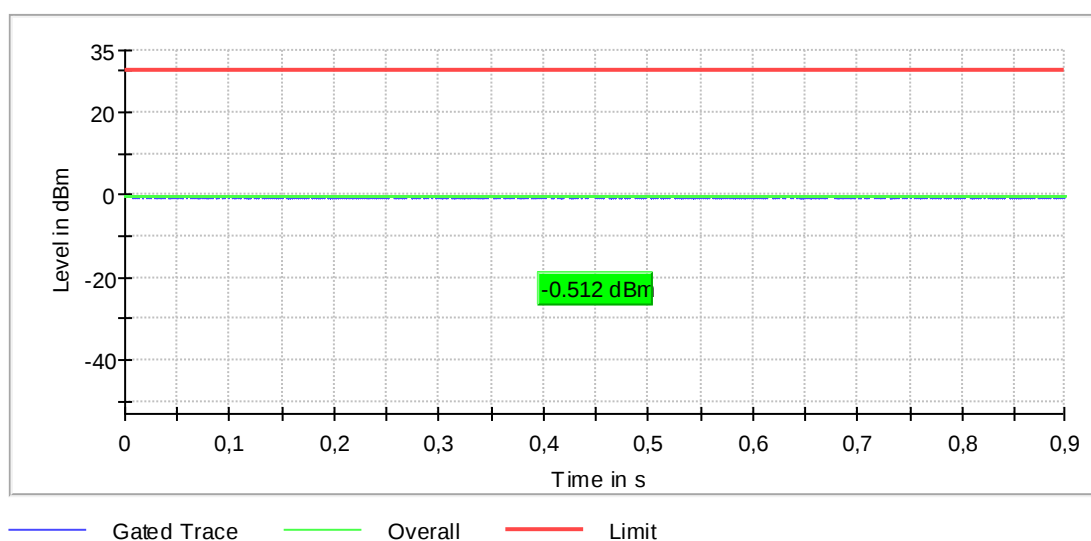

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5180 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	2.8	24.0	2.8	89.478	PASS

Gated Trace

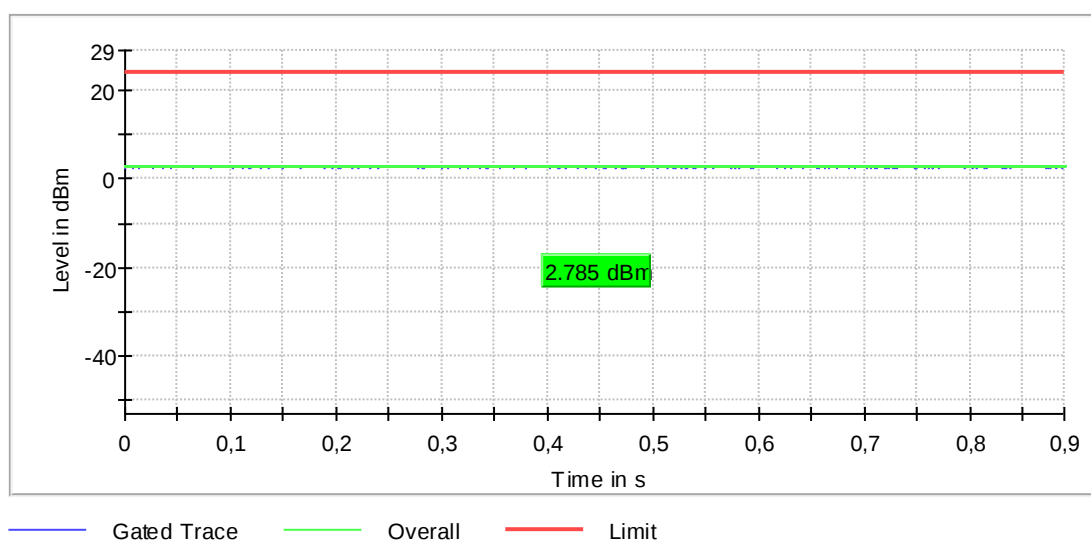

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5200 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	89.472	PASS

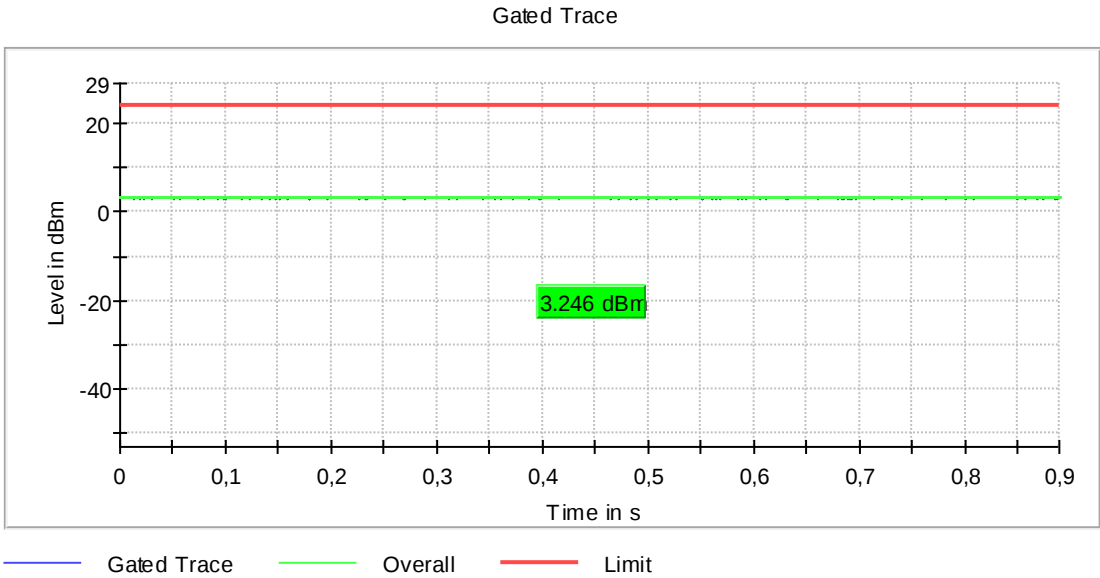

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5240 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.2	24.0	2.2	89.488	PASS

Gated Trace

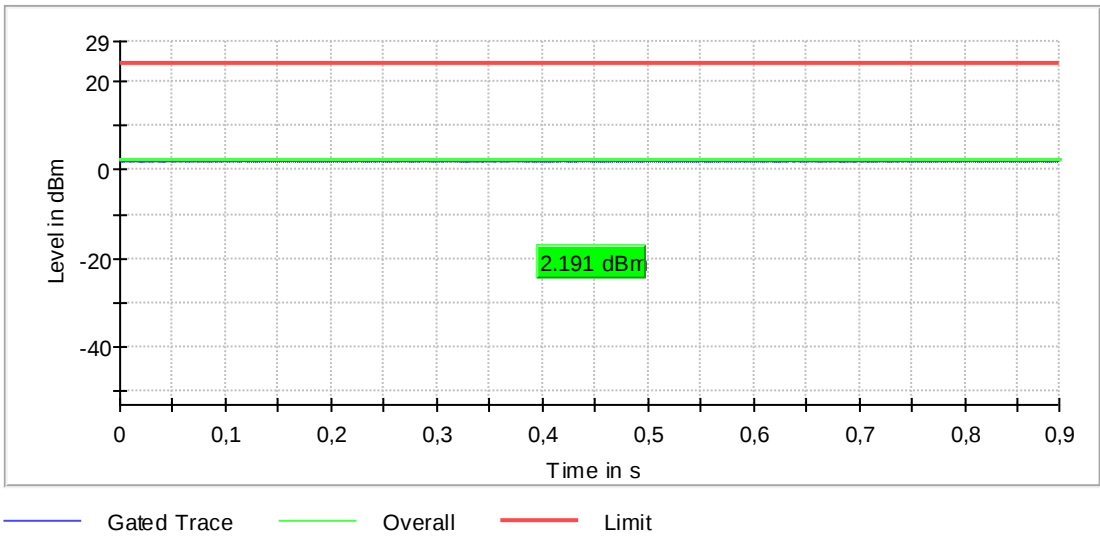

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	89.487	PASS

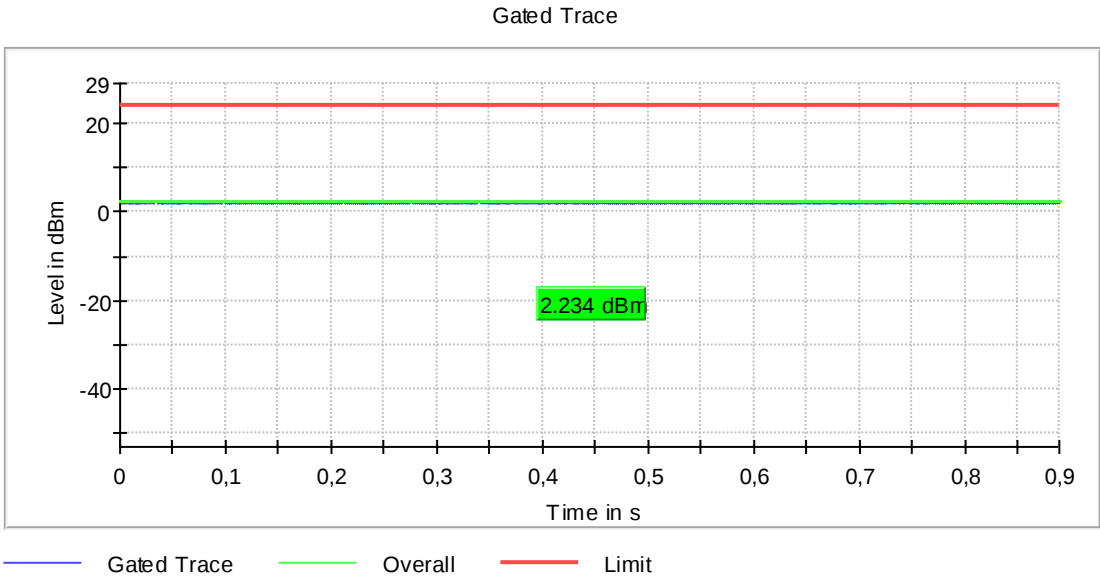

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	89.478	PASS

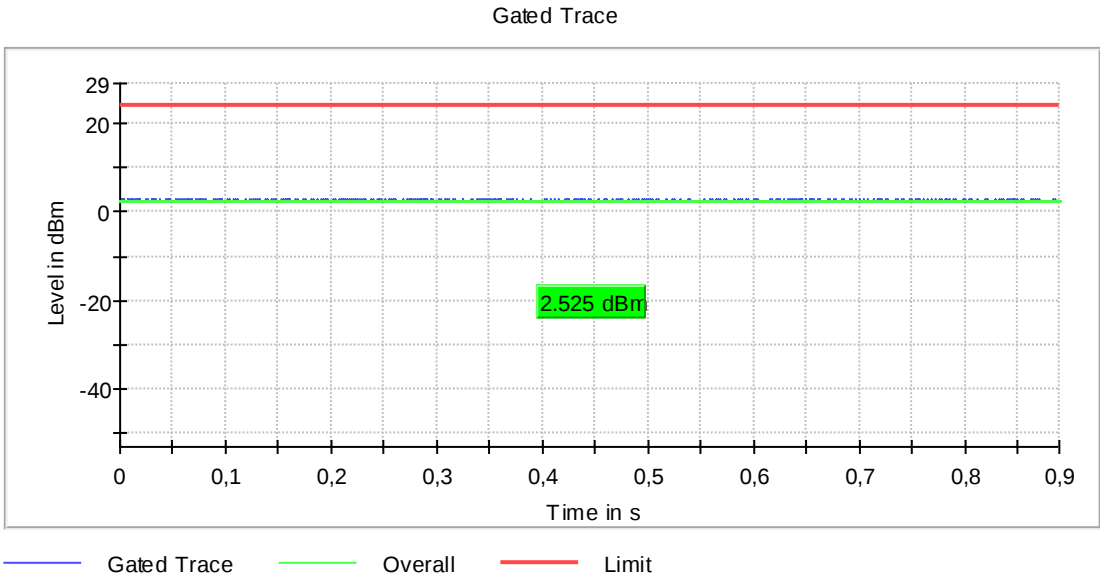

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	89.510	PASS

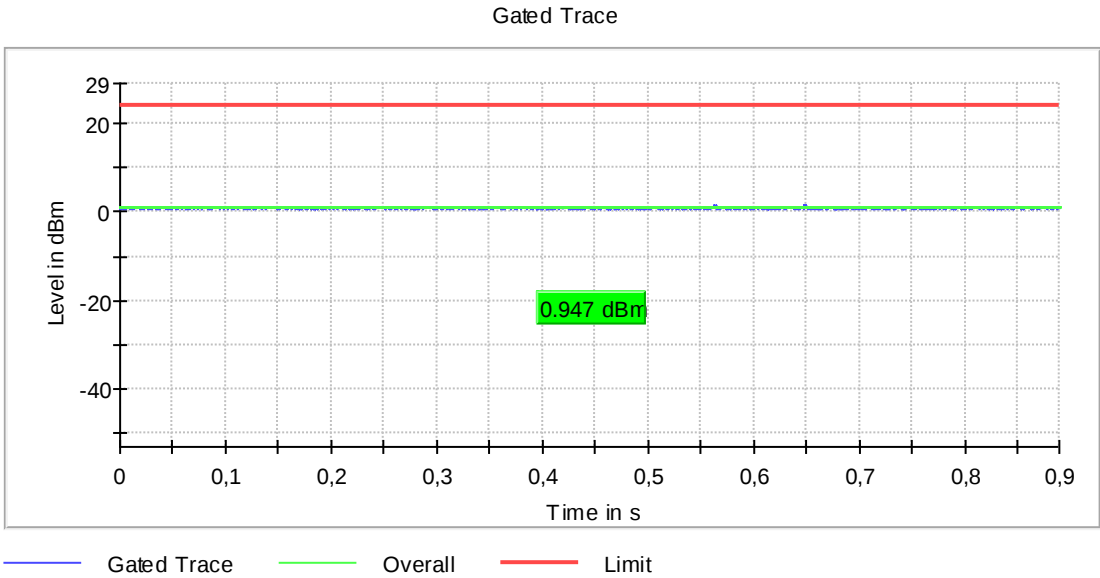

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.3	24.0	-1.3	89.575	PASS

Gated Trace

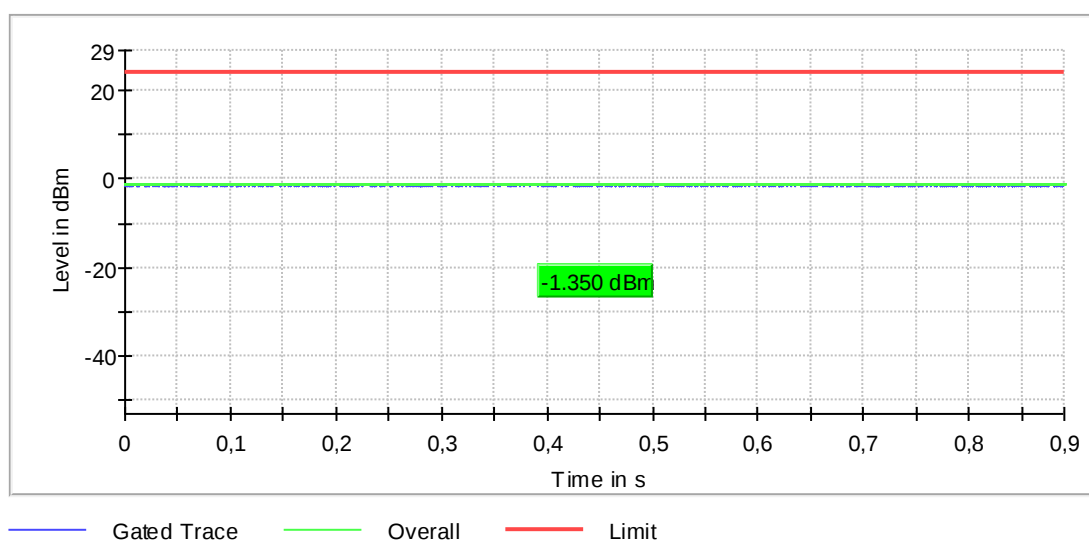

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5580 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.0	24.0	-1.0	89.561	PASS

Gated Trace

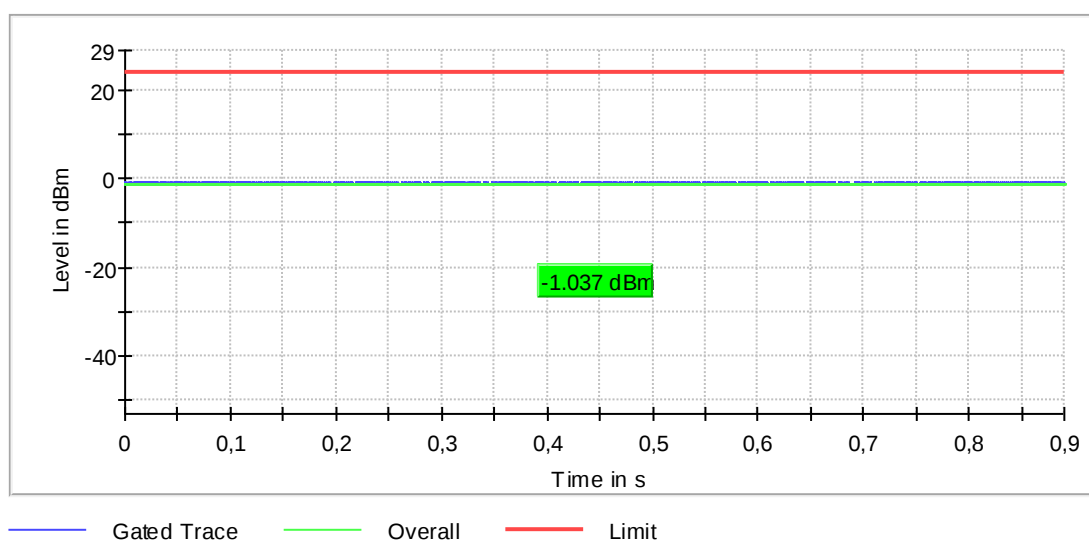

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5700 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	89.538	PASS

Gated Trace

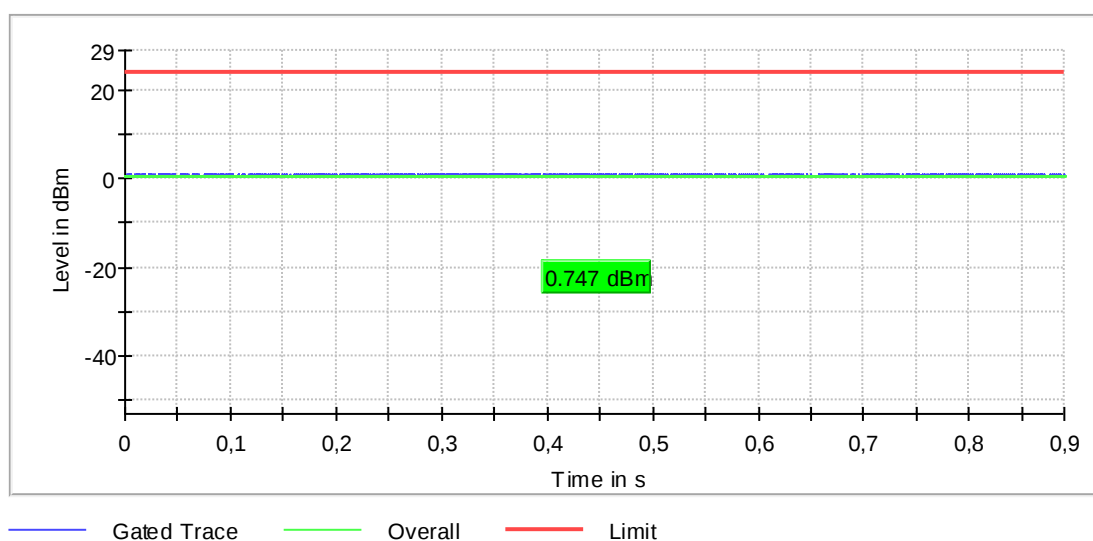

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5745 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	89.574	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5785 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	0.0	30.0	0.0	89.553	PASS

Gated Trace

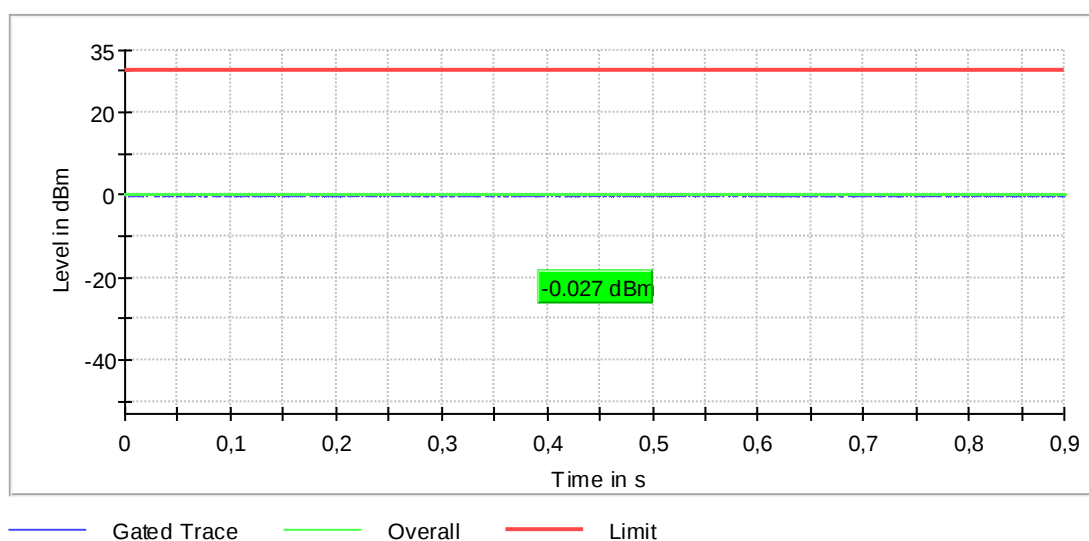

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5825 MHz; n20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.4	30.0	-0.4	89.546	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

1.5.3 ac-mode 20 MHz BW

RF output power

Mode	DUT Frequency	Gated RMS	Limit Max (dBm)	Gated EIRP	DutyCycle (%)	Result
ac20-mode [MCS0]; 5180MHz	5180.0000	3.1	24.0	3.1	98.505	PASS
ac20-mode [MCS0]; 5200MHz	5200.0000	3.1	24.0	3.1	98.506	PASS
ac20-mode [MCS0]; 5240MHz	5240.0000	2.1	24.0	2.1	98.505	PASS
ac20-mode [MCS0]; 5260MHz	5260.0000	2.2	24.0	2.2	98.506	PASS
ac20-mode [MCS0]; 5280MHz	5280.0000	2.5	24.0	2.5	98.504	PASS
ac20-mode [MCS0]; 5320MHz	5320.0000	1.1	24.0	1.1	98.507	PASS
ac20-mode [MCS0]; 5500MHz	5500.0000	-1.2	24.0	-1.2	98.518	PASS
ac20-mode [MCS0]; 5580MHz	5580.0000	-1.2	24.0	-1.2	98.517	PASS
ac20-mode [MCS0]; 5700MHz	5700.0000	0.7	24.0	0.7	98.516	PASS
ac20-mode [MCS0]; 5745MHz	5745.0000	-0.7	30.0	-0.7	98.518	PASS
ac20-mode [MCS0]; 5785MHz	5785.0000	-0.8	30.0	-0.8	98.519	PASS
ac20-mode [MCS0]; 5825MHz	5825.0000	-0.4	30.0	-0.4	98.517	PASS
ac20-mode [MCS1]; 5180MHz	5180.0000	3.1	24.0	3.1	97.204	PASS
ac20-mode [MCS1]; 5200MHz	5200.0000	3.2	24.0	3.2	97.203	PASS
ac20-mode [MCS1]; 5240MHz	5240.0000	2.1	24.0	2.1	97.200	PASS
ac20-mode [MCS1]; 5260MHz	5260.0000	2.2	24.0	2.2	97.207	PASS
ac20-mode [MCS1]; 5280MHz	5280.0000	2.5	24.0	2.5	97.201	PASS
ac20-mode [MCS1]; 5320MHz	5320.0000	1.0	24.0	1.0	97.210	PASS
ac20-mode [MCS1]; 5500MHz	5500.0000	-1.2	24.0	-1.2	97.228	PASS
ac20-mode [MCS1]; 5580MHz	5580.0000	-1.2	24.0	-1.2	97.227	PASS
ac20-mode [MCS1]; 5700MHz	5700.0000	0.7	24.0	0.7	97.223	PASS
ac20-mode [MCS1]; 5745MHz	5745.0000	-0.9	30.0	-0.9	97.230	PASS
ac20-mode [MCS1]; 5785MHz	5785.0000	-0.2	30.0	-0.2	97.225	PASS
ac20-mode [MCS1]; 5825MHz	5825.0000	-0.4	30.0	-0.4	97.227	PASS
ac20-mode [MCS2]; 5180MHz	5180.0000	3.1	24.0	3.1	95.991	PASS
ac20-mode [MCS2]; 5200MHz	5200.0000	3.2	24.0	3.2	95.994	PASS
ac20-mode [MCS2]; 5240MHz	5240.0000	2.1	24.0	2.1	95.996	PASS
ac20-mode [MCS2]; 5260MHz	5260.0000	2.2	24.0	2.2	95.995	PASS
ac20-mode [MCS2]; 5280MHz	5280.0000	2.5	24.0	2.5	96.005	PASS
ac20-mode [MCS2]; 5320MHz	5320.0000	1.1	24.0	1.1	96.010	PASS
ac20-mode [MCS2]; 5500MHz	5500.0000	-1.2	24.0	-1.2	96.030	PASS
ac20-mode [MCS2]; 5580MHz	5580.0000	-1.2	24.0	-1.2	96.027	PASS
ac20-mode [MCS2]; 5700MHz	5700.0000	0.8	24.0	0.8	96.021	PASS
ac20-mode [MCS2]; 5745MHz	5745.0000	-0.7	30.0	-0.7	96.030	PASS
ac20-mode [MCS2]; 5785MHz	5785.0000	-0.2	30.0	-0.2	96.027	PASS
ac20-mode [MCS2]; 5825MHz	5825.0000	-0.7	30.0	-0.7	96.026	PASS
ac20-mode [MCS3]; 5180MHz	5180.0000	3.1	24.0	3.1	94.856	PASS
ac20-mode [MCS3]; 5200MHz	5200.0000	3.2	24.0	3.2	94.863	PASS
ac20-mode [MCS3]; 5240MHz	5240.0000	2.1	24.0	2.1	94.881	PASS
ac20-mode [MCS3]; 5260MHz	5260.0000	2.2	24.0	2.2	94.843	PASS
ac20-mode [MCS3]; 5280MHz	5280.0000	2.5	24.0	2.5	94.883	PASS
ac20-mode [MCS3]; 5320MHz	5320.0000	1.2	24.0	1.2	94.884	PASS
ac20-mode [MCS3]; 5500MHz	5500.0000	-1.2	24.0	-1.2	94.914	PASS
ac20-mode [MCS3]; 5580MHz	5580.0000	-1.2	24.0	-1.2	94.920	PASS
ac20-mode [MCS3]; 5700MHz	5700.0000	0.8	24.0	0.8	94.919	PASS
ac20-mode [MCS3]; 5745MHz	5745.0000	-0.9	30.0	-0.9	94.890	PASS
ac20-mode [MCS3]; 5785MHz	5785.0000	-0.2	30.0	-0.2	94.911	PASS
ac20-mode [MCS3]; 5825MHz	5825.0000	-0.4	30.0	-0.4	94.894	PASS
ac20-mode [MCS4]; 5180MHz	5180.0000	-2.5	24.0	-2.5	91.176	PASS
ac20-mode [MCS4]; 5200MHz	5200.0000	3.2	24.0	3.2	92.725	PASS


ac20-mode [MCS4]; 5240MHz	5240.0000	2.2	24.0	2.2	92.762	PASS
ac20-mode [MCS4]; 5260MHz	5260.0000	2.2	24.0	2.2	92.740	PASS
ac20-mode [MCS4]; 5280MHz	5280.0000	2.5	24.0	2.5	92.755	PASS
ac20-mode [MCS4]; 5320MHz	5320.0000	0.9	24.0	0.9	92.749	PASS
ac20-mode [MCS4]; 5500MHz	5500.0000	-1.2	24.0	-1.2	92.796	PASS
ac20-mode [MCS4]; 5580MHz	5580.0000	-1.2	24.0	-1.2	92.821	PASS
ac20-mode [MCS4]; 5700MHz	5700.0000	0.7	24.0	0.7	92.781	PASS
ac20-mode [MCS4]; 5745MHz	5745.0000	-0.9	30.0	-0.9	92.801	PASS
ac20-mode [MCS4]; 5785MHz	5785.0000	-0.2	30.0	-0.2	92.790	PASS
ac20-mode [MCS4]; 5825MHz	5825.0000	-0.6	30.0	-0.6	92.787	PASS
ac20-mode [MCS5]; 5180MHz	5180.0000	2.9	24.0	2.9	91.117	PASS
ac20-mode [MCS5]; 5200MHz	5200.0000	3.3	24.0	3.3	91.102	PASS
ac20-mode [MCS5]; 5240MHz	5240.0000	2.3	24.0	2.3	91.111	PASS
ac20-mode [MCS5]; 5260MHz	5260.0000	2.3	24.0	2.3	91.116	PASS
ac20-mode [MCS5]; 5280MHz	5280.0000	2.6	24.0	2.6	91.101	PASS
ac20-mode [MCS5]; 5320MHz	5320.0000	1.2	24.0	1.2	91.120	PASS
ac20-mode [MCS5]; 5500MHz	5500.0000	-1.2	24.0	-1.2	91.190	PASS
ac20-mode [MCS5]; 5580MHz	5580.0000	-1.1	24.0	-1.1	91.177	PASS
ac20-mode [MCS5]; 5700MHz	5700.0000	0.7	24.0	0.7	91.174	PASS
ac20-mode [MCS5]; 5745MHz	5745.0000	-0.9	30.0	-0.9	91.198	PASS
ac20-mode [MCS5]; 5785MHz	5785.0000	-0.2	30.0	-0.2	91.183	PASS
ac20-mode [MCS5]; 5825MHz	5825.0000	-0.7	30.0	-0.7	91.174	PASS
ac20-mode [MCS6]; 5180MHz	5180.0000	2.9	24.0	2.9	90.343	PASS
ac20-mode [MCS6]; 5200MHz	5200.0000	3.3	24.0	3.3	90.332	PASS
ac20-mode [MCS6]; 5240MHz	5240.0000	2.3	24.0	2.3	90.317	PASS
ac20-mode [MCS6]; 5260MHz	5260.0000	2.3	24.0	2.3	90.341	PASS
ac20-mode [MCS6]; 5280MHz	5280.0000	2.6	24.0	2.6	90.340	PASS
ac20-mode [MCS6]; 5320MHz	5320.0000	1.2	24.0	1.2	90.337	PASS
ac20-mode [MCS6]; 5500MHz	5500.0000	-1.2	24.0	-1.2	90.423	PASS
ac20-mode [MCS6]; 5580MHz	5580.0000	-1.1	24.0	-1.1	90.388	PASS
ac20-mode [MCS6]; 5700MHz	5700.0000	0.7	24.0	0.7	90.390	PASS
ac20-mode [MCS6]; 5745MHz	5745.0000	-0.9	30.0	-0.9	90.398	PASS
ac20-mode [MCS6]; 5785MHz	5785.0000	-0.2	30.0	-0.2	90.422	PASS
ac20-mode [MCS6]; 5825MHz	5825.0000	-0.7	30.0	-0.7	90.409	PASS
ac20-mode [MCS7]; 5180MHz	5180.0000	3.1	24.0	3.1	89.676	PASS
ac20-mode [MCS7]; 5200MHz	5200.0000	3.2	24.0	3.2	89.609	PASS
ac20-mode [MCS7]; 5240MHz	5240.0000	2.2	24.0	2.2	89.625	PASS
ac20-mode [MCS7]; 5260MHz	5260.0000	2.3	24.0	2.3	89.624	PASS
ac20-mode [MCS7]; 5280MHz	5280.0000	2.5	24.0	2.5	89.633	PASS
ac20-mode [MCS7]; 5320MHz	5320.0000	1.0	24.0	1.0	89.638	PASS
ac20-mode [MCS7]; 5500MHz	5500.0000	-1.2	24.0	-1.2	89.768	PASS
ac20-mode [MCS7]; 5580MHz	5580.0000	-1.1	24.0	-1.1	89.706	PASS
ac20-mode [MCS7]; 5700MHz	5700.0000	0.7	24.0	0.7	89.752	PASS
ac20-mode [MCS7]; 5745MHz	5745.0000	-0.9	30.0	-0.9	89.770	PASS
ac20-mode [MCS7]; 5785MHz	5785.0000	-0.2	30.0	-0.2	89.692	PASS
ac20-mode [MCS7]; 5825MHz	5825.0000	-0.7	30.0	-0.7	89.705	PASS

RF output power (5180 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	89.676	PASS

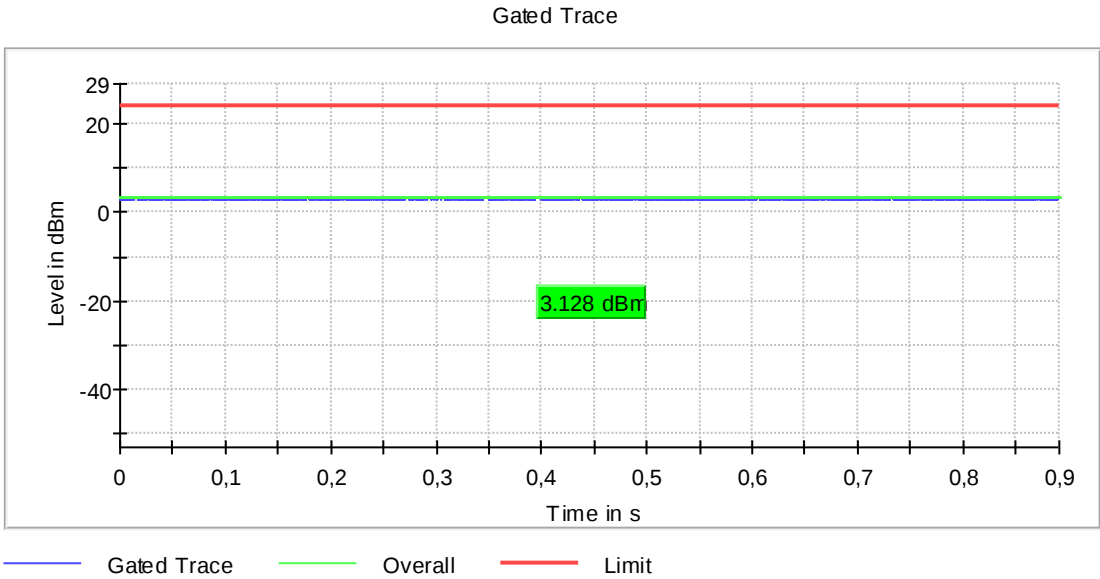

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	89.609	PASS

Gated Trace

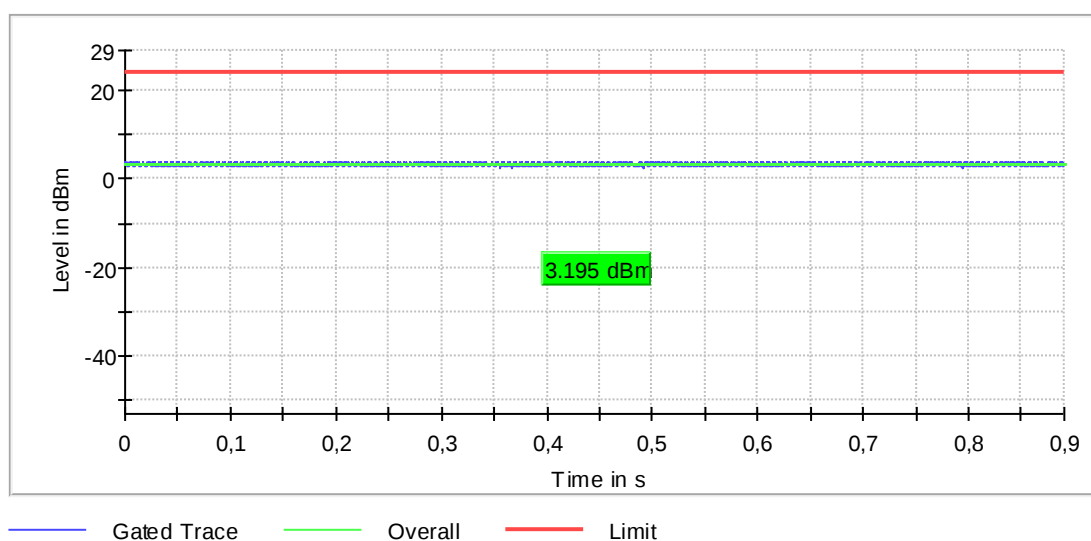

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.2	24.0	2.2	89.625	PASS

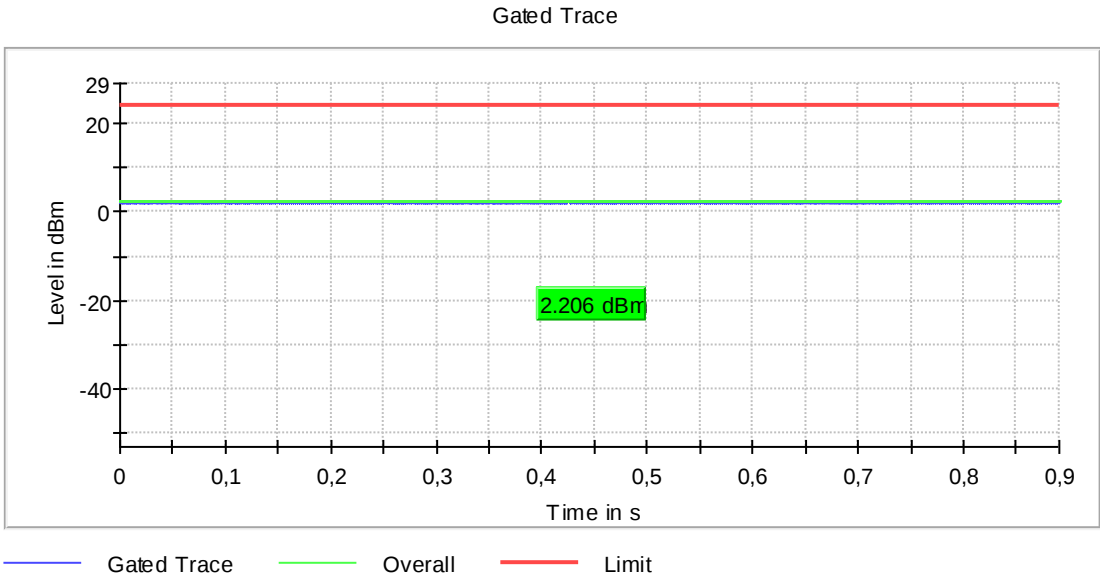

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.3	24.0	2.3	89.624	PASS

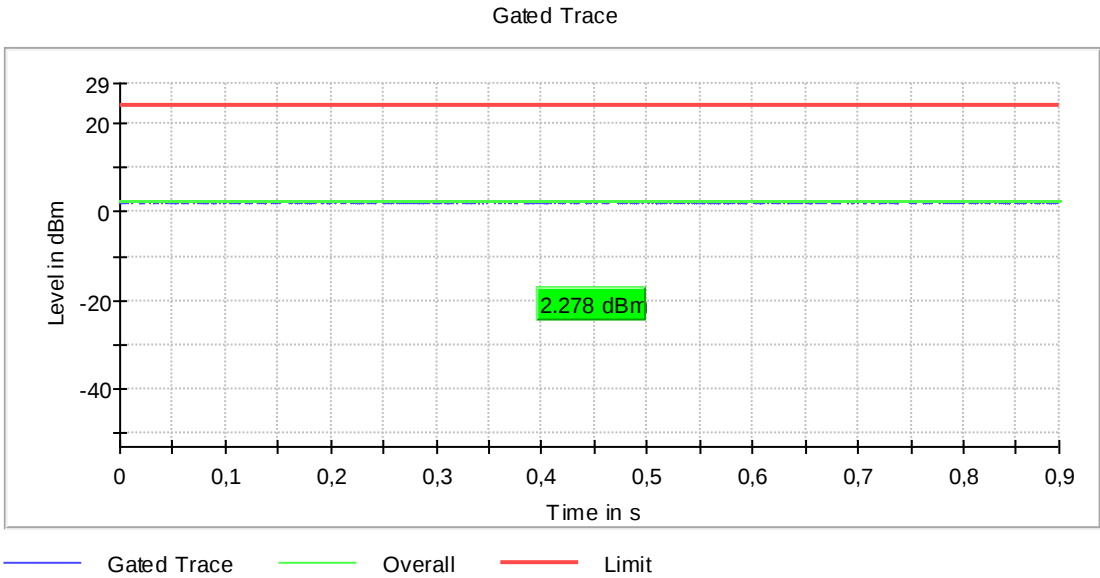

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5280 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	89.633	PASS

Gated Trace

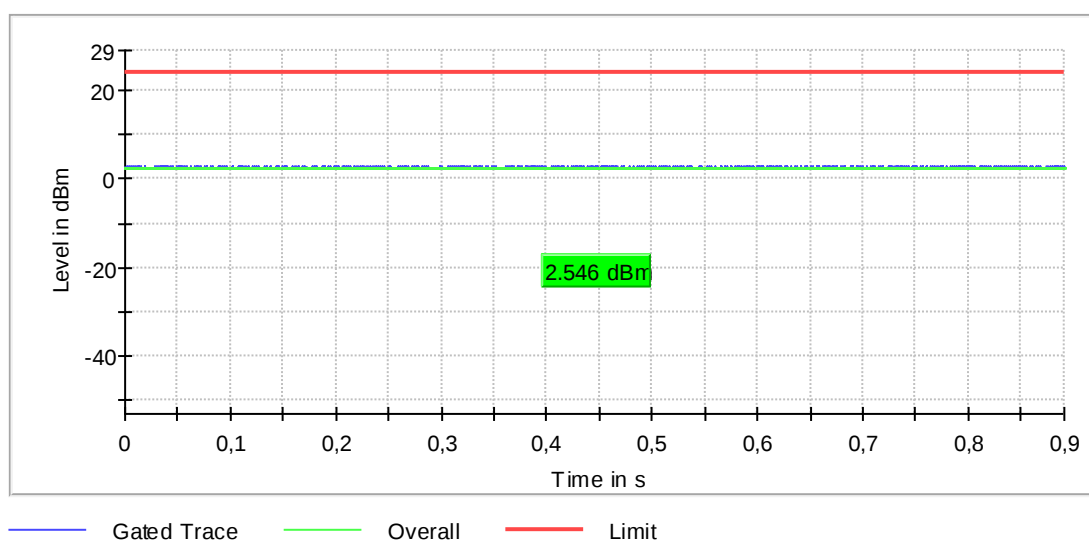

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.0	24.0	1.0	89.638	PASS

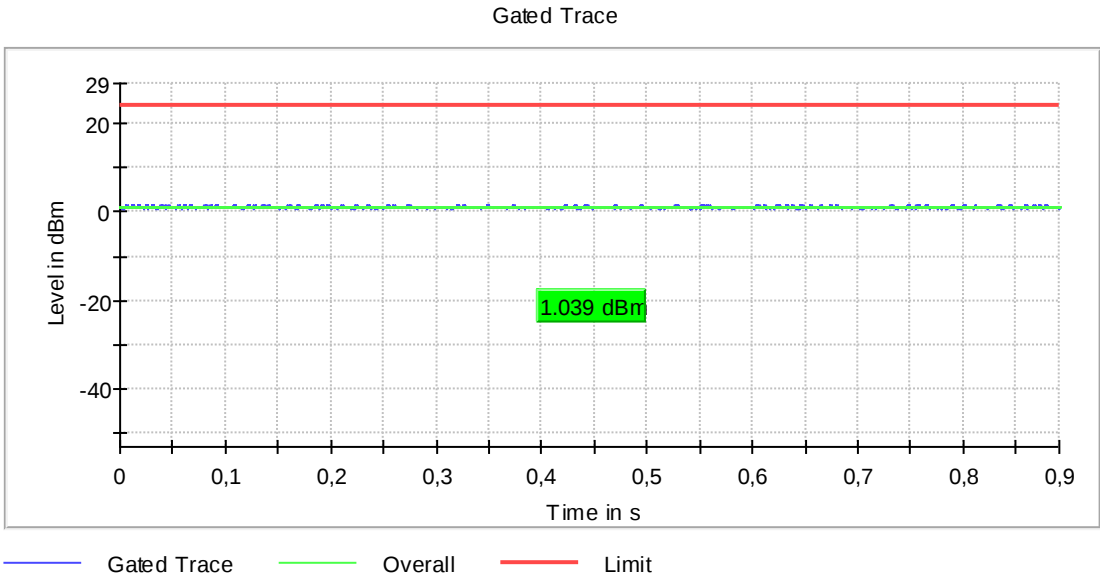

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	89.768	PASS

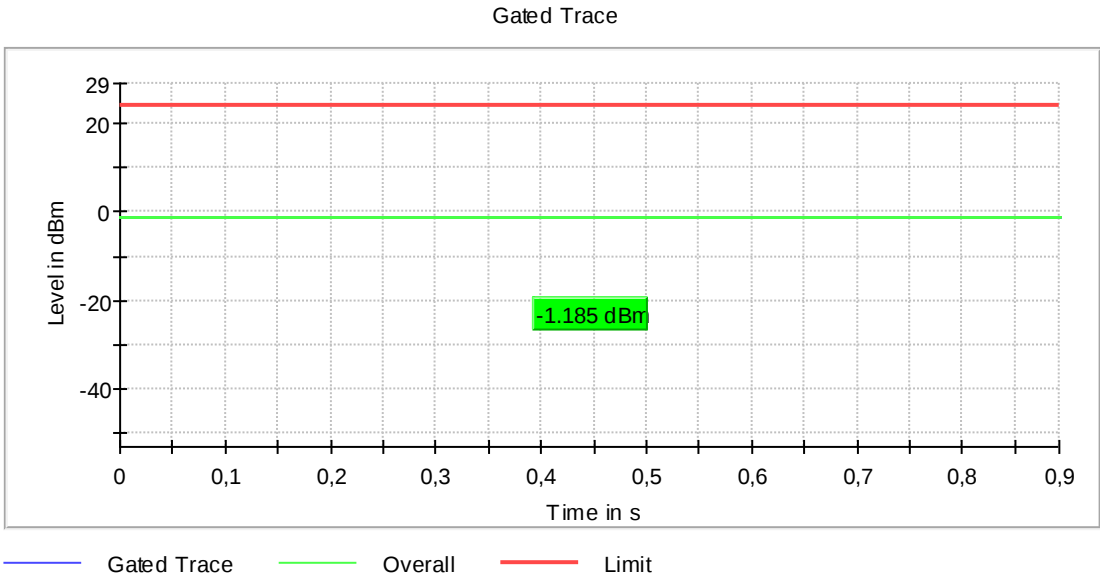

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.1	24.0	-1.1	89.706	PASS

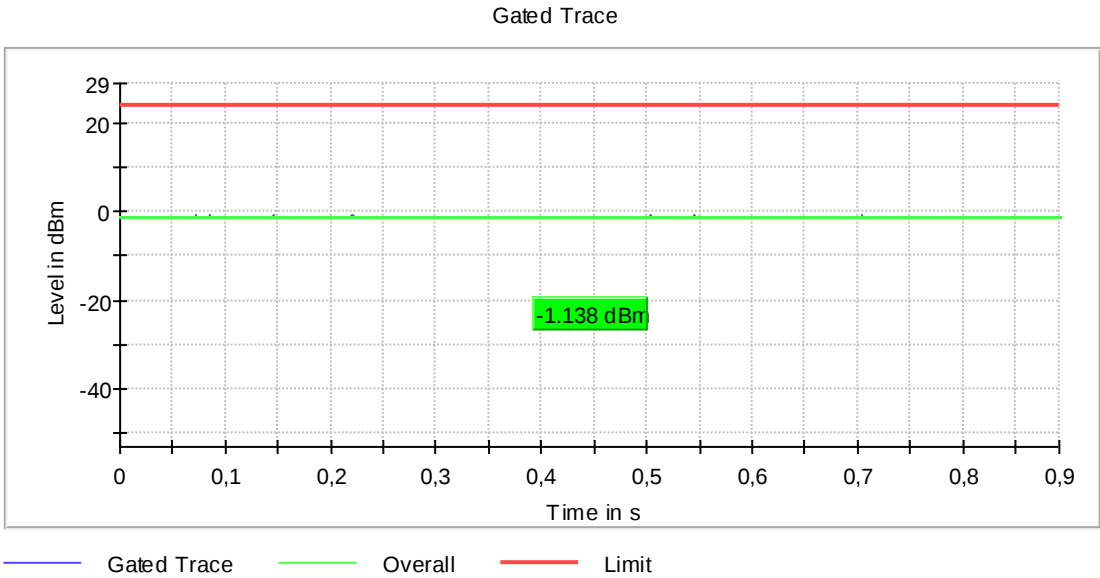

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	89.752	PASS

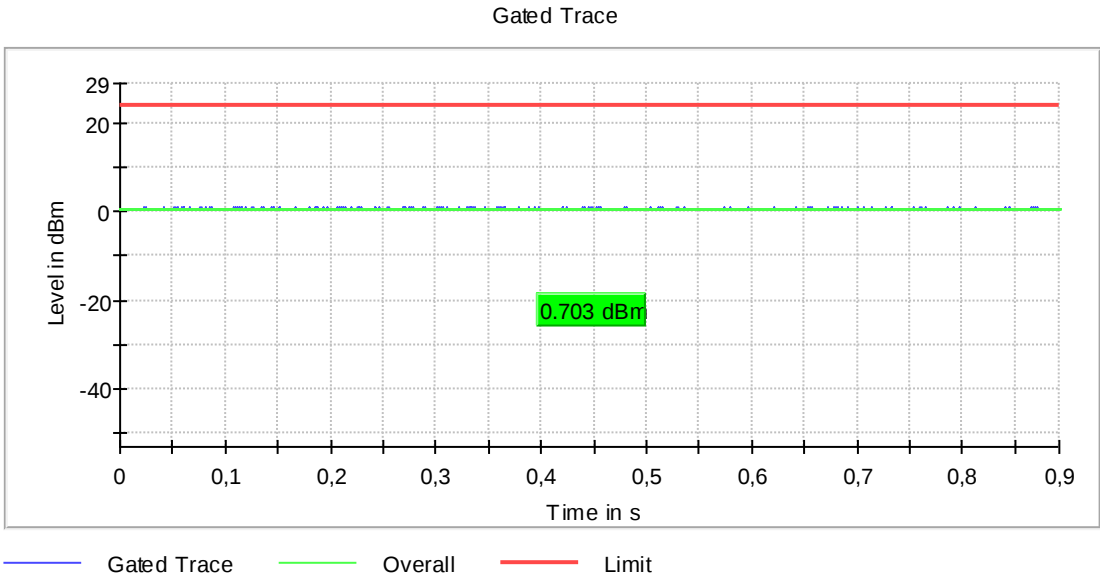

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.9	30.0	-0.9	89.770	PASS

Gated Trace

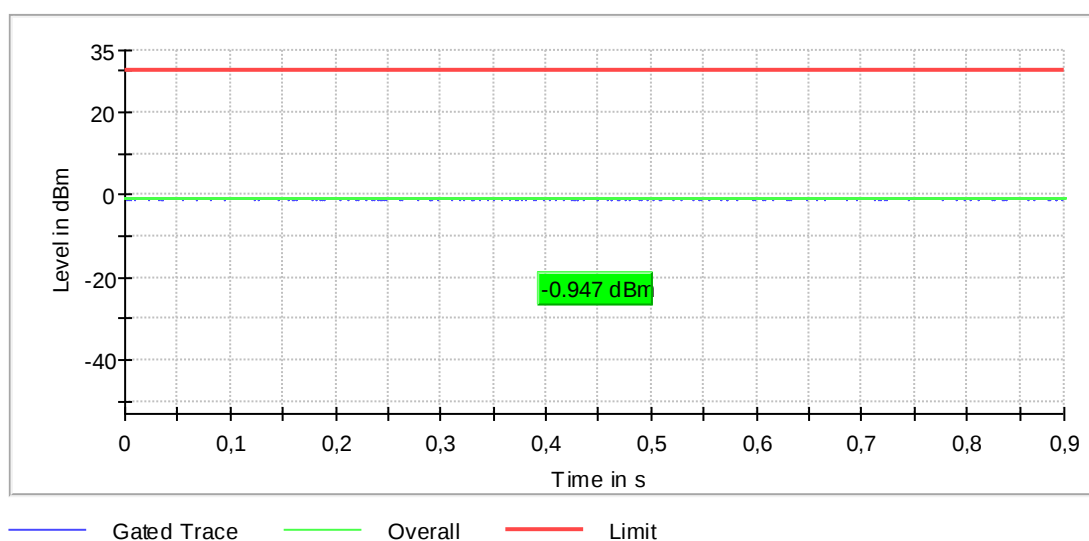

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5785 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	89.692	PASS

Gated Trace

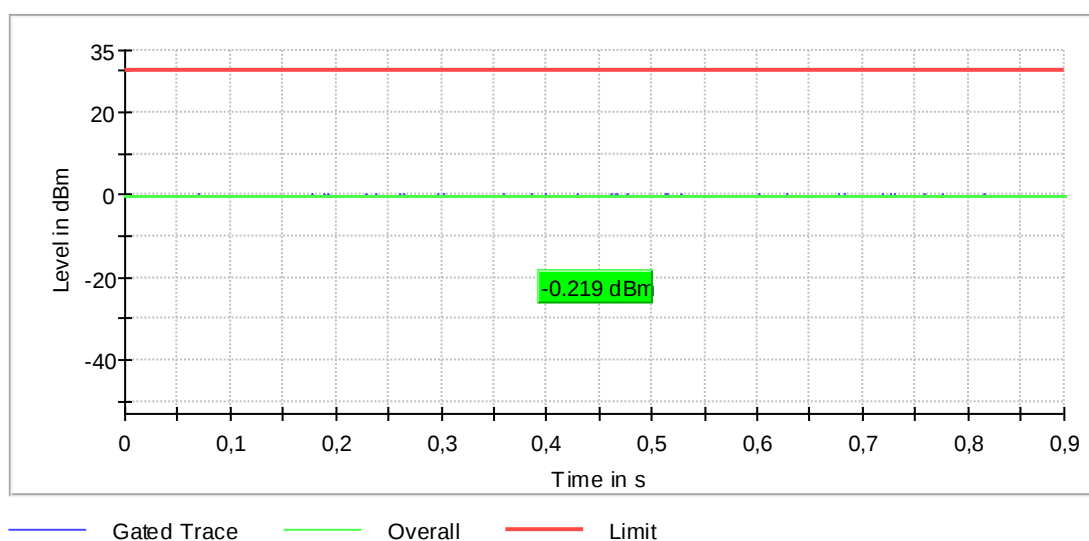

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5825 MHz; ac20-mode [MCS7] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.7	30.0	-0.7	89.705	PASS

Gated Trace

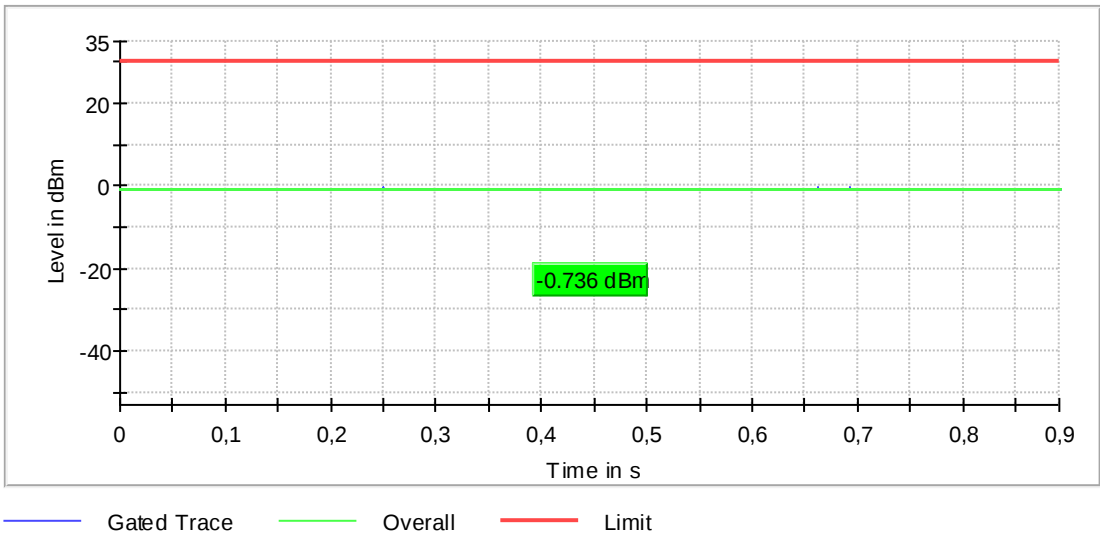

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	2.9	24.0	2.9	90.343	PASS

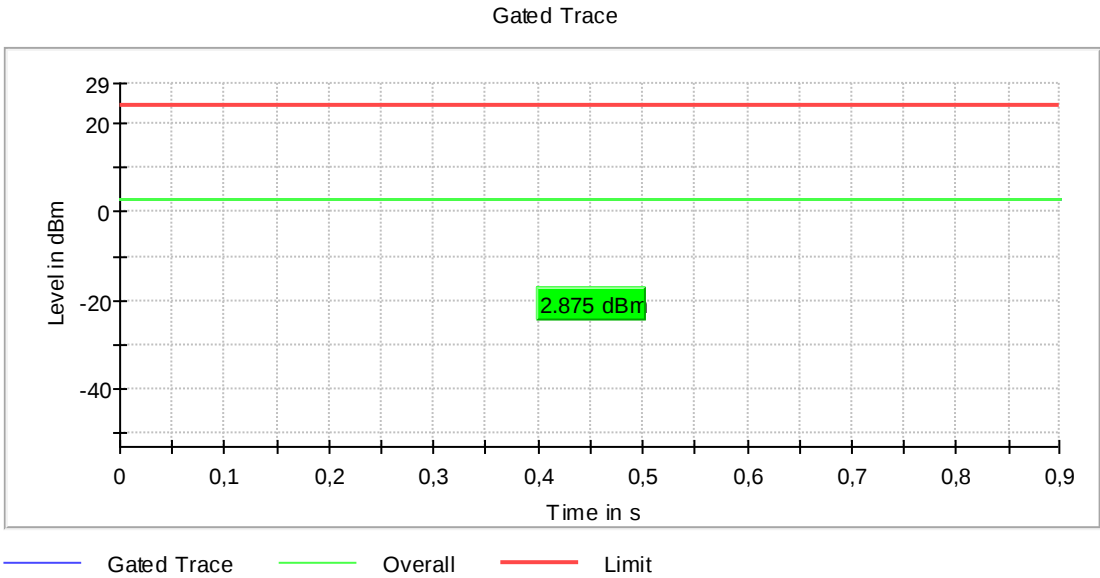

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	90.332	PASS

Gated Trace

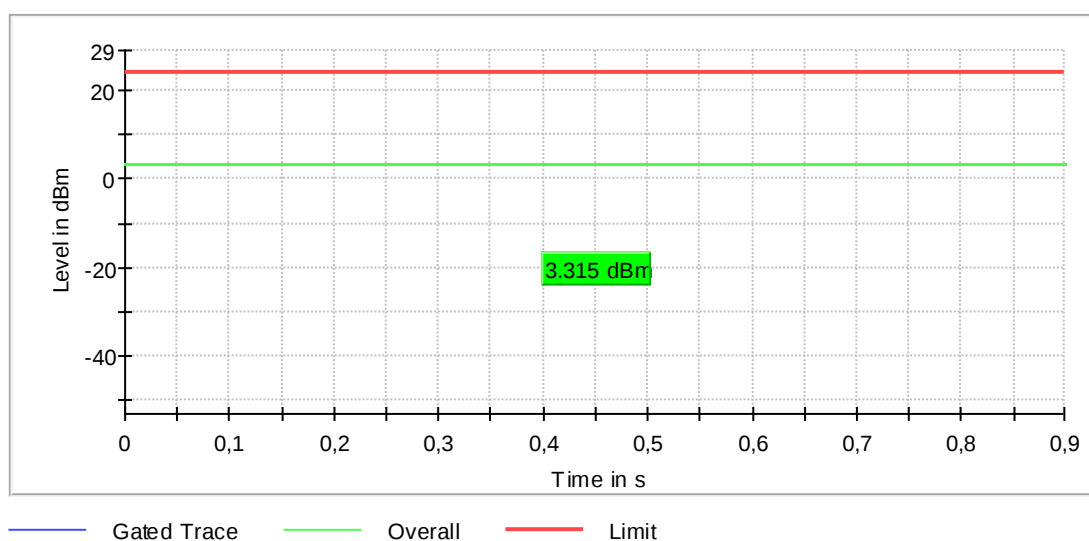

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.3	24.0	2.3	90.317	PASS

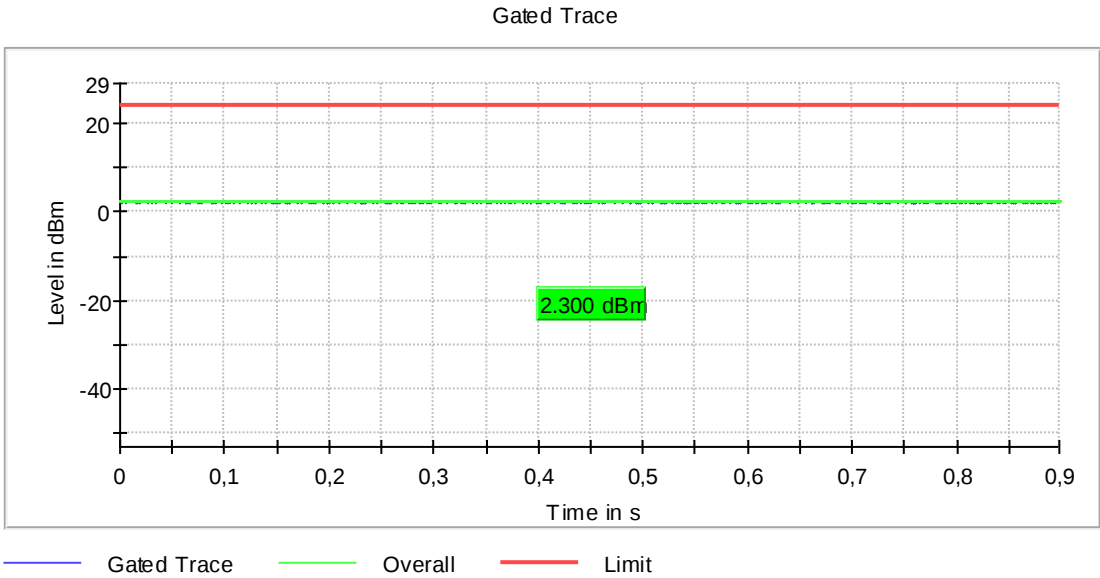

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.3	24.0	2.3	90.341	PASS

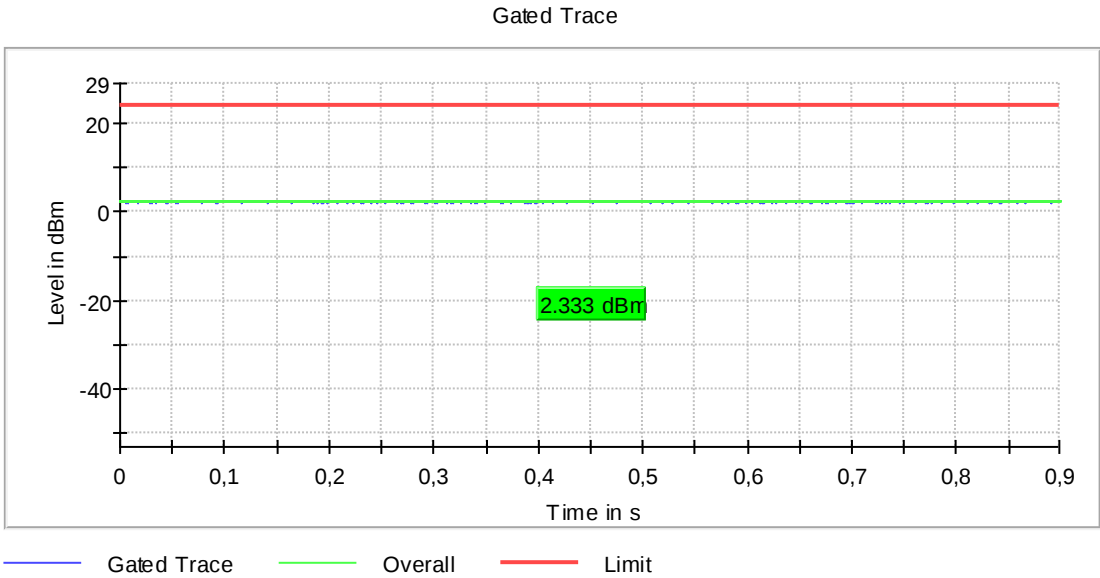

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.6	24.0	2.6	90.340	PASS

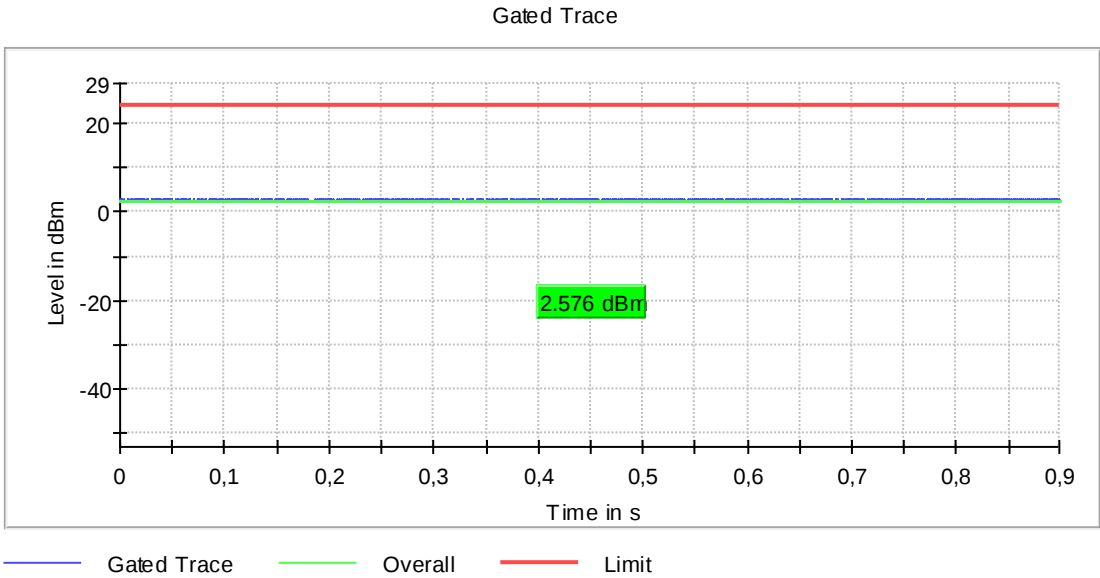

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.2	24.0	1.2	90.337	PASS

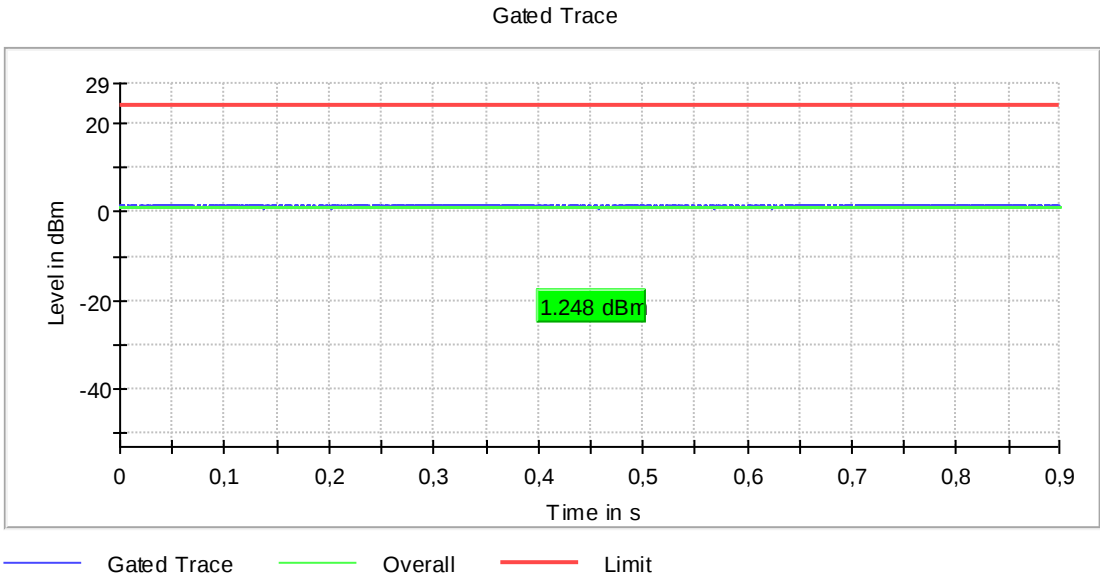

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	90.423	PASS

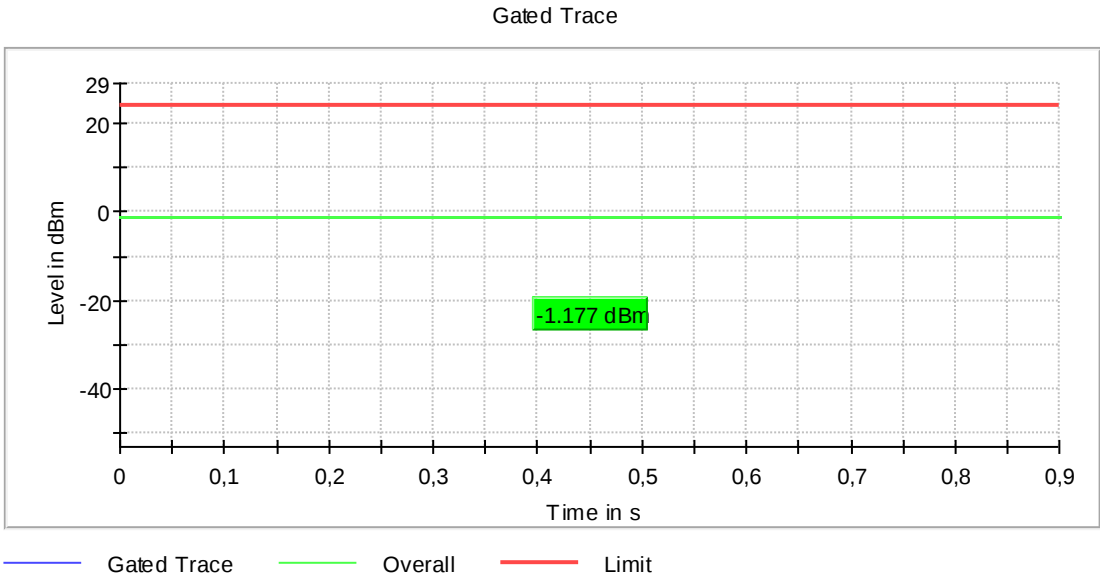

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.1	24.0	-1.1	90.388	PASS

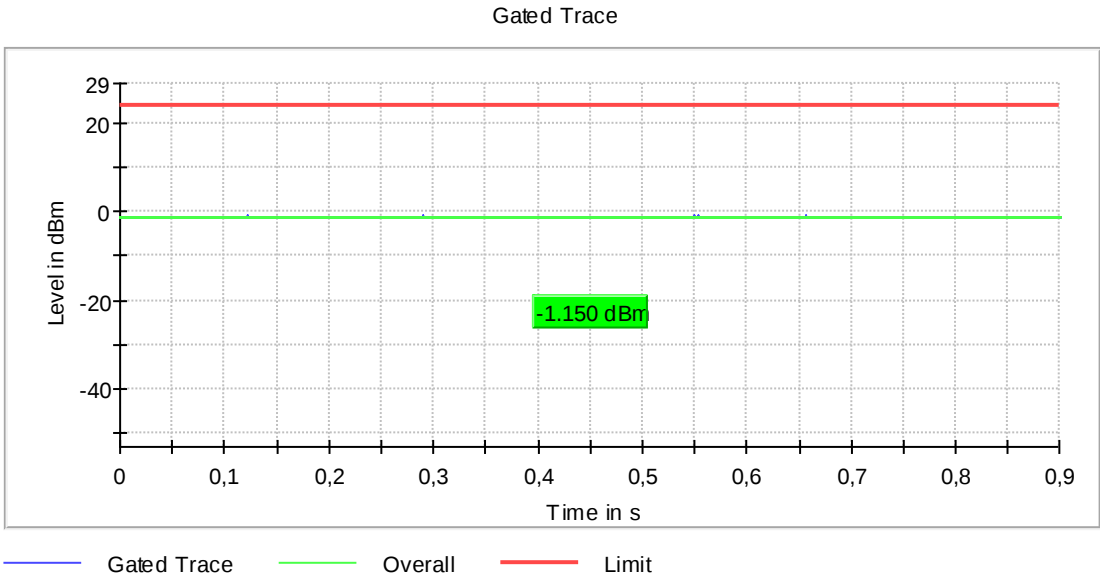

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5700 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	90.390	PASS

Gated Trace

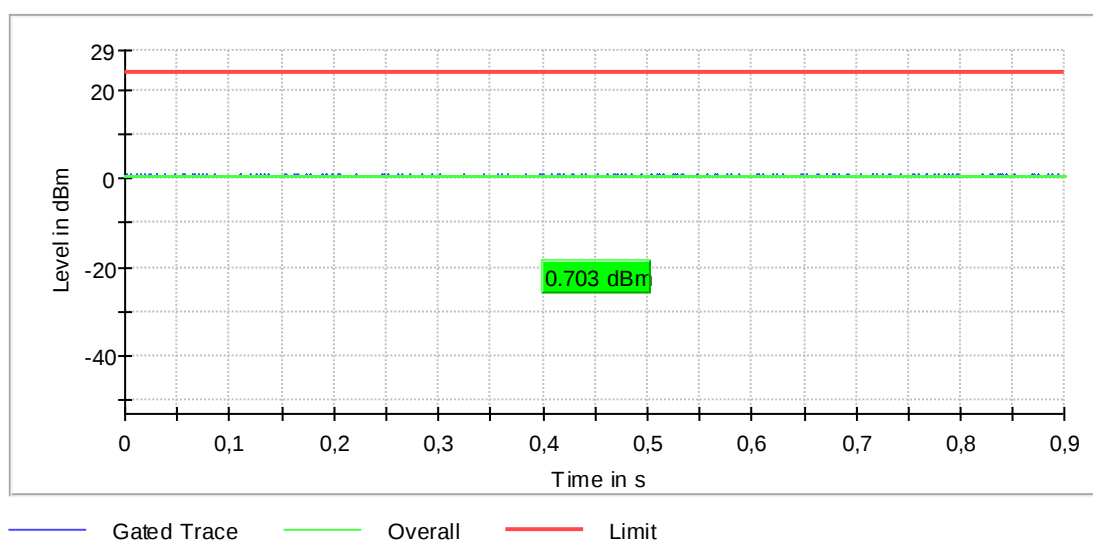

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5745 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.9	30.0	-0.9	90.398	PASS



OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	90.422	PASS

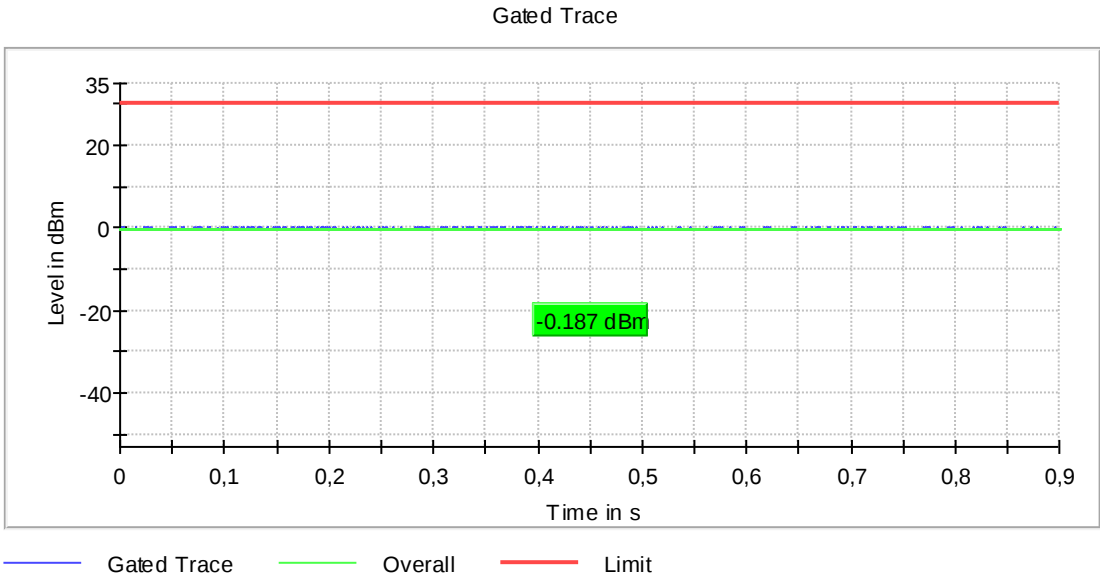

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5825 MHz; ac20-mode [MCS6] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.7	30.0	-0.7	90.409	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5180 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	2.9	24.0	2.9	91.117	PASS

Gated Trace

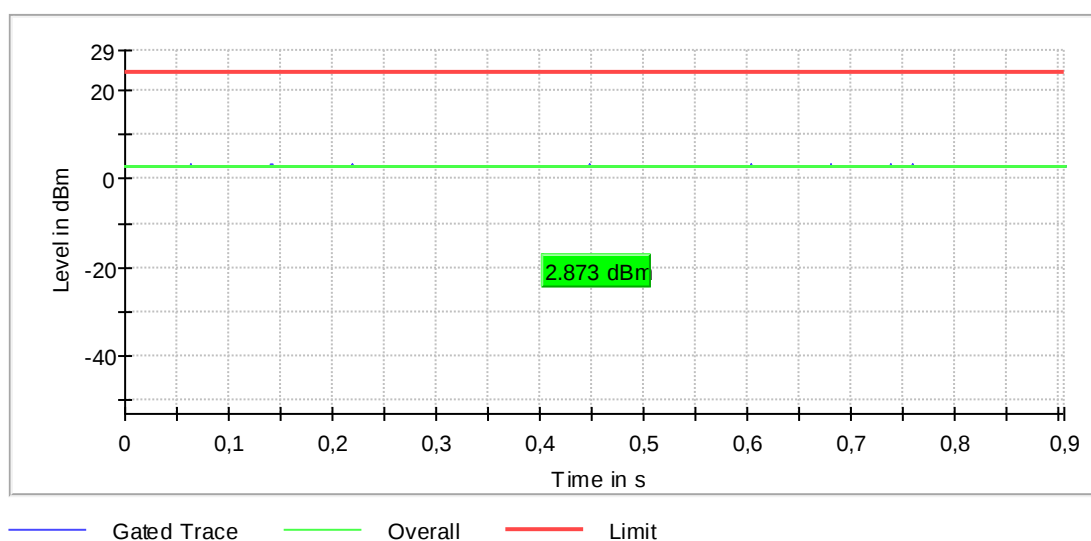

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5200 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.3	24.0	3.3	91.102	PASS

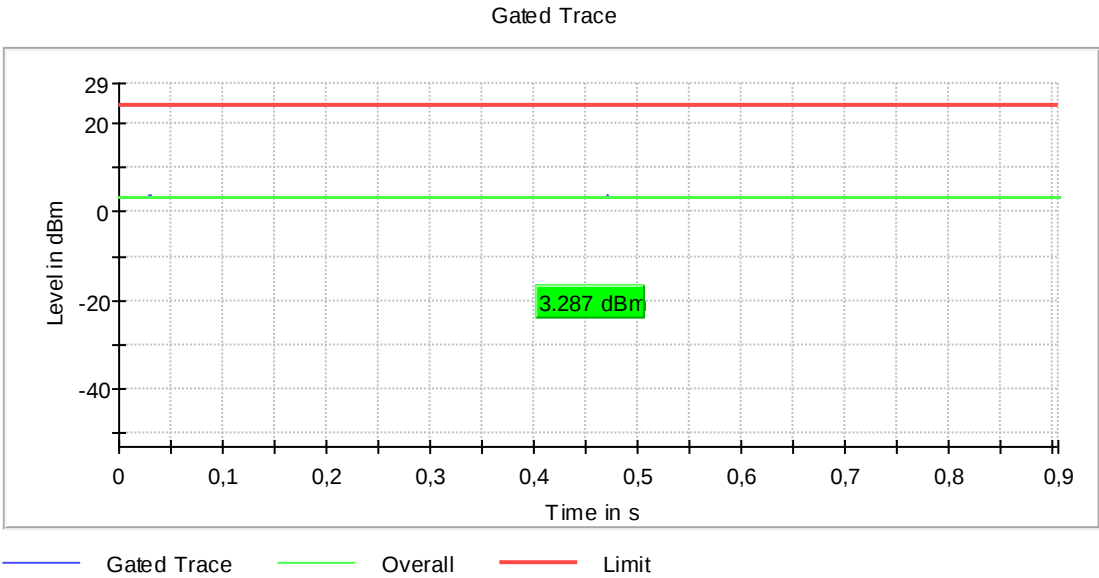

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.3	24.0	2.3	91.111	PASS

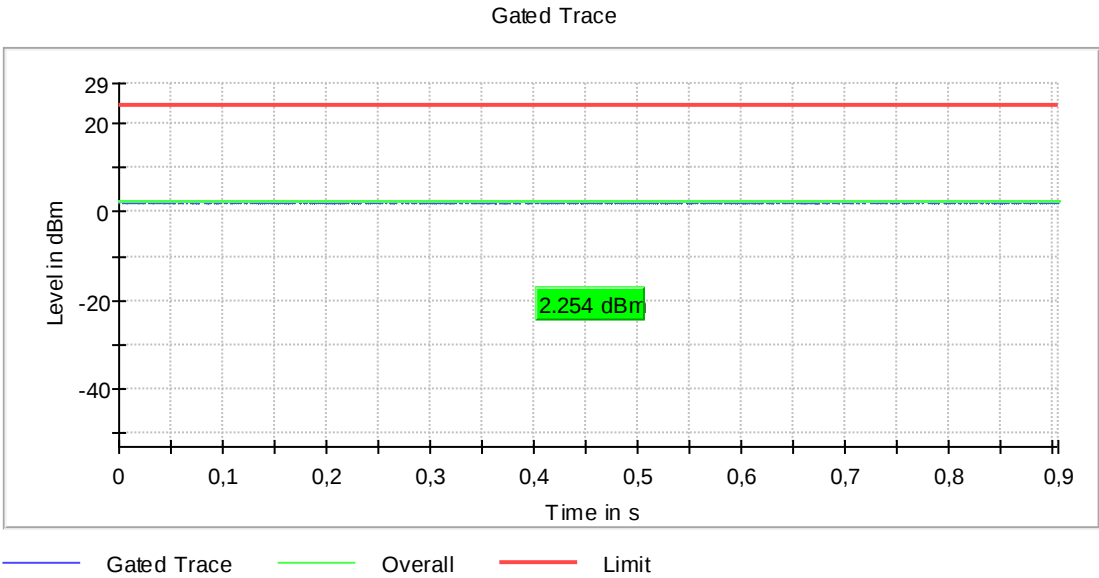

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5260 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.3	24.0	2.3	91.116	PASS

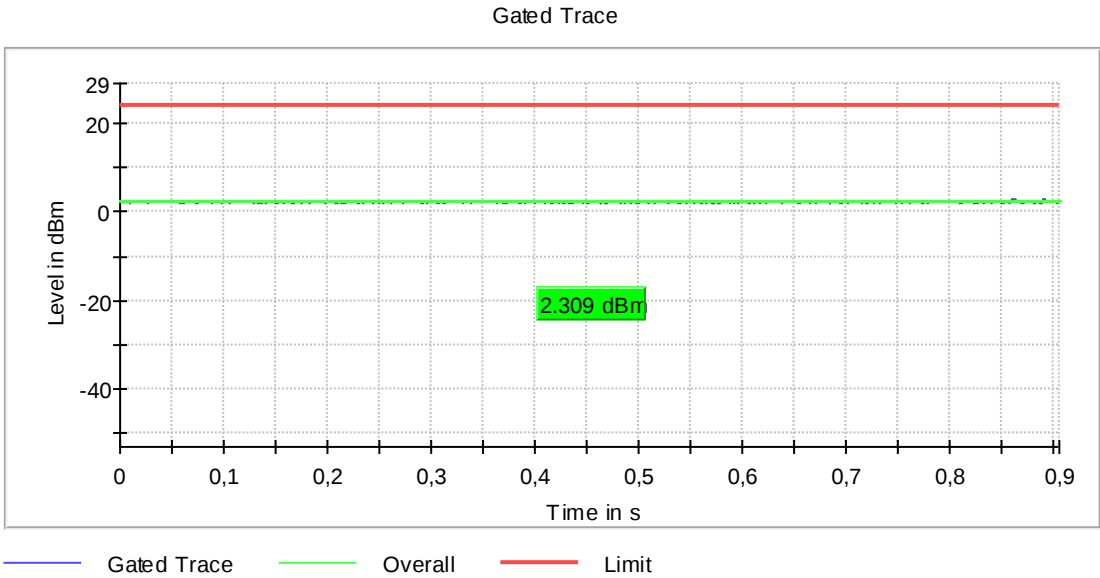

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.6	24.0	2.6	91.101	PASS

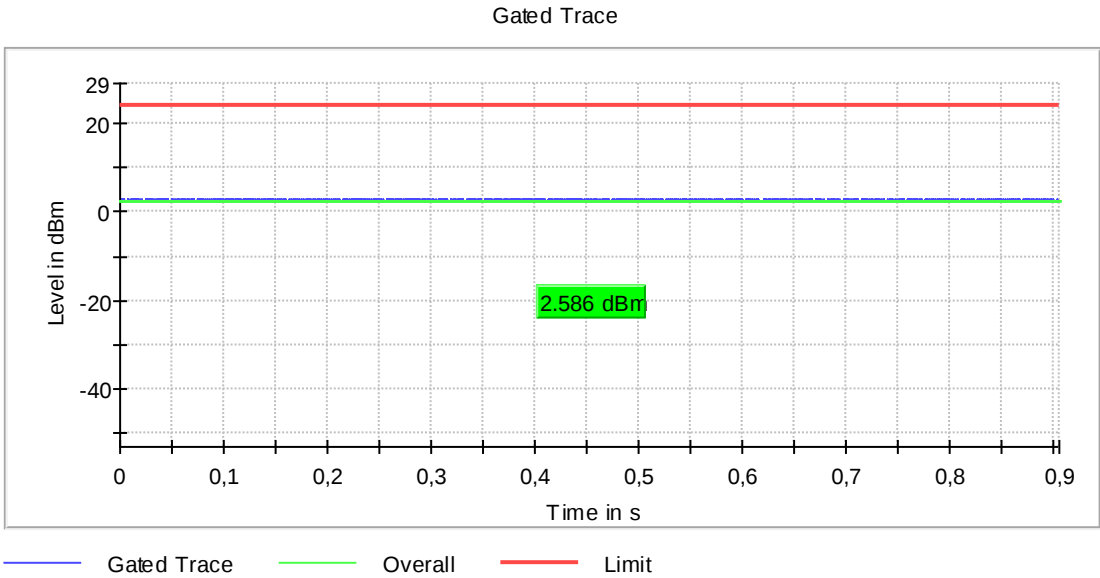

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5320 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.2	24.0	1.2	91.120	PASS

Gated Trace

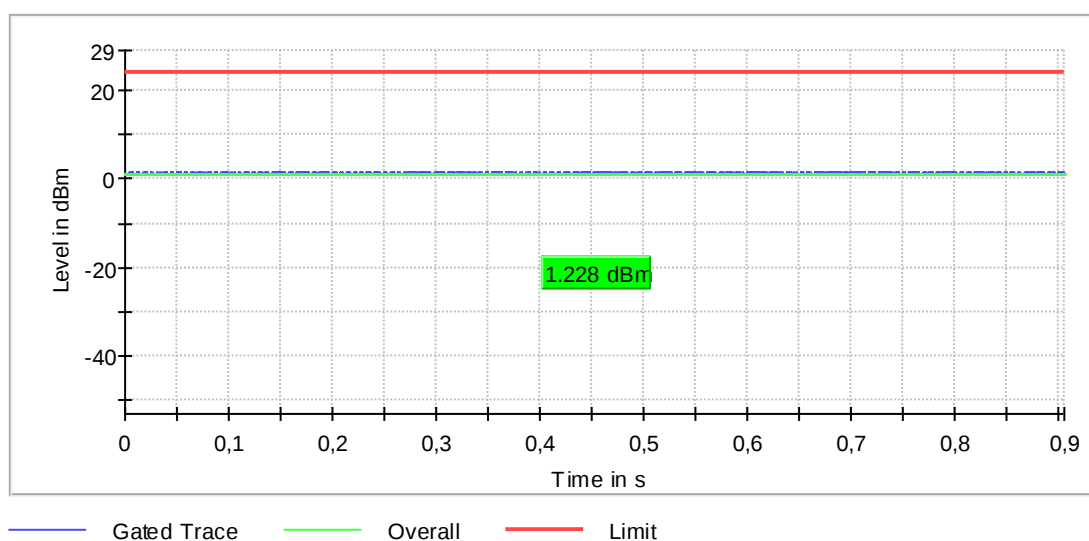

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5500 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	91.190	PASS

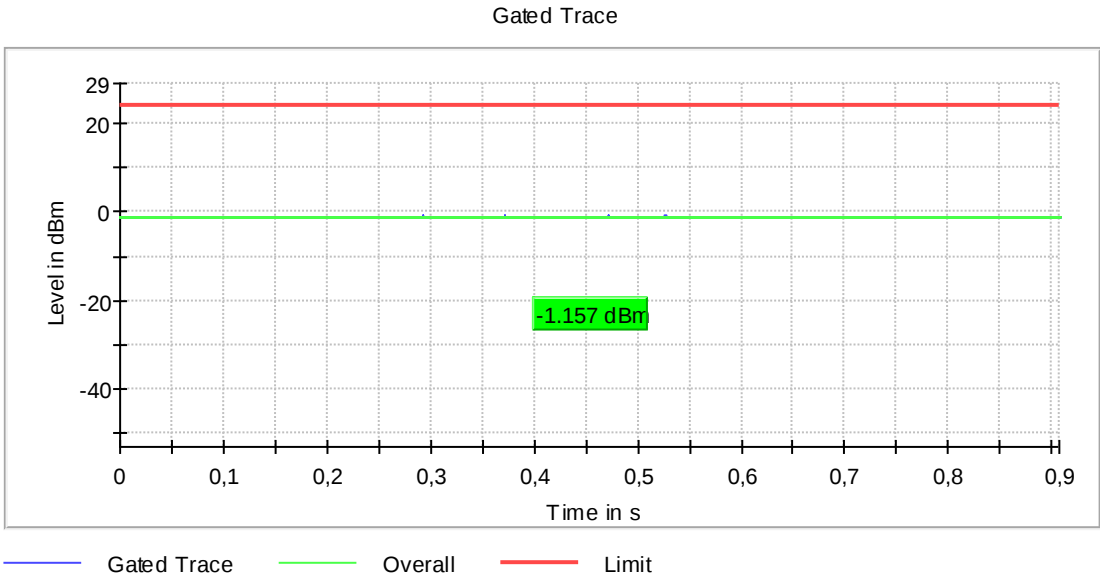

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.1	24.0	-1.1	91.177	PASS

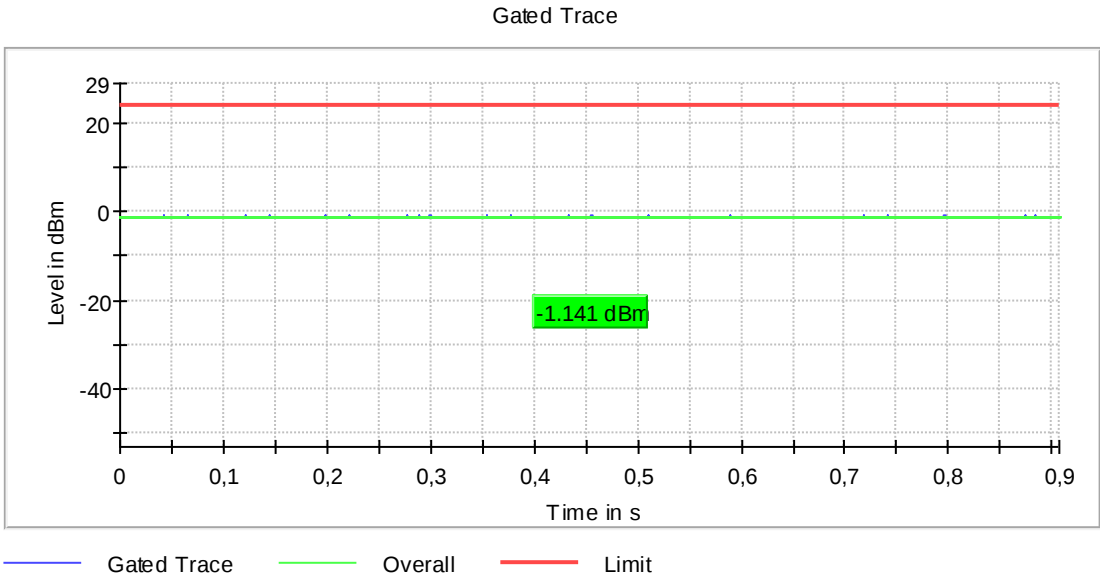

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	91.174	PASS

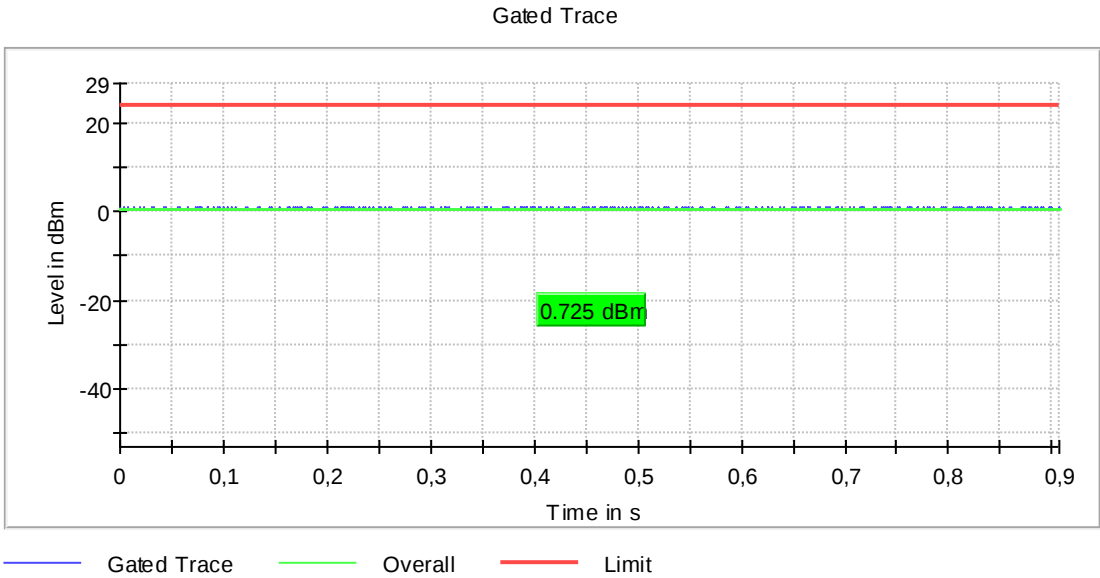

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.9	30.0	-0.9	91.198	PASS

Gated Trace

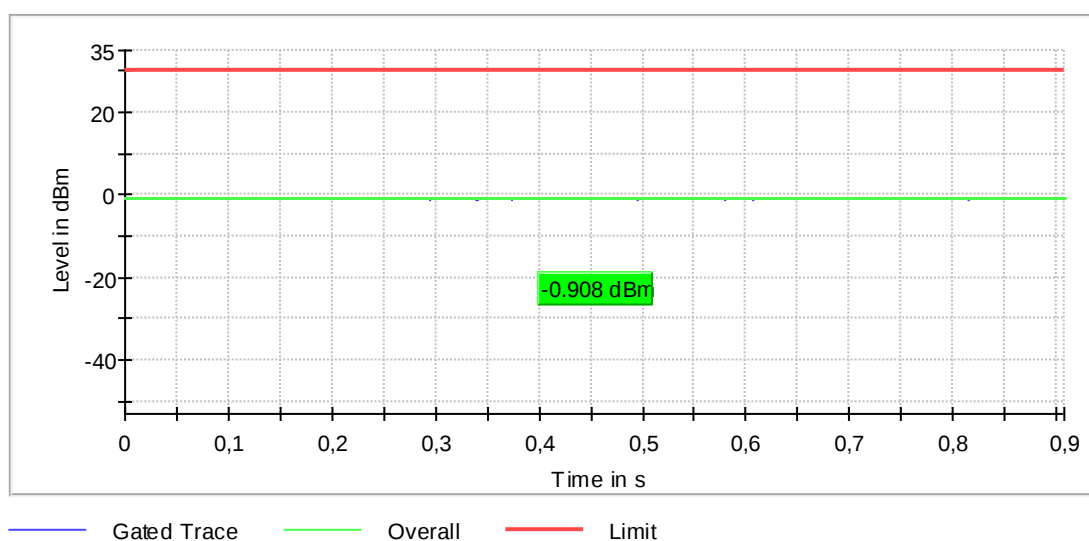

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	91.183	PASS

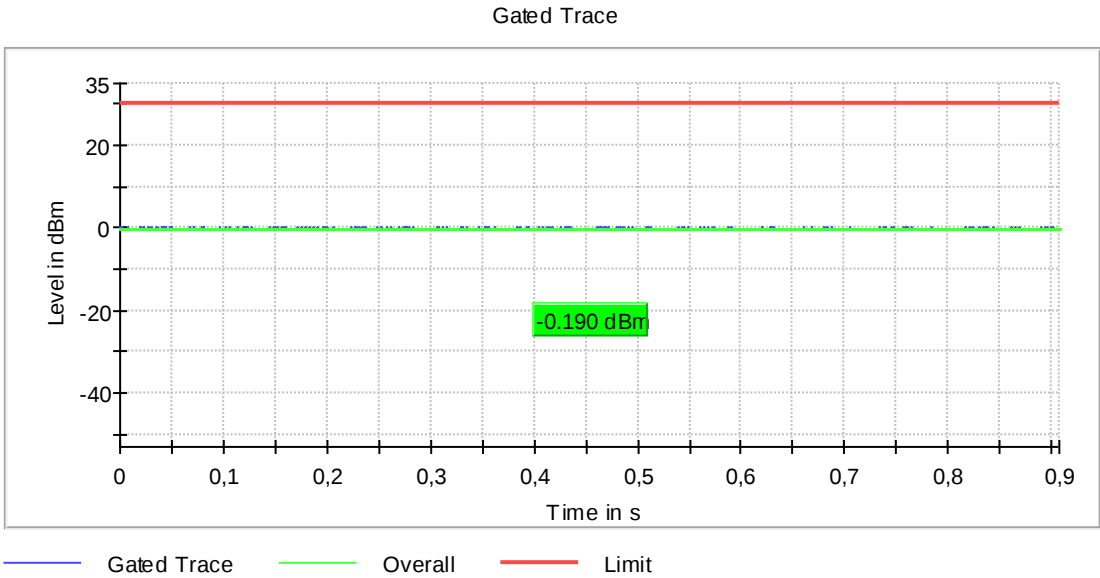

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; ac20-mode [MCS5] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.7	30.0	-0.7	91.174	PASS

Gated Trace

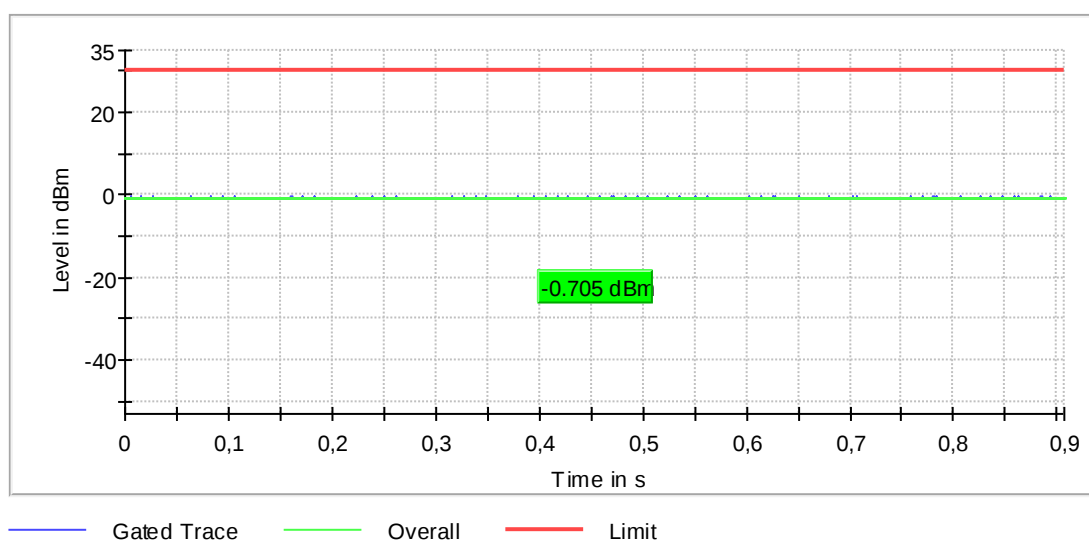

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	-2.5	24.0	-2.5	91.176	PASS

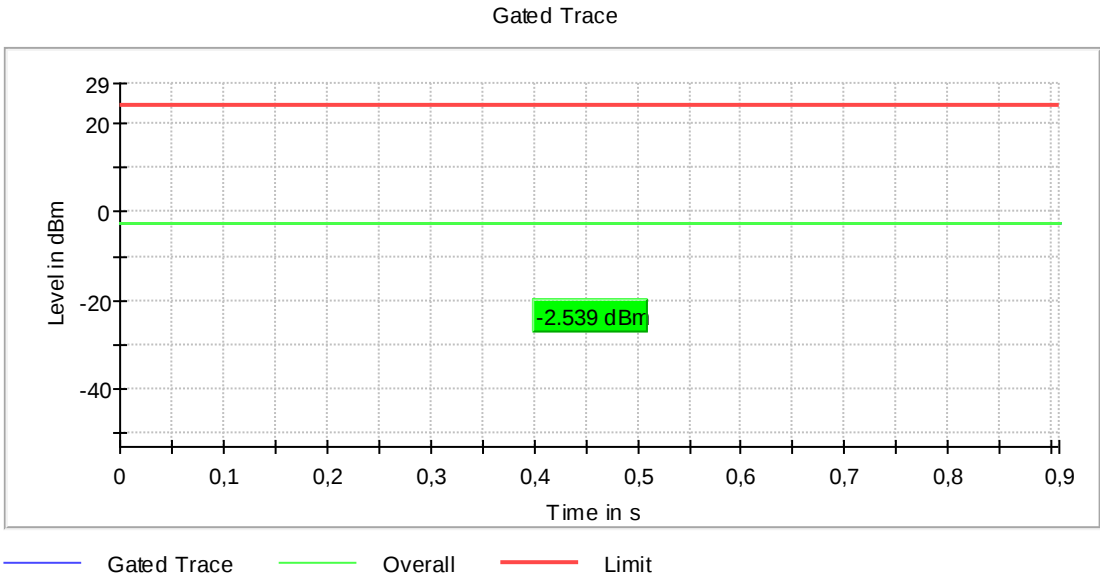

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5200 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	92.725	PASS

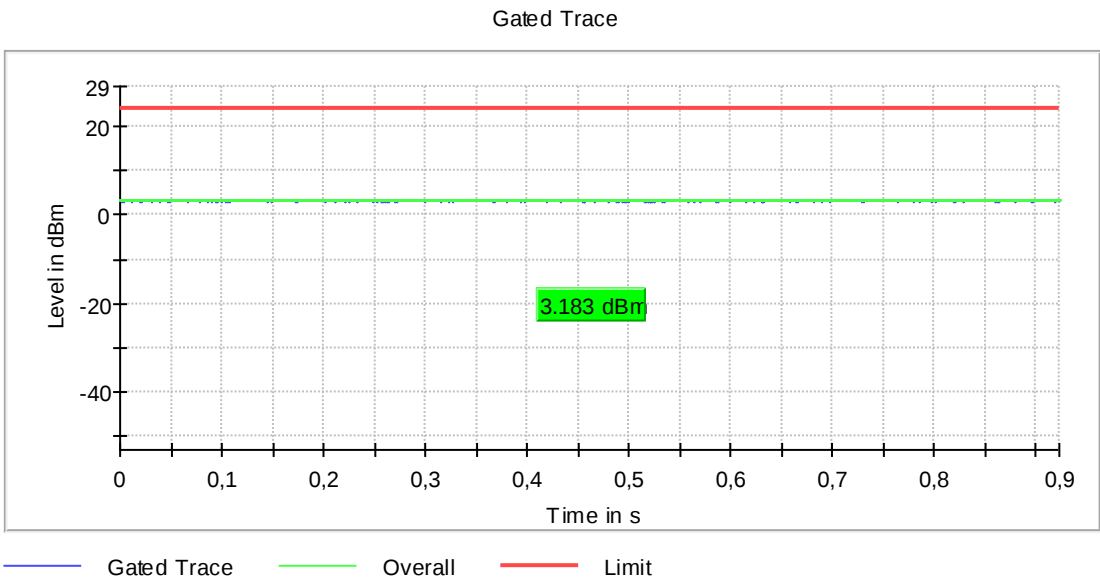

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.2	24.0	2.2	92.762	PASS

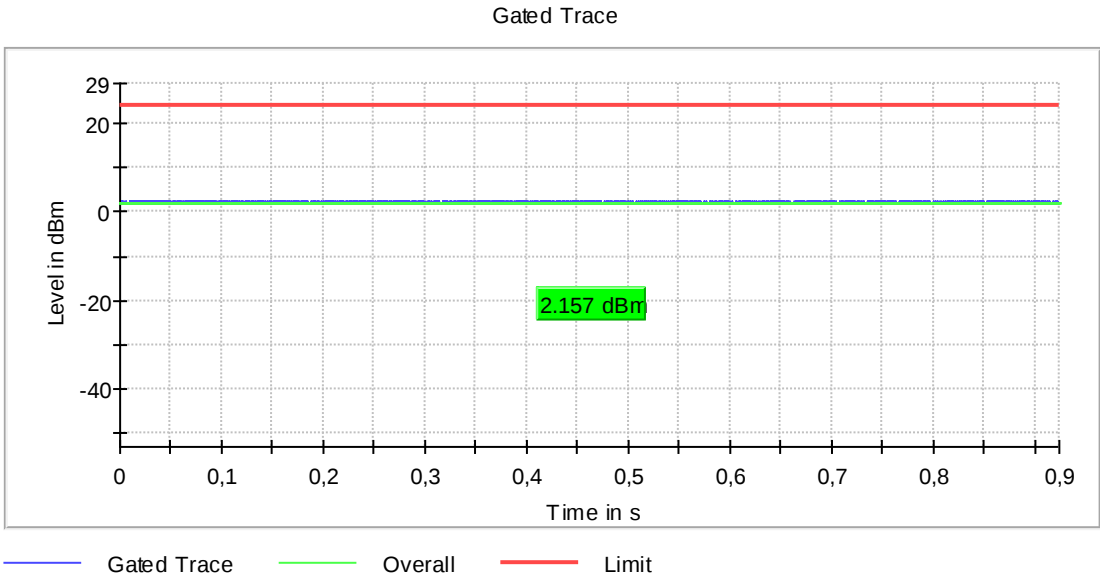

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	92.740	PASS

Gated Trace

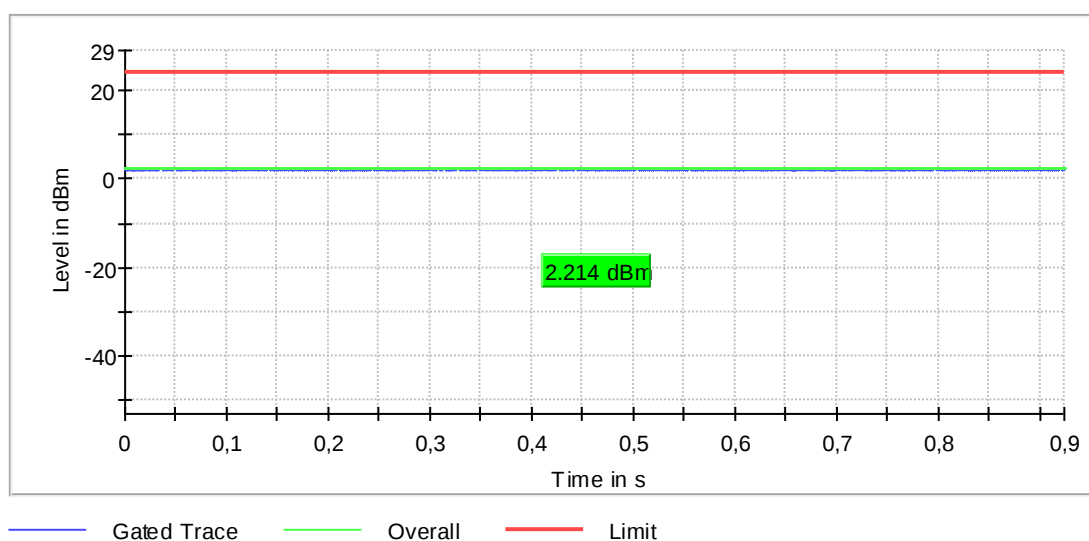

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5280 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	92.755	PASS

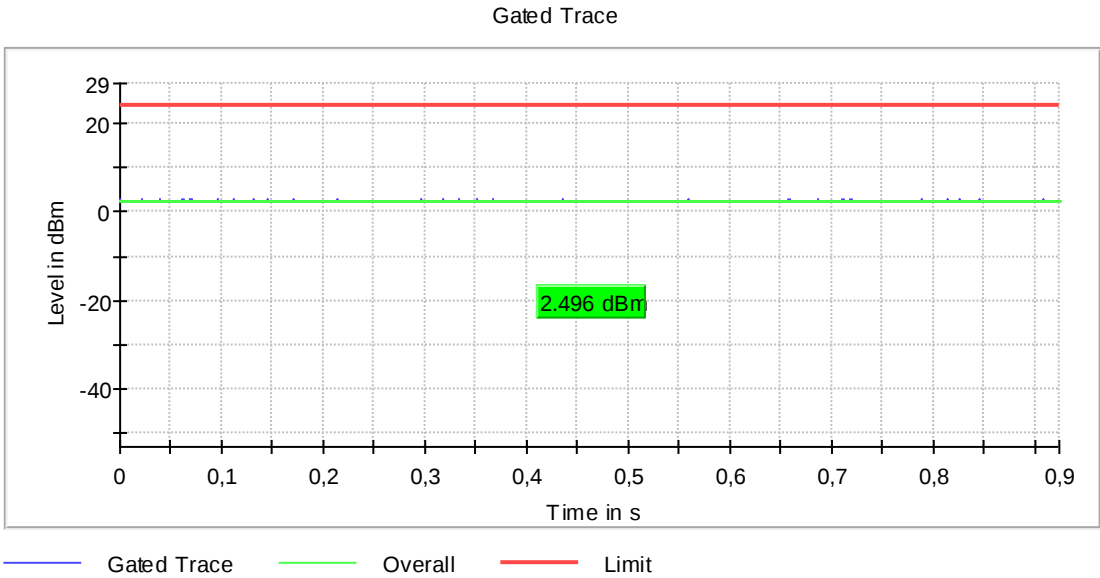

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5320 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	0.9	24.0	0.9	92.749	PASS

Gated Trace

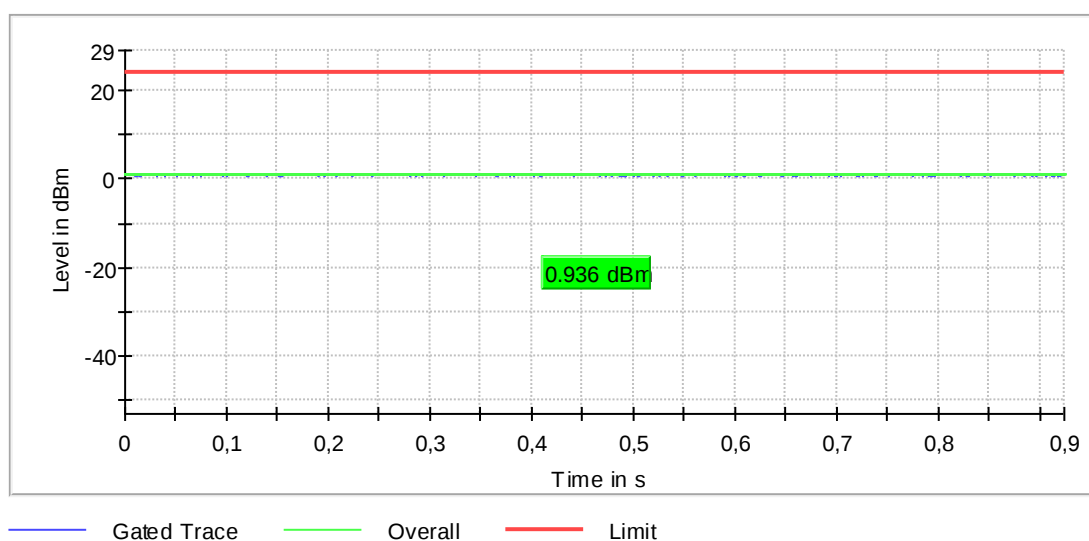

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5500 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	92.796	PASS

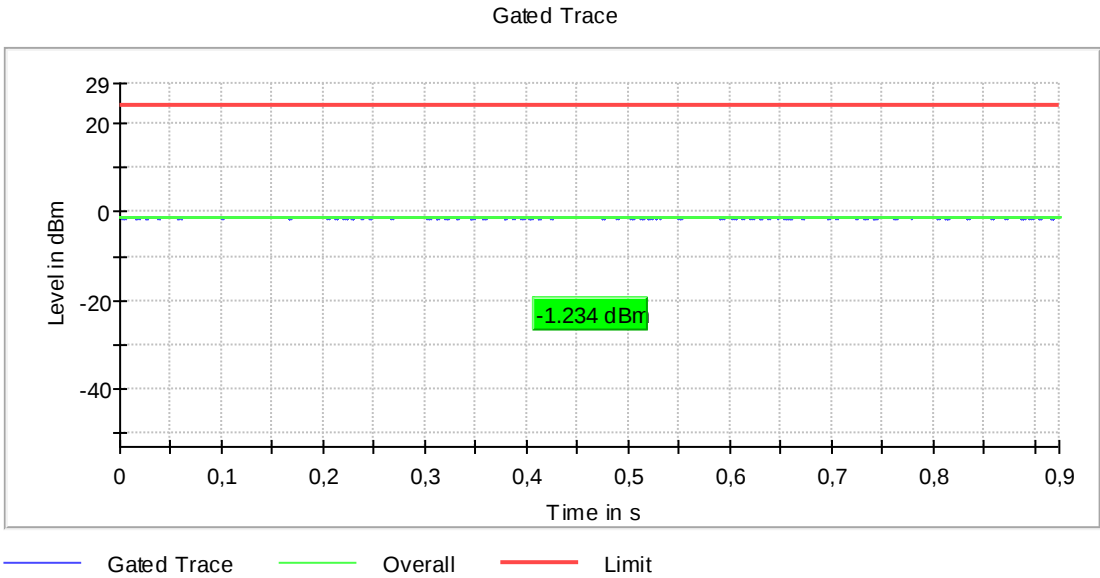

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5580 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.2	24.0	-1.2	92.821	PASS

Gated Trace

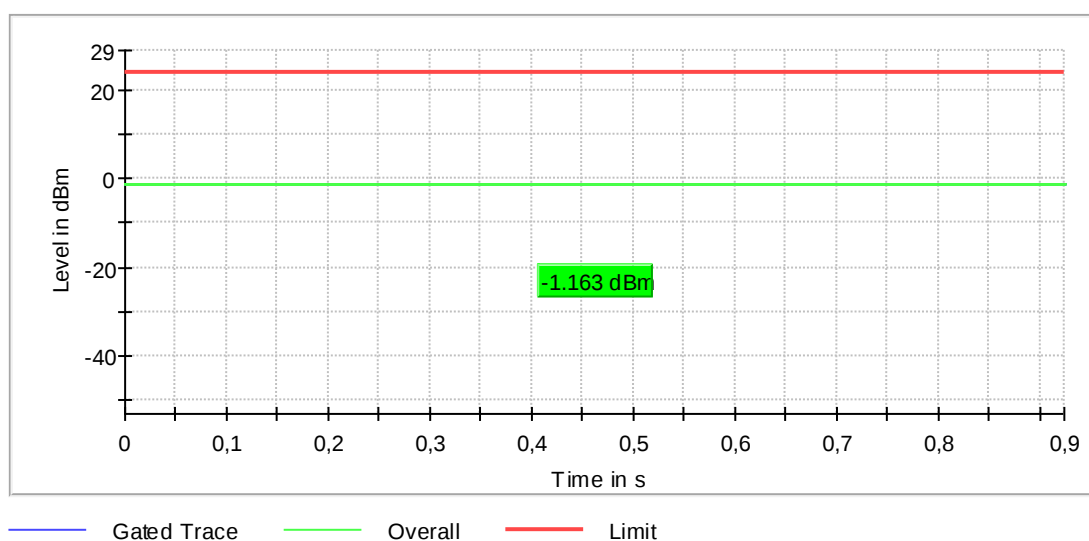

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5700 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	92.781	PASS

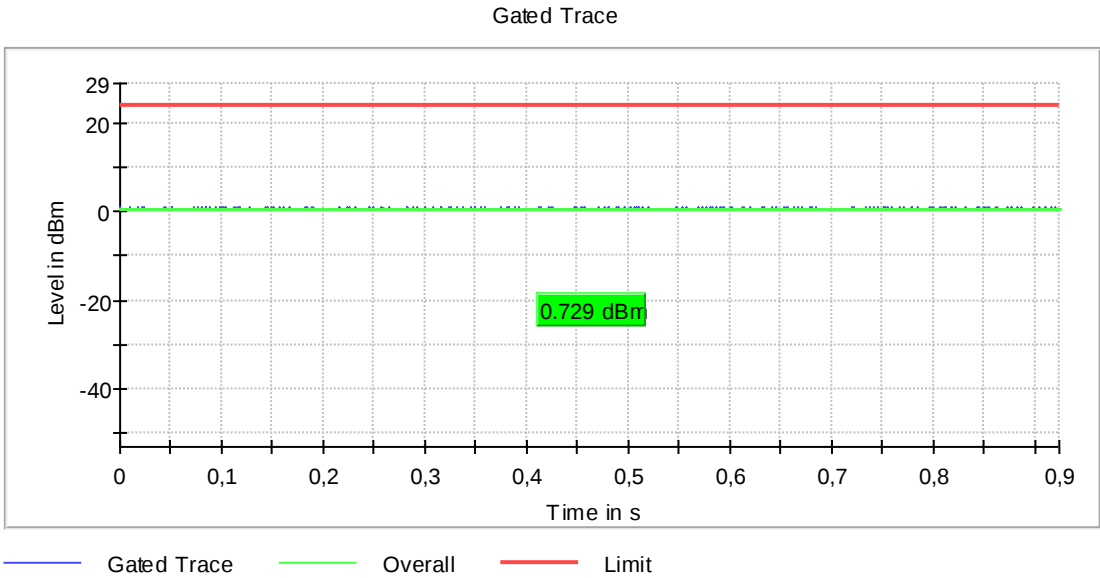

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.9	30.0	-0.9	92.801	PASS

Gated Trace

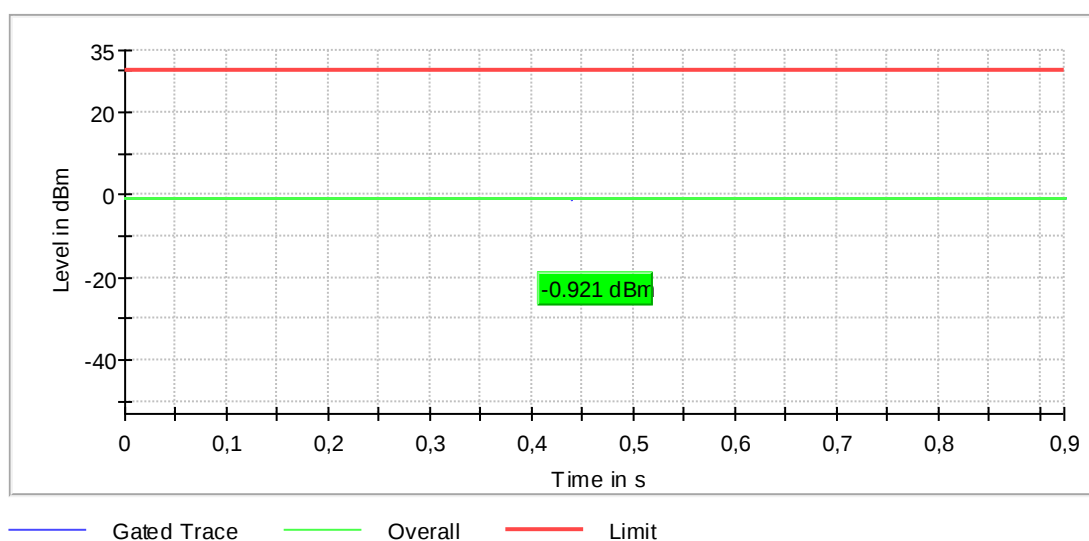

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5785 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	92.790	PASS

Gated Trace

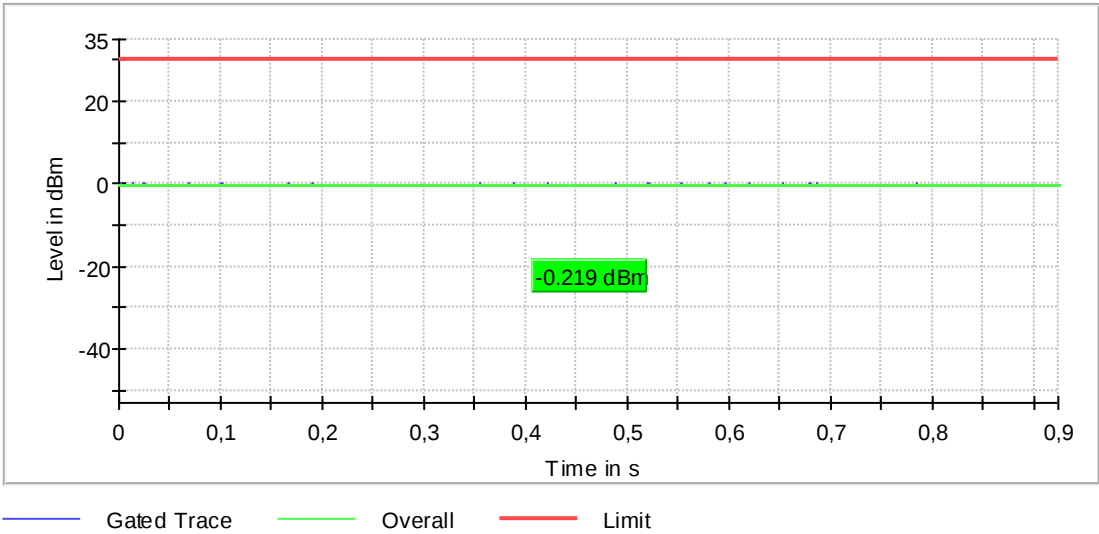

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; ac20-mode [MCS4] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.6	30.0	-0.6	92.787	PASS

Gated Trace

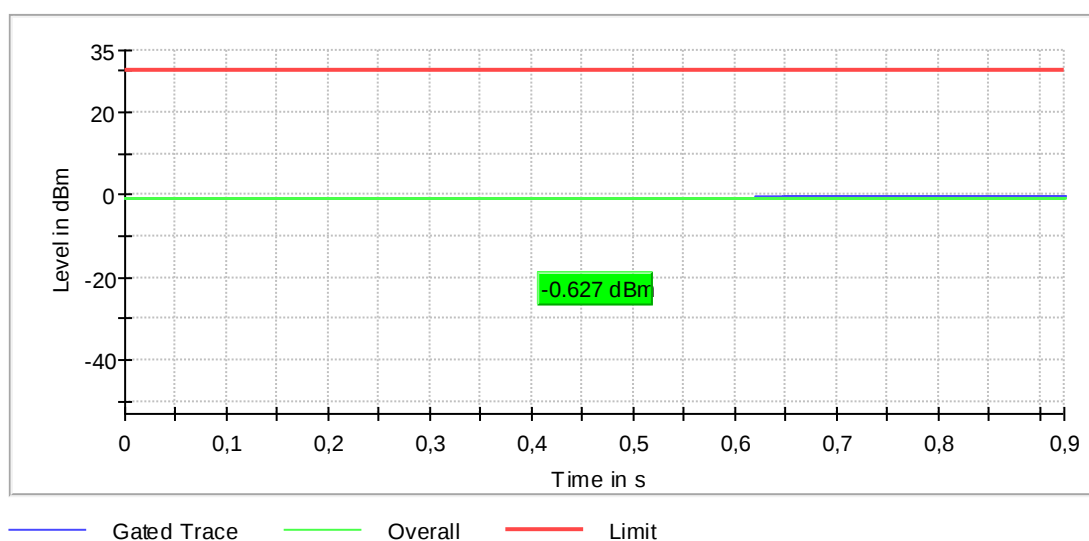

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	94.856	PASS

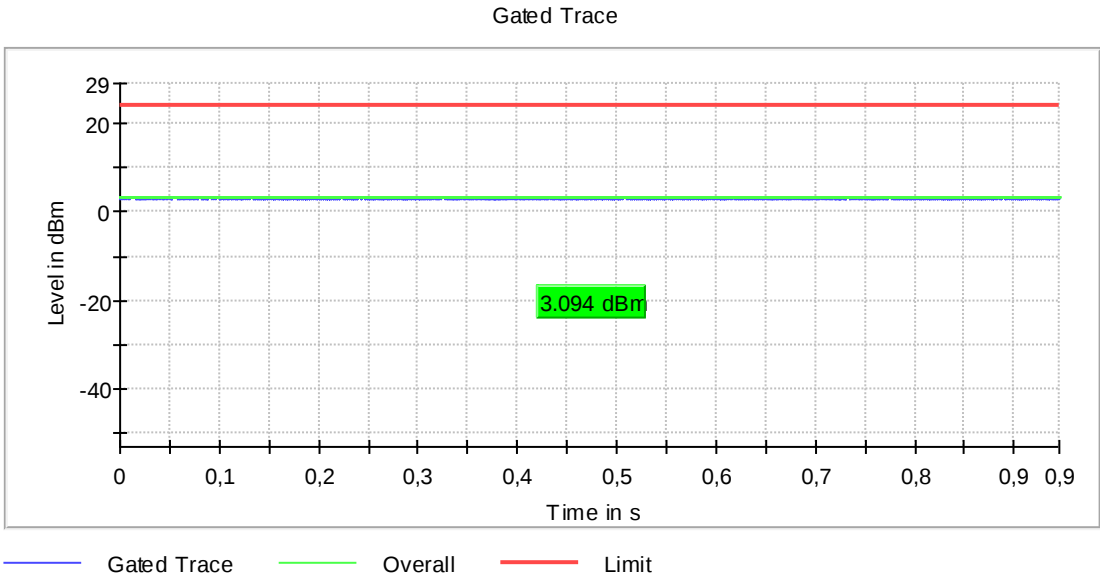

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	94.863	PASS

Gated Trace

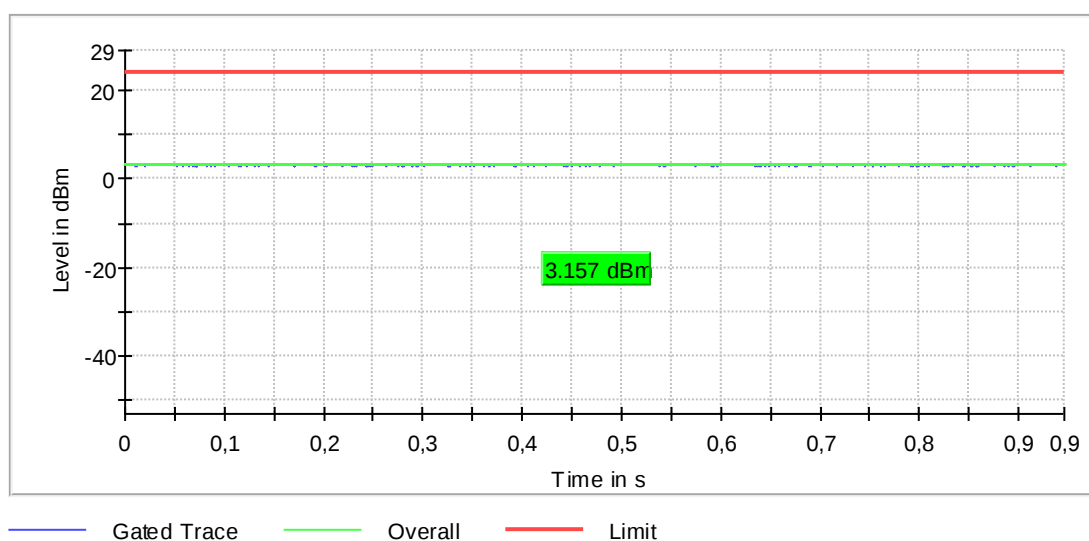

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5240 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	94.881	PASS

Gated Trace

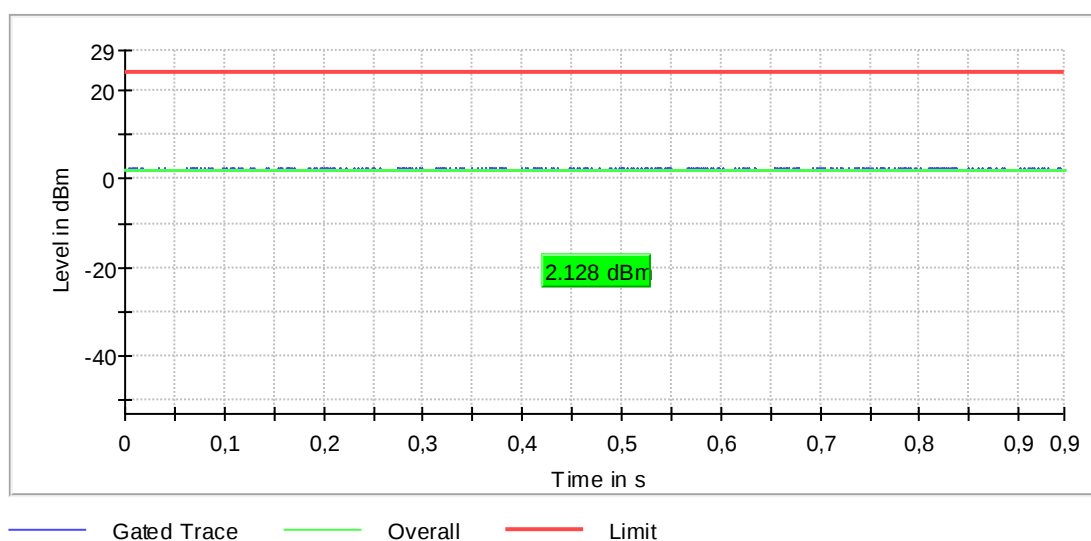

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5260 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	94.843	PASS



OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	94.883	PASS

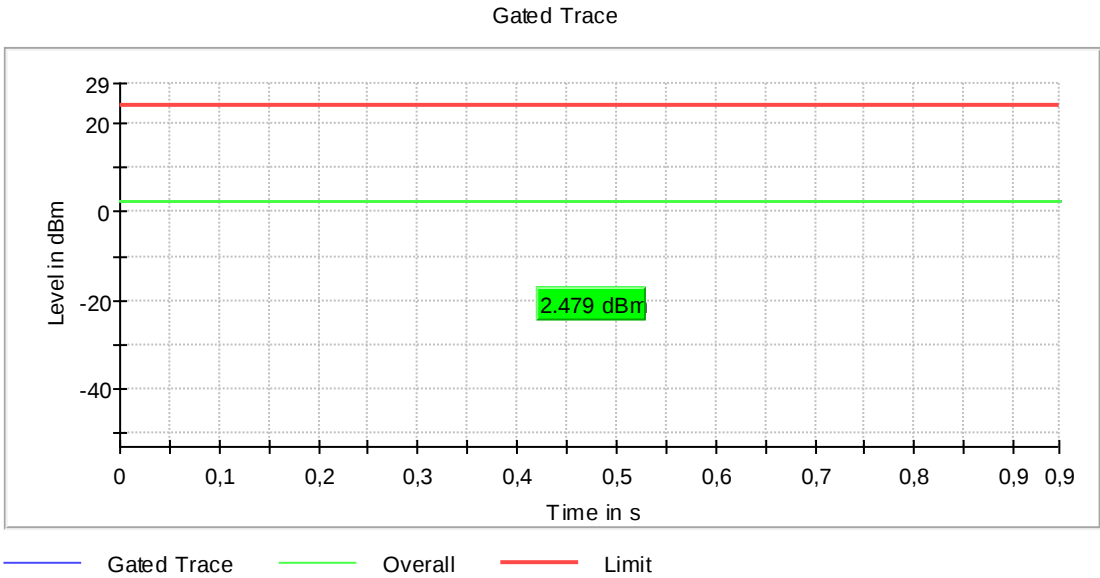

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.2	24.0	1.2	94.884	PASS

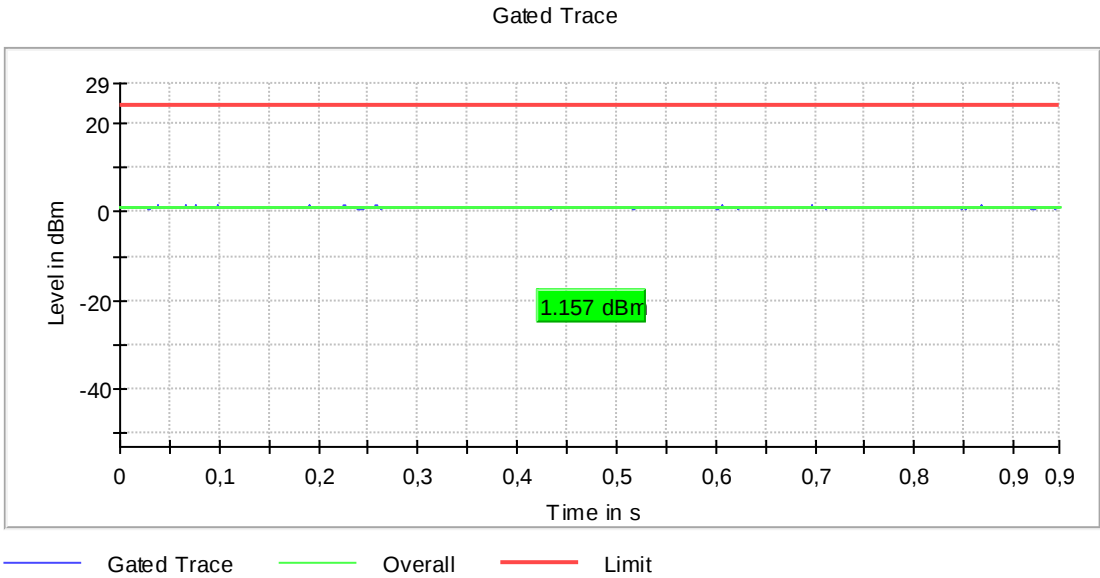

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5500 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	94.914	PASS

Gated Trace

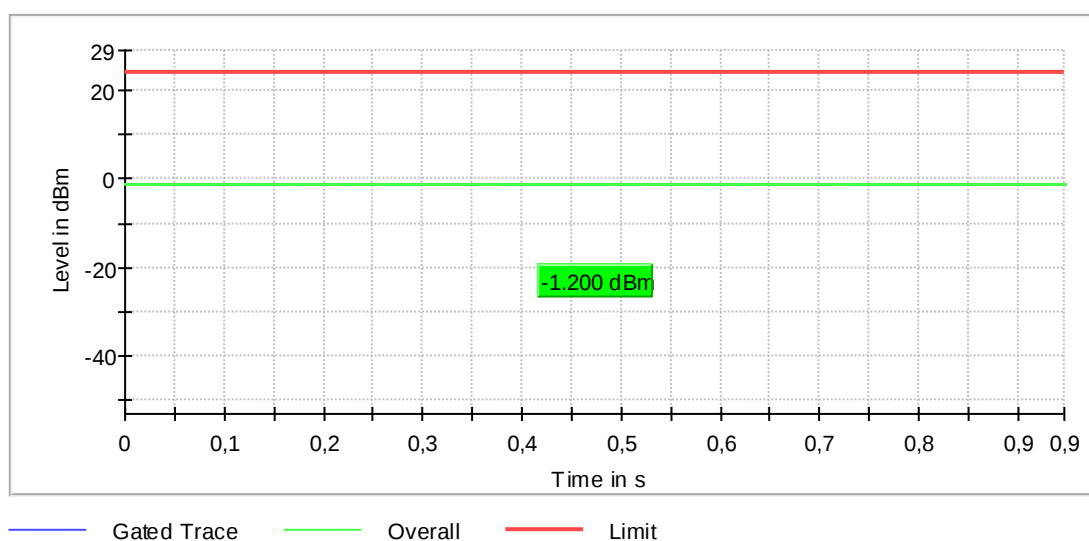

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.2	24.0	-1.2	94.920	PASS

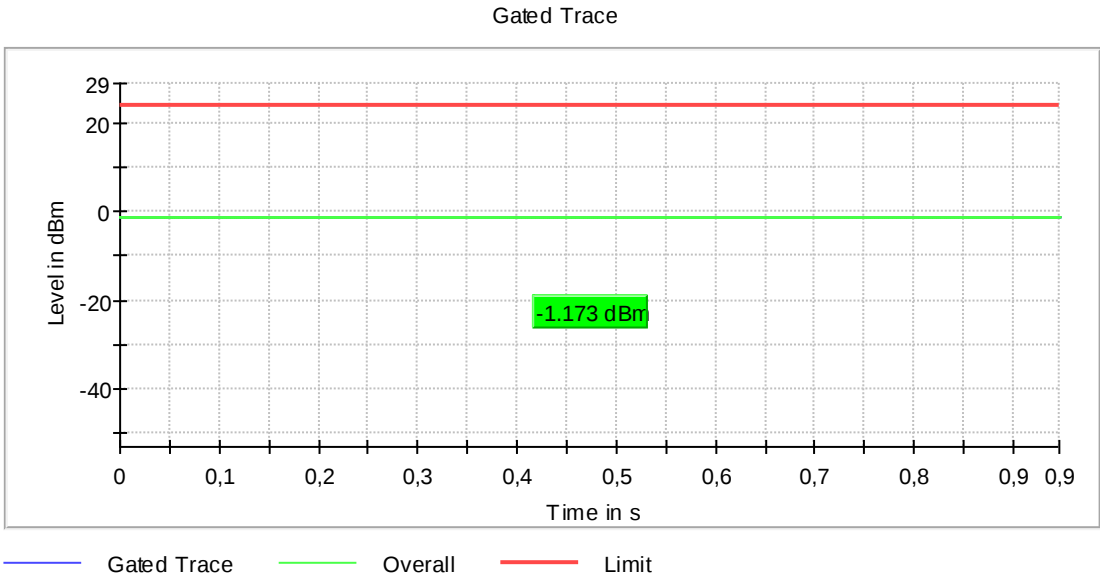

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.8	24.0	0.8	94.919	PASS

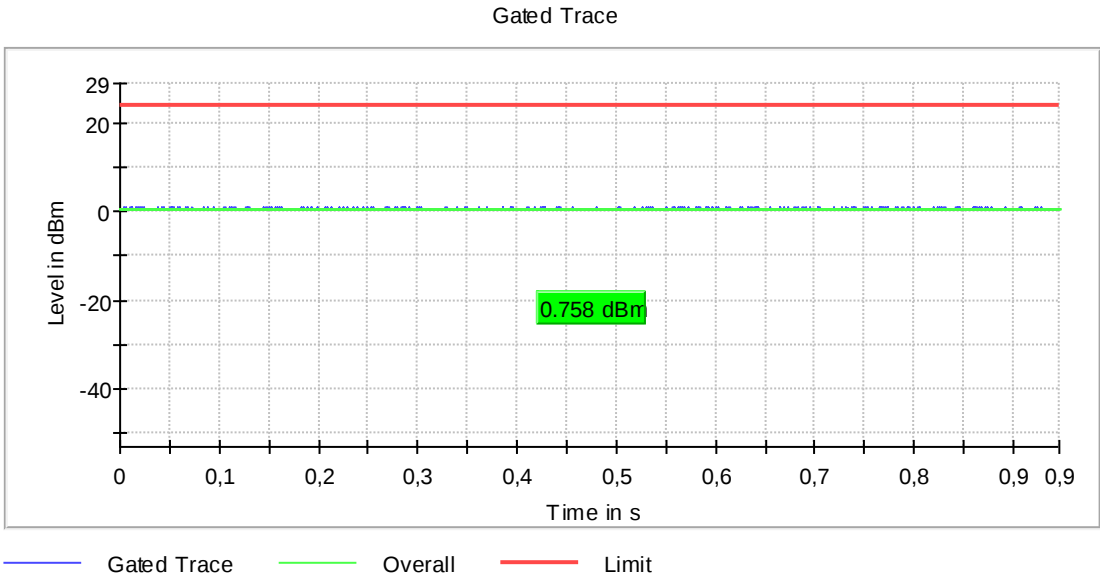

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5745 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.9	30.0	-0.9	94.890	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5785 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	94.911	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; ac20-mode [MCS3] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.4	30.0	-0.4	94.894	PASS

Gated Trace

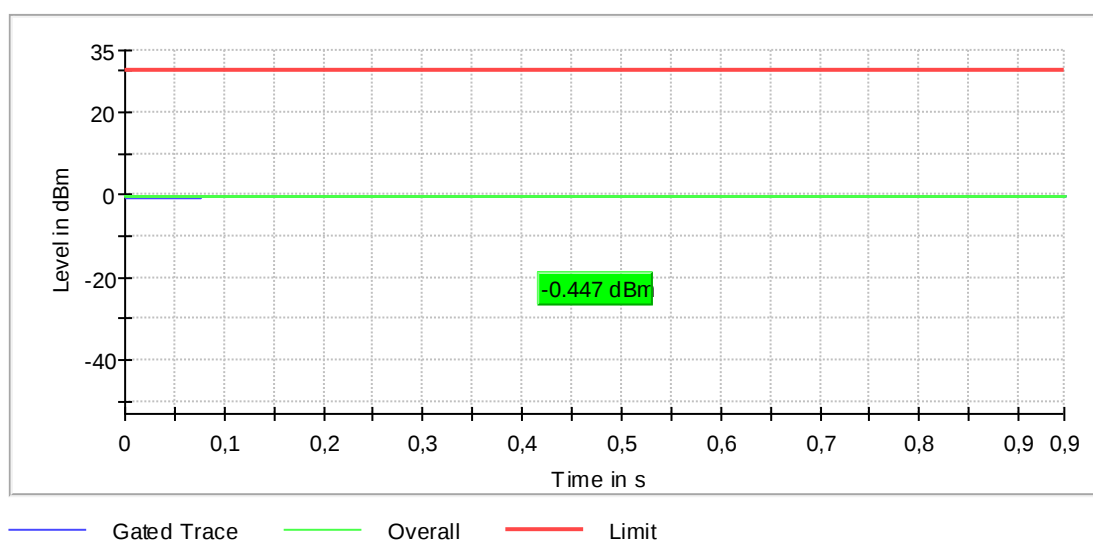

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	95.991	PASS

Gated Trace

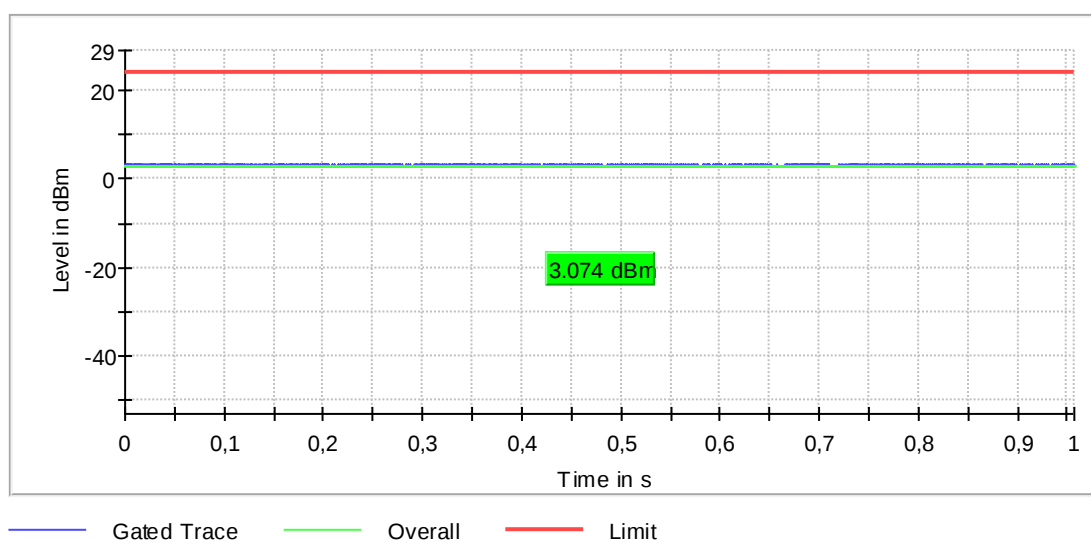

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5200 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	95.994	PASS

Gated Trace

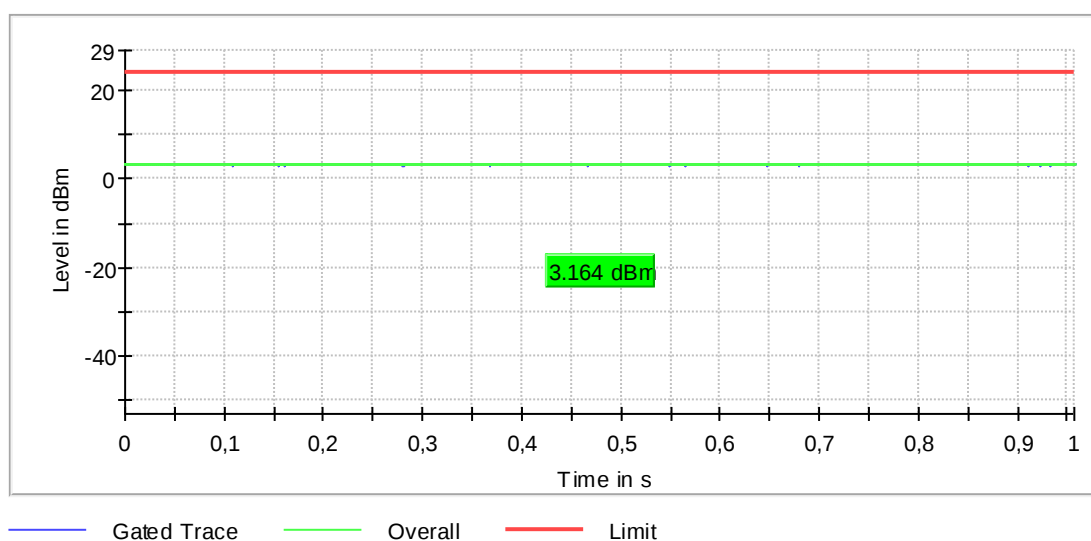

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5240 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	95.996	PASS

Gated Trace

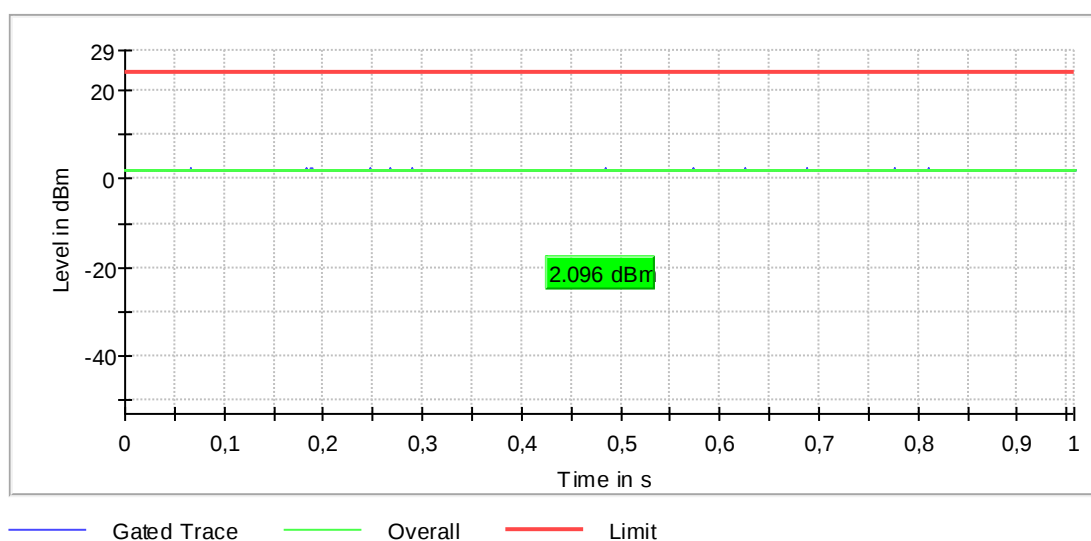

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5260 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	95.995	PASS

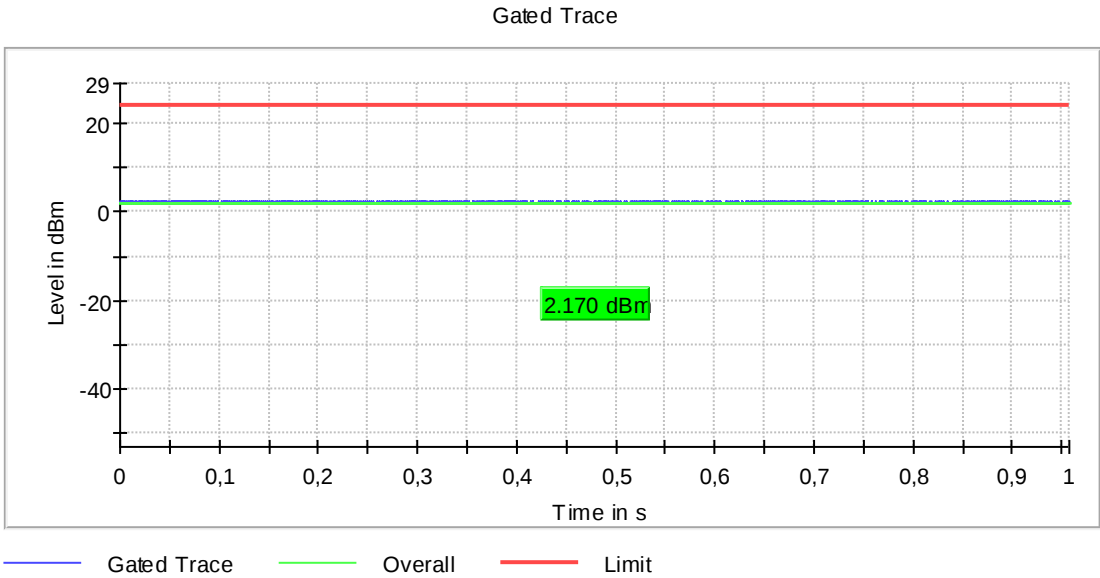

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5280 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	96.005	PASS

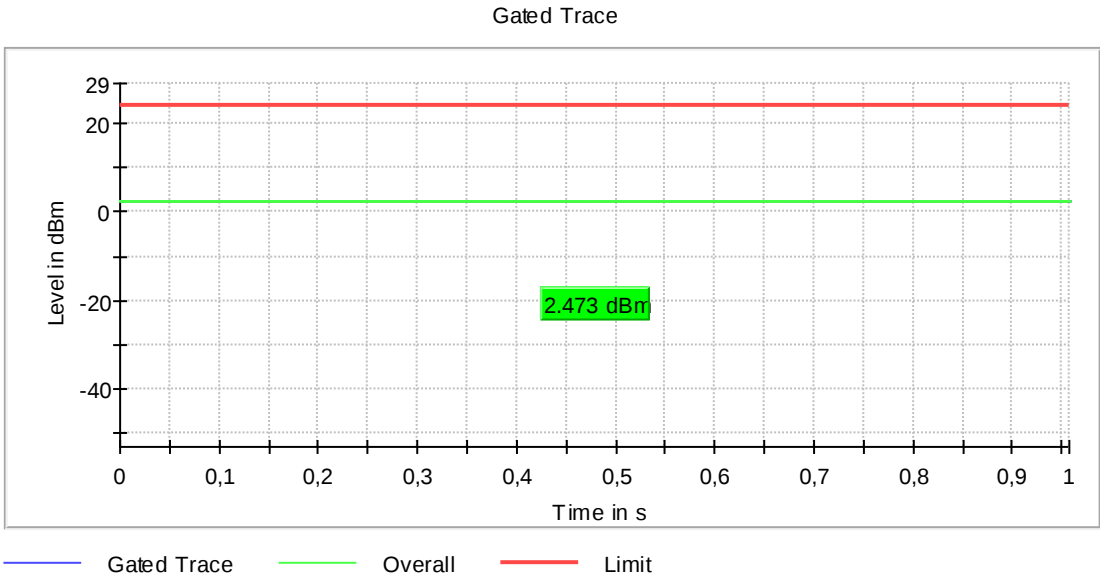

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.1	24.0	1.1	96.010	PASS

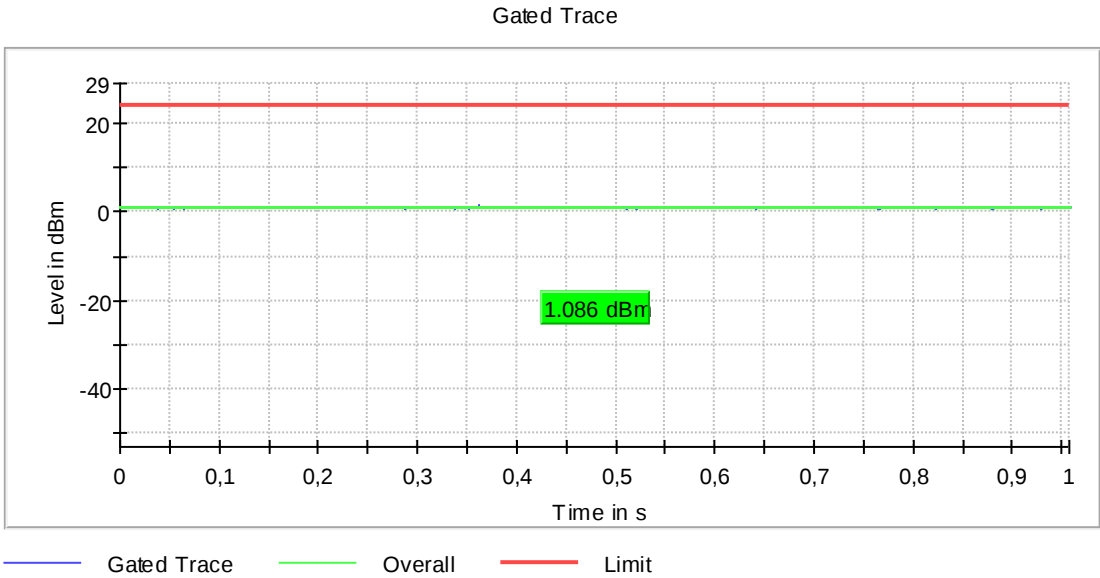

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	96.030	PASS

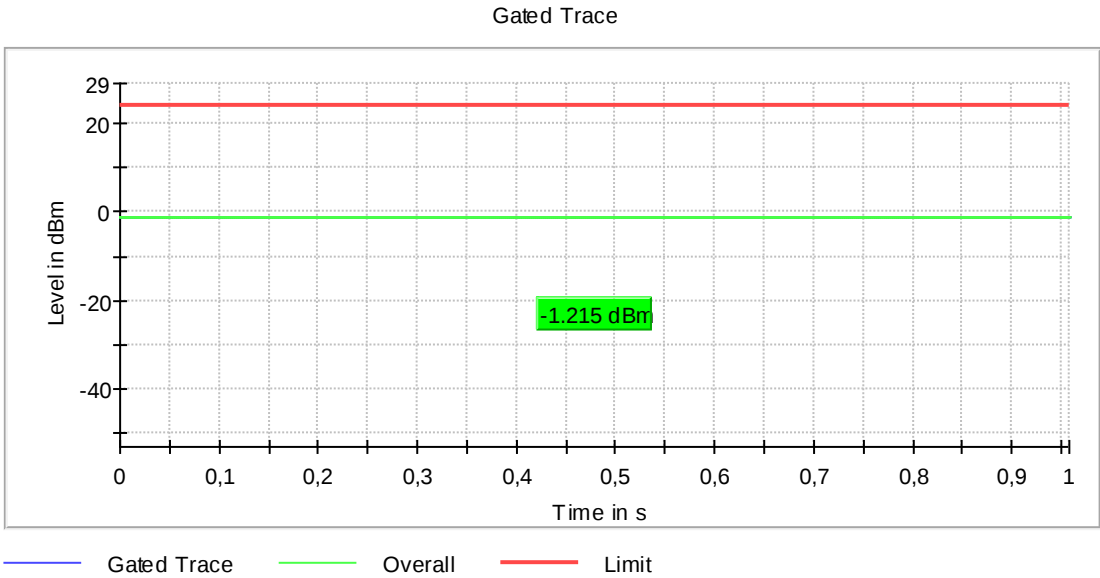

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.2	24.0	-1.2	96.027	PASS

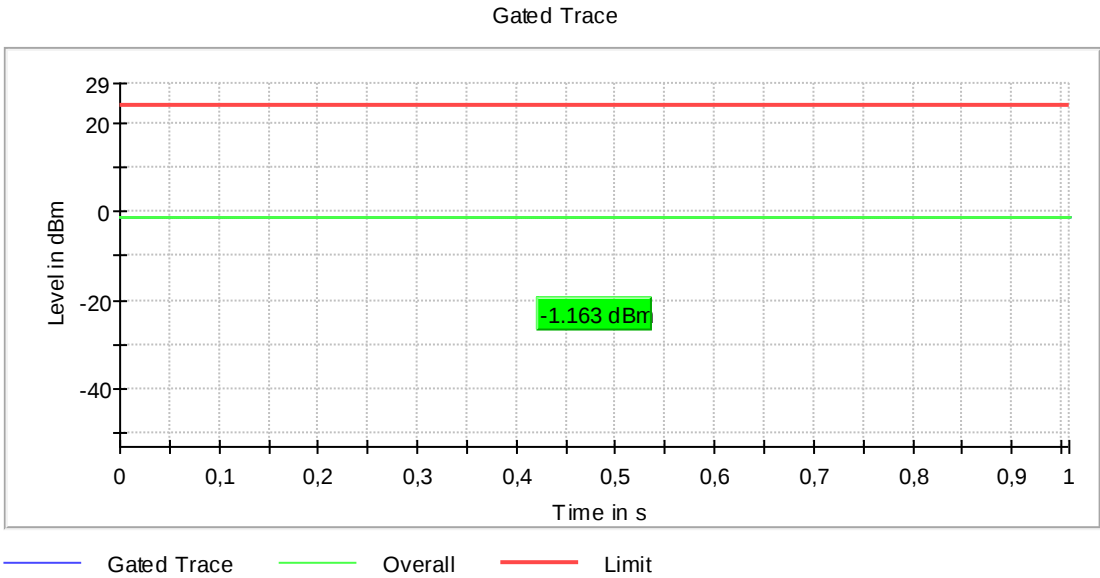

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.8	24.0	0.8	96.021	PASS

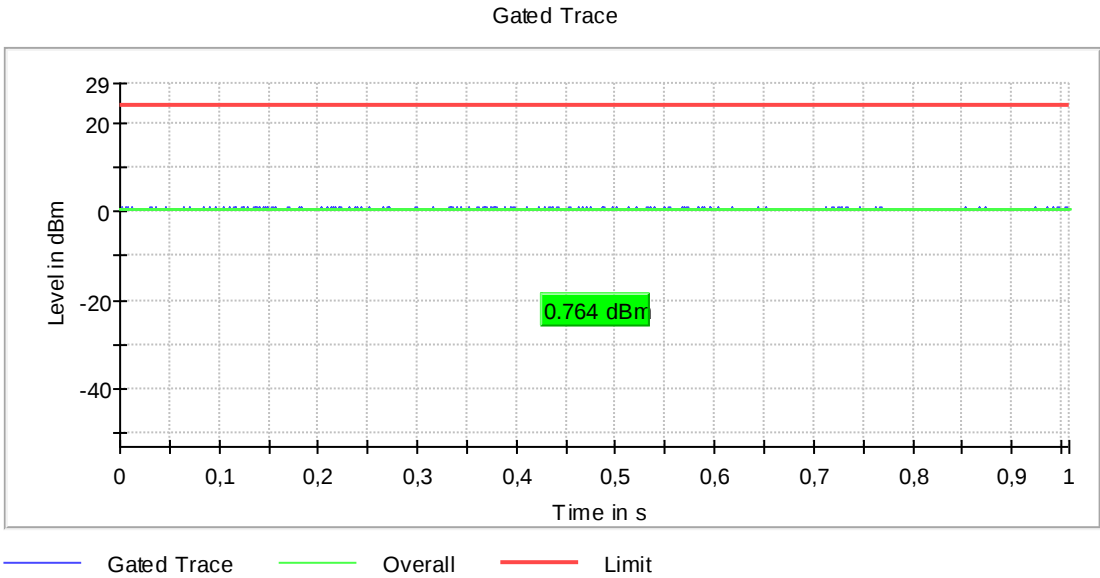

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	96.030	PASS

Gated Trace

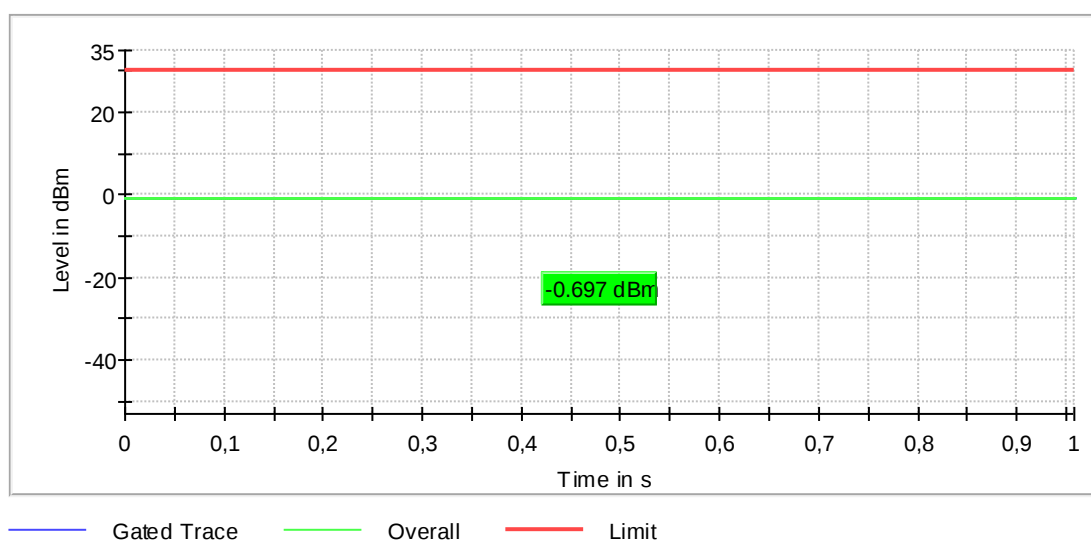

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5785 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	96.027	PASS



OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; ac20-mode [MCS2] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.7	30.0	-0.7	96.026	PASS

Gated Trace

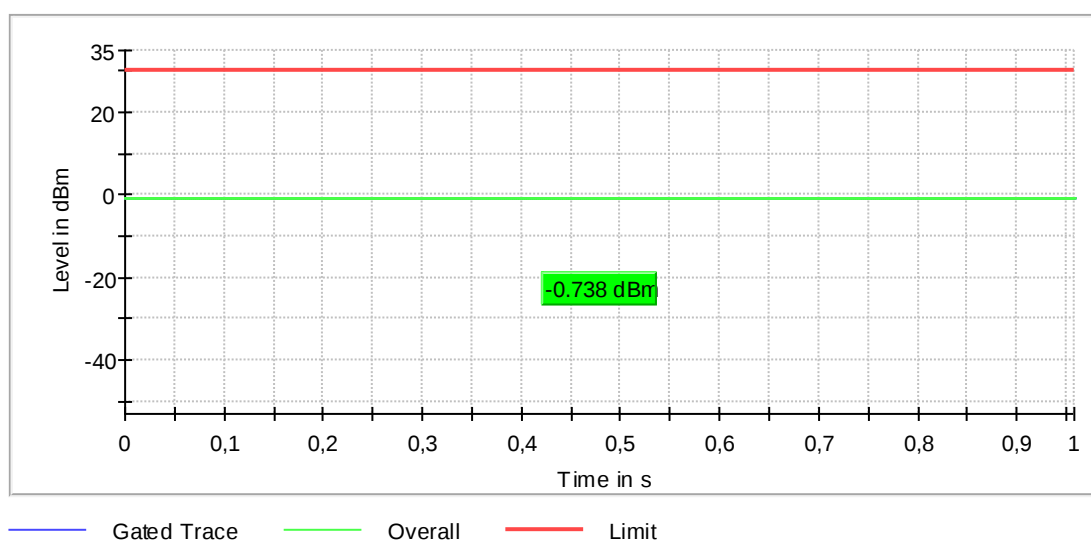

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5180 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	97.204	PASS

Gated Trace

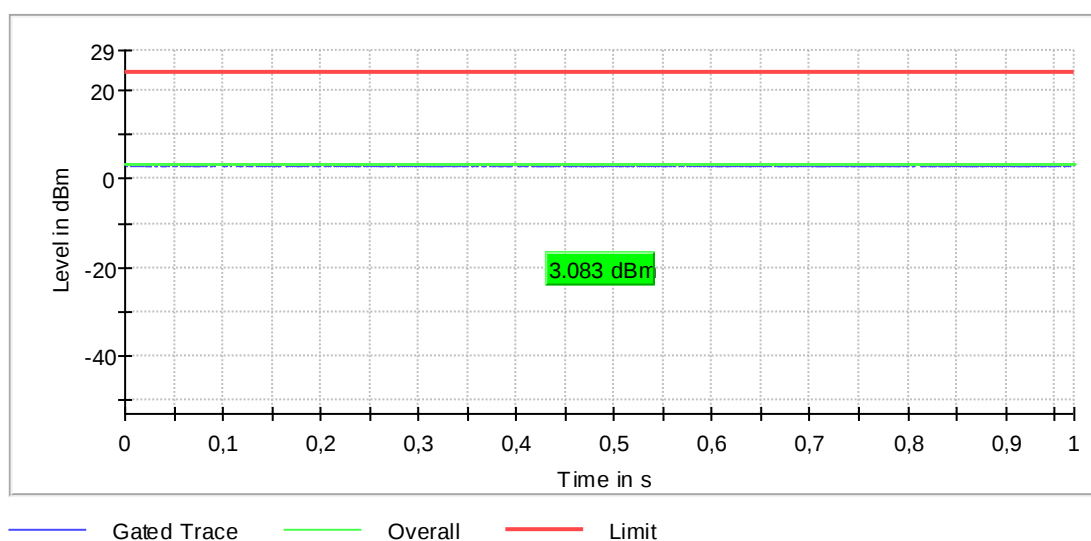

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5200 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.2	24.0	3.2	97.203	PASS

Gated Trace

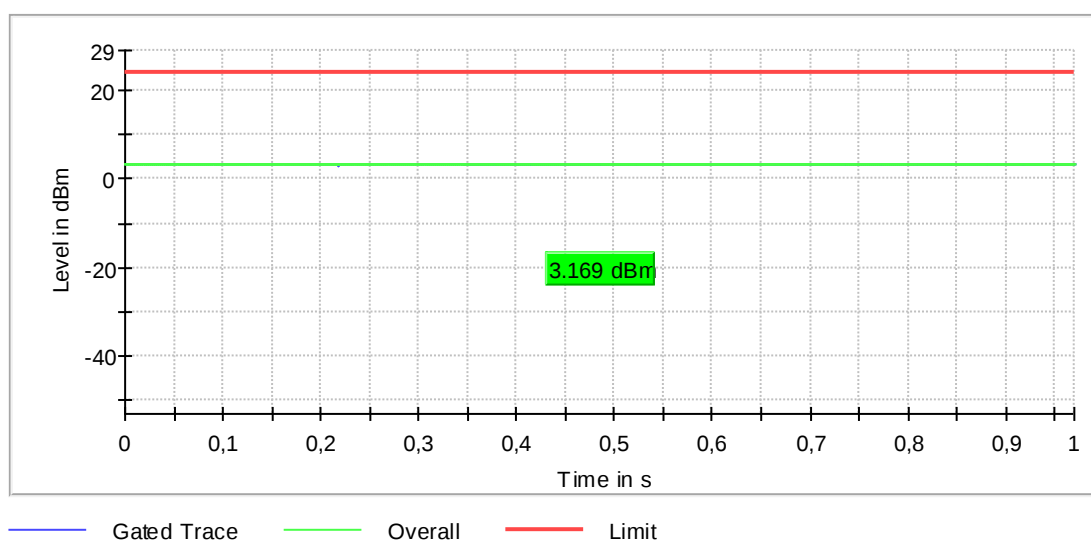

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5240 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	97.200	PASS

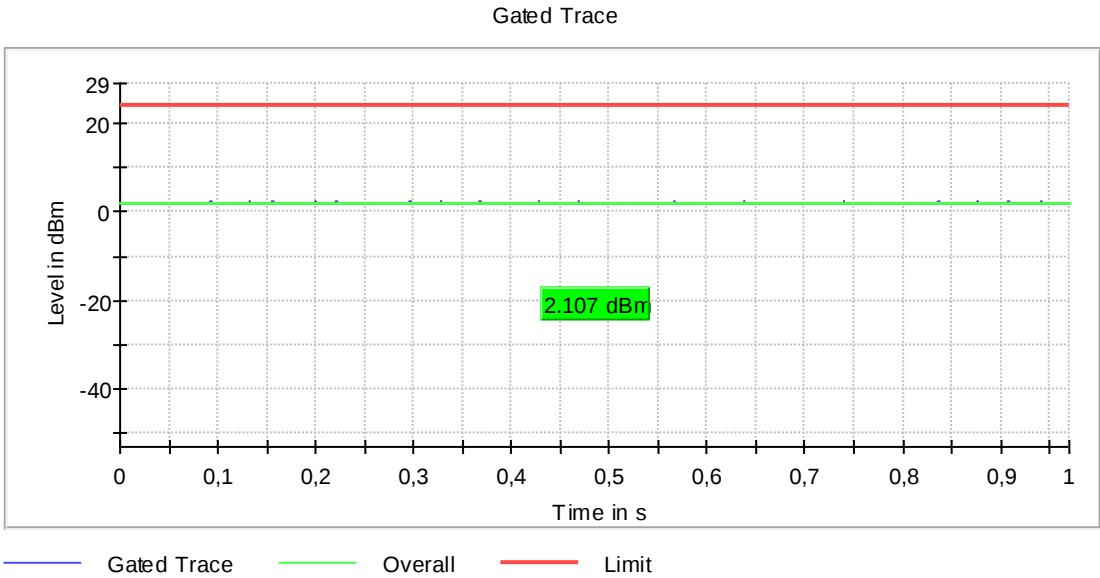

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	97.207	PASS

Gated Trace

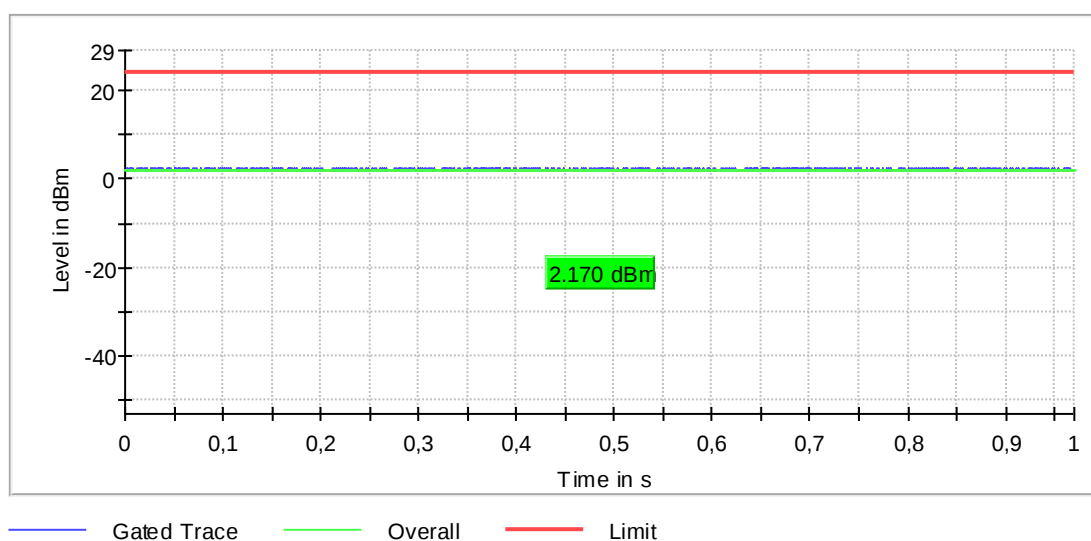

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5280 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	97.201	PASS

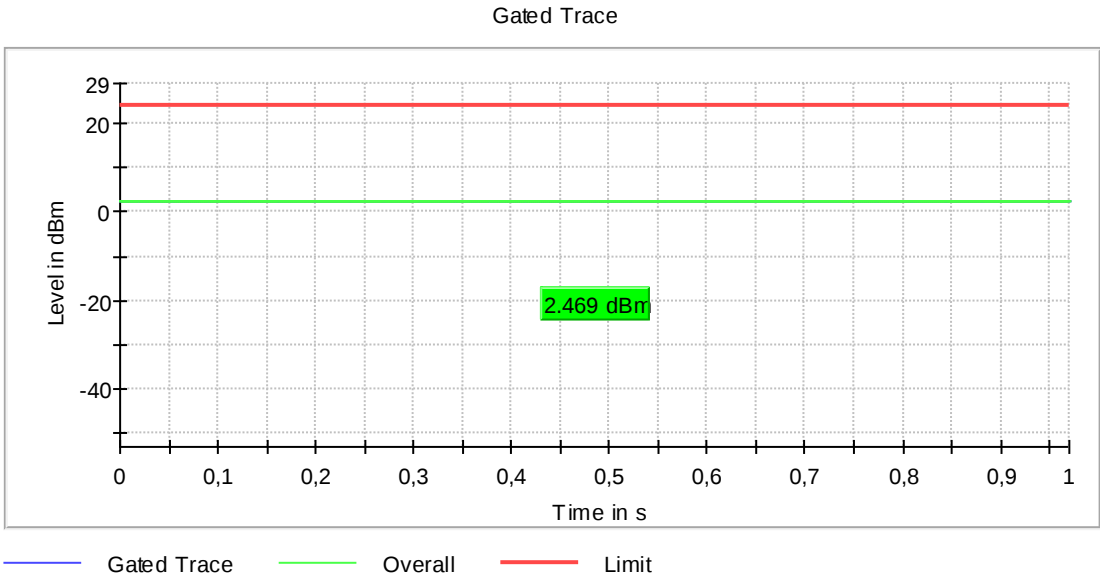

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5320 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.0	24.0	1.0	97.210	PASS

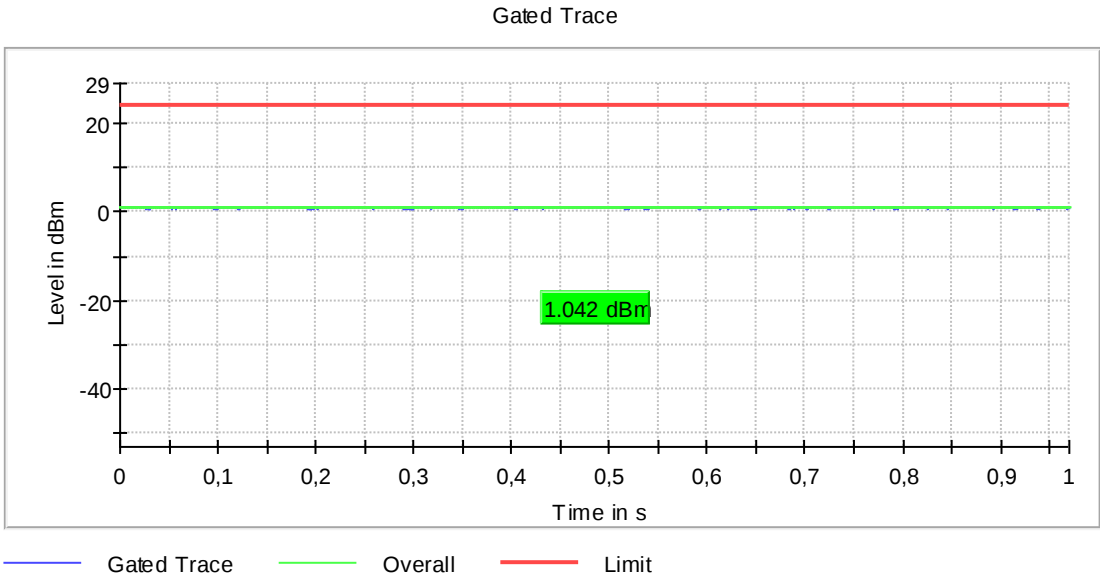

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5500 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	97.228	PASS

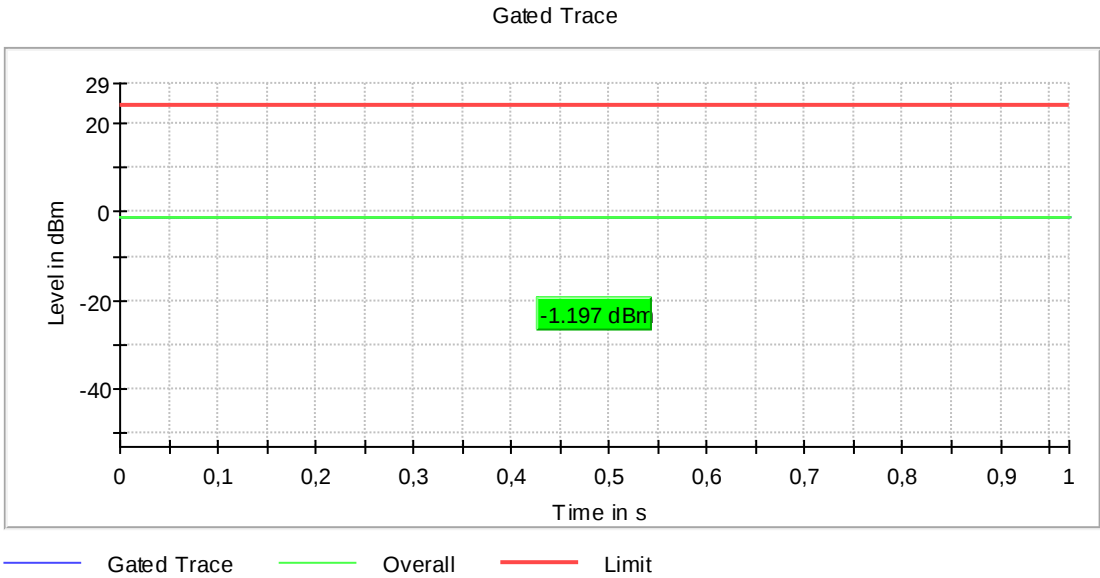

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.2	24.0	-1.2	97.227	PASS

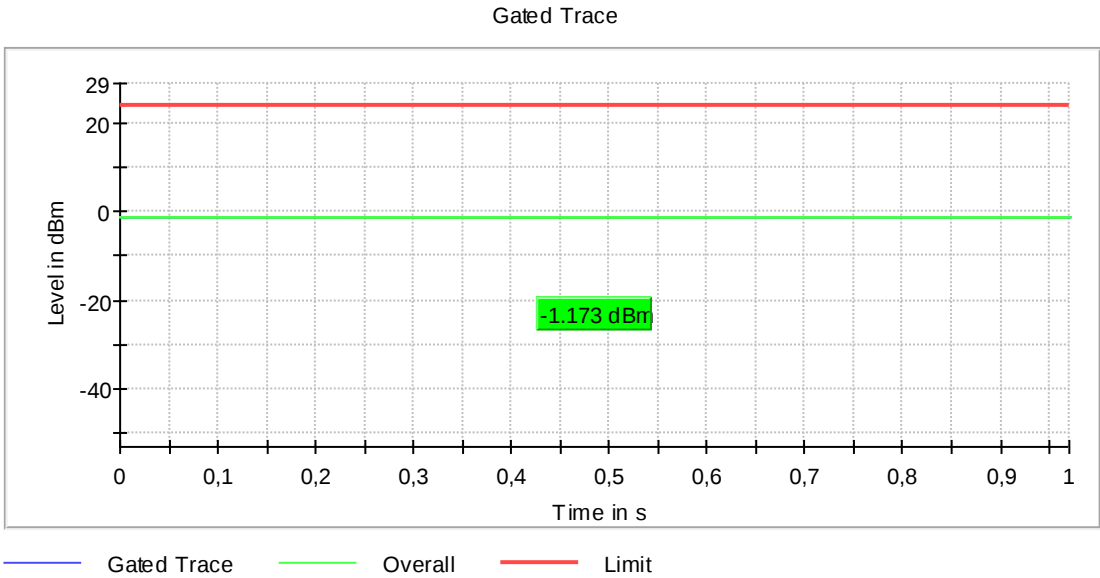

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	97.223	PASS

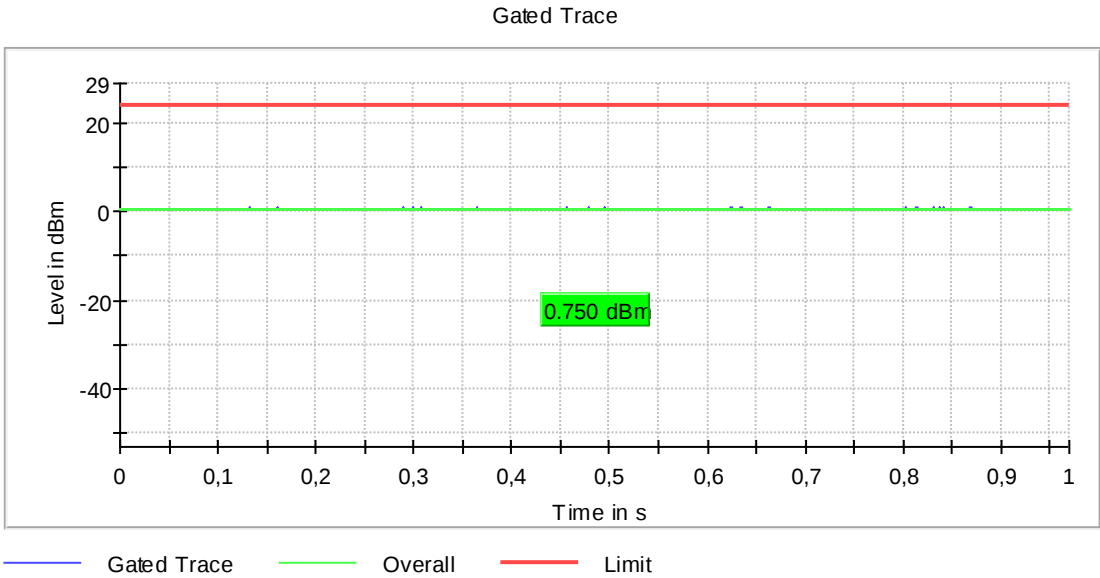

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.9	30.0	-0.9	97.230	PASS

Gated Trace

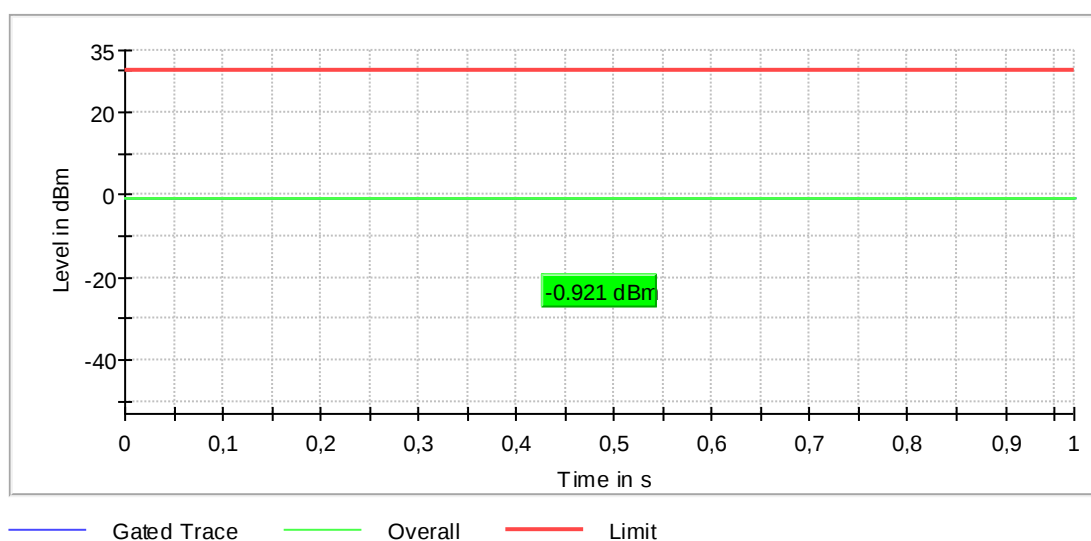

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5785 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.2	30.0	-0.2	97.225	PASS

Gated Trace

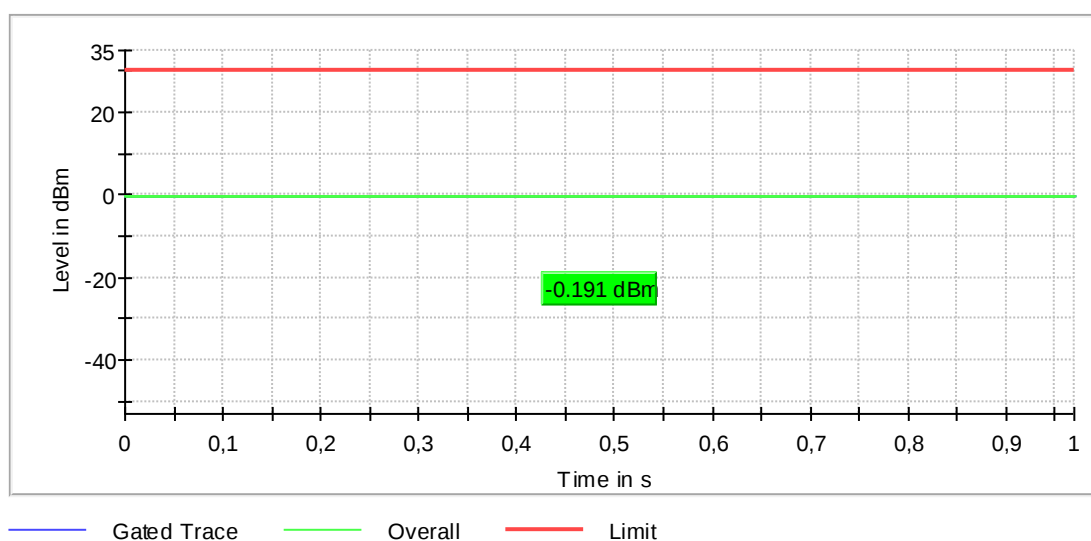

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s


RF output power (5825 MHz; ac20-mode [MCS1] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.4	30.0	-0.4	97.227	PASS

Gated Trace

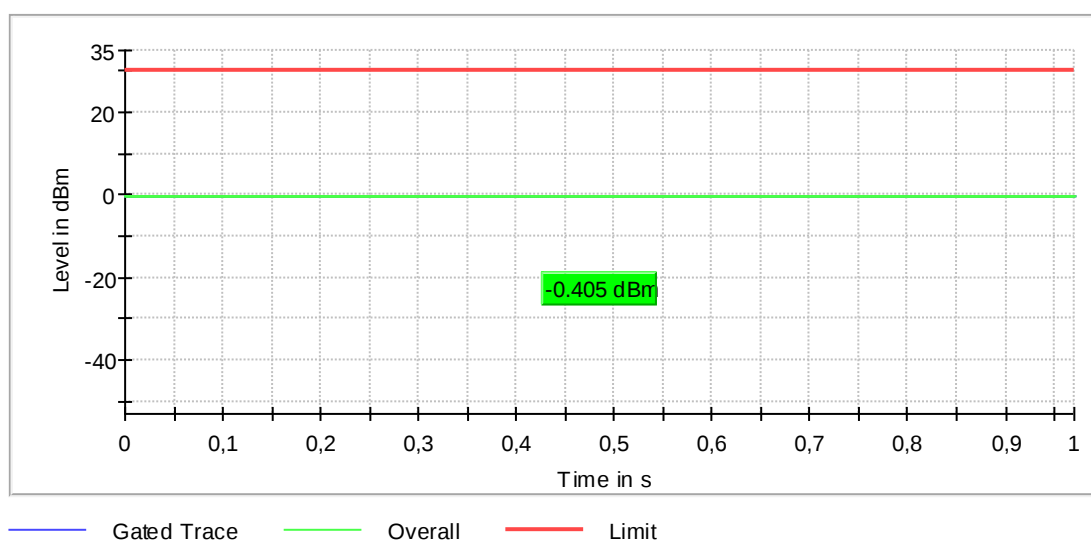

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5180 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5180.000000	3.1	24.0	3.1	98.505	PASS

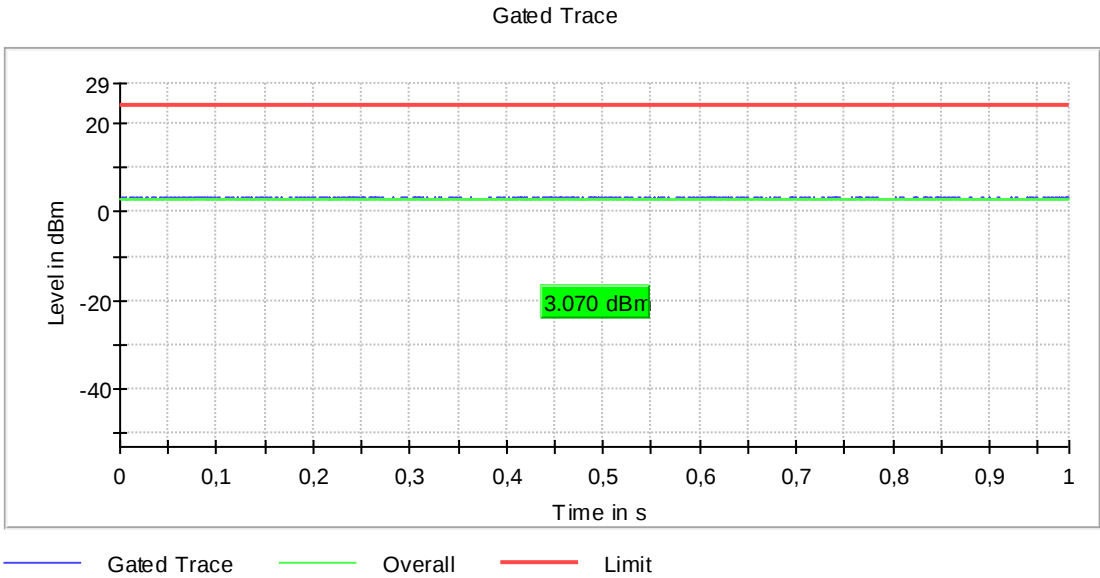

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5200 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5200.000000	3.1	24.0	3.1	98.506	PASS

Gated Trace

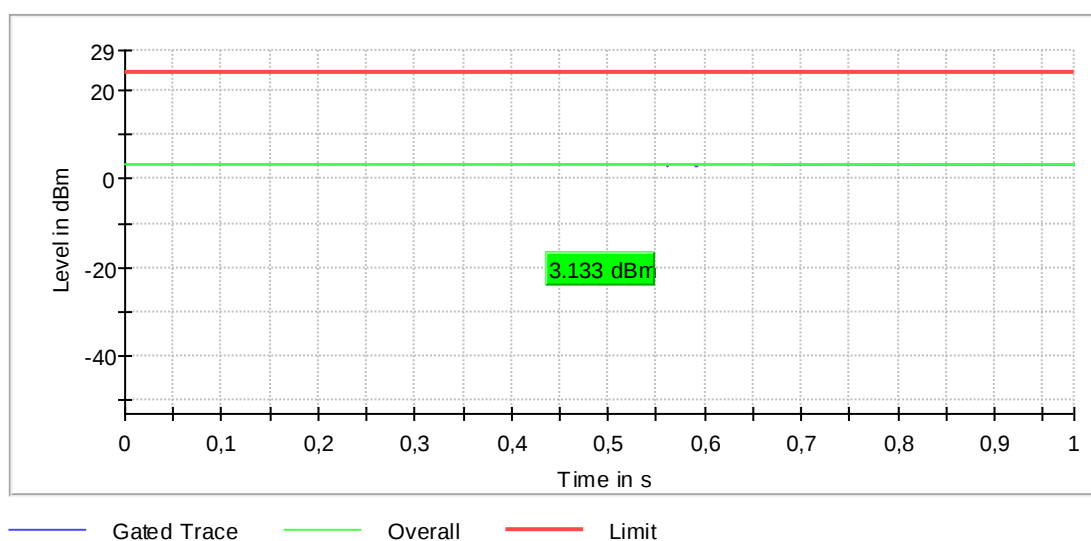

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5240 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5240.000000	2.1	24.0	2.1	98.505	PASS

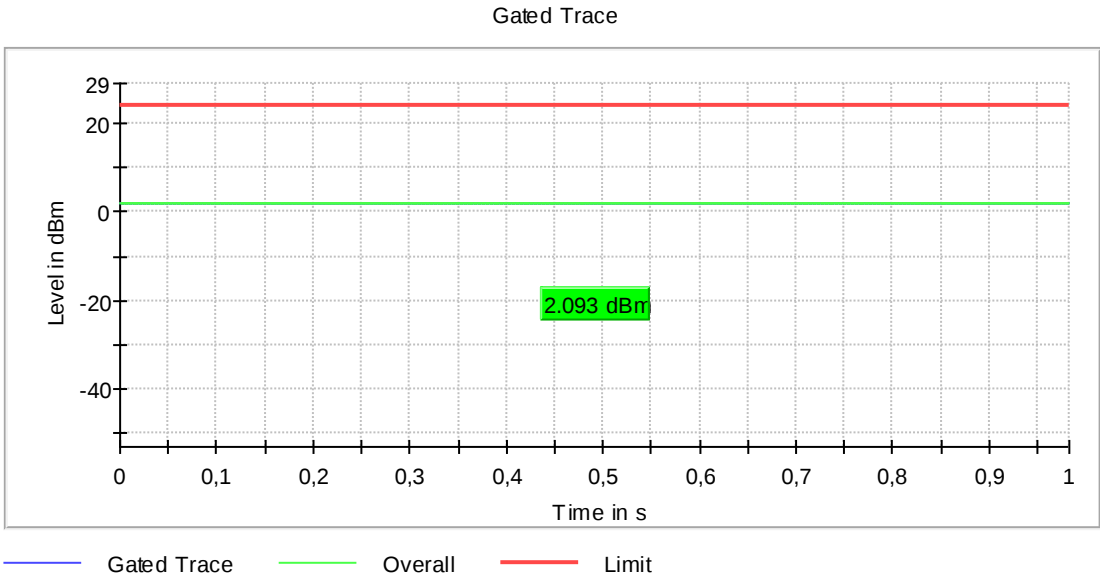

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5260 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	2.2	24.0	2.2	98.506	PASS

Gated Trace

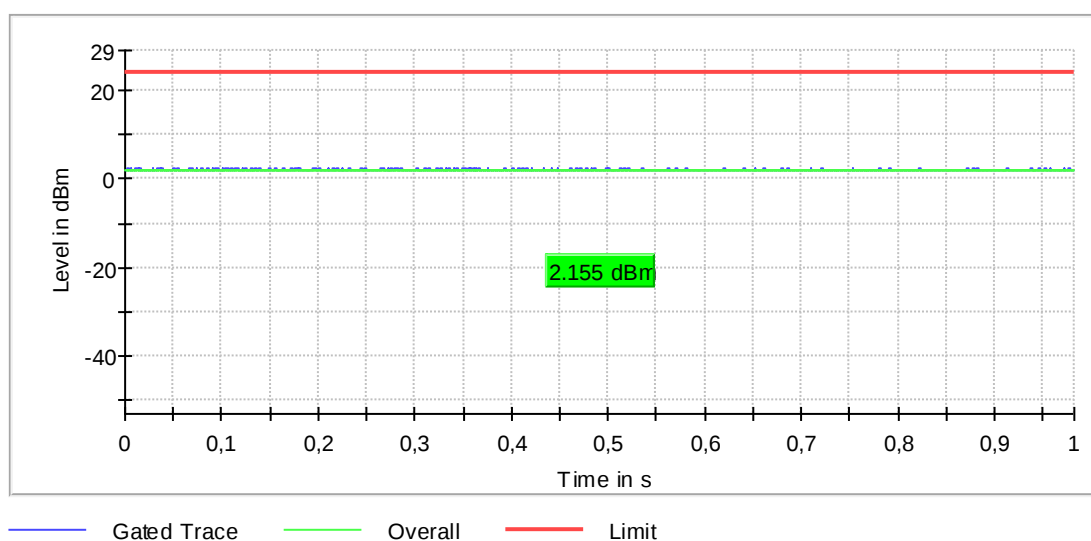

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5280 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5280.000000	2.5	24.0	2.5	98.504	PASS

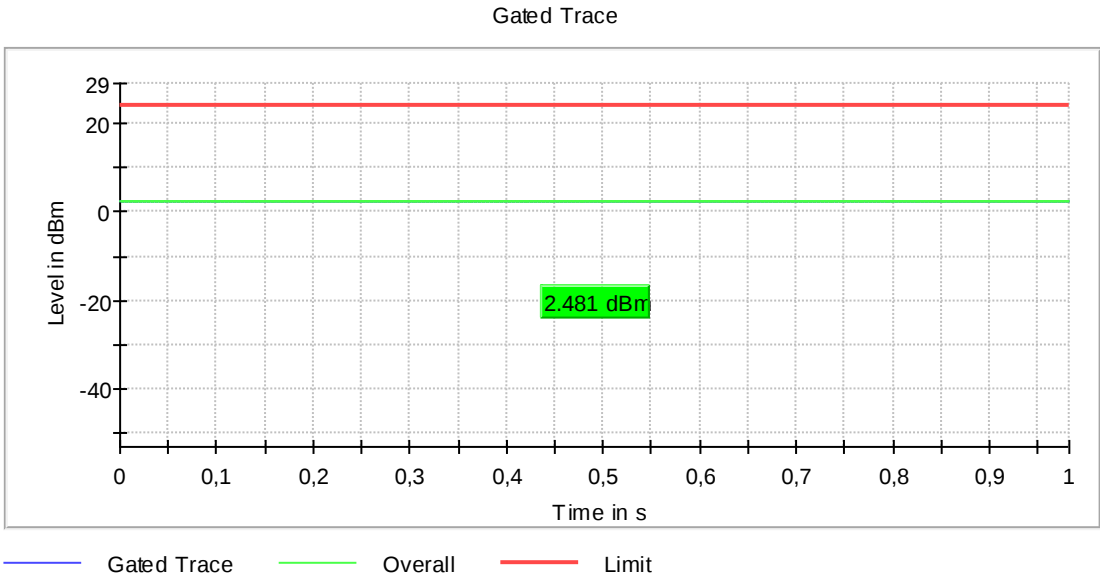

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5320 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5320.000000	1.1	24.0	1.1	98.507	PASS

Gated Trace

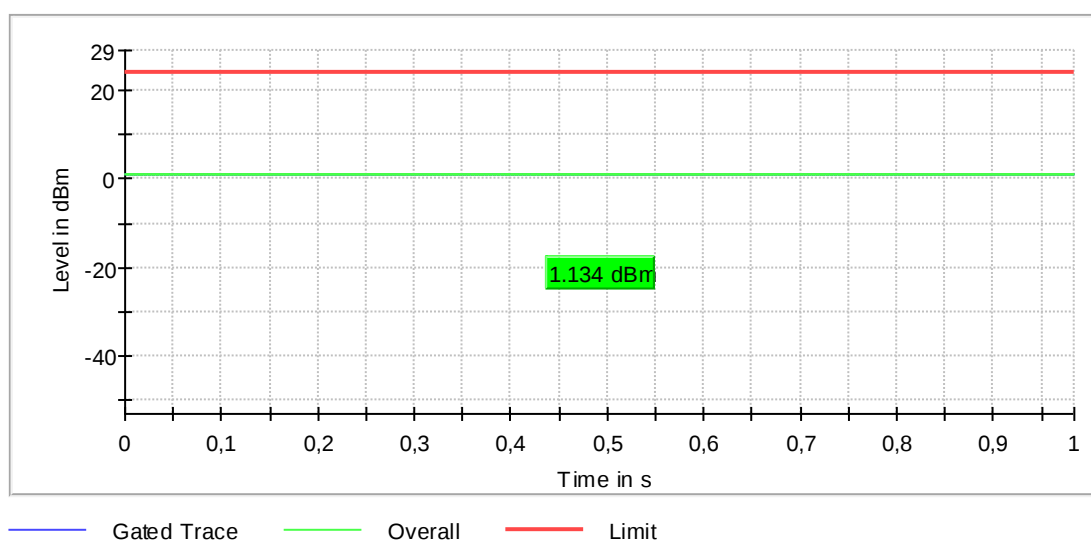

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5500 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	-1.2	24.0	-1.2	98.518	PASS

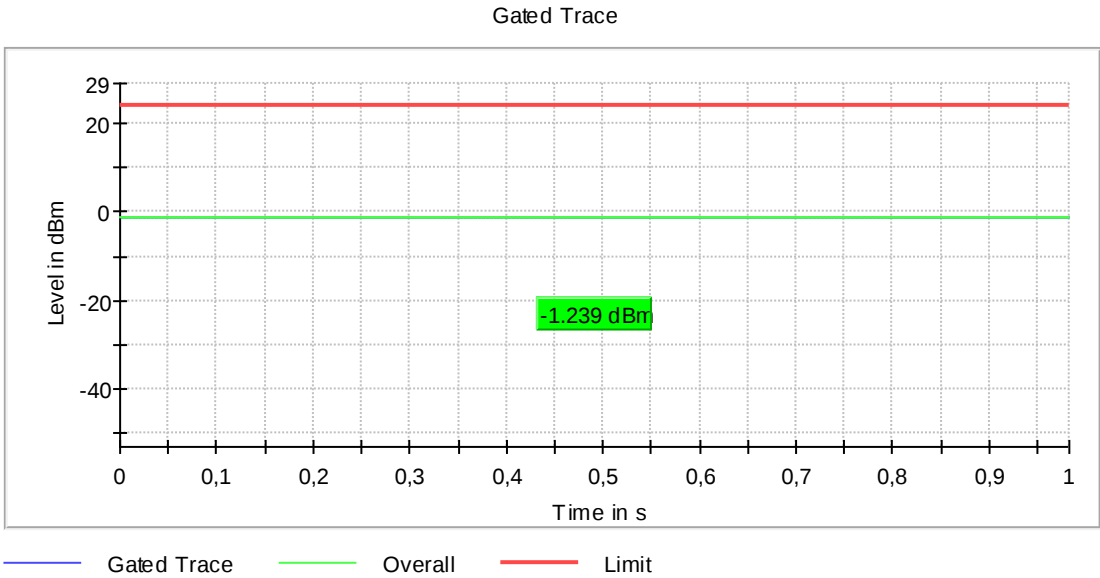

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5580 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5580.000000	-1.2	24.0	-1.2	98.517	PASS

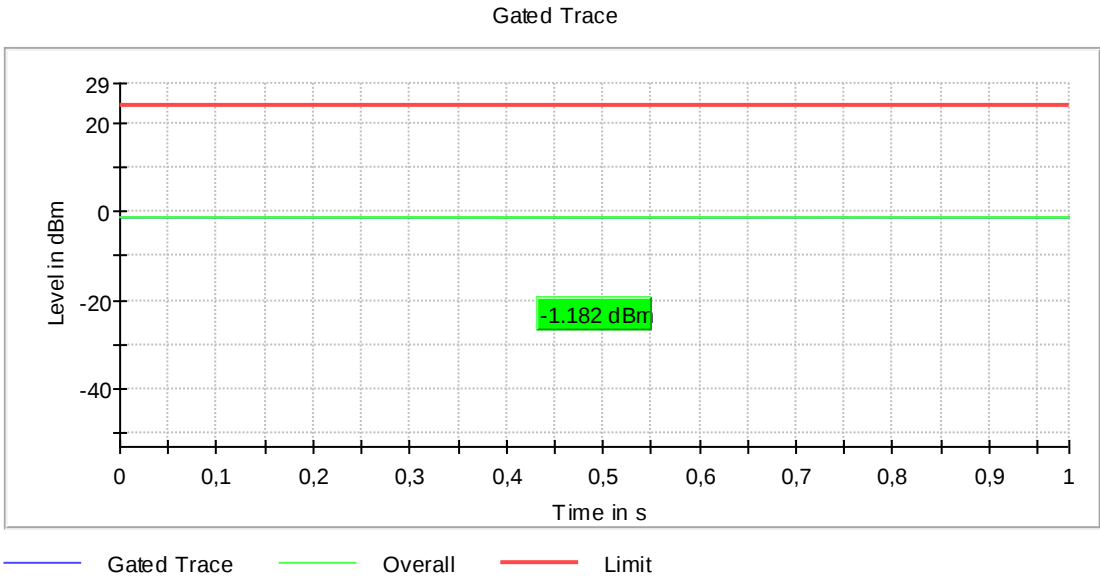

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (5700 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	0.7	24.0	0.7	98.516	PASS

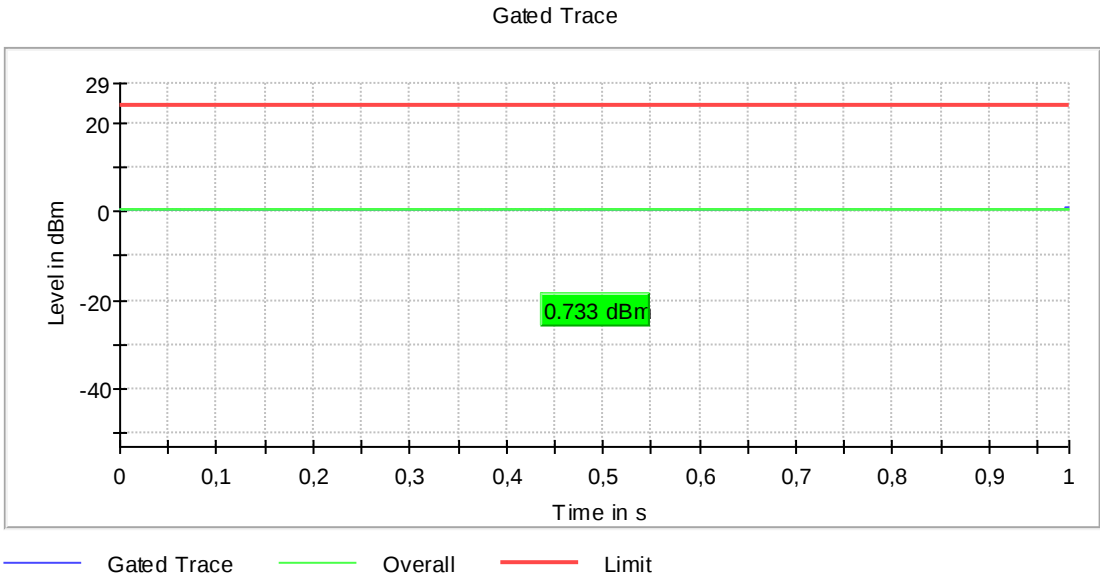

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5745 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	-0.7	30.0	-0.7	98.518	PASS

Gated Trace

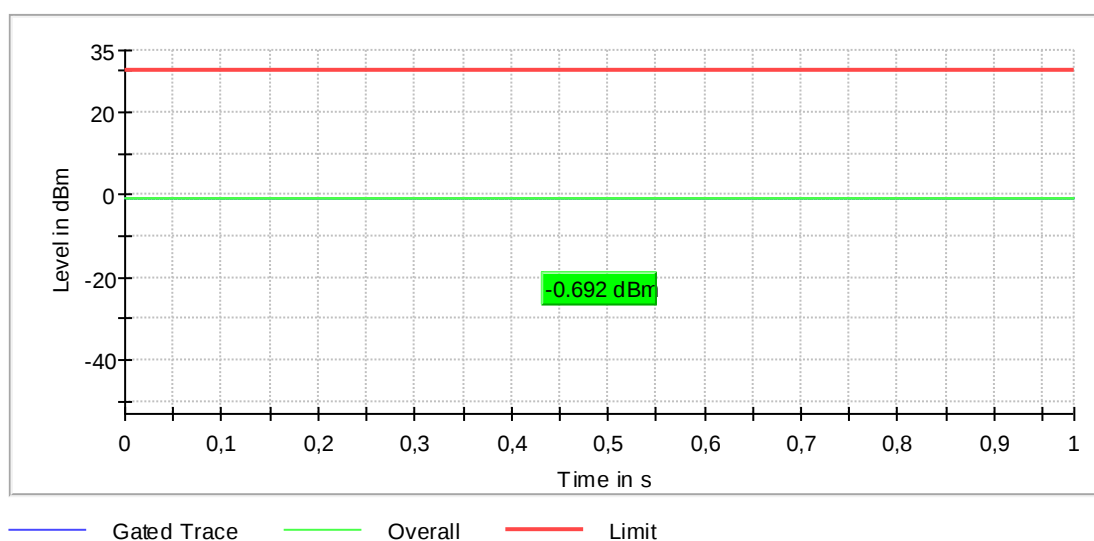

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

RF output power (5785 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5785.000000	-0.8	30.0	-0.8	98.519	PASS

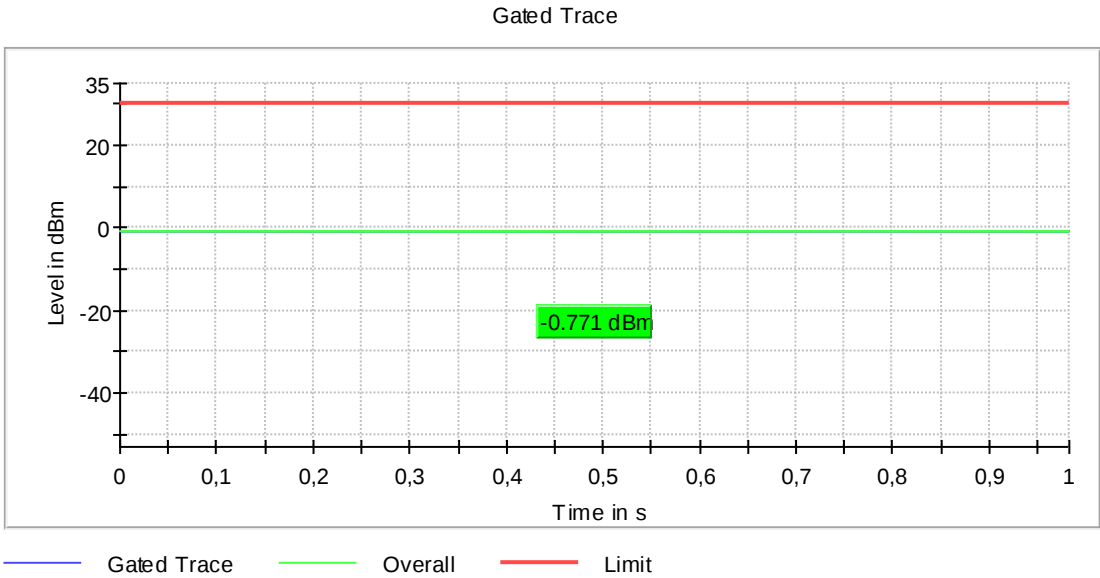

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs


RF output power (5825 MHz; ac20-mode [MCS0] (5 dBm); 20 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	-0.4	30.0	-0.4	98.517	PASS

Gated Trace

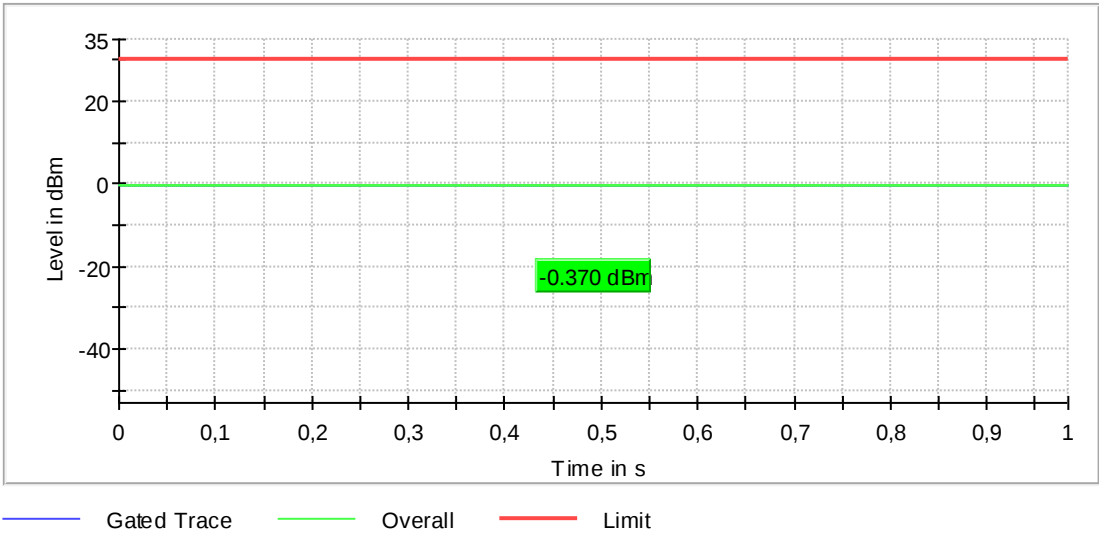

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs