

## Appendix C for KSCR220800147201

## Calibration Certificate

Object	Apply	No	Model	SN	Calibration Date
Dipole	<input type="checkbox"/>	1	CLA150	4025	2021/04/26
	<input checked="" type="checkbox"/>	2	D450V3	1103	2021/04/21
	<input type="checkbox"/>	3	D750V3	1188	2022/03/29
	<input type="checkbox"/>	4	D835V2	4d114	2022/03/31
	<input type="checkbox"/>	5	D900V2	1d079	2022/06/07
	<input type="checkbox"/>	6	D1800V2	2d170	2022/03/31
	<input type="checkbox"/>	7	D1900V2	5d136	2022/06/07
	<input type="checkbox"/>	8	D2000V2	1041	2022/06/06
	<input type="checkbox"/>	9	D2300V2	1096	2022/03/31
	<input type="checkbox"/>	10	D2450V2	817	2022/04/01
	<input type="checkbox"/>	11	D2600V2	1158	2022/03/31
	<input type="checkbox"/>	12	D5GHzV2	1095	2022/06/01
DAE	<input checked="" type="checkbox"/>	13	DAE4	1245	2022/05/30
Probe	<input checked="" type="checkbox"/>	14	EX3DV4	3801	2022/07/21

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



# 1 Dipole

## 1.1 CLA150 - SN 4025

<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zughestrasse 43, 8001 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SCS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: SGS-CN (Auden) Certificate No.: CLA150-4025_Apr21</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: CLA150 - SN: 4025</p> <p>Calibration procedure(s): QA CAL-15.v9 Calibration Procedure for SAR Validation Sources below 700 MHz</p> <p>Calibration date: April 26, 2021</p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurement (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (MATE critical for calibration):</p> <table border="1"> <thead> <tr> <th>Primary Standard(s)</th> <th>ID #</th> <th>Cal. Cal. (Calibration No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter NRP</td> <td>SN: 104/76</td> <td>05-Apr-21 (No. 217-0329)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP-Z91</td> <td>SN: 103/44</td> <td>05-Apr-21 (No. 217-0329)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP-Z91</td> <td>SN: 103/24</td> <td>06-Apr-21 (No. 217-0329)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor NRP-Z91</td> <td>SN: 103/26</td> <td>06-Apr-21 (No. 217-0329)</td> <td>Apr-22</td> </tr> <tr> <td>Trick-N Intensity Meter</td> <td>SN: 00010000000000000000000000000000</td> <td>04-Apr-21 (No. 217-0329)</td> <td>Apr-22</td> </tr> <tr> <td>Reference Probe DEXTRA</td> <td>SN: 3877</td> <td>30-Dec-20 (No. E3X0177, Dex30)</td> <td>Dec-21</td> </tr> <tr> <td>DAK</td> <td>SN: 664</td> <td>06-Jun-20 (No. DAK-654_Jun20)</td> <td>Jun-21</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standard(s)</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter E4441B</td> <td>SN: 03410000/4</td> <td>05-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power meter E4441B</td> <td>SN: 03410000/1</td> <td>05-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4441/2A</td> <td>SN: 00010210</td> <td>05-Apr-10 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Power sensor E4441/2A</td> <td>SN: 00010210</td> <td>04-Apr-09 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>RF Generator HP 8440C</td> <td>SN: US8440U1700</td> <td>04-Apr-09 (in house check Jun-20)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Network Analyzer Agilent E5080A</td> <td>SN: 1U481004017000</td> <td>31-Mar-14 (in house check Oct-20)</td> <td>In house check: Oct-21</td> </tr> </tbody> </table> <p>Calibrated by: Jeffrey Katsurin Function: Laboratory Technician Signature: </p> <p>Approved by: Kaja Polovic Function: Technical Manager Signature: </p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No.: CLA150-4025_Apr21 Page 1 of 6</p>	Primary Standard(s)	ID #	Cal. Cal. (Calibration No.)	Scheduled Calibration	Power meter NRP	SN: 104/76	05-Apr-21 (No. 217-0329)	Apr-22	Power sensor NRP-Z91	SN: 103/44	05-Apr-21 (No. 217-0329)	Apr-22	Power sensor NRP-Z91	SN: 103/24	06-Apr-21 (No. 217-0329)	Apr-22	Power sensor NRP-Z91	SN: 103/26	06-Apr-21 (No. 217-0329)	Apr-22	Trick-N Intensity Meter	SN: 00010000000000000000000000000000	04-Apr-21 (No. 217-0329)	Apr-22	Reference Probe DEXTRA	SN: 3877	30-Dec-20 (No. E3X0177, Dex30)	Dec-21	DAK	SN: 664	06-Jun-20 (No. DAK-654_Jun20)	Jun-21	Secondary Standard(s)	ID #	Check Date (in house)	Scheduled Check	Power meter E4441B	SN: 03410000/4	05-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power meter E4441B	SN: 03410000/1	05-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power sensor E4441/2A	SN: 00010210	05-Apr-10 (in house check Jun-20)	In house check: Jun-22	Power sensor E4441/2A	SN: 00010210	04-Apr-09 (in house check Jun-20)	In house check: Jun-22	RF Generator HP 8440C	SN: US8440U1700	04-Apr-09 (in house check Jun-20)	In house check: Jun-22	Network Analyzer Agilent E5080A	SN: 1U481004017000	31-Mar-14 (in house check Oct-20)	In house check: Oct-21	<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zughestrasse 43, 8001 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SCS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p><b>Glossary:</b></p> <p>TSL: tissue simulating liquid ConvF: sensitivity in TSL / NORM x,y,z NA: not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <ul style="list-style-type: none"> <li>a) IEEE Std 1526-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices and Measurements Techniques", June 2013</li> <li>b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016</li> <li>c) IEC 62209-2, "Measurement procedure for the determination of the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010</li> <li>d) KDB 865662, "SAR Measurement Requirements for 100 MHz to 6 GHz"</li> </ul> <p><b>Additional Documentation:</b></p> <ul style="list-style-type: none"> <li>e) DASY4.5 System Handbook</li> </ul> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of this certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>• <b>Interim Parameters for TSL:</b> The source is mounted in a touch configuration below the center marking of the flat phantom.</li> <li>• <b>Return Loss:</b> This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.</li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No.: CLA150-4025_Apr21 Page 2 of 6</p>
Primary Standard(s)	ID #	Cal. Cal. (Calibration No.)	Scheduled Calibration																																																										
Power meter NRP	SN: 104/76	05-Apr-21 (No. 217-0329)	Apr-22																																																										
Power sensor NRP-Z91	SN: 103/44	05-Apr-21 (No. 217-0329)	Apr-22																																																										
Power sensor NRP-Z91	SN: 103/24	06-Apr-21 (No. 217-0329)	Apr-22																																																										
Power sensor NRP-Z91	SN: 103/26	06-Apr-21 (No. 217-0329)	Apr-22																																																										
Trick-N Intensity Meter	SN: 00010000000000000000000000000000	04-Apr-21 (No. 217-0329)	Apr-22																																																										
Reference Probe DEXTRA	SN: 3877	30-Dec-20 (No. E3X0177, Dex30)	Dec-21																																																										
DAK	SN: 664	06-Jun-20 (No. DAK-654_Jun20)	Jun-21																																																										
Secondary Standard(s)	ID #	Check Date (in house)	Scheduled Check																																																										
Power meter E4441B	SN: 03410000/4	05-Apr-10 (in house check Jun-20)	In house check: Jun-22																																																										
Power meter E4441B	SN: 03410000/1	05-Apr-10 (in house check Jun-20)	In house check: Jun-22																																																										
Power sensor E4441/2A	SN: 00010210	05-Apr-10 (in house check Jun-20)	In house check: Jun-22																																																										
Power sensor E4441/2A	SN: 00010210	04-Apr-09 (in house check Jun-20)	In house check: Jun-22																																																										
RF Generator HP 8440C	SN: US8440U1700	04-Apr-09 (in house check Jun-20)	In house check: Jun-22																																																										
Network Analyzer Agilent E5080A	SN: 1U481004017000	31-Mar-14 (in house check Oct-20)	In house check: Oct-21																																																										
<p><b>Measurement Conditions</b> DASY system configuration, as far as not shown on page 1:</p> <table border="1"> <thead> <tr> <th>DASY Version</th> <th>DASY</th> <th>V52.10.4</th> </tr> </thead> <tbody> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>EL44 Rat Phantom</td> <td>Shell thickness: 2 ± 0.2 mm</td> </tr> <tr> <td>EUT Positioning</td> <td>Touch Position</td> <td></td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dc, dy = 4.0 mm, dz = 1.4 mm</td> <td>Graded Ratio = 1.4 (Z direction)</td> </tr> <tr> <td>Frequency</td> <td>150 MHz ± 1 MHz</td> <td></td> </tr> </tbody> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied:</p> <table border="1"> <thead> <tr> <th>Nominal Head TSL parameters</th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> </thead> <tbody> <tr> <td>22.0 °C</td> <td>62.3</td> <td>0.75 mNm</td> <td></td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>51.1 ± 6 %</td> <td>0.75 mNm ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt; 0.5 °C</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <thead> <tr> <th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>1 W input power</td> <td>3.90 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>3.80 W/kg ± 18.4 % (n=2)</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> </thead> <tbody> <tr> <td>SAR measured</td> <td>1 W input power</td> <td>2.60 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>2.59 W/kg ± 18.0 % (n=2)</td> </tr> </tbody> </table> <p>Certificate No.: CLA150-4025_Apr21 Page 3 of 6</p>	DASY Version	DASY	V52.10.4	Extrapolation	Advanced Extrapolation		Phantom	EL44 Rat Phantom	Shell thickness: 2 ± 0.2 mm	EUT Positioning	Touch Position		Zoom Scan Resolution	dc, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)	Frequency	150 MHz ± 1 MHz		Nominal Head TSL parameters	Temperature	Permittivity	Conductivity	22.0 °C	62.3	0.75 mNm		Measured Head TSL parameters	(22.0 ± 0.2) °C	51.1 ± 6 %	0.75 mNm ± 6 %	Head TSL temperature change during test	< 0.5 °C	---	---	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	1 W input power	3.90 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	3.80 W/kg ± 18.4 % (n=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	1 W input power	2.60 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	2.59 W/kg ± 18.0 % (n=2)	<p><b>Appendix (Additional assessments outside the scope of SCS 0108)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <thead> <tr> <th>Impedance, transformed to feed point</th> <th>47.8 Ω ± 1.5 jΩ</th> </tr> </thead> <tbody> <tr> <td>Return Loss</td> <td>-31.4 dB</td> </tr> </tbody> </table> <p><b>Additional EUT Data</b></p> <table border="1"> <thead> <tr> <th>Manufactured by</th> <th>SPIAG</th> </tr> </thead> </table> <p>Certificate No.: CLA150-4025_Apr21 Page 4 of 6</p>	Impedance, transformed to feed point	47.8 Ω ± 1.5 jΩ	Return Loss	-31.4 dB	Manufactured by	SPIAG		
DASY Version	DASY	V52.10.4																																																											
Extrapolation	Advanced Extrapolation																																																												
Phantom	EL44 Rat Phantom	Shell thickness: 2 ± 0.2 mm																																																											
EUT Positioning	Touch Position																																																												
Zoom Scan Resolution	dc, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)																																																											
Frequency	150 MHz ± 1 MHz																																																												
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity																																																										
22.0 °C	62.3	0.75 mNm																																																											
Measured Head TSL parameters	(22.0 ± 0.2) °C	51.1 ± 6 %	0.75 mNm ± 6 %																																																										
Head TSL temperature change during test	< 0.5 °C	---	---																																																										
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																												
SAR measured	1 W input power	3.90 W/kg																																																											
SAR for nominal Head TSL parameters	normalized to 1W	3.80 W/kg ± 18.4 % (n=2)																																																											
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																												
SAR measured	1 W input power	2.60 W/kg																																																											
SAR for nominal Head TSL parameters	normalized to 1W	2.59 W/kg ± 18.0 % (n=2)																																																											
Impedance, transformed to feed point	47.8 Ω ± 1.5 jΩ																																																												
Return Loss	-31.4 dB																																																												
Manufactured by	SPIAG																																																												

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



DASY5 Validation Report for Head TSL

Date: 26.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

**DTU: CLA150; Type: CLA150; Serial: CLA150 - SN: 4025**

Communication System: UID 0 - CW; Frequency: 150 MHz

Medium parameters used:  $\epsilon = 150 \text{ S/m}$ ;  $\epsilon_r = 51.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEC/IEC/ANSI C63.19-2011)

**DASY5 Configuration**

- Probe: EXIDV4 - SN3877; ConvF(12.51, 12.51, 12.51) @ 150 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA4B Snd654; Calibrated: 26.06.2020
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY5 52.10.4(1527); SEMCAD X 14.6.14(7483)

**CLA Calibration for HSL-LF Tissue/CLA150, touch configuration, Pin=1W/Zoom Scan, distz=1.4mm (8x10x8) /Cube 0: Measurement grid: dxz=4mm, dy=4mm, dz=1.4mm**

Reference: 0 dB; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 7.36 W/kg

SAR(1 g) = 3.90 W/kg; SAR(10 g) = 2.69 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 30mm)

Ratio of SAR at M2 to SAR at M1 = 80.4%

Maximum value of SAR (measured) = 5.48 W/kg

**Figure 1: Heatmap of SAR distribution on a 1.4mm thick phantom section. The heatmap shows a central peak (red/yellow) and a smaller secondary peak (blue). A color scale bar on the left indicates dB values from -10.00 to 2.00. A small white square indicates the measurement point. The text '0 dB = 5.48 W/kg = 7.39 dBW/kg' is at the bottom.**

**Figure 2: DASY5 software screenshot showing the SAR distribution. The top part is a 3D polar plot of the SAR distribution. The bottom part is a 2D line graph showing the SAR profile across the measurement grid. The graph has a y-axis from 0 to 25.00 and an x-axis from 0 to 20. The peak is at approximately 18.5 dB. The text '0 dB = 5.48 W/kg = 7.39 dBW/kg' is at the bottom of the graph area.**

## 1.2 D450V3 - SN 1103

<p><b>Calibration Laboratory of</b>  <b>Schmid &amp; Partner</b>  <b>Engineering AG</b>  <b>Zugstrasse 43, 8004 Zurich, Switzerland</b></p> <p>Accredited by the Swiss Accreditation Service (SAS)    The Swiss Accreditation Service is one of the signatories to the EA    Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS-CN (Auden)</b>      Accreditation No: <b>SCS 0108</b></p>		<p><b>Schweizerischer Kalibrierdienst</b>  <b>Service suisse d'kalibrage</b>  <b>Centro svizzero di testatura</b>  <b>Swiss Calibration Service</b></p> <p>Accredited by the Swiss Accreditation Service (SAS)    The Swiss Accreditation Service is one of the signatories to the EA    Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: <b>SGS-CN (Auden)</b>      Accreditation No: <b>SCS 0108</b></p>																																																																									
<p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: <b>D450V3 - SN:1103</b></p> <p>Calibration procedure(s): <b>QA CAL-15 v9</b>  <b>Calibration Procedure for SAR Validation Sources below 700 MHz</b></p> <p>Calibration date: <b>April 21, 2021</b></p> <p>This calibration certificate documents the traceability to reference standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (20 ± 3°C) and humidity - 70%.</p> <p>Calibration equipment used (MSTE critical for calibration):</p> <table border="1"> <thead> <tr> <th>Primary Standard</th> <th>Object</th> <th>Cal Date (Certification No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter NIPF</td> <td>SIH 104778</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor E41412A</td> <td>SIH 10324</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>Apr-22</td> </tr> <tr> <td>Power sensor MPR-ZH1</td> <td>SIH 104779</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>Apr-22</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SIH C2020 D96</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>Apr-22</td> </tr> <tr> <td>Type N-male/female connector</td> <td>SIH 3-10862 / 03232</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>Apr-22</td> </tr> <tr> <td>D450V3</td> <td>SIH 10477</td> <td>30-Dec-20 (No. EK3-0077-De20)</td> <td>Dec-21</td> </tr> <tr> <td>EMF Probe E300V4</td> <td>SIH 10474</td> <td>30-Dec-20 (No. EK3-0074-De20)</td> <td>Jan-21</td> </tr> <tr> <td>Boundary Standards</td> <td>Object</td> <td>Check Date (in hours)</td> <td>Scheduled Check</td> </tr> <tr> <td>Point meter E44108</td> <td>SIH 1050074</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>Point check: Jun-20</td> </tr> <tr> <td>Power sensor E41412A</td> <td>SIH 1049002</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>In house check: Jun-20</td> </tr> <tr> <td>Power sensor E4142A</td> <td>SIH 00001010</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>RF generator RF-BASIC</td> <td>SIH 1049011700</td> <td>09-Apr-21 (No. 217-0281108092)</td> <td>In house check: Jun-22</td> </tr> <tr> <td>Handheld Antenna Agilent E3393A</td> <td>SIH 104900277</td> <td>31-Mar-20 (No. 217-0281108092)</td> <td>In house check: Oct-21</td> </tr> <tr> <td>Calibrated by:</td> <td>Name: <b>Olafdo Leibler</b></td> <td>Function: <b>Laboratory Technician</b></td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Name: <b>Katja Pfeiffer</b></td> <td>Function: <b>Technical Manager</b></td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;">Issued: April 23, 2021</td> </tr> <tr> <td colspan="4"> <p>This calibration certificate should not be reproduced except in full without written approval of the laboratory.</p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor <math>k=2</math>, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> </td> </tr> </tbody></table>				Primary Standard	Object	Cal Date (Certification No.)	Scheduled Calibration	Power meter NIPF	SIH 104778	09-Apr-21 (No. 217-0281108092)	Apr-22	Power sensor E41412A	SIH 10324	09-Apr-21 (No. 217-0281108092)	Apr-22	Power sensor MPR-ZH1	SIH 104779	09-Apr-21 (No. 217-0281108092)	Apr-22	Reference 20 dB Attenuator	SIH C2020 D96	09-Apr-21 (No. 217-0281108092)	Apr-22	Type N-male/female connector	SIH 3-10862 / 03232	09-Apr-21 (No. 217-0281108092)	Apr-22	D450V3	SIH 10477	30-Dec-20 (No. EK3-0077-De20)	Dec-21	EMF Probe E300V4	SIH 10474	30-Dec-20 (No. EK3-0074-De20)	Jan-21	Boundary Standards	Object	Check Date (in hours)	Scheduled Check	Point meter E44108	SIH 1050074	09-Apr-21 (No. 217-0281108092)	Point check: Jun-20	Power sensor E41412A	SIH 1049002	09-Apr-21 (No. 217-0281108092)	In house check: Jun-20	Power sensor E4142A	SIH 00001010	09-Apr-21 (No. 217-0281108092)	In house check: Jun-22	RF generator RF-BASIC	SIH 1049011700	09-Apr-21 (No. 217-0281108092)	In house check: Jun-22	Handheld Antenna Agilent E3393A	SIH 104900277	31-Mar-20 (No. 217-0281108092)	In house check: Oct-21	Calibrated by:	Name: <b>Olafdo Leibler</b>	Function: <b>Laboratory Technician</b>		Approved by:	Name: <b>Katja Pfeiffer</b>	Function: <b>Technical Manager</b>		Issued: April 23, 2021				<p>This calibration certificate should not be reproduced except in full without written approval of the laboratory.</p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor <math>k=2</math>, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p>			
Primary Standard	Object	Cal Date (Certification No.)	Scheduled Calibration																																																																								
Power meter NIPF	SIH 104778	09-Apr-21 (No. 217-0281108092)	Apr-22																																																																								
Power sensor E41412A	SIH 10324	09-Apr-21 (No. 217-0281108092)	Apr-22																																																																								
Power sensor MPR-ZH1	SIH 104779	09-Apr-21 (No. 217-0281108092)	Apr-22																																																																								
Reference 20 dB Attenuator	SIH C2020 D96	09-Apr-21 (No. 217-0281108092)	Apr-22																																																																								
Type N-male/female connector	SIH 3-10862 / 03232	09-Apr-21 (No. 217-0281108092)	Apr-22																																																																								
D450V3	SIH 10477	30-Dec-20 (No. EK3-0077-De20)	Dec-21																																																																								
EMF Probe E300V4	SIH 10474	30-Dec-20 (No. EK3-0074-De20)	Jan-21																																																																								
Boundary Standards	Object	Check Date (in hours)	Scheduled Check																																																																								
Point meter E44108	SIH 1050074	09-Apr-21 (No. 217-0281108092)	Point check: Jun-20																																																																								
Power sensor E41412A	SIH 1049002	09-Apr-21 (No. 217-0281108092)	In house check: Jun-20																																																																								
Power sensor E4142A	SIH 00001010	09-Apr-21 (No. 217-0281108092)	In house check: Jun-22																																																																								
RF generator RF-BASIC	SIH 1049011700	09-Apr-21 (No. 217-0281108092)	In house check: Jun-22																																																																								
Handheld Antenna Agilent E3393A	SIH 104900277	31-Mar-20 (No. 217-0281108092)	In house check: Oct-21																																																																								
Calibrated by:	Name: <b>Olafdo Leibler</b>	Function: <b>Laboratory Technician</b>																																																																									
Approved by:	Name: <b>Katja Pfeiffer</b>	Function: <b>Technical Manager</b>																																																																									
Issued: April 23, 2021																																																																											
<p>This calibration certificate should not be reproduced except in full without written approval of the laboratory.</p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor <math>k=2</math>, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p>																																																																											

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions given. The Company's sole responsibility is to the Client and this document does not entitle parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced in full, without prior written agreement of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN\\_DocCheck@sgs.com](mailto:CN_DocCheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

<p><b>Measurement Conditions</b> DASYS system configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">DASYS Version</td> <td style="width: 30%;">DAEY5</td> <td style="width: 40%;">V52.10.4</td> </tr> <tr> <td>Extrapolation</td> <td colspan="2">Advanced Extrapolation</td> </tr> <tr> <td>Phantom</td> <td colspan="2">ELI Par Phantom</td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td colspan="2">15 mm</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td colspan="2">dx, dy, dz = 5 mm with Spacer</td> </tr> <tr> <td>Frequency</td> <td colspan="2">450 MHz ± 1 MHz</td> </tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Temperature</td> <td style="width: 30%;">Permittivity</td> <td style="width: 40%;">Conductivity</td> </tr> <tr> <td>22.0 °C</td> <td>43.5</td> <td>0.87 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>43.1 ± 6 % 0.87 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td colspan="2">&lt; 0.5 °C</td> </tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td> <td style="width: 30%;">Condition</td> <td style="width: 40%;">SAR measured</td> </tr> <tr> <td>250 mW input power</td> <td>1.14 W/kg</td> <td>250 mW input power</td> <td>1.14 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td colspan="2">4.88 W/kg ± 18.1 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td> <td>condition</td> <td>SAR measured</td> <td>0.757 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td colspan="2">3.06 W/kg ± 17.5 % (k=2)</td> </tr> </table>	DASYS Version	DAEY5	V52.10.4	Extrapolation	Advanced Extrapolation		Phantom	ELI Par Phantom		Distance Dipole Center - TSL	15 mm		Zoom Scan Resolution	dx, dy, dz = 5 mm with Spacer		Frequency	450 MHz ± 1 MHz		Temperature	Permittivity	Conductivity	22.0 °C	43.5	0.87 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	43.1 ± 6 % 0.87 mho/m ± 6 %	Head TSL temperature change during test	< 0.5 °C		SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power	1.14 W/kg	250 mW input power	1.14 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	4.88 W/kg ± 18.1 % (k=2)		SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	SAR measured	0.757 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	3.06 W/kg ± 17.5 % (k=2)		<p><b>Appendix (Additional assessments outside the scope of SCS 0108)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Impedance, transformed to feed point</td> <td style="width: 50%;">57.1 Ω - 2.8 jΩ</td> </tr> <tr> <td>Return Loss</td> <td>-23.0 dB</td> </tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Electrical Delay (one direction)</td> <td style="width: 50%;">1.346 ns</td> </tr> </table> <p>After long term use with 100W radiated power, only a slight warming of this dipole near the feedpoint can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second end of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are mounted on the feedpoint in order to improve matching when located according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No electrical force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Manufactured by</td> <td style="width: 50%;">SPEAG</td> </tr> </table>	Impedance, transformed to feed point	57.1 Ω - 2.8 jΩ	Return Loss	-23.0 dB	Electrical Delay (one direction)	1.346 ns	Manufactured by	SPEAG
DASYS Version	DAEY5	V52.10.4																																																								
Extrapolation	Advanced Extrapolation																																																									
Phantom	ELI Par Phantom																																																									
Distance Dipole Center - TSL	15 mm																																																									
Zoom Scan Resolution	dx, dy, dz = 5 mm with Spacer																																																									
Frequency	450 MHz ± 1 MHz																																																									
Temperature	Permittivity	Conductivity																																																								
22.0 °C	43.5	0.87 mho/m																																																								
Measured Head TSL parameters	(22.0 ± 0.2) °C	43.1 ± 6 % 0.87 mho/m ± 6 %																																																								
Head TSL temperature change during test	< 0.5 °C																																																									
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured																																																								
250 mW input power	1.14 W/kg	250 mW input power	1.14 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	4.88 W/kg ± 18.1 % (k=2)																																																								
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	SAR measured	0.757 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	3.06 W/kg ± 17.5 % (k=2)																																																								
Impedance, transformed to feed point	57.1 Ω - 2.8 jΩ																																																									
Return Loss	-23.0 dB																																																									
Electrical Delay (one direction)	1.346 ns																																																									
Manufactured by	SPEAG																																																									

Certificate No: D450V3-1103\_Apr21

Page 3 of 6

**DASYS Validation Report for Head TSL**

Date: 21.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3-3-SN:1103

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used: f = 450 MHz; σ = 0.87 S/m; ε<sub>r</sub> = 43.1; ρ = 1000 kg/m<sup>3</sup>


Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASYS2 Configuration:

- Probe: EX3DV4 - SN3877; ConvF10.64, 10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAEF4 Soe654; Calibrated: 26.06.2020
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP1003
- DASYS2 S2.10.4(S27); SEMCAD X 14.6.14(7483)

**Dipole Calibration for Head Tissue(d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:**  
Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 39.18 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 1.76 W/kg  
SAR1 g = 1.14 W/kg; SAR10 g = 0.767 W/kg  
Small peaks in SAR10 g peaks to all points 3 dB below: Larger than measurement grid  
Ratio of SAR at M2 to SAR at M1 = 64.9%  
Maximum value of SAR (measured) = 1.53 W/kg

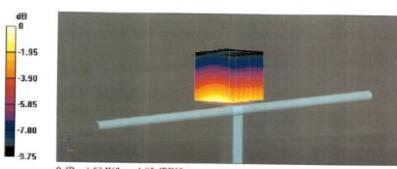

0 dB = 1.53 W/kg = 1.85 dBW/kg

Certificate No: D450V3-1103\_Apr21

Page 4 of 6



Status: CH1: 511 C1\*Pot Avg=20 Delay LCL

Certificate No: D450V3-1103\_Apr21

Page 5 of 6

Certificate No: D450V3-1103\_Apr21

Page 6 of 6

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



## 1.3 D750V3 - SN 1188

     <p>Client: SGS-CN Certificate No: Z22-60103</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D750V3 - SN: 1188</p> <p>Calibration Procedure(s): FF-211-003-01 Calibration Procedures for dipole validation kit</p> <p>Calibration date: March 29, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>105277</td> <td>24-Sep-21 (CITL, No.J21X08329)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (CITL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DVA</td> <td>SN 7307</td> <td>26-May-21 (SPEAG No. EX3-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CITL-SPEAG No. 22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY46071430</td> <td>13-Jan-22 (CITL, No.J22X0409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CITL, No.J22X0406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Name: Zhao Jing Function: SAR Test Engineer Signature: </p> <p>Reviewed by: Lin Hao SAR Test Engineer </p> <p>Approved by: Qi Dianyuan SAR Project Leader </p> <p>Issued: April 3, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: Z22-60103 Page 1 of 6</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105277	24-Sep-21 (CITL, No.J21X08329)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CITL, No.J21X08326)	Sep-22	Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (CITL-SPEAG No. 22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY46071430	13-Jan-22 (CITL, No.J22X0409)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CITL, No.J22X0406)	Jan-23	     <p>Client: SGS-CN Certificate No: Z22-60103</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D750V3 - SN: 1188</p> <p>Calibration Procedure(s): FF-211-003-01 Calibration Procedures for dipole validation kit</p> <p>Calibration date: March 29, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>105277</td> <td>24-Sep-21 (CITL, No.J21X08329)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (CITL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DVA</td> <td>SN 7307</td> <td>26-May-21 (SPEAG No. EX3-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CITL-SPEAG No. 22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY46071430</td> <td>13-Jan-22 (CITL, No.J22X0409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CITL, No.J22X0406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Name: Zhao Jing Function: SAR Test Engineer Signature: </p> <p>Reviewed by: Lin Hao SAR Test Engineer </p> <p>Approved by: Qi Dianyuan SAR Project Leader </p> <p>Issued: April 3, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: Z22-60103 Page 2 of 6</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105277	24-Sep-21 (CITL, No.J21X08329)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CITL, No.J21X08326)	Sep-22	Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (CITL-SPEAG No. 22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY46071430	13-Jan-22 (CITL, No.J22X0409)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CITL, No.J22X0406)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																
Power Meter NRP2	105277	24-Sep-21 (CITL, No.J21X08329)	Sep-22																																																																
Power sensor NRP85	104291	24-Sep-21 (CITL, No.J21X08326)	Sep-22																																																																
Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22																																																																
DAE4	SN 1556	12-Jan-22 (CITL-SPEAG No. 22-60007)	Jan-23																																																																
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																
Signal Generator E4438C	MY46071430	13-Jan-22 (CITL, No.J22X0409)	Jan-23																																																																
Network Analyzer E5071C	MY46110673	14-Jan-22 (CITL, No.J22X0406)	Jan-23																																																																
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																
Power Meter NRP2	105277	24-Sep-21 (CITL, No.J21X08329)	Sep-22																																																																
Power sensor NRP85	104291	24-Sep-21 (CITL, No.J21X08326)	Sep-22																																																																
Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22																																																																
DAE4	SN 1556	12-Jan-22 (CITL-SPEAG No. 22-60007)	Jan-23																																																																
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																
Signal Generator E4438C	MY46071430	13-Jan-22 (CITL, No.J22X0409)	Jan-23																																																																
Network Analyzer E5071C	MY46110673	14-Jan-22 (CITL, No.J22X0406)	Jan-23																																																																
<p><b>Glossary:</b></p> <p>TSL tissue simulating liquid ConfF sensitivity in TSL / NORMxyz N/A not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEEE/IEC 62629-1029:2019-09: Standard Test Method for Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Measurement</p> <p>b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p><b>Additional Documentation:</b></p> <p>c) DASY400 System Handbook</p> <p><b>Method Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed position at the center of the phantom. The impedance stated is transformed from the measured impedance at the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid phantom. The impedance stated is transformed from the measured impedance at the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>SAR measured: SAR measured at the stated antenna input power.</li> <li>SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: Z22-60103 Page 3 of 6</p>		<p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D750V3 - SN: 1188</p> <p>Calibration Procedure(s): FF-211-003-01 Calibration Procedures for dipole validation kit</p> <p>Calibration date: March 29, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>105277</td> <td>24-Sep-21 (CITL, No.J21X08329)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP85</td> <td>104291</td> <td>24-Sep-21 (CITL, No.J21X08326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DVA</td> <td>SN 7307</td> <td>26-May-21 (SPEAG No. EX3-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CITL-SPEAG No. 22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY46071430</td> <td>13-Jan-22 (CITL, No.J22X0409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CITL, No.J22X0406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Name: Zhao Jing Function: SAR Test Engineer Signature: </p> <p>Reviewed by: Lin Hao SAR Test Engineer </p> <p>Approved by: Qi Dianyuan SAR Project Leader </p> <p>Issued: April 3, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: Z22-60103 Page 4 of 6</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105277	24-Sep-21 (CITL, No.J21X08329)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CITL, No.J21X08326)	Sep-22	Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (CITL-SPEAG No. 22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY46071430	13-Jan-22 (CITL, No.J22X0409)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CITL, No.J22X0406)	Jan-23																																
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																
Power Meter NRP2	105277	24-Sep-21 (CITL, No.J21X08329)	Sep-22																																																																
Power sensor NRP85	104291	24-Sep-21 (CITL, No.J21X08326)	Sep-22																																																																
Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No. EX3-7307, May21)	May-22																																																																
DAE4	SN 1556	12-Jan-22 (CITL-SPEAG No. 22-60007)	Jan-23																																																																
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																
Signal Generator E4438C	MY46071430	13-Jan-22 (CITL, No.J22X0409)	Jan-23																																																																
Network Analyzer E5071C	MY46110673	14-Jan-22 (CITL, No.J22X0406)	Jan-23																																																																


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)




No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)5735888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)5735888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

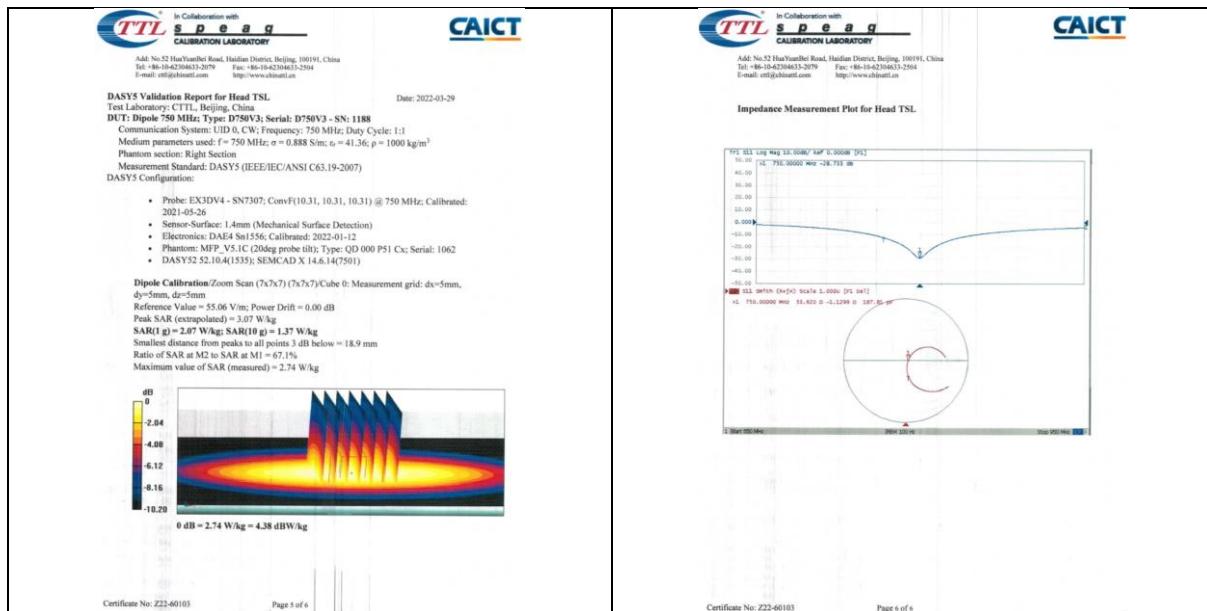

#### 1.4 D835V2 - SN 4d114

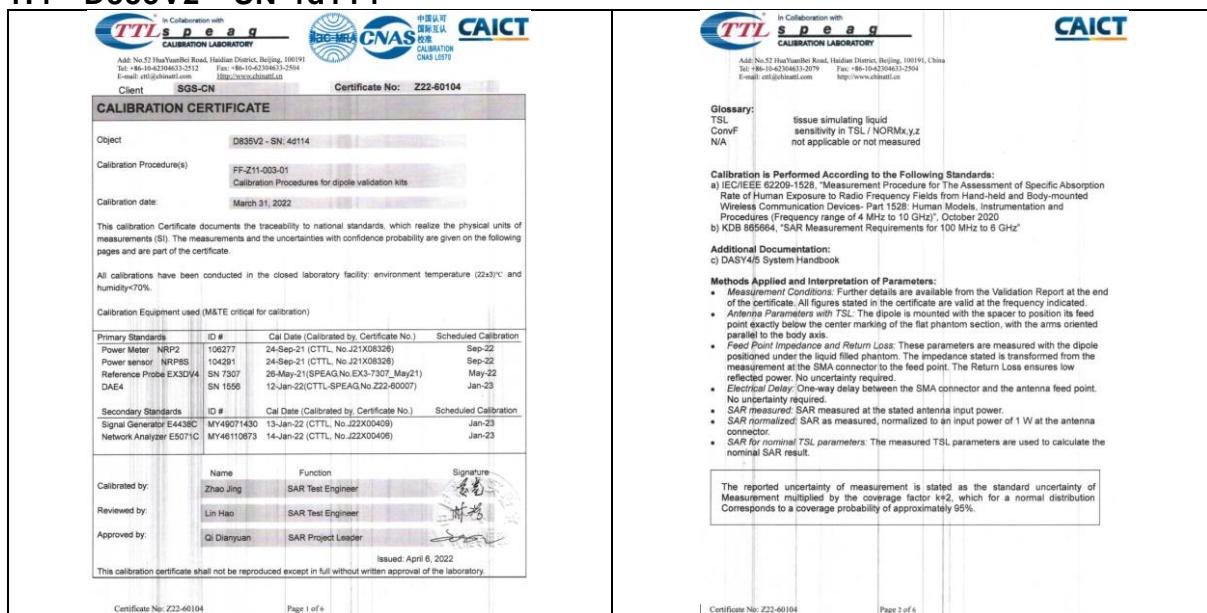

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory  
No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed online, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic form documents, at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any header of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (06752027442)

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

## 1.5 D900V2 - SN 1d079

<div style="text-align: center;">       <b>CALIBRATION CERTIFICATE</b>   <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Object</td> <td>D900V2 - SN: 1d079</td> </tr> <tr> <td>Calibration Procedure(s)</td> <td>FF-Z11-003-01 Calibrator Procedures for dipole validation kits</td> </tr> <tr> <td>Calibration date</td> <td>June 7, 2022</td> </tr> <tr> <td colspan="2">This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</td> </tr> <tr> <td colspan="2">All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity 70%.</td> </tr> <tr> <td colspan="2">Calibration Equipment used (MATE critical for calibration)</td> </tr> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NIP25</td> <td>106277</td> <td>24-Sep-21 (CTTL, No.J2108328)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NIP26</td> <td>104269</td> <td>24-Sep-21 (CTTL, No.J2108329)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7464</td> <td>20-Jan-22 (SPEAG No. EX3-7464, Jan22)</td> <td>Jan-23</td> </tr> <tr> <td>DAE4</td> <td>SN 1558</td> <td>12-Jan-22 (CTTL, SPEAG No. 222-40007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator 6438C</td> <td>MY48071430</td> <td>13-Jan-22 (CTTL, No.J22304059)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY48110573</td> <td>14-Jan-22 (CTTL, No.J22304056)</td> <td>Jan-23</td> </tr> <tr> <td>Calibrated by:</td> <td>Name</td> <td>Function</td> <td>Signature</td> </tr> <tr> <td>Zhao Jing</td> <td>SAR Test Engineer</td> <td></td> <td></td> </tr> <tr> <td>Reviewed by:</td> <td>Lin Hao</td> <td>SAR Test Engineer</td> <td></td> </tr> <tr> <td>Approved by:</td> <td>Qi Dianyuan</td> <td>SAR Project Leader</td> <td></td> </tr> <tr> <td colspan="4" style="text-align: center;">Issued: June 13, 2022</td> </tr> <tr> <td colspan="4">This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</td> </tr> </table> </div>	Object	D900V2 - SN: 1d079	Calibration Procedure(s)	FF-Z11-003-01 Calibrator Procedures for dipole validation kits	Calibration date	June 7, 2022	This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.		All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity 70%.		Calibration Equipment used (MATE critical for calibration)		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NIP25	106277	24-Sep-21 (CTTL, No.J2108328)	Sep-22	Power sensor NIP26	104269	24-Sep-21 (CTTL, No.J2108329)	Sep-22	Reference Probe EX3DV4	SN 7464	20-Jan-22 (SPEAG No. EX3-7464, Jan22)	Jan-23	DAE4	SN 1558	12-Jan-22 (CTTL, SPEAG No. 222-40007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator 6438C	MY48071430	13-Jan-22 (CTTL, No.J22304059)	Jan-23	Network Analyzer E5071C	MY48110573	14-Jan-22 (CTTL, No.J22304056)	Jan-23	Calibrated by:	Name	Function	Signature	Zhao Jing	SAR Test Engineer			Reviewed by:	Lin Hao	SAR Test Engineer		Approved by:	Qi Dianyuan	SAR Project Leader		Issued: June 13, 2022				This calibration certificate shall not be reproduced except in full without written approval of the laboratory.				<div style="text-align: center;">      <b>Glossary:</b> <ul style="list-style-type: none"> <li>TSL: tissue simulating liquid</li> <li>ConvF: sensitivity in TSL / NORMxyz</li> <li>N/A: not applicable or not measured</li> </ul> <p><b>Calibration is Performed According to the Following Standards:</b></p> <ul style="list-style-type: none"> <li>a) IEC 62626: "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Handheld and Body-mounted Wireless Communication Devices-Part 1: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2002</li> <li>b) ICNIRP 86694, "SAR Measurement Requirements for 100 MHz to 6 GHz"</li> </ul> <p><b>Additional Documentation:</b></p> <ul style="list-style-type: none"> <li>c) DAS-4000: Validation Report</li> </ul> <p><b>Method Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>• <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>• <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed arm parallel to the long axis of the flat phantom section, with the arm oriented to the body axis.</li> <li>• <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole connected to the flat phantom section. Impedance is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>• <b>Electrical Delay:</b> The one-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>• <b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li>• <b>Normalized SAR:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>• <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor <math>k=2</math>, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> </div> </div>
Object	D900V2 - SN: 1d079																																																																				
Calibration Procedure(s)	FF-Z11-003-01 Calibrator Procedures for dipole validation kits																																																																				
Calibration date	June 7, 2022																																																																				
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																																																																					
All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity 70%.																																																																					
Calibration Equipment used (MATE critical for calibration)																																																																					
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																		
Power Meter NIP25	106277	24-Sep-21 (CTTL, No.J2108328)	Sep-22																																																																		
Power sensor NIP26	104269	24-Sep-21 (CTTL, No.J2108329)	Sep-22																																																																		
Reference Probe EX3DV4	SN 7464	20-Jan-22 (SPEAG No. EX3-7464, Jan22)	Jan-23																																																																		
DAE4	SN 1558	12-Jan-22 (CTTL, SPEAG No. 222-40007)	Jan-23																																																																		
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																																		
Signal Generator 6438C	MY48071430	13-Jan-22 (CTTL, No.J22304059)	Jan-23																																																																		
Network Analyzer E5071C	MY48110573	14-Jan-22 (CTTL, No.J22304056)	Jan-23																																																																		
Calibrated by:	Name	Function	Signature																																																																		
Zhao Jing	SAR Test Engineer																																																																				
Reviewed by:	Lin Hao	SAR Test Engineer																																																																			
Approved by:	Qi Dianyuan	SAR Project Leader																																																																			
Issued: June 13, 2022																																																																					
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																																					




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: to check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

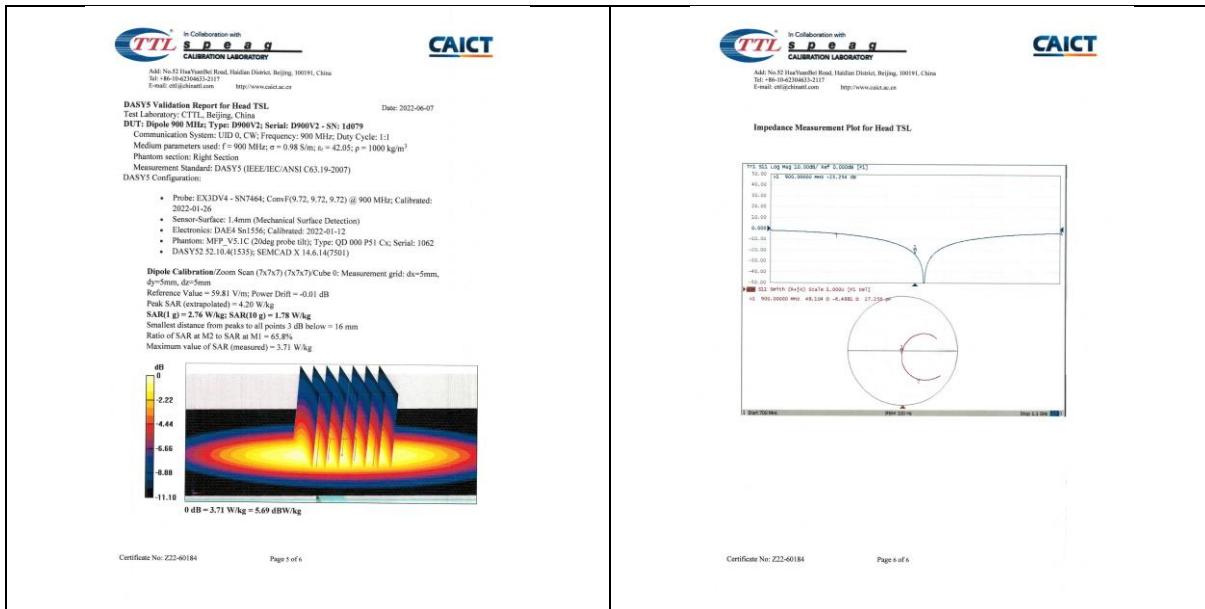

## 1.6 D1800V2 - SN 2d170

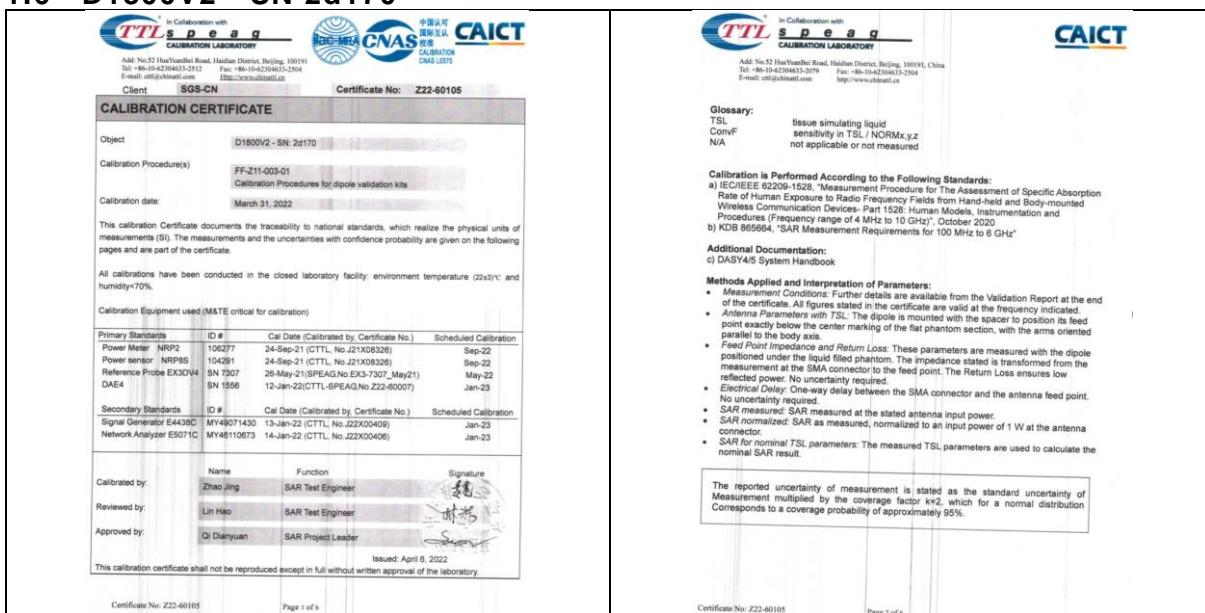

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



<p><b>TTL speag</b> In Collaboration with CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62306832-2079 Fax: +86-10-62306832-2504 E-mail: ctll@chinastl.com http://www.chinastl.com</p> <p><b>Measurement Conditions</b> DASY5 system configuration, as far as not given on page 1.</p> <table border="1"> <tr><td>DASY Version</td><td>DASY52</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td></tr> <tr><td>Frequency</td><td>1800 MHz ± 1 MHz</td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <tr><td>Nominal Head TSL parameters</td><td>Temperature</td><td>Permittivity</td><td>Conductivity</td></tr> <tr><td>22.0 °C</td><td>40.0</td><td>1.40 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>40.6 ± 5 %</td><td>1.41 mho/m ± 5 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>+1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <tr><td>SAR averaged over 1 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power 9.73 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W 38.8 W/kg ± 18.8 % (k=2)</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>250 mW input power 5.11 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W 20.4 W/kg ± 18.7 % (k=2)</td></tr> </table> <p>Certificate No: Z22-60105 Page 3 of 6</p>	DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation	Phantom	Triple Flat Phantom 5.1C	Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm	Frequency	1800 MHz ± 1 MHz	Nominal Head TSL parameters	Temperature	Permittivity	Conductivity	22.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	40.6 ± 5 %	1.41 mho/m ± 5 %	Head TSL temperature change during test	+1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power 9.73 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 38.8 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power 5.11 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 20.4 W/kg ± 18.7 % (k=2)	<p><b>TTL speag</b> In Collaboration with CALIBRATION LABORATORY</p> <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62306832-2079 Fax: +86-10-62306832-2504 E-mail: ctll@chinastl.com http://www.chinastl.com</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <tr><td>Impedance, transformed to feed point</td><td>47.9Ω-2.54jΩ</td></tr> <tr><td>Return Loss</td><td>-29.4dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <tr><td>Electrical Delay (one direction)</td><td>1.119 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semi-rigid coaxial cable. The center conductor of the feeding line is directly soldered to the ground plane of the PCB. The antenna is therefore short-circuited for DC-signals. On some of the dipoles small end caps are added to the feed-point to prevent the soldered connection from being loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.</p> <p>No excessive bending of the dipole is recommended. Bending the dipole may damage the PCB. In some cases, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table> <p>Certificate No: Z22-60105 Page 4 of 6</p>	Impedance, transformed to feed point	47.9Ω-2.54jΩ	Return Loss	-29.4dB	Electrical Delay (one direction)	1.119 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																
Extrapolation	Advanced Extrapolation																																																	
Phantom	Triple Flat Phantom 5.1C																																																	
Distance Dipole Center - TSL	10 mm	with Spacer																																																
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																	
Frequency	1800 MHz ± 1 MHz																																																	
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity																																															
22.0 °C	40.0	1.40 mho/m																																																
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.6 ± 5 %	1.41 mho/m ± 5 %																																															
Head TSL temperature change during test	+1.0 °C	—	—																																															
SAR averaged over 1 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																	
SAR measured	250 mW input power 9.73 W/kg																																																	
SAR for nominal Head TSL parameters	normalized to 1W 38.8 W/kg ± 18.8 % (k=2)																																																	
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																	
SAR measured	250 mW input power 5.11 W/kg																																																	
SAR for nominal Head TSL parameters	normalized to 1W 20.4 W/kg ± 18.7 % (k=2)																																																	
Impedance, transformed to feed point	47.9Ω-2.54jΩ																																																	
Return Loss	-29.4dB																																																	
Electrical Delay (one direction)	1.119 ns																																																	
Manufactured by	SPEAG																																																	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 1.7 D1900V2 - SN 5d136

    <p>In Collaboration with TTL CALIBRATION LABORATORY Add: No. 52 HuaYanBei Road, Haidian District, Beijing, 100081, China Tel: +86-10-62556564 E-mail: sgs@sgs.com.cn http://www.sgs.com.cn</p> <p>Client: SGS-CN Certificate No: 222-60185</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D1900V2 - SN: 5d136</p> <p>Calibration Procedure(s): FF-Z1-053-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: June 1, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity &gt;70%.</p> <p>Calibration Equipment used (M&amp;T critical for calibration)</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>105377</td> <td>24-Sep-21 (CTTL No.21X08528)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP8</td> <td>04289</td> <td>24-Sep-21 (CTTL No.21X08528)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX2DV4</td> <td>SN 7454</td> <td>20-Jun-22 (CTTL-SPEAG No.223-40007)</td> <td>Jan-23</td> </tr> <tr> <td>DKE4</td> <td>SN 1556</td> <td>12-Jan-22 (CTTL-SPEAG No.223-40007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4436C</td> <td>MY49071430</td> <td>13-Jan-22 (CTTL No.22209460)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY81103873</td> <td>14-Jan-22 (CTTL No.22209460)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Zhao Jing SAR Test Engineer</p> <p>Reviewed by: Lin Hao SAR Test Engineer</p> <p>Approved by: Qi Dianyuan SAR Project Leader</p> <p>Issued: June 13, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p> <p>Certificate No: 222-60185 Page 1 of 6</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105377	24-Sep-21 (CTTL No.21X08528)	Sep-22	Power sensor NRP8	04289	24-Sep-21 (CTTL No.21X08528)	Sep-22	Reference Probe EX2DV4	SN 7454	20-Jun-22 (CTTL-SPEAG No.223-40007)	Jan-23	DKE4	SN 1556	12-Jan-22 (CTTL-SPEAG No.223-40007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4436C	MY49071430	13-Jan-22 (CTTL No.22209460)	Jan-23	Network Analyzer E5071C	MY81103873	14-Jan-22 (CTTL No.22209460)	Jan-23	  <p>In Collaboration with TTL CALIBRATION LABORATORY Add: No. 52 HuaYanBei Road, Haidian District, Beijing, 100081, China Tel: +86-10-62556564 E-mail: sgs@sgs.com.cn http://www.sgs.com.cn</p> <p><b>Glossary:</b></p> <ul style="list-style-type: none"> <li>TSL: Issue simulating liquid</li> <li>ComF: sensitivity in TSL / NORMs,y,z</li> <li>N/A: not applicable or not measured</li> </ul> <p><b>Calibration is Performed According to the Following Standards:</b></p> <ol style="list-style-type: none"> <li>ICNIRP (1996) "Guidelines for the Protection of Human Beings from the Effects of Electromagnetic Fields - Part 1: Exposure of the General Public to Electromagnetic Fields Below 30 GHz"</li> <li>KD26554, SAR Measurement Requirements for 100 MHz to 6 GHz</li> </ol> <p><b>Additional Information:</b></p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li><b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li><b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point at the center of the arms of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li><b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned at the feed point of the phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li><b>Electrical Delay:</b> The electrical delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li><b>SAR measured:</b> SAR measured at the stated antenna input power.</li> <li><b>SAR normalized:</b> SAR is measured, normalized to an input power of 1 W at the antenna connector.</li> <li><b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p> <p>Certificate No: 222-60185 Page 2 of 6</p>																							
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																						
Power Meter NRP2	105377	24-Sep-21 (CTTL No.21X08528)	Sep-22																																																						
Power sensor NRP8	04289	24-Sep-21 (CTTL No.21X08528)	Sep-22																																																						
Reference Probe EX2DV4	SN 7454	20-Jun-22 (CTTL-SPEAG No.223-40007)	Jan-23																																																						
DKE4	SN 1556	12-Jan-22 (CTTL-SPEAG No.223-40007)	Jan-23																																																						
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																						
Signal Generator E4436C	MY49071430	13-Jan-22 (CTTL No.22209460)	Jan-23																																																						
Network Analyzer E5071C	MY81103873	14-Jan-22 (CTTL No.22209460)	Jan-23																																																						
  <p>In Collaboration with TTL CALIBRATION LABORATORY Add: No. 52 HuaYanBei Road, Haidian District, Beijing, 100081, China Tel: +86-10-62556564 E-mail: sgs@sgs.com.cn http://www.sgs.com.cn</p> <p><b>Measurement Conditions</b> DASY2 system configuration, as far as not given on page 1.</p> <table border="1"> <tr> <td>DASY2</td> <td>DASY2</td> <td>52.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz = 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>1900 MHz ± 1 MHz</td> <td></td> </tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied:</p> <table border="1"> <tr> <td></td> <td>Temperature</td> <td>Permittivity</td> <td>Conductivity</td> </tr> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>40.0</td> <td>1.40 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>39.9 ± 0.1 %</td> <td>1.39 mho/m ± 0.5 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>±1.0 °C</td> <td>---</td> <td>---</td> </tr> </table> <p><b>SAR result with Head TSL</b> SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</p> <table border="1"> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>9.95 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>40.0 W/kg ± 18.6 % (n=2)</td> </tr> </table> <p>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</p> <table border="1"> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>5.18 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>20.8 W/kg ± 18.7 % (n=2)</td> </tr> </table> <p>Certificate No: 222-60185 Page 1 of 6</p>		DASY2	DASY2	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	1900 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	39.9 ± 0.1 %	1.39 mho/m ± 0.5 %	Head TSL temperature change during test	±1.0 °C	---	---	SAR measured	250 mW input power	9.95 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 18.6 % (n=2)	SAR measured	250 mW input power	5.18 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg ± 18.7 % (n=2)	<p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <tr> <td>Impedance, transformed to feed point</td> <td>51.20+7.68jΩ</td> </tr> <tr> <td>Return Loss</td> <td>-22.4dB</td> </tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <tr> <td>Electrical Delay (one direction)</td> <td>1.109 ns</td> </tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The antenna is made of standard screening copper cable. The center conductor of the feedline is terminated with the second arm of the dipole. The antenna is therefore non-compliant for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when using different feed points. The feed points are not compliant with the standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table> <p>Certificate No: 222-60185 Page 4 of 6</p>		Impedance, transformed to feed point	51.20+7.68jΩ	Return Loss	-22.4dB	Electrical Delay (one direction)	1.109 ns	Manufactured by	SPEAG
DASY2	DASY2	52.10.4																																																							
Extrapolation	Advanced Extrapolation																																																								
Phantom	Triple Flat Phantom 5.1C																																																								
Distance Dipole Center - TSL	10 mm	with Spacer																																																							
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																								
Frequency	1900 MHz ± 1 MHz																																																								
	Temperature	Permittivity	Conductivity																																																						
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m																																																						
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.9 ± 0.1 %	1.39 mho/m ± 0.5 %																																																						
Head TSL temperature change during test	±1.0 °C	---	---																																																						
SAR measured	250 mW input power	9.95 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 18.6 % (n=2)																																																							
SAR measured	250 mW input power	5.18 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg ± 18.7 % (n=2)																																																							
Impedance, transformed to feed point	51.20+7.68jΩ																																																								
Return Loss	-22.4dB																																																								
Electrical Delay (one direction)	1.109 ns																																																								
Manufactured by	SPEAG																																																								

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



**TTT** In Collaboration with **speag**  
CALIBRATION LABORATORY


Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62198072; E-mail: office@caict.ac.cn <http://www.caict.ac.cn>

**CAICT**

Test Laboratory: TTTL, Beijing, China  
DUT: Dipole 1900 MHz Transmitter; Serial: B1900V2; SN: 541136  
System: 2D; CW; Frequency: 1900 MHz; Duty Cycle: 1.1  
Medium parameters used:  $\epsilon' = 1900 \text{ MHz}$ ;  $\sigma = 1.385 \text{ S/m}$ ;  $\mu = 39.8$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)  
DASY5 Configuration:  

- Probe: EX3DV4 - SN7464; ConvF18.18, 8.18, 8.18) @ 1900 MHz; Calibrated: 2022-01-29
- Surface: 1.4mm (Mechanical Surface Detector)
- Electrode: DAJA-Sa1556; Calibrated: 2022-01-12
- Phantom: MFP V5.3.1 (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 S2.10.04(1535); SEMCAD X 16.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)Cube 0°: Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Peak SAR (interpolated) = 16.8 W/kg  
SAR (g) = 9.85 W/kg; SAR (g) = 8.18 W/kg  
Smallest distance from peaks to all points 3 dB below = 9.2 mm  
Ratio of SAR at M2 to SAR at M1 = 54.1%  
Maximum value of SAR (measured) = 15.6 W/kg

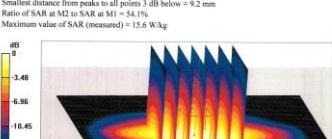

0 dB = 15.6 W/kg = 11.93 dBW/kg


Certificate No: Z22-60185 Page 5 of 6

**TTT** In Collaboration with **speag**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62198072; E-mail: office@caict.ac.cn <http://www.caict.ac.cn>

**CAICT**

Impedance Measurement Plot for Head TSL

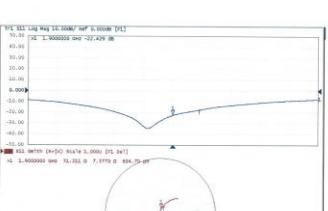

10 20 30 40 50 60 70 80 90 100 [MHz]

0.000 0.020 0.040 0.060 0.080 0.100 [Ω]

12. 1.000000 0.98 0.97 0.95 0.93 0.92 0.91 0.90 0.89 0.88 0.87 0.86 0.85 0.84 0.83 0.82 0.81 0.80 0.79 0.78 0.77 0.76 0.75 0.74 0.73 0.72 0.71 0.70 0.69 0.68 0.67 0.66 0.65 0.64 0.63 0.62 0.61 0.60 0.59 0.58 0.57 0.56 0.55 0.54 0.53 0.52 0.51 0.50 0.49 0.48 0.47 0.46 0.45 0.44 0.43 0.42 0.41 0.40 0.39 0.38 0.37 0.36 0.35 0.34 0.33 0.32 0.31 0.30 0.29 0.28 0.27 0.26 0.25 0.24 0.23 0.22 0.21 0.20 0.19 0.18 0.17 0.16 0.15 0.14 0.13 0.12 0.11 0.10 0.09 0.08 0.07 0.06 0.05 0.04 0.03 0.02 0.01 0.00 0.000 [Ω]

12. 1.000000 0.98 0.97 0.95 0.93 0.92 0.91 0.90 0.89 0.88 0.87 0.86 0.85 0.84 0.83 0.82 0.81 0.80 0.79 0.78 0.77 0.76 0.75 0.74 0.73 0.72 0.71 0.70 0.69 0.68 0.67 0.66 0.65 0.64 0.63 0.62 0.61 0.60 0.59 0.58 0.57 0.56 0.55 0.54 0.53 0.52 0.51 0.50 0.49 0.48 0.47 0.46 0.45 0.44 0.43 0.42 0.41 0.40 0.39 0.38 0.37 0.36 0.35 0.34 0.33 0.32 0.31 0.30 0.29 0.28 0.27 0.26 0.25 0.24 0.23 0.22 0.21 0.20 0.19 0.18 0.17 0.16 0.15 0.14 0.13 0.12 0.11 0.10 0.09 0.08 0.07 0.06 0.05 0.04 0.03 0.02 0.01 0.00 0.000 [Ω]

Certificate No: Z22-60185 Page 6 of 6

1.8 D2000V2 - SN 1041



  <b>CAICT</b> Add: No.13 Huayuanqiao Road, Haidian District, Beijing, 100091 Tel: +86-10-62368333-2117 E-mail: <a href="mailto:cert@caict.ac.cn">cert@caict.ac.cn</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a>		 In Collaboration with <b>CAICT</b> Add: No.23 Huayuanqiao Road, Haidian District, Beijing, 100091, China Tel: +86-10-62368333-2117 E-mail: <a href="mailto:cert@caict.ac.cn">cert@caict.ac.cn</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a>																					
Client	SGS-CN	Certificate No: 222-60186																					
<b>CALIBRATION CERTIFICATE</b>																							
Object	C2000V2 - SN: 1041																						
Calibration Procedure(s)	FF-ZH-032-01 Calibration Procedures for dipole validation kits																						
Calibration date:	June 8, 2022																						
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																							
All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity<70%.																							
Calibration Equipment used (M&TE critical for calibration)																							
<table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power Meter</td> <td>NRP2</td> <td>106277 24-Sep-21 (CTTL, No. J21X08328)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor</td> <td>NRP85</td> <td>104291 24-Sep-21 (CTTL, No. J21X08336)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe</td> <td>ES404</td> <td>104294 28-Jan-22 (SPEAG No. EK3-1464, Jan22)</td> <td>Jan-23</td> </tr> <tr> <td>D424</td> <td>BN 1596</td> <td>12-Jan-22 (CTTL, 09EA03, No. 222-60070)</td> <td>Jan-23</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter	NRP2	106277 24-Sep-21 (CTTL, No. J21X08328)	Sep-22	Power sensor	NRP85	104291 24-Sep-21 (CTTL, No. J21X08336)	Sep-22	Reference Probe	ES404	104294 28-Jan-22 (SPEAG No. EK3-1464, Jan22)	Jan-23	D424	BN 1596	12-Jan-22 (CTTL, 09EA03, No. 222-60070)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																				
Power Meter	NRP2	106277 24-Sep-21 (CTTL, No. J21X08328)	Sep-22																				
Power sensor	NRP85	104291 24-Sep-21 (CTTL, No. J21X08336)	Sep-22																				
Reference Probe	ES404	104294 28-Jan-22 (SPEAG No. EK3-1464, Jan22)	Jan-23																				
D424	BN 1596	12-Jan-22 (CTTL, 09EA03, No. 222-60070)	Jan-23																				
<table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Signal Generator E4438C</td> <td>MY40071430</td> <td>13-Jan-22 (CTTL, No. J22X0408)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5710C</td> <td>MY40110973</td> <td>14-Jan-22 (CTTL, No. J22X0408)</td> <td>Jan-23</td> </tr> </tbody> </table>				Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY40071430	13-Jan-22 (CTTL, No. J22X0408)	Jan-23	Network Analyzer E5710C	MY40110973	14-Jan-22 (CTTL, No. J22X0408)	Jan-23								
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																				
Signal Generator E4438C	MY40071430	13-Jan-22 (CTTL, No. J22X0408)	Jan-23																				
Network Analyzer E5710C	MY40110973	14-Jan-22 (CTTL, No. J22X0408)	Jan-23																				
Calibrated by:	Name	Function	Signature																				
Zhao Jing	SAR Test Engineer																						
Reviewed by:	Liu Hao	SAR Test Engineer																					
Approved by:	Qi Dianyuan	SAR Project Leader																					
Issued: June 13, 2022																							
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																							
Certificate No: 222-60186		Page 1 of 4																					
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.																							
Certificate No: 222-60186		Page 2 of 6																					

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>.  
Attention is drawn to the limitation of liability, jurisdiction and jurisdictional issues defined in the General Conditions of this document. It is advised that information contained herein reflects the Company's findings at the time of its intervention only, within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN\\_DocCheck@sgs.com](mailto:CN_DocCheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com
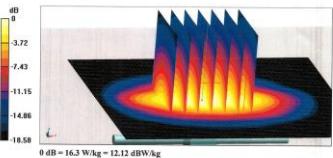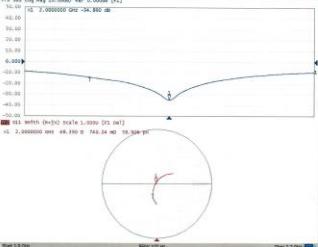
<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanRoad, Haidian District, Beijing, 100091, China Tel: +86-10-64394613-2117 E-mail: <a href="mailto:ctt@caict.ac.cn">ctt@caict.ac.cn</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Measurement Conditions</b> DASY system configuration, as far as given on page 1</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASY Version</td><td>DASY52</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr> <tr><td>Frequency</td><td>2000 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were posted.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>40.0</td><td>1.40 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>40.2 ± 6 %</td><td>1.39 mho/m ± 8 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>+1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th><th>Condition</th></tr> <tr><td>SAR measured</td><td>250 mW input power</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W.</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td></tr> <tr><td>SAR measured</td><td>5.30 mW/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td></tr> </table> </div>	DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	2000 MHz ± 1 MHz			Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 %	1.39 mho/m ± 8 %	Head TSL temperature change during test	+1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power	SAR for nominal Head TSL parameters	normalized to 1W.	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	5.30 mW/kg	SAR for nominal Head TSL parameters	normalized to 1W	<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.07 HuaYuanRoad, Haidian District, Beijing, 100091, China Tel: +86-10-64394613-2117 E-mail: <a href="mailto:ctt@caict.ac.cn">ctt@caict.ac.cn</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Appendix (Additional Conditions outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>48.4Ω ± 0.7Ω</td></tr> <tr><td>Return Loss</td><td>-34.9dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Electrical Delay (one direction)</td><td>1.088 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the measurement points, the dipole is bent. The dipole is therefore not perfectly aligned with the feed line, according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.</p> <p>No metal parts are present in the antenna, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td>SPAEAG</td></tr> </table> </div>	Impedance, transformed to feed point	48.4Ω ± 0.7Ω	Return Loss	-34.9dB	Electrical Delay (one direction)	1.088 ns	Manufactured by	SPAEAG
DASY Version	DASY52	52.10.4																																																					
Extrapolation	Advanced Extrapolation																																																						
Phantom	Triple Flat Phantom 5.1C																																																						
Distance Dipole Center - TSL	10 mm	with Spacer																																																					
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																						
Frequency	2000 MHz ± 1 MHz																																																						
	Temperature	Permittivity	Conductivity																																																				
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m																																																				
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 %	1.39 mho/m ± 8 %																																																				
Head TSL temperature change during test	+1.0 °C	—	—																																																				
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																						
SAR measured	250 mW input power																																																						
SAR for nominal Head TSL parameters	normalized to 1W.																																																						
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																						
SAR measured	5.30 mW/kg																																																						
SAR for nominal Head TSL parameters	normalized to 1W																																																						
Impedance, transformed to feed point	48.4Ω ± 0.7Ω																																																						
Return Loss	-34.9dB																																																						
Electrical Delay (one direction)	1.088 ns																																																						
Manufactured by	SPAEAG																																																						
<p>Certificate No: Z22-60186 Page 1 of 6</p> <p>Certificate No: Z22-60186 Page 4 of 6</p>																																																							
<div style="display: flex; justify-content: space-around;"> <div style="width: 45%;"> <div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.52 HuaYuanRoad, Haidian District, Beijing, 100091, China Tel: +86-10-64394613-2117 E-mail: <a href="mailto:ctt@caict.ac.cn">ctt@caict.ac.cn</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>DASY Values and Parameters for Head TSL</b> Date: 2022-06-06</p> <p>Test Laboratory: CTIIT, Beijing, China DUT: Dipole 2000 MHz, Type: D2000V2, Serial: D2000V2 - SN: 1041 Communication System: UUD 0, CW; Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2000 MHz; n = 1.392; S(n); n = 40.21; p = 1000 kg/m<sup>3</sup> Phantom: Triple Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN7464; ConvF(8.2, 8.2, 8.2) @ 2000 MHz; Calibrated: 2022-01-26</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DASA-Sn1556; Calibrated: 2022-01-12</li> <li>• Phantom: MFP V3.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li> <li>• DASY52 S2.10.14(1535); NEMCAD X 14.14(7501)</li> </ul> <p>Dipole Calibration/Zoom Scan (7x7) (7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm</p> <p>Reference Value = 10.4 V/m; Power Drift = 0.03 dB</p> <p>Peak SAR (extrapolated) = 19.6 W/kg</p> <p>SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.3 W/kg</p> <p>Small peaks in SAR values at all points &gt;8 dB below ~9.1 mm</p> <p>Ratio of SAR at M2 to SAR at M1 = 3.95</p> <p>Maximum value of SAR (measured) = 16.3 W/kg</p>  </div> </div> <div style="width: 45%;"> <div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No.07 HuaYuanRoad, Haidian District, Beijing, 100091, China Tel: +86-10-64394613-2117 E-mail: <a href="mailto:ctt@caict.ac.cn">ctt@caict.ac.cn</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Impedance Measurement Plot for Head TSL</b></p>  </div> </div> </div>																																																							
<p>Certificate No: Z22-60186 Page 5 of 6</p> <p>Certificate No: Z22-60186 Page 6 of 6</p>																																																							

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory


No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300

中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)

t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 1.9 D2300V2 - SN 1096

    <p>Client SGS-CN Certificate No: Z22-60106</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: D2300V2 - SN 1096</p> <p>Calibration Procedure(s): FF-211-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 31, 2022</p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration equipment used (M&amp;TE critical for calibration):</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>105277</td> <td>24-Sep-22 (CTTL No.J21X05326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP8</td> <td>104291</td> <td>24-Sep-21 (CTTL No.J21X05326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV4</td> <td>SN 7307</td> <td>26-May-21 (SPEAG No. EX3-2307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1556</td> <td>12-Jan-22 (CTTL SPEAG No.Z22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E4438C</td> <td>MY49011430</td> <td>13-Jan-22 (CTTL No.J22X0409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY46110673</td> <td>14-Jan-22 (CTTL No.J22X0406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Zhao Jing SAR Test Engineer Reviewed by: Lin Hao SAR Test Engineer Approved by: Qi Dianyuan SAR Project Leader</p> <p>Issued: April 6, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105277	24-Sep-22 (CTTL No.J21X05326)	Sep-22	Power sensor NRP8	104291	24-Sep-21 (CTTL No.J21X05326)	Sep-22	Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No. EX3-2307, May21)	May-22	DAE4	SN 1556	12-Jan-22 (CTTL SPEAG No.Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49011430	13-Jan-22 (CTTL No.J22X0409)	Jan-23	Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL No.J22X0406)	Jan-23	  <p>Add: No.52 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304813-2112 Fax: +86-10-62304813-2094 E-mail: cict@caict.ac.cn</p> <p><b>Glossary:</b></p> <p>TSL tissue simulating liquid ConvF sensitivity in TSL / NORMx,y,z N/A not applicable or not measured</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>IEC 62209-1523 "Measurement Procedure for the Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1523: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 b) KOB 865668 "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p><b>Additional Documentation:</b> c) DASY4.5 System Handbook</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <ul style="list-style-type: none"> <li>Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.</li> <li>Antenna Parameters with TSL: The dipole is mounted with the spacer to position the feed point directly under the center marking of the flat phantom section, with the arms oriented parallel to the body axis.</li> <li>Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid phantom. The impedance stated is transformed from the measured at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.</li> <li>Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.</li> <li>Q-factor: SAR measured at the stated antenna input power.</li> <li>SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.</li> <li>SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.</li> </ul> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.</p>																												
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																											
Power Meter NRP2	105277	24-Sep-22 (CTTL No.J21X05326)	Sep-22																																																											
Power sensor NRP8	104291	24-Sep-21 (CTTL No.J21X05326)	Sep-22																																																											
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No. EX3-2307, May21)	May-22																																																											
DAE4	SN 1556	12-Jan-22 (CTTL SPEAG No.Z22-60007)	Jan-23																																																											
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																											
Signal Generator E4438C	MY49011430	13-Jan-22 (CTTL No.J22X0409)	Jan-23																																																											
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL No.J22X0406)	Jan-23																																																											
<p>Certificate No: Z22-60106 Page 1 of 6</p>   <p>Add: No.52 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304813-2079 Fax: +86-10-62304813-2504 E-mail: cict@caict.ac.cn</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <tr> <td>DASY Version</td> <td>DASY2</td> <td>52.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz &lt; 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>2300 MHz ± 1 MHz</td> <td></td> </tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <tr> <td>Nominal Head TSL parameters</td> <td>Temperature</td> <td>Permittivity</td> <td>Conductivity</td> </tr> <tr> <td>22.0 °C</td> <td>39.5</td> <td>1.67 mho/m</td> <td></td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>39.8 ± 6 %</td> <td>1.70 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <tr> <td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>12.4 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>48.2 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>5.88 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>23.4 W/kg ± 18.7 % (k=2)</td> </tr> </table>		DASY Version	DASY2	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz < 5 mm		Frequency	2300 MHz ± 1 MHz		Nominal Head TSL parameters	Temperature	Permittivity	Conductivity	22.0 °C	39.5	1.67 mho/m		Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.70 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	250 mW input power	12.4 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	48.2 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	250 mW input power	5.88 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 18.7 % (k=2)	<p>Certificate No: Z22-60106 Page 2 of 6</p>   <p>Add: No.52 HuaYanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304813-2079 Fax: +86-10-62304813-2504 E-mail: cict@caict.ac.cn</p> <p><b>Appendix: Additional assessments outside the scope of CNAS L0570</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <tr> <td>Impedance, transformed to feed point</td> <td>49.20.4.96(j)</td> </tr> <tr> <td>Return Loss</td> <td>-29.8dB</td> </tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <tr> <td>Electrical Delay (one direction)</td> <td>1.083 ns</td> </tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semi rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded with the liquid phantom. Measurement of the SAR data is not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table>	Impedance, transformed to feed point	49.20.4.96(j)	Return Loss	-29.8dB	Electrical Delay (one direction)	1.083 ns	Manufactured by	SPEAG
DASY Version	DASY2	52.10.4																																																												
Extrapolation	Advanced Extrapolation																																																													
Phantom	Triple Flat Phantom 5.1C																																																													
Distance Dipole Center - TSL	10 mm	with Spacer																																																												
Zoom Scan Resolution	dx, dy, dz < 5 mm																																																													
Frequency	2300 MHz ± 1 MHz																																																													
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity																																																											
22.0 °C	39.5	1.67 mho/m																																																												
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.70 mho/m ± 6 %																																																											
Head TSL temperature change during test	<1.0 °C	—	—																																																											
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																													
SAR measured	250 mW input power	12.4 W/kg																																																												
SAR for nominal Head TSL parameters	normalized to 1W	48.2 W/kg ± 18.8 % (k=2)																																																												
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																													
SAR measured	250 mW input power	5.88 W/kg																																																												
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 18.7 % (k=2)																																																												
Impedance, transformed to feed point	49.20.4.96(j)																																																													
Return Loss	-29.8dB																																																													
Electrical Delay (one direction)	1.083 ns																																																													
Manufactured by	SPEAG																																																													
<p>Certificate No: Z22-60106 Page 3 of 6</p> <p>Certificate No: Z22-60106 Page 4 of 6</p>																																																														


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.DocCheck@sgs.com](mailto:CN.DocCheck@sgs.com)


No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



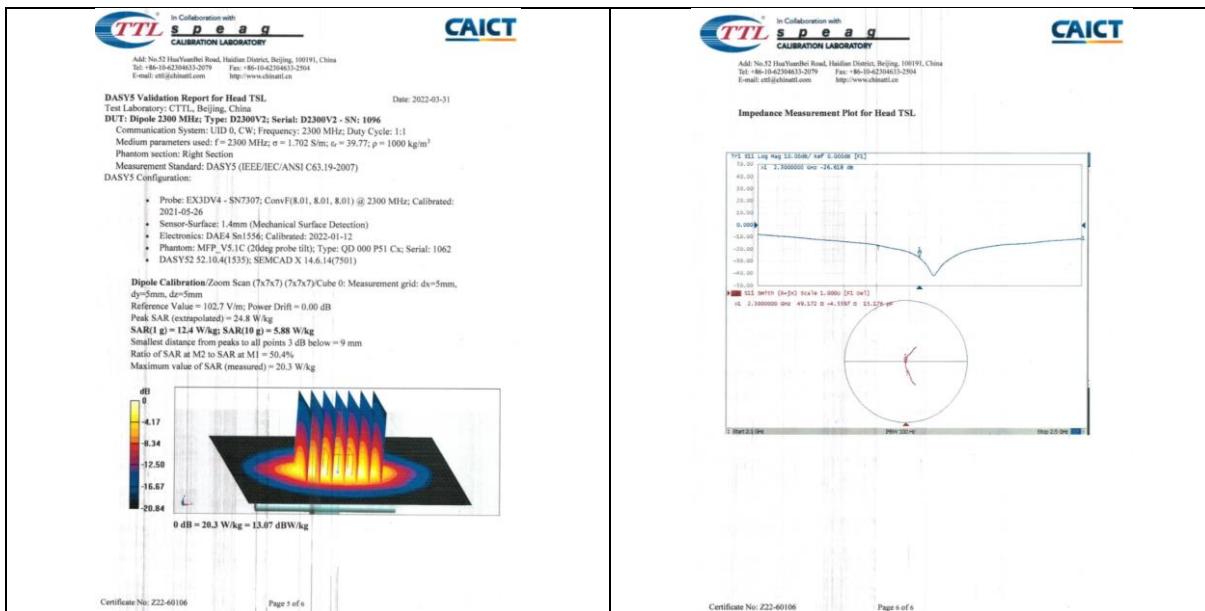



## 1.10 D2450V2 - SN 817

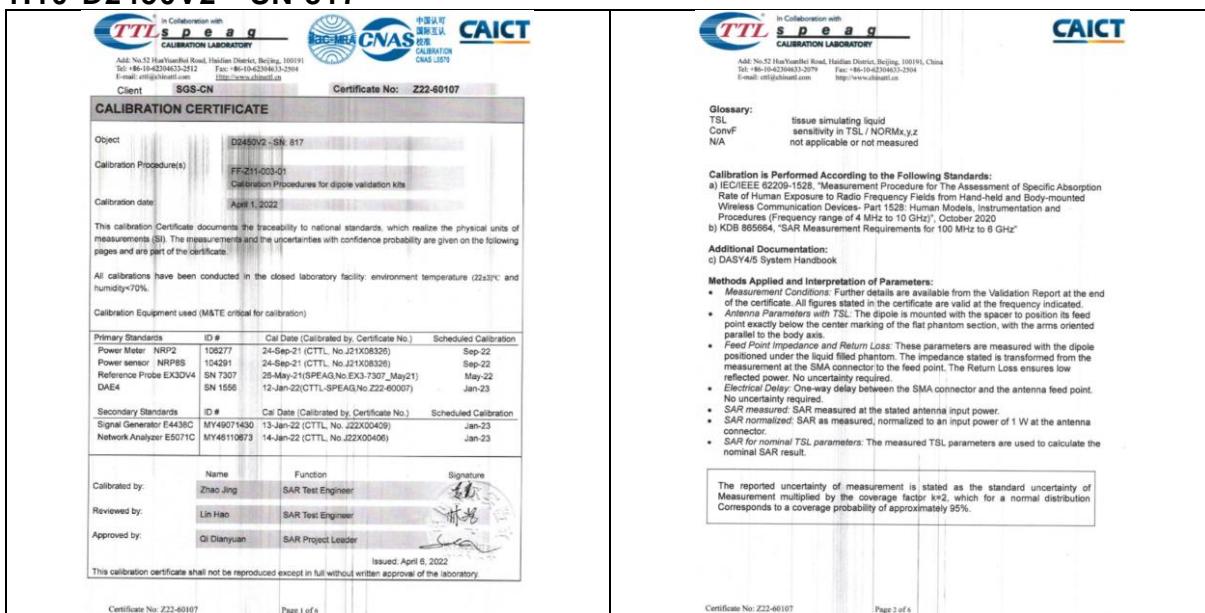

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

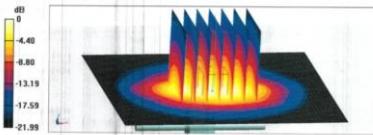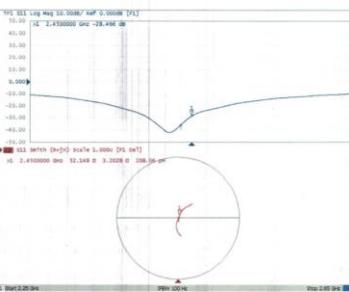

<p><b>TTL speag</b> In Collaboration with Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42306833-2079 Fax: +86-10-42306433-2504 E-mail: cftt@caict.com http://www.caict.com</p> <p><b>CAICT</b></p> <p><b>Measurement Conditions</b> DASY5 configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DASY Version</td><td>DASY52</td><td>52.10.4</td></tr> <tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr> <tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr> <tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr> <tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr> <tr><td>Frequency</td><td>2450 MHz ± 1 MHz</td><td></td></tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>39.2</td><td>1.80 mho/m</td></tr> <tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>39.5 ± 6 %</td><td>1.79 mho/m ± 6 %</td></tr> <tr><td>Head TSL temperature change during test</td><td>+1.0 °C</td><td>—</td><td>—</td></tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td><td>Condition</td><td></td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>13.2 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>63.6 W/kg ± 18.8 % (k=2)</td></tr> <tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td><td></td></tr> <tr><td>SAR measured</td><td>250 mW input power</td><td>6.15 W/kg</td></tr> <tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>24.7 W/kg ± 18.7 % (k=2)</td></tr> </table>	DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	2450 MHz ± 1 MHz		Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.79 mho/m ± 6 %	Head TSL temperature change during test	+1.0 °C	—	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition		SAR measured	250 mW input power	13.2 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	63.6 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition		SAR measured	250 mW input power	6.15 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)	<p><b>TTL speag</b> In Collaboration with Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42306833-2079 Fax: +86-10-42306433-2504 E-mail: cftt@caict.com http://www.caict.com</p> <p><b>CAICT</b></p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Impedance, transformed to feed point</td><td>52.10+3.20jΩ</td></tr> <tr><td>Return Loss</td><td>-28.5dB</td></tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Electrical Delay (one direction)</td><td>1.086 ns</td></tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semi-rigid coaxial cable. The outer conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited at DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this modification, because the dipole is still according to the Standard.</p> <p>No excessive force must be applied to the dipole antenna, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td>SPEAG</td></tr> </table>	Impedance, transformed to feed point	52.10+3.20jΩ	Return Loss	-28.5dB	Electrical Delay (one direction)	1.086 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																							
Extrapolation	Advanced Extrapolation																																																								
Phantom	Triple Flat Phantom 5.1C																																																								
Distance Dipole Center - TSL	10 mm	with Spacer																																																							
Zoom Scan Resolution	dx, dy, dz = 5 mm																																																								
Frequency	2450 MHz ± 1 MHz																																																								
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m																																																						
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.79 mho/m ± 6 %																																																						
Head TSL temperature change during test	+1.0 °C	—	—																																																						
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																								
SAR measured	250 mW input power	13.2 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	63.6 W/kg ± 18.8 % (k=2)																																																							
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																								
SAR measured	250 mW input power	6.15 W/kg																																																							
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)																																																							
Impedance, transformed to feed point	52.10+3.20jΩ																																																								
Return Loss	-28.5dB																																																								
Electrical Delay (one direction)	1.086 ns																																																								
Manufactured by	SPEAG																																																								
<p>Certificate No: Z22-40107 Page 3 of 6</p> <p><b>TTL speag</b> In Collaboration with Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42306833-2079 Fax: +86-10-42306433-2504 E-mail: cftt@caict.com</p> <p><b>CAICT</b></p> <p><b>DASY5 Validation Report for Head TSL</b> Test Laboratory: CTTL, Beijing, China Date: 2022-04-01</p> <p><b>DUT:</b> Dipole 2450 MHz; Type: D2450V2 - SN: 817 Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium: Water; Frequency used: f = 2450 MHz; <math>\sigma = 1.79</math> S/m; <math>\epsilon_r = 39.52</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EXIDV4 - SN7307; ConvF(7.75, 7.75, 7.75) @ 2450 MHz; Calibrated: 2021-05-26</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 S1156; Calibrated: 2022-01-12</li> <li>• Phantom: MFP, V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li> <li>• DASY52 52.10.4(535); SEMICAD X 14.6.14(7501)</li> </ul> <p><b>Dipole Calibration/Zoom Scan (7x7x7) Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.4 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 27.0 W/kg SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.15 W/kg Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = 49.2% Maximum value of SAR (measured) = 22.1 W/kg</p> 																																																									
<p>Certificate No: Z22-40107 Page 4 of 6</p> <p><b>TTL speag</b> In Collaboration with Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42306833-2079 Fax: +86-10-42306433-2504 E-mail: cftt@caict.com</p> <p><b>CAICT</b></p> <p><b>Impedance Measurement Plot for Head TSL</b></p> 																																																									
<p>Certificate No: Z22-40107 Page 5 of 6</p> <p>Certificate No: Z22-40107 Page 6 of 6</p>																																																									

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300

中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

## 1.11 D2600V2 - SN 1158

  <p>in Collaboration with TTL speag CALIBRATION LABORATORY Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191 Tel: +86-10-62304083-2512 Fax: +86-10-62304083-2594 E-mail: cmtt@caict.com.cn http://www.caict.com.cn</p> <p>Client SGS-CN Certificate No: Z22-60108</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object D2600V2 - SN: 1158</p> <p>Calibration Procedure(s) FF-Z11-003-01 Calibration Procedures for dipole validation kits</p> <p>Calibration date: March 31, 2022</p> <p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity&lt;70%.</p> <p>Calibration equipment used (M&amp;TE critical for calibration)</p> <table border="1"> <tr> <td>Primary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Power Meter NRP2</td> <td>105277</td> <td>24-Sep-21 (CTTL No.J21X05326)</td> <td>Sep-22</td> </tr> <tr> <td>Power sensor NRP83</td> <td>104291</td> <td>24-Sep-21 (CTTL No.J21X05326)</td> <td>Sep-22</td> </tr> <tr> <td>Reference Probe EX3DV2</td> <td>SN 7307</td> <td>26-May-21(SPEAG No. EX3-7307, May21)</td> <td>May-22</td> </tr> <tr> <td>DAE4</td> <td>SN 1158</td> <td>12-Jan-22(CTTL-SPEAG No.Z22-60007)</td> <td>Jan-23</td> </tr> <tr> <td>Secondary Standards</td> <td>ID #</td> <td>Cal Date (Calibrated by, Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Signal Generator E438C</td> <td>MY46071430</td> <td>13-Jan-22 (CTTL No.J22X0409)</td> <td>Jan-23</td> </tr> <tr> <td>Network Analyzer E5071C</td> <td>MY4610673</td> <td>14-Jan-22 (CTTL No.J22X0406)</td> <td>Jan-23</td> </tr> </table> <p>Calibrated by: Zhao Jing SAR Test Engineer</p> <p>Reviewed by: Lin Hao SAR Test Engineer</p> <p>Approved by: Qi Dianyuan SAR Project Leader</p> <p>Issued: April 6, 2022</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>		Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power Meter NRP2	105277	24-Sep-21 (CTTL No.J21X05326)	Sep-22	Power sensor NRP83	104291	24-Sep-21 (CTTL No.J21X05326)	Sep-22	Reference Probe EX3DV2	SN 7307	26-May-21(SPEAG No. EX3-7307, May21)	May-22	DAE4	SN 1158	12-Jan-22(CTTL-SPEAG No.Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Signal Generator E438C	MY46071430	13-Jan-22 (CTTL No.J22X0409)	Jan-23	Network Analyzer E5071C	MY4610673	14-Jan-22 (CTTL No.J22X0406)	Jan-23	 <p>in Collaboration with TTL speag CALIBRATION LABORATORY Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304083-2512 Fax: +86-10-62304083-2594 E-mail: cmtt@caict.com.cn http://www.caict.com.cn</p> <p>Glossary: TSL tissue simulating liquid ConvF sensitivity in TSL / NORMx,y,z N/A not applicable or not measured</p> <p>Calibration is Performed According to the Following Standards: a) IEC62621:2012 "Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1526: Human Models, Instrumentation and Procedures (Frequency range 4 MHz to 10 GHz)", October 2020 b) KDS 86598 "SAR Measurement Requirements for 100 MHz to 6 GHz"</p> <p>Additional Documentation: c) DASY4/5 System Handbook</p> <p>Methods Applied and Interpretation of Parameters: • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. • <b>Antenna Parameters with TSL:</b> The dipole is mounted with a spacer to position its feed measurement at the same center marking of the fat phantom section, with the arms oriented parallel to the body axis. • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measured at the feed point to the feed point. The Return Loss ensures low reflected power. No uncertainty required. • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required. • <b>SAR measured:</b> SAR measured at the stated antenna input power. • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector. • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.</p> <p>The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.</p>																		
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																	
Power Meter NRP2	105277	24-Sep-21 (CTTL No.J21X05326)	Sep-22																																																	
Power sensor NRP83	104291	24-Sep-21 (CTTL No.J21X05326)	Sep-22																																																	
Reference Probe EX3DV2	SN 7307	26-May-21(SPEAG No. EX3-7307, May21)	May-22																																																	
DAE4	SN 1158	12-Jan-22(CTTL-SPEAG No.Z22-60007)	Jan-23																																																	
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																	
Signal Generator E438C	MY46071430	13-Jan-22 (CTTL No.J22X0409)	Jan-23																																																	
Network Analyzer E5071C	MY4610673	14-Jan-22 (CTTL No.J22X0406)	Jan-23																																																	
<p>Certificate No: Z22-60108 Page 1 of 6</p>   <p>Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304083-2512 Fax: +86-10-62304083-2594 E-mail: cmtt@caict.com.cn http://www.caict.com.cn</p> <p><b>Measurement Conditions</b> DASY system configuration, as far as not given on page 1.</p> <table border="1"> <tr> <td>DASY Version</td> <td>DASY52</td> <td>52.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz &lt; 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>2800 MHz ± 1 MHz</td> <td></td> </tr> </table> <p><b>Head TSL parameters</b> The following parameters and calculations were applied.</p> <table border="1"> <tr> <td>Temperature</td> <td>Permittivity</td> <td>Conductivity</td> </tr> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>39.0 1.96 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>38.7 ± 6 % 1.96 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL</b></p> <table border="1"> <tr> <td>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</td> <td>Condition</td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power 13.7 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W 54.8 W/kg ± 18.7 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td> <td>Condition</td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power 6.12 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W 24.5 W/kg ± 18.7 % (k=2)</td> </tr> </table> <p>Certificate No: Z22-60108 Page 2 of 6</p>		DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz < 5 mm		Frequency	2800 MHz ± 1 MHz		Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	39.0 1.96 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	38.7 ± 6 % 1.96 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	SAR measured	250 mW input power 13.7 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 54.8 W/kg ± 18.7 % (k=2)	SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	SAR measured	250 mW input power 6.12 W/kg	SAR for nominal Head TSL parameters	normalized to 1W 24.5 W/kg ± 18.7 % (k=2)	<p>Certificate No: Z22-60108 Page 2 of 6</p>  <p>in Collaboration with TTL speag CALIBRATION LABORATORY Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304083-2512 Fax: +86-10-62304083-2594 E-mail: cmtt@caict.com.cn http://www.caict.com.cn</p> <p><b>Appendix (Additional assessments outside the scope of CNAS L0570)</b></p> <p><b>Antenna Parameters with Head TSL</b></p> <table border="1"> <tr> <td>Impedance, transformed to feed point</td> <td>49.9Ω 6.4ΩΩ</td> </tr> <tr> <td>Return Loss</td> <td>-23.9dB</td> </tr> </table> <p><b>General Antenna Parameters and Design</b></p> <table border="1"> <tr> <td>Electrical Delay (one direction)</td> <td>1.053 ns</td> </tr> </table> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded with a phantom. This is mentioned in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is as specified in the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table>	Impedance, transformed to feed point	49.9Ω 6.4ΩΩ	Return Loss	-23.9dB	Electrical Delay (one direction)	1.053 ns	Manufactured by	SPEAG
DASY Version	DASY52	52.10.4																																																		
Extrapolation	Advanced Extrapolation																																																			
Phantom	Triple Flat Phantom 5.1C																																																			
Distance Dipole Center - TSL	10 mm	with Spacer																																																		
Zoom Scan Resolution	dx, dy, dz < 5 mm																																																			
Frequency	2800 MHz ± 1 MHz																																																			
Temperature	Permittivity	Conductivity																																																		
Nominal Head TSL parameters	22.0 °C	39.0 1.96 mho/m																																																		
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.7 ± 6 % 1.96 mho/m ± 6 %																																																		
Head TSL temperature change during test	<1.0 °C	—																																																		
SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition																																																			
SAR measured	250 mW input power 13.7 W/kg																																																			
SAR for nominal Head TSL parameters	normalized to 1W 54.8 W/kg ± 18.7 % (k=2)																																																			
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition																																																			
SAR measured	250 mW input power 6.12 W/kg																																																			
SAR for nominal Head TSL parameters	normalized to 1W 24.5 W/kg ± 18.7 % (k=2)																																																			
Impedance, transformed to feed point	49.9Ω 6.4ΩΩ																																																			
Return Loss	-23.9dB																																																			
Electrical Delay (one direction)	1.053 ns																																																			
Manufactured by	SPEAG																																																			
<p>Certificate No: Z22-60108 Page 3 of 6</p> <p>Certificate No: Z22-60108 Page 4 of 6</p>																																																				


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



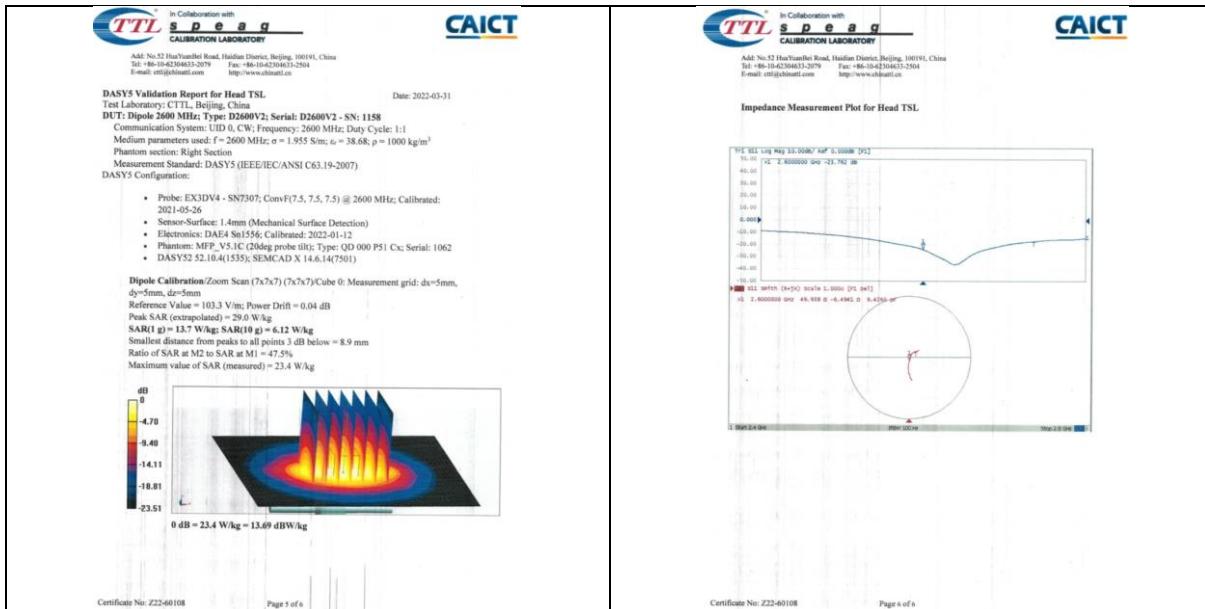

## 1.12 D5GHzV2 - SN 1095

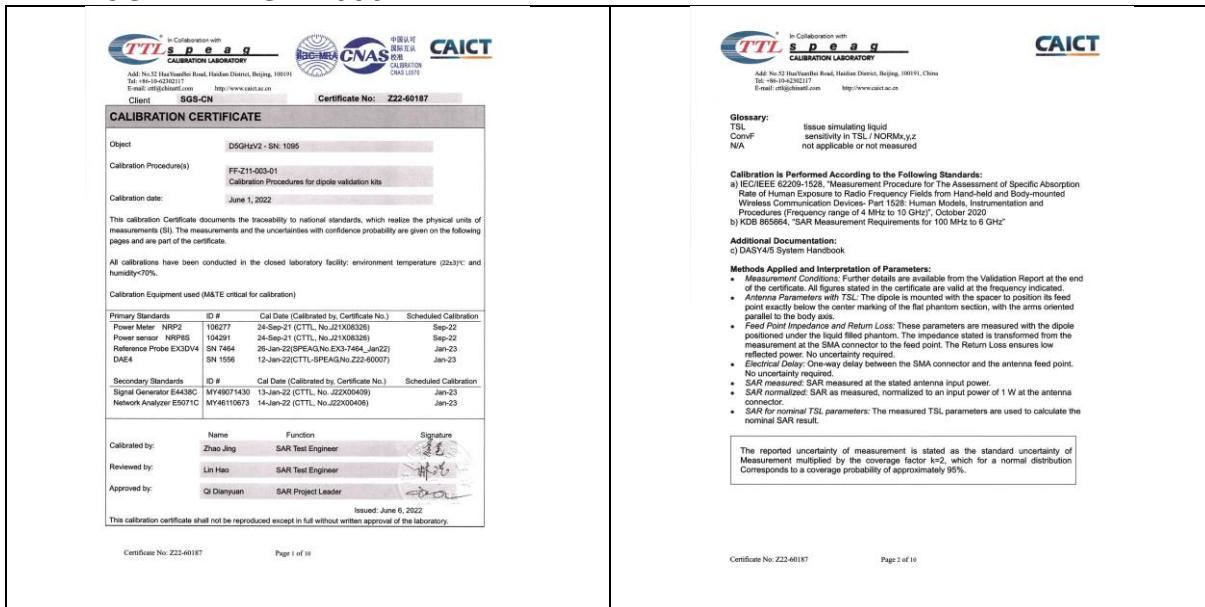

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No. 52 HuaYanBei Road, Haidian District, Beijing, 100081, China Tel: +86-10-62320117 E-mail: cmttj@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Measurement Conditions</b> CNAS test configuration, as far as not given on page 1.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DASY Version</td> <td>DASY2</td> <td>S2.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td><math>dx, dy = 4 \text{ mm}, dz = 1.4 \text{ mm}</math></td> <td>Graded Ratio = 1.4 (Z direction)</td> </tr> <tr> <td>Frequency</td> <td>5200 MHz ± 1 MHz 5400 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz</td> <td></td> </tr> </table> <p><b>Head TSL parameters at 5200MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>7.79 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>2.22 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> <p><b>SAR result with Head TSL at 5200MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>7.79 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>2.22 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> <p><b>Head TSL parameters at 5300MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>35.9</td> <td>4.76 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>35.2 ± 6 %</td> <td>4.73 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL at 5300MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>7.79 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>78.1 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.27 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>22.6 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> <p><b>Head TSL parameters at 5500MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>35.6</td> <td>4.96 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>34.8 ± 6 %</td> <td>4.94 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL at 5500MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>8.20 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>82.5 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.34 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>23.3 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> </div>	DASY Version	DASY2	S2.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	$dx, dy = 4 \text{ mm}, dz = 1.4 \text{ mm}$	Graded Ratio = 1.4 (Z direction)	Frequency	5200 MHz ± 1 MHz 5400 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz		SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	250 mW input power	7.79 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	250 mW input power	2.22 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	250 mW input power	7.79 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	250 mW input power	2.22 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	100 mW input power	7.79 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$78.1 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	100 mW input power	2.27 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$22.6 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	100 mW input power	8.20 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$82.5 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	100 mW input power	2.34 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$23.3 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No. 52 HuaYanBei Road, Haidian District, Beijing, 100081, China Tel: +86-10-62320117 E-mail: cmttj@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Head TSL parameters at 5300MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>35.9</td> <td>4.76 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>35.2 ± 6 %</td> <td>4.73 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL at 5300MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>7.79 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.22 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> <p><b>Head TSL parameters at 5500MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>35.6</td> <td>4.96 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>34.8 ± 6 %</td> <td>4.94 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL at 5500MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>8.20 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>82.5 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.34 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>23.3 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> </div>	Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	100 mW input power	7.79 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	100 mW input power	2.22 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	100 mW input power	8.20 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$82.5 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	100 mW input power	2.34 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$23.3 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>Add: No. 52 HuaYanBei Road, Haidian District, Beijing, 100081, China Tel: +86-10-62320117 E-mail: cmttj@caict.ac.cn <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a></p> <p><b>Head TSL parameters at 5600MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>35.5</td> <td>5.07 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>34.7 ± 6 %</td> <td>5.05 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL at 5600MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>8.12 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>88.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.30 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>22.9 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> <p><b>Head TSL parameters at 5800MHz</b> The following parameters and calculations were applied.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>35.3</td> <td>5.27 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>34.4 ± 6 %</td> <td>5.25 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>&lt;1.0 °C</td> <td>—</td> <td>—</td> </tr> </table> <p><b>SAR result with Head TSL at 5800MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SAR averaged over <math>1 \text{ cm}^3</math> (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>7.71 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>78.7 \text{ W/kg} \pm 24.4\% (\text{in}^2)</math></td> </tr> <tr> <td>SAR averaged over <math>10 \text{ cm}^3</math> (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>100 mW input power</td> <td>2.16 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td><math>21.5 \text{ W/kg} \pm 24.2\% (\text{in}^2)</math></td> </tr> </table> <p><b>Antenna Parameters with Head TSL at 5200MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Impedance, transformed to feed point</td> <td>46.10 ± 5.03Ω</td> </tr> <tr> <td>Return Loss</td> <td>-23.6dB</td> </tr> </table> <p><b>Antenna Parameters with Head TSL at 5300MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Impedance, transformed to feed point</td> <td>47.80 ± 2.43Ω</td> </tr> <tr> <td>Return Loss</td> <td>-29.5dB</td> </tr> </table> <p><b>Antenna Parameters with Head TSL at 5500MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Impedance, transformed to feed point</td> <td>50.30 ± 4.26Ω</td> </tr> <tr> <td>Return Loss</td> <td>-27.4dB</td> </tr> </table> <p><b>Antenna Parameters with Head TSL at 5600MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Impedance, transformed to feed point</td> <td>54.50 ± 4.89Ω</td> </tr> <tr> <td>Return Loss</td> <td>-24.0dB</td> </tr> </table> <p><b>Antenna Parameters with Head TSL at 5800MHz</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Impedance, transformed to feed point</td> <td>51.50 ± 5.61Ω</td> </tr> <tr> <td>Return Loss</td> <td>-24.9dB</td> </tr> </table> </div>	Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	5.05 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	100 mW input power	8.12 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$88.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	100 mW input power	2.30 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$22.9 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.25 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	—	—	SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition		SAR measured	100 mW input power	7.71 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$78.7 \text{ W/kg} \pm 24.4\% (\text{in}^2)$	SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition		SAR measured	100 mW input power	2.16 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	$21.5 \text{ W/kg} \pm 24.2\% (\text{in}^2)$	Impedance, transformed to feed point	46.10 ± 5.03Ω	Return Loss	-23.6dB	Impedance, transformed to feed point	47.80 ± 2.43Ω	Return Loss	-29.5dB	Impedance, transformed to feed point	50.30 ± 4.26Ω	Return Loss	-27.4dB	Impedance, transformed to feed point	54.50 ± 4.89Ω	Return Loss	-24.0dB	Impedance, transformed to feed point	51.50 ± 5.61Ω	Return Loss	-24.9dB
DASY Version	DASY2	S2.10.4																																																																																																																																																																																																																																																														
Extrapolation	Advanced Extrapolation																																																																																																																																																																																																																																																															
Phantom	Triple Flat Phantom 5.1C																																																																																																																																																																																																																																																															
Distance Dipole Center - TSL	10 mm	with Spacer																																																																																																																																																																																																																																																														
Zoom Scan Resolution	$dx, dy = 4 \text{ mm}, dz = 1.4 \text{ mm}$	Graded Ratio = 1.4 (Z direction)																																																																																																																																																																																																																																																														
Frequency	5200 MHz ± 1 MHz 5400 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz																																																																																																																																																																																																																																																															
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	250 mW input power	7.79 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	250 mW input power	2.22 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	250 mW input power	7.79 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	250 mW input power	2.22 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m																																																																																																																																																																																																																																																													
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %																																																																																																																																																																																																																																																													
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																																																																																																																																																													
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	7.79 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$78.1 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	2.27 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$22.6 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m																																																																																																																																																																																																																																																													
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %																																																																																																																																																																																																																																																													
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																																																																																																																																																													
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	8.20 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$82.5 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	2.34 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$23.3 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m																																																																																																																																																																																																																																																													
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %																																																																																																																																																																																																																																																													
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																																																																																																																																																													
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	7.79 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$77.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	2.22 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$22.1 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m																																																																																																																																																																																																																																																													
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %																																																																																																																																																																																																																																																													
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																																																																																																																																																													
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	8.20 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$82.5 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	2.34 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$23.3 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m																																																																																																																																																																																																																																																													
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	5.05 mho/m ± 6 %																																																																																																																																																																																																																																																													
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																																																																																																																																																													
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	8.12 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$88.8 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	2.30 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$22.9 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m																																																																																																																																																																																																																																																													
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.25 mho/m ± 6 %																																																																																																																																																																																																																																																													
Head TSL temperature change during test	<1.0 °C	—	—																																																																																																																																																																																																																																																													
SAR averaged over $1 \text{ cm}^3$ (1 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	7.71 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$78.7 \text{ W/kg} \pm 24.4\% (\text{in}^2)$																																																																																																																																																																																																																																																														
SAR averaged over $10 \text{ cm}^3$ (10 g) of Head TSL	Condition																																																																																																																																																																																																																																																															
SAR measured	100 mW input power	2.16 W/kg																																																																																																																																																																																																																																																														
SAR for nominal Head TSL parameters	normalized to 1W	$21.5 \text{ W/kg} \pm 24.2\% (\text{in}^2)$																																																																																																																																																																																																																																																														
Impedance, transformed to feed point	46.10 ± 5.03Ω																																																																																																																																																																																																																																																															
Return Loss	-23.6dB																																																																																																																																																																																																																																																															
Impedance, transformed to feed point	47.80 ± 2.43Ω																																																																																																																																																																																																																																																															
Return Loss	-29.5dB																																																																																																																																																																																																																																																															
Impedance, transformed to feed point	50.30 ± 4.26Ω																																																																																																																																																																																																																																																															
Return Loss	-27.4dB																																																																																																																																																																																																																																																															
Impedance, transformed to feed point	54.50 ± 4.89Ω																																																																																																																																																																																																																																																															
Return Loss	-24.0dB																																																																																																																																																																																																																																																															
Impedance, transformed to feed point	51.50 ± 5.61Ω																																																																																																																																																																																																																																																															
Return Loss	-24.9dB																																																																																																																																																																																																																																																															

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57358888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57358888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>General Antenna Parameters and Design</p> <p>Electrical Delay (one direction) 1.101 ns</p> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard ferrite-coated cables. The center conductor of the feed-points is directly connected to the center of the dipole. The outer conductors of the dipole arms are connected to the outer conductors of the dipoles, small end caps are added to the dipole arms in order to improve matching when tested according to the position as explained in the "Measurement Conditions" paragraph. The BAR data are not affected by the feed-point warming.</p> <p>No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p>Additional EUT Data</p> <p>Manufactured by SPEAG</p> </div>	<div style="text-align: center;">  <p>In Collaboration with <b>CAICT</b></p> <p>DASYS Validation Report for Head TSL</p> <p>DUT: Dipole 50MHz; Serial: DSGH02V2; SN: 1995</p> <p>Communication System: CW; Frequency: 5200 MHz; Frequency: 5300 MHz;</p> <p>Frequency: 5500 MHz; Frequency: 5600 MHz; Frequency: 5800 MHz; Pulse Cycle: 1:1</p> <p>Medium parameters used: <math>f = 5200</math> MHz; <math>\sigma = 35.38</math> S/m; <math>\epsilon_r = 35.38</math>; <math>\mu_r = 1000</math> kg/m<sup>3</sup></p> <p>Medium parameters used: <math>f = 5300</math> MHz; <math>\sigma = 4.73</math> S/m; <math>\epsilon_r = 4.73</math>; <math>\mu_r = 1000</math> kg/m<sup>3</sup></p> <p>Medium parameters used: <math>f = 5500</math> MHz; <math>\sigma = 4.939</math> S/m; <math>\epsilon_r = 34.83</math>; <math>\mu_r = 1000</math> kg/m<sup>3</sup></p> <p>Medium parameters used: <math>f = 5600</math> MHz; <math>\sigma = 5.051</math> S/m; <math>\epsilon_r = 34.69</math>; <math>\mu_r = 1000</math> kg/m<sup>3</sup></p> <p>Medium parameters used: <math>f = 5800</math> MHz; <math>\sigma = 5.247</math> S/m; <math>\epsilon_r = 34.42</math>; <math>\mu_r = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Right Section</p> <p>Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)</p> <p>Configuration</p> <ul style="list-style-type: none"> <li>Probe: EX30DV4 - SN464; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; ConvF(5.32, 5.32, 5.32) @ 5300 MHz; ConvF(5.11, 5.11, 5.11) @ 5500 MHz;</li> <li>ConvF(4.91, 4.91, 4.91) @ 5600 MHz; ConvF(5.5, 5.5) @ 5800 MHz;</li> <li>Calibration: 2022-01-12</li> <li>Sensor-Surface: 4 mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn1556; Calibrated: 2022-01-12</li> <li>Antennas: MFP_VS_1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1003</li> <li>DASYS2 10.4(1535); SEMCAD X 14.6.14(7501)</li> </ul> <p>Dipole Calibration (Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)Cube 0) Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</p> <p>Reference Value = 60.80 V/m; Power Drift = -0.06 dB</p> <p>Peak SAR (extrapolated) = 34.7 W/kg</p> <p>SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.22 W/kg</p> <p>Smallest distance from peaks to all points 3 dB below = 7.2 mm</p> <p>Ratio of SAR at M2 to SAR at M1 = 66.5%</p> <p>Maximum value of SAR (measured) = 18.3 W/kg</p> <p>Dipole Calibration (Pin=100mW, d=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)Cube 0) Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</p> <p>Reference Value = 61.08 V/m; Power Drift = -0.07 dB</p> <p>Peak SAR (extrapolated) = 35.2 W/kg</p> <p>SAR(1 g) = 7.34 W/kg; SAR(10 g) = 2.27 W/kg</p> <p>Smallest distance from peaks to all points 3 dB below = 7.2 mm</p> <p>Ratio of SAR at M2 to SAR at M1 = 65.5%</p> <p>Maximum value of SAR (measured) = 19.0 W/kg</p> </div>
<p>Certificate No: Z22-00187 Page 7 of 10</p> <p>Certificate No: Z22-00187 Page 8 of 10</p> <p>Certificate No: Z22-00187 Page 9 of 10</p> <p>Certificate No: Z22-00187 Page 10 of 10</p>	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to need the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory

## 2 DAE4 - SN 1245

<p><b>SGS</b></p> <p><b>IMPORTANT NOTICE</b></p> <p><b>USAGE OF THE DAE4</b></p> <p><b>Battery Exchange:</b> The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE to wear.</p> <p><b>Shipping of the DAE:</b> Before shipping the DAE to SPEAG for calibration, remove the battery and pack the DAE in a sturdy shipping box. It is recommended to use a padded box or a larger box in a container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.</p> <p><b>E-Stop Failures:</b> Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may damage the magnets. Touch and collision errors are often caused by dust and dirt accumulation on the E-stop. To prevent damage, always store the DAE unit in a clean environment and carefully keep the DAE unit in a non-dusty environment if not used for measurements.</p> <p><b>Repair:</b> Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair necessary if rough/unprofessional handling caused the defect.</p> <p><b>DAE Configuration Files:</b> Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MΩ is given in the corresponding configuration file.</p> <p><b>Important Note:</b> Warning and calibration is void if the DAE unit is disassembled partly or fully by the Customer.</p> <p><b>Important Notes:</b> Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop must be performed by certified SPEAG personnel only and is part of the annual calibration procedure.</p> <p><b>Important Notes:</b> To prevent damage of the DAE probe connector pins, use great care when installing the probe pins to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disassembling the probe from the DAE.</p> <p>TN_IH190306AE DAE4.docx 07.03.2019</p>	<p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 0750, Fax +41 44 245 9779 e-mail: <a href="mailto:info@speag.com">info@speag.com</a></p> <p><b>Accreditation No.:</b> SCS 0108</p> <p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 0750, Fax +41 44 245 9779 e-mail: <a href="mailto:info@speag.com">info@speag.com</a></p> <p><b>Accreditation No.:</b> SCS 0108</p> <p><b>Calibration Laboratory of</b> Schmid &amp; Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 0750, Fax +41 44 245 9779 e-mail: <a href="mailto:info@speag.com">info@speag.com</a></p> <p><b>Accreditation No.:</b> SCS 0108</p> <p><b>Calibration Certificate</b></p> <p><b>Object:</b> DAE4 - SD 000 D04 BM - SN: 1245</p> <p><b>Calibration procedure(s):</b> QA CAL-06 v30 Calibration procedure for the data acquisition electronics (DAE)</p> <p><b>Calibration date:</b> May 30, 2022</p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability one given on the following pages are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 5°C) and humidity &lt; 70%.</p> <p>Calibration Equipment used (IMATE critical for calibration):</p> <table border="1"> <tr> <td>Primary Standards</td> <td>IQ 4</td> <td>Cal Date (Certificate No.)</td> <td>Scheduled Calibration</td> </tr> <tr> <td>Kathley Multimeter Type 2001</td> <td>SN: 08102078</td> <td>31-Aug-21 (No. 3196)</td> <td>Aug-22</td> </tr> <tr> <td>Secondary Standards</td> <td>IQ 4</td> <td>Check Date (in house)</td> <td>Scheduled Check</td> </tr> <tr> <td>Auto DAE Calibration Unit</td> <td>SE LMS 303 AA 1991</td> <td>24-Jan-22 (in house check)</td> <td>In house check: Jan-23</td> </tr> <tr> <td>Calibrator Box V1</td> <td>SE LMS 306 AA 1002</td> <td>24-Jan-22 (in house check)</td> <td>In house check: Jan-23</td> </tr> </table> <p>Calibrated by: Name: Dominique Steffen Function: Laboratory Technician Signature: </p> <p>Approved by: Name: Sven Künn Function: Technical Manager Signature: </p> <p>Issued: May 30, 2022</p> <p>Certificate No: DAE4-1245_May22 Page 1 of 5</p> <p><b>DC Voltage Measurement</b></p> <p>AD - Converter Resolution nominal High Range: 1.050 = 5 mV Full range = -150...+100 mV Low Range: 1.050 = 6 mV Full range = -1...+300 mV DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</p> <table border="1"> <thead> <tr> <th>Calibration Factors</th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>High Range:</td> <td>405.295 ± 0.02% (n=2)</td> <td>405.074 ± 0.02% (n=2)</td> <td>405.092 ± 0.02% (n=2)</td> </tr> <tr> <td>Low Range:</td> <td>3.99534 ± 1.50% (n=2)</td> <td>3.99508 ± 1.50% (n=2)</td> <td>4.01015 ± 1.50% (n=2)</td> </tr> </tbody> </table> <p><b>Connector Angle</b></p> <table border="1"> <tr> <td>Connector Angle to be used in DASY system</td> <td>90.0 ± 1°</td> </tr> </table> <p>Certificate No: DAE4-1245_May22 Page 3 of 5</p>	Primary Standards	IQ 4	Cal Date (Certificate No.)	Scheduled Calibration	Kathley Multimeter Type 2001	SN: 08102078	31-Aug-21 (No. 3196)	Aug-22	Secondary Standards	IQ 4	Check Date (in house)	Scheduled Check	Auto DAE Calibration Unit	SE LMS 303 AA 1991	24-Jan-22 (in house check)	In house check: Jan-23	Calibrator Box V1	SE LMS 306 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23	Calibration Factors	X	Y	Z	High Range:	405.295 ± 0.02% (n=2)	405.074 ± 0.02% (n=2)	405.092 ± 0.02% (n=2)	Low Range:	3.99534 ± 1.50% (n=2)	3.99508 ± 1.50% (n=2)	4.01015 ± 1.50% (n=2)	Connector Angle to be used in DASY system	90.0 ± 1°
Primary Standards	IQ 4	Cal Date (Certificate No.)	Scheduled Calibration																																
Kathley Multimeter Type 2001	SN: 08102078	31-Aug-21 (No. 3196)	Aug-22																																
Secondary Standards	IQ 4	Check Date (in house)	Scheduled Check																																
Auto DAE Calibration Unit	SE LMS 303 AA 1991	24-Jan-22 (in house check)	In house check: Jan-23																																
Calibrator Box V1	SE LMS 306 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23																																
Calibration Factors	X	Y	Z																																
High Range:	405.295 ± 0.02% (n=2)	405.074 ± 0.02% (n=2)	405.092 ± 0.02% (n=2)																																
Low Range:	3.99534 ± 1.50% (n=2)	3.99508 ± 1.50% (n=2)	4.01015 ± 1.50% (n=2)																																
Connector Angle to be used in DASY system	90.0 ± 1°																																		

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: to need the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



<b>Appendix (Additional assessments outside the scope of SCS0108)</b>																																																																																	
<b>1. DC Voltage Linearity</b> <small>DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</small> <table border="1"> <thead> <tr> <th>Input Voltage (mV)</th> <th>Reading (µV)</th> <th>Difference (µV)</th> <th>Error (%)</th> </tr> </thead> <tbody> <tr><td>Channel X + Input</td><td>199994.45</td><td>1.83</td><td>0.06</td></tr> <tr><td>Channel X - Input</td><td>200004.58</td><td>2.22</td><td>0.01</td></tr> <tr><td>Channel X + Input</td><td>-20000.14</td><td>1.12</td><td>-0.01</td></tr> <tr><td>Channel Y + Input</td><td>199994.72</td><td>1.98</td><td>0.00</td></tr> <tr><td>Channel Y - Input</td><td>20001.22</td><td>-1.00</td><td>-0.00</td></tr> <tr><td>Channel Y + Input</td><td>-20005.05</td><td>-1.57</td><td>0.01</td></tr> <tr><td>Channel Z + Input</td><td>199992.64</td><td>0.19</td><td>0.00</td></tr> <tr><td>Channel Z - Input</td><td>20003.58</td><td>0.98</td><td>0.00</td></tr> <tr><td>Channel Z + Input</td><td>-20001.73</td><td>-0.27</td><td>0.00</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Low Range</th> <th>Reading (µV)</th> <th>Difference (µV)</th> <th>Error (%)</th> </tr> </thead> <tbody> <tr><td>Channel X + Input</td><td>2001.91</td><td>0.41</td><td>0.07</td></tr> <tr><td>Channel X - Input</td><td>2001.93</td><td>0.45</td><td>0.06</td></tr> <tr><td>Channel X + Input</td><td>-197.86</td><td>0.07</td><td>0.04</td></tr> <tr><td>Channel Y + Input</td><td>2022.05</td><td>0.59</td><td>0.03</td></tr> <tr><td>Channel Y - Input</td><td>201.27</td><td>-0.57</td><td>-0.28</td></tr> <tr><td>Channel Y + Input</td><td>-198.23</td><td>-0.06</td><td>0.03</td></tr> <tr><td>Channel Z + Input</td><td>2001.36</td><td>0.08</td><td>0.00</td></tr> <tr><td>Channel Z - Input</td><td>200.09</td><td>-1.53</td><td>-0.76</td></tr> <tr><td>Channel Z + Input</td><td>-199.85</td><td>-1.57</td><td>0.79</td></tr> </tbody> </table>		Input Voltage (mV)	Reading (µV)	Difference (µV)	Error (%)	Channel X + Input	199994.45	1.83	0.06	Channel X - Input	200004.58	2.22	0.01	Channel X + Input	-20000.14	1.12	-0.01	Channel Y + Input	199994.72	1.98	0.00	Channel Y - Input	20001.22	-1.00	-0.00	Channel Y + Input	-20005.05	-1.57	0.01	Channel Z + Input	199992.64	0.19	0.00	Channel Z - Input	20003.58	0.98	0.00	Channel Z + Input	-20001.73	-0.27	0.00	Low Range	Reading (µV)	Difference (µV)	Error (%)	Channel X + Input	2001.91	0.41	0.07	Channel X - Input	2001.93	0.45	0.06	Channel X + Input	-197.86	0.07	0.04	Channel Y + Input	2022.05	0.59	0.03	Channel Y - Input	201.27	-0.57	-0.28	Channel Y + Input	-198.23	-0.06	0.03	Channel Z + Input	2001.36	0.08	0.00	Channel Z - Input	200.09	-1.53	-0.76	Channel Z + Input	-199.85	-1.57	0.79
Input Voltage (mV)	Reading (µV)	Difference (µV)	Error (%)																																																																														
Channel X + Input	199994.45	1.83	0.06																																																																														
Channel X - Input	200004.58	2.22	0.01																																																																														
Channel X + Input	-20000.14	1.12	-0.01																																																																														
Channel Y + Input	199994.72	1.98	0.00																																																																														
Channel Y - Input	20001.22	-1.00	-0.00																																																																														
Channel Y + Input	-20005.05	-1.57	0.01																																																																														
Channel Z + Input	199992.64	0.19	0.00																																																																														
Channel Z - Input	20003.58	0.98	0.00																																																																														
Channel Z + Input	-20001.73	-0.27	0.00																																																																														
Low Range	Reading (µV)	Difference (µV)	Error (%)																																																																														
Channel X + Input	2001.91	0.41	0.07																																																																														
Channel X - Input	2001.93	0.45	0.06																																																																														
Channel X + Input	-197.86	0.07	0.04																																																																														
Channel Y + Input	2022.05	0.59	0.03																																																																														
Channel Y - Input	201.27	-0.57	-0.28																																																																														
Channel Y + Input	-198.23	-0.06	0.03																																																																														
Channel Z + Input	2001.36	0.08	0.00																																																																														
Channel Z - Input	200.09	-1.53	-0.76																																																																														
Channel Z + Input	-199.85	-1.57	0.79																																																																														
<b>2. Common mode sensitivity</b> <small>DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</small> <table border="1"> <thead> <tr> <th>Common mode Input Voltage (mV)</th> <th>High Range Average Reading (µV)</th> <th>Low Range Average Reading (µV)</th> </tr> </thead> <tbody> <tr><td>200</td><td>-5.97</td><td>-7.69</td></tr> <tr><td>-200</td><td>5.12</td><td>7.79</td></tr> <tr><td>Channel Y</td><td>200</td><td>-6.68</td><td>-9.28</td></tr> <tr><td>-200</td><td>8.82</td><td>8.85</td></tr> <tr><td>Channel Z</td><td>200</td><td>-5.25</td><td>-5.60</td></tr> <tr><td>-200</td><td>5.68</td><td>5.66</td></tr> </tbody> </table>		Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)	200	-5.97	-7.69	-200	5.12	7.79	Channel Y	200	-6.68	-9.28	-200	8.82	8.85	Channel Z	200	-5.25	-5.60	-200	5.68	5.66																																																									
Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)																																																																															
200	-5.97	-7.69																																																																															
-200	5.12	7.79																																																																															
Channel Y	200	-6.68	-9.28																																																																														
-200	8.82	8.85																																																																															
Channel Z	200	-5.25	-5.60																																																																														
-200	5.68	5.66																																																																															
<b>3. Channel separation</b> <small>DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec</small> <table border="1"> <thead> <tr> <th>Input Voltage (mV)</th> <th>Channel X (µV)</th> <th>Channel Y (µV)</th> <th>Channel Z (µV)</th> </tr> </thead> <tbody> <tr><td>Channel X</td><td>200</td><td>-</td><td>4.07</td><td>-5.14</td></tr> <tr><td>Channel Y</td><td>200</td><td>9.35</td><td>-</td><td>4.27</td></tr> <tr><td>Channel Z</td><td>200</td><td>10.11</td><td>7.14</td><td>-</td></tr> </tbody> </table>		Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)	Channel X	200	-	4.07	-5.14	Channel Y	200	9.35	-	4.27	Channel Z	200	10.11	7.14	-																																																													
Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)																																																																														
Channel X	200	-	4.07	-5.14																																																																													
Channel Y	200	9.35	-	4.27																																																																													
Channel Z	200	10.11	7.14	-																																																																													
<small>Certificate No: DAIE-1246, May22</small> <small>Page 4 of 5</small>																																																																																	
<small>Certificate No: DAIE-1246, May22</small> <small>Page 5 of 5</small>																																																																																	

### 3 EX3DV4 - SN 3801

<p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zugstrasse 43, 8045 Zurich, Switzerland Accredited by Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p>Client: Auden Certificate No: EX-3801_Jul22</p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: EX3DV4 - SN:3801</p> <p>Calibration procedure(s): QA CAL_01.v9, QA CAL_12.v9, QA CAL_14.v6, QA CAL_23.v5, QA CAL_25.v7 Calibration procedure for dielectric E-field probes</p> <p>Calibration date: July 21, 2022</p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closest laboratory facility, environment temperature (22 ± 5) °C and humidity &lt; 70%.</p> <p>Calibration Equipment used (WATT offset for calibration)</p> <p>Frequency Standard: SN: 1004798 Cat Date: Certificate No.: 1004798/03/2022 Subcalibrated Calibration</p> <p>Power sensor NPF: SN: 1004799 05-04-2022 No. 217/2022/03/2022 Apr 23</p> <p>Power sensor NPF-21: SN: 1023844 06-04-22 No. 217/2022/03/2022 Apr 23</p> <p>Power sensor E412A: SN: 1023845 06-04-22 No. 217/2022/03/2022 Apr 23</p> <p>Power sensor E412B: SN: 1023846 06-04-22 No. 217/2022/03/2022 Apr 23</p> <p>RFQ-DAC (20 dB Attenuator): SN: 10116 20-04-21 OCP-DAC-03-104 (0dB) 06/21</p> <p>Reference Probe E3002: SN: 669 13-04-21 No. 5414-466 (0dB) 06/21</p> <p>Reference Probe E3002: SN: 3013 27-04-21 (No. E3-3013) (0dB) 06/21</p> <p>Calibrated by: Last Name: Function: Signature: Issued: July 21, 2022</p> <p>Approved by: Sven Kühn Technical Manager: Signature: Issued: July 21, 2022</p>	<p>Calibration Laboratory of Schweizerischer Kalibrierdienst Service suisse d'étalonnage Service suisse de mesure Suisse Calibration Service</p> <p>Accreditation No.: SCS 0108</p> <p>Calibration Laboratory of Schmid &amp; Partner Engineering AG Zugstrasse 43, 8045 Zurich, Switzerland Accredited by Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates</p> <p><b>Glossary</b></p> <p>TSL: Issue simulating liquid NORM<sub>0,2</sub>: Uncertainty in free space Conv.: Convolution of two signals DCP: Diode compression point COP: Cross polarization point, i.e. the angle between the polarization of the RF signal and the polarization of the measurement Polarization v: Polarization vector Polarization angle: The angle between the polarization vector and that in the plane normal to probe axis (at measurement center), i.e., <math>\theta = 0</math> is normal to probe axis Corrector Angle: Information used in DASY system to align probe sensor x to the robot coordinate system</p> <p><b>Calibration is Performed According to the Following Standards:</b></p> <p>a) IEC/IEEE 62201-1524, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields - Human Exposure To Radio Frequency Fields From 100 MHz To 18 GHz", October 2009. b) KDB 86864, "SAR Measurement Requirements for 100 MHz to 8 GHz".</p> <p><b>Methods Applied and Interpretation of Parameters:</b></p> <p>• NORM<sub>0,2</sub>: Assessed for E-field polarization <math>\theta = 0</math> (0.900MHz in TEM-cell, <math>\sim 18000MHz</math>: R22 wavelength). NORM<sub>0,2</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>0,2</sub> does not affect the E-field uncertainty inside TSL (see below).</p> <p>• NORM<sub>0,2</sub>, NORM<sub>0,2</sub>, NORM<sub>0,2</sub> "Frequency response" (see Frequency Response Chart). This uncertainty is included in the stated uncertainty of Conv.</p> <p>• DCP: DCP are numerical uncertainty parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.</p> <p>• PWR: PWR is the Power to Average Ratio. It is not calibrated but determined based on the signal characteristics. A PWR of 100% means that the average power is 100% of the maximum power. It is used to correct the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. 99% is the maximum uncertainty.</p> <p>• ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for 3 dB) and mode waveguide using the same field distributions based on power measurements for 1-400MHz. The boundary effect is the uncertainty of the parameters of the field distributions. The uncertainty of the field distributions is included in the uncertainty values. The parameters are used in DASY software to improve accuracy closer to the boundary effect. ConvF is a frequency dependent parameter. It is used to correct the data of power sweep for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from 100MHz to 18GHz.</p> <p>• Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.</p> <p>• Sensor offset: The sensor offset corresponds to the offset of visual measurement center from the probe tip (on probe axis).</p> <p>• No tolerance required.</p> <p>• Corrector Angle: The angle is assessed using the information gained by determining the NORMs (no uncertainty required).</p>
<small>Certificate No: EX-3801_Jul22</small> <small>Page 1 of 22</small>	
<small>Certificate No: EX-3801_Jul22</small> <small>Page 2 of 22</small>	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)



EX3DV4 - SN:3861

July 21, 2022

July 21, 2022

**Parameters of Probe: EX3DV4 - SN:3861**

**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (x = 2)
Norm (μV/V(m)) <sup>A</sup>	0.51	0.53	0.42	±10.1%
DOP (mV) <sup>B</sup>	103.3	101.7	104.5	±4.7%

**Calibration Results for Modulation Response**

UID	Communication System Name	A	b	C	D	Wf	Mr	Max dev	Max Unc <sup>C</sup>	k = 2
0	CW	X: 0.00	0.00	1.00	0.00	164.0	+2.7%	±1.7%		
		Y: 0.00	0.00	1.00	0.00	151.2	+2.7%	±1.7%		
		Z: 0.00	0.00	1.00	0.00	149.2	+2.7%	±1.7%		
10302	Pulse Waveform (200Hz, 10%)	X: 20.00	60.00	71.87	10.00	60.0	+3.0%	±0.6%		
		Y: 20.00	60.00	71.87	10.00	60.0	+3.0%	±0.6%		
		Z: 20.00	60.00	71.87	10.00	60.0	+3.0%	±0.6%		
10353	Pulse Waveform (200Hz, 20%)	X: 20.00	60.00	71.25	6.98	60.0	+1.0%	±0.6%		
		Y: 20.00	60.00	71.25	6.98	60.0	+1.0%	±0.6%		
		Z: 20.00	60.00	71.25	6.98	60.0	+1.0%	±0.6%		
10354	Pulse Waveform (200Hz, 40%)	X: 20.00	60.00	18.80	3.98	60.0	+0.6%	±0.6%		
		Y: 20.00	60.00	18.80	3.98	60.0	+0.6%	±0.6%		
		Z: 20.00	60.00	18.80	3.98	60.0	+0.6%	±0.6%		
10355	Pulse Waveform (200Hz, 60%)	X: 20.00	60.00	2.32	0.50	100.0	+0.8%	±0.8%		
		Y: 20.00	60.00	2.32	0.50	100.0	+0.8%	±0.8%		
		Z: 20.00	60.00	2.32	0.50	100.0	+0.8%	±0.8%		
10387	QPSK Waveform, 1MHz	X: 1.48	64.00	18.00	1.00	150.0	+2.7%	±0.6%		
		Y: 1.48	64.00	18.00	1.00	150.0	+2.7%	±0.6%		
		Z: 1.53	64.00	18.00	1.00	150.0	+2.7%	±0.6%		
10388	QPSK Waveform, 10MHz	X: 1.93	65.81	4.23	0.00	150.0	+1.1%	±0.6%		
		Y: 1.93	65.81	4.23	0.00	150.0	+1.1%	±0.6%		
		Z: 2.02	66.38	4.23	0.00	150.0	+1.1%	±0.6%		
10396	64-QAM Waveform, 100 kHz	X: 2.97	59.80	18.40	1.00	150.0	+0.7%	±0.6%		
		Y: 2.97	59.80	18.40	1.00	150.0	+0.7%	±0.6%		
10399	64-QAM Waveform, 40 MHz	X: 3.50	59.90	18.60	1.00	150.0	+0.7%	±0.6%		
		Y: 3.51	69.96	15.52	1.00	150.0	+0.7%	±0.6%		
10414	WLAN CCDF 64-QAM, 40MHz	X: 4.69	61.05	15.07	0.00	150.0	+1.1%	±0.6%		
		Y: 4.73	64.96	15.08	0.00	150.0	+1.1%	±0.6%		
		Z: 4.79	63.36	15.20	0.00	150.0	+1.1%	±0.6%		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

\* The uncertainties of Norm (X,Y) do not affect the k=2 k=2 uncertainty (see Fig. 3 and 4).

<sup>B</sup> Uncertainty parameter underlying for maximum specified field strength.

<sup>C</sup> Uncertainty is determined using the most accurate mean value response applying no scaling or reduction and is expressed as the square of the field value.

Certificate No: EX-3861\_Ju02

Page 3 of 22

EX3DV4 - SN:3801

July 21, 2022

**Parameters of Probe: EX3DV4 - SN:3801**

**Calibration Parameter Determined in Head Tissue Simulating Media**

I (MHz) <sup>A</sup>	Relative Permittivity <sup>B</sup>	Conductivity <sup>C</sup> (S/m)	Convf X	Convf Y	Convf Z	Alpha <sup>D</sup>	Depth <sup>E</sup> (mm)	Unc (x = 2)
150	52.3	0.78	11.26	11.26	11.26	0.00	1.00	±13.3%
450	43.5	0.87	10.04	10.04	10.04	0.16	1.80	±12.2%
750	41.8	0.89	9.57	9.57	9.57	0.00	1.80	±12.0%
835	41.5	0.85	9.22	9.22	9.22	0.54	0.80	±12.0%
895	41.5	0.87	9.13	9.13	9.13	0.49	0.87	±12.0%
1450	40.5	1.20	8.28	8.28	8.28	0.26	0.90	±12.0%
1750	40.1	1.37	8.16	8.16	8.16	0.33	0.86	±12.0%
1900	40.0	1.40	7.86	7.86	7.86	0.36	0.86	±12.0%
2100	39.8	1.49	7.84	7.84	7.84	0.33	0.86	±12.0%
2300	39.5	1.67	7.47	7.47	7.47	0.41	0.90	±12.0%
2450	39.2	1.80	7.34	7.34	7.34	0.41	0.90	±12.0%
2600	38.6	1.96	7.04	7.04	7.04	0.40	0.90	±12.0%
3000	38.2	2.71	6.55	6.55	6.55	0.39	1.30	±13.1%
3500	37.9	2.31	6.49	6.49	6.49	0.35	1.30	±13.1%
3700	37.7	3.12	6.40	6.40	6.40	0.35	1.30	±13.1%
3900	37.5	3.32	6.34	6.34	6.34	0.40	1.80	±13.1%
4100	37.2	3.53	6.00	6.00	6.00	0.40	1.80	±13.1%
4000	37.1	3.63	5.97	5.97	5.97	0.40	1.80	±13.1%
4460	36.9	3.84	5.76	5.76	5.76	0.40	1.70	±13.1%
4600	36.7	4.44	5.78	5.78	5.78	0.40	1.70	±13.1%
4700	36.4	4.25	5.67	5.67	5.67	0.40	1.70	±13.1%
4900	36.3	4.40	5.93	5.93	5.93	0.40	1.80	±13.1%
5250	35.9	4.71	5.17	5.17	5.17	0.40	1.80	±13.1%
5600	35.5	5.07	4.58	4.58	4.58	0.40	1.80	±13.1%
5750	35.4	5.22	4.86	4.86	4.86	0.40	1.80	±13.1%

<sup>A</sup> Frequency (MHz) of the probe only, applies to SAR (4-40 and higher) see Page 20, note 4-40 restricted to 100MHz. This uncertainty is the standard uncertainty of the measured frequency, it does not include the uncertainty of the probe frequency, which is ±10% for frequencies between 100-400MHz and ±10% for frequencies between 400-1000MHz.

<sup>B</sup> At frequencies below 100MHz, the validity of these parameters (μ) can be reduced to 10% if field compensation formula is applied to measured SAR values. The uncertainty in the RSS of the Convf uncertainty for indicated frequency ranges is assumed.

<sup>C</sup> At frequencies below 100MHz, the validity of these parameters (μ) can be reduced to 10% if field compensation formula is applied to measured SAR values. The uncertainty in the RSS of the Convf uncertainty for indicated frequency ranges is assumed.

<sup>D</sup> Average alpha determined during calibration. QPSK assumes that the retransmission deviation due to the boundary effect after compensation is always less than 1% at frequencies below 20MHz and below 2% for frequencies between 3-20GHz or any distance larger than half the probe (diameter) from the boundary.

Certificate No: EX-3861\_Ju02

Page 5 of 22

EX3DV4 - SN:3801

July 21, 2022

**Parameters of Probe: EX3DV4 - SN:3801**

**Sensor Model Parameters**

E1	C3	fr	n <sup>a</sup>	ms/V	T1	T2	T3	T4	T5	T6
4	43.6	39.79	55.30	15.52	2.17	1.96	2.05	1.97	2.01	2.01
7	49.4	369.80	35.36	29.11	0.18	5.10	0.57	0.40	1.01	1.01
7	49.5	359.88	34.97	15.13	0.50	5.08	1.28	0.29	1.01	1.01

**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle	102.5°
Measurement Area Detection Mode	enabled
Optical Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
TIP Length	2 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan probe.

Certificate No: EX-3861\_Ju02

Page 4 of 22

EX3DV4 - SN:3801

July 21, 2022

**Parameters of Probe: EX3DV4 - SN:3801**

**Calibration Parameter Determined in Head Tissue Simulating Media**

I (MHz) <sup>A</sup>	Relative Permittivity <sup>B</sup>	Conductivity <sup>C</sup> (S/m)	Convf X	Convf Y	Convf Z	Alpha <sup>D</sup>	Depth <sup>E</sup> (mm)	Unc (x = 2)
6500	34.5	6.07	5.20	5.20	5.20	0.20	2.50	±18.8%

<sup>A</sup> Frequency validity up to 400 MHz, then 100-700 MHz, and 1000-1200 MHz. The uncertainty in the RSS of the Convf uncertainty at calibration frequency and the uncertainty for the indicated frequency is assumed.

<sup>B</sup> Average relative permittivity for the indicated frequency. The uncertainty in the RSS of the Convf uncertainty for indicated frequency is assumed.

<sup>C</sup> Average conductivity for the indicated frequency. The uncertainty in the RSS of the Convf uncertainty for indicated frequency is assumed.

<sup>D</sup> Average alpha determined during calibration. QPSK assumes that the retransmission deviation due to the boundary effect after compensation is always less than 1% at frequencies below 20MHz and below 2% for frequencies between 3-20GHz or any distance larger than half the probe (diameter) from the boundary.

Certificate No: EX-3861\_Ju02


Page 5 of 22

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that it is the responsibility of the client to ensure that the document is in accordance with the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,  
or email: [CN\\_DocCheck@sgs.com](mailto:CN_DocCheck@sgs.com)  
1 No. 10, Weizhou Road, Innovation Park, Kunshan, Jiangsu, China, 215300      +86 510 67255990      +86 510 67270049      [WWW.SGSCTOUR.COM.CN](http://WWW.SGSCTOUR.COM.CN)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

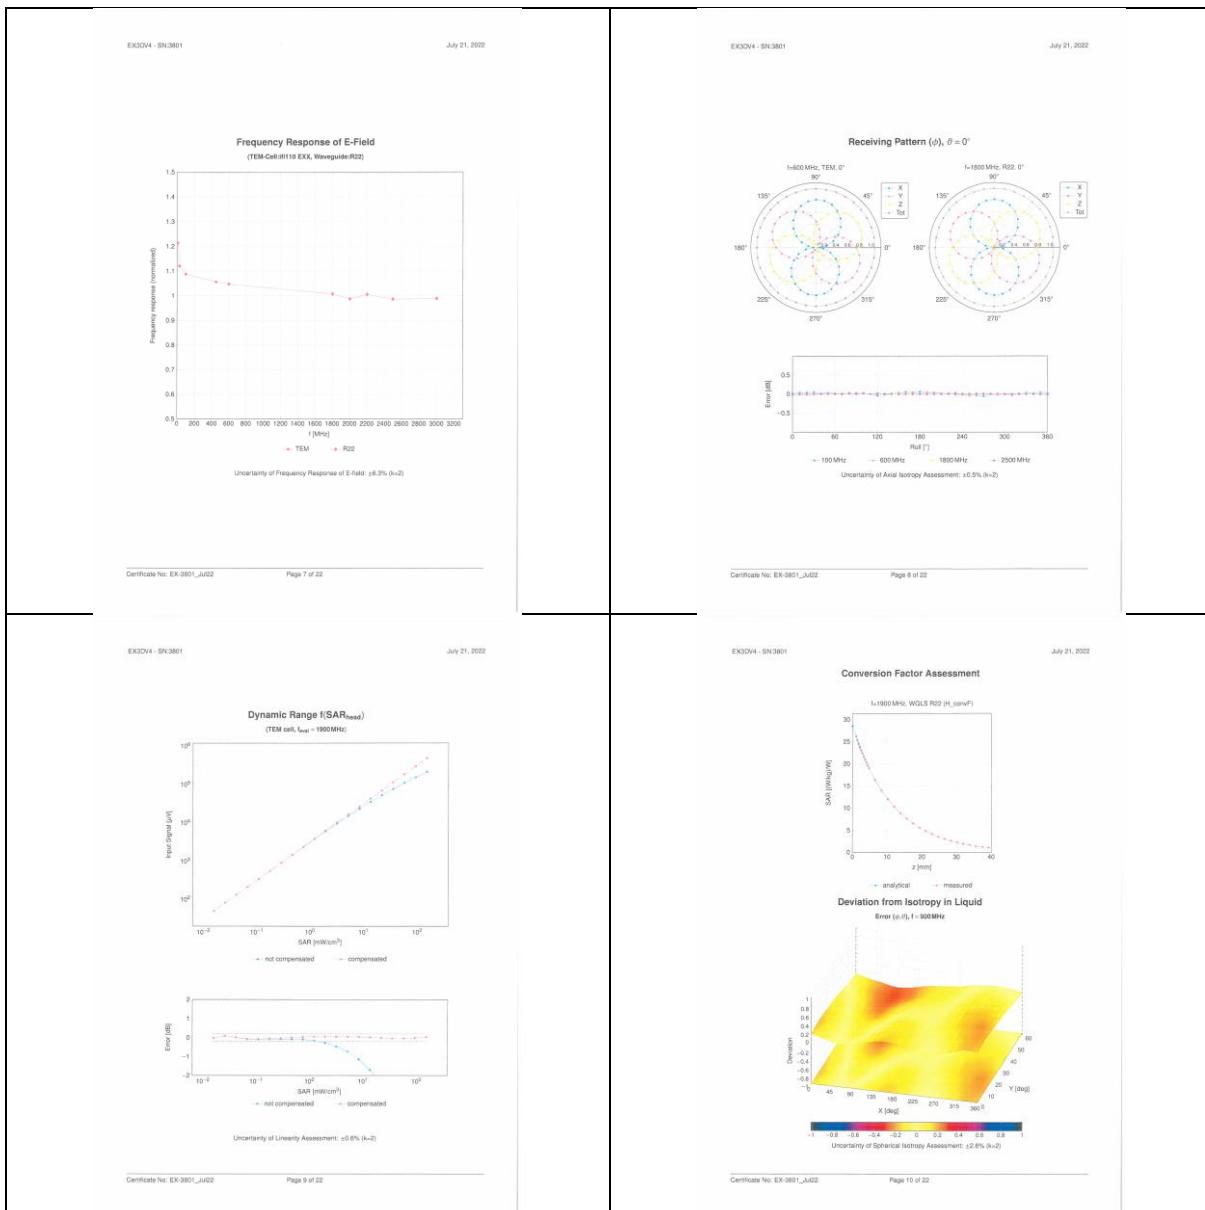

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, at <http://www.sgs.com/en/Terms-and-Conditions-Electronic-Format.aspx>. Attention is drawn to any limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not entitle parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. S7512377442

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of this document, please contact us by phone or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
M(86-512)57355888 f(86-512)57370818 sgs\_china@sgs.com

t(86-512)57355888 t(86-512)57370818 sgs.china@sgs.com



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed online, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic document, subject to the General Conditions of Electronic Document at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, non-pecuniary and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed online, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic form documents, at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any header of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (06753207442)

results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sqs.com

or email: CN.Doccheck@sgs.com  
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

#### 4 Impedance and return loss

Dipole CLA150 SN 4025				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
2021/4/26	-31.4	/	47.8	/
2022/4/26	-30.9	1.59%	47.2	0.6
Dipole D450V3 SN 1103				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
2021/4/21	-23	/	57.1	/
2022/4/21	-22.9	0.43%	56.9	0.2

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



No.10, Weiyi Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)