

Report on the Radio Testing
For
Lacuna Space
on
LS300
Report no. TRA-058206-47-00C
2023-03-29

RF916 11.0



Report Number: TRA-058206-47-00C
Issue: C

REPORT ON THE RADIO TESTING OF A
Lacuna Space
LS300
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247

TEST DATE: 2022-12-09 to 2022-12-20

Tested by:



Steven Garwell
Radio test Engineer

Written by:



Steven Garwell
Radio Test Engineer

Approved by:

John Charters
Department Manager - Radio

Date: 2023-03-29

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	2022-12-06	Original
B	2022-12-09	Contact details amended, Typographical corrections
C	2023-03-15	Technical corrections throughout document

2 Summary

TEST REPORT NUMBER:	TRA-058206-47-00C
WORKS ORDER NUMBER:	TRA-058206-01
PURPOSE OF TEST:	Certification
TEST SPECIFICATION:	47CFR15.247
EQUIPMENT UNDER TEST (EUT):	LS300
FCC IDENTIFIER:	2A8AP-LS300
EUT SERIAL NUMBER:	0012 (conducted), 0009 (radiated)
MANUFACTURER/AGENT:	Lacuna Space
ADDRESS:	R104 Rutherford Appleton Laboratory Harwell Campus Didcot OX11 0QX United Kingdom
CLIENT CONTACT:	Rob Spurret ☎ +447827828624 ✉ regulatory@lacuna.space
ORDER NUMBER:	LN-PO-042-22
TEST DATE:	2022-12-09 to 2022-12-20
TESTED BY:	Steven Garwell Element

2.1 Test Summary

Test Method and Description	Requirement Clause 47CFR15	Applicable to this equipment	Result / Note
Radiated spurious emissions (restricted bands of operation and cabinet radiation)	15.247(d)	☒	PASS
AC power line conducted emissions	15.207	☐	Note 1
Carrier frequency separation	15.247 (a) (1)	☒	PASS
Number of hopping channels	15.247 (a) (1) (i), (ii) and (iii)	☒	PASS
Average time of occupancy	15.247 (a) (1) (i), (ii) and (iii)	☒	PASS
Maximum peak conducted output power	15.247 (a) (1), (b)(1) and (b)(2)	☒	PASS
20 dB emission bandwidth	15.247 (a) (1) (i) and (ii)	☒	PASS
Out-of-band emissions	15.247(d)	☒	PASS
Calculation of duty correction	-	☐	Client Declaration

Specific Note:

1. The EUT is a battery powered device

General Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction.....	8
5	Test Specifications.....	9
5.1	Normative References.....	9
5.2	Deviations from Test Standards.....	9
6	Glossary of Terms.....	10
7	Equipment under Test.....	11
7.1	EUT Identification.....	11
7.2	System Equipment.....	11
7.3	EUT Mode of Operation.....	11
7.4	EUT Radio Parameters.....	11
7.4.1	General.....	11
7.4.2	Antennas.....	11
7.5	EUT Description.....	12
8	Modifications.....	12
9	EUT Test Setup.....	13
9.1	Block Diagram.....	13
9.2	General Set-up Photograph.....	14
9.3	Measurement software.....	15
10	General Technical Parameters.....	16
10.1	Normal Conditions.....	16
10.2	Varying Test Conditions.....	16
11	Radiated emissions.....	17
11.1	Definitions.....	17
11.2	Test Parameters.....	17
11.3	Test Limit.....	17
11.4	Test Method.....	18
11.5	Test Equipment.....	19
11.6	Test Results.....	20
12	Carrier frequency separation.....	23
12.1	Definition.....	23
12.2	Test Parameters.....	23
12.3	Test Limit.....	23
12.4	Test Method.....	24
12.5	Test Equipment.....	24
12.6	Test Results.....	25
13	Number of hopping frequencies.....	27
13.1	Definition.....	27
13.2	Test Parameters.....	27
13.3	Test Limit.....	27
13.4	Test Method.....	28
13.5	Test Equipment.....	28
13.6	Test Results.....	29
14	Average channel occupancy.....	31
14.1	Definition.....	31
14.2	Test Parameters.....	31
14.3	Test Limit.....	31
14.4	Test Method.....	32
14.5	Test Equipment.....	32
14.6	Test Results.....	33
15	Maximum peak conducted output power.....	36
15.1	Definition.....	36
15.2	Test Parameters.....	36
15.3	Test Limit.....	36
15.4	Test Method.....	37
15.5	Test Equipment.....	37
15.6	Test Results.....	38
16	Occupied Bandwidth.....	40
16.1	Definition.....	40
16.2	Test Parameters.....	40
16.3	Test Limit.....	40
16.4	Test Method.....	40

16.5	Test Equipment.....	41
16.6	Test Results – 20 dB Bandwidth	42
17	Out-of-band and conducted spurious emissions	44
17.1	Definition	44
17.2	Test Parameters.....	44
17.3	Test Limits.....	44
17.4	Test Method	45
17.5	Test Equipment.....	45
17.6	Test Results	46
18	Measurement Uncertainty	52
19	RF Exposure	54
21	Appendix A.....	56
21.1	Antenna Information.....	56

4 Introduction

This report TRA-058206-47-00C presents the results of the Radio testing on a Lacuna Space, LS300 to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Lacuna Space by Element, at the address detailed below.

☐	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	☒	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

The test laboratory is accredited for the above sites under the US-UK MRA,

Designation number(s):

Element Hull UK2007

Element Skelmersdale UK2020

IC Registration Numbers:

Element Hull 3483A

Element North West 3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment under Test

7.1 EUT Identification

- Name: LS300
- Serial Number: 0012 (conducted), 0009 (radiated)
- Model Number: LS300-915-A
- Software Revision: LSM Ver 0.10.0
- Build Level / Revision Number: Version 2.1

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

- Laptop Computer – Dell Inspiron P114G

7.3 EUT Mode of Operation

The EUT was transmitting a modulated carrier on the required frequencies for the duration of the test, programming was performed using customer supplied test scripts.

7.4 EUT Radio Parameters

7.4.1 General

Frequencies of operation:	902 MHz – 928 MHz
Modulation type:	LR-FHSS
Occupied channel bandwidth:	1.523 MHz
Channel spacing:	25.415 kHz
Declared output power:	≤ 23 dBm
Nominal Supply Voltage:	4.5 Vdc

7.4.2 Antennas

Type:	Integrated RHCP patch
Frequency range:	902 MHz to 908 MHz
Gain:	1.75 dBi Peak
Connector type:	Integrated

7.5 EUT Description

The EUT is a Wireless satellite terminal utilising a Lora LR-FHSS modulation scheme the EUT has an integrated multi-band circularly polarized antenna system, See datasheet in appendix A.

The EUT hops across 60 channels, separated by 25.4 kHz giving a total occupied bandwidth of 1.523 MHz, testing was performed with the EUT hopping across all 60 channels in the bottom, middle and top sections of the band.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup


9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

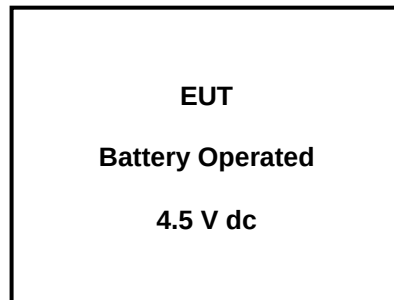

9.2 General Set-up Photograph

The following photographs shows basic EUT set-up:

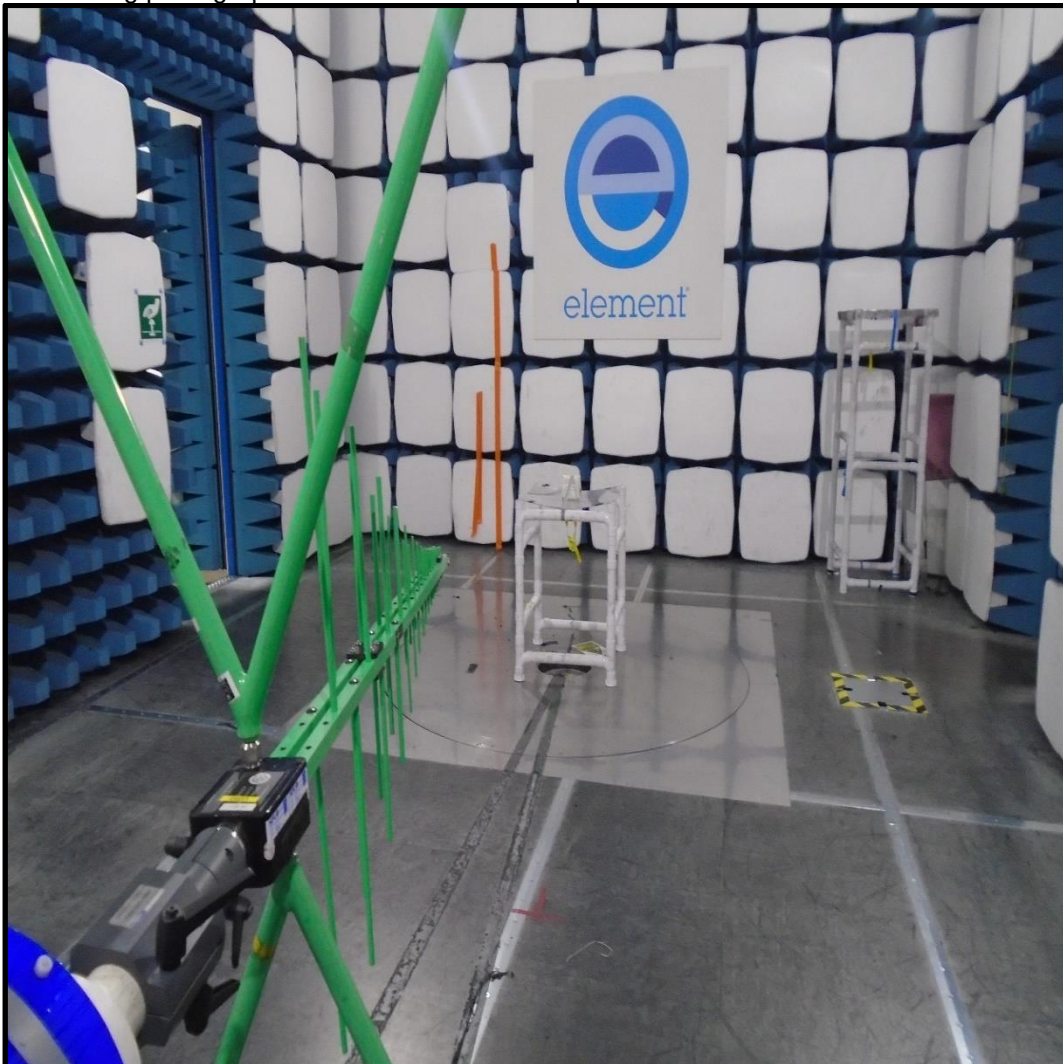



9.3 Measurement software

Where applicable, the following software was used to perform measurements contained within this report.

Element Emissions R5
Element Transmitter Bench Test
ETS Lindgren EMPower V1.0.4.2

10 General Technical Parameters

10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 4.5 V dc via 3 AA Alkaline batteries.

10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
☐	Mains	110 Vac +/-2 %	85 % and 115 %
☒	Battery	New battery	N/A

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	SK03 Radio Chamber
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	903 MHz, 915 MHz, 927 MHz
Deviations from Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz; Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak; Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V dc	4.5 V dc (as declared)

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (μV/m at 3 m)</i>	<i>Field Strength (dBμV/m at 3 m)</i>
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

On frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function. On frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit.

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dBμV/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

$$\text{Factor} = CL + AF - PA$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dBμV;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup





11.5 Test Equipment


<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Radio Chamber - PP	Rainford EMC	ATS	REF940	2023-11-06
Radiated Test Software	Element	Emissions R5	REF9000	Cal not required
Spectrum Analyser	R&S	ESR 7	U727	2023-04-27
Spectrum Analyser	R&S	FSU46	REF910	2022-12-22
Bilog	Chase	CBL611/A	L290	2023-03-24
PreAmp	Watkins Johnson	6201-69	U372	2023-03-01
1-18GHz Horn	EMCO	3115	L139	2024-07-01
Pre Amp	Agilent	8449B	U457	2023-01-22
High Pass Filter	MiniCircuits	VHF-1500+	U519	2023-02-03

11.6 Test Results


Frequency: 903.0 MHz; Bandwidth: 1523 kHz

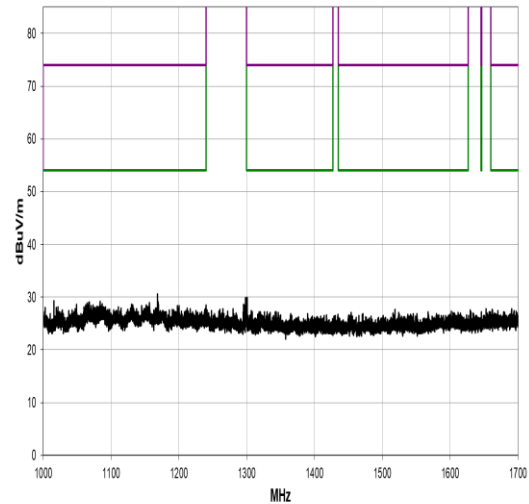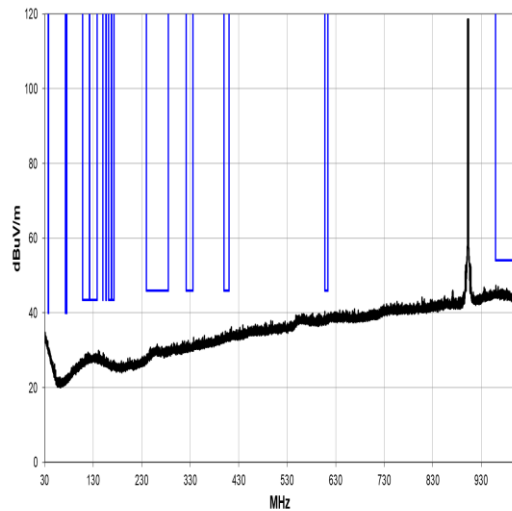

30 MHz to 1 GHz

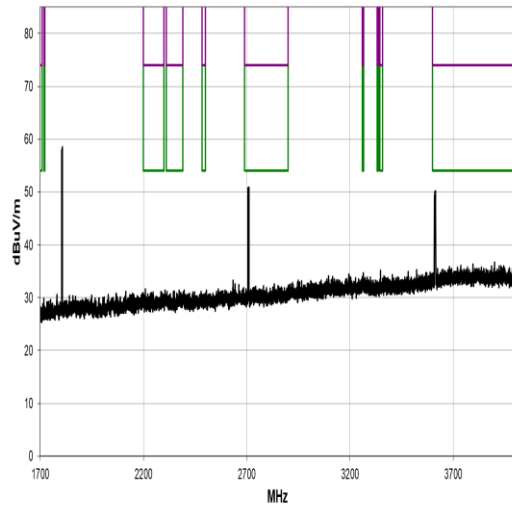

1 GHz to 1.7 GHz

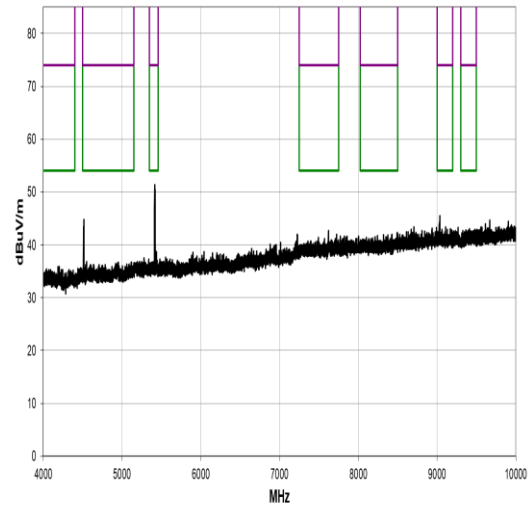


1.7 GHz to 4 GHz

4 GHz to 10 GHz


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2706.958	52.4	-2.6	1.16	296.9	3.0	0.0	Vert	AV	0.0	49.8	54.0	-4.2
3612.167	44.9	1.0	1.03	301.0	3.0	0.0	Vert	AV	0.0	45.9	54.0	-8.1
2709.958	48.1	-2.6	1.25	2.1	3.0	0.0	Horz	AV	0.0	45.5	54.0	-8.5
3611.250	43.1	1.0	1.5	7.9	3.0	0.0	Horz	AV	0.0	44.1	54.0	-9.9
2708.750	57.6	-2.6	1.16	296.9	3.0	0.0	Vert	PK	0.0	55.0	74.0	-19.0
3614.750	53.8	1.1	1.03	301.0	3.0	0.0	Vert	PK	0.0	54.9	74.0	-19.1
2709.542	57.2	-2.6	1.25	2.1	3.0	0.0	Horz	PK	0.0	54.6	74.0	-19.4

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
5419.517	42.1	4.4	1.33	208.8	3.0	0.0	Vert	AV	0.0	46.5	54.0	-7.5
5421.642	39.2	4.4	1.73	279.1	3.0	0.0	Horz	AV	0.0	43.6	54.0	-10.4
9036.892	33.8	9.0	2.02	207.2	3.0	0.0	Horz	AV	0.0	42.8	54.0	-11.2
4518.425	39.4	2.5	1.08	137.9	3.0	0.0	Horz	AV	0.0	41.9	54.0	-12.1
4515.642	38.9	2.5	1.5	252.1	3.0	0.0	Vert	AV	0.0	41.4	54.0	-12.6
9036.142	32.2	9.0	1.7	215.8	3.0	0.0	Vert	AV	0.0	41.2	54.0	-12.8
9034.458	47.3	9.0	2.02	207.2	3.0	0.0	Horz	PK	0.0	56.3	74.0	-17.7
5419.300	51.2	4.4	1.33	208.8	3.0	0.0	Vert	PK	0.0	55.6	74.0	-18.4
5421.742	50.4	4.4	1.73	279.1	3.0	0.0	Horz	PK	0.0	54.8	74.0	-19.2
9037.367	45.3	9.0	1.7	215.8	3.0	0.0	Vert	PK	0.0	54.3	74.0	-19.7


Frequency: 915.0 MHz; Bandwidth: 1523 kHz

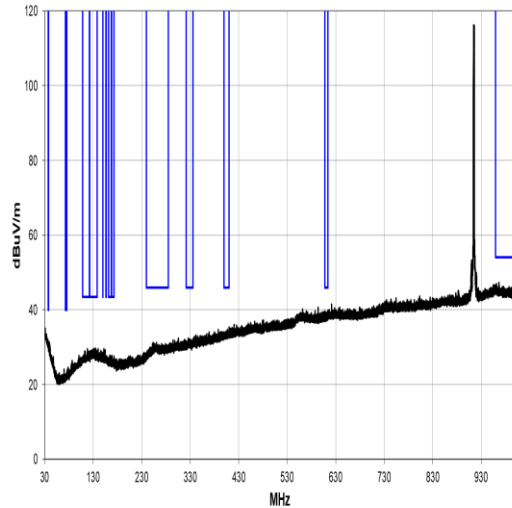


30 MHz to 1 GHz

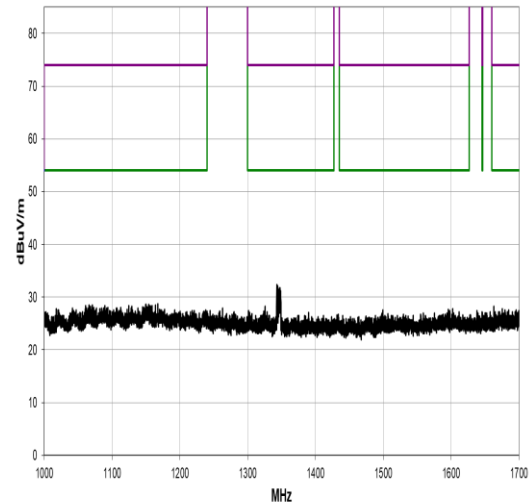

1 GHz to 1.7 GHz

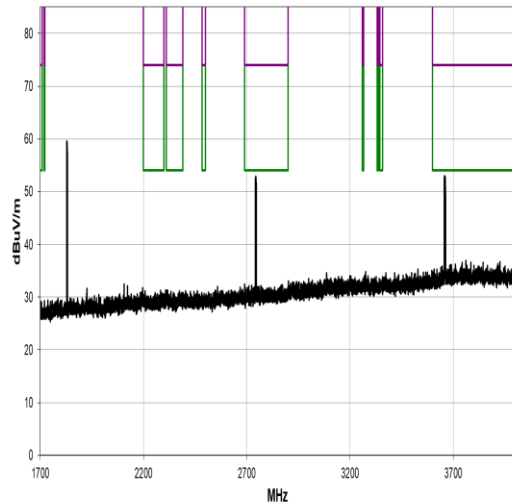

1.7 GHz to 4 GHz

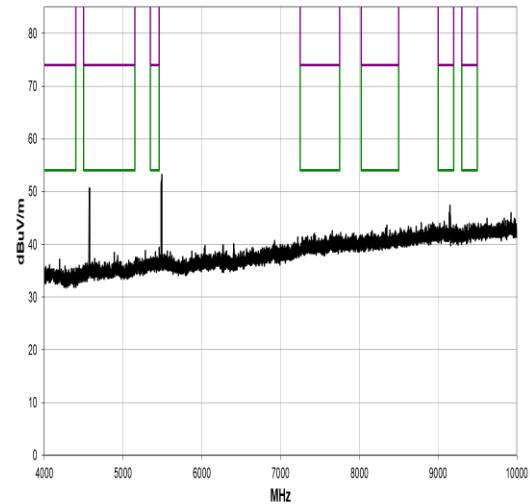


4 GHz to 10 GHz


Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
3659.750	49.8	1.3	3.08	342.9	3.0	0.0	Horz	AV	0.0	51.1	54.0	-2.9
2746.667	52.1	-2.5	1.12	285.2	3.0	0.0	Vert	AV	0.0	49.6	54.0	-4.4
2746.542	51.7	-2.5	1.25	359.9	3.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8
3657.583	47.2	1.3	1.05	283.0	3.0	0.0	Vert	AV	0.0	48.5	54.0	-5.5
3661.750	56.4	1.3	1.05	283.0	3.0	0.0	Vert	PK	0.0	57.7	74.0	-16.3
3657.375	55.1	1.3	3.08	342.9	3.0	0.0	Horz	PK	0.0	56.4	74.0	-17.6
2745.917	58.7	-2.5	1.12	285.2	3.0	0.0	Vert	PK	0.0	56.2	74.0	-17.8
2743.583	57.3	-2.5	1.25	359.9	3.0	0.0	Horz	PK	0.0	54.8	74.0	-19.2

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
9153.042	38.3	9.6	1.88	185.1	3.0	0.0	Horz	AV	0.0	47.9	54.0	-6.1
4573.667	41.3	3.2	1.36	246.1	3.0	0.0	Vert	AV	0.0	44.5	54.0	-9.5
4578.667	40.2	3.2	1.5	136.9	3.0	0.0	Horz	AV	0.0	43.4	54.0	-10.6
9151.125	32.5	9.6	1.5	223.9	3.0	0.0	Vert	AV	0.0	42.1	54.0	-11.9
9146.542	47.9	9.6	1.88	185.1	3.0	0.0	Horz	PK	0.0	57.5	74.0	-16.5
9148.167	46.5	9.6	1.5	223.9	3.0	0.0	Vert	PK	0.0	56.1	74.0	-17.9
4577.875	52.0	3.2	1.36	246.1	3.0	0.0	Vert	PK	0.0	55.2	74.0	-18.8


Frequency: 927.0 MHz; Bandwidth: 1523 kHz

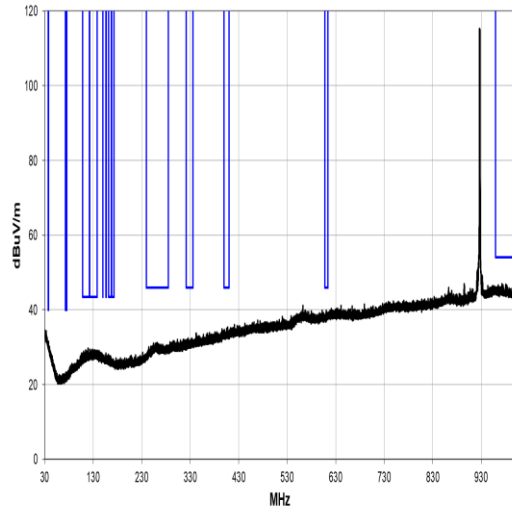


30 MHz to 1 GHz

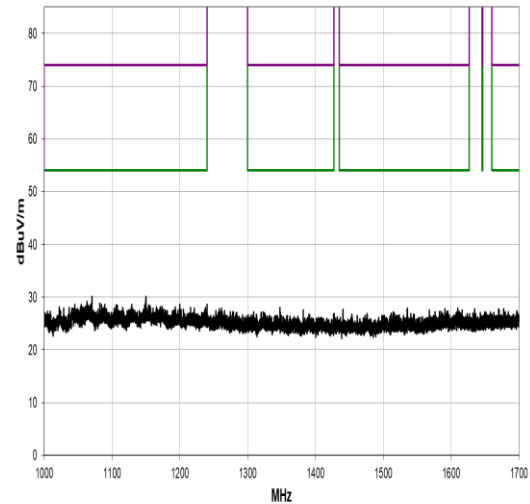

1 GHz to 1.7 GHz

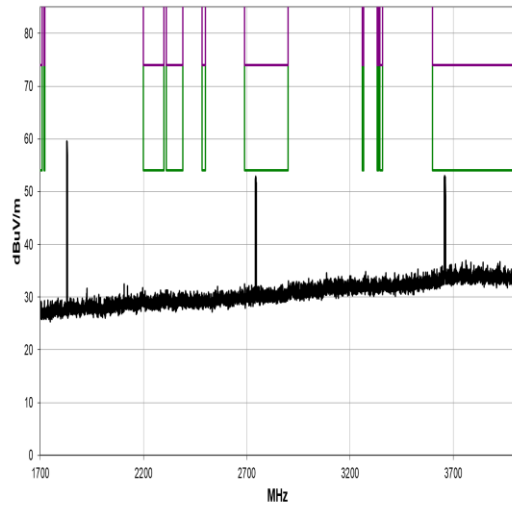

1.7 GHz to 4 GHz

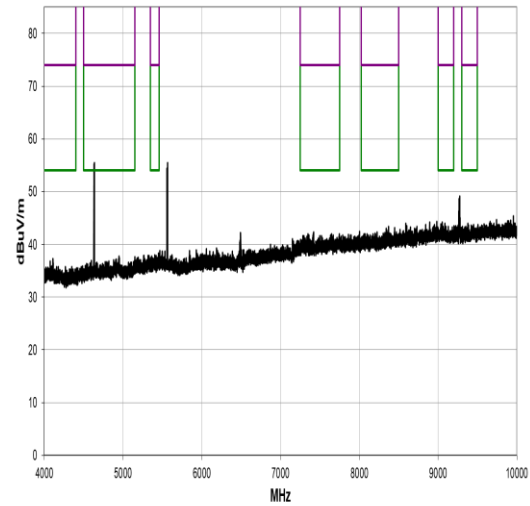

4 GHz to 10 GHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
2780.625	53.7	-2.5	1.5	8.9	3.0	0.0	Horz	AV	0.0	51.2	54.0	-2.8
3708.167	49.6	1.6	1.17	310.9	3.0	0.0	Vert	AV	0.0	51.2	54.0	-2.8
2781.583	52.1	-2.5	1.1	293.9	3.0	0.0	Vert	AV	0.0	49.6	54.0	-4.4
3705.125	46.1	1.6	1.39	346.0	3.0	0.0	Horz	AV	0.0	47.7	54.0	-6.3
3705.750	55.7	1.6	1.17	310.9	3.0	0.0	Vert	PK	0.0	57.3	74.0	-16.7
2778.792	59.5	-2.5	1.1	293.9	3.0	0.0	Vert	PK	0.0	57.0	74.0	-17.0
3705.375	55.0	1.6	1.39	346.0	3.0	0.0	Horz	PK	0.0	56.6	74.0	-17.4
2781.750	57.8	-2.5	1.5	8.9	3.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
4637.125	46.7	3.3	1.06	315.9	3.0	0.0	Horz	AV	0.0	50.0	54.0	-4.0
4632.750	46.5	3.3	1.4	245.9	3.0	0.0	Vert	AV	0.0	49.8	54.0	-4.2
4631.750	55.0	3.3	1.4	245.9	3.0	0.0	Vert	PK	0.0	58.3	74.0	-15.7
4636.167	54.4	3.3	1.06	315.9	3.0	0.0	Horz	PK	0.0	57.7	74.0	-16.3

12 Carrier frequency separation

12.1 Definition

The carrier frequency separation is the frequency separation between two adjacent hopping frequencies.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.2
Frequencies Measured:	903 MHz, 915 MHz, 927 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	100 Hz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V dc	4.5 V dc (as declared)

12.3 Test Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400 to 2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

Figure iii Test Setup




12.5 Test Equipment


<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSW 43	U728	2023-04-26
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use

12.6 Test Results


Frequency: 902 MHz; Modulation: d-m2_1523; Power setting: 20			
$F1_c$ (MHz)	$F2_c$ (MHz)	Channel Separation, $F2_c - F1_c$ (kHz)	Result
902.987592	903.013007	25.415	PASS

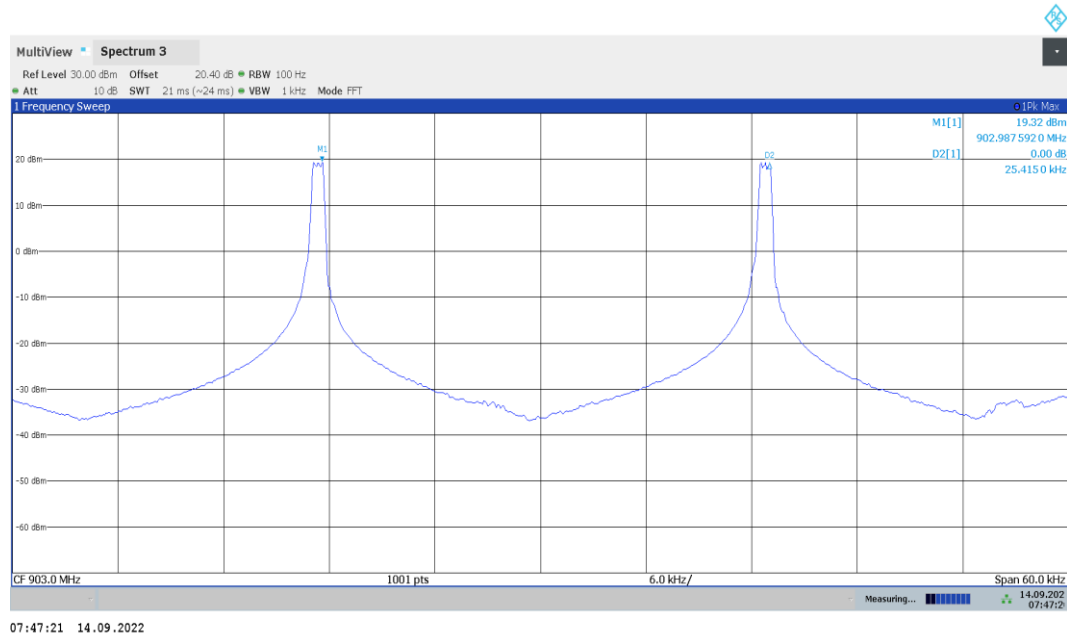

Frequency: 915 MHz; Modulation: d-m2_1523; Power setting: 20			
$F1_c$ (MHz)	$F2_c$ (MHz)	Channel Separation, $F2_c - F1_c$ (kHz)	Result
914.758377	915.012527	25.415	PASS

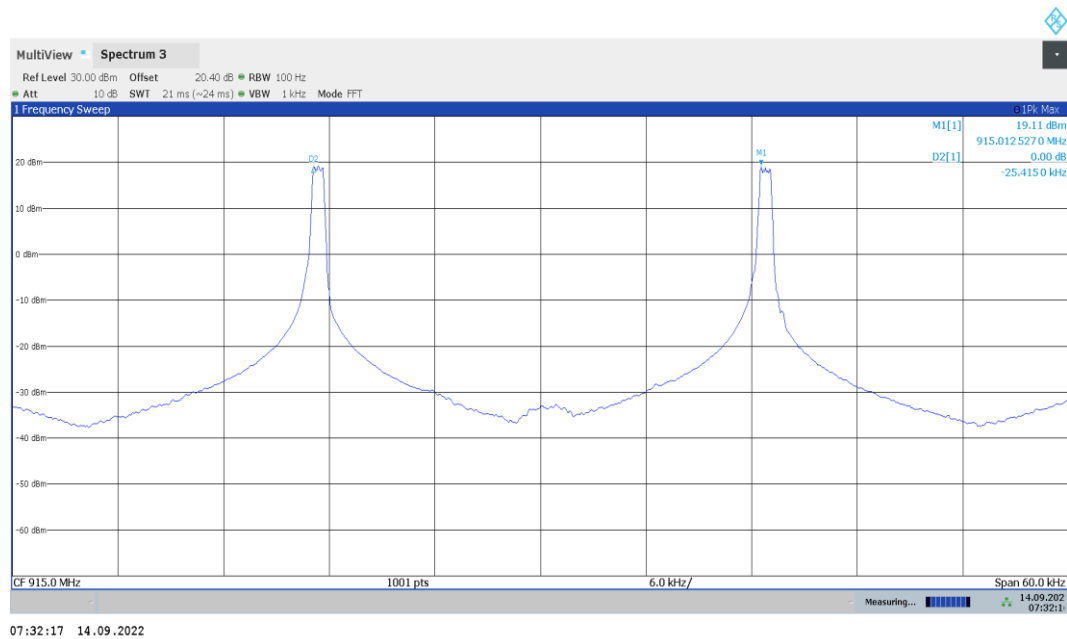

Frequency: 927 MHz; Modulation: d-m2_1523; Power setting: 20			
$F1_c$ (MHz)	$F2_c$ (MHz)	Channel Separation, $F2_c - F1_c$ (kHz)	Result
926.758377	927.012527	25.415	PASS

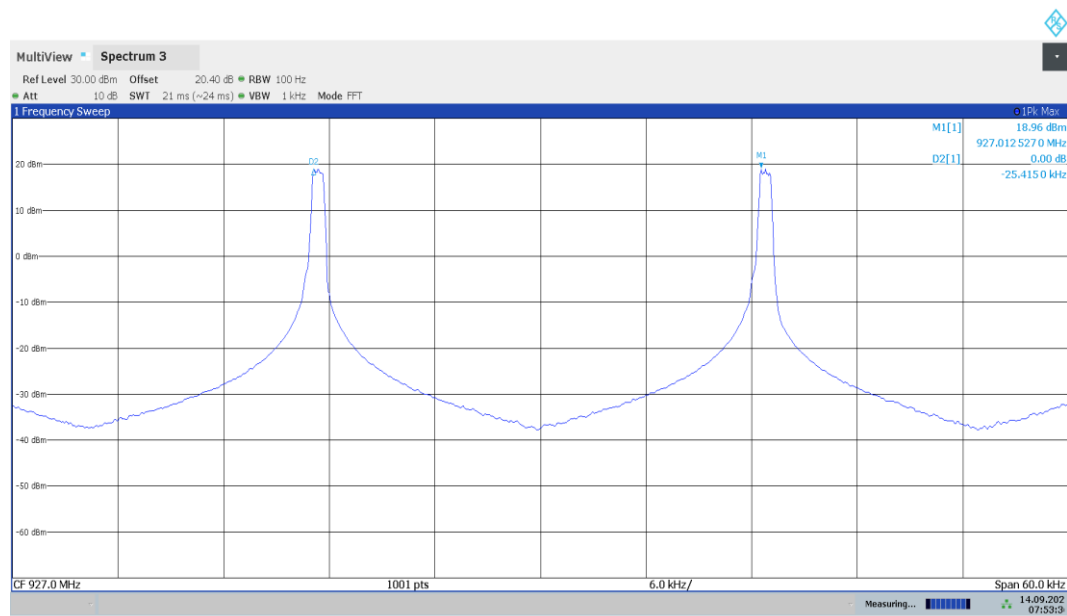

07:53:37 14.09.2022

13 Number of hopping frequencies

13.1 Definition

The total number of hopping frequencies (the centre frequencies defined within the hopping sequence of a FHSS equipment) which are randomly sequenced in order to spread the transmission.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.3
Frequencies Measured:	All; 903 MHz, 915 MHz, 927 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	20 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V dc	4.5 V dc (as declared)

13.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels;
If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz shall use at least 15 hopping channels;
- Frequency hopping systems operating in the band 5725 to 5850 MHz shall use at least 75 hopping channels.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each nominal bandwidth.

Figure iv Test Setup




13.5 Test Equipment


<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSW 43	U728	2023-04-26
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use

13.6 Test Results


Modulation: d-m2_1523; Power setting: 20				
Frequency (MHz)	Lowest channel, F_{CL} (MHz)	Highest channel, F_{CH} (MHz)	Number of channels observed	Result
903	902.2385	903.7615	60	PASS
915	914.2385	915.7615	60	PASS
927	926.2385	927.7615	60	PASS

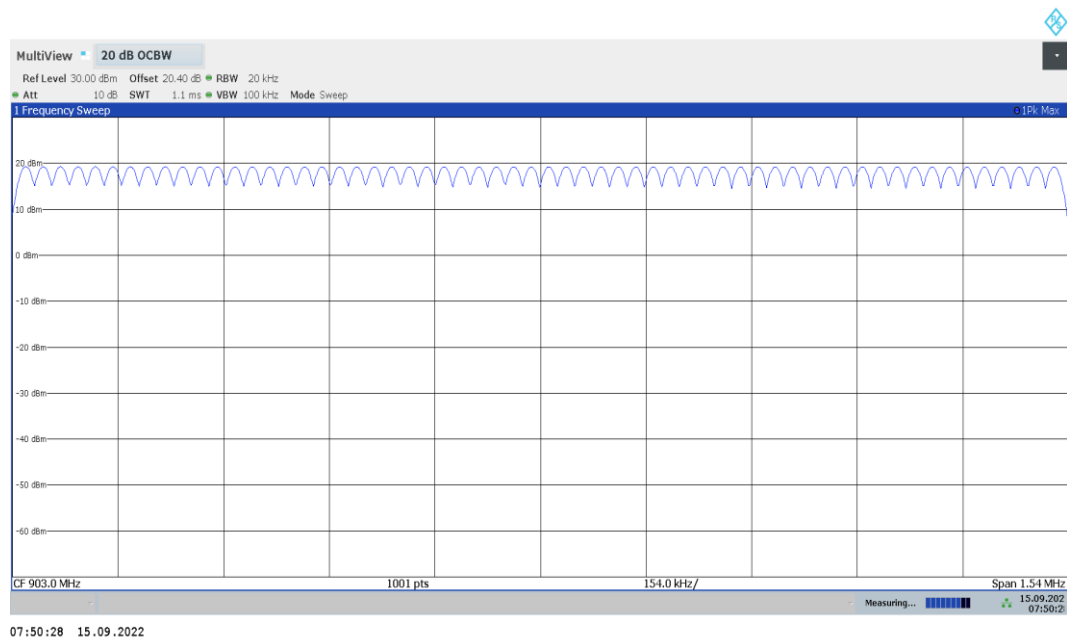

Frequency: 903 MHz

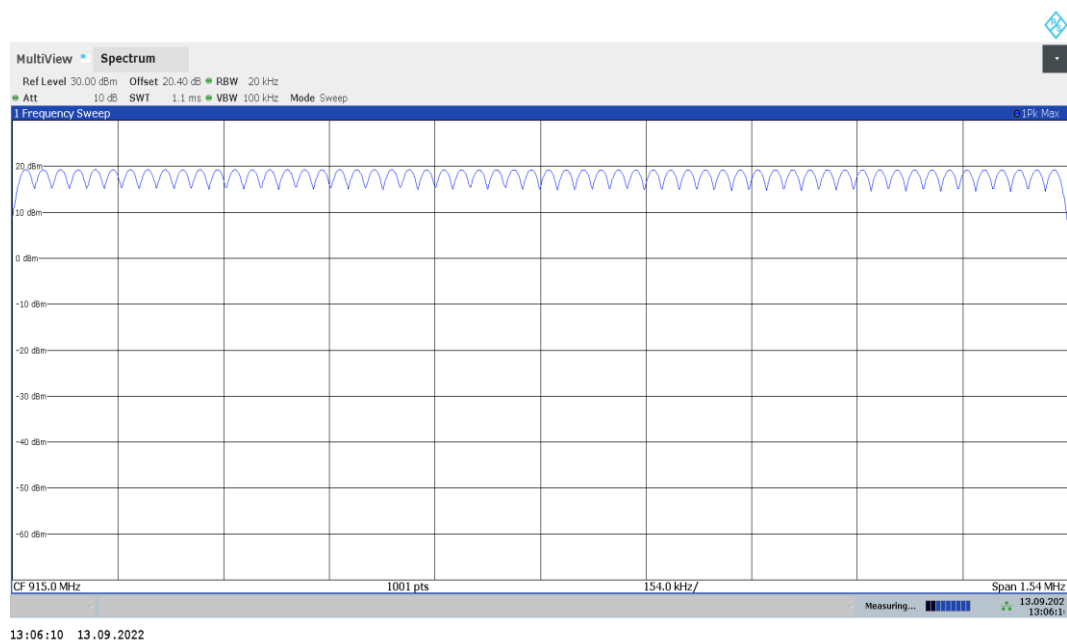

Frequency: 915 MHz

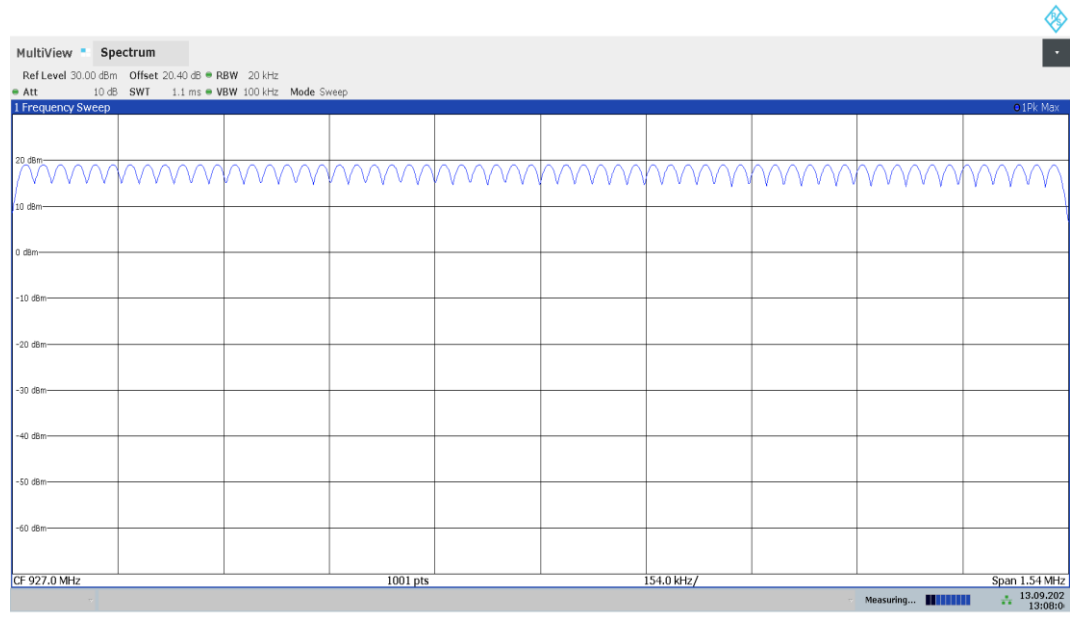

Frequency: 927 MHz

14 Average channel occupancy

14.1 Definition

The channel occupancy is the total of the transmitter 'on' times, during an observation period, on a particular hopping frequency.

14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.4
EUT Frequencies Measured:	903 MHz, 915 MHz, 927 MHz
EUT Number of hopping channels:	60
EUT Test Modulations:	Internal pattern generation – hopping enabled
Deviations From Standard:	None
Measurement BW:	1 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V dc	4.5 V dc (as declared)

14.3 Test Limit


- For frequency hopping systems in the band 902 to 928 MHz: if the -20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20 second period; If the -20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10 second period;
- Frequency hopping systems operating in the band 2400 to 2483.5 MHz: The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed;
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions of the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. A number of hops were observed to confirm consistency of the dwell time / observe the worst case. All modulation schemes, data rates and power settings were used to observe the worst-case configuration.

Figure v Test Setup




14.5 Test Equipment


<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSW 43	U728	2023-04-26
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use

14.6 Test Results


Frequency: 903 MHz; Modulation: d-m6_1523; Power setting: 20				
Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
233.0	20	1	0.3347	PASS
101.7	20	1		

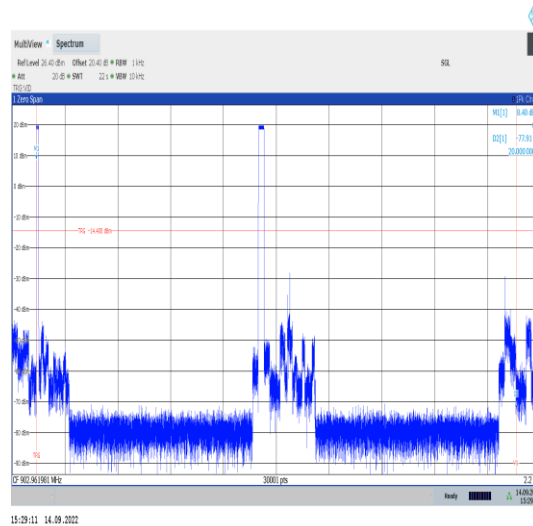

Number of transmissions in 20 seconds

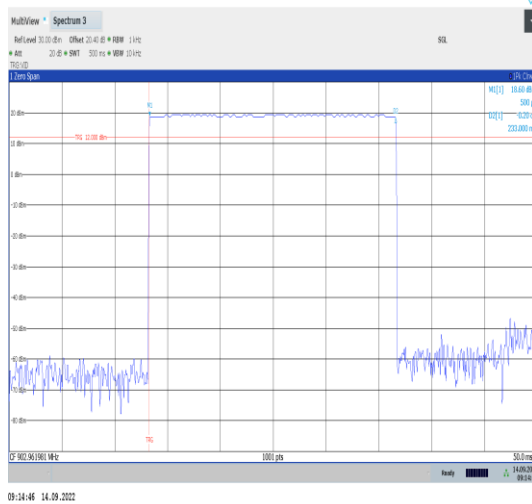


Tx on period – Header

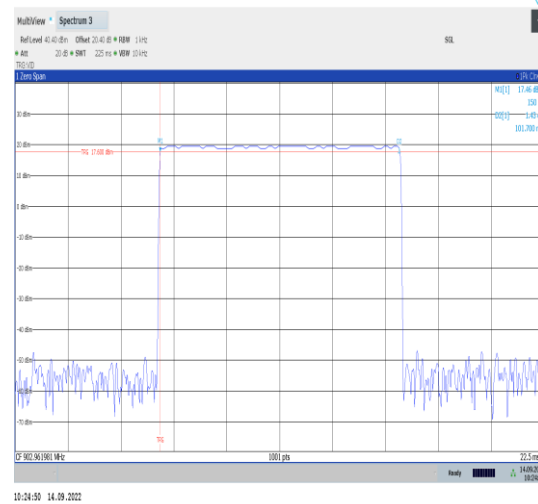


Tx on period - Payload

Note: Average time of occupancy = Individual occupancy time * Number of hops observed (Header) + Individual occupancy time * Number of hops observed (Payload)


Frequency: 915 MHz; Modulation: d-m6_1523; Power setting: 20				
Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
233.0	20	1	0.3347	PASS
101.7	20	1		

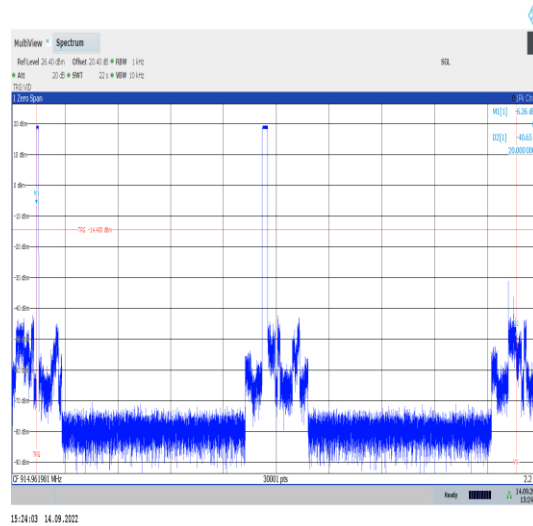

Number of transmissions in 20 seconds

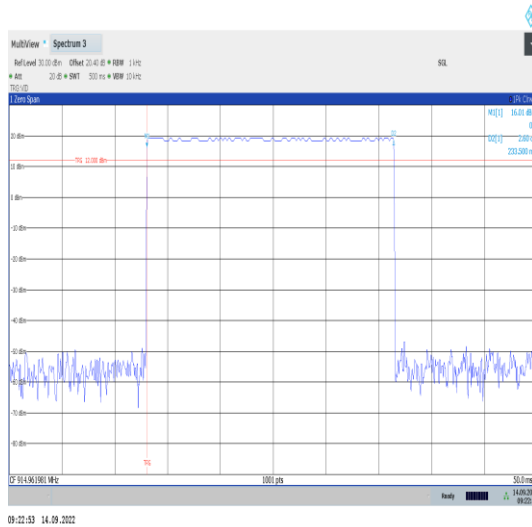


Tx on period – Header

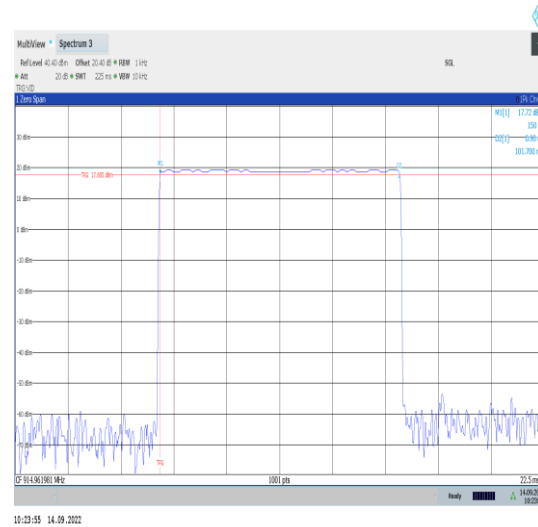


Tx on period - Payload

Note: Average time of occupancy = Individual occupancy time * Number of hops observed (Header) + Individual occupancy time * Number of hops observed (Payload)


Frequency: 915 MHz; Modulation: d-m6_1523; Power setting: 20				
Individual occupancy time (ms)	Observation period (s)	Number of hops observed	Average time of occupancy (s)	Result
233.0	20	1	0.3347	PASS
101.7	20	1		

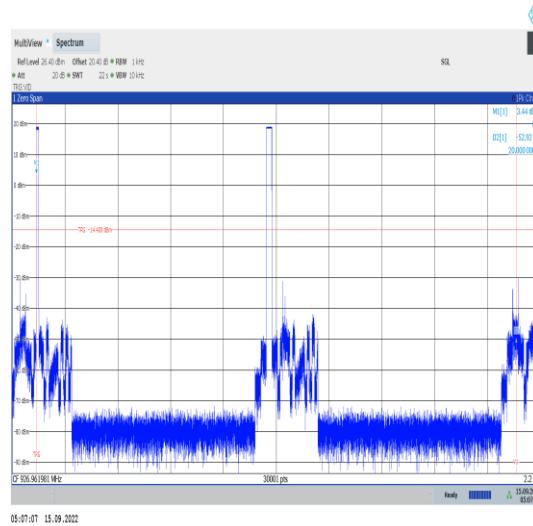

Number of transmissions in 20 seconds

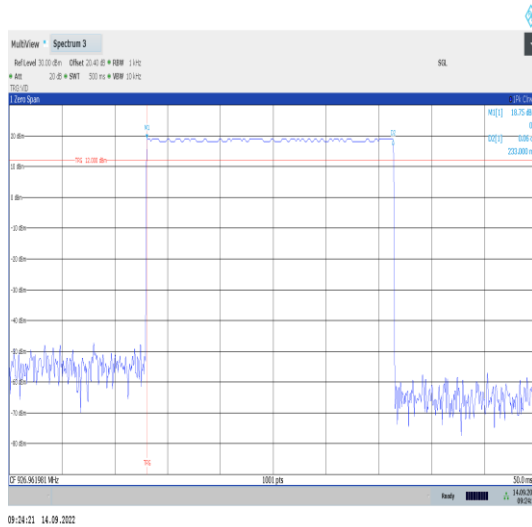

Tx on period – Header

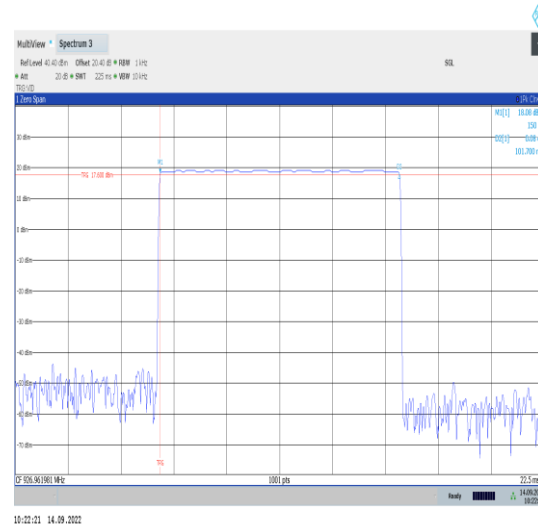

Tx on period - Payload

Note: Average time of occupancy = Individual occupancy time * Number of hops observed (Header) + Individual occupancy time * Number of hops observed (Payload)

15 Maximum peak conducted output power

15.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.5
EUT Channels Measured:	Lower Band Hopping Range
	Low - 902.25095 MHz; High - 903.74899 MHz
	Middle Band Hopping Range
	Low - 914.25095 MHz; High - 915.74899 MHz
EUT Test Modulations:	Upper Band Hopping Range
	Low - 926.25095 MHz; High - 927.74899 MHz
EUT Test Modulations:	Internal pattern generation – hopping disabled
Deviations From Standard:	None
Measurement BW:	2 kHz
Spectrum Analyzer Video BW:	10 kHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)

15.3 Test Limit


- For frequency hopping systems operating in the band 902 to 928 MHz, the maximum peak conducted output power shall not exceed 1 W, and the e.i.r.p. shall not exceed 4 W, if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W, and the e.i.r.p. shall not exceed 1 W, if the hopset uses less than 50 hopping channels.
- For frequency hopping systems operating in the band 2400 to 2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. The e.i.r.p. shall not exceed 4 W.
- For frequency hopping systems operating in the band 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.
- Point-to-point systems in the bands 2400-2483.5 MHz and 5725 to 5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vi Test Setup




15.5 Test Equipment


<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSW 43	U728	2023-04-26
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use

15.6 Test Results

Lower Band Hopping Range; Modulation: d-m4_1523; Power setting: 20					
Channel Frequency (MHz)	Analyzer Level (dBm)	Maximum peak conducted output power (W)	Antenna gain (dBi)	E.I.R.P. (W)	Result
Low - 902.25095	19.12	0.0817	1.75	0.1222	PASS
High - 903.74899	19.10	0.0813	1.75	0.1216	PASS

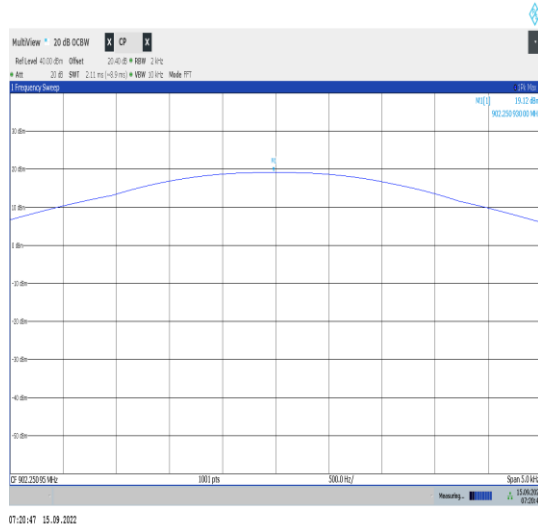


Hopping Channel - 902.25095 MHz

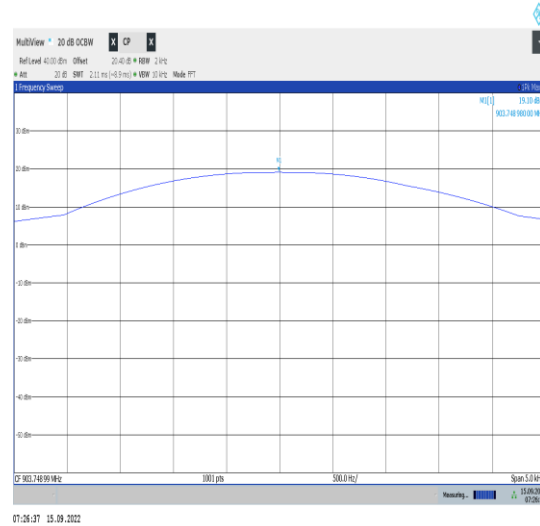


Hopping Channel - 903.74899 MHz

Middle Band Hopping Range; Modulation: d-m4_1523; Power setting: 20					
Channel Frequency (MHz)	Analyzer Level (dBm)	Maximum peak conducted output power (W)	Antenna gain (dBi)	E.I.R.P. (W)	Result
Low - 903.74899	18.96	0.0787	1.75	0.1178	PASS
High - 903.74899	18.95	0.0785	1.75	0.1175	PASS

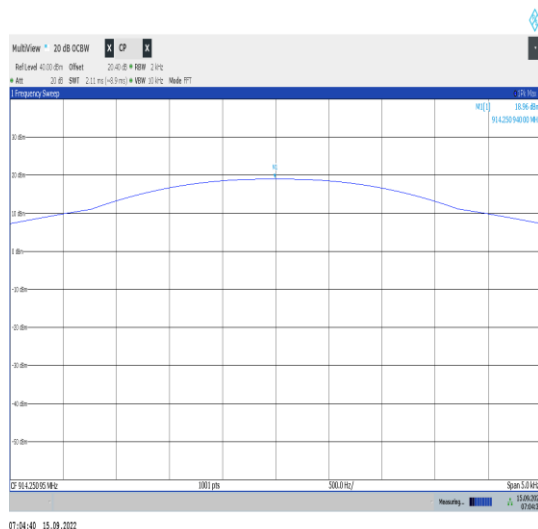


Hopping Channel - 903.74899 MHz

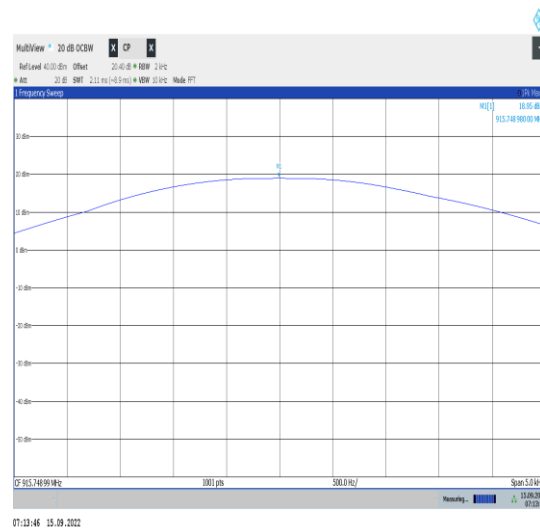


Hopping Channel - 915.74899 MHz

Upper Band Hopping Range; Modulation: d-m4_1523; Power setting: 20					
Channel Frequency (MHz)	Analyzer Level (dBm)	Maximum peak conducted output power (W)	Antenna gain (dBi)	E.I.R.P. (W)	Result
Low - 926.25095	18.81	0.0760	1.75	0.1138	PASS
High - 927.74899	18.79	0.0757	1.75	0.1132	PASS

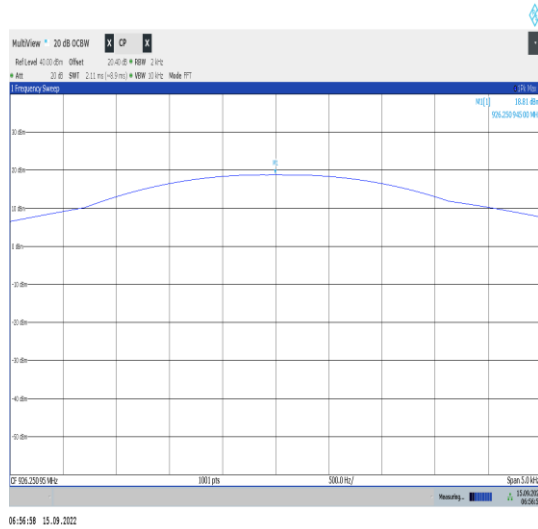

Hopping Channel - 926.25095 MHz

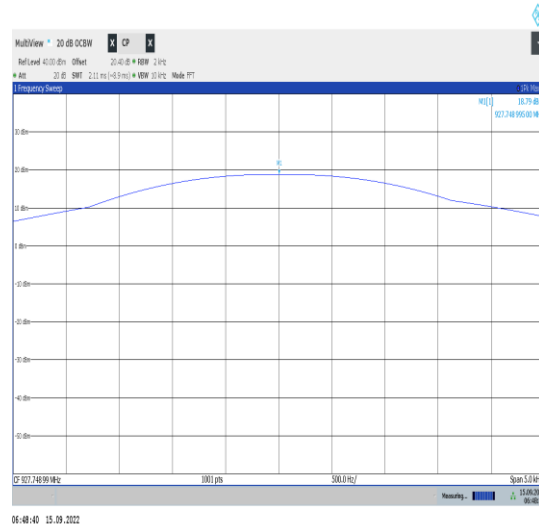

Hopping Channel - 927.74899 MHz

16 Occupied Bandwidth

16.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.9
EUT Frequencies Measured:	Lower Band Hopping Range Low - 902.25095 MHz; High - 903.74899 MHz
	Middle Band Hopping Range Low - 914.25095 MHz; High - 915.74899 MHz
	Upper Band Hopping Range Low - 926.25095 MHz; High - 927.74899 MHz
EUT Test Modulations:	Internal pattern generation – hopping disabled
Deviations From Standard:	None
Measurement BW:	10 Hz
(requirement: 1 % to 5 % OBW)	
Spectrum Analyzer Video BW:	100 Hz
(requirement at least 3x RBW)	
Measurement Span:	1.3 kHz
(requirement 2 to 5 times OBW)	
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V dc	4.5 V dc (as declared)


16.3 Test Limit

- For frequency hopping systems in the band 902 to 928 MHz: The maximum allowed -20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the band 5725 to 5850 MHz: The maximum -20 dB bandwidth of the hopping channel shall be 1 MHz

16.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure vii Test Setup**16.5 Test Equipment**


<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU46	REF910	2022-12-22
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use

16.6 Test Results – 20 dB Bandwidth

Lower Band Hopping Range; Modulation: d-m4_1523; Power Setting: 20				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	20dB Bandwidth (kHz)	Result
Low - 902.25095	902.250644	902.251237	0.593	PASS
High - 903.74899	903.748681	903.749289	0.608	PASS




Hopping Channel - 903.74899 MHz

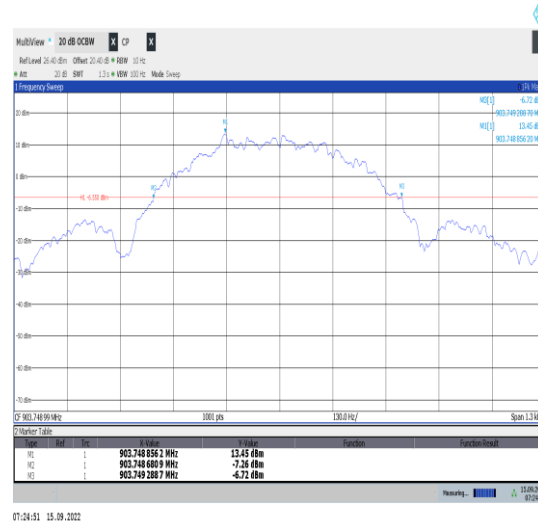


Hopping Channel - 903.74899 MHz

Middle Band Hopping Range; Modulation: d-m4_1523; Power Setting: 20				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	20dB Bandwidth (kHz)	Result
Low - 903.74899	914.250647	914.251242	0.595	PASS
High - 903.74899	915.748695	915.749293	0.597	PASS

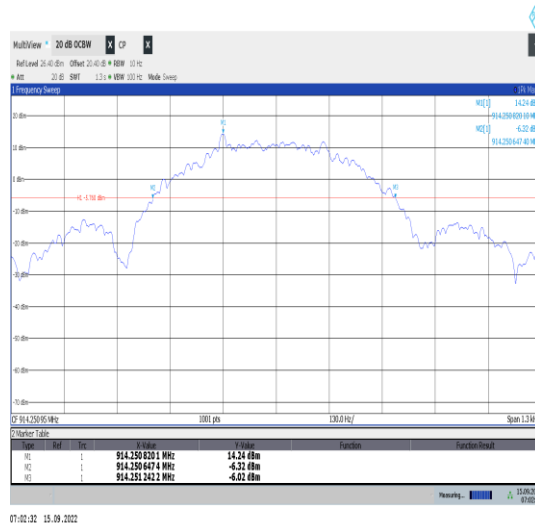


Hopping Channel - 903.74899 MHz

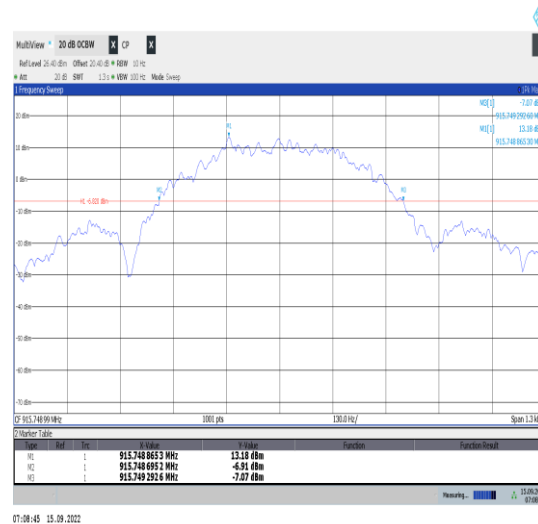


Hopping Channel - 903.74899 MHz

Upper Band Hopping Range; Modulation: d-m4_1523; Power Setting: 20				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	20dB Bandwidth (kHz)	Result
Low - 926.25095	926.250653	926.251247	0.595	PASS
High - 927.74899	927.748703	927.749297	0.594	PASS

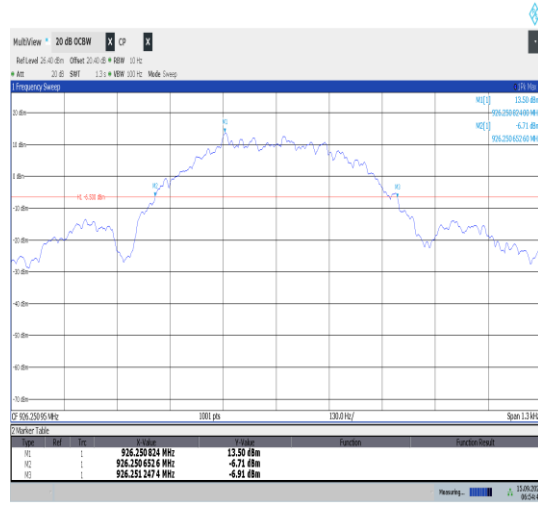

06:54:42 15.09.2022

Hopping Channel - 926.25095 MHz

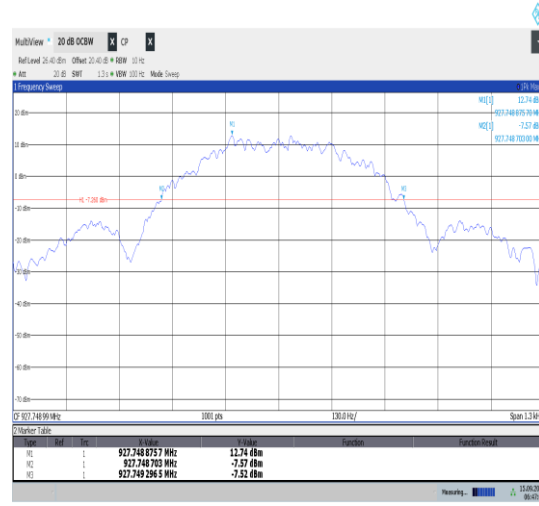

06:47:05 15.09.2022

Hopping Channel - 927.74899 MHz

17 Out-of-band and conducted spurious emissions

17.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

17.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.8.8
EUT Channels Measured:	Lower Band Hopping Range
	Low - 902.25095 MHz; High - 903.74899 MHz
	Middle Band Hopping Range
	Low - 914.25095 MHz; High - 915.74899 MHz
EUT Test Modulations:	Upper Band Hopping Range
	Low - 926.25095 MHz; High - 927.74899 MHz
EUT Test Modulations:	Internal pattern generation – hopping enabled / disabled
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	9 kHz to 10 GHz

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 46 % RH	20 % RH to 75 % RH (as declared)
Supply: 4.5 V dc	4.5 V dc (as declared)

17.3 Test Limits


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

17.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure viii Test Setup




17.5 Test Equipment

<i>Equipment Type</i>	<i>Manufacturer</i>	<i>Equipment Description</i>	<i>Element No</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSW 43	U728	2023-04-26
Attenuator	AtlanTecRF Microwave	20dB SMA Attenuator	U632	Cal in use

17.6 Test Results


Lower Band Hopping Range; Modulation: d-m4_1523; Power setting: 20

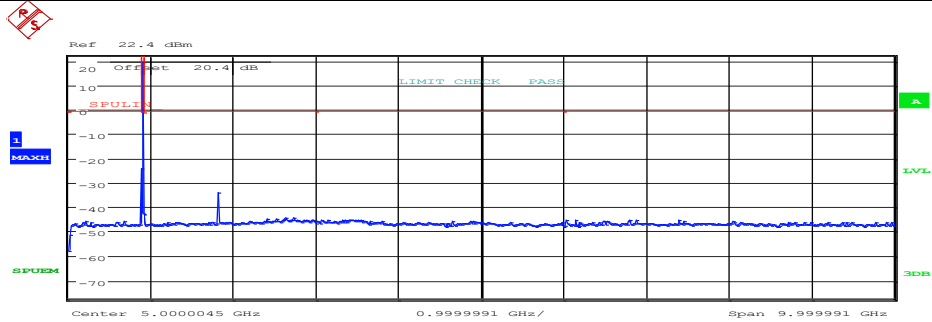

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
9.000 k	150.000 k	1.00 k	11.711538 k	-57.91	-57.16
150.000 k	30.000 M	10.00 k	152.985000 k	-51.76	-51.01
30.000 M	902.000 M	100.00 k	901.912800 M	-32.10	-31.35
902.000 M	928.000 M	100.00 k	902.252200 M	19.22	-10.78
928.000 M	3.000 G	100.00 k	1.804456 G	-34.27	-33.52
3.000 G	6.000 G	100.00 k	3.067200 G	-45.25	-44.50
6.000 G	10.000 G	100.00 k	6.790000 G	-45.28	-44.53

Date: 14.SEP.2022 13:36:44


Hopping channel low - 902.25095 MHz

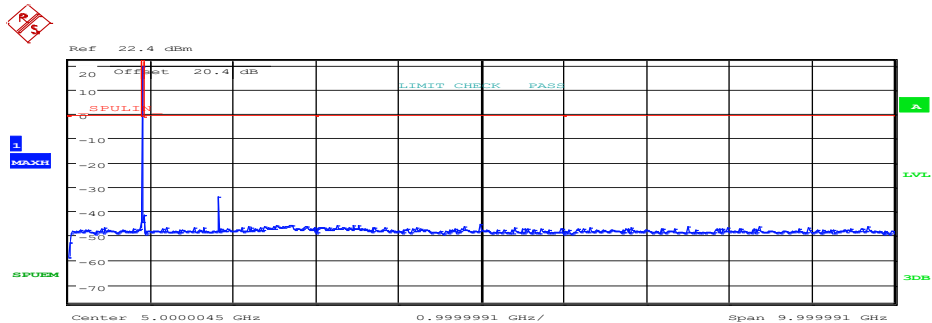


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
9.000 k	150.000 k	1.00 k	9.000000 k	-58.99	-58.24
150.000 k	30.000 M	10.00 k	173.880000 k	-52.92	-52.17
30.000 M	902.000 M	100.00 k	901.912800 M	-44.38	-43.63
902.000 M	928.000 M	100.00 k	903.749800 M	19.23	-10.77
928.000 M	3.000 G	100.00 k	1.807564 G	-34.39	-33.64
3.000 G	6.000 G	100.00 k	4.990800 G	-45.30	-44.55
6.000 G	10.000 G	100.00 k	9.672000 G	-46.32	-45.57

Date: 14.SEP.2022 14:53:18

Hopping channel high - 903.74899 MHz

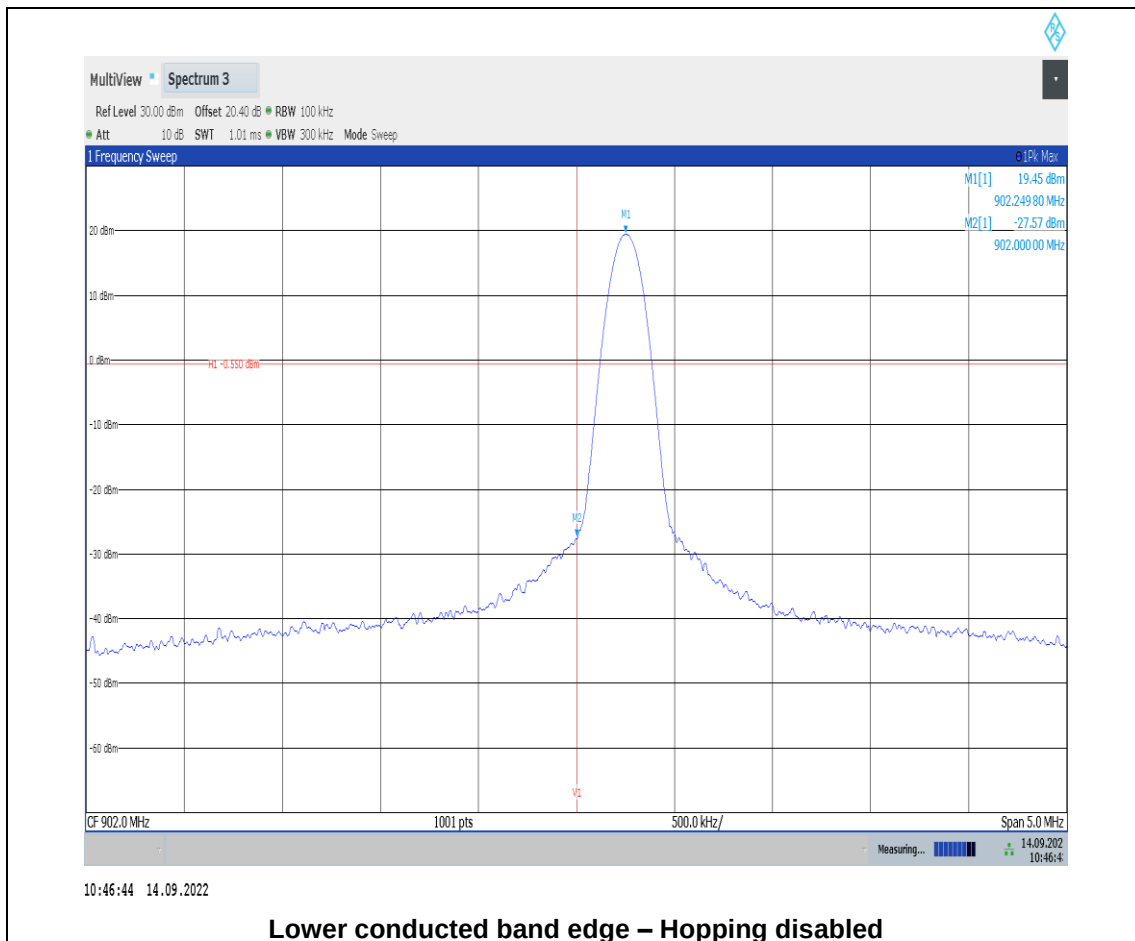


Middle Band Hopping Range; Modulation: d-m4_1523; Power setting: 20

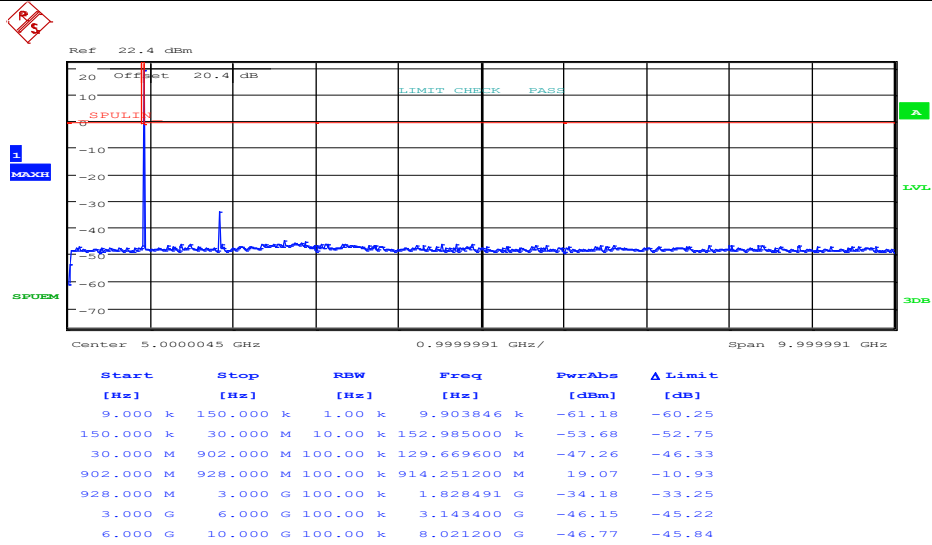

Date: 14.SEP.2022 14:57:10


Hopping channel low - 914.25095 MHz

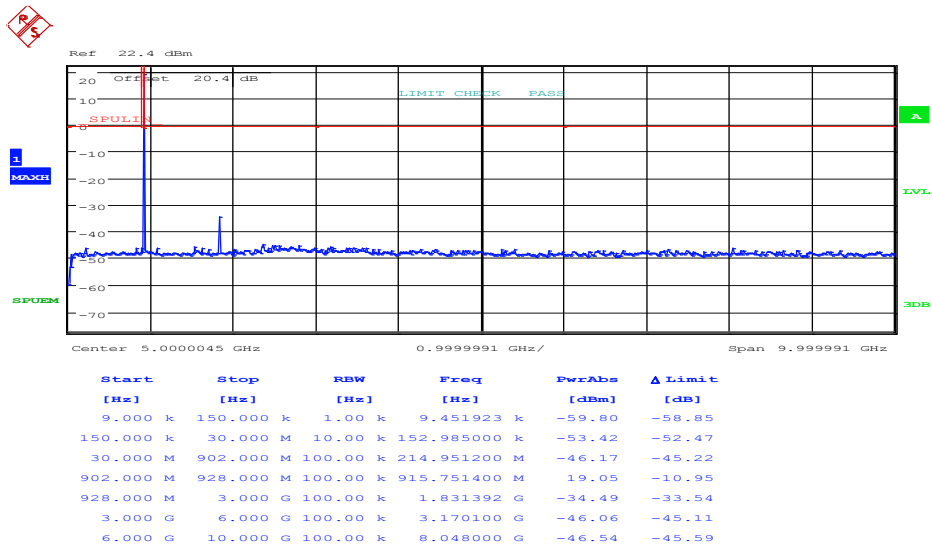

Date: 14.SEP.2022 15:00:02


Hopping channel high - 915.74899 MHz

Upper Band Hopping range; Modulation: d-m4_1523; Power setting: 20

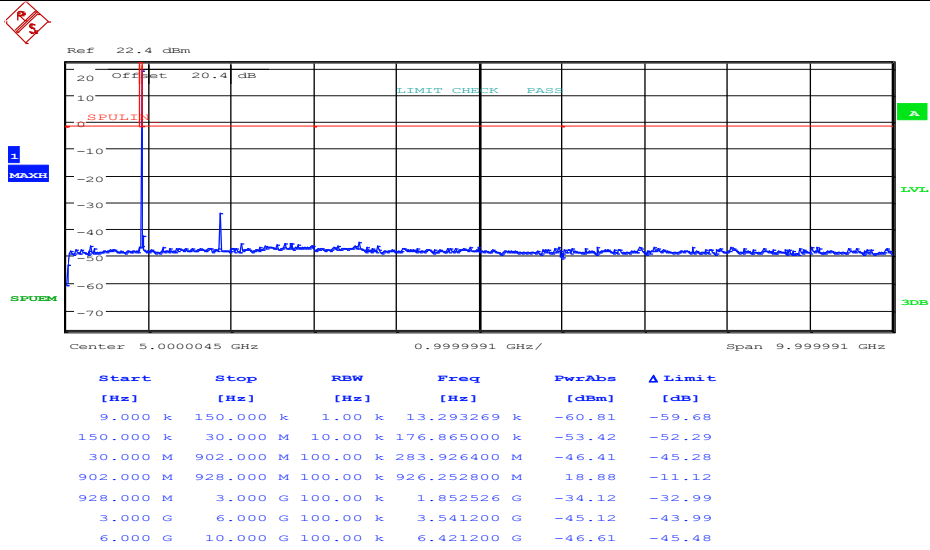


Date: 14.SEP.2022 15:07:56

Hopping channel low - 926.25095 MHz

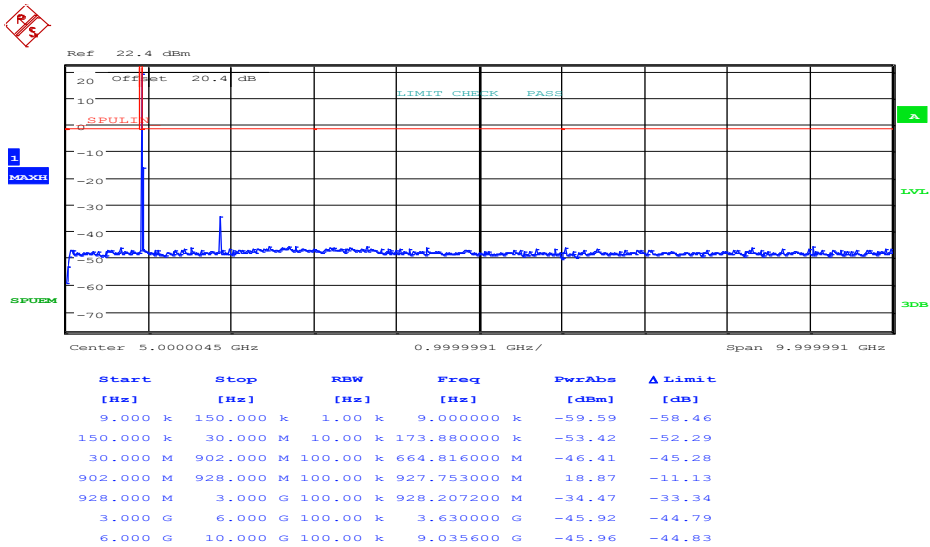


Date: 14.SEP.2022 15:05:02

Hopping channel high - 927.74899 MHz

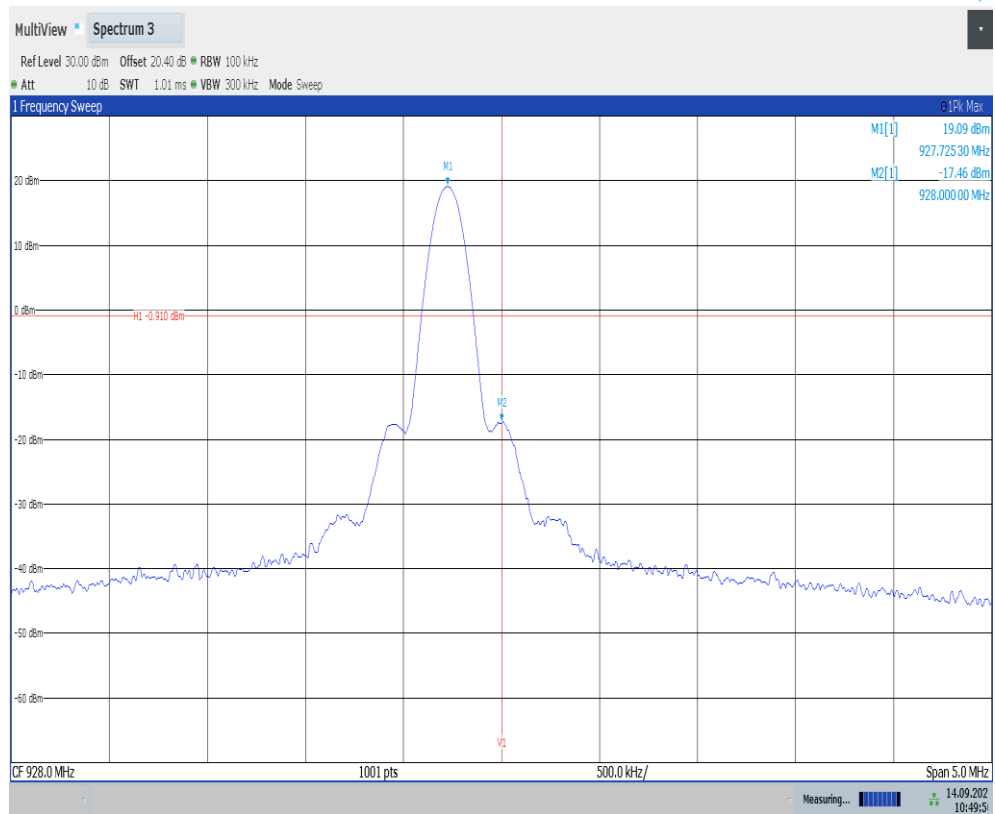


10:49:50 14.09.2022

Upper conducted band edge – Hopping disabled

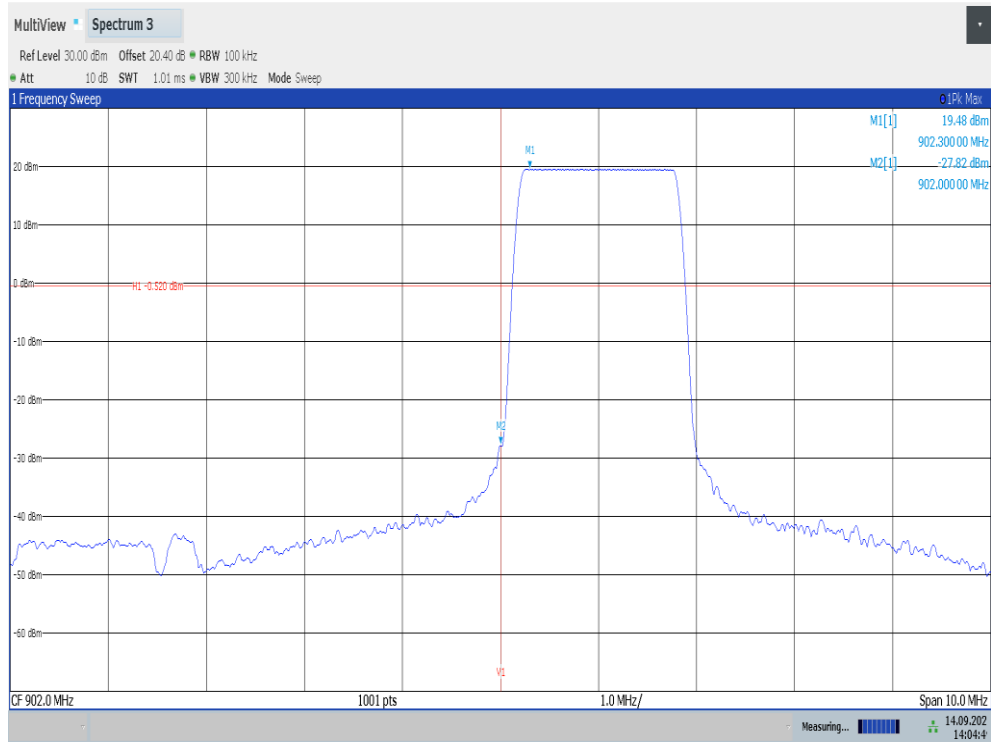

14:04:50 14.09.2022

Lower conducted band edge – All hopping

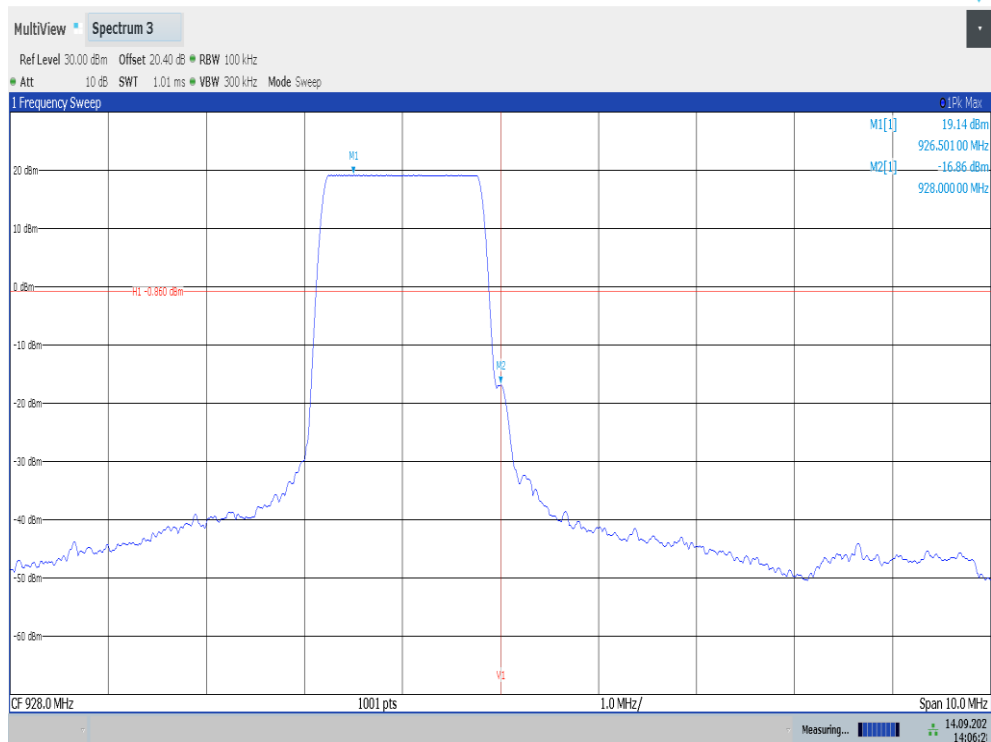

14:06:29 14.09.2022

Upper conducted band edge – All hopping

18 Measurement Uncertainty

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence where no required test level exists.

Test/Measurement	Budget Number	MU
Conducted RF Power, Power Spectral Density, Adjacent Channel Power and Spurious emissions		
Absolute RF power (via antenna connector) Dare RPR3006W Power Head	MU4001	0.9 dB
Carrier Power and PSD - Spectrum Analysers	MU4004	0.9 dB
Adjacent Channel Power	MU4002	1.9 dB
Transmitter conducted spurious emissions	MU4041	0.9 dB
Conducted power and spurious emissions 40 GHz to 50 GHz	MU4042	2.4 dB
Conducted power and spurious emissions 50 GHz to 75 GHz	MU4043	2.5 dB
Conducted power and spurious emissions 75 GHz to 110 GHz	MU4044	2.4 dB
Radiated RF Power and Spurious emissions ERP and EIRP		
Effective Radiated Power Reverb Chamber	MU4020	3.7 dB
Effective Radiated Power	MU4021	4.7 dB
TRP Emissions 30 MHz to 1 GHz using CBL6111 or CBL6112 Bilog Antenna	MU4046	5.3 dB
TRP Emissions 1 GHz to 18 GHz using HL050 Log Periodic Antenna	MU4047	5.1 dB
TRP Emissions 18 GHz to 26.5 GHz using Standard Gain Horn	MU4048	2.7 dB
TRP Emissions 26.5 GHz to 40 GHz using Standard Gain Horn	MU4049	2.7 dB
Spurious Emissions Electric and Magnetic Field		
Radiated Spurious Emissions 30 MHz to 1 GHz	MU4037	4.7 dB
Radiated Spurious Emissions 1-18 GHz	MU4032	4.5 dB
E Field Emissions 18GHz to 26 GHz	MU4024	3.2 dB
E Field Emissions 26GHz to 40 GHz	MU4025	3.3 dB
E Field Emissions 40GHz to 50 GHz	MU4026	3.5 dB
E Field Emissions 50GHz to 75 GHz	MU4027	3.6 dB
E Field Emissions 75GHz to 110 GHz	MU4028	3.6 dB
Radiated Magnetic Field Emissions	MU4031	2.3 dB
Frequency Measurements		
Frequency Deviation	MU4022	0.316 kHz
Frequency error using CMTA test set	MU4023	113.441 Hz
Frequency error using GPS locked frequency source	MU4045	0.0413 ppm
Bandwidth/Spectral Mask Measurements		
Channel Bandwidth	MU4005	3.87 %
Transmitter Mask Amplitude	MU4039	1.3 dB
Transmitter Mask Frequency	MU4040	2.59 %
Time Domain Measurements		
Transmission Time	MU4038	4.40 %
Dynamic Frequency Selection (DFS) Parameters		
DFS Analyser - Measurement Time	MU4006	679 μ s
DFS Generator - Frequency Error	MU4007	92 Hz
DFS Threshold Conducted	MU4008	1.3 dB
DFS Threshold Radiated	MU4009	3.2 dB

Test/Measurement	Budget Number	MU
Receiver Parameters		
EN300328 Receiver Blocking	MU4010	1.1 dB
EN301893 Receiver Blocking	MU4011	1.1 dB
EN303340 Adjacent Channel Selectivity	MU4012	1.1 dB
EN303340 Overloading	MU4013	1.1 dB
EN303340 Receiver Blocking	MU4014	1.1 dB
EN303340 Receiver Sensitivity	MU4015	0.9 dB
EN303372-1 Image Rejection	MU4016	1.4 dB
EN303372-1 Receiver Blocking	MU4017	1.1 dB
EN303372-2 Adjacent Channel Selectivity	MU4018	1.1 dB
EN303372-2 Dynamic Range	MU4019	0.9 dB
Receiver Blocking Talk Mode Conducted	MU4033	1.2 dB
Receiver Blocking Talk Mode- radiated	MU4034	3.4 dB
Rx Blocking, listen mode, blocking level	MU4035	3.2 dB
Rx Blocking, listen mode, radiated Threshold Measurement	MU4036	3.4 dB
Adjacent Sub Band Selectivity	MU4003	4.2 dB

19 RF Exposure

General SAR test reduction & exclusion guidance

KDB 447498

Section 4.3 General SAR test reduction and exclusion guidance

For Standalone SAR exclusion consideration, when SAR Exclusion Threshold requirement in KDB 447498 is satisfied, standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

The SAR Test Exclusion Threshold for frequencies in the range 100 MHz to 6 GHz, and for test separation distance of ≤ 50 mm, is determined as follows.

$$\text{SAR Exclusion Threshold (SARET)} = (\text{NT} \times \text{TSD}_A) / \sqrt{f_{\text{GHz}}}$$

Where,

NT = Numeric Threshold (3.0 for 1-g SAR and 7.5 for 10-g SAR)

TSD_A = Minimum Test separation distance or 50 mm (whichever is lower)

f_{GHz} = Transmit frequency in GHz

<i>Channel Frequency (MHz)</i>	<i>Maximum Conducted Power (mW)</i>	<i>SAR Exclusion Threshold at 27 mm (mW)</i>	<i>SAR Evaluation</i>
902	85.1	85.3	Not Required
915	81.3	84.7	Not Required
927	77.6	84.1	Not Required

Therefore standalone SAR evaluation for general population exposure conditions by measurement or numerical simulation is not required.

Note: Evaluation based on maximum conducted power.

MPE Calculation

Prediction of MPE limit at a given distance

For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20 cm separation specified under FCC rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than the power density limit, as required under FCC rules.

Equation from IEEE C95.1

$$S = \frac{EIRP}{4\pi R^2} \text{ re - arranged } R = \sqrt{\frac{EIRP}{S 4\pi}}$$

Where:

S = power density

R = distance to the centre of radiation of the antenna

EIRP = EUT Maximum power

Result

<i>Channel Frequency (MHz)</i>	<i>EIRP (mW)</i>	<i>Power density limit (S) (mW/cm²)</i>	<i>Distance (R) cm required to be less than the power density limit</i>
902	126.5	0.6	4.1
915	122.2	0.6	4.0
927	116.9	0.6	3.9

Note: Evaluation based on maximum conducted power.

21 Appendix A

21.1 Antenna Information

RF Parameter

Parameter	868/915 band*		GNSS	S-Band	
Frequency Range (MHz)	862-870	902-928	1500-1700	1950-2250	
Typical Frequency (MHz)	870	915	1575	2000 (up)	2180 (down)
Peak Total Gain (dBi)**	1.69	1.75	1.31	2.68	2.78
Peak RHCP Gain (dBic)**	1.49	1.62	0.99	2.51	1.53
Average Gain (dBi)**	-2.3	-2.2	-2.74	-1.77	-2.85
Total Efficiency	< 49%	< 50%	< 37%	< 46%	< 45%
Axial Ratio (dB)	< 6	< 6	< 6	< 6	< 6
Reflection coefficient (dB)	< -10	< -10	< -6	< -6	< -6
Peak EIRP (dBm)***	23.69	23.75	N/A	26.51	N/A

* Model variant 868: LS300-868-A, Model variant 915: LS300-915-A

** Values for "Typical Frequency"

*** Hardware maximum. Transmissions will be limited in software according to regional regulations.

Antenna Type

All antennas are integrated RHCP patch antennas. The antennas will be fixed, i.e. not replaceable by other antennas.