

FCC Test Report

Report No: WD-RF-R-220226-C0

Product Name : Action Camera
Model Name : LVPRO2
Series Model Name : LVPRO2 Plus
FCC ID : 2A8BT-LVPRO2
Applicant : Live View Sports, Inc.
Received Date : Jun. 17, 2022
Tested Date : Jul. 27, 2022 ~ Aug. 09, 2022
Applicable Standard : 47 CFR FCC Part 15, Subpart C (Section 15.247)
KDB 558074 D01 DTS Meas. Guidance v05
ANSI C63.10 : 2013



Wendell Industrial Co., Ltd
Wendell EMC & RF Laboratory

Caution:

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

Test Report

Issued Date: August 10, 2022

Project No.: 22Q061702

Product Name	Action Camera
Trade Name	LIVEVIEWSPORTS
Model Name	LVPRO2
Series Model Name	LVPRO2 Plus
FCC ID	2A8BT-LVPRO2
Applicant	Live View Sports, Inc.
Manufacturer	GWAN KUEN TECHNOLOGY CO., LTD.
EUT Rated Voltage	USB Power 5V / Battery 3.7V
EUT Test Voltage	USB Power 5V
EUT Supports Radios Application	WLAN 802.11b/g WLAN 802.11n (HT20/HT40) Bluetooth BR/EDR/LE
Applicable Standard	47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 DTS Meas. Guidance v05 ANSI C63.10 : 2013
Output Power	19.28dBm
Test Result	Complied

Documented :




(Specialist / Emma Lu)

Technical Engineer :



(Section Manager / Jack Chang)

Approved :



(Project Manager / Gary Wu)

Table of Contents

Document Revision History	5
Summary of Test Result	6
1 Generation Information	7
1.1 Applicant	7
1.2 Manufacturer	7
1.3 Description of Equipment under Test	7
1.4 Test Mode Applicability And Tested Channel Detail	10
1.5 Configuration of Tested System	12
1.6 EUT Exercise Software	12
1.7 Tested System Details	13
1.8 Test Facility	14
1.9 Measurement Uncertainty	15
1.10 List of Test Equipment	16
2 Test Result	19
2.1 Antenna Requirement	19
2.1.1 Applicable Standard	19
2.1.2 Antenna Connected Construction	19
2.1.3 Antenna Gain	20
2.2 Peak Output Power Measurement	21
2.2.1 Limit	21
2.2.2 Test Setup	21
2.2.3 Test Procedure	21
2.2.4 Test Result	22
2.3 6dB Bandwidth Measurement	24
2.3.1 Limit	24
2.3.2 Test Setup	24
2.3.3 Test Procedure	24
2.3.4 Test Result	25
2.4 Power Spectral Density Measurement	29
2.4.1 Limit	29
2.4.2 Test Setup	29
2.4.3 Test Procedure	29
2.4.4 Test Result	30
2.5 Conducted Band Edges and Spurious Emission Measurement	34
2.5.1 Limit	34
2.5.2 Test Setup	34
2.5.3 Test Procedure	34
2.5.4 Test Result	35
2.6 Radiated Band Edges and Spurious Emission Measurement	47
2.6.1 Limit	47
2.6.2 Test Setup	48
2.6.3 Test Procedure	49
2.6.4 Duty Cycle	50
2.6.5 Test Result of Radiated Band Edge Measurement	50
2.6.6 Test Result of Radiated Spurious Emission Measurement	67
2.7 AC Conducted Emissions Measurement	94

2.7.1	Limit	94
2.7.2	Test Setup.....	94
2.7.3	Test Procedure.....	95
2.7.4	Test Result	96

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

Document Revision History

Report No.	Issue date	Description
WD-RF-R-220226-C0	August 10, 2022	Initial report

Summary of Test Result

Ref. Std. Clause	Test Items	Result
15.203 15.247(C)	Antenna Requirement	Pass
15.247(b)	Peak Output Power	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(e)	Power Spectral Density	Pass
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	Pass
15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass
15.207	AC Conducted Emission	Pass

1 Generation Information

1.1 Applicant

Live View Sports, Inc.
10061 Bubb Road, #200, Cupertino, CA 95014

1.2 Manufacturer

GWAN KUEN TECHNOLOGY CO., LTD.
No. 105, Liye Rd., Zhonghe Dist., New Taipei City 235, Taiwan

1.3 Description of Equipment under Test

Product Name	Action Camera
Model No.	LVPRO2
Series Model Name	LVPRO2 Plus
Model Difference	LVPRO2: AP mode only. LVPRO2 PLUS: AP mode or Client mode. This series only has software differences, everything else is the same.
FCC ID	2A8BT-LVPRO2
Frequency Range	802.11b/g/n-20MHz: 2412~2462MHz 802.11n-40MHz: 2422~2452MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Rate	802.11b: 1-11Mbps, 802.11g: 6-54Mbps, 802.11n: up to 150Mbps
Channel separation	802.11b/g/n: 5 MHz
Type of Modulation	802.11b:DSSS (DBPSK, DQPSK, CCK) 802.11g/n:OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Information	Refer to the table "Antenna List"
EUT Supports Radios Application	WLAN 802.11b/g WLAN 802.11n (HT20/HT40) Bluetooth BR/EDR/LE
EUT Rated Voltage	USB Power 5V / Battery 3.7V
EUT Test Voltage	USB Power 5V

Antenna List

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	Liteconn Co.,Ltd	520101-7040-23R	PCB Antenna	2.44 dBi for 2.4GHz

Remark: The antenna of EUT is conforming to FCC 15.203

Channel List

802.11b/g/n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	--	--
02	2417	--	--
03	2422	03	2422
04	2427	04	2427
05	2432	05	2432
06	2437	06	2437
07	2442	07	2442
08	2447	08	2447
09	2452	09	2452
10	2457	--	--
11	2462	--	--

Test Frequencies in each operating band

Frequency range over which the device operates in each operating band (Note 1)	Number of test frequencies required	Location of test frequencies inside the operating frequency range (Note 1,2)
≤ 1 MHz	1	near center
> 1 MHz and ≤ 10 MHz	2	1 near high end, 1 near low end
> 10 MHz	3	1 near high end, 1 near center, and 1 near low end

Note 1: The frequency range over which the device operates in a given operating band is the difference between the highest and lowest frequencies on which the device can be tuned within that given operating band. The frequency range can be smaller than or equal to the operating band, but cannot be greater than the operating band.

Note 2: In the third column of table 1, “near” means as close as possible to or at the center / low end / high end of the frequency range over which the device operates.

Firmware / Software Version

1	Product Name	Action Camera
2	Model No.	LVPRO2
3	Test SW Version	Putty Version 0.63.0.0
4	RF power setting in TEST SW	☐ RF power setting was not able to alter during testing. ☒ RF power setting was able to alter during testing. (See the following table)

Parameters of test software setting

Type of Modulation	Channel	Frequency (MHz)	Set Value
802.11b	01	2412	43
	06	2437	41
	11	2462	46
802.11g	01	2412	39
	06	2437	39
	11	2462	39
802.11n HT20	01	2412	36
	06	2437	36
	11	2462	36
802.11n HT40	03	2422	36
	06	2437	36
	09	2452	36

1.4 Test Mode Applicability And Tested Channel Detail

1. This device is a Action Camera with a built-in Wi-Fi and Bluetooth transceiver.
2. These tests were performed on a sample of equipment to demonstrate compliance with 47 CFR FCC Part 15, Subpart C (Section 15.247).
3. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.
4. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is recorded in the report:

EUT Configure Mode	RE < 1G	RE ≥ 1G	ACM	ACP	Description
--	☒	☒	☒	☐	Transmit WIFI
--	☐	☐	☐	☒	Normal Link

Note : RE<1G: Radiated Emission below 1GHz RE≥1G: Radiated Emission above 1GHz
ACM: Antenna Port Conducted Measurement ACP: AC Power Line Conducted Emission

Following channel(s) was (were) selected for the final test as listed below:

Radiated Spurious Emission Measurement(Below 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	802.11b	1 ~ 11	11	DSSS	1

Radiated Spurious Emission Measurement(Above 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	802.11b	1 ~ 11	01, 06, 11	DSSS	1
--	802.11g	1 ~ 11	01, 06, 11	OFDM	6
--	802.11n HT20	1 ~ 11	01, 06, 11	OFDM	6.5
--	802.11n HT40	3 ~ 9	03, 06, 09	OFDM	13.5

Radiated Band Edge Emission Measurement(Above 1GHz):

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	802.11b	1 ~ 11	01, 11	DSSS	1
--	802.11g	1 ~ 11	01, 11	OFDM	6
--	802.11n HT20	1 ~ 11	01, 11	OFDM	6.5
--	802.11n HT40	3 ~ 9	03, 09	OFDM	13.5

Peak Output Power, 6dB Bandwidth, Power Spectral Density, Conducted Spurious Emission:

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	802.11b	1 ~ 11	01, 06, 11	DSSS	1
--	802.11g	1 ~ 11	01, 06, 11	OFDM	6
--	802.11n HT20	1 ~ 11	01, 06, 11	OFDM	6.5
--	802.11n HT40	3 ~ 9	03, 06, 09	OFDM	13.5

Conducted Band Edges:


EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	802.11b	1 ~ 11	01, 11	DSSS	1
--	802.11g	1 ~ 11	01, 11	OFDM	6
--	802.11n HT20	1 ~ 11	01, 11	OFDM	6.5
--	802.11n HT40	3 ~ 9	03, 09	OFDM	13.5

AC Conducted Emission:

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
--	802.11b	1 ~ 11	06	DSSS	1


1.5 Configuration of Tested System

Radiation

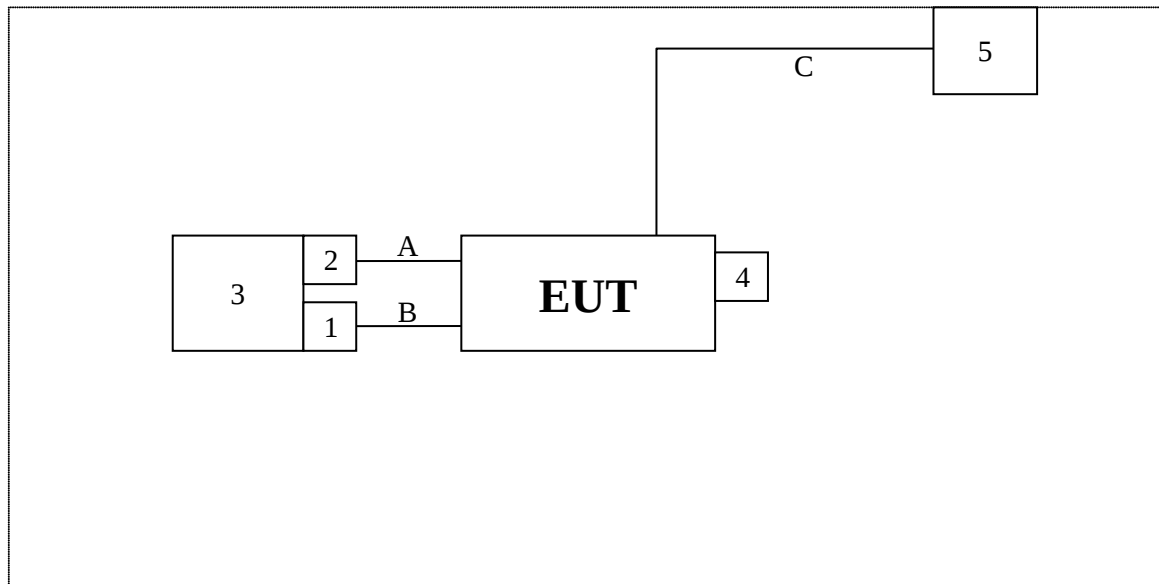

Test Table

AC Conduction

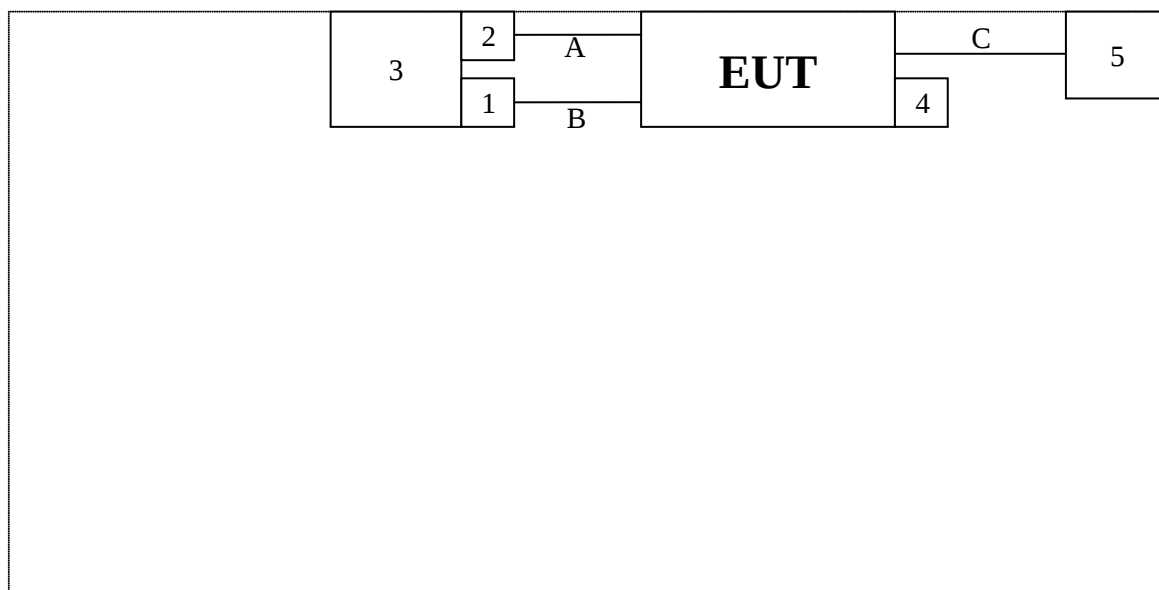

Test Table

1.6 EUT Exercise Software

1. Setup the EUT as shown in Section 1.5
2. Execute software "Putty Version 0.63.0.0".
3. Configure the test mode, the test channel, and the data rate.
4. Press "OK" to start the continuous transmit.
5. Verify that the EUT works properly.

1.7 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Fixture	AISU	CP2102	N/A	N/A
2	Fixture	AISU	CP2102	N/A	N/A
3	Notebook PC	acer	N16Q1	NXVF4TA023742254147600	Non-shielded, 1 Core, 0.8m
4	Micro SD Card	Jolanyee	JL-TFSD32GB-ATM-S	N/A	N/A
5	Adapter	XIAOMI	AD16TW	N/A	N/A

No.	Signal Cable Type	Signal cable Description
A	Data Cable	Non-shielded, Non-Core, 1m
B	Data Cable	Non-shielded, Non-Core, 0.05m
C	USB Cable	Non-shielded, Non-Core, 0.5m

1.8 Test Facility

Items	Required (IEC 60068-1)
Temperature (°C)	15-35
Humidity (% RH)	25-75
Barometric pressure (mbar)	860-1060

Description: Accredited by TAF
Accredited Number: 2965

Issued by: Wendell Industrial Co., Ltd

Lab Address: 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,
New Taipei City 23145, Taiwan R.O.C

Test Lab: Wendell EMC & RF Laboratory

Test Location: No. 119, Wugong 3rd Rd., Wugu Dist.,
New Taipei City 248, Taiwan (R.O.C.)

Designation Number: TW0025

Test Firm Registration Number: 665221

1.9 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Condition	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	2.64 dB
Radiated Emission	0.009 ~ 30 MHz	± 4.2 dB
	30 ~ 1000 MHz	± 3.9 dB
	1000 ~ 18000 MHz	± 4.1 dB
	18000 ~ 40000 MHz	± 3.9 dB
RF Power, Conducted	Conducted Measuring	± 0.5 dB
Occupied Bandwidth	Conducted Measuring	± 2.4 %
Power Density	Conducted Measuring	± 1.7 dB
Duty Cycle and Dwell Time	Conducted Measuring	± 1.3 %
Conducted Unwanted Emission Strength	Conducted Measuring	± 1.8 dB
DC Power Supply	--	± 3.2 %
Temperature	--	± 1.1 °C
Humidity	--	± 3.4 %

Note: Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

1.10 List of Test Equipment

For Conducted measurements / W08-Conducted Measurement

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ Spectrum analyzer	Keysight	N9010A	SG50420005	2021/08/09	2022/08/08
✓ Wideband Peak Power Meter	Anritsu	ML2495A	1733007	2021/09/07	2022/09/06
✓ Pulse Power Sensor + Precision Adaptor	Anritsu	MA2411B	1726022	2021/09/07	2022/09/06
Temperature Chamber	TAICHY	MHK-225LK	1061121	2022/04/22	2023/04/21
Wireless Connectivity Tester	R&S	CMW270	101307	2022/05/23	2023/05/22
✓ Attenuator	MVE	MVE2211-10	CT-9-056	2021/08/18	2022/08/17
Attenuator	MVE	MVE2211-20	CT-9-057	2021/08/18	2022/08/17
Attenuator	MVE	MVE2211-30	CT-9-058	2021/08/18	2022/08/17
Power Divider	MVE	MVE8546	170826003	2021/08/18	2022/08/17
Power Splitter	MVE	MVE8547	170302047	2021/08/18	2022/08/17
DC Power Supply	GW INSTEK	GPC-3060D	GER817636	2021/08/19	2022/08/18

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.

For AC Conduction measurements / W08-CE

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Test Receiver	R&S	ESR3	102309	2022/6/15	2023/6/14
✓	2-Line V-Network LISN	R&S	ENV216	101185	2022/6/20	2023/6/19
✓	LISN	SCHWARZBECK	NSLK 8127RC	05028	2022/6/20	2023/6/19
✓	Transient Limiter	EM Electronics Corporation	EM-7600	857	2022/6/20	2023/6/19
✓	50ohm Cable	EMCI	EMCCFD300-BM-BM- 5000	170612	2022/6/17	2023/6/16
✓	50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2022/6/17	2023/6/16

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

For Radiated measurements / W08-996-2

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓	EMI Receiver	Keysight	N9038A	MY51210173	2021/08/20	2022/08/19
✓	Spectrum Analyzer	Keysight	N9010A	MY52220228	2021/08/24	2022/08/23
✓	Loop Antenna	EMCI	LPA600	277	2021/09/02	2022/09/01
✓	TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 1421	2021/08/11	2022/08/10
✓	Horn Antenna	Schwarzbeck	BBHA 9120D	01767	2021/08/11	2022/08/10
✓	Horn Antenna	Schwarzbeck	BBHA 9170	703	2021/12/17	2022/12/16
✓	Pre-Amplifier	EM	EMC330	060774	2021/08/24	2022/08/23
✓	Pre-Amplifier	EMEC	EM01G18G	060648	2021/08/24	2022/08/23
✓	Pre-Amplifier	JPT	JPA0118-55-303K	1910001800055003	2021/08/25	2022/08/24
✓	Pre-Amplifier	EMCI	EMC184045SE	980515	2021/08/24	2022/08/23
✓	Cable	EMEC	EM-CB400	105060103	2021/08/24	2022/08/23
✓	Cable	EMEC	EM-CB400	105060102	2021/08/24	2022/08/23
✓	Cable	EMEC	EM-CB400	105060101	2021/08/24	2022/08/23
✓	RF Cable	HUBER+SUHNER	SF102	MY2752/2	2021/08/24	2022/08/23
✓	Cable	MVE	280280.LL266.1200	B60028C	2021/08/24	2022/08/23
✓	RF Cable	HUBER+SUHNER	SF102	MY2751/2	2021/08/24	2022/08/23
✓	Cable	EMCI	EMC102-KM-KM-600	190646	2021/10/04	2022/10/03
✓	RF Filter	EMEC	BRF-2400-2500	002	2021/08/26	2022/08/25
	RF Filter	EMEC	BRF-5150-5350	104	2021/08/26	2022/08/25
	RF Filter	EMEC	BRF-5470-5725	092	2021/08/26	2022/08/25
	RF Filter	EMEC	BRF-5725-5875	091	2021/08/26	2022/08/25
✓	RF Filter	EMEC	HPF-2800	002	2021/08/26	2022/08/25
	RF Filter	EMEC	HPF-5850	059	2021/08/26	2022/08/25
	SMA Notch Filter	MVE	MFN-902.928.S1	190604001	2021/09/02	2022/09/01

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with "✓" are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

2 Test Result

2.1 Antenna Requirement

2.1.1 Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

An intentional radiator shall be designed to ensure that no antenna other than as furnished by the responsible party shall be used with the device. If transmitting antennas of directional gain greater than 6dBi are using the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, for compliance to FCC 47CFR 15.247 (c) requirements.

2.1.2 Antenna Connected Construction

Non-standard antenna connector is used.

2.1.3 Antenna Gain

No.	Manufacturer	Model No.	Antenna Type	Peak Gain
1	Liteconn Co.,Ltd	520101-7040-23R	PCB Antenna	2.44 dBi for 2.4GHz

Description of the operating transmit modes :

- * 802.11b : Only one Antenna mode, this port is Ant-1
- * 802.11g : Only one Antenna mode, this port is Ant-1
- * 802.11n_HT20 : Only one Antenna mode, this port is Ant-1
- * 802.11n_HT40 : Only one Antenna mode, this port is Ant-1

Directional gain calculation & Conducted Output Power limit after correction :

- * 802.11b : Gain = 2.44 dBi < 6dBi ;
- * 802.11g : Gain = 2.44 dBi < 6dBi ;
- * 802.11n_HT20 : Gain = 2.44 dBi < 6dBi ;
- * 802.11n_HT40 : Gain = 2.44 dBi < 6dBi ;

Directional gain calculation & Power Spectral Density limit after correction :


- * 802.11b : Gain = 2.44 dBi < 6dBi ;
- * 802.11g : Gain = 2.44 dBi < 6dBi ;
- * 802.11n_HT20 : Gain = 2.44 dBi < 6dBi ;
- * 802.11n_HT40 : Gain = 2.44 dBi < 6dBi ;

2.2 Peak Output Power Measurement

2.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 1W. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

2.2.2 Test Setup



2.2.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 11.9.1.3
2. Enable the EUT transmit continuously.
3. Let EUT be connected to the power meter, and record the max. reading.
4. Measurement using a gated RF average power meter, since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

2.2.4 Test Result

802.11b

Frequency (MHz)	Peak power (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2412	18.35	--	--	≤ 30	Pass
2437	17.53	--	--	≤ 30	Pass
2462	19.28	--	--	≤ 30	Pass

Remark:

1. Peak Power = Reading value on power meter + cable loss
2. $10 \log(X/\text{mW}) = \text{dBm}$, $X=1$ watt (Limit)
1 watt = 30 dBm

802.11g

Frequency (MHz)	Peak power (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2412	18.11	--	--	≤ 30	Pass
2437	18.32	--	--	≤ 30	Pass
2462	18.06	--	--	≤ 30	Pass

Remark:

1. Peak Power = Reading value on power meter + cable loss
2. $10 \log(X/\text{mW}) = \text{dBm}$, $X=1$ watt (Limit)
1 watt = 30 dBm

802.11n HT20

Frequency (MHz)	Peak power (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2412	17.10	--	--	≤ 30	Pass
2437	17.44	--	--	≤ 30	Pass
2462	17.00	--	--	≤ 30	Pass

Remark:

1. Peak Power = Reading value on power meter + cable loss
2. $10 \log(X/\text{mW}) = \text{dBm}$, $X=1$ watt (Limit)
1 watt = 30 dBm

802.11n HT40

Frequency (MHz)	Peak power (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2422	17.24	--	--	≤ 30	Pass
2437	17.38	--	--	≤ 30	Pass
2452	17.05	--	--	≤ 30	Pass

Remark:

1. Peak Power = Reading value on power meter + cable loss
2. $10 \log(X/\text{mW}) = \text{dBm}$, $X=1$ watt (Limit)
1 watt = 30 dBm

2.3 6dB Bandwidth Measurement

2.3.1 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Setup




2.3.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 11.8.2
2. Enable the EUT transmit continuously.
3. Spectrum analyzer set:
 - a) RBW = 100 kHz
 - b) VBW $\geq$ 3 RBW
 - c) Detector = peak
 - d) Sweep time = auto couple
 - e) Trace mode = max hold.

2.3.4 Test Result


802.11b

Frequency (MHz)	6dB BW (kHz)		Limit (kHz)	Result
	Chain A	Chain B		
2412	10050	--	≥ 500	Pass
2437	10050	--	≥ 500	Pass
2462	10040	--	≥ 500	Pass

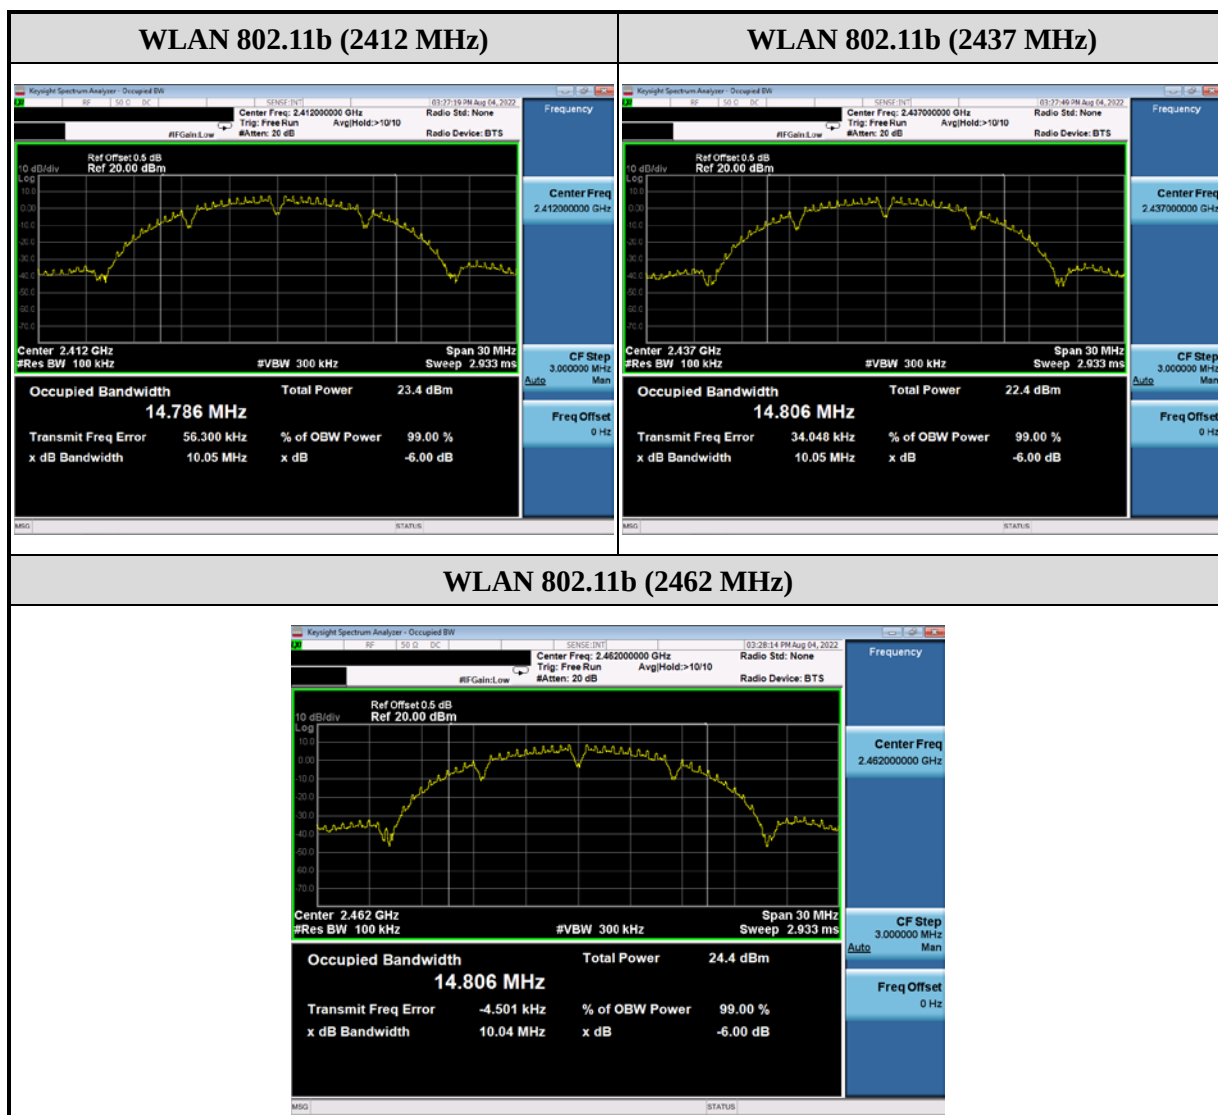

802.11g

Frequency (MHz)	6dB BW (kHz)		Limit (kHz)	Result
	Chain A	Chain B		
2412	16340	--	≥ 500	Pass
2437	16350	--	≥ 500	Pass
2462	16350	--	≥ 500	Pass

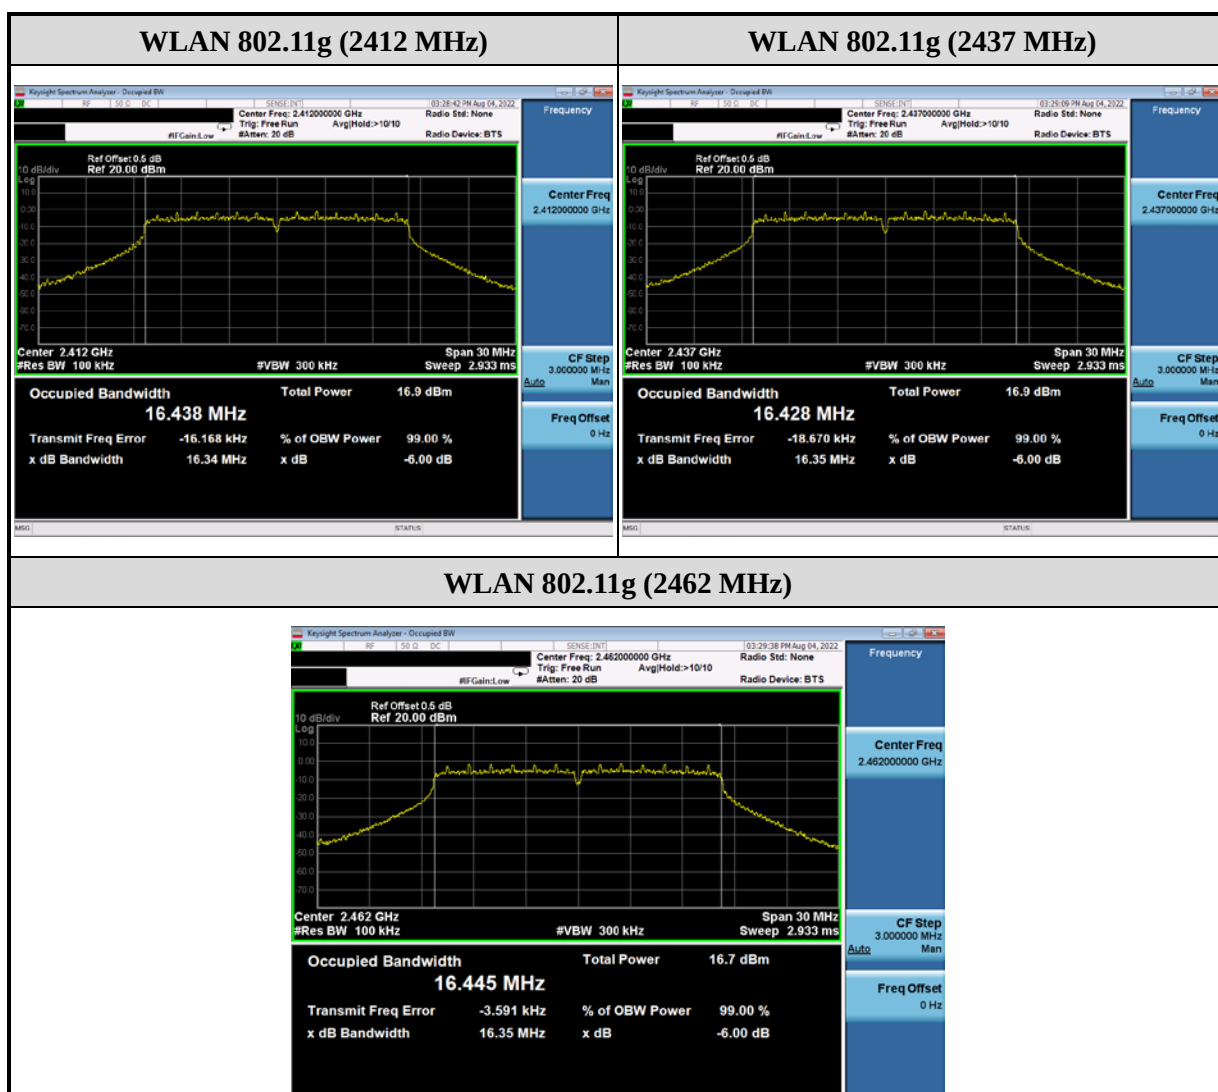


802.11n HT20

Frequency (MHz)	6dB BW (kHz)		Limit (kHz)	Result
	Chain A	Chain B		
2412	17550	--	≥ 500	Pass
2437	17530	--	≥ 500	Pass
2462	17550	--	≥ 500	Pass



802.11n HT40

Frequency (MHz)	6dB BW (kHz)		Limit (kHz)	Result
	Chain A	Chain B		
2422	35210	--	≥ 500	Pass
2437	35390	--	≥ 500	Pass
2452	35220	--	≥ 500	Pass

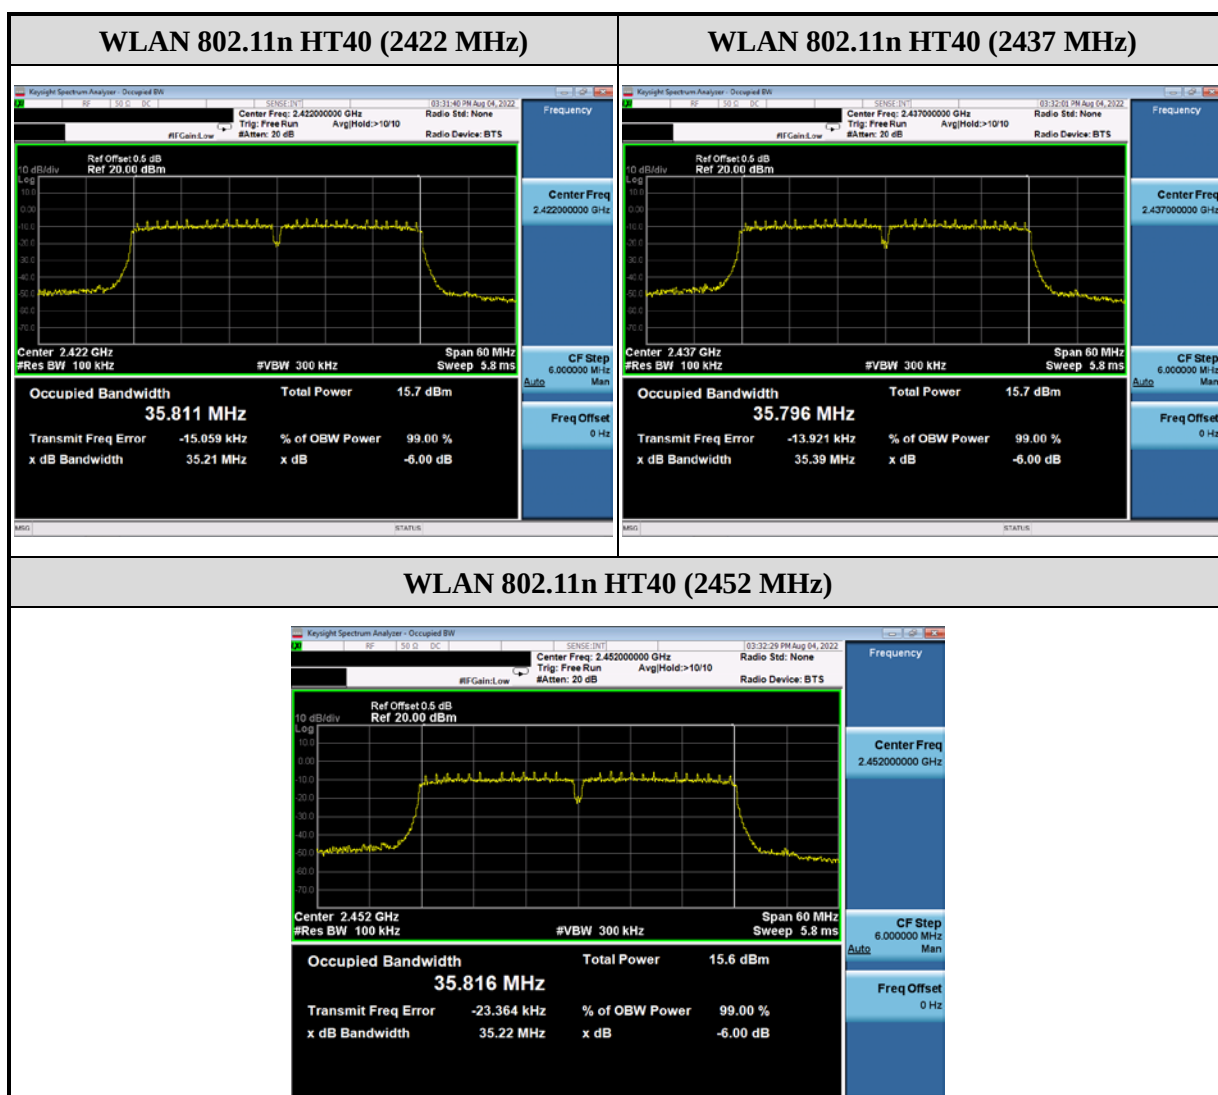

2.4 Power Spectral Density Measurement

2.4.1 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.4.2 Test Setup



2.4.3 Test Procedure


1. Reference ANSI C63.10 : 2013 chapter 11.10.2
2. Enable the EUT transmit continuously.
3. Spectrum analyzer set:
 - a) RBW = 3 kHz ~ 100 kHz
 - b) VBW $\geq$ 3 RBW
 - c) Span = 1.5 times DTS Channel 6dB Bandwidth
 - d) Detector = peak
 - e) Sweep time = auto couple
 - f) Trace mode = max hold.

2.4.4 Test Result

802.11b

Frequency (MHz)	Power Spectral Density (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2412	-5.488	--	--	≤ 8	Pass
2437	-6.137	--	--	≤ 8	Pass
2462	-4.087	--	--	≤ 8	Pass


Remark: PSD = Reading value on spectrum analyzer + cable loss

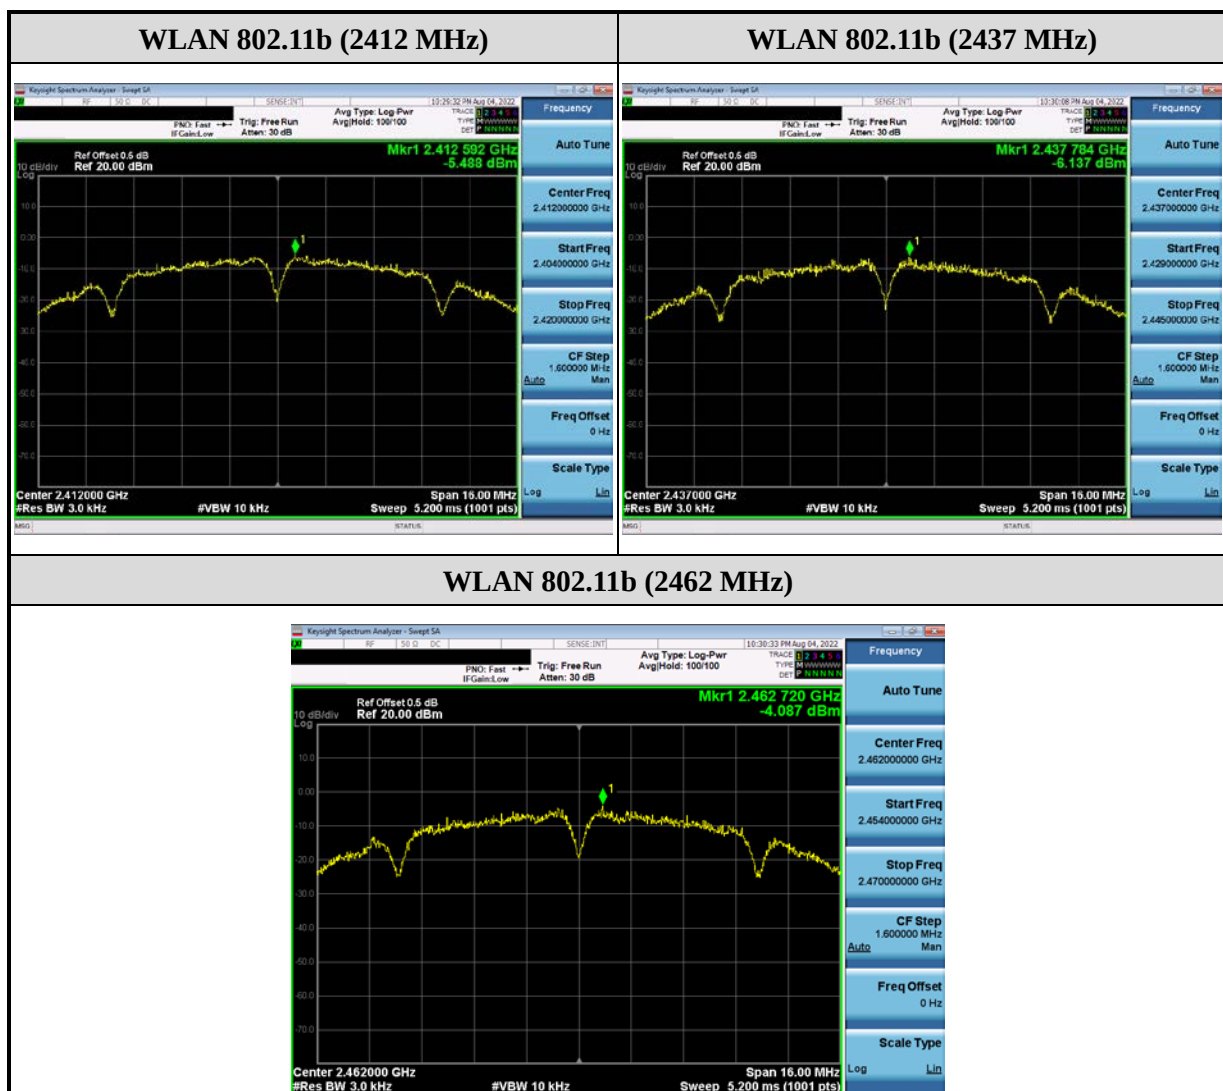

802.11g

Frequency (MHz)	Power Spectral Density (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2412	-13.679	--	--	≤ 8	Pass
2437	-14.308	--	--	≤ 8	Pass
2462	-14.729	--	--	≤ 8	Pass


Remark: PSD = Reading value on spectrum analyzer + cable loss

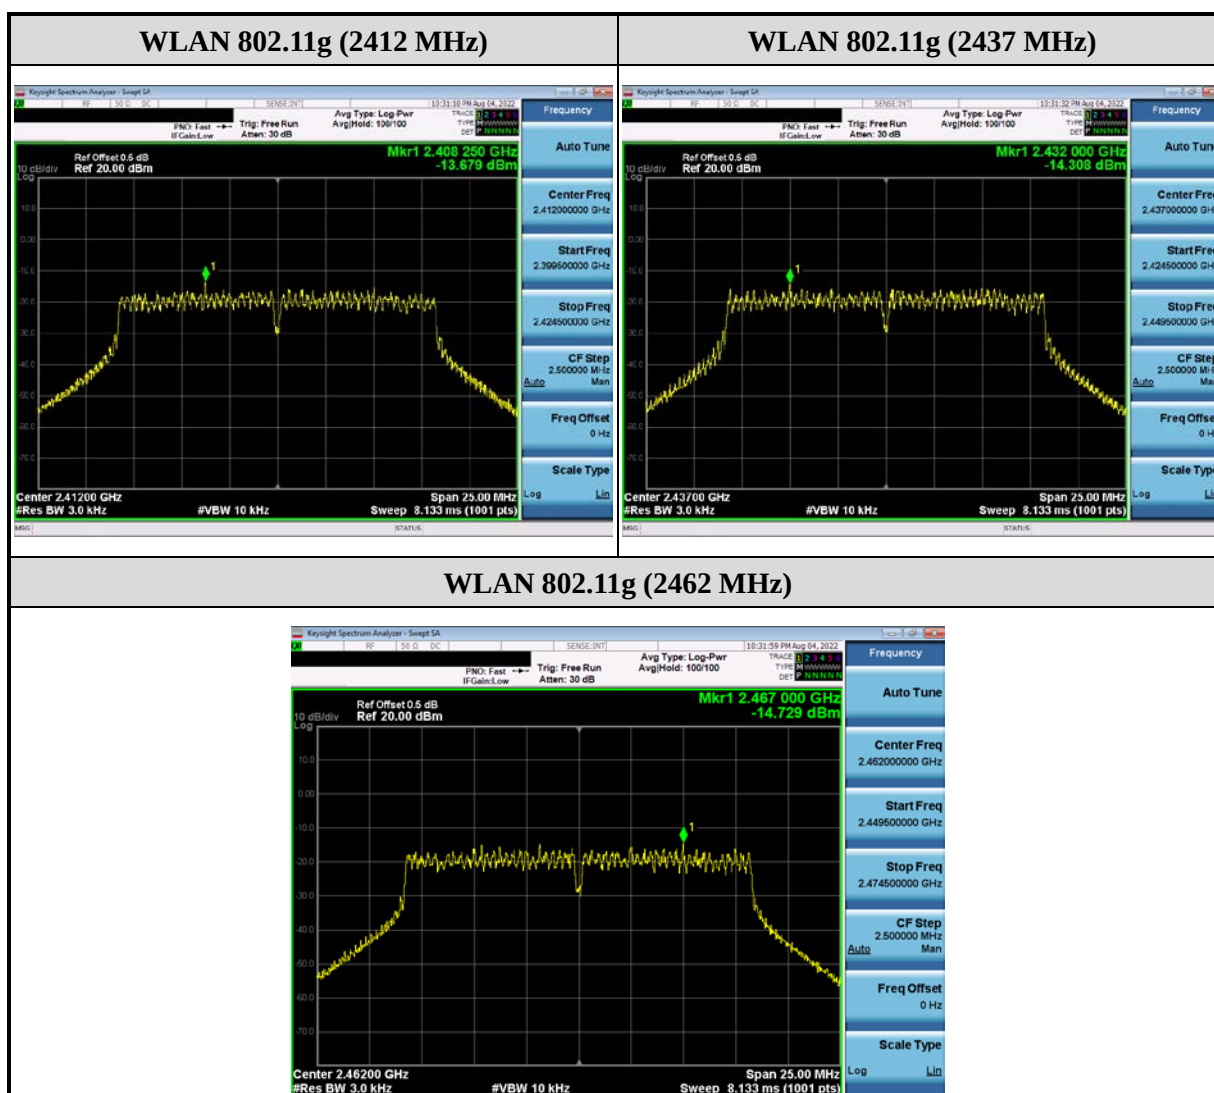

802.11n HT20

Frequency (MHz)	Power Spectral Density (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2412	-16.854	--	--	≤ 8	Pass
2437	-16.837	--	--	≤ 8	Pass
2462	-16.864	--	--	≤ 8	Pass


Remark: PSD = Reading value on spectrum analyzer + cable loss

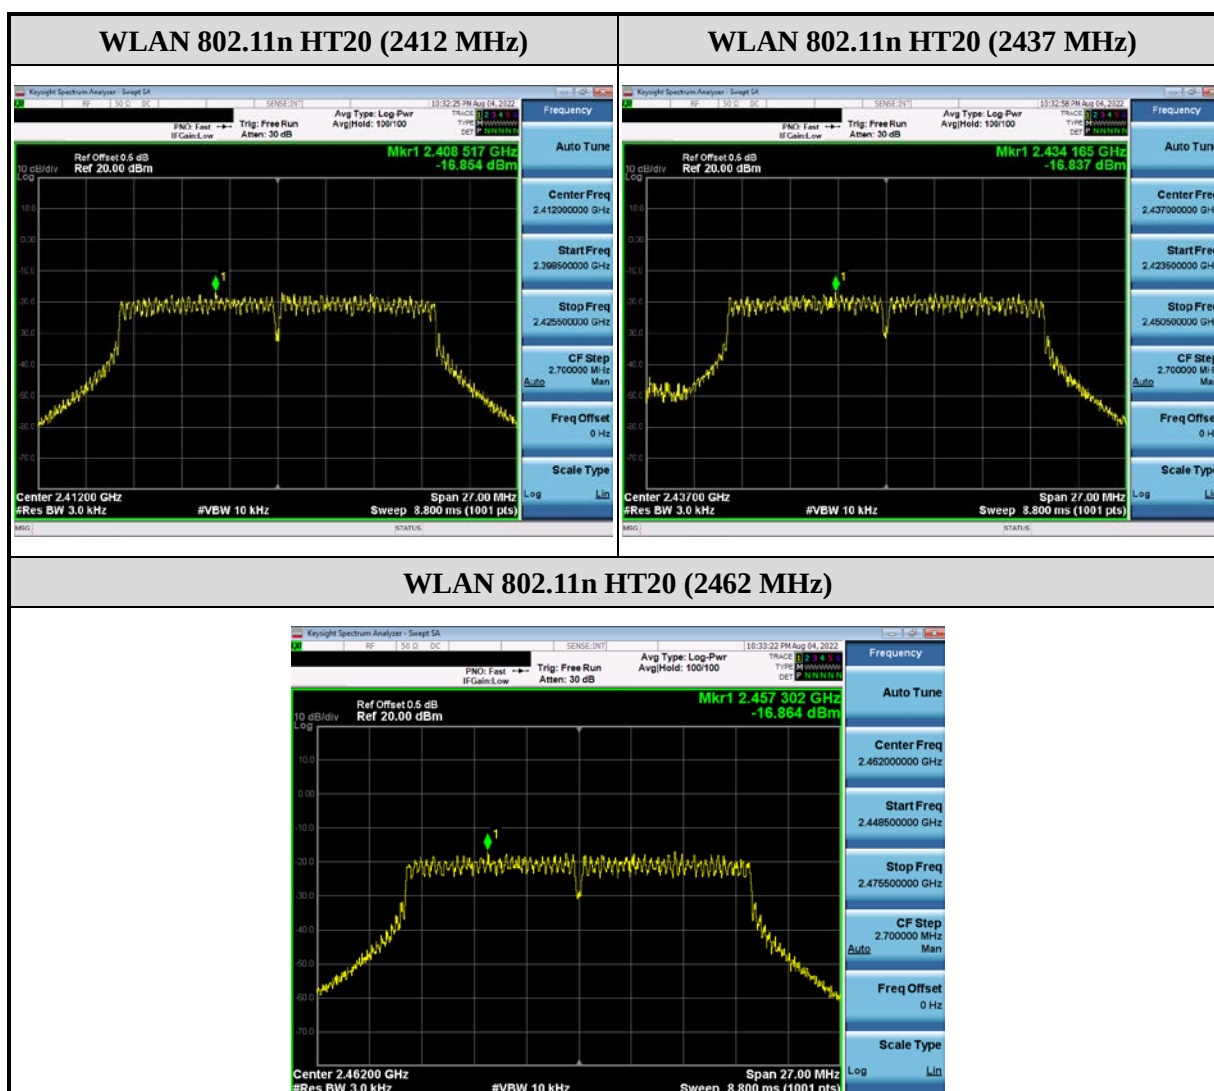

802.11n HT40

Frequency (MHz)	Power Spectral Density (dBm)			Limit (dBm)	Result
	Chain A	Chain B	Total		
2422	-19.695	--	--	≤ 8	Pass
2437	-19.331	--	--	≤ 8	Pass
2452	-19.633	--	--	≤ 8	Pass

Remark: PSD = Reading value on spectrum analyzer + cable loss

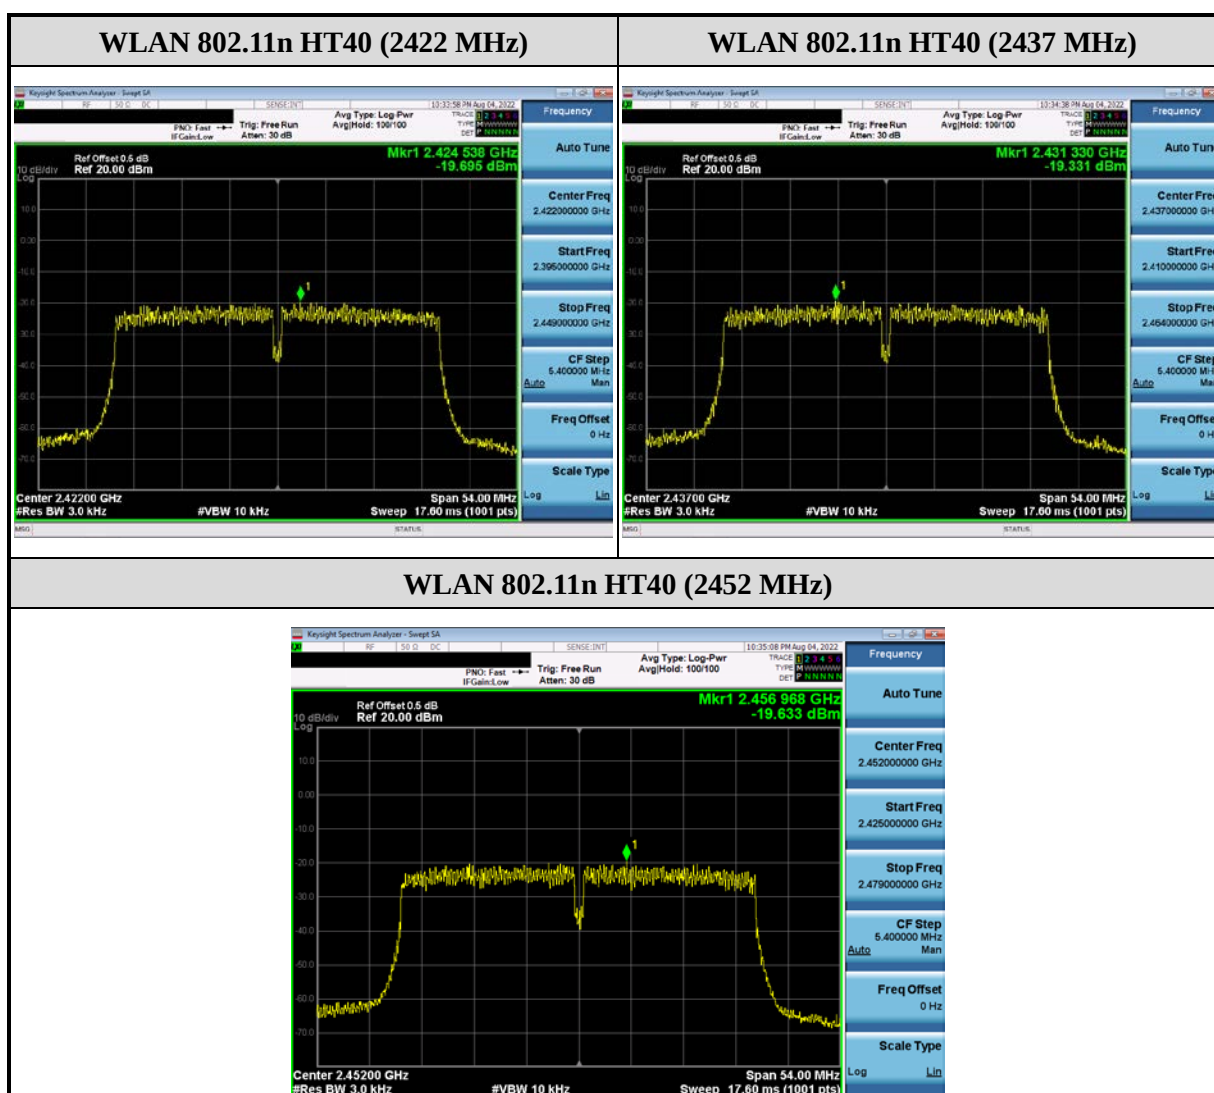

2.5 Conducted Band Edges and Spurious Emission Measurement

2.5.1 Limit

In any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in must also comply with the radiated emission limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB


2.5.2 Test Setup




2.5.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 6.10
2. Enable the EUT transmit continuously.
3. Spectrum analyzer set :
 - a) RBW = 100 kHz
 - b) VBW $\geq$ 3 RBW
 - c) Detector = peak
 - d) Sweep time = auto couple
 - e) Trace mode = max hold.

2.5.4 Test Result

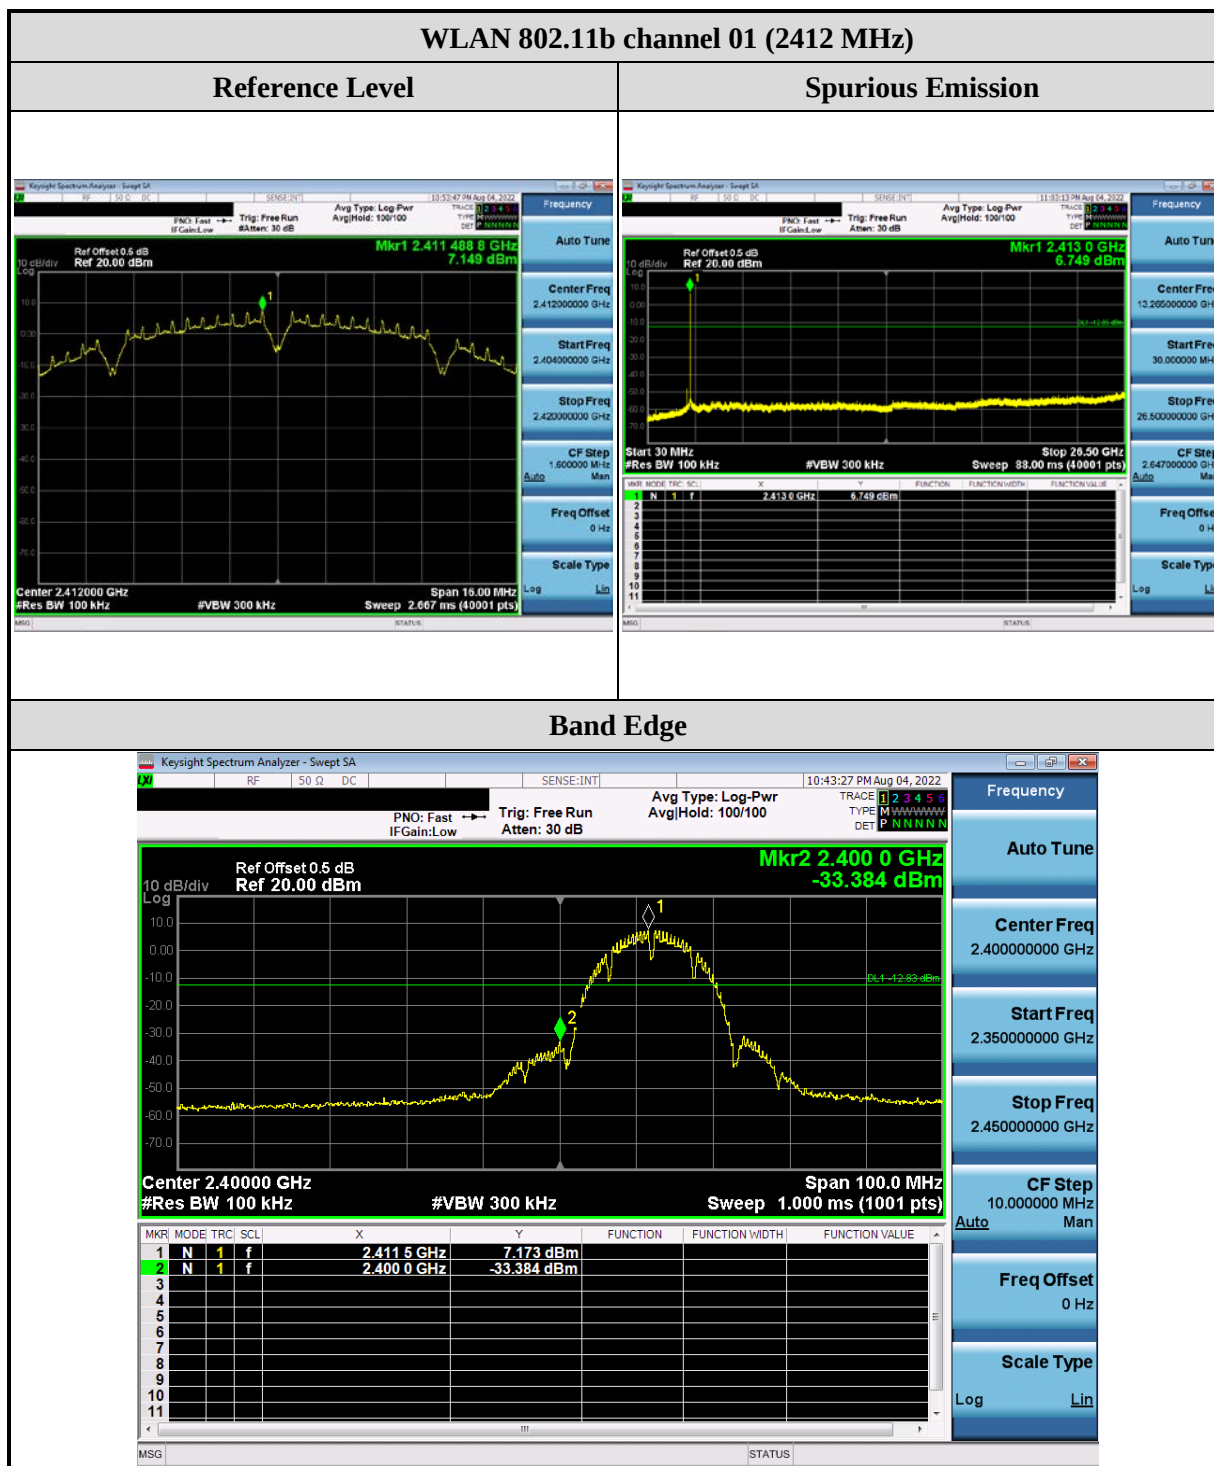

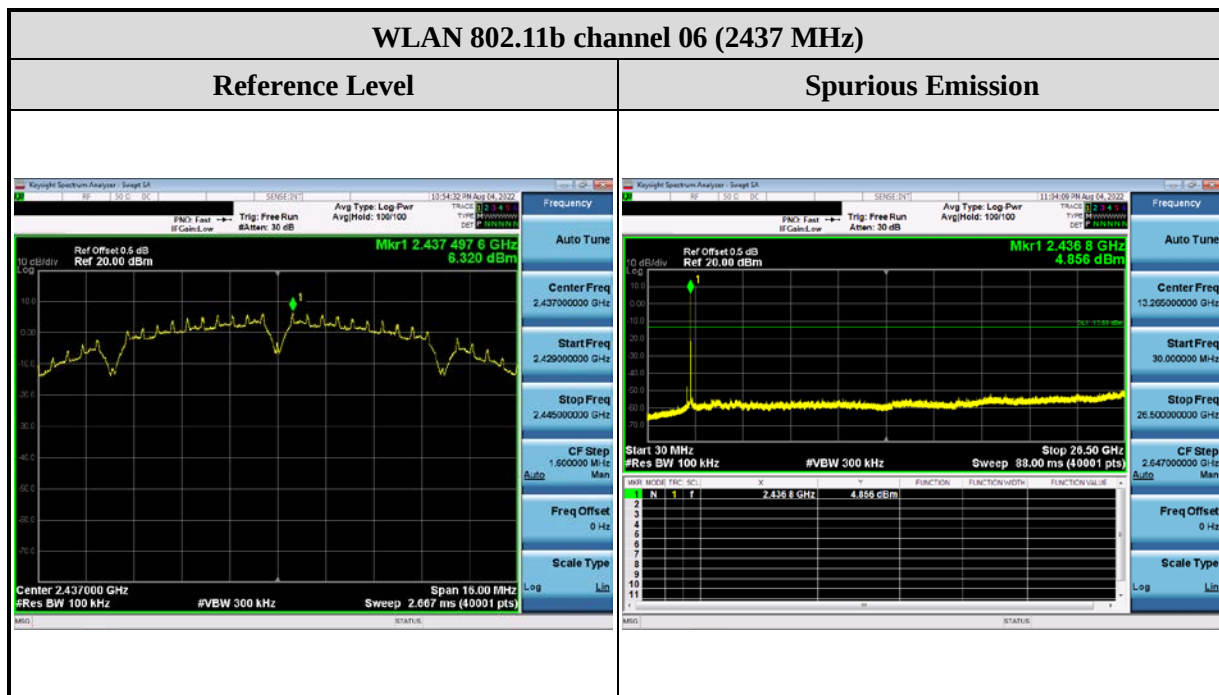


WLAN 802.11b channel 11 (2462MHz)


Reference Level





Spurious Emission

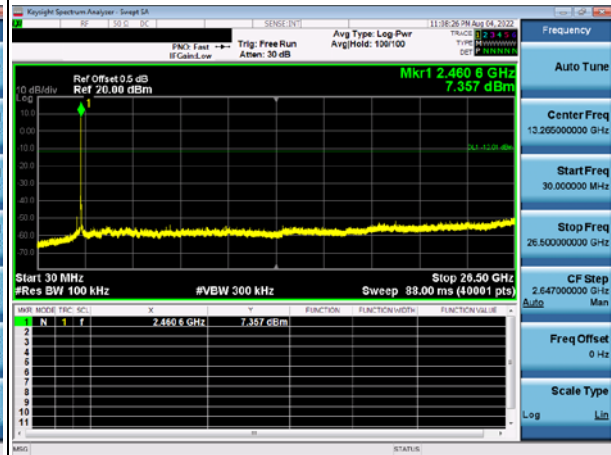

Band Edge

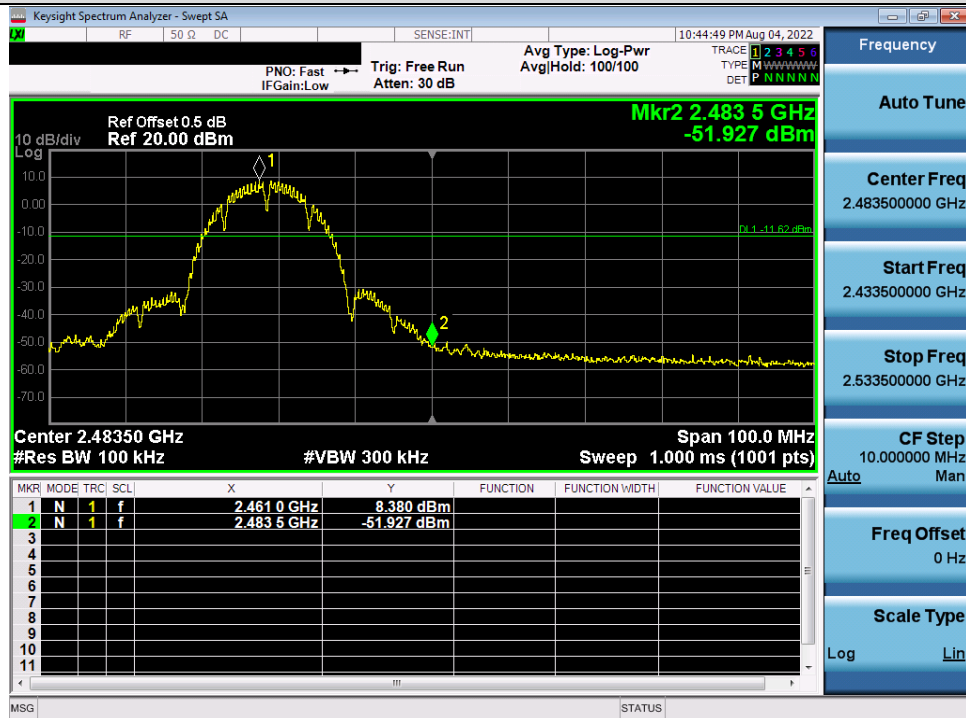


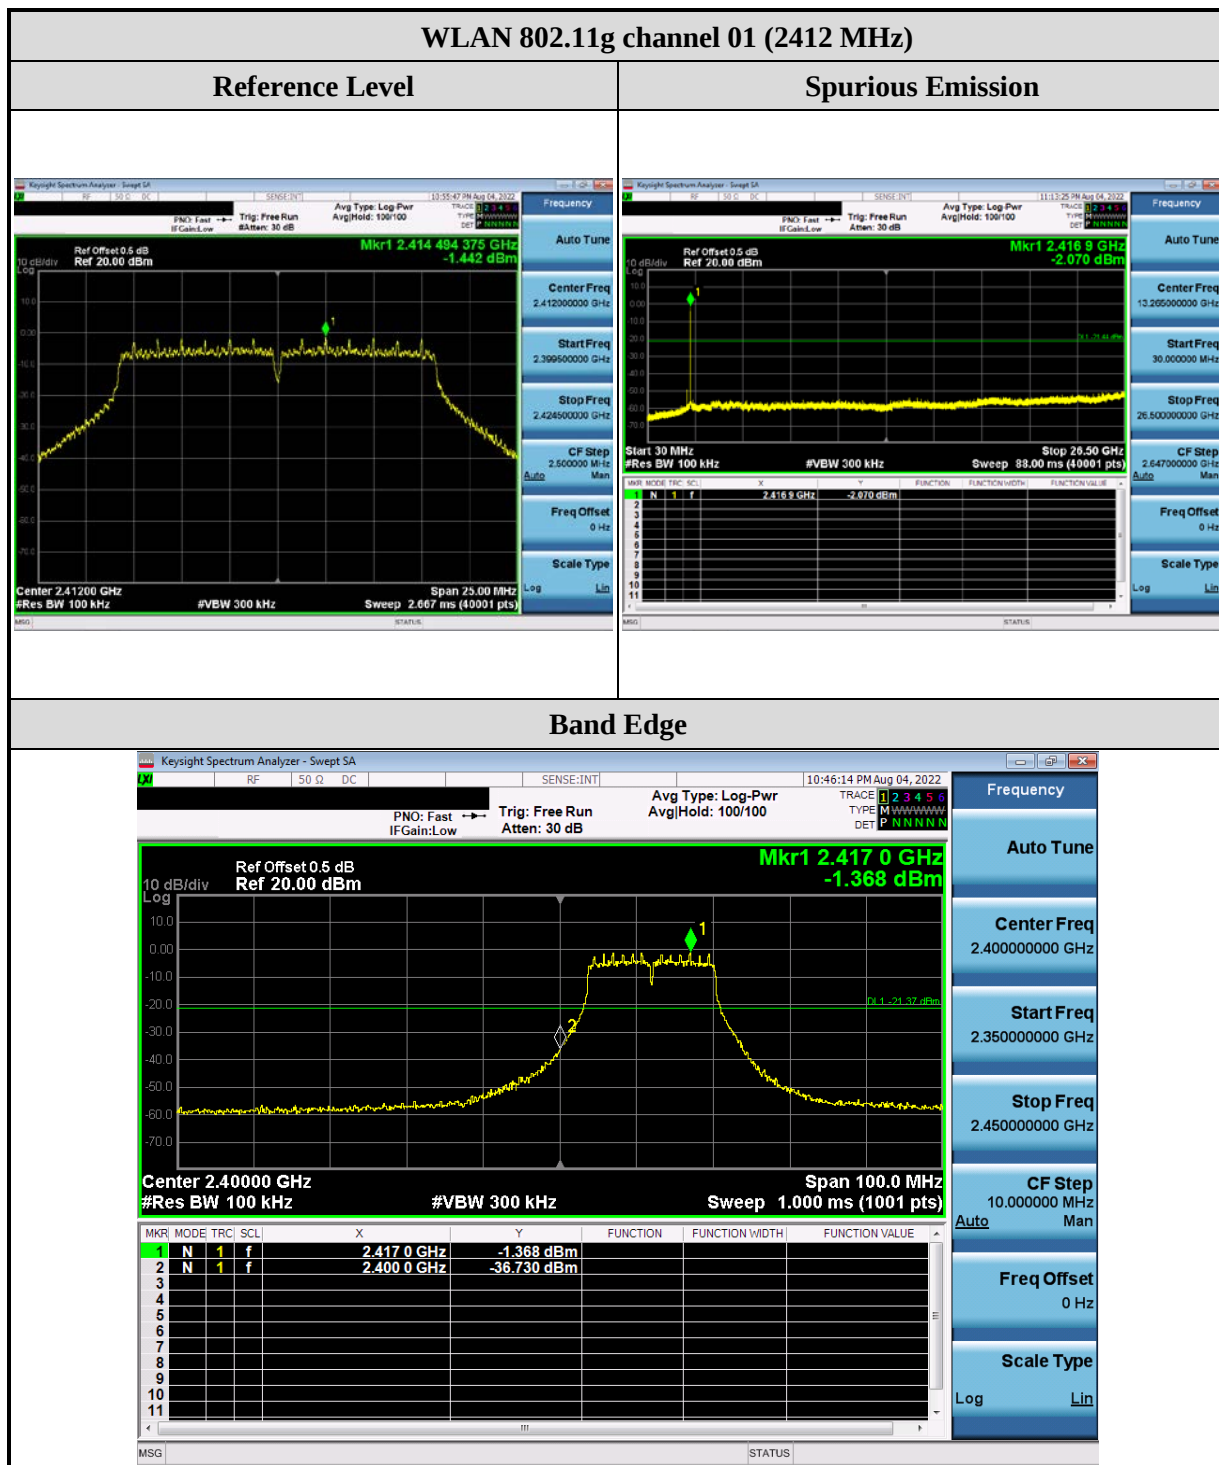

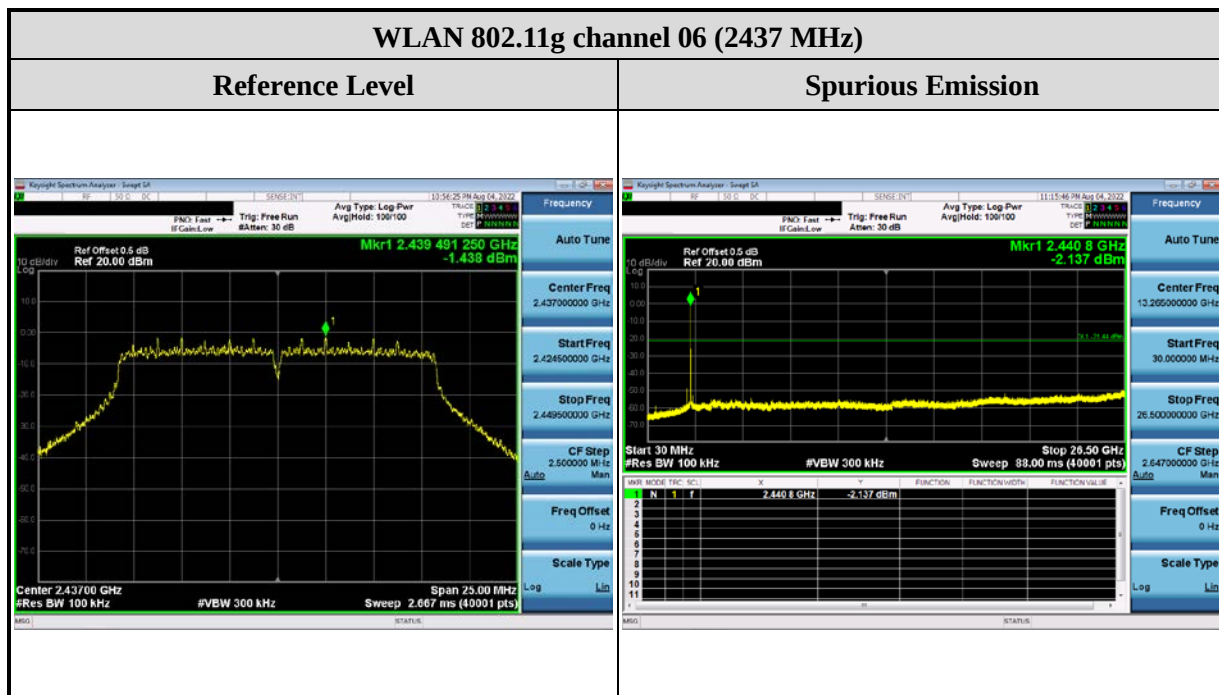


WLAN 802.11g channel 11 (2462MHz)


Reference Level

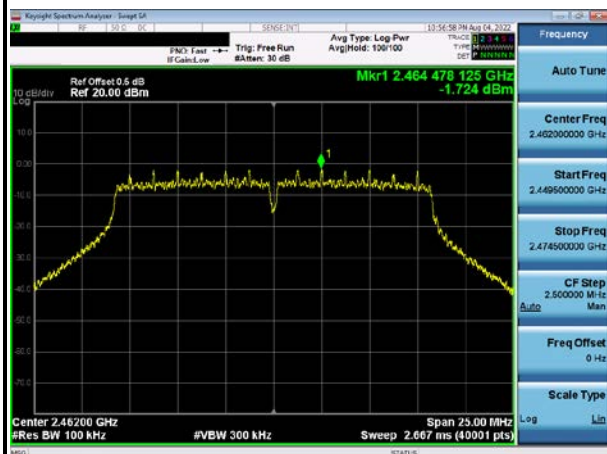

Spurious Emission

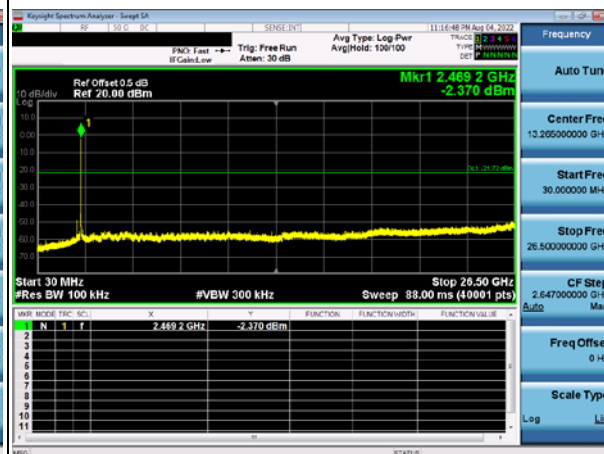


Band Edge

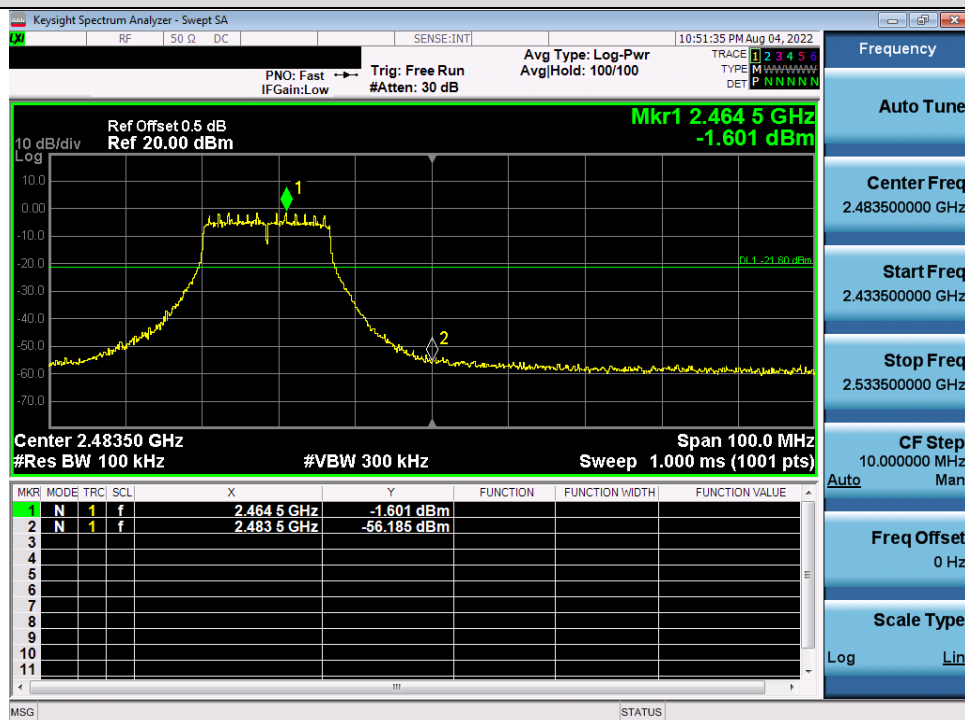


WLAN 802.11n HT20 channel 01 (2412 MHz)


Reference Level

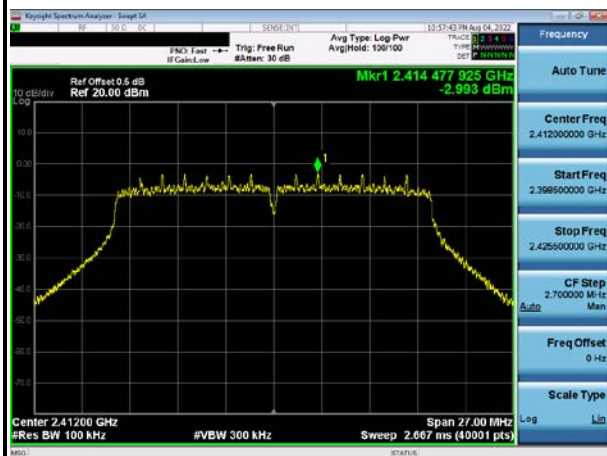

Spurious Emission

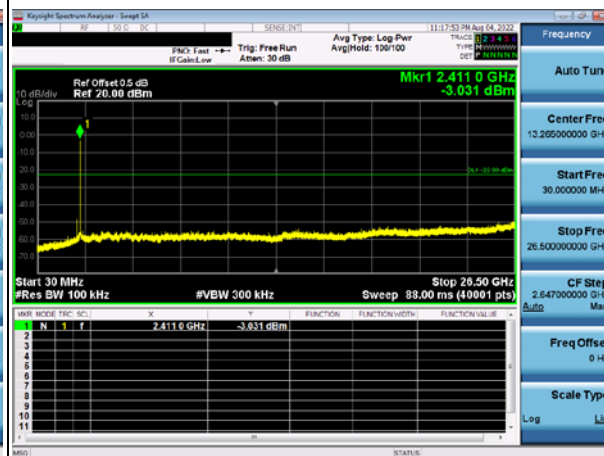


Band Edge

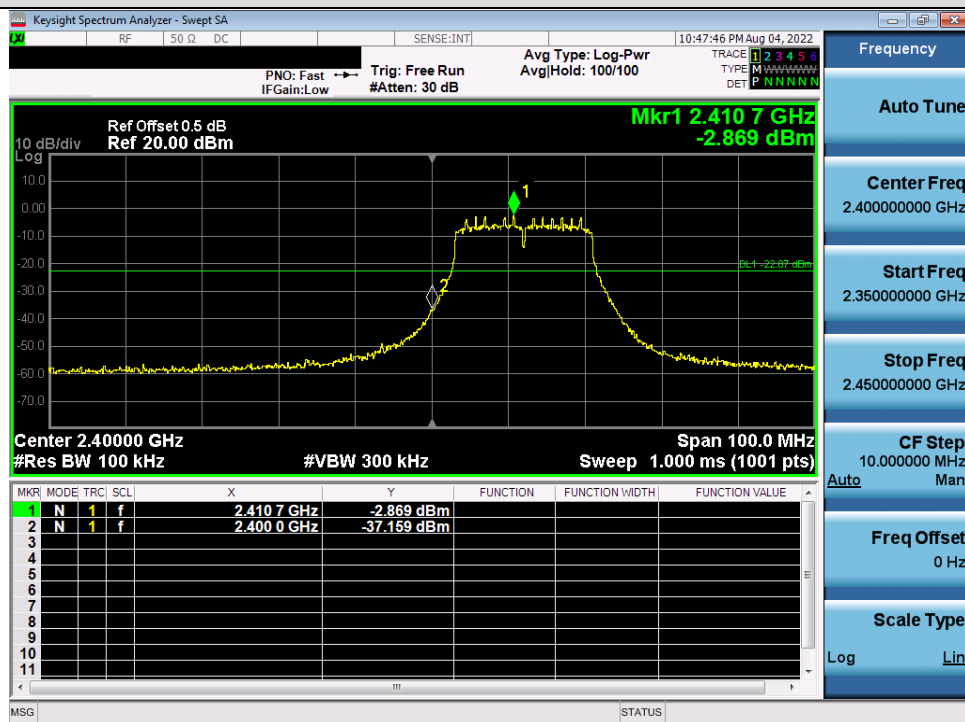


WLAN 802.11n HT20 channel 06 (2437 MHz)

Reference Level

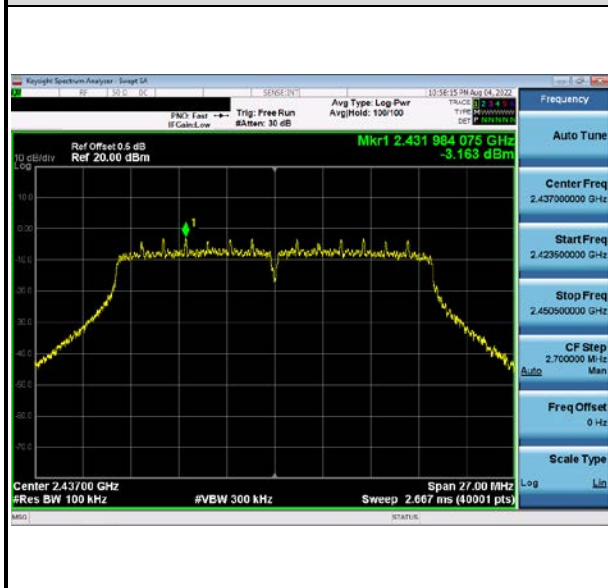


Spurious Emission

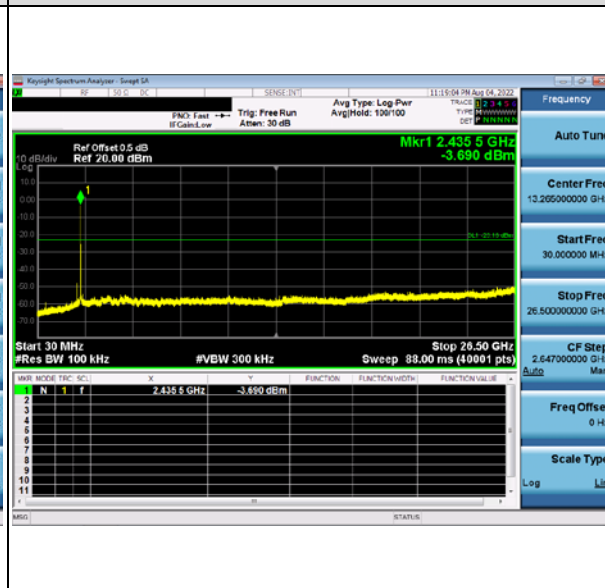


WLAN 802.11n HT20 channel 11 (2462MHz)


Reference Level

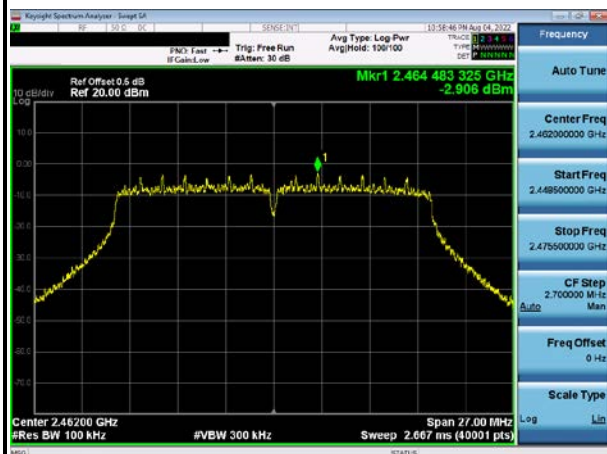

Spurious Emission

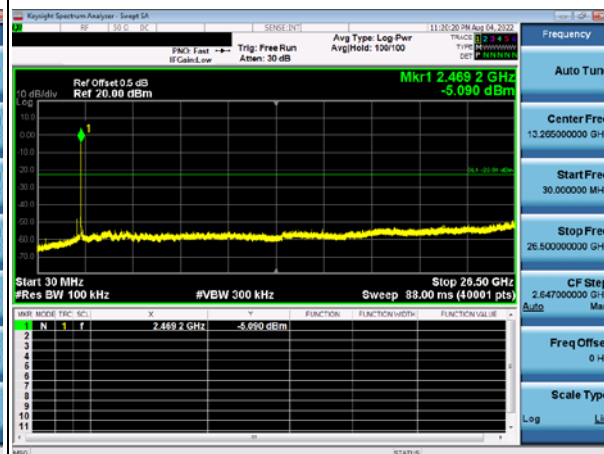

Band Edge

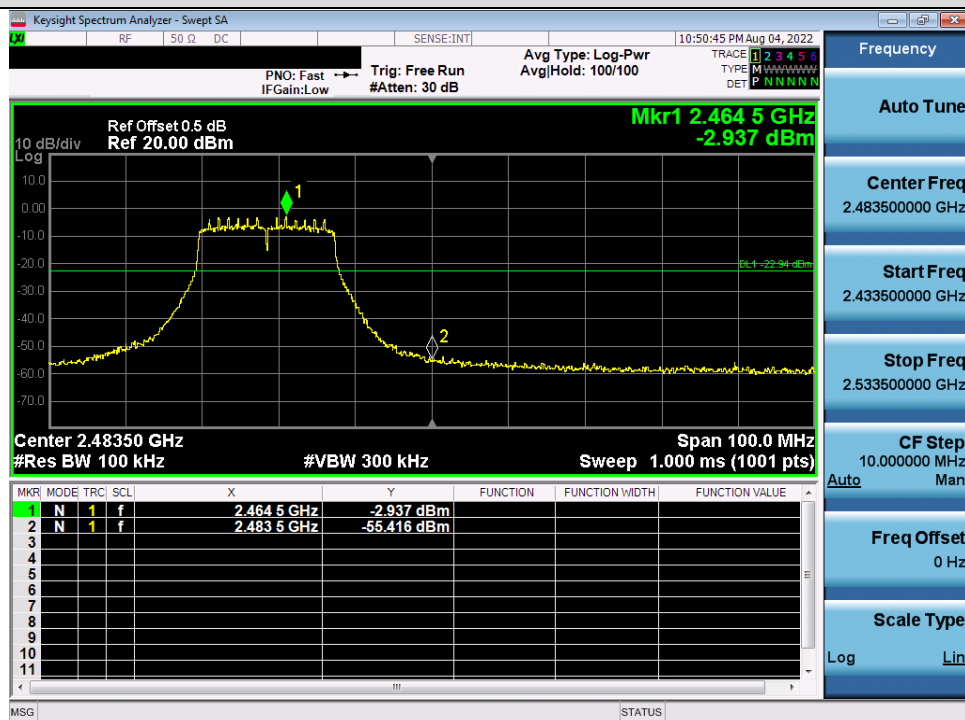


WLAN 802.11n HT40 channel 03 (2422 MHz)


Reference Level



Spurious Emission

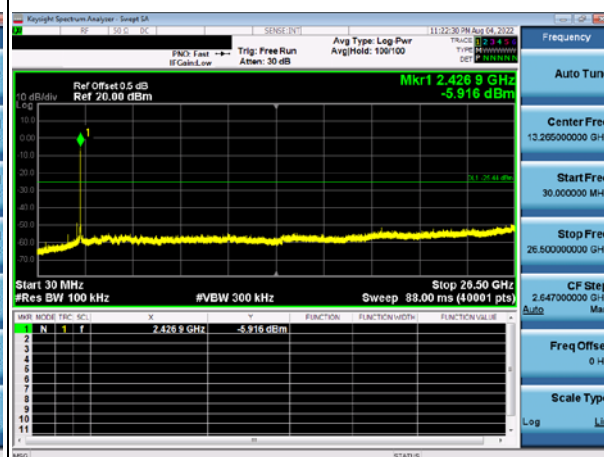


Band Edge

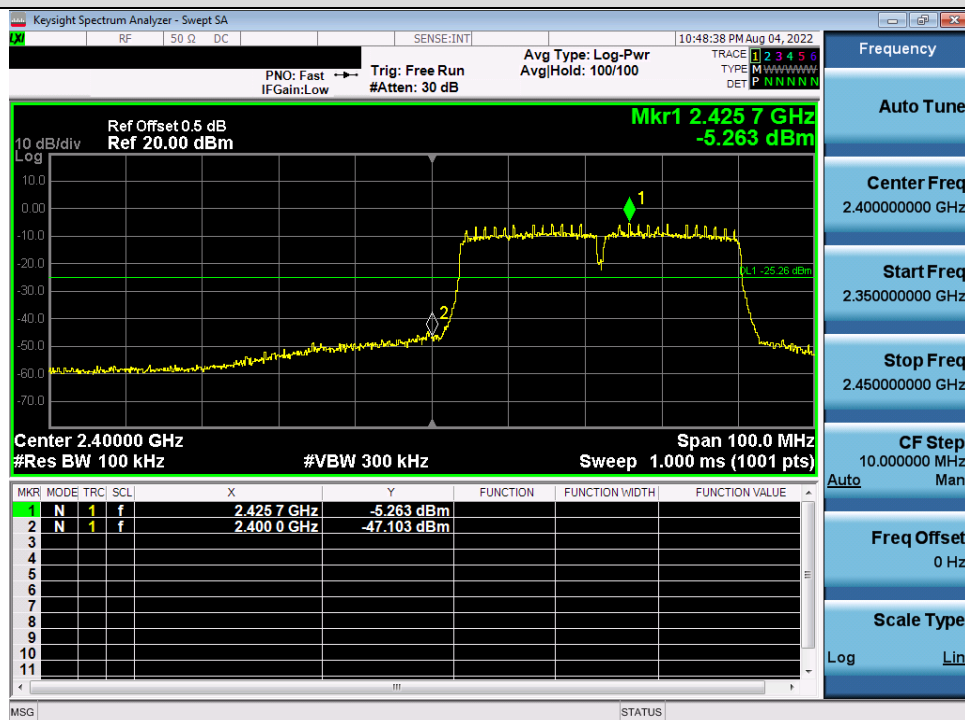


WLAN 802.11n HT40 channel 06 (2437 MHz)

Reference Level

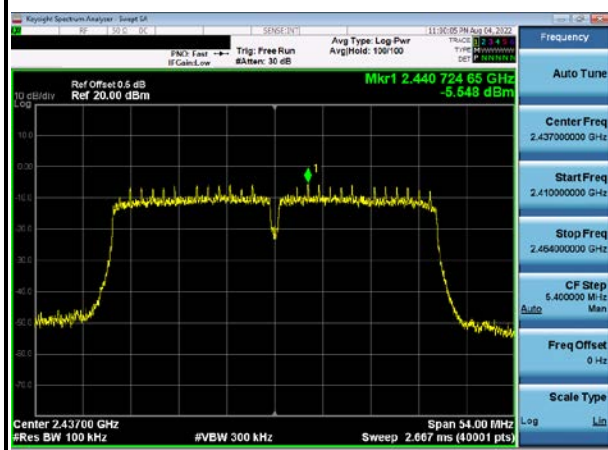


Spurious Emission

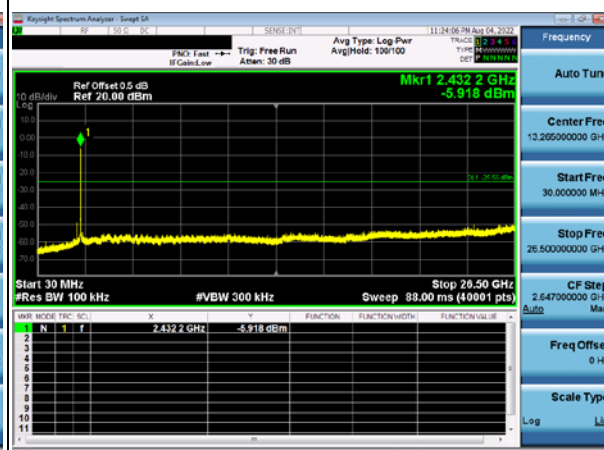


WLAN 802.11n HT40 channel 9 (2452MHz)


Reference Level

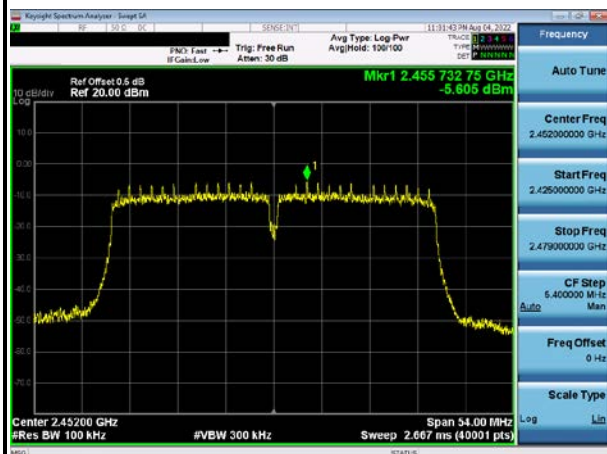

Spurious Emission

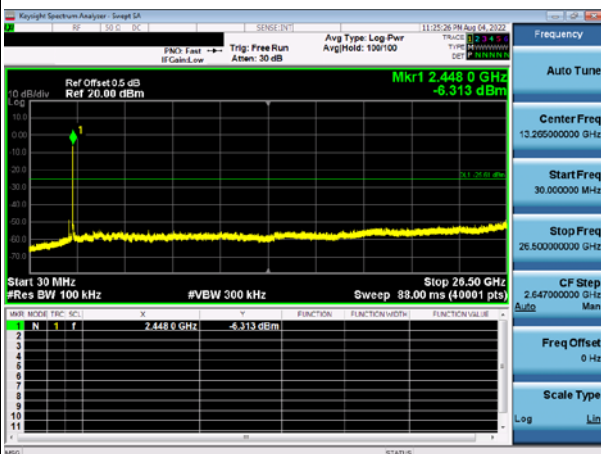

Band Edge

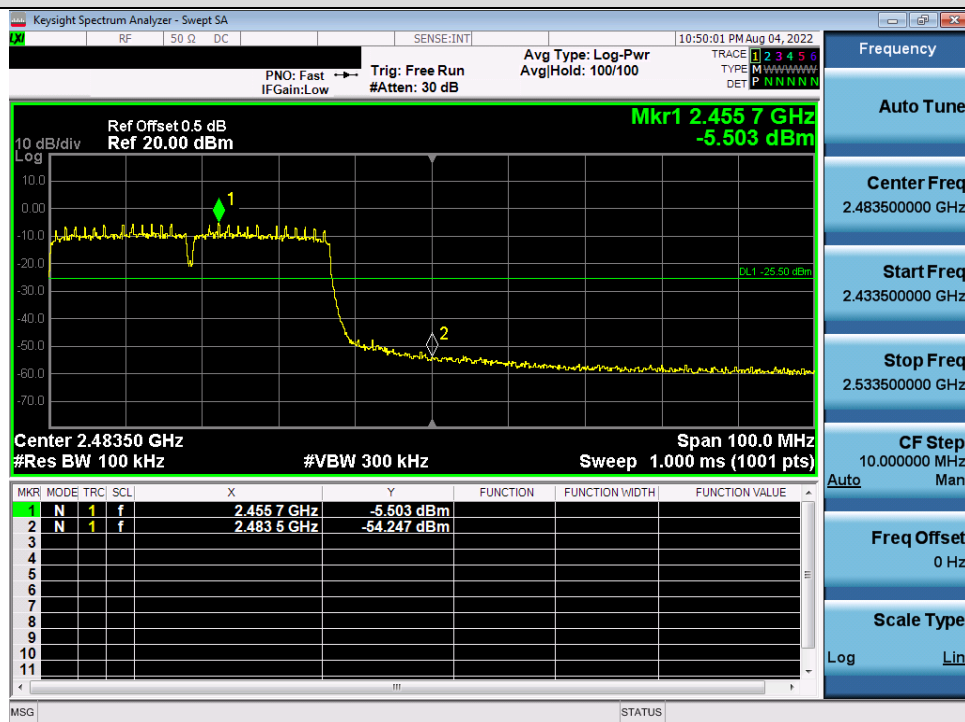

2.6 Radiated Band Edges and Spurious Emission Measurement

2.6.1 Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) = $20 \log \text{RF Voltage}(\mu\text{V})$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

2.6.2 Test Setup


Below 30MHz

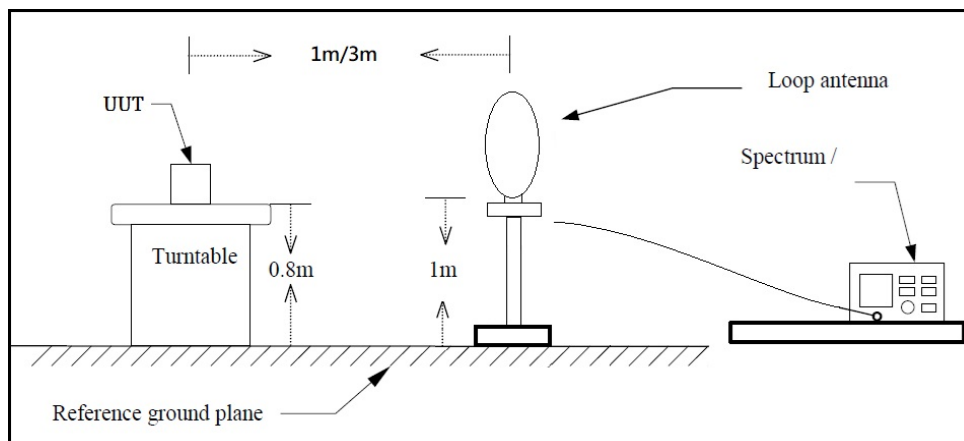

30MHz~1GHz

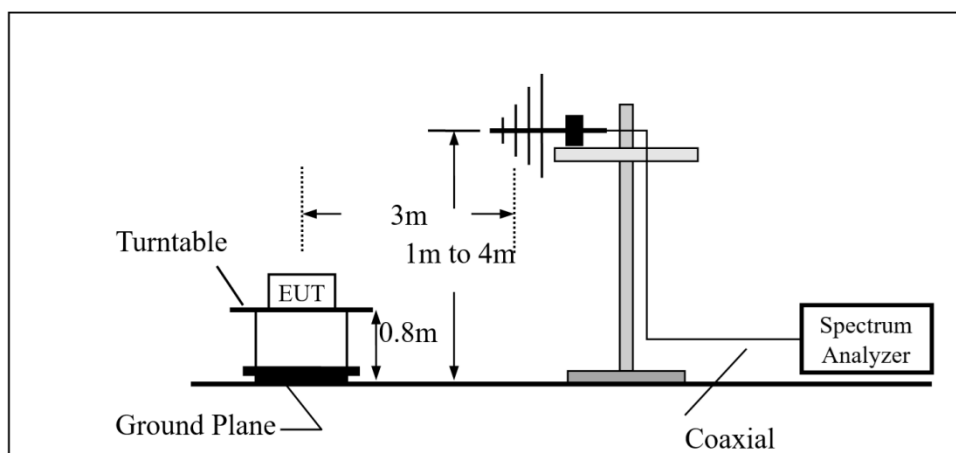

Above 1GHz

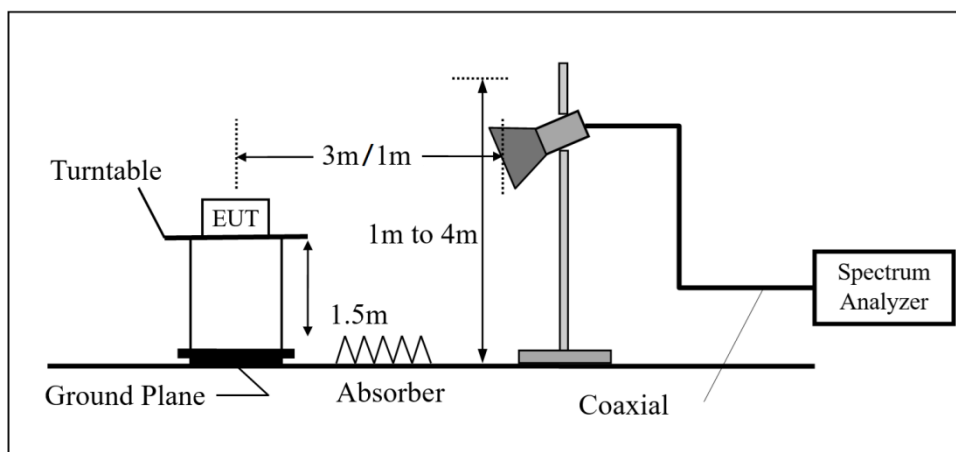

2.6.3 Test Procedure

The EUT was setup according to ANSI C63.10 : 2013 chapter 6.4, 6.5, 6.6 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

For Radiated emission Above 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

2.6.4 Duty Cycle


Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	2412	1.000	1.000	1.000	0.000	0.010
802.11g	2412	2.079	2.200	0.945	0.246	0.481
802.11n HT20	2412	1.929	2.043	0.944	0.249	0.518
802.11n HT40	2422	0.951	1.076	0.884	0.535	1.051

2.6.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

Test Frequency		
RF	802.11b / 802.11g / 802.11n HT20	802.11n HT40
Tx	CH01 (2412MHz)	CH03 (2422MHz)
	CH11 (2462MHz)	CH09 (2452MHz)

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

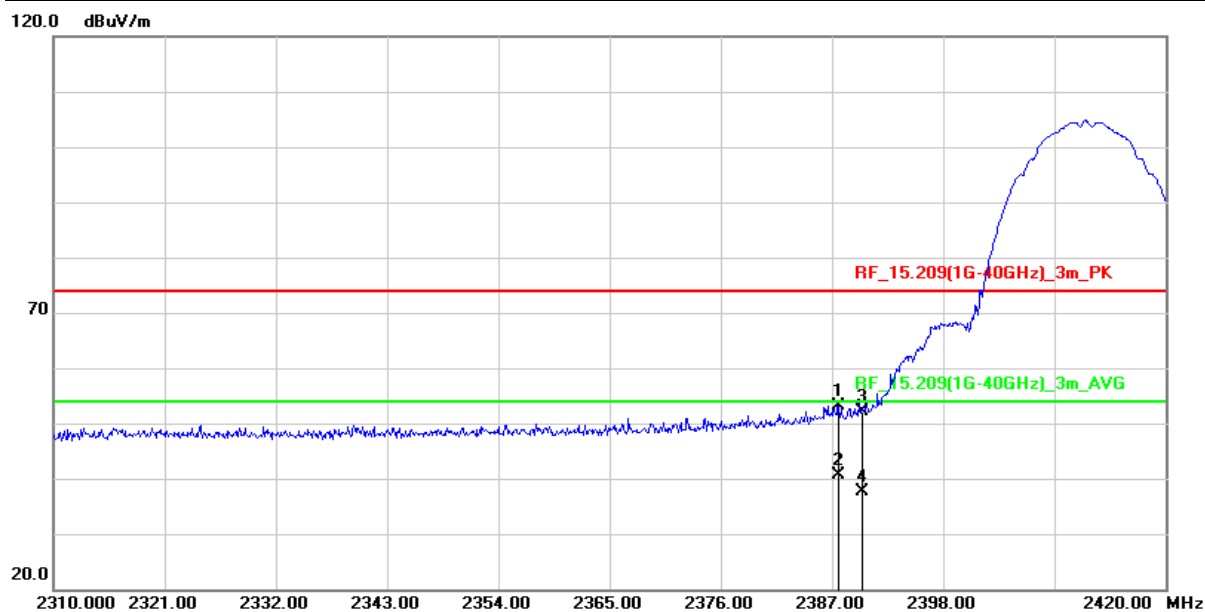


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.660	59.89	-6.70	53.19	74.00	-20.81	peak
2	2387.660	47.25	-6.70	40.55	54.00	-13.45	AVG
3	2390.000	58.71	-6.69	52.02	74.00	-21.98	peak
4	2390.000	44.43	-6.69	37.74	54.00	-16.26	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

120.0 dBuV/m

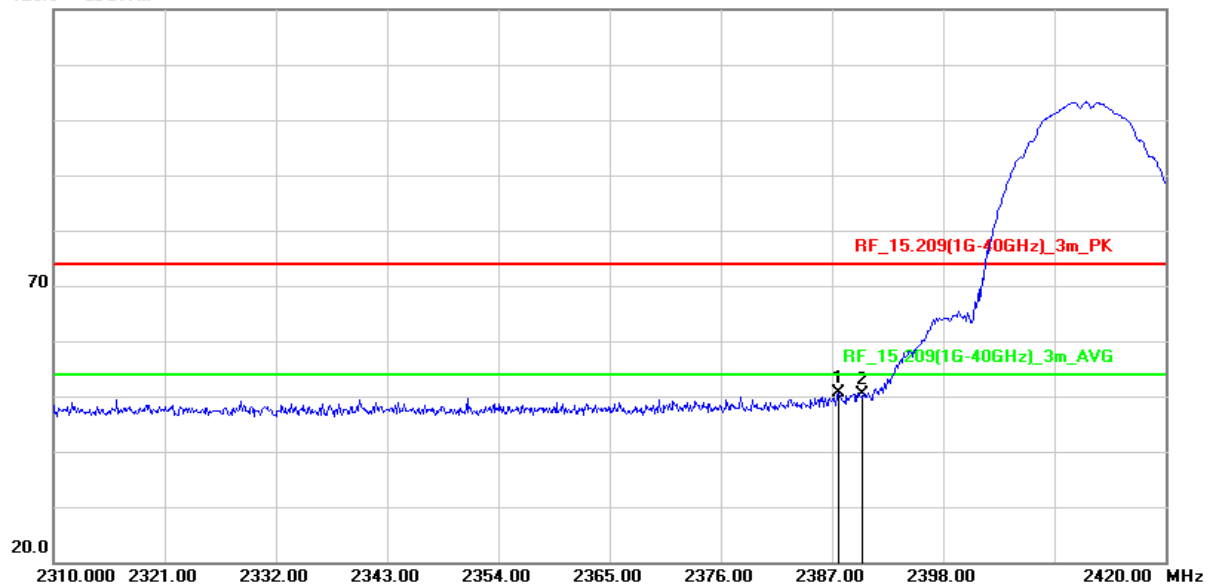


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.660	57.42	-6.70	50.72	74.00	-23.28	peak
2	2390.000	57.19	-6.69	50.50	74.00	-23.50	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

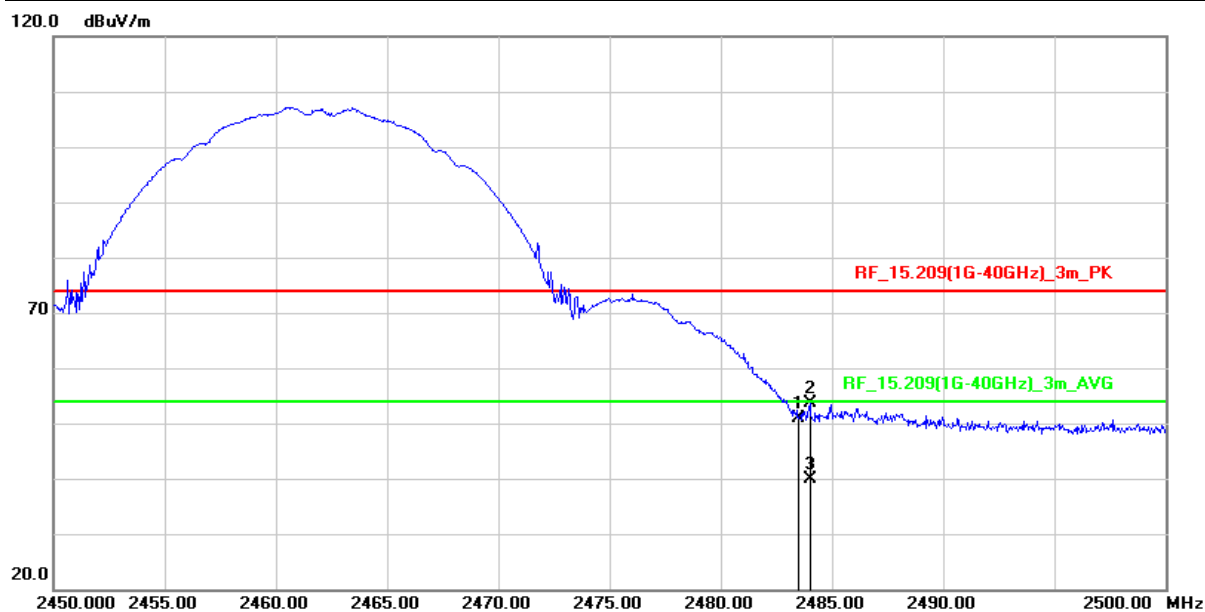


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.52	-6.61	50.91	74.00	-23.09	peak
2	2484.000	60.15	-6.61	53.54	74.00	-20.46	peak
3	2484.000	46.47	-6.61	39.86	54.00	-14.14	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

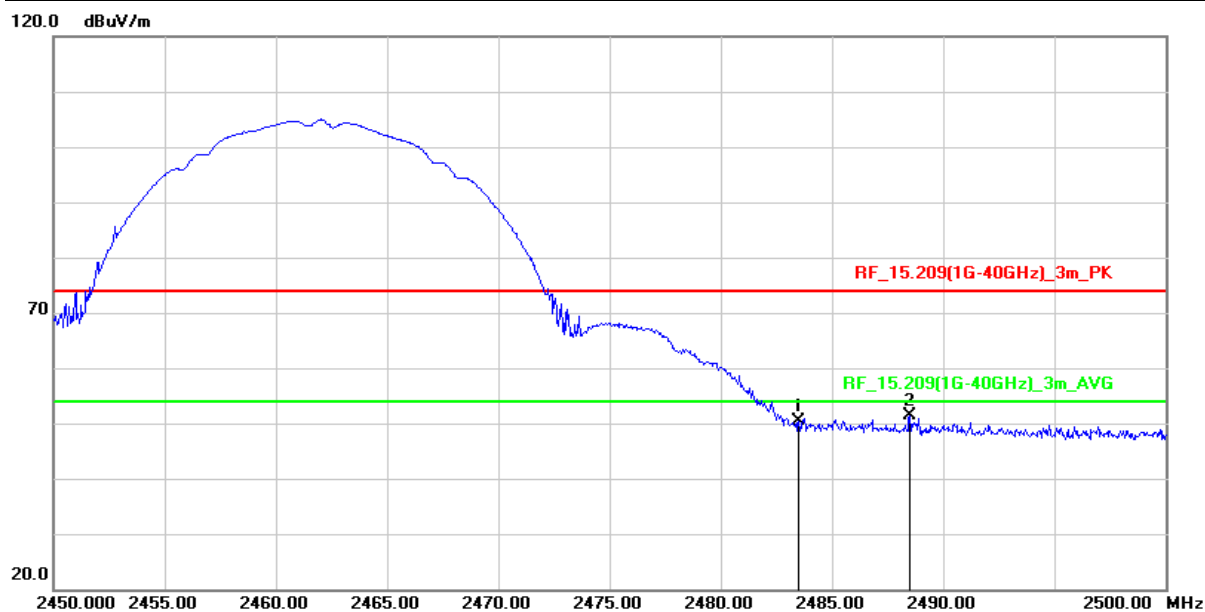

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.93	-6.61	50.32	74.00	-23.68	peak
2	2488.500	58.04	-6.60	51.44	74.00	-22.56	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

120.0 dBuV/m




No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.650	59.25	-6.70	52.55	74.00	-21.45	peak
2	2388.650	43.85	-6.70	37.15	54.00	-16.85	AVG
3	2390.000	63.94	-6.69	57.25	74.00	-16.75	peak
4	2390.000	44.87	-6.69	38.18	54.00	-15.82	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

120.0 dBuV/m

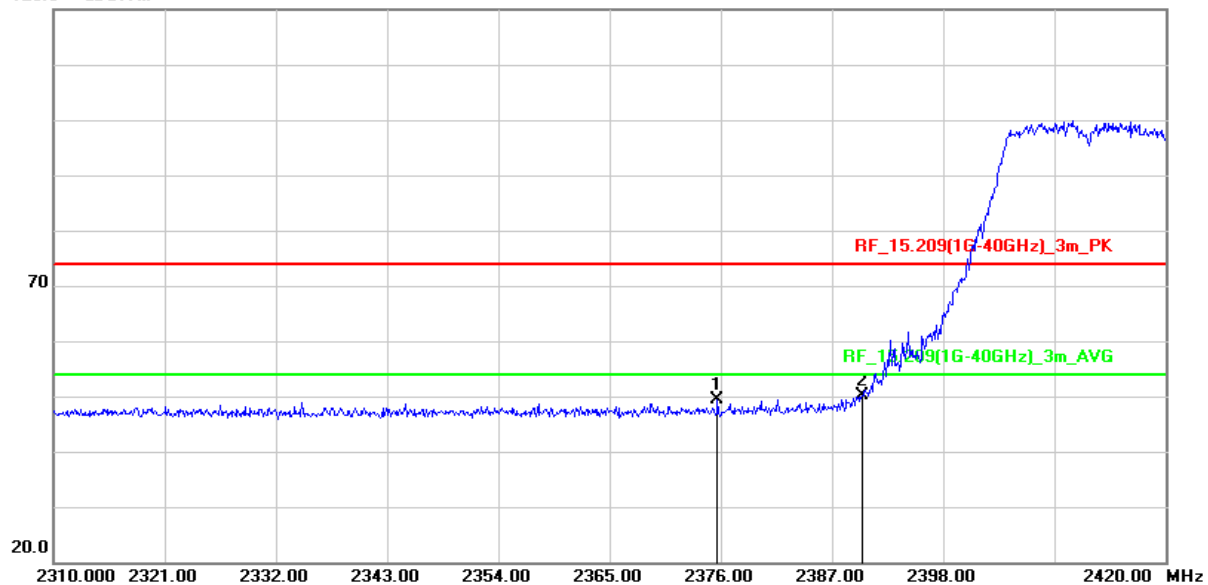


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.670	56.19	-6.72	49.47	74.00	-24.53	peak
2	2390.000	56.82	-6.69	50.13	74.00	-23.87	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

120.0 dBuV/m

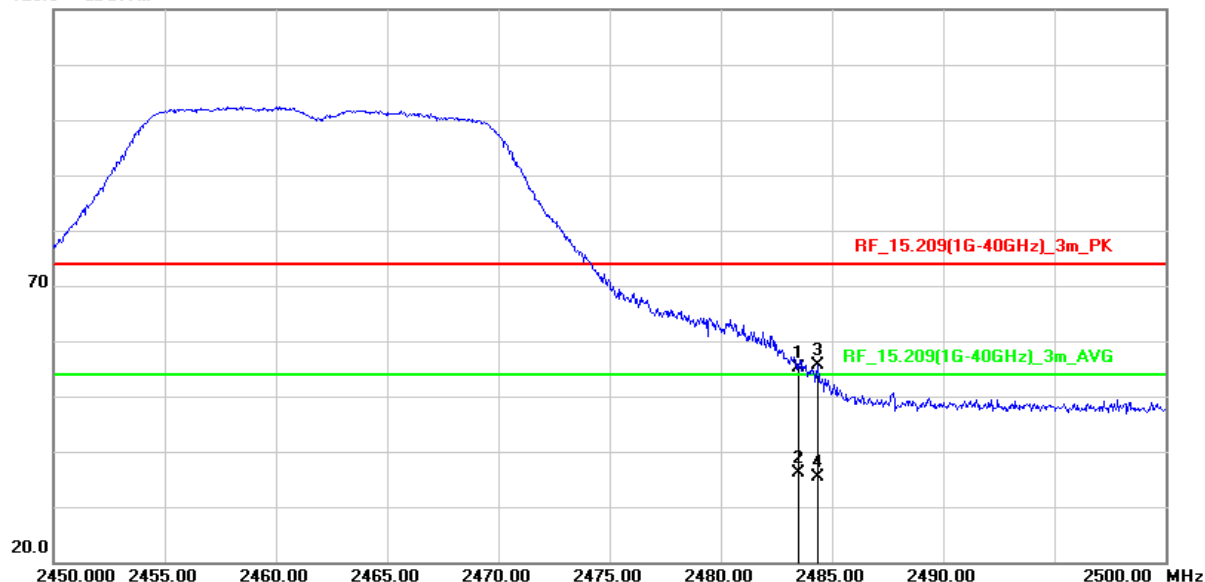


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.81	-6.61	55.20	74.00	-18.80	peak
2	2483.500	42.73	-6.61	36.12	54.00	-17.88	AVG
3	2484.350	62.30	-6.61	55.69	74.00	-18.31	peak
4	2484.350	41.98	-6.61	35.37	54.00	-18.63	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

120.0 dBuV/m

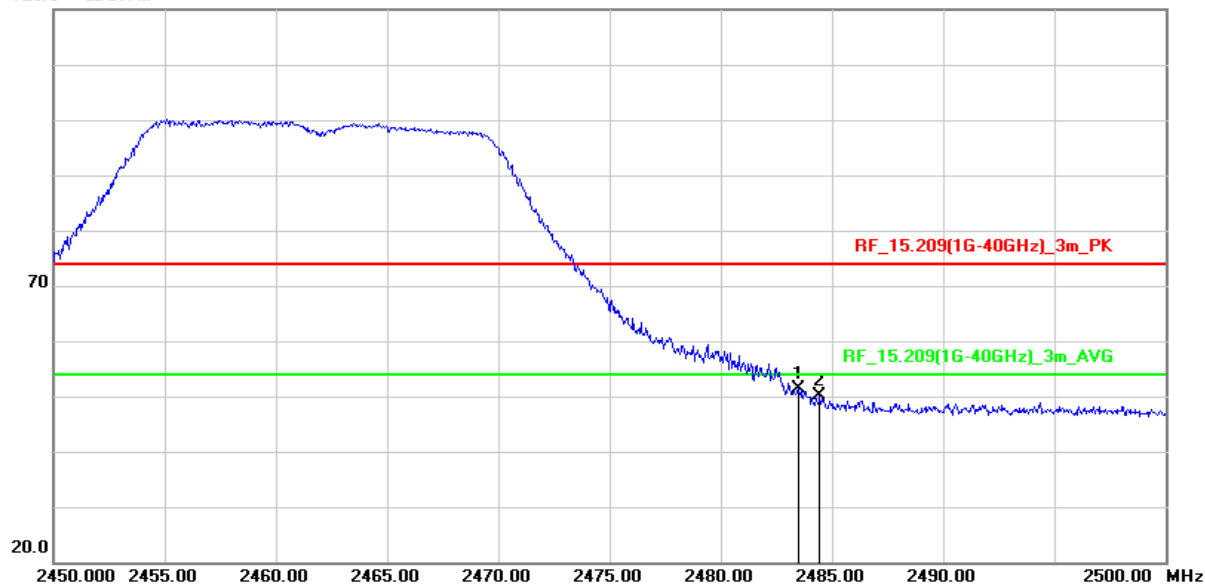


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.96	-6.61	51.35	74.00	-22.65	peak
2	2484.450	56.79	-6.61	50.18	74.00	-23.82	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

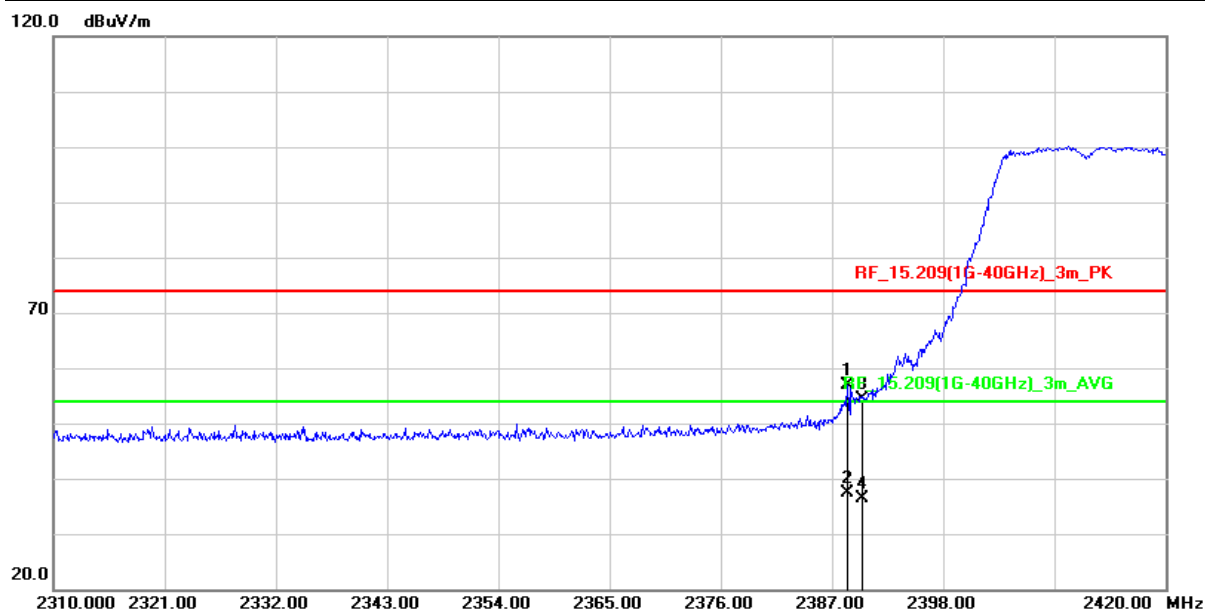


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	63.47	-6.70	56.77	74.00	-17.23	peak
2	2388.540	44.06	-6.70	37.36	54.00	-16.64	AVG
3	2390.000	61.13	-6.69	54.44	74.00	-19.56	peak
4	2390.000	42.98	-6.69	36.29	54.00	-17.71	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

120.0 dBuV/m

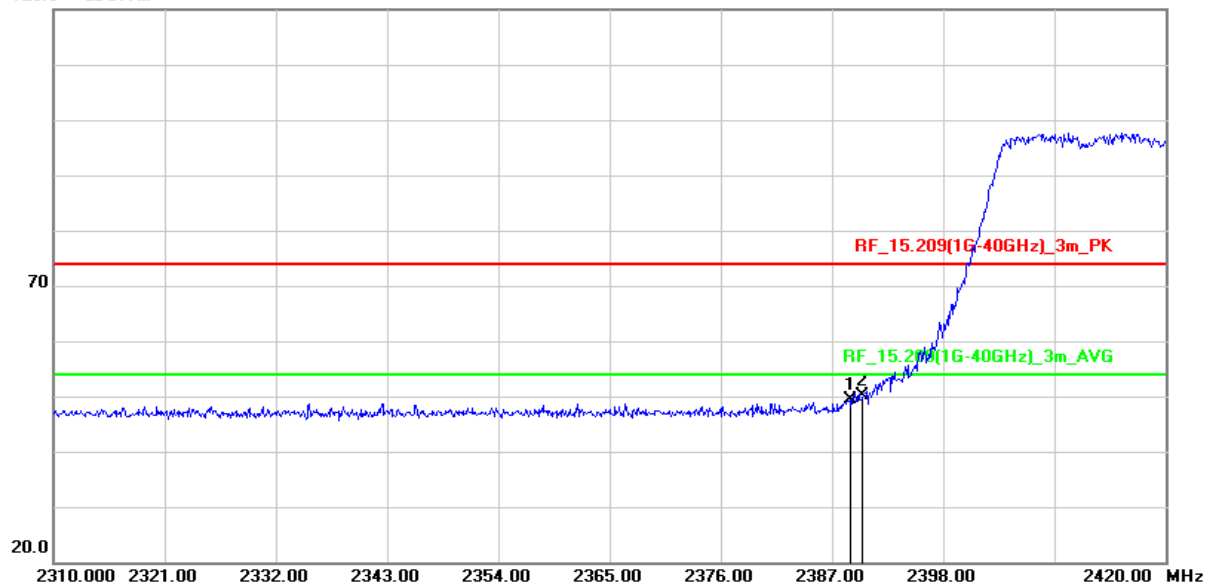


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.760	56.01	-6.70	49.31	74.00	-24.69	peak
2	2390.000	56.92	-6.69	50.23	74.00	-23.77	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

120.0 dBuV/m

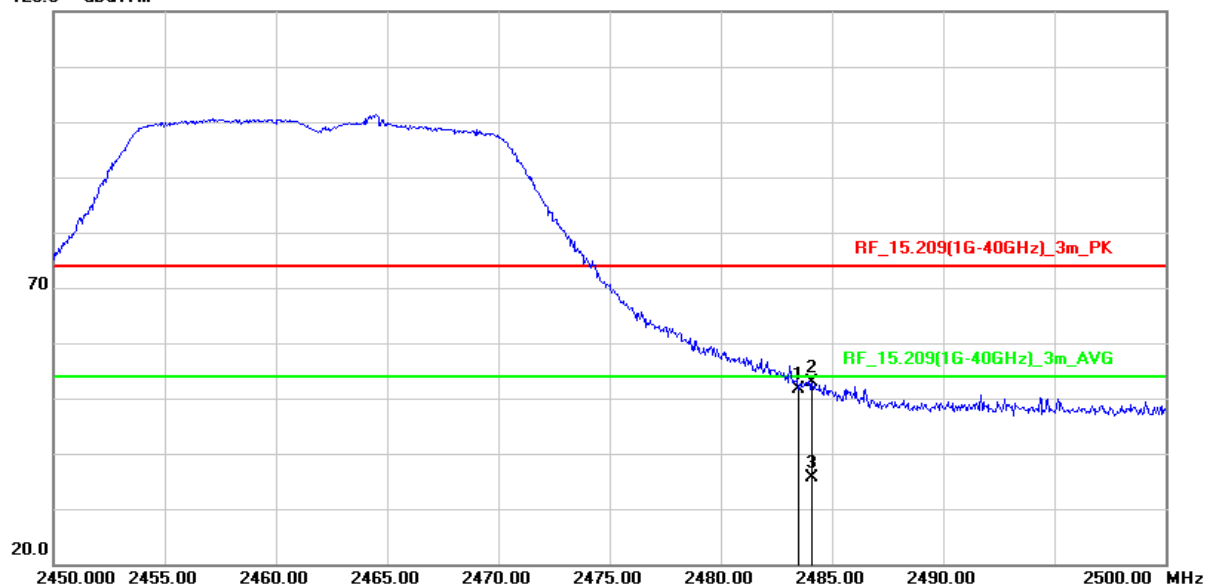


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	58.12	-6.61	51.51	74.00	-22.49	peak
2	2484.100	59.41	-6.61	52.80	74.00	-21.20	peak
3	2484.100	42.28	-6.61	35.67	54.00	-18.33	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

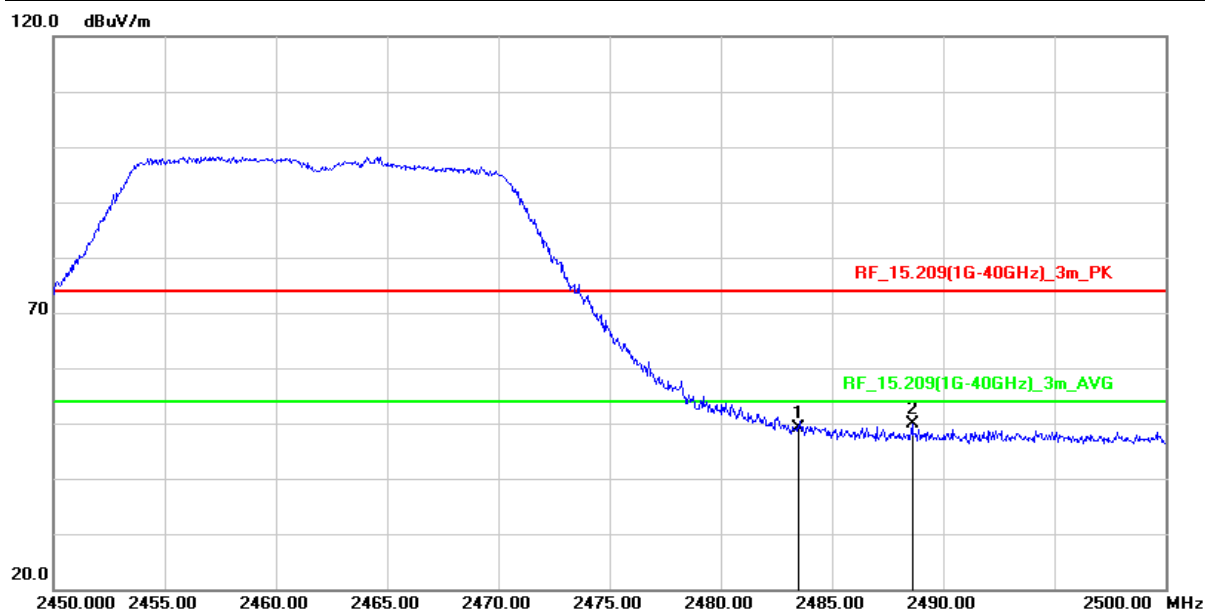


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.79	-6.61	49.18	74.00	-24.82	peak
2	2488.600	56.45	-6.60	49.85	74.00	-24.15	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH03(2422MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

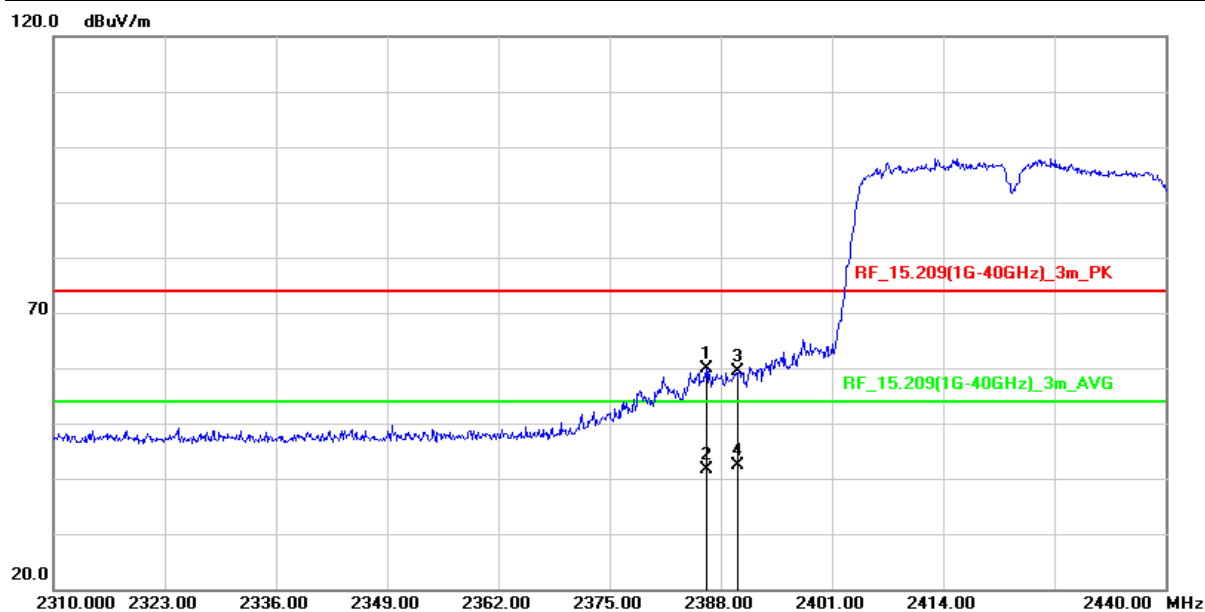


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.310	66.55	-6.70	59.85	74.00	-14.15	peak
2	2386.310	48.42	-6.70	41.72	54.00	-12.28	AVG
3	2390.000	66.03	-6.69	59.34	74.00	-14.66	peak
4	2390.000	49.12	-6.69	42.43	54.00	-11.57	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH03(2422MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

120.0 dBuV/m

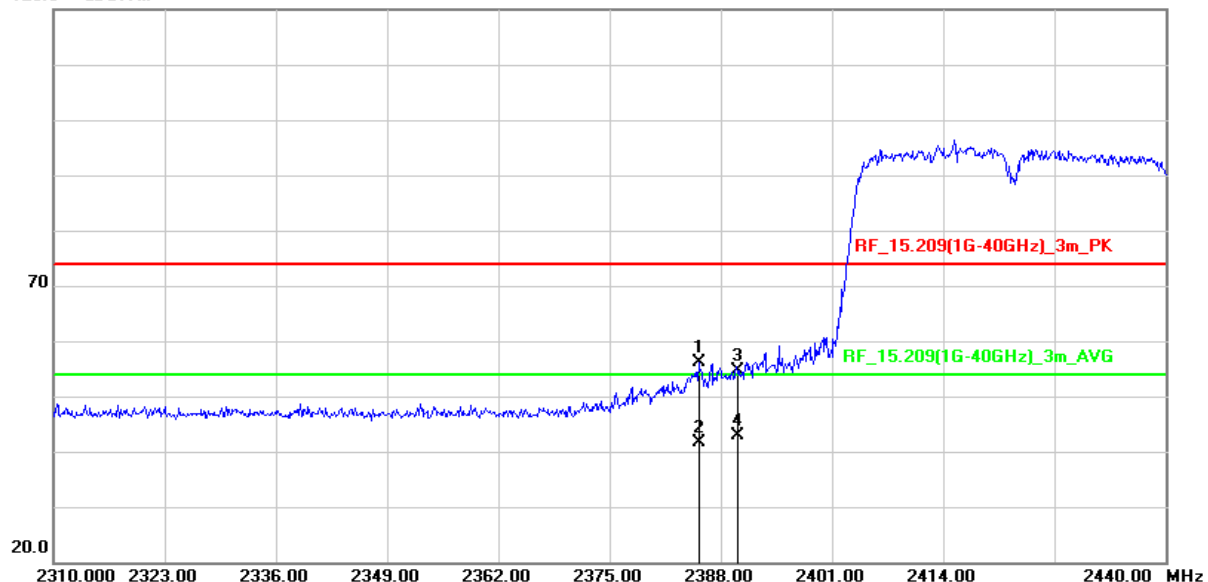


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.400	62.80	-6.70	56.10	74.00	-17.90	peak
2	2385.400	48.35	-6.70	41.65	54.00	-12.35	AVG
3	2390.000	61.21	-6.69	54.52	74.00	-19.48	peak
4	2390.000	49.67	-6.69	42.98	54.00	-11.02	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH09(2452MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

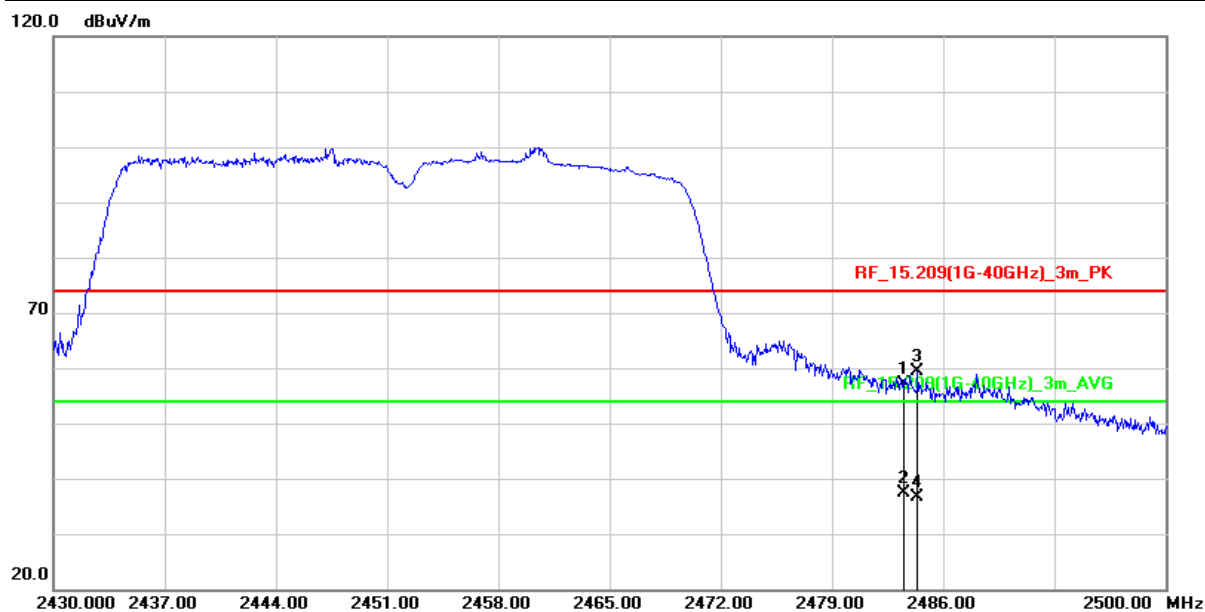


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.71	-6.61	57.10	74.00	-16.90	peak
2	2483.500	43.92	-6.61	37.31	54.00	-16.69	AVG
3	2484.390	66.03	-6.61	59.42	74.00	-14.58	peak
4	2484.390	43.29	-6.61	36.68	54.00	-17.32	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH09(2452MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

120.0 dBuV/m

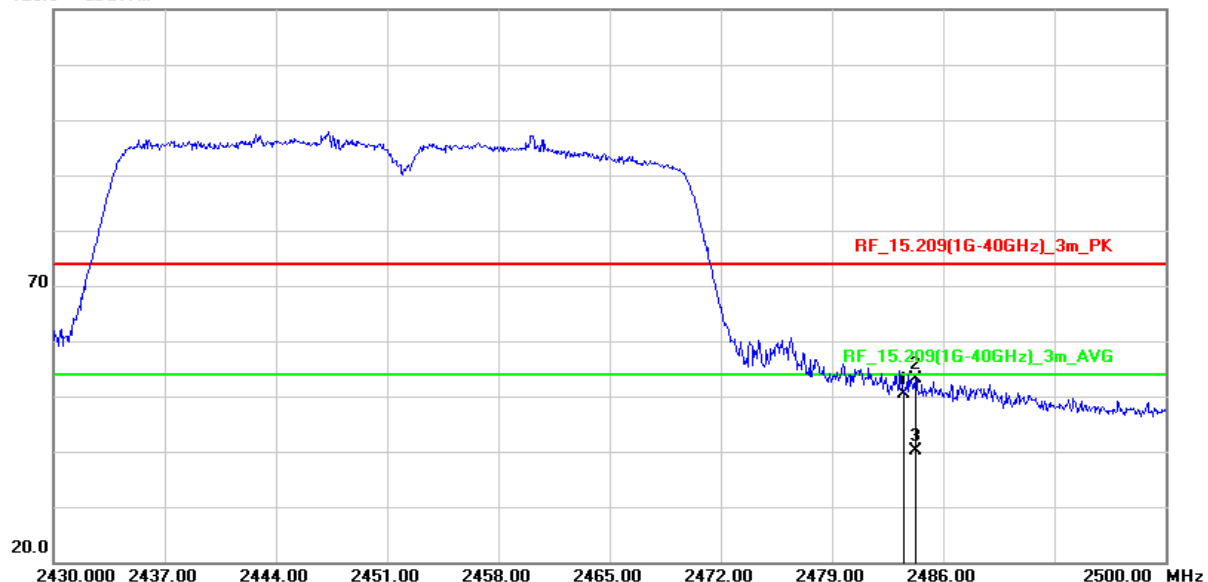

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.03	-6.61	50.42	74.00	-23.58	peak
2	2484.250	59.73	-6.61	53.12	74.00	-20.88	peak
3	2484.250	46.65	-6.61	40.04	54.00	-13.96	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.6.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency		
RF	802.11b / 802.11g / 802.11n HT20	802.11n HT40
Tx	CH01 (2412MHz)	CH03 (2422MHz)
	CH06 (2437MHz)	CH06 (2437MHz)
	CH11 (2462MHz)	CH09 (2452MHz)

Above 1GHz Data

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

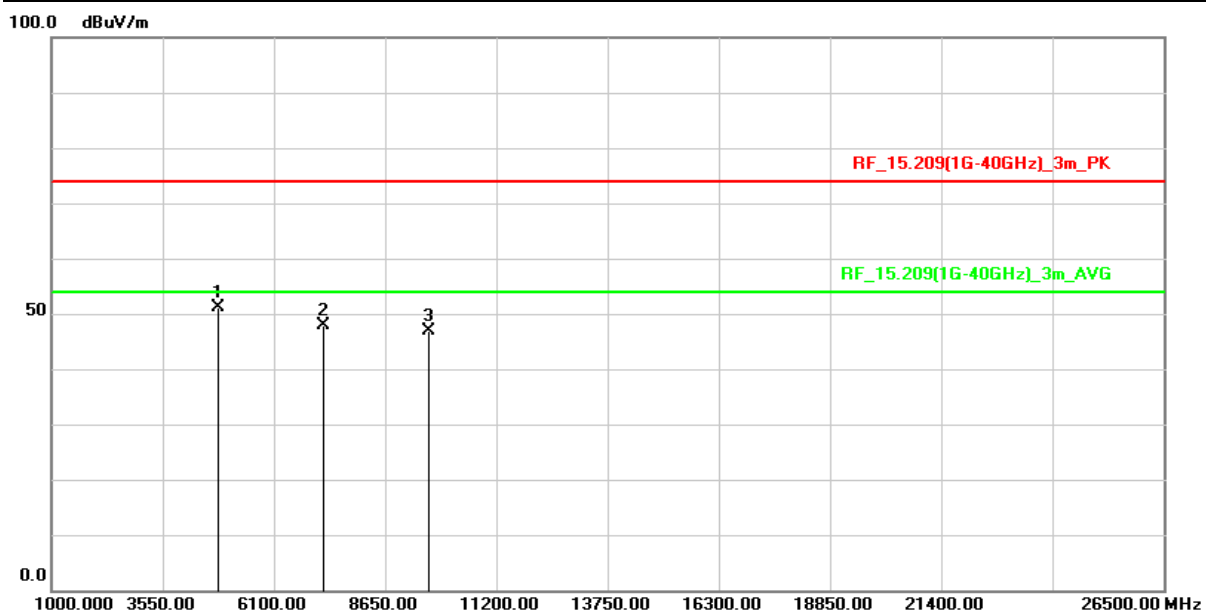


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	71.74	-20.64	51.10	74.00	-22.90	peak
2	7236.000	62.66	-14.88	47.78	74.00	-26.22	peak
3	9648.000	57.81	-10.91	46.90	74.00	-27.10	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

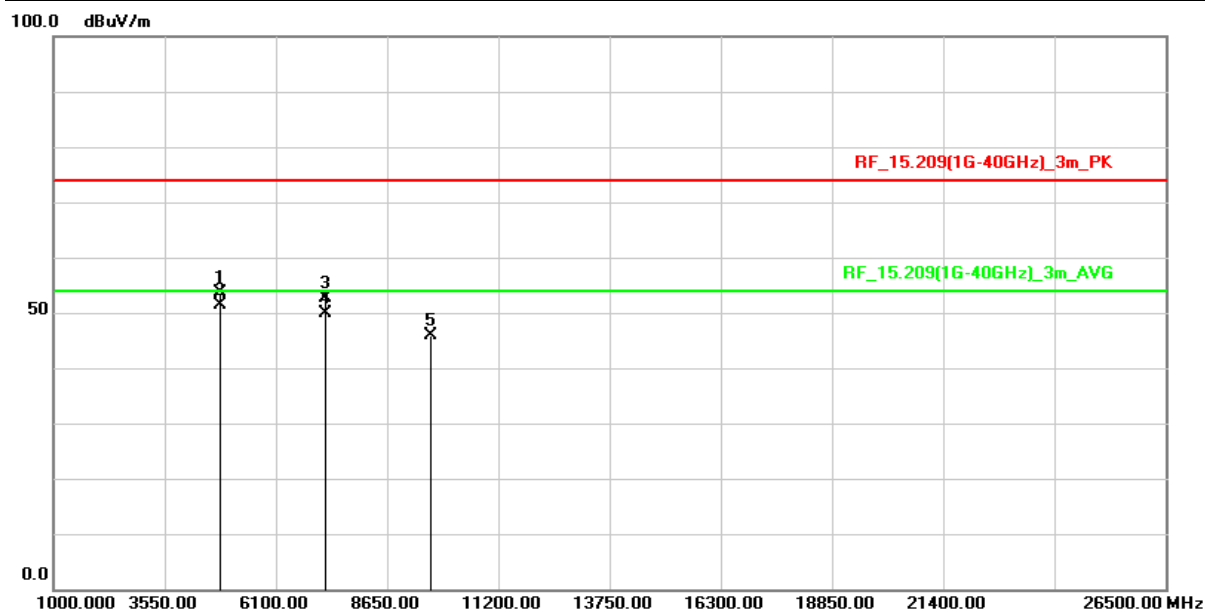


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	74.26	-20.64	53.62	74.00	-20.38	peak
2	4824.000	72.09	-20.64	51.45	54.00	-2.55	AVG
3	7236.000	67.44	-14.88	52.56	74.00	-21.44	peak
4	7236.000	64.83	-14.88	49.95	54.00	-4.05	AVG
5	9648.000	56.75	-10.91	45.84	74.00	-28.16	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

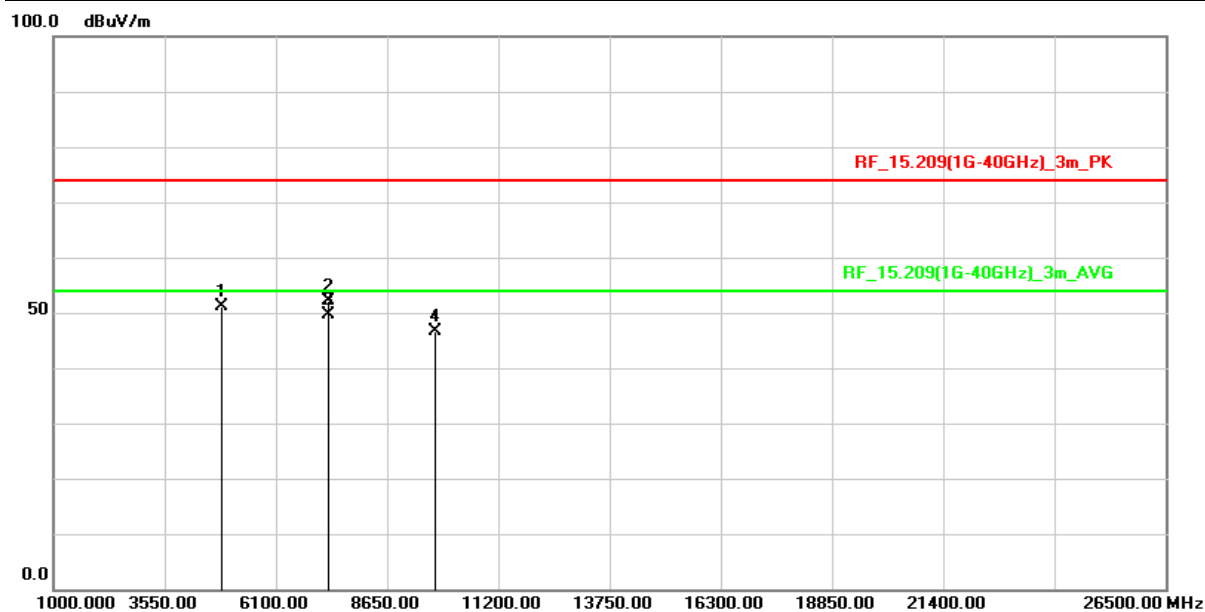


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	71.79	-20.72	51.07	74.00	-22.93	peak
2	7311.000	67.12	-15.01	52.11	74.00	-21.89	peak
3	7311.000	64.75	-15.01	49.74	54.00	-4.26	AVG
4	9748.000	57.42	-10.73	46.69	74.00	-27.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

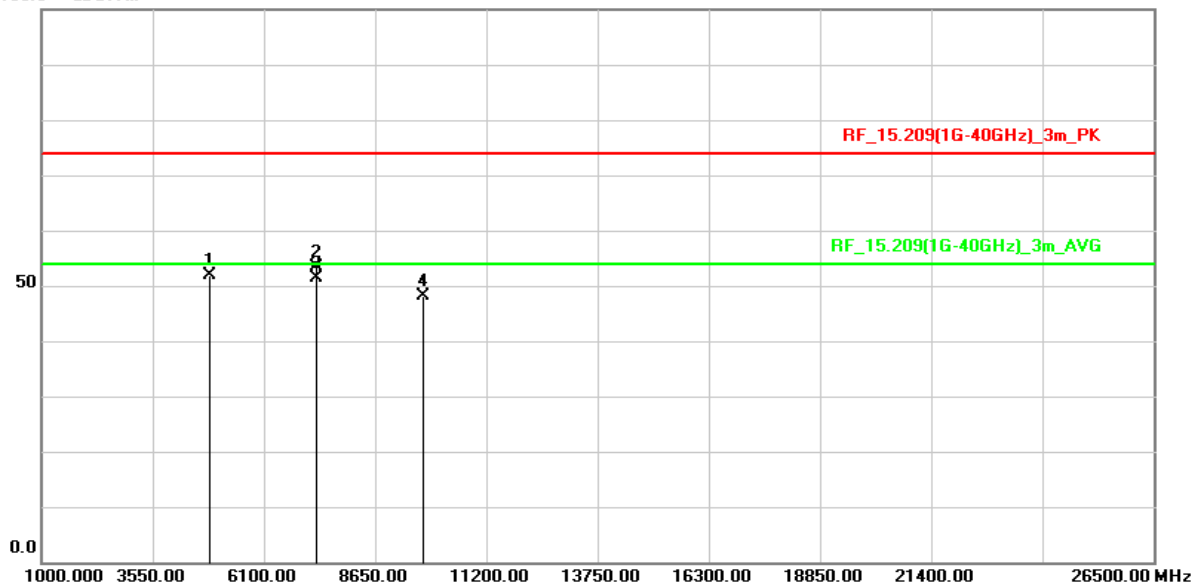


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	72.71	-20.72	51.99	74.00	-22.01	peak
2	7311.000	68.46	-15.01	53.45	74.00	-20.55	peak
3	7311.000	66.39	-15.01	51.38	54.00	-2.62	AVG
4	9748.000	58.85	-10.73	48.12	74.00	-25.88	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

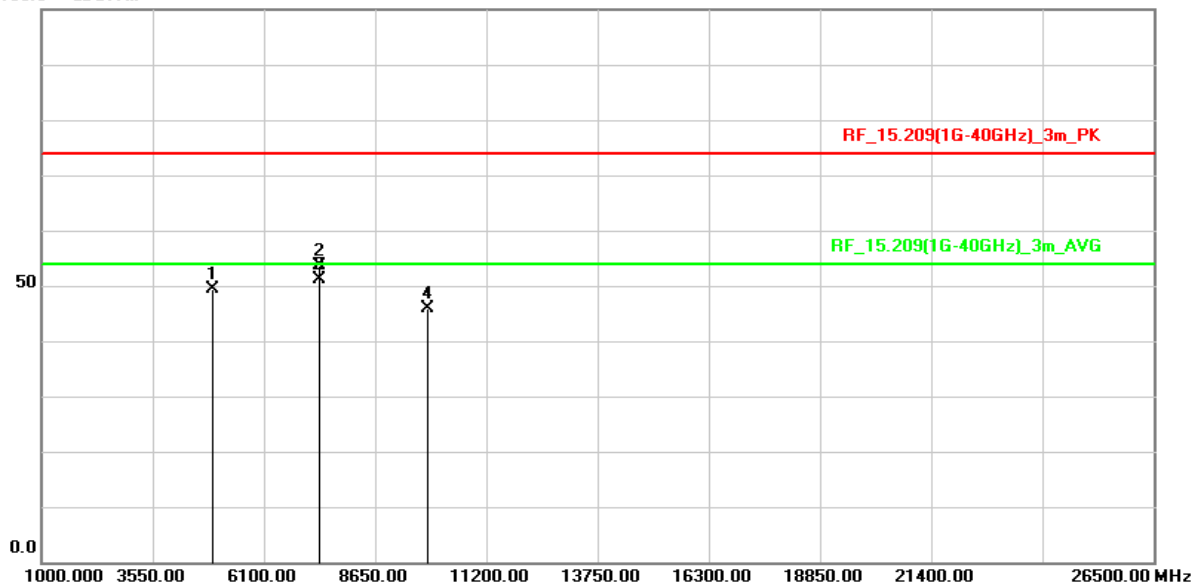


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	70.15	-20.74	49.41	74.00	-24.59	peak
2	7386.000	68.32	-14.70	53.62	74.00	-20.38	peak
3	7386.000	65.72	-14.70	51.02	54.00	-2.98	AVG
4	9848.000	56.45	-10.63	45.82	74.00	-28.18	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

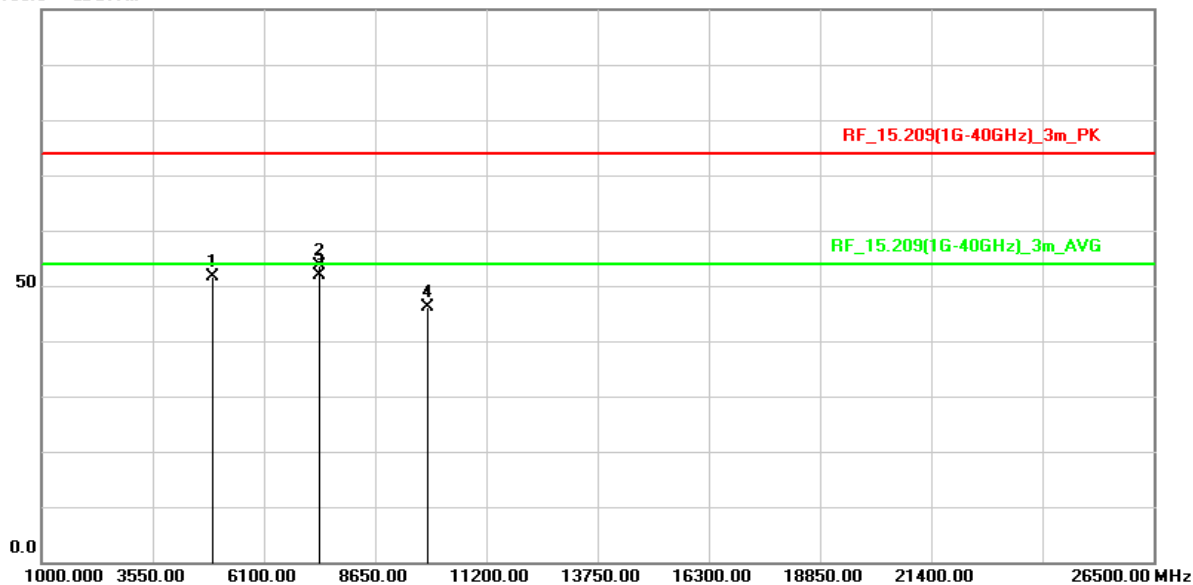


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	72.25	-20.74	51.51	74.00	-22.49	peak
2	7386.000	68.40	-14.70	53.70	74.00	-20.30	peak
3	7386.000	66.68	-14.70	51.98	54.00	-2.02	AVG
4	9848.000	56.76	-10.63	46.13	74.00	-27.87	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

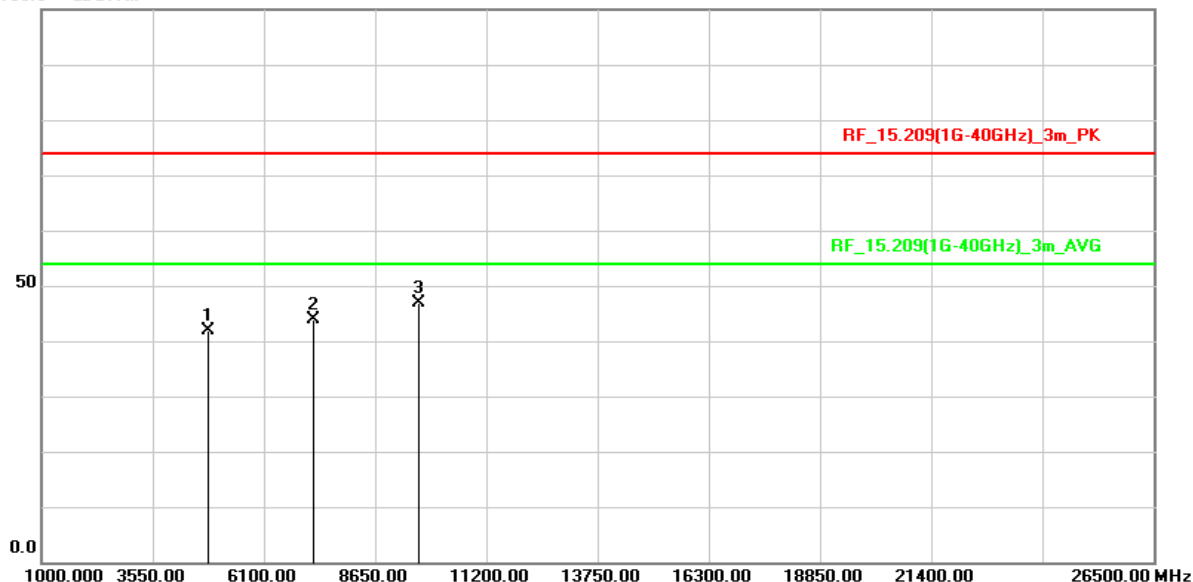


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	62.63	-20.64	41.99	74.00	-32.01	peak
2	7236.000	58.80	-14.88	43.92	74.00	-30.08	peak
3	9648.000	57.74	-10.91	46.83	74.00	-27.17	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

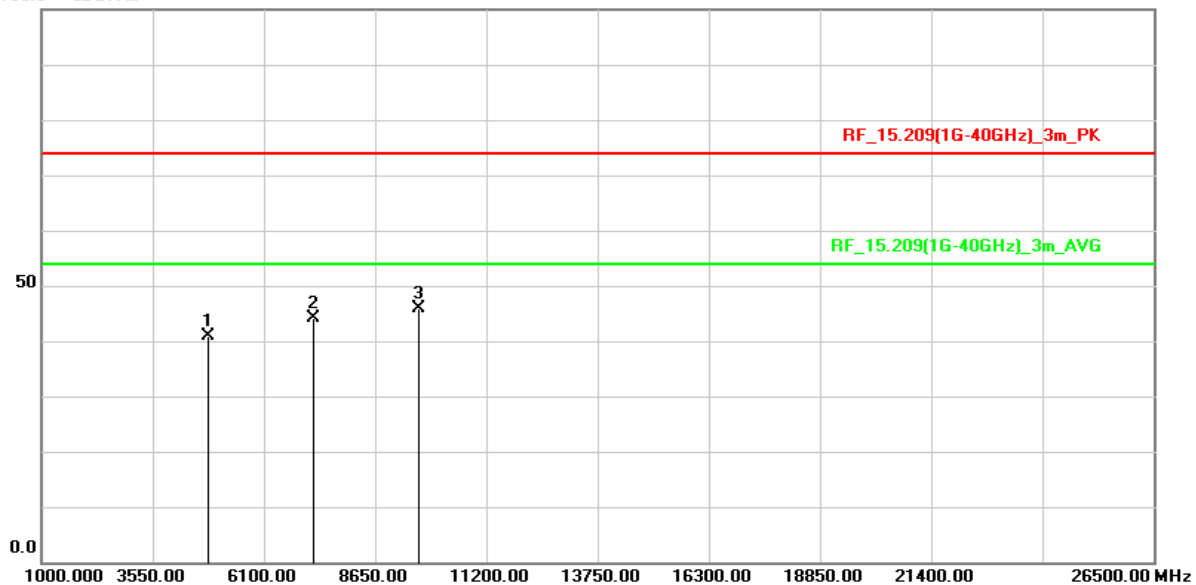


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.41	-20.64	40.77	74.00	-33.23	peak
2	7236.000	58.89	-14.88	44.01	74.00	-29.99	peak
3	9648.000	56.76	-10.91	45.85	74.00	-28.15	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

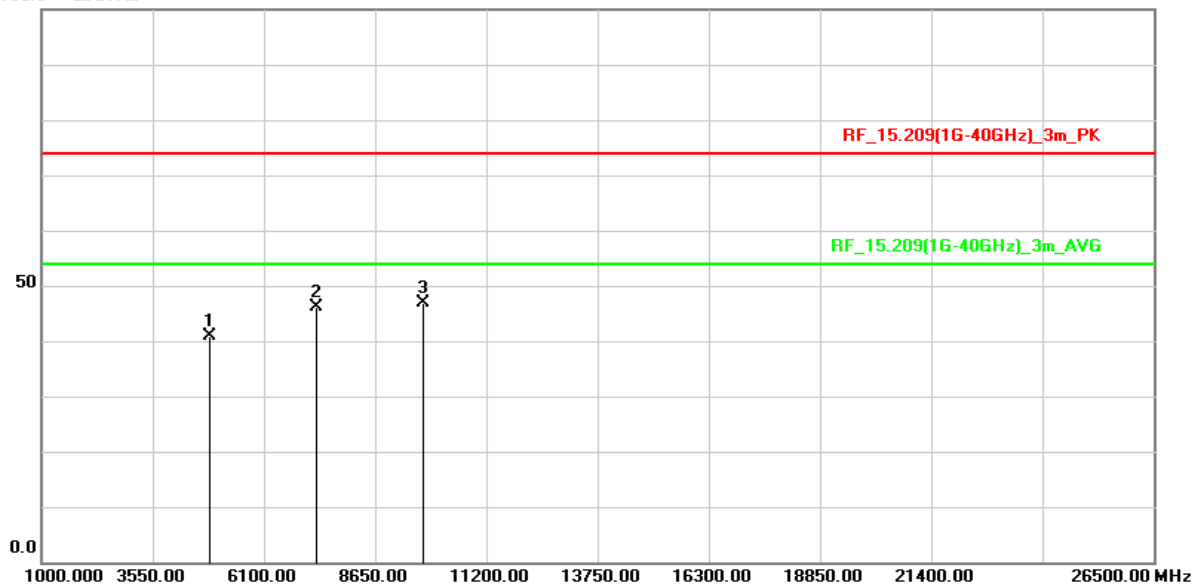


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	61.60	-20.72	40.88	74.00	-33.12	peak
2	7311.000	61.11	-15.01	46.10	74.00	-27.90	peak
3	9748.000	57.51	-10.73	46.78	74.00	-27.22	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

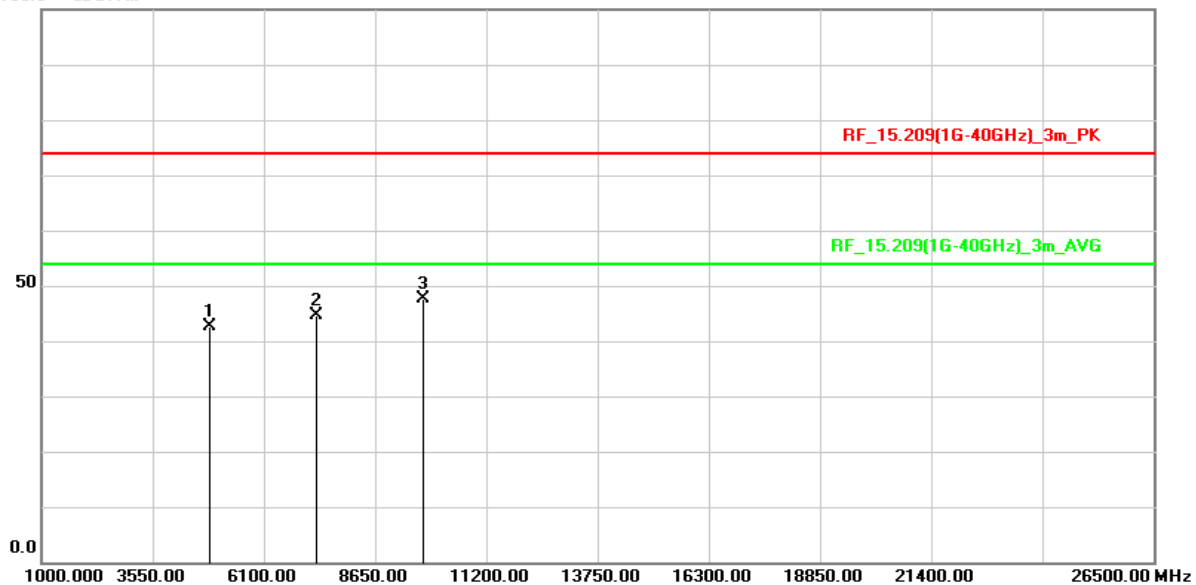


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	63.36	-20.72	42.64	74.00	-31.36	peak
2	7311.000	59.71	-15.01	44.70	74.00	-29.30	peak
3	9748.000	58.24	-10.73	47.51	74.00	-26.49	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

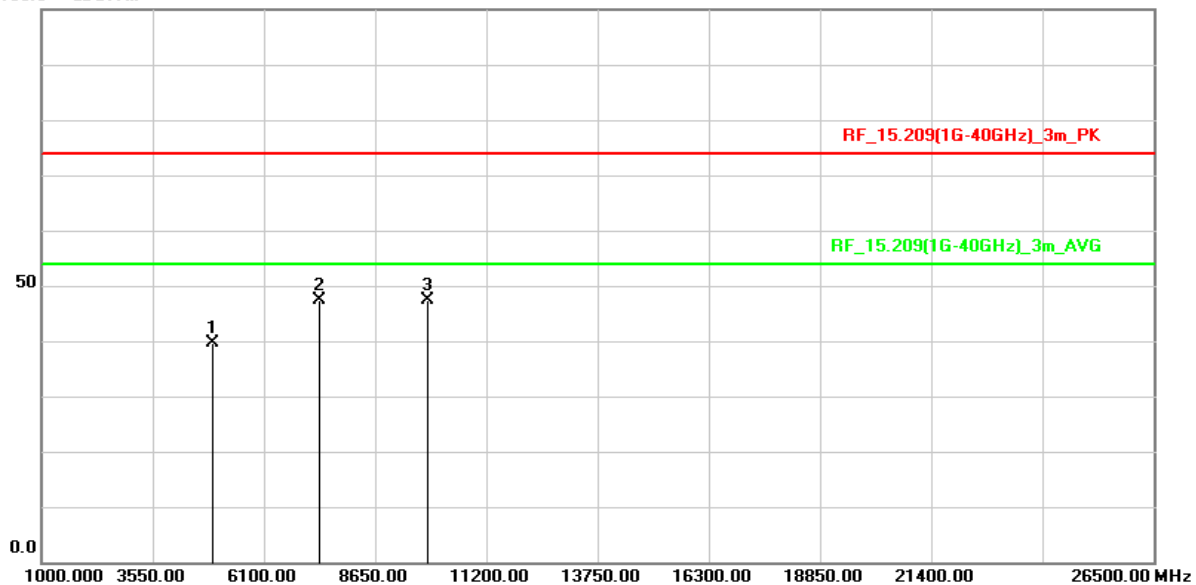


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	60.31	-20.74	39.57	74.00	-34.43	peak
2	7386.000	62.07	-14.70	47.37	74.00	-26.63	peak
3	9848.000	58.12	-10.63	47.49	74.00	-26.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

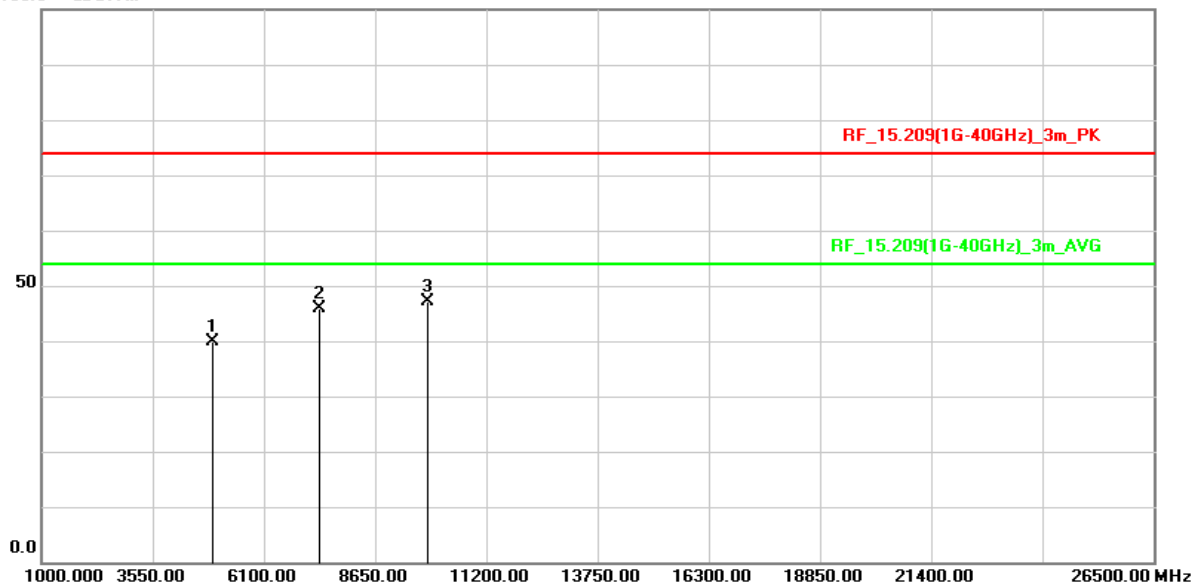


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	60.61	-20.74	39.87	74.00	-34.13	peak
2	7386.000	60.55	-14.70	45.85	74.00	-28.15	peak
3	9848.000	57.64	-10.63	47.01	74.00	-26.99	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

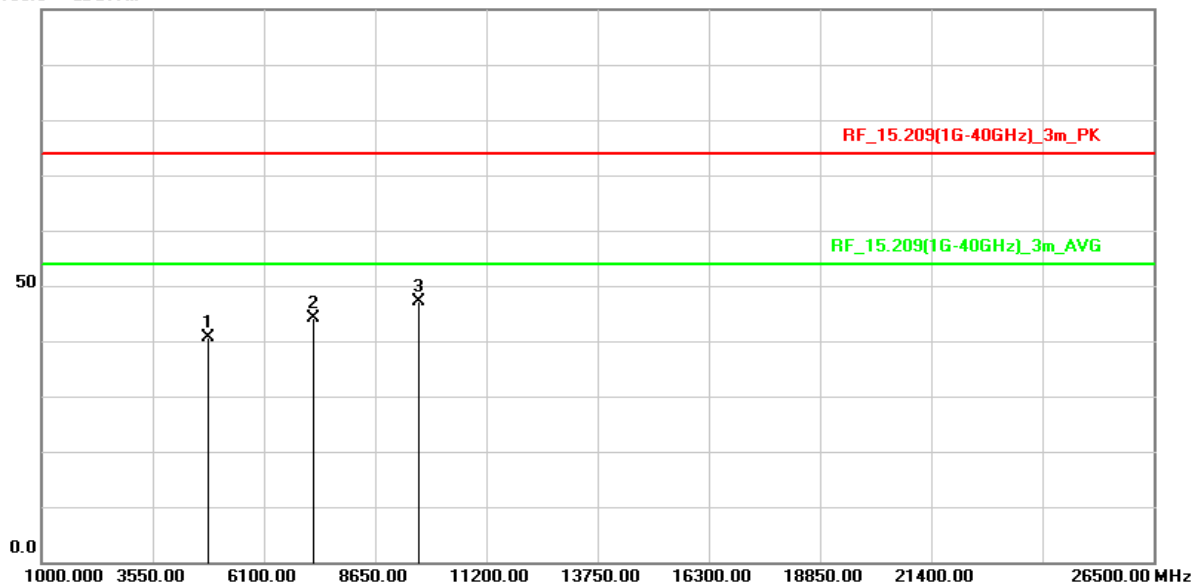


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.32	-20.64	40.68	74.00	-33.32	peak
2	7236.000	58.91	-14.88	44.03	74.00	-29.97	peak
3	9648.000	58.04	-10.91	47.13	74.00	-26.87	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH01(2412MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

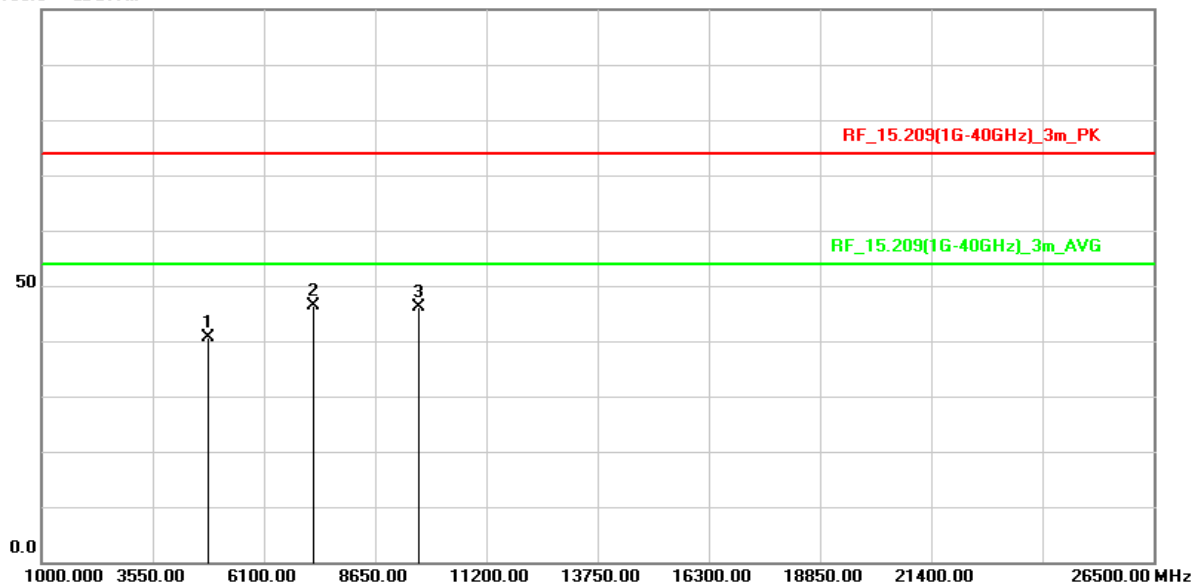


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.17	-20.64	40.53	74.00	-33.47	peak
2	7236.000	61.35	-14.88	46.47	74.00	-27.53	peak
3	9648.000	57.10	-10.91	46.19	74.00	-27.81	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

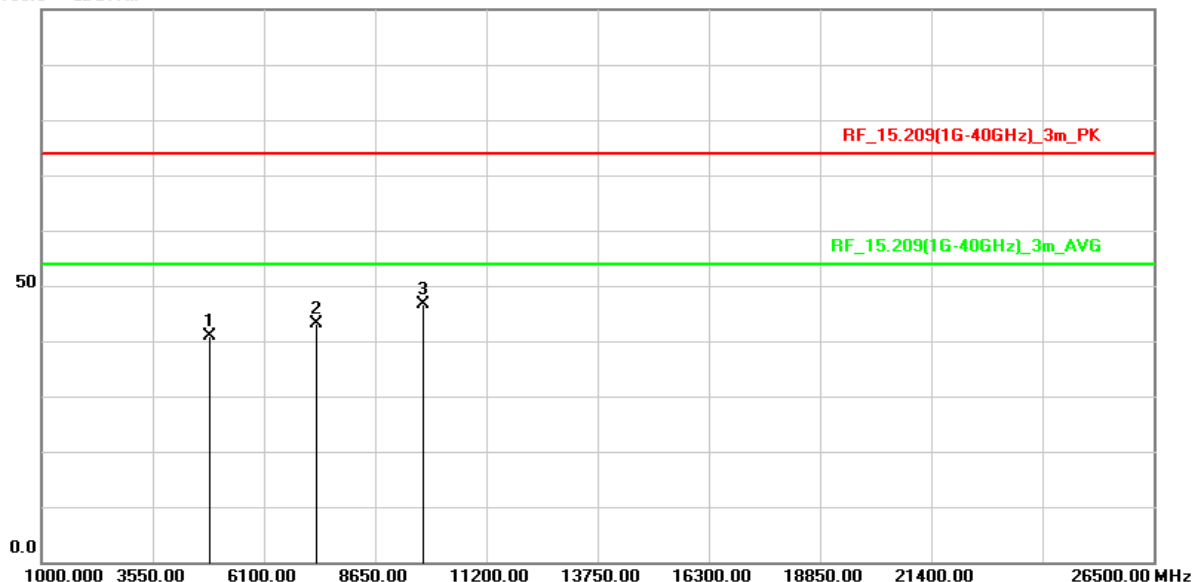


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	61.61	-20.72	40.89	74.00	-33.11	peak
2	7311.000	58.24	-15.01	43.23	74.00	-30.77	peak
3	9748.000	57.39	-10.73	46.66	74.00	-27.34	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

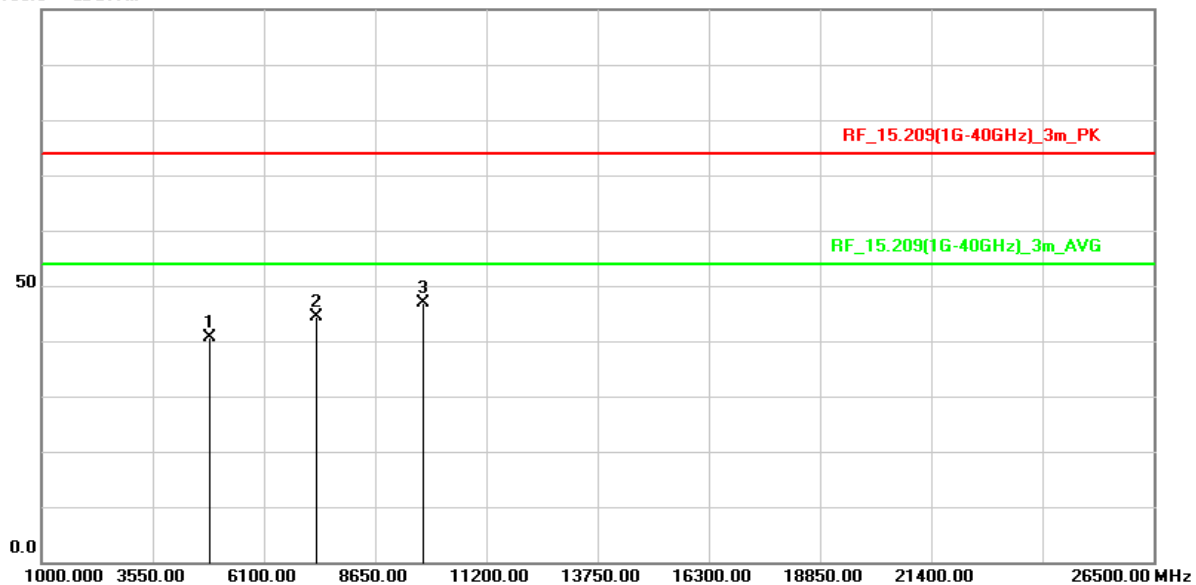


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	61.41	-20.72	40.69	74.00	-33.31	peak
2	7311.000	59.30	-15.01	44.29	74.00	-29.71	peak
3	9748.000	57.63	-10.73	46.90	74.00	-27.10	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

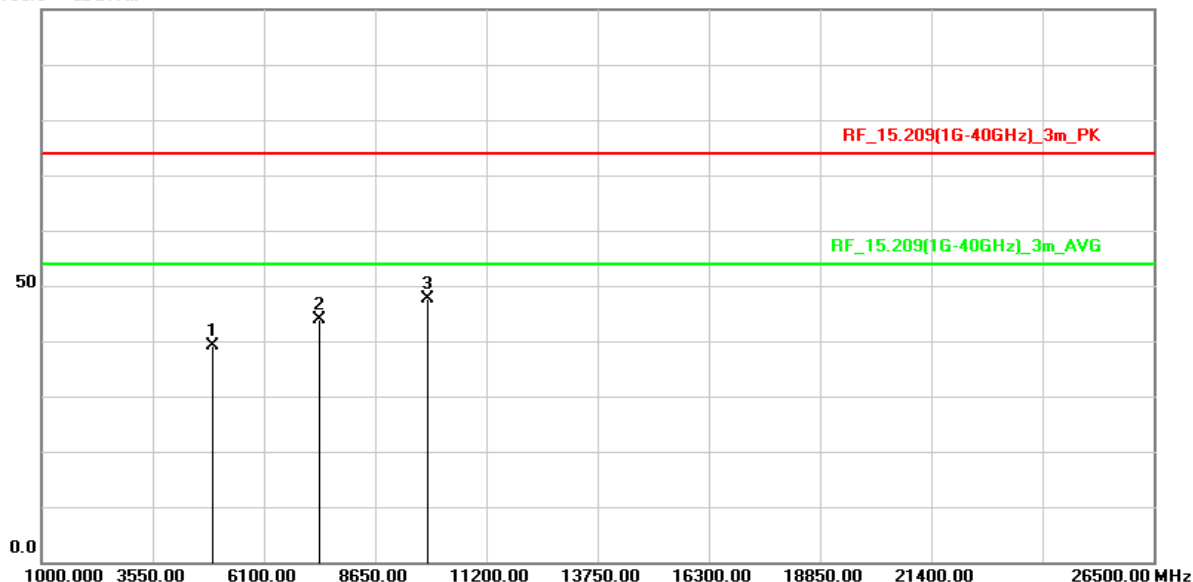


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	59.97	-20.74	39.23	74.00	-34.77	peak
2	7386.000	58.46	-14.70	43.76	74.00	-30.24	peak
3	9848.000	58.38	-10.63	47.75	74.00	-26.25	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2022/08/01
Test Channel :	CH11(2462MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

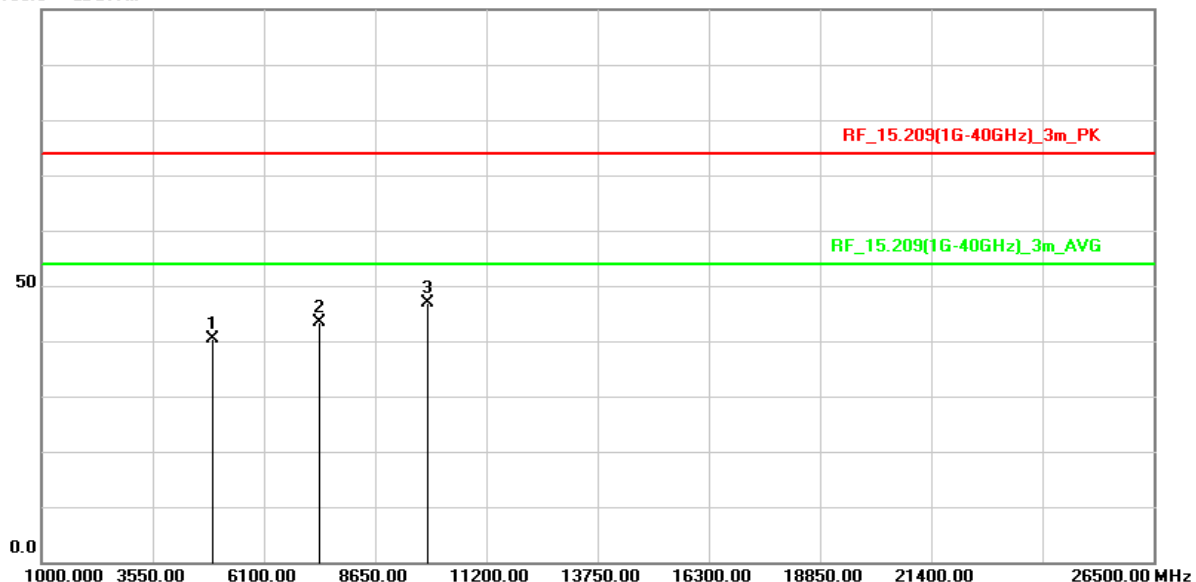


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	61.04	-20.74	40.30	74.00	-33.70	peak
2	7386.000	58.14	-14.70	43.44	74.00	-30.56	peak
3	9848.000	57.46	-10.63	46.83	74.00	-27.17	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH03(2422MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

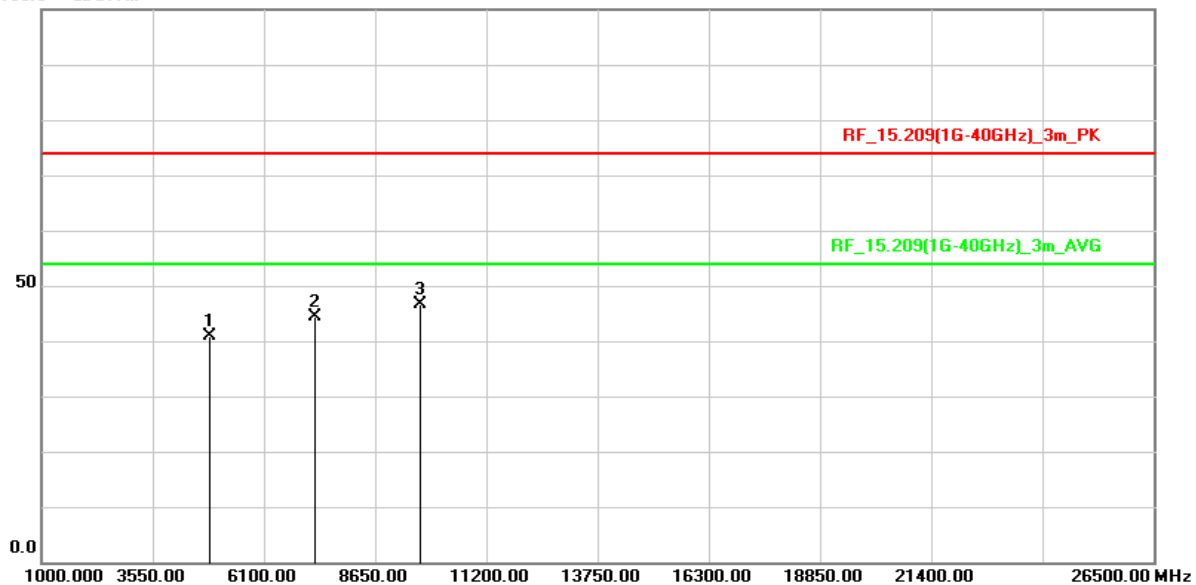


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	61.55	-20.65	40.90	74.00	-33.10	peak
2	7266.000	59.26	-14.95	44.31	74.00	-29.69	peak
3	9688.000	57.42	-10.87	46.55	74.00	-27.45	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH03(2422MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

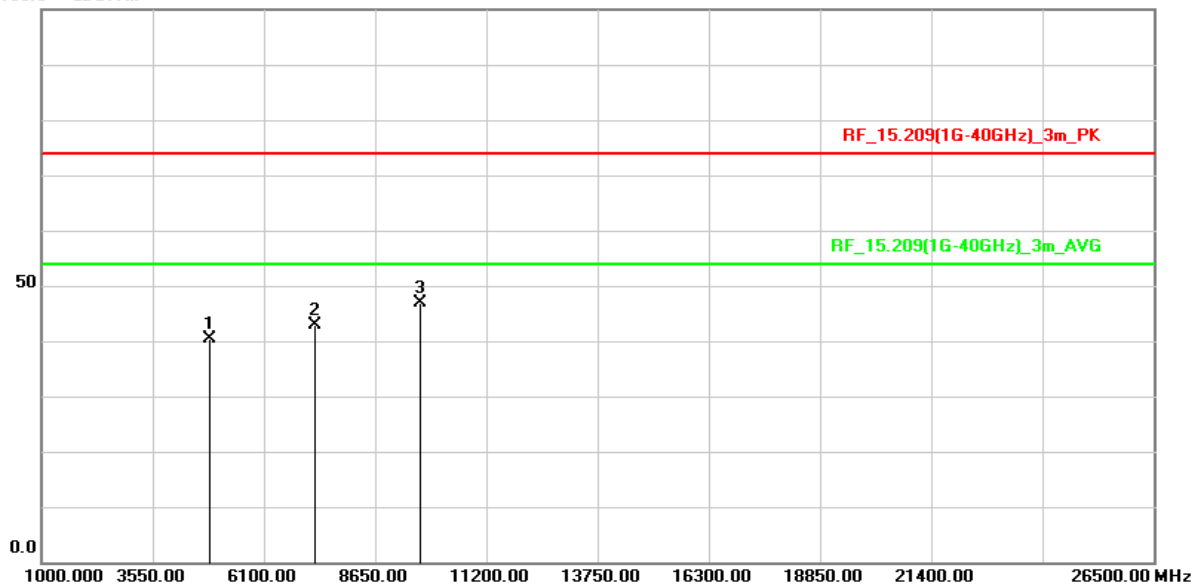


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	60.94	-20.65	40.29	74.00	-33.71	peak
2	7266.000	57.95	-14.95	43.00	74.00	-31.00	peak
3	9688.000	57.76	-10.87	46.89	74.00	-27.11	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

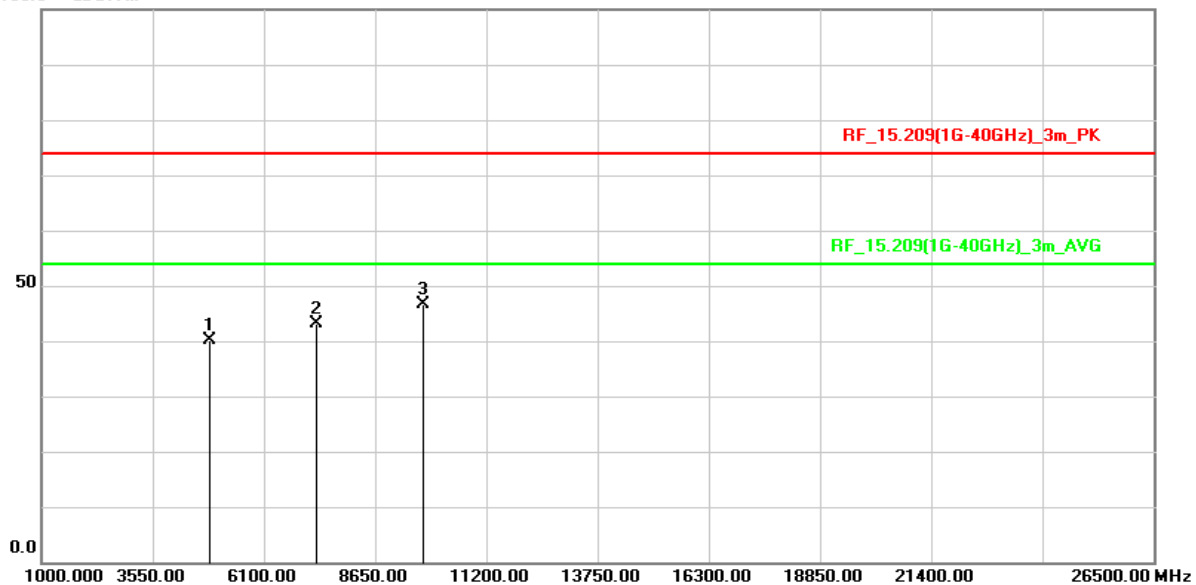


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	60.96	-20.72	40.24	74.00	-33.76	peak
2	7311.000	58.16	-15.01	43.15	74.00	-30.85	peak
3	9748.000	57.38	-10.73	46.65	74.00	-27.35	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

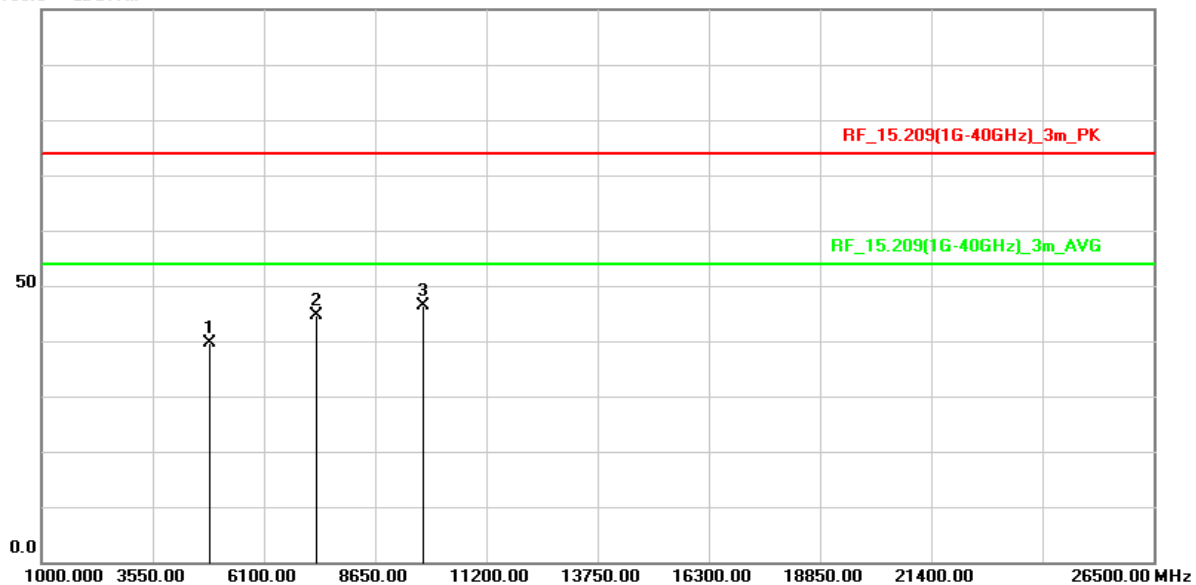


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	60.29	-20.72	39.57	74.00	-34.43	peak
2	7311.000	59.53	-15.01	44.52	74.00	-29.48	peak
3	9748.000	57.22	-10.73	46.49	74.00	-27.51	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH09(2452MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

100.0 dBuV/m

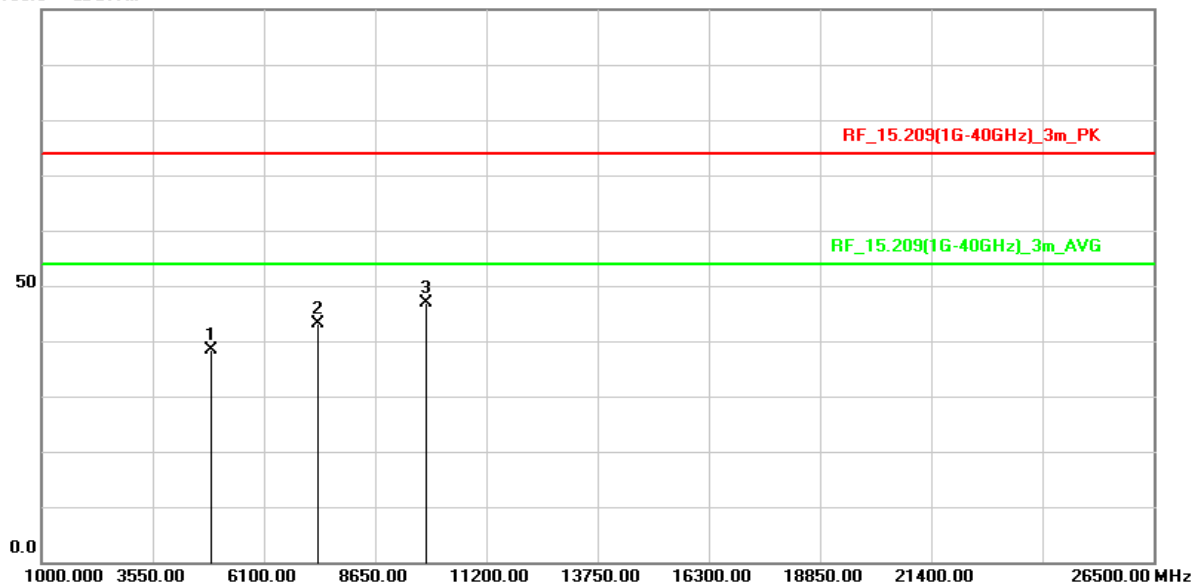


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	59.22	-20.76	38.46	74.00	-35.54	peak
2	7356.000	58.00	-14.76	43.24	74.00	-30.76	peak
3	9808.000	57.34	-10.58	46.76	74.00	-27.24	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT40)	Test Date :	2022/08/01
Test Channel :	CH09(2452MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

100.0 dBuV/m

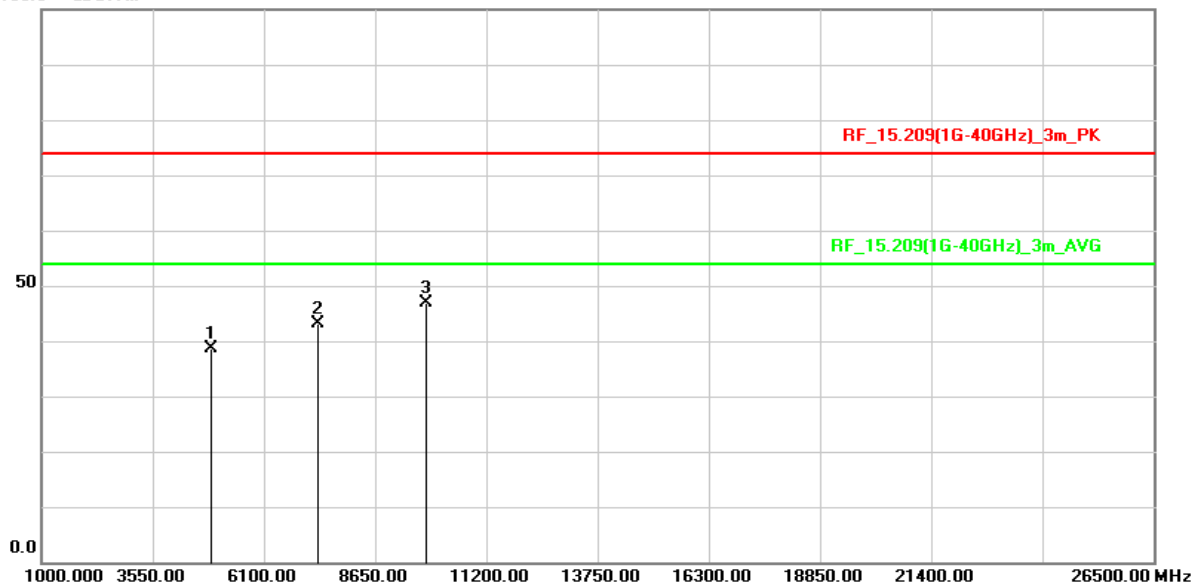


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	59.31	-20.76	38.55	74.00	-35.45	peak
2	7356.000	57.96	-14.76	43.20	74.00	-30.80	peak
3	9808.000	57.53	-10.58	46.95	74.00	-27.05	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Below 1GHz Data

Test Mode :	Transmit(802.11b)	Test Date :	2022/07/28
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Horizontal	Relative Humidity :	30 %

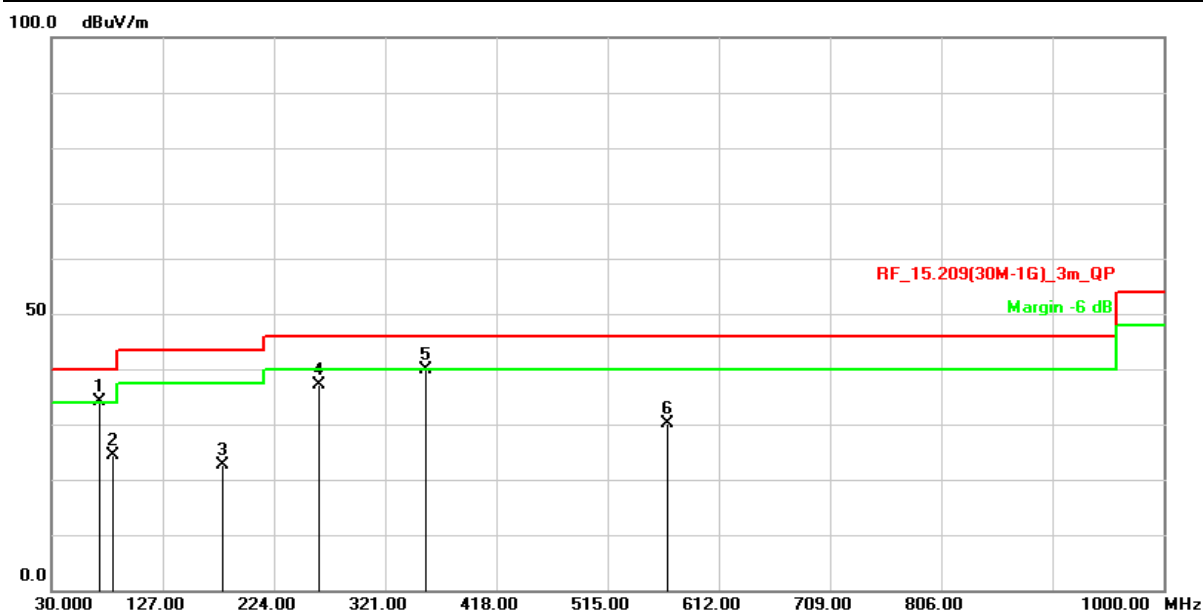


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	72.0000	47.72	-13.67	34.05	40.00	-5.95	QP
2	84.0300	41.13	-16.64	24.49	40.00	-15.51	QP
3	180.0020	35.37	-12.70	22.67	43.50	-20.83	QP
4	263.7700	49.13	-11.92	37.21	46.00	-8.79	QP
5	356.8900	48.91	-8.96	39.95	46.00	-6.05	QP
6	566.9950	34.13	-3.89	30.24	46.00	-15.76	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2022/07/28
Test Channel :	CH06(2437MHz)	Temperature :	25.8 °C
Polarization :	Vertical	Relative Humidity :	30 %

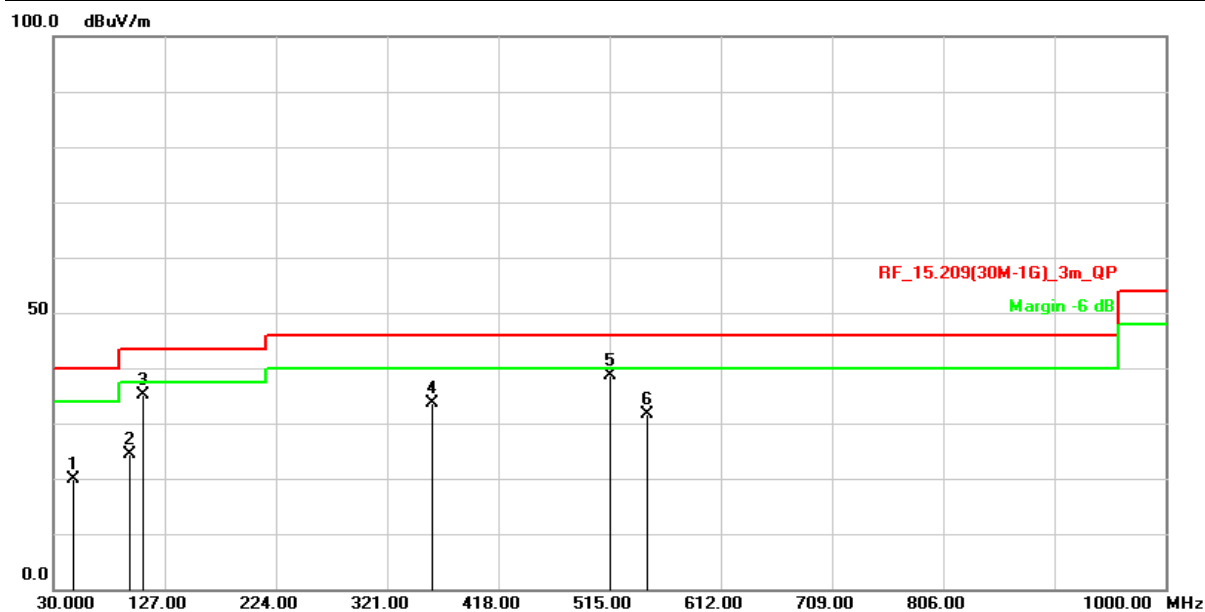

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	48.0000	31.20	-11.38	19.82	40.00	-20.18	QP
2	95.9780	41.31	-16.97	24.34	43.50	-19.16	QP
3	108.0020	50.25	-15.02	35.23	43.50	-8.27	QP
4	360.7700	42.52	-8.80	33.72	46.00	-12.28	QP
5	515.9700	43.49	-4.75	38.74	46.00	-7.26	QP
6	547.8350	35.75	-4.24	31.51	46.00	-14.49	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.7 AC Conducted Emissions Measurement

2.7.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.7.2 Test Setup

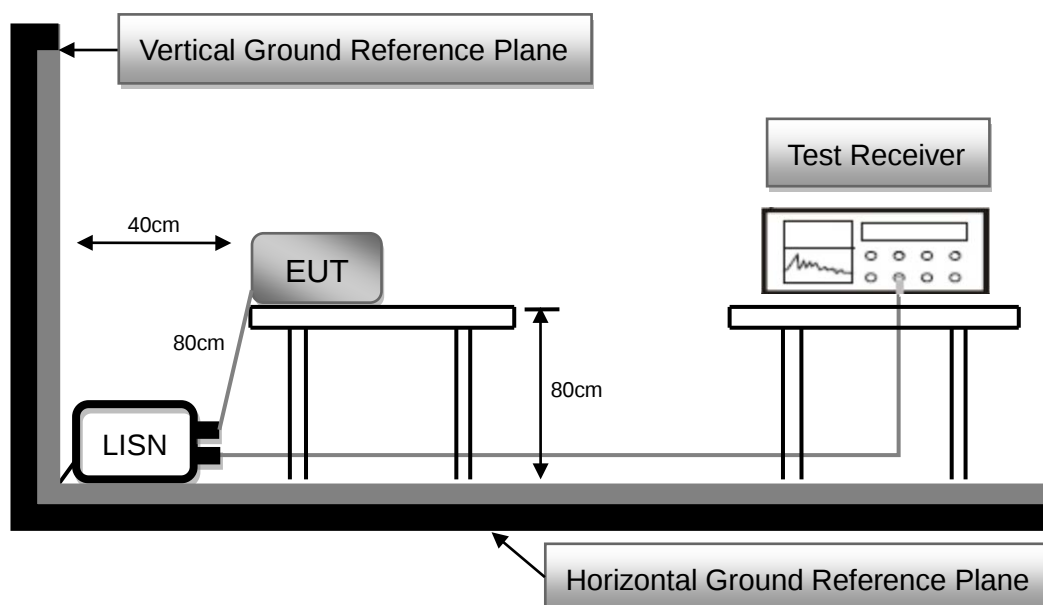


2.7.3 Test Procedure

1. Reference ANSI C63.10 : 2013 chapter 6.2
2. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
3. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
4. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
5. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
7. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
8. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

2.7.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2022/07/27	Phase :	L
Temperature :	27°C	Humidity :	32 %

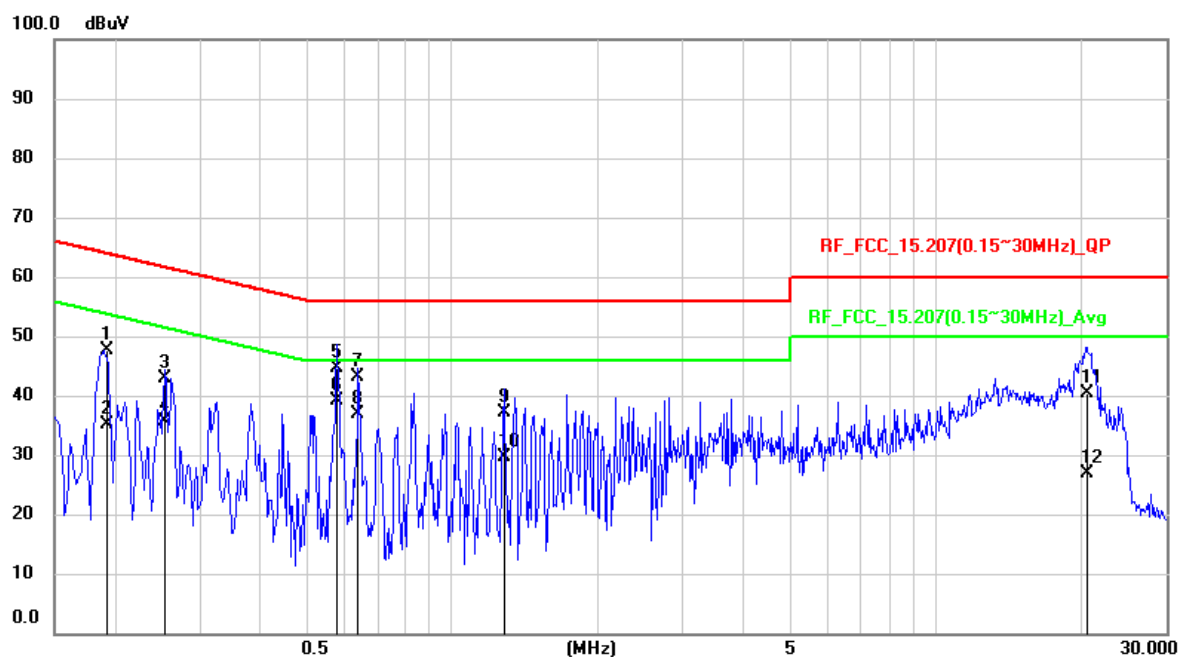


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1928	37.81	9.82	47.63	63.92	-16.29	QP
2	0.1928	25.23	9.82	35.05	53.92	-18.87	AVG
3	0.2541	33.15	9.82	42.97	61.62	-18.65	QP
4	0.2541	25.77	9.82	35.59	51.62	-16.03	AVG
5	0.5765	34.9	9.83	44.73	56	-11.27	QP
6	0.5765	29.18	9.83	39.01	46	-6.99	AVG
7	0.6399	33.38	9.83	43.21	56	-12.79	QP
8	0.6399	27.17	9.83	37	46	-9	AVG
9	1.2804	27.25	9.86	37.11	56	-18.89	QP
10	1.2804	19.75	9.86	29.61	46	-16.39	AVG
11	20.5813	30.22	10.25	40.47	60	-19.53	QP
12	20.5813	16.56	10.25	26.81	50	-23.19	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2022/07/27	Phase :	N
Temperature :	27°C	Humidity :	32 %

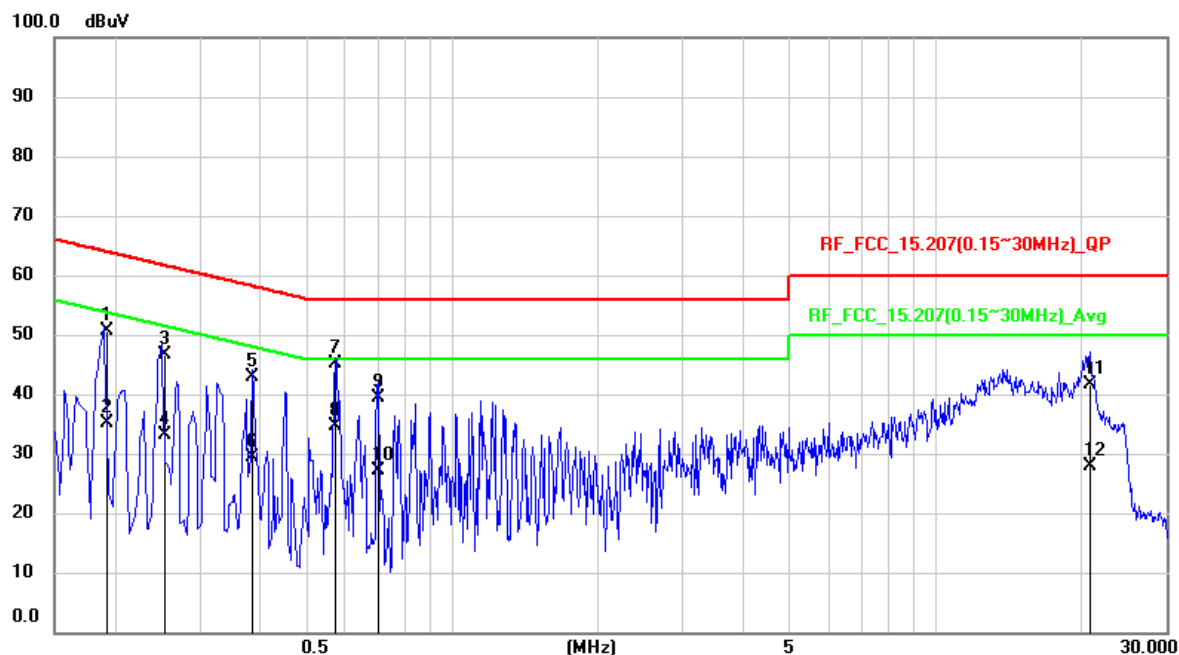

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1929	40.75	9.8	50.55	63.91	-13.36	QP
2	0.1929	25.42	9.8	35.22	53.91	-18.69	AVG
3	0.2547	36.92	9.8	46.72	61.6	-14.88	QP
4	0.2547	23.22	9.8	33.02	51.6	-18.58	AVG
5	0.3867	33.12	9.8	42.92	58.13	-15.21	QP
6	0.3867	19.6	9.8	29.4	48.13	-18.73	AVG
7	0.5779	35.28	9.81	45.09	56	-10.91	QP
8	0.5779	24.86	9.81	34.67	46	-11.33	AVG
9	0.7059	29.63	9.82	39.45	56	-16.55	QP
10	0.7059	17.42	9.82	27.24	46	-18.76	AVG
11	20.9179	31.39	10.22	41.61	60	-18.39	QP
12	20.9179	17.54	10.22	27.76	50	-22.24	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

--- END ---